



Test Mode: 00; Polarity: Vertical; Modulation:GFSK; Channel:High

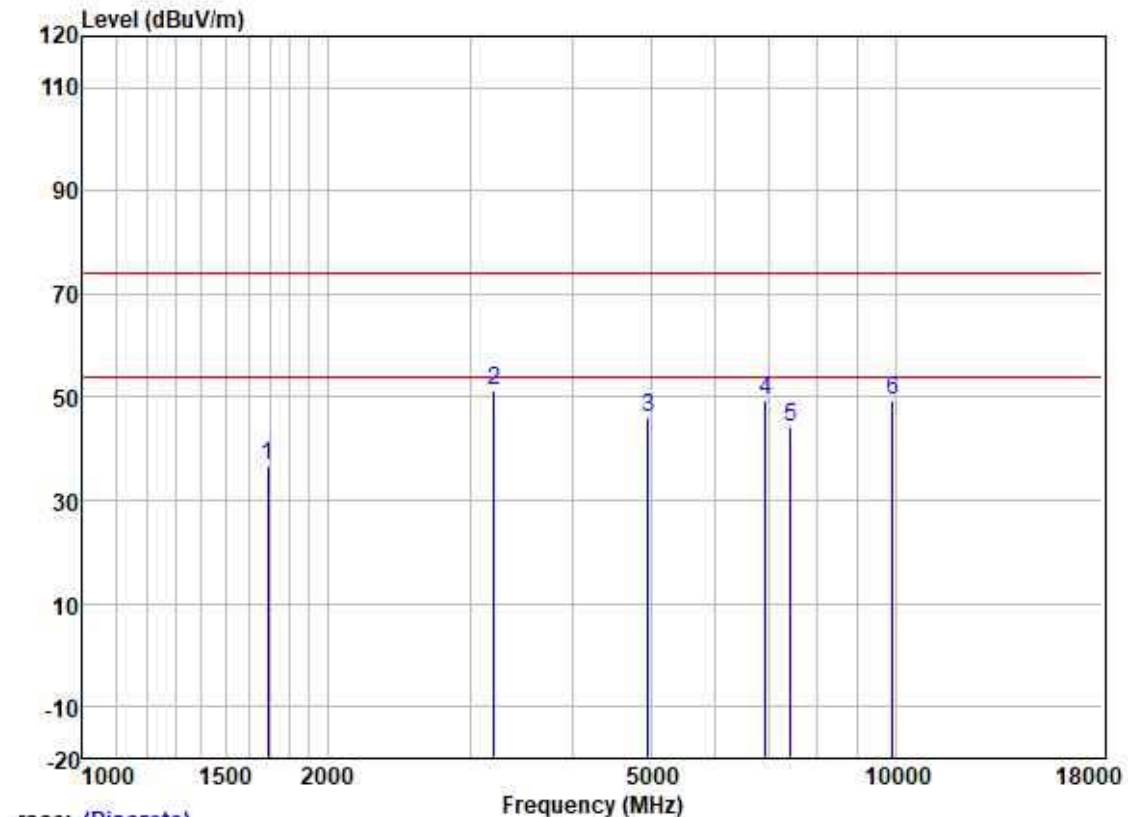

Trace: (Discrete)

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1692.231	46.47	25.09	3.07	37.93	36.70	74.00	-37.30	VERTICAL	peak
2	3205.345	55.33	28.82	4.43	37.15	51.43	74.00	-22.57	VERTICAL	peak
3	4960.000	43.52	34.15	5.28	36.89	46.06	74.00	-27.94	VERTICAL	peak
4	6914.763	44.57	34.97	7.08	37.08	49.54	74.00	-24.46	VERTICAL	peak
5	7440.000	38.39	36.33	6.72	37.16	44.28	74.00	-29.72	VERTICAL	peak
6	9920.000	39.74	38.95	7.67	37.00	49.36	74.00	-24.64	VERTICAL	peak


Test Mode: 00; Polarity: Horizontal; Modulation:GFSK; Channel:High

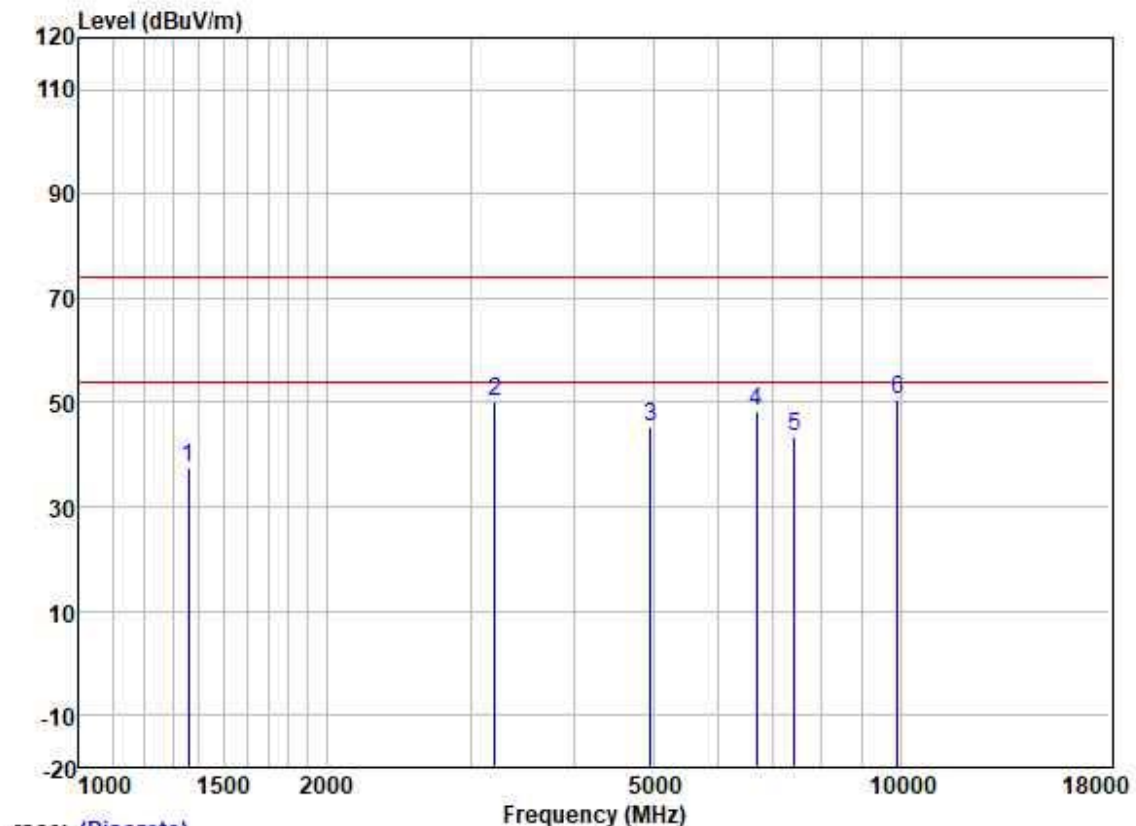

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1358.498	48.58	24.16	2.86	37.97	37.63	74.00	-36.37	HORIZONTAL peak
2	3205.345	54.01	28.82	4.43	37.15	50.11	74.00	-23.89	HORIZONTAL peak
3	4960.000	42.91	34.15	5.28	36.89	45.45	74.00	-28.55	HORIZONTAL peak
4	6679.040	44.29	34.28	6.82	37.05	48.34	74.00	-25.66	HORIZONTAL peak
5	7440.000	37.62	36.33	6.72	37.16	43.51	74.00	-30.49	HORIZONTAL peak
6	9920.000	40.84	38.95	7.67	37.00	50.46	74.00	-23.54	HORIZONTAL peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

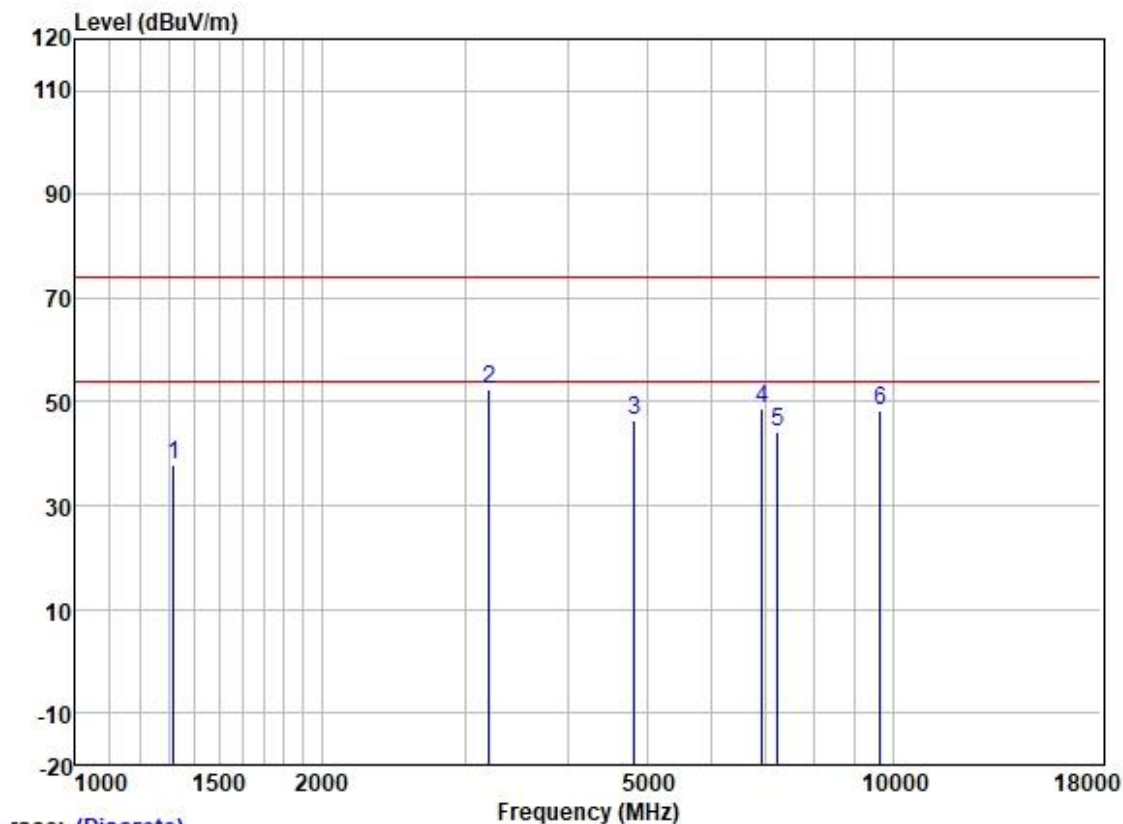

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1319.794	48.93	24.04	2.71	37.97	37.71	74.00	-36.29	VERTICAL peak
2	3205.345	56.56	28.82	4.35	37.15	52.58	74.00	-21.42	VERTICAL peak
3	4824.000	43.72	34.16	5.46	36.87	46.47	74.00	-27.53	VERTICAL peak
4	6914.763	44.34	34.97	6.39	37.08	48.62	74.00	-25.38	VERTICAL peak
5	7236.000	39.20	35.78	6.35	37.14	44.19	74.00	-29.81	VERTICAL peak
6	9648.000	38.65	38.70	7.89	37.02	48.22	74.00	-25.78	VERTICAL peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

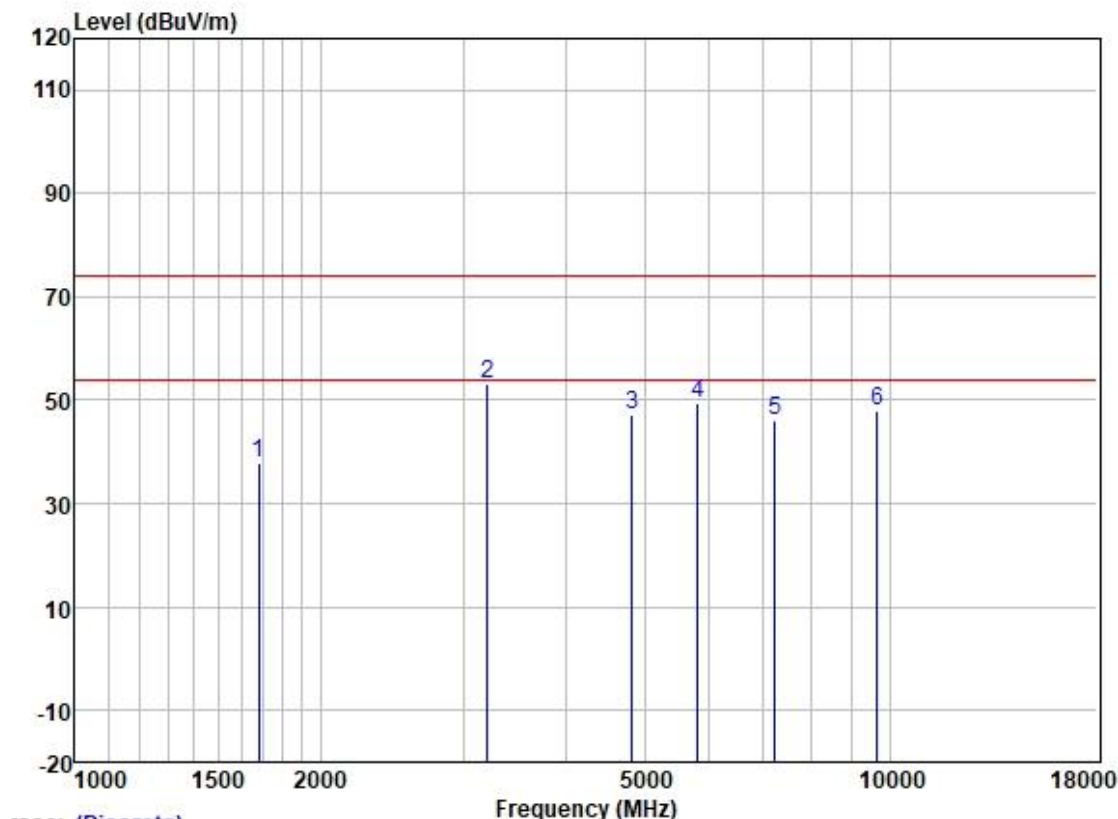

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Loss	Factor	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1682.477	47.50	25.03	3.25	37.93	37.85	74.00	-36.15	HORIZONTAL peak
2	3205.345	57.11	28.82	4.35	37.15	53.13	74.00	-20.87	HORIZONTAL peak
3	4824.000	44.36	34.16	5.46	36.87	47.11	74.00	-26.89	HORIZONTAL peak
4	5813.812	48.14	32.67	5.71	36.99	49.53	74.00	-24.47	HORIZONTAL peak
5	7236.000	41.24	35.78	6.35	37.14	46.23	74.00	-27.77	HORIZONTAL peak
6	9648.000	38.52	38.70	7.89	37.02	48.09	74.00	-25.91	HORIZONTAL peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

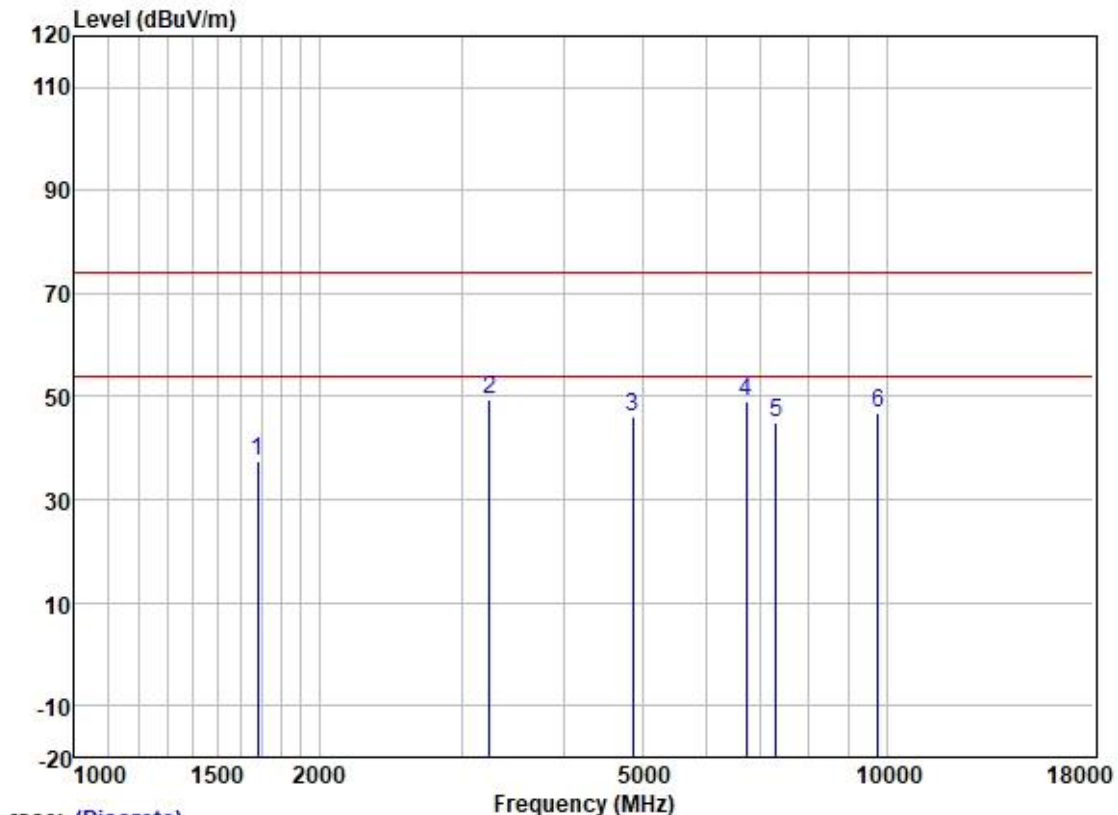

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1682.477	47.06	25.03	3.25	37.93	37.41	74.00	-36.59	VERTICAL	peak
2	3242.619	53.27	28.87	4.32	37.11	49.35	74.00	-24.65	VERTICAL	peak
3	4874.000	43.18	34.15	5.49	36.87	45.95	74.00	-28.05	VERTICAL	peak
4	6717.762	45.45	34.42	6.29	37.05	49.11	74.00	-24.89	VERTICAL	peak
5	7311.000	39.74	36.00	6.32	37.15	44.91	74.00	-29.09	VERTICAL	peak
6	9748.000	37.62	38.81	7.43	37.01	46.85	74.00	-27.15	VERTICAL	peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

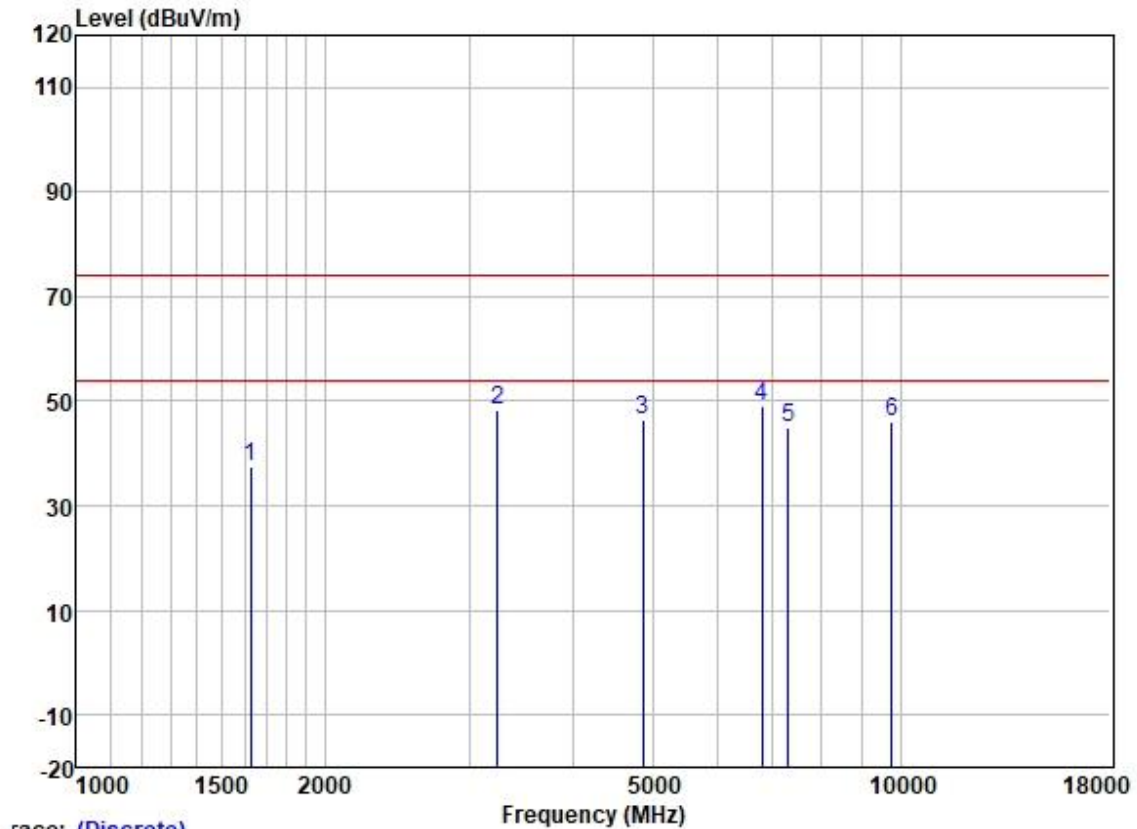

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1625.121	47.75	24.77	3.06	37.93	37.65	74.00	-36.35	HORIZONTAL peak
2	3242.619	52.37	28.87	4.32	37.11	48.45	74.00	-25.55	HORIZONTAL peak
3	4874.000	43.75	34.15	5.49	36.87	46.52	74.00	-27.48	HORIZONTAL peak
4	6795.879	45.27	34.69	6.34	37.06	49.24	74.00	-24.76	HORIZONTAL peak
5	7311.000	39.78	36.00	6.32	37.15	44.95	74.00	-29.05	HORIZONTAL peak
6	9748.000	37.01	38.81	7.43	37.01	46.24	74.00	-27.76	HORIZONTAL peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

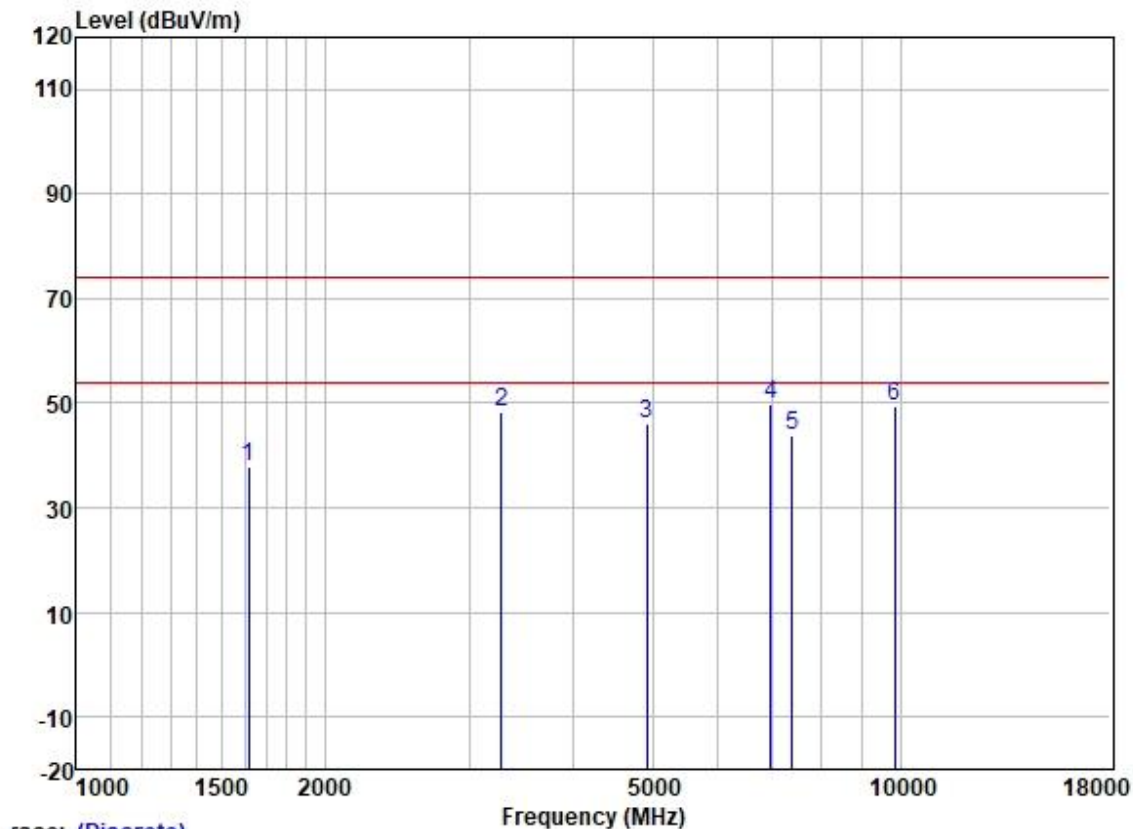

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1615.754	47.90	24.74	3.00	37.93	37.71	74.00	-36.29	VERTICAL peak
2	3280.326	52.14	28.91	4.52	37.10	48.47	74.00	-25.53	VERTICAL peak
3	4924.000	43.50	34.15	5.26	36.88	46.03	74.00	-27.97	VERTICAL peak
4	6954.852	44.93	35.04	7.10	37.09	49.98	74.00	-24.02	VERTICAL peak
5	7386.000	38.08	36.23	6.75	37.16	43.90	74.00	-30.10	VERTICAL peak
6	9848.000	39.76	38.88	7.66	37.01	49.29	74.00	-24.71	VERTICAL peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

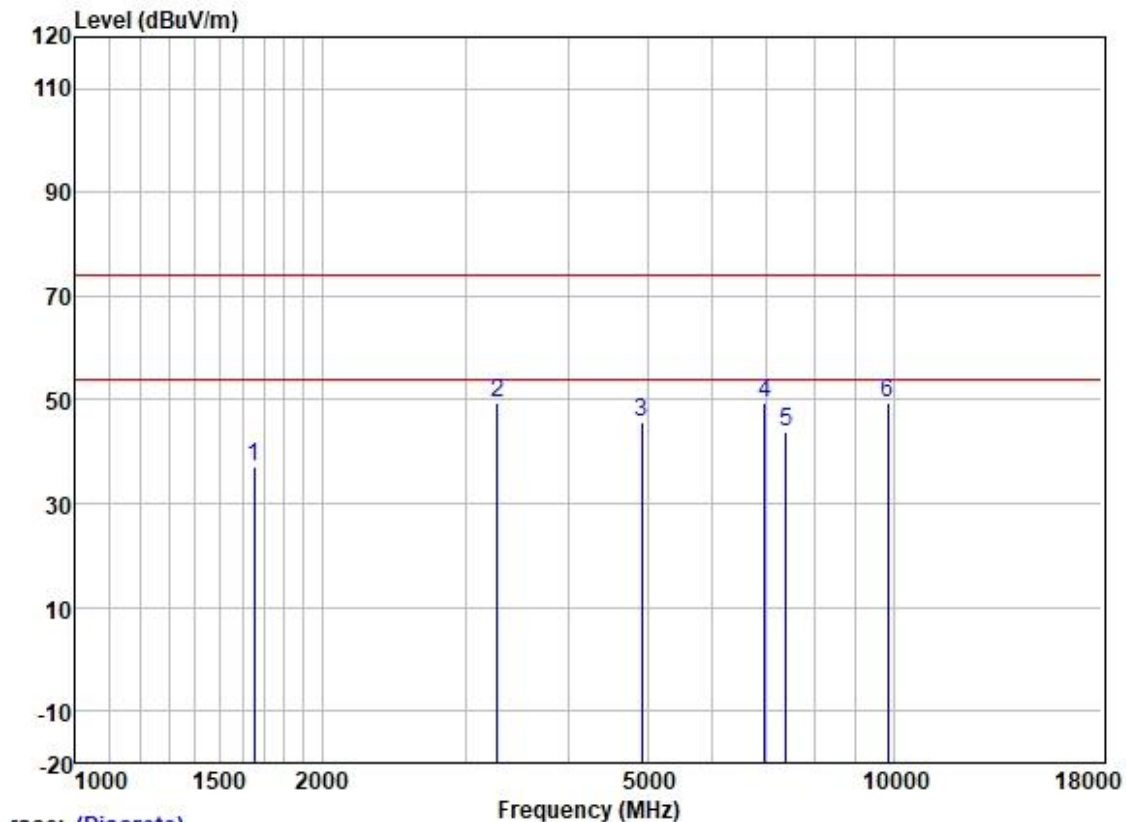

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1653.550	47.26	24.89	3.03	37.93	37.25	74.00	-36.75	HORIZONTAL	peak
2	3280.326	53.07	28.91	4.52	37.10	49.40	74.00	-24.60	HORIZONTAL	peak
3	4924.000	43.20	34.15	5.26	36.88	45.73	74.00	-28.27	HORIZONTAL	peak
4	6954.852	44.32	35.04	7.10	37.09	49.37	74.00	-24.63	HORIZONTAL	peak
5	7386.000	38.08	36.23	6.75	37.16	43.90	74.00	-30.10	HORIZONTAL	peak
6	9848.000	39.77	38.88	7.66	37.01	49.30	74.00	-24.70	HORIZONTAL	peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

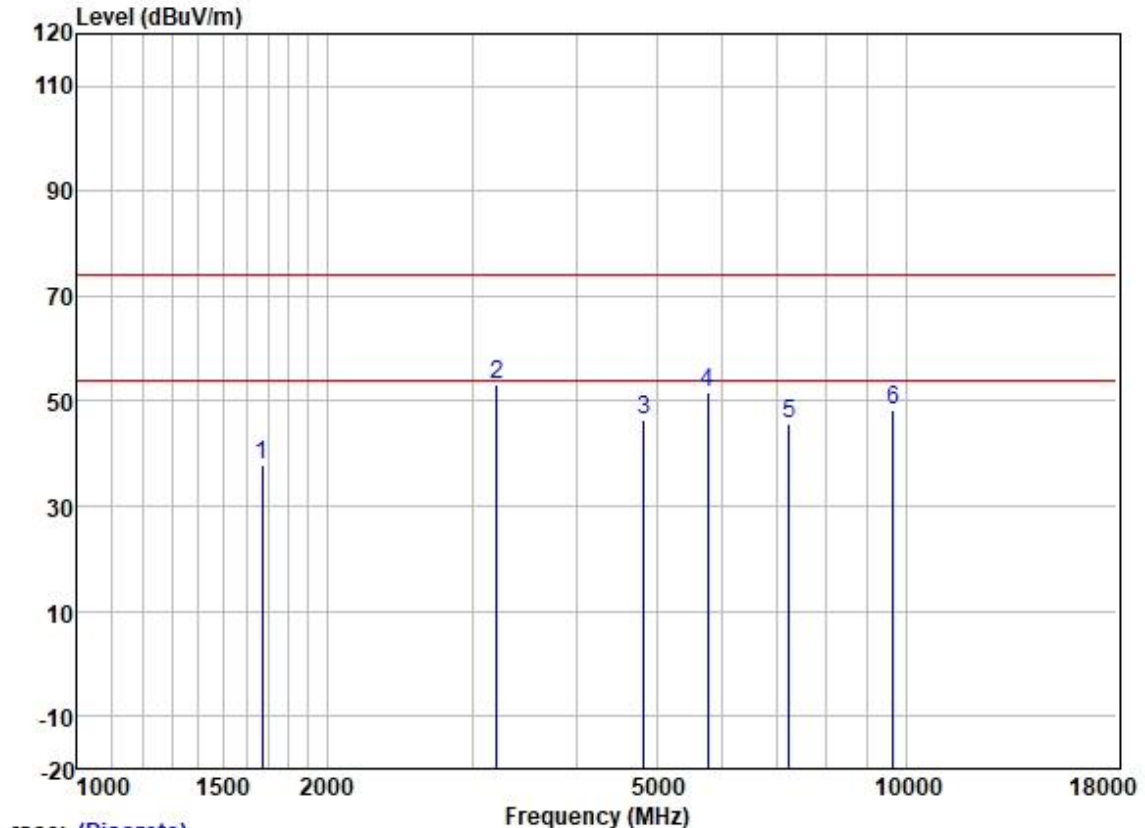

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1672.779	47.90	24.98	3.05	37.93	38.00	74.00	-36.00	VERTICAL	peak
2	3205.345	57.00	28.82	4.43	37.15	53.10	74.00	-20.90	VERTICAL	peak
3	4824.000	44.17	34.16	5.16	36.87	46.62	74.00	-27.38	VERTICAL	peak
4	5763.617	50.16	32.66	5.75	36.99	51.58	74.00	-22.42	VERTICAL	peak
5	7236.000	39.99	35.78	6.90	37.14	45.53	74.00	-28.47	VERTICAL	peak
6	9648.000	39.03	38.70	7.65	37.02	48.36	74.00	-25.64	VERTICAL	peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

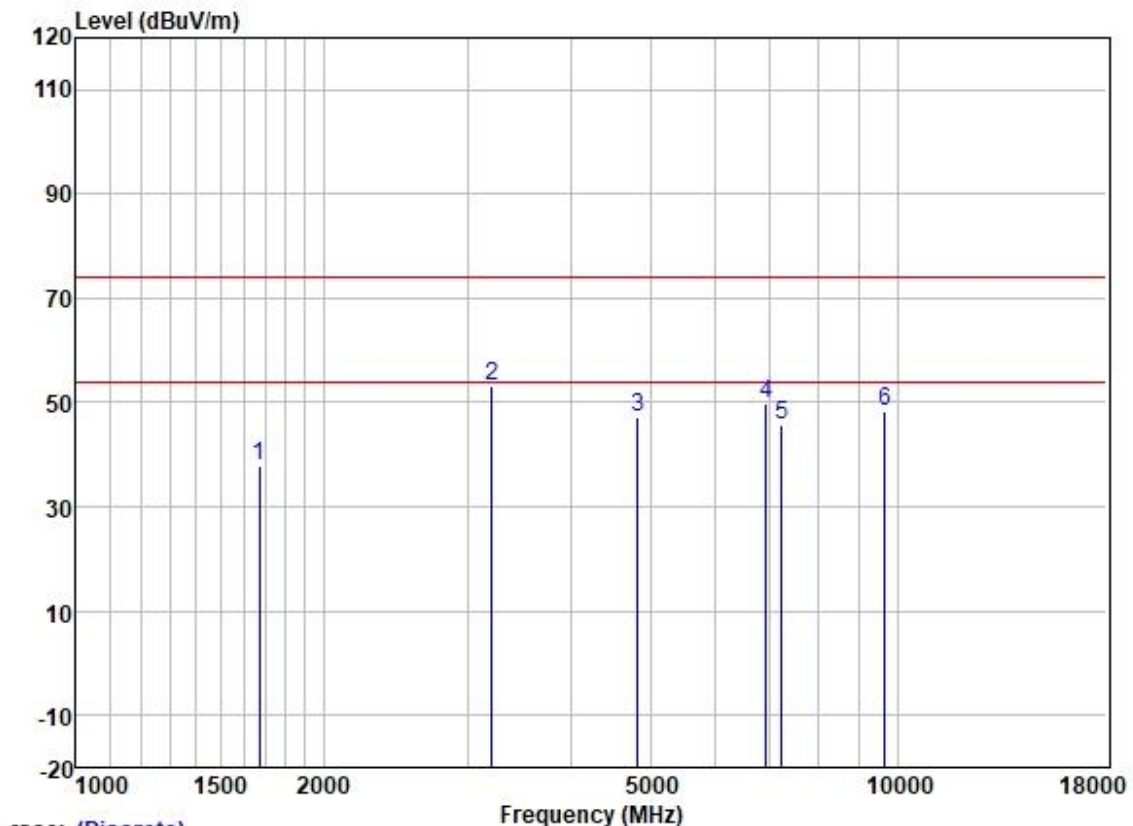

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1672.779	47.90	24.98	3.05	37.93	38.00	74.00	-36.00	HORIZONTAL peak
2	3205.345	57.00	28.82	4.43	37.15	53.10	74.00	-20.90	HORIZONTAL peak
3	4824.000	44.61	34.16	5.16	36.87	47.06	74.00	-26.94	HORIZONTAL peak
4	6914.763	44.91	34.97	7.08	37.08	49.88	74.00	-24.12	HORIZONTAL peak
5	7236.000	40.03	35.78	6.90	37.14	45.57	74.00	-28.43	HORIZONTAL peak
6	9648.000	39.05	38.70	7.65	37.02	48.38	74.00	-25.62	HORIZONTAL peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

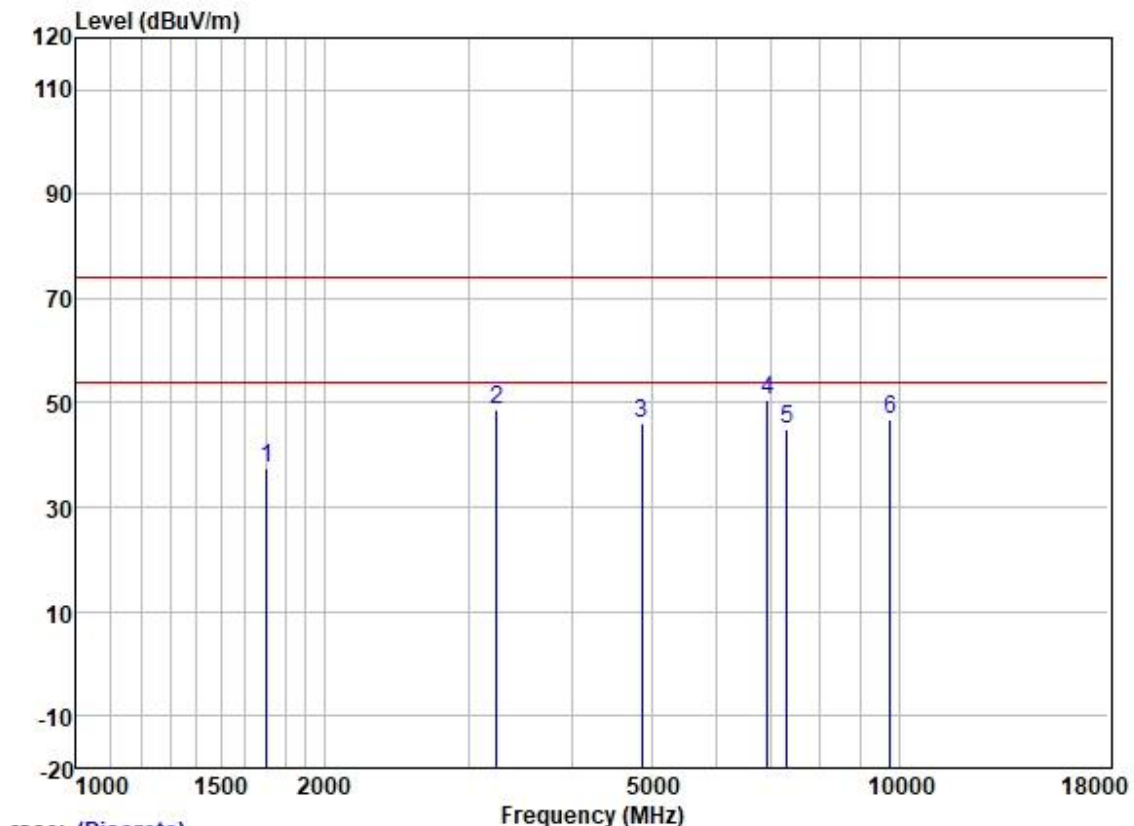

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1702.042	47.20	25.15	3.09	37.92	37.52	74.00	-36.48	VERTICAL peak
2	3242.619	52.62	28.87	4.48	37.11	48.86	74.00	-25.14	VERTICAL peak
3	4874.000	43.61	34.15	5.22	36.87	46.11	74.00	-27.89	VERTICAL peak
4	6914.763	45.53	34.97	7.08	37.08	50.50	74.00	-23.50	VERTICAL peak
5	7311.000	39.25	36.00	6.83	37.15	44.93	74.00	-29.07	VERTICAL peak
6	9748.000	37.22	38.81	7.65	37.01	46.67	74.00	-27.33	VERTICAL peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

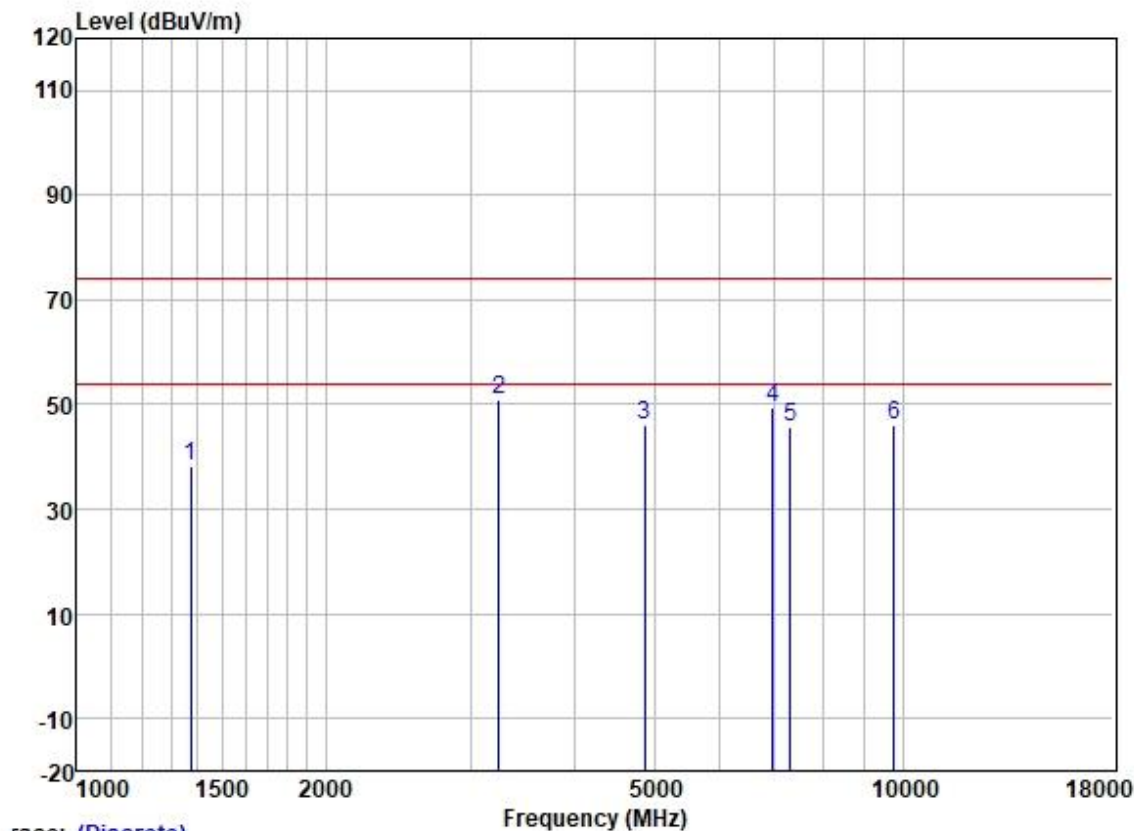

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1374.295	48.97	24.20	2.87	37.97	38.07	74.00	-35.93	HORIZONTAL	peak
2	3242.619	54.72	28.87	4.48	37.11	50.96	74.00	-23.04	HORIZONTAL	peak
3	4874.000	43.62	34.15	5.22	36.87	46.12	74.00	-27.88	HORIZONTAL	peak
4	6954.852	44.37	35.04	7.10	37.09	49.42	74.00	-24.58	HORIZONTAL	peak
5	7311.000	39.95	36.00	6.83	37.15	45.63	74.00	-28.37	HORIZONTAL	peak
6	9748.000	36.79	38.81	7.65	37.01	46.24	74.00	-27.76	HORIZONTAL	peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

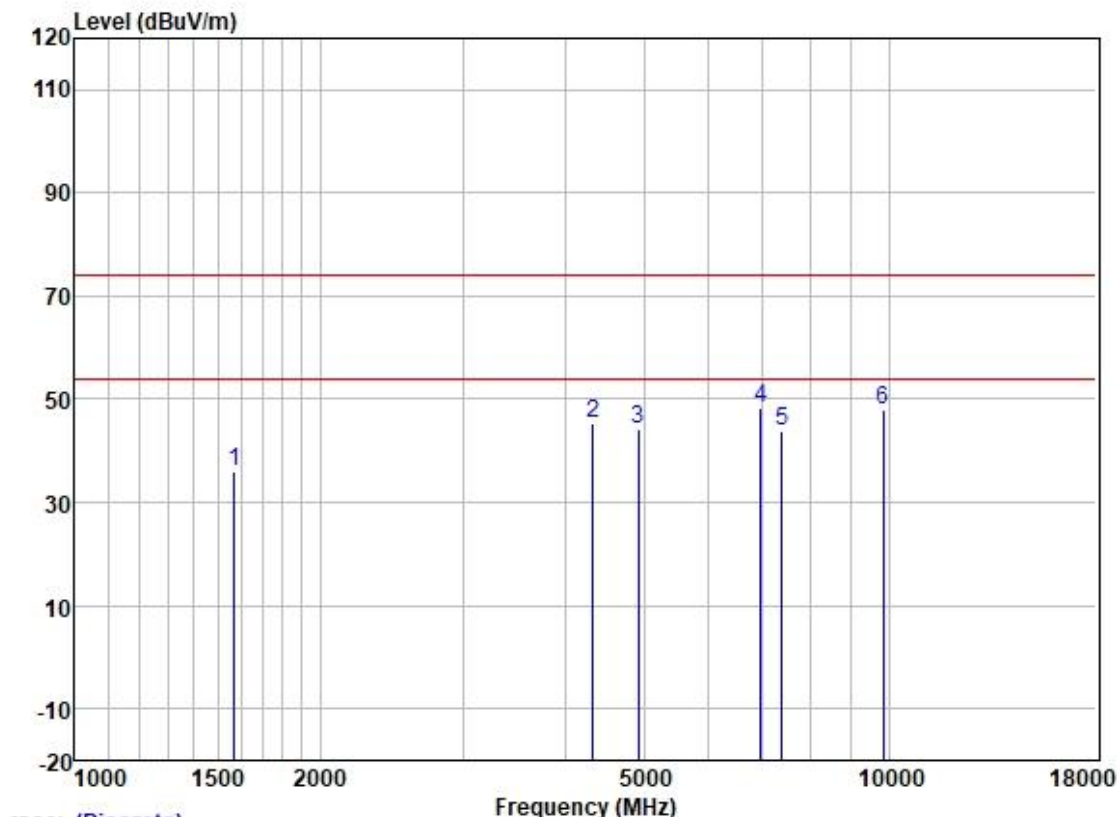

Trace: (Discrete)

	Freq	ReadAntenna Level	Cable Factor	Preamp Loss	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB		
1	1569.721	46.31	24.60	2.97	37.94	74.00	-38.06	VERTICAL	peak
2	4329.354	43.99	33.25	4.81	36.82	74.00	-28.77	VERTICAL	peak
3	4924.000	41.68	34.15	5.26	36.88	74.00	-29.79	VERTICAL	peak
4	6954.852	43.27	35.04	7.10	37.09	74.00	-25.68	VERTICAL	peak
5	7386.000	38.08	36.23	6.75	37.16	74.00	-30.10	VERTICAL	peak
6	9848.000	38.45	38.88	7.66	37.01	74.00	-26.02	VERTICAL	peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

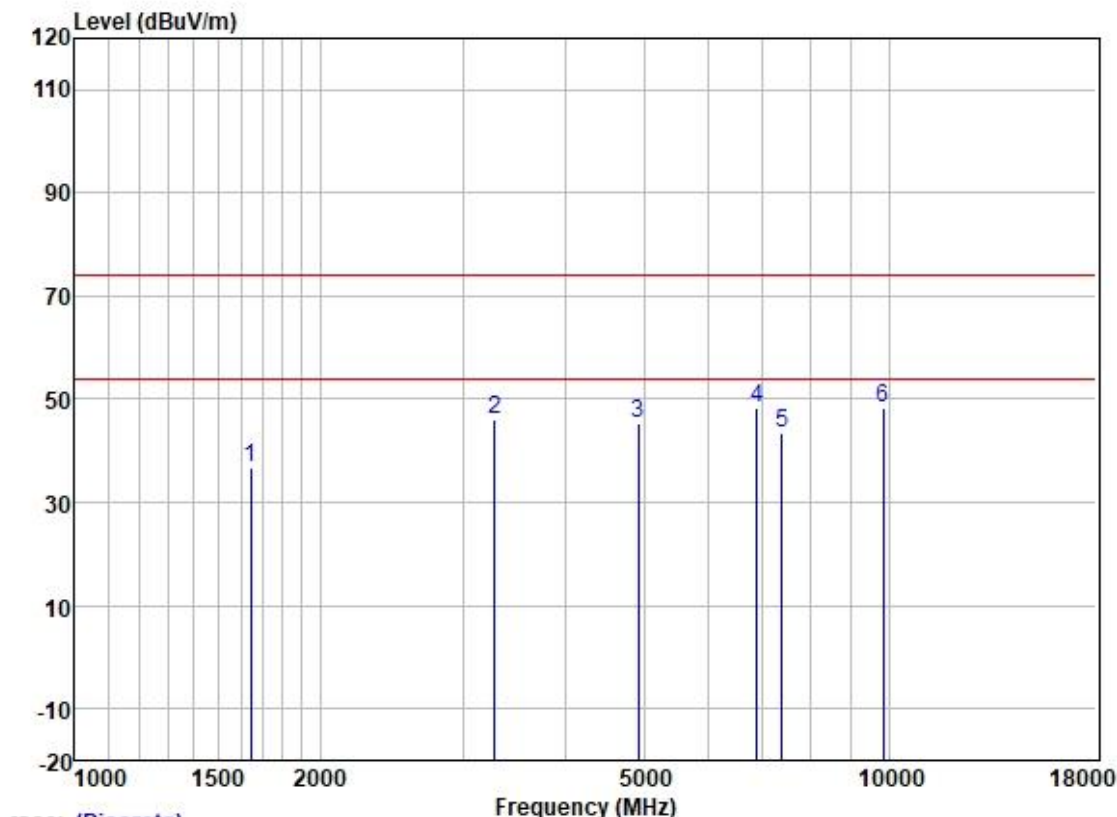

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1644.019	46.78	24.84	3.03	37.93	36.72	74.00	-37.28	HORIZONTAL	peak
2	3280.326	49.65	28.91	4.52	37.10	45.98	74.00	-28.02	HORIZONTAL	peak
3	4924.000	42.83	34.15	5.26	36.88	45.36	74.00	-28.64	HORIZONTAL	peak
4	6874.906	43.63	34.88	7.04	37.07	48.48	74.00	-25.52	HORIZONTAL	peak
5	7386.000	37.74	36.23	6.75	37.16	43.56	74.00	-30.44	HORIZONTAL	peak
6	9848.000	38.61	38.88	7.66	37.01	48.14	74.00	-25.86	HORIZONTAL	peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

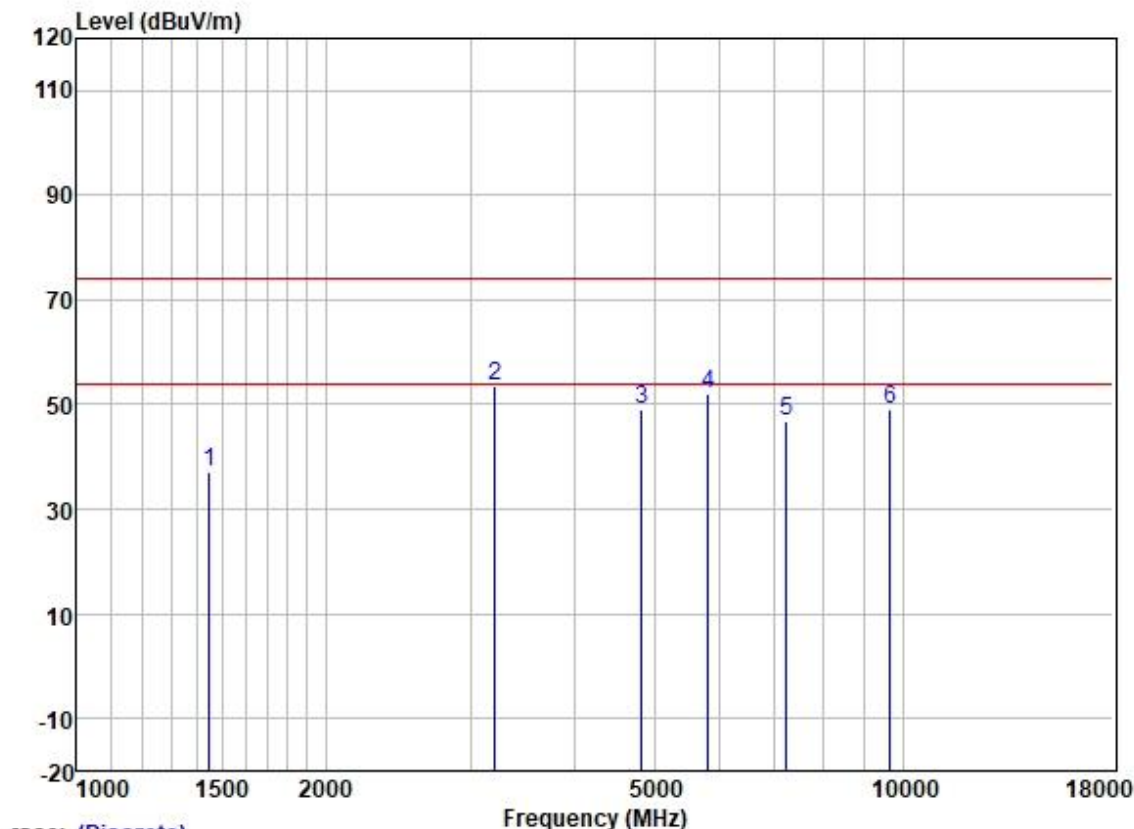

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1447.688	47.93	24.35	2.92	37.96	37.24	74.00	-36.76	VERTICAL	peak
2	3205.345	57.27	28.82	4.43	37.15	53.37	74.00	-20.63	VERTICAL	peak
3	4824.000	46.47	34.16	5.16	36.87	48.92	74.00	-25.08	VERTICAL	peak
4	5813.812	50.49	32.67	5.77	36.99	51.94	74.00	-22.06	VERTICAL	peak
5	7236.000	41.12	35.78	6.90	37.14	46.66	74.00	-27.34	VERTICAL	peak
6	9648.000	39.78	38.70	7.65	37.02	49.11	74.00	-24.89	VERTICAL	peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

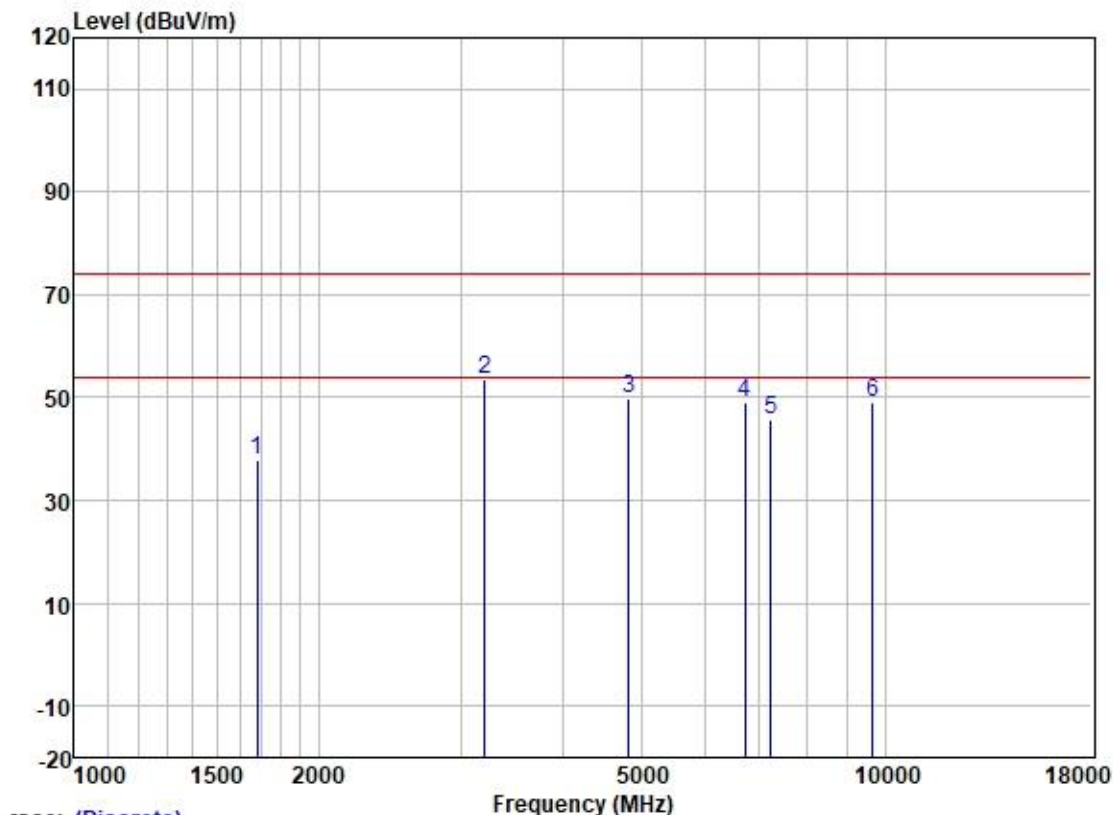

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1682.477	47.56	25.03	3.06	37.93	37.72	74.00	-36.28	HORIZONTAL	peak
2	3205.345	57.51	28.82	4.43	37.15	53.61	74.00	-20.39	HORIZONTAL	peak
3	4824.000	47.24	34.16	5.16	36.87	49.69	74.00	-24.31	HORIZONTAL	peak
4	6717.762	44.99	34.42	6.87	37.05	49.23	74.00	-24.77	HORIZONTAL	peak
5	7236.000	40.14	35.78	6.90	37.14	45.68	74.00	-28.32	HORIZONTAL	peak
6	9648.000	39.62	38.70	7.65	37.02	48.95	74.00	-25.05	HORIZONTAL	peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

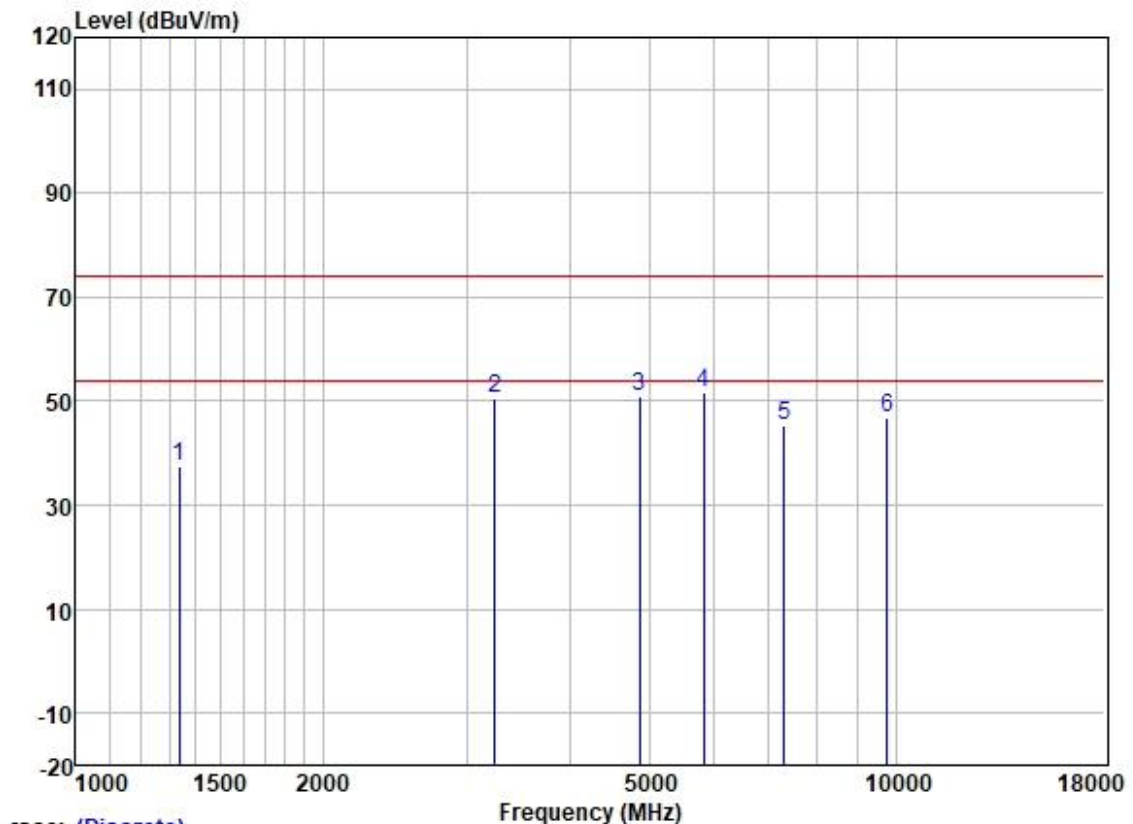

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1335.141	48.49	24.09	2.84	37.97	37.45	74.00	-36.55	VERTICAL peak
2	3242.619	54.45	28.87	4.48	37.11	50.69	74.00	-23.31	VERTICAL peak
3	4874.000	48.46	34.15	5.22	36.87	50.96	74.00	-23.04	VERTICAL peak
4	5830.640	50.07	32.67	5.78	36.99	51.53	74.00	-22.47	VERTICAL peak
5	7311.000	39.72	36.00	6.83	37.15	45.40	74.00	-28.60	VERTICAL peak
6	9748.000	37.38	38.81	7.65	37.01	46.83	74.00	-27.17	VERTICAL peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

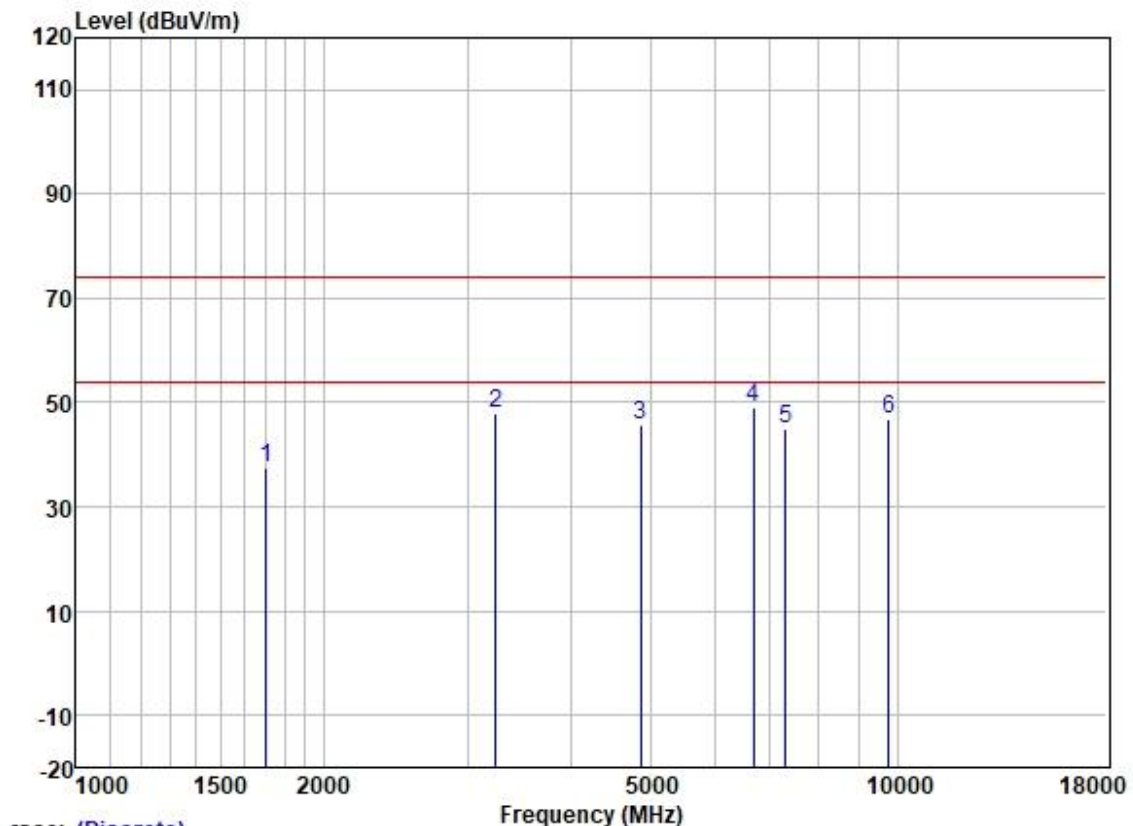

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1702.042	47.00	25.15	3.09	37.92	37.32	74.00	-36.68	HORIZONTAL peak
2	3242.619	51.83	28.87	4.48	37.11	48.07	74.00	-25.93	HORIZONTAL peak
3	4874.000	43.10	34.15	5.22	36.87	45.60	74.00	-28.40	HORIZONTAL peak
4	6679.040	45.18	34.28	6.82	37.05	49.23	74.00	-24.77	HORIZONTAL peak
5	7311.000	39.12	36.00	6.83	37.15	44.80	74.00	-29.20	HORIZONTAL peak
6	9748.000	37.37	38.81	7.65	37.01	46.82	74.00	-27.18	HORIZONTAL peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

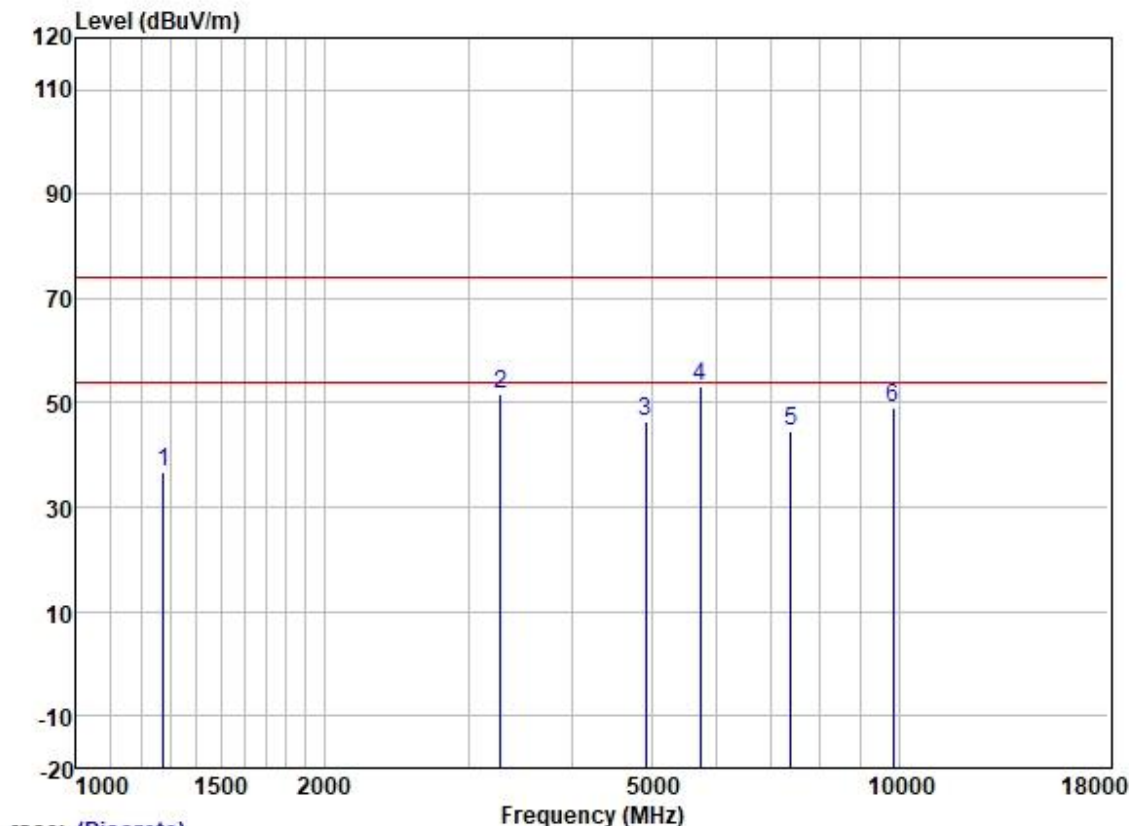

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1274.802	48.28	23.85	2.76	37.98	36.91	74.00	-37.09	VERTICAL	peak
2	3280.326	55.39	28.91	4.52	37.10	51.72	74.00	-22.28	VERTICAL	peak
3	4924.000	44.01	34.15	5.26	36.88	46.54	74.00	-27.46	VERTICAL	peak
4	5730.396	51.92	32.65	5.72	36.99	53.30	74.00	-20.70	VERTICAL	peak
5	7386.000	38.64	36.23	6.75	37.16	44.46	74.00	-29.54	VERTICAL	peak
6	9848.000	39.43	38.88	7.66	37.01	48.96	74.00	-25.04	VERTICAL	peak

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

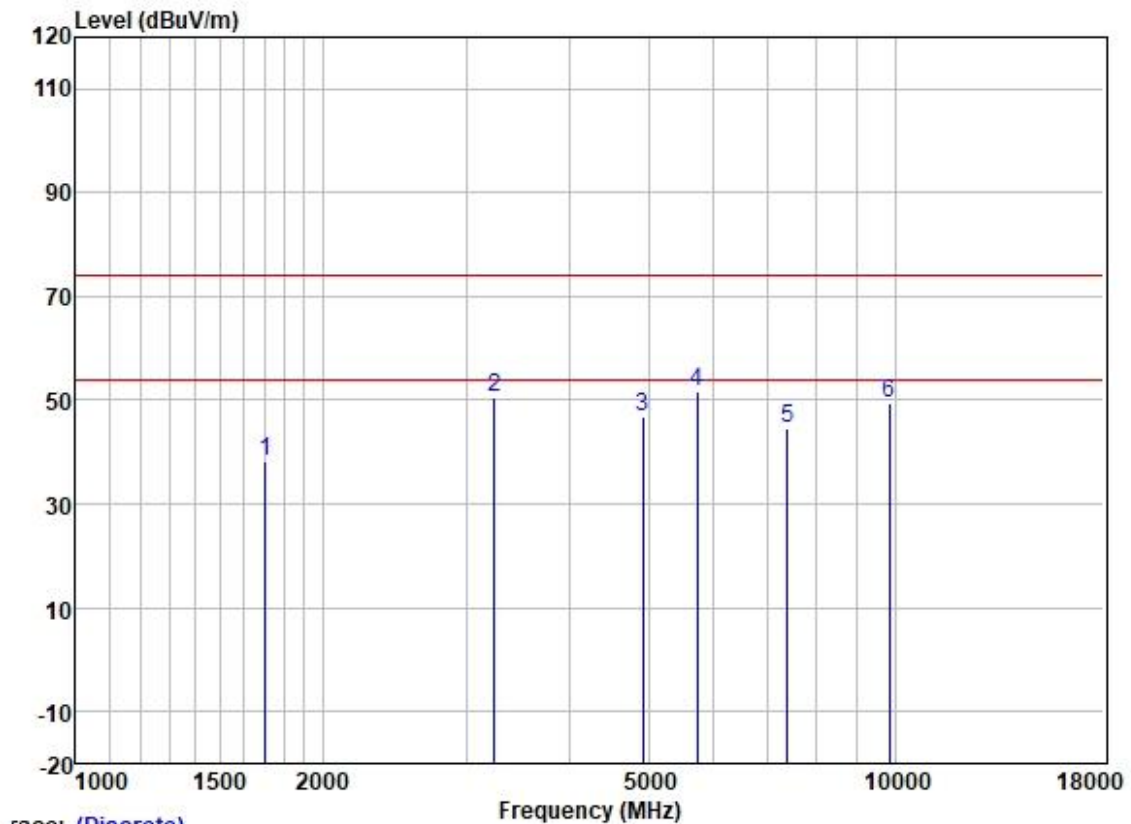


	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1702.042	47.87	25.15	3.09	37.92	38.19	74.00	-35.81	HORIZONTAL peak
2	3242.619	54.38	28.87	4.48	37.11	50.62	74.00	-23.38	HORIZONTAL peak
3	4924.000	44.45	34.15	5.26	36.88	46.98	74.00	-27.02	HORIZONTAL peak
4	5730.396	50.24	32.65	5.72	36.99	51.62	74.00	-22.38	HORIZONTAL peak
5	7386.000	38.77	36.23	6.75	37.16	44.59	74.00	-29.41	HORIZONTAL peak
6	9848.000	39.86	38.88	7.66	37.01	49.39	74.00	-24.61	HORIZONTAL peak

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

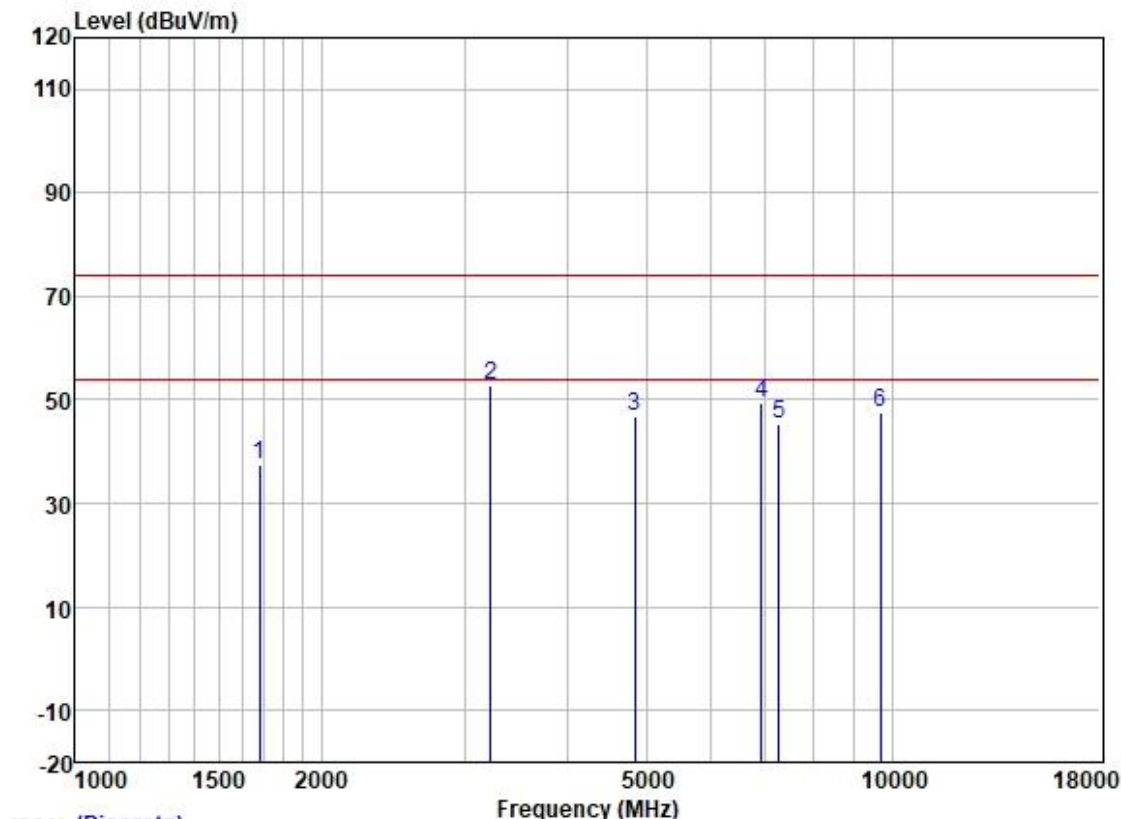

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1682.477	47.40	25.03	3.06	37.93	37.56	74.00	-36.44	VERTICAL peak
2	3223.928	56.63	28.84	4.45	37.13	52.79	74.00	-21.21	VERTICAL peak
3	4844.000	44.24	34.15	5.19	36.87	46.71	74.00	-27.29	VERTICAL peak
4	6914.763	44.45	34.97	7.08	37.08	49.42	74.00	-24.58	VERTICAL peak
5	7266.000	39.74	35.86	6.88	37.14	45.34	74.00	-28.66	VERTICAL peak
6	9688.000	38.14	38.75	7.65	37.02	47.52	74.00	-26.48	VERTICAL peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

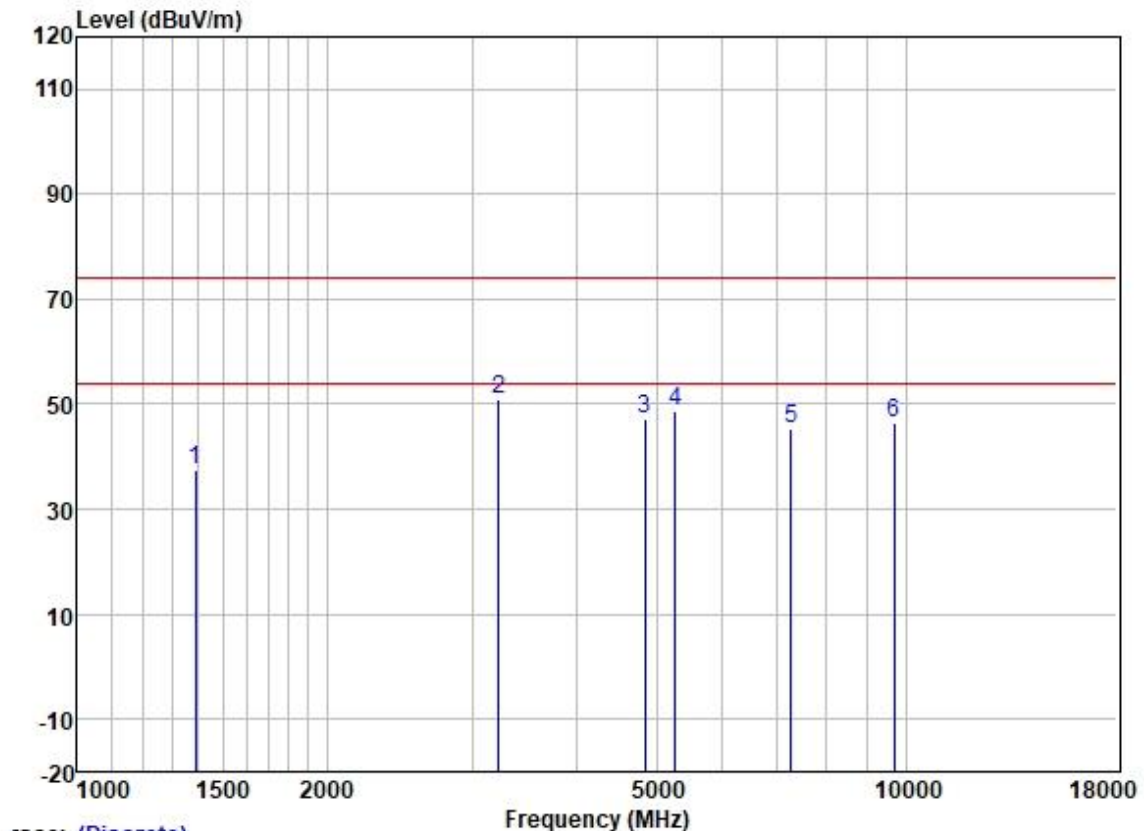

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1390.276	48.22	24.24	2.88	37.97	37.37	74.00	-36.63	HORIZONTAL	peak
2	3223.928	54.65	28.84	4.45	37.13	50.81	74.00	-23.19	HORIZONTAL	peak
3	4844.000	44.74	34.15	5.19	36.87	47.21	74.00	-26.79	HORIZONTAL	peak
4	5269.649	46.96	33.30	5.49	36.94	48.81	74.00	-25.19	HORIZONTAL	peak
5	7266.000	39.62	35.86	6.88	37.14	45.22	74.00	-28.78	HORIZONTAL	peak
6	9688.000	37.26	38.75	7.65	37.02	46.64	74.00	-27.36	HORIZONTAL	peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

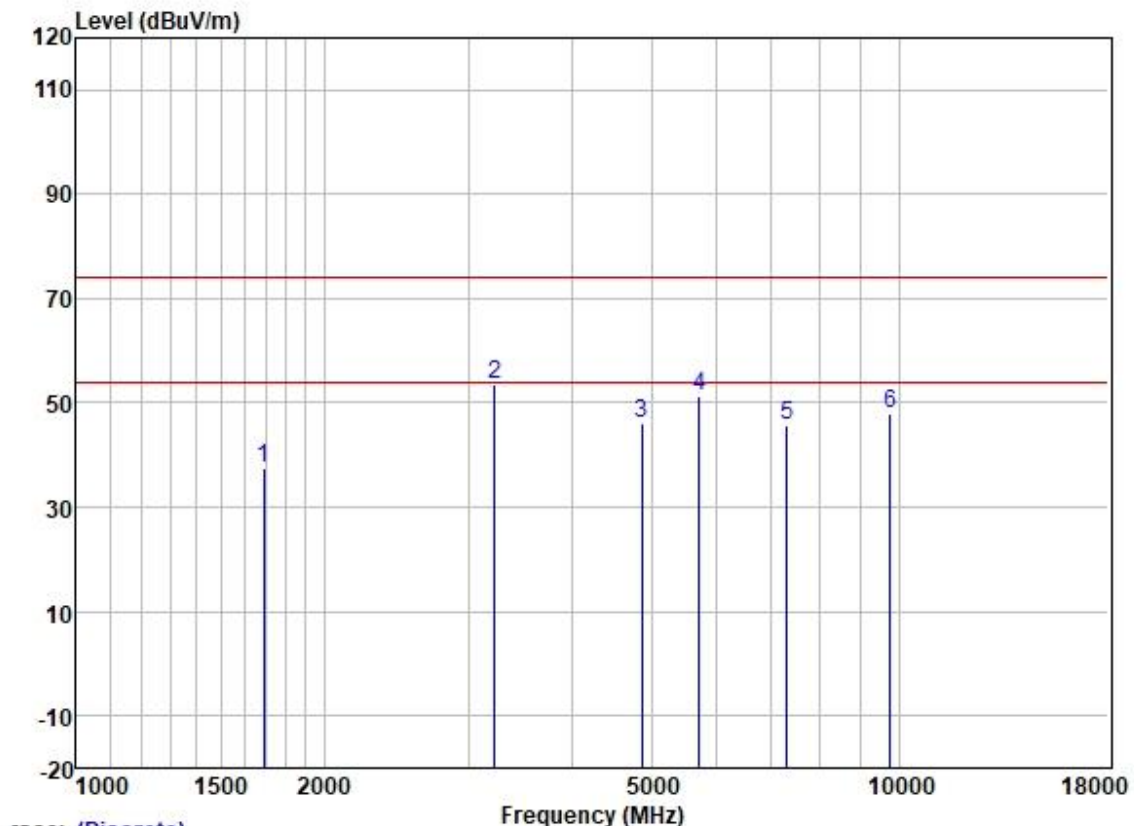

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1692.231	47.26	25.09	3.07	37.93	37.49	74.00	-36.51	VERTICAL peak
2	3223.928	57.33	28.84	4.45	37.13	53.49	74.00	-20.51	VERTICAL peak
3	4874.000	43.43	34.15	5.22	36.87	45.93	74.00	-28.07	VERTICAL peak
4	5713.856	49.91	32.65	5.71	36.98	51.29	74.00	-22.71	VERTICAL peak
5	7311.000	40.00	36.00	6.83	37.15	45.68	74.00	-28.32	VERTICAL peak
6	9748.000	38.40	38.81	7.65	37.01	47.85	74.00	-26.15	VERTICAL peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

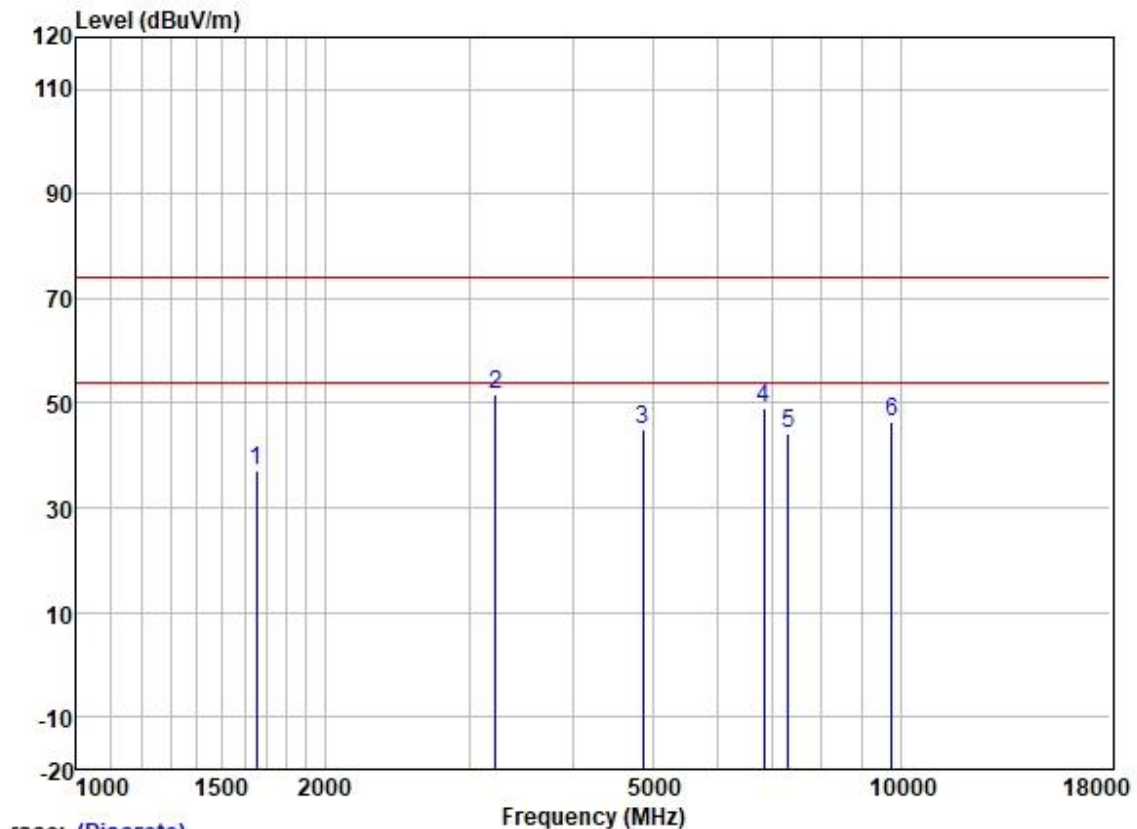

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1653.550	47.28	24.89	3.03	37.93	37.27	74.00	-36.73	HORIZONTAL peak
2	3223.928	55.44	28.84	4.45	37.13	51.60	74.00	-22.40	HORIZONTAL peak
3	4874.000	42.30	34.15	5.22	36.87	44.80	74.00	-29.20	HORIZONTAL peak
4	6835.278	44.21	34.79	7.01	37.07	48.94	74.00	-25.06	HORIZONTAL peak
5	7311.000	38.43	36.00	6.83	37.15	44.11	74.00	-29.89	HORIZONTAL peak
6	9748.000	36.84	38.81	7.65	37.01	46.29	74.00	-27.71	HORIZONTAL peak


Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

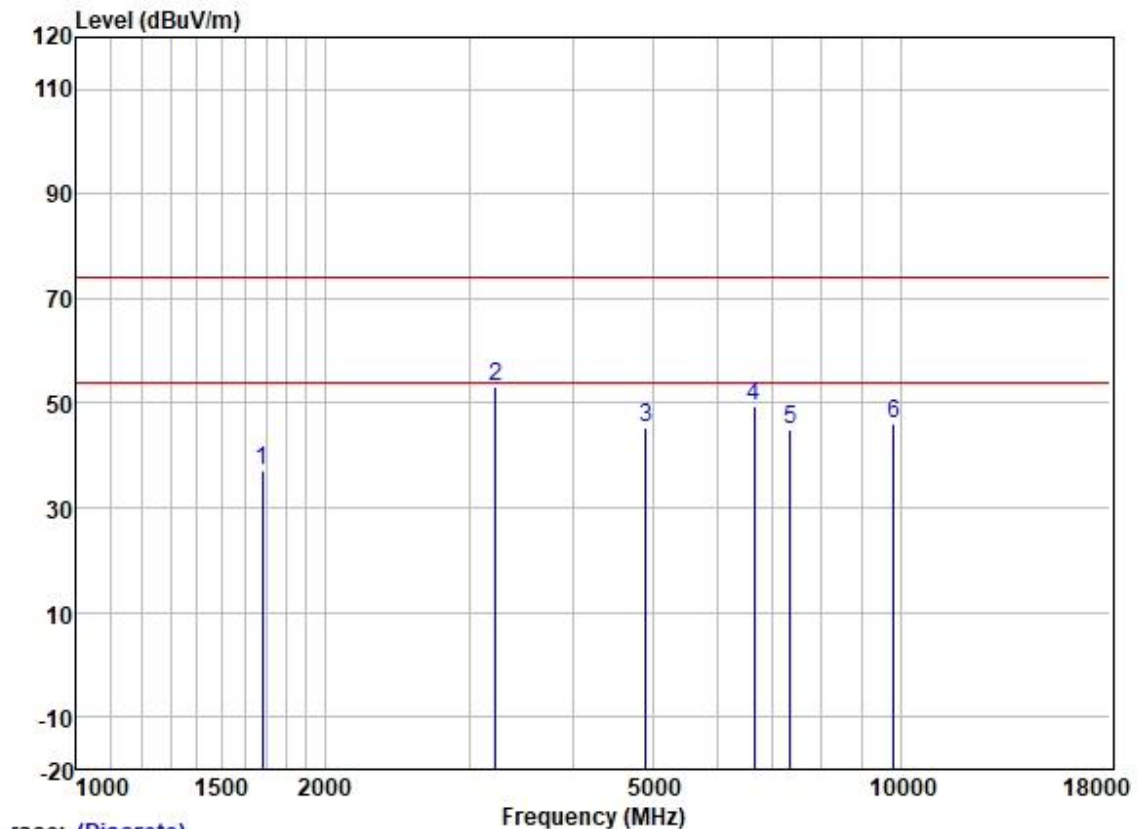

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1682.477	46.93	25.03	3.06	37.93	37.09	74.00	-36.91	VERTICAL peak
2	3223.928	56.92	28.84	4.45	37.13	53.08	74.00	-20.92	VERTICAL peak
3	4904.000	42.97	34.15	5.24	36.88	45.48	74.00	-28.52	VERTICAL peak
4	6640.542	45.39	34.17	6.77	37.04	49.29	74.00	-24.71	VERTICAL peak
5	7356.000	39.20	36.12	6.79	37.15	44.96	74.00	-29.04	VERTICAL peak
6	9808.000	36.53	38.86	7.66	37.01	46.04	74.00	-27.96	VERTICAL peak


Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

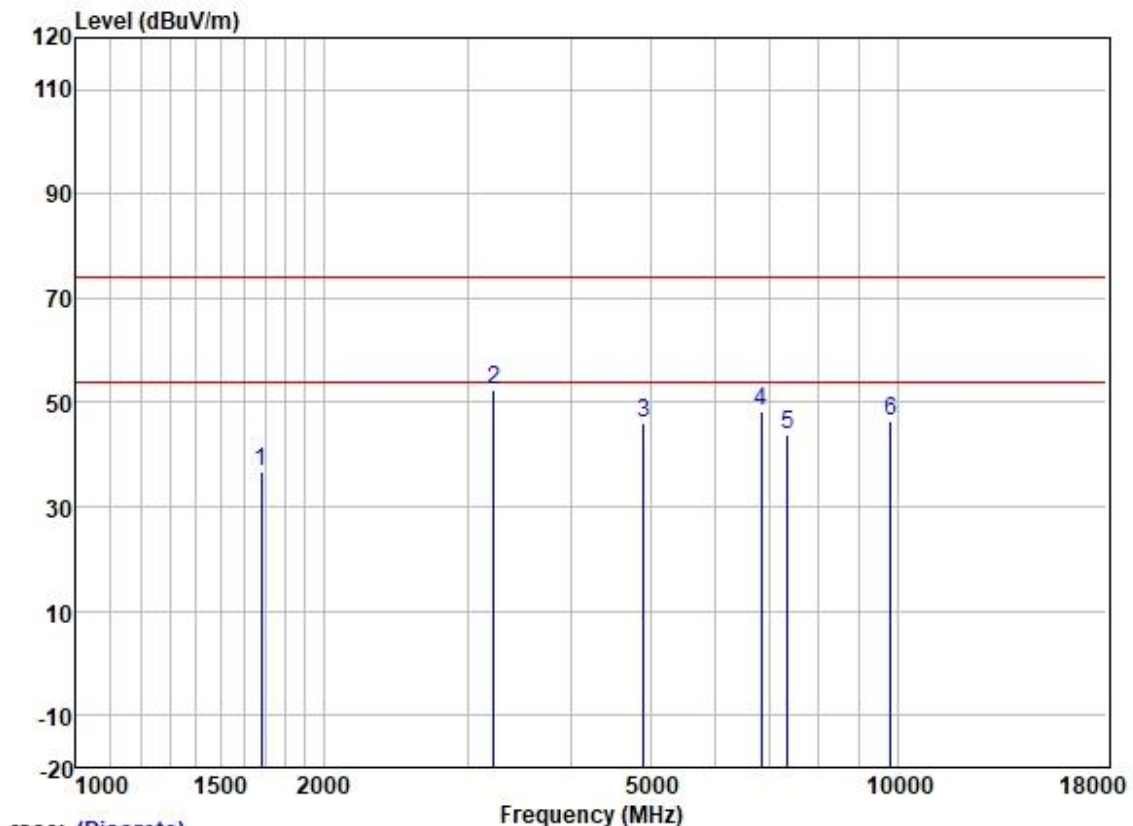

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1682.477	46.71	25.03	3.06	37.93	36.87	74.00	-37.13	HORIZONTAL	peak
2	3223.928	56.11	28.84	4.45	37.13	52.27	74.00	-21.73	HORIZONTAL	peak
3	4904.000	43.46	34.15	5.24	36.88	45.97	74.00	-28.03	HORIZONTAL	peak
4	6835.278	43.70	34.79	7.01	37.07	48.43	74.00	-25.57	HORIZONTAL	peak
5	7356.000	38.06	36.12	6.79	37.15	43.82	74.00	-30.18	HORIZONTAL	peak
6	9808.000	36.79	38.86	7.66	37.01	46.30	74.00	-27.70	HORIZONTAL	peak


Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:Low

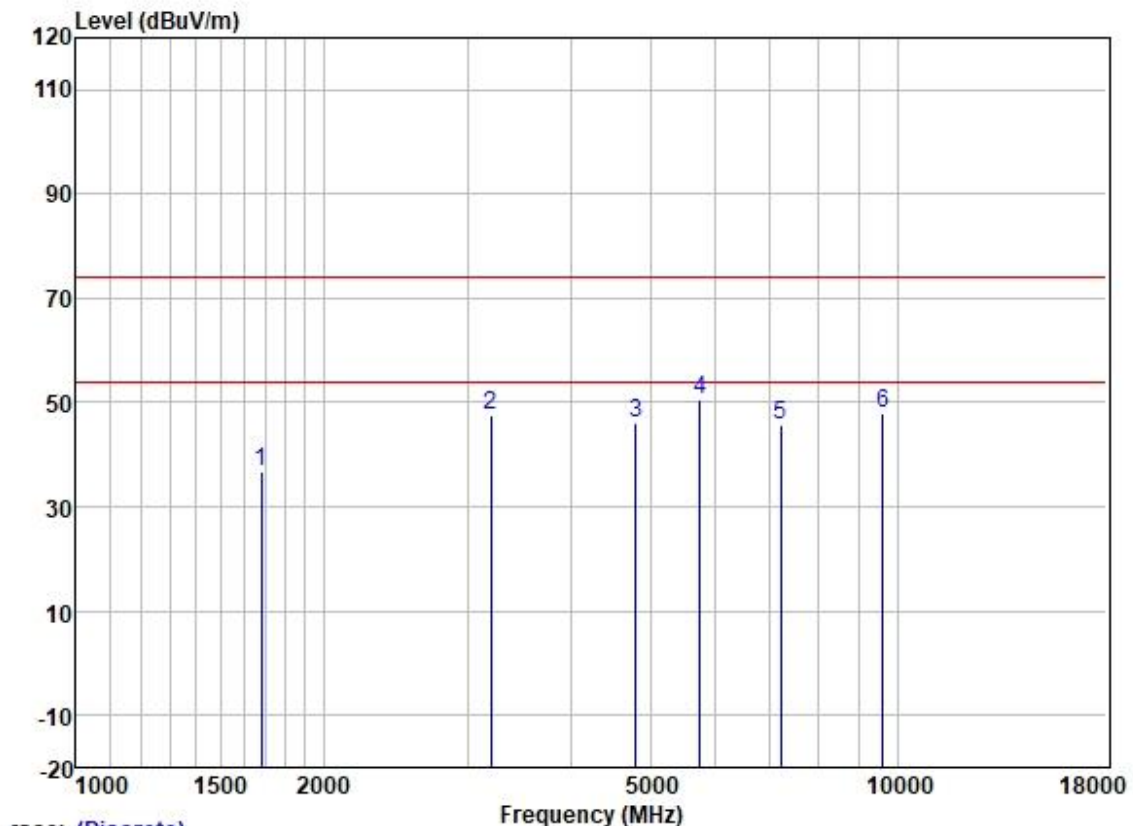

race: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1682.477	46.41	25.03	3.06	37.93	36.57	74.00	-37.43	VERTICAL
2	3196.094	51.64	28.81	4.42	37.15	47.72	74.00	-26.28	VERTICAL
3	4804.000	43.50	34.16	5.15	36.86	45.95	74.00	-28.05	VERTICAL
4	5746.982	49.08	32.65	5.74	36.99	50.48	74.00	-23.52	VERTICAL
5	7206.000	40.25	35.63	6.96	37.13	45.71	74.00	-28.29	VERTICAL
6	9608.000	38.55	38.68	7.65	37.02	47.86	74.00	-26.14	VERTICAL


Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:Low

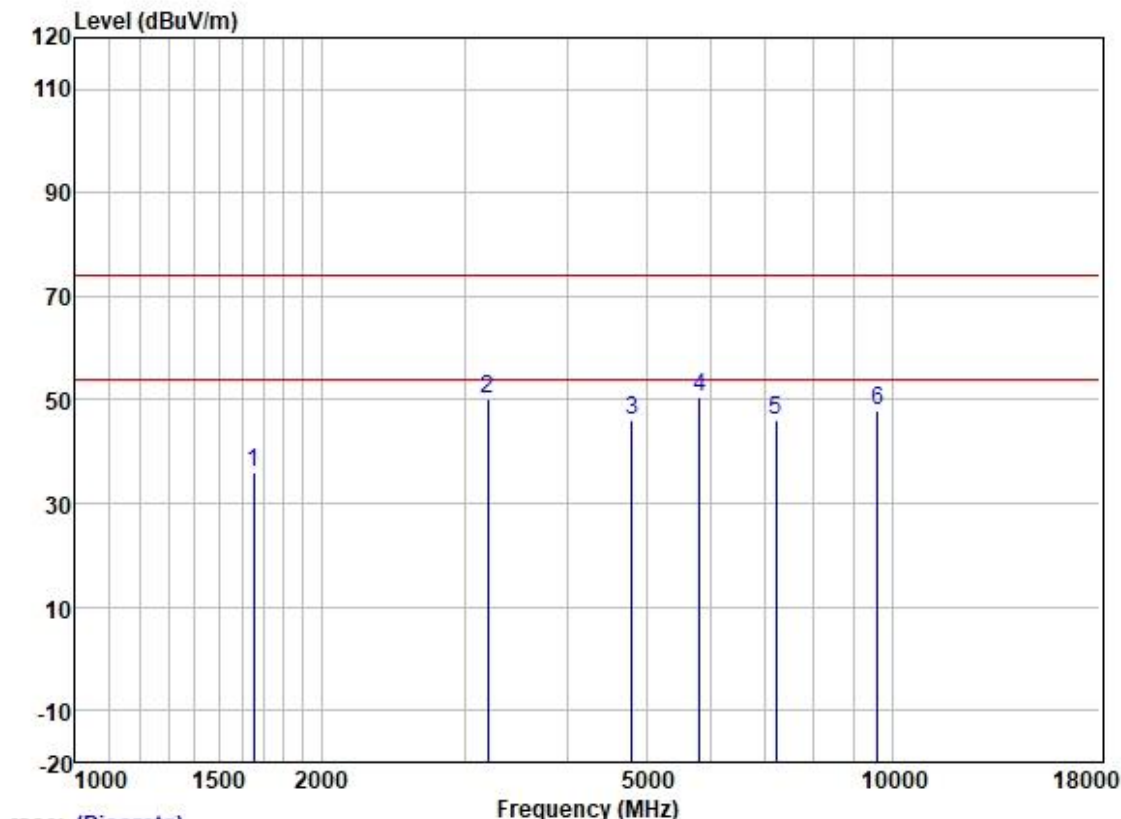

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1653.550	46.15	24.89	3.03	37.93	36.14	74.00	-37.86	HORIZONTAL peak
2	3196.094	54.05	28.81	4.42	37.15	50.13	74.00	-23.87	HORIZONTAL peak
3	4804.000	43.76	34.16	5.15	36.86	46.21	74.00	-27.79	HORIZONTAL peak
4	5813.812	48.97	32.67	5.77	36.99	50.42	74.00	-23.58	HORIZONTAL peak
5	7206.000	40.47	35.63	6.96	37.13	45.93	74.00	-28.07	HORIZONTAL peak
6	9608.000	38.67	38.68	7.65	37.02	47.98	74.00	-26.02	HORIZONTAL peak


Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:middle

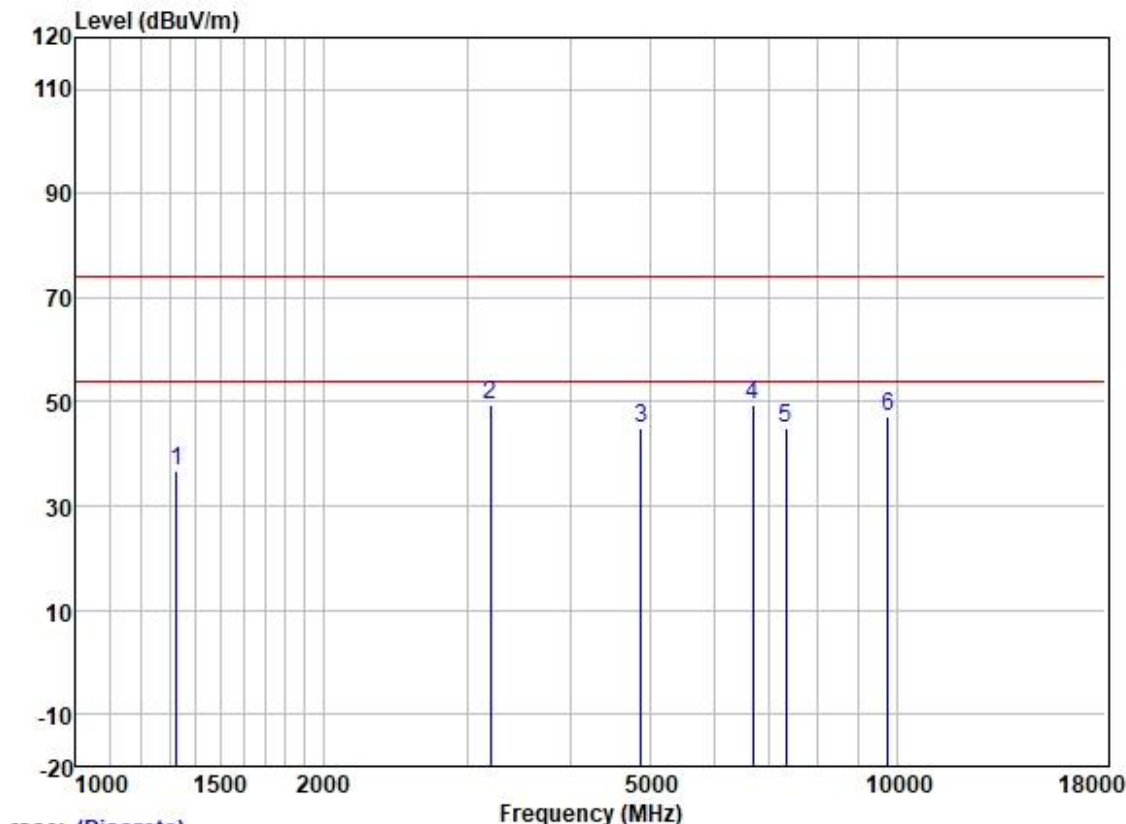

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1327.446	47.95	24.07	2.83	37.97	36.88	74.00	-37.12	VERTICAL	peak
2	3196.094	53.24	28.81	4.42	37.15	49.32	74.00	-24.68	VERTICAL	peak
3	4880.000	42.49	34.15	5.22	36.87	44.99	74.00	-29.01	VERTICAL	peak
4	6679.040	45.43	34.28	6.82	37.05	49.48	74.00	-24.52	VERTICAL	peak
5	7320.000	39.10	36.07	6.81	37.15	44.83	74.00	-29.17	VERTICAL	peak
6	9760.000	37.68	38.81	7.65	37.01	47.13	74.00	-26.87	VERTICAL	peak


Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:middle

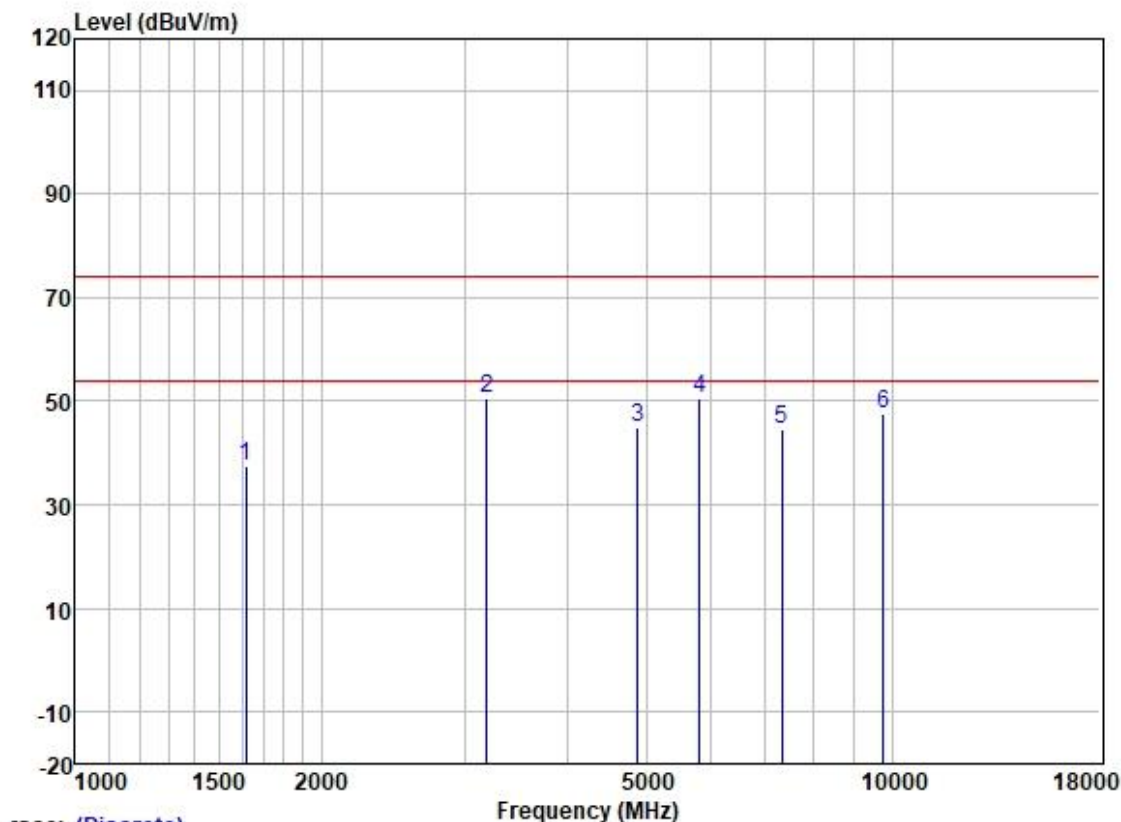

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1615.754	47.67	24.74	3.00	37.93	37.48	74.00	-36.52	HORIZONTAL	peak
2	3186.869	54.39	28.80	4.41	37.15	50.45	74.00	-23.55	HORIZONTAL	peak
3	4880.000	42.46	34.15	5.22	36.87	44.96	74.00	-29.04	HORIZONTAL	peak
4	5813.812	49.17	32.67	5.77	36.99	50.62	74.00	-23.38	HORIZONTAL	peak
5	7320.000	38.97	36.07	6.81	37.15	44.70	74.00	-29.30	HORIZONTAL	peak
6	9760.000	38.05	38.81	7.65	37.01	47.50	74.00	-26.50	HORIZONTAL	peak


Test Mode: 05; Polarity: Vertical; Modulation: GFSK; Channel: High

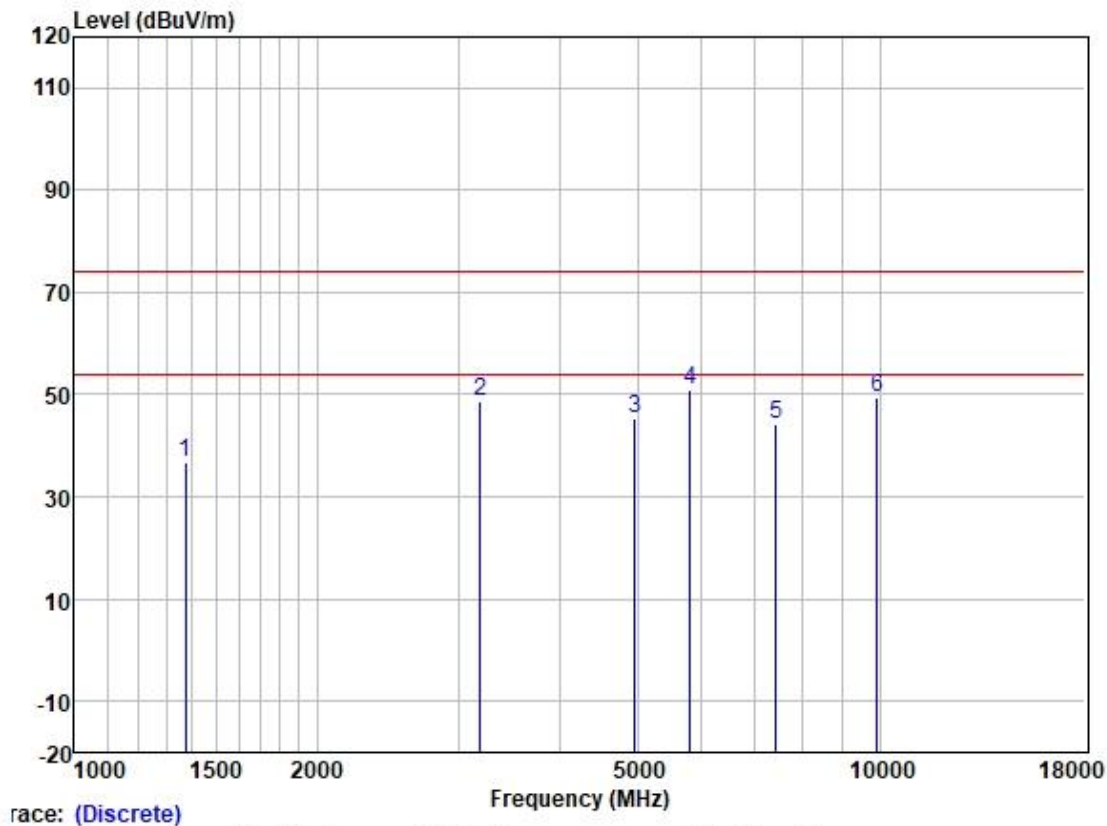

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1374.295	47.66	24.20	2.87	37.97	36.76	74.00	-37.24	VERTICAL peak
2	3186.869	52.67	28.80	4.41	37.15	48.73	74.00	-25.27	VERTICAL peak
3	4960.000	42.85	34.15	5.28	36.89	45.39	74.00	-28.61	VERTICAL peak
4	5813.812	49.51	32.67	5.77	36.99	50.96	74.00	-23.04	VERTICAL peak
5	7440.000	38.20	36.33	6.72	37.16	44.09	74.00	-29.91	VERTICAL peak
6	9920.000	39.98	38.95	7.67	37.00	49.60	74.00	-24.40	VERTICAL peak

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

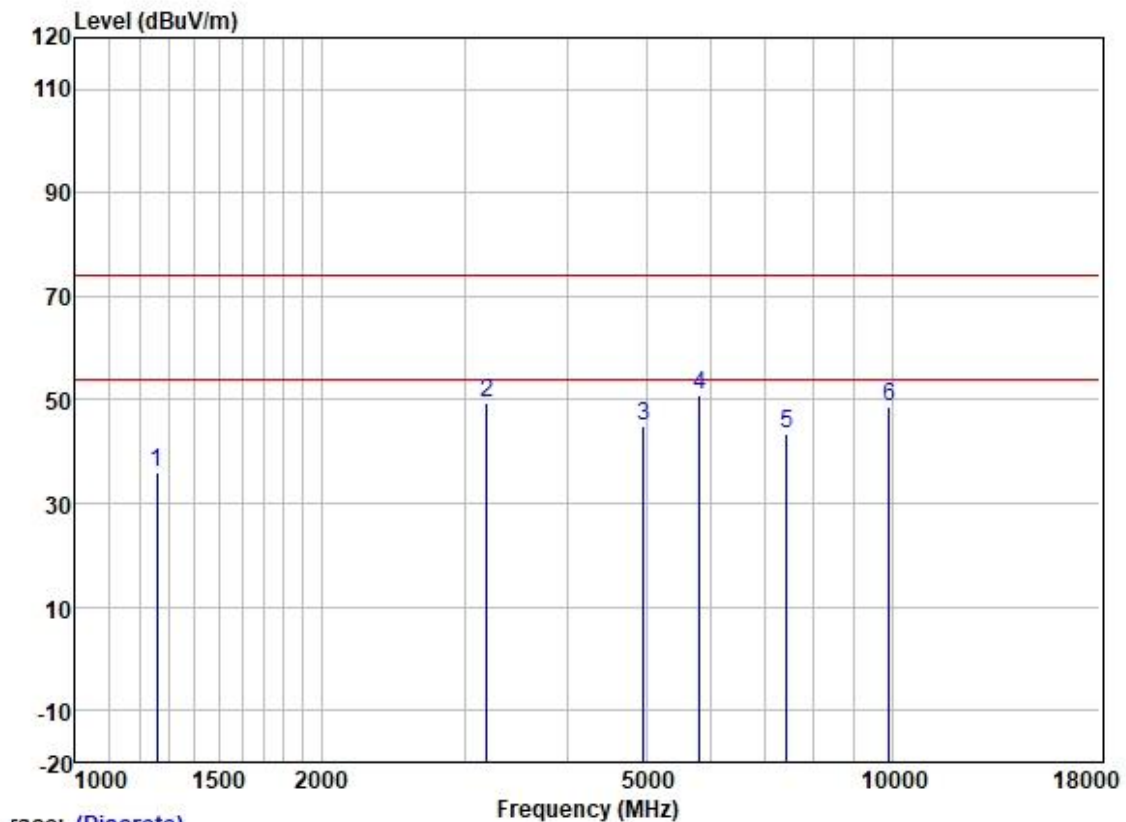

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1260.149	47.34	23.76	2.74	37.98	35.86	74.00	-38.14	HORIZONTAL peak
2	3186.869	53.50	28.80	4.41	37.15	49.56	74.00	-24.44	HORIZONTAL peak
3	4960.000	42.41	34.15	5.28	36.89	44.95	74.00	-29.05	HORIZONTAL peak
4	5813.812	49.44	32.67	5.77	36.99	50.89	74.00	-23.11	HORIZONTAL peak
5	7440.000	37.67	36.33	6.72	37.16	43.56	74.00	-30.44	HORIZONTAL peak
6	9920.000	38.89	38.95	7.67	37.00	48.51	74.00	-25.49	HORIZONTAL peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

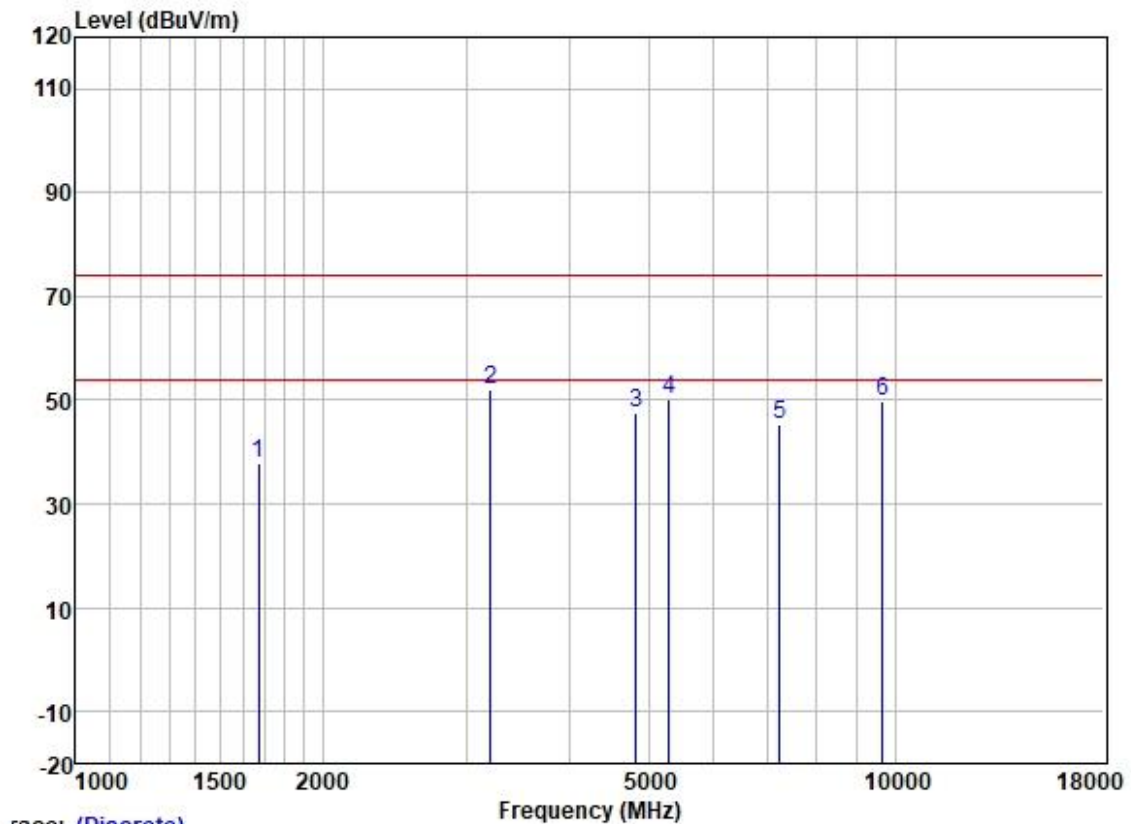

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
		Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1672.779	47.68	24.98	3.21	37.93	37.94	74.00	-36.06	VERTICAL peak
2	3205.345	56.12	28.82	4.35	37.15	52.14	74.00	-21.86	VERTICAL peak
3	4824.000	44.66	34.16	5.46	36.87	47.41	74.00	-26.59	VERTICAL peak
4	5300.200	48.41	33.17	5.47	36.95	50.10	74.00	-23.90	VERTICAL peak
5	7236.000	40.19	35.78	6.35	37.14	45.18	74.00	-28.82	VERTICAL peak
6	9648.000	40.09	38.70	7.89	37.02	49.66	74.00	-24.34	VERTICAL peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

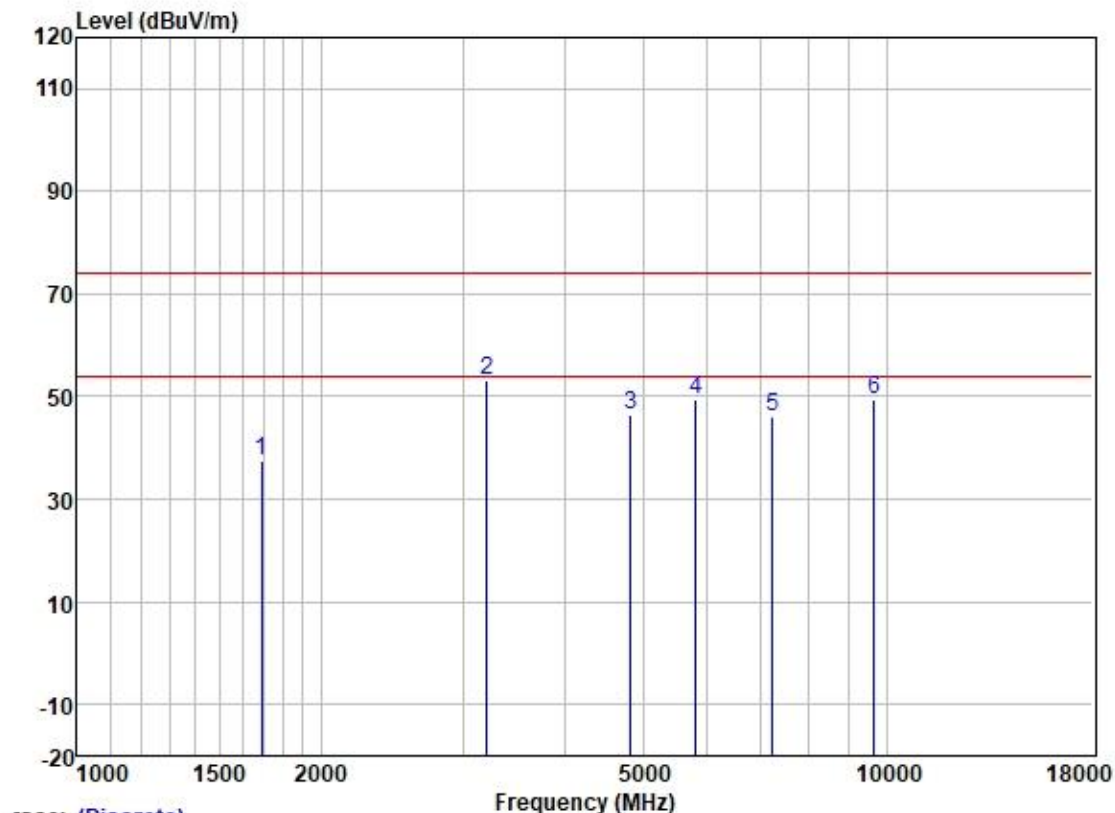

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1692.231	47.09	25.09	3.30	37.93	37.55	74.00	-36.45	HORIZONTAL	peak
2	3205.345	57.11	28.82	4.35	37.15	53.13	74.00	-20.87	HORIZONTAL	peak
3	4824.000	43.81	34.16	5.46	36.87	46.56	74.00	-27.44	HORIZONTAL	peak
4	5813.812	47.98	32.67	5.71	36.99	49.37	74.00	-24.63	HORIZONTAL	peak
5	7236.000	41.14	35.78	6.35	37.14	46.13	74.00	-27.87	HORIZONTAL	peak
6	9648.000	39.76	38.70	7.89	37.02	49.33	74.00	-24.67	HORIZONTAL	peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

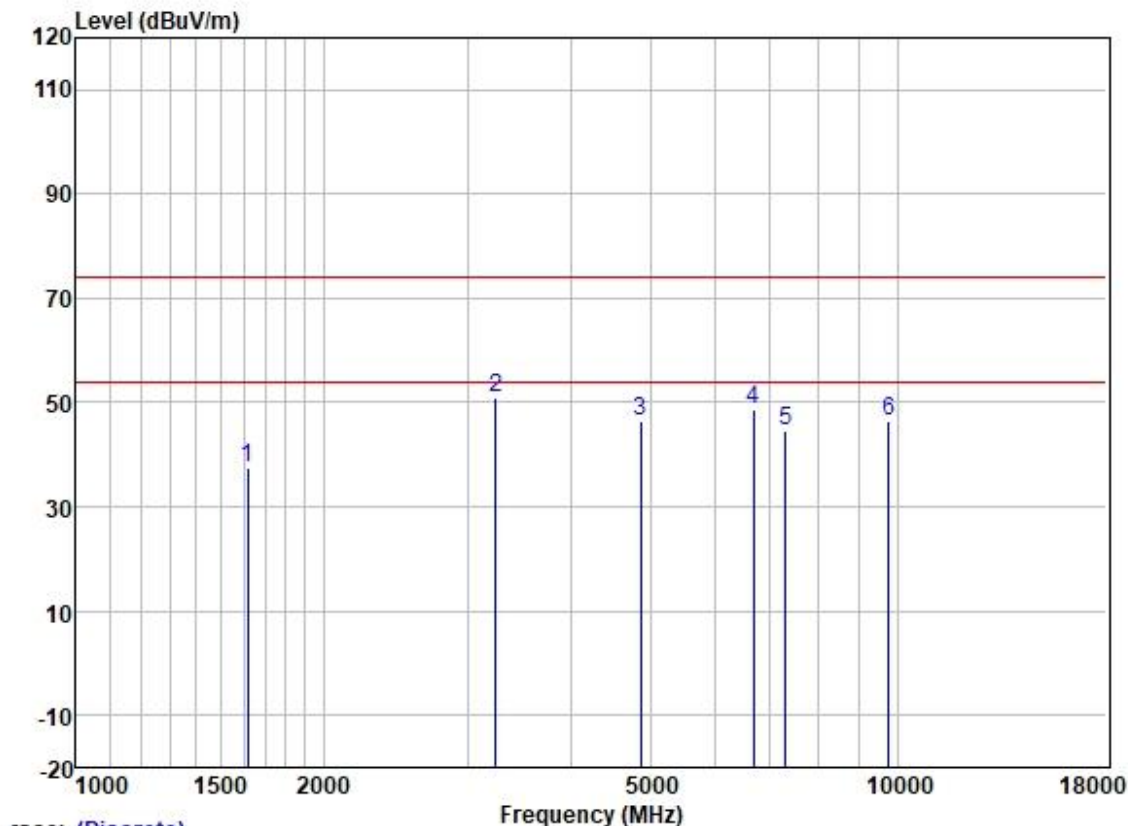

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1615.754	47.78	24.74	3.04	37.93	37.63	74.00	-36.37	VERTICAL	peak
2	3242.619	54.71	28.87	4.32	37.11	50.79	74.00	-23.21	VERTICAL	peak
3	4874.000	43.78	34.15	5.49	36.87	46.55	74.00	-27.45	VERTICAL	peak
4	6679.040	45.38	34.28	6.27	37.05	48.88	74.00	-25.12	VERTICAL	peak
5	7311.000	39.51	36.00	6.32	37.15	44.68	74.00	-29.32	VERTICAL	peak
6	9748.000	37.08	38.81	7.43	37.01	46.31	74.00	-27.69	VERTICAL	peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

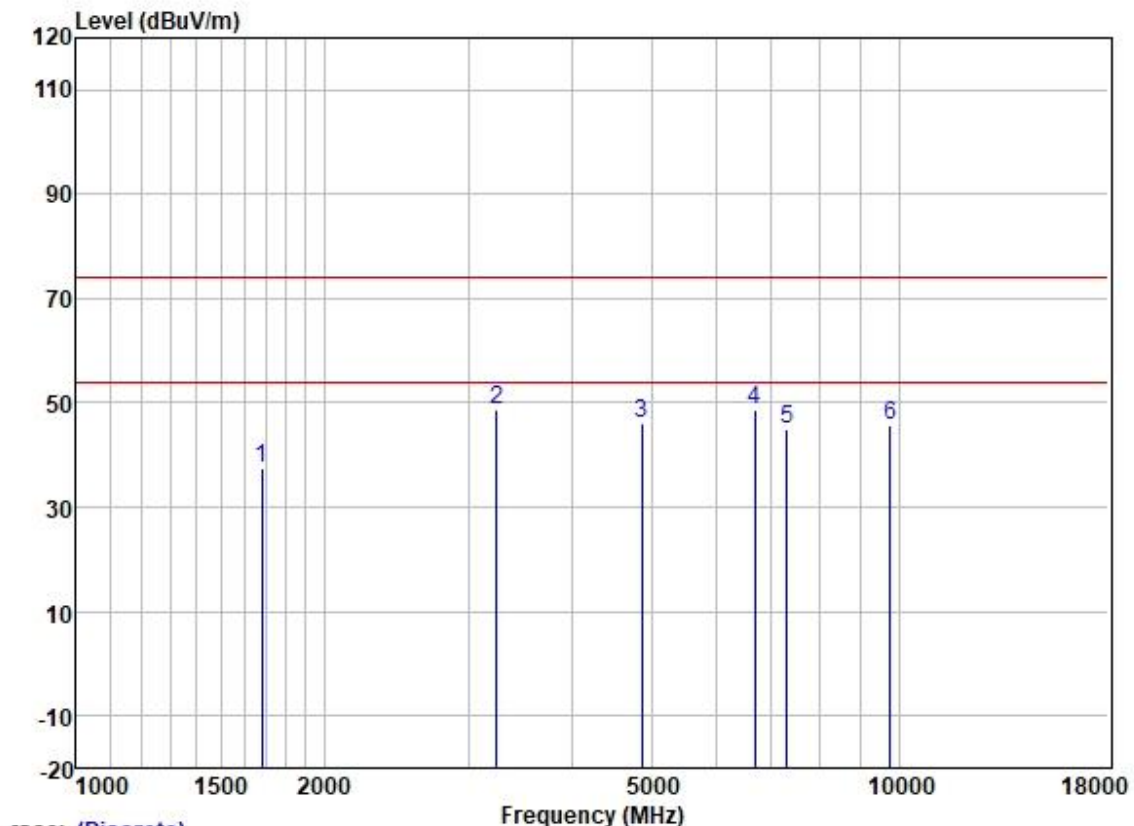

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1682.477	47.22	25.03	3.25	37.93	37.57	74.00	-36.43	HORIZONTAL peak
2	3242.619	52.69	28.87	4.32	37.11	48.77	74.00	-25.23	HORIZONTAL peak
3	4874.000	43.37	34.15	5.49	36.87	46.14	74.00	-27.86	HORIZONTAL peak
4	6679.040	45.23	34.28	6.27	37.05	48.73	74.00	-25.27	HORIZONTAL peak
5	7311.000	39.81	36.00	6.32	37.15	44.98	74.00	-29.02	HORIZONTAL peak
6	9748.000	36.59	38.81	7.43	37.01	45.82	74.00	-28.18	HORIZONTAL peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

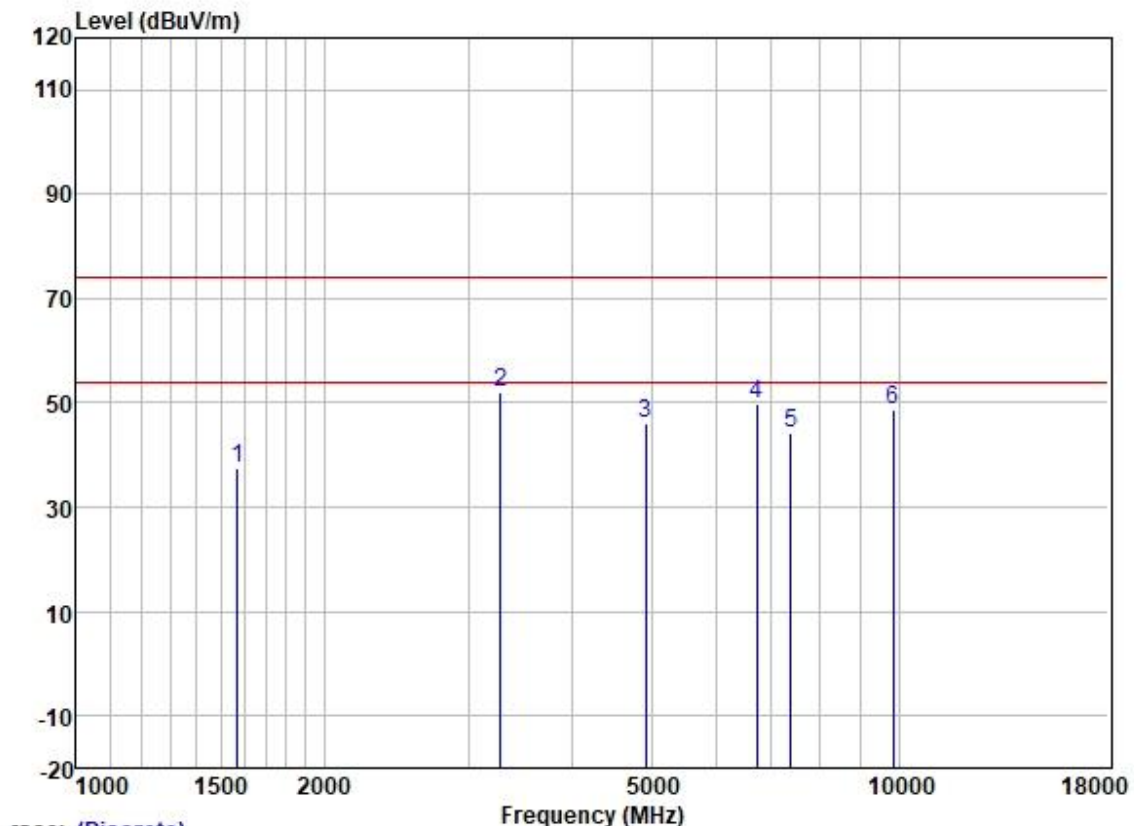

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1569.721	47.81	24.60	2.97	37.94	37.44	74.00	-36.56	VERTICAL peak
2	3280.326	55.71	28.91	4.52	37.10	52.04	74.00	-21.96	VERTICAL peak
3	4924.000	43.39	34.15	5.26	36.88	45.92	74.00	-28.08	VERTICAL peak
4	6717.762	45.45	34.42	6.87	37.05	49.69	74.00	-24.31	VERTICAL peak
5	7386.000	38.32	36.23	6.75	37.16	44.14	74.00	-29.86	VERTICAL peak
6	9848.000	39.33	38.88	7.66	37.01	48.86	74.00	-25.14	VERTICAL peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

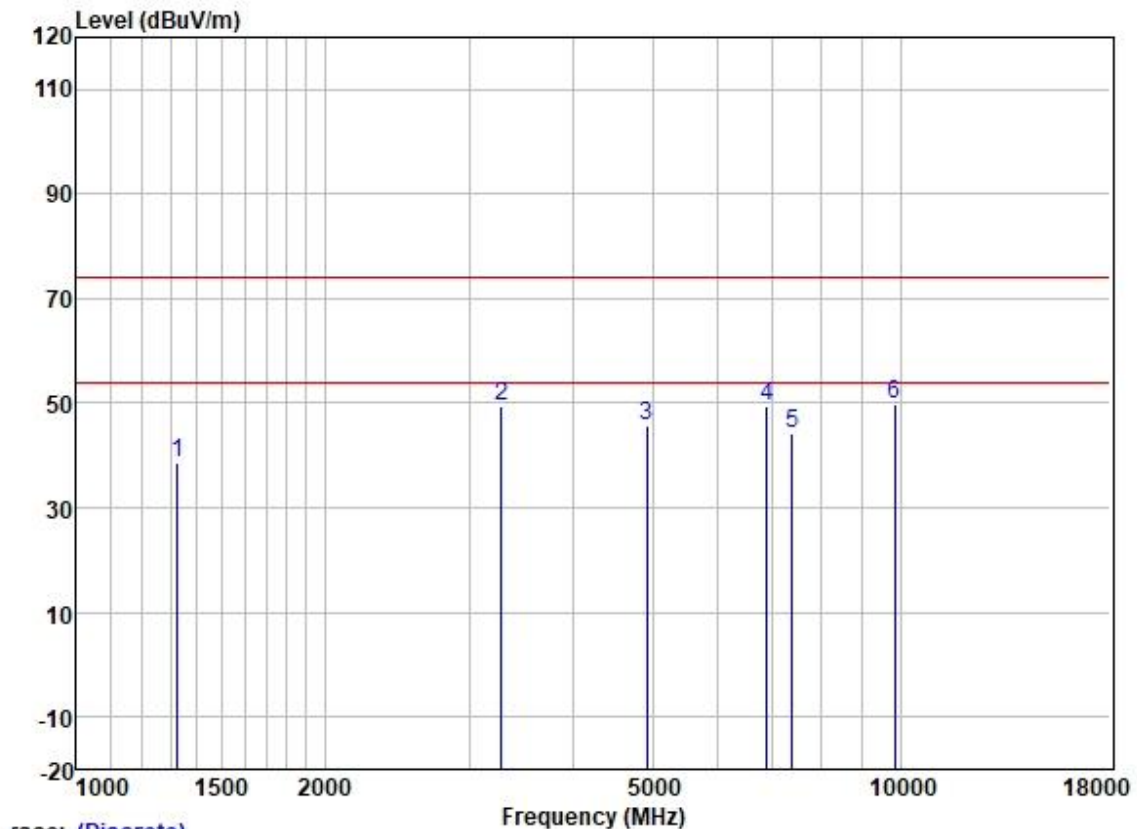

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1327.446	49.81	24.07	2.83	37.97	38.74	74.00	-35.26	HORIZONTAL peak
2	3280.326	53.28	28.91	4.52	37.10	49.61	74.00	-24.39	HORIZONTAL peak
3	4924.000	43.35	34.15	5.26	36.88	45.88	74.00	-28.12	HORIZONTAL peak
4	6874.906	44.55	34.88	7.04	37.07	49.40	74.00	-24.60	HORIZONTAL peak
5	7386.000	38.26	36.23	6.75	37.16	44.08	74.00	-29.92	HORIZONTAL peak
6	9848.000	40.39	38.88	7.66	37.01	49.92	74.00	-24.08	HORIZONTAL peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

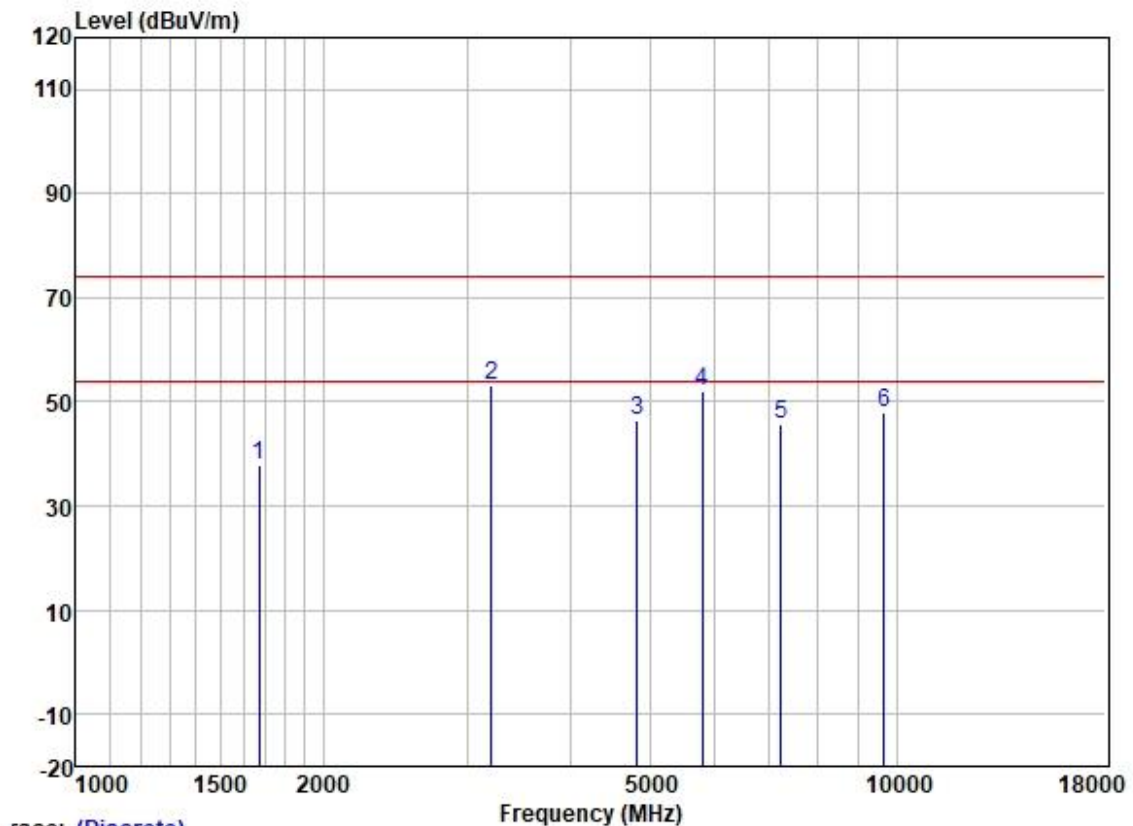

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1672.779	47.90	24.98	3.05	37.93	38.00	74.00	-36.00	VERTICAL	peak
2	3205.345	57.00	28.82	4.43	37.15	53.10	74.00	-20.90	VERTICAL	peak
3	4824.000	43.99	34.16	5.16	36.87	46.44	74.00	-27.56	VERTICAL	peak
4	5797.032	50.49	32.67	5.77	36.99	51.94	74.00	-22.06	VERTICAL	peak
5	7236.000	39.99	35.78	6.90	37.14	45.53	74.00	-28.47	VERTICAL	peak
6	9648.000	38.63	38.70	7.65	37.02	47.96	74.00	-26.04	VERTICAL	peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

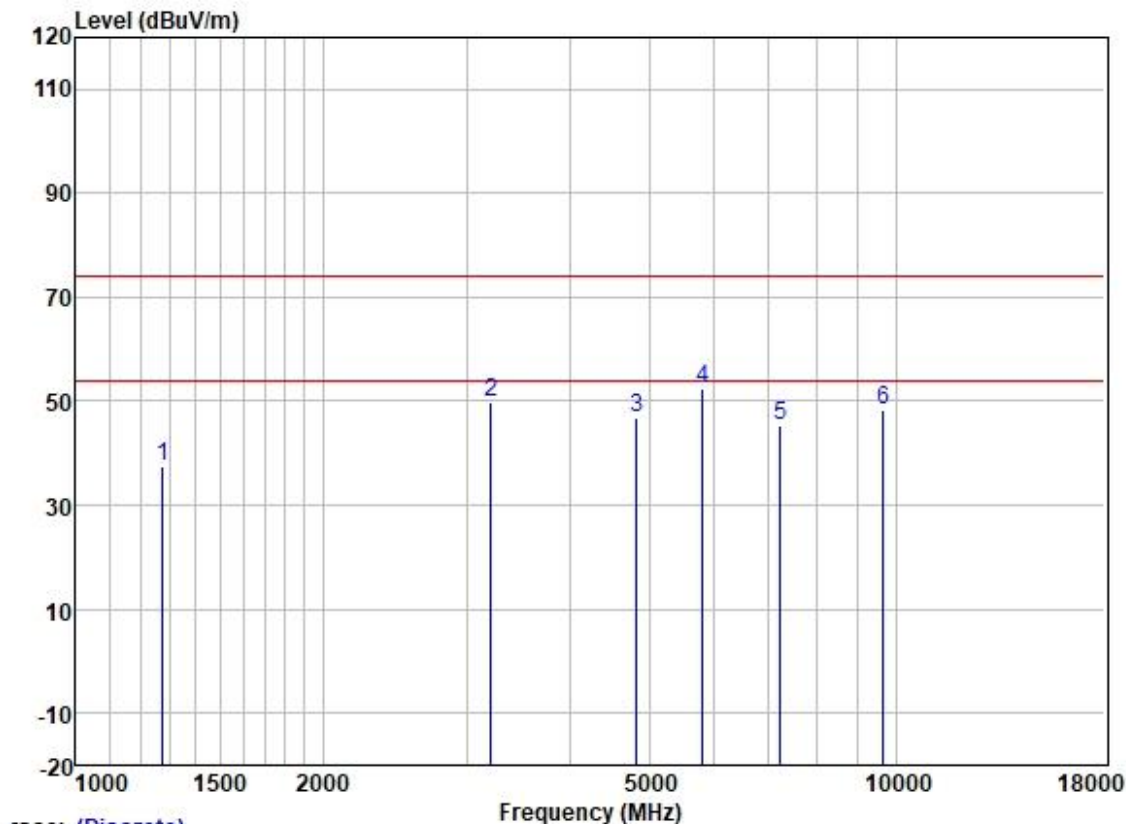

race: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1274.802	49.04	23.85	2.76	37.98	37.67	74.00	-36.33	HORIZONTAL peak
2	3205.345	53.74	28.82	4.43	37.15	49.84	74.00	-24.16	HORIZONTAL peak
3	4824.000	44.25	34.16	5.16	36.87	46.70	74.00	-27.30	HORIZONTAL peak
4	5813.812	50.80	32.67	5.77	36.99	52.25	74.00	-21.75	HORIZONTAL peak
5	7236.000	39.97	35.78	6.90	37.14	45.51	74.00	-28.49	HORIZONTAL peak
6	9648.000	39.15	38.70	7.65	37.02	48.48	74.00	-25.52	HORIZONTAL peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

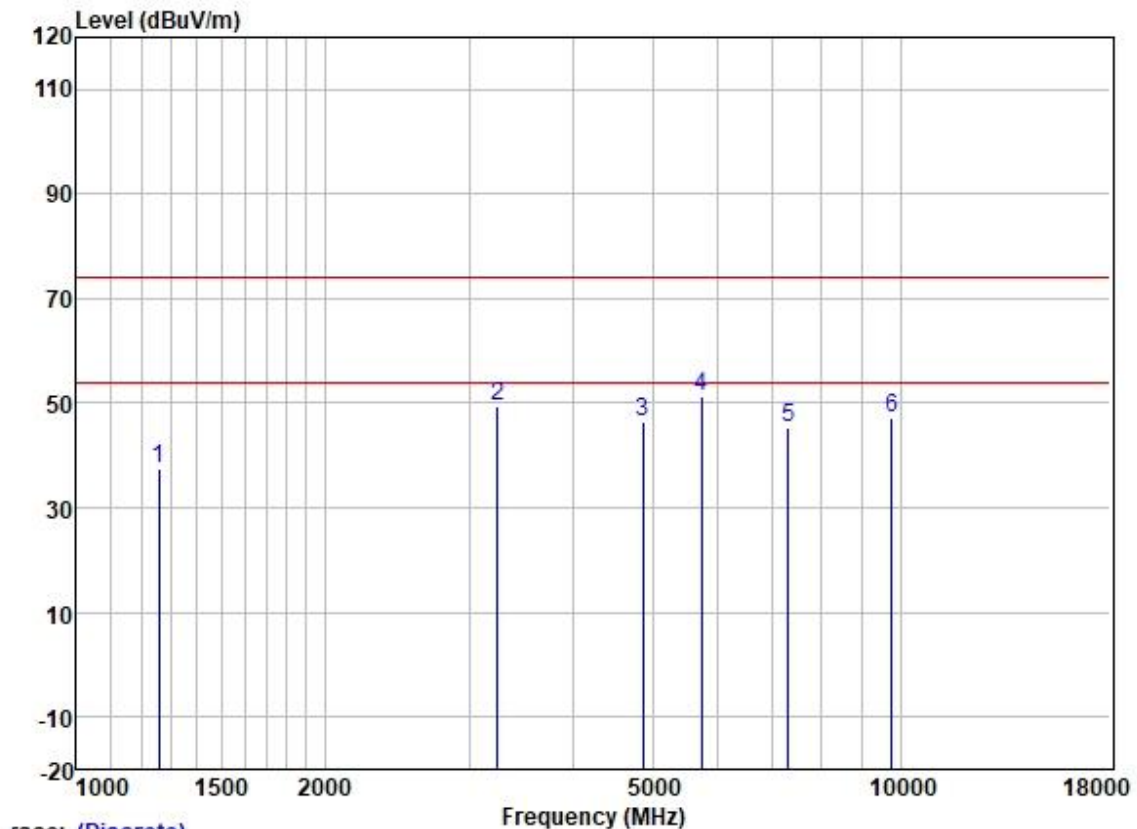

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1260.149	48.80	23.76	2.74	37.98	37.32	74.00	-36.68	VERTICAL peak
2	3242.619	53.18	28.87	4.48	37.11	49.42	74.00	-24.58	VERTICAL peak
3	4874.000	44.11	34.15	5.22	36.87	46.61	74.00	-27.39	VERTICAL peak
4	5730.396	49.97	32.65	5.72	36.99	51.35	74.00	-22.65	VERTICAL peak
5	7311.000	39.49	36.00	6.83	37.15	45.17	74.00	-28.83	VERTICAL peak
6	9748.000	37.80	38.81	7.65	37.01	47.25	74.00	-26.75	VERTICAL peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

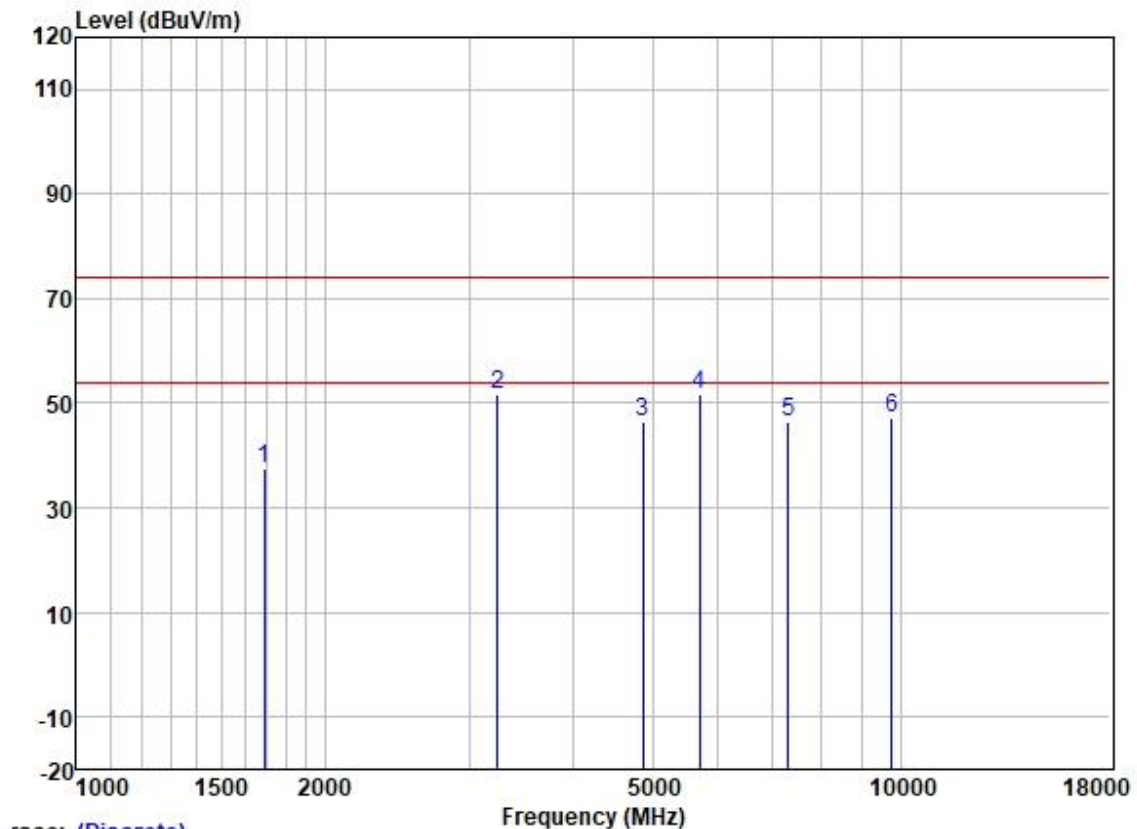

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1692.231	47.28	25.09	3.07	37.93	37.51	74.00	-36.49	HORIZONTAL peak
2	3242.619	55.42	28.87	4.48	37.11	51.66	74.00	-22.34	HORIZONTAL peak
3	4874.000	44.11	34.15	5.22	36.87	46.61	74.00	-27.39	HORIZONTAL peak
4	5697.365	50.14	32.64	5.70	36.98	51.50	74.00	-22.50	HORIZONTAL peak
5	7311.000	40.72	36.00	6.83	37.15	46.40	74.00	-27.60	HORIZONTAL peak
6	9748.000	37.80	38.81	7.65	37.01	47.25	74.00	-26.75	HORIZONTAL peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

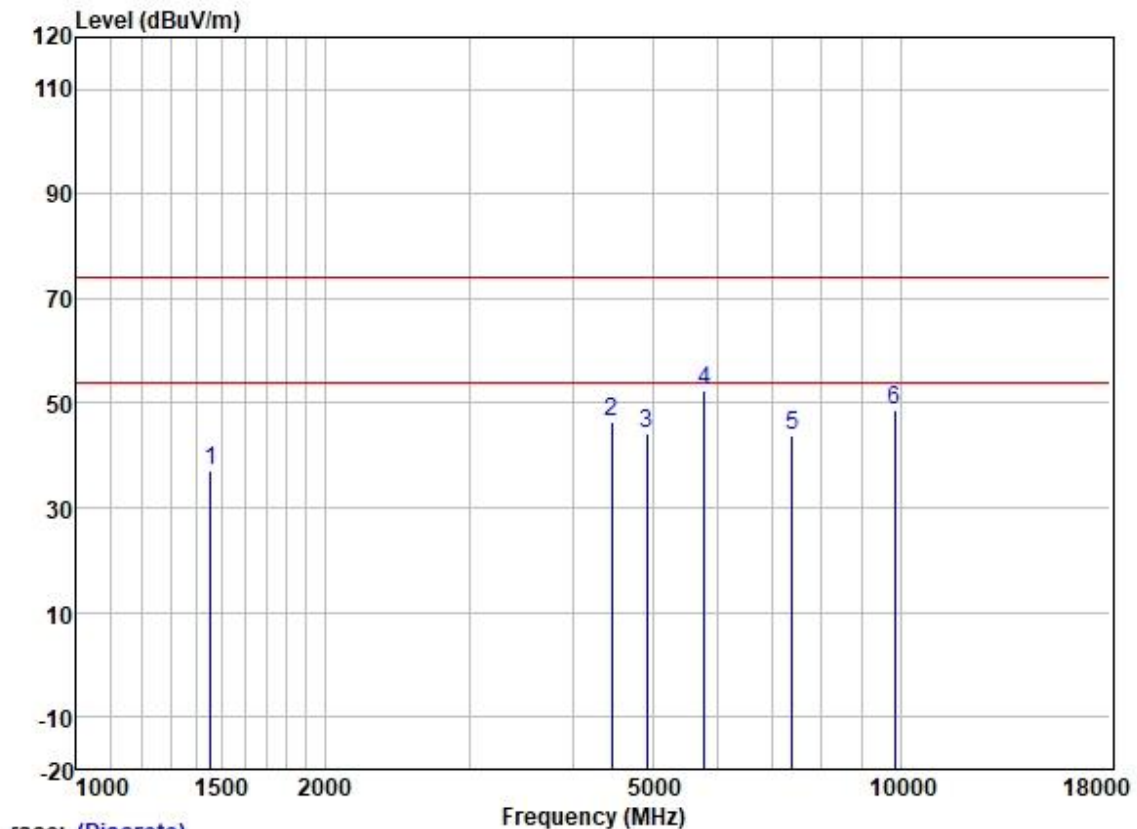

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1456.081	47.63	24.37	2.92	37.96	36.96	74.00	-37.04	VERTICAL peak
2	4456.315	44.32	34.00	4.79	36.83	46.28	74.00	-27.72	VERTICAL peak
3	4924.000	41.86	34.15	5.26	36.88	44.39	74.00	-29.61	VERTICAL peak
4	5780.300	51.09	32.66	5.76	36.99	52.52	74.00	-21.48	VERTICAL peak
5	7386.000	37.94	36.23	6.75	37.16	43.76	74.00	-30.24	VERTICAL peak
6	9848.000	39.13	38.88	7.66	37.01	48.66	74.00	-25.34	VERTICAL peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

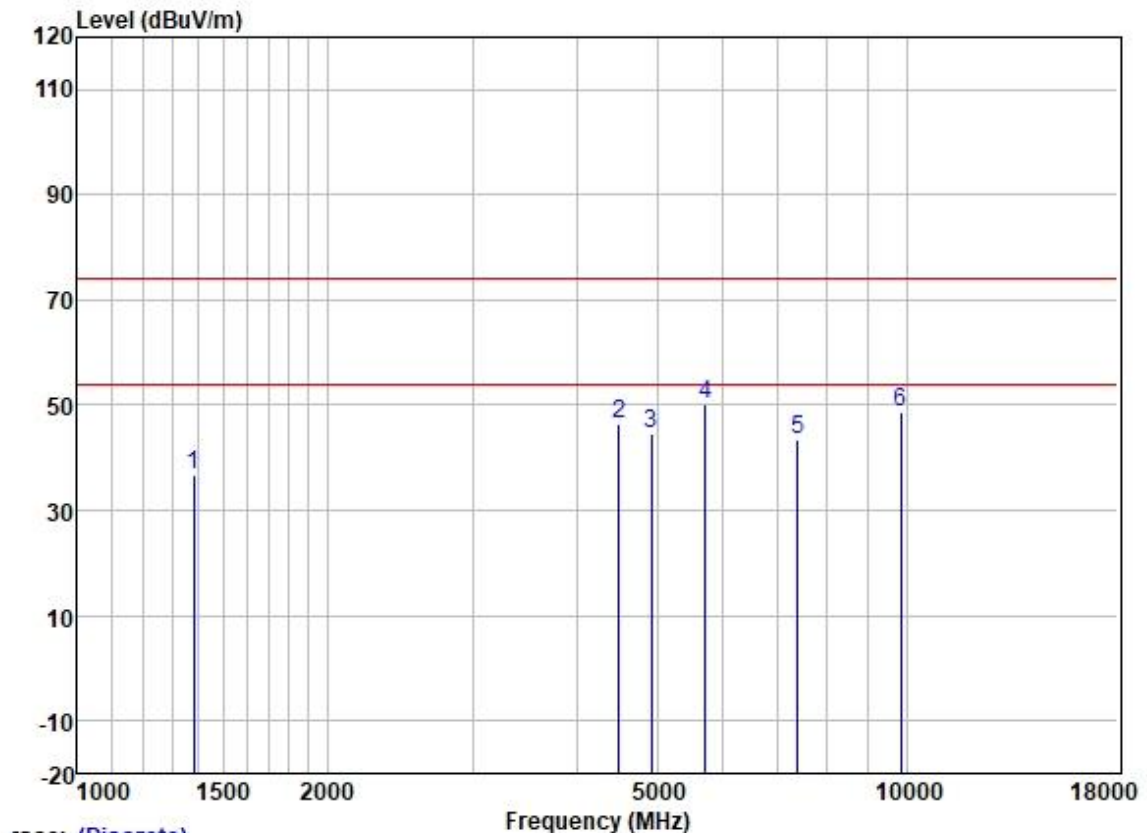

race: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1382.262	47.47	24.22	2.88	37.97	36.60	74.00	-37.40	HORIZONTAL	peak
2	4495.125	44.40	34.17	4.78	36.83	46.52	74.00	-27.48	HORIZONTAL	peak
3	4924.000	42.20	34.15	5.26	36.88	44.73	74.00	-29.27	HORIZONTAL	peak
4	5713.856	48.93	32.65	5.71	36.98	50.31	74.00	-23.69	HORIZONTAL	peak
5	7386.000	37.62	36.23	6.75	37.16	43.44	74.00	-30.56	HORIZONTAL	peak
6	9848.000	39.07	38.88	7.66	37.01	48.60	74.00	-25.40	HORIZONTAL	peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

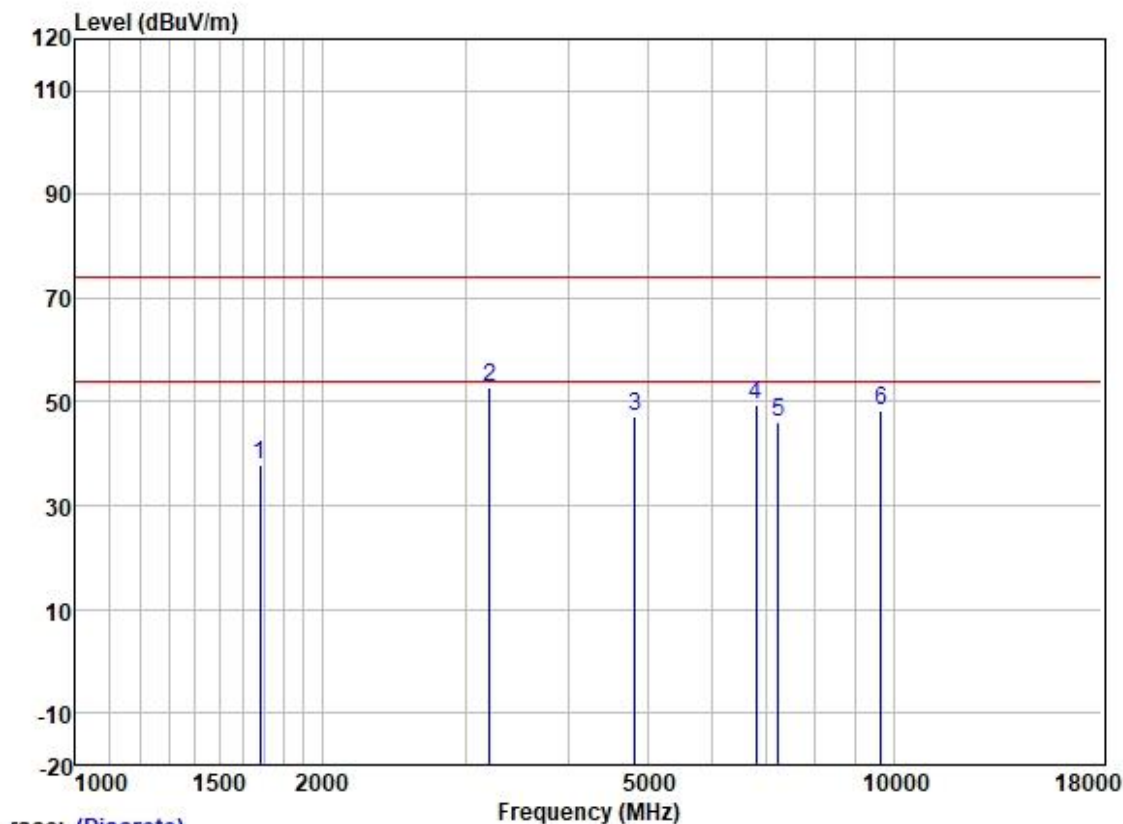

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
		Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1682.477	47.64	25.03	3.06	37.93	37.80	74.00	-36.20	VERTICAL peak
2	3205.345	56.78	28.82	4.43	37.15	52.88	74.00	-21.12	VERTICAL peak
3	4824.000	44.61	34.16	5.16	36.87	47.06	74.00	-26.94	VERTICAL peak
4	6795.879	44.81	34.69	6.97	37.06	49.41	74.00	-24.59	VERTICAL peak
5	7236.000	40.53	35.78	6.90	37.14	46.07	74.00	-27.93	VERTICAL peak
6	9648.000	39.01	38.70	7.65	37.02	48.34	74.00	-25.66	VERTICAL peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

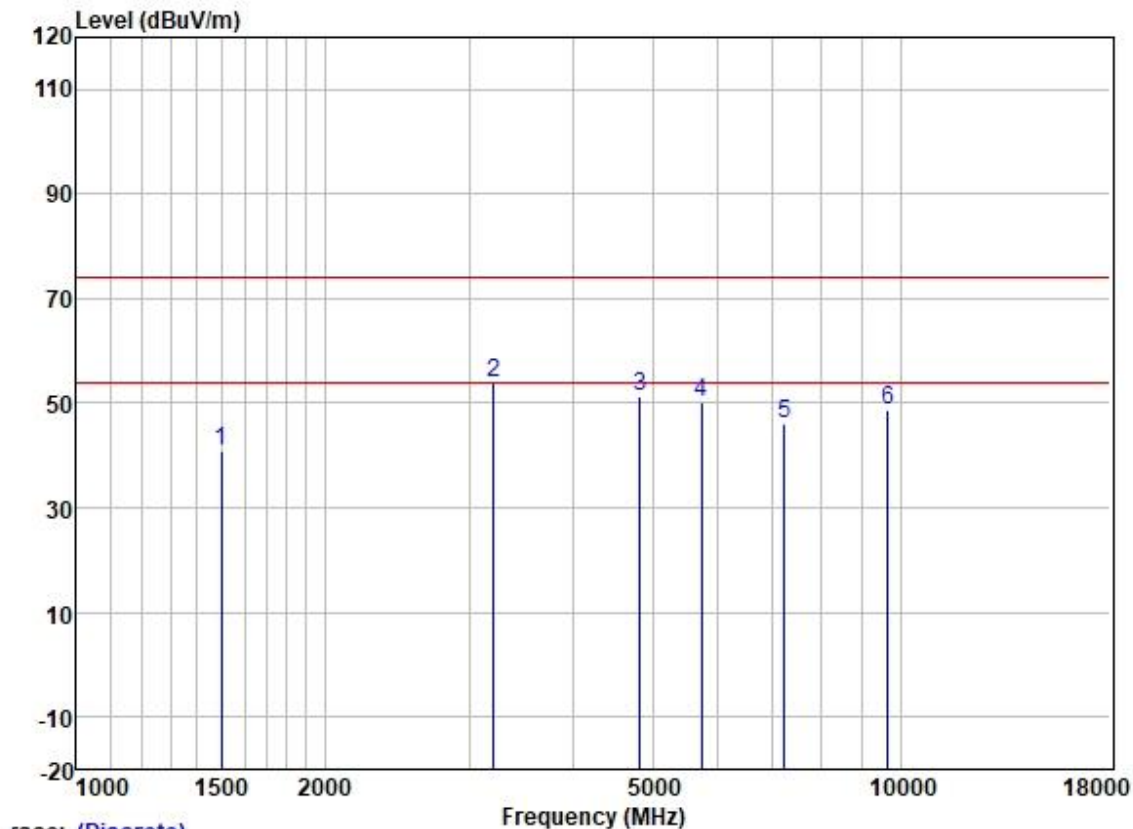

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1498.781	51.43	24.43	2.94	37.95	40.85	74.00	-33.15	HORIZONTAL peak
2	3205.345	57.84	28.82	4.43	37.15	53.94	74.00	-20.06	HORIZONTAL peak
3	4824.000	48.69	34.16	5.16	36.87	51.14	74.00	-22.86	HORIZONTAL peak
4	5730.396	48.86	32.65	5.72	36.99	50.24	74.00	-23.76	HORIZONTAL peak
5	7236.000	40.37	35.78	6.90	37.14	45.91	74.00	-28.09	HORIZONTAL peak
6	9648.000	39.33	38.70	7.65	37.02	48.66	74.00	-25.34	HORIZONTAL peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

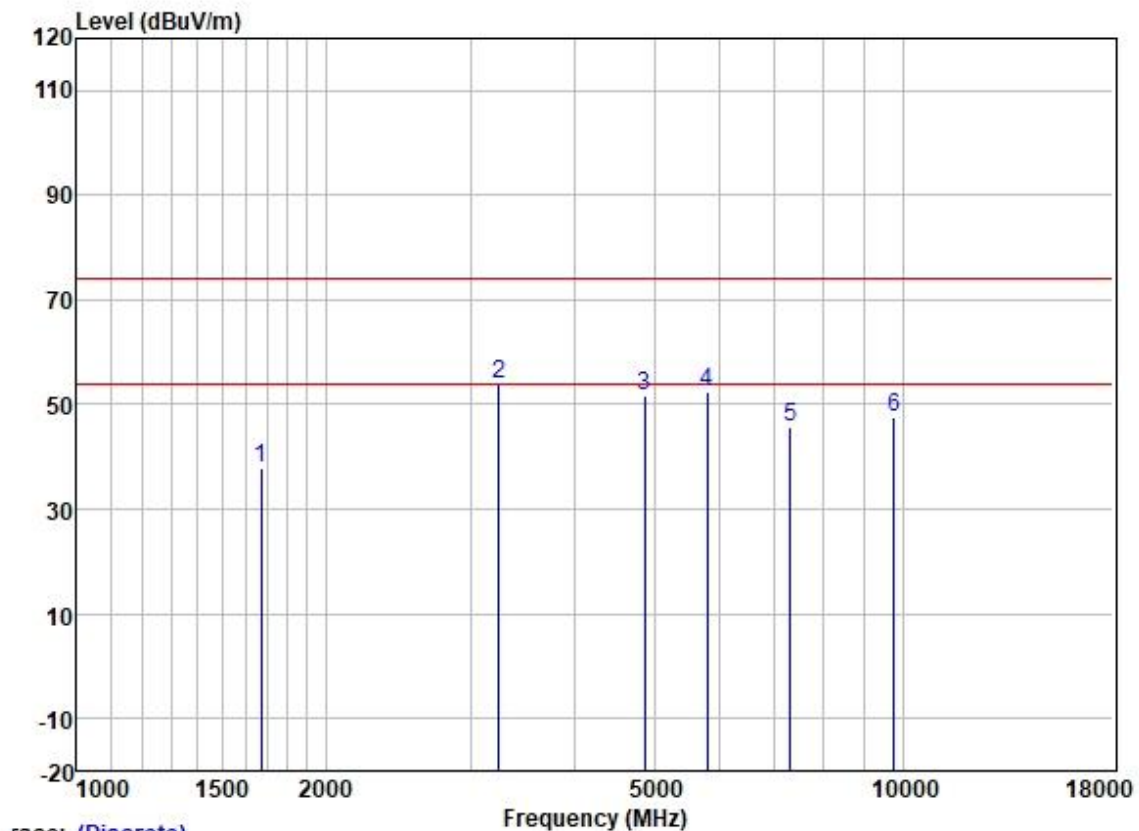

Trace: (Discrete)


	Freq	ReadAntenna Level	Cable Factor	Preamplifier Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1672.779	47.78	24.98	3.05	37.93	37.88	74.00	-36.12	VERTICAL	peak
2	3242.619	57.56	28.87	4.48	37.11	53.80	74.00	-20.20	VERTICAL	peak
3	4874.000	49.08	34.15	5.22	36.87	51.58	74.00	-22.42	VERTICAL	peak
4	5797.032	50.95	32.67	5.77	36.99	52.40	74.00	-21.60	VERTICAL	peak
5	7311.000	40.19	36.00	6.83	37.15	45.87	74.00	-28.13	VERTICAL	peak
6	9748.000	37.95	38.81	7.65	37.01	47.40	74.00	-26.60	VERTICAL	peak

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

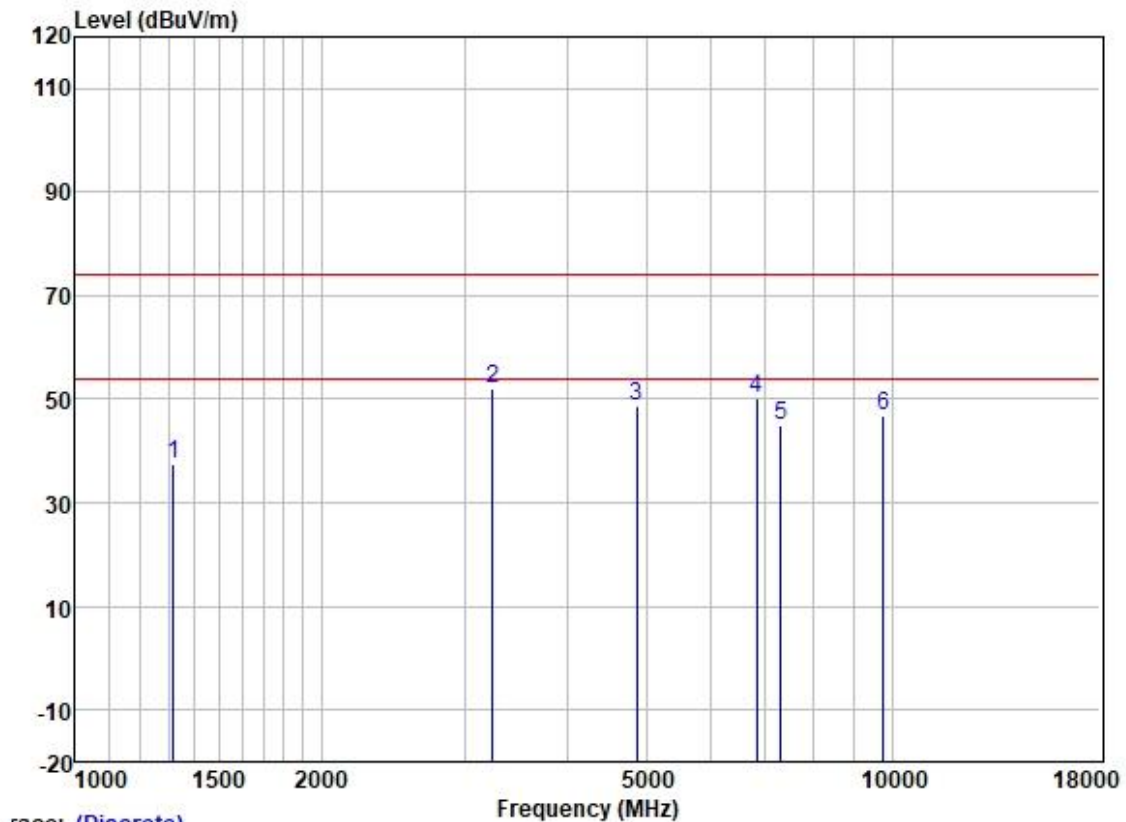

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1319.794	48.63	24.04	2.82	37.97	37.52	74.00	-36.48	HORIZONTAL peak
2	3242.619	55.98	28.87	4.48	37.11	52.22	74.00	-21.78	HORIZONTAL peak
3	4874.000	46.15	34.15	5.22	36.87	48.65	74.00	-25.35	HORIZONTAL peak
4	6835.278	45.43	34.79	7.01	37.07	50.16	74.00	-23.84	HORIZONTAL peak
5	7311.000	39.23	36.00	6.83	37.15	44.91	74.00	-29.09	HORIZONTAL peak
6	9748.000	37.37	38.81	7.65	37.01	46.82	74.00	-27.18	HORIZONTAL peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

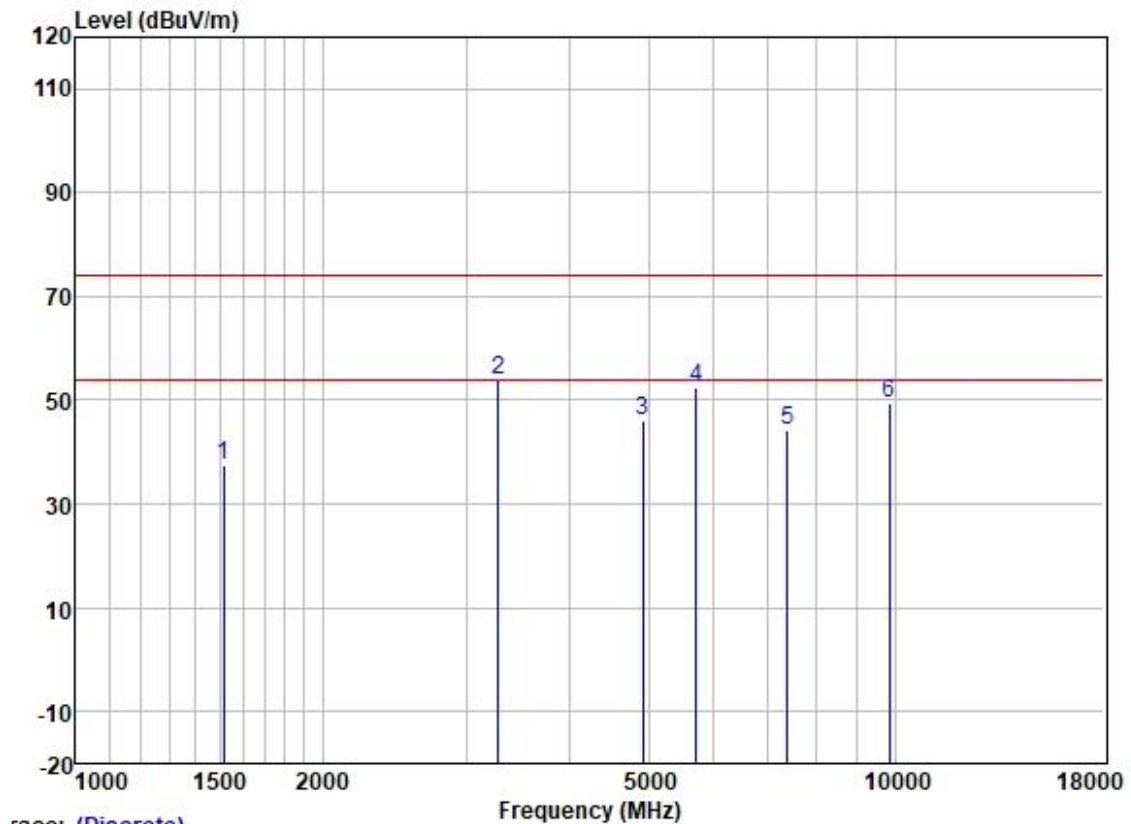

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
		Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1516.210	47.92	24.47	2.95	37.95	37.39	74.00	-36.61	VERTICAL peak
2	3280.326	57.45	28.91	4.52	37.10	53.78	74.00	-20.22	VERTICAL peak
3	4924.000	43.42	34.15	5.26	36.88	45.95	74.00	-28.05	VERTICAL peak
4	5713.856	50.87	32.65	5.71	36.98	52.25	74.00	-21.75	VERTICAL peak
5	7386.000	38.34	36.23	6.75	37.16	44.16	74.00	-29.84	VERTICAL peak
6	9848.000	39.81	38.88	7.66	37.01	49.34	74.00	-24.66	VERTICAL peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

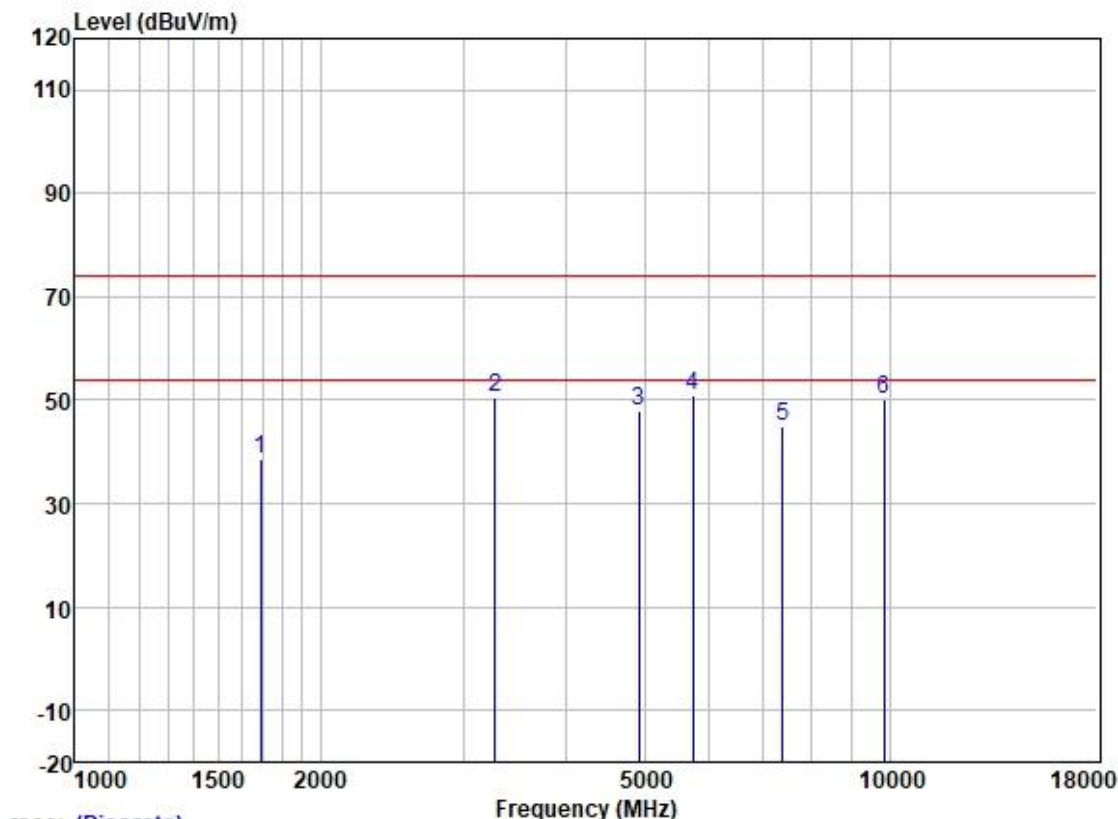

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Limit	Over			
	MHz	Level	Loss	Factor	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1692.231	48.45	25.09	3.07	37.93	38.68	74.00	-35.32	HORIZONTAL peak
2	3280.326	54.40	28.91	4.52	37.10	50.73	74.00	-23.27	HORIZONTAL peak
3	4924.000	45.40	34.15	5.26	36.88	47.93	74.00	-26.07	HORIZONTAL peak
4	5730.396	49.43	32.65	5.72	36.99	50.81	74.00	-23.19	HORIZONTAL peak
5	7386.000	39.30	36.23	6.75	37.16	45.12	74.00	-28.88	HORIZONTAL peak
6	9848.000	40.48	38.88	7.66	37.01	50.01	74.00	-23.99	HORIZONTAL peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

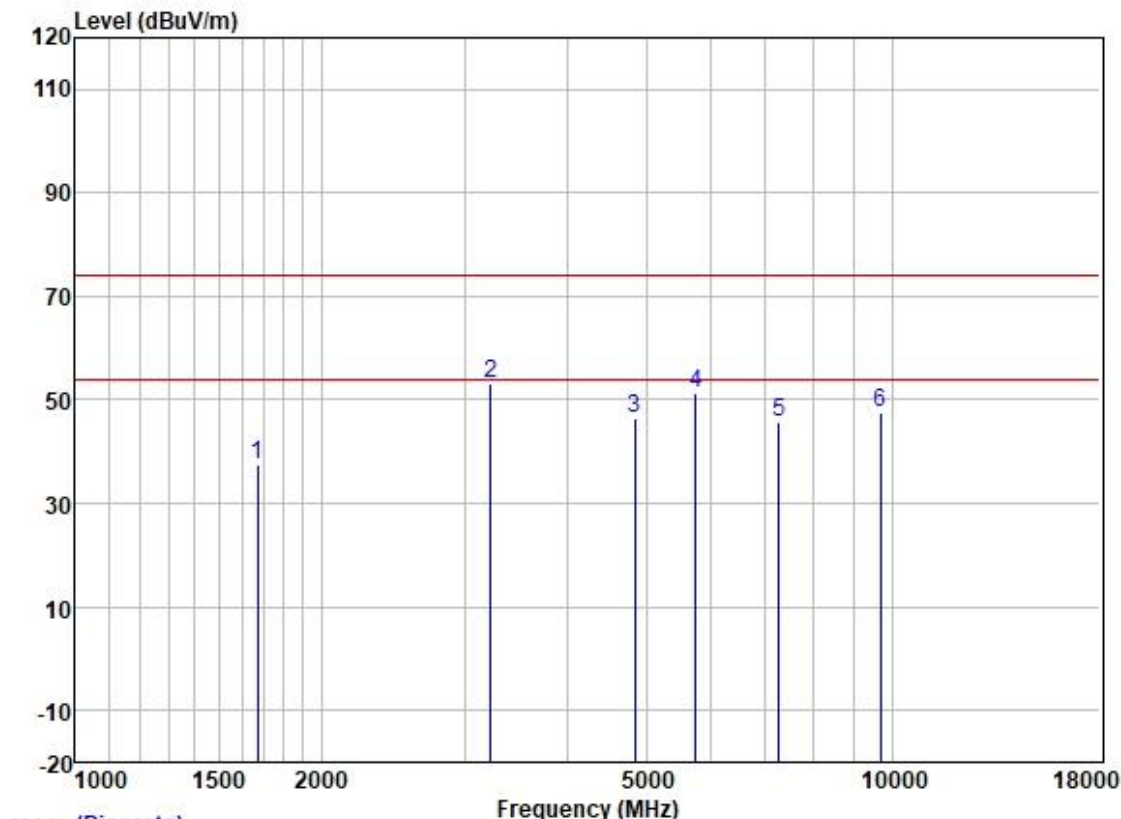

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1672.779	47.49	24.98	3.05	37.93	37.59	74.00	-36.41	VERTICAL peak
2	3223.928	56.84	28.84	4.45	37.13	53.00	74.00	-21.00	VERTICAL peak
3	4844.000	44.03	34.15	5.19	36.87	46.50	74.00	-27.50	VERTICAL peak
4	5746.982	49.78	32.65	5.74	36.99	51.18	74.00	-22.82	VERTICAL peak
5	7266.000	40.21	35.86	6.88	37.14	45.81	74.00	-28.19	VERTICAL peak
6	9688.000	38.17	38.75	7.65	37.02	47.55	74.00	-26.45	VERTICAL peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

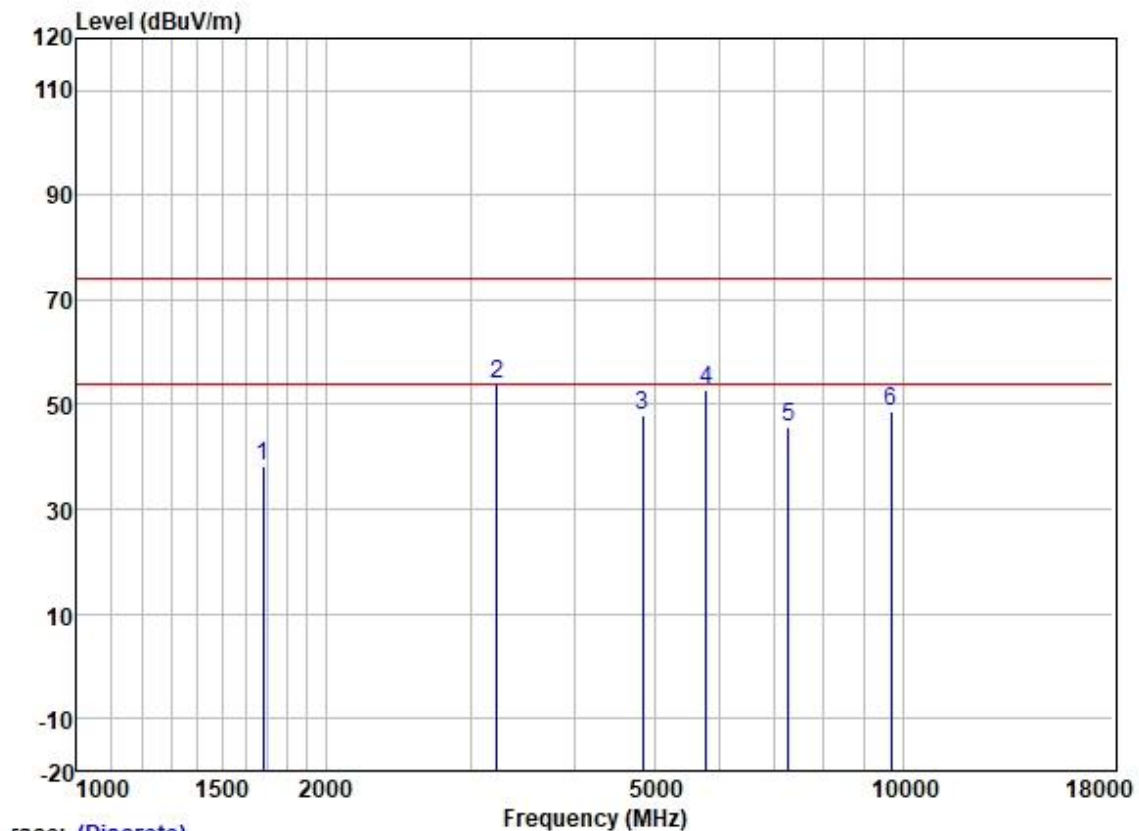

Trace: (Discrete)

	Freq	ReadAntenna		Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1682.477	47.95	25.03	3.06	37.93	38.11	74.00	-35.89	HORIZONTAL	peak
2	3223.928	57.75	28.84	4.45	37.13	53.91	74.00	-20.09	HORIZONTAL	peak
3	4844.000	45.42	34.15	5.19	36.87	47.89	74.00	-26.11	HORIZONTAL	peak
4	5780.300	51.29	32.66	5.76	36.99	52.72	74.00	-21.28	HORIZONTAL	peak
5	7266.000	40.10	35.86	6.88	37.14	45.70	74.00	-28.30	HORIZONTAL	peak
6	9688.000	39.35	38.75	7.65	37.02	48.73	74.00	-25.27	HORIZONTAL	peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

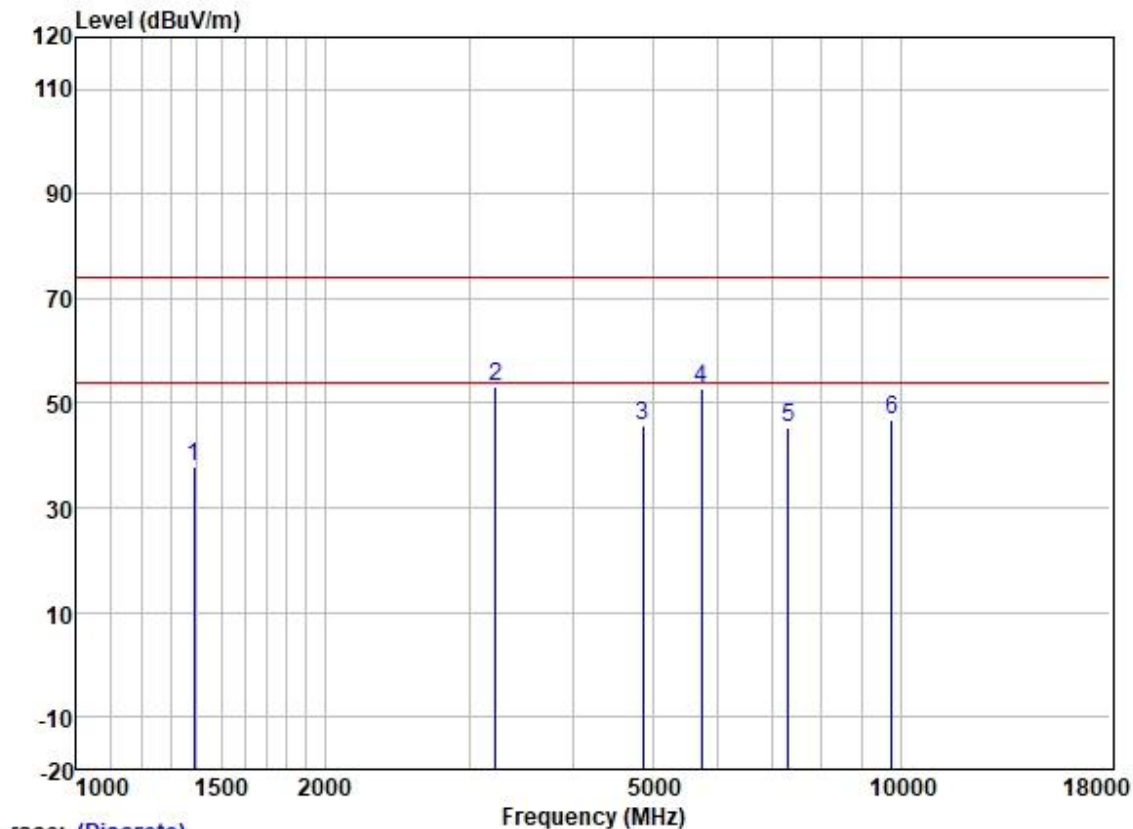

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1390.276	48.65	24.24	2.88	37.97	37.80	74.00	-36.20	VERTICAL peak
2	3223.928	56.86	28.84	4.45	37.13	53.02	74.00	-20.98	VERTICAL peak
3	4874.000	43.35	34.15	5.22	36.87	45.85	74.00	-28.15	VERTICAL peak
4	5730.396	51.41	32.65	5.72	36.99	52.79	74.00	-21.21	VERTICAL peak
5	7311.000	39.84	36.00	6.83	37.15	45.52	74.00	-28.48	VERTICAL peak
6	9748.000	37.40	38.81	7.65	37.01	46.85	74.00	-27.15	VERTICAL peak


Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

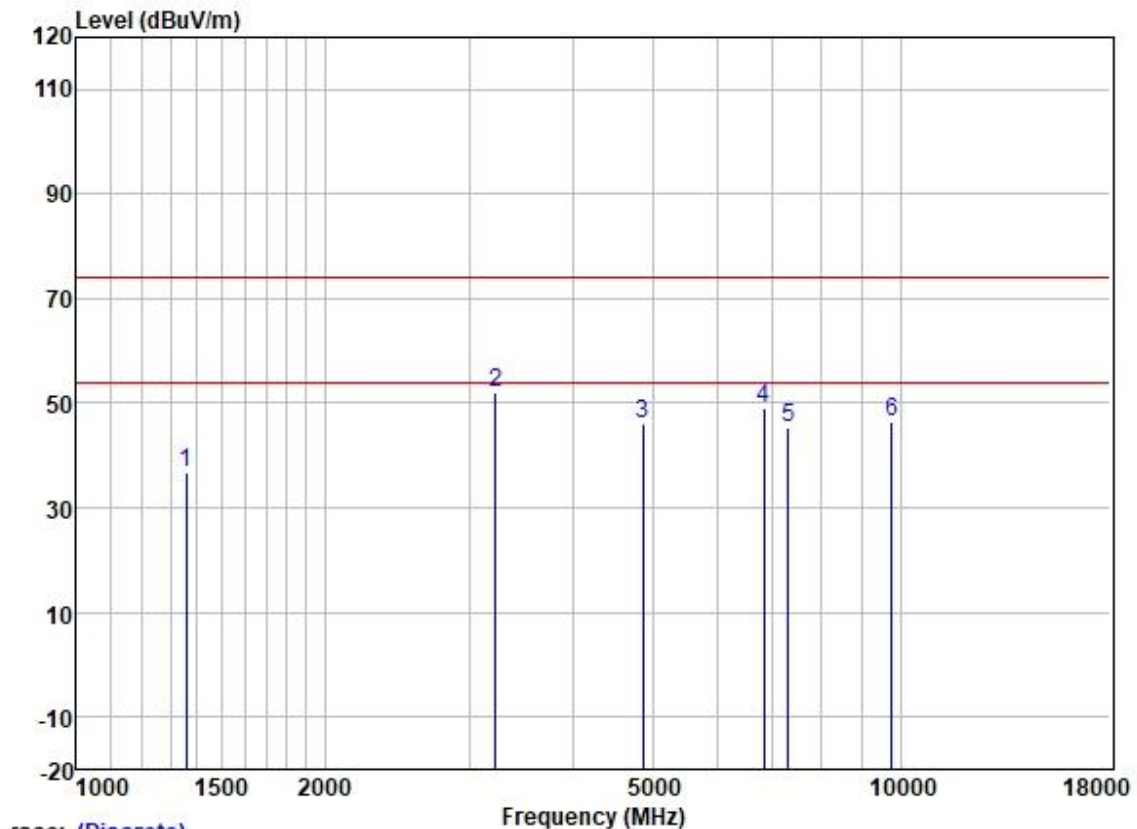

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1358.498	47.61	24.16	2.86	37.97	36.66	74.00	-37.34	HORIZONTAL peak
2	3223.928	55.75	28.84	4.45	37.13	51.91	74.00	-22.09	HORIZONTAL peak
3	4874.000	43.52	34.15	5.22	36.87	46.02	74.00	-27.98	HORIZONTAL peak
4	6835.278	44.23	34.79	7.01	37.07	48.96	74.00	-25.04	HORIZONTAL peak
5	7311.000	39.60	36.00	6.83	37.15	45.28	74.00	-28.72	HORIZONTAL peak
6	9748.000	36.96	38.81	7.65	37.01	46.41	74.00	-27.59	HORIZONTAL peak


Test Mode: 07; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

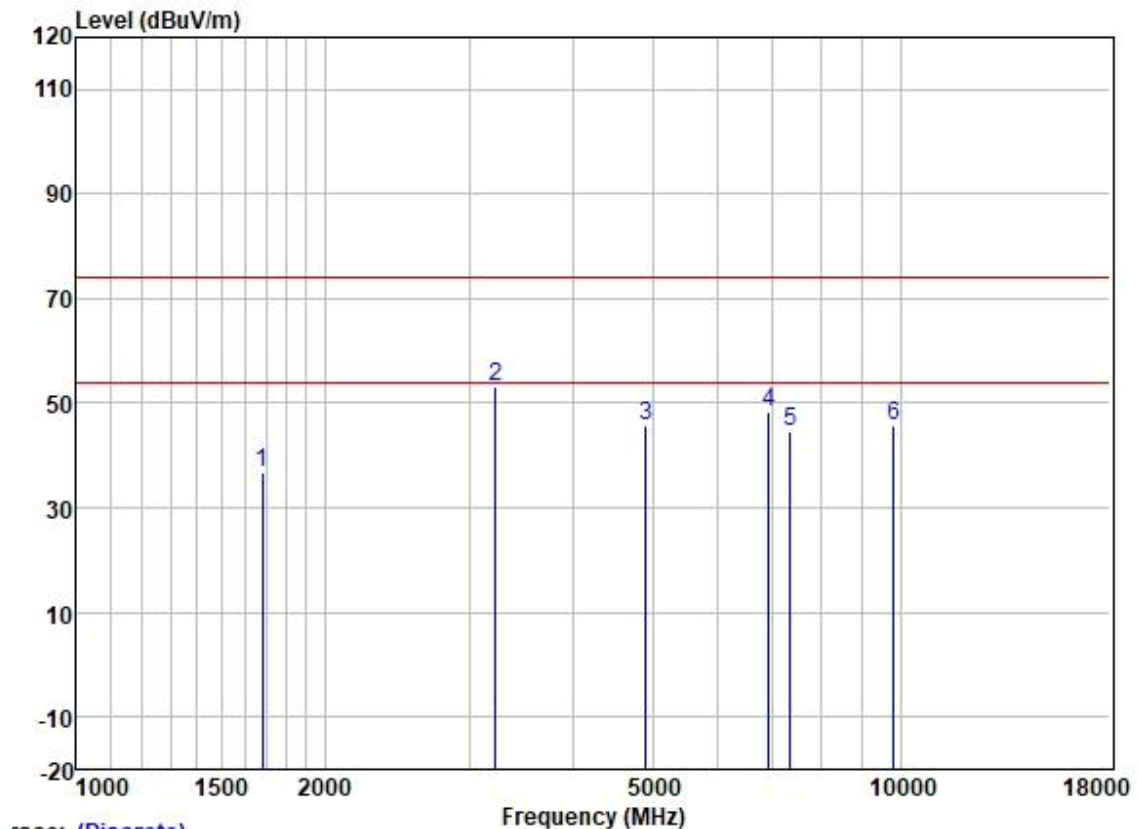

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1682.477	46.68	25.03	3.06	37.93	36.84	74.00	-37.16	VERTICAL peak
2	3223.928	56.96	28.84	4.45	37.13	53.12	74.00	-20.88	VERTICAL peak
3	4904.000	43.10	34.15	5.24	36.88	45.61	74.00	-28.39	VERTICAL peak
4	6914.763	43.31	34.97	7.08	37.08	48.28	74.00	-25.72	VERTICAL peak
5	7356.000	38.70	36.12	6.79	37.15	44.46	74.00	-29.54	VERTICAL peak
6	9808.000	36.34	38.86	7.66	37.01	45.85	74.00	-28.15	VERTICAL peak

Test Mode: 07; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

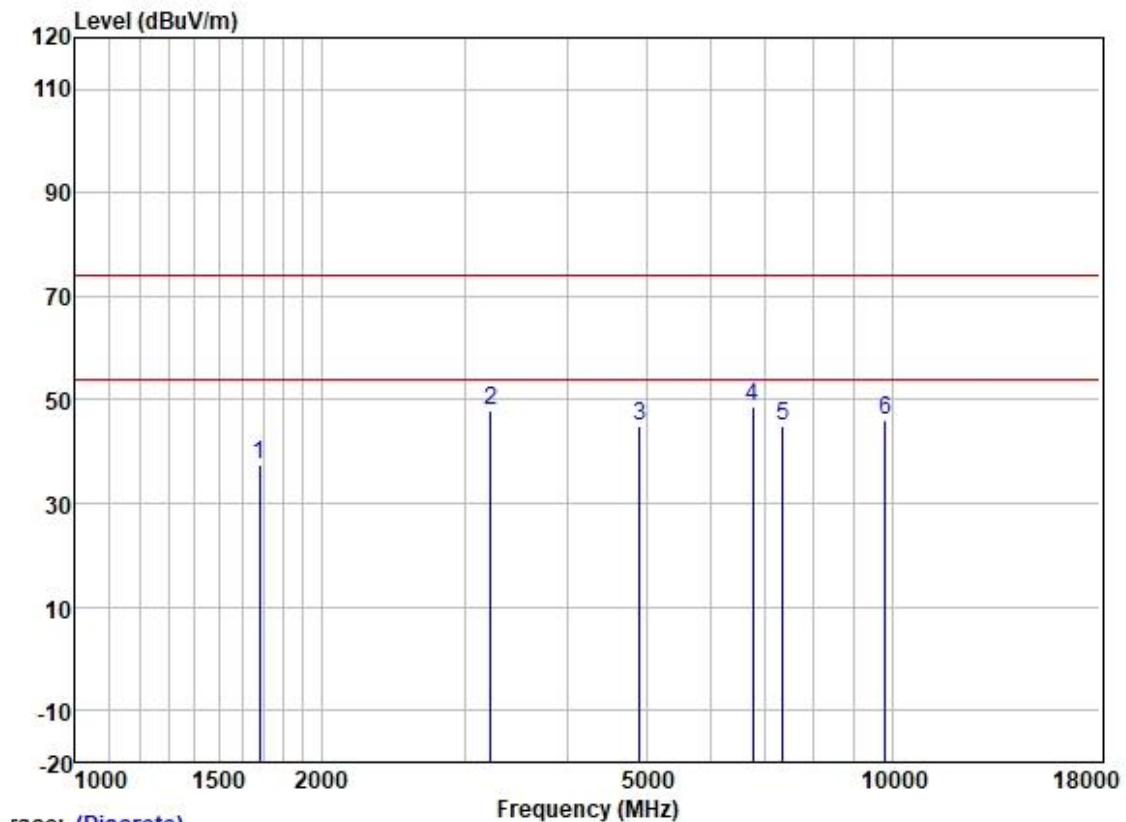

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1682.477	47.38	25.03	3.06	37.93	37.54	74.00	-36.46	HORIZONTAL peak
2	3223.928	51.96	28.84	4.45	37.13	48.12	74.00	-25.88	HORIZONTAL peak
3	4904.000	42.44	34.15	5.24	36.88	44.95	74.00	-29.05	HORIZONTAL peak
4	6756.708	44.18	34.56	6.92	37.06	48.60	74.00	-25.40	HORIZONTAL peak
5	7356.000	39.02	36.12	6.79	37.15	44.78	74.00	-29.22	HORIZONTAL peak
6	9808.000	36.45	38.86	7.66	37.01	45.96	74.00	-28.04	HORIZONTAL peak

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for GZEM200701390908.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for GZCR2306000619HS

- End of the Report -