



|                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                   |                                                                                                                                                                                                         |                  |                                              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|----------------------------------------------|
| <b>Prüfbericht-Nr.:</b><br><i>Test Report No.:</i>                                                                                                                                                                                                                                                                                                                                                                                                         | <b>17043527 003</b>                                                                                                                                               | <b>Auftrags-Nr.:</b><br><i>Order No.:</i>                                                                                                                                                               | <b>164021717</b> | <b>Seite 1 von 85</b><br><i>Page 1 of 85</i> |
| <b>Kunden-Referenz-Nr.:</b><br><i>Client Reference No.:</i>                                                                                                                                                                                                                                                                                                                                                                                                | N/A                                                                                                                                                               | <b>Auftragsdatum:</b><br><i>Order date:</i>                                                                                                                                                             | 17.09.2014       |                                              |
| <b>Auftraggeber:</b><br><i>Client:</i>                                                                                                                                                                                                                                                                                                                                                                                                                     | Shenzhen Zowee Technology Co., Ltd.,<br>Science & Technology Industrial Park of Privately Owned Enterprises, Pingshan, Xili, Nanshan District,<br>Shenzhen, China |                                                                                                                                                                                                         |                  |                                              |
| <b>Prüfgegenstand:</b><br><i>Test item:</i>                                                                                                                                                                                                                                                                                                                                                                                                                | Tablet PC                                                                                                                                                         |                                                                                                                                                                                                         |                  |                                              |
| <b>Bezeichnung / Typ-Nr.:</b><br><i>Identification / Type No.:</i>                                                                                                                                                                                                                                                                                                                                                                                         | UB-15MS10, UB-15MS101, UB-15MS10SA, M1045, NS-15MS08, NS-15MS081,<br>M8011                                                                                        |                                                                                                                                                                                                         |                  |                                              |
| <b>Auftrags-Inhalt:</b><br><i>Order content:</i>                                                                                                                                                                                                                                                                                                                                                                                                           | FCC/IC Certification                                                                                                                                              |                                                                                                                                                                                                         |                  |                                              |
| <b>Prüfgrundlage:</b><br><i>Test specification:</i>                                                                                                                                                                                                                                                                                                                                                                                                        | CFR47 FCC Part 15: Subpart B Section 15.107<br>CFR47 FCC Part 15: Subpart B Section 15.109<br>ICES-003 Issue 5 August 2012                                        |                                                                                                                                                                                                         |                  |                                              |
| <b>Wareneingangsdatum:</b><br><i>Date of receipt:</i>                                                                                                                                                                                                                                                                                                                                                                                                      | 10.10.2014                                                                                                                                                        |                                                                                                                                                                                                         |                  |                                              |
| <b>Prüfmuster-Nr.:</b><br><i>Test sample No.:</i>                                                                                                                                                                                                                                                                                                                                                                                                          | 1401914, 1401915                                                                                                                                                  |                                                                                                                                                                                                         |                  |                                              |
| <b>Prüfzeitraum:</b><br><i>Testing period:</i>                                                                                                                                                                                                                                                                                                                                                                                                             | 12.10.2014 - 13.10.2014                                                                                                                                           |                                                                                                                                                                                                         |                  |                                              |
| <b>Ort der Prüfung:</b><br><i>Place of testing:</i>                                                                                                                                                                                                                                                                                                                                                                                                        | Accurate Technology Co., Ltd.                                                                                                                                     |                                                                                                                                                                                                         |                  |                                              |
| <b>Prüflaboratorium:</b><br><i>Testing laboratory:</i>                                                                                                                                                                                                                                                                                                                                                                                                     | TÜV Rheinland (Shenzhen) Co., Ltd.                                                                                                                                |                                                                                                                                                                                                         |                  |                                              |
| <b>Prüfergebnis*:</b><br><i>Test result*:</i>                                                                                                                                                                                                                                                                                                                                                                                                              | Pass                                                                                                                                                              |                                                                                                                                                                                                         |                  |                                              |
| <b>geprüft von / tested by:</b>                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                   | <b>kontrolliert von / reviewed by:</b>                                                                                                                                                                  |                  |                                              |
| <br>29.10.2014 Owen Tian/Project Manager<br>Datum Name / Stellung Unterschrift<br>Date Name / Position Signature                                                                                                                                                                                                                                                        |                                                                                                                                                                   | <br>29.10.2014 Sam Lin/Technical Certifier<br>Datum Name / Stellung Unterschrift<br>Date Name / Position Signature |                  |                                              |
| <b>Sonstiges / Other:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                   |                                                                                                                                                                                                         |                  |                                              |
| <b>Zustand des Prüfgegenstandes bei Anlieferung:</b><br><i>Condition of the test item at delivery:</i>                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                   | Prüfmuster vollständig und unbeschädigt<br><i>Test item complete and undamaged</i>                                                                                                                      |                  |                                              |
| * Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft<br>P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet<br>Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor<br>P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested                          |                                                                                                                                                                   |                                                                                                                                                                                                         |                  |                                              |
| <b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b><br><i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i> |                                                                                                                                                                   |                                                                                                                                                                                                         |                  |                                              |

V04

**Prüfbericht - Nr.: 17043527 003**  
*Test Report No.*

**Seite 2 von 85**  
*Page 2 of 85*

## TEST SUMMARY

### **5.1.1 CONDUCTED EMISSIONS**

*RESULT: Pass*

### **5.2.1 RADIATED EMISSION**

*RESULT: Pass*

## CONTENTS

|            |                                                           |           |
|------------|-----------------------------------------------------------|-----------|
| <b>1.</b>  | <b>GENERAL REMARKS .....</b>                              | <b>4</b>  |
| <b>1.1</b> | <b>COMPLEMENTARY MATERIALS .....</b>                      | <b>4</b>  |
| <b>2.</b>  | <b>TEST SITES .....</b>                                   | <b>4</b>  |
| <b>2.1</b> | <b>TEST FACILITIES.....</b>                               | <b>4</b>  |
| <b>2.2</b> | <b>LIST OF TEST AND MEASUREMENT INSTRUMENTS.....</b>      | <b>5</b>  |
| <b>2.3</b> | <b>TRACEABILITY .....</b>                                 | <b>6</b>  |
| <b>2.4</b> | <b>CALIBRATION .....</b>                                  | <b>6</b>  |
| <b>2.5</b> | <b>MEASUREMENT UNCERTAINTY .....</b>                      | <b>6</b>  |
| <b>2.6</b> | <b>LOCATION OF ORIGINAL DATA .....</b>                    | <b>6</b>  |
| <b>2.7</b> | <b>STATUS OF FACILITY USED FOR TESTING.....</b>           | <b>6</b>  |
| <b>2.8</b> | <b>TEST SETUP DIAGRAM.....</b>                            | <b>7</b>  |
| <b>3.</b>  | <b>GENERAL PRODUCT INFORMATION .....</b>                  | <b>8</b>  |
| <b>3.1</b> | <b>PRODUCT FUNCTION AND INTENDED USE.....</b>             | <b>8</b>  |
| <b>3.2</b> | <b>RATINGS AND SYSTEM DETAILS .....</b>                   | <b>8</b>  |
| <b>3.3</b> | <b>INDEPENDENT OPERATION MODES .....</b>                  | <b>8</b>  |
| <b>3.4</b> | <b>NOISE GENERATING AND NOISE SUPPRESSING PARTS .....</b> | <b>9</b>  |
| <b>3.5</b> | <b>SUBMITTED DOCUMENTS .....</b>                          | <b>9</b>  |
| <b>4.</b>  | <b>TEST SET-UP AND OPERATION MODES .....</b>              | <b>10</b> |
| <b>4.1</b> | <b>PRINCIPLE OF CONFIGURATION SELECTION .....</b>         | <b>10</b> |
| <b>4.2</b> | <b>TEST OPERATION AND TEST SOFTWARE.....</b>              | <b>10</b> |
| <b>4.3</b> | <b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>  | <b>10</b> |
| <b>4.4</b> | <b>COUNTERMEASURES TO ACHIEVE ERM COMPLIANCE .....</b>    | <b>10</b> |
| <b>5.</b>  | <b>TEST RESULTS EMISSION .....</b>                        | <b>11</b> |
| <b>5.1</b> | <b>EMISSION IN THE FREQUENCY RANGE UP TO 30 MHz .....</b> | <b>11</b> |
| 5.1.1      | <i>Conducted emissions.....</i>                           | <i>11</i> |
| <b>5.2</b> | <b>EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHz.....</b>  | <b>26</b> |
| 5.2.1      | <i>Radiated Emission .....</i>                            | <i>26</i> |
| <b>6.</b>  | <b>PHOTOGRAPHS OF THE TEST SET-UP.....</b>                | <b>81</b> |
| <b>7.</b>  | <b>LIST OF TABLES .....</b>                               | <b>85</b> |
| <b>8.</b>  | <b>LIST OF PHOTOGRAPHS .....</b>                          | <b>85</b> |

**Prüfbericht - Nr.: 17043527 003**  
Test Report No.

**Seite 4 von 85**  
Page 4 of 85

## 1. General Remarks

### 1.1 Complementary Materials

None.

## 2. Test Sites

### 2.1 Test Facilities

Accurate Technology Co., Ltd.

**(FCC Registration No.: 752051)**

**(Test site Industry Canada No.: 5077A-2)**

F1, Bldg. A, Changyuan New Material Port  
Keyuan Rd., Science & Industry Park, Nanshan  
Shenzhen, P.R. China

NETC Building, No. 4 Tongfa Rd., Xili, Nanshan, Shenzhen, China

The tests at the test site have been conducted under the supervision of a TÜV engineer.

## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

| Kind of Equipment                                       | Manufacturer    | Type               | S/N        | Calibrated until |
|---------------------------------------------------------|-----------------|--------------------|------------|------------------|
| <b>Conducted Emission</b>                               |                 |                    |            |                  |
| Test Receiver                                           | Rohde & Schwarz | ESCS30             | 100307     | 2015-01-11       |
| L.I.S.N.                                                | Schwarzbeck     | NLSK8126           | 8126431    | 2015-01-11       |
| Pulse Limiter                                           | Rohde & Schwarz | ESH3-Z2            | 100815     | 2015-01-11       |
| 50Ω Coaxial Switch                                      | Anritsu Corp    | MP59B              | 6200283933 | 2015-01-11       |
| <b>Radiated Emission</b>                                |                 |                    |            |                  |
| Spectrum Analyzer                                       | Agilent         | E7405A             | MY45115511 | 2015-01-11       |
| Test Receiver                                           | Rohde & Schwarz | ESCS30             | 100307     | 2015-01-11       |
| Bilog Antenna                                           | Schwarzbeck     | VULB9163           | 9163-323   | 2015-01-11       |
| Loop Antenna                                            | Schwarzbeck     | FMZB1516           | 1516131    | 2015-01-11       |
| Horn Antenna                                            | Schwarzbeck     | BBHA9120D          | 9120D-655  | 2015-01-11       |
| 50 Coaxial Switch                                       | Anritsu Corp    | MP59B              | 6200506474 | 2015-01-11       |
| Pre-Amplifier                                           | Rohde & Schwarz | CBLU118354<br>0-01 | 3791       | 2015-01-11       |
| RF Coaxial Cable (966 Chamber)<br>(for below 1GHz test) | Suhner          | N-3m               | No.8       | 2015-01-11       |
| RF Coaxial Cable (966 Chamber)<br>(for below 1GHz test) | Resenberger     | N-3.5m             | No.9       | 2015-01-11       |
| RF Coaxial Cable (966 Chamber)<br>(for below 1GHz test) | Suhner          | N-6m               | No.10      | 2015-01-11       |
| RF Coaxial Cable (966 Chamber)<br>(for above 1GHz test) | Resenberger     | N-12m              | No.11      | 2015-01-11       |
| RF Coaxial Cable (966 Chamber)<br>(for above 1GHz test) | Resenberger     | N-0.5m             | No.12      | 2015-01-11       |

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO/IEC 17025 are:

**Table 2: Measurement Uncertainty**

| Items                                |                            | Extended Uncertainty                          |
|--------------------------------------|----------------------------|-----------------------------------------------|
| Conducted Emission<br>(0.15 - 30MHz) | Disturbance Voltage (dBuV) | $U=\pm 2.23\text{dB}$ , $k=2$ , $\sigma=95\%$ |
| Radiated Emission<br>(30 - 1000MHz)  | Field strength (dBuV/m)    | $U=\pm 4.42\text{dB}$ , $k=2$ , $\sigma=95\%$ |
| Radiated Emission<br>(1 - 26.5GHz)   | Field strength (dBuV/m)    | $U=\pm 4.06\text{dB}$ , $k=2$ , $\sigma=95\%$ |

## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

## 2.7 Status of Facility Used for Testing

Accurate Technology Co., Ltd. test facility located at F1, Bldg. A, Changyuan New Material Port Keyuan Rd., Science & Industry Park, Nanshan, Shenzhen, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

## 2.8 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test


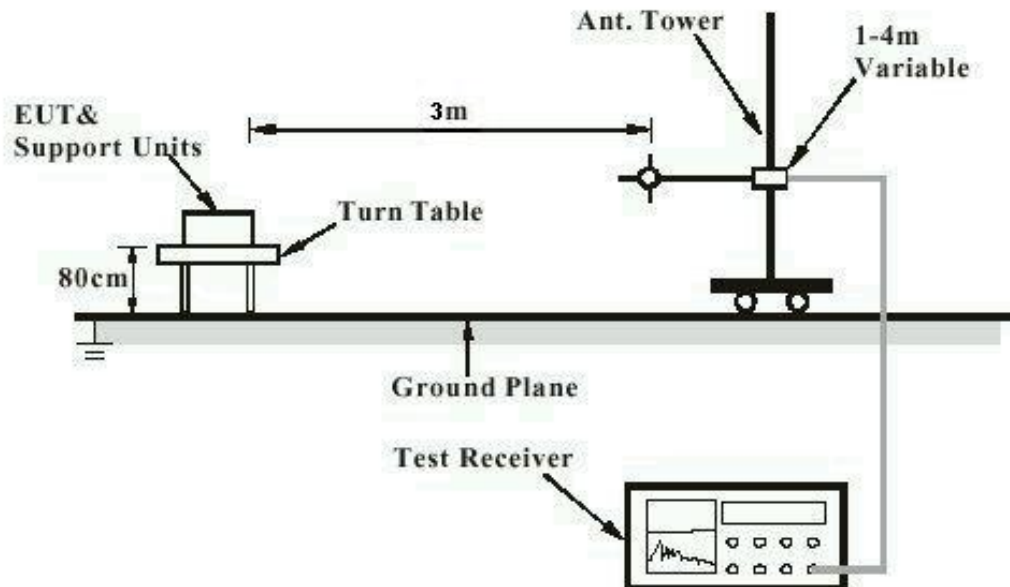


Diagram of Measurement Equipment Configuration for Conduction Measurement

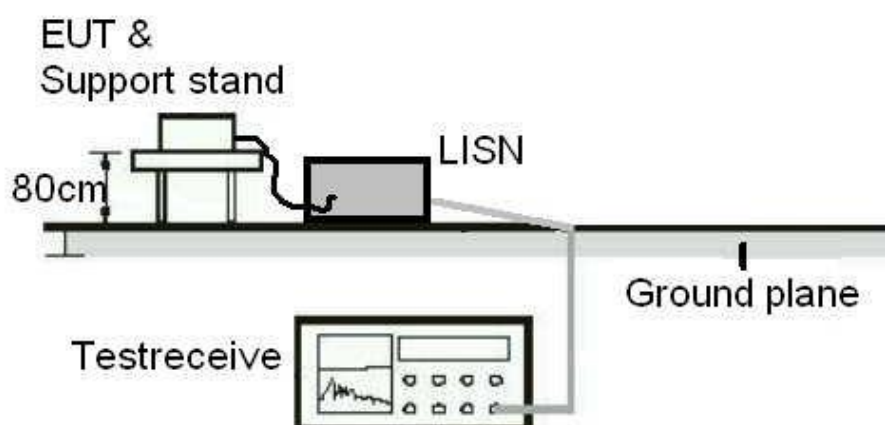

### 3. General Product Information

#### 3.1 Product Function and Intended Use

The EUTs are tablet with Wi-Fi, Bluetooth & GPS function.

The models UB-15MS10, UB-15MS101, UB-15MS10SA & M1045 are identical except the model name; the models NS-15MS08, NS-15MS081 & M8011 are identical except the model name.

The models UB-15MS10 & NS-15MS08 have the same circuit, PCB layout and RF module, only some functions are different.

The differences between UB-15MS10 and NS-15MS08:

| Model     | PCBA                                   | Function                         | Screen | DDR | EMMC                        | Antenna                                                         |
|-----------|----------------------------------------|----------------------------------|--------|-----|-----------------------------|-----------------------------------------------------------------|
| UB-15MS10 | With GPS board & POPO-Pin for keyboard | With light sensor, GPS & compass | 10.1"  | 2G  | Internal 32G                | With GPS antenna                                                |
| NS-15MS08 | Without                                | Without                          | 8"     | 1G  | Internal 16G + external 16G | Without GPS antenna, the position of Wi-Fi antenna is different |

For details refer to the User Manual and Circuit Diagram.

#### 3.2 Ratings and System Details

**Table 3: Technical Specification of EUT**

| Technical Specification   | Value                                                                   |
|---------------------------|-------------------------------------------------------------------------|
| Kind of Equipment         | Tablet PC                                                               |
| Type Designation          | UB-15MS10, UB-15MS101, UB-15MS10SA, M1045, NS-15MS08, NS-15MS081, M8011 |
| FCC ID                    | 2AAP6UB15MS10                                                           |
| Extreme Temperature Range | -30~+75°C                                                               |
| Operation Voltage         | DC 3.7V (via built in battery)                                          |
|                           | DC 5V (via AC/DC adapter)                                               |

#### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On, with charging
  - 1. Recording mode
  - 2. Playing mode
  - 3. Transmitting data (via USB port connected to USB device)
  - 4. GPS mode
- B. Standby
- C. Off

## **3.4 Noise Generating and Noise Suppressing Parts**

Refer to the Circuit Diagram.

## **3.5 Submitted Documents**

- Bill of Material
- Constructional Drawing
- PCB Layout
- Photo Document
- Circuit Diagram
- Instruction Manual
- Rating Label

## 4. Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.4: 2003. According to clause 3.1, all tests were applied on models UB-15MS10 & NS-15MS08 only.

### 4.3 Special Accessories and Auxiliary Equipment

The EUT was tested together with the following accessories:

| Description             | Manufacturer                          | Part No.                | S/N                   | Rating                                                   |
|-------------------------|---------------------------------------|-------------------------|-----------------------|----------------------------------------------------------|
| Switching Power Adaptor | Shenzhen Frecom Electronics Co., Ltd. | F12L6-050200SPAU L.P.S. | N/A                   | Input: AC 100-240V, 50/60Hz, 0.3A<br>Output: DC 5V, 2.4A |
| LED TV                  | AEG                                   | CTV 2240 DVB-T/DVD      | LA102516A1<br>A701414 | ---                                                      |

The EUT was tested with following cables:

| Interface(s)/Port(s): | Max. cable length, shielding    | Cable classification |
|-----------------------|---------------------------------|----------------------|
| AC Mains of adapter   | 2 cores, non-shielded port, 3m  | AC Power Input       |
| Micro USB port        | 4 cores, non-shielded port, 3m  | DC Power Input       |
| Microphone            | 2 cores, non-shielded port, 3m  | Audio Input          |
| HDMI port             | 19 cores, non-shielded port, 3m | Audio/Video Output   |
| Micro SD card slot    | ---                             | ---                  |

### 4.4 Countermeasures to Achieve ERM Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF). No additional measures were employed to achieve compliance.

## 5. Test Results EMISSION

### 5.1 Emission in the Frequency Range up to 30 MHz

#### 5.1.1 Conducted emissions

**RESULT:****Pass**

|                   |   |                                                     |
|-------------------|---|-----------------------------------------------------|
| Date of testing   | : | 2014-10-13                                          |
| Test standard     | : | FCC Part 15.107 (a)<br>ICES-003 Issue 5 August 2012 |
| Basic standard    | : | ANSI C63.4: 2003                                    |
| Frequency range   | : | 0.15 – 30MHz                                        |
| Limits            | : | FCC Part 15.107(a)<br>ICES-003 Issue 5 August 2012  |
| Kind of test site | : | Shield room                                         |

**Test setup**

|                      |   |               |
|----------------------|---|---------------|
| Input Voltage        | : | AC 120V, 60Hz |
| Operation Mode       | : | A             |
| Earthing             | : | Not Connected |
| Ambient temperature  | : | 25°C          |
| Relative humidity    | : | 52%           |
| Atmospheric pressure | : | 101kPa        |


For details refer to following test plot.

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: Recording video  
 Test Site: I#Shielding Room  
 Operator: LAN  
 Test Specification: L 120V/60Hz  
 Comment: Back Camera  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

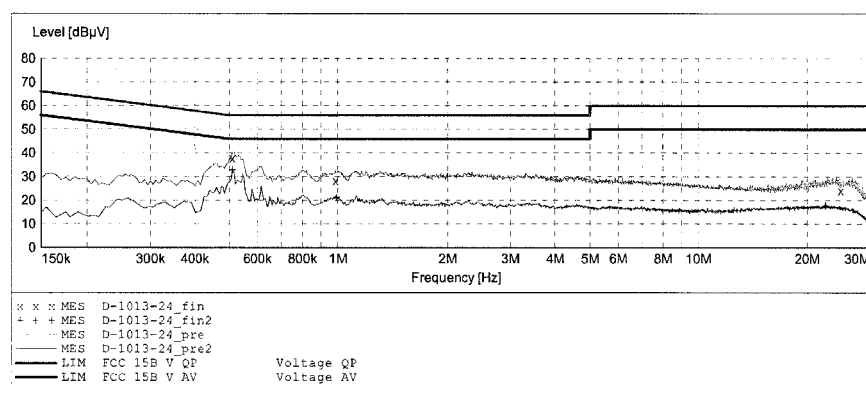
**MEASUREMENT RESULT: "D-1013-24\_fin"**

| Frequency<br>MHz | Level<br>dBuV | Transd<br>dB | Limit<br>dBuV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.510000         | 37.70         | 10.7         | 56            | 18.3         | QP       | L1   | GND |
| 0.985000         | 28.20         | 10.8         | 56            | 27.8         | QP       | L1   | GND |
| 24.850000        | 24.10         | 11.5         | 60            | 35.9         | QP       | L1   | GND |

**MEASUREMENT RESULT: "D-1013-24\_fin2"**


| Frequency<br>MHz | Level<br>dBuV | Transd<br>dB | Limit<br>dBuV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.510000         | 32.80         | 10.7         | 46            | 13.2         | AV       | L1   | GND |
| 0.990000         | 21.10         | 10.8         | 46            | 24.9         | AV       | L1   | GND |
| 22.475000        | 17.60         | 11.4         | 50            | 32.4         | AV       | L1   | GND |

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: Recording video  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: N 120V/60Hz  
 Comment: Back Camera  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

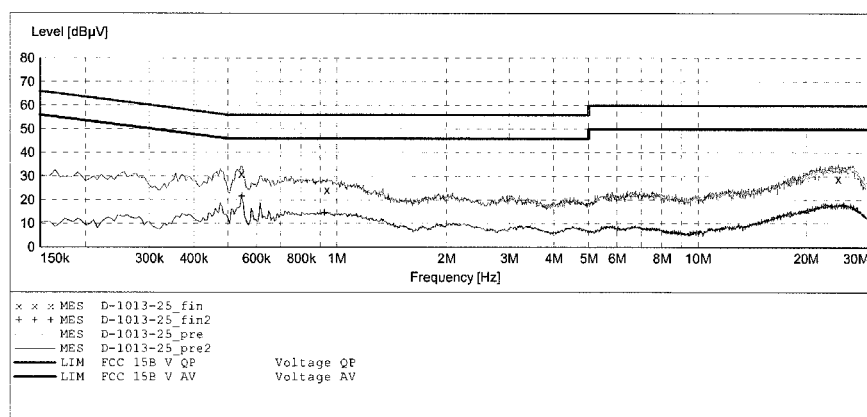
**MEASUREMENT RESULT: "D-1013-25\_fin"**

10/13/2014

| Frequency<br>MHz | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.545000         | 31.10         | 10.7         | 56            | 24.9         | QP       | N    | GND |
| 0.940000         | 24.20         | 10.8         | 56            | 31.8         | QP       | N    | GND |
| 24.625000        | 29.00         | 11.5         | 60            | 31.0         | QP       | N    | GND |

**MEASUREMENT RESULT: "D-1013-25\_fin2"**

10/13/2014


| Frequency<br>MHz | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.545000         | 21.60         | 10.7         | 46            | 24.4         | AV       | N    | GND |
| 0.925000         | 14.60         | 10.8         | 46            | 31.4         | AV       | N    | GND |
| 25.450000        | 17.70         | 11.5         | 50            | 32.3         | AV       | N    | GND |

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: Recording video  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: L 120V/60Hz  
 Comment: Front Camera  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

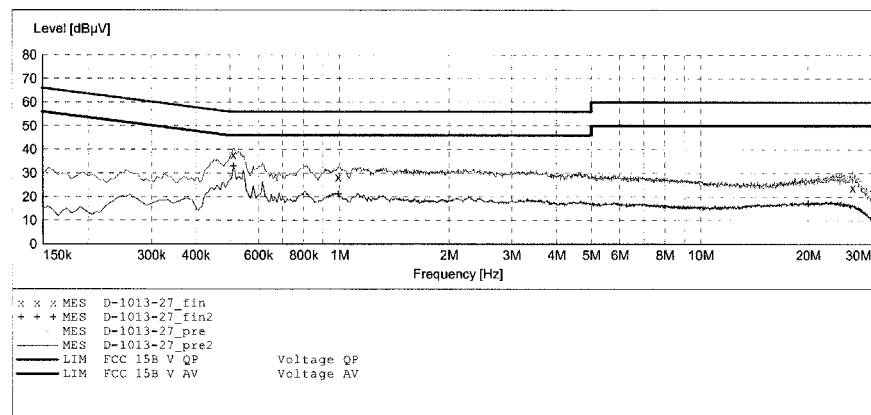
**MEASUREMENT RESULT: "D-1013-27\_fin"**

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.510000         | 37.80         | 10.7         | 56            | 18.2         | QP       | L1   | GND |
| 0.990000         | 28.30         | 10.8         | 56            | 27.7         | QP       | L1   | GND |
| 26.650000        | 23.90         | 11.5         | 60            | 36.1         | QP       | L1   | GND |

**MEASUREMENT RESULT: "D-1013-27\_fin2"**


| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.510000         | 33.00         | 10.7         | 46            | 13.0         | AV       | L1   | GND |
| 0.990000         | 21.20         | 10.8         | 46            | 24.8         | AV       | L1   | GND |
| 19.975000        | 17.10         | 11.4         | 50            | 32.9         | AV       | L1   | GND |

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: Recording video  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: N 120V/60Hz  
 Comment: Front Camera  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

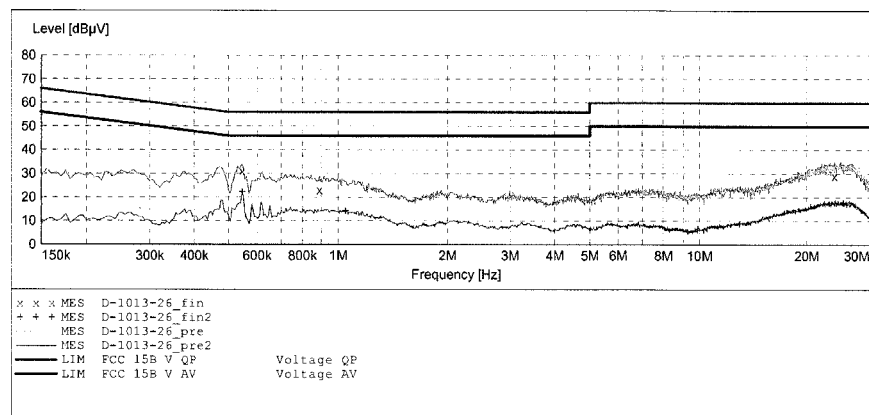
**MEASUREMENT RESULT: "D-1013-26\_fin"**

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.545000         | 31.00         | 10.7         | 56            | 25.0         | QP       | N    | GND |
| 0.890000         | 23.00         | 10.8         | 56            | 33.0         | QP       | N    | GND |
| 23.950000        | 29.00         | 11.5         | 60            | 31.0         | QP       | N    | GND |

**MEASUREMENT RESULT: "D-1013-26\_fin2"**


| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.545000         | 22.20         | 10.7         | 46            | 23.8         | AV       | N    | GND |
| 1.045000         | 14.20         | 10.9         | 46            | 31.8         | AV       | N    | GND |
| 25.300000        | 17.60         | 11.5         | 50            | 32.4         | AV       | N    | GND |

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: Playing video  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: L 120V/60Hz  
 Comment: HDMI output  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

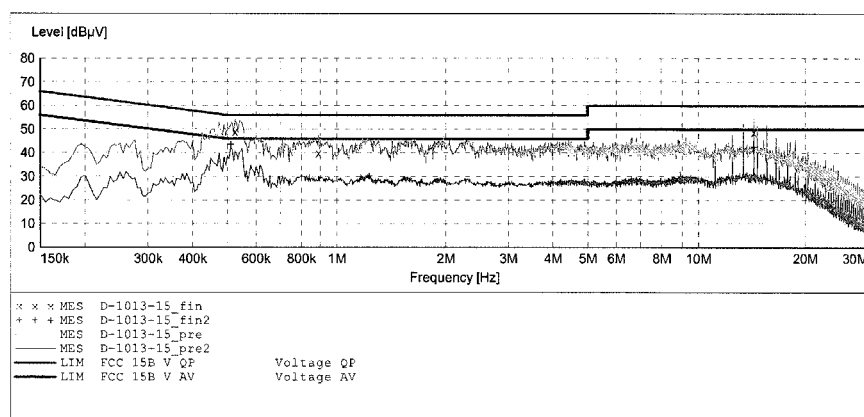
**MEASUREMENT RESULT: "D-1013-15\_fin"**

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.525000         | 48.90         | 10.7         | 56            | 7.1          | QP       | L1   | GND |
| 0.890000         | 39.80         | 10.8         | 56            | 16.2         | QP       | L1   | GND |
| 14.300000        | 51.80         | 11.4         | 60            | 8.2          | QP       | L1   | GND |

**MEASUREMENT RESULT: "D-1013-15\_fin2"**


| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.510000         | 42.90         | 10.7         | 46            | 3.1          | AV       | L1   | GND |
| 1.225000         | 30.10         | 10.9         | 46            | 15.9         | AV       | L1   | GND |
| 14.300000        | 46.40         | 11.4         | 50            | 3.6          | AV       | L1   | GND |

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: Playing video  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: N 120V/60Hz  
 Comment: HDMI output  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

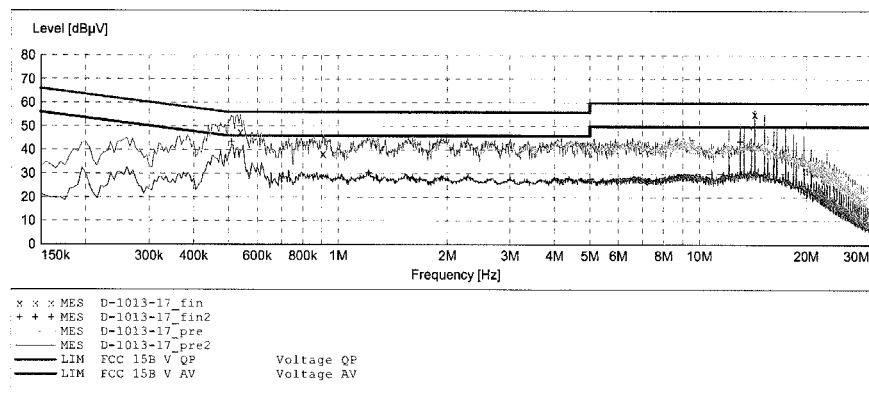
**MEASUREMENT RESULT: "D-1013-17\_fin"**

| Frequency<br>MHz | Level<br>dBuV | Transd<br>dB | Limit<br>dBuV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.540000         | 47.60         | 10.7         | 56            | 8.4          | QP       | N    | GND |
| 0.910000         | 38.30         | 10.8         | 56            | 17.7         | QP       | N    | GND |
| 14.300000        | 55.40         | 11.4         | 60            | 4.6          | QP       | N    | GND |

**MEASUREMENT RESULT: "D-1013-17\_fin2"**


| Frequency<br>MHz | Level<br>dBuV | Transd<br>dB | Limit<br>dBuV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.510000         | 43.50         | 10.7         | 46            | 2.5          | AV       | N    | GND |
| 1.210000         | 30.30         | 10.9         | 46            | 15.7         | AV       | N    | GND |
| 13.025000        | 46.70         | 11.3         | 50            | 3.3          | AV       | N    | GND |

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N: NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: Recording video  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: L 120V/60Hz  
 Comment: Back Camera  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

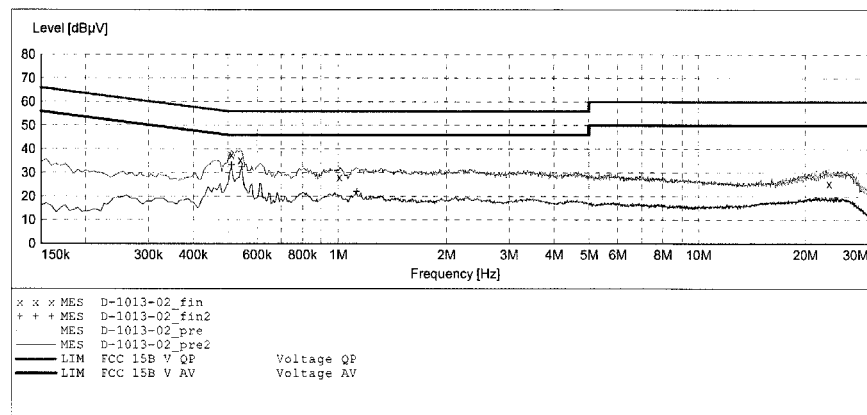
**MEASUREMENT RESULT: "D-1013-02\_fin"**

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.510000         | 37.60         | 10.7         | 56            | 18.4         | QP       | L1   | GND |
| 0.540000         | 35.30         | 10.7         | 56            | 20.7         | QP       | L1   | GND |
| 1.010000         | 28.10         | 10.8         | 56            | 27.9         | QP       | L1   | GND |
| 23.325000        | 25.50         | 11.5         | 60            | 34.5         | QP       | L1   | GND |

**MEASUREMENT RESULT: "D-1013-02\_fin2"**


| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.510000         | 33.20         | 10.7         | 46            | 12.8         | AV       | L1   | GND |
| 0.545000         | 32.40         | 10.7         | 46            | 13.6         | AV       | L1   | GND |
| 1.125000         | 22.00         | 10.9         | 46            | 24.0         | AV       | L1   | GND |

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N: NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: Recording video  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: N 120V/60Hz  
 Comment: Back Camera  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: SUB STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

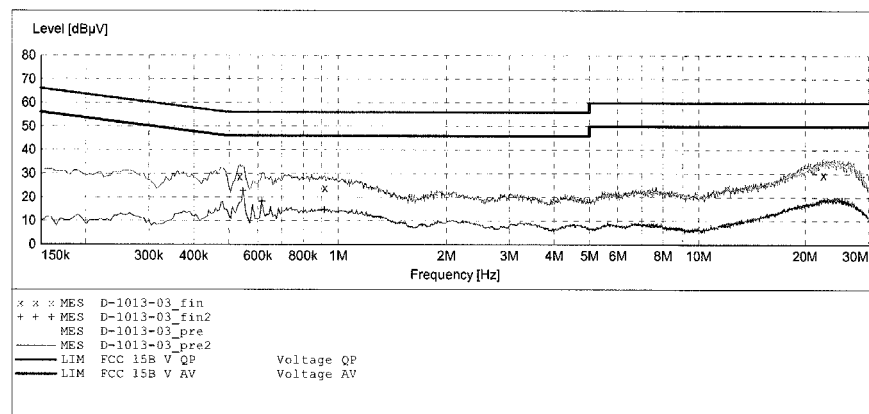
**MEASUREMENT RESULT: "D-1013-03\_fin"**

| Frequency<br>MHz | Level<br>dBuV | Transd<br>dB | Limit<br>dBuV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.535000         | 28.70         | 10.7         | 56            | 27.3         | QP       | N    | GND |
| 0.920000         | 23.90         | 10.8         | 56            | 32.1         | QP       | N    | GND |
| 22.550000        | 29.60         | 11.4         | 60            | 30.4         | QP       | N    | GND |

**MEASUREMENT RESULT: "D-1013-03\_fin2"**


| Frequency<br>MHz | Level<br>dBuV | Transd<br>dB | Limit<br>dBuV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.545000         | 22.70         | 10.7         | 46            | 23.3         | AV       | N    | GND |
| 0.615000         | 18.30         | 10.7         | 46            | 27.7         | AV       | N    | GND |
| 0.915000         | 14.60         | 10.8         | 46            | 31.4         | AV       | N    | GND |
| 25.400000        | 18.60         | 11.5         | 50            | 31.4         | AV       | N    | GND |

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N: NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: Recording video  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: L 120V/60Hz  
 Comment: Front Camera  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

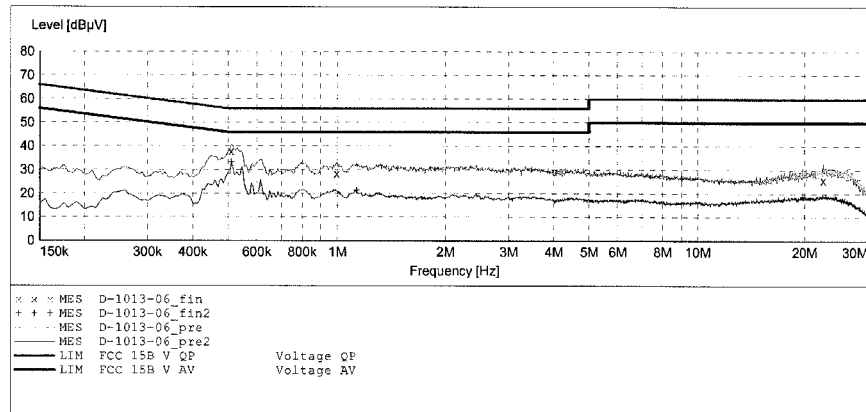
**MEASUREMENT RESULT: "D-1013-06\_fin"**

| Frequency<br>MHz | Level<br>dBuV | Transd<br>dB | Limit<br>dBuV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.510000         | 37.90         | 10.7         | 56            | 18.1         | QP       | L1   | GND |
| 0.995000         | 28.40         | 10.8         | 56            | 27.6         | QP       | L1   | GND |
| 22.550000        | 25.80         | 11.4         | 60            | 34.2         | QP       | L1   | GND |

**MEASUREMENT RESULT: "D-1013-06\_fin2"**


| Frequency<br>MHz | Level<br>dBuV | Transd<br>dB | Limit<br>dBuV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.510000         | 33.20         | 10.7         | 46            | 12.8         | AV       | L1   | GND |
| 1.130000         | 21.40         | 10.9         | 46            | 24.6         | AV       | L1   | GND |
| 19.750000        | 18.70         | 11.4         | 50            | 31.3         | AV       | L1   | GND |

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N: NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: Recording video  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: N 120V/60Hz  
 Comment: Front Camera  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

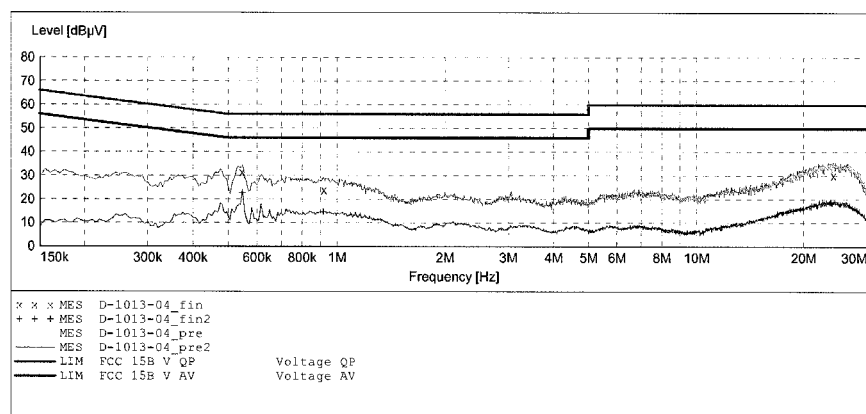
**MEASUREMENT RESULT: "D-1013-04\_fin"**

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.545000         | 31.50         | 10.7         | 56            | 24.5         | QP       | N    | GND |
| 0.920000         | 23.90         | 10.8         | 56            | 32.1         | QP       | N    | GND |
| 24.200000        | 30.20         | 11.5         | 60            | 29.8         | QP       | N    | GND |

**MEASUREMENT RESULT: "D-1013-04\_fin2"**


| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.545000         | 22.60         | 10.7         | 46            | 23.4         | AV       | N    | GND |
| 0.915000         | 14.60         | 10.8         | 46            | 31.4         | AV       | N    | GND |
| 23.775000        | 18.80         | 11.5         | 50            | 31.2         | AV       | N    | GND |

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N: NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: Playing video  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: L 120V/60Hz  
 Comment: HDMI output  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

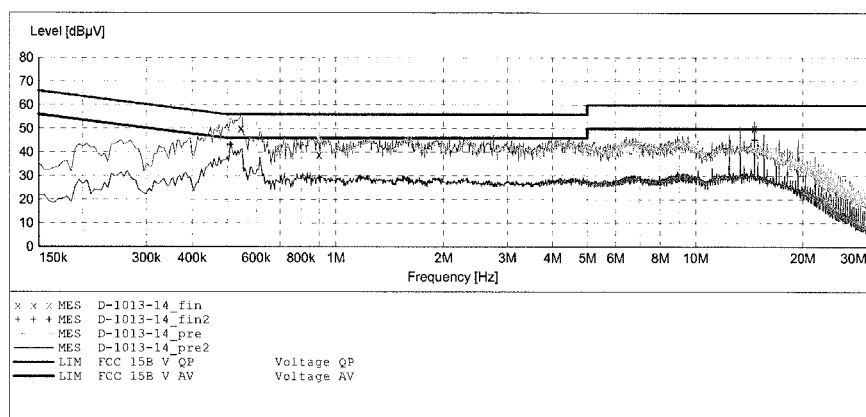
**MEASUREMENT RESULT: "D-1013-14\_fin"**

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.545000         | 50.20         | 10.7         | 56            | 5.8          | QP       | L1   | GND |
| 0.900000         | 39.00         | 10.8         | 56            | 17.0         | QP       | L1   | GND |
| 14.625000        | 50.30         | 11.4         | 60            | 9.7          | QP       | L1   | GND |

**MEASUREMENT RESULT: "D-1013-14\_fin2"**


| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.510000         | 43.00         | 10.7         | 46            | 3.0          | AV       | L1   | GND |
| 1.170000         | 28.90         | 10.9         | 46            | 17.1         | AV       | L1   | GND |
| 14.625000        | 45.20         | 11.4         | 50            | 4.8          | AV       | L1   | GND |

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N: NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: Playing video  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: N 120V/60Hz  
 Comment: HDMI output  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

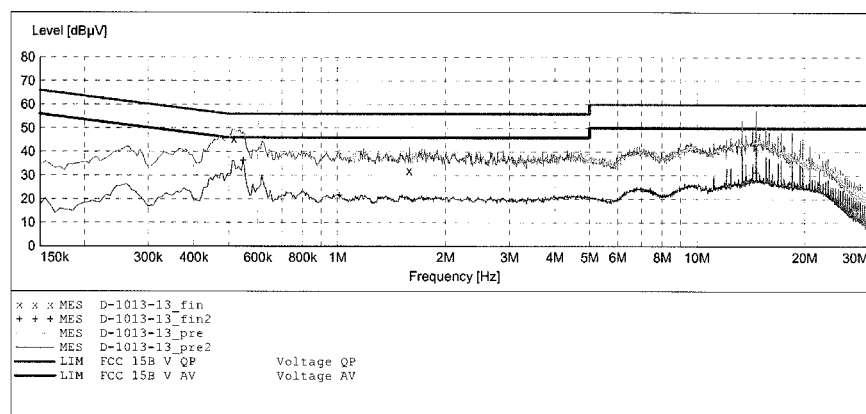
**MEASUREMENT RESULT: "D-1013-13\_fin"**

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.515000         | 45.60         | 10.7         | 56            | 10.4         | QP       | N    | GND |
| 1.590000         | 32.10         | 10.9         | 56            | 23.9         | QP       | N    | GND |
| 14.650000        | 52.30         | 11.4         | 60            | 7.7          | QP       | N    | GND |

**MEASUREMENT RESULT: "D-1013-13\_fin2"**


| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.545000         | 36.30         | 10.7         | 46            | 9.7          | AV       | N    | GND |
| 1.010000         | 21.50         | 10.8         | 46            | 24.5         | AV       | N    | GND |
| 14.650000        | 47.20         | 11.4         | 50            | 2.8          | AV       | N    | GND |

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: On with GPS  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: L 120V/60Hz  
 Comment: Mains Port  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

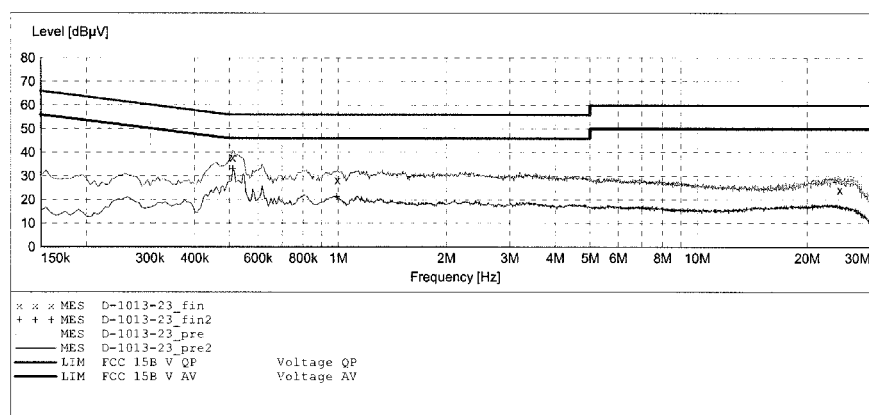
**MEASUREMENT RESULT: "D-1013-23\_fin"**

10/13/2014

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.510000         | 37.80         | 10.7         | 56            | 18.2         | QP       | L1   | GND |
| 0.995000         | 28.30         | 10.8         | 56            | 27.7         | QP       | L1   | GND |
| 24.625000        | 24.20         | 11.5         | 60            | 35.8         | QP       | L1   | GND |

**MEASUREMENT RESULT: "D-1013-23\_fin2"**

10/13/2014


| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.510000         | 33.00         | 10.7         | 46            | 13.0         | AV       | L1   | GND |
| 0.990000         | 21.20         | 10.8         | 46            | 24.8         | AV       | L1   | GND |
| 20.625000        | 17.00         | 11.4         | 50            | 33.0         | AV       | L1   | GND |

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: On with GPS  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: N 120V/60Hz  
 Comment: Mains Port  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

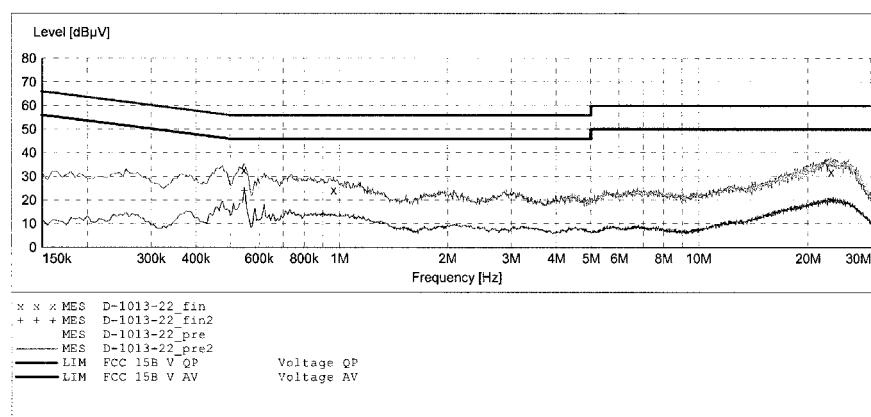
**MEASUREMENT RESULT: "D-1013-22\_fin"**

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.545000         | 32.70         | 10.7         | 56            | 23.3         | QP       | N    | GND |
| 0.965000         | 24.20         | 10.8         | 56            | 31.8         | QP       | N    | GND |
| 23.175000        | 31.90         | 11.5         | 60            | 28.1         | QP       | N    | GND |

**MEASUREMENT RESULT: "D-1013-22\_fin2"**

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.545000         | 24.00         | 10.7         | 46            | 22.0         | AV       | N    | GND |
| 0.900000         | 14.00         | 10.8         | 46            | 32.0         | AV       | N    | GND |
| 23.475000        | 20.00         | 11.5         | 50            | 30.0         | AV       | N    | GND |

**Prüfbericht - Nr.: 17043527 003**  
Test Report No.**Seite 26 von 85**  
Page 26 of 85

## 5.2 Emission in the Frequency Range above 30 MHz

### 5.2.1 Radiated Emission

**RESULT:****Pass**

|                          |   |                                                     |
|--------------------------|---|-----------------------------------------------------|
| Date of testing          | : | 2014-10-12 to 2014-10-13                            |
| Test standard            | : | FCC Part 15.109 (a)<br>ICES-003 Issue 5 August 2012 |
| Test procedure           | : | ANSI C63.4: 2003                                    |
| Frequency range          | : | 30 - 26500MHz                                       |
| Equipment Classification | : | Class B                                             |
| Limits                   | : | FCC Part 15.109(a)<br>ICES-003 Issue 5 August 2012  |
| Kind of test site        | : | 3m Semi-Anechoic Chamber                            |

**Test setup**

|                      |   |               |
|----------------------|---|---------------|
| Input Voltage        | : | AC 120V, 60Hz |
| Operation mode       | : | A             |
| Earthing             | : | Not connected |
| Ambient temperature  | : | 25°C          |
| Relative humidity    | : | 52%           |
| Atmospheric pressure | : | 101kPa        |

For details refer to following test plot.


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #759

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.( C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: Recording video

Distance: 3m

Model: UB-15MS10

Manufacturer: Zowee

Note: Back Camera

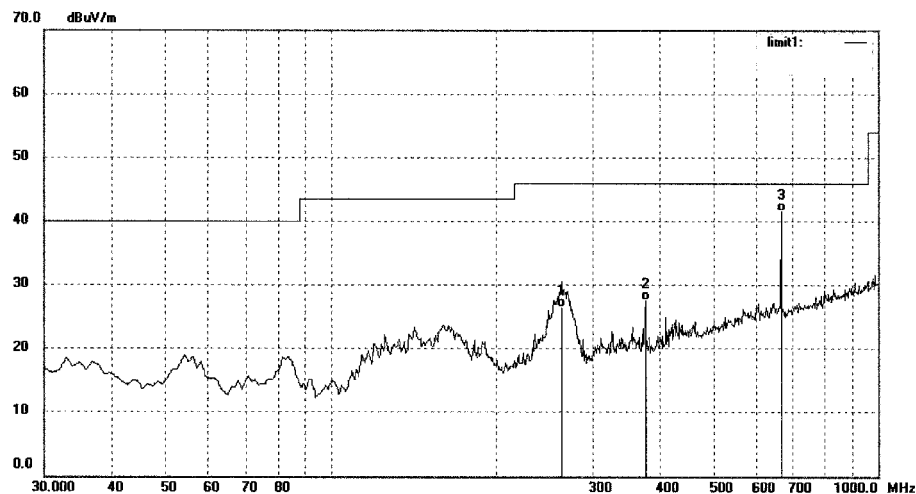

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 263.7700       | 36.97               | -10.50         | 26.47              | 46.00             | -19.53         | QP       |                |                  |        |
| 2   | 375.3200       | 34.96               | -7.43          | 27.53              | 46.00             | -18.47         | QP       |                |                  |        |
| 3   | 667.2900       | 43.65               | -2.17          | 41.48              | 46.00             | -4.52          | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #760

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Back Camera

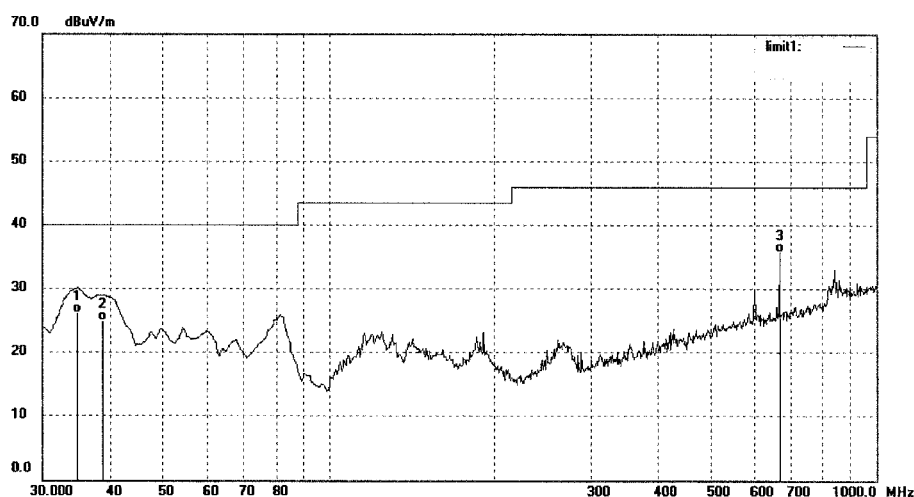

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 34.8500        | 36.62               | -10.40         | 26.22              | 40.00             | -13.78         | QP       |                |                  |        |
| 2   | 38.7299        | 36.27               | -11.26         | 25.01              | 40.00             | -14.99         | QP       |                |                  |        |
| 3   | 667.2899       | 37.96               | -2.17          | 35.79              | 46.00             | -10.21         | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #762

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Front Camera

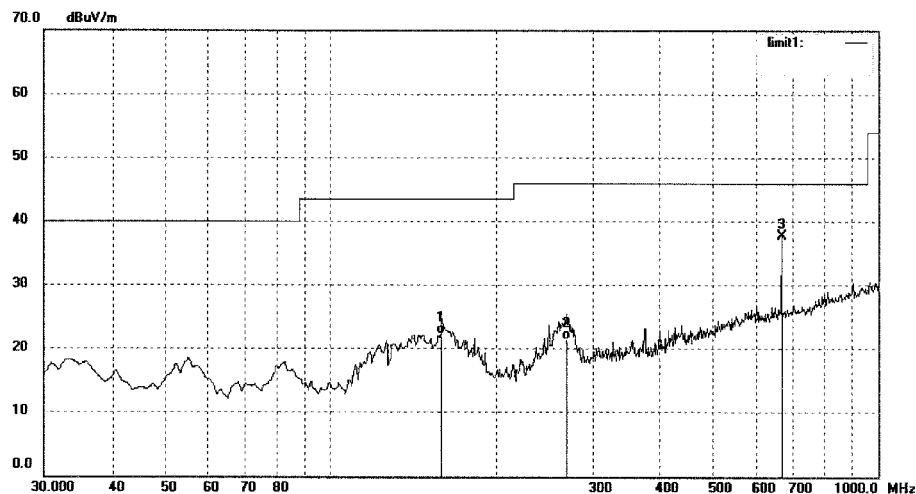

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 159.9798       | 36.90               | -14.54         | 22.36              | 43.50             | -21.14         | QP       |                |                  |        |
| 2   | 267.6499       | 31.82               | -10.30         | 21.52              | 46.00             | -24.48         | QP       |                |                  |        |
| 3   | 667.2899       | 39.87               | -2.17          | 37.70              | 46.00             | -8.30          | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #761

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Front Camera

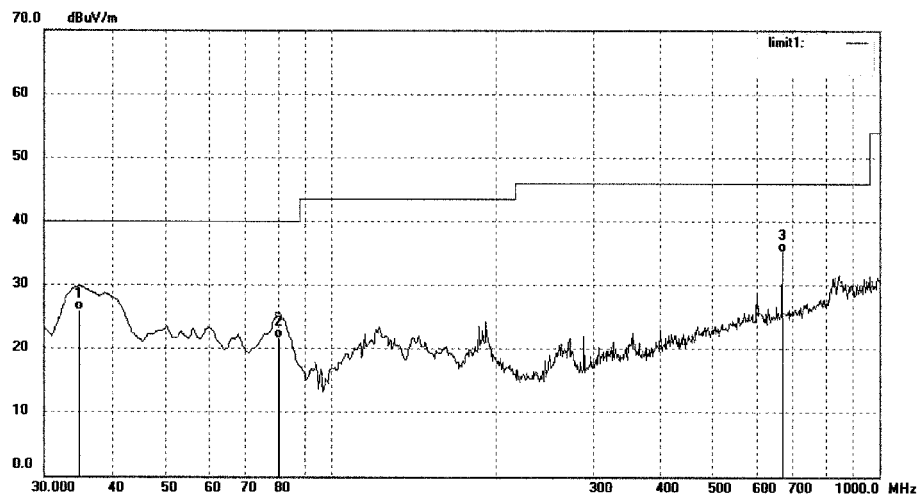

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 34.8500        | 36.32               | -10.40         | 25.92              | 40.00             | -14.08         | QP       |                |                  |        |
| 2   | 80.4399        | 38.11               | -16.41         | 21.70              | 40.00             | -18.30         | QP       |                |                  |        |
| 3   | 667.2899       | 37.36               | -2.17          | 35.19              | 46.00             | -10.81         | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #766

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Playing video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: HDMI output

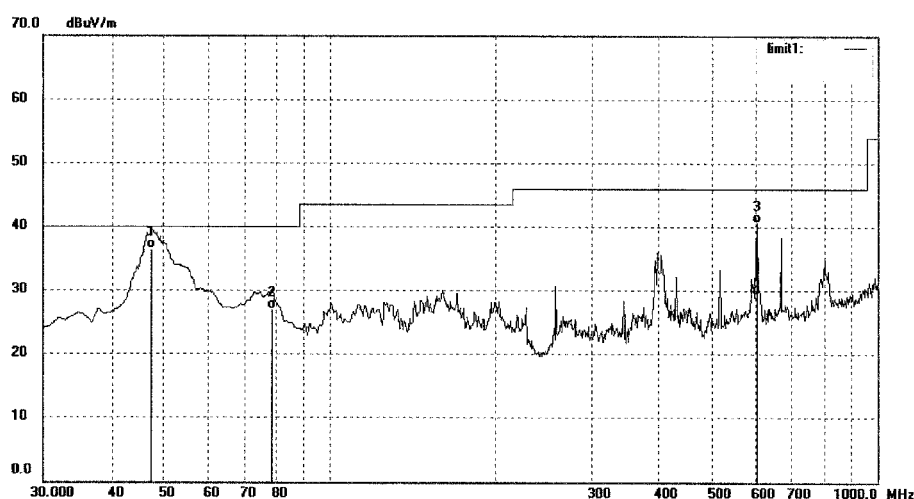

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 47.4600        | 49.15               | -12.62         | 36.53              | 40.00             | -3.47          | QP       |                |                  |        |
| 2   | 78.5000        | 43.69               | -16.58         | 27.11              | 40.00             | -12.89         | QP       |                |                  |        |
| 3   | 602.3000       | 43.63               | -2.94          | 40.69              | 46.00             | -5.31          | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #765

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Playing video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: HDMI output

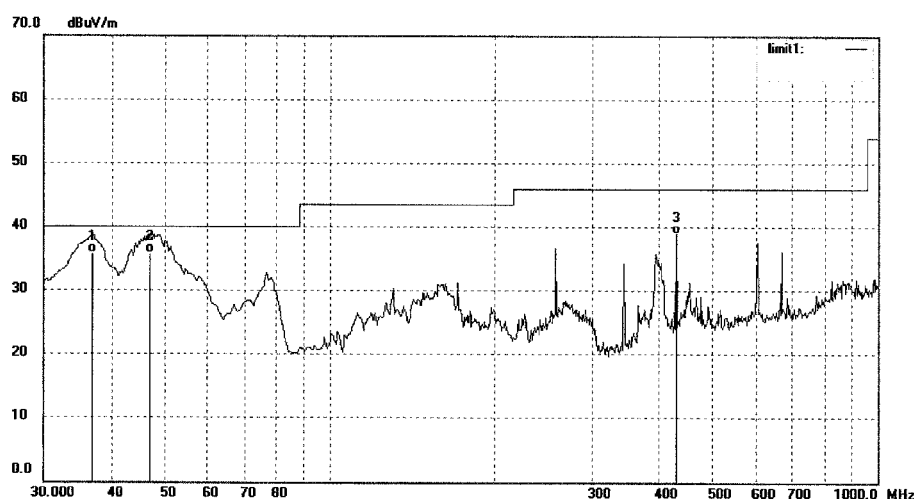

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 36.7899        | 46.56               | -10.82         | 35.74              | 40.00             | -4.26          | QP       |                |                  |        |
| 2   | 46.8303        | 48.42               | -12.63         | 35.79              | 40.00             | -4.21          | QP       |                |                  |        |
| 3   | 429.6399       | 45.01               | -6.05          | 38.96              | 46.00             | -7.04          | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #763  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT: Tablet PC  
Mode: Transfer data  
Model: UB-15MS10  
Manufacturer: Zowee

Polarization: Horizontal  
Power Source: AC 120V/60Hz  
Date: 14/10/12/  
Time:  
Engineer Signature:  
Distance: 3m

Note:

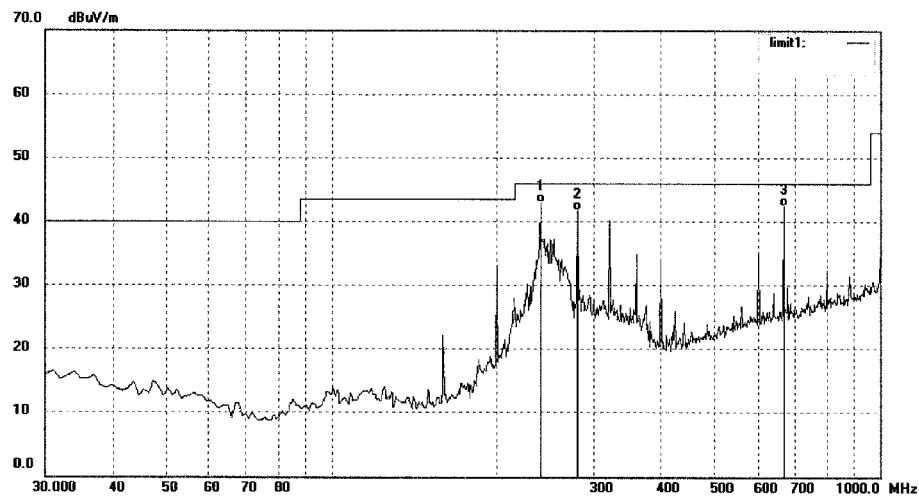

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 239.5200       | 53.82               | -10.86         | 42.96              | 46.00             | -3.04          | QP       |                |                  |        |
| 2   | 279.2900       | 51.58               | -9.87          | 41.71              | 46.00             | -4.29          | QP       |                |                  |        |
| 3   | 667.2900       | 44.57               | -2.17          | 42.40              | 46.00             | -3.60          | QP       |                |                  |        |



**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: LAN2014 #764  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Tablet PC  
 Mode: Transfer data  
 Model: UB-15MS10  
 Manufacturer: Zowee

 Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 14/10/12/  
 Time:  
 Engineer Signature:  
 Distance: 3m

Note:

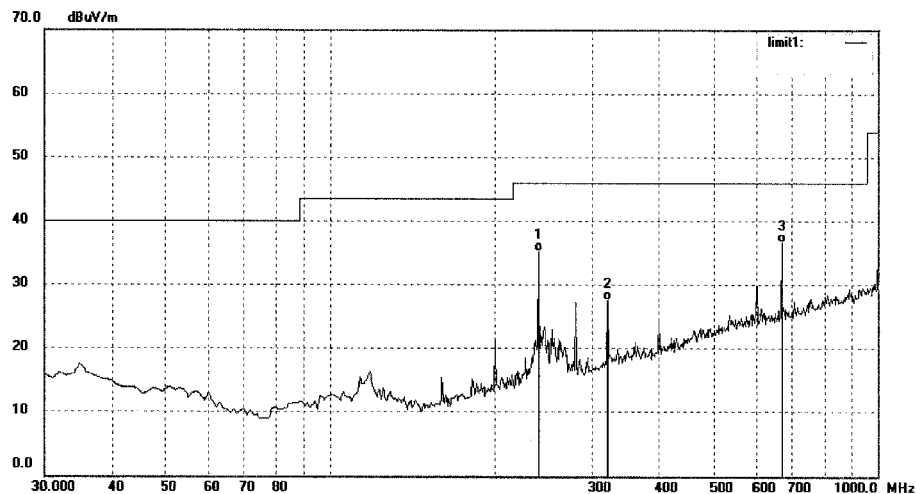

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 239.5200       | 46.08               | -10.86         | 35.22              | 46.00             | -10.78         | QP       |                |                  |        |
| 2   | 320.0299       | 36.32               | -8.75          | 27.57              | 46.00             | -18.43         | QP       |                |                  |        |
| 3   | 667.2899       | 38.90               | -2.17          | 36.73              | 46.00             | -9.27          | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1088

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: RX

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: GPS

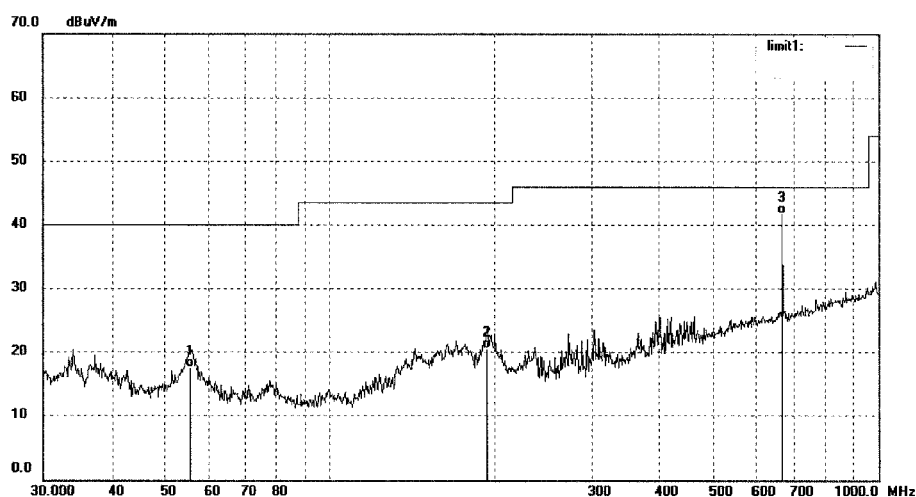

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 55.4147        | 30.73               | -13.06         | 17.67              | 40.00             | -22.33         | QP       |                |                  |        |
| 2   | 193.0945       | 33.17               | -12.54         | 20.63              | 43.50             | -22.87         | QP       |                |                  |        |
| 3   | 668.1422       | 43.88               | -2.16          | 41.72              | 46.00             | -4.28          | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel: +86-0755-26503290

Fax: +86-0755-26503396

Job No.: LAN2014 #1087

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: RX

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: GPS

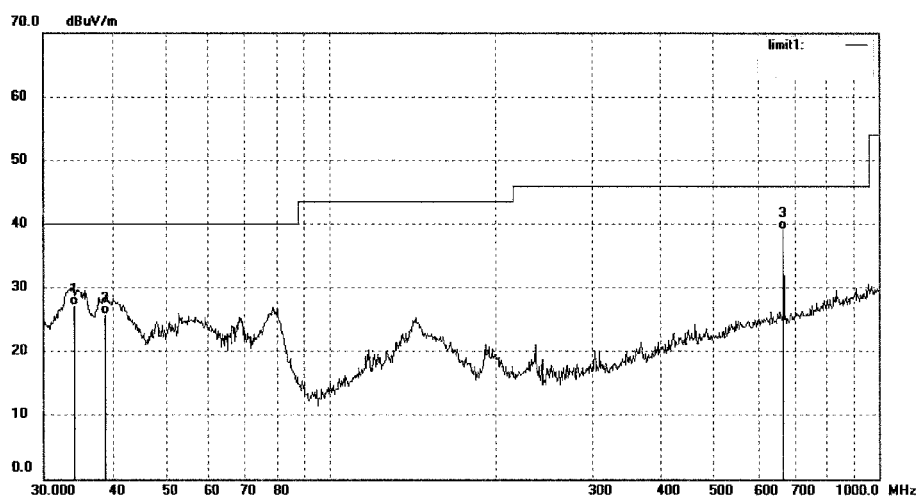

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 34.0363        | 37.51               | -10.32         | 27.19              | 40.00             | -12.81         | QP       |                |                  |        |
| 2   | 38.7518        | 37.13               | -11.26         | 25.87              | 40.00             | -14.13         | QP       |                |                  |        |
| 3   | 668.1422       | 41.19               | -2.16          | 39.03              | 46.00             | -6.97          | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #788

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Back Camera

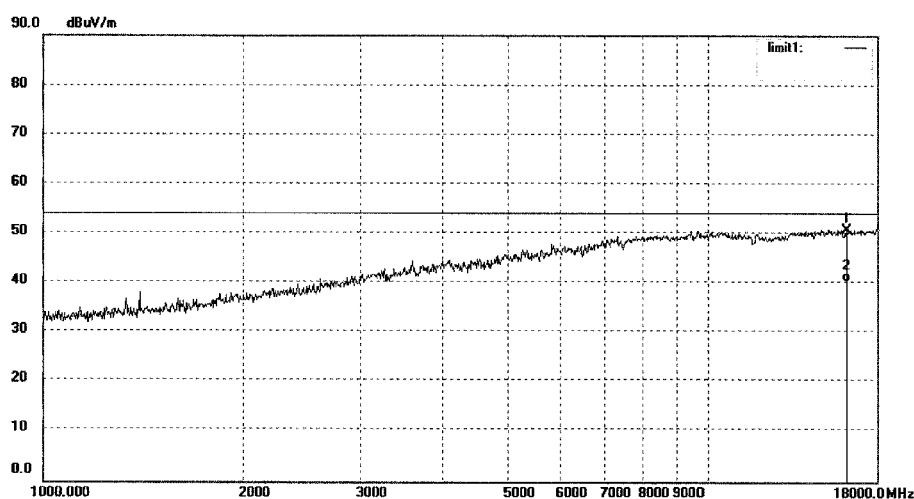

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 16174.372      | 10.66               | 40.10          | 50.76              | 74.00             | -23.24         | peak     |                |                  |        |
| 2   | 16174.372      | 0.38                | 40.10          | 40.48              | 54.00             | -13.52         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #787

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Back Camera

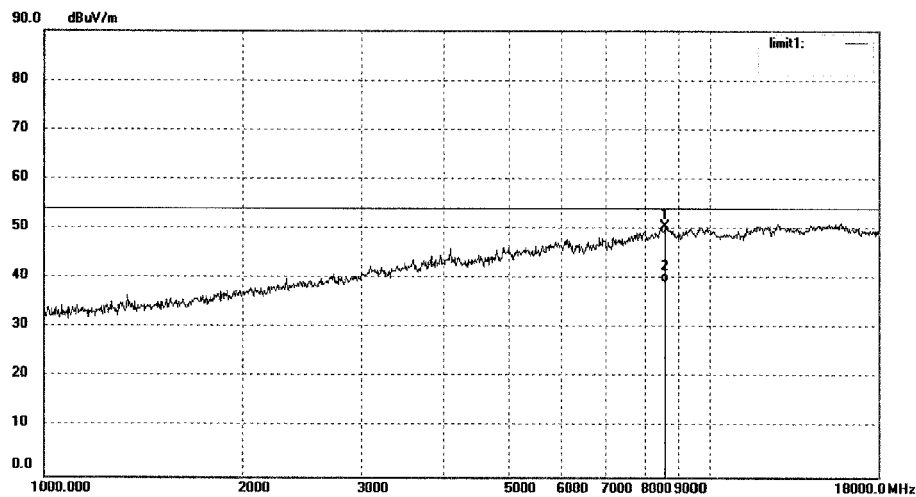

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 8613.467       | 42.90               | 7.60           | 50.50              | 74.00             | -23.50         | peak     |                |                  |        |
| 2   | 8613.467       | 31.56               | 7.60           | 39.16              | 54.00             | -14.84         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 17043527 003**
*Test Report No.*
**Seite 39 von 85**
*Page 39 of 85*

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #790

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Front Camera

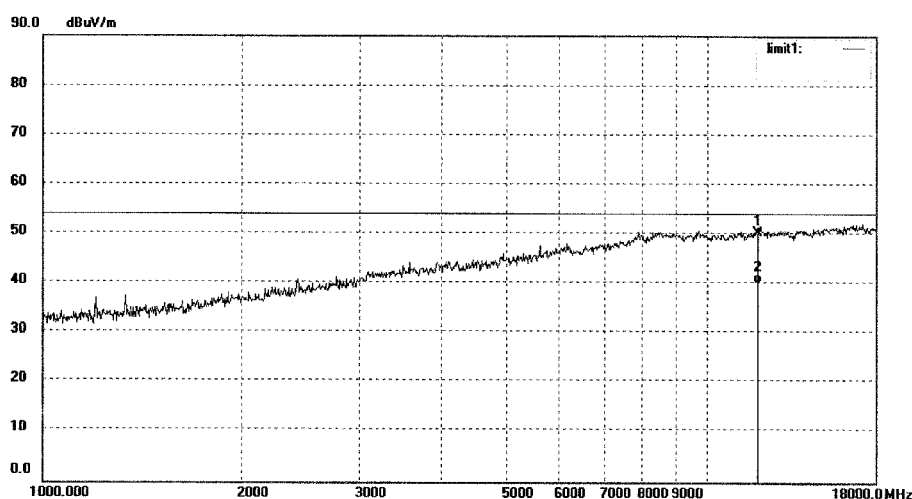

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 11906.073      | 39.13               | 11.24          | 50.37              | 74.00             | -23.63         | peak     |                |                  |        |
| 2   | 11906.073      | 28.96               | 11.24          | 40.20              | 54.00             | -13.80         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #789

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Front Camera

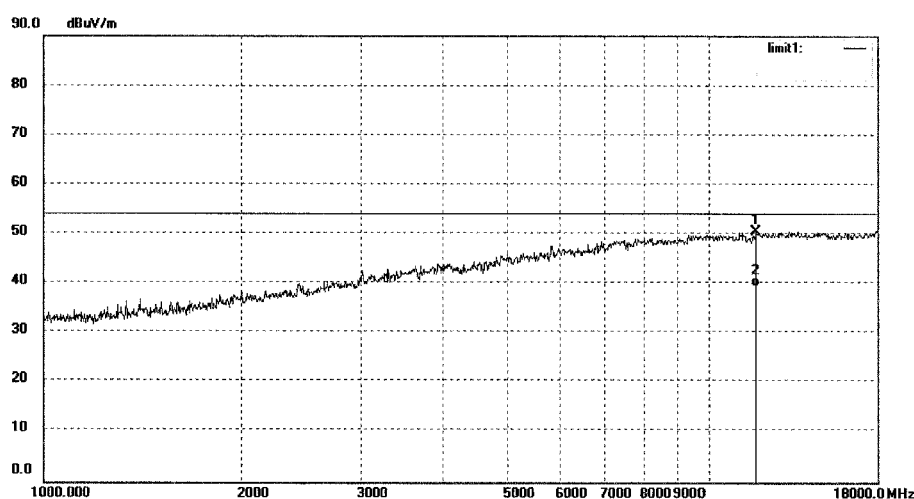

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 11769.214      | 38.77               | 11.84          | 50.61              | 74.00             | -23.39         | peak     |                |                  |        |
| 2   | 11769.214      | 27.64               | 11.84          | 39.48              | 54.00             | -14.52         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #784

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Playing video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: HDMI output

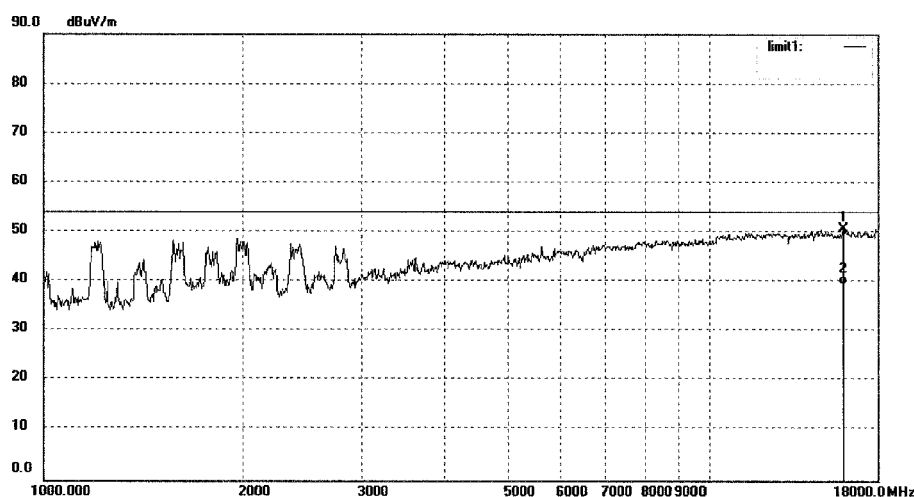

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 15988.449      | 10.66               | 40.00          | 50.66              | 74.00             | -23.34         | peak     |                |                  |        |
| 2   | 15988.449      | -0.46               | 40.00          | 39.54              | 54.00             | -14.46         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 17043527 003**  
*Test Report No.*
**Seite 42 von 85**  
*Page 42 of 85*


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: LAN2014 #783  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Tablet PC  
 Mode: Playing video  
 Model: UB-15MS10  
 Manufacturer: Zowee

 Polarization: Vertical  
 Power Source: AC 120V/60Hz  
 Date: 14/10/12/  
 Time:  
 Engineer Signature:  
 Distance: 3m

Note: HDMI output

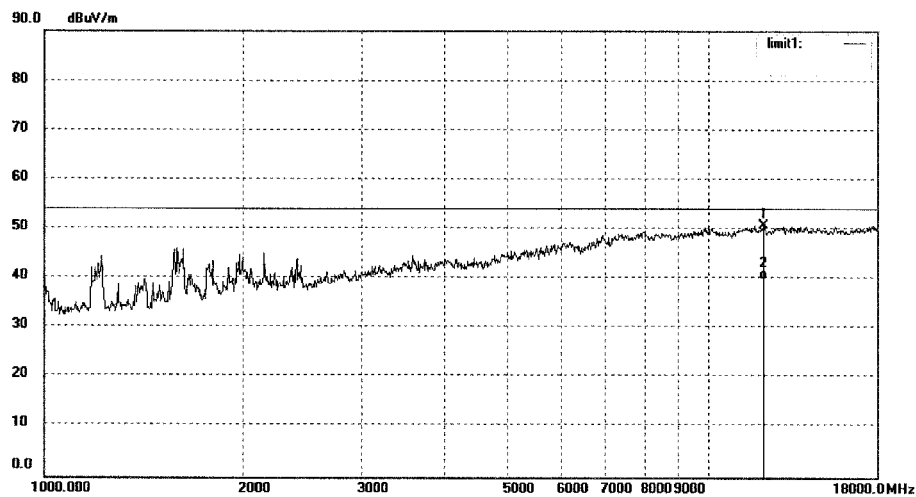

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 12114.352      | 40.50               | 10.21          | 50.71              | 74.00             | -23.29         | peak     |                |                  |        |
| 2   | 12114.352      | 29.82               | 10.21          | 40.03              | 54.00             | -13.97         | AVG      |                |                  |        |



**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

 Job No.: LAN2014 #785  
 Standard: FCC Class B 3M Radiated  
 Test item: Radiation Test  
 Temp.( C)/Hum.(%) 23 C / 48 %  
 EUT: Tablet PC  
 Mode: Transfer data  
 Model: UB-15MS10  
 Manufacturer: Zowee

 Polarization: Horizontal  
 Power Source: AC 120V/60Hz  
 Date: 14/10/12/  
 Time:  
 Engineer Signature:  
 Distance: 3m

Note:

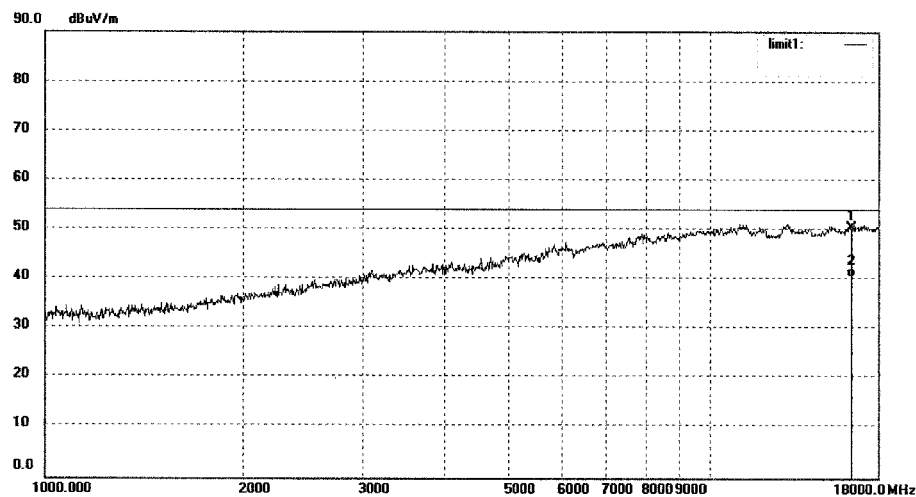

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 16409.819      | 10.25               | 40.25          | 50.50              | 74.00             | -23.50         | peak     |                |                  |        |
| 2   | 16409.819      | 0.34                | 40.25          | 40.59              | 54.00             | -13.41         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #786

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Transfer data

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note:

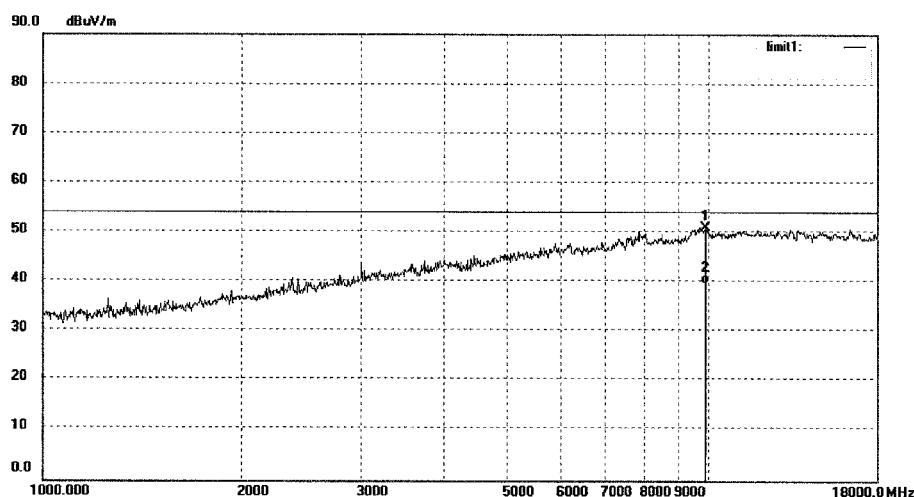

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 9895.349       | 41.29               | 9.62           | 50.91              | 74.00             | -23.09         | peak     |                |                  |        |
| 2   | 9895.349       | 30.14               | 9.62           | 39.76              | 54.00             | -14.24         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel: +86-0755-26503290

Fax: +86-0755-26503396

Job No.: LAN2014 #1094

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: RX

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/13/

Time:

Engineer Signature:

Distance: 3m

Note: GPS

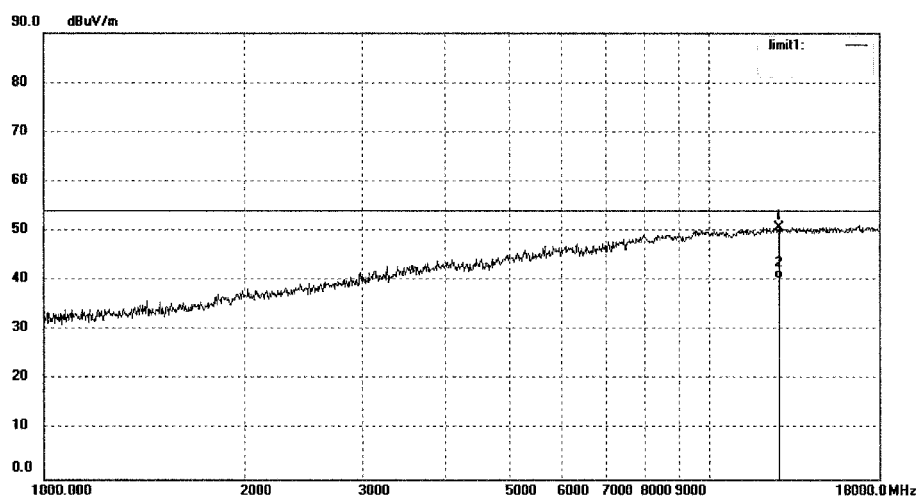

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 12687.748      | 12.03               | 38.63          | 50.66              | 74.00             | -23.34         | peak     |                |                  |        |
| 2   | 12687.748      | 1.85                | 38.63          | 40.48              | 54.00             | -13.52         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 17043527 003**  
*Test Report No.*
**Seite 46 von 85**  
*Page 46 of 85*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1093

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/13/

Temp.( C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: RX

Distance: 3m

Model: UB-15MS10

Manufacturer: Zowee

Note: GPS

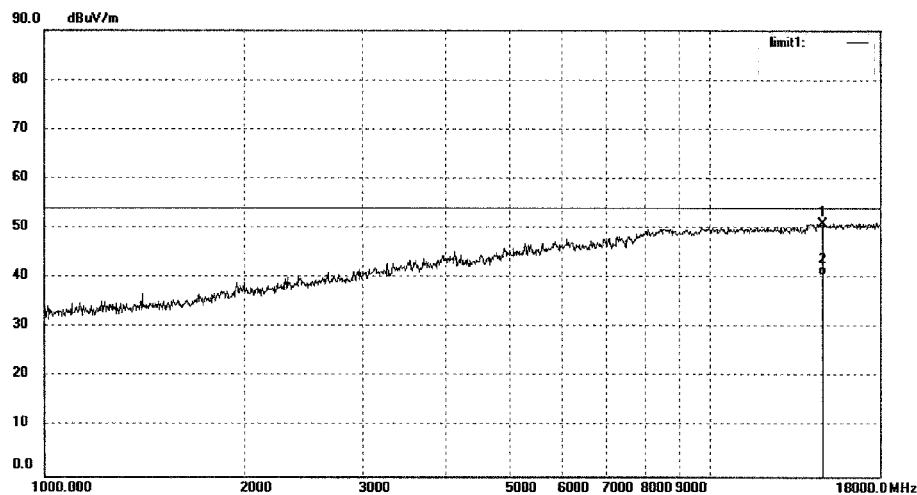

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 14745.473      | 9.09                | 41.86          | 50.95              | 74.00             | -23.05         | peak     |                |                  |        |
| 2   | 14745.473      | -1.27               | 41.86          | 40.59              | 54.00             | -13.41         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1043

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Back Camera

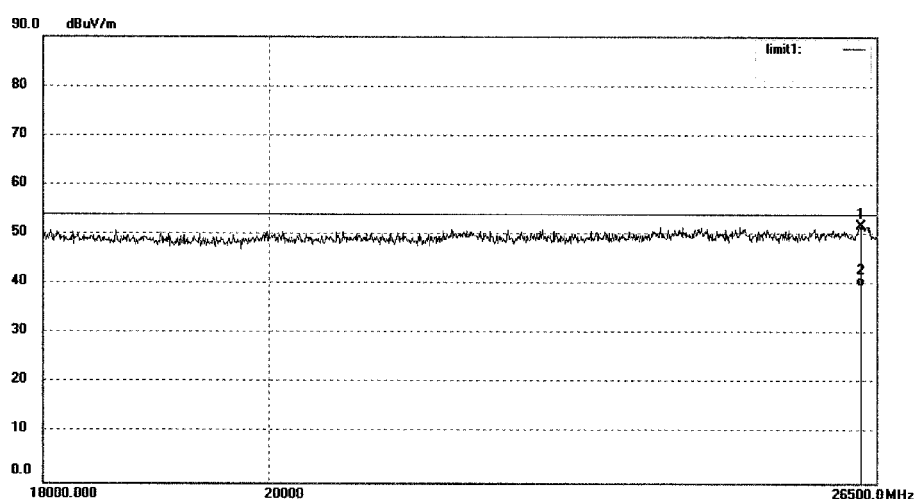

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26315.783      | 35.30               | 16.50          | 51.80              | 74.00             | -22.20         | peak     |                |                  |        |
| 2   | 26315.783      | 23.13               | 16.50          | 39.63              | 54.00             | -14.37         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1044

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Back Camera

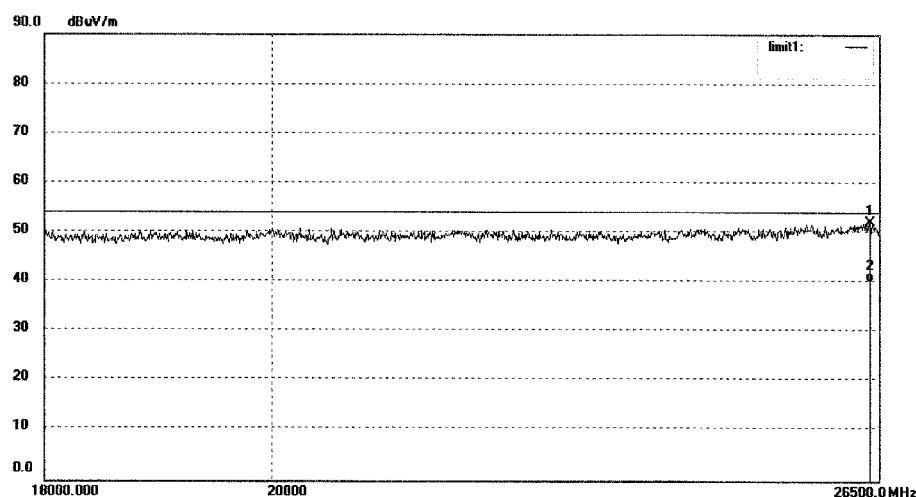

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26397.499      | 35.04               | 16.97          | 52.01              | 74.00             | -21.99         | peak     |                |                  |        |
| 2   | 26397.499      | 23.30               | 16.97          | 40.27              | 54.00             | -13.73         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1046

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Front Camera

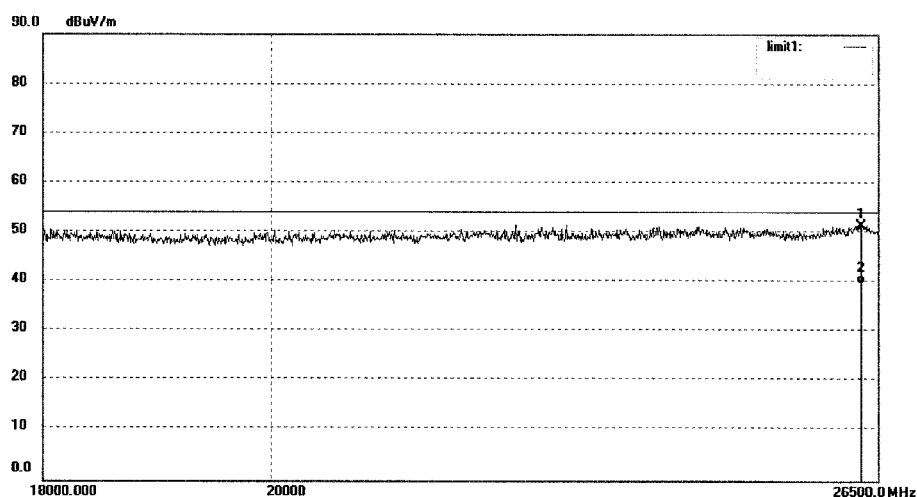

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26305.586      | 34.93               | 16.50          | 51.43              | 74.00             | -22.57         | peak     |                |                  |        |
| 2   | 26305.586      | 23.26               | 16.50          | 39.76              | 54.00             | -14.24         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 17043527 003**  
*Test Report No.*
**Seite 50 von 85**  
*Page 50 of 85*

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1045

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Front Camera

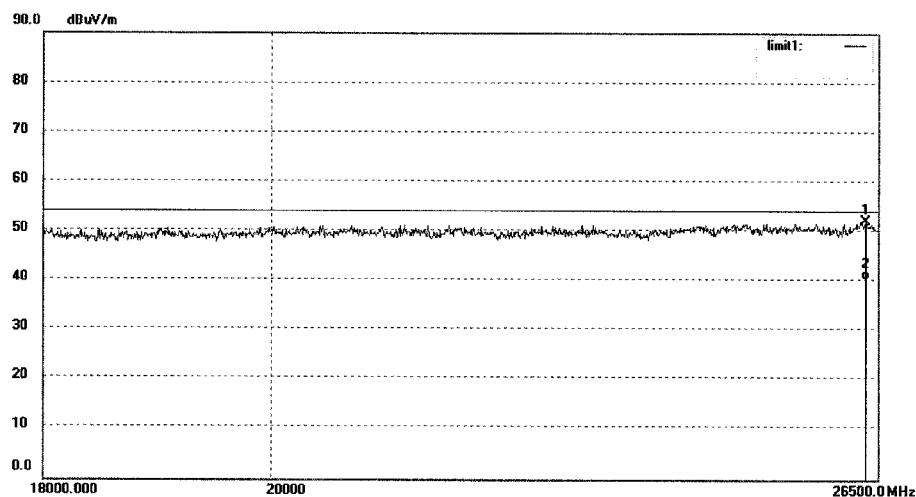

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26356.609      | 35.11               | 16.99          | 52.10              | 74.00             | -21.90         | peak     |                |                  |        |
| 2   | 26356.609      | 23.36               | 16.99          | 40.35              | 54.00             | -13.65         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1047

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Playing video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: HDMI output

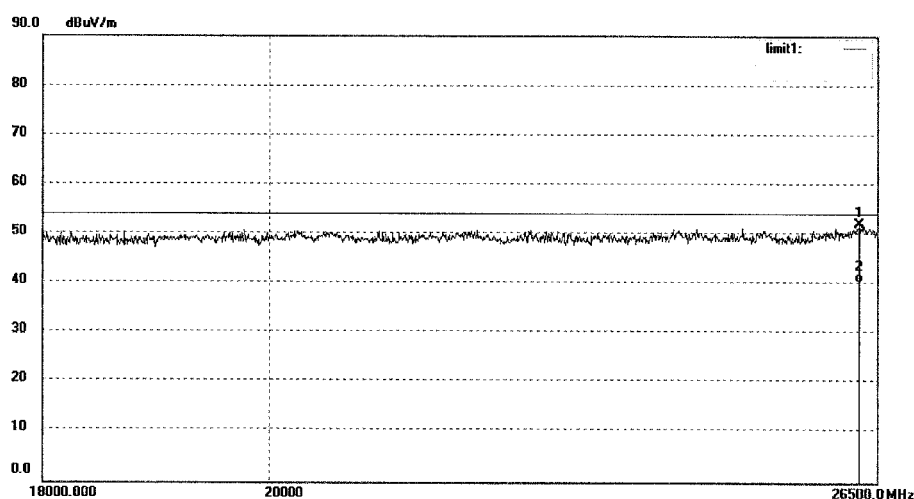

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26295.393      | 35.64               | 16.50          | 52.14              | 74.00             | -21.86         | peak     |                |                  |        |
| 2   | 26295.393      | 23.86               | 16.50          | 40.36              | 54.00             | -13.64         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 17043527 003**  
*Test Report No.*
**Seite 52 von 85**  
*Page 52 of 85*

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1048

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Playing video

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: HDMI output

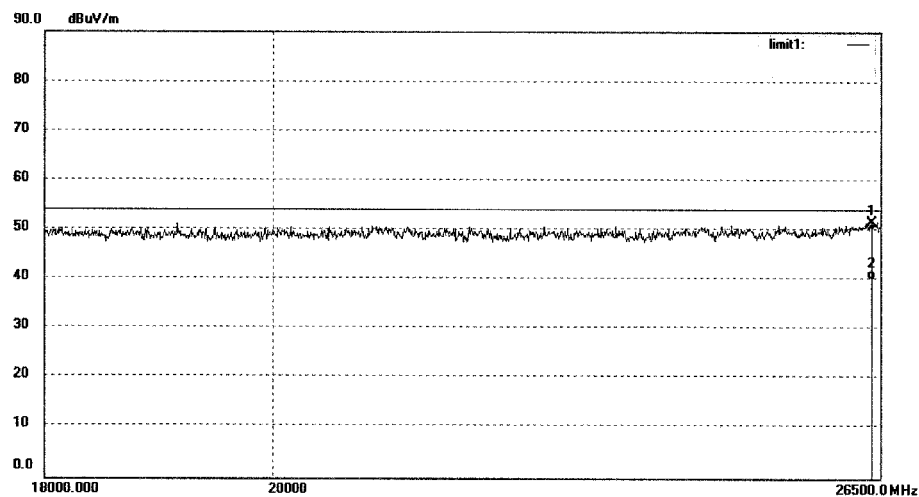

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26397.499      | 34.74               | 16.97          | 51.71              | 74.00             | -22.29         | peak     |                |                  |        |
| 2   | 26397.499      | 23.17               | 16.97          | 40.14              | 54.00             | -13.86         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1050

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Transfer data

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note:

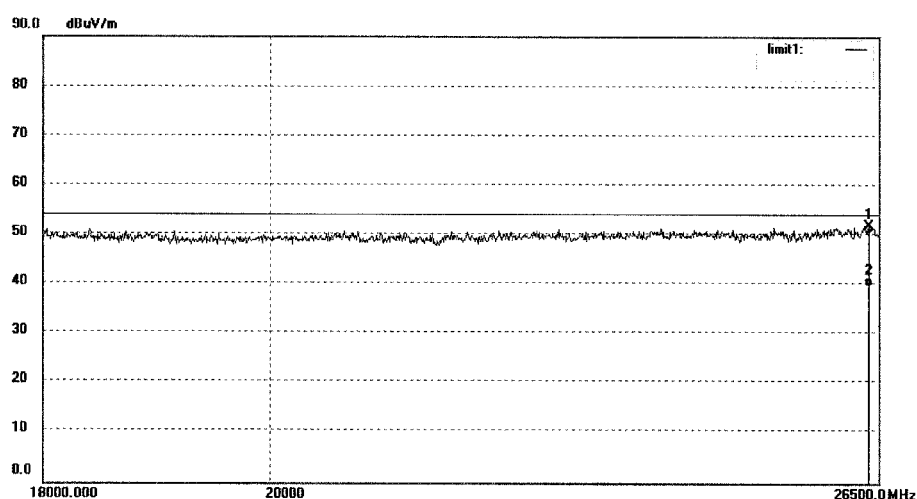

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26387.270      | 35.36               | 16.50          | 51.86              | 74.00             | -22.14         | peak     |                |                  |        |
| 2   | 26387.270      | 23.24               | 16.50          | 39.74              | 54.00             | -14.26         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 17043527 003**
*Test Report No.*
**Seite 54 von 85**
*Page 54 of 85*

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1049

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Transfer data

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note:

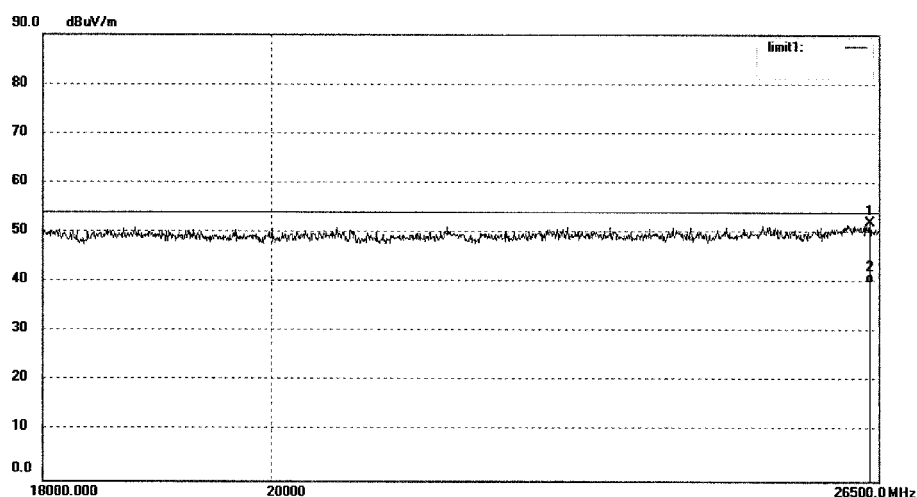

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26397.499      | 35.01               | 16.97          | 51.98              | 74.00             | -22.02         | peak     |                |                  |        |
| 2   | 26397.499      | 22.98               | 16.97          | 39.95              | 54.00             | -14.05         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 17043527 003**  
*Test Report No.*
**Seite 55 von 85**  
*Page 55 of 85*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1096

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/13/

Temp.( C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: RX

Distance: 3m

Model: UB-15MS10

Manufacturer: Zowee

Note: GPS

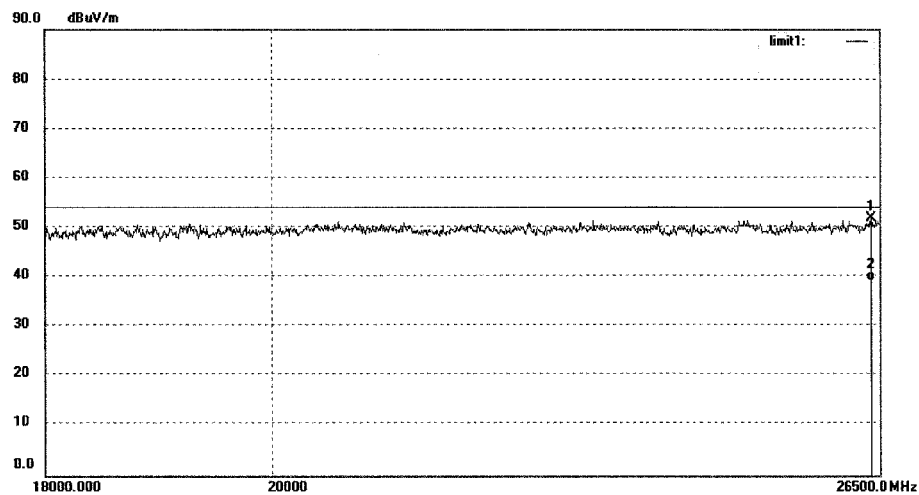

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26397.499      | 35.34               | 16.50          | 51.84              | 74.00             | -22.16         | peak     |                |                  |        |
| 2   | 26397.499      | 22.83               | 16.50          | 39.33              | 54.00             | -14.67         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 17043527 003**
*Test Report No.*
**Seite 56 von 85**
*Page 56 of 85*

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1095

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: RX

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/13/

Time:

Engineer Signature:

Distance: 3m

Note: GPS

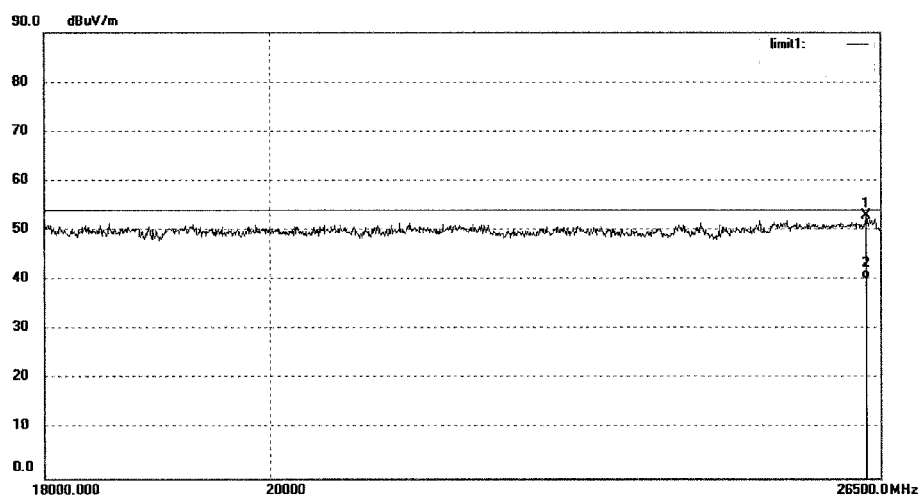

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26336.188      | 35.87               | 17.01          | 52.88              | 74.00             | -21.12         | peak     |                |                  |        |
| 2   | 26336.188      | 23.06               | 17.01          | 40.07              | 54.00             | -13.93         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #772

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Back Camera

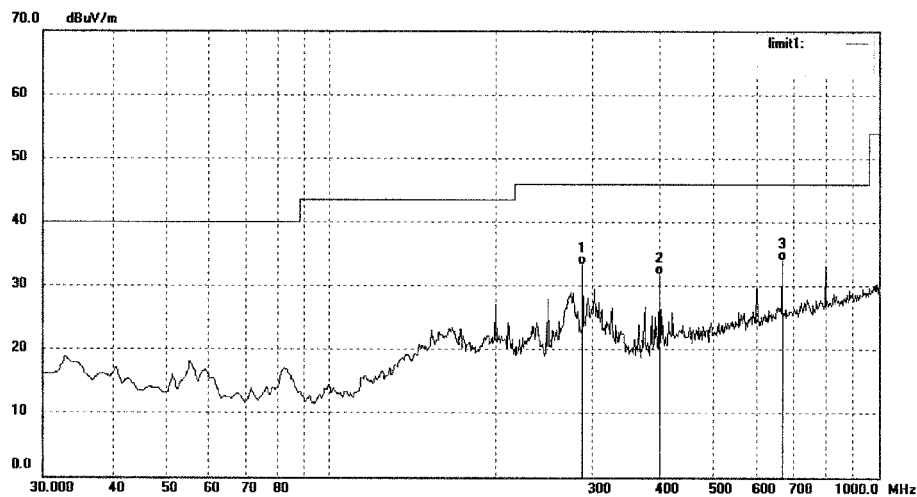

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 288.0199       | 42.91               | -9.61          | 33.30              | 46.00             | -12.70         | QP       |                |                  |        |
| 2   | 399.5699       | 38.54               | -6.83          | 31.71              | 46.00             | -14.29         | QP       |                |                  |        |
| 3   | 667.2899       | 36.26               | -2.17          | 34.09              | 46.00             | -11.91         | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #771

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Back Camera

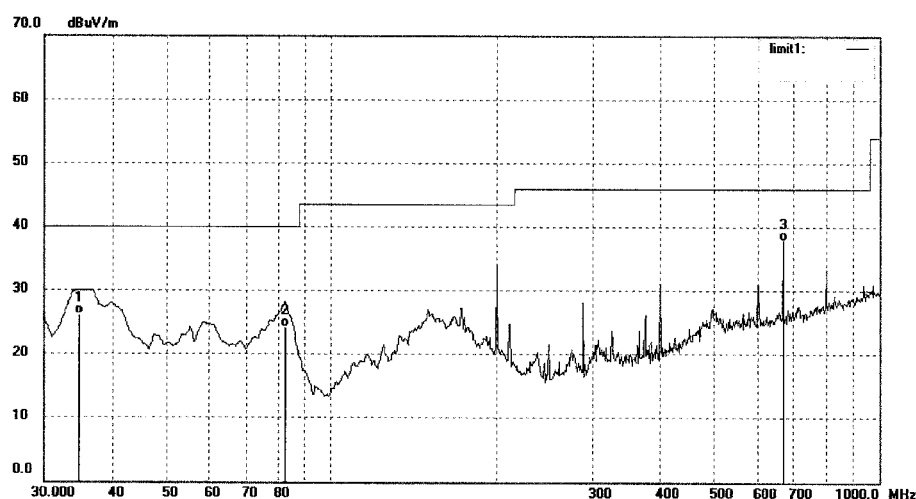

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 34.8500        | 36.50               | -10.40         | 26.10              | 40.00             | -13.90         | QP       |                |                  |        |
| 2   | 82.3799        | 40.23               | -15.98         | 24.25              | 40.00             | -15.75         | QP       |                |                  |        |
| 3   | 667.2898       | 40.12               | -2.17          | 37.95              | 46.00             | -8.05          | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #773

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Front Camera

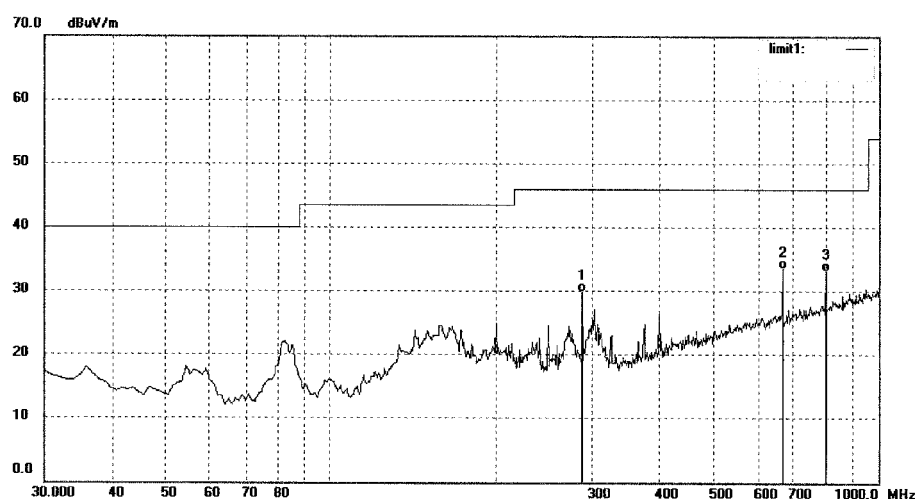

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 288.0199       | 39.43               | -9.61          | 29.82              | 46.00             | -16.18         | QP       |                |                  |        |
| 2   | 667.2899       | 35.75               | -2.17          | 33.58              | 46.00             | -12.42         | QP       |                |                  |        |
| 3   | 800.1799       | 33.04               | 0.04           | 33.08              | 46.00             | -12.92         | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #774

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.( C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: Recording video

Distance: 3m

Model: NS-15MS08

Manufacturer: Zowee

Note: Front Camera

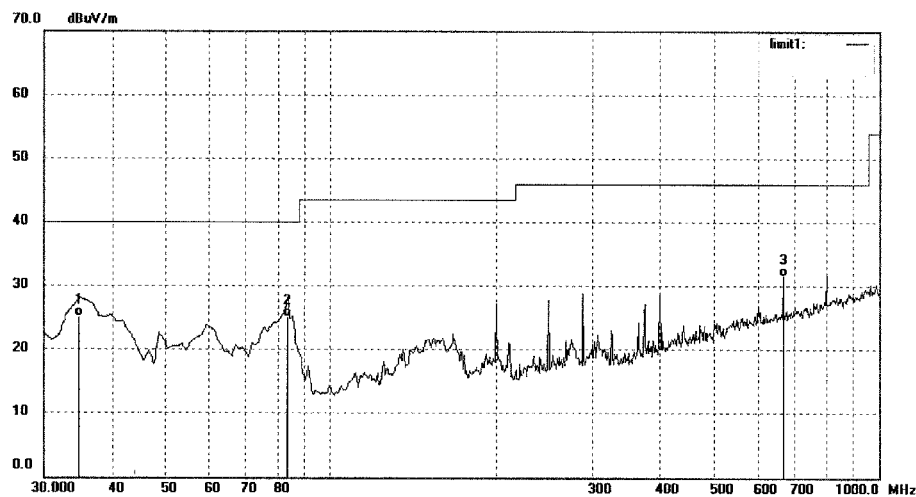

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 34.8500        | 35.58               | -10.40         | 25.18              | 40.00             | -14.82         | QP       |                |                  |        |
| 2   | 83.3499        | 40.79               | -15.76         | 25.03              | 40.00             | -14.97         | QP       |                |                  |        |
| 3   | 667.2899       | 33.82               | -2.17          | 31.65              | 46.00             | -14.35         | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #767

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Playing video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: HDMI output

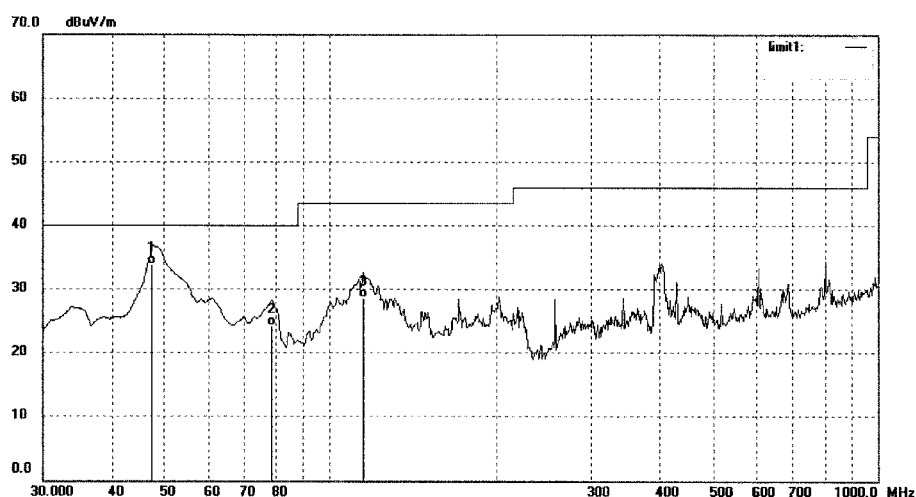

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 47.4600        | 46.41               | -12.62         | 33.79              | 40.00             | -6.21          | QP       |                |                  |        |
| 2   | 78.5000        | 40.85               | -16.58         | 24.27              | 40.00             | -15.73         | QP       |                |                  |        |
| 3   | 115.3599       | 41.73               | -13.15         | 28.58              | 43.50             | -14.92         | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #768

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Playing video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: HDMI output

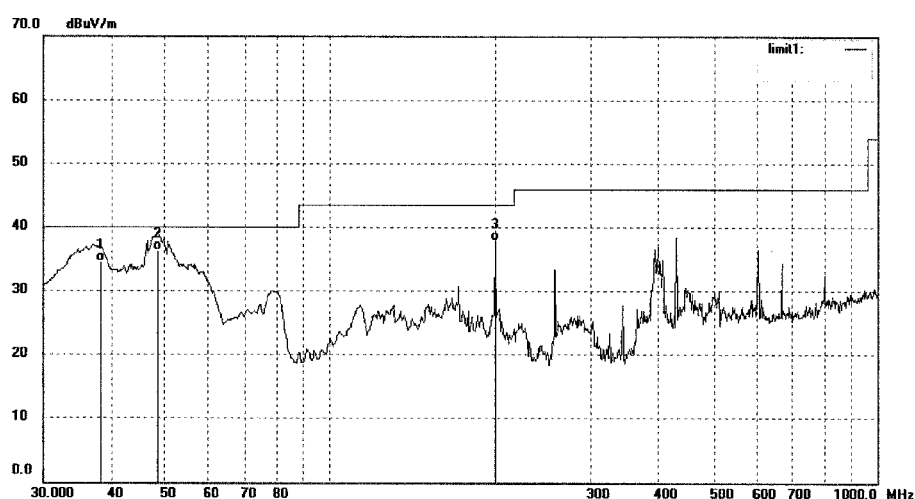

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 38.0782        | 45.68               | -11.11         | 34.57              | 40.00             | -5.43          | QP       |                |                  |        |
| 2   | 48.4299        | 48.85               | -12.62         | 36.23              | 40.00             | -3.77          | QP       |                |                  |        |
| 3   | 199.7500       | 50.42               | -12.45         | 37.97              | 43.50             | -5.53          | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #769

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.( C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: Transfer data

Distance: 3m

Model: NS-15MS08

Manufacturer: Zowee

Note:

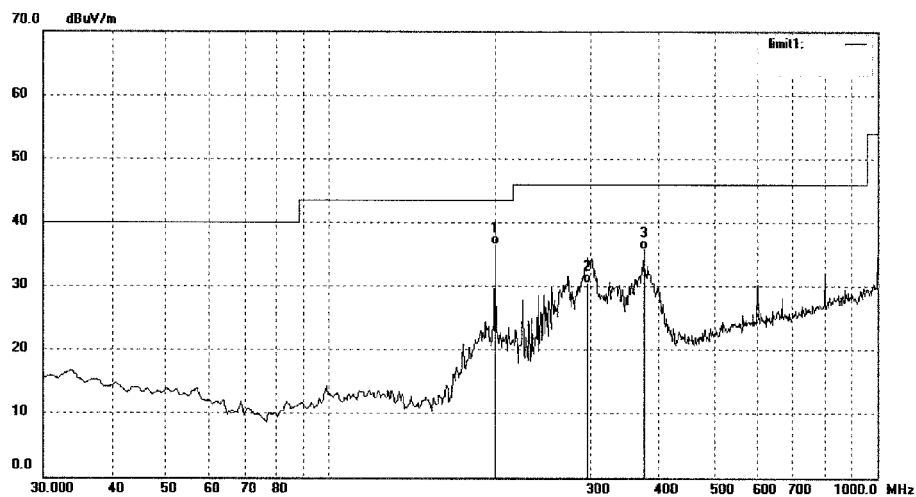

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 199.7500       | 48.89               | -12.45         | 36.44              | 43.50             | -7.06          | QP       |                |                  |        |
| 2   | 296.7500       | 39.92               | -9.34          | 30.58              | 46.00             | -15.42         | QP       |                |                  |        |
| 3   | 375.3199       | 43.23               | -7.43          | 35.80              | 46.00             | -10.20         | QP       |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #770

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Transfer data

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note:

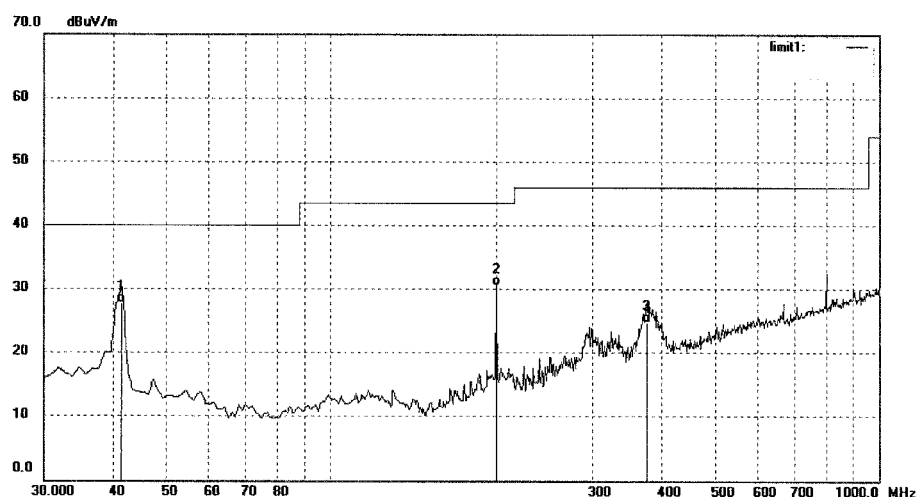

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 41.6400        | 39.72               | -11.90         | 27.82              | 40.00             | -12.18         | QP       |                |                  |        |
| 2   | 199.7500       | 43.01               | -12.45         | 30.56              | 43.50             | -12.94         | QP       |                |                  |        |
| 3   | 377.2599       | 32.24               | -7.40          | 24.84              | 46.00             | -21.16         | QP       |                |                  |        |

**Prüfbericht - Nr.: 17043527 003**
*Test Report No.*
**Seite 65 von 85**
*Page 65 of 85*

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #778

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Back Camera

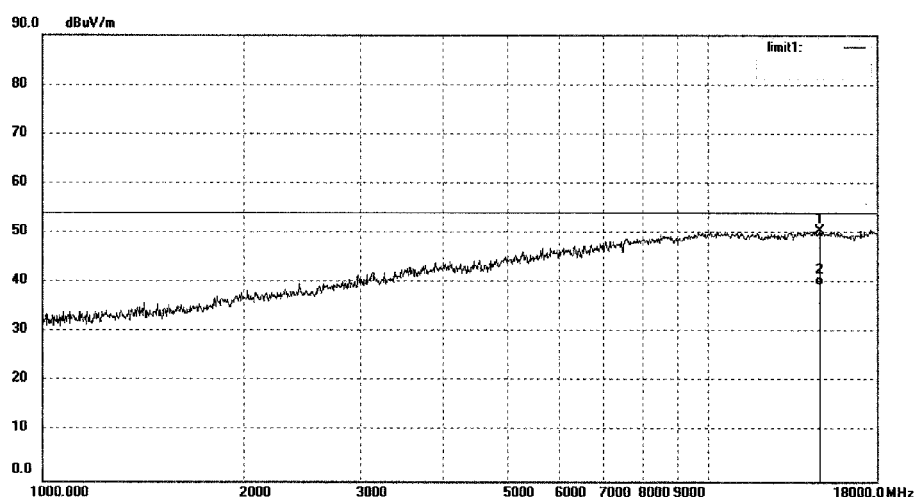

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 14745.473      | 8.59                | 41.86          | 50.45              | 74.00             | -23.55         | peak     |                |                  |        |
| 2   | 14745.473      | -2.37               | 41.86          | 39.49              | 54.00             | -14.51         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #777

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Back Camera

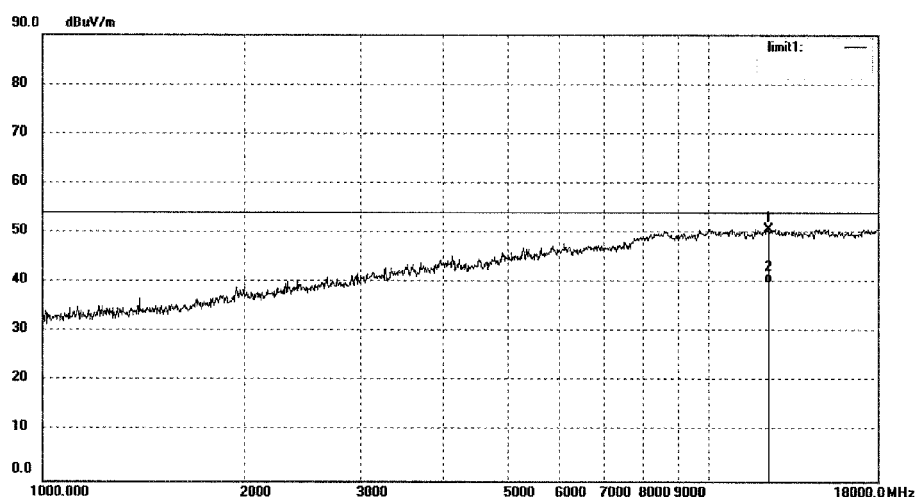

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 12326.274      | 12.59               | 38.23          | 50.82              | 74.00             | -23.18         | peak     |                |                  |        |
| 2   | 12326.274      | 1.60                | 38.23          | 39.83              | 54.00             | -14.17         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #776

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Front Camera

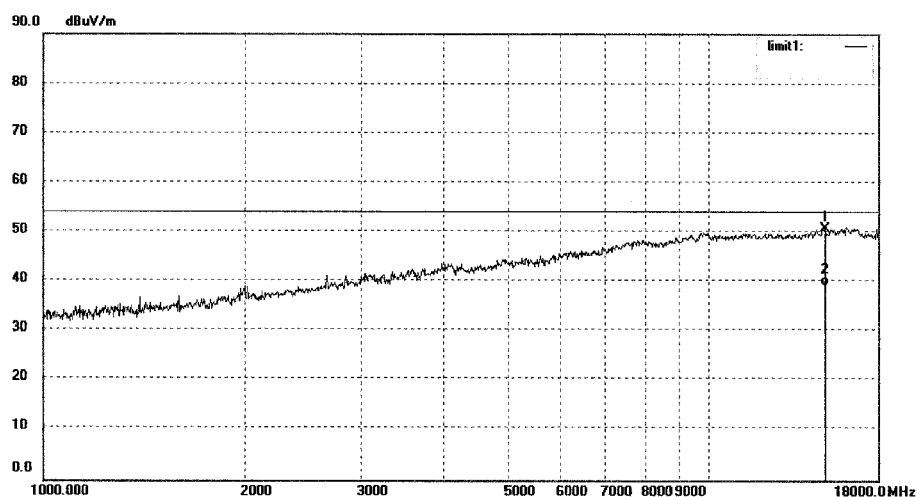

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 14960.120      | 9.49                | 41.22          | 50.71              | 74.00             | -23.29         | peak     |                |                  |        |
| 2   | 14960.120      | -1.89               | 41.22          | 39.33              | 54.00             | -14.67         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #775

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Front Camera

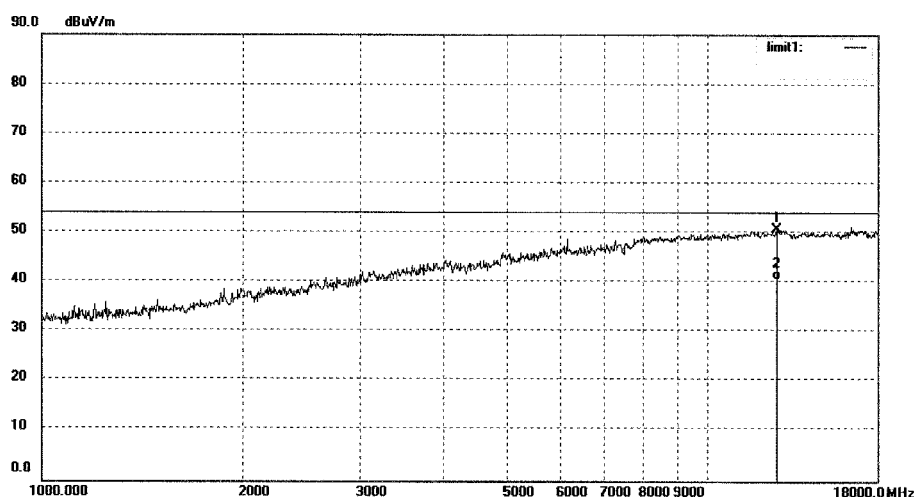

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 12687.748      | 12.09               | 38.63          | 50.72              | 74.00             | -23.28         | peak     |                |                  |        |
| 2   | 12687.748      | 2.04                | 38.63          | 40.67              | 54.00             | -13.33         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #781

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Playing video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: HDMI output

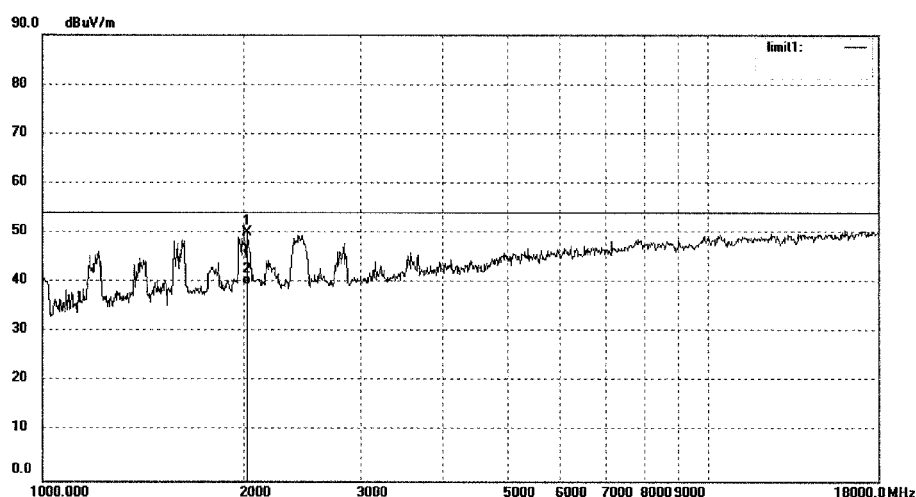

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 2018.512       | 59.05               | -8.99          | 50.06              | 74.00             | -23.94         | peak     |                |                  |        |
| 2   | 2018.512       | 48.40               | -8.99          | 39.41              | 54.00             | -14.59         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #782

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Playing video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: HDMI output

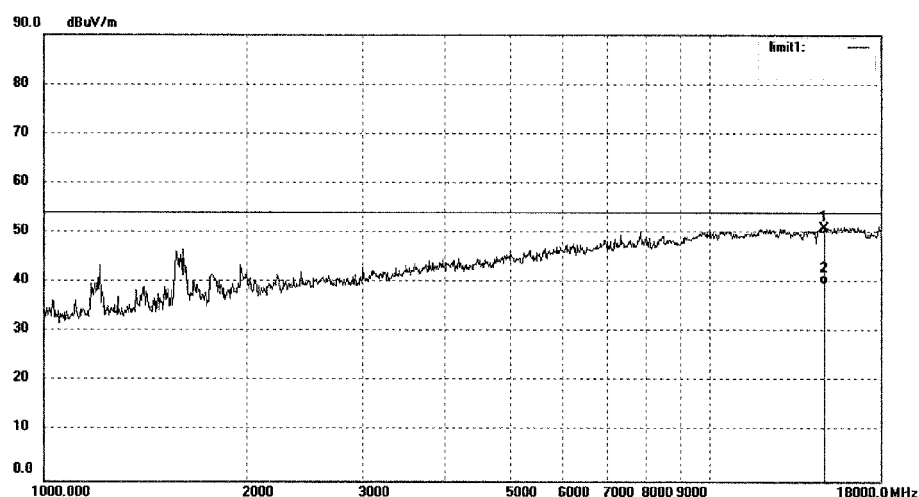


| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 14830.959      | 9.38                | 41.61          | 50.99              | 74.00             | -23.01         | peak     |                |                  |        |
| 2   | 14830.959      | -1.79               | 41.61          | 39.82              | 54.00             | -14.18         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|                                   |                            |
|-----------------------------------|----------------------------|
| Job No.: LAN2014 #779             | Polarization: Horizontal   |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test         | Date: 14/10/12/            |
| Temp.( C)/Hum.(%) 23 C / 48 %     | Time:                      |
| EUT: Tablet PC                    | Engineer Signature:        |
| Mode: Transfer data               | Distance: 3m               |
| Model: NS-15MS08                  |                            |
| Manufacturer: Zowee               |                            |

Note:

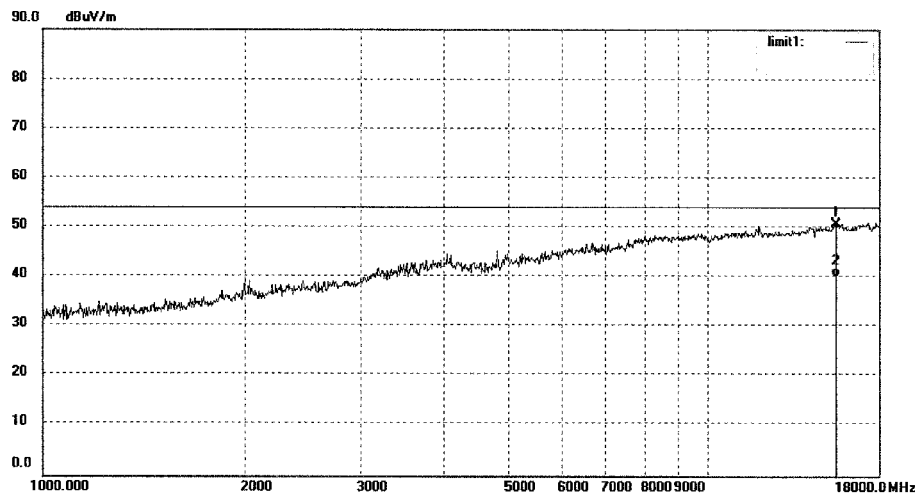

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 15488.107      | 10.72               | 40.12          | 50.84              | 74.00             | -23.16         | peak     |                |                  |        |
| 2   | 15488.107      | 0.05                | 40.12          | 40.17              | 54.00             | -13.83         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #780

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Transfer data

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note:

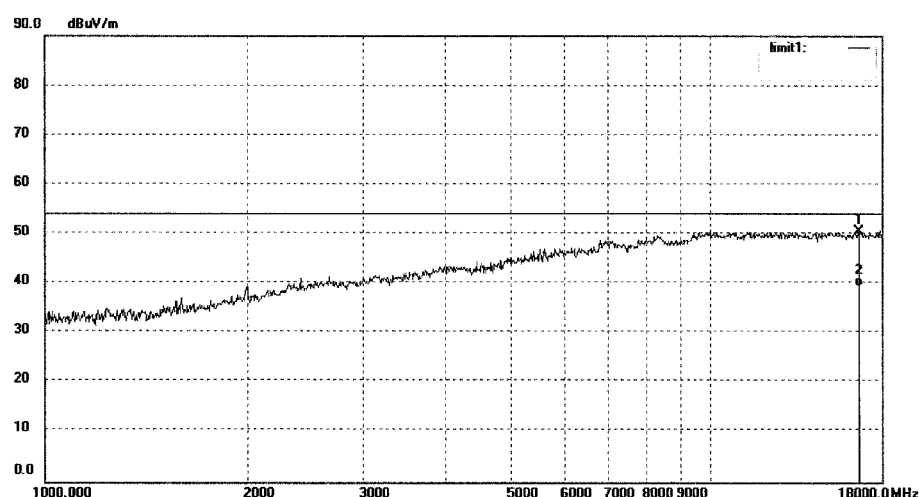

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 16600.642      | 10.01               | 40.58          | 50.59              | 74.00             | -23.41         | peak     |                |                  |        |
| 2   | 16600.642      | -1.09               | 40.58          | 39.49              | 54.00             | -14.51         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #999

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Back Camera

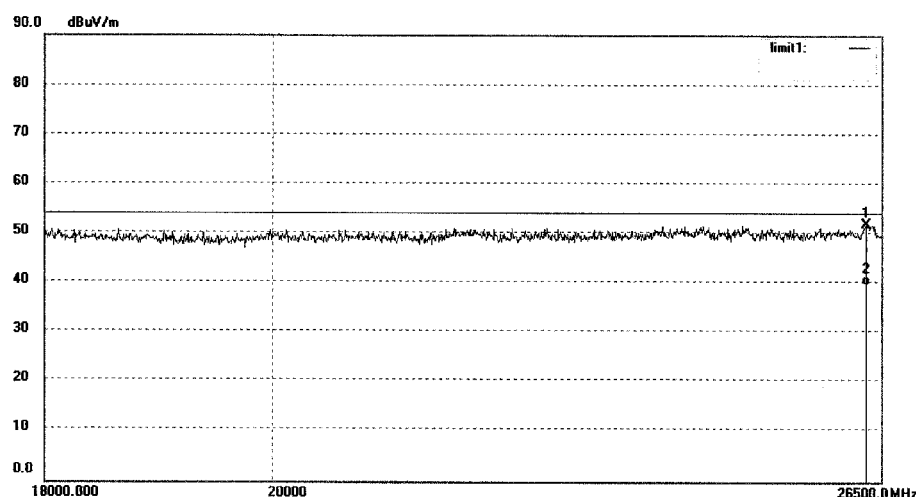

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26315.783      | 35.30               | 16.50          | 51.80              | 74.00             | -22.20         | peak     |                |                  |        |
| 2   | 26315.783      | 23.13               | 16.50          | 39.63              | 54.00             | -14.37         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 17043527 003**
*Test Report No.*
**Seite 74 von 85**
*Page 74 of 85*

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1000

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.( C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: Recording video

Distance: 3m

Model: NS-15MS08

Manufacturer: Zowee

Note: Back Camera

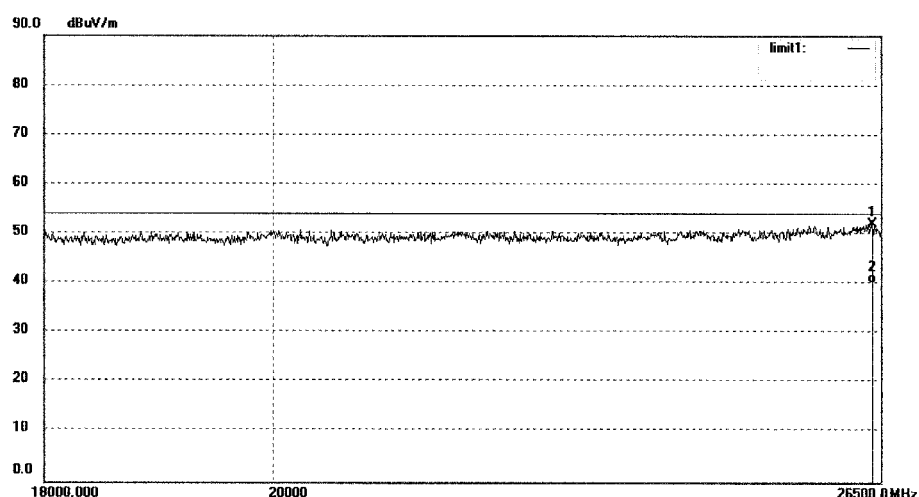

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26397.499      | 35.04               | 16.97          | 52.01              | 74.00             | -21.99         | peak     |                |                  |        |
| 2   | 26397.499      | 23.30               | 16.97          | 40.27              | 54.00             | -13.73         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1002

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Front Camera

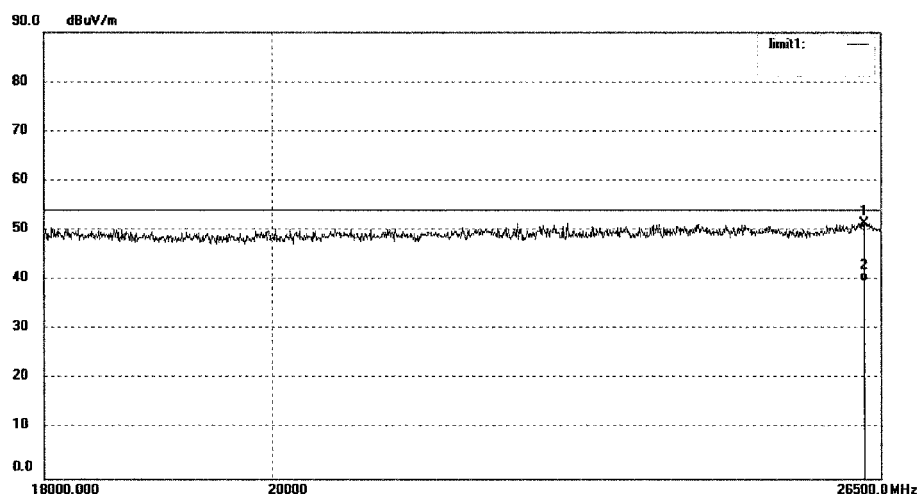

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26305.586      | 34.93               | 16.50          | 51.43              | 74.00             | -22.57         | peak     |                |                  |        |
| 2   | 26305.586      | 23.26               | 16.50          | 39.76              | 54.00             | -14.24         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 17043527 003**
*Test Report No.*
**Seite 76 von 85**
*Page 76 of 85*

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1001

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Recording video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Front Camera

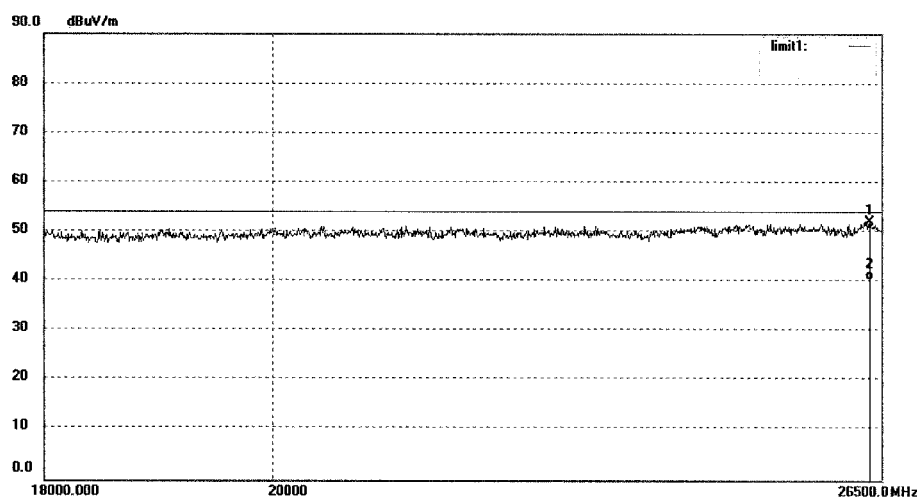

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26356.609      | 35.10               | 17.00          | 52.10              | 74.00             | -21.90         | peak     |                |                  |        |
| 2   | 26356.609      | 23.35               | 17.00          | 40.35              | 54.00             | -13.65         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 17043527 003**
*Test Report No.*
**Seite 77 von 85**
*Page 77 of 85*

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1003

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT:

Tablet PC

Mode: Playing video

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: HDMI output

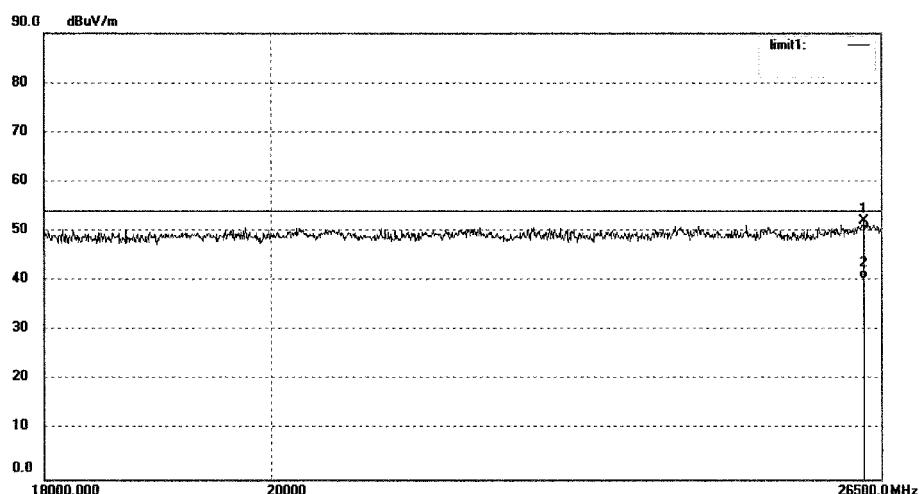

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26295.393      | 35.64               | 16.50          | 52.14              | 74.00             | -21.86         | peak     |                |                  |        |
| 2   | 26295.393      | 23.86               | 16.50          | 40.36              | 54.00             | -13.64         | AVG      |                |                  |        |


**Prüfbericht - Nr.: 17043527 003**  
*Test Report No.*
**Seite 78 von 85**  
*Page 78 of 85*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

|                                   |                            |
|-----------------------------------|----------------------------|
| Job No.: LAN2014 #1004            | Polarization: Vertical     |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test         | Date: 14/10/12/            |
| Temp.( C)/Hum.(%) 23 C / 48 %     | Time:                      |
| EUT: Tablet PC                    | Engineer Signature:        |
| Mode: Playing video               | Distance: 3m               |
| Model: NS-15MS08                  |                            |
| Manufacturer: Zowee               |                            |

Note: HDMI output

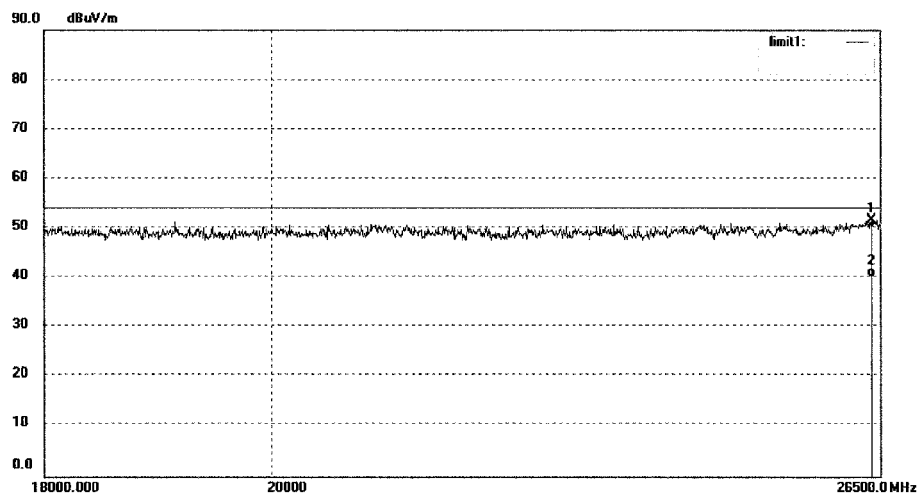

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26397.499      | 34.74               | 16.97          | 51.71              | 74.00             | -22.29         | peak     |                |                  |        |
| 2   | 26397.499      | 23.17               | 16.97          | 40.14              | 54.00             | -13.86         | AVG      |                |                  |        |


**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1006

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 14/10/12/

Temp.( C)/Hum.(%) 23 C / 48 %

Time:

EUT: Tablet PC

Engineer Signature:


Mode: Transfer data

Distance: 3m

Model: NS-15MS08

Manufacturer: Zowee

Note:

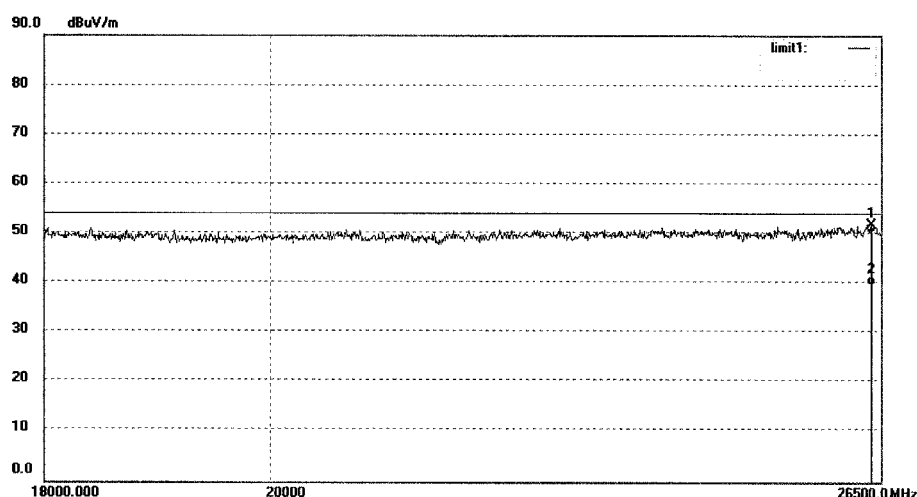

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26387.270      | 35.36               | 16.50          | 51.86              | 74.00             | -22.14         | peak     |                |                  |        |
| 2   | 26387.270      | 23.24               | 16.50          | 39.74              | 54.00             | -14.26         | AVG      |                |                  |        |

**Prüfbericht - Nr.: 17043527 003**
*Test Report No.*
**Seite 80 von 85**
*Page 80 of 85*

**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1005

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: Transfer data

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m



Note:

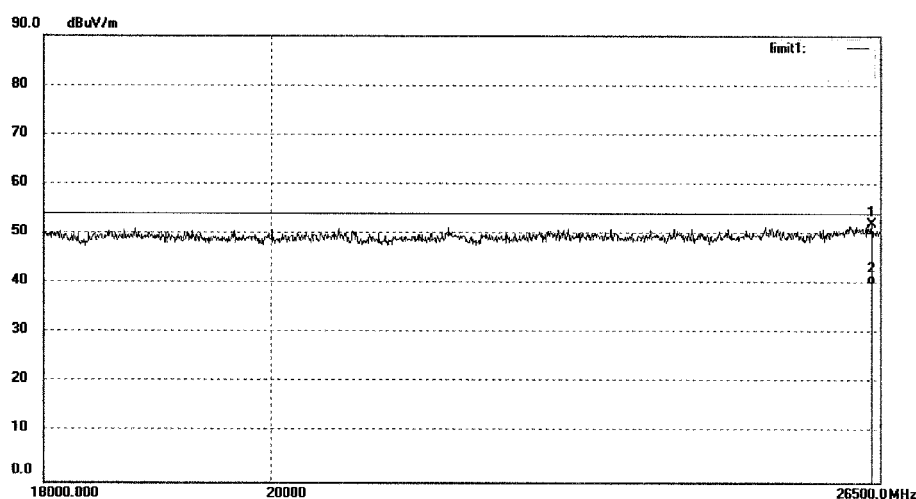


| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Degree<br>(deg.) | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|----------------|------------------|--------|
| 1   | 26397.499      | 35.01               | 16.97          | 51.98              | 74.00             | -22.02         | peak     |                |                  |        |
| 2   | 26397.499      | 22.98               | 16.97          | 39.95              | 54.00             | -14.05         | AVG      |                |                  |        |

## 6. Photographs of the Test Set-Up



Photograph 1: Set-up for Conducted Emission

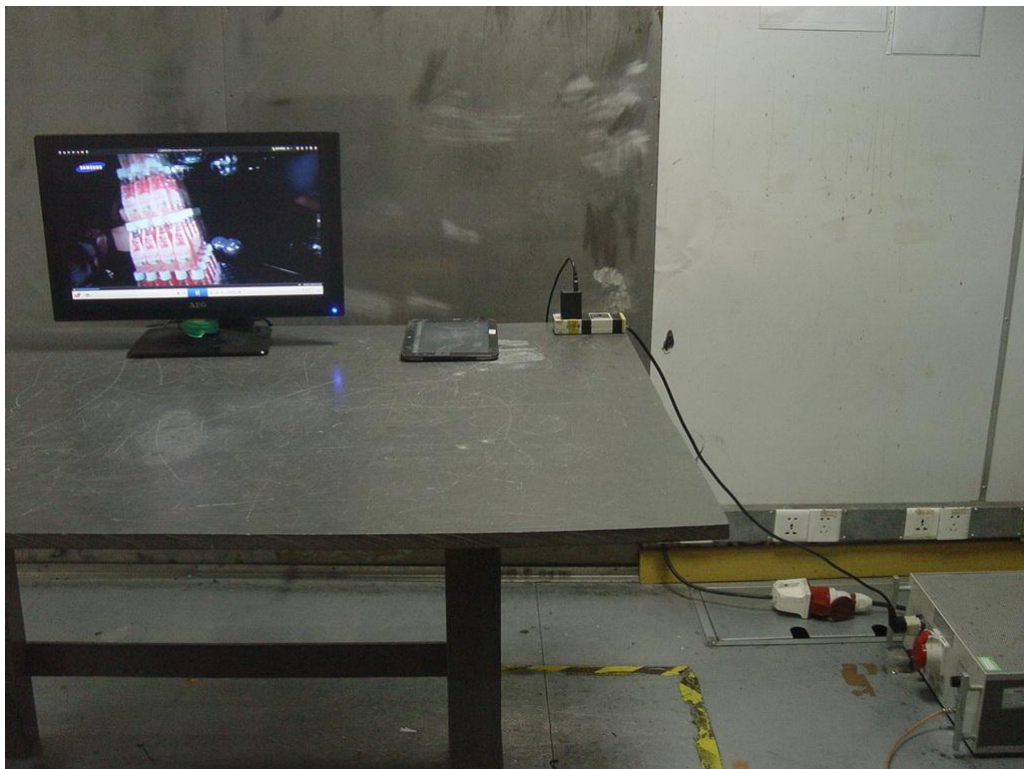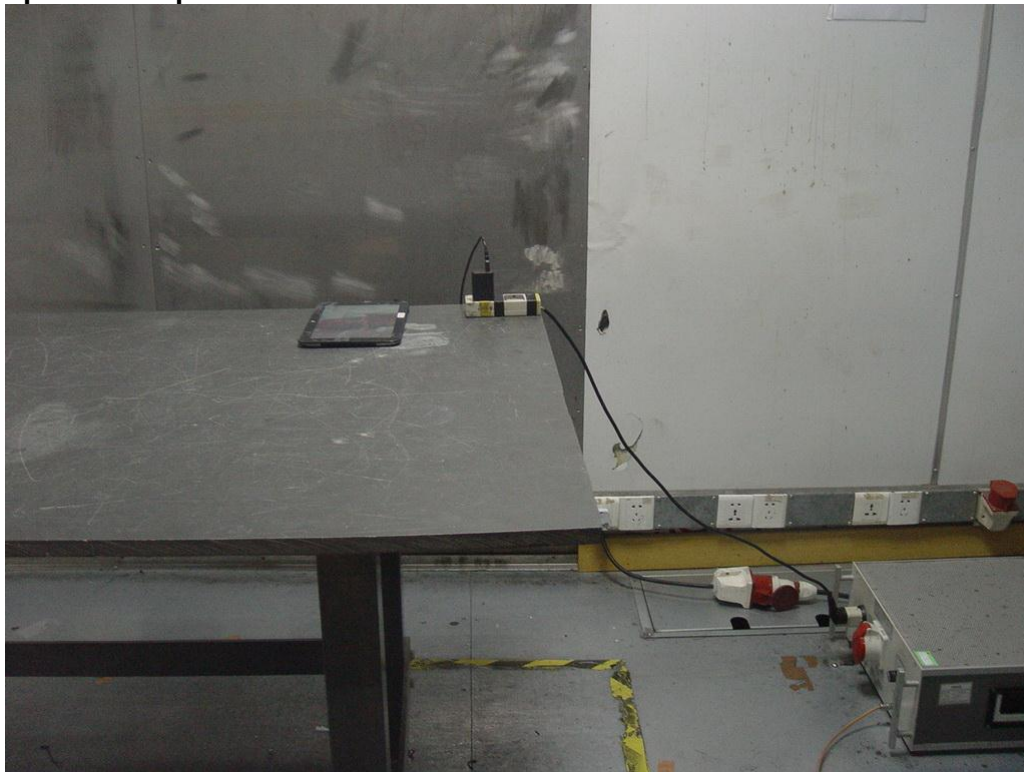



**Photograph 2: Set-up for Radiated Emission of below 1GHz**

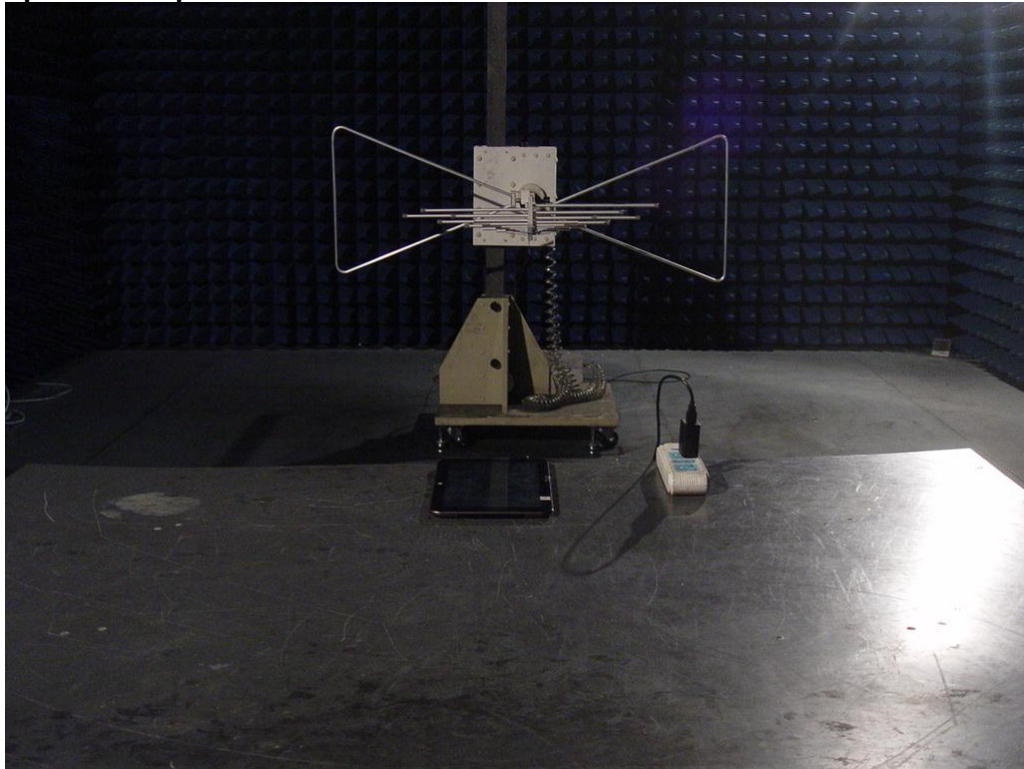

**Photograph 3: Set-up for Radiated Emission of 1 - 18GHz**

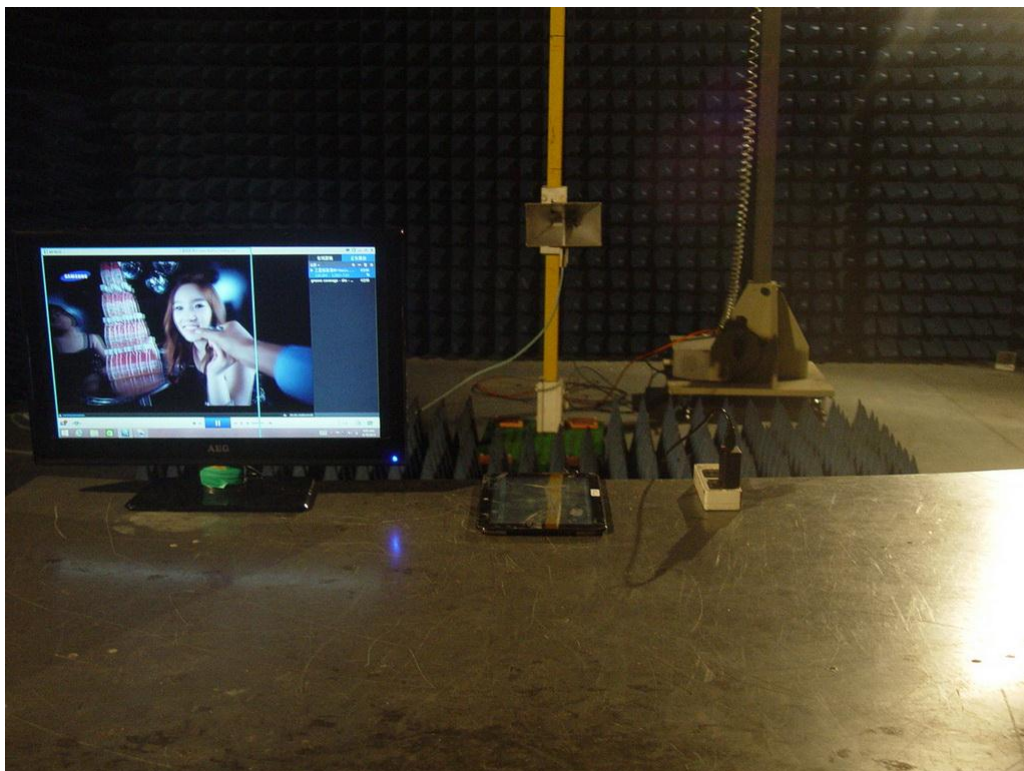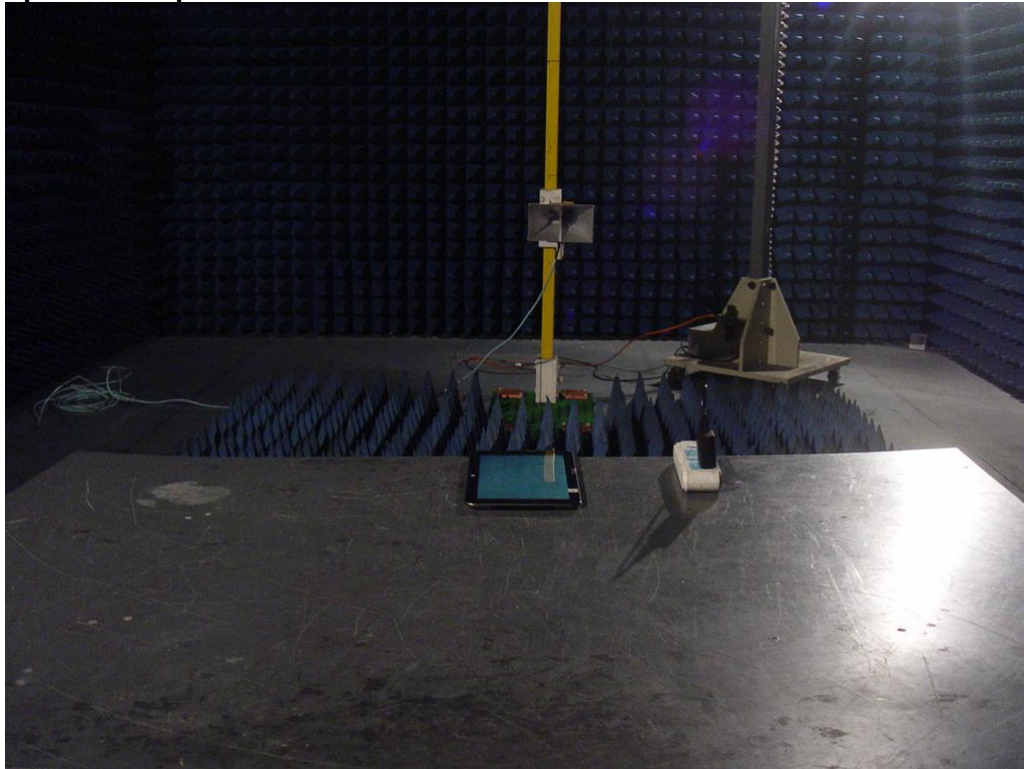

**Photograph 4: Set-up for Radiated Emission of 18 - 26.5GHz**

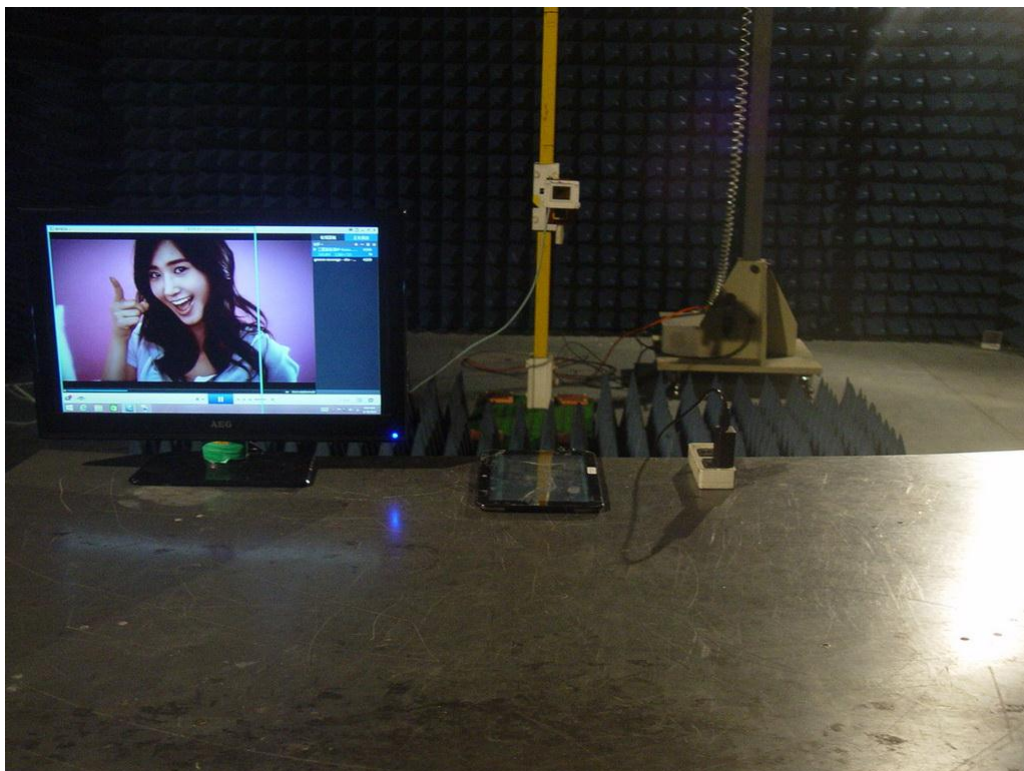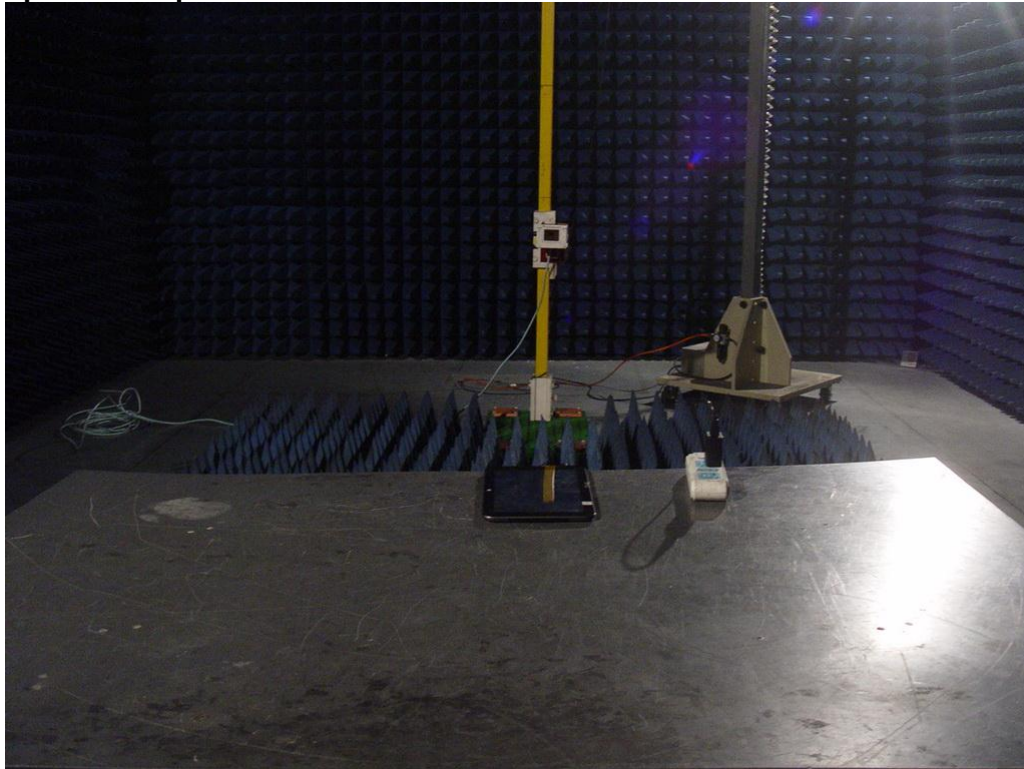

## 7. List of Tables

|                                                      |   |
|------------------------------------------------------|---|
| Table 1: List of Test and Measurement Equipment..... | 5 |
| Table 2: Measurement Uncertainty .....               | 6 |
| Table 3: Technical Specification of EUT .....        | 8 |

## 8. List of Photographs

|                                                                  |    |
|------------------------------------------------------------------|----|
| Photograph 1: Set-up for Conducted Emission .....                | 81 |
| Photograph 2: Set-up for Radiated Emission of below 1GHz .....   | 82 |
| Photograph 3: Set-up for Radiated Emission of 1 - 18GHz.....     | 83 |
| Photograph 4: Set-up for Radiated Emission of 18 - 26.5GHz ..... | 84 |