

# FCC Test Report

Report No.: AGC03329181205FE03

**FCC ID** : 2AAXO-SML2200  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : MP3+G KARAOKE PLAYER WITH BT  
**BRAND NAME** : Singing Machine  
**MODEL NAME** : SML2200, SML692, SML692XX and SML2200XX (XX means unit color, it can be A to Z or N/A)  
**CLIENT** : The Singing Machine Company, Inc.  
**DATE OF ISSUE** : Mar. 21, 2019  
**STANDARD(S)** : FCC Part 15 Subpart C Section 15.247  
**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### Report Revise Record

| Report Version | Revise Time | Issued Date   | Valid Version | Notes           |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0           | /           | Mar. 21, 2019 | Valid         | Initial release |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## TABLE OF CONTENTS

|                                                            |           |
|------------------------------------------------------------|-----------|
| <b>1. VERIFICATION OF CONFORMITY .....</b>                 | <b>5</b>  |
| <b>2. GENERAL INFORMATION .....</b>                        | <b>6</b>  |
| 2.1. PRODUCT DESCRIPTION.....                              | 6         |
| 2.2. TABLE OF CARRIER FREQUENCIES .....                    | 6         |
| 2.3. RECEIVER INPUT BANDWIDTH .....                        | 7         |
| 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE .....      | 7         |
| 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR..... | 7         |
| 2.6. TEST METHOD.....                                      | 8         |
| 2.7. EQUIPMENT MODIFICATIONS .....                         | 8         |
| <b>3. MEASUREMENT UNCERTAINTY .....</b>                    | <b>8</b>  |
| <b>4. DESCRIPTION OF TEST MODES.....</b>                   | <b>9</b>  |
| <b>5. SYSTEM TEST CONFIGURATION .....</b>                  | <b>10</b> |
| 5.1. CONFIGURATION OF EUT SYSTEM .....                     | 10        |
| 5.2. EQUIPMENT USED IN EUT SYSTEM .....                    | 10        |
| 5.3. SUMMARY OF TEST RESULTS .....                         | 11        |
| <b>6. TEST FACILITY.....</b>                               | <b>12</b> |
| <b>7. TEST EQUIPMENT LIST .....</b>                        | <b>12</b> |
| <b>8. PEAK OUTPUT POWER.....</b>                           | <b>13</b> |
| 8.1. MEASUREMENT PROCEDURE .....                           | 13        |
| 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....     | 13        |
| 8.3. LIMITS AND MEASUREMENT RESULT .....                   | 14        |
| <b>9. BANDWIDTH.....</b>                                   | <b>18</b> |
| 9.1. MEASUREMENT PROCEDURE .....                           | 18        |
| 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....     | 18        |
| 9.3. LIMITS AND MEASUREMENT RESULTS .....                  | 18        |
| <b>10. CONDUCTED SPURIOUS EMISSION.....</b>                | <b>23</b> |
| 10.1. MEASUREMENT PROCEDURE .....                          | 23        |
| 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....    | 23        |
| 10.3. LIMITS AND MEASUREMENT RESULT .....                  | 23        |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>11. RADIATED EMISSION .....</b>                                | <b>27</b> |
| 11.1. TEST LIMIT .....                                            | 27        |
| 11.2. MEASUREMENT PROCEDURE .....                                 | 27        |
| 11.3. TEST SETUP .....                                            | 29        |
| 11.4. TEST RESULT .....                                           | 31        |
| <b>12. BAND EDGE EMISSION .....</b>                               | <b>36</b> |
| 12.1. MEASUREMENT PROCEDURE .....                                 | 36        |
| 12.2. TEST .....                                                  | 36        |
| 12.3. TEST RESULT .....                                           | 37        |
| <b>13. NUMBER OF HOPPING FREQUENCY .....</b>                      | <b>41</b> |
| 13.1. MEASUREMENT PROCEDURE .....                                 | 41        |
| 13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....           | 41        |
| 13.3. LIMITS AND MEASUREMENT RESULT .....                         | 41        |
| <b>14. TIME OF OCCUPANCY (DWELL TIME) .....</b>                   | <b>42</b> |
| 14.1. MEASUREMENT PROCEDURE .....                                 | 42        |
| 14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....           | 42        |
| 14.3. LIMITS AND MEASUREMENT RESULT .....                         | 42        |
| <b>15. FREQUENCY SEPARATION .....</b>                             | <b>45</b> |
| 15.1. MEASUREMENT PROCEDURE .....                                 | 45        |
| 15.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....           | 45        |
| 15.3. LIMITS AND MEASUREMENT RESULT .....                         | 46        |
| <b>16. LINE CONDUCTED EMISSION TEST .....</b>                     | <b>47</b> |
| 16.1. LIMITS OF LINE CONDUCTED EMISSION TEST .....                | 47        |
| 16.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST .....         | 47        |
| 16.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST ..... | 48        |
| 16.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST .....       | 48        |
| 16.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST .....           | 49        |
| <b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>                | <b>53</b> |
| <b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>                       | <b>56</b> |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 1. VERIFICATION OF CONFORMITY

|                                 |                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------|
| <b>Applicant</b>                | The Singing Machine Company, Inc.                                                               |
| <b>Address</b>                  | 6301 NW 5th Way, Suite 2900, Fort Lauderdale, FL 33309, USA                                     |
| <b>Manufacturer</b>             | SHENZHEN JUNLAN ELECTRONIC LTD                                                                  |
| <b>Address</b>                  | No.277 PingKui Road, Shijing Community, Pingshan Street, Pingshan New District, Shenzhen, China |
| <b>Factory</b>                  | SHENZHEN JUNLAN ELECTRONIC LTD                                                                  |
| <b>Address</b>                  | No.277 PingKui Road, Shijing Community, Pingshan Street, Pingshan New District, Shenzhen, China |
| <b>Product Designation</b>      | MP3+G KARAOKE PLAYER WITH BT                                                                    |
| <b>Brand Name</b>               | Singing Machine                                                                                 |
| <b>Test Model</b>               | SML2200                                                                                         |
| <b>Series Model</b>             | SML692, SML692XX and SML2200XX (XX means unit color, it can be A to Z or N/A)                   |
| <b>Difference Description</b>   | All the same except for the model name and the appearance color                                 |
| <b>Date of test</b>             | Mar. 06, 2019 to Mar. 13, 2019                                                                  |
| <b>Deviation</b>                | None                                                                                            |
| <b>Condition of Test Sample</b> | Normal                                                                                          |
| <b>Report Template</b>          | AGCRT-US-BR/RF (2013-03-01)                                                                     |

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.247. The test results of this report relate only to the tested sample identified in this report.

Tested By

*sky dong*

Sky Dong(Dong Huihui)

Mar. 13, 2019

Reviewed By

*Bart Xie*

Bart Xie(Xie Xiaobin)

Mar. 21, 2019

Approved By

*Forrest Lei*

Forrest Lei(Lei Yonggang)

Authorized Officer

Mar. 21, 2019

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

The EUT is "MP3+G KARAOKE PLAYER WITH BT" designed as a "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

|                                                                                                 |                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operation Frequency</b>                                                                      | 2.402 GHz to 2.480GHz                                                                                                                                                                                              |
| <b>RF Output Power</b>                                                                          | -3.232dBm(Max)                                                                                                                                                                                                     |
| <b>Bluetooth Version</b>                                                                        | V5.0                                                                                                                                                                                                               |
| <b>Modulation</b>                                                                               | BR <input checked="" type="checkbox"/> GFSK, EDR <input checked="" type="checkbox"/> $\pi/4$ -DQPSK, <input type="checkbox"/> 8DPSK<br>BLE <input type="checkbox"/> GFSK 1Mbps <input type="checkbox"/> GFSK 2Mbps |
| <b>Number of channels</b>                                                                       | 79                                                                                                                                                                                                                 |
| <b>Hardware Version</b>                                                                         | V1.0                                                                                                                                                                                                               |
| <b>Software Version</b>                                                                         | V1.0                                                                                                                                                                                                               |
| <b>Antenna Designation</b>                                                                      | PCB Antenna                                                                                                                                                                                                        |
| <b>Antenna Gain</b>                                                                             | 0dBi                                                                                                                                                                                                               |
| <b>Power Supply</b>                                                                             | DC 12V by battery or DC12V by adapter                                                                                                                                                                              |
| Note: 1. The USB port can be used to transfer data.<br>2. The EUT didn't support 8DPSK and BLE. |                                                                                                                                                                                                                    |

### 2.2. TABLE OF CARRIER FREQUENCIES

| Frequency Band | Channel Number | Frequency |
|----------------|----------------|-----------|
| 2402~2480MHz   | 0              | 2402MHz   |
|                | 1              | 2403MHz   |
|                | :              | :         |
|                | 38             | 2440 MHz  |
|                | 39             | 2441 MHz  |
|                | 40             | 2442 MHz  |
|                | :              | :         |
|                | 77             | 2479 MHz  |
|                | 78             | 2480 MHz  |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz. In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be sent on the same frequency, it is sent on the next frequency of the hopping sequence.

### 2.4. EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE

Example of a 79 hopping sequence in data mode:

40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67  
56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59  
72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75  
09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06  
01, 51, 03, 55, 05, 04

### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD\_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day (23h30). In most cases it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence.

This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmissions is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5us). The hopping sequence will always differ from the first one.

## 2.6. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013.

## 2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

## 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %

- Uncertainty of Conducted Emission,  $U_c = \pm 3.2$  dB
- Uncertainty of Radiated Emission below 1GHz,  $U_c = \pm 3.9$  dB
- Uncertainty of Radiated Emission above 1GHz,  $U_c = \pm 4.8$  dB

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

#### 4. DESCRIPTION OF TEST MODES


| NO.                                                                                                                                                                                                                                            | TEST MODE DESCRIPTION         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| 1                                                                                                                                                                                                                                              | Low channel GFSK              |
| 2                                                                                                                                                                                                                                              | Middle channel GFSK           |
| 3                                                                                                                                                                                                                                              | High channel GFSK             |
| 4                                                                                                                                                                                                                                              | Low channel $\pi/4$ -DQPSK    |
| 5                                                                                                                                                                                                                                              | Middle channel $\pi/4$ -DQPSK |
| 6                                                                                                                                                                                                                                              | High channel $\pi/4$ -DQPSK   |
| 7                                                                                                                                                                                                                                              | BT Link with charging         |
| Note: 1. Only the result of the worst case was recorded in the report, if no other cases.<br>2. For Conducted Test method, a temporary antenna connector is provided by the manufacture.<br>3. The EUT used fully-charged battery when tested. |                               |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 5. SYSTEM TEST CONFIGURATION


### 5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

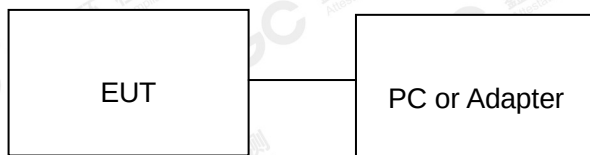

**Note:** Owing to the EUT has own battery, testing may be performed while PC or adapter removed.

Configure 2: (Control continuous TX)



### 5.2. EQUIPMENT USED IN EUT SYSTEM

| Item | Equipment                      | Mfr/Brand       | Model/Type No.   | Remark    |
|------|--------------------------------|-----------------|------------------|-----------|
| 1    | SHENZHEN JUNLAN ELECTRONIC LTD | Singing Machine | SML2200          | EUT       |
| 2    | Control box                    | AIROHA          | N/A              | A.E       |
| 3    | Adapter                        | J.POWER         | GKYP50150120US1  | Accessory |
| 4    | Adapter                        | J.POWER         | JY018120150AA-UL | Accessory |
| 5    | MIC                            | N/A             | N/A              | A.E       |
| 6    | IPOD                           | APPLE           | A1367            | A.E       |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### 5.3. SUMMARY OF TEST RESULTS

| FCC RULES            | DESCRIPTION OF TEST         | RESULT    |
|----------------------|-----------------------------|-----------|
| §15.247 b(1)         | Peak Output Power           | Compliant |
| §15.247 a(1)         | 20 dB Bandwidth             | Compliant |
| §15.247 d            | Conducted Spurious Emission | Compliant |
| §15.247 d<br>§15.209 | Radiated Emission           | Compliant |
| §15.247 d            | Band Edges                  | Compliant |
| §15.247 a(1)(iii)    | Number of hopping frequency | Compliant |
| §15.247 a(1)(iii)    | Time of Occupancy           | Compliant |
| §15.247 a(1)         | Frequency Separation        | Compliant |
| §15.207              | Line conduction Emission    | Compliant |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 6. TEST FACILITY

|                                          |                                                                                                                                          |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Site</b>                         | Attestation of Global Compliance (Shenzhen) Co., Ltd                                                                                     |
| <b>Location</b>                          | 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China |
| <b>Designation Number</b>                | CN1259                                                                                                                                   |
| <b>FCC Test Firm Registration Number</b> | 975832                                                                                                                                   |
| <b>A2LA Cert. No.</b>                    | 5054.02                                                                                                                                  |
| <b>Description</b>                       | Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA                                                                |

## 7. TEST EQUIPMENT LIST

### TEST EQUIPMENT OF CONDUCTED EMISSION TEST

| Equipment     | Manufacturer | Model   | S/N    | Cal. Date     | Cal. Due      |
|---------------|--------------|---------|--------|---------------|---------------|
| TEST RECEIVER | R&S          | ESPI    | 101206 | Jun. 12, 2018 | Jun. 11, 2019 |
| LISN          | R&S          | ESH2-Z5 | 100086 | Aug. 28, 2018 | Aug. 27, 2019 |

### TEST EQUIPMENT OF RADIATED EMISSION TEST

| Equipment                      | Manufacturer   | Model     | S/N        | Cal. Date     | Cal. Due      |
|--------------------------------|----------------|-----------|------------|---------------|---------------|
| TEST RECEIVER                  | R&S            | ESCI      | 10096      | Jun. 12, 2018 | Jun. 11, 2019 |
| EXA Signal Analyzer            | Aglient        | N9010A    | MY53470504 | Dec. 20, 2018 | Dec. 19, 2019 |
| 2.4GHz Fliter                  | Micro-tronics  | 087       | N/A        | Jun. 12, 2018 | Jun. 11, 2019 |
| Attenuator                     | Weinachel Corp | 58-30-33  | N/A        | Jun. 12, 2018 | Jun. 11, 2019 |
| Horn antenna                   | SCHWARZBECK    | BBHA 9170 | #768       | Sep. 21, 2017 | Sep. 20, 2020 |
| Active loop antenna (9K-30MHz) | ZHINAN         | ZN30900C  | 18051      | Jun. 14, 2018 | Jun. 13, 2020 |
| Double-Ridged Waveguide Horn   | ETS LINDGREN   | 3117      | 00034609   | May. 26, 2018 | May. 25, 2020 |
| Broadband Preamplifier         | ETS LINDGREN   | 3117PA    | 00225134   | Oct. 25, 2018 | Oct. 24, 2019 |
| ANTENNA                        | SCHWARZBECK    | VULB9168  | D69250     | Sep. 28, 2017 | Sep. 27, 2019 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


## 8. PEAK OUTPUT POWER

### 8.1. MEASUREMENT PROCEDURE

For peak power test:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
3. RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW.
4. Record the maximum power from the Spectrum Analyzer.
5. The maximum peak power shall be less 21dBm.

### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

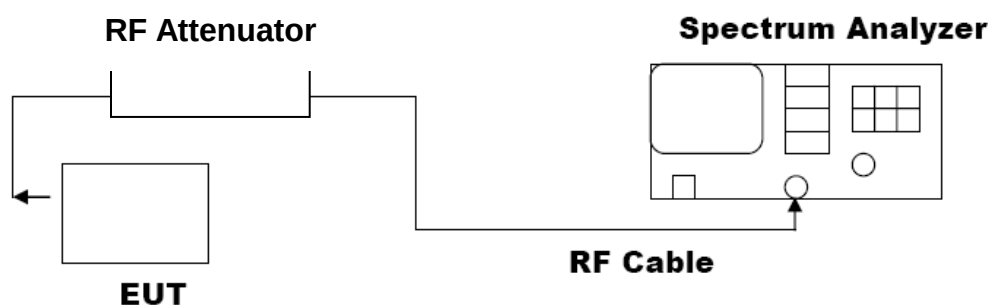


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### 8.3. LIMITS AND MEASUREMENT RESULT


| PEAK OUTPUT POWER MEASUREMENT RESULT<br>FOR GFSK MODULATION |                     |                            |              |
|-------------------------------------------------------------|---------------------|----------------------------|--------------|
| Frequency<br>(GHz)                                          | Peak Power<br>(dBm) | Applicable Limits<br>(dBm) | Pass or Fail |
| 2.402                                                       | -3.968              | 21                         | Pass         |
| 2.441                                                       | -4.134              | 21                         | Pass         |
| 2.480                                                       | -4.569              | 21                         | Pass         |

CH00

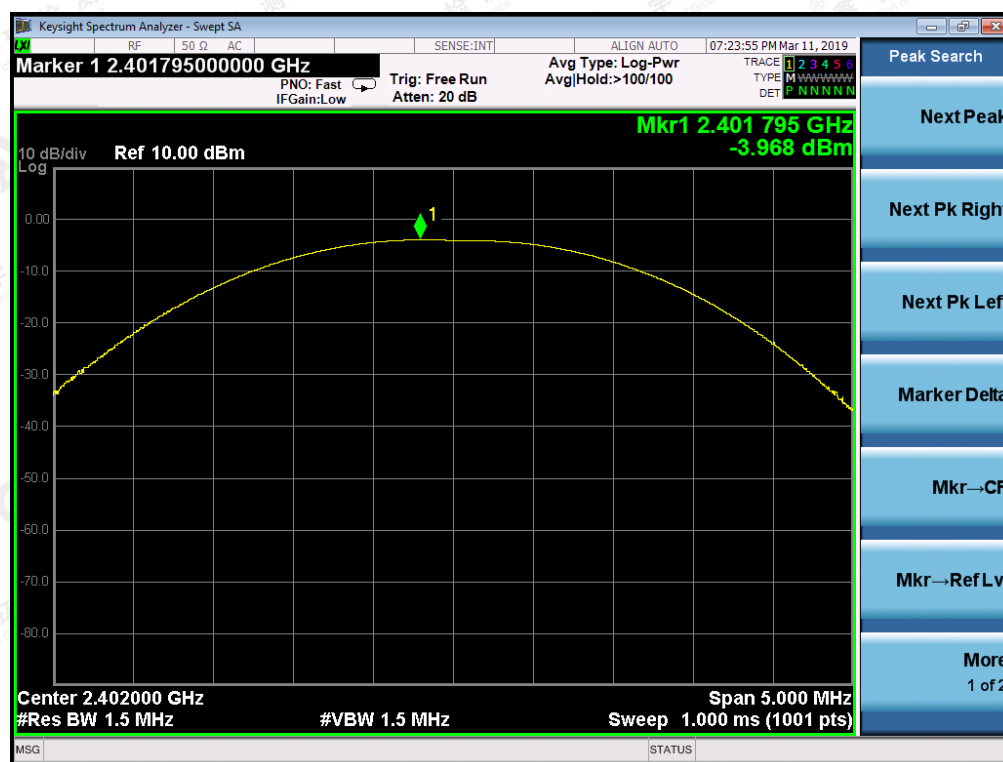


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

CH39

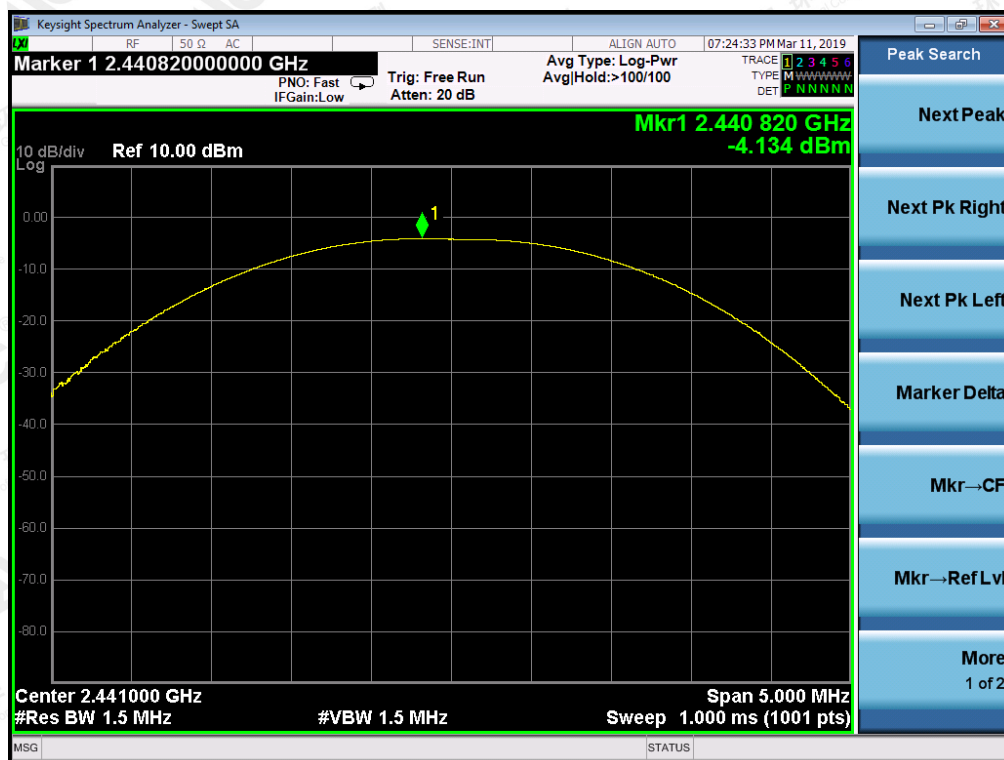

CH78

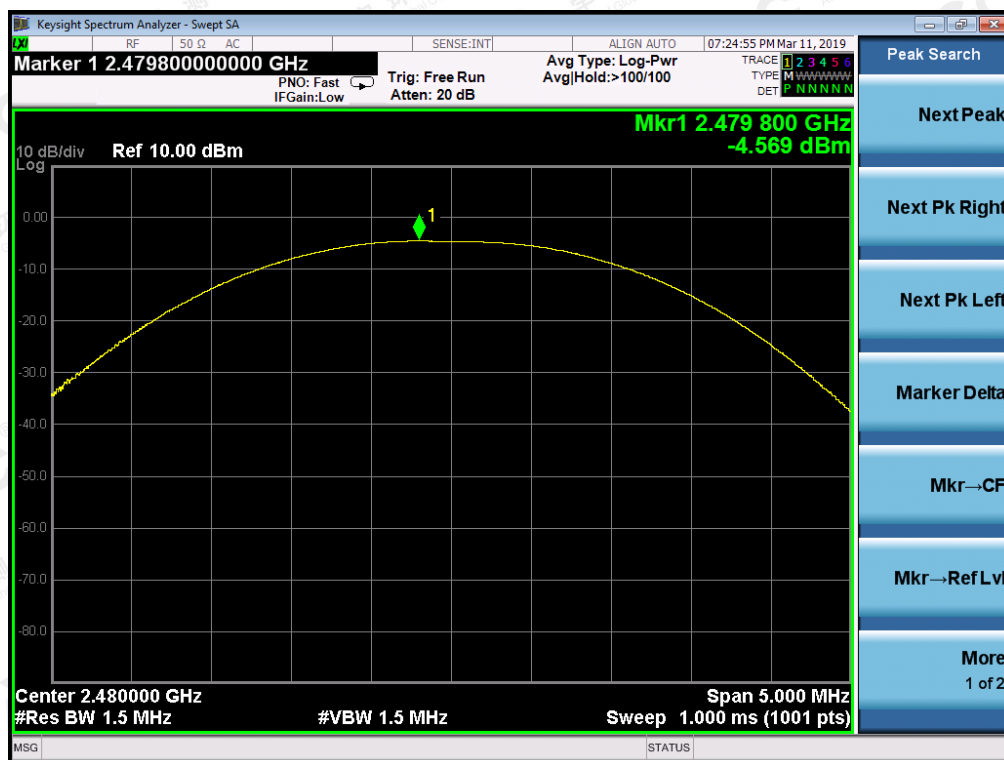


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**PEAK OUTPUT POWER MEASUREMENT RESULT  
FOR II /4-DQPSK MODULATION**


| Frequency (GHz) | Peak Power (dBm) | Applicable Limits (dBm) | Pass or Fail |
|-----------------|------------------|-------------------------|--------------|
| 2.402           | -3.232           | 21                      | Pass         |
| 2.441           | -3.386           | 21                      | Pass         |
| 2.480           | -4.003           | 21                      | Pass         |

CH00

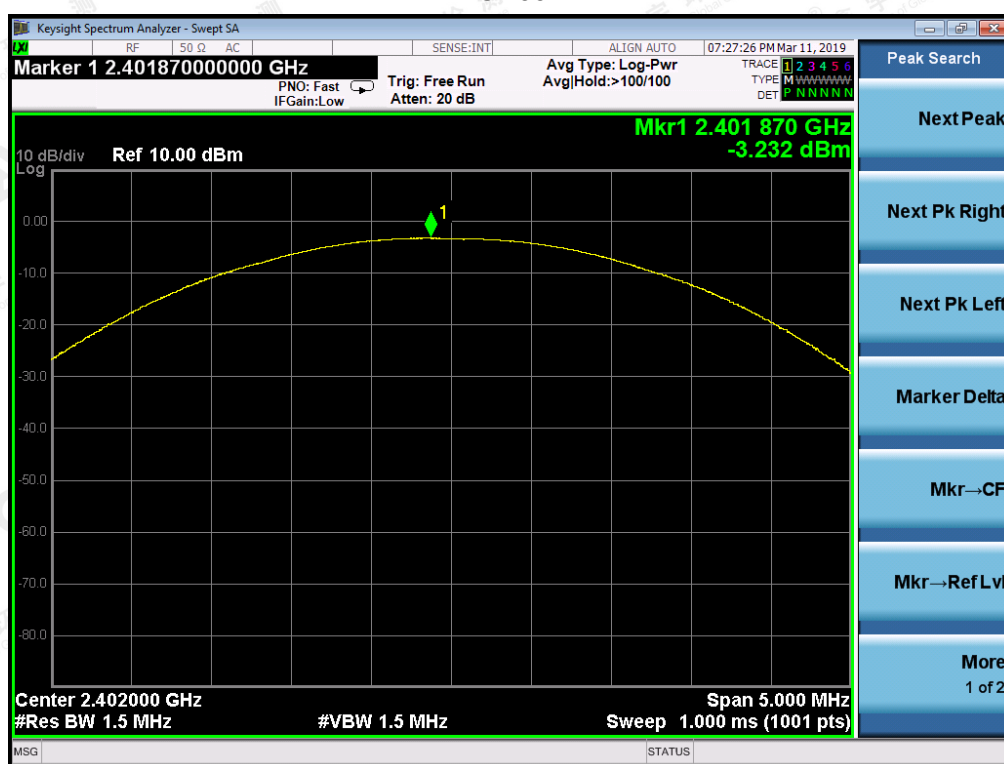


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

CH39

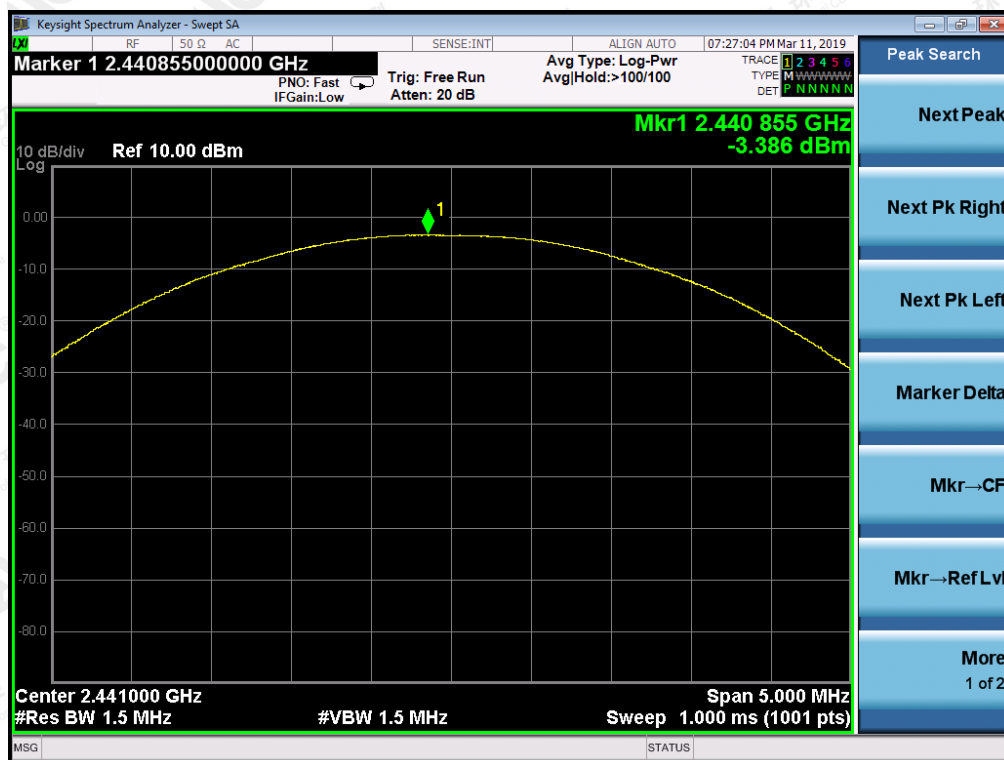

CH78

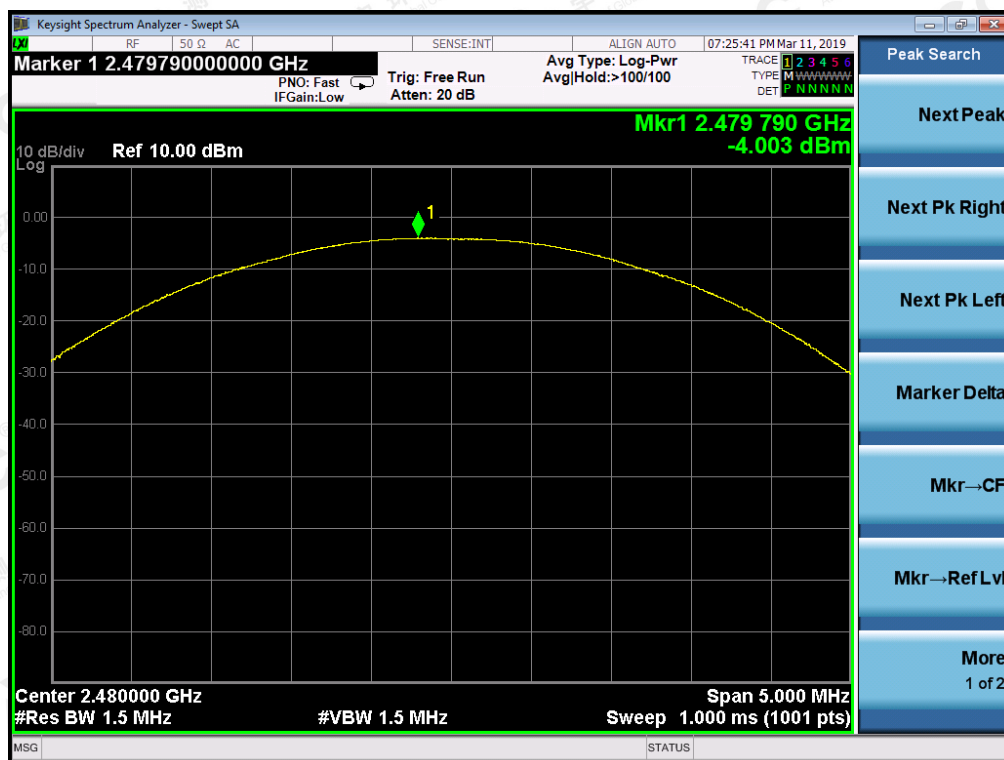


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 9. BANDWIDTH

### 9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  3RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

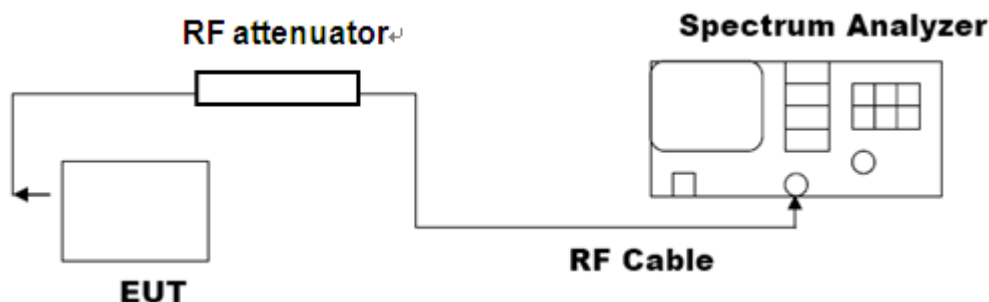


**Note:** The EUT has been used temporary antenna connector for testing.

### 9.3. LIMITS AND MEASUREMENT RESULTS


| BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT |                    |              |               |        |
|-----------------------------------------------|--------------------|--------------|---------------|--------|
| Applicable Limits                             | Measurement Result |              |               |        |
|                                               | Test Data (MHz)    |              |               | Result |
|                                               |                    | 99%OBW (MHz) | -20dB BW(MHz) |        |
| N/A                                           | Low Channel        | 0.8257       | 0.8744        | PASS   |
|                                               | Middle Channel     | 0.8247       | 0.8740        | PASS   |
|                                               | High Channel       | 0.8245       | 0.8737        | PASS   |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

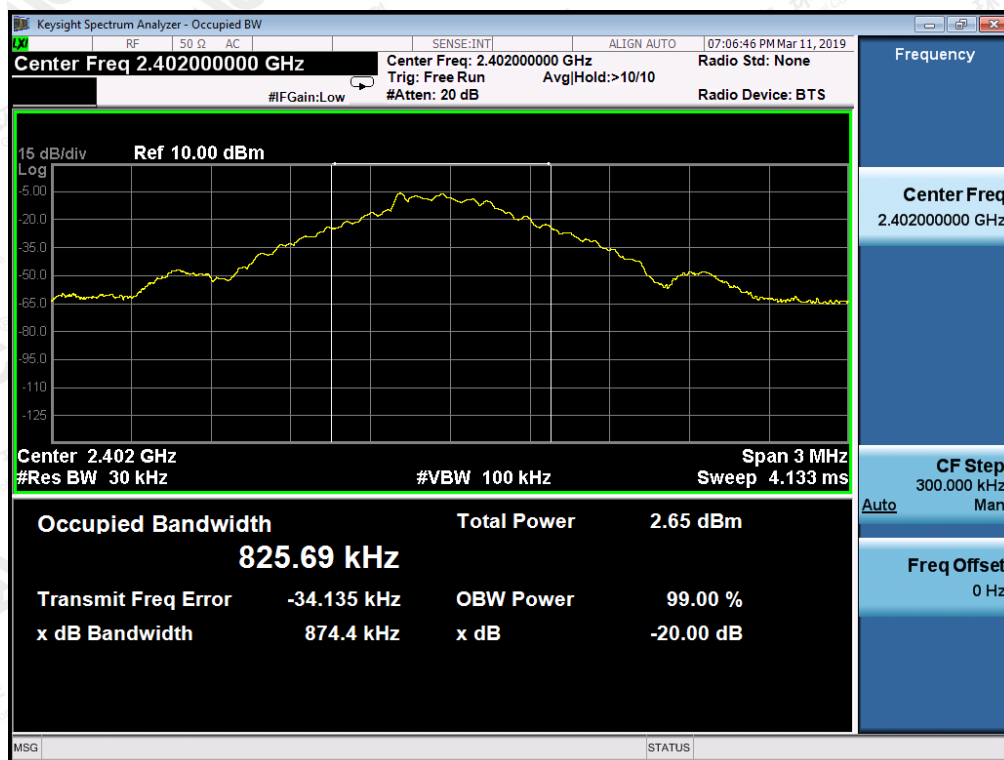

### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

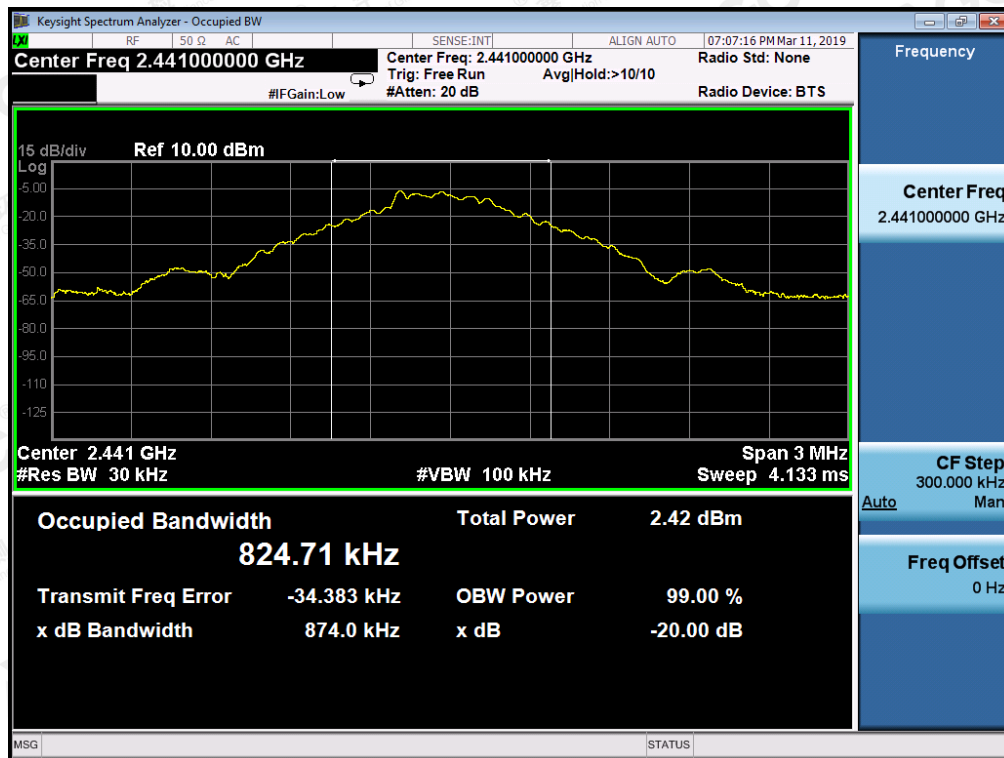

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


| BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT |                    |              |               |        |
|-----------------------------------------------|--------------------|--------------|---------------|--------|
| Applicable Limits                             | Measurement Result |              |               |        |
|                                               | Test Data (MHz)    |              |               | Result |
|                                               |                    | 99%OBW (MHz) | -20dB BW(MHz) |        |
| N/A                                           | Low Channel        | 1.189        | 1.267         | PASS   |
|                                               | Middle Channel     | 1.190        | 1.267         | PASS   |
|                                               | High Channel       | 1.190        | 1.269         | PASS   |

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

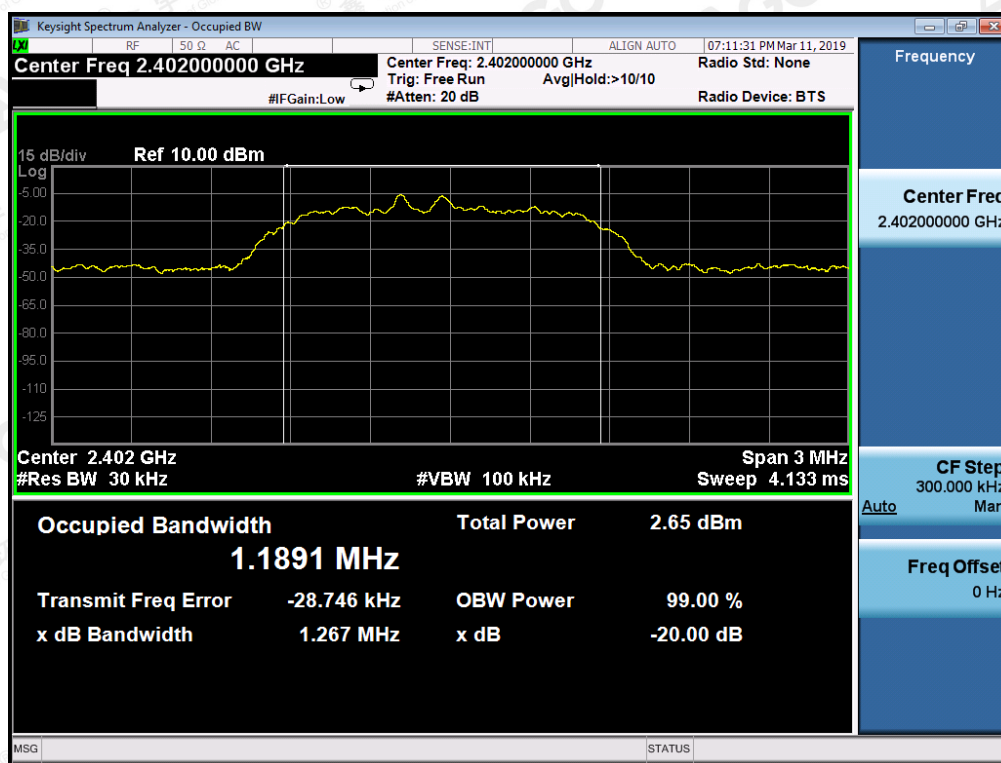


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

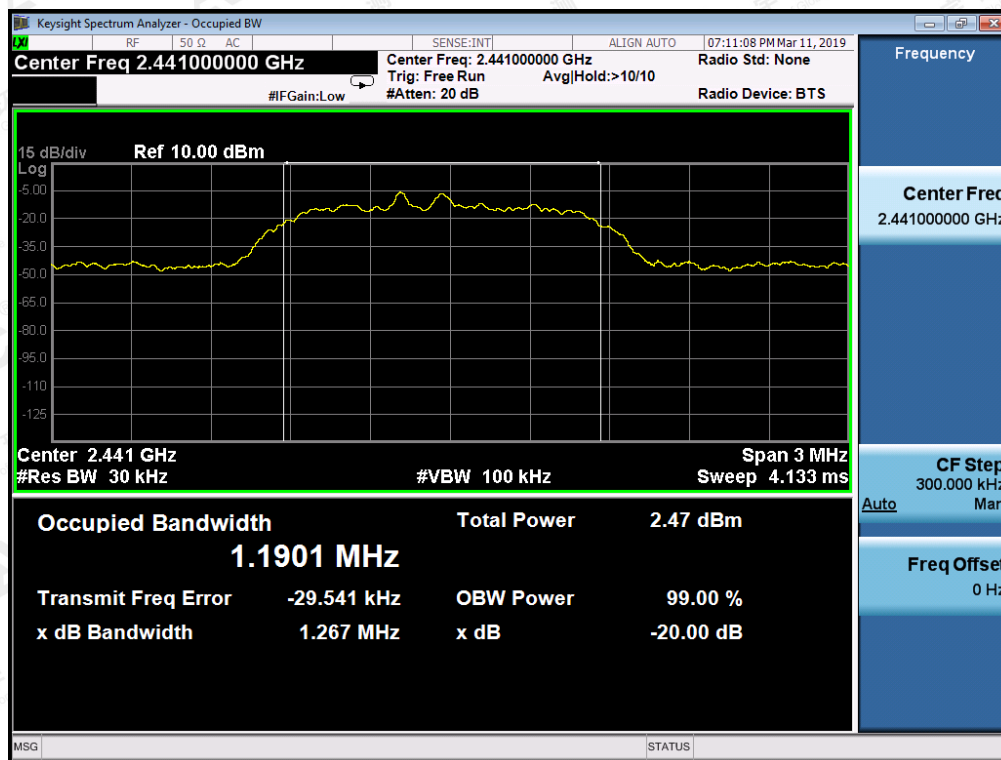

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

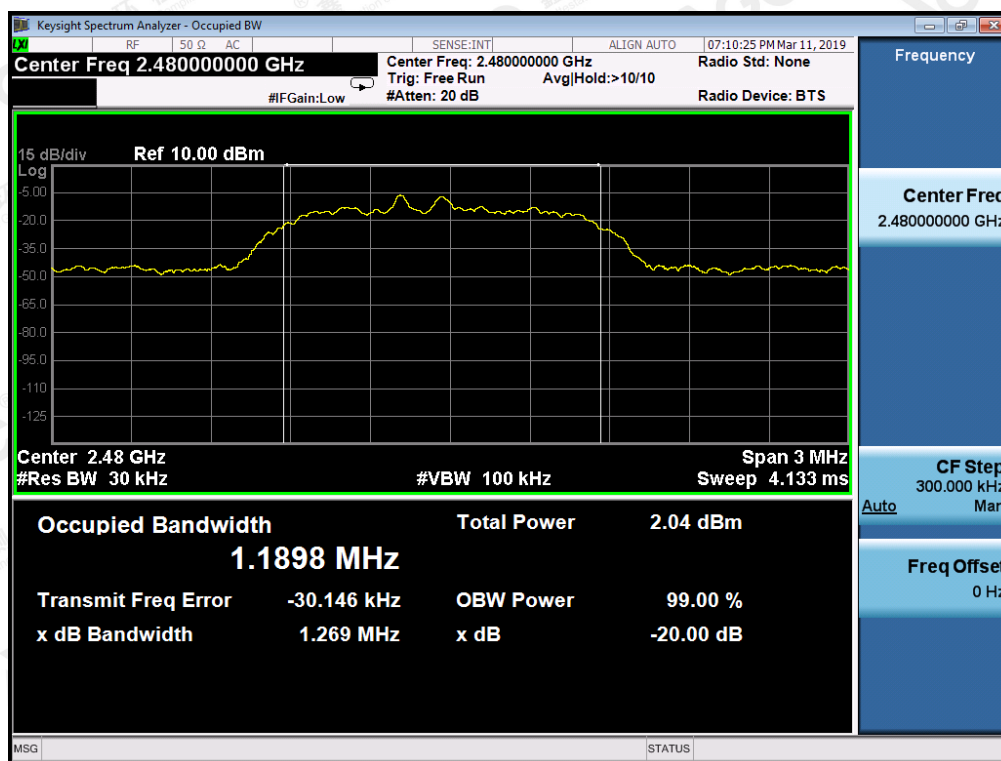


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 10. CONDUCTED SPURIOUS EMISSION

### 10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.  
RBW = 100 kHz; VBW = 300kHz; Sweep = auto; Detector function = peak.
4. Set SPA Trace 1 Max hold, then View.

### 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


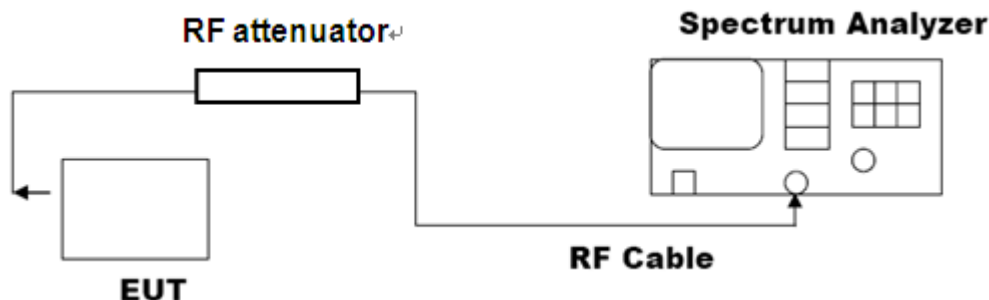


### 10.3. LIMITS AND MEASUREMENT RESULT

| LIMITS AND MEASUREMENT RESULT                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                |        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|--------|
| Applicable Limits                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Measurement Result                                             |        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Test Data                                                      | Result |
| In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.<br>In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a) | At least -20dBc than the limit Specified on the BOTTOM Channel | PASS   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | At least -20dBc than the limit Specified on the TOP Channel    | PASS   |



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE  
OF  $\pi/4$ -DQPSK MODULATION IN LOW CHANNEL

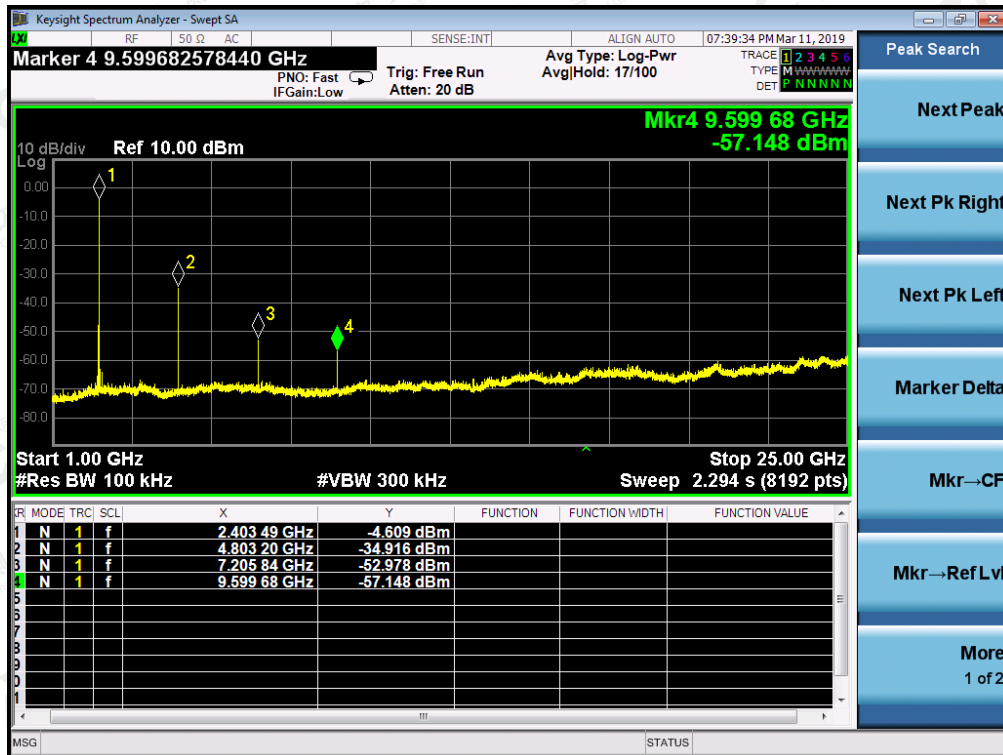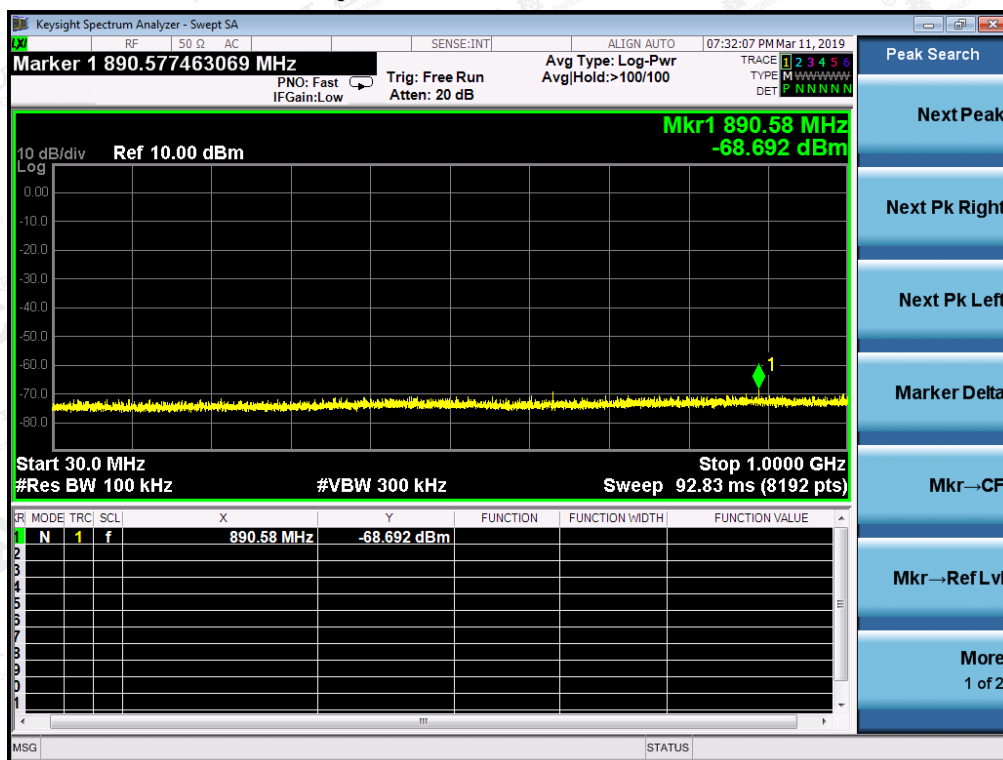


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TEST PLOT OF OUT OF BAND EMISSIONS  
OF  $\pi$ /4-DQPSK MODULATION IN MIDDLE CHANNEL

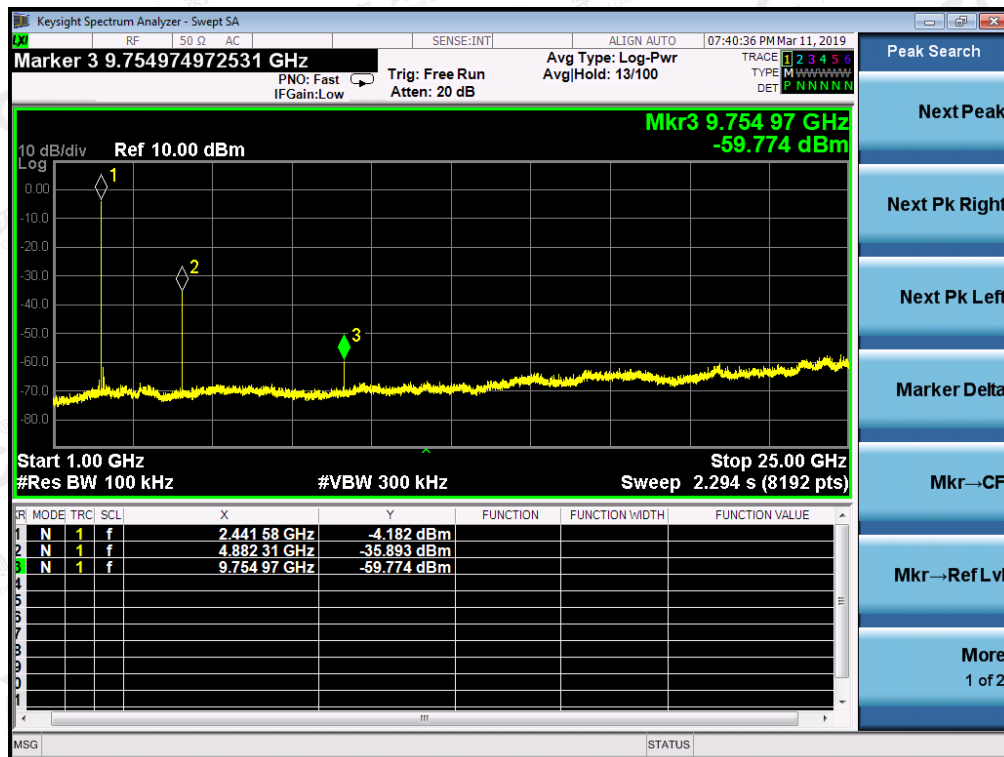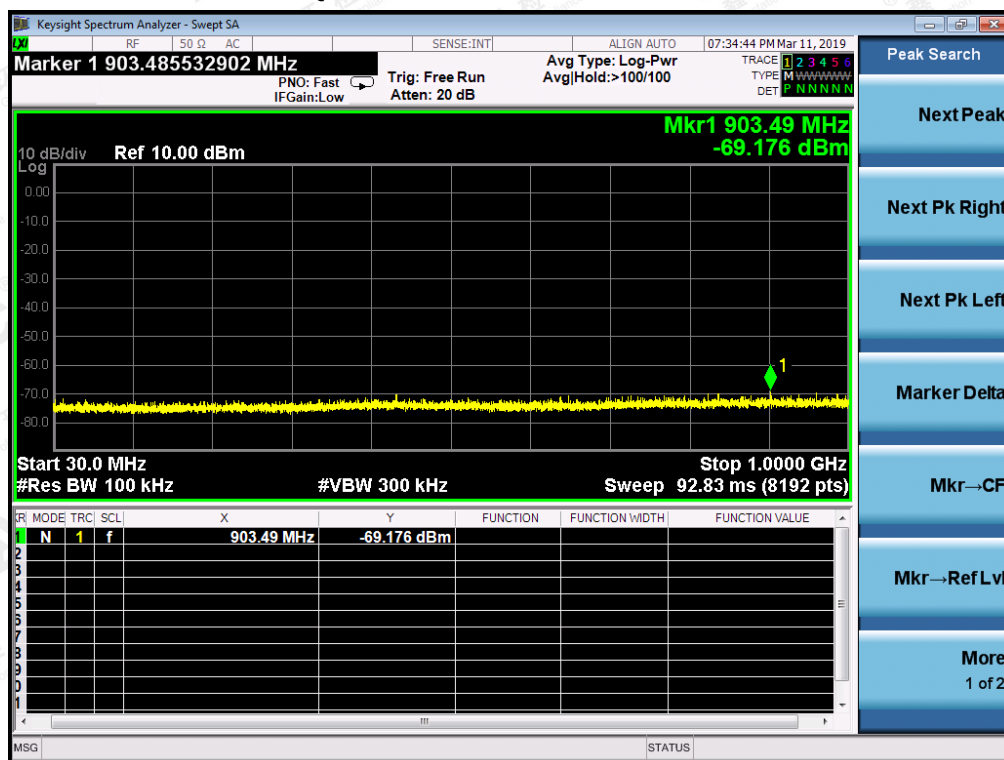

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

# TEST PLOT OF OUT OF BAND EMISSIONS OF $\pi/4$ -DQPSK MODULATION IN HIGH CHANNEL

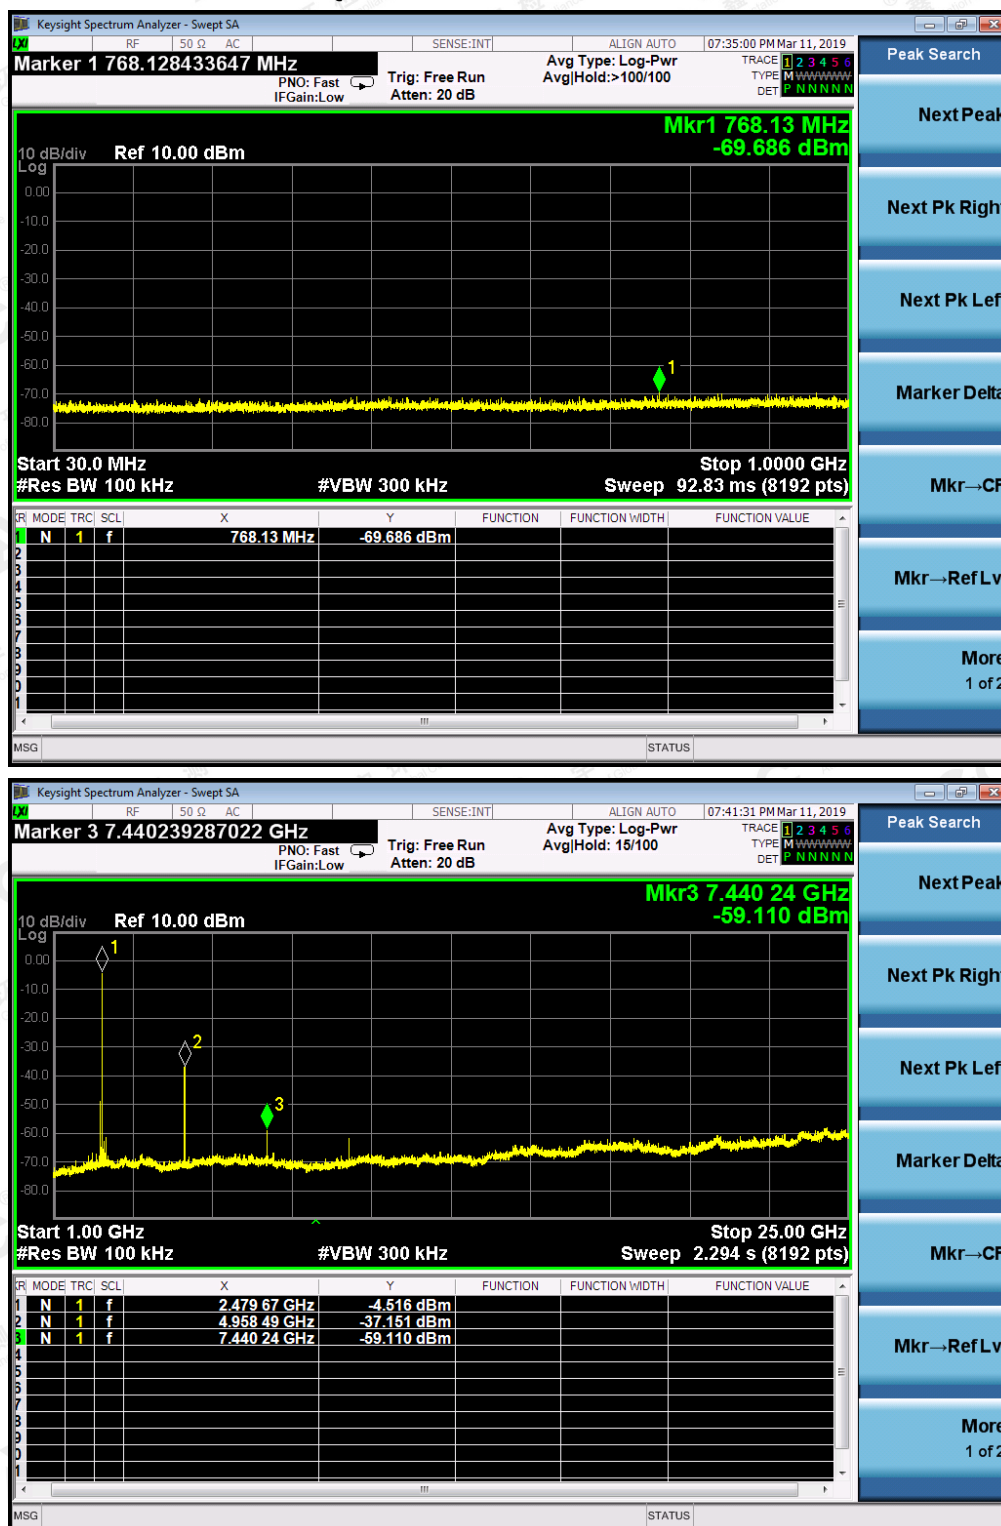

Note: The  $\pi/4$ -DQPSK modulation is the worst case and only those data recorded in the report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 11. RADIATED EMISSION

### 11.1. TEST LIMIT

| Frequency<br>(MHz)                                                                                                                                                                                                                                                                                           | Distance<br>Meters | Field Strengths Limit                                          |                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------------------------------------------|----------------|
|                                                                                                                                                                                                                                                                                                              |                    | $\mu$ V/m                                                      | dB( $\mu$ V)/m |
| 0.009 ~ 0.490                                                                                                                                                                                                                                                                                                | 300                | 2400/F(kHz)                                                    | ---            |
| 0.490 ~ 1.705                                                                                                                                                                                                                                                                                                | 30                 | 24000/F(kHz)                                                   | ---            |
| 1.705 ~ 30                                                                                                                                                                                                                                                                                                   | 30                 | 30                                                             | ---            |
| 30 ~ 88                                                                                                                                                                                                                                                                                                      | 3                  | 100                                                            | 40.0           |
| 88 ~ 216                                                                                                                                                                                                                                                                                                     | 3                  | 150                                                            | 43.5           |
| 216 ~ 960                                                                                                                                                                                                                                                                                                    | 3                  | 200                                                            | 46.0           |
| 960 ~ 1000                                                                                                                                                                                                                                                                                                   | 3                  | 500                                                            | 54.0           |
| Above 1000                                                                                                                                                                                                                                                                                                   | 3                  | Other:74.0 dB( $\mu$ V)/m (Peak) 54.0 dB( $\mu$ V)/m (Average) |                |
| Remark: (1) Emission level dB $\mu$ V = 20 log Emission level $\mu$ V/m.<br>(2) The smaller limit shall apply at the cross point between two frequency bands.<br>(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system. |                    |                                                                |                |

### 11.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak&AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

The following table is the setting of spectrum analyzer and receiver.


| Spectrum Parameter    | Setting                                                                        |
|-----------------------|--------------------------------------------------------------------------------|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP                                                    |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP                                                    |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP                                                 |
| Start ~Stop Frequency | 1GHz~26.5GHz<br>RBW 1MHz/ VBW 3MHz for Peak,<br>RBW 1MHz/ VBW 10Hz for Average |

| Receiver Parameter    | Setting                        |
|-----------------------|--------------------------------|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP    |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP    |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### 11.3. TEST SETUP

#### RADIATED EMISSION TEST SETUP BELOW 30MHz

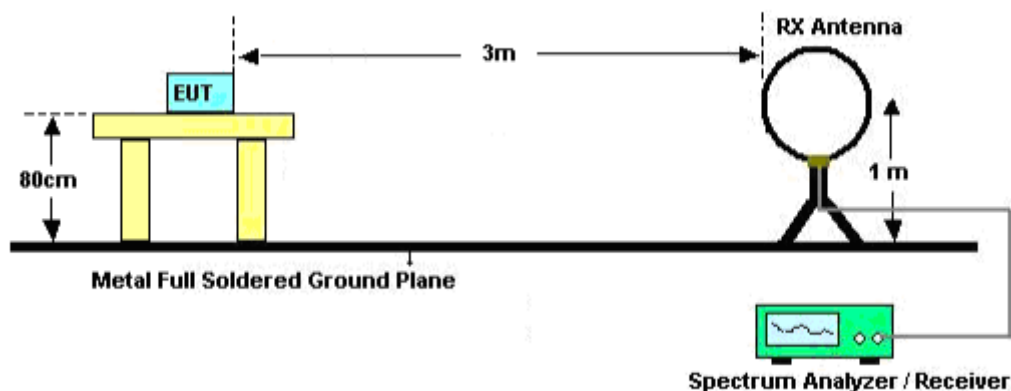


#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

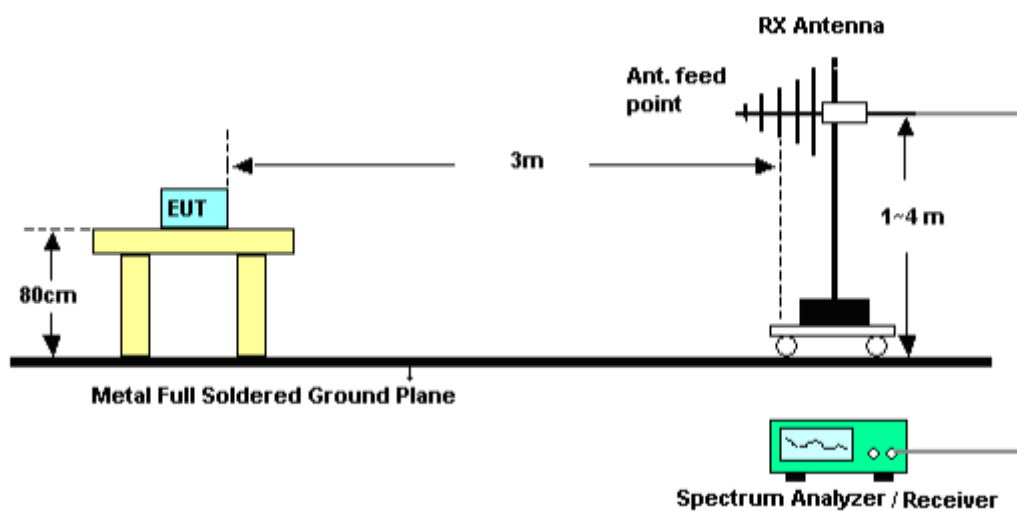

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

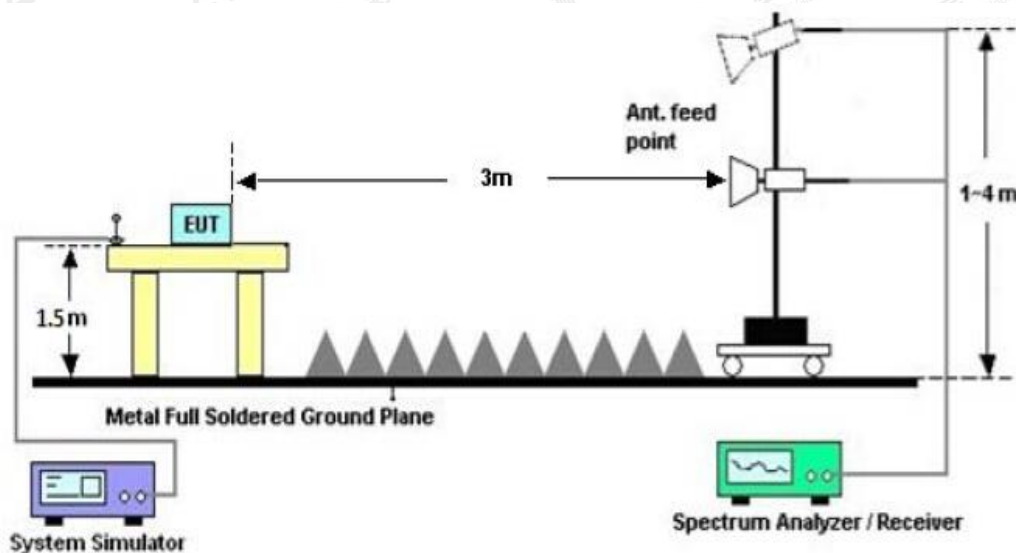

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 11.4. TEST RESULT


(Worst Modulation:  $\pi$  /4-DQPSK)

### RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

### RADIATED EMISSION BELOW 1GHz


RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

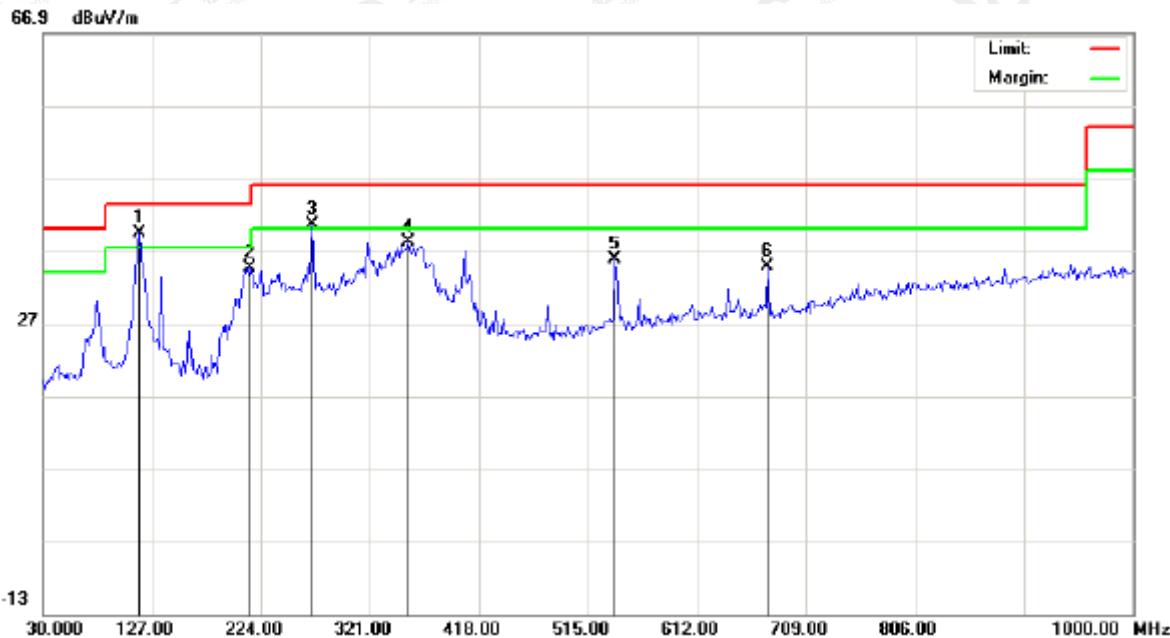

**RESULT: PASS**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

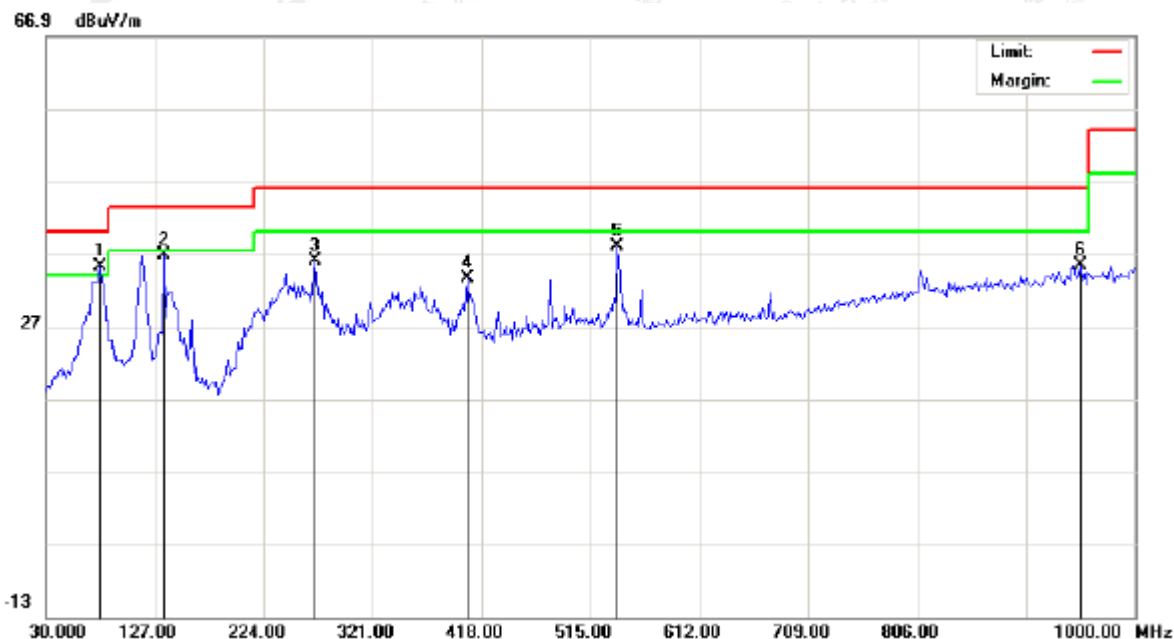

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|----------------|--------------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm             | degree       |         |
| 1   | *  | 78.5000  | 19.89   | 15.27  | 35.16       | 40.00  | -4.84  | peak     |                |              |         |
| 2   |    | 135.0833 | 17.95   | 18.92  | 36.87       | 43.50  | -6.63  | peak     |                |              |         |
| 3   |    | 269.2667 | 17.03   | 19.07  | 36.10       | 46.00  | -9.90  | peak     |                |              |         |
| 4   |    | 405.0667 | 10.49   | 23.08  | 33.57       | 46.00  | -12.43 | peak     |                |              |         |
| 5   |    | 539.2500 | 12.28   | 25.76  | 38.04       | 46.00  | -7.96  | peak     |                |              |         |
| 6   |    | 951.5000 | 3.36    | 32.14  | 35.50       | 46.00  | -10.50 | peak     |                |              |         |

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

3. All test modes had been pre-tested. The low channel TX with  $\pi/4$ -DQPSK modulation is the worst case and only those data recorded in the report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**RADIATED EMISSION ABOVE 1GHZ FOR BR/EDR**

|               |                              |                     |            |
|---------------|------------------------------|---------------------|------------|
| EUT :         | MP3+G KARAOKE PLAYER WITH BT | Model Name. :       | SML2200    |
| Temperature : | 20 °C                        | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa                     | Test Voltage :      | DC 12V     |
| Test Mode :   | Mode 4                       | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Value Type |
|-----------|---------------|--------|----------------|----------|--------|------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |            |
| 4804      | 53.56         | 7.12   | 60.68          | 74       | -13.32 | peak       |
| 4804      | 44.98         | 7.12   | 52.1           | 54       | -1.9   | AVG        |
| 7206      | 39.83         | 9.84   | 49.67          | 74       | -24.33 | peak       |
| 7206      | 30.1          | 9.84   | 39.94          | 54       | -14.06 | AVG        |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

|               |                              |                     |          |
|---------------|------------------------------|---------------------|----------|
| EUT :         | MP3+G KARAOKE PLAYER WITH BT | Model Name. :       | SML2200  |
| Temperature : | 20 °C                        | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                     | Test Voltage :      | DC 12V   |
| Test Mode :   | Mode 4                       | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Value Type |
|-----------|---------------|--------|----------------|----------|--------|------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |            |
| 4804      | 51.06         | 7.12   | 58.18          | 74       | -15.82 | peak       |
| 4804      | 42.45         | 7.12   | 49.57          | 54       | -4.43  | AVG        |
| 7206      | 36.85         | 9.84   | 46.69          | 74       | -27.31 | peak       |
| 7206      | 28.69         | 9.84   | 38.53          | 54       | -15.47 | AVG        |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

|               |                              |                     |            |
|---------------|------------------------------|---------------------|------------|
| EUT :         | MP3+G KARAOKE PLAYER WITH BT | Model Name. :       | SML2200    |
| Temperature : | 20 °C                        | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa                     | Test Voltage :      | DC 12V     |
| Test Mode :   | Mode 5                       | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Value Type |
|-----------|---------------|--------|----------------|----------|--------|------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |            |
| 4882.000  | 54.67         | 7.12   | 61.79          | 74       | -12.21 | peak       |
| 4882.000  | 45.47         | 7.12   | 52.59          | 54       | -1.41  | AVG        |
| 7323.000  | 40.76         | 9.84   | 50.6           | 74       | -23.4  | peak       |
| 7323.000  | 30.79         | 9.84   | 40.63          | 54       | -13.37 | AVG        |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

|               |                              |                     |          |
|---------------|------------------------------|---------------------|----------|
| EUT :         | MP3+G KARAOKE PLAYER WITH BT | Model Name. :       | SML2200  |
| Temperature : | 20 °C                        | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                     | Test Voltage :      | DC 12V   |
| Test Mode :   | Mode 5                       | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Value Type |
|-----------|---------------|--------|----------------|----------|--------|------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |            |
| 4882.000  | 52.75         | 7.12   | 59.87          | 74       | -14.13 | peak       |
| 4882.000  | 42.53         | 7.12   | 49.65          | 54       | -4.35  | AVG        |
| 7323.000  | 37.76         | 9.84   | 47.6           | 74       | -26.4  | peak       |
| 7323.000  | 27.94         | 9.84   | 37.78          | 54       | -16.22 | AVG        |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

|               |                              |                     |            |
|---------------|------------------------------|---------------------|------------|
| EUT :         | MP3+G KARAOKE PLAYER WITH BT | Model Name. :       | SML2200    |
| Temperature : | 20 °C                        | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa                     | Test Voltage :      | DC 12V     |
| Test Mode :   | Mode 6                       | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Value Type |
|-----------|---------------|--------|----------------|----------|--------|------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |            |
| 4960.000  | 53.69         | 7.12   | 60.81          | 74       | -13.19 | peak       |
| 4960.000  | 44.9          | 7.12   | 52.02          | 54       | -1.98  | AVG        |
| 7440.000  | 39.45         | 9.84   | 49.29          | 74       | -24.71 | peak       |
| 7440.000  | 30.72         | 9.84   | 40.56          | 54       | -13.44 | AVG        |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

|               |                              |                     |          |
|---------------|------------------------------|---------------------|----------|
| EUT :         | MP3+G KARAOKE PLAYER WITH BT | Model Name. :       | SML2200  |
| Temperature : | 20 °C                        | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                     | Test Voltage :      | DC 12V   |
| Test Mode :   | Mode 6                       | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Value Type |
|-----------|---------------|--------|----------------|----------|--------|------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |            |
| 4960.000  | 52.05         | 7.12   | 59.17          | 74       | -14.83 | peak       |
| 4960.000  | 43.36         | 7.12   | 50.48          | 54       | -3.52  | AVG        |
| 7440.000  | 38.88         | 9.84   | 48.72          | 74       | -25.28 | peak       |
| 7440.000  | 30.62         | 9.84   | 40.46          | 54       | -13.54 | AVG        |

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**Note:** Other emissions from 8G to 25 GHz are considered as ambient noise. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

The  $\pi/4$ -DQPSK modulation was the worst case and only the data of worst recorded in this report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.