FCC Radio Test Report

FCC ID: 2ABSTRPH0002

This report concerns: Original Grant

Project No.	:	1907C242
Equipment	:	WiFi Lock
Brand Name	:	Lynkd
Test Model	:	Alert Lock
Series Model	:	N/A
Applicant	:	RPH Engineering, LLC
Address	:	1601 N. State St. Suite 1A, LEHI, UT, United States, 84043
Manufacturer	:	Iton Technology Corp.
Address	:	7 Floor East, Building C, Shenzhen International Innovation Center, No. 1006 Shennan Road, Futian District, Shenzhen, China
Factory	:	Iton Technology Corp.
Address	:	7 Floor East, Building C, Shenzhen International Innovation Center, No. 1006 Shennan Road, Futian District, Shenzhen, China
Date of Receipt	:	Jul. 30, 2019
Date of Test	:	Jul. 30, 2019 ~ Oct. 17, 2019
Issued Date	:	Nov. 11, 2019
Report Version	:	R00
Test Sample	:	Engineering Sample No.: DG2019092634, DG2019092635
Standard(s)	:	FCC Part15, Subpart C (15.247) ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Rose. Liu

Prepared by : Rose Liu

Ethan Ma

Approved by : Ethan Ma

Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town,Dongguan, Guangdong, China.
Tel: +86-769-8318-3000
Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.
Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents Page

REPORT ISSUED HISTORY 6

1 . SUMMARY OF TEST RESULTS 7

1.1 TEST FACILITY 8

1.2 MEASUREMENT UNCERTAINTY 8

1.3 TEST ENVIRONMENT CONDITIONS 9

2 . GENERAL INFORMATION 10

2.1 GENERAL DESCRIPTION OF EUT 10

2.2 DESCRIPTION OF TEST MODES 12

2.3 PARAMETERS OF TEST SOFTWARE 13

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 14

2.5 SUPPORT UNITS 14

3 . AC POWER LINE CONDUCTED EMISSIONS TEST 15

3.1 LIMIT 15

3.2 TEST PROCEDURE 15

3.3 DEVIATION FROM TEST STANDARD 15

3.4 TEST SETUP 16

3.5 EUT OPERATING CONDITIONS 16

3.6 TEST RESULTS 16

4 . RADIATED EMISSION TEST 17

4.1 LIMIT 17

4.2 TEST PROCEDURE 18

4.3 DEVIATION FROM TEST STANDARD 18

4.4 TEST SETUP 19

4.5 EUT OPERATING CONDITIONS 20

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ 20

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ 20

4.8 TEST RESULTS - ABOVE 1000 MHZ 20

5 . NUMBER OF HOPPING FREQUENCY 21

5.1 LIMIT 21

5.2 TEST PROCEDURE 21

5.3 DEVIATION FROM STANDARD 21

5.4 TEST SETUP 21

Table of Contents Page

5.5 EUT OPERATION CONDITIONS 21
5.6 TEST RESULTS 21
6 . AVERAGE TIME OF OCCUPANCY 22
6.1 LIMIT 22
6.2 TEST PROCEDURE 22
6.3 DEVIATION FROM STANDARD 22
6.4 TEST SETUP 22
6.5 EUT OPERATION CONDITIONS 22
6.6 TEST RESULTS 22
7 . HOPPING CHANNEL SEPARATION MEASUREMENT 23
7.1 LIMIT 23
7.2 TEST PROCEDURE 23
7.3 DEVIATION FROM STANDARD 23
7.4 TEST SETUP 23
7.5 EUT OPERATION CONDITIONS 23
7.6 TEST RESULTS 23
8 . BANDWIDTH TEST 24
8.1 LIMIT 24
8.2 TEST PROCEDURE 24
8.3 DEVIATION FROM STANDARD 24
8.4 TEST SETUP 24
8.5 EUT OPERATION CONDITIONS 24
8.6 TEST RESULTS 24
9 . MAXIMUM OUTPUT POWER 25
9.1 LIMIT 25
9.2 TEST PROCEDURE 25
9.3 DEVIATION FROM STANDARD 25
9.4 TEST SETUP 25
9.5 EUT OPERATION CONDITIONS 25
9.6 TEST RESULTS 25
10 . CONDUCTED SPURIOUS EMISSION 26
10.1 LIMIT 26
10.2 TEST PROCEDURE 26

Table of Contents Page

10.3 DEVIATION FROM STANDARD 26
10.4 TEST SETUP 26
10.5 EUT OPERATION CONDITIONS 26
10.6 TEST RESULTS 26
11 . MEASUREMENT INSTRUMENTS LIST 27
12 . EUT TEST PHOTO 29
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS 33
APPENDIX B - RADIATED EMISSION - 9 KHZ-30 MHZ 36
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ 41
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ 44
APPENDIX E - NUMBER OF HOPPING FREQUENCY 69
APPENDIX F - AVERAGE TIME OF OCCUPANCY 71
APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT 76
APPENDIX H - BANDWIDTH 78
APPENDIX I - MAXIMUM OUTPUT POWER 80
APPENDIX J - CONDUCTED SPURIOUS EMISSION 82

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Nov. 11, 2019

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.247)				
Standard(s) Section	**Test Item**	**Test Result**	**Judgment**	**Remark**
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	------
15.247(d) 15.205(a) 15.209(a)	Radiated Emission	APPENDIX B APPENDIX C APPENDIX D	PASS	------
15.247 (a)(1)(iii)	Number of Hopping Frequency	APPENDIX E	PASS	------
15.247 (a)(1)(iii)	Average Time Of Occupancy	APPENDIX F	PASS	------
15.247(a)(1)	Hopping Channel Separation	APPENDIX G	PASS	------
15.247(a)(1)	Bandwidth	APPENDIX H	PASS	------
15.247(a)(1)	Maximum Output Power	APPENDIX I	PASS	------
15.247(d)	Conducted Spurious Emission	APPENDIX J	PASS	------
15.203	Antenna Requirement	------	PASS	Note(2)

Note:

(1) “N/A” denotes test is not applicable in this test report

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China
BTL's Test Firm Registration Number for FCC: 357015
BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))
The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 kHz ~ 30 MHz	2.32

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	V	3.79
		9kHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	4.88
		30MHz ~ 200MHz	H	4.14
		200MHz ~ 1,000MHz	V	4.62
		200MHz ~ 1,000MHz	H	4.80
		1GHz ~ 6GHz	-	4.58
		6GHz ~ 18GHz	-	5.18
		18GHz ~ 26.5GHz	-	3.80
		26.5GHz ~ 40GHz	-	4.30

C. Other Measurement:

Test Item	Uncertainty
Conducted Spurious Emission	2.67 dB
Hopping Channel Separation	53.46 MHz
Output Power	0.95 dB
Number of Hopping Frequency	53.46 MHz
Temperature	0.08 °C
Humidity	1.5%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	53%	DC 5V	Laughing Zhang
Radiated Emissions-9K-30MHz	25℃	60%	DC 3.7V	Laughing Zhang
Radiated Emissions-30 MHz to 1GHz	24℃	68%	DC 3.7V	Berton Luo
Radiated Emissions-Above 1000 MHz	26℃	65%	DC 3.7V	Sheldon Ou
Number of Hopping Frequency	25.1°C	61%	DC 3.7V	Jonas Chen
Average Time Of Occupancy	25.1°C	61%	DC 3.7V	Jonas Chen
Hopping Channel Separation	25.1°C	61%	DC 3.7V	Jonas Chen
Bandwidth	25.1°C	61%	DC 3.7V	Jonas Chen
Maximum Output Power	25.1°C	61%	DC 3.7V	Jonas Chen
Conducted Spurious Emission	25.1°C	61%	DC 3.7V	Jonas Chen

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	WiFi Lock
Brand Name	Lynkd
Test Model	Alert Lock
Series Model	N/A
Model Difference(s)	N/A
Software Version	R003588_05_03_01_0E
Hardware Version	R003475_05
Power Source	1# Battery supplied. Model: LP573040 2# Supplied from USB port.
Power Rating	1# DC 3.7V 700mAh 2# DC 5V
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Technology	GFSK, π/4-DQPSK, 8-DPSK
Bit Rate of Transmitter	1/2/3Mbps
Max. Output Power	8.02 dBm (0.0063 W) For 1Mbps 10.67 dBm (0.0117 W) For 3Mbps

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3 Table for Filed Antenna:

.

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Printed	N/A	2

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode **NOTE (1)**
Mode 2	TX Mode Channel 78 _3Mbps

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 2	TX Mode Channel 78 _3Mbps

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 2	TX Mode Channel 78 _3Mbps

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX Mode **NOTE (1)**

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode **NOTE (1)**

Note:

(1) The measurements are performed at the high, middle, low available channels.

(2) The measurements for Hopping Channel Separation, Bandwidth and Maximum Output Power were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented.

(3) For radiated emission above 1 GHz test, 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.

2.3 PARAMETERS OF TEST SOFTWARE

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test Software	espRFTool		
Frequency (MHz)	2402	2441	2480
Parameters(1Mbps)	8	8	8
Parameters(3Mbps)	8	8	8

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

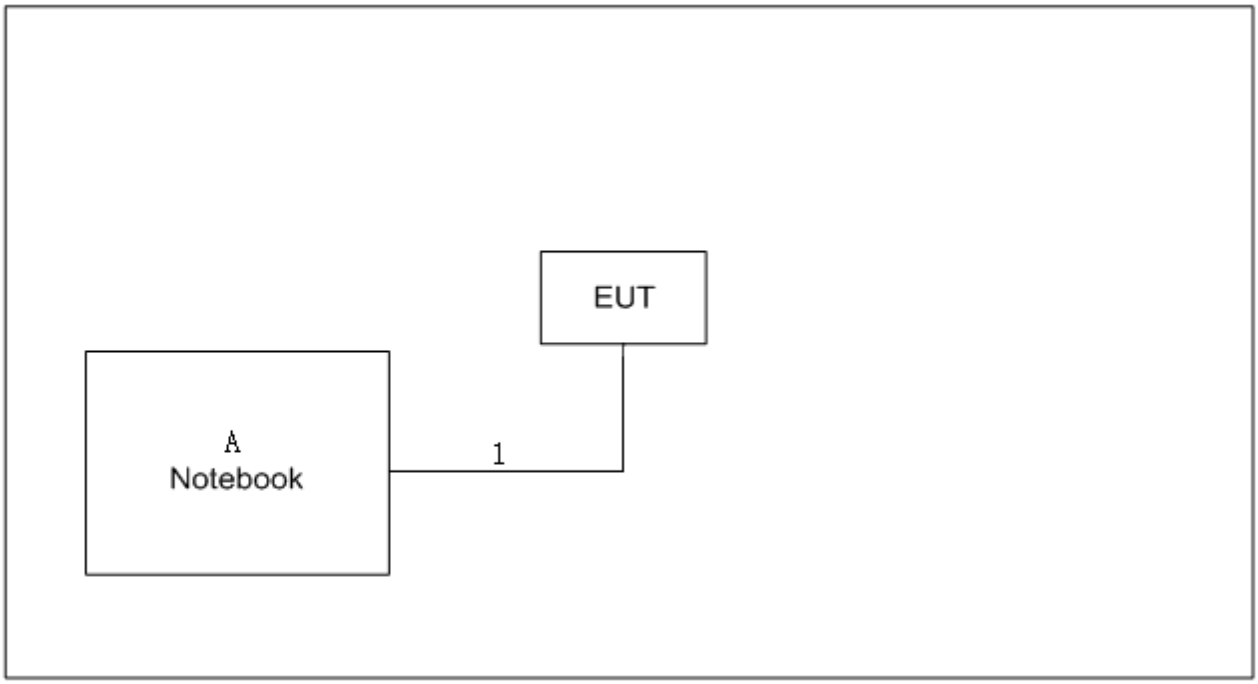

2.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	USB Cable	NO	NO	0.8m

3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

(1) The tighter limit applies at the band edges.

(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

d. LISN at least 80 cm from nearest part of EUT chassis.

e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

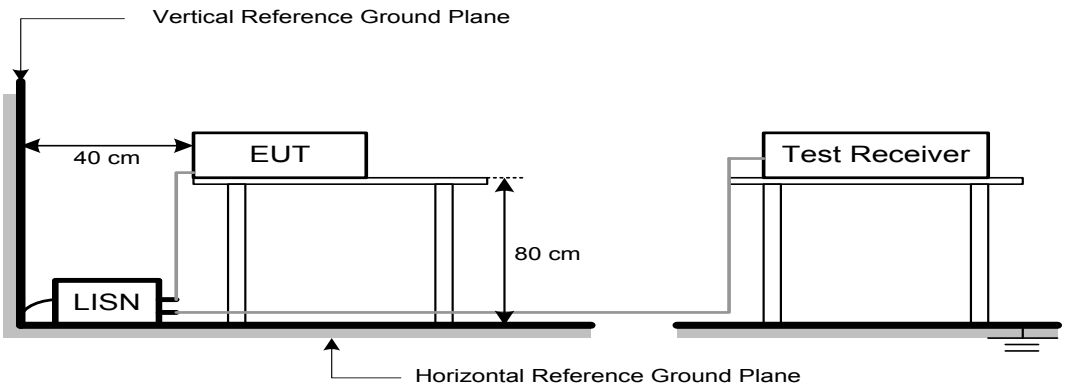

3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting data or hopping on mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

(1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "*" marked in AVG Mode column of Interference Voltage Measured.

(2) Measuring frequency range from 150 kHz to 30 MHz.

4. RADIATED EMISSION TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.
LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:
(1) The limit for radiated test was performed according to FCC PART 15C.
(2) The tighter limit applies at the band edges.
(3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1 MHz VBW 3 MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

4.2 TEST PROCEDURE

a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn‘t perform. (below 1 GHz)
h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn‘t perform. (above 1 GHz)
i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

9 kHz-30 MHz

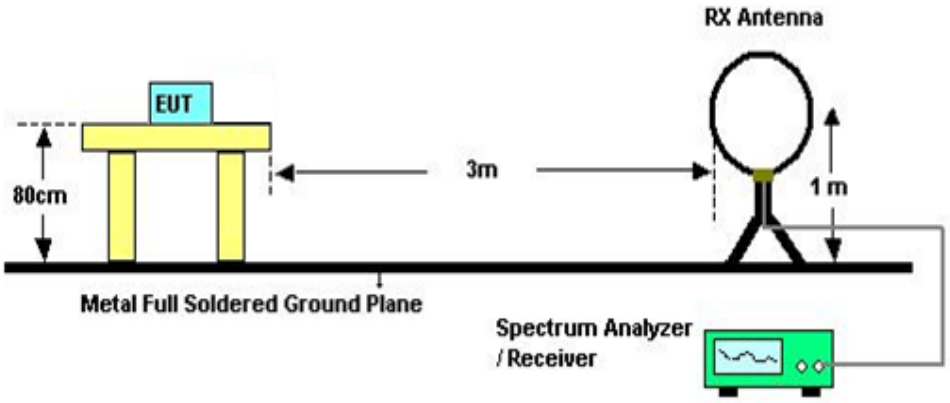

30 MHz to 1 GHz

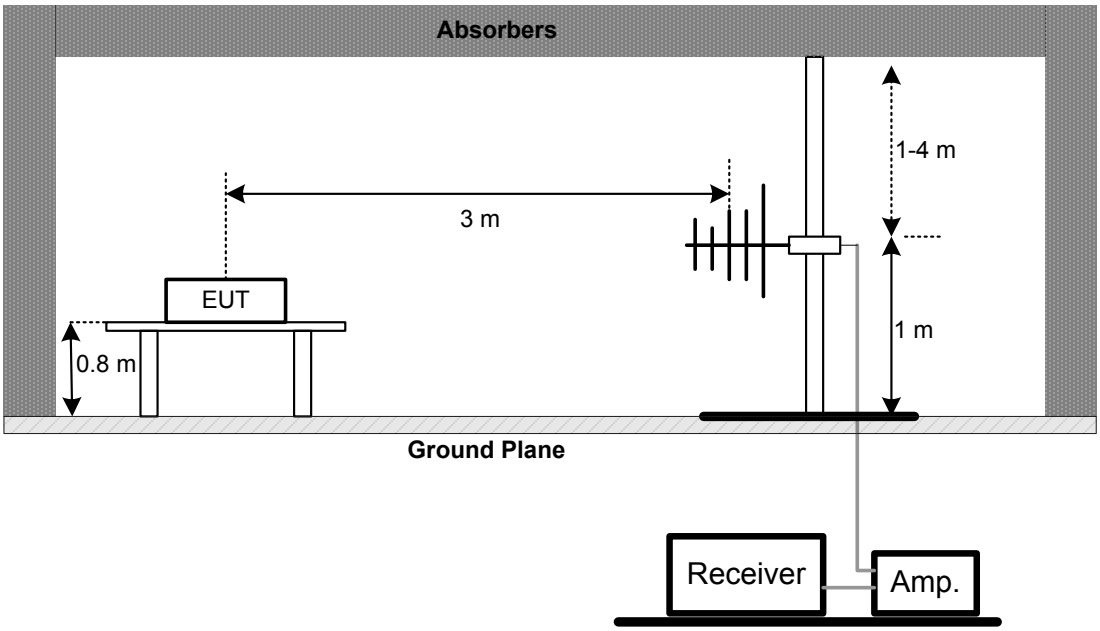

Above 1 GHz

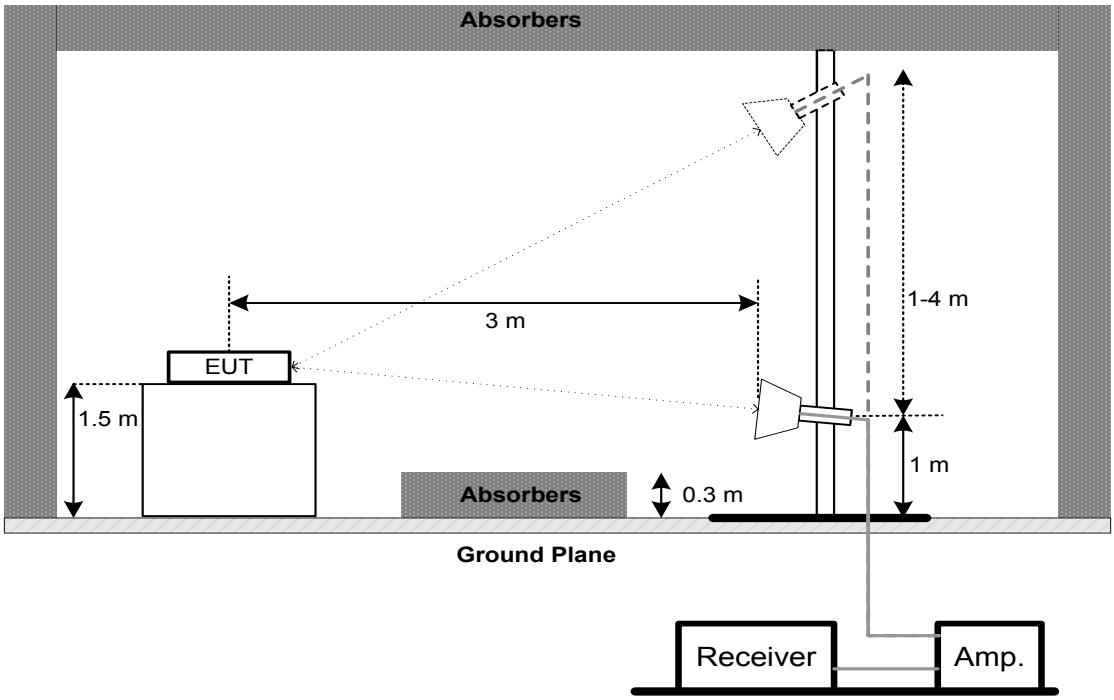

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 kHz TO 30 MHz

Please refer to the APPENDIX B

Remark:

(1) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
(2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

(1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. NUMBER OF HOPPING FREQUENCY

5.1 LIMIT

FCC Part15, Subpart C (15.247)	
Section	Test Item
15.247(a)(1)(iii)	Number of Hopping Frequency

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
b. Spectrum Setting: RBW=100 kHz, VBW=100 kHz, Sweep time = Auto.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Please refer to the APPENDIX E

6. AVERAGE TIME OF OCCUPANCY

6.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(1)(iii)	Average Time of Occupancy	0.4sec

6.2 TEST PROCEDURE

a. The transmitter output (antenna port) was connected to the spectrum analyzer
b. Set RBW of spectrum analyzer to 1 MHz and VBW to 1 MHz
c. Use a video trigger with the trigger level set to enable triggering only on full pulses
d. Sweep Time is more than once pulse time
e. Set the center frequency on any frequency would be measure and set the frequency span to zero span
f. Measure the maximum time duration of one single pulse
g. Set the EUT for DH1, DH3 and DH5 packet transmitting
h. Measure the maximum time duration of one single pulse
i. DH1 Packet permit maximum 1600 / 79 /2 = 10.12 hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 10.12 x 31.6 = 320 within 31.6 seconds
j. DH3 Packet permit maximum 1600 / 79 / 4 = 5.06 hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 5.06 x 31.6 = 160 within 31.6 seconds
k. DH5 Packet permit maximum 1600/ 79 / 6 = 3.37 hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 3.37 x 31.6 = 106.6 within 31.6 seconds

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

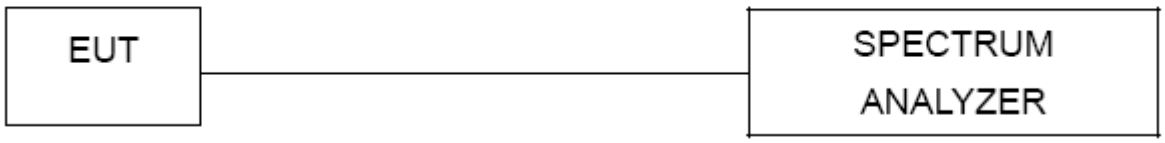

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

Please refer to the APPENDIX F

7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
b. Span = wide enough to capture the peaks of two adjacent channels
Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span
Video (or Average) Bandwidth (VBW) ≥ RBW
Sweep = Auto
Detector function = Peak
Trace = Max Hold

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

Please refer to the APPENDIX G

8. BANDWIDTH TEST

8.1 LIMIT

FCC Part15, Subpart C (15.247)	
Section	Test Item
15.247(a)(1)	Bandwidth

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
b. Spectrum Setting: RBW= 30 kHz, VBW=100 kHz, Sweep Time = Auto.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

Please refer to the APPENDIX H

9. MAXIMUM OUTPUT POWER

9.1 LIMIT

FCC Part15 , Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(1)	Maximum Output Power	0.125 Watt or 21 dBm

Note: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB band width of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
b. Spectrum Setting: RBW= 1 MHz/3 MHz, VBW= 1 MHz/3 MHz, Sweep time = Auto.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

Please refer to the APPENDIX I

10. CONDUCTED SPURIOUS EMISSION

10.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

10.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
b. Spectrum Setting: RBW= 100 kHz, VBW=100 kHz, Sweep time = Auto.

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP

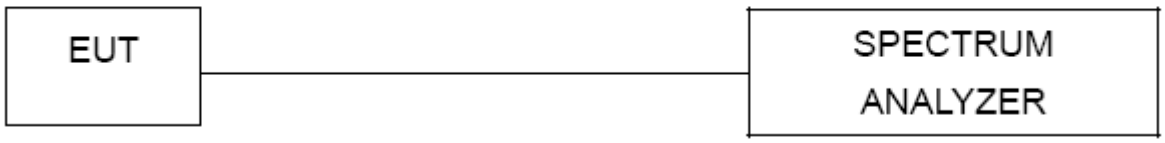

10.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

10.6 TEST RESULTS

Please refer to the APPENDIX J

11. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 10, 2020
2	LISN	EMCO	3816/2	52765	Mar. 10, 2020
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	May. 19, 2020
4	50Ω Terminator	SHX	TF5-3	15041305	Mar. 10, 2020
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 12, 2020

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Jan. 15, 2020
2	Cable	N/A	RG 213/U	C-102	May 31, 2020
3	EMI Test Receiver	R&S	ESCI	100895	Mar. 10, 2020
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 09, 2020
2*	Amplifier	HP	8447D	2944A09673	Aug. 11, 2021
3	Receiver	Agilent	N9038A	MY52130039	Aug. 03, 2020
4	Cable	emci	LMR-400(30MHz-1GHz)(8m+5m)	N/A	May 24, 2020
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 09, 2020
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 23, 2020
3	Amplifier	Agilent	8449B	3008A02333	Mar. 10, 2020
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 10, 2020
5	Receiver	Agilent	N9038A	MY52130039	Aug. 03, 2020
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	mitron	B10-01-01-12M	18072744	Jun. 29, 2020
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Number of Hopping Frequency & Average Time of Occupancy & Hopping Channel Separation Measurement & Bandwidth & Maximum Output Power & Antenna Conducted Spurious Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 03, 2020

Remark "N/A" denotes no model name, serial no. or calibration specified.
"*" calibration period of equipment list is three year.
Except * item, all calibration period of equipment list is one year.

12. EUT TEST PHOTO

AC power line conducted emissions test

Radiated Emissions Test Photos

9 kHz to 30 MHz

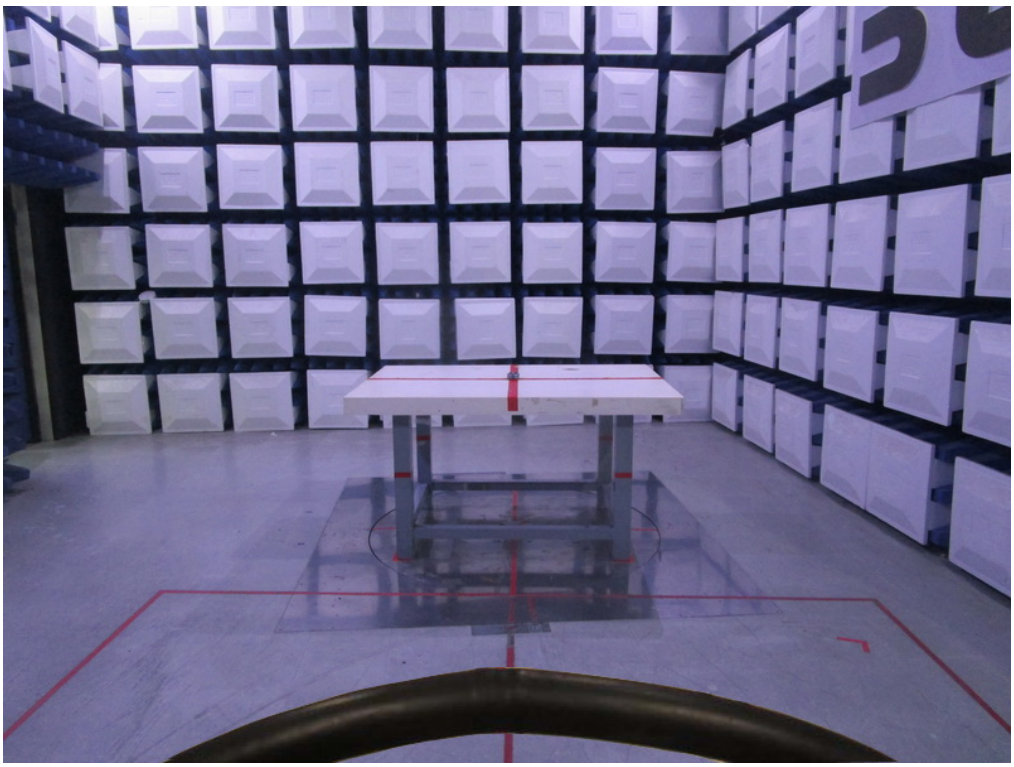

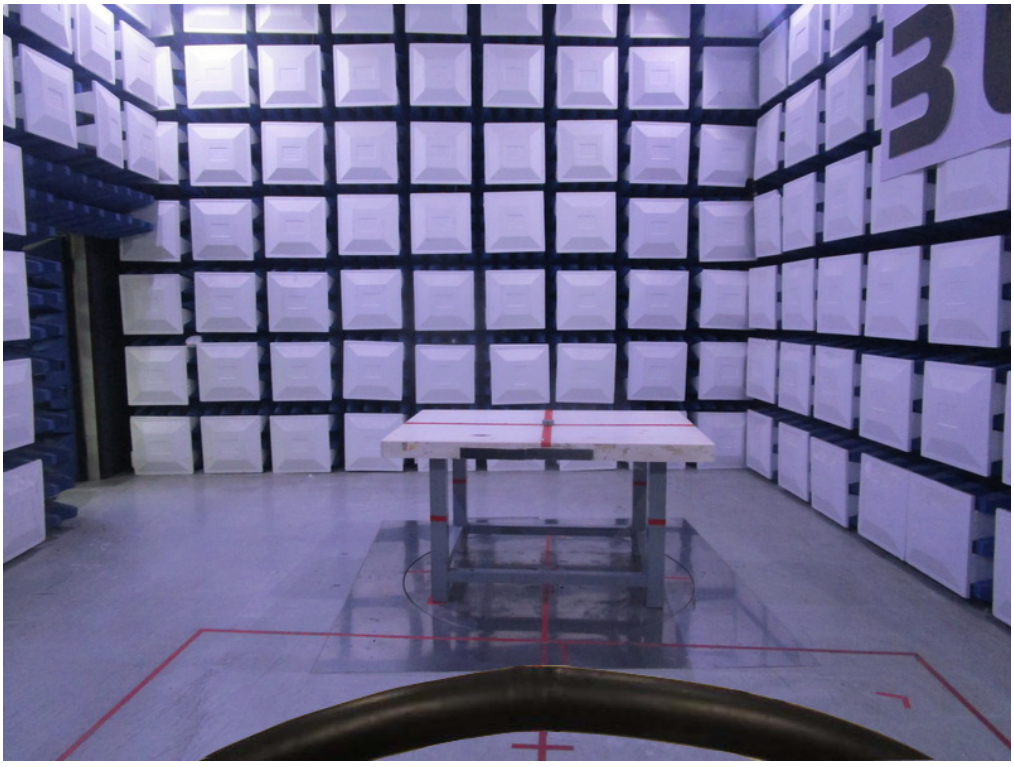

Radiated Emissions Test Photos

30 MHz to 1000 MHz

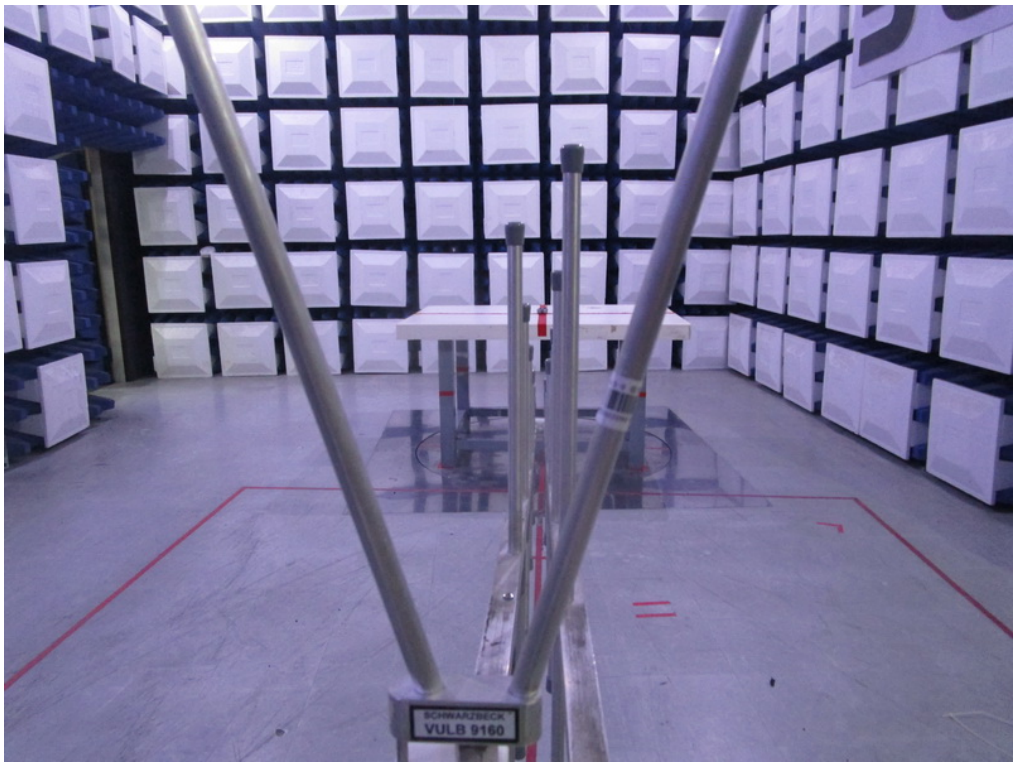

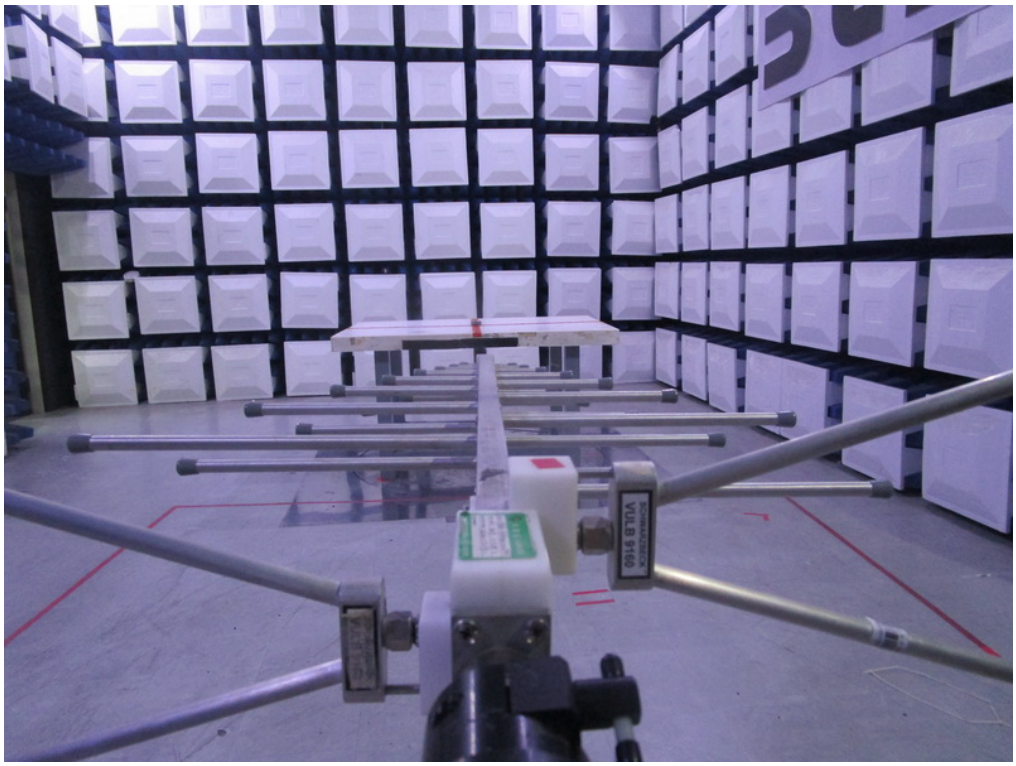

Radiated Emissions Test Photos

Above 1 GHz

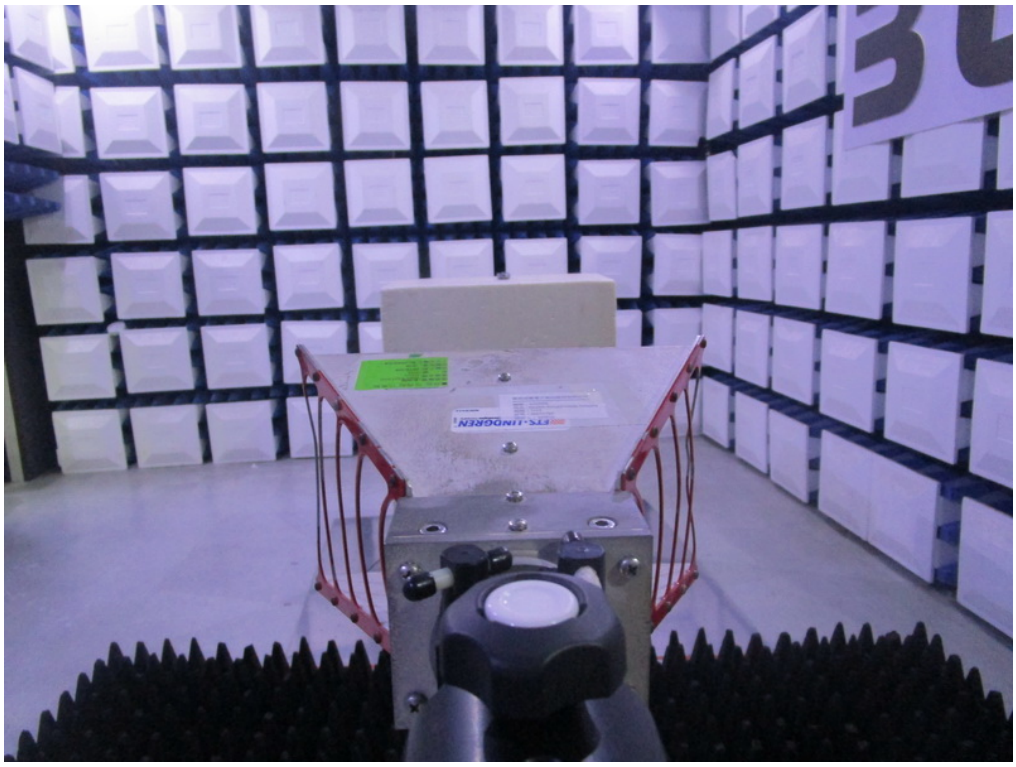

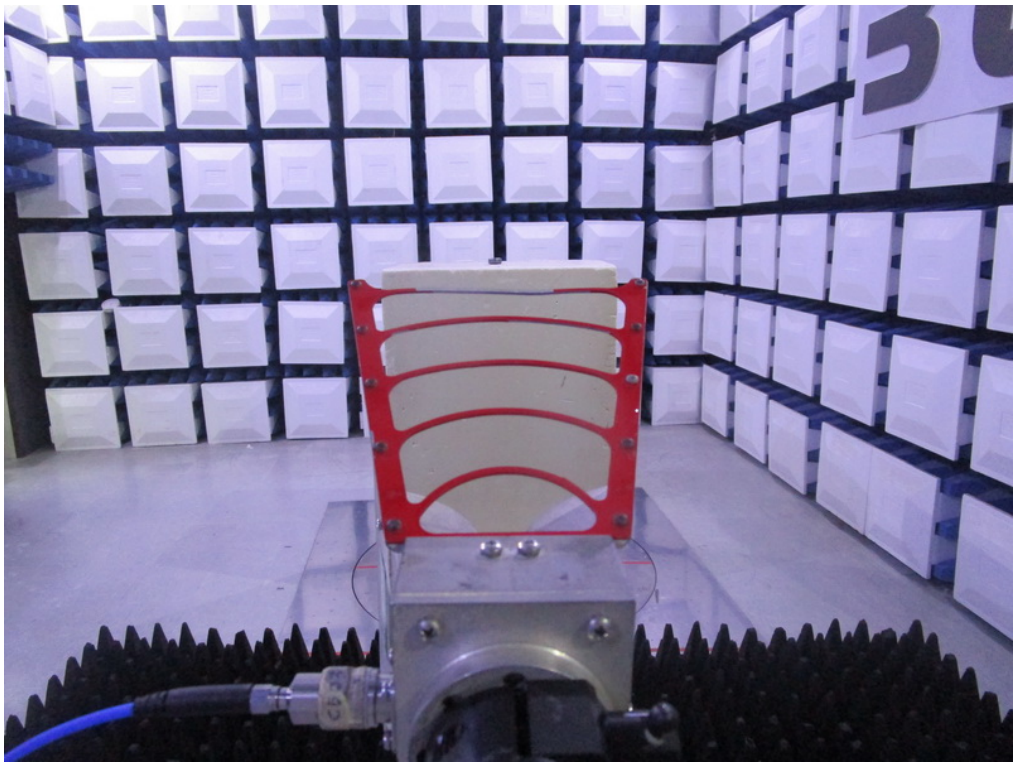

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode:	TX Mode Channel 78 _3Mbps

Line

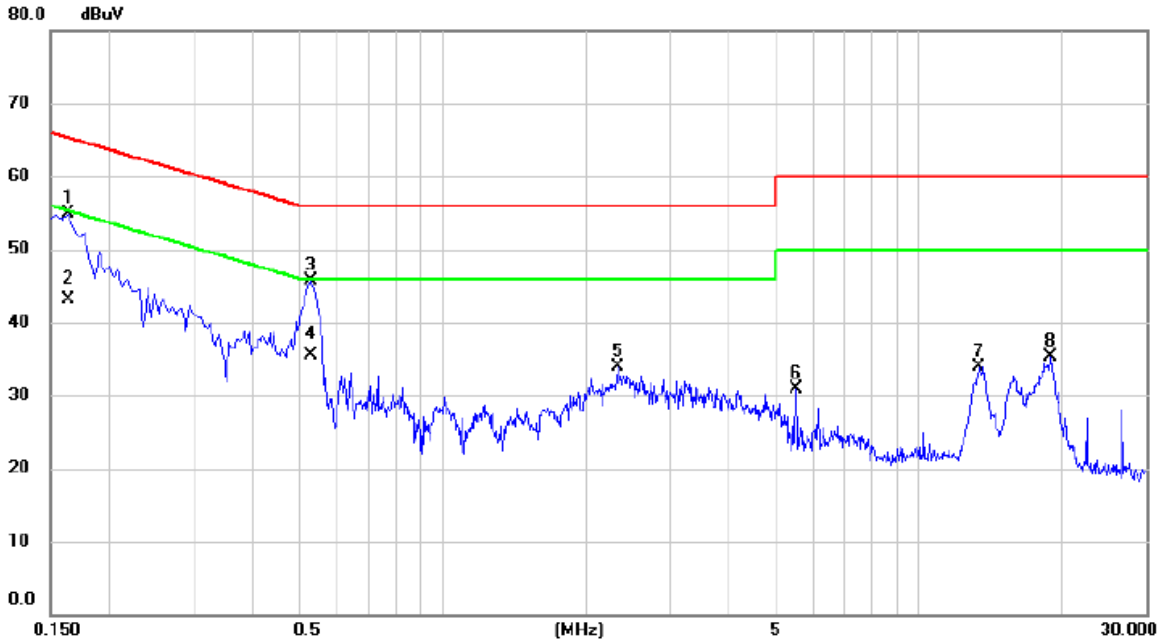

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1635	45.12	9.82	54.94	65.28	-10.34	peak	
2		0.1635	33.35	9.82	43.17	55.28	-12.11	AVG	
3	*	0.5280	35.81	9.88	45.69	56.00	-10.31	peak	
4		0.5280	25.65	9.88	35.53	46.00	-10.47	AVG	
5		2.3280	23.89	10.02	33.91	56.00	-22.09	peak	
6		5.5275	20.64	10.23	30.87	60.00	-29.13	peak	
7		13.3935	23.30	10.67	33.97	60.00	-26.03	peak	
8		18.9240	24.22	11.10	35.32	60.00	-24.68	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX Mode Channel 78 _3Mbps

Neutral

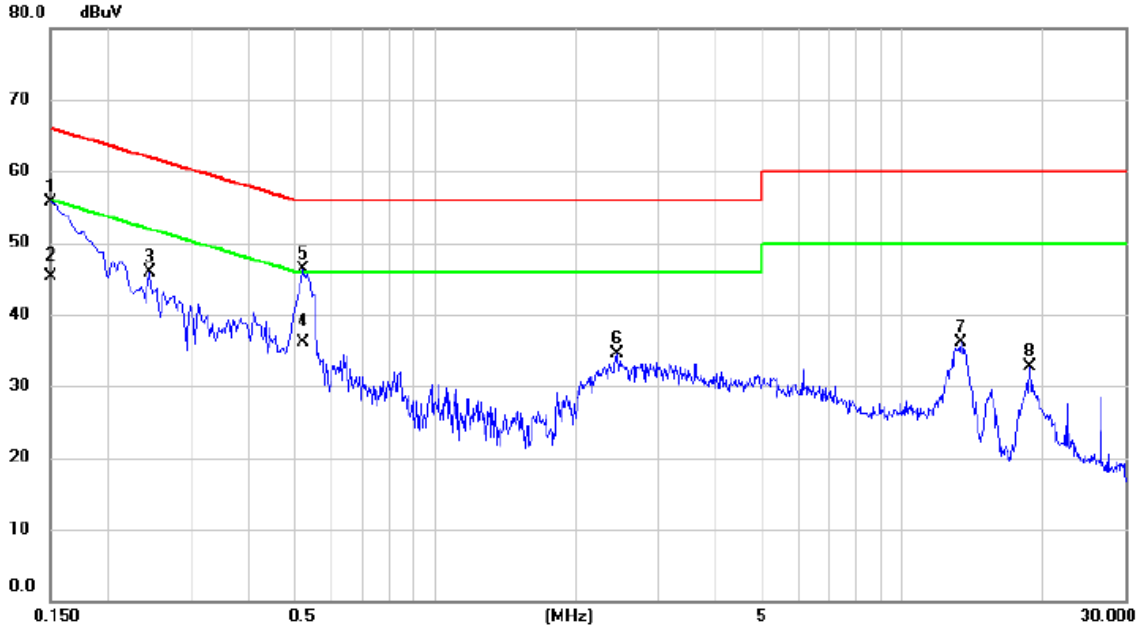

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	45.82	9.91	55.73	66.00	-10.27	peak	
2		0.1500	35.32	9.91	45.23	56.00	-10.77	AVG	
3		0.2445	36.04	9.93	45.97	61.94	-15.97	peak	
4		0.5233	25.98	10.03	36.01	46.00	-9.99	AVG	
5	*	0.5234	36.21	10.03	46.24	56.00	-9.76	peak	
6		2.4540	24.22	10.21	34.43	56.00	-21.57	peak	
7		13.3755	25.19	10.98	36.17	60.00	-23.83	peak	
8		18.7665	21.23	11.38	32.61	60.00	-27.39	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ-30 MHZ

Test Mode:	TX Mode Channel 78 _3Mbps

Ant 0°

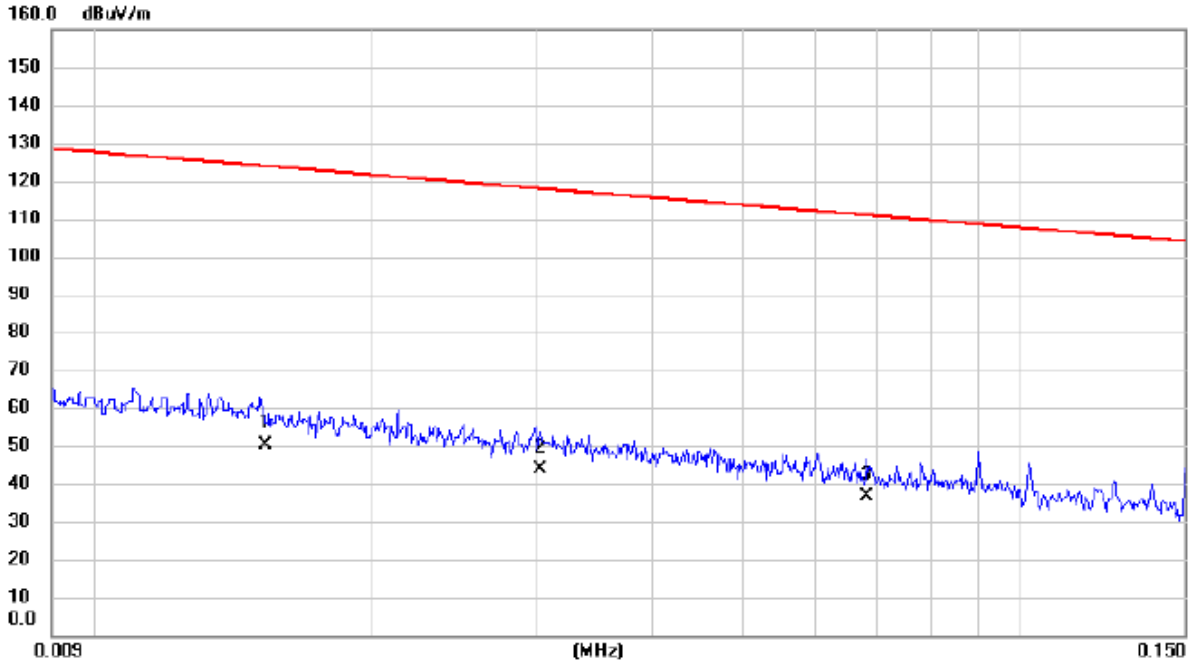

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0153	34.81	15.23	50.04	123.91	-73.87	AVG	
2		0.0303	29.87	13.85	43.72	117.98	-74.26	AVG	
3		0.0680	22.83	13.64	36.47	110.95	-74.48	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX Mode Channel 78 _3Mbps

Ant 0°

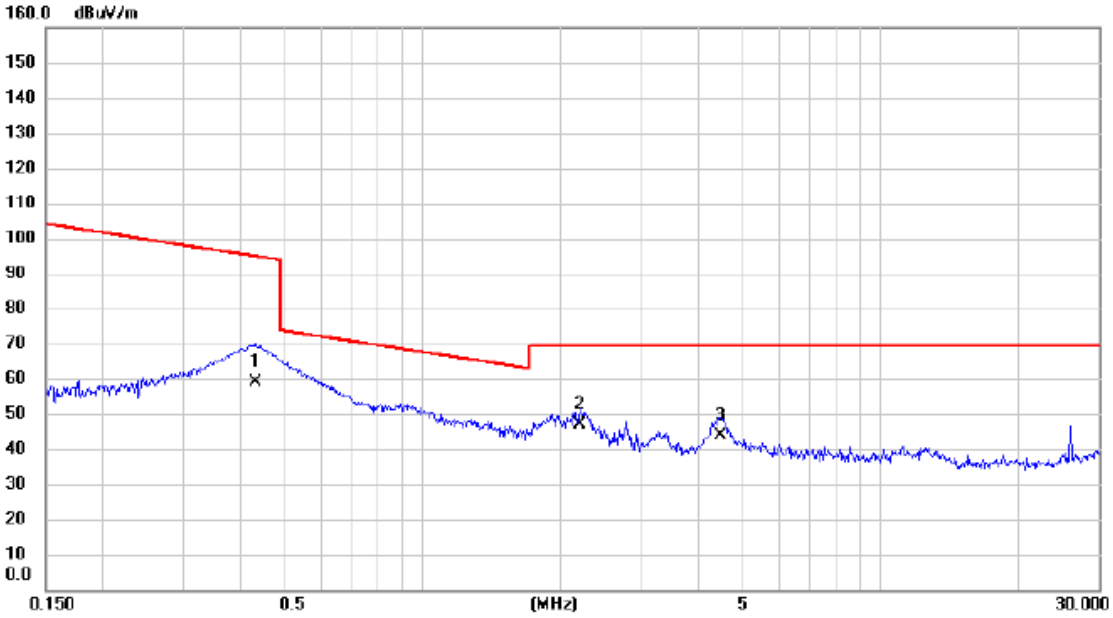

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.4305	45.81	13.23	59.04	94.92	-35.88	AVG	
2	*	2.2015	35.26	11.70	46.96	69.54	-22.58	QP	
3		4.4777	32.77	10.90	43.67	69.54	-25.87	QP	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX Mode Channel 78 _3Mbps

Ant 90°

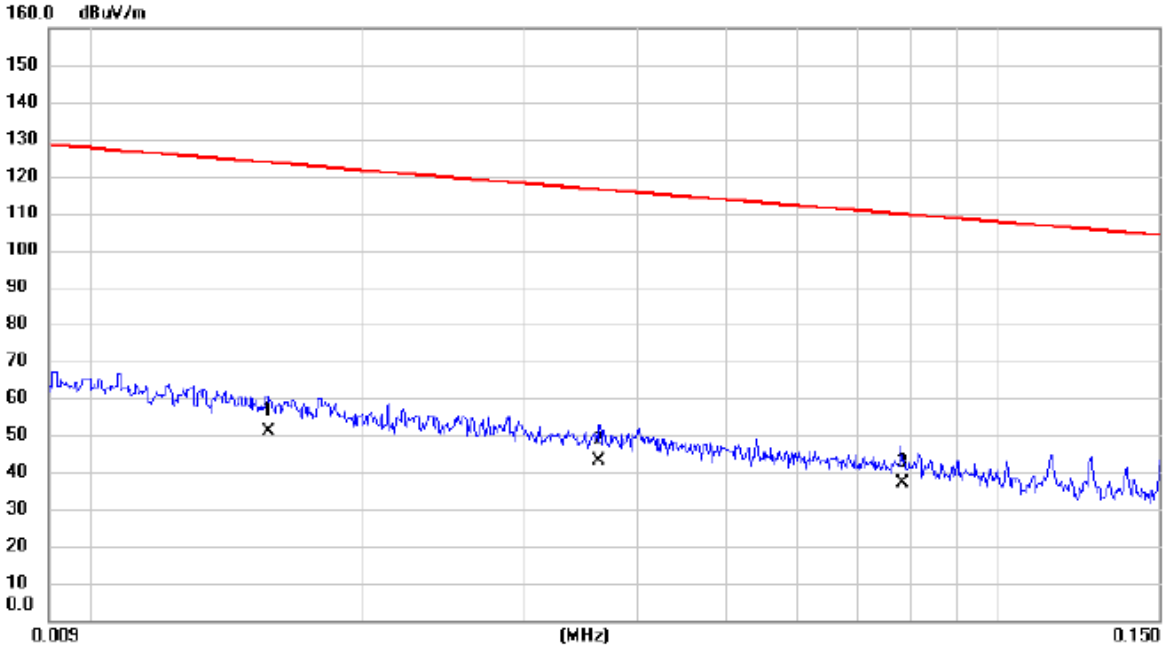

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0157	35.84	15.11	50.95	123.69	-72.74	AVG	
2		0.0363	29.24	13.88	43.12	116.41	-73.29	AVG	
3		0.0781	23.31	13.54	36.85	109.75	-72.90	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX Mode Channel 78 _3Mbps

Ant 90°

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.4305	45.14	13.23	58.37	94.92	-36.55	AVG	
2		2.1552	27.36	11.73	39.09	69.54	-30.45	QP	
3	*	4.4540	29.86	10.90	40.76	69.54	-28.78	QP	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode:	TX Mode Channel 78 _3Mbps

Vertical

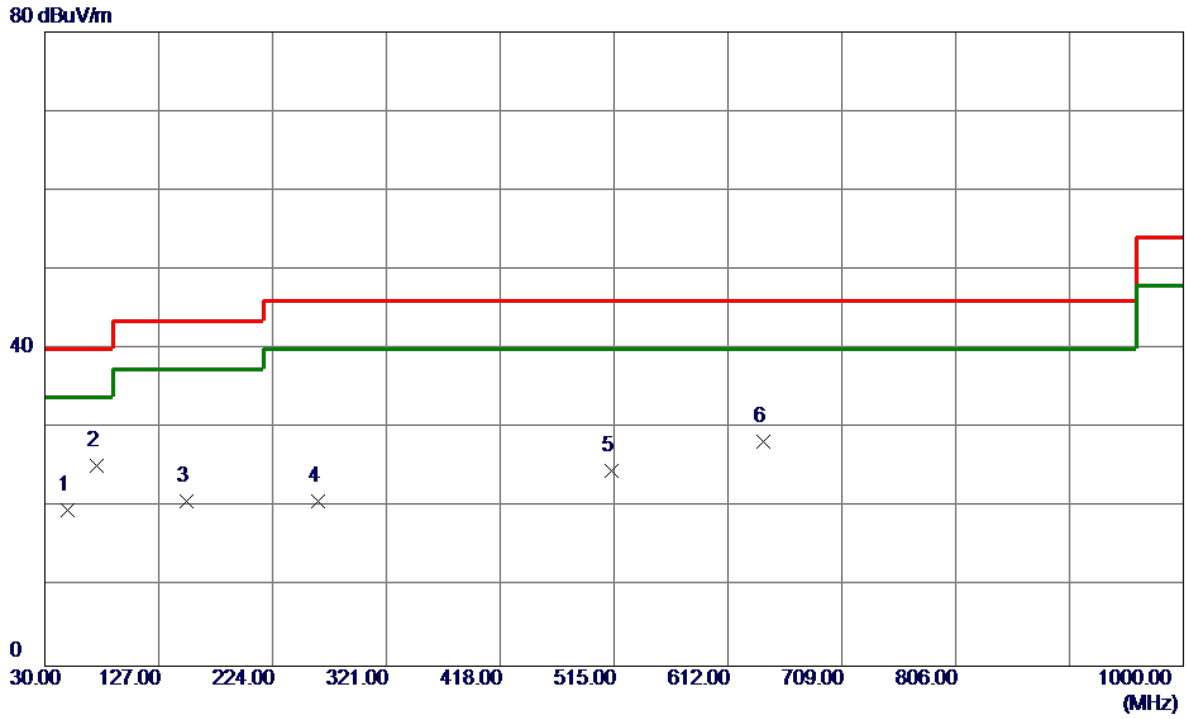

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	49.4000	33.72	-13.98	19.74	40.00	-20.26	Peak	
2 *	74.6200	42.44	-17.12	25.32	40.00	-14.68	Peak	
3	150.7650	33.12	-12.25	20.87	43.50	-22.63	Peak	
4	262.3150	33.59	-12.83	20.76	46.00	-25.24	Peak	
5	513.0600	32.33	-7.63	24.70	46.00	-21.30	Peak	
6	642.0700	33.22	-4.89	28.33	46.00	-17.67	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX Mode Channel 78 _3Mbps

Horizontal

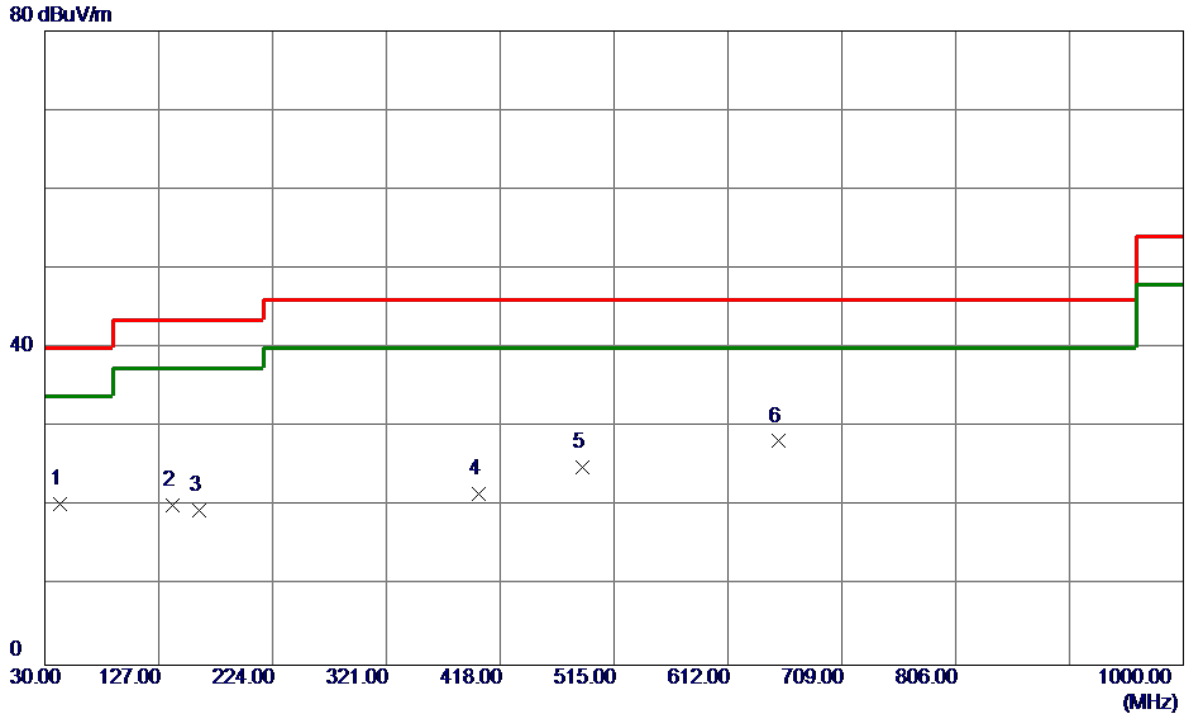

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	42.6100	34.83	-14.51	20.32	40.00	-19.68	Peak	
2	138.6400	33.13	-12.96	20.17	43.50	-23.33	Peak	
3	161.9200	30.80	-11.34	19.46	43.50	-24.04	Peak	
4	400.0550	31.18	-9.54	21.64	46.00	-24.36	Peak	
5	487.8400	32.81	-7.85	24.96	46.00	-21.04	Peak	
6 *	654.6800	32.89	-4.65	28.24	46.00	-17.76	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode:	TX 2402 MHz _CH00_1Mbps

Vertical

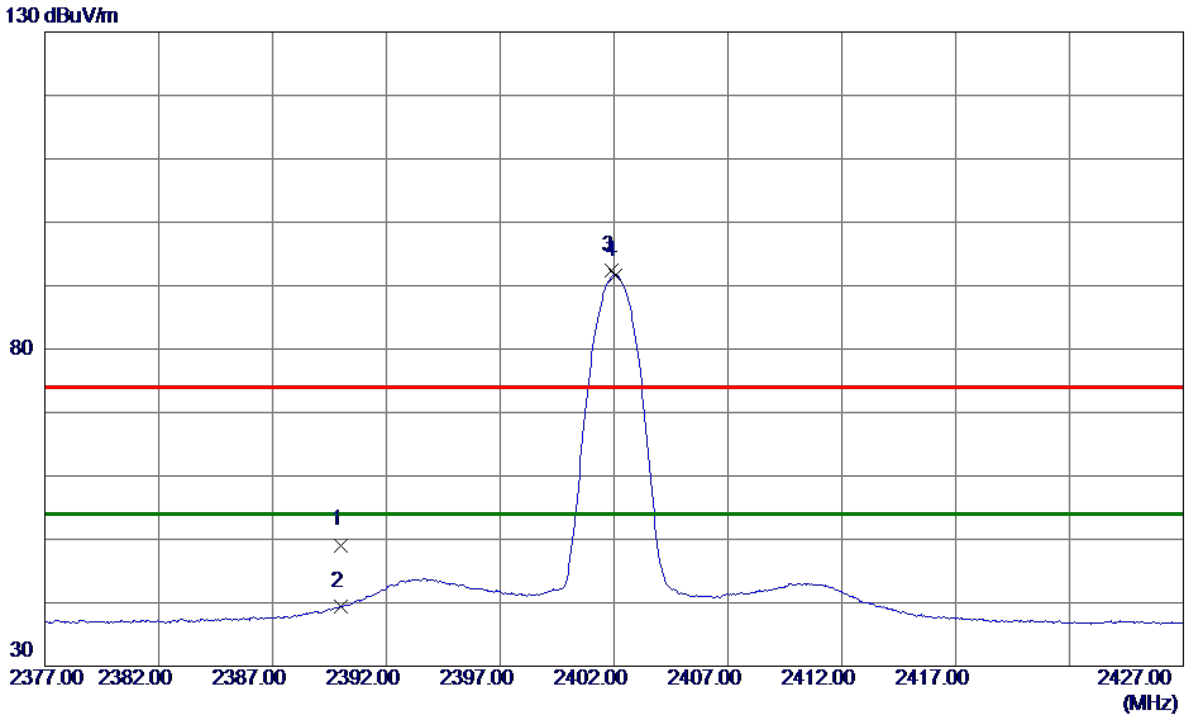

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	41.54	7.56	49.10	74.00	-24.90	Peak	
2	2390.0000	31.82	7.56	39.38	54.00	-14.62	AVG	
3	2401.9000	84.78	7.60	92.38	74.00	18.38	Peak	No Limit
4 *	2402.0500	84.04	7.60	91.64	54.00	37.64	AVG	No Limit

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_1Mbps

Vertical

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3202.6459	46.34	0.30	46.64	54.00	-7.36	AVG	
2	3202.7629	49.41	0.30	49.71	74.00	-24.29	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_1Mbps

Horizontal

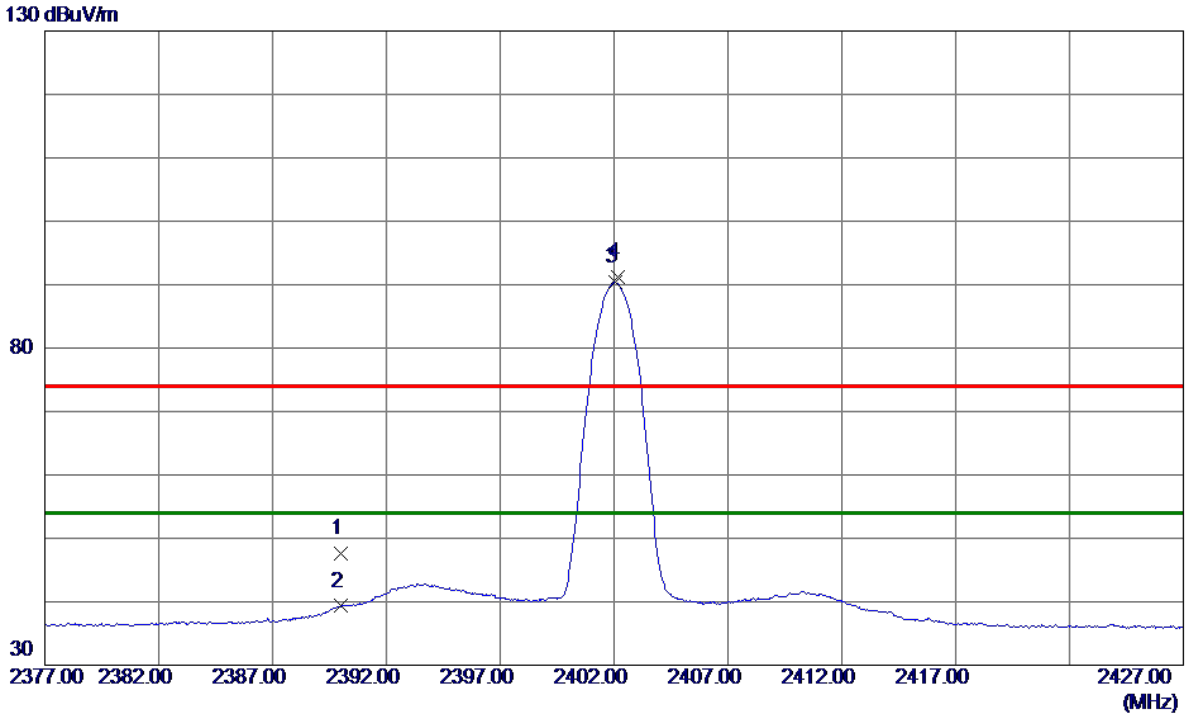

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	40.06	7.56	47.62	74.00	-26.38	Peak	
2	2390.0000	31.74	7.56	39.30	54.00	-14.70	AVG	
3 *	2402.0500	82.73	7.60	90.33	54.00	36.33	AVG	No Limit
4	2402.1750	83.61	7.61	91.22	74.00	17.22	Peak	No Limit

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_1Mbps

Horizontal

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	3202.4370	51.64	0.30	51.94	74.00	-22.06	Peak	
2 *	3202.6370	49.61	0.30	49.91	54.00	-4.09	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_1Mbps

Vertical

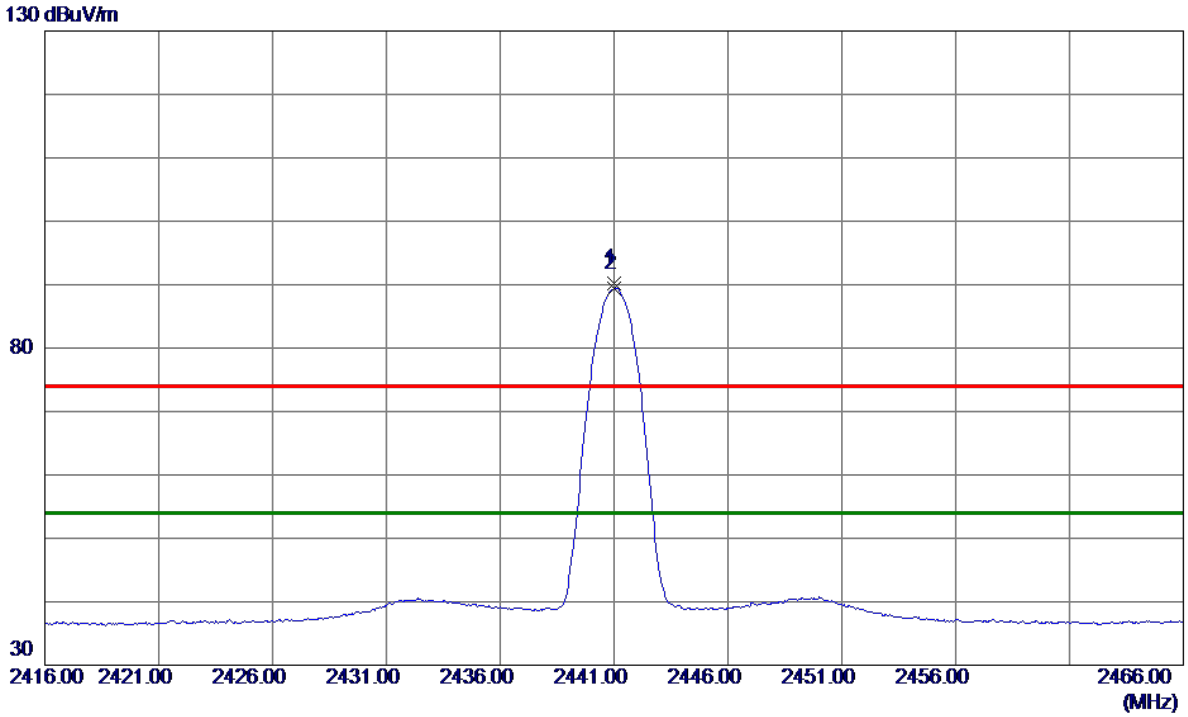

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2441.0250	82.51	7.73	90.24	74.00	16.24	Peak	No Limit
2 *	2441.0250	81.71	7.73	89.44	54.00	35.44	AVG	No Limit

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_1Mbps

Vertical

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	3254.5209	48.48	0.37	48.85	74.00	-25.15	Peak	
2 *	3254.6700	45.63	0.37	46.00	54.00	-8.00	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_1Mbps

Horizontal

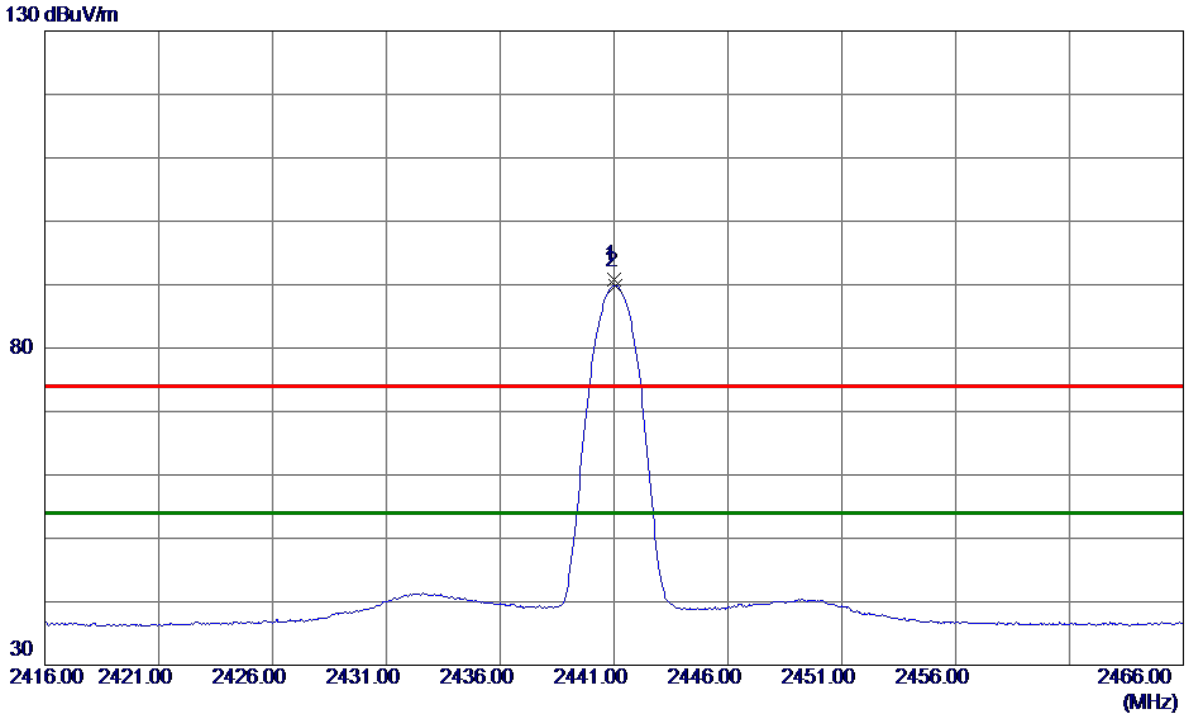

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2441.0000	83.01	7.73	90.74	74.00	16.74	Peak	No Limit
2 *	2441.0750	82.16	7.73	89.89	54.00	35.89	AVG	No Limit

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_1Mbps

Horizontal

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3254.6220	48.45	0.37	48.82	54.00	-5.18	AVG	
2	3254.6450	50.29	0.37	50.66	74.00	-23.34	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_1Mbps

Vertical

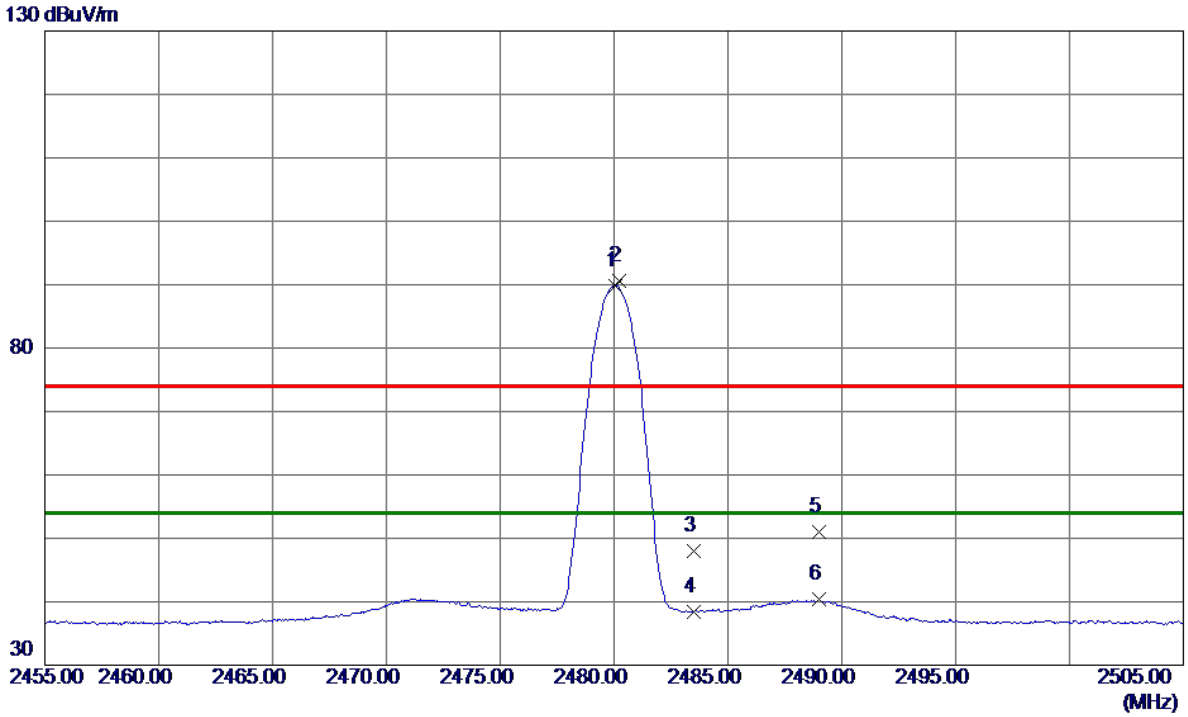

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2480.0500	82.02	7.86	89.88	54.00	35.88	AVG	No Limit
2	2480.2000	82.68	7.86	90.54	74.00	16.54	Peak	No Limit
3	2483.5000	40.16	7.88	48.04	74.00	-25.96	Peak	
4	2483.5000	30.58	7.88	38.46	54.00	-15.54	AVG	
5	2488.9750	43.04	7.89	50.93	74.00	-23.07	Peak	
6	2488.9750	32.51	7.89	40.40	54.00	-13.60	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_1Mbps

Vertical

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	3306.5700	47.88	0.44	48.32	74.00	-25.68	Peak	
2 *	3306.6020	44.62	0.44	45.06	54.00	-8.94	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_1Mbps

Horizontal

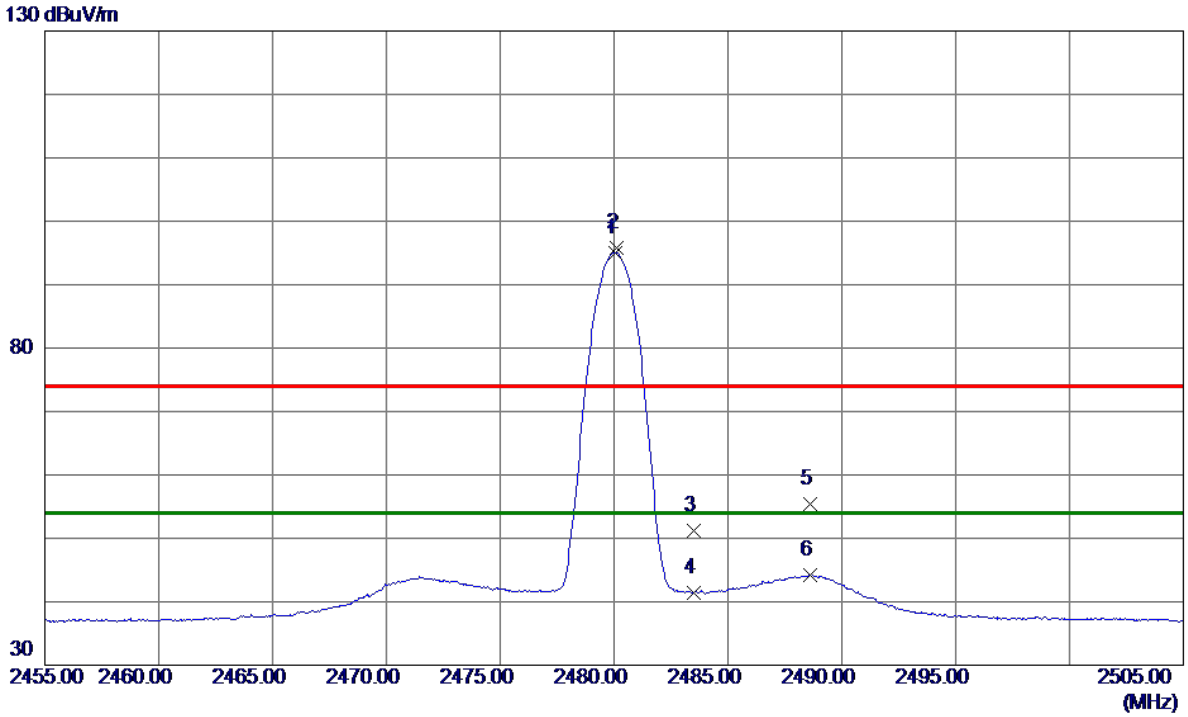

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2480.0500	87.22	7.86	95.08	54.00	41.08	AVG	No Limit
2	2480.1000	87.94	7.86	95.80	74.00	21.80	Peak	No Limit
3	2483.5000	43.27	7.88	51.15	74.00	-22.85	Peak	
4	2483.5000	33.47	7.88	41.35	54.00	-12.65	AVG	
5	2488.6000	47.45	7.89	55.34	74.00	-18.66	Peak	
6	2488.6000	36.39	7.89	44.28	54.00	-9.72	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_1Mbps

Horizontal

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3306.6630	48.03	0.44	48.47	54.00	-5.53	AVG	
2	3306.7280	49.30	0.44	49.74	74.00	-24.26	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_3Mbps

Vertical

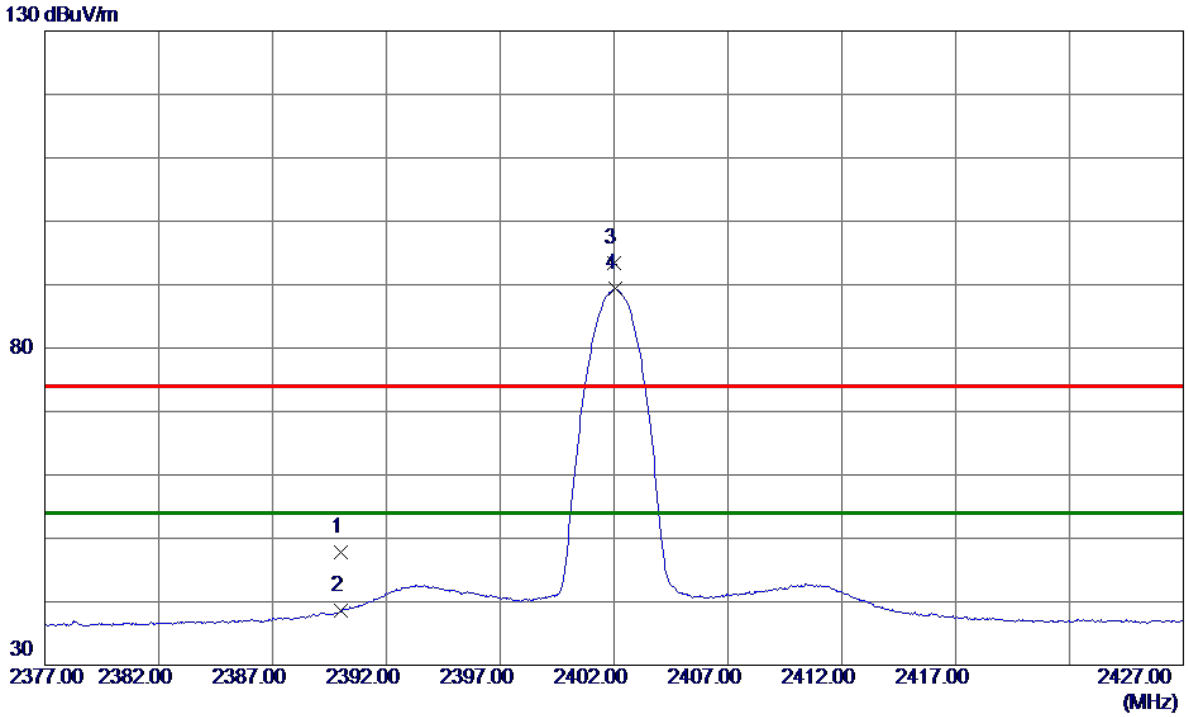

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	40.25	7.56	47.81	74.00	-26.19	Peak	
2	2390.0000	31.03	7.56	38.59	54.00	-15.41	AVG	
3	2401.9750	85.86	7.60	93.46	74.00	19.46	Peak	No Limit
4 *	2402.0750	81.71	7.60	89.31	54.00	35.31	AVG	No Limit

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_3Mbps

Vertical

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3202.6140	47.00	0.30	47.30	54.00	-6.70	AVG	
2	3202.6510	50.30	0.30	50.60	74.00	-23.40	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_3Mbps

Horizontal

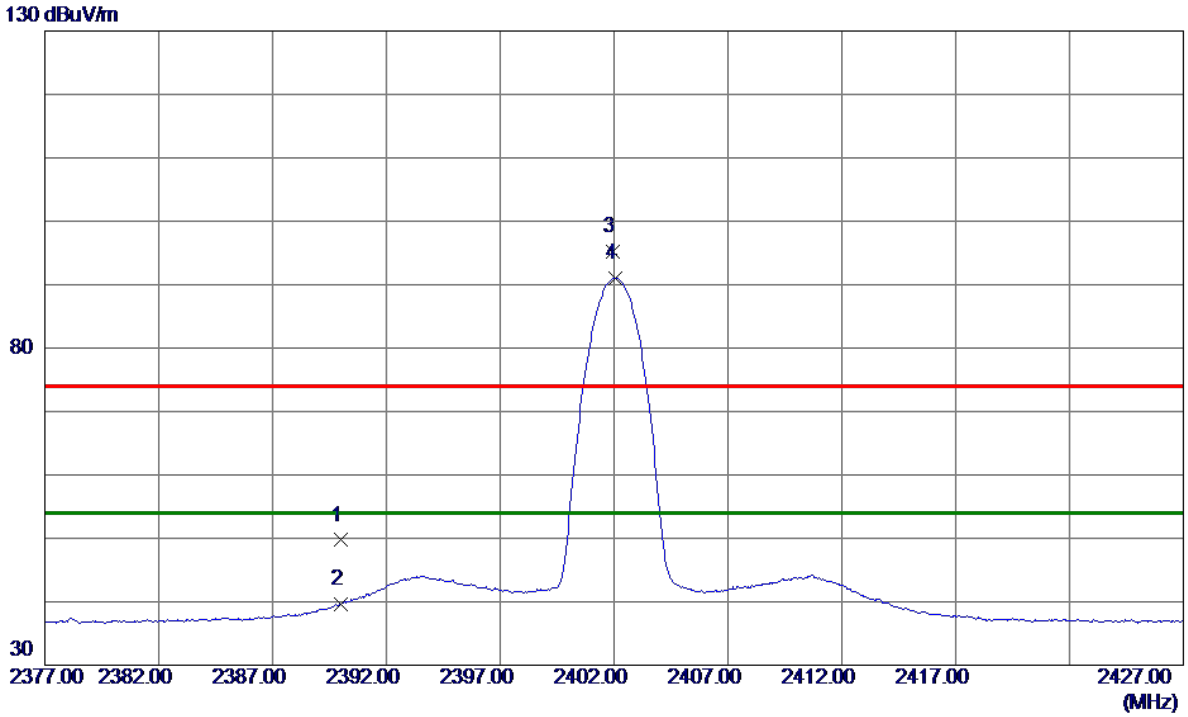

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	42.14	7.56	49.70	74.00	-24.30	Peak	
2	2390.0000	32.12	7.56	39.68	54.00	-14.32	AVG	
3	2401.9250	87.63	7.60	95.23	74.00	21.23	Peak	No Limit
4 *	2402.0750	83.46	7.60	91.06	54.00	37.06	AVG	No Limit

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2402 MHz _CH00_3Mbps

Horizontal

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3202.6610	49.95	0.30	50.25	54.00	-3.75	AVG	
2	3202.7130	51.76	0.30	52.06	74.00	-21.94	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_3Mbps

Vertical

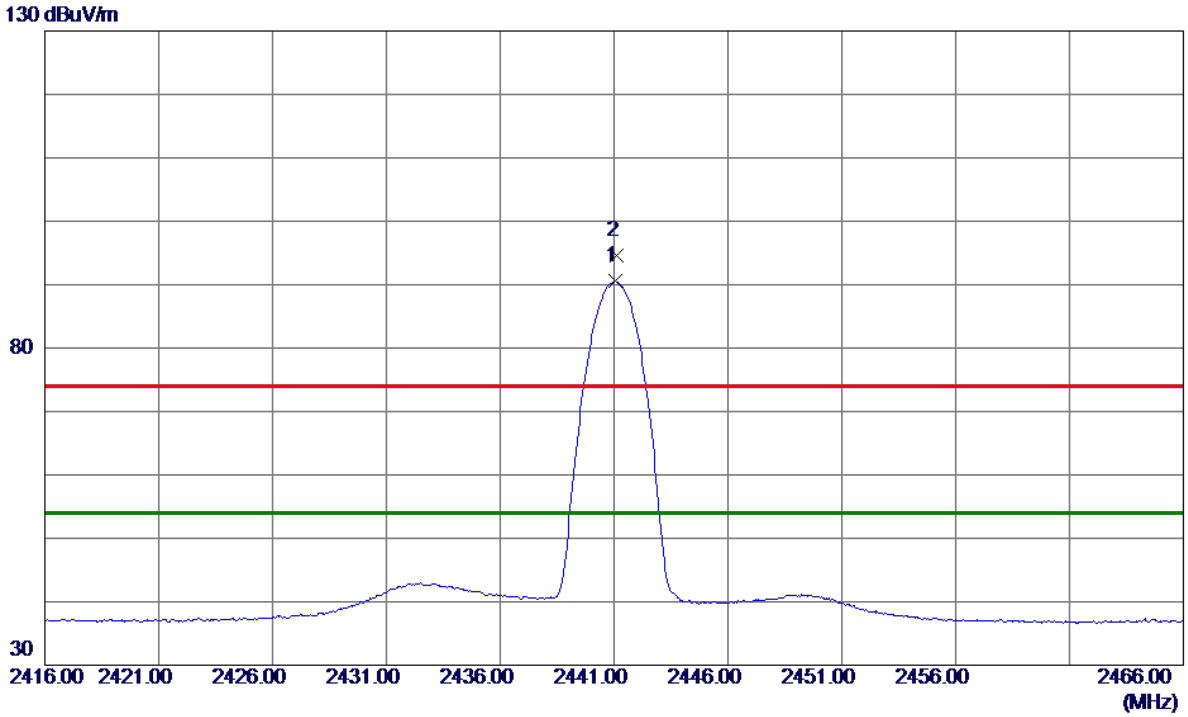

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2441.0500	82.78	7.73	90.51	54.00	36.51	AVG	No Limit
2	2441.1000	86.84	7.73	94.57	74.00	20.57	Peak	No Limit

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_3Mbps

Vertical

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	3254.5280	47.16	0.37	47.53	74.00	-26.47	Peak	
2 *	3254.6430	43.06	0.37	43.43	54.00	-10.57	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_3Mbps

Horizontal

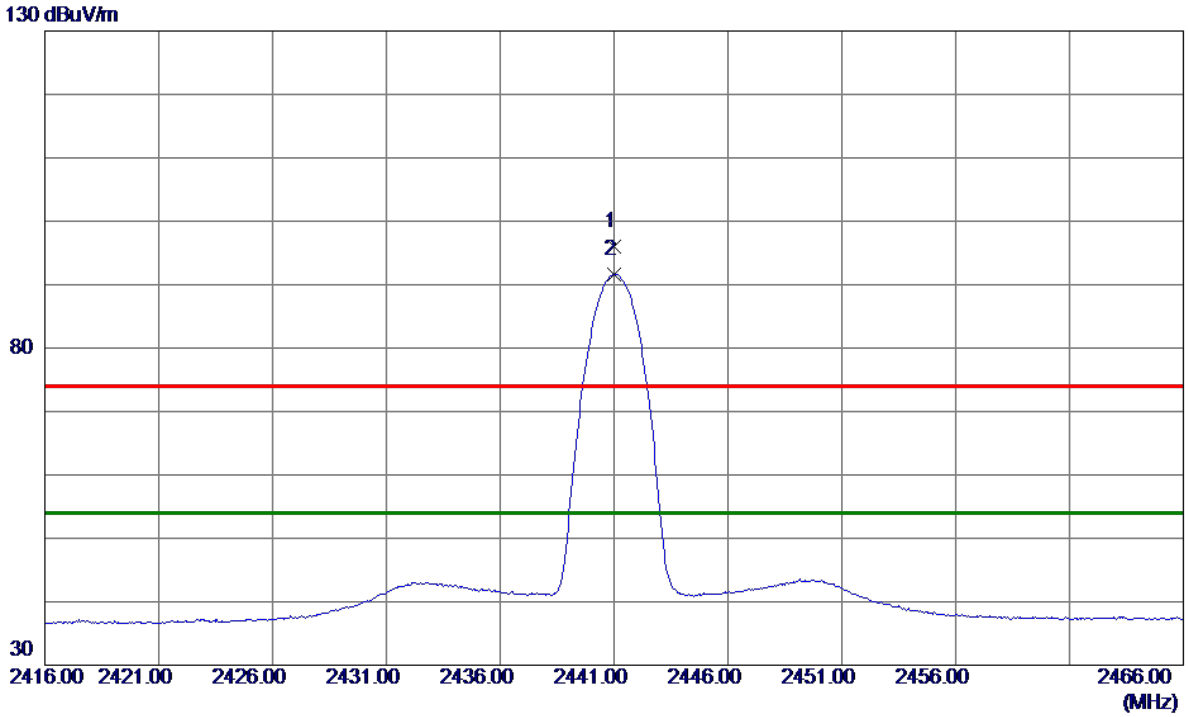

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2441.0250	88.18	7.73	95.91	74.00	21.91	Peak	No Limit
2 *	2441.0250	83.95	7.73	91.68	54.00	37.68	AVG	No Limit

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2441 MHz _CH39_3Mbps

Horizontal

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3254.6480	47.05	0.37	47.42	54.00	-6.58	AVG	
2	3255.6379	49.90	0.37	50.27	74.00	-23.73	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_3Mbps

Vertical

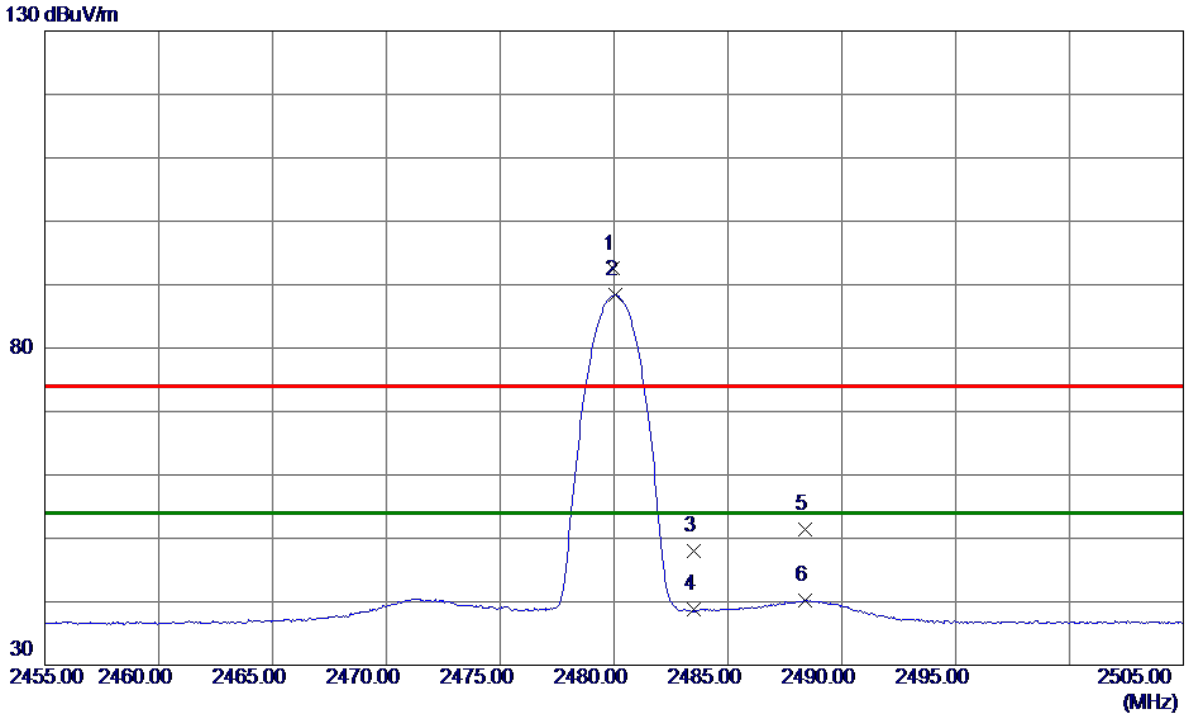

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2479.9500	84.64	7.86	92.50	74.00	18.50	Peak	No Limit
2 *	2480.0500	80.51	7.86	88.37	54.00	34.37	AVG	No Limit
3	2483.5000	40.18	7.88	48.06	74.00	-25.94	Peak	
4	2483.5000	30.83	7.88	38.71	54.00	-15.29	AVG	
5	2488.3750	43.52	7.89	51.41	74.00	-22.59	Peak	
6	2488.3750	32.34	7.89	40.23	54.00	-13.77	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_3Mbps

Vertical

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3306.6880	44.60	0.44	45.04	54.00	-8.96	AVG	
2	3306.7210	47.97	0.44	48.41	74.00	-25.59	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_3Mbps

Horizontal

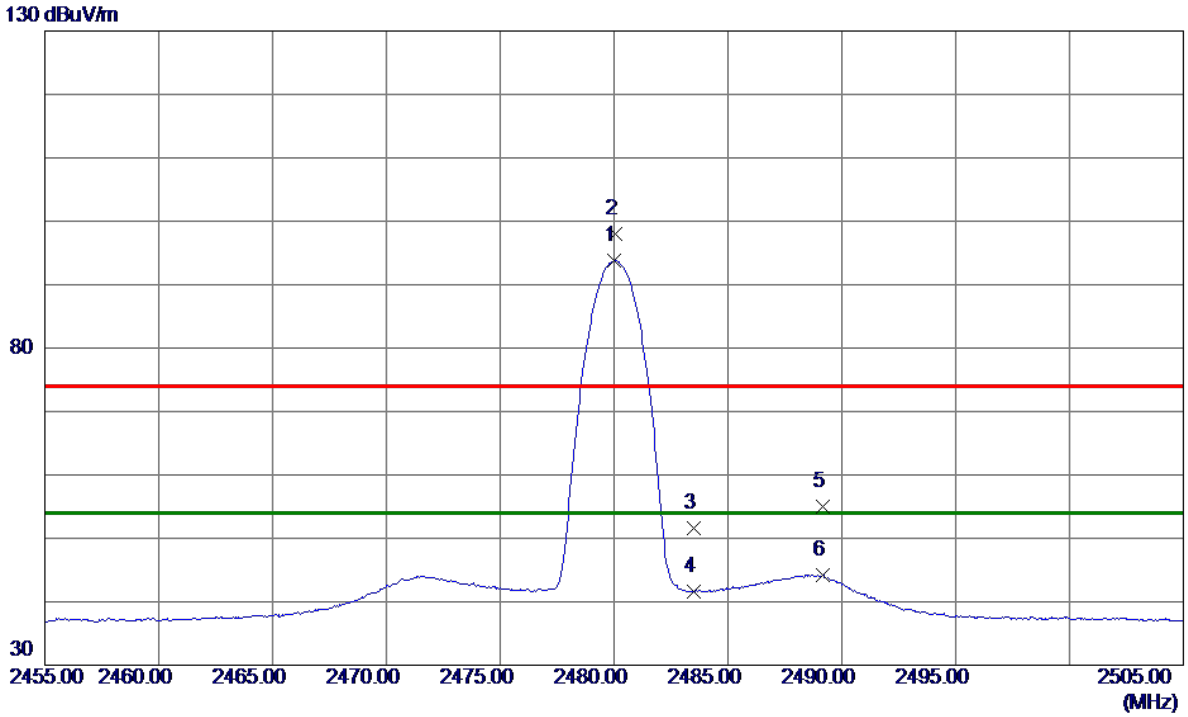

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2480.0250	85.94	7.86	93.80	54.00	39.80	AVG	No Limit
2	2480.0500	90.05	7.86	97.91	74.00	23.91	Peak	No Limit
3	2483.5000	43.78	7.88	51.66	74.00	-22.34	Peak	
4	2483.5000	33.80	7.88	41.68	54.00	-12.32	AVG	
5	2489.1750	47.12	7.89	55.01	74.00	-18.99	Peak	
6	2489.1750	36.39	7.89	44.28	54.00	-9.72	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX 2480 MHz _CH78_3Mbps

Horizontal

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	3306.6290	47.93	0.44	48.37	54.00	-5.63	AVG	
2	3307.0330	49.26	0.44	49.70	74.00	-24.30	Peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - NUMBER OF HOPPING FREQUENCY

Test Mode	Hopping Mode_1Mbps
Number of Hopping Frequency	79

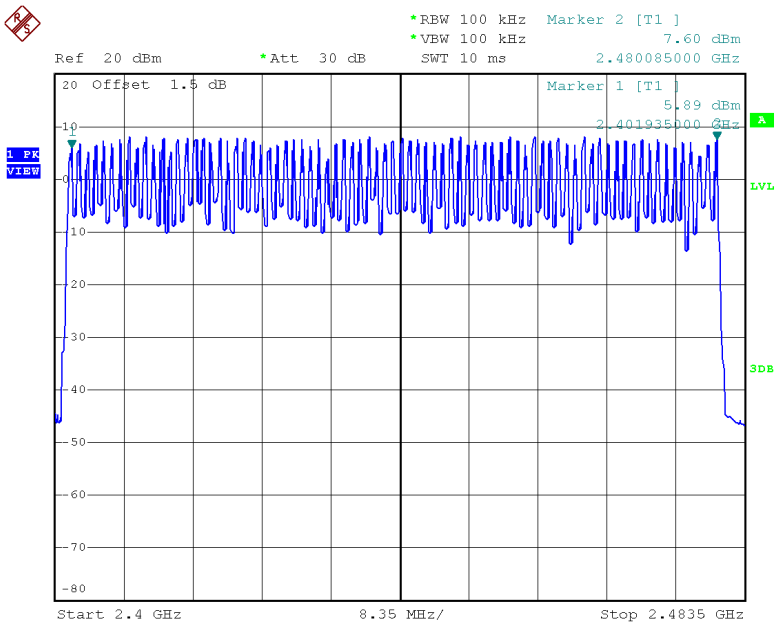

Date: 13.OCT.2019 15:27:23

Test Mode	Hopping Mode_3Mbps
Number of Hopping Frequency	79

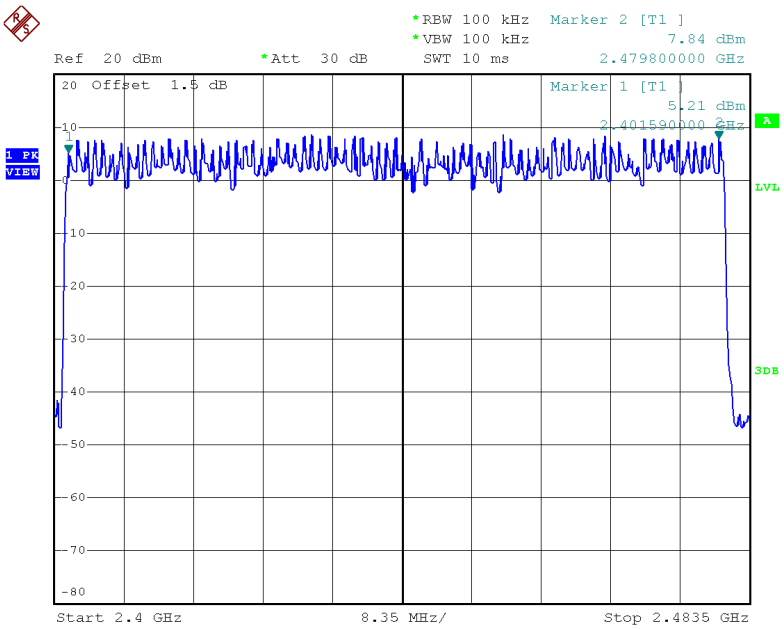

Date: 13.OCT.2019 16:08:53

APPENDIX F - AVERAGE TIME OF OCCUPANCY

Test Mode:	TX Mode_1Mbps

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH1	2402	0.3800	0.1216	0.4000	Pass
DH3	2402	1.6400	0.2624	0.4000	Pass
DH5	2402	2.8800	0.3072	0.4000	Pass
DH1	2441	0.3800	0.1216	0.4000	Pass
DH3	2441	1.6400	0.2624	0.4000	Pass
DH5	2441	2.8800	0.3072	0.4000	Pass
DH1	2480	0.3750	0.1200	0.4000	Pass
DH3	2480	1.6400	0.2624	0.4000	Pass
DH5	2480	2.8800	0.3072	0.4000	Pass

CH00-DH1

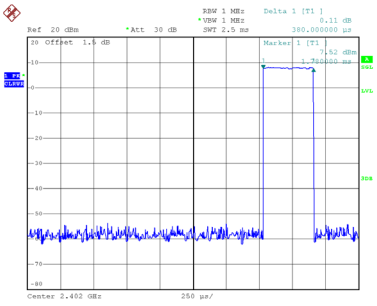

Date: 13.OCT.2019 15:36:27

CH39-DH1

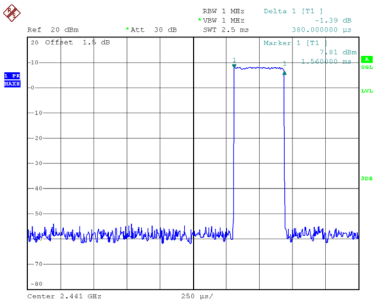

Date: 13.OCT.2019 15:10:31

CH78-DH1

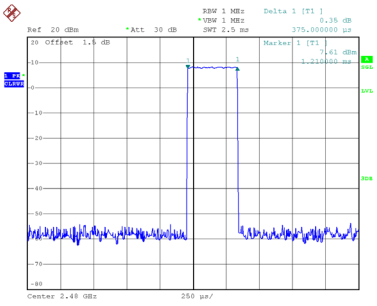

Date: 13.OCT.2019 15:40:28

CH00-DH3

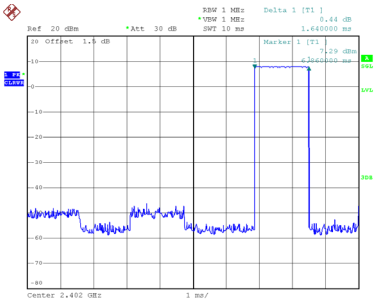

Date: 13.OCT.2019 15:33:15

CH39-DH3

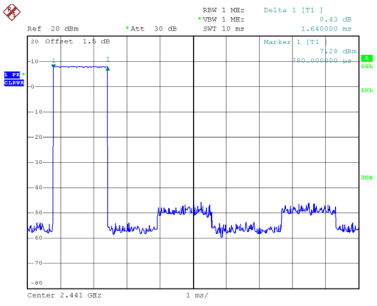

Date: 13.OCT.2019 15:40:46

CH78-DH3

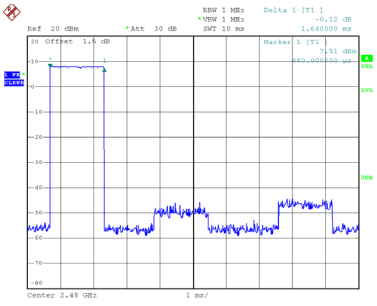

Date: 13.OCT.2019 15:41:26

CH00-DH5

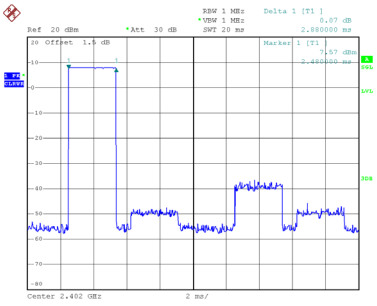

Date: 13.OCT.2019 15:34:30

CH39-DH5

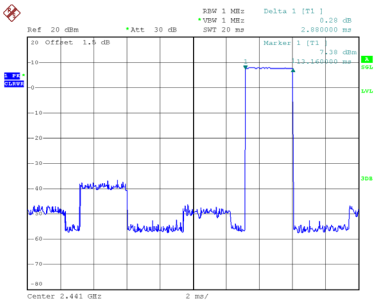

Date: 13.OCT.2019 15:41:59

CH78-DH5

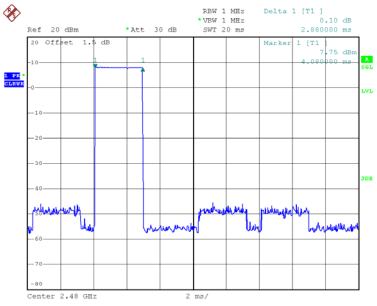

Date: 13.OCT.2019 15:34:43

Test Mode:	TX Mode_3Mbps

Data Packet	Frequency	Pulse Duration(ms)	Dwell Time(s)	Limits(s)	Test Result
3DH1	2402	0.3900	0.1248	0.4000	Pass
3DH3	2402	1.6400	0.2624	0.4000	Pass
3DH5	2402	2.9200	0.3115	0.4000	Pass
3DH1	2441	0.3900	0.1248	0.4000	Pass
3DH3	2441	1.6400	0.2624	0.4000	Pass
3DH5	2441	2.9200	0.3115	0.4000	Pass
3DH1	2480	0.3900	0.1248	0.4000	Pass
3DH3	2480	1.6400	0.2624	0.4000	Pass
3DH5	2480	2.8800	0.3072	0.4000	Pass

CH00-3DH1

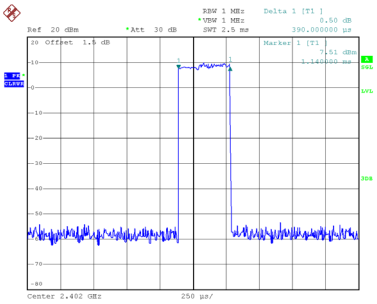

Date: 13.OCT.2019 16:15:49

CH39-3DH1

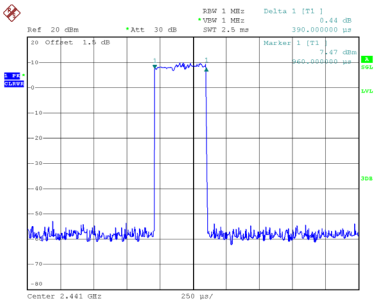

Date: 13.OCT.2019 16:16:03

CH78-3DH1

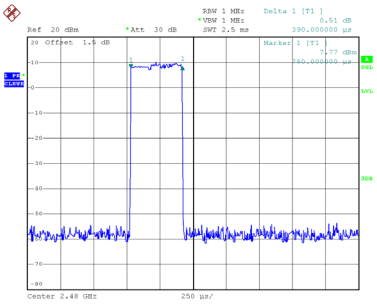

Date: 13.OCT.2019 16:15:27

CH00-3DH3

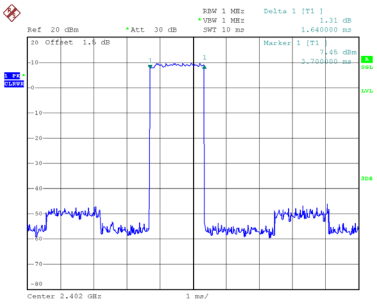

Date: 13.OCT.2019 16:16:19

CH39-3DH3

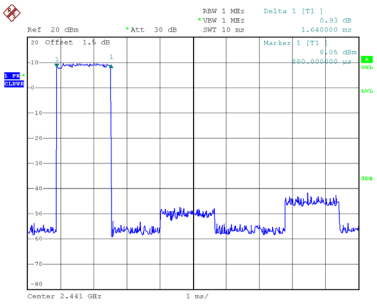

Date: 13.OCT.2019 16:16:50

CH78-3DH3

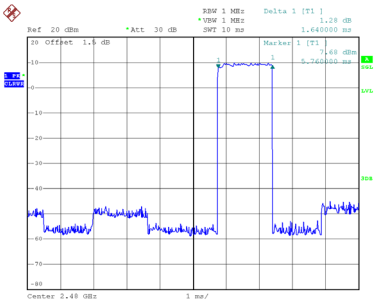

Date: 13.OCT.2019 16:16:30

CH00-3DH5

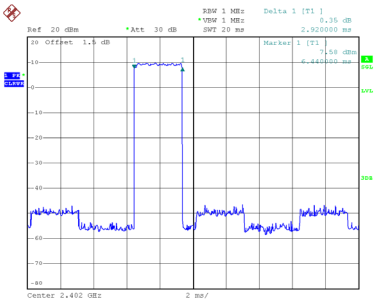

Date: 13.OCT.2019 16:17:18

CH39-3DH5

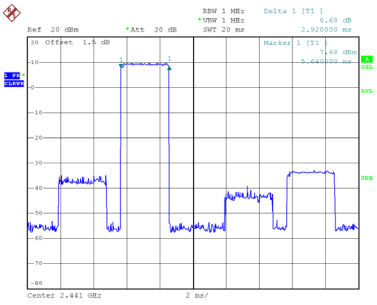

Date: 13.OCT.2019 16:17:24

CH78-3DH5

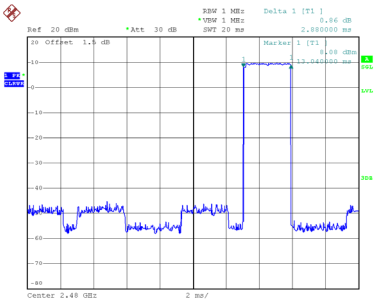

Date: 13.OCT.2019 16:17:29

APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT

Test Mode:	Hopping on _1Mbps

Channel	Frequency (MHz)	Channel Separation (MHz)	2/3 of 20 dB Bandwidth (MHz)	Test Result
00	2402	1.005	0.607	Pass
39	2441	1.040	0.631	Pass
78	2480	0.999	0.627	Pass

CH00

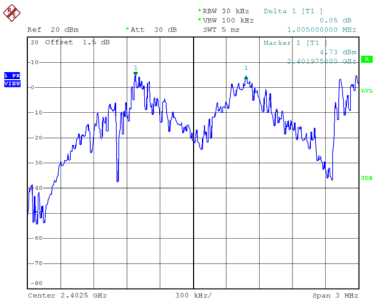

Date: 13.OCT.2019 15:17:06

CH39

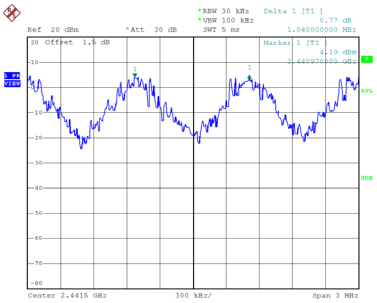

Date: 13.OCT.2019 15:18:28

CH78

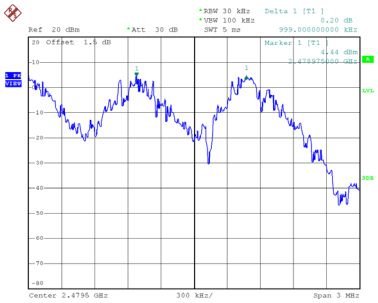

Date: 13.OCT.2019 15:19:50

Test Mode:	Hopping on _3Mbps

Channel	Frequency (MHz)	Channel Separation (MHz)	2/3 of 20 dB Bandwidth (MHz)	Test Result
00	2402	0.962	0.864	Pass
39	2441	1.005	0.873	Pass
78	2480	1.002	0.872	Pass

CH00

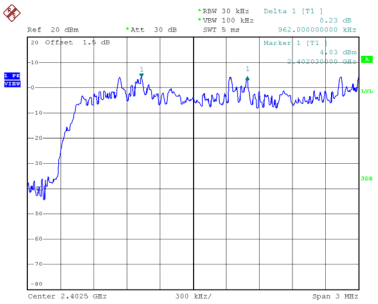

Date: 13.OCT.2019 16:02:40

CH39

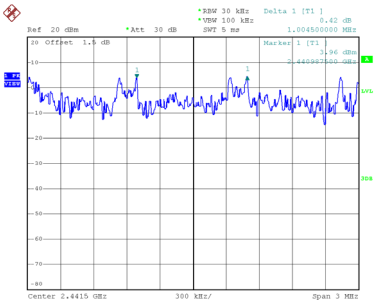

Date: 13.OCT.2019 16:05:04

CH78

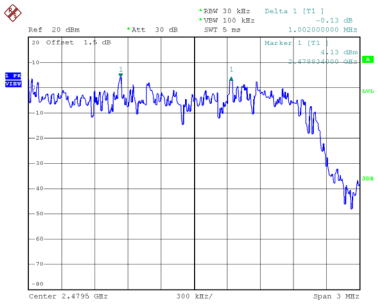

Date: 13.OCT.2019 16:06:10

APPENDIX H - BANDWIDTH

Test Mode:	TX Mode _1Mbps

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
00	2402	0.911	0.852
39	2441	0.946	0.848
78	2480	0.940	0.856

CH00

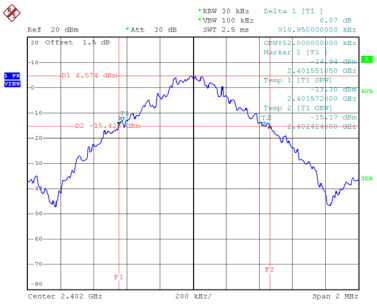

Date: 13.OCT.2019 14:56:21

CH39

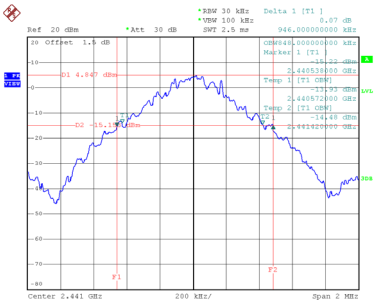

Date: 13.OCT.2019 15:06:20

CH78

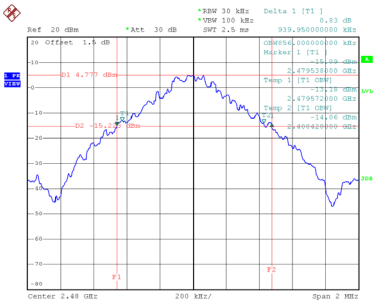

Date: 13.OCT.2019 15:07:55

Test Mode:	TX Mode _3Mbps

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
00	2402	1.296	1.196
39	2441	1.310	1.188
78	2480	1.308	1.192

CH00

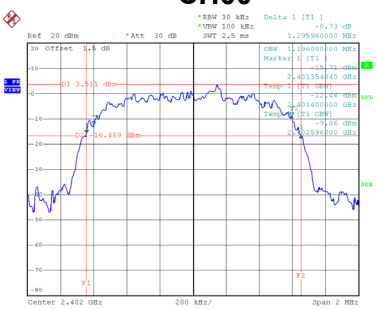

Date: 13.OCT.2019 15:43:39

CH39

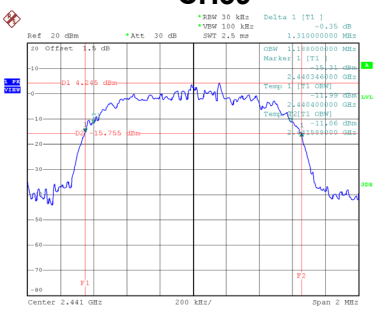

Date: 13.OCT.2019 15:46:30

CH78

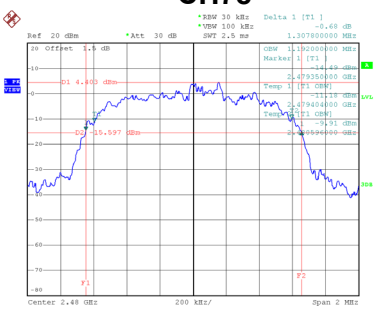

Date: 13.OCT.2019 15:48:12

APPENDIX I - MAXIMUM OUTPUT POWER

Test Mode:	TX Mode _1Mbps

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	8.02	0.0063	21.00	0.125	Pass
39	2441	7.92	0.0062	21.00	0.125	Pass
78	2480	8.01	0.0063	21.00	0.125	Pass

CH00

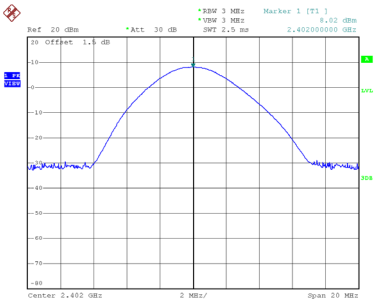

Date: 13.OCT.2019 14:55:20

CH39

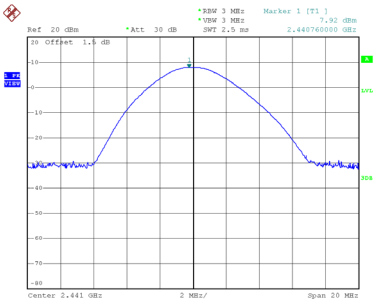

Date: 13.OCT.2019 15:04:40

CH78

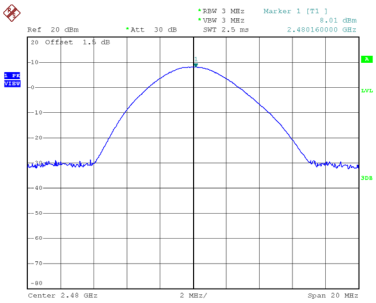

Date: 13.OCT.2019 15:06:54

Test Mode:	TX Mode _3Mbps

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2402	10.46	0.0111	21.00	0.125	Pass
39	2441	10.41	0.0110	21.00	0.125	Pass
78	2480	10.67	0.0117	21.00	0.125	Pass

CH00

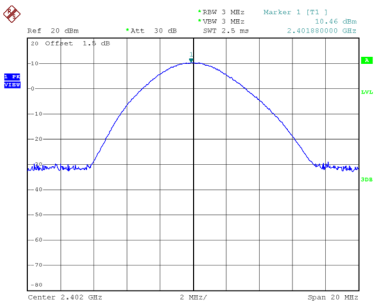

Date: 13.OCT.2019 15:44:19

CH39

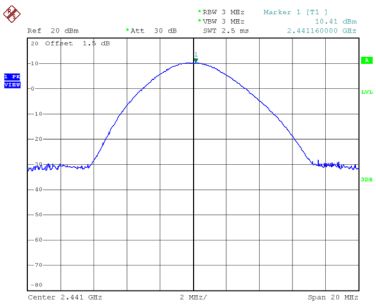

Date: 13.OCT.2019 15:46:38

CH78

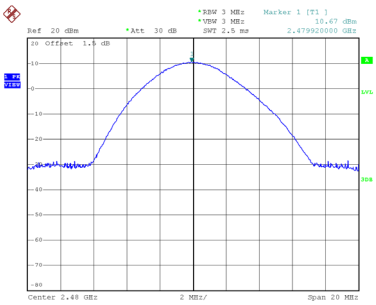

Date: 13.OCT.2019 15:48:52

APPENDIX J - CONDUCTED SPURIOUS EMISSION

Test Mode : TX Mode _1Mbps

Bandedge- CH00 (Lower)

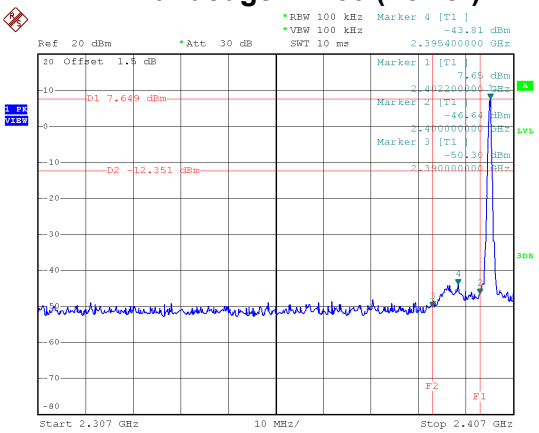

Date: 13.OCT.2019 14:55:29

Bandedge CH78 (Upper)

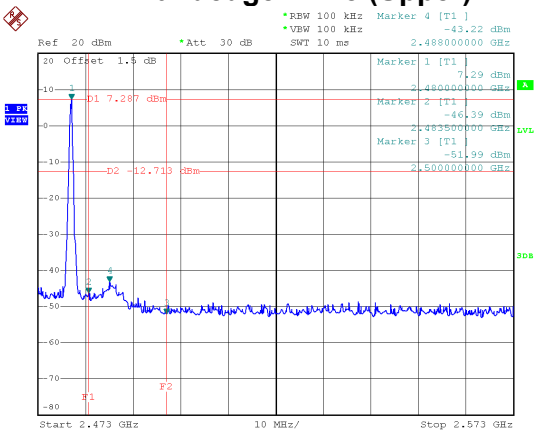

Date: 13.OCT.2019 15:07:03

Hopping on mode (Lower)

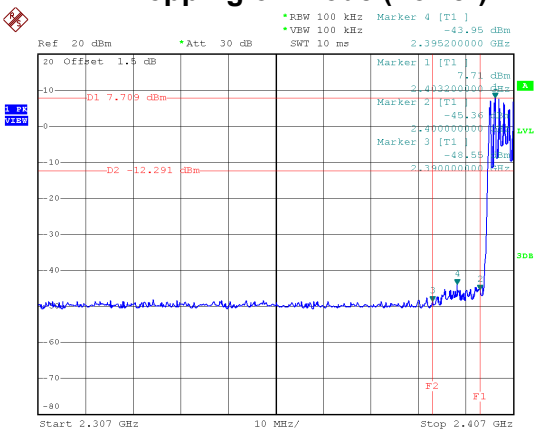

Date: 13.OCT.2019 15:29:53

Hopping on mode (Upper)

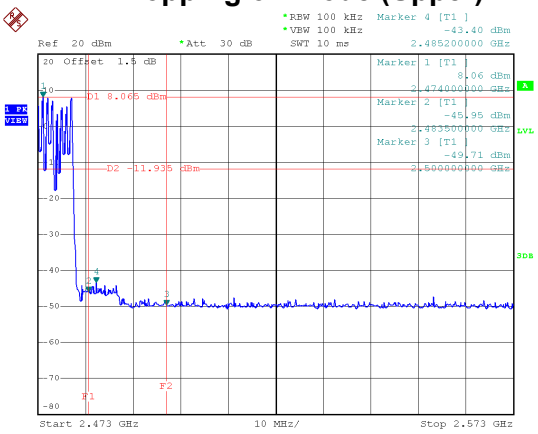

Date: 13.OCT.2019 15:31:19

CH00 – 10th Harmonic of the fundamental frequency

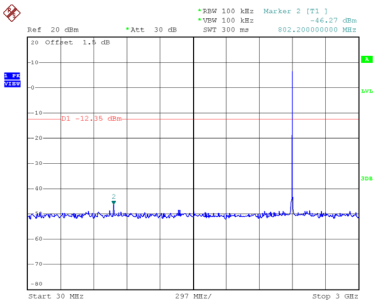

Date: 13.OCT.2019 14:56:36

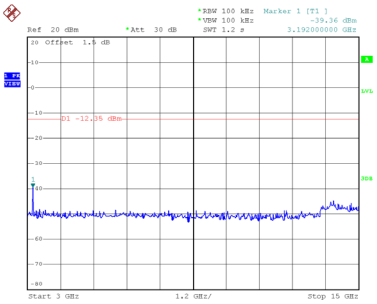

Date: 13.OCT.2019 14:56:46

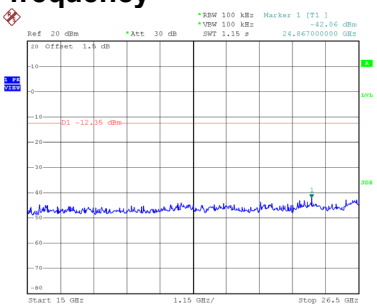

Date: 13.OCT.2019 14:56:55

CH39 – 10th Harmonic of the fundamental frequency

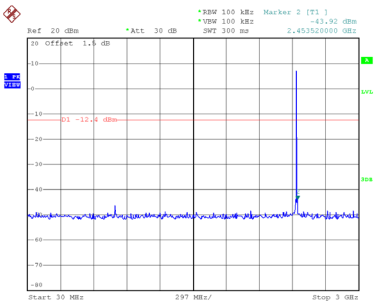

Date: 13.OCT.2019 15:05:04

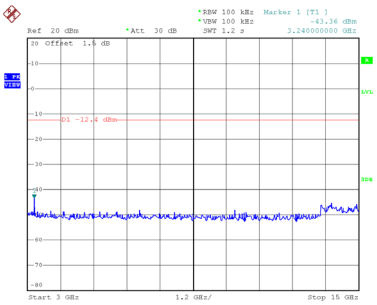

Date: 13.OCT.2019 15:05:13

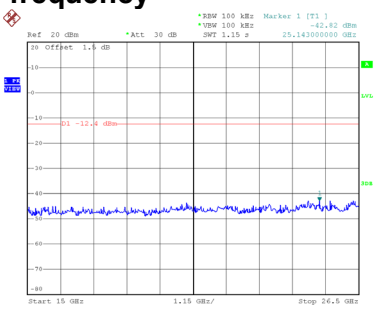

Date: 13.OCT.2019 15:05:23

CH78 – 10th Harmonic of the fundamental frequency

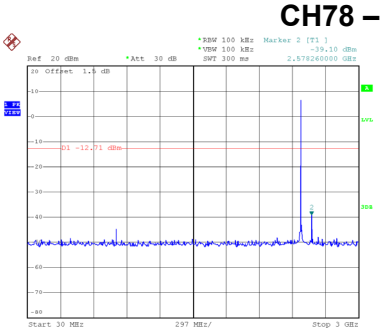

Date: 13.OCT.2019 15:08:09

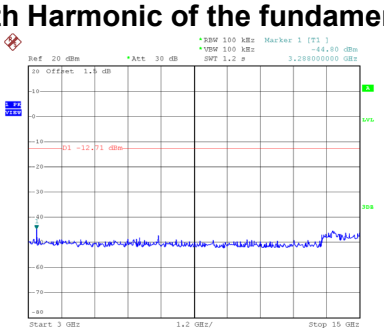

Date: 13.OCT.2019 15:08:18

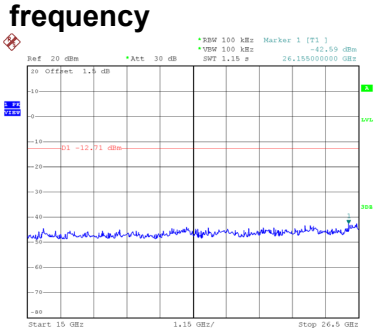

Date: 13.OCT.2019 15:08:28

Test Mode : TX Mode _3Mbps

Bandedge- CH00 (Lower)

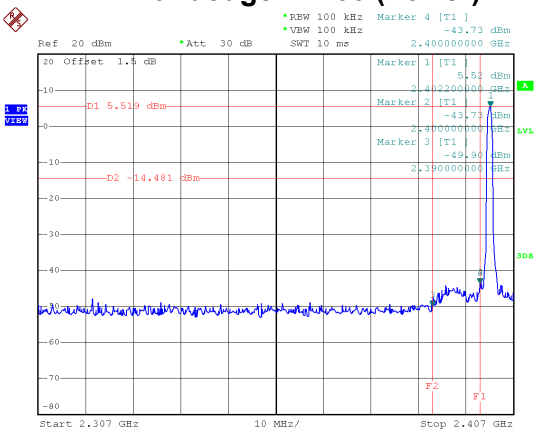

Date: 13.OCT.2019 15:43:03

Bandedge CH78 (Upper)

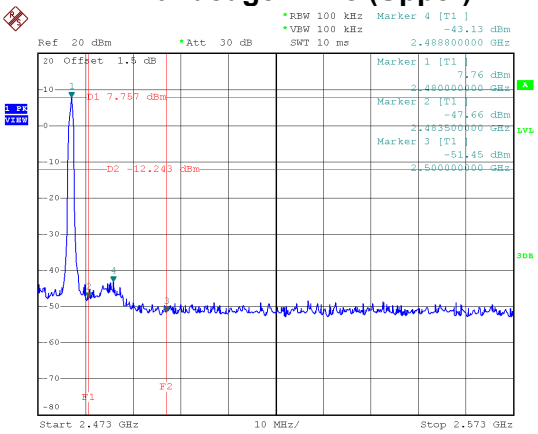

Date: 13.OCT.2019 15:47:35

Hopping on mode (Lower)

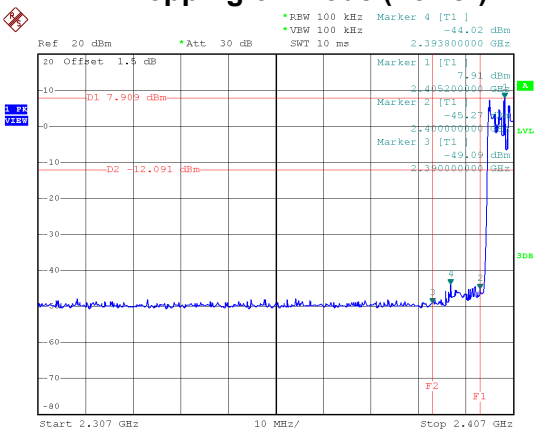

Date: 13.OCT.2019 16:10:20

Hopping on mode (Upper)

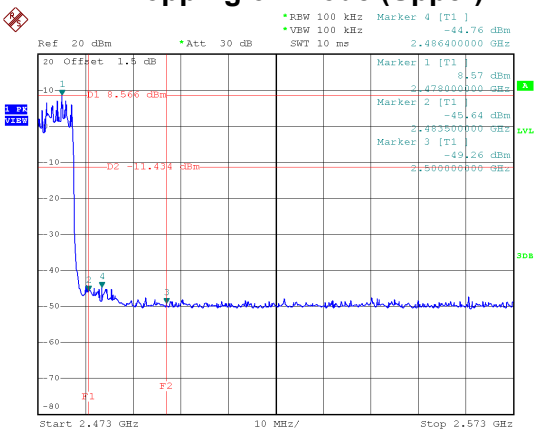

Date: 13.OCT.2019 16:13:19

CH00 – 10th Harmonic of the fundamental frequency

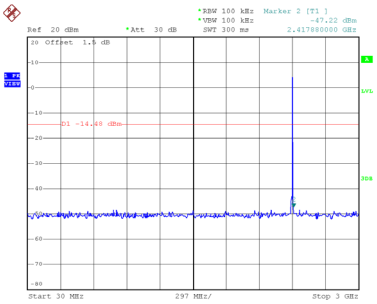

Date: 13.OCT.2019 15:43:54

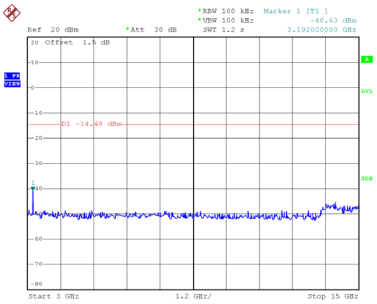

Date: 13.OCT.2019 15:44:03

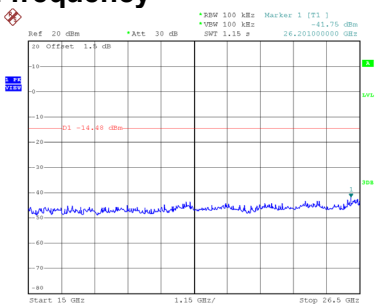

Date: 13.OCT.2019 15:44:12

CH39 – 10th Harmonic of the fundamental frequency

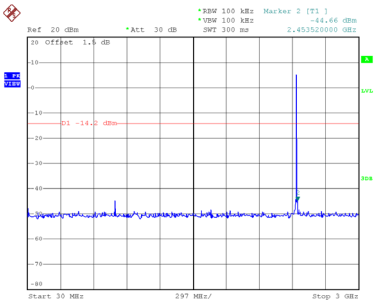

Date: 13.OCT.2019 15:45:32

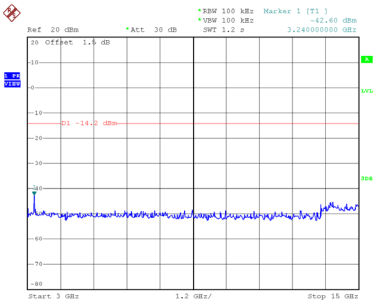

Date: 13.OCT.2019 15:45:41

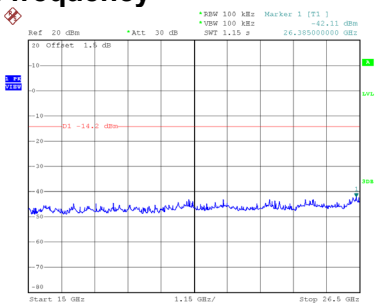

Date: 13.OCT.2019 15:45:51

CH78 – 10th Harmonic of the fundamental frequency

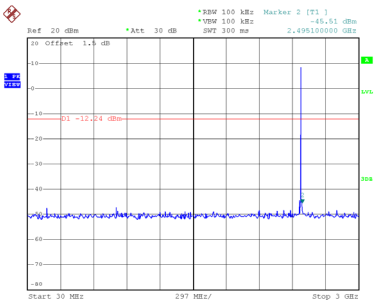

Date: 13.OCT.2019 15:48:26

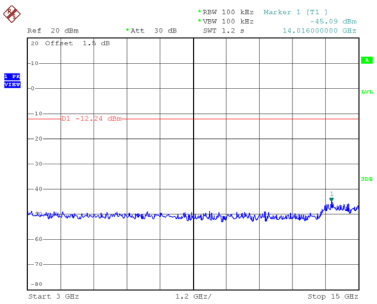

Date: 13.OCT.2019 15:48:35

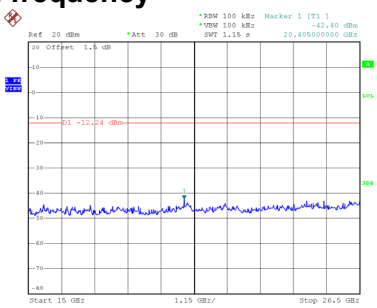

Date: 13.OCT.2019 15:48:44

End of Test Report