



Test Graphs




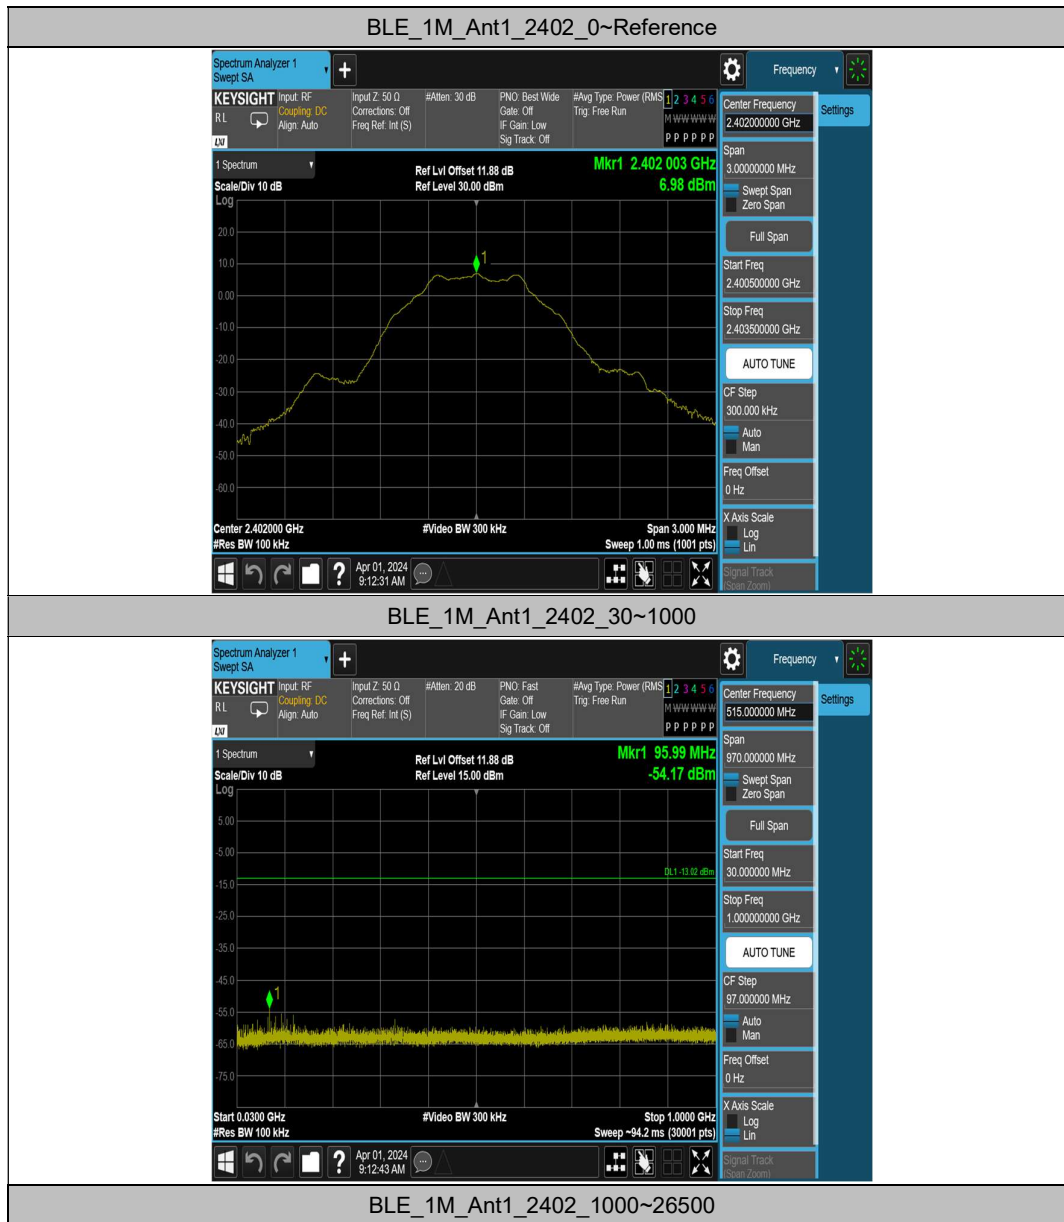

BLE_1M_Ant1_2440_0~Reference

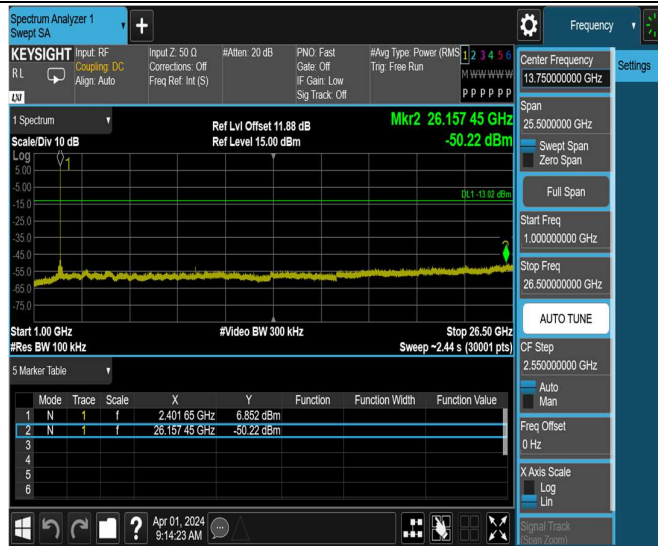

BLE_1M_Ant1_2440_30~1000

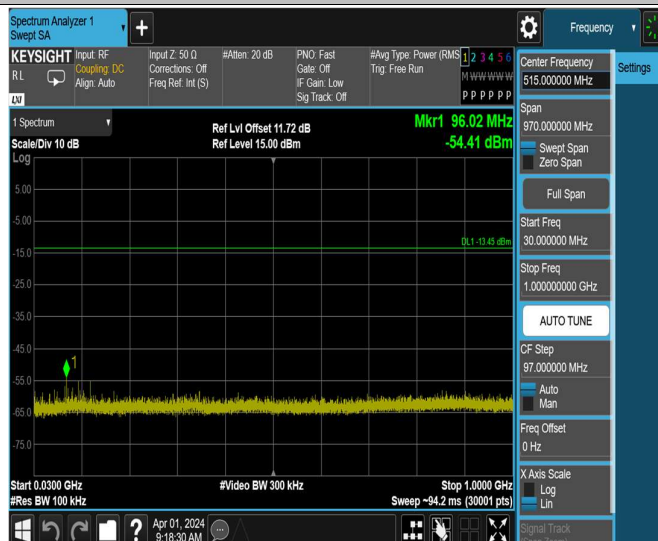

BLE_1M_Ant1_2440_1000~26500



BLE_1M_Ant1_2480_0~Reference



BLE_1M_Ant1_2480_30~1000





BLE_1M_Ant1_2480_1000~26500




BLE_2M_Ant1_2402_0~Reference



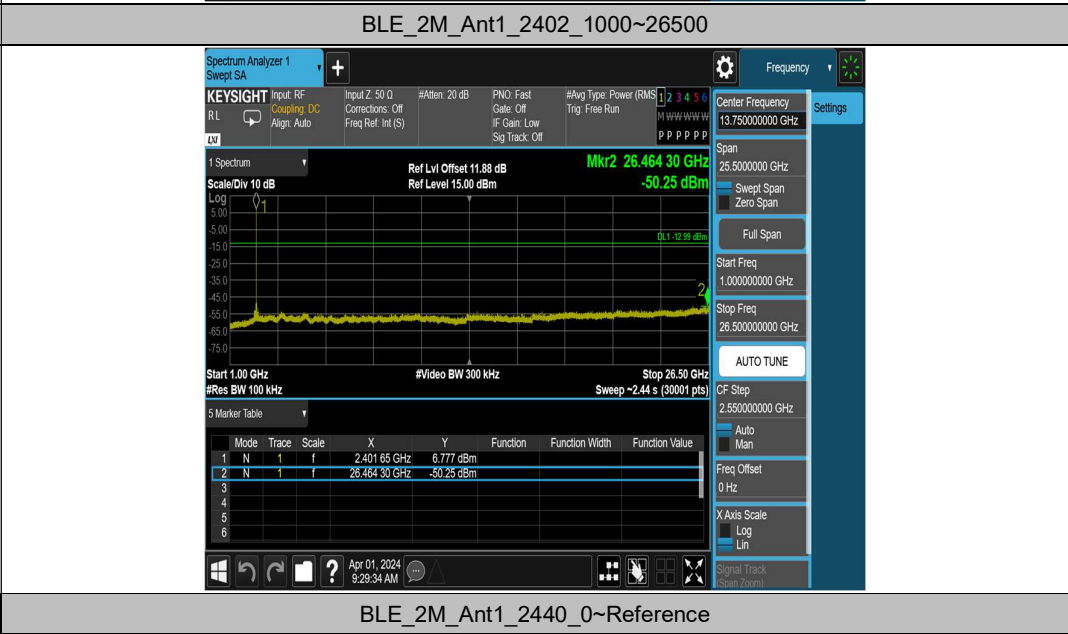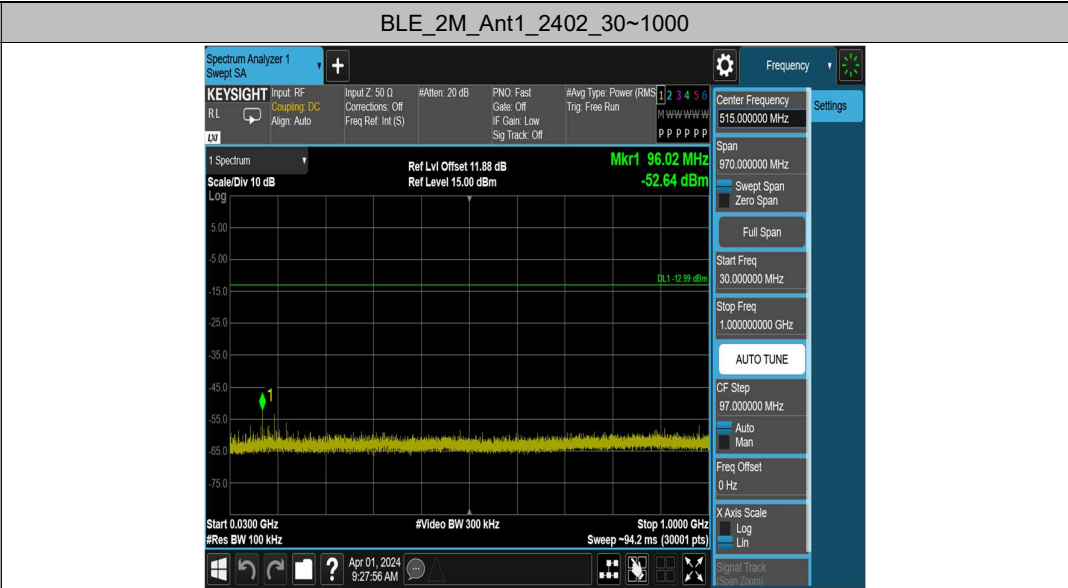



BLE_2M_Ant1_2440_30~1000

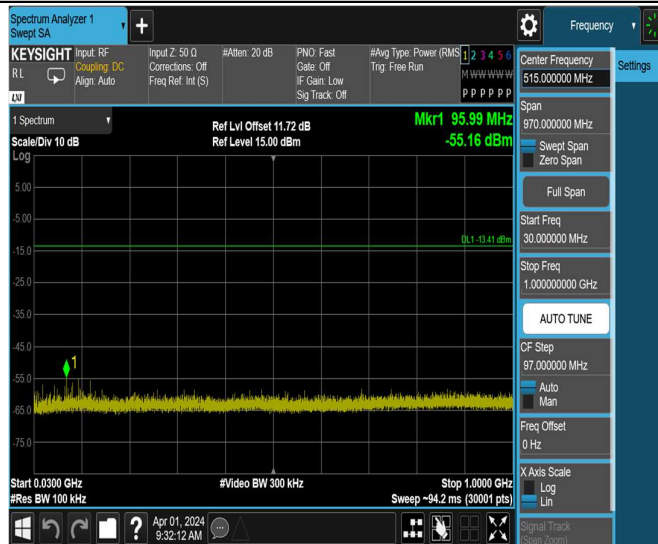


BLE_2M_Ant1_2440_1000~26500



BLE_2M_Ant1_2480_0~Reference



BLE_2M_Ant1_2480_30~1000

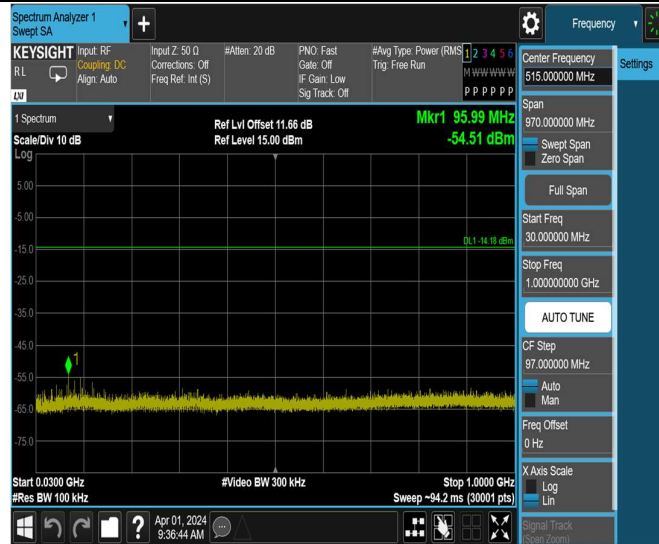

BLE_2M_Ant1_2480_1000~26500




Appendix G: Duty Cycle

Test Result


TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]
BLE_1M	Ant1	2402	0.42	0.85	49.41
		2440	0.41	0.84	48.81
		2480	0.41	0.84	48.81
BLE_2M	Ant1	2402	0.21	0.64	32.81
		2440	0.21	0.64	32.81
		2480	0.21	0.64	32.81

Test Graphs




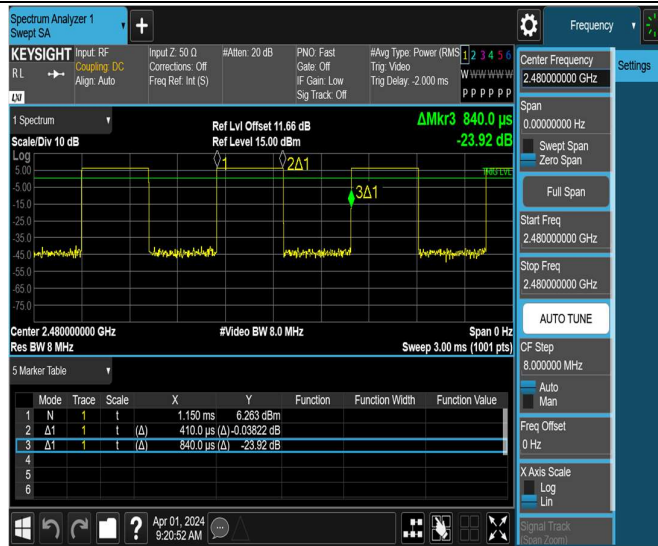


BLE_2M_Ant1_2402

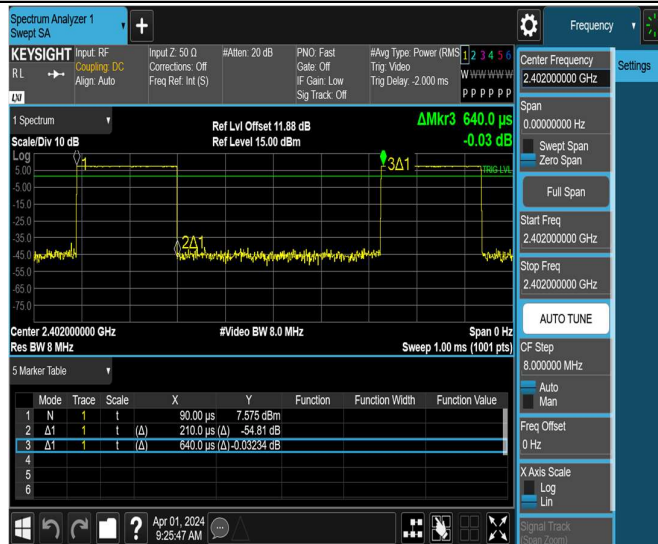

BLE_2M_Ant1_2440

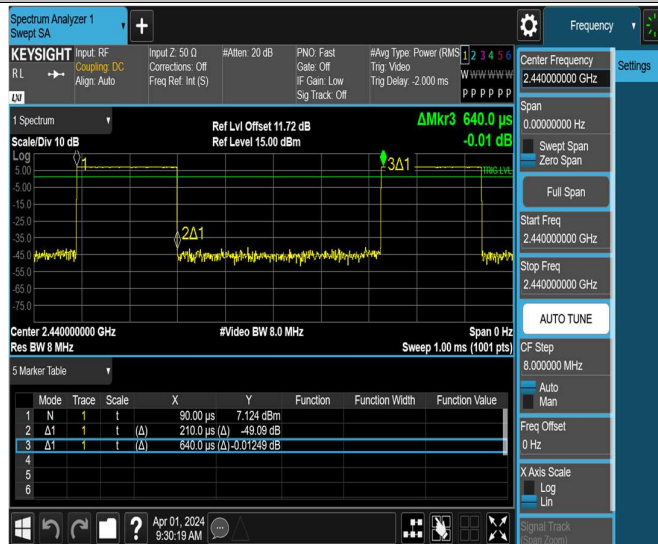

BLE_2M_Ant1_2480

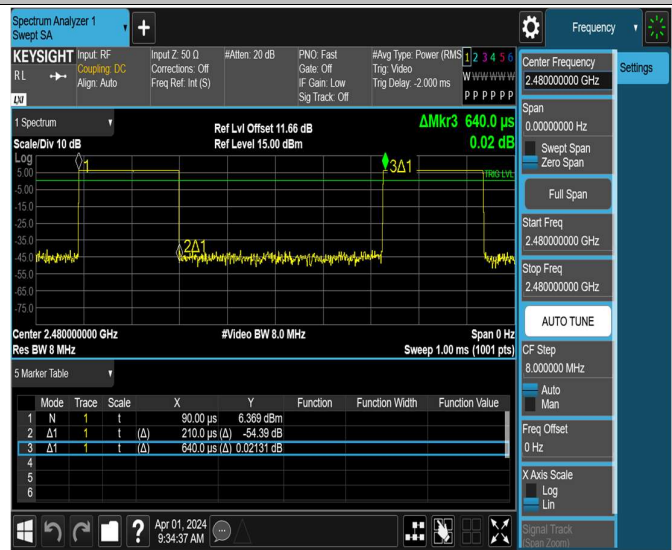

Appendix H: Emissions in Restricted Bands

Test Result

Mode:	BLE 1M-2402
-------	-------------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	48.45	9.07	74.00	25.55	150	187	Horizontal	PASS
2	2334.32	50.44	9.20	74.00	23.56	150	297	Horizontal	PASS
3	2343.76	50.98	9.30	74.00	23.02	150	187	Horizontal	PASS
4	2358.72	51.40	9.34	74.00	22.60	150	187	Horizontal	PASS
5	2372.56	51.09	9.63	74.00	22.91	150	158	Horizontal	PASS
6	2390	50.08	10.38	74.00	23.92	150	114	Horizontal	PASS

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	49.57	9.07	74.00	24.43	150	171	Vertical	PASS
2	2334.72	52.72	9.22	74.00	21.28	150	189	Vertical	PASS
3	2342.88	52.05	9.25	74.00	21.95	150	194	Vertical	PASS
4	2367.12	52.33	9.47	74.00	21.67	150	218	Vertical	PASS
5	2383.2	52.70	10.07	74.00	21.30	150	230	Vertical	PASS
6	2390	49.81	10.38	74.00	24.19	150	212	Vertical	PASS

Mode:	BLE 1M-2480
-------	-------------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	51.08	10.62	74.00	22.92	150	360	Horizontal	PASS
2	2487.36	51.61	10.29	74.00	22.39	150	250	Horizontal	PASS
3	2491.81	51.53	10.39	74.00	22.47	150	202	Horizontal	PASS
4	2494.20	53.45	10.49	74.00	20.55	150	113	Horizontal	PASS
5	2496.86	51.90	10.31	74.00	22.10	150	268	Horizontal	PASS
6	2500	49.44	10.10	74.00	24.56	150	102	Horizontal	PASS

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	51.32	10.62	74.00	22.68	150	28	Vertical	PASS
2	2485.54	51.69	10.44	74.00	22.31	150	144	Vertical	PASS
3	2488.84	52.26	10.24	74.00	21.74	150	223	Vertical	PASS
4	2492.27	52.57	10.41	74.00	21.43	150	214	Vertical	PASS
5	2495.57	52.03	10.41	74.00	21.97	150	223	Vertical	PASS
6	2500	50.05	10.10	74.00	23.95	150	188	Vertical	PASS

Mode:	BLE 2M-2402
-------	-------------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	49.70	9.07	74.00	24.30	150	155	Horizontal	PASS
2	2318.32	50.76	9.09	74.00	23.24	150	5	Horizontal	PASS
3	2331.84	51.12	9.29	74.00	22.88	150	356	Horizontal	PASS
4	2349.92	51.81	9.25	74.00	22.19	150	73	Horizontal	PASS
5	2382.16	51.19	9.95	74.00	22.81	150	332	Horizontal	PASS
6	2390	51.21	10.38	74.00	22.79	150	173	Horizontal	PASS

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	50.37	9.07	74.00	23.63	150	218	Vertical	PASS
2	2318	52.44	9.07	74.00	21.56	150	207	Vertical	PASS
3	2330.08	51.87	9.19	74.00	22.13	150	177	Vertical	PASS
4	2346.32	52.23	9.30	74.00	21.77	150	198	Vertical	PASS
5	2371.2	51.94	9.53	74.00	22.06	150	224	Vertical	PASS
6	2390	49.80	10.38	74.00	24.20	150	73	Vertical	PASS

Mode:	BLE 2M-2480
-------	-------------

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	51.41	10.62	74.00	22.59	150	340	Horizontal	PASS
2	2487.57	52.00	10.27	74.00	22.00	150	130	Horizontal	PASS
3	2491.20	51.71	10.36	74.00	22.29	150	0	Horizontal	PASS
4	2492.19	51.91	10.41	74.00	22.09	150	240	Horizontal	PASS
5	2497.44	52.01	10.25	74.00	21.99	150	356	Horizontal	PASS
6	2500	49.52	10.10	74.00	24.48	150	97	Horizontal	PASS


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	51.50	10.62	74.00	22.50	150	265	Vertical	PASS
2	2485.66	52.24	10.42	74.00	21.76	150	73	Vertical	PASS
3	2490.39	51.79	10.30	74.00	22.21	150	214	Vertical	PASS
4	2493.58	51.94	10.47	74.00	22.06	150	360	Vertical	PASS
5	2496.98	52.53	10.30	74.00	21.47	150	196	Vertical	PASS
6	2500	50.27	10.10	74.00	23.73	150	336	Vertical	PASS

Note:


1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Appendix I: Spurious emissions

Mode: Power by AC

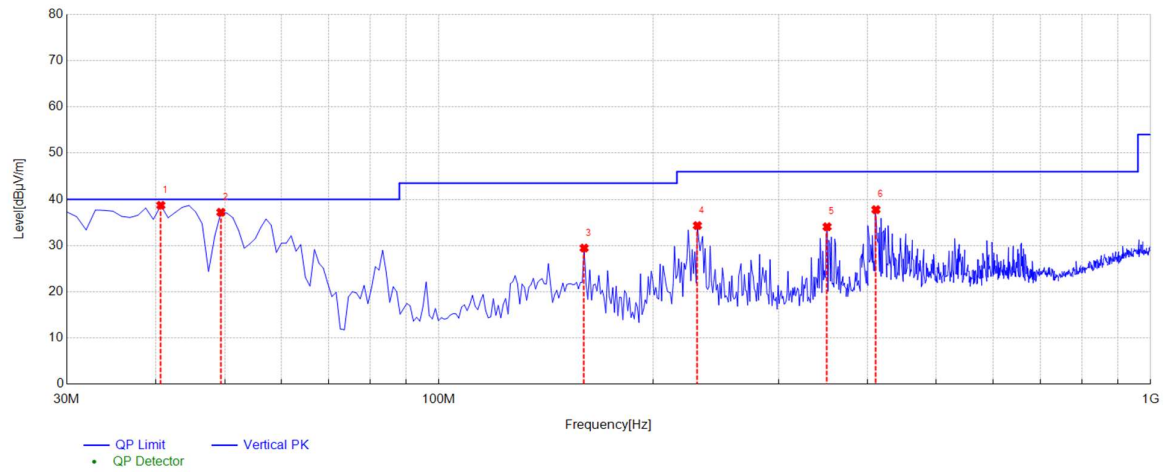


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	40.6700	38.71	-15.69	40.00	1.29	100	298	Vertical	PASS
2	49.4000	37.20	-15.93	40.00	2.80	100	279	Vertical	PASS
3	159.980	29.47	-16.24	43.50	14.03	100	222	Vertical	PASS
4	230.790	34.33	-17.67	46.00	11.67	100	171	Vertical	PASS
5	351.070	34.06	-14.56	46.00	11.94	100	344	Vertical	PASS
6	411.210	37.77	-12.60	46.00	8.23	100	31	Vertical	PASS

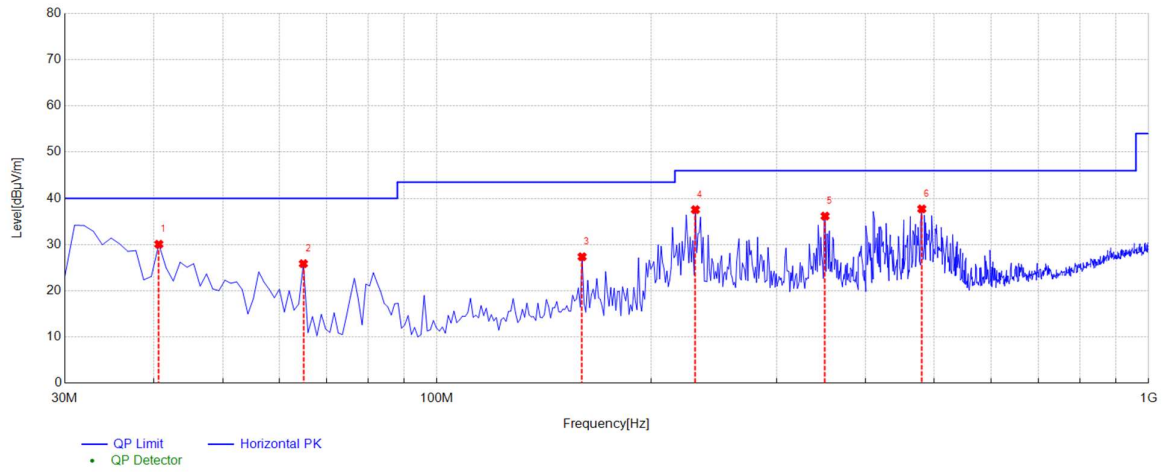


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	40.6700	30.08	-15.69	40.00	9.92	100	270	Horizontal	PASS
2	64.9200	25.87	-17.48	40.00	14.13	100	348	Horizontal	PASS
3	159.980	27.36	-16.24	43.50	16.14	100	348	Horizontal	PASS
4	230.790	37.56	-17.67	46.00	8.44	100	211	Horizontal	PASS
5	351.070	36.16	-14.56	46.00	9.84	100	208	Horizontal	PASS
6	480.080	37.71	-11.25	46.00	8.29	100	154	Horizontal	PASS

Mode: Power by Battery

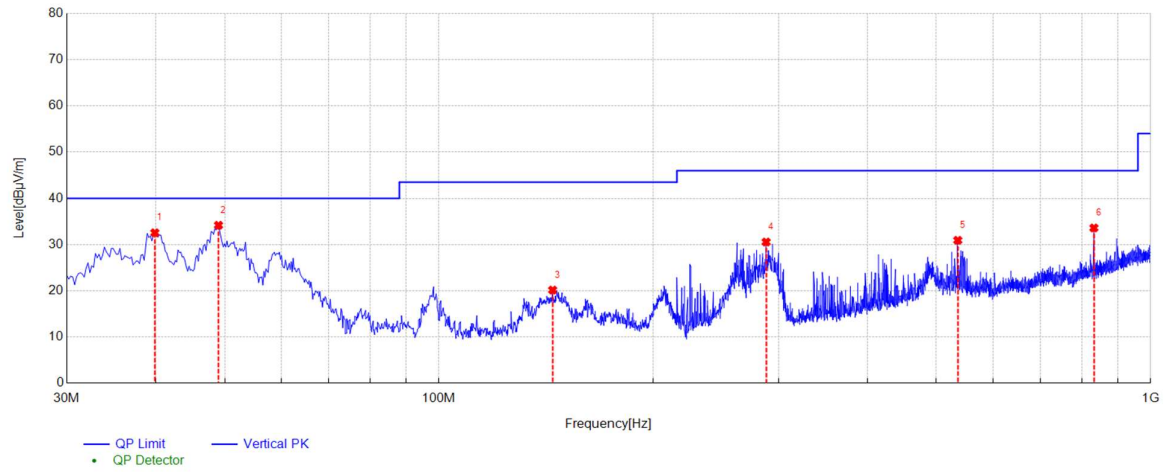

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	39.8960	32.56	-15.60	40.00	7.44	100	174	Vertical	PASS
2	49.0158	34.18	-16.45	40.00	5.82	100	222	Vertical	PASS
3	144.482	20.16	-16.41	43.50	23.34	100	348	Vertical	PASS
4	288.265	30.56	-16.96	46.00	15.44	100	13	Vertical	PASS
5	535.859	30.93	-11.00	46.00	15.07	100	13	Vertical	PASS
6	832.350	33.60	-4.94	46.00	12.40	100	13	Vertical	PASS

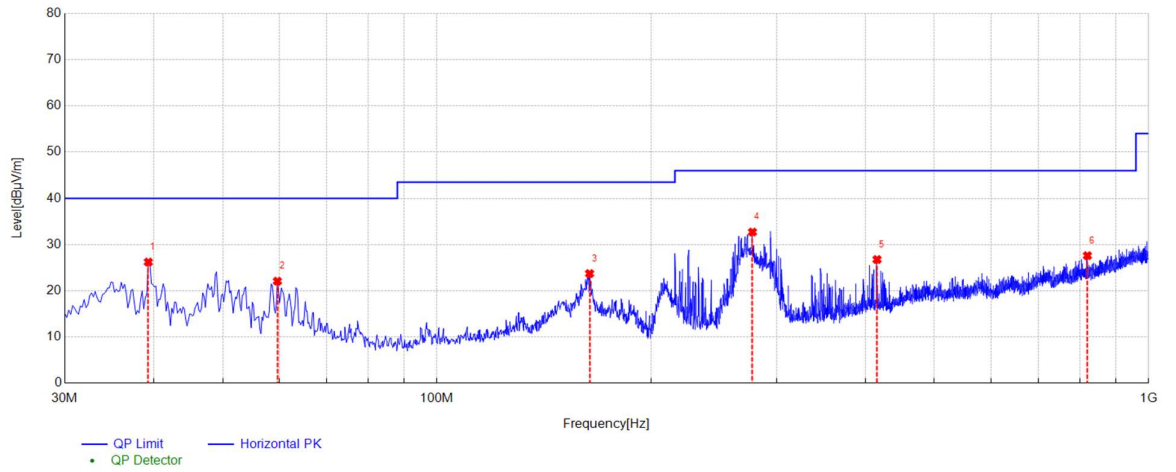

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	39.3139	26.22	-15.70	40.00	13.78	100	346	Horizontal	PASS
2	59.6879	22.08	-17.25	40.00	17.92	100	346	Horizontal	PASS
3	163.886	23.73	-16.09	43.50	19.77	100	207	Horizontal	PASS
4	277.593	32.71	-17.25	46.00	13.29	100	346	Horizontal	PASS
5	415.361	26.77	-13.28	46.00	19.23	100	220	Horizontal	PASS
6	820.320	27.61	-5.03	46.00	18.39	100	258	Horizontal	PASS

Mode:	BLE 1M-2402
-------	-------------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1384	1.19	38.90	74.00	35.10	32.05	54.00	21.95	150	181	Horizontal	PASS
2	2012	6.18	43.32	74.00	30.68	38.02	54.00	15.98	150	47	Horizontal	PASS
3	4803	-14.85	46.18	74.00	27.82	30.80	54.00	23.20	150	192	Horizontal	PASS
4	7206	-12.26	46.80	74.00	27.20	33.88	54.00	20.12	150	102	Horizontal	PASS
5	11115	-6.01	44.64	74.00	29.36	36.68	54.00	17.32	150	53	Horizontal	PASS
6	14382	-1.45	46.81	74.00	27.19	37.70	54.00	16.30	150	338	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1318	1.15	39.35	74.00	34.65	33.38	54.00	20.62	150	99	Vertical	PASS
2	1900	5.27	41.55	74.00	32.45	36.98	54.00	17.02	150	166	Vertical	PASS
3	4803	-14.85	48.69	74.00	25.31	31.34	54.00	22.66	150	19	Vertical	PASS
4	7206	-12.26	47.93	74.00	26.07	35.69	54.00	18.31	150	86	Vertical	PASS
5	11871	-4.85	45.30	74.00	28.70	38.47	54.00	15.53	150	118	Vertical	PASS
6	14358	-1.17	46.38	74.00	27.62	37.73	54.00	16.27	150	54	Vertical	PASS

Mode:	BLE 1M-2440
-------	-------------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1112	0.84	38.83	74.00	35.17	33.11	54.00	20.89	150	267	Horizontal	PASS
2	1808	4.30	41.10	74.00	32.90	36.03	54.00	17.97	150	306	Horizontal	PASS
3	4879.44	-14.67	56.56	74.00	17.44	52.68	54.00	1.32	199.8	188.1	Horizontal	PASS
4	7320	-11.84	48.02	74.00	25.98	34.71	54.00	19.29	150	84	Horizontal	PASS
5	11133	-6.02	43.63	74.00	30.37	34.69	54.00	19.31	150	292	Horizontal	PASS
6	14334	-1.20	46.19	74.00	27.81	38.16	54.00	15.84	150	306	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1098	0.78	38.80	74.00	35.20	31.86	54.00	22.14	150	204	Vertical	PASS
2	2000	6.13	42.75	74.00	31.25	38.02	54.00	15.98	150	33	Vertical	PASS
3	4880.37	-14.67	56.41	74.00	17.59	52.51	54.00	1.49	196.6	206.1	Vertical	PASS
4	7320	-11.84	47.88	74.00	26.12	35.78	54.00	18.22	150	109	Vertical	PASS
5	10605	-6.90	42.95	74.00	31.05	35.55	54.00	18.45	150	260	Vertical	PASS
6	13137	-3.07	45.51	74.00	28.49	37.19	54.00	16.81	150	217	Vertical	PASS

Mode:	BLE 1M-2480
-------	-------------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1224	1.08	38.93	74.00	35.07	32.27	54.00	21.73	150	193	Horizontal	PASS
2	1772	3.88	40.97	74.00	33.03	35.29	54.00	18.71	150	152	Horizontal	PASS
3	4960.38	-15.18	56.77	74.00	17.23	53.29	54.00	0.71	147.1	146.6	Horizontal	PASS
4	7440	-11.79	48.13	74.00	25.87	34.24	54.00	19.76	150	171	Horizontal	PASS
5	10032	-7.77	44.15	74.00	29.85	35.41	54.00	18.59	150	264	Horizontal	PASS
6	15108	-0.41	47.11	74.00	26.89	39.11	54.00	14.89	150	273	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1292	1.16	38.91	74.00	35.09	31.95	54.00	22.05	150	124	Vertical	PASS
2	1994	6.05	43.54	74.00	30.46	36.94	54.00	17.06	150	139	Vertical	PASS
3	4960.23	-15.18	53.12	74.00	20.88	49.03	54.00	4.97	130.2	118	Vertical	PASS
4	7440	-11.79	46.53	74.00	27.47	34.21	54.00	19.79	150	223	Vertical	PASS
5	11436	-5.49	45.14	74.00	28.86	37.09	54.00	16.91	150	334	Vertical	PASS
6	13554	-2.28	46.02	74.00	27.98	37.73	54.00	16.27	150	181	Vertical	PASS

Mode:	BLE 2M-2402
-------	-------------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1270	1.10	39.75	74.00	34.25	33.69	54.00	20.31	150	212	Horizontal	PASS
2	1784	4.03	47.26	74.00	26.74	35.51	54.00	18.49	150	347	Horizontal	PASS
3	4806	-14.87	45.99	74.00	28.01	41.76	54.00	12.24	150	83	Horizontal	PASS
4	7209	-12.25	48.11	74.00	25.89	40.36	54.00	13.64	150	117	Horizontal	PASS
5	10092	-7.53	42.98	74.00	31.02	35.44	54.00	18.56	150	216	Horizontal	PASS
6	13242	-2.66	46.46	74.00	27.54	37.44	54.00	16.56	150	321	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1170	1.06	39.70	74.00	34.30	32.95	54.00	21.05	150	151	Vertical	PASS
2	2012	6.18	43.81	74.00	30.19	37.18	54.00	16.82	150	61	Vertical	PASS
3	4803	-14.85	47.22	74.00	26.78	31.74	54.00	22.26	150	203	Vertical	PASS
4	7206	-12.26	48.63	74.00	25.37	40.13	54.00	13.87	150	84	Vertical	PASS
5	11502	-6.11	45.39	74.00	28.61	35.44	54.00	18.56	150	25	Vertical	PASS
6	15111	-0.41	47.37	74.00	26.63	38.70	54.00	15.30	150	278	Vertical	PASS

Mode:	BLE 2M-2440
-------	-------------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1480	1.34	38.64	74.00	35.36	32.76	54.00	21.24	150	224	Horizontal	PASS
2	2012	6.18	43.07	74.00	30.93	37.26	54.00	16.74	150	9	Horizontal	PASS
3	4881	-14.67	50.60	74.00	23.40	43.29	54.00	10.71	150	187	Horizontal	PASS
4	7320	-11.84	47.94	74.00	26.06	39.38	54.00	14.62	150	105	Horizontal	PASS
5	12093	-3.89	46.55	74.00	27.45	39.15	54.00	14.85	150	155	Horizontal	PASS
6	17715	1.15	50.08	74.00	23.92	41.37	54.00	12.63	150	55	Horizontal	PASS


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1452	1.35	39.41	74.00	34.59	32.74	54.00	21.26	150	134	Vertical	PASS
2	1888	5.14	42.12	74.00	31.88	35.67	54.00	18.33	150	127	Vertical	PASS
3	4881	-14.67	49.83	74.00	24.17	41.50	54.00	12.50	150	204	Vertical	PASS
4	7323	-11.83	46.90	74.00	27.10	42.56	54.00	11.44	150	82	Vertical	PASS
5	12609	-4.16	45.40	74.00	28.60	37.64	54.00	16.36	150	198	Vertical	PASS
6	17244	2.04	50.14	74.00	23.86	41.01	54.00	12.99	150	50	Vertical	PASS

Mode:	BLE 2M-2480
-------	-------------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1406	1.26	38.81	74.00	35.19	32.76	54.00	21.24	150	223	Horizontal	PASS
2	2012	6.18	43.67	74.00	30.33	37.56	54.00	16.44	150	101	Horizontal	PASS
3	4959.12	-15.15	56.25	74.00	17.75	51.25	54.00	2.75	198.1	105.6	Horizontal	PASS
4	7440	-11.79	46.76	74.00	27.24	35.90	54.00	18.10	150	105	Horizontal	PASS
5	11487	-5.94	45.43	74.00	28.57	35.55	54.00	18.45	150	175	Horizontal	PASS
6	15957	-0.70	48.50	74.00	25.50	40.04	54.00	13.96	150	178	Horizontal	PASS


Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1316	1.15	38.86	74.00	35.14	32.53	54.00	21.47	150	147	Vertical	PASS
2	1968	5.73	41.88	74.00	32.12	37.58	54.00	16.42	150	93	Vertical	PASS
3	4960.95	-15.15	57.38	74.00	16.62	50.85	54.00	3.15	199.9	209.7	Vertical	PASS
4	4962	-15.15	52.10	74.00	21.90	48.10	54.00	5.90	150	206	Vertical	PASS
5	7443	-11.81	46.94	74.00	27.06	40.99	54.00	13.01	150	223	Vertical	PASS
6	11418	-5.60	44.98	74.00	29.02	36.88	54.00	17.12	150	34	Vertical	PASS

Appendix J: Conducted emission AC power port

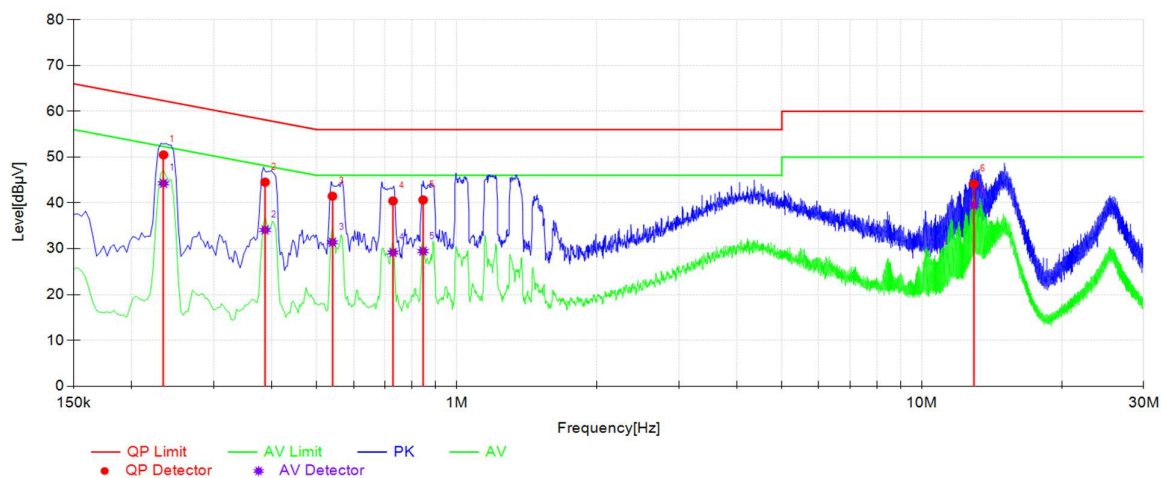

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type	Verdict
1	0.234	10.26	50.49	62.31	11.82	44.27	52.31	8.04	L1	PASS
2	0.387	10.26	44.53	58.13	13.60	34.10	48.13	14.03	L1	PASS
3	0.54	10.28	41.48	56.00	14.52	31.42	46.00	14.58	L1	PASS
4	0.729	10.28	40.44	56.00	15.56	29.19	46.00	16.81	L1	PASS
5	0.846	10.27	40.65	56.00	15.35	29.48	46.00	16.52	L1	PASS
6	12.943	10.51	44.15	60.00	15.85	39.54	50.00	10.46	L1	PASS

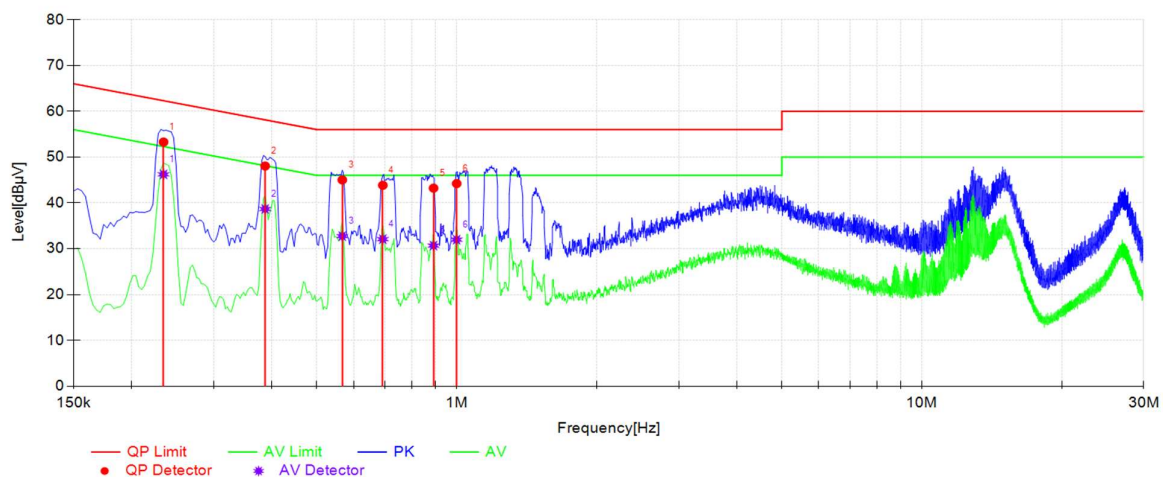

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type	Verdict
1	0.234	10.26	53.29	62.31	9.02	46.24	52.31	6.07	N	PASS
2	0.387	10.26	48.06	58.13	10.07	38.67	48.13	9.46	N	PASS
3	0.567	10.27	45.03	56.00	10.97	32.76	46.00	13.24	N	PASS
4	0.693	10.28	43.86	56.00	12.14	32.10	46.00	13.90	N	PASS
5	0.891	10.28	43.23	56.00	12.77	30.68	46.00	15.32	N	PASS
6	0.999	10.28	44.23	56.00	11.77	31.98	46.00	14.02	N	PASS