

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.

RADIO TEST - REPORT

FCC Compliance Test Report for

Product name: Macro Twin Flash

Model name: MF-T76 C, MF-T76 S, MF-T76 N

FCC ID: 2ABYN144

Test Report Number: EFGX26050226-IE-01-E01

1	General Information	3
1.1	Notes	3
1.2	Testing laboratory	4
1.3	Details of applicant	4
1.4	Details of manufacturer	4
1.5	Details of Factory	4
1.6	Application details	5
1.7	Test item	5
1.8	Test standards	5
2	Technical Test	6
2.1	Summary of test results	6
2.2	Test environment	6
2.3	Measurement uncertainty	6
2.4	Test equipment utilized	7
2.5	Test mode	8
2.6	Auxiliary equipment used during test	8
2.7	Test software information	8
2.8	Test results	9
3	Test Requirements	10
3.1	AC power-line conducted emissions	10
3.2	20 dB bandwidth	11
3.3	Radiated emissions	12
	Appendix A: AC power-line conducted emissions	14
	Appendix B: Occupied Channel Bandwidth	16
	Appendix C: Radiated emission	18
4	Test Setup Photos	40
5	External Photos	42
6	Internal Photos	42

1 General Information

1.1 Notes

The results of this test report relate exclusively to the item tested as specified in chapter "Description of test item" and are not transferable to any other test items.

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD. is not responsible for any generalisations and conclusions drawn from this report. Any modification of the test item can lead to invalidity of test results and this test report may therefore be not applicable to the modified test item.

The test report may only be reproduced or published in full. Reproducing or publishing extracts of the report requires the prior written approval of the EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.


This document is subject to the General Terms and Conditions and the Testing and Certification System of EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD., available on request or accessible at www.eurofins.com.

Operator

2026-06-01	Bruce Zheng / Project Engineer	
------------	--------------------------------	---

Date	Eurofins-Lab.	Name / Title	Signature
------	---------------	--------------	-----------

Technical responsibility for area of testing:

2026-06-01	Albert Xu / EMC Manager	
------------	-------------------------	---

Date	Eurofins-Lab.	Name / Title	Signature
------	---------------	--------------	-----------

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

1.2 Testing laboratory

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.

Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83, Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Telephone : +86-755-82911867

Fax : +86-755-82910749

The Laboratory has passed the Accreditation by the American Association for Laboratory Accreditation (A2LA). The Accreditation number is 5376.01.

The Laboratory has been listed by industry Canada to perform electromagnetic emission measurements, The CAB identifier is CN0088.

1.3 Details of applicant

Name : GODOX PHOTO EQUIPMENT CO.,LTD
Address : 1st to 4th Floor, Building 2/1st to 4th Floor, Building 4 ,Yao-chuan Industrial Zone, Tangwei Community, Fuhai Street, Baoan District, Shenzhen, 518103 China
Telephone : N/A
Fax : N/A

1.4 Details of manufacturer

Name : GODOX Photo Equipment Co.,Ltd.
Address : 4th Floor of Building 1, 1st to 4 th Floor of Building 2, 4th Floor of Building 3,1st to 4th Floor of Building 4, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China
Telephone : N/A
Fax : N/A

1.5 Details of Factory

Name : GODOX Photo Equipment Co.,Ltd.
Address : 4th Floor of Building 1, 1st to 4 th Floor of Building 2, 4th Floor of Building 3,1st to 4th Floor of Building 4, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China
Telephone : N/A
Fax : N/A

1.6 Application details

Date of receipt of application : 2026-05-10
Date of receipt of test item : 2026-05-10
Date of test : 2026-05-10 to 2026-06-01
Date of issue : 2026-06-01

1.7 Test item

Product type : Macro Twin Flash
Model name : MF-T76 C
MF-T76 S, MF-T76 N
Model differences: All models use the same circuitry and RF module, except for the differences in model names and the bottom hot shoe.
Brand name : 
Technical Description : SRD-2.4GHz
Sample Code : 260511-29-001

RadioTechnical data

Fundamental frequency : 2.412999634GHz-2.464499756GHz
Modulation : MSK
Antenna type : PCB Antenna
MaxGain : -0.37847 dBi

(General disclaimer:

The above sample(s) and sample information was/were submitted and identified on behalf of the applicant.

Eurofins assures objectivity and impartiality of the test, and fulfills the obligation of confidentiality for applicant's commercial information and technical documents.)

1.8 Test standards

FCC Part 15 Subpart C	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
-----------------------	--

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Page 5 of 42

2 Technical Test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations as specified were ascertained in the course of the tests performed.



2.2 Test environment

Ac line conducted

Environment Parameter	Temperature °C	Relative Humidity
101.7 kPa	24.2	63.5%

RF Conducted

Environment Parameter	Temperature °C	Relative Humidity
101.7 kPa	24.3	61.7%

Radiated

Environment Parameter	Temperature °C	Relative Humidity
101.7 kPa	22.2	62.4%

2.3 Measurement uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty in conducted measurements	1.96dB
Uncertainty for Conducted RF test	RF Power Conducted: 1.16dB Frequency test involved: 1.05×10 ⁻⁷ or 1%
Uncertainty for Radiated Emission 9KHz-30MHz	4.56dB
Uncertainty for Radiated Spurious Emission 30MHz-1000MHz	Horizontal: 4.46dB; Vertical: 4.54dB;
Uncertainty for Radiated Spurious Emission 1000MHz-18000MHz	Horizontal: 4.42dB; Vertical: 4.41dB;
Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 4.63dB; Vertical: 4.62dB;

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

2.4 Test equipment utilized

EQUIPMENT ID	EQUIPMENT NAME	MODEL NO.	CAL. DUE DATE
23-2-13-05	EMI Test Receiver	ESR3	2027-03-20
23-2-13-06	LISN	NNLK 8127 RC	2027-03-20
23-2-10-16	Attenuator	VTSD 9561-F	2027-03-20
23-2-10-63	Temperature & Humidity Meter	COS-03	2027-03-20
23-2-10-65	Barometer	Baro	2027-03-20
23-2-13-12	Signal Analyzer	N9010B-544	2027-03-20
23-2-13-13	BT/WLAN Tester	CMW270	2027-03-20
23-2-13-14	Signal Generator	N5183B-520	2027-03-20
23-2-13-15	Vector Signal Generator	N5182B-506	2027-03-20
23-2-10-43	Switch and Control Unit	ERIT-E-JS0806-2	2027-03-20
23-2-10-44	DC power supply	E3642A	2027-03-20
23-2-10-45	Temperature test chamber	SG-80-CC-2	2027-03-20
23-2-10-50	Temperature & Humidity Meter	COS-03	2027-03-20
23-2-10-66	Barometer	Baro	2027-03-20
23-2-13-01	EMI Test Receiver	ESR7	2027-03-20
23-2-13-02	Signal Analyzer	N9020B-544	2027-03-20
23-2-12-01	Active Loop Antenna	FMZB 1519B	2026-08-16
23-2-12-02	TRILOG Broadband Antenna	VULB9168	2026-09-11
23-2-12-03	Horn Antenna	3117	2026-08-23
23-2-12-04	Horn Antenna	BBHA 9170	2026-08-16
23-2-10-01	Preamplifier	BBV9745	2027-03-20
23-2-10-02	Preamplifier	TAP01018048	2027-03-20
23-2-10-03	Preamplifier	TAP18040048	2027-03-20
23-2-10-62	Temperature & Humidity Meter	COS-03	2027-03-20
23-2-10-64	Barometer	Baro	2027-03-20
23-2-10-14	Switch and Control Unit	ERIT-E-JS0806-SF1	N/A
23-2-13-03	EMI Test Receiver	ESR7	2027-03-20
23-2-13-04	Signal Analyzer	N9020B-526	2027-03-20
23-2-12-06	Active Loop Antenna	FMZB 1519B	2027-03-20
23-2-10-46	Preamplifier	BBV9745	2027-03-20
23-2-10-47	Preamplifier	TAP01018048	2027-03-20
23-2-10-61	Temperature & Humidity Meter	COS-03	2027-03-20
23-2-10-52	Barometer	Baro	2027-03-20
23-2-10-15	Switch and Control Unit	ERIT-E-JS0806-SF1	N/A
23-2-13-34	Cable	LMR240-NMNM-2.50M	2027-03-20
23-2-13-35	Cable	LMR240-NMNM-7.00M	2027-03-20
23-2-13-36	attenuator	EMCI-N-6-06	2027-03-20
23-2-13-37	Cable	SFT205-NMSMR-3.00M	2027-03-20
23-2-13-38	Cable	EMC104-SM-SM-7000	2027-03-20

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

2.5 Test mode

Pretest Mode	Description	Data/Modulation
Mode 1	TX/CH01	FSK
Mode 2	TX/CH16	FSK
Mode 3	TX/CH32	FSK

Channel List			
Channel Number	Frequency (GHz)	Channel Number	Frequency (GHz)
1	2.412999634	17	2.439499908
2	2.414499664	18	2.440999939
3	2.415999695	19	2.442999847
4	2.418000000	20	2.444499878
5	2.419499634	21	2.445999908
6	2.420999664	22	2.447999817
7	2.422999969	23	2.449499847
8	2.424500000	24	2.450999878
9	2.425999634	25	2.452999786
10	2.427999939	26	2.454499817
11	2.429499969	27	2.455999847
12	2.431000000	28	2.457999756
13	2.432999908	29	2.459499786
14	2.434499939	30	2.460999817
15	2.435999969	31	2.462999725
16	2.437999878	32	2.464499756

2.6 Auxiliary equipment used during test

Item	Equipment	Mfr/Brand	Model/Type No.	Note
E-1	Macro Twin Flash		MF-T76 C	N/A
E-2	Adapter	N/A	JZB310-050200UU	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	Shielded	NO	100cm	

2.7 Test software information

N/A

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

2.8 Test results

☒ 1st test

☐ test after modification

☐ production test

FCC rule section(s)		Test Result	Verdict
§15.207	AC power-line conducted emissions	Appendix A	Pass
§15.215 (c)	20 dB bandwidth	Appendix B	Pass
§15.249 (a)&(d)	Radiated emissions	Appendix C	Pass
§15.203	Antenna requirement	See note 1	Pass

Note 1: The EUT incorporates an embedded, non-removable PCB Antenna with a maximum gain of -0.37847 dBi. This design satisfies FCC § 15.203 (prohibiting user-replaceable antennas) and ISED RSS-GEN Section 6.8 (antenna gain $\leq$ 6 dBi).

3 Test Requirements

3.1 AC power-line conducted emissions

3.1.1 Limits


Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

3.1.2 Measurement procedure

Clause 6.2 of *ANSI C63.10-2020*.

3.1.3 Setup

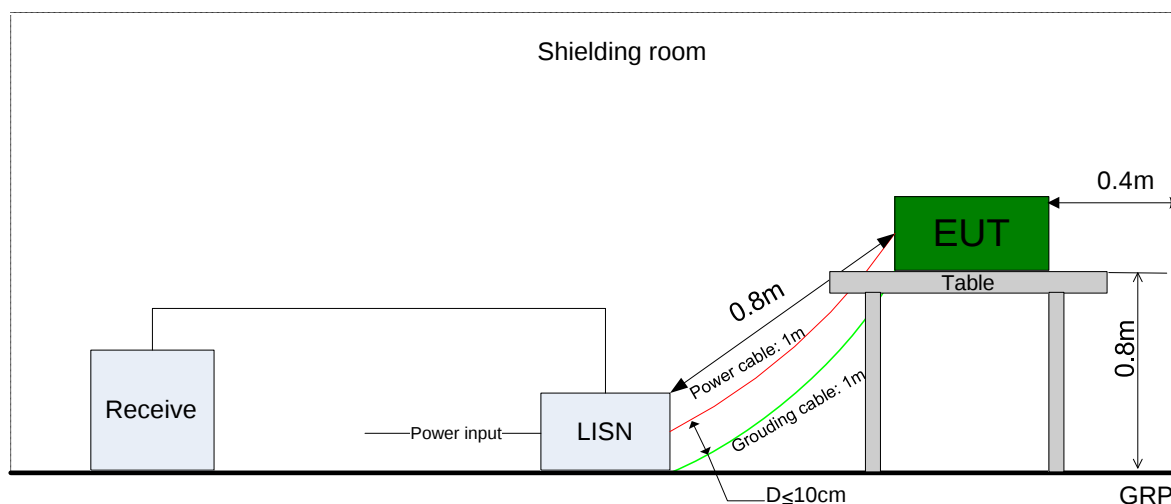

3.2 20 dB bandwidth


3.2.1 Limits

None; for reporting purposes only.

3.2.2 Measurement procedure

Clause 6.9 of *ANSI C63.10-2020*.

3.2.3 Setup

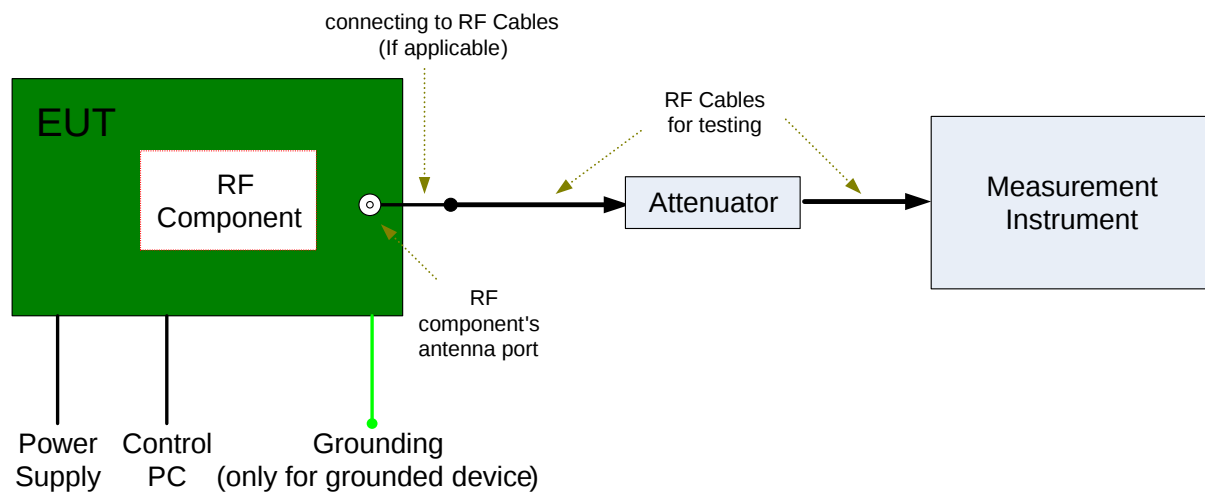

3.3 Radiated emissions

3.3.1 Limits

Fundamental frequency (MHz)	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	500

Field strength limits are specified at a distance of 3 meters.

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the emission limits in the following table, whichever requires the lesser attenuation.


Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

3.3.2 Measurement procedure


Clause 4.1.5; 5.2; 5.3; 6.3; 6.4; 6.5; 6.6 of ANSI C63.10-2020.

3.3.3 Setup


Below 30MHz

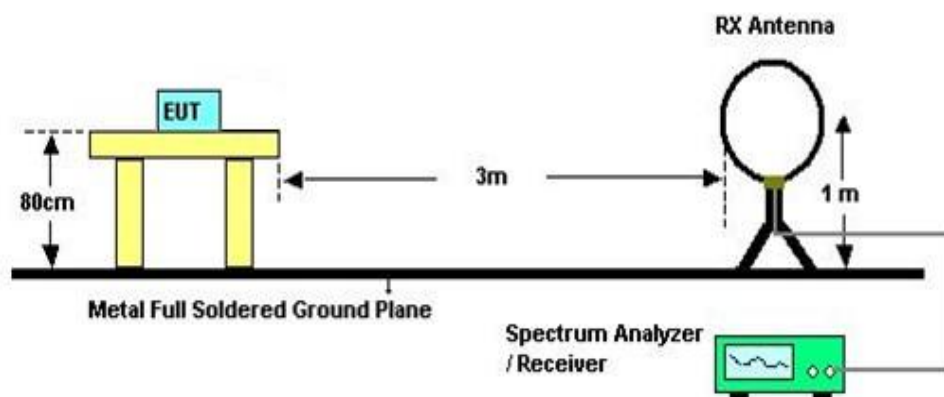

Below 1GHz

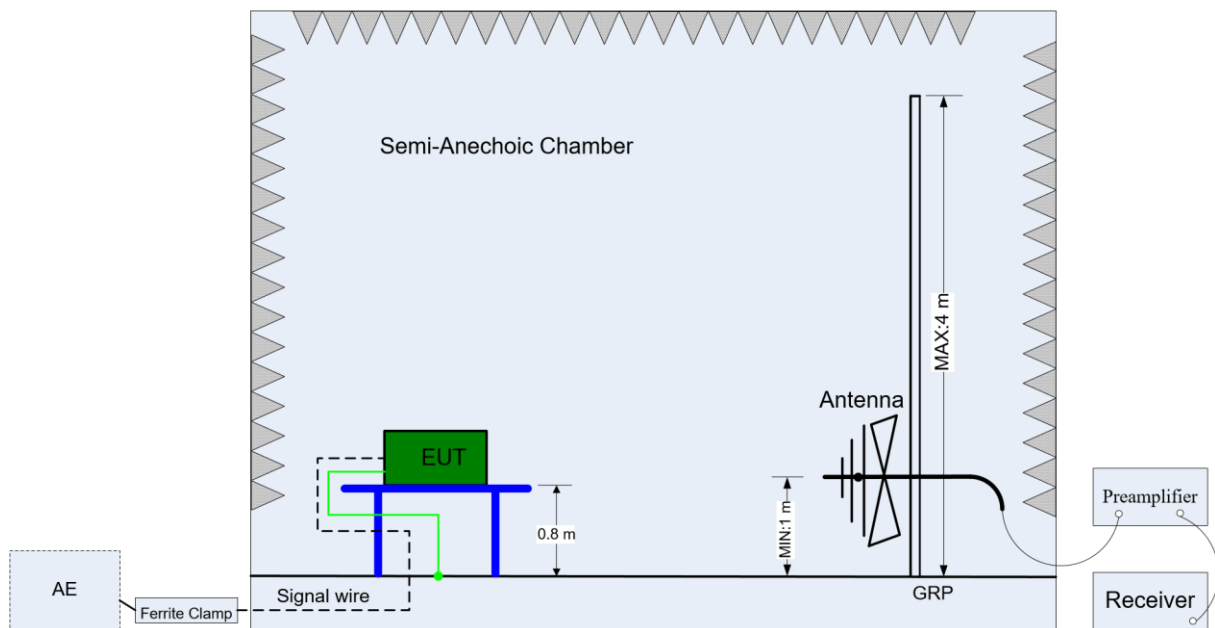

Above 1GHz

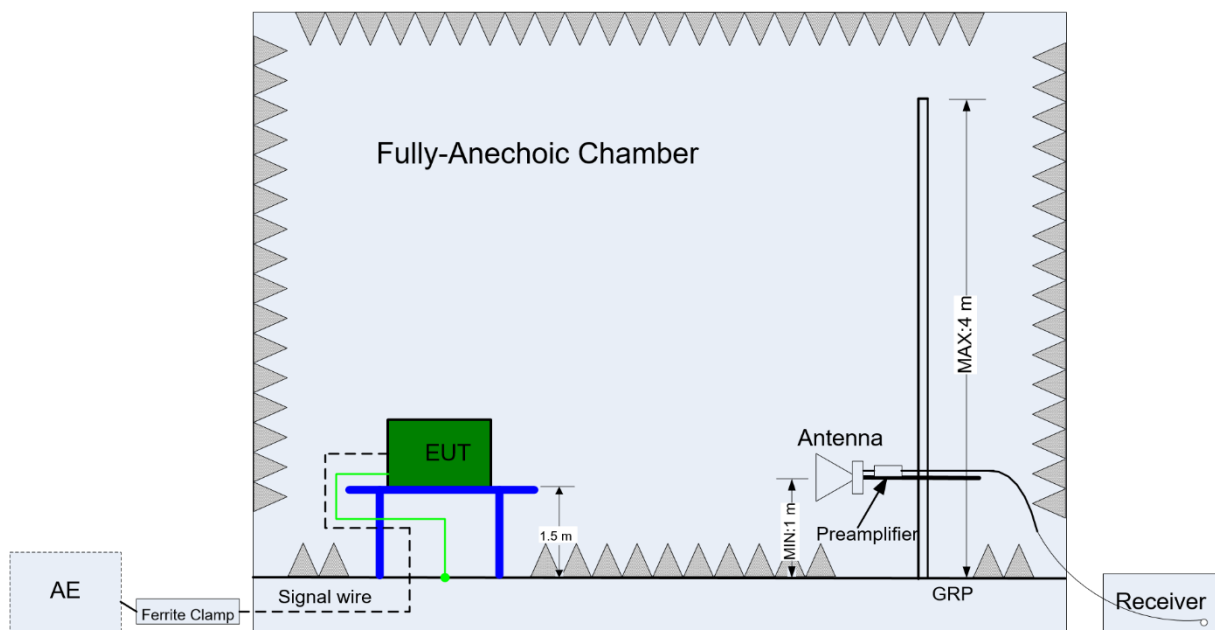

Test Report No.: EFGX26050226-IE-01-E01


EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Appendix A: AC power-line conducted emissions

Mode:	Charging
-------	----------

Start of Test: 2026-05-14 17:27:18


Test Graph

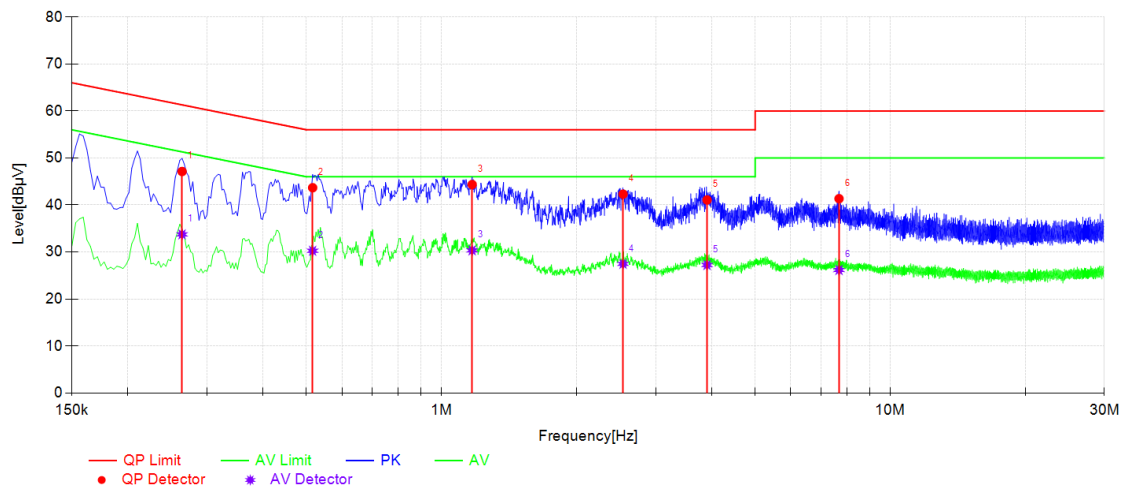

Final Data List										
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type	Verdict
1	0.264	10.33	47.13	61.30	14.17	33.75	51.30	17.55	L1	PASS
2	0.516	10.25	43.68	56.00	12.32	30.26	46.00	15.74	L1	PASS
3	1.17	10.35	44.36	56.00	11.64	30.35	46.00	15.65	L1	PASS
4	2.538	10.29	42.32	56.00	13.68	27.48	46.00	18.52	L1	PASS
5	3.906	10.30	41.08	56.00	14.92	27.24	46.00	18.76	L1	PASS
6	7.689	10.42	41.35	60.00	18.65	26.17	50.00	23.83	L1	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

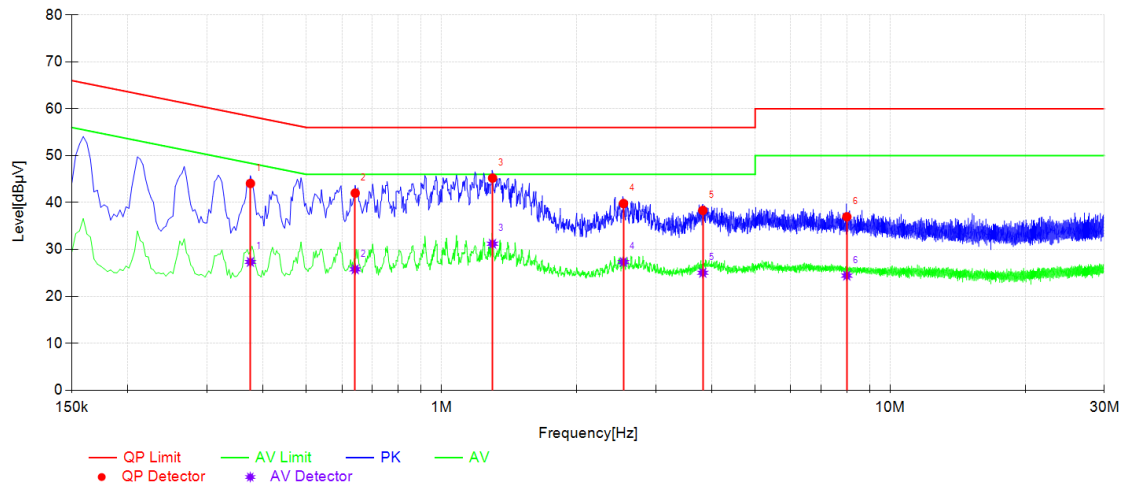

Final Data List										
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type	Verdict
1	0.375	10.29	44.08	58.39	14.31	27.35	48.39	21.04	N	PASS
2	0.642	10.26	42.02	56.00	13.98	25.78	46.00	20.22	N	PASS
3	1.299	10.30	45.22	56.00	10.78	31.22	46.00	14.78	N	PASS
4	2.544	10.39	39.80	56.00	16.20	27.33	46.00	18.67	N	PASS
5	3.822	10.40	38.33	56.00	17.67	25.04	46.00	20.96	N	PASS
6	8.004	10.43	36.97	60.00	23.03	24.44	50.00	25.56	N	PASS

Test Report No.: EFGX26050226-IE-01-E01


EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Appendix B: Occupied Channel Bandwidth

Test Result



Channel Frequency[MHz]	OCB [MHz]	20db EBW[MHz]
2412.999634	0.83461	0.8063
2437.999878	0.98754	0.9176
2464.499756	1.00750	0.9173

Test Graphs

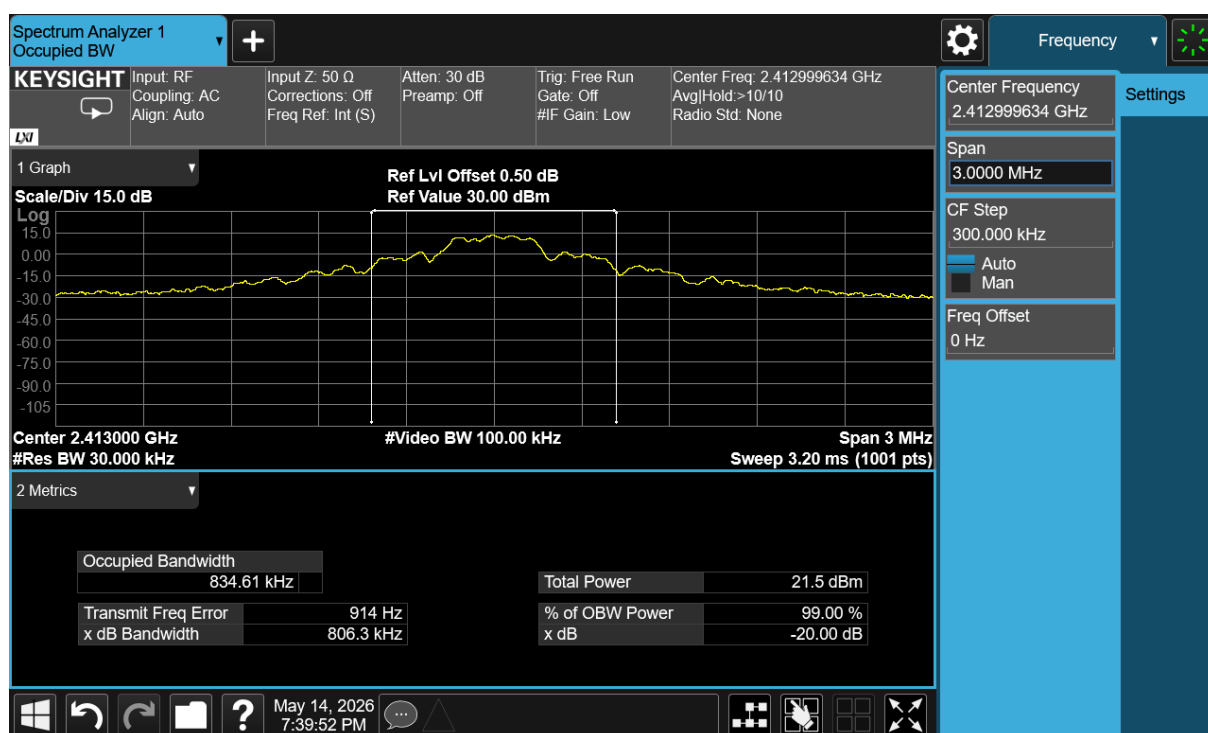

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

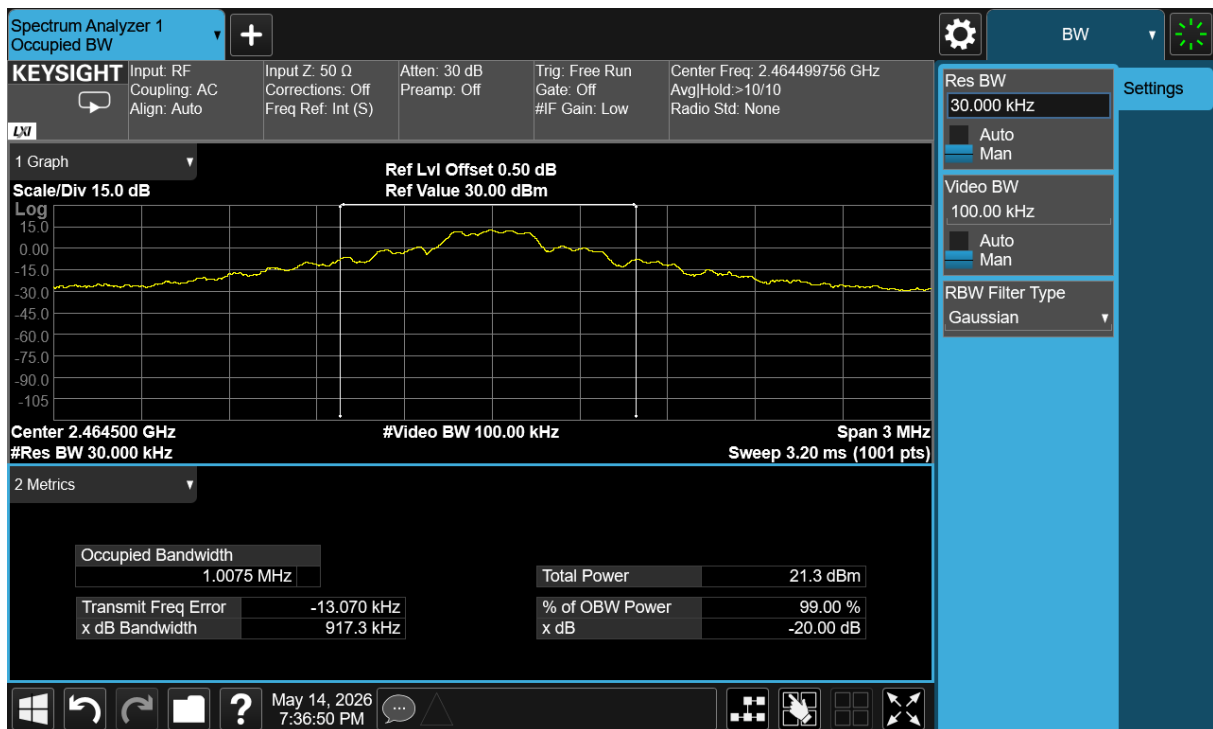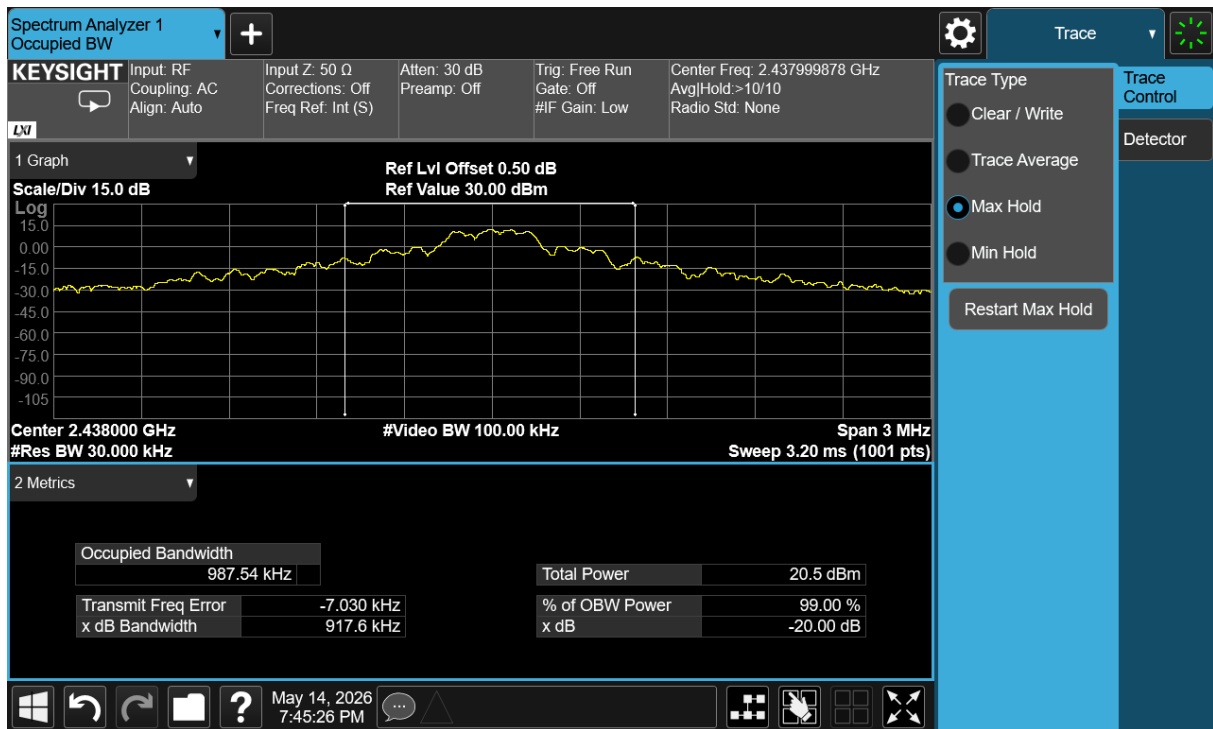

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.

Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83, Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China


Appendix C: Radiated emission

The report only records the worst-case emission levels.

For radiated emissions in the frequency range of 9 kHz to 30 MHz, a preliminary scan was performed. Per FCC §15.31(o), emissions that were more than 20 dB below the applicable limit are not reported.

For radiated emissions at frequencies above 1 GHz, per ANSI C63.10-2020, Section 6.6.4.3, Note 1, if the peak measured value complies with the average limit, an average measurement is not required. Therefore, for frequencies where the peak result complies with the average limit, average (AV) emission values may be omitted from the table below.


Mode:	Tx	Model:	MF-T76 C
-------	----	--------	----------

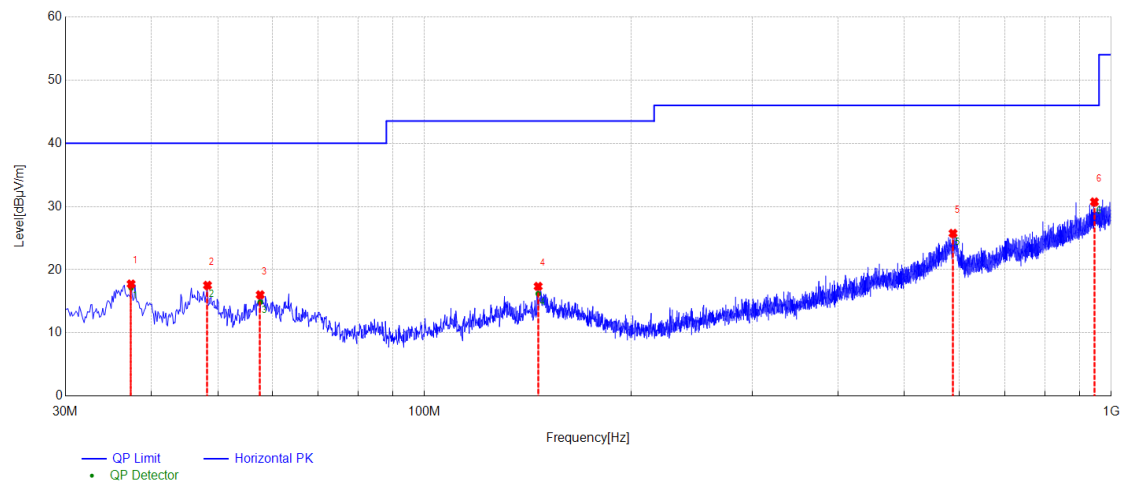

QP Final Data List									
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	37.3962	-16.05	17.13	40.00	22.87	100	40	Horizontal	PASS
2	48.3088	-16.08	17.46	40.00	22.54	100	91	Horizontal	PASS
3	57.6450	-16.67	14.89	40.00	25.11	100	13	Horizontal	PASS
4	146.4000	-16.13	16.22	43.50	27.28	100	106	Horizontal	PASS
5	588.3562	-8.82	25.68	46.00	20.32	100	191	Horizontal	PASS
6	945.1950	-1.57	30.65	46.00	15.35	100	108	Horizontal	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83, Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

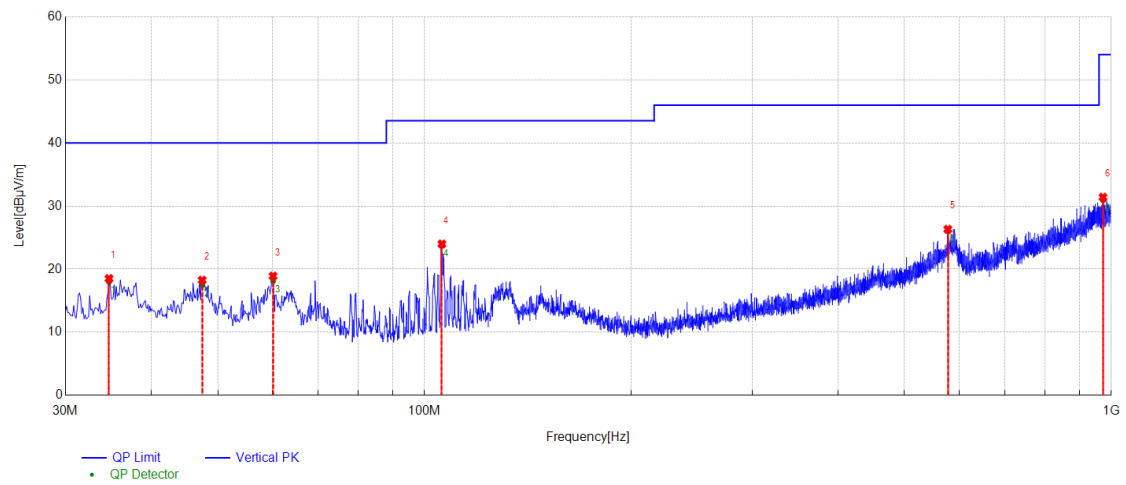


QP Final Data List									
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	34.7288	-16.23	17.93	40.00	22.07	100	276	Vertical	PASS
2	47.4600	-16.04	17.43	40.00	22.57	100	15	Vertical	PASS
3	60.1912	-17.01	18.08	40.00	21.92	100	103	Vertical	PASS
4	106.0238	-19.06	23.71	43.50	19.79	100	62	Vertical	PASS
5	578.1712	-9.16	26.03	46.00	19.97	100	241	Vertical	PASS
6	972.8400	-1.66	30.87	54.00	23.13	100	359	Vertical	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China


Mode:	Tx	Model:	MF-T76 S
-------	----	--------	----------

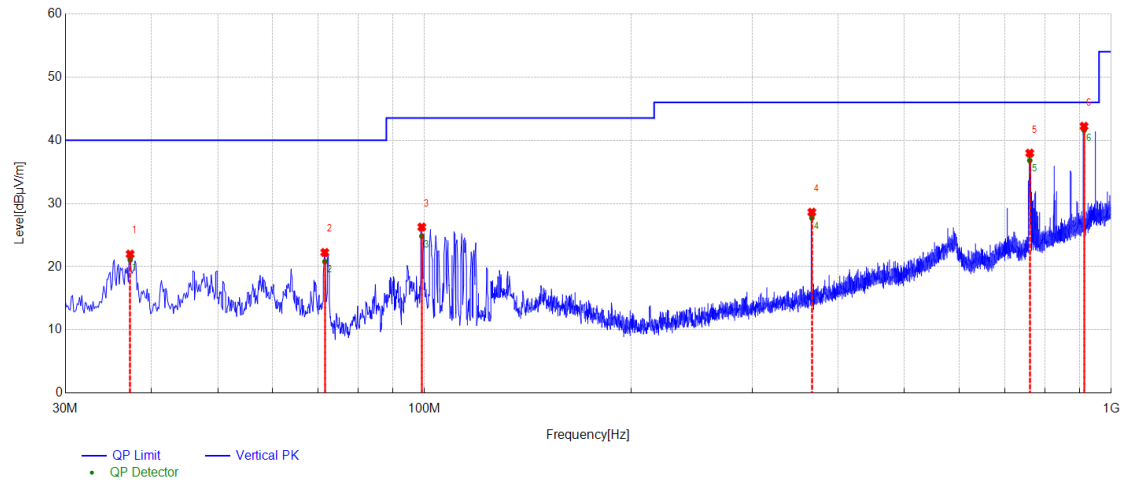

QP Final Data List									
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	37.2750	-16.06	21.09	40.00	18.91	100	140	Vertical	PASS
2	71.5888	-18.88	20.81	40.00	19.19	100	49	Vertical	PASS
3	99.1125	-19.74	24.83	43.50	18.67	100	246	Vertical	PASS
4	366.4688	-14.46	27.71	46.00	18.29	100	143	Vertical	PASS
5	760.8950	-5.42	36.80	46.00	9.20	100	133	Vertical	PASS
6	912.8212	-2.97	41.59	46.00	4.41	100	120	Vertical	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

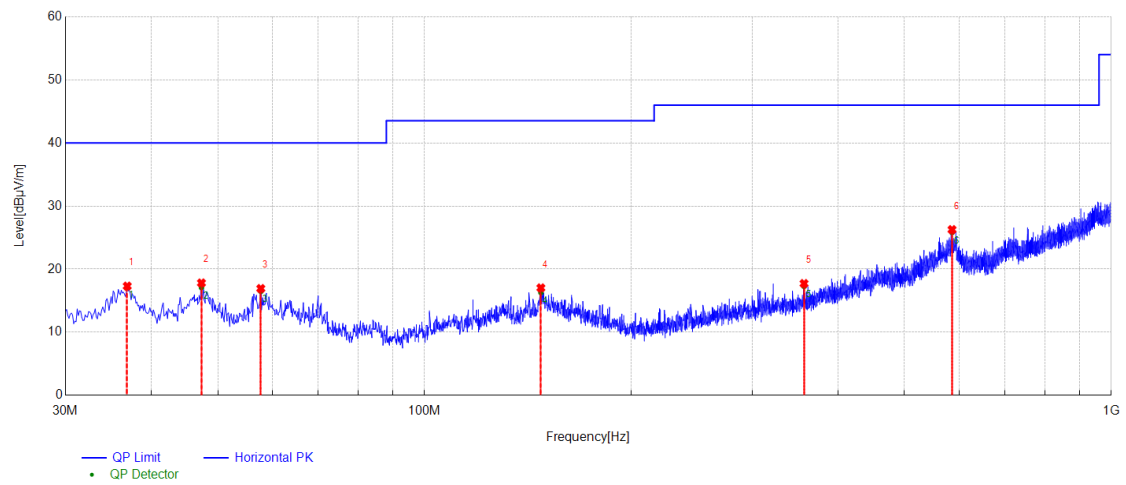


QP Final Data List									
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	36.9112	-16.09	17.12	40.00	22.88	100	119	Horizontal	PASS
2	47.3388	-16.04	17.08	40.00	22.92	100	198	Horizontal	PASS
3	57.7662	-16.68	16.49	40.00	23.51	100	168	Horizontal	PASS
4	147.7337	-16.05	16.30	43.50	27.20	100	350	Horizontal	PASS
5	357.0112	-14.74	17.28	46.00	28.72	100	239	Horizontal	PASS
6	586.4162	-8.94	25.82	46.00	20.18	100	38	Horizontal	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Model:	MF-T76 N
-------	----	--------	----------


Test Graph

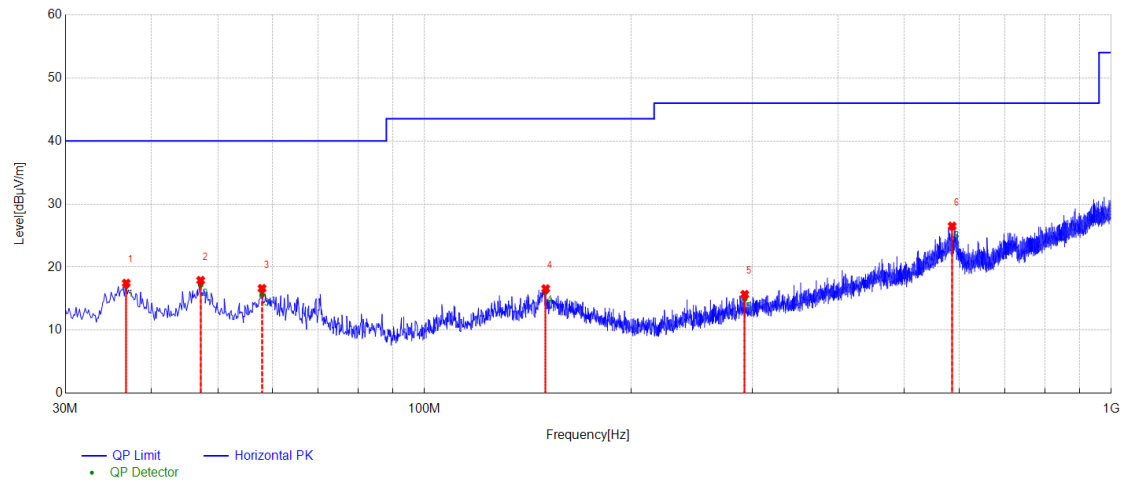

QP Final Data List									
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	36.7900	-16.09	16.99	40.00	23.01	100	350	Horizontal	PASS
2	47.2175	-16.03	17.19	40.00	22.81	100	62	Horizontal	PASS
3	58.0088	-16.70	15.62	40.00	24.38	100	43	Horizontal	PASS
4	150.1588	-15.92	16.11	43.50	27.39	100	60	Horizontal	PASS
5	292.6275	-16.26	14.97	46.00	31.03	100	222	Horizontal	PASS
6	586.6588	-8.93	26.33	46.00	19.67	100	116	Horizontal	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

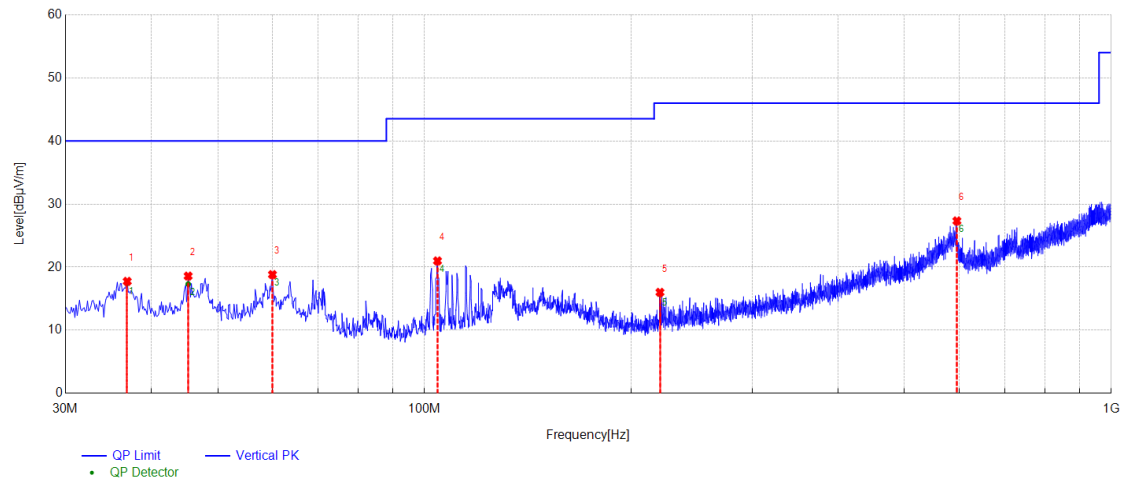


QP Final Data List									
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	36.9112	-16.09	17.45	40.00	22.55	100	148	Vertical	PASS
2	45.2775	-15.91	17.33	40.00	22.67	100	280	Vertical	PASS
3	60.0700	-16.98	18.81	40.00	21.19	100	47	Vertical	PASS
4	104.4475	-19.23	20.94	43.50	22.56	100	25	Vertical	PASS
5	220.2412	-19.19	15.71	46.00	30.29	100	39	Vertical	PASS
6	595.9950	-8.91	27.31	46.00	18.69	100	106	Vertical	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

The internal RF module is the same. The tests for the limiting band and spurious emissions are conducted on the main test model MF-T76 C.

Mode:	Tx	Channel:	2.464499756
-------	----	----------	-------------

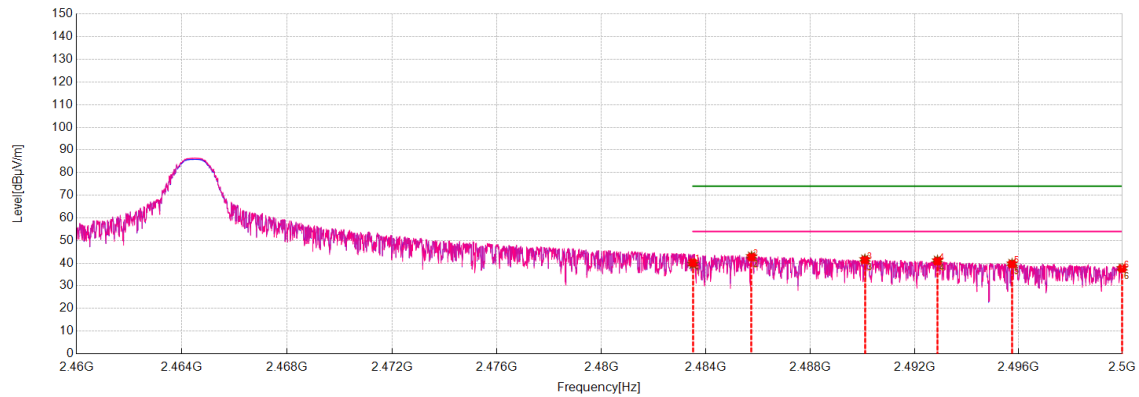


★ PK Detector ★ AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5000	5.46	40.22	74.00	33.78	39.52	54.00	14.48	100	153	Horizontal	PASS
2	2485.7474	5.49	42.70	74.00	31.30	43.03	54.00	10.97	200	150	Horizontal	PASS
3	2490.0959	5.57	41.37	74.00	32.63	41.71	54.00	12.29	100	147	Horizontal	PASS
4	2492.8857	5.57	40.87	74.00	33.13	41.22	54.00	12.78	200	141	Horizontal	PASS
5	2495.7554	5.56	39.60	74.00	34.40	39.79	54.00	14.21	200	153	Horizontal	PASS
6	2500.0000	5.50	37.67	74.00	36.33	37.74	54.00	16.26	100	172	Horizontal	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2.464499756
-------	----	----------	-------------

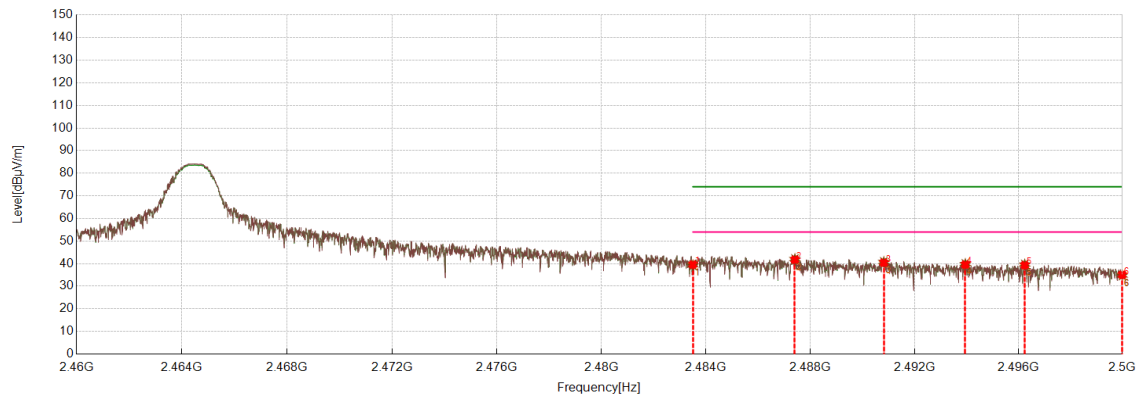


★ PK Detector ★ AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5000	5.46	39.59	74.00	34.41	39.21	54.00	14.79	200	175	Vertical	PASS
2	2487.4101	5.51	41.73	74.00	32.27	42.05	54.00	11.95	100	69	Vertical	PASS
3	2490.8233	5.55	40.39	74.00	33.61	40.76	54.00	13.24	100	59	Vertical	PASS
4	2493.9568	5.59	39.53	74.00	34.47	39.87	54.00	14.13	200	194	Vertical	PASS
5	2496.2430	5.57	39.27	74.00	34.73	39.63	54.00	14.37	100	62	Vertical	PASS
6	2500.0000	5.50	35.06	74.00	38.94	34.70	54.00	19.30	100	88	Vertical	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2.412999634
-------	----	----------	-------------

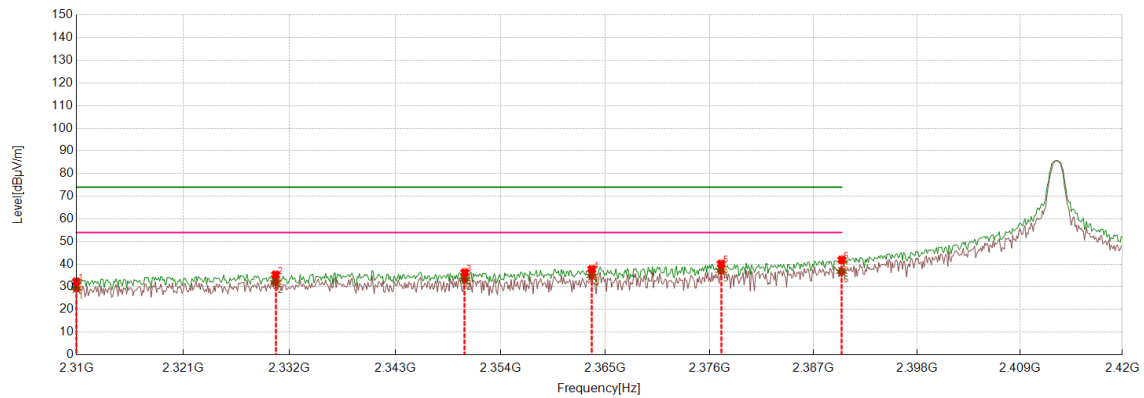


★ PK Detector ✱ AV Detector

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310.0000	4.67	32.27	74.00	41.73	29.36	54.00	24.64	200	230	Vertical	PASS
2	2330.5700	4.80	35.33	74.00	38.67	31.96	54.00	22.04	100	221	Vertical	PASS
3	2350.2600	5.04	36.32	74.00	37.68	33.26	54.00	20.74	200	205	Vertical	PASS
4	2363.5700	4.93	37.73	74.00	36.27	34.84	54.00	19.16	200	192	Vertical	PASS
5	2377.2100	5.08	40.14	74.00	33.86	37.05	54.00	16.95	200	225	Vertical	PASS
6	2390.0000	4.95	41.92	74.00	32.08	36.67	54.00	17.33	100	221	Vertical	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2.412999634
-------	----	----------	-------------

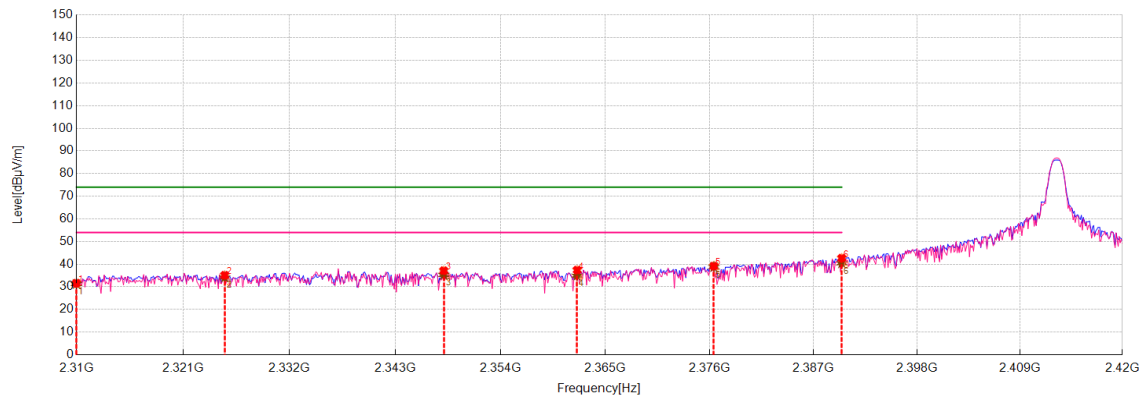

★ PK Detector ★ AV Detector


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310.0000	4.67	31.61	74.00	42.39	31.21	54.00	22.79	100	145	Horizontal	PASS
2	2325.2900	4.86	35.11	74.00	38.89	34.12	54.00	19.88	200	153	Horizontal	PASS
3	2348.0600	4.96	37.16	74.00	36.84	35.22	54.00	18.78	100	169	Horizontal	PASS
4	2362.0300	4.91	37.40	74.00	36.60	34.88	54.00	19.12	100	167	Horizontal	PASS
5	2376.4400	5.05	39.18	74.00	34.82	38.71	54.00	15.29	100	169	Horizontal	PASS
6	2390.0000	4.95	42.67	74.00	31.33	40.38	54.00	13.62	200	162	Horizontal	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

1GHz-18GHz

Mode:	Tx	Channel:	2.412999634
-------	----	----------	-------------

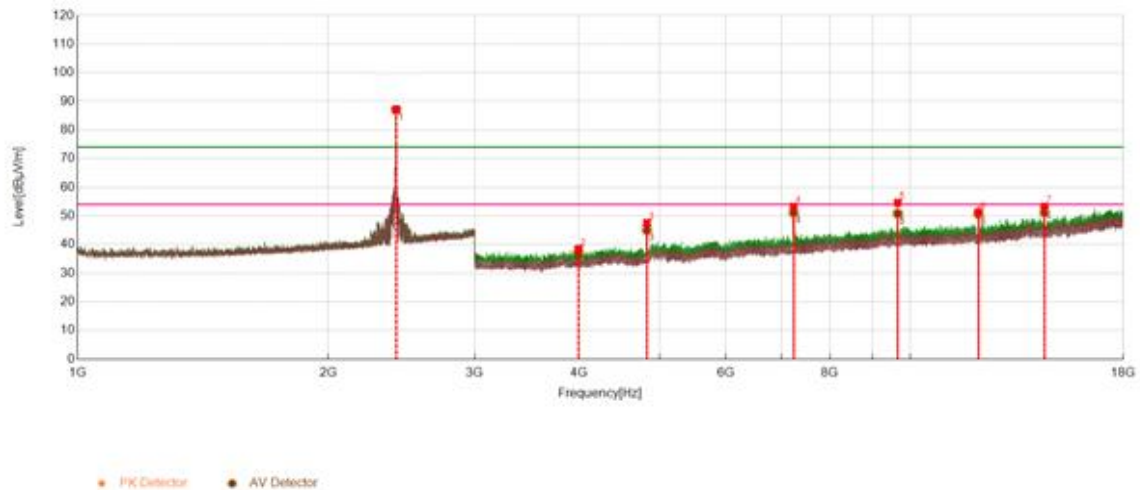


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2412.8000	3.09	88.42	114.00	25.58	87.22	94.00	6.78	150	212	Vertical	PASS
2	3994.0000	-17.66	38.42	74.00	35.58	36.84	54.00	17.16	150	250	Vertical	PASS
3	4826.0000	-14.84	46.07	74.00	27.93	44.95	54.00	9.05	150	167	Vertical	PASS
4	7238.5000	-8.98	52.25	74.00	21.75	51.05	54.00	2.95	150	192	Vertical	PASS
5	9652.0000	-4.73	51.10	74.00	22.90	50.75	54.00	3.25	150	226	Vertical	PASS
6	12064.0000	-1.83	51.97	74.00	22.03	50.61	54.00	3.39	150	236	Vertical	PASS
7	14478.0000	1.36	52.74	74.00	21.26	51.09	54.00	2.91	150	212	Vertical	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2.412999634
-------	----	----------	-------------

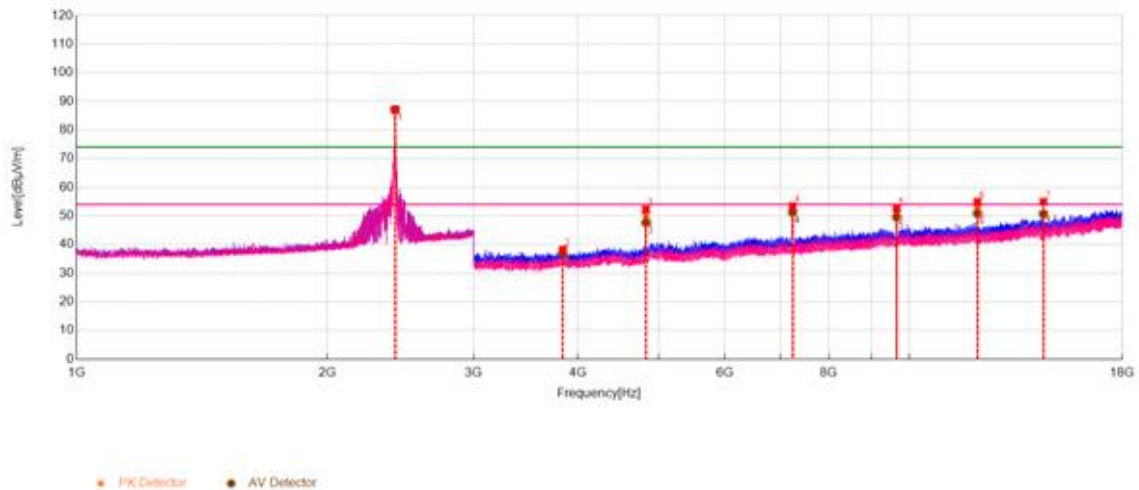


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2413.0000	3.08	89.12	114.00	24.88	87.96	94.00	6.04	150	158	Horizontal	PASS
2	3834.5000	-17.70	38.12	74.00	35.88	36.94	54.00	17.06	150	211	Horizontal	PASS
3	4826.0000	-14.84	50.26	74.00	23.74	47.64	54.00	6.36	150	187	Horizontal	PASS
4	7238.5000	-8.98	51.47	74.00	22.53	51.20	54.00	2.80	150	120	Horizontal	PASS
5	9651.5000	-4.73	51.62	74.00	22.38	49.56	54.00	4.44	150	143	Horizontal	PASS
6	12065.0000	-1.83	52.90	74.00	21.10	50.77	54.00	3.23	150	81	Horizontal	PASS
7	14478.5000	1.37	50.93	74.00	23.07	50.59	54.00	3.41	150	172	Horizontal	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2.437999878
-------	----	----------	-------------

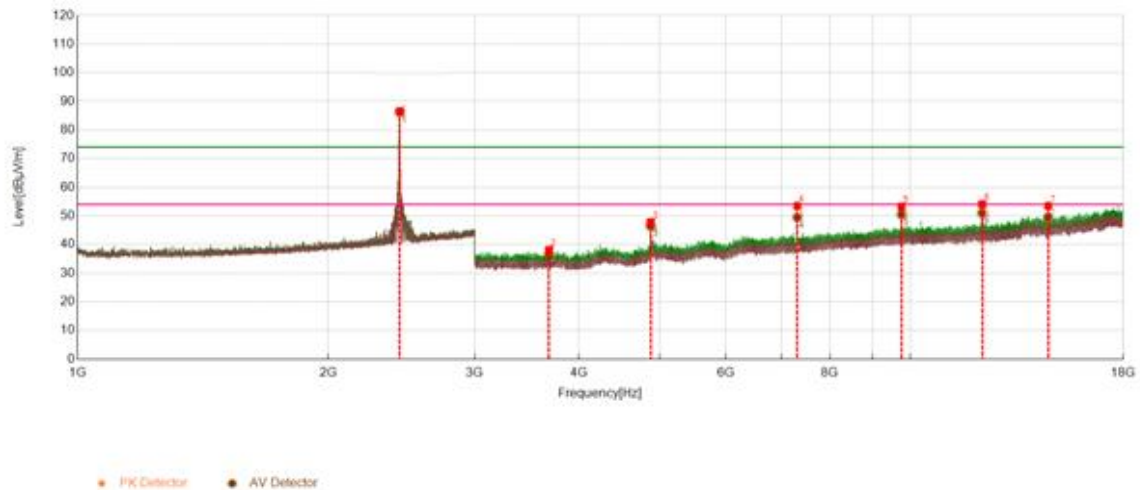


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2438.0000	3.48	88.73	114.00	25.27	86.39	94.00	7.61	150	231	Vertical	PASS
2	3681.5000	-18.87	38.05	74.00	35.95	36.47	54.00	17.53	150	337	Vertical	PASS
3	4875.5000	-14.18	47.81	74.00	26.19	46.42	54.00	7.58	150	198	Vertical	PASS
4	7313.5000	-9.47	53.48	74.00	20.52	49.46	54.00	4.54	150	208	Vertical	PASS
5	9752.5000	-4.64	53.23	74.00	20.77	50.46	54.00	3.54	150	247	Vertical	PASS
6	12189.5000	-1.54	54.09	74.00	19.91	50.99	54.00	3.01	150	91	Vertical	PASS
7	14628.5000	0.93	53.45	74.00	20.55	49.58	54.00	4.42	150	145	Vertical	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2.437999878
-------	----	----------	-------------

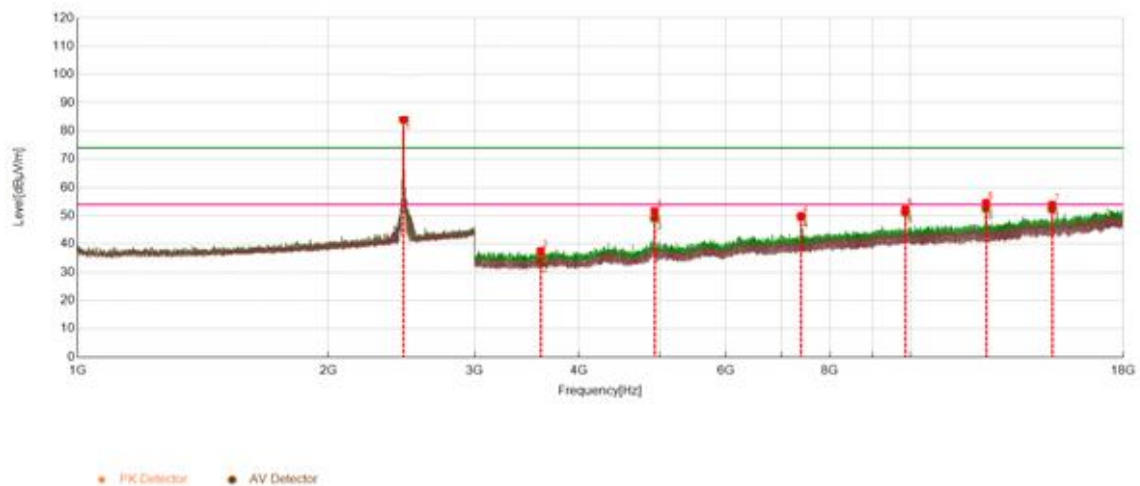


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2437.6000	3.48	92.53	114.00	21.47	90.02	94.00	3.98	150	185	Horizontal	PASS
2	3265.5000	-19.86	38.44	74.00	35.56	32.99	54.00	21.01	150	165	Horizontal	PASS
3	4876.0000	-14.17	54.24	74.00	19.76	51.05	54.00	2.95	150	107	Horizontal	PASS
4	7313.5000	-9.47	52.44	74.00	21.56	50.75	54.00	3.25	150	136	Horizontal	PASS
5	9752.0000	-4.65	53.03	74.00	20.97	48.77	54.00	5.23	150	161	Horizontal	PASS
6	12189.5000	-1.54	53.39	74.00	20.61	50.22	54.00	3.78	150	142	Horizontal	PASS
7	14627.5000	0.94	52.18	74.00	21.82	51.30	54.00	2.70	150	200	Horizontal	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2.464499756
-------	----	----------	-------------

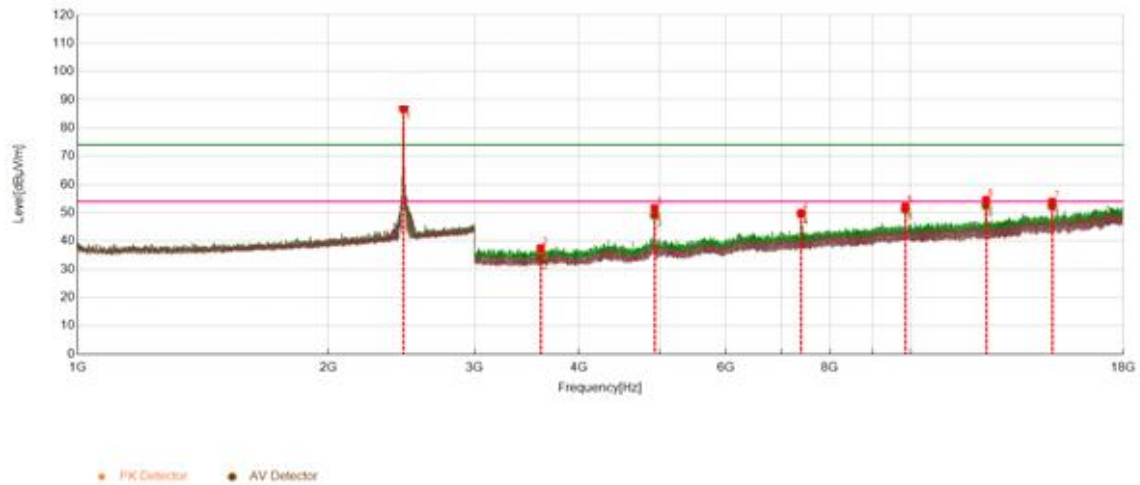


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2464.4000	3.57	88.25	114.00	25.75	86.87	94.00	7.13	150	196	Vertical	PASS
2	3598.0000	-19.21	37.47	74.00	36.53	33.80	54.00	20.20	150	279	Vertical	PASS
3	4929.0000	-13.91	51.62	74.00	22.38	49.05	54.00	4.95	150	173	Vertical	PASS
4	7393.5000	-9.54	49.77	74.00	24.23	49.59	54.00	4.41	150	192	Vertical	PASS
5	9857.5000	-4.42	52.19	74.00	21.81	51.19	54.00	2.81	150	352	Vertical	PASS
6	12322.0000	-1.57	54.55	74.00	19.45	52.53	54.00	1.47	150	130	Vertical	PASS
7	14787.0000	1.11	53.87	74.00	20.13	52.28	54.00	1.72	150	197	Vertical	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2.464499756
-------	----	----------	-------------

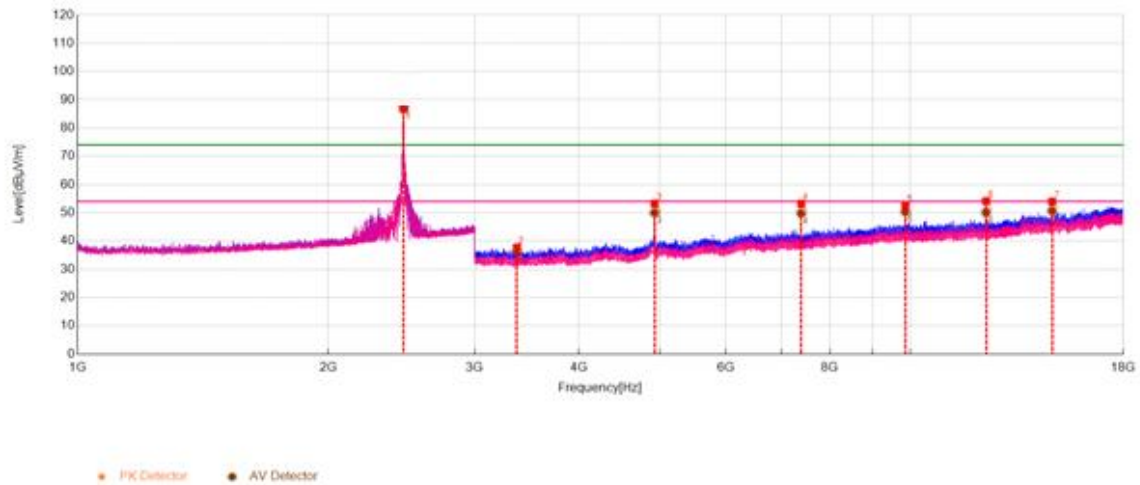


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2464.4000	3.57	88.12	114.00	25.88	87.23	94.00	6.77	150	140	Horizontal	PASS
2	3369.5000	-19.93	37.70	74.00	36.30	36.61	54.00	17.39	150	123	Horizontal	PASS
3	4928.5000	-13.89	53.23	74.00	20.77	49.99	54.00	4.01	150	95	Horizontal	PASS
4	7393.5000	-9.54	53.21	74.00	20.79	49.83	54.00	4.17	150	113	Horizontal	PASS
5	9857.5000	-4.42	52.53	74.00	21.47	50.36	54.00	3.64	150	138	Horizontal	PASS
6	12322.0000	-1.57	54.14	74.00	19.86	50.14	54.00	3.86	150	118	Horizontal	PASS
7	14787.0000	1.11	53.93	74.00	20.07	50.66	54.00	3.34	150	191	Horizontal	PASS

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

18GHz-25GHz

Mode:	Tx	Channel:	2.412999634
-------	----	----------	-------------

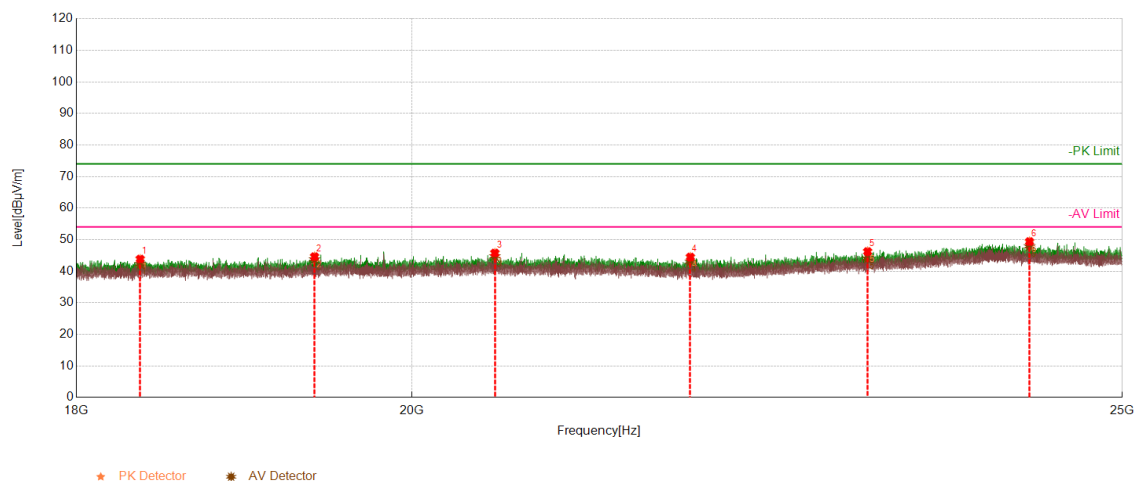


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	18364.368	-4.89	48.75	43.86	74.00	30.14	47.13	42.24	54.00	11.76	100	342
2	19398.319	-3.96	48.59	44.63	74.00	29.37	47.71	43.75	54.00	10.25	100	140
3	20528.526	-2.32	48.1	45.78	74.00	28.22	47.03	44.71	54.00	9.29	100	194
4	21828.491	-1.72	46.22	44.50	74.00	29.50	44.71	42.99	54.00	11.01	100	90
5	23078.403	0.96	45.28	46.24	74.00	27.76	43.06	44.02	54.00	9.98	100	243
6	24282.464	2.99	46.41	49.40	74.00	24.60	44.87	47.86	54.00	6.14	100	332
1	18364.368	-4.89	48.75	43.86	74.00	30.14	47.13	42.24	54.00	11.76	100	342

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83, Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2.412999634
-------	----	----------	-------------

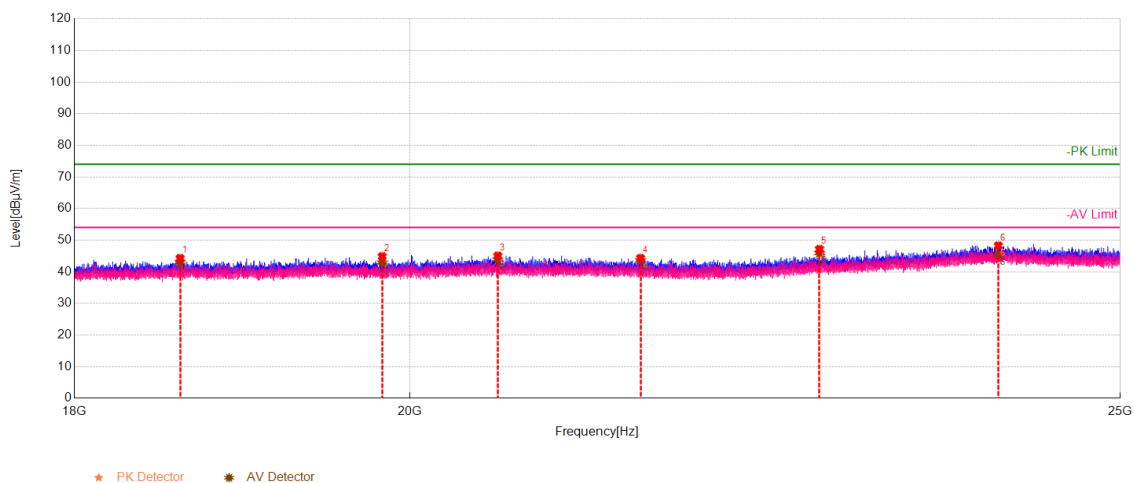


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	18607.630	-4.75	49.04	44.29	74.00	29.71	47.75	43.00	54.00	11.00	100	89
2	19827.441	-3.36	48.22	44.86	74.00	29.14	46.30	42.94	54.00	11.06	100	9
3	20560.728	-2.27	47.32	45.05	74.00	28.95	46.10	43.83	54.00	10.17	100	89
4	21503.325	-1.68	45.98	44.30	74.00	29.70	45.33	43.65	54.00	10.35	100	84
5	22746.587	0.14	47.02	47.16	74.00	26.84	45.76	45.90	54.00	8.10	100	201
6	24060.903	3.10	45.15	48.25	74.00	25.75	42.37	45.47	54.00	8.53	100	196
7	18607.630	-4.75	49.04	44.29	74.00	29.71	47.75	43.00	54.00	11.00	100	89

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2.437999878
-------	----	----------	-------------

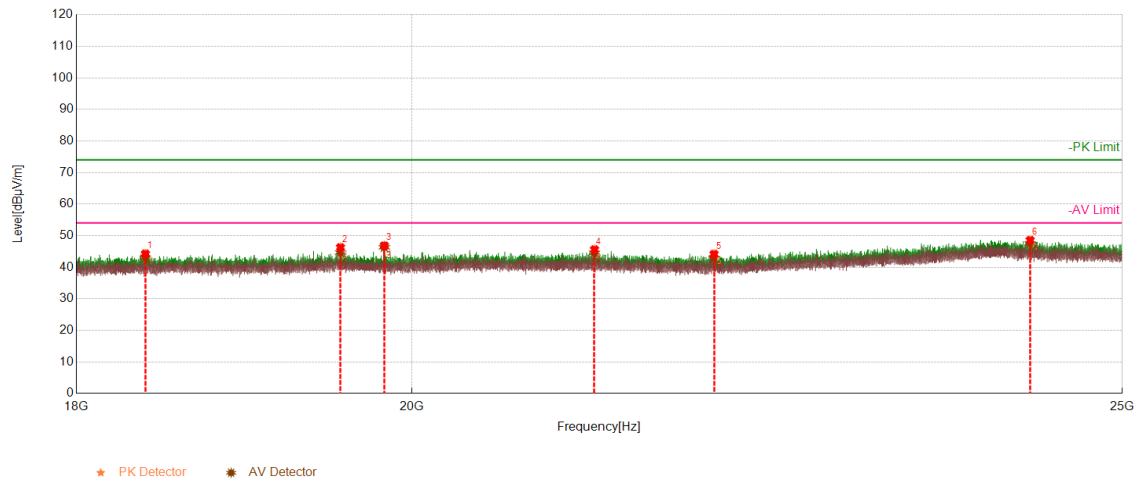


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	18394.469	-4.87	49.14	44.27	74.00	29.73	47.90	43.03	54.00	10.97	100	108
2	19556.877	-3.73	50.01	46.28	74.00	27.72	48.38	44.65	54.00	9.35	100	247
3	19827.791	-3.36	50.19	46.83	74.00	27.17	49.67	46.31	54.00	7.69	100	30
4	21181.309	-1.63	47.24	45.61	74.00	28.39	46.22	44.59	54.00	9.41	100	125
5	21991.599	-1.74	45.91	44.17	74.00	29.83	44.56	42.82	54.00	11.18	100	180
6	24287.364	2.98	45.59	48.57	74.00	25.43	44.54	47.52	54.00	6.48	100	341
7	18394.469	-4.87	49.14	44.27	74.00	29.73	47.90	43.03	54.00	10.97	100	108

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2.437999878
-------	----	----------	-------------

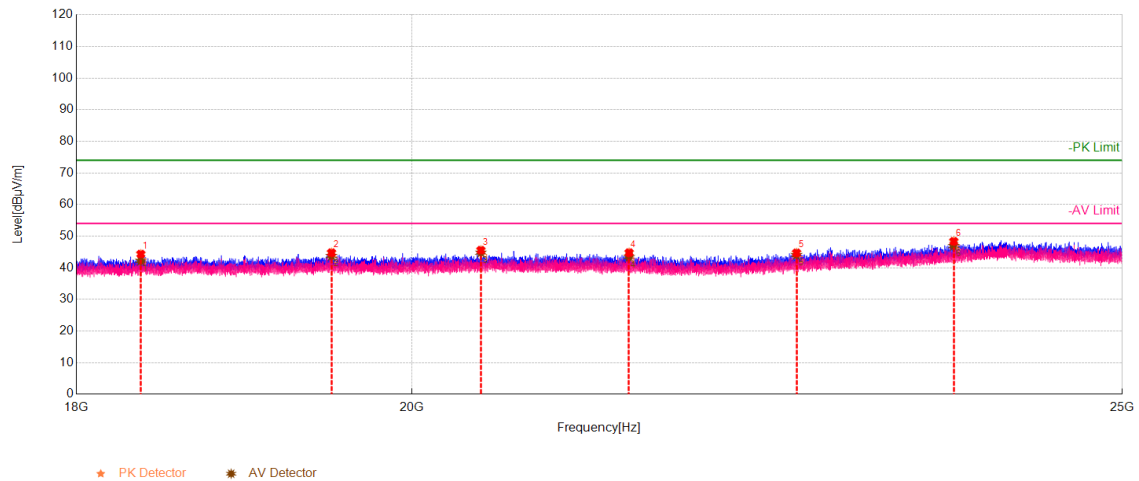


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	18368.218	-4.89	49.23	44.34	74.00	29.66	47.07	42.18	54.00	11.82	100	276
2	19501.575	-3.81	48.59	44.78	74.00	29.22	47.55	43.74	54.00	10.26	100	198
3	20438.921	-2.46	48.02	45.56	74.00	28.44	47.24	44.78	54.00	9.22	100	220
4	21412.670	-1.66	46.45	44.79	74.00	29.21	45.04	43.38	54.00	10.62	100	24
5	22568.778	-0.31	45.03	44.72	74.00	29.28	44.33	44.02	54.00	9.98	100	127
6	23711.585	2.46	45.92	48.38	74.00	25.62	44.39	46.85	54.00	7.15	100	71
7	18368.218	-4.89	49.23	44.34	74.00	29.66	47.07	42.18	54.00	11.82	100	276

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2.464499756
-------	----	----------	-------------

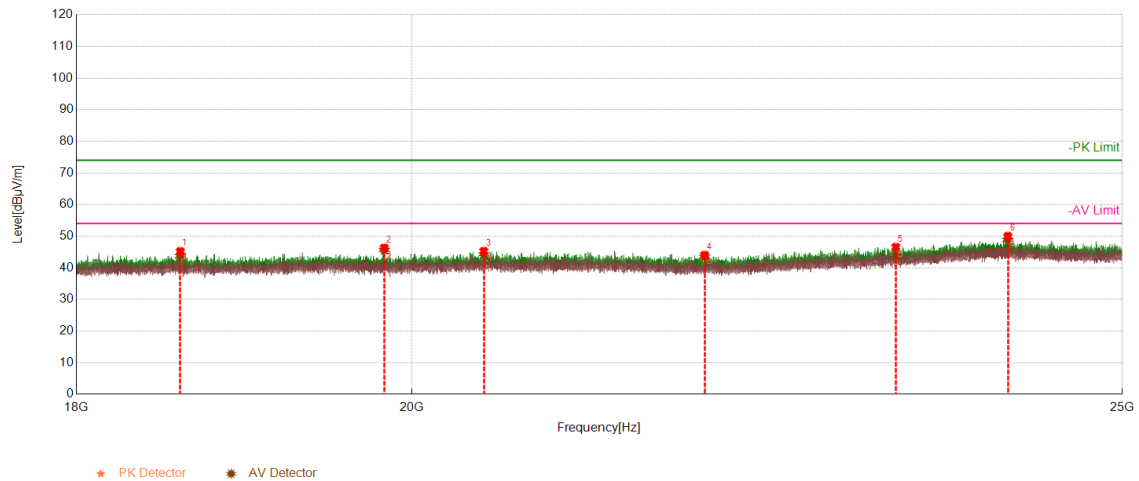


Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	18597.129	-4.75	49.95	45.20	74.00	28.80	48.50	43.75	54.00	10.25	100	250
2	19827.791	-3.36	49.65	46.29	74.00	27.71	49.02	45.66	54.00	8.34	100	350
3	20457.122	-2.43	47.71	45.28	74.00	28.72	46.67	44.24	54.00	9.76	100	245
4	21926.846	-1.73	45.74	44.01	74.00	29.99	45.21	43.48	54.00	10.52	100	281
5	23283.864	1.45	45.11	46.56	74.00	27.44	42.50	43.95	54.00	10.05	100	225
6	24117.605	3.08	46.94	50.02	74.00	23.98	45.70	48.78	54.00	5.22	100	360
7	18597.129	-4.75	49.95	45.20	74.00	28.80	48.50	43.75	54.00	10.25	100	250

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
 Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
 Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Mode:	Tx	Channel:	2.464499756
-------	----	----------	-------------

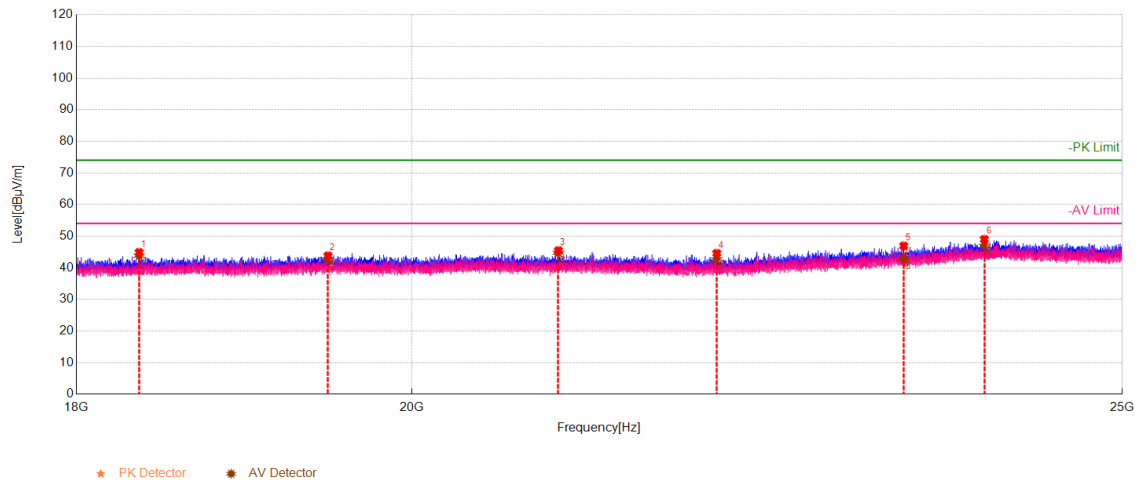

Final Data List												
NO.	Freq. [MHz]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	18358.417	-4.89	49.78	44.89	74.00	29.11	48.71	43.82	54.00	10.18	100	166
2	19480.224	-3.84	47.65	43.81	74.00	30.19	46.46	42.62	54.00	11.38	100	91
3	20942.247	-1.69	47.12	45.43	74.00	28.57	46.45	44.76	54.00	9.24	100	329
4	22010.150	-1.71	46.3	44.59	74.00	29.41	44.37	42.66	54.00	11.34	100	91
5	23341.267	1.58	45.35	46.93	74.00	27.07	41.18	42.76	54.00	11.24	100	37
6	23940.147	3.00	46.02	49.02	74.00	24.98	43.93	46.93	54.00	7.07	100	31
7	18358.417	-4.89	49.78	44.89	74.00	29.11	48.71	43.82	54.00	10.18	100	166

Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

4 Test Setup Photos

Conducted emissions



30MHz-1GHz



Test Report No.: EFGX26050226-IE-01-E01

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.
Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block Meishenghuigu Innovation Park, No.83,
Dabao Road, Bao'an District Shenzhen, Guangdong, People's Republic of China

Page 40 of 42

Spurious emissions



5 External Photos

Ref "EFGX26050226-IE-01_External_Photos.pdf"

6 Internal Photos

Ref "EFGX26050226-IE-01_Internal_Photos.pdf"

--End of report--