



BLE_1M_Ant1_2480_0~Reference



BLE_1M_Ant1_2480_30~1000



BLE_1M_Ant1_2480_1000~26500



BLE 2M Ant1 2402 0~Reference



BLE 2M Ant1 2402 30~1000




BLE 2M Ant1 2402 1000~26500



BLE 2M Ant1 2440 0~Reference



BLE 2M Ant1 2440 30~1000

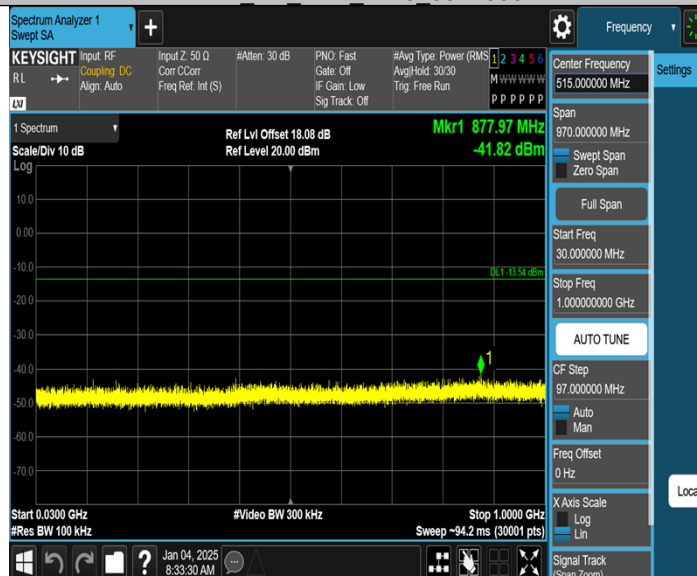


BLE 2M Ant1 2440 1000~26500



BLE 2M Ant1 2480 0~Reference



BLE 2M Ant1 2480 30~1000

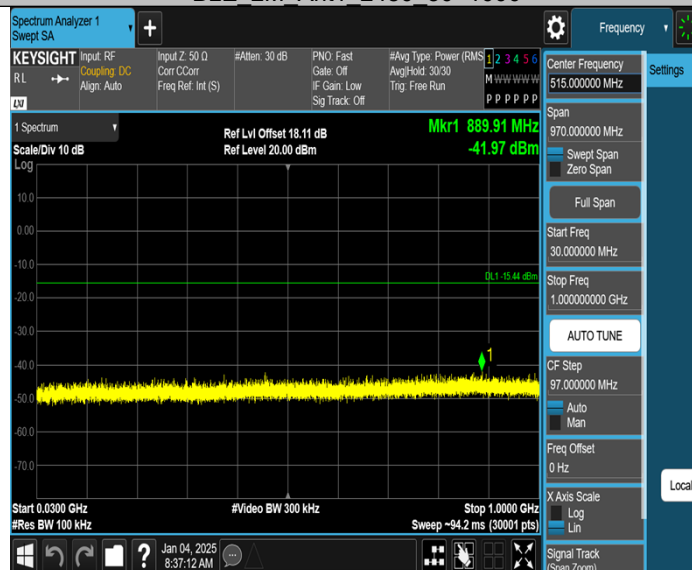

BLE 2M Ant1 2480 1000~26500



Appendix B.6: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations & different channels, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz

EUT Information

EUT Name:	WIFI+BT Module
Model:	DT3HR1601
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168518486/A003886577-011
Test Voltage:	DC 3.3V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

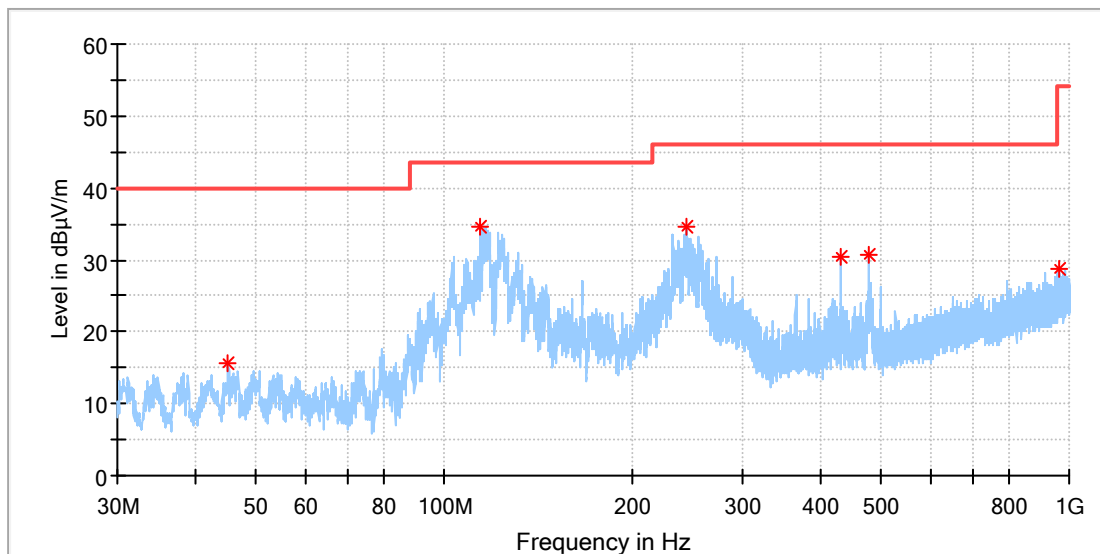

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.184231	15.70	40.00	24.30	100.0	H	271.0	-18.9
114.240769	34.69	43.50	8.81	100.0	H	343.0	-19.7
244.780385	34.47	46.00	11.53	100.0	H	195.0	-17.5
431.990385	30.34	46.00	15.66	100.0	H	14.0	-13.1
479.296539	30.67	46.00	15.33	100.0	H	228.0	-12.2
964.221923	28.76	54.00	25.24	100.0	H	75.0	-4.1

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: WIFI+BT Module
Model: DT3HR1601
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168518486/A003886577-011
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

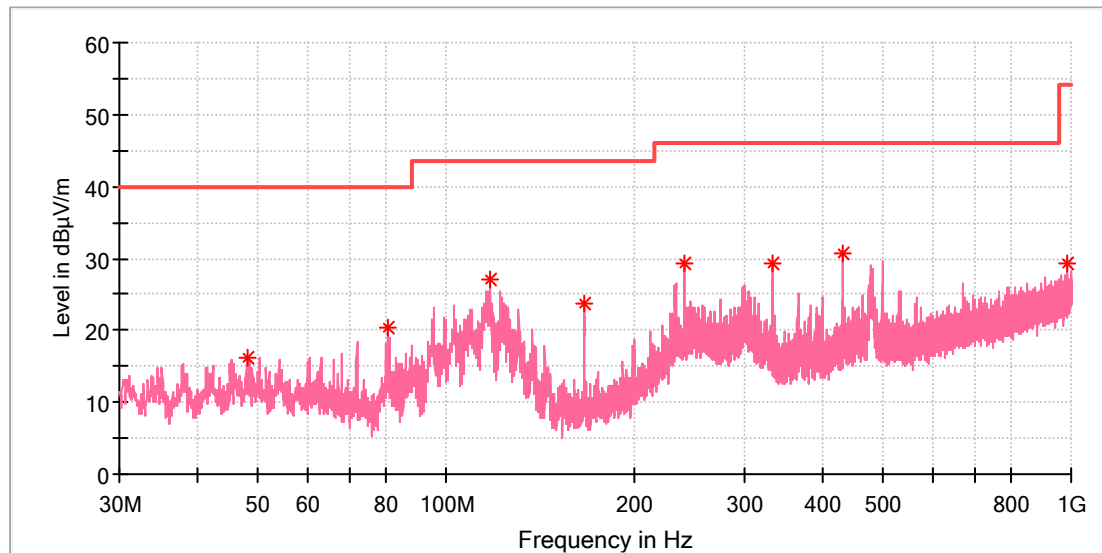

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.982308	16.11	40.00	23.89	100.0	V	245.0	-18.5
80.925000	20.40	40.00	19.60	100.0	V	91.0	-23.4
117.523846	27.05	43.50	16.45	100.0	V	100.0	-20.4
165.986539	23.70	43.50	19.80	100.0	V	253.0	-21.5
240.005000	29.39	46.00	16.61	100.0	V	229.0	-17.7
332.565385	29.31	46.00	16.69	100.0	V	212.0	-15.2
432.027692	30.69	46.00	15.31	100.0	V	284.0	-13.1
984.256154	29.24	54.00	24.76	100.0	V	277.0	-3.7

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	WIFI+BT Module
Model:	DT3HR1601
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168518486/A003886577-011
Test Voltage:	DC 3.3V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

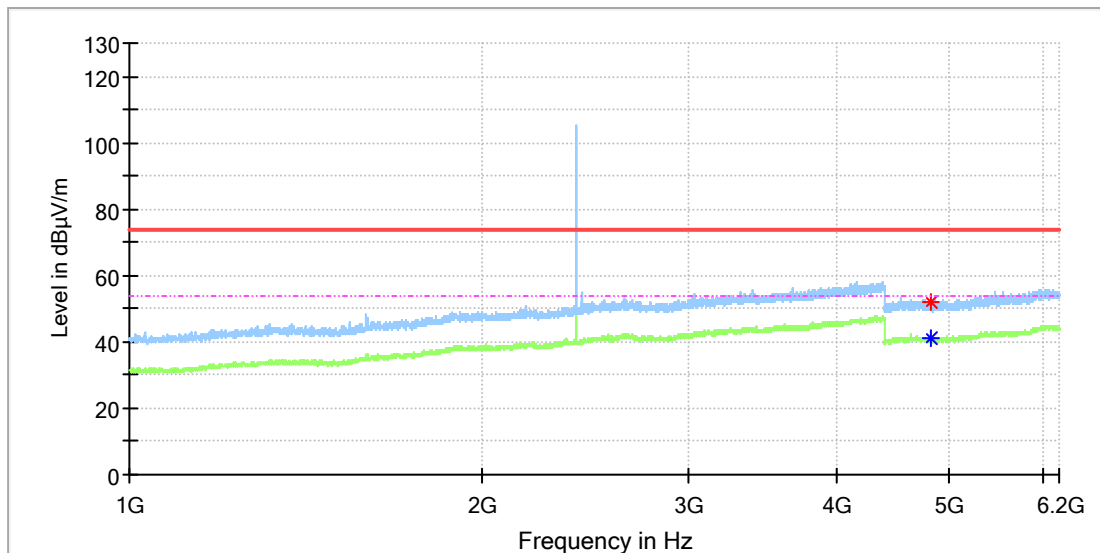

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4815.500000	---	41.09	54.00	12.91	150.0	H	27.0	13.3
4818.000000	51.99	---	74.00	22.01	150.0	H	319.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: WIFI+BT Module
Model: DT3HR1601
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168518486/A003886577-011
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

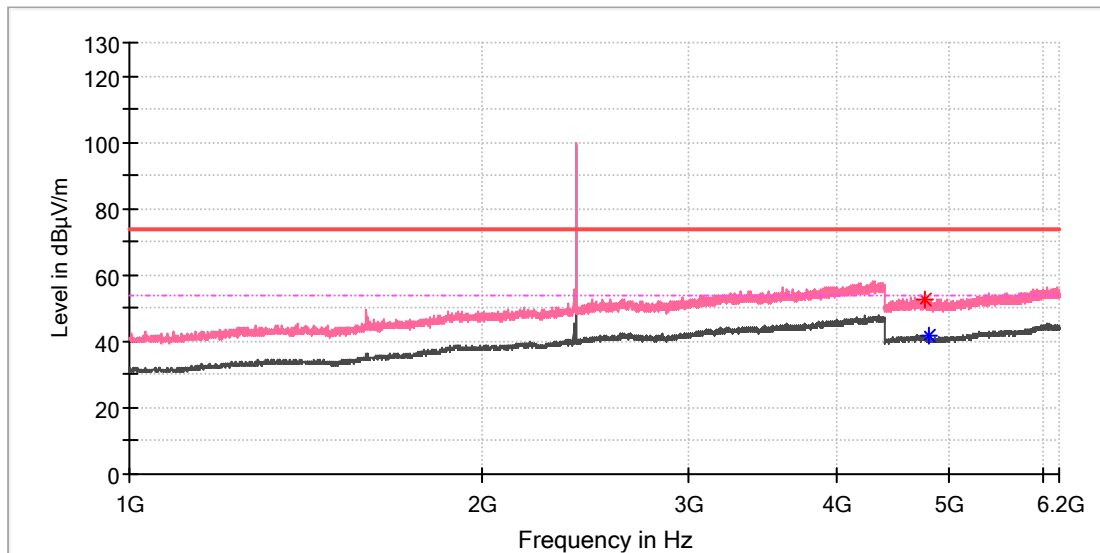

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4771.000000	52.56	---	74.00	21.44	150.0	V	346.0	13.3
4802.500000	---	41.43	54.00	12.57	150.0	V	322.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: WIFI+BT Module
Model: DT3HR1601
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168518486/A003886577-011
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

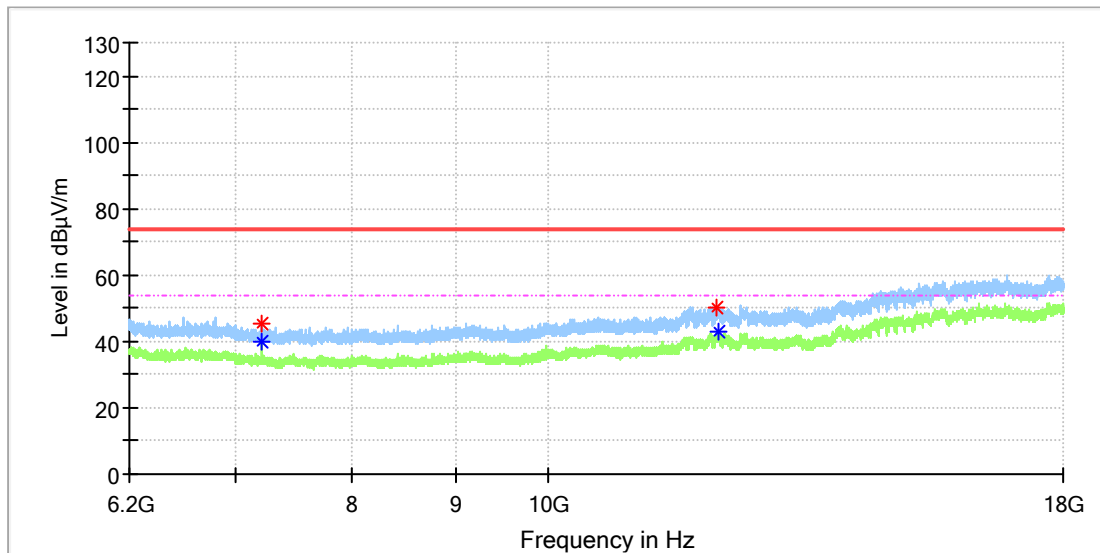

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	45.62	---	74.00	28.38	150.0	H	170.0	8.8
7205.950000	---	39.88	54.00	14.12	150.0	H	0.0	8.8
12123.108333	50.27	---	74.00	23.73	150.0	H	47.0	16.0
12146.708333	---	42.68	54.00	11.32	150.0	H	192.0	16.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: WIFI+BT Module
Model: DT3HR1601
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168518486/A003886577-011
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

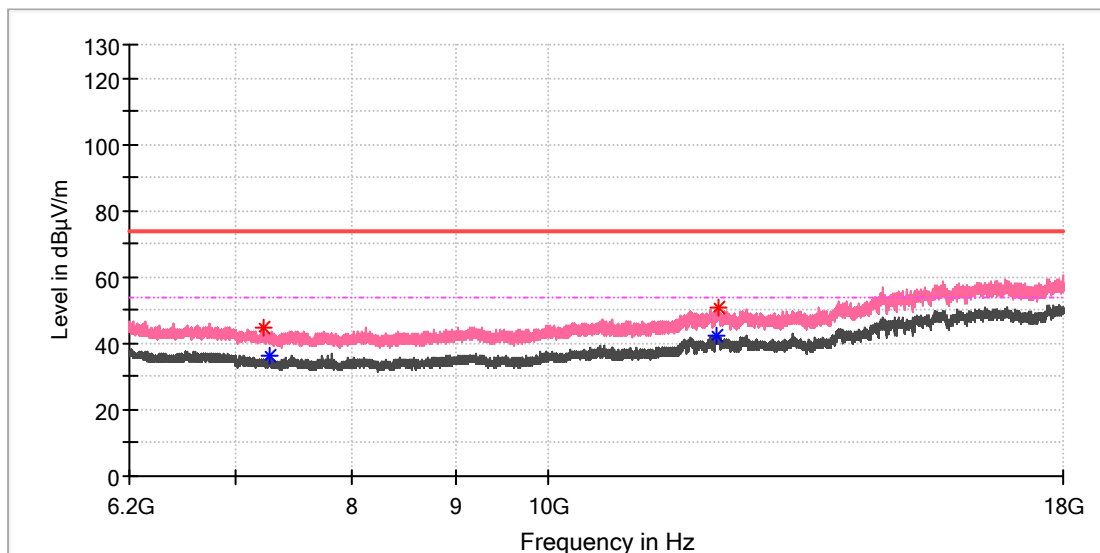

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7222.666667	44.52	---	74.00	29.48	150.0	V	146.0	8.7
7272.325000	---	36.09	54.00	17.91	150.0	V	0.0	8.4
12125.075000	---	42.26	54.00	11.74	150.0	V	340.0	16.1
12138.350000	50.88	---	74.00	23.12	150.0	V	272.0	16.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: WIFI+BT Module
Model: DT3HR1601
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168518486/A003886577-011
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

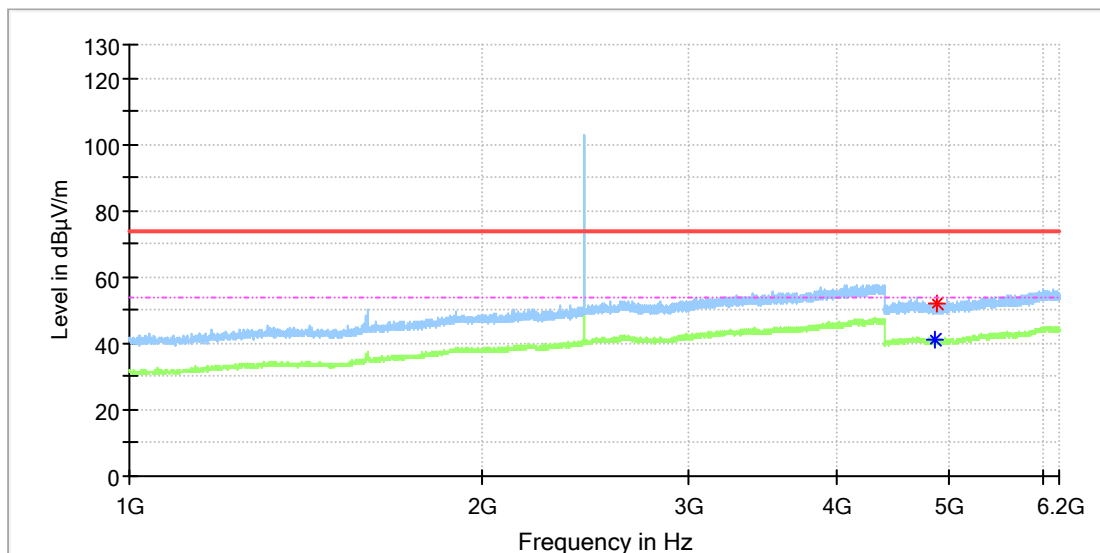

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4868.000000	---	40.83	54.00	13.18	150.0	H	221.0	13.3
4873.500000	51.96	---	74.00	22.04	150.0	H	28.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: WIFI+BT Module
Model: DT3HR1601
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168518486/A003886577-011
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

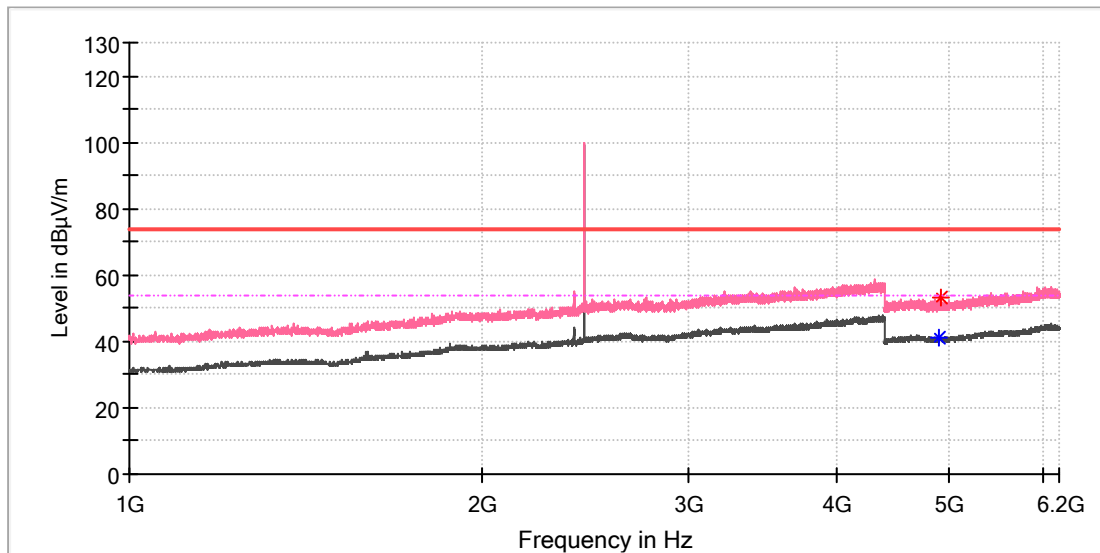

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4902.000000	---	41.00	54.00	13.00	150.0	V	36.0	13.3
4913.000000	53.38	---	74.00	20.62	150.0	V	183.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: WIFI+BT Module
Model: DT3HR1601
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168518486/A003886577-011
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

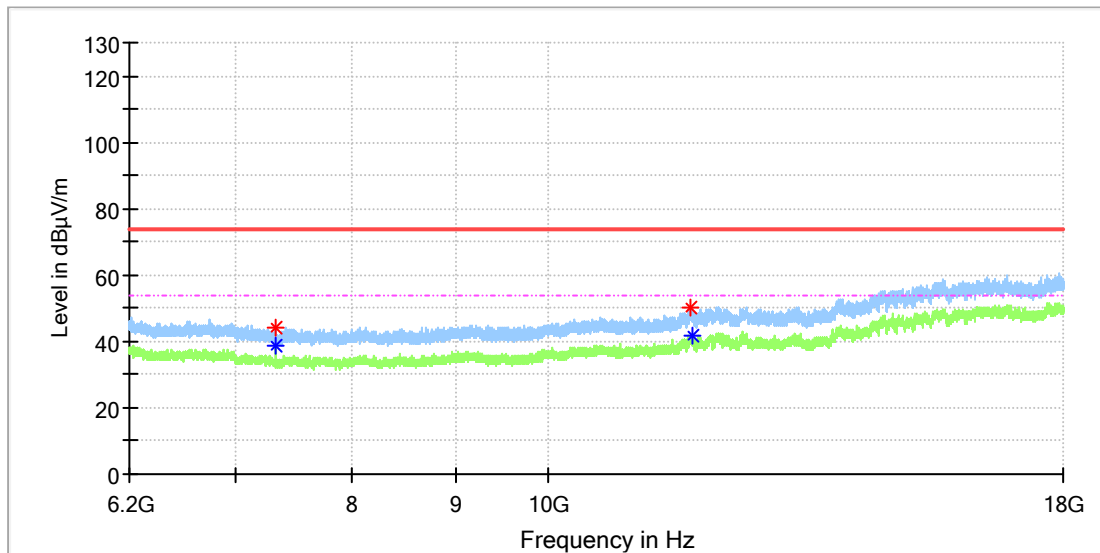

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7319.525000	44.43	---	74.00	29.57	150.0	H	163.0	8.2
7320.016667	---	38.70	54.00	15.30	150.0	H	0.0	8.2
11771.566667	50.11	---	74.00	23.89	150.0	H	239.0	15.2
11796.150000	---	41.92	54.00	12.08	150.0	H	328.0	14.9

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: WIFI+BT Module
Model: DT3HR1601
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168518486/A003886577-011
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

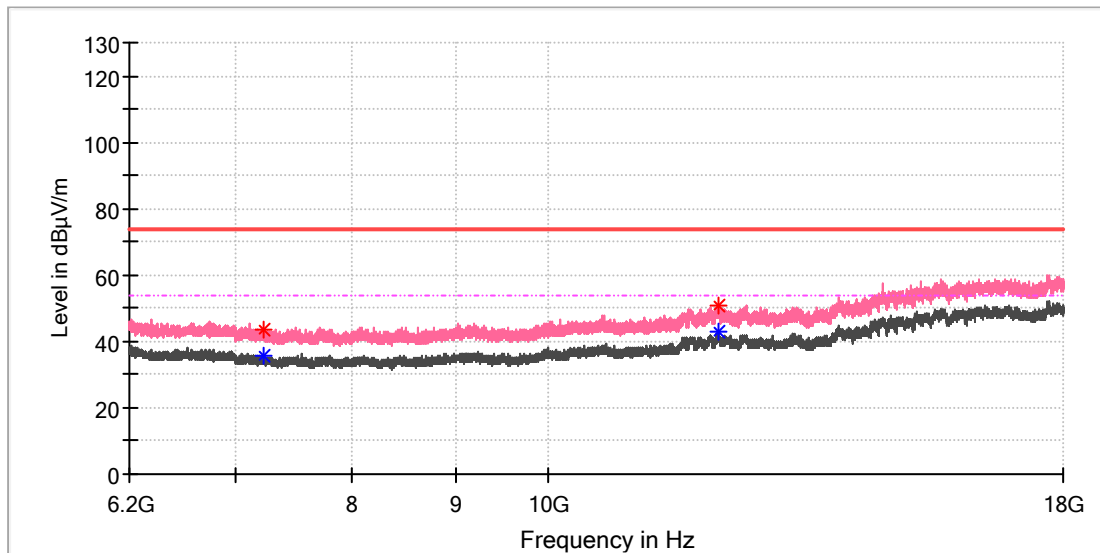

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7230.533333	---	35.78	54.00	18.22	150.0	V	4.0	8.6
7232.008333	43.83	---	74.00	30.17	150.0	V	198.0	8.6
12143.758333	---	42.95	54.00	11.05	150.0	V	0.0	16.6
12145.233333	50.78	---	74.00	23.22	150.0	V	37.0	16.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: WIFI+BT Module
Model: DT3HR1601
Test Mode: BLE 1M_High channel
Order No/Sample No: 168518486/A003886577-011
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

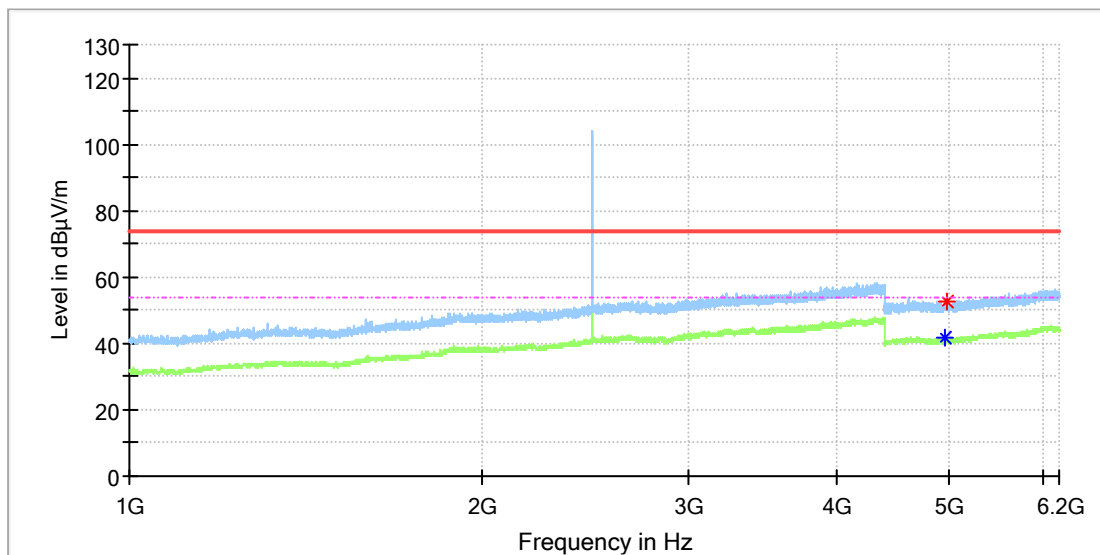

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4956.000000	---	41.47	54.00	12.53	150.0	H	357.0	13.3
4965.000000	52.76	---	74.00	21.24	150.0	H	298.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: WIFI+BT Module
Model: DT3HR1601
Test Mode: BLE 1M_High channel
Order No/Sample No: 168518486/A003886577-011
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

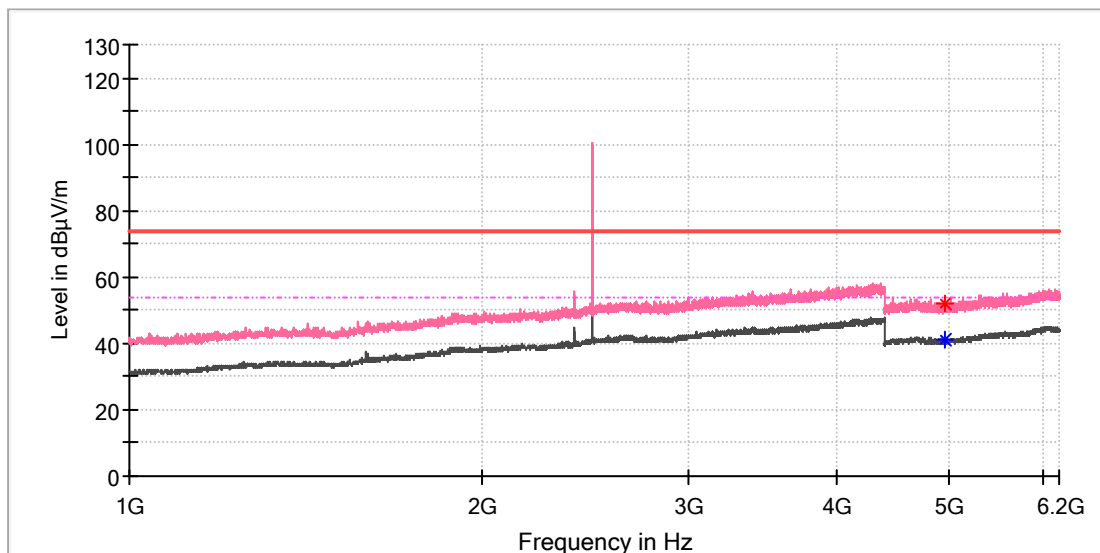

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4951.500000	---	41.28	54.00	12.72	150.0	V	226.0	13.3
4959.500000	52.06	---	74.00	21.94	150.0	V	326.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: WIFI+BT Module
Model: DT3HR1601
Test Mode: BLE 1M_High channel
Order No/Sample No: 168518486/A003886577-011
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

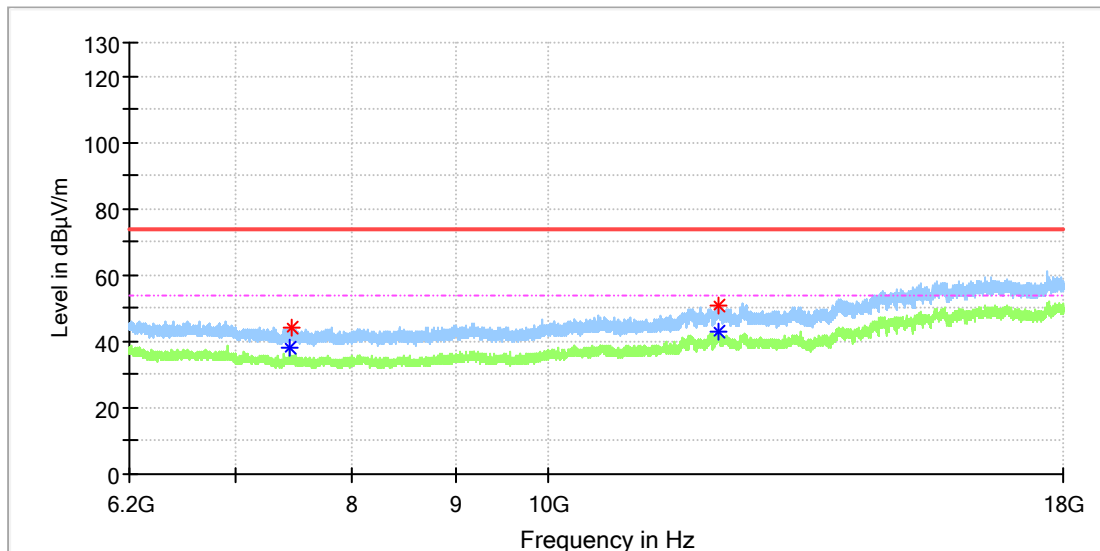

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.983333	---	37.93	54.00	16.07	150.0	H	0.0	8.4
7457.683333	44.30	---	74.00	29.70	150.0	H	228.0	8.5
12133.433333	50.73	---	74.00	23.27	150.0	H	195.0	16.3
12140.316667	---	42.64	54.00	11.36	150.0	H	358.0	16.5

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: WIFI+BT Module
Model: DT3HR1601
Test Mode: BLE 1M_High channel
Order No/Sample No: 168518486/A003886577-011
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

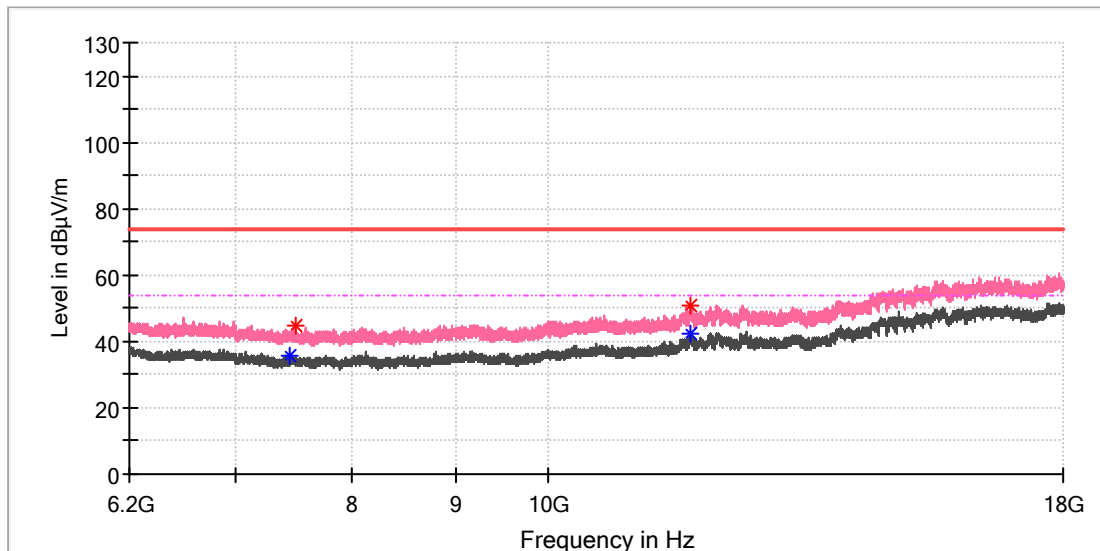

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7441.950000	---	35.64	54.00	18.36	150.0	V	178.0	8.4
7502.916667	44.49	---	74.00	29.51	150.0	V	136.0	8.7
11753.375000	---	42.11	54.00	11.89	150.0	V	86.0	15.5
11764.683333	50.58	---	74.00	23.42	150.0	V	214.0	15.3


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix B.7: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	WIFI+BT Module
Model:	DT3HR1601
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168518486/A003886577-011
Test Voltage:	DC 3.3V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

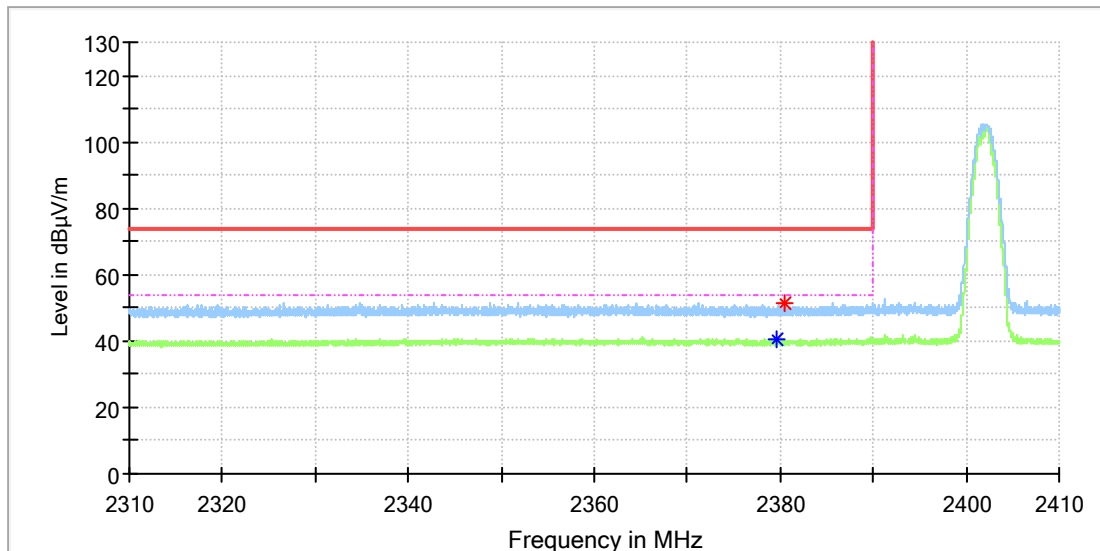

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2379.558824	---	40.44	54.00	13.56	150.0	H	327.0	8.5
2380.367647	51.40	---	74.00	22.60	150.0	H	47.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	WIFI+BT Module
Model:	DT3HR1601
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168518486/A003886577-011
Test Voltage:	DC 3.3V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

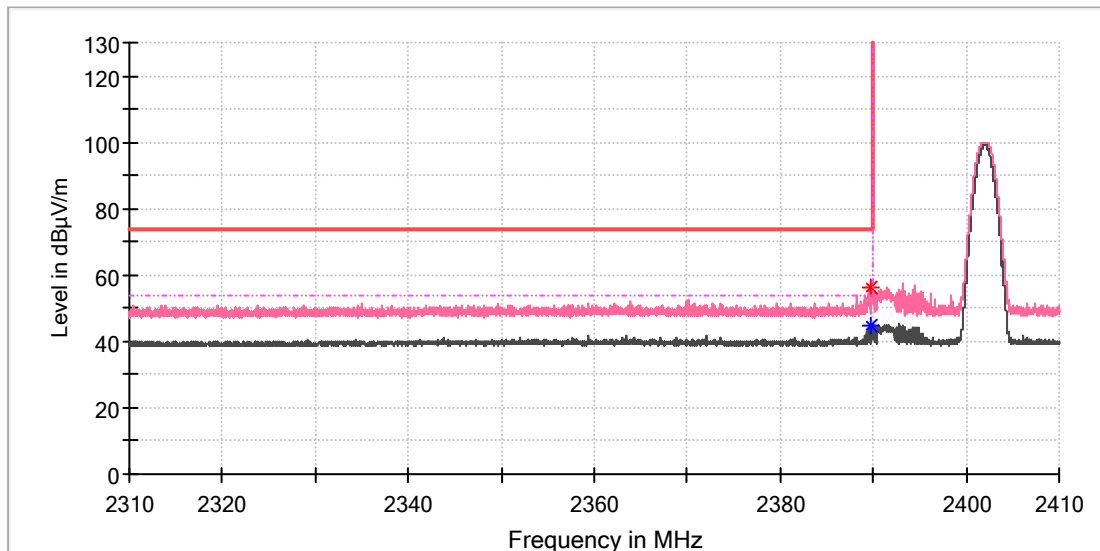

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.705882	---	44.73	54.00	9.27	150.0	V	268.0	8.5
2389.808824	56.13	---	74.00	17.87	150.0	V	268.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: WIFI+BT Module
Model: DT3HR1601
Test Mode: BLE 1M_High channel
Order No/Sample No: 168518486/A003886577-011
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

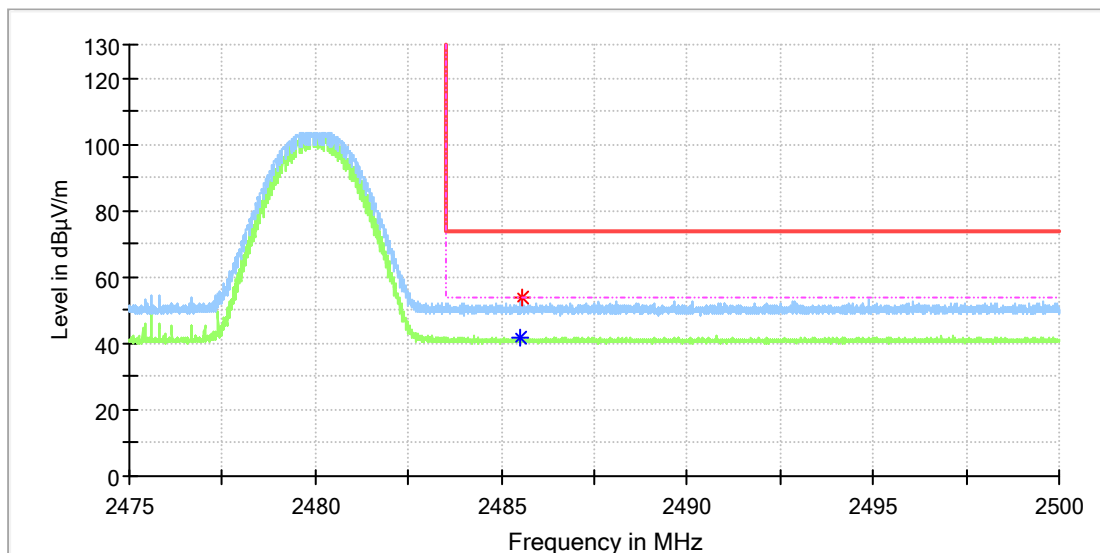

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2485.481618	---	41.44	54.00	12.56	150.0	H	307.0	9.0
2485.547794	53.51	---	74.00	20.49	150.0	H	172.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	WIFI+BT Module
Model:	DT3HR1601
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168518486/A003886577-011
Test Voltage:	DC 3.3V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

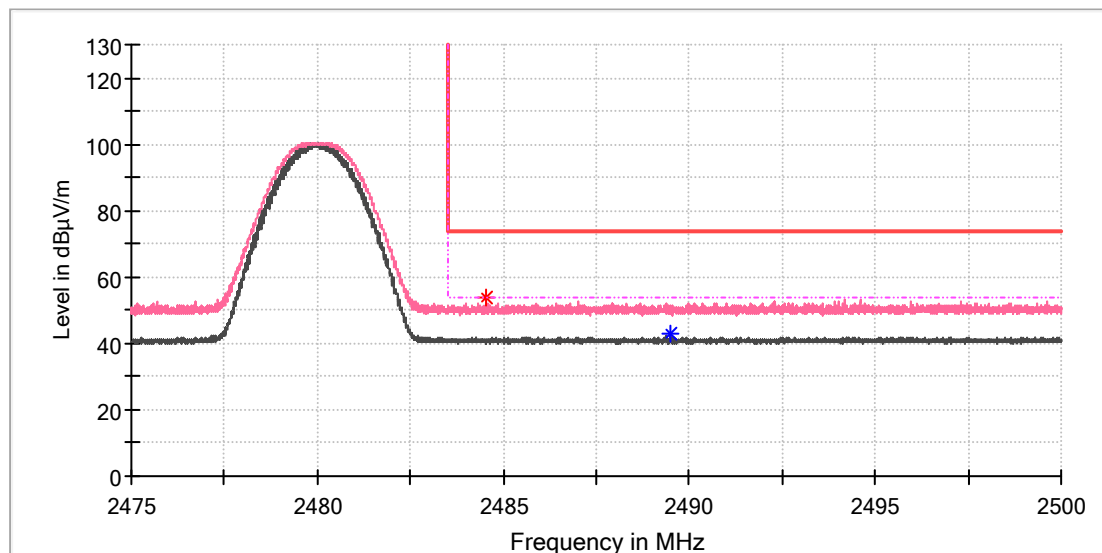

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.547794	53.51	---	74.00	20.49	150.0	V	93.0	9.0
2489.492647	---	43.00	54.00	11.00	150.0	V	272.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	WIFI+BT Module
Model:	DT3HR1601
Test Mode:	BLE 2M_Low channel
Order No/Sample No:	168518486/A003886577-011
Test Voltage:	DC 3.3V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

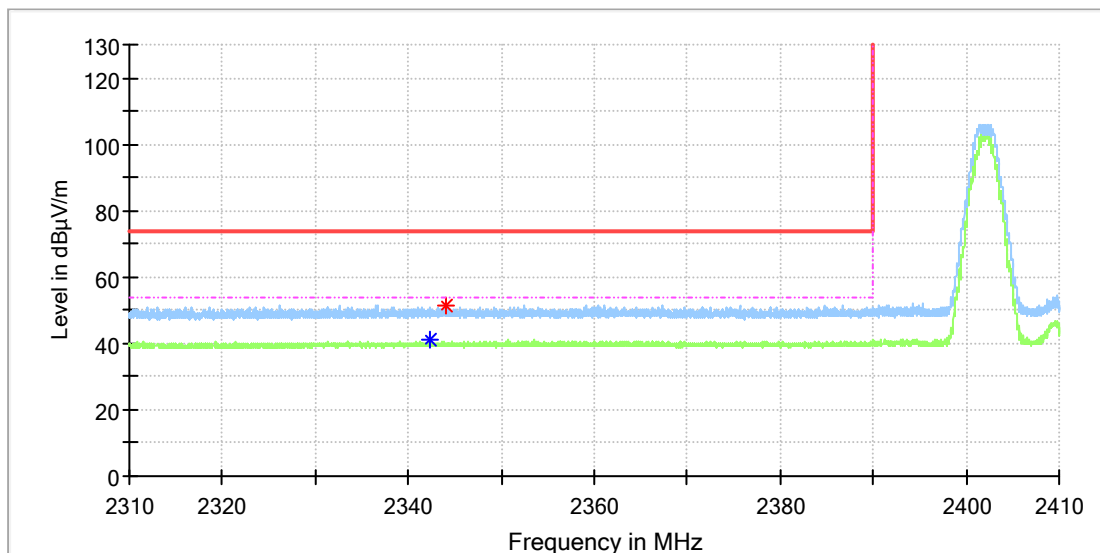

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2342.235294	---	41.05	54.00	12.95	150.0	H	73.0	8.4
2344.088235	51.12	---	74.00	22.88	150.0	H	278.0	8.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: WIFI+BT Module
Model: DT3HR1601
Test Mode: BLE 2M_Low channel
Order No/Sample No: 168518486/A003886577-011
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

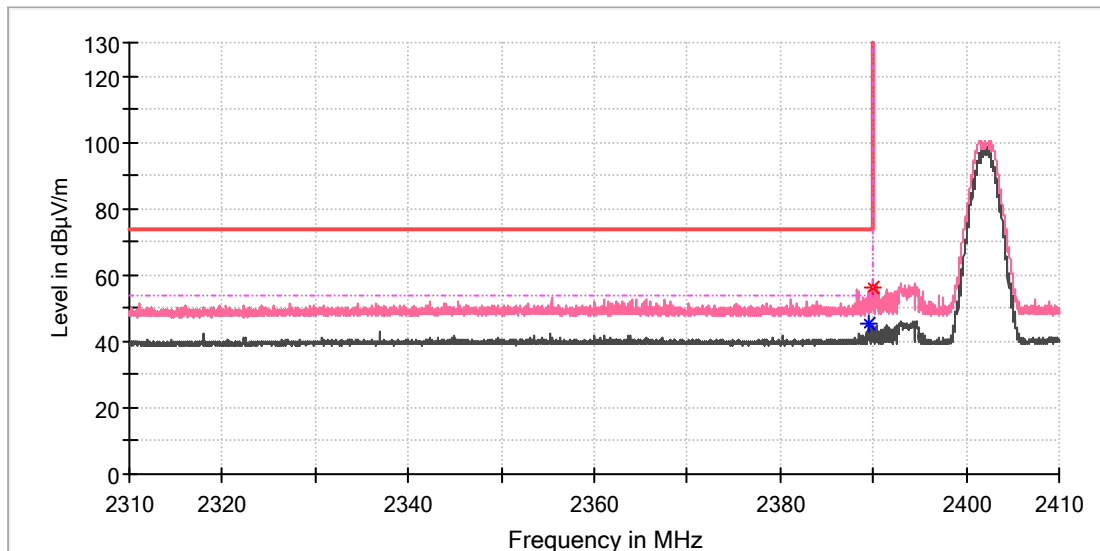

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.617647	---	45.26	54.00	8.74	150.0	V	256.0	8.5
2389.897059	56.40	---	74.00	17.60	150.0	V	256.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	WIFI+BT Module
Model:	DT3HR1601
Test Mode:	BLE 2M_High channel
Order No/Sample No:	168518486/A003886577-011
Test Voltage:	DC 3.3V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

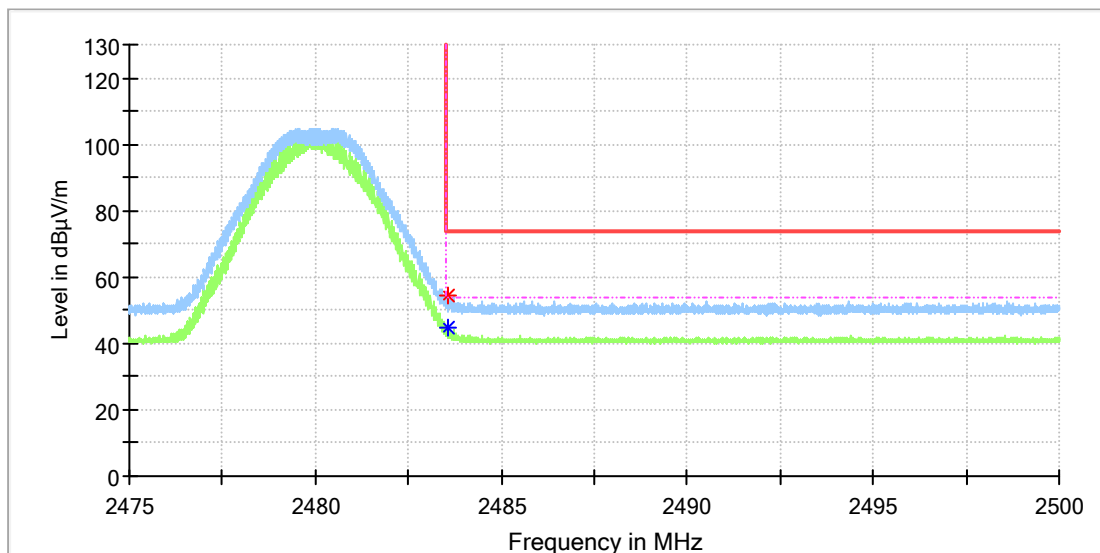

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.544118	54.16	---	74.00	19.84	150.0	H	325.0	9.0
2483.558824	---	44.98	54.00	9.02	150.0	H	302.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	WIFI+BT Module
Model:	DT3HR1601
Test Mode:	BLE 2M_High channel
Order No/Sample No:	168518486/A003886577-011
Test Voltage:	DC 3.3V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

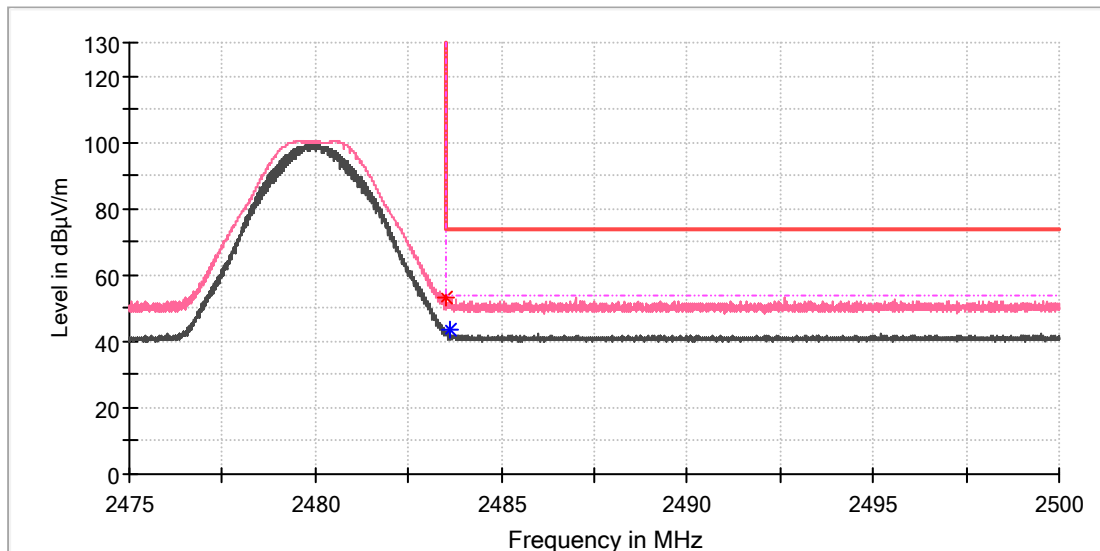

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.522059	53.25	---	74.00	20.75	150.0	V	2.0	9.0
2483.595588	---	43.36	54.00	10.64	150.0	V	353.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---