



Test Mode:	802.11a	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 5V

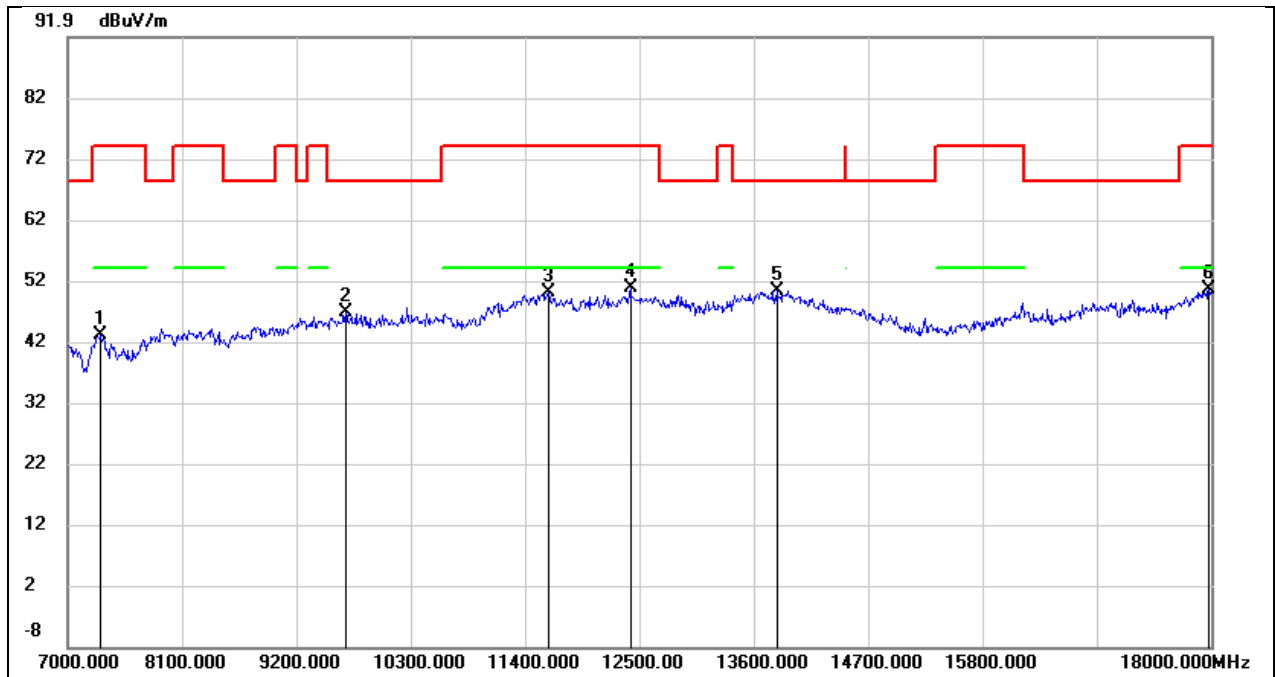


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.55	7.50	43.05	74.00	-30.95	peak
2	9673.000	33.34	13.42	46.76	68.20	-21.44	peak
3	11620.000	32.22	17.88	50.10	74.00	-23.90	peak
4	12412.000	31.01	19.65	50.66	74.00	-23.34	peak
5	13820.000	27.03	23.22	50.25	68.20	-17.95	peak
6	17978.000	22.33	28.31	50.64	74.00	-23.36	peak

Test Mode:	802.11a	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 5V

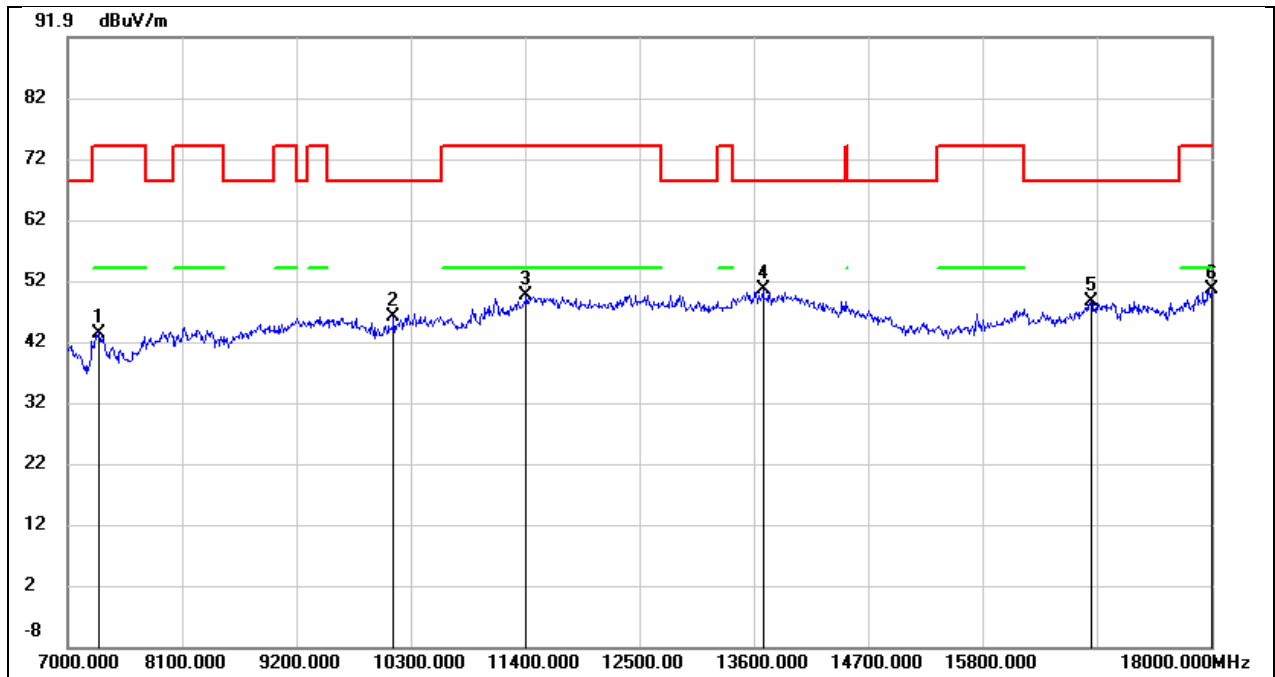


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.90	7.50	43.40	74.00	-30.60	peak
2	10135.000	32.80	13.29	46.09	68.20	-22.11	peak
3	11411.000	32.34	17.24	49.58	74.00	-24.42	peak
4	13688.000	27.61	22.84	50.45	68.20	-17.75	peak
5	16845.000	26.33	22.19	48.52	68.20	-19.68	peak
6	18000.000	22.03	28.51	50.54	74.00	-23.46	peak

Test Mode:	802.11a	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 5V

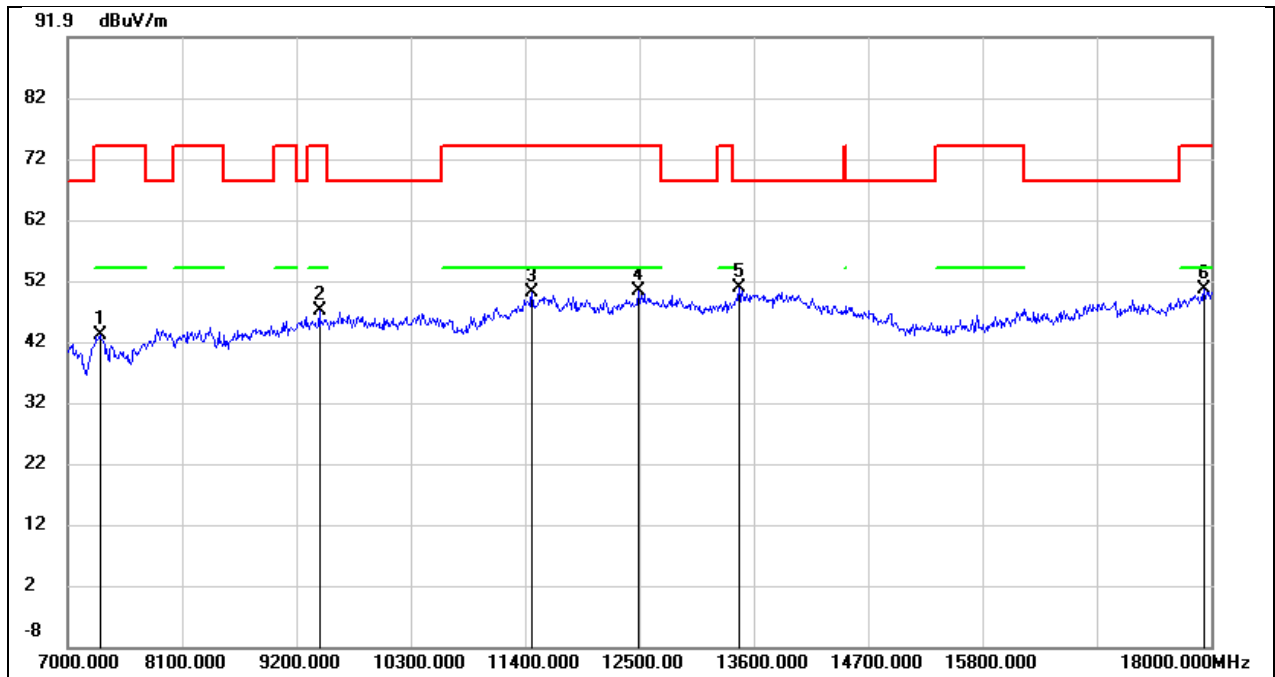


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.61	7.49	43.10	74.00	-30.90	peak
2	9420.000	34.96	12.16	47.12	74.00	-26.88	peak
3	11466.000	32.70	17.42	50.12	74.00	-23.88	peak
4	12489.000	30.55	19.78	50.33	74.00	-23.67	peak
5	13457.000	28.54	22.27	50.81	68.20	-17.39	peak
6	17934.000	22.72	27.90	50.62	74.00	-23.38	peak

Test Mode:	802.11a	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 5V

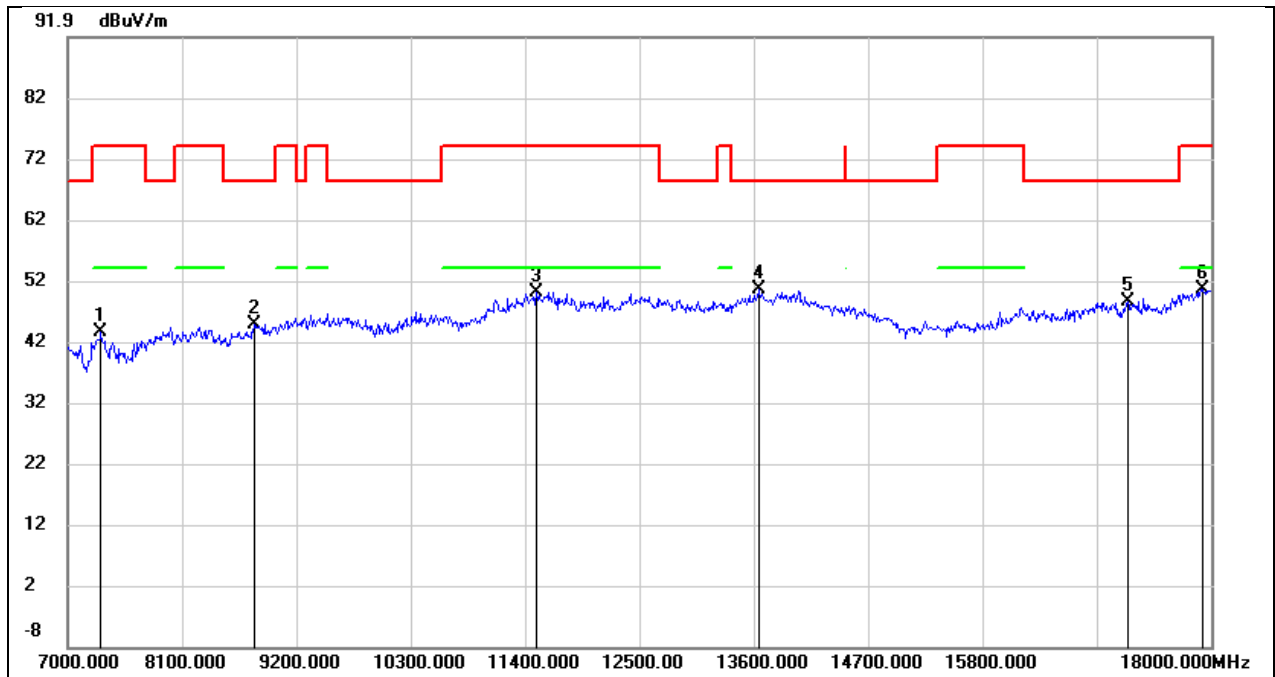


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	36.01	7.50	43.51	74.00	-30.49	peak
2	8793.000	35.25	9.57	44.82	68.20	-23.38	peak
3	11510.000	32.55	17.57	50.12	74.00	-23.88	peak
4	13644.000	27.69	22.72	50.41	68.20	-17.79	peak
5	17197.000	24.74	23.71	48.45	68.20	-19.75	peak
6	17923.000	22.71	27.79	50.50	74.00	-23.50	peak

Test Mode:	802.11a	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 5V

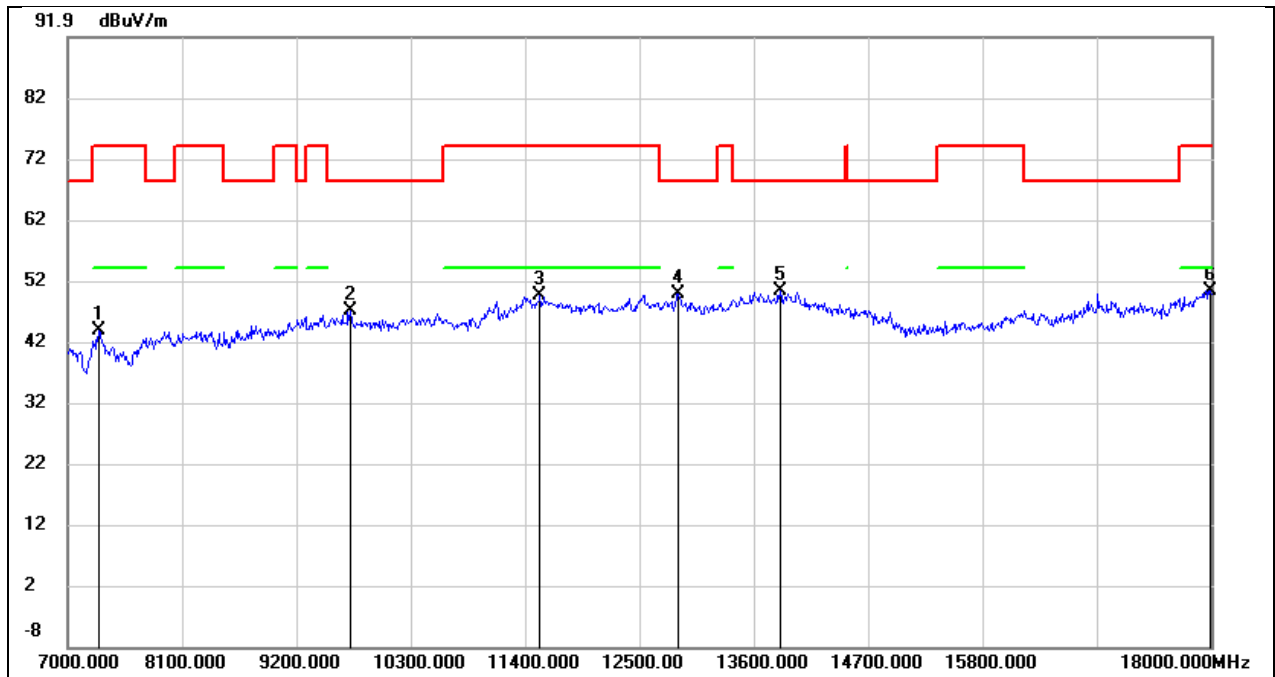


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.16	7.50	43.66	74.00	-30.34	peak
2	9717.000	33.41	13.50	46.91	68.20	-21.29	peak
3	11543.000	31.78	17.67	49.45	74.00	-24.55	peak
4	12874.000	29.34	20.50	49.84	68.20	-18.36	peak
5	13853.000	26.84	23.34	50.18	68.20	-18.02	peak
6	17989.000	21.92	28.40	50.32	74.00	-23.68	peak

Test Mode:	802.11a	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 5V

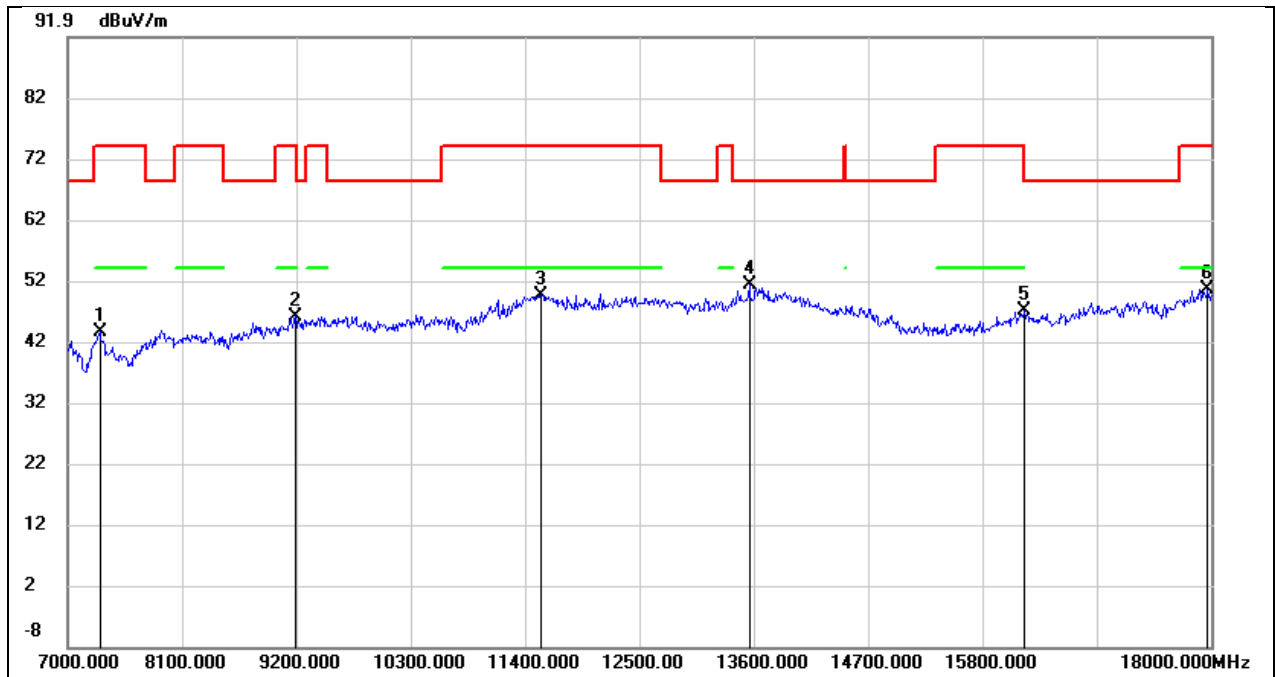


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.07	7.49	43.56	74.00	-30.44	peak
2	9189.000	34.78	11.37	46.15	74.00	-27.85	peak
3	11554.000	31.81	17.71	49.52	74.00	-24.48	peak
4	13556.000	28.82	22.53	51.35	68.20	-16.85	peak
5	16207.000	25.37	21.58	46.95	68.20	-21.25	peak
6	17967.000	22.35	28.21	50.56	74.00	-23.44	peak

Test Mode:	802.11a	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 5V

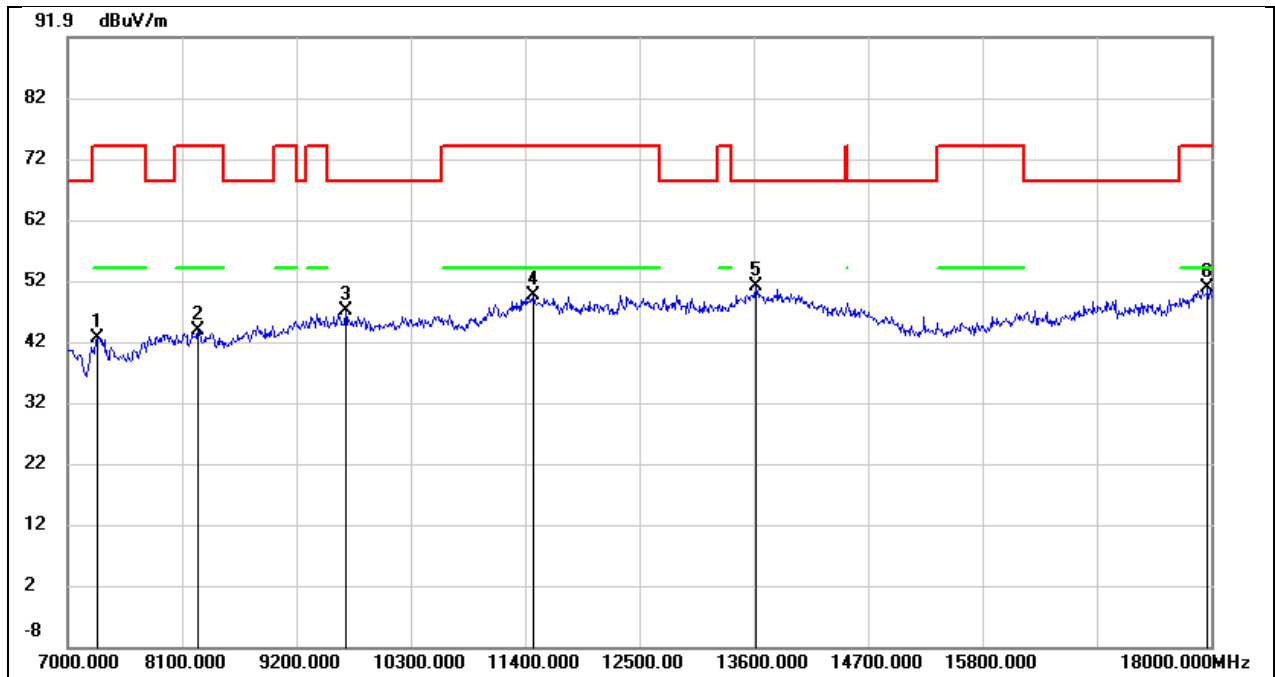


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	35.12	7.49	42.61	74.00	-31.39	peak
2	8254.000	35.34	8.46	43.80	74.00	-30.20	peak
3	9673.000	33.57	13.42	46.99	68.20	-21.21	peak
4	11477.000	32.13	17.46	49.59	74.00	-24.41	peak
5	13622.000	28.42	22.66	51.08	68.20	-17.12	peak
6	17967.000	22.60	28.21	50.81	74.00	-23.19	peak

Test Mode:	802.11a	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 5V

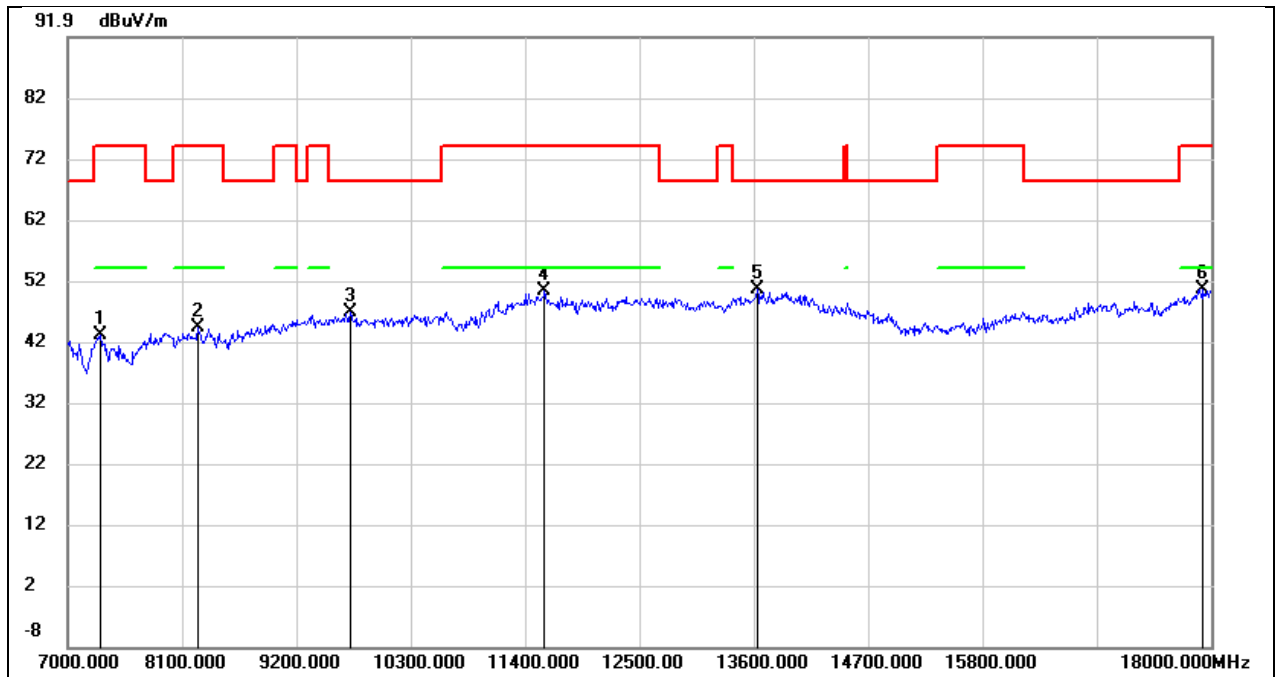


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.47	7.50	42.97	74.00	-31.03	peak
2	8254.000	35.81	8.46	44.27	74.00	-29.73	peak
3	9717.000	33.24	13.50	46.74	68.20	-21.46	peak
4	11587.000	32.39	17.84	50.23	74.00	-23.77	peak
5	13633.000	27.84	22.68	50.52	68.20	-17.68	peak
6	17923.000	22.77	27.79	50.56	74.00	-23.44	peak

Test Mode:	802.11a	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 5V

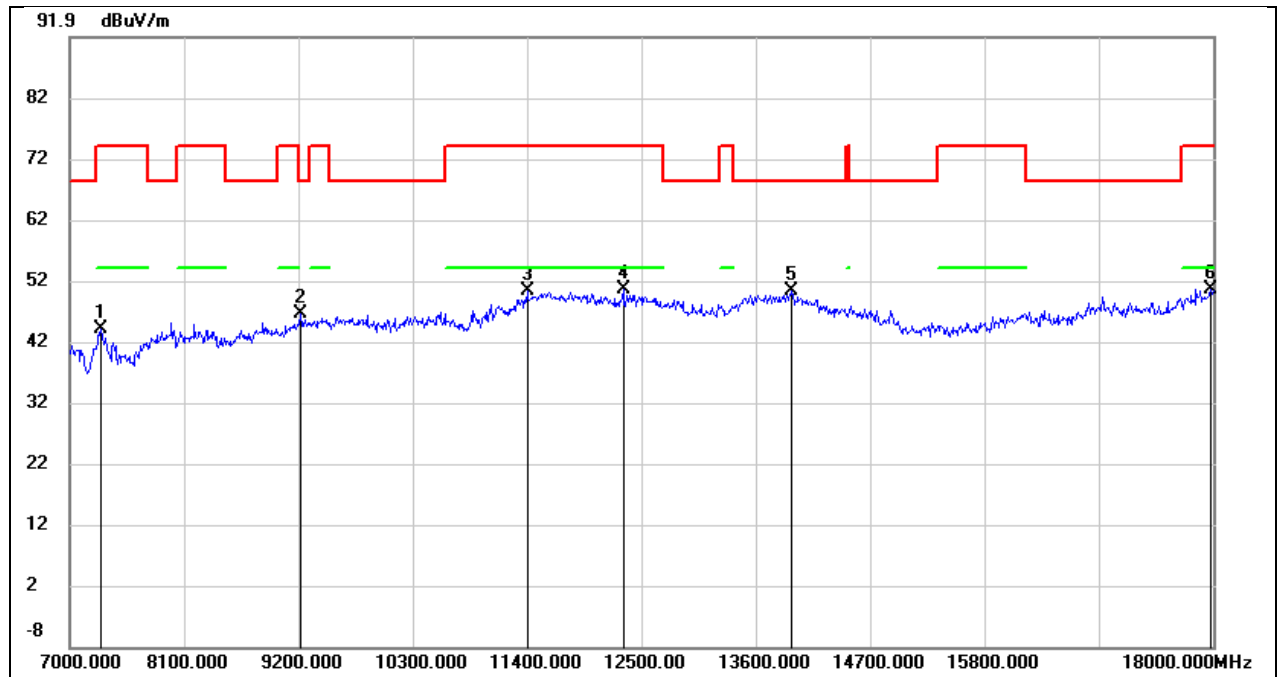


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.48	7.50	43.98	74.00	-30.02	peak
2	9222.000	35.06	11.49	46.55	68.20	-21.65	peak
3	11400.000	32.97	17.20	50.17	74.00	-23.83	peak
4	12324.000	31.11	19.43	50.54	74.00	-23.46	peak
5	13941.000	26.67	23.68	50.35	68.20	-17.85	peak
6	17978.000	22.27	28.31	50.58	74.00	-23.42	peak

Test Mode:	802.11a	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 5V

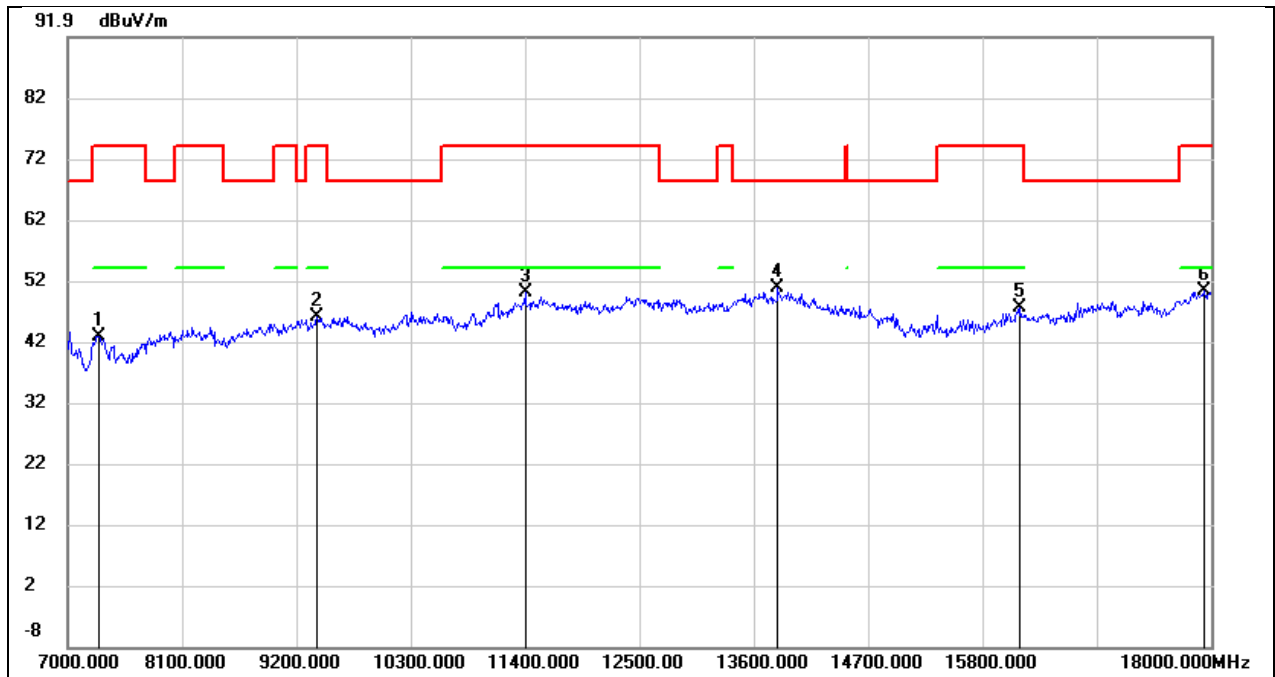


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.38	7.50	42.88	74.00	-31.12	peak
2	9398.000	33.98	12.03	46.01	74.00	-27.99	peak
3	11400.000	32.85	17.20	50.05	74.00	-23.95	peak
4	13831.000	27.50	23.26	50.76	68.20	-17.44	peak
5	16163.000	26.24	21.35	47.59	74.00	-26.41	peak
6	17934.000	22.45	27.90	50.35	74.00	-23.65	peak

Test Mode:	802.11a	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 5V

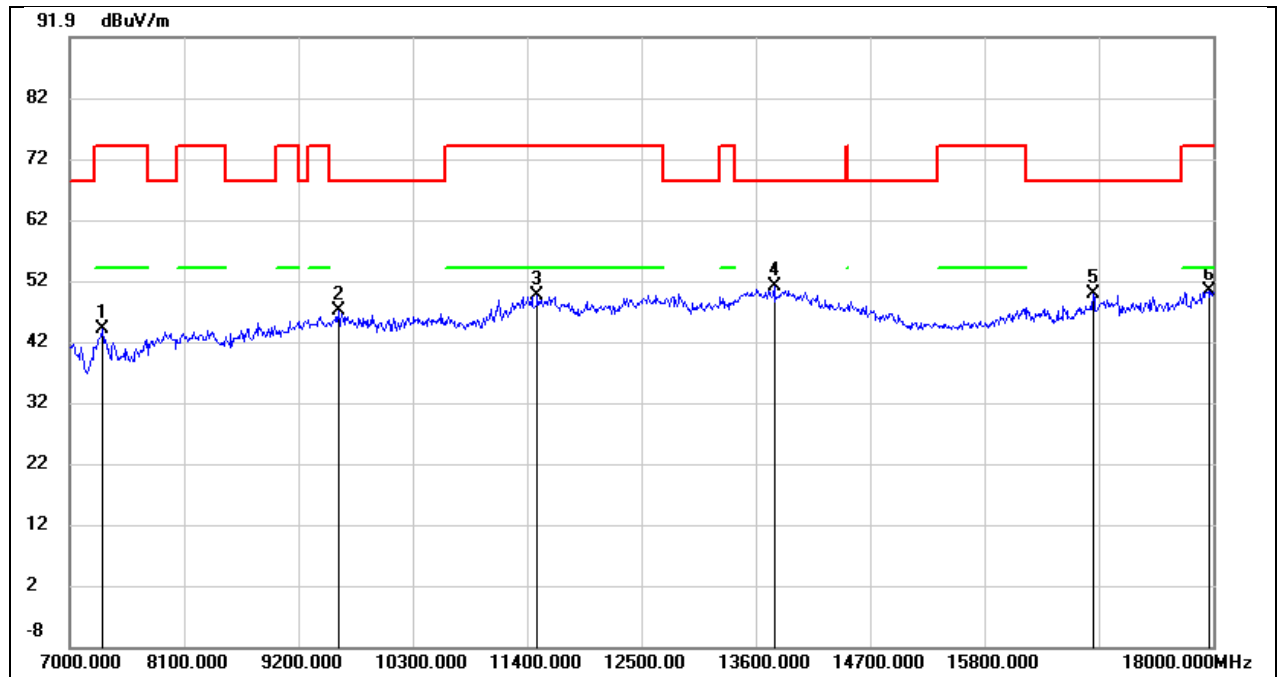


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	36.49	7.50	43.99	74.00	-30.01	peak
2	9585.000	33.87	13.19	47.06	68.20	-21.14	peak
3	11499.000	31.88	17.53	49.41	74.00	-24.59	peak
4	13776.000	27.88	23.07	50.95	68.20	-17.25	peak
5	16845.000	27.59	22.19	49.78	68.20	-18.42	peak
6	17956.000	22.25	28.10	50.35	74.00	-23.65	peak

Test Mode:	802.11a	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 5V

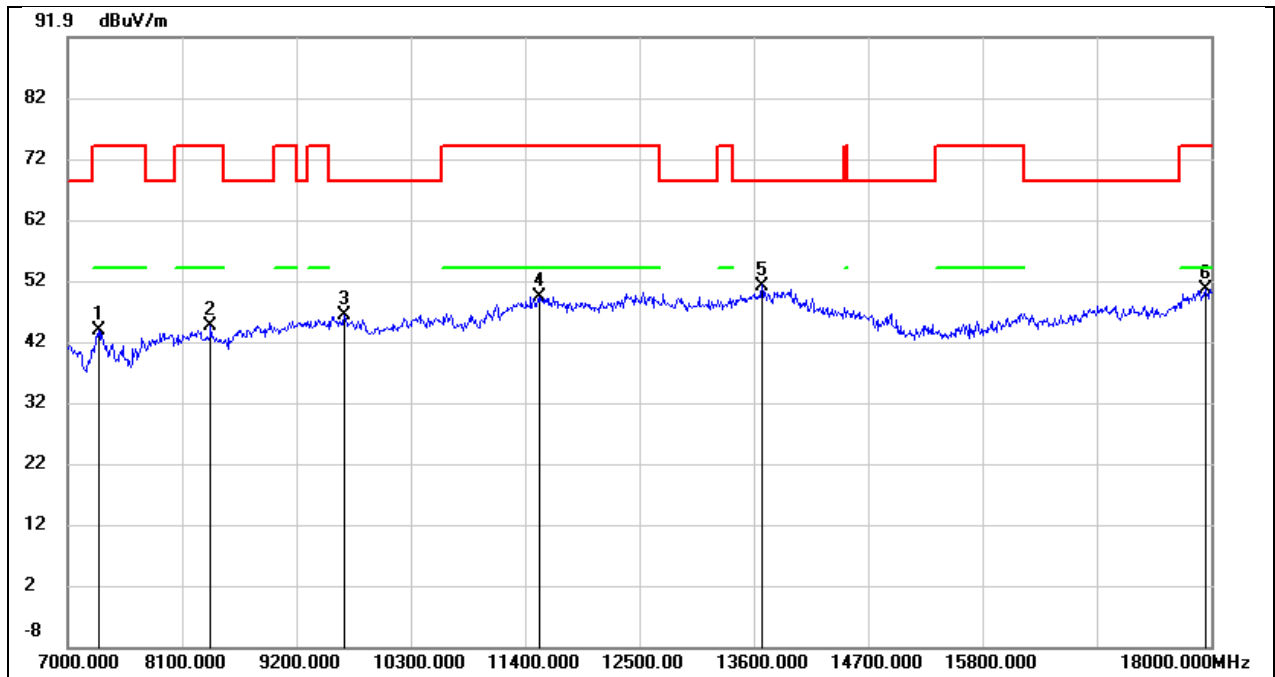


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.39	7.50	43.89	74.00	-30.11	peak
2	8375.000	35.98	8.55	44.53	74.00	-29.47	peak
3	9662.000	32.92	13.39	46.31	68.20	-21.89	peak
4	11532.000	31.76	17.64	49.40	74.00	-24.60	peak
5	13677.000	28.35	22.80	51.15	68.20	-17.05	peak
6	17945.000	22.52	28.01	50.53	74.00	-23.47	peak

Test Mode:	802.11a	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 5V

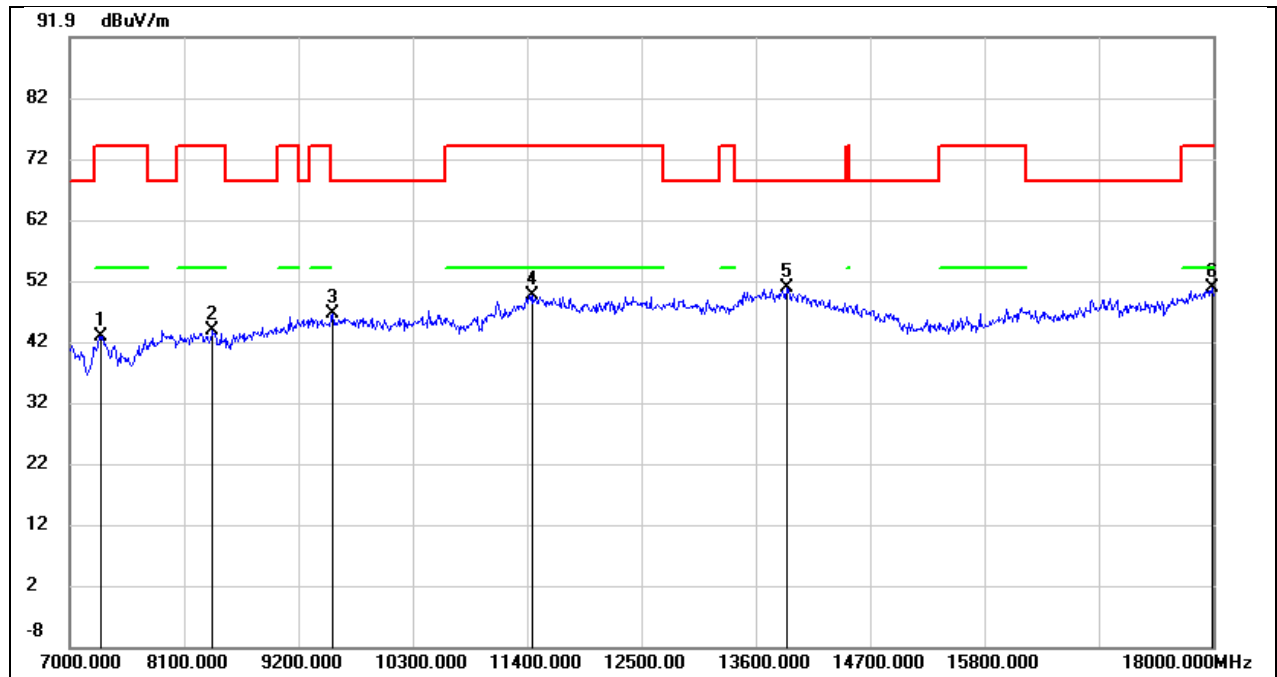


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.28	7.50	42.78	74.00	-31.22	peak
2	8375.000	35.30	8.55	43.85	74.00	-30.15	peak
3	9530.000	33.64	12.85	46.49	68.20	-21.71	peak
4	11455.000	32.19	17.38	49.57	74.00	-24.43	peak
5	13897.000	27.33	23.51	50.84	68.20	-17.36	peak
6	17989.000	22.33	28.40	50.73	74.00	-23.27	peak

Test Mode:	802.11a	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 5V

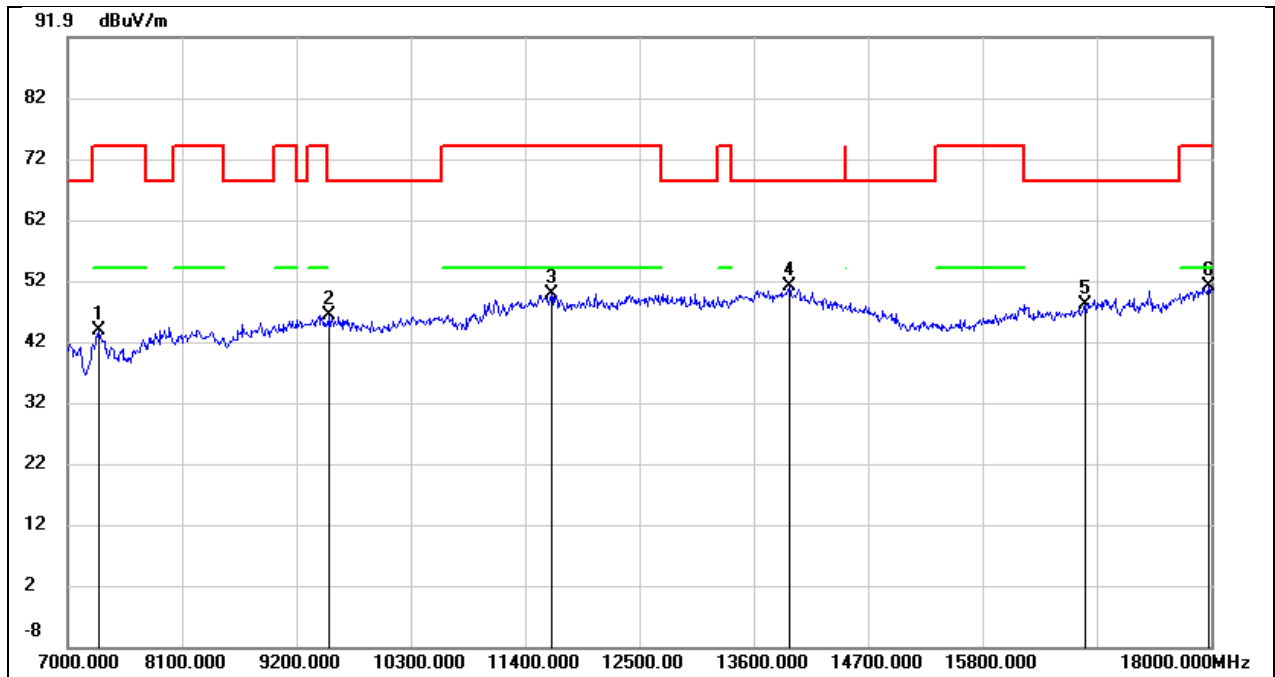


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.22	7.50	43.72	74.00	-30.28	peak
2	9519.000	33.49	12.77	46.26	68.20	-21.94	peak
3	11653.000	31.99	17.88	49.87	74.00	-24.13	peak
4	13941.000	27.37	23.68	51.05	68.20	-17.15	peak
5	16790.000	26.01	21.99	48.00	68.20	-20.20	peak
6	17978.000	22.65	28.31	50.96	74.00	-23.04	peak

Test Mode:	802.11a	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 5V

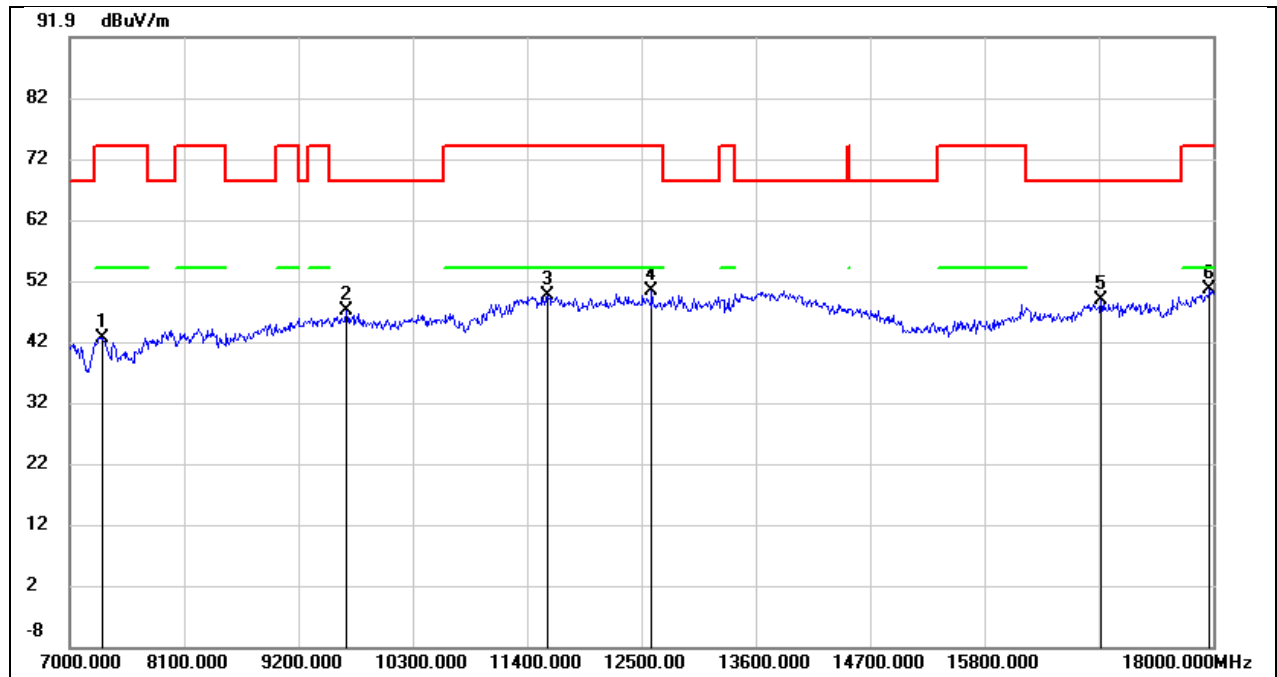


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.12	7.50	42.62	74.00	-31.38	peak
2	9662.000	33.54	13.39	46.93	68.20	-21.27	peak
3	11598.000	31.62	17.88	49.50	74.00	-24.50	peak
4	12599.000	30.31	19.88	50.19	74.00	-23.81	peak
5	16922.000	26.42	22.46	48.88	68.20	-19.32	peak
6	17967.000	22.27	28.21	50.48	74.00	-23.52	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

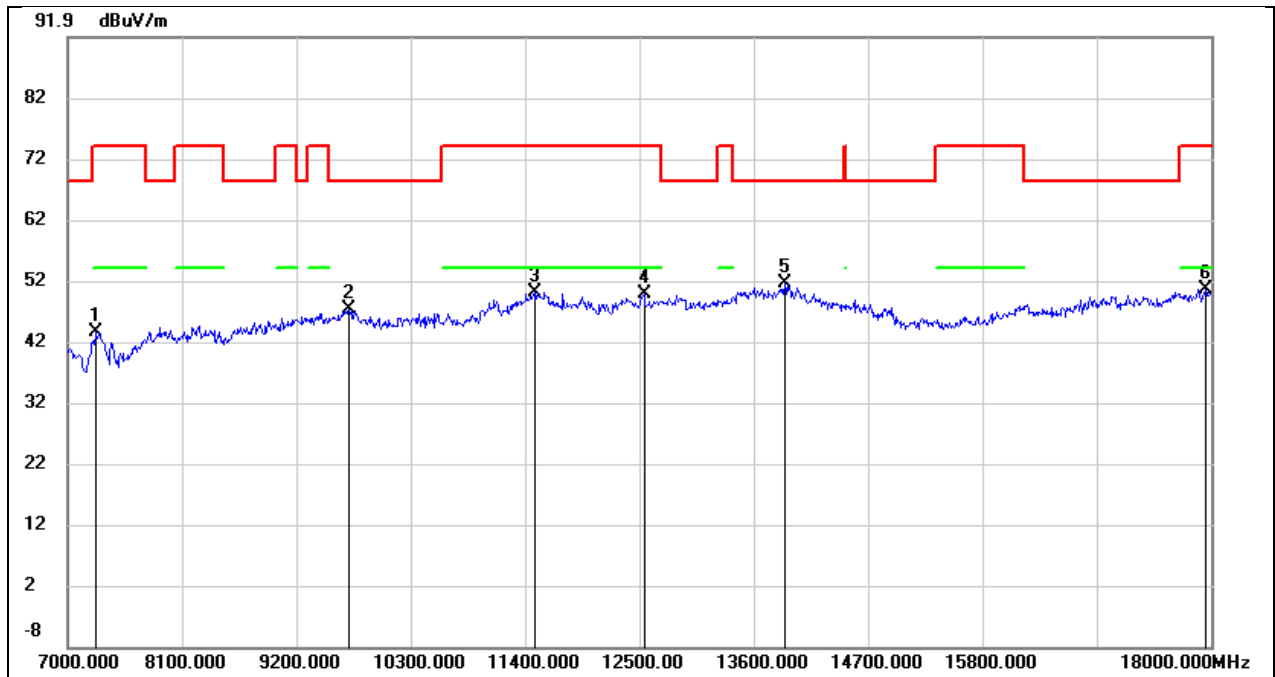


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7275.000	35.94	7.49	43.43	74.00	-30.57	peak
2	9706.000	33.86	13.49	47.35	68.20	-20.85	peak
3	11488.000	32.66	17.49	50.15	74.00	-23.85	peak
4	12544.000	30.06	19.83	49.89	74.00	-24.11	peak
5	13897.000	27.97	23.51	51.48	68.20	-16.72	peak
6	17945.000	22.64	28.01	50.65	74.00	-23.35	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5V

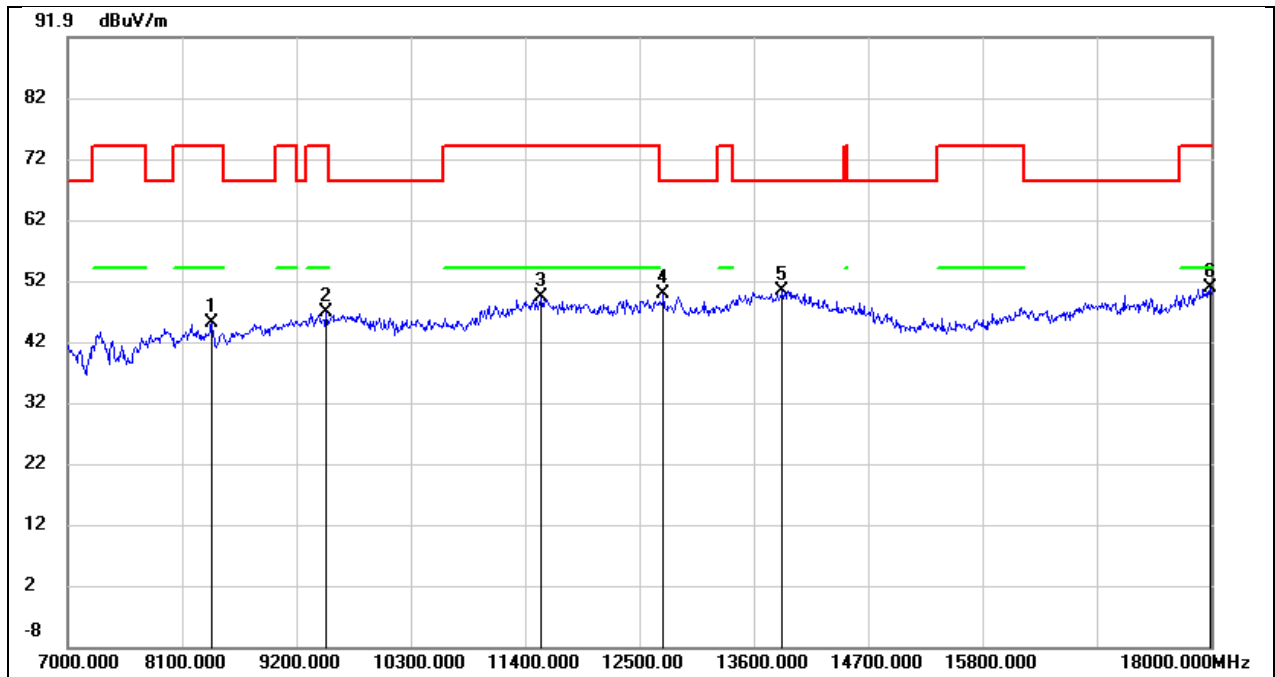


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8386.000	36.47	8.57	45.04	74.00	-28.96	peak
2	9486.000	34.25	12.57	46.82	74.00	-27.18	peak
3	11554.000	31.59	17.71	49.30	74.00	-24.70	peak
4	12731.000	29.50	20.32	49.82	68.20	-18.38	peak
5	13875.000	26.89	23.44	50.33	68.20	-17.87	peak
6	17989.000	22.30	28.40	50.70	74.00	-23.30	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 5V

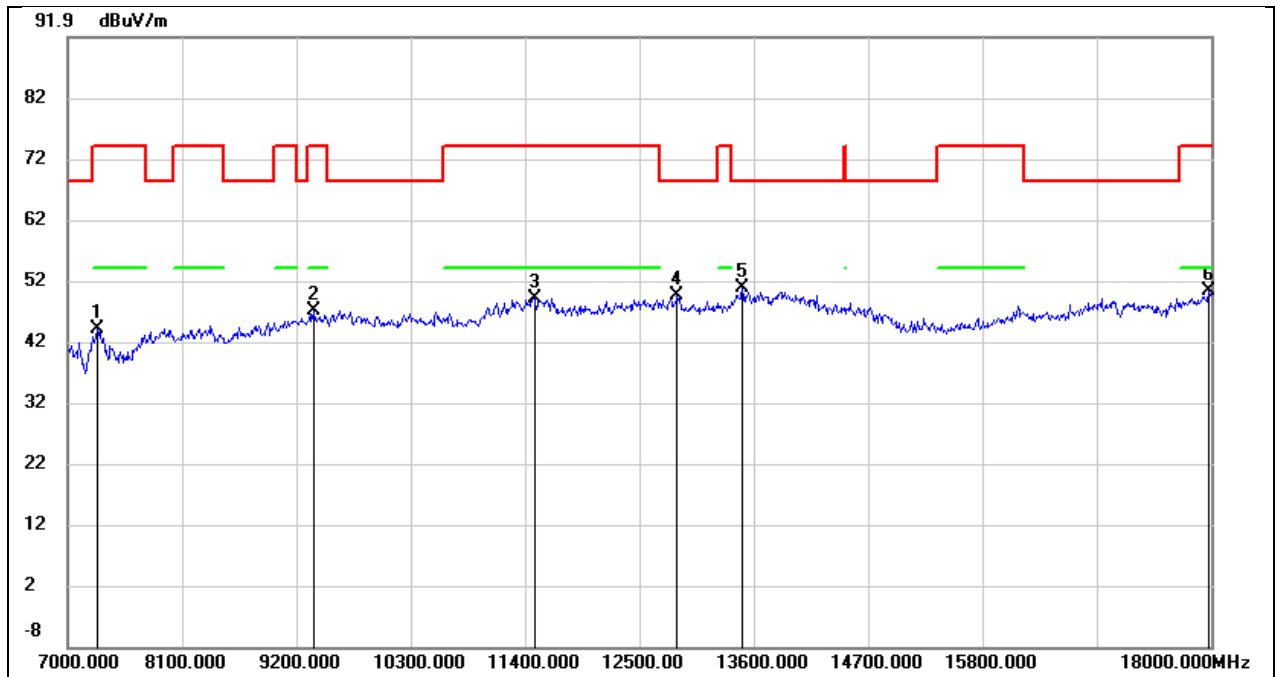


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	36.63	7.49	44.12	74.00	-29.88	peak
2	9365.000	35.20	11.92	47.12	74.00	-26.88	peak
3	11488.000	31.53	17.49	49.02	74.00	-24.98	peak
4	12863.000	29.03	20.51	49.54	68.20	-18.66	peak
5	13490.000	28.26	22.40	50.66	68.20	-17.54	peak
6	17978.000	22.06	28.31	50.37	74.00	-23.63	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 5V

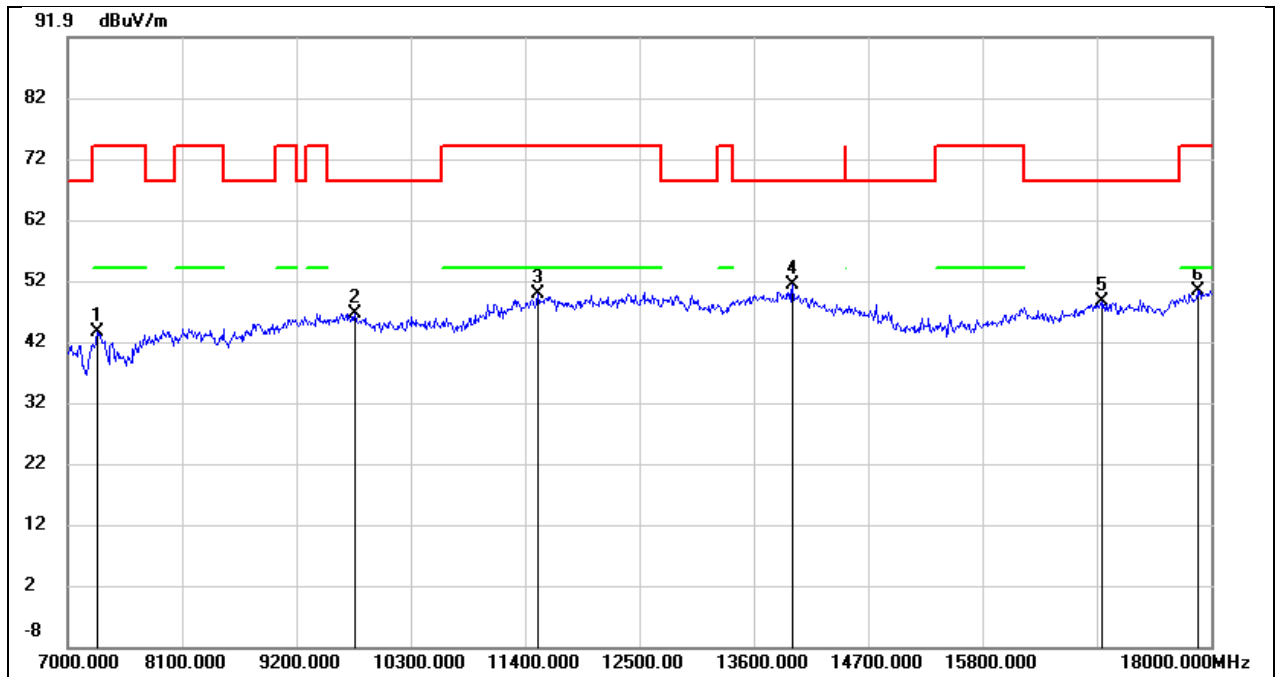


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	35.94	7.49	43.43	74.00	-30.57	peak
2	9761.000	33.01	13.58	46.59	68.20	-21.61	peak
3	11521.000	32.11	17.60	49.71	74.00	-24.29	peak
4	13974.000	27.41	23.81	51.22	68.20	-16.98	peak
5	16944.000	26.05	22.54	48.59	68.20	-19.61	peak
6	17868.000	22.97	27.29	50.26	74.00	-23.74	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 5V

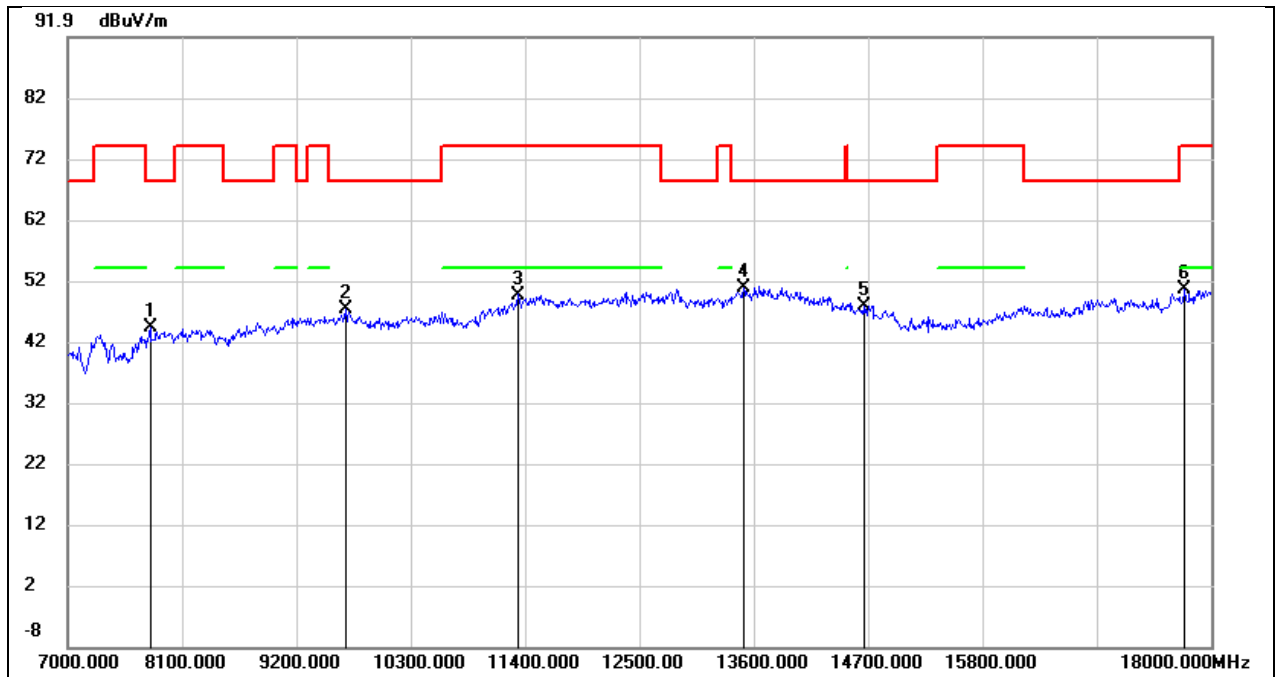


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7792.000	36.39	7.94	44.33	68.20	-23.87	peak
2	9673.000	33.76	13.42	47.18	68.20	-21.02	peak
3	11334.000	32.75	16.90	49.65	74.00	-24.35	peak
4	13501.000	28.22	22.44	50.66	68.20	-17.54	peak
5	14656.000	27.26	20.64	47.90	68.20	-20.30	peak
6	17747.000	24.29	26.23	50.52	74.00	-23.48	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 5V

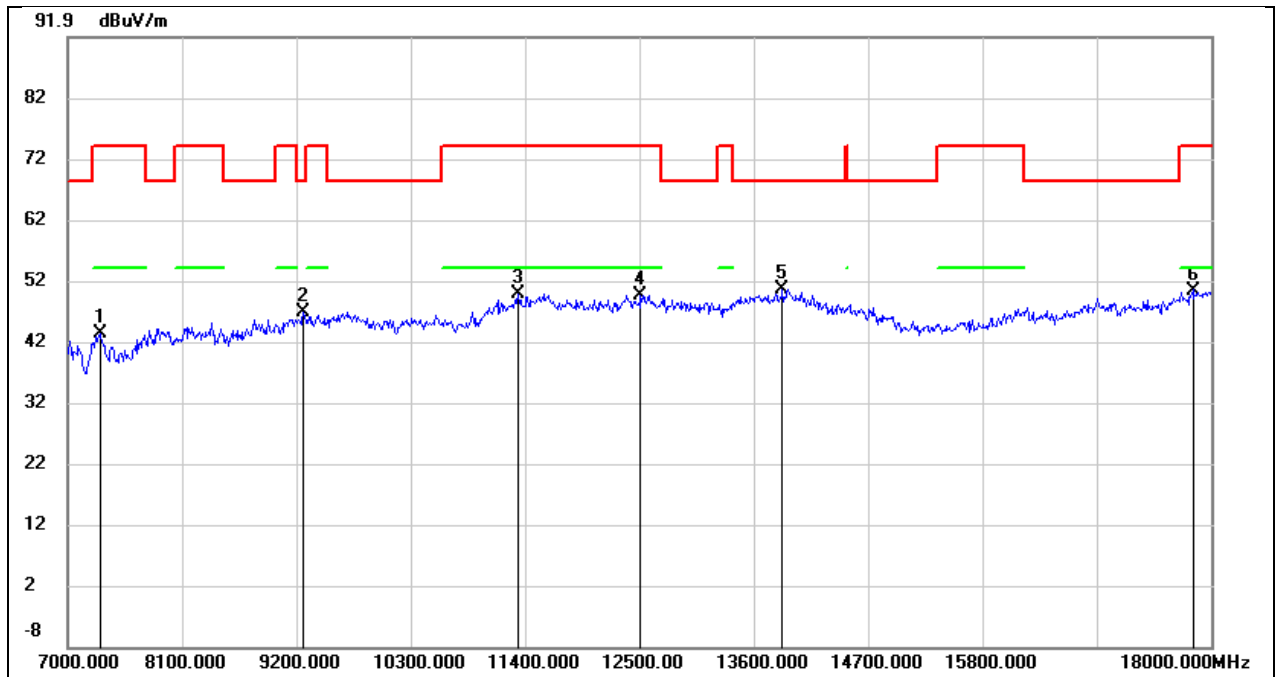


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.86	7.49	43.35	74.00	-30.65	peak
2	9266.000	35.25	11.62	46.87	68.20	-21.33	peak
3	11334.000	32.86	16.90	49.76	74.00	-24.24	peak
4	12511.000	29.84	19.80	49.64	74.00	-24.36	peak
5	13875.000	27.16	23.44	50.60	68.20	-17.60	peak
6	17824.000	23.52	26.88	50.40	74.00	-23.60	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 5V

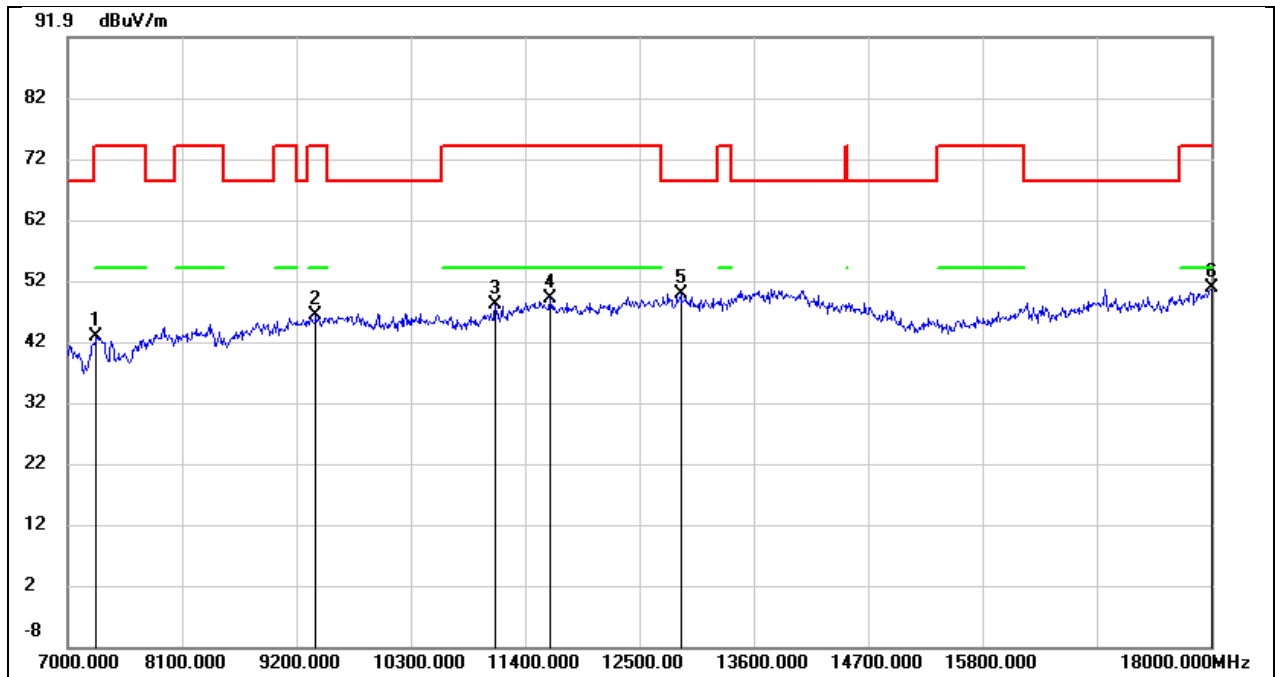


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7275.000	35.24	7.49	42.73	74.00	-31.27	peak
2	9387.000	34.33	11.99	46.32	74.00	-27.68	peak
3	11114.000	32.18	15.92	48.10	74.00	-25.90	peak
4	11642.000	31.17	17.88	49.05	74.00	-24.95	peak
5	12896.000	29.27	20.50	49.77	68.20	-18.43	peak
6	18000.000	22.38	28.51	50.89	74.00	-23.11	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 5V

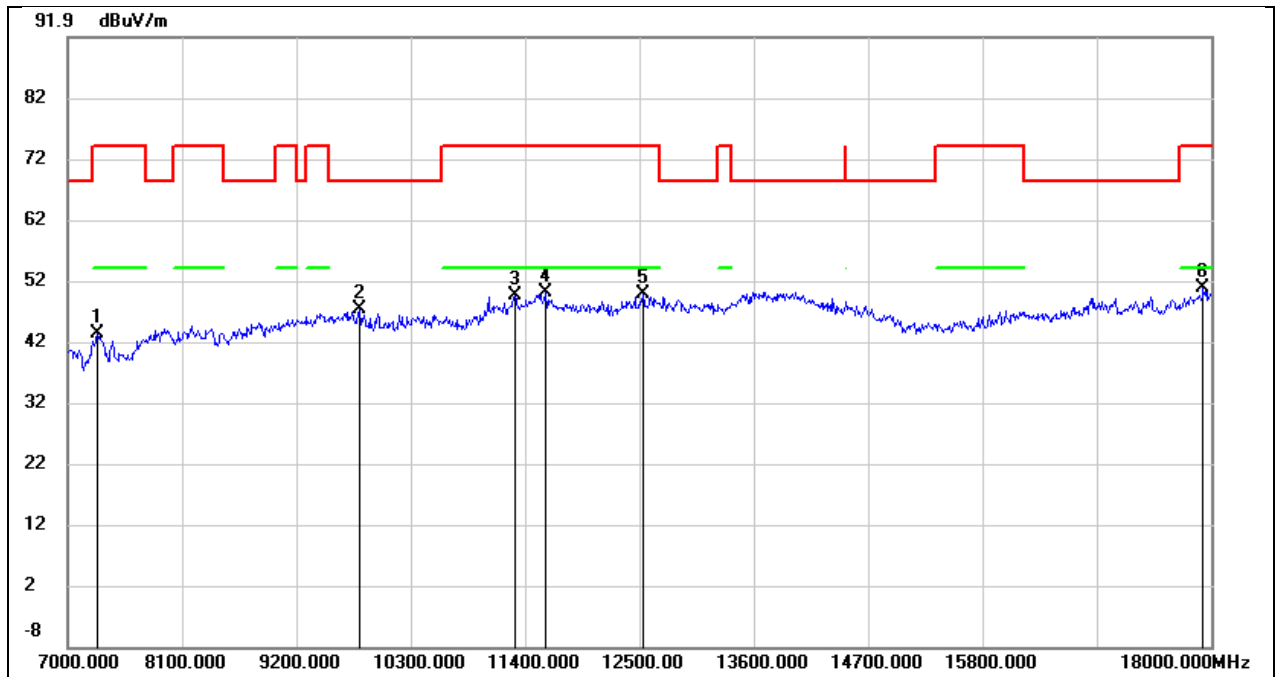


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	35.67	7.49	43.16	74.00	-30.84	peak
2	9805.000	33.63	13.66	47.29	68.20	-20.91	peak
3	11301.000	32.79	16.74	49.53	74.00	-24.47	peak
4	11598.000	32.12	17.88	50.00	74.00	-24.00	peak
5	12533.000	29.93	19.82	49.75	74.00	-24.25	peak
6	17923.000	22.89	27.79	50.68	74.00	-23.32	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 5V

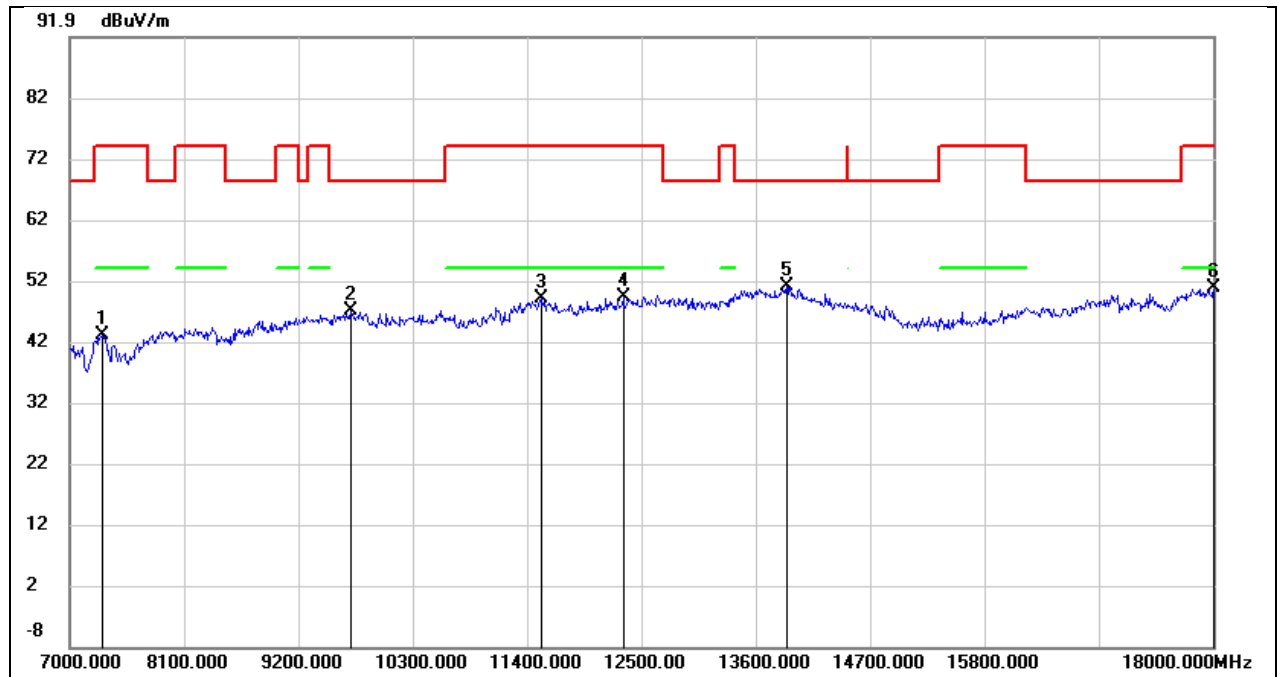


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.54	7.50	43.04	74.00	-30.96	peak
2	9706.000	33.49	13.49	46.98	68.20	-21.22	peak
3	11543.000	31.38	17.67	49.05	74.00	-24.95	peak
4	12324.000	29.92	19.43	49.35	74.00	-24.65	peak
5	13897.000	27.42	23.51	50.93	68.20	-17.27	peak
6	18000.000	22.22	28.51	50.73	74.00	-23.27	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 5V

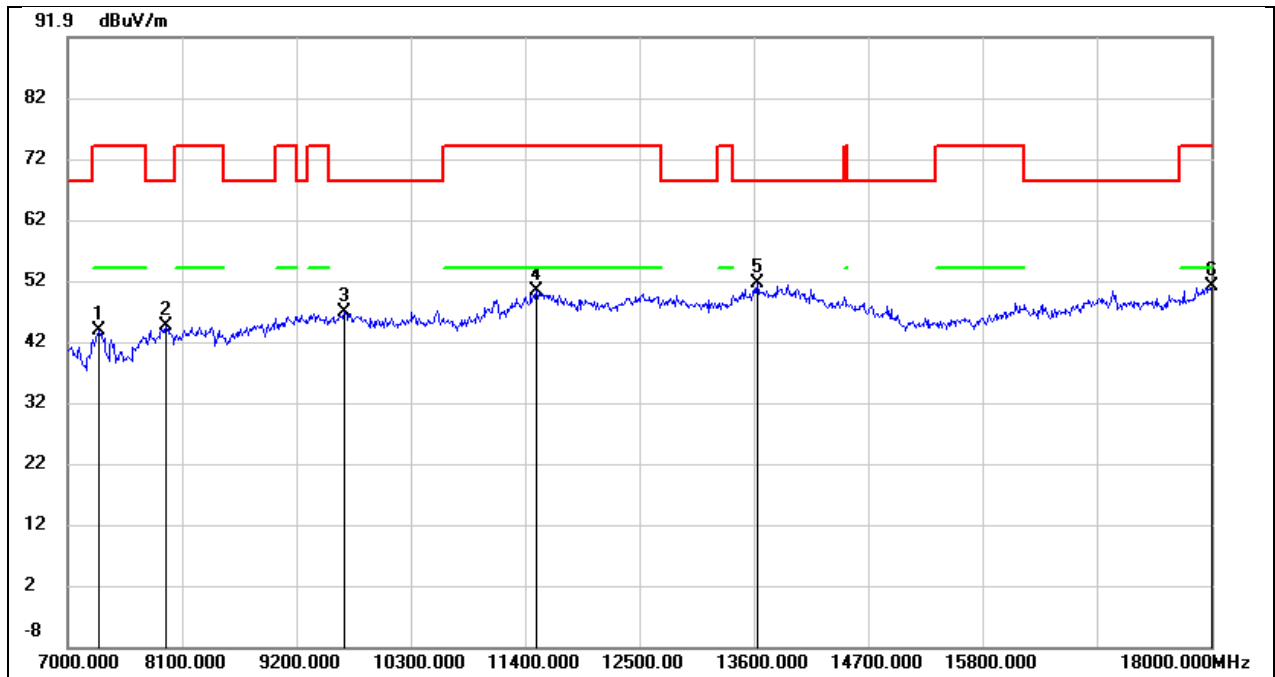


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.24	7.50	43.74	74.00	-30.26	peak
2	7946.000	36.31	8.12	44.43	68.20	-23.77	peak
3	9662.000	33.31	13.39	46.70	68.20	-21.50	peak
4	11510.000	32.79	17.57	50.36	74.00	-23.64	peak
5	13633.000	28.80	22.68	51.48	68.20	-16.72	peak
6	18000.000	22.43	28.51	50.94	74.00	-23.06	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 5V

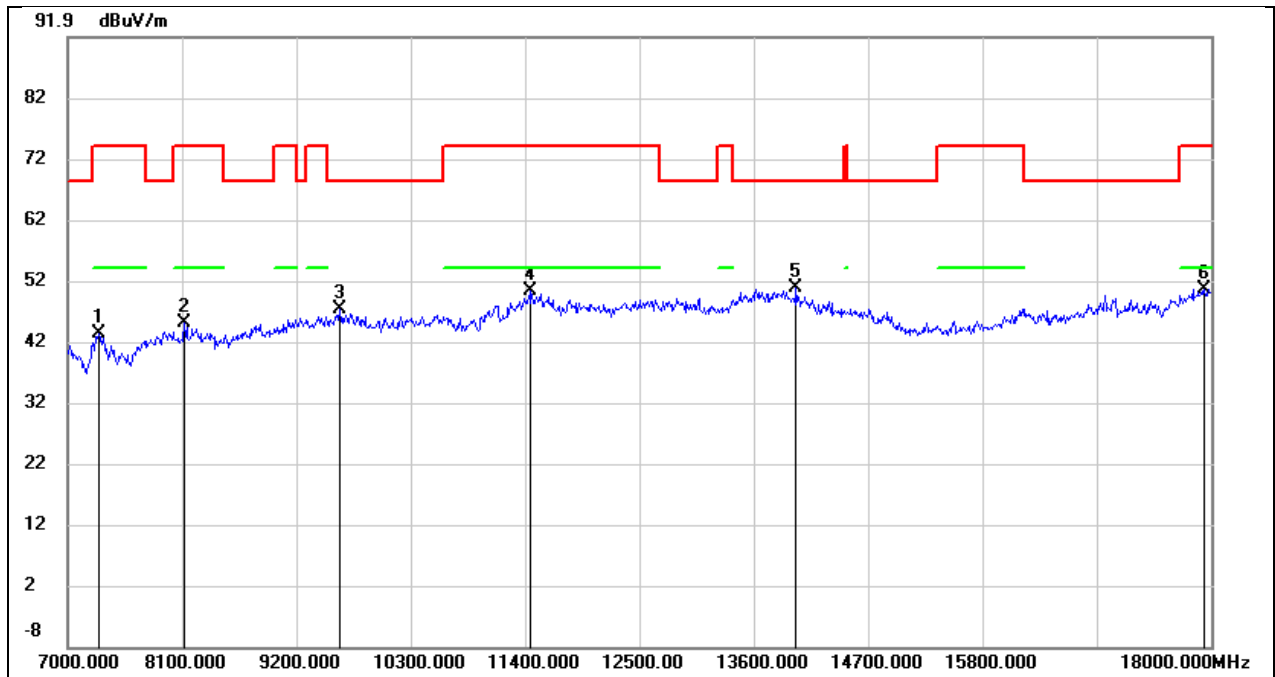


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.71	7.50	43.21	74.00	-30.79	peak
2	8122.000	36.59	8.32	44.91	74.00	-29.09	peak
3	9618.000	34.02	13.31	47.33	68.20	-20.87	peak
4	11455.000	32.85	17.38	50.23	74.00	-23.77	peak
5	14007.000	26.90	23.88	50.78	68.20	-17.42	peak
6	17934.000	22.73	27.90	50.63	74.00	-23.37	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 5V

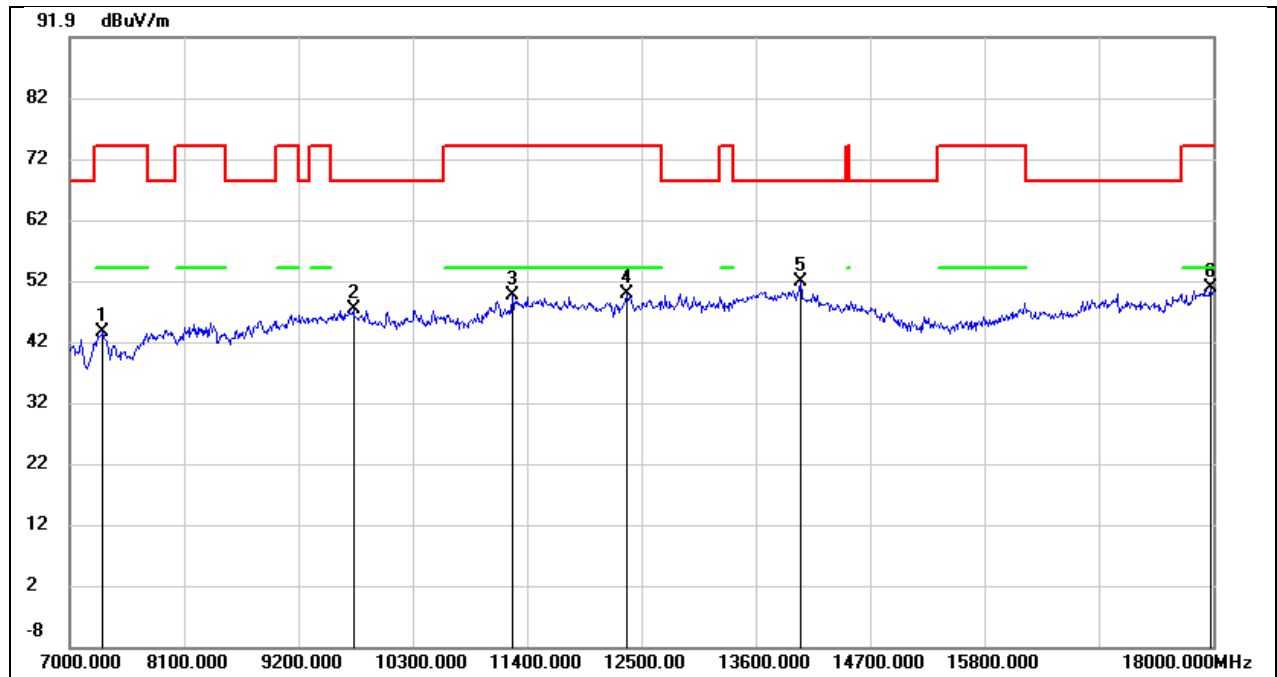


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.91	7.50	43.41	74.00	-30.59	peak
2	9728.000	33.78	13.52	47.30	68.20	-20.90	peak
3	11257.000	32.90	16.55	49.45	74.00	-24.55	peak
4	12357.000	30.24	19.52	49.76	74.00	-24.24	peak
5	14029.000	28.12	23.76	51.88	68.20	-16.32	peak
6	17978.000	22.53	28.31	50.84	74.00	-23.16	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 5V

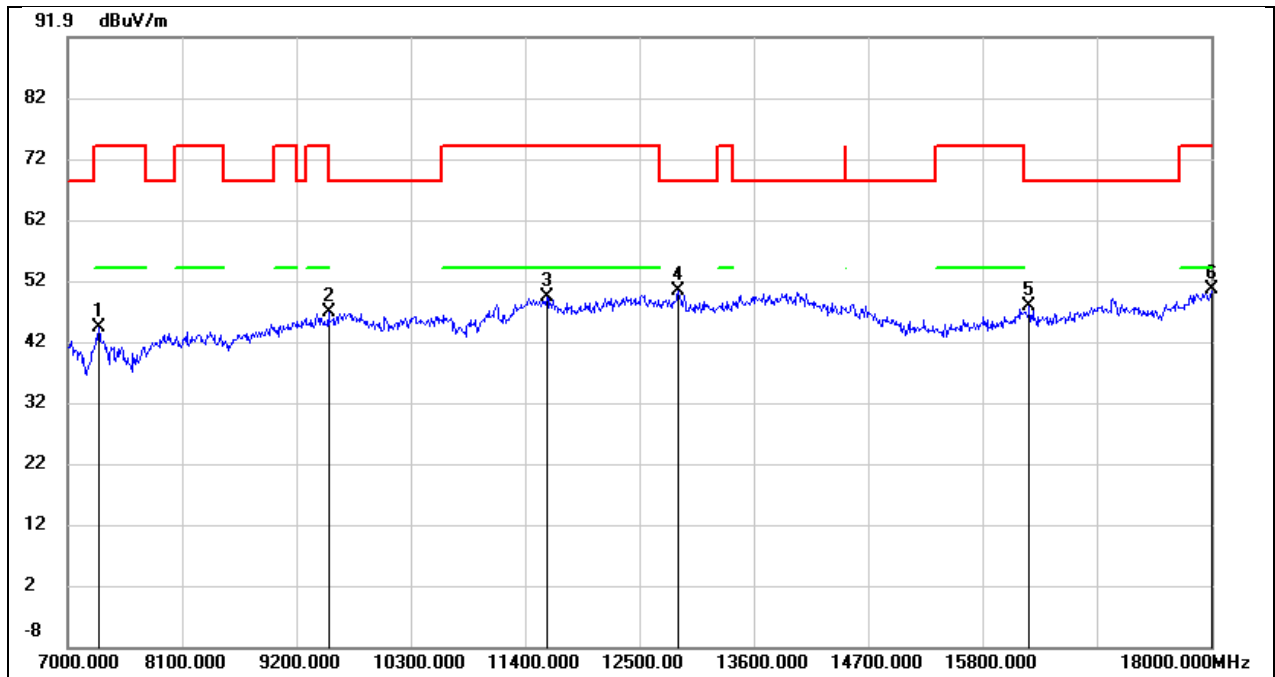


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.81	7.50	44.31	74.00	-29.69	peak
2	9508.000	34.17	12.71	46.88	68.20	-21.32	peak
3	11609.000	31.36	17.88	49.24	74.00	-24.76	peak
4	12874.000	29.66	20.50	50.16	68.20	-18.04	peak
5	16251.000	26.40	21.46	47.86	68.20	-20.34	peak
6	18000.000	22.08	28.51	50.59	74.00	-23.41	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 5V

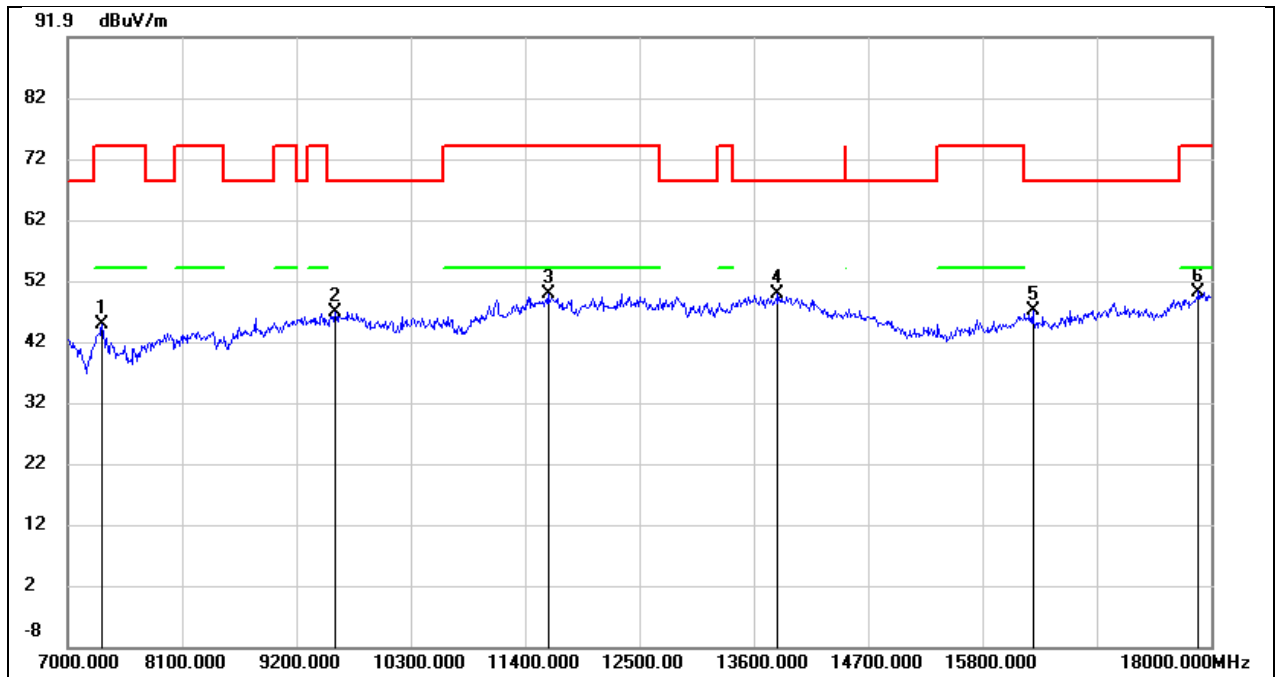


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	37.24	7.50	44.74	74.00	-29.26	peak
2	9574.000	33.77	13.13	46.90	68.20	-21.30	peak
3	11620.000	32.00	17.88	49.88	74.00	-24.12	peak
4	13831.000	26.55	23.26	49.81	68.20	-18.39	peak
5	16284.000	25.74	21.38	47.12	68.20	-21.08	peak
6	17879.000	22.76	27.39	50.15	74.00	-23.85	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 5V

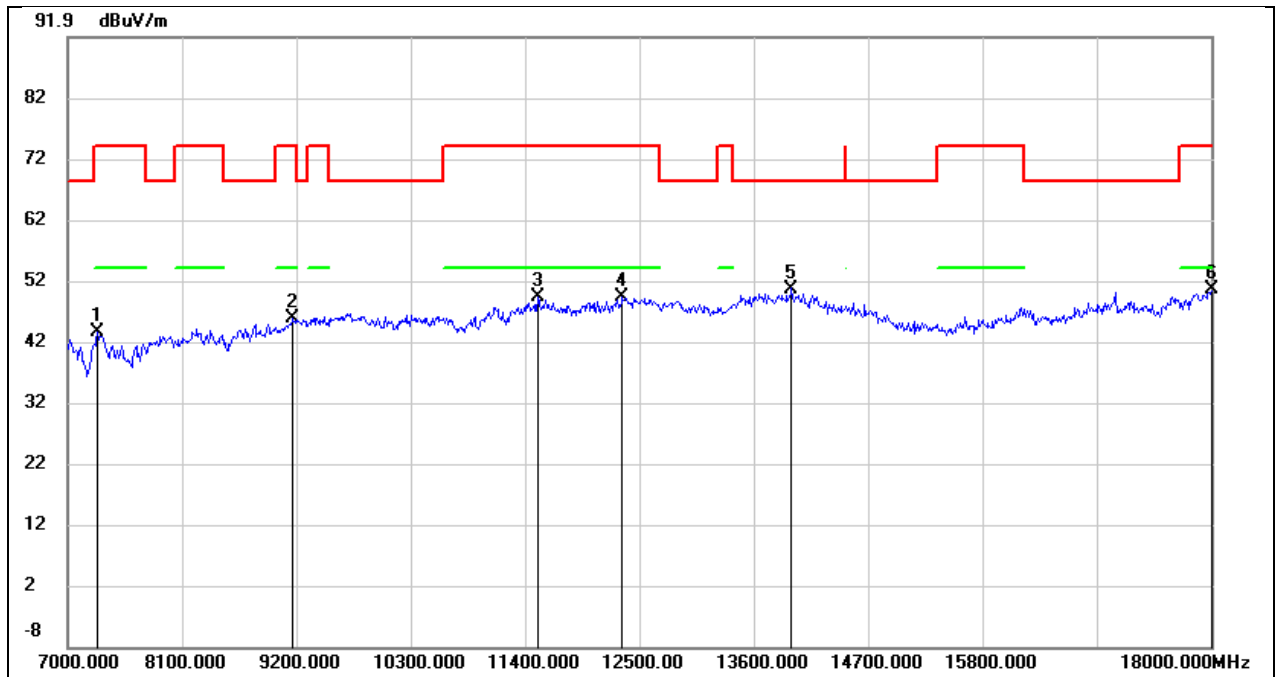


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	35.97	7.49	43.46	74.00	-30.54	peak
2	9167.000	34.61	11.28	45.89	74.00	-28.11	peak
3	11521.000	31.65	17.60	49.25	74.00	-24.75	peak
4	12335.000	29.84	19.46	49.30	74.00	-24.70	peak
5	13963.000	26.88	23.77	50.65	68.20	-17.55	peak
6	18000.000	21.98	28.51	50.49	74.00	-23.51	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 5V

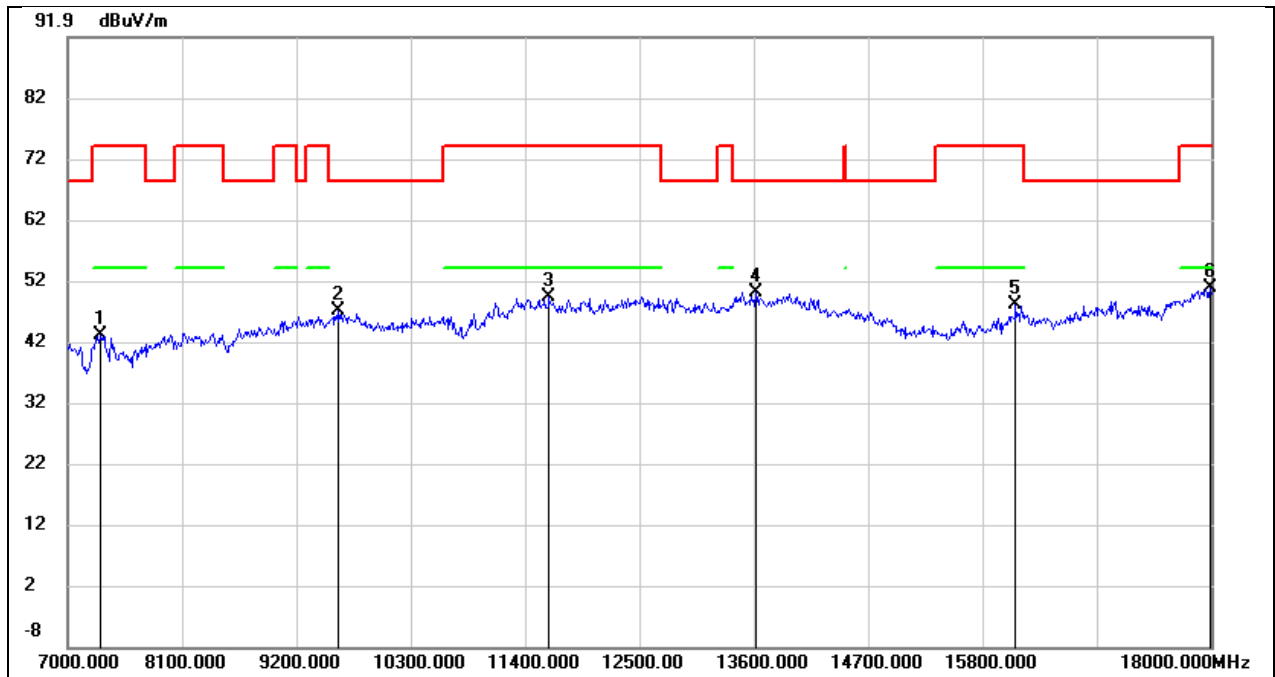


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.55	7.50	43.05	74.00	-30.95	peak
2	9607.000	33.64	13.30	46.94	68.20	-21.26	peak
3	11631.000	31.49	17.88	49.37	74.00	-24.63	peak
4	13622.000	27.38	22.66	50.04	68.20	-18.16	peak
5	16119.000	26.92	21.06	47.98	74.00	-26.02	peak
6	17989.000	22.34	28.40	50.74	74.00	-23.26	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 5V

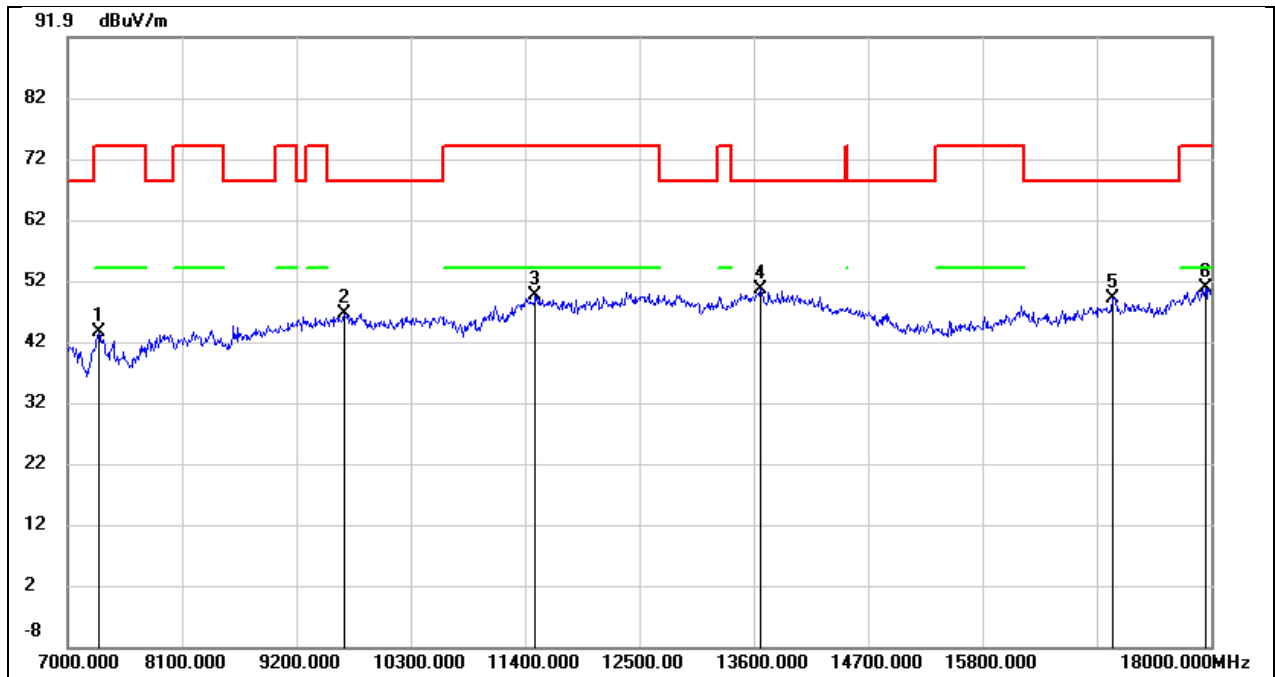


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.95	7.50	43.45	74.00	-30.55	peak
2	9662.000	33.14	13.39	46.53	68.20	-21.67	peak
3	11499.000	31.90	17.53	49.43	74.00	-24.57	peak
4	13666.000	27.87	22.78	50.65	68.20	-17.55	peak
5	17054.000	26.11	22.99	49.10	68.20	-19.10	peak
6	17945.000	22.83	28.01	50.84	74.00	-23.16	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 5V

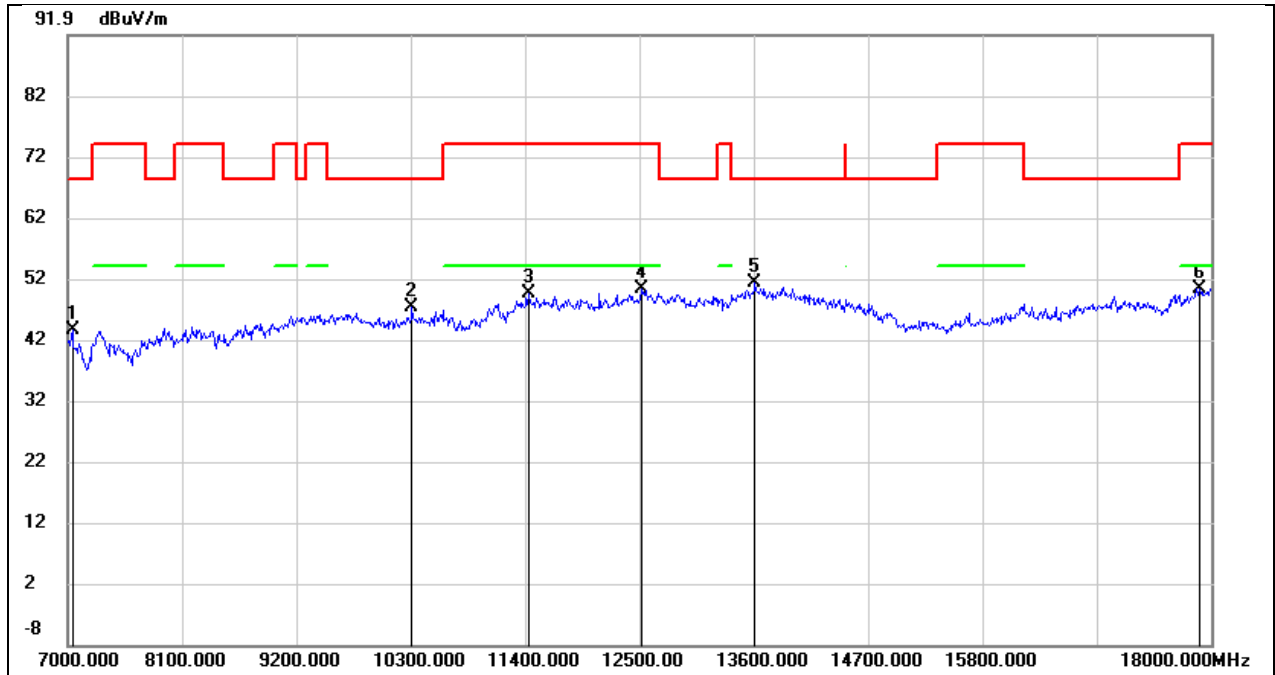


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7044.000	36.13	7.28	43.41	68.20	-24.79	peak
2	10311.000	33.67	13.55	47.22	68.20	-20.98	peak
3	11433.000	32.23	17.31	49.54	74.00	-24.46	peak
4	12522.000	30.44	19.80	50.24	74.00	-23.76	peak
5	13611.000	28.58	22.63	51.21	68.20	-16.99	peak
6	17890.000	22.85	27.49	50.34	74.00	-23.66	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 5V

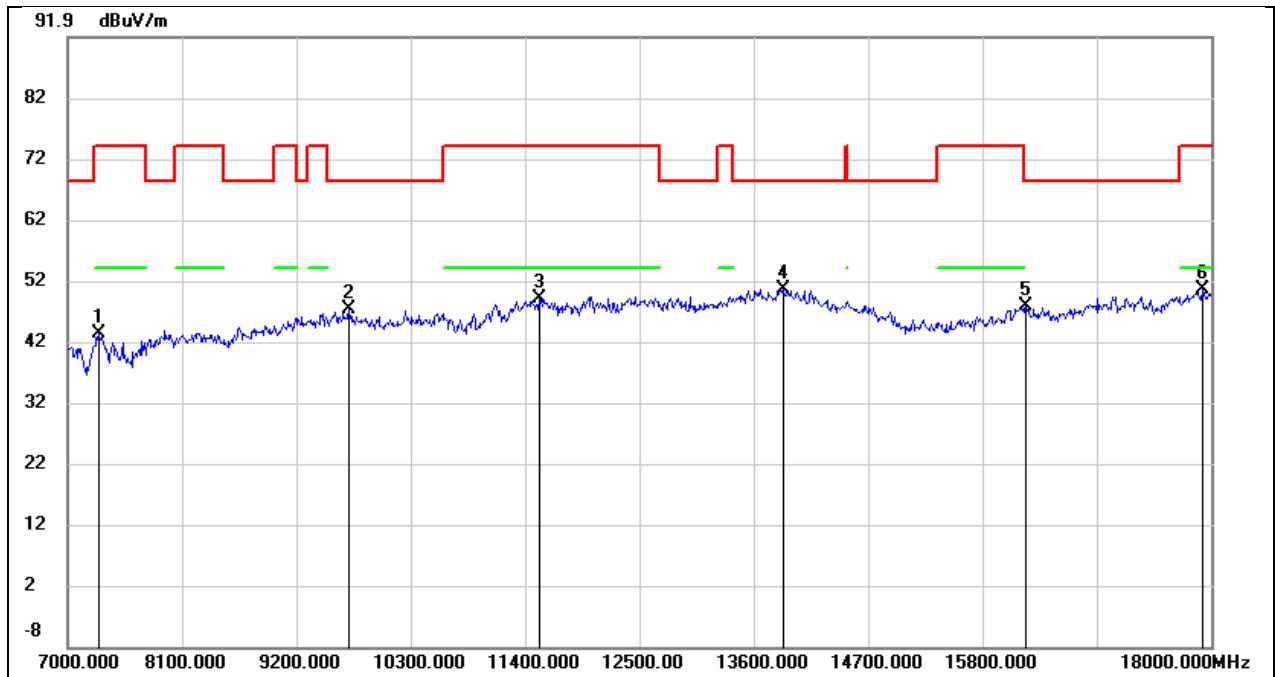


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.66	7.50	43.16	74.00	-30.84	peak
2	9706.000	33.74	13.49	47.23	68.20	-20.97	peak
3	11543.000	31.36	17.67	49.03	74.00	-24.97	peak
4	13886.000	27.08	23.47	50.55	68.20	-17.65	peak
5	16218.000	26.16	21.55	47.71	68.20	-20.49	peak
6	17923.000	22.84	27.79	50.63	74.00	-23.37	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 5V

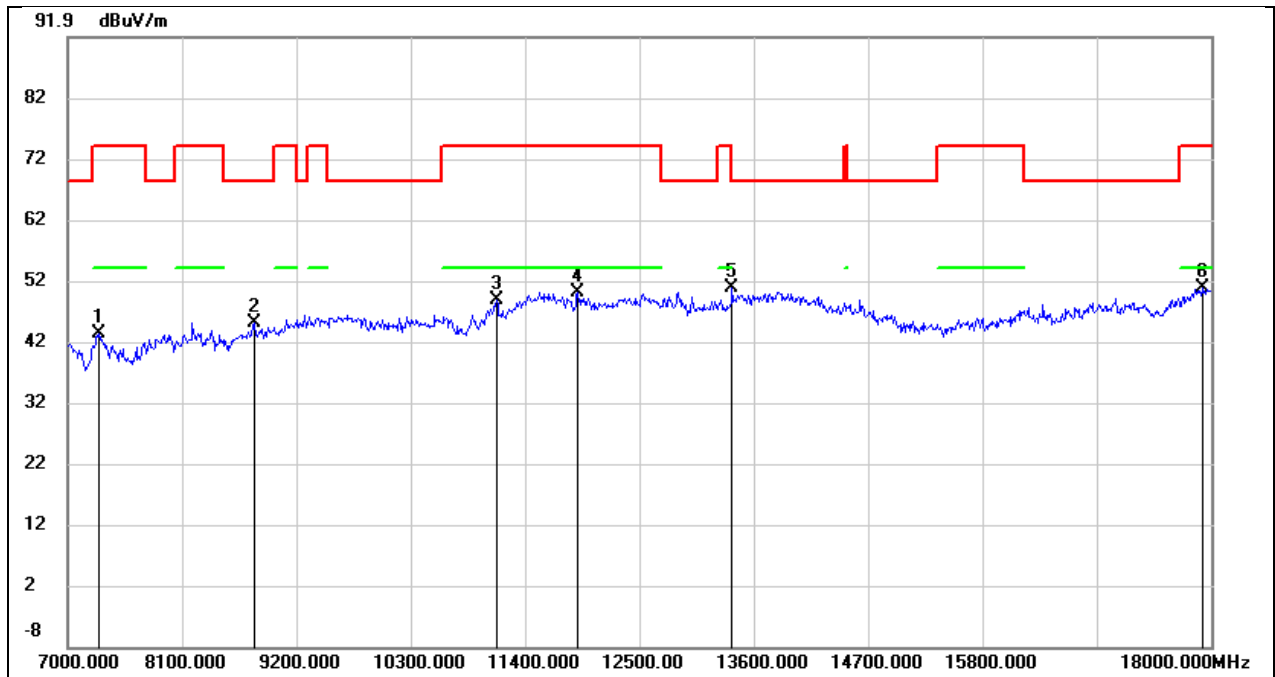


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.69	7.50	43.19	74.00	-30.81	peak
2	8793.000	35.44	9.57	45.01	68.20	-23.19	peak
3	11125.000	32.86	15.98	48.84	74.00	-25.16	peak
4	11906.000	31.62	18.29	49.91	74.00	-24.09	peak
5	13391.000	28.72	22.01	50.73	74.00	-23.27	peak
6	17912.000	22.98	27.70	50.68	74.00	-23.32	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 5V

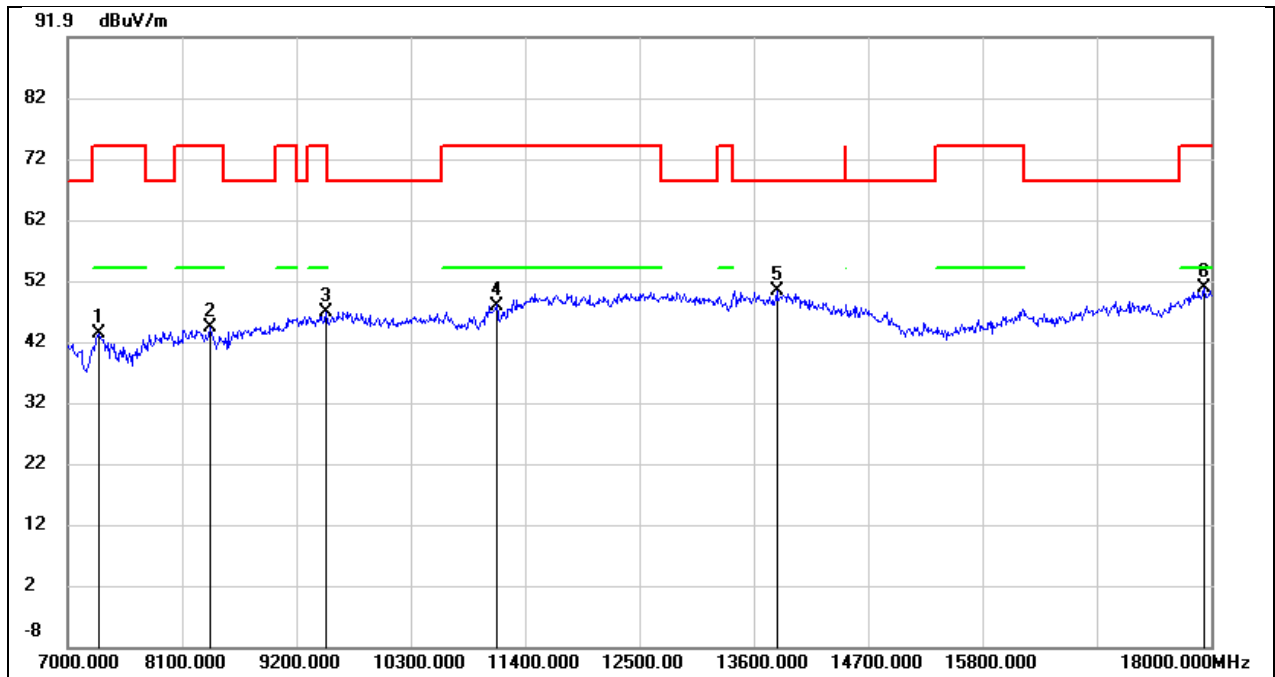


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.67	7.50	43.17	74.00	-30.83	peak
2	8364.000	35.62	8.55	44.17	74.00	-29.83	peak
3	9486.000	34.28	12.57	46.85	74.00	-27.15	peak
4	11125.000	31.92	15.98	47.90	74.00	-26.10	peak
5	13820.000	27.12	23.22	50.34	68.20	-17.86	peak
6	17934.000	22.87	27.90	50.77	74.00	-23.23	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 5V

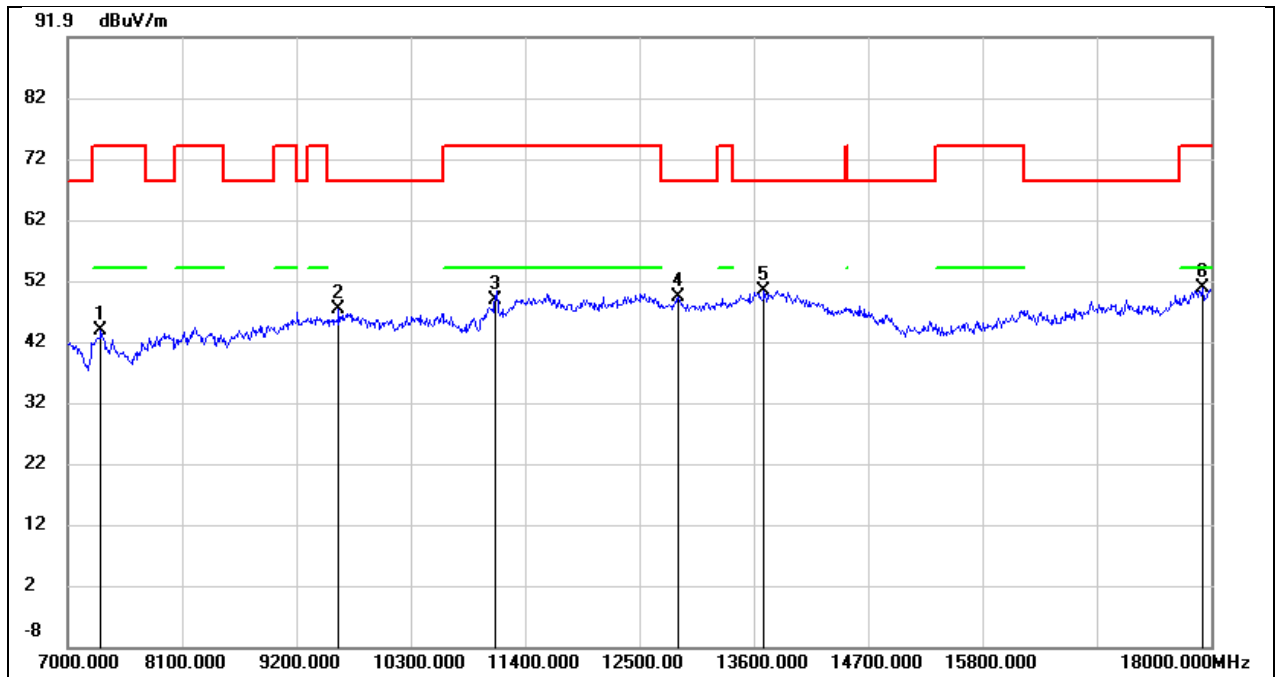


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	36.16	7.50	43.66	74.00	-30.34	peak
2	9607.000	34.07	13.30	47.37	68.20	-20.83	peak
3	11114.000	32.79	15.92	48.71	74.00	-25.29	peak
4	12874.000	28.85	20.50	49.35	68.20	-18.85	peak
5	13699.000	27.42	22.87	50.29	68.20	-17.91	peak
6	17912.000	23.18	27.70	50.88	74.00	-23.12	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 5V

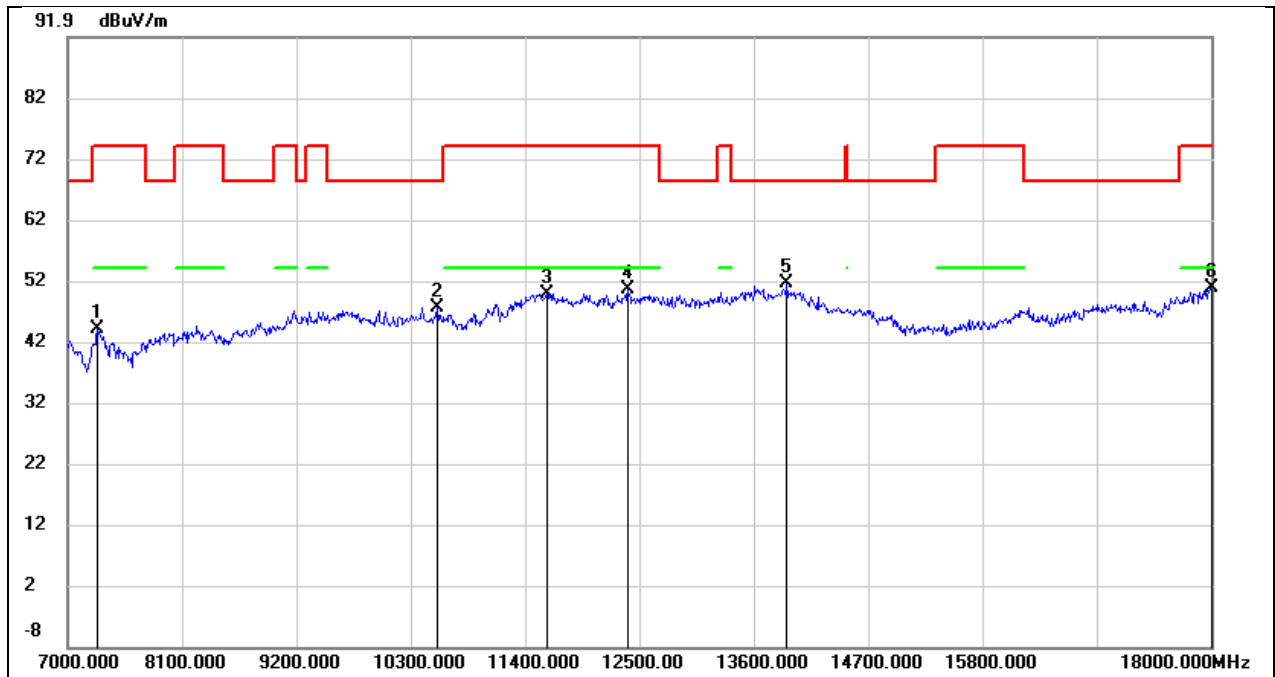


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	36.49	7.49	43.98	74.00	-30.02	peak
2	10553.000	33.44	14.18	47.62	68.20	-20.58	peak
3	11609.000	32.02	17.88	49.90	74.00	-24.10	peak
4	12390.000	30.89	19.62	50.51	74.00	-23.49	peak
5	13919.000	27.85	23.60	51.45	68.20	-16.75	peak
6	18000.000	22.27	28.51	50.78	74.00	-23.22	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 5V

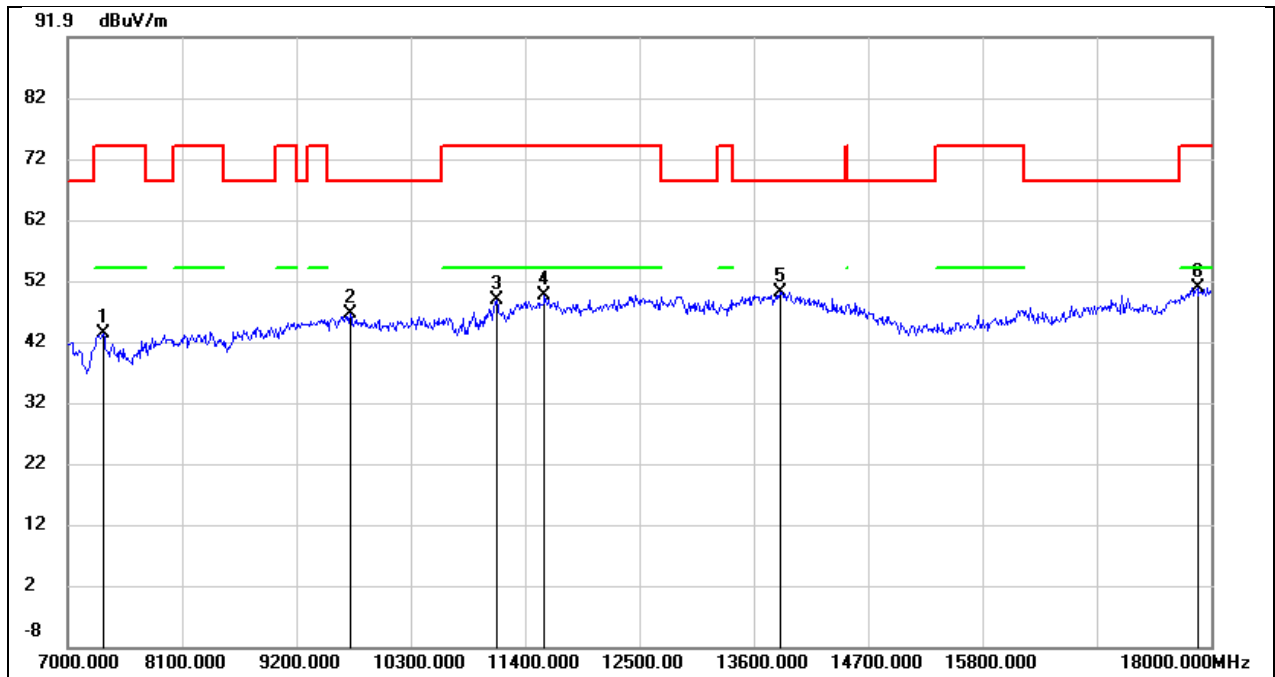


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.77	7.50	43.27	74.00	-30.73	peak
2	9717.000	33.09	13.50	46.59	68.20	-21.61	peak
3	11125.000	32.77	15.98	48.75	74.00	-25.25	peak
4	11587.000	31.69	17.84	49.53	74.00	-24.47	peak
5	13853.000	26.67	23.34	50.01	68.20	-18.19	peak
6	17868.000	23.54	27.29	50.83	74.00	-23.17	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 5V

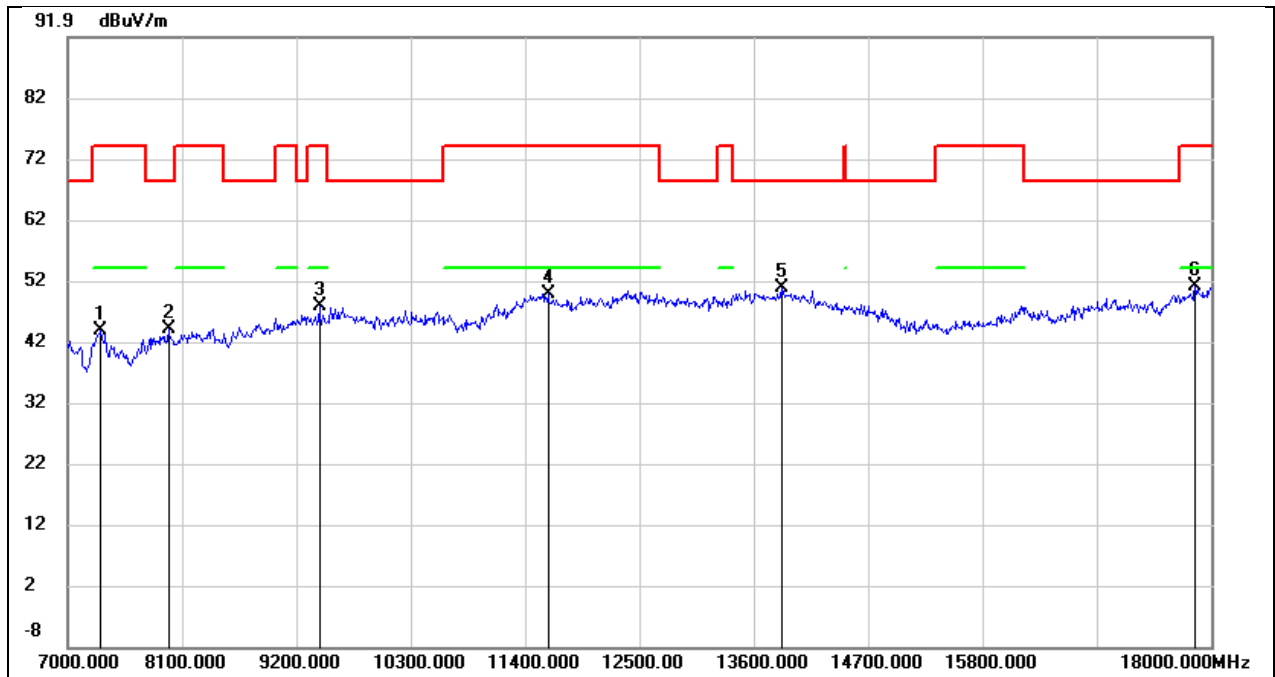


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	36.25	7.50	43.75	74.00	-30.25	peak
2	7968.000	35.92	8.13	44.05	68.20	-24.15	peak
3	9420.000	35.60	12.16	47.76	74.00	-26.24	peak
4	11620.000	31.97	17.88	49.85	74.00	-24.15	peak
5	13864.000	27.48	23.39	50.87	68.20	-17.33	peak
6	17846.000	23.90	27.09	50.99	74.00	-23.01	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 5V

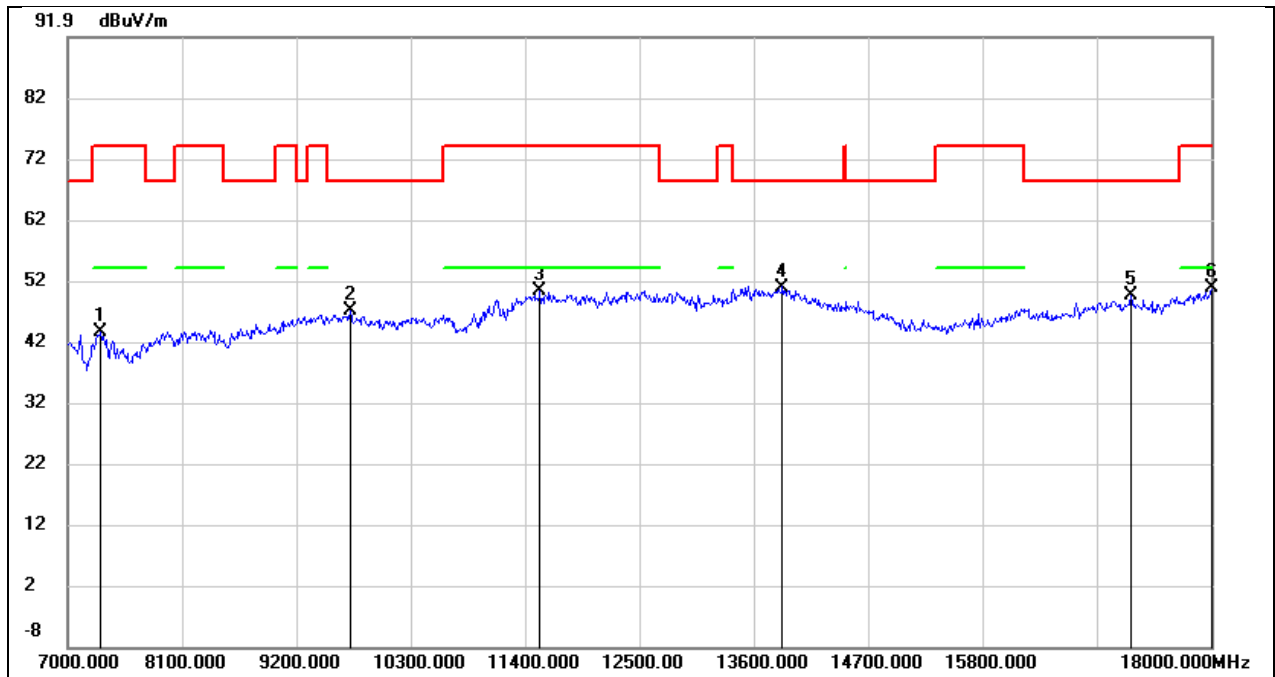


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.99	7.50	43.49	74.00	-30.51	peak
2	9717.000	33.41	13.50	46.91	68.20	-21.29	peak
3	11543.000	32.65	17.67	50.32	74.00	-23.68	peak
4	13875.000	27.46	23.44	50.90	68.20	-17.30	peak
5	17230.000	25.66	23.83	49.49	68.20	-18.71	peak
6	18000.000	22.19	28.51	50.70	74.00	-23.30	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 5V

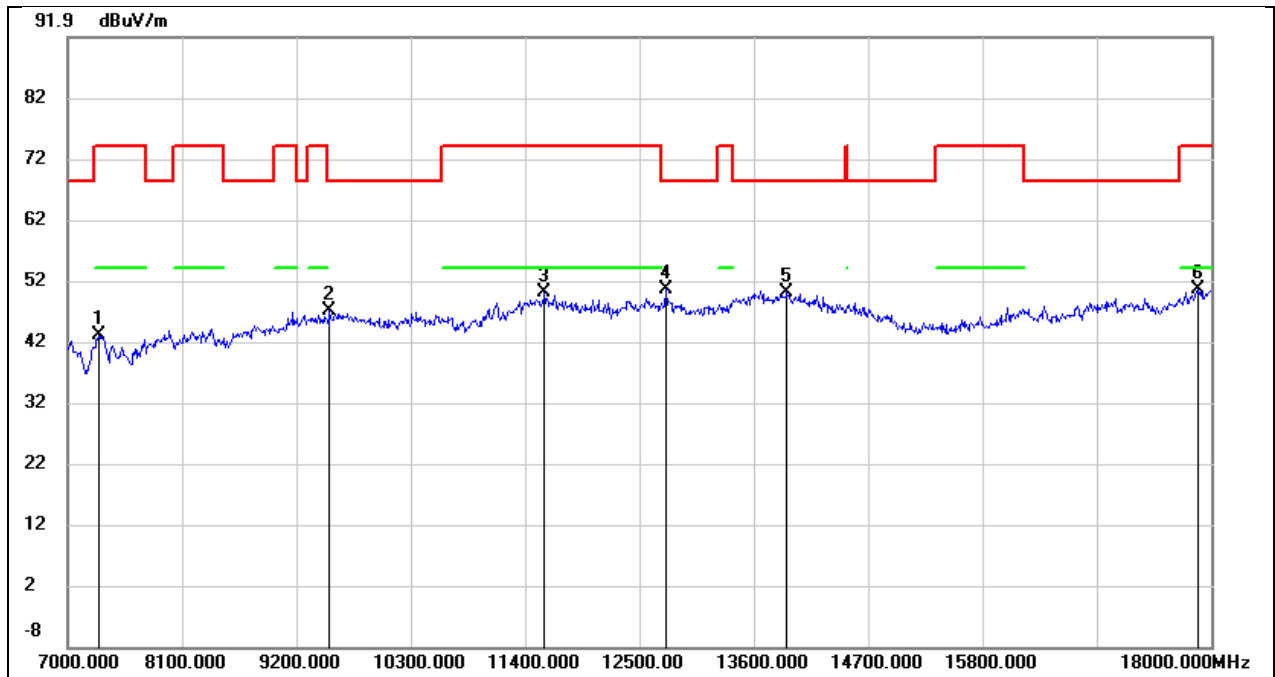


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.58	7.50	43.08	74.00	-30.92	peak
2	9519.000	34.18	12.77	46.95	68.20	-21.25	peak
3	11587.000	32.15	17.84	49.99	74.00	-24.01	peak
4	12753.000	30.09	20.38	50.47	68.20	-17.73	peak
5	13919.000	26.45	23.60	50.05	68.20	-18.15	peak
6	17879.000	23.15	27.39	50.54	74.00	-23.46	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 5V

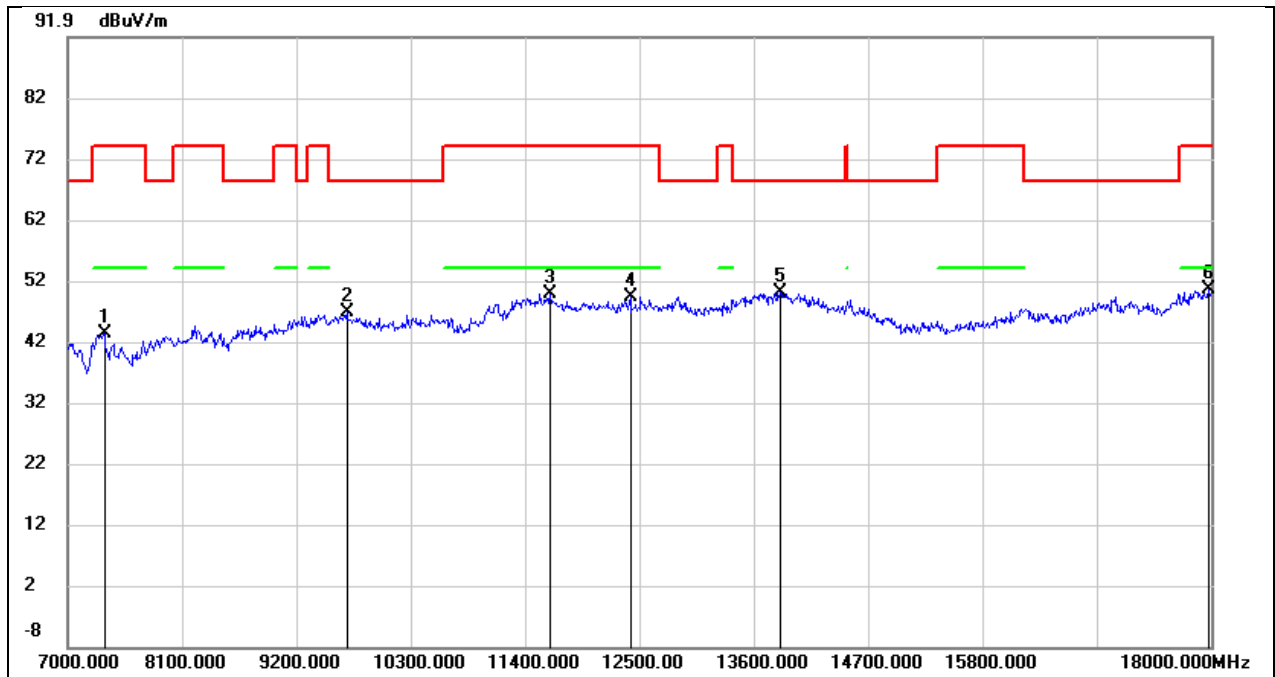


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	35.71	7.51	43.22	74.00	-30.78	peak
2	9684.000	33.40	13.44	46.84	68.20	-21.36	peak
3	11642.000	31.99	17.88	49.87	74.00	-24.13	peak
4	12412.000	29.68	19.65	49.33	74.00	-24.67	peak
5	13853.000	26.76	23.34	50.10	68.20	-18.10	peak
6	17978.000	22.21	28.31	50.52	74.00	-23.48	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 5V

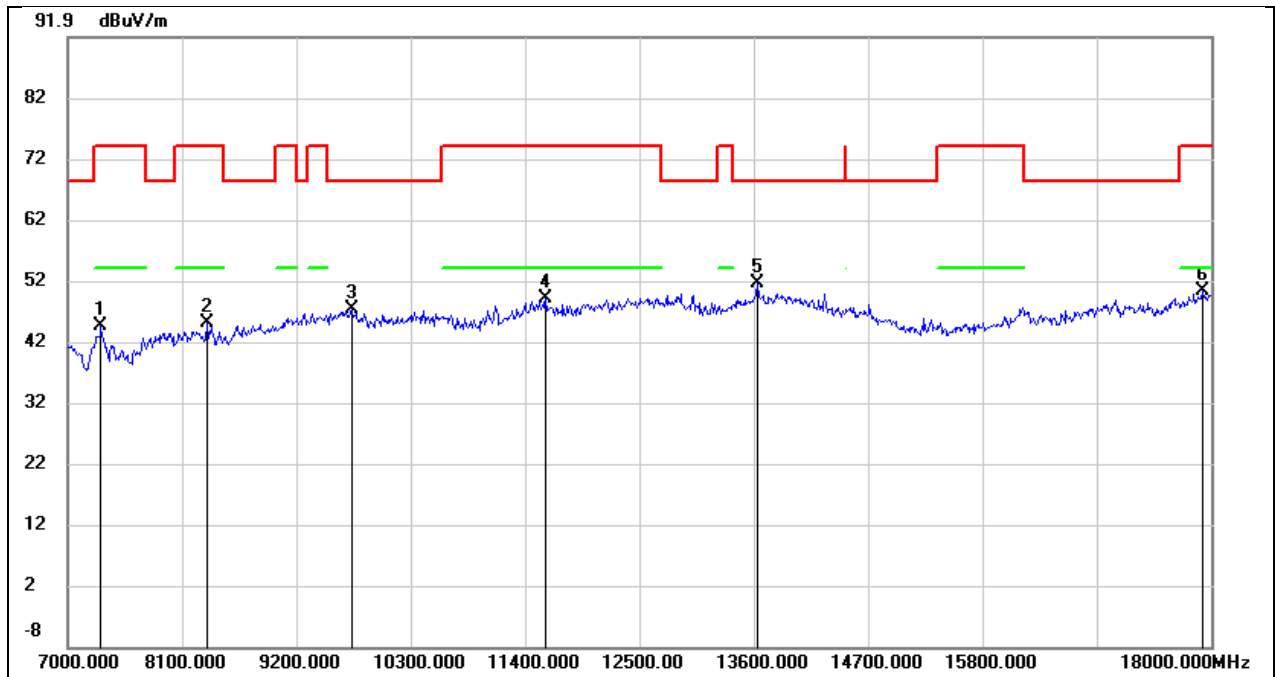


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	37.13	7.50	44.63	74.00	-29.37	peak
2	8342.000	36.41	8.53	44.94	74.00	-29.06	peak
3	9728.000	33.69	13.52	47.21	68.20	-20.99	peak
4	11598.000	31.11	17.88	48.99	74.00	-25.01	peak
5	13633.000	28.80	22.68	51.48	68.20	-16.72	peak
6	17912.000	22.57	27.70	50.27	74.00	-23.73	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 5V

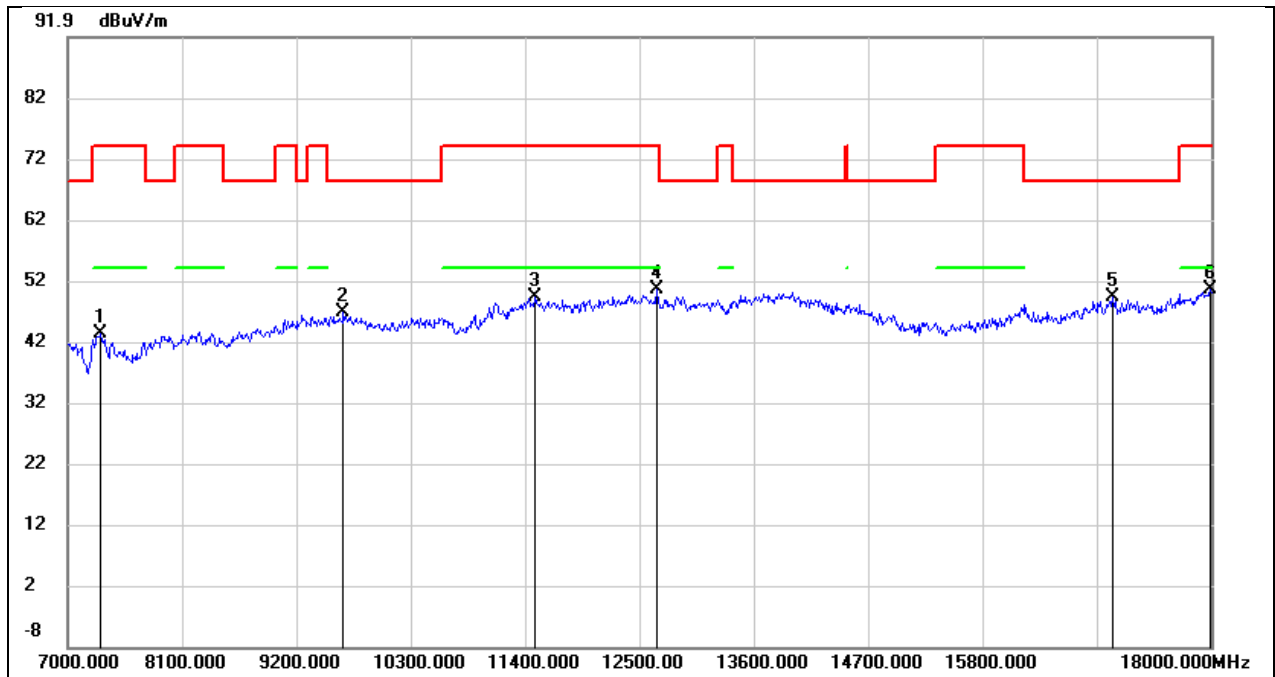


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.73	7.50	43.23	74.00	-30.77	peak
2	9651.000	33.47	13.38	46.85	68.20	-21.35	peak
3	11499.000	31.82	17.53	49.35	74.00	-24.65	peak
4	12665.000	30.47	20.09	50.56	74.00	-23.44	peak
5	17054.000	26.24	22.99	49.23	68.20	-18.97	peak
6	17989.000	22.21	28.40	50.61	74.00	-23.39	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 5V

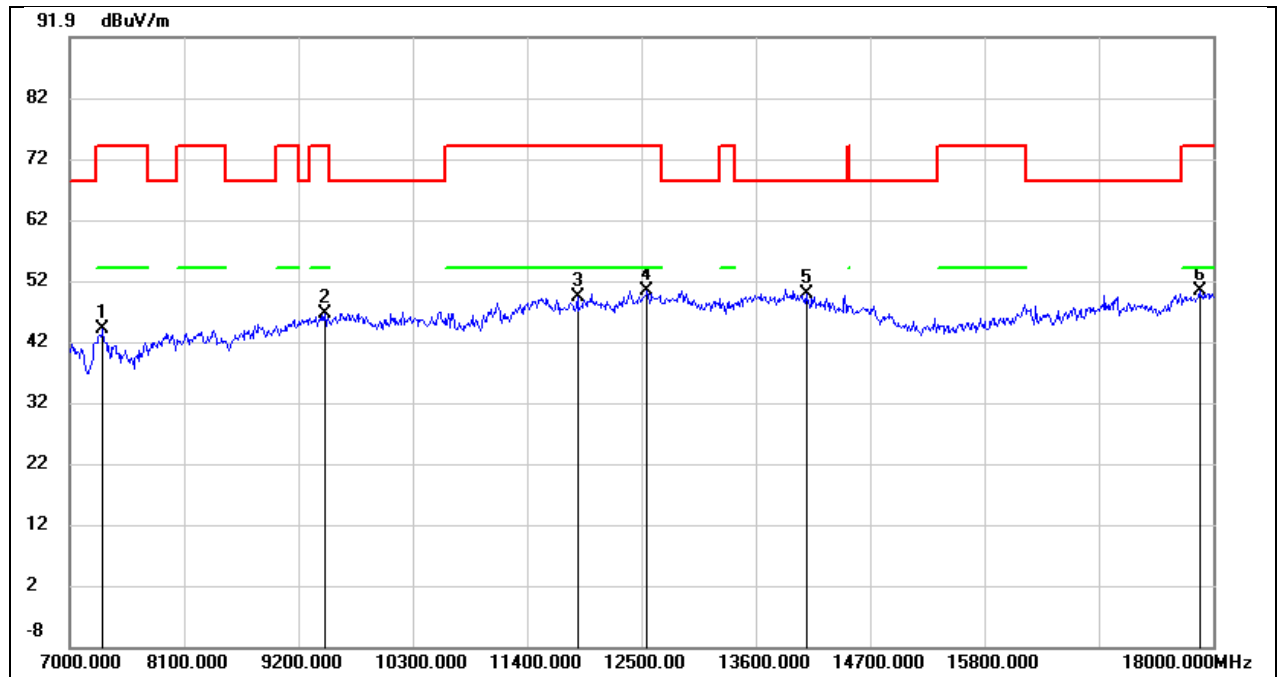


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	36.41	7.50	43.91	74.00	-30.09	peak
2	9453.000	34.20	12.36	46.56	74.00	-27.44	peak
3	11884.000	31.12	18.20	49.32	74.00	-24.68	peak
4	12555.000	30.48	19.84	50.32	74.00	-23.68	peak
5	14084.000	26.38	23.49	49.87	68.20	-18.33	peak
6	17868.000	22.96	27.29	50.25	74.00	-23.75	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 5V

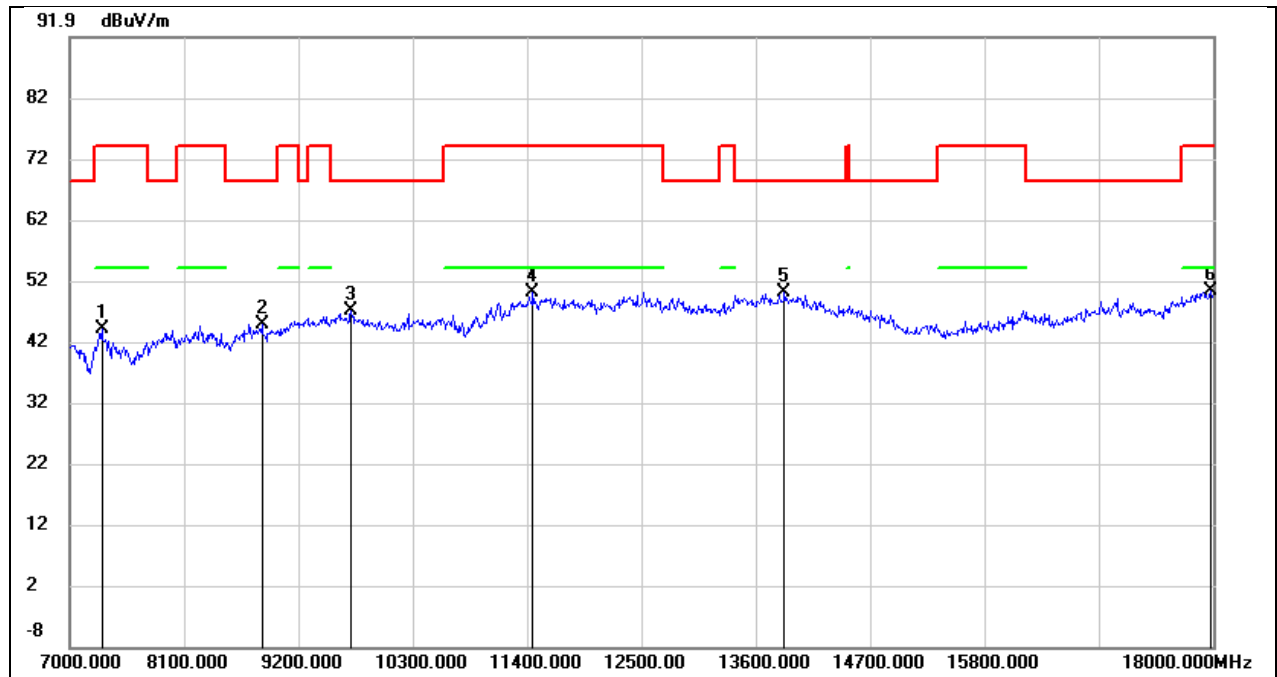


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.45	7.49	43.94	74.00	-30.06	peak
2	8848.000	34.93	9.83	44.76	68.20	-23.44	peak
3	9706.000	33.54	13.49	47.03	68.20	-21.17	peak
4	11455.000	32.73	17.38	50.11	74.00	-23.89	peak
5	13875.000	26.56	23.44	50.00	68.20	-18.20	peak
6	17978.000	21.89	28.31	50.20	74.00	-23.80	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 5V

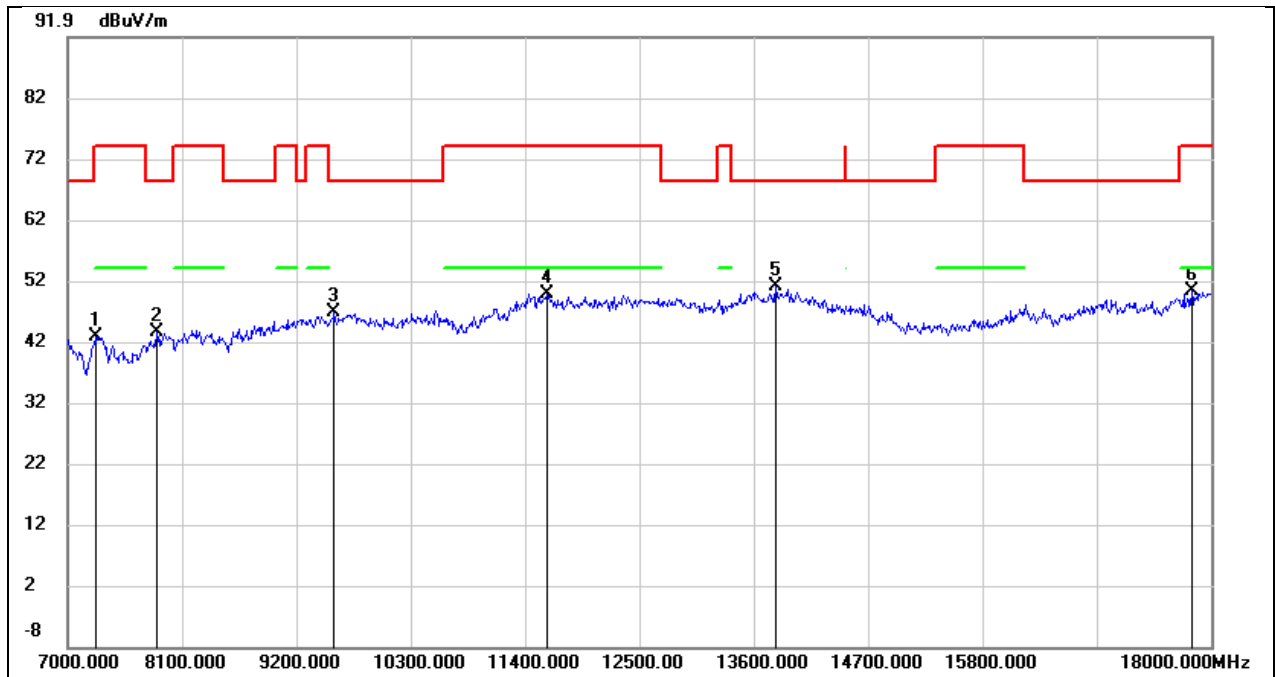


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7264.000	35.28	7.49	42.77	74.00	-31.23	peak
2	7858.000	35.40	8.01	43.41	68.20	-24.79	peak
3	9563.000	33.63	13.05	46.68	68.20	-21.52	peak
4	11609.000	31.89	17.88	49.77	74.00	-24.23	peak
5	13809.000	27.83	23.17	51.00	68.20	-17.20	peak
6	17813.000	23.61	26.78	50.39	74.00	-23.61	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 5V

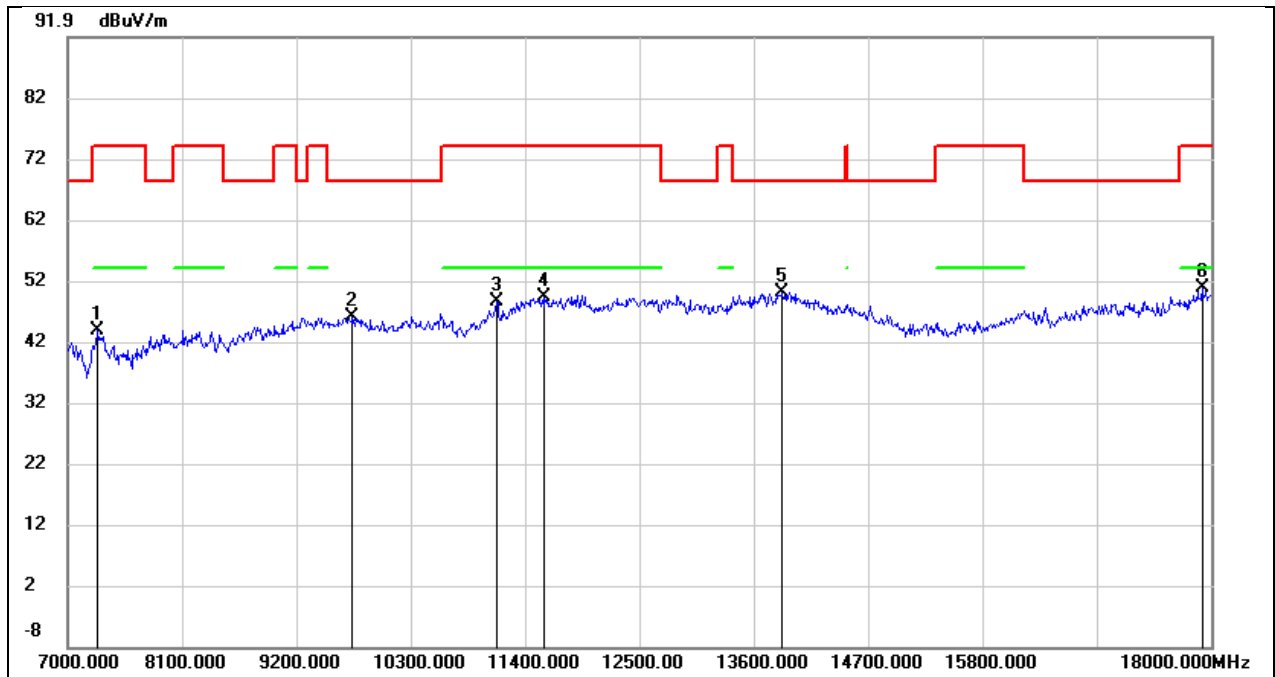


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	36.36	7.49	43.85	74.00	-30.15	peak
2	9739.000	32.43	13.55	45.98	68.20	-22.22	peak
3	11125.000	32.47	15.98	48.45	74.00	-25.55	peak
4	11587.000	31.40	17.84	49.24	74.00	-24.76	peak
5	13875.000	26.60	23.44	50.04	68.20	-18.16	peak
6	17912.000	23.09	27.70	50.79	74.00	-23.21	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 5V

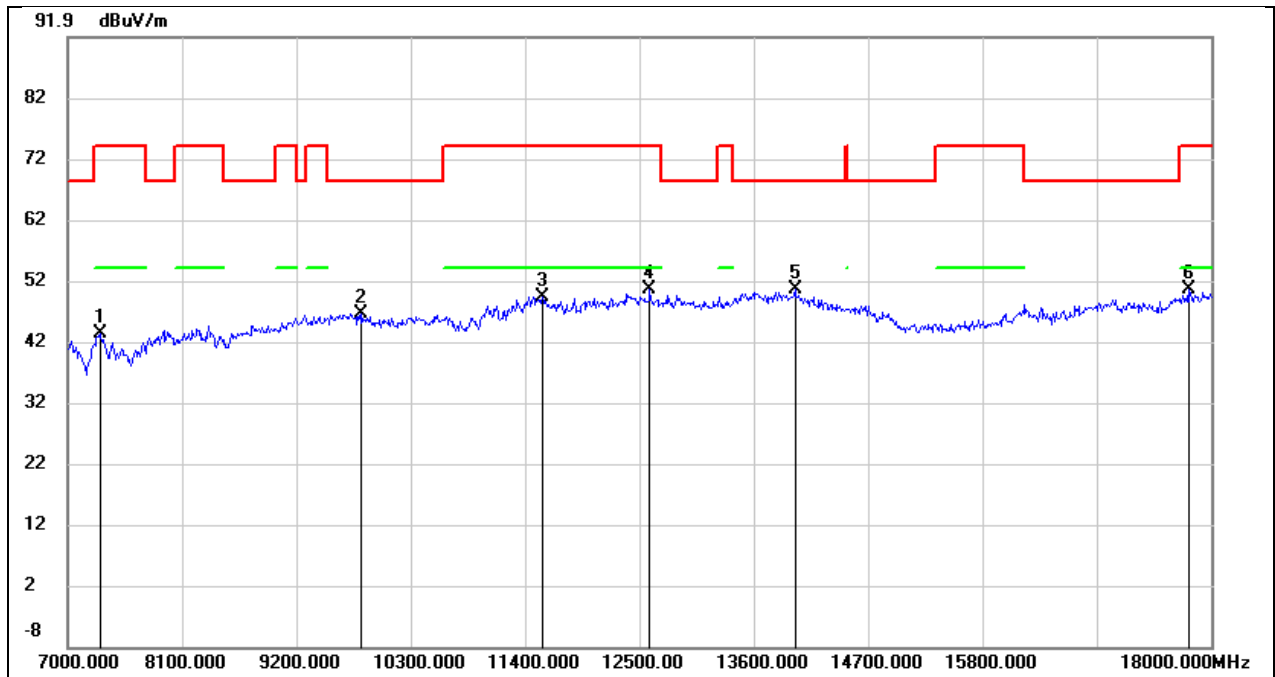


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.82	7.49	43.31	74.00	-30.69	peak
2	9827.000	32.94	13.61	46.55	68.20	-21.65	peak
3	11565.000	31.58	17.77	49.35	74.00	-24.65	peak
4	12599.000	30.57	19.88	50.45	74.00	-23.55	peak
5	13996.000	26.64	23.89	50.53	68.20	-17.67	peak
6	17780.000	23.96	26.50	50.46	74.00	-23.54	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 5V

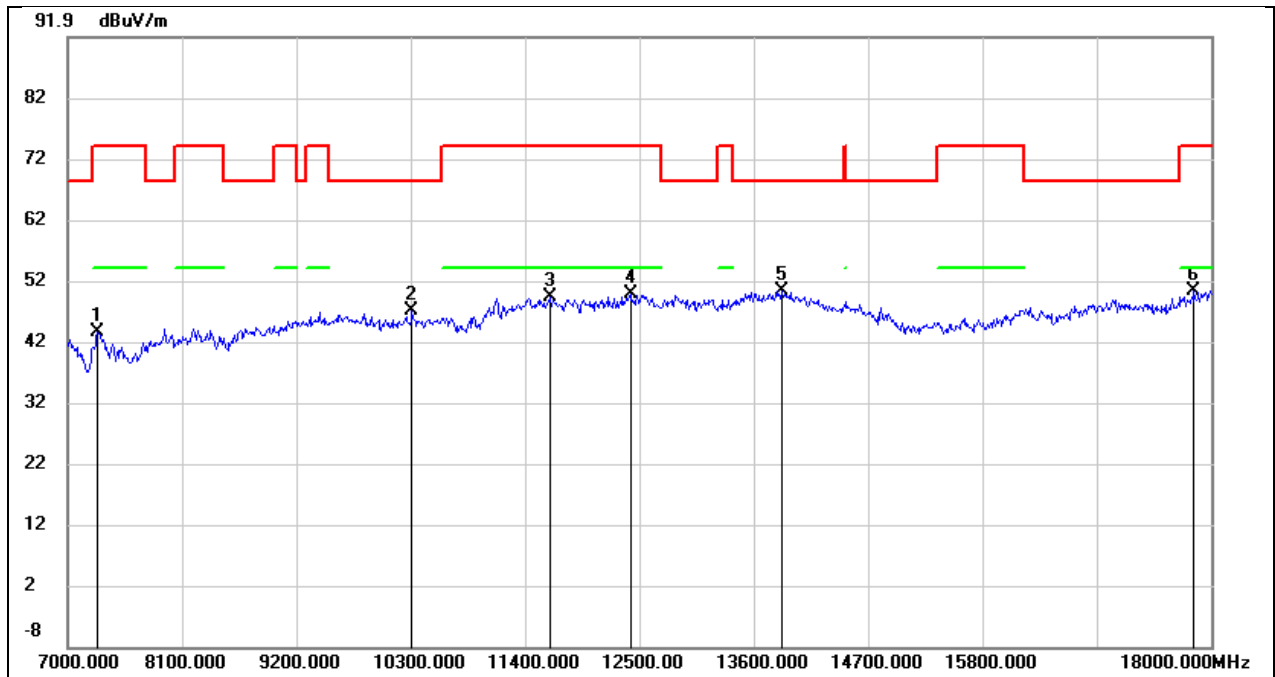


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	36.02	7.49	43.51	74.00	-30.49	peak
2	10311.000	33.49	13.55	47.04	68.20	-21.16	peak
3	11642.000	31.36	17.88	49.24	74.00	-24.76	peak
4	12412.000	30.24	19.65	49.89	74.00	-24.11	peak
5	13864.000	26.95	23.39	50.34	68.20	-17.86	peak
6	17835.000	23.40	26.99	50.39	74.00	-23.61	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 5V

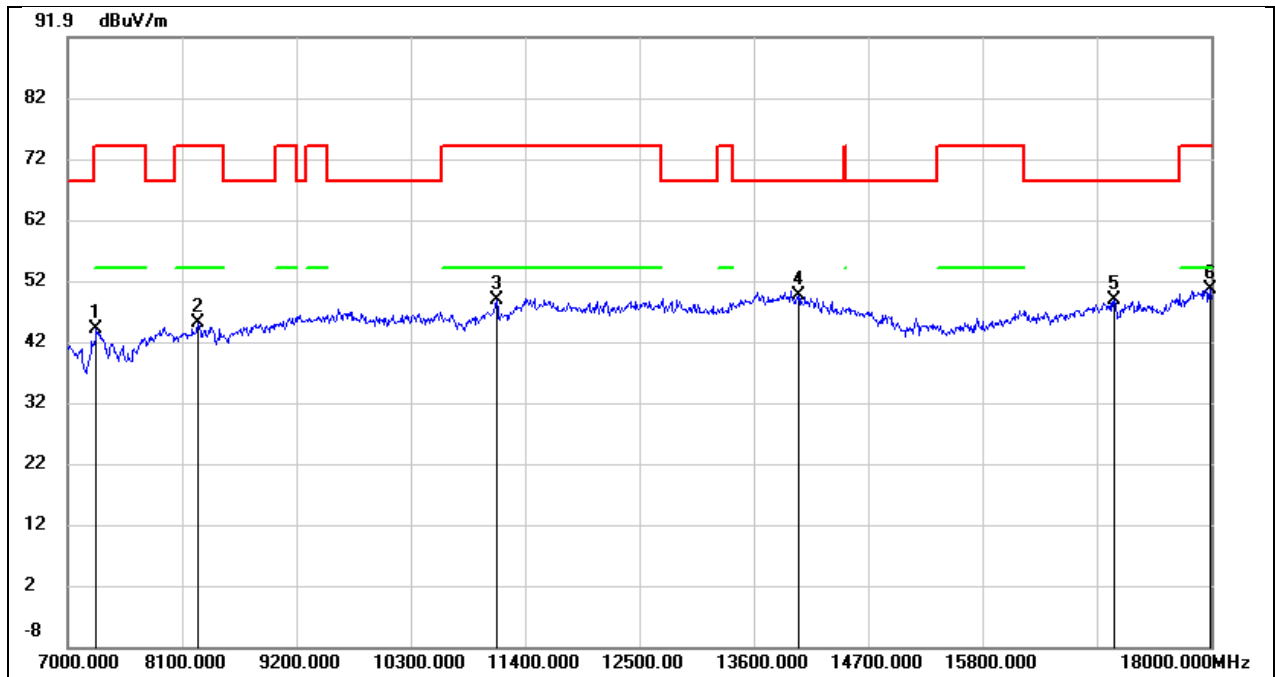


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7275.000	36.62	7.49	44.11	74.00	-29.89	peak
2	8254.000	36.51	8.46	44.97	74.00	-29.03	peak
3	11125.000	32.89	15.98	48.87	74.00	-25.13	peak
4	14029.000	25.66	23.76	49.42	68.20	-18.78	peak
5	17065.000	25.75	23.05	48.80	68.20	-19.40	peak
6	17989.000	22.01	28.40	50.41	74.00	-23.59	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 5V

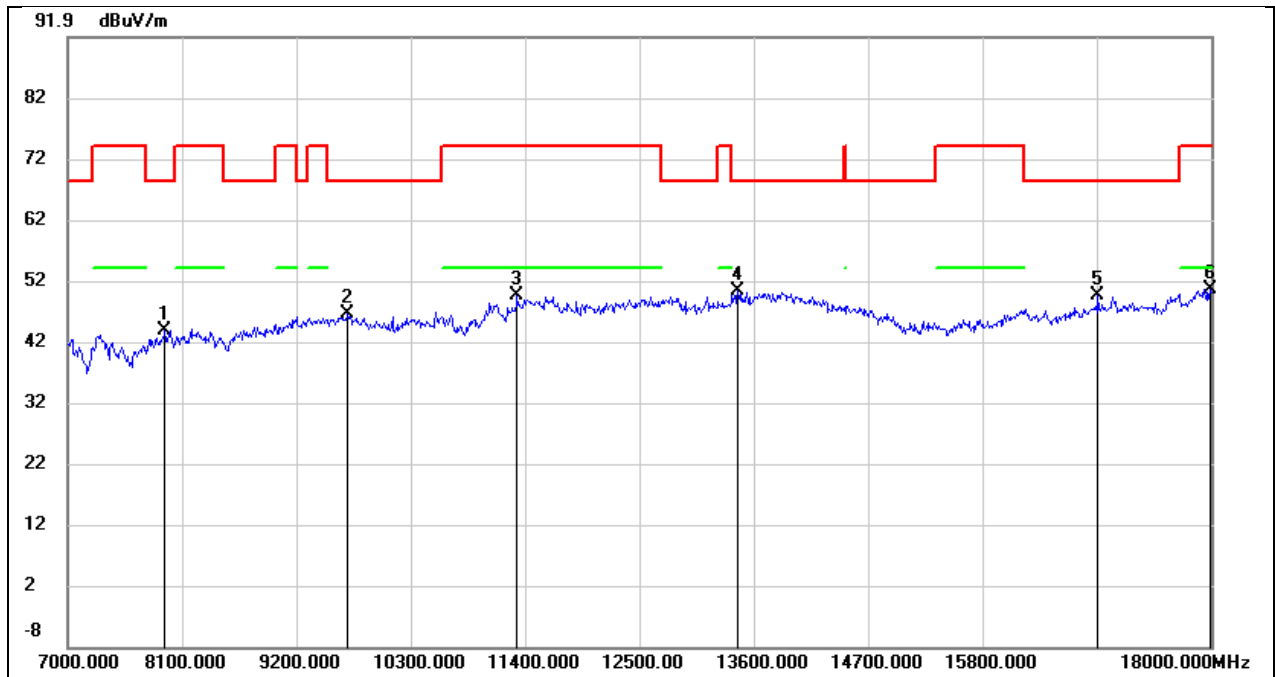


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7935.000	35.61	8.10	43.71	68.20	-24.49	peak
2	9695.000	33.17	13.45	46.62	68.20	-21.58	peak
3	11323.000	32.66	16.84	49.50	74.00	-24.50	peak
4	13446.000	28.02	22.22	50.24	68.20	-17.96	peak
5	16911.000	27.11	22.41	49.52	68.20	-18.68	peak
6	17989.000	22.19	28.40	50.59	74.00	-23.41	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 5V

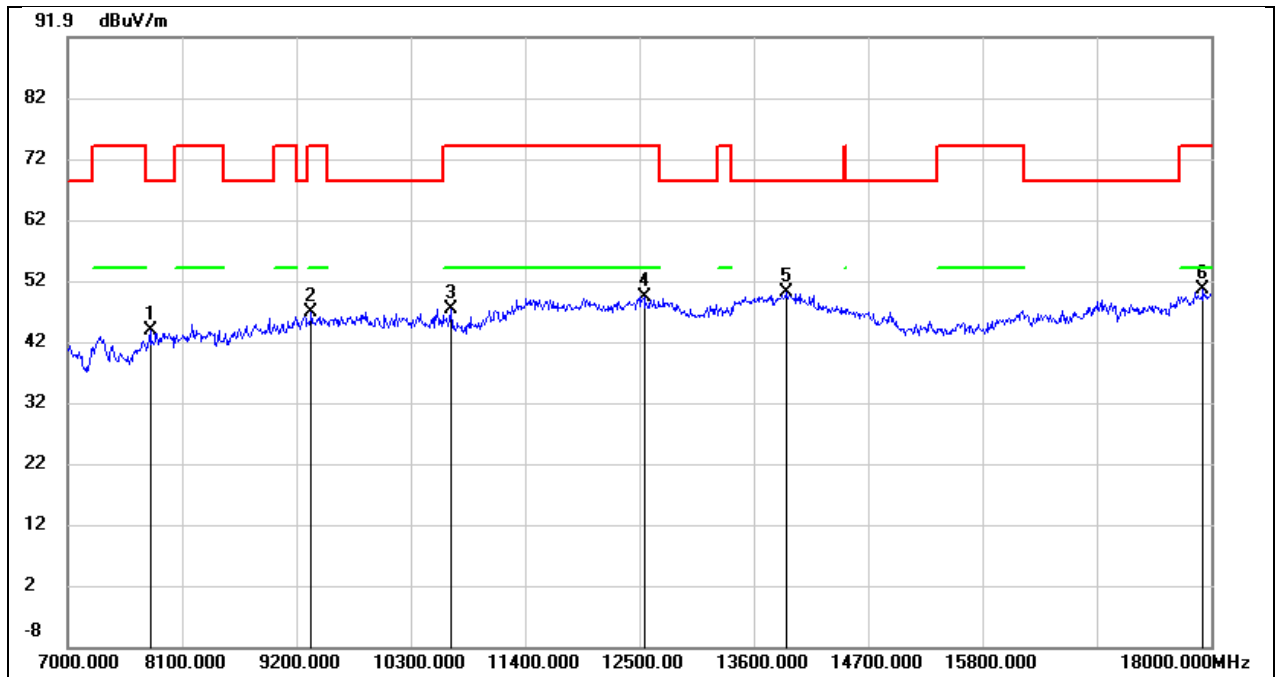


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7792.000	35.82	7.94	43.76	68.20	-24.44	peak
2	9343.000	35.01	11.86	46.87	74.00	-27.13	peak
3	10685.000	32.79	14.55	47.34	74.00	-26.66	peak
4	12544.000	29.50	19.83	49.33	74.00	-24.67	peak
5	13908.000	26.38	23.56	49.94	68.20	-18.26	peak
6	17923.000	22.65	27.79	50.44	74.00	-23.56	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 5V

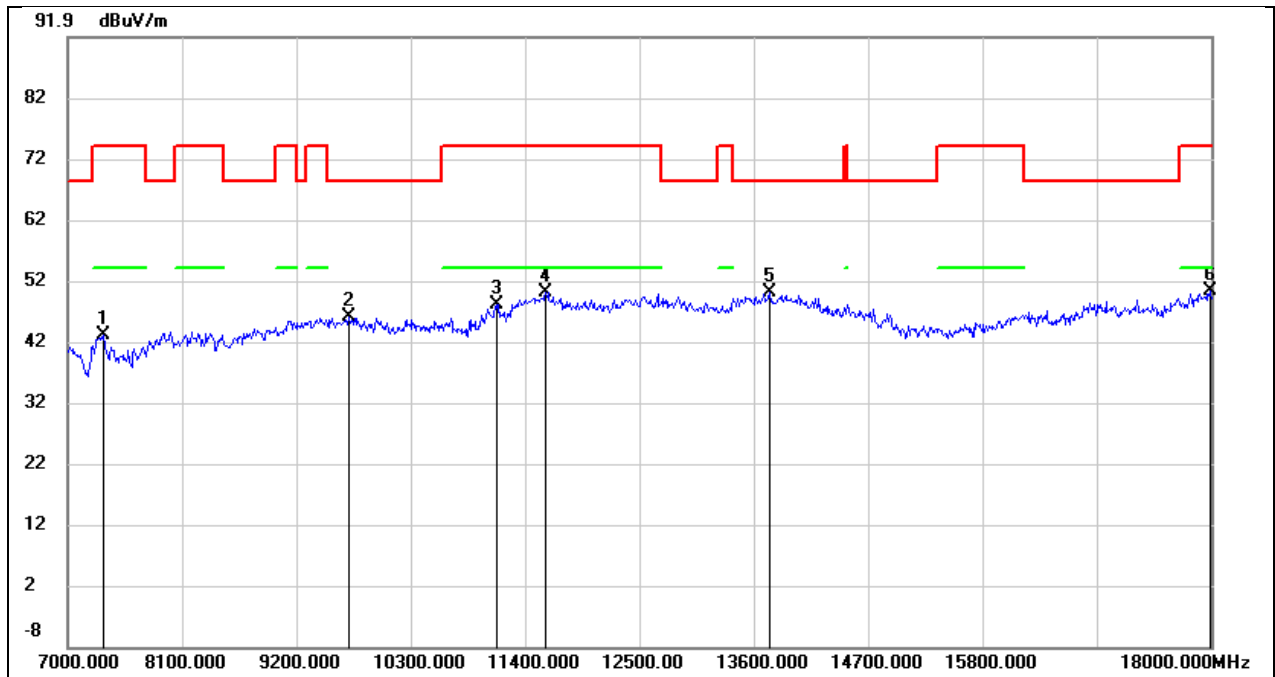


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.54	7.50	43.04	74.00	-30.96	peak
2	9706.000	32.63	13.49	46.12	68.20	-22.08	peak
3	11125.000	32.06	15.98	48.04	74.00	-25.96	peak
4	11598.000	32.16	17.88	50.04	74.00	-23.96	peak
5	13754.000	27.00	23.01	50.01	68.20	-18.19	peak
6	17989.000	21.76	28.40	50.16	74.00	-23.84	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 5V

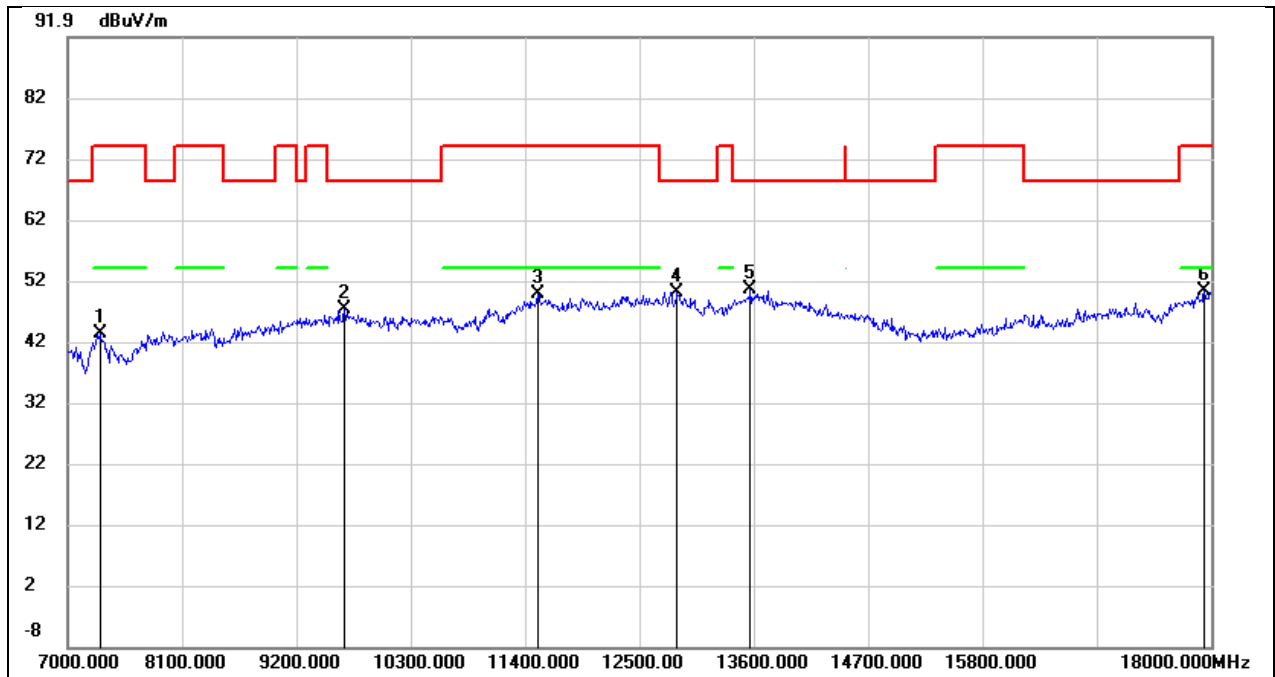


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.84	7.49	43.33	74.00	-30.67	peak
2	9662.000	33.87	13.39	47.26	68.20	-20.94	peak
3	11521.000	32.21	17.60	49.81	74.00	-24.19	peak
4	12863.000	29.60	20.51	50.11	68.20	-18.09	peak
5	13567.000	27.91	22.55	50.46	68.20	-17.74	peak
6	17934.000	22.38	27.90	50.28	74.00	-23.72	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 5V

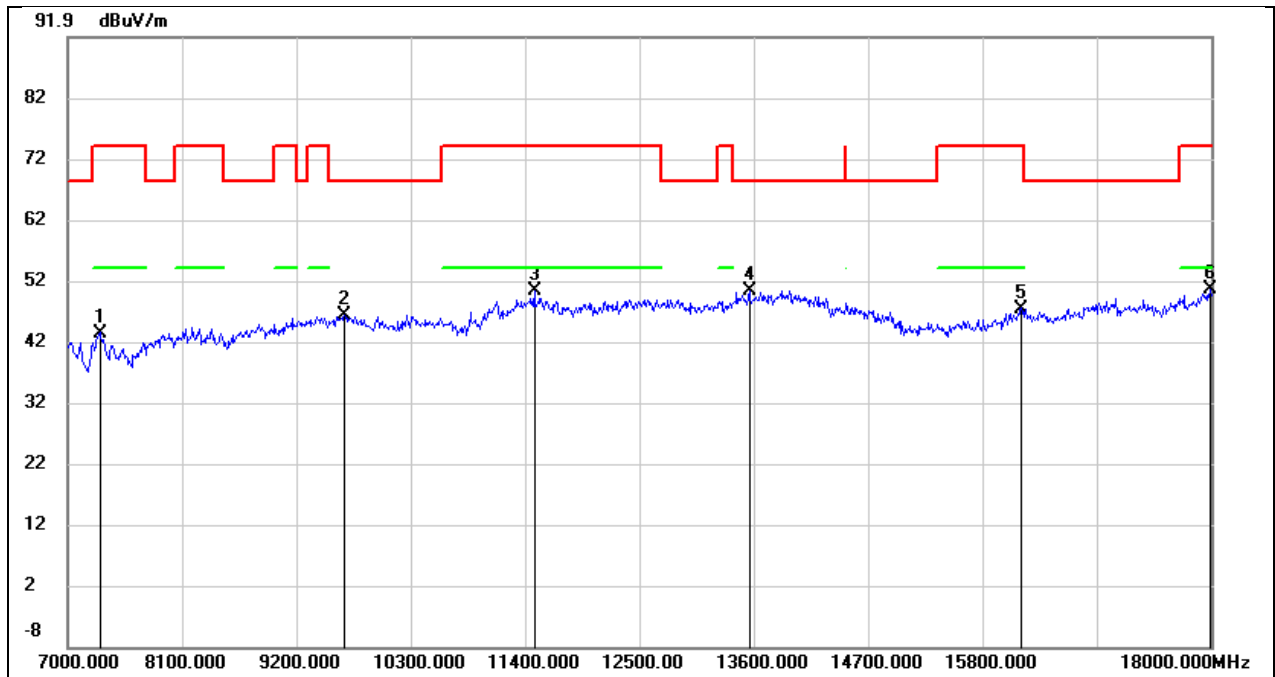


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.91	7.49	43.40	74.00	-30.60	peak
2	9662.000	32.92	13.39	46.31	68.20	-21.89	peak
3	11488.000	32.67	17.49	50.16	74.00	-23.84	peak
4	13556.000	27.86	22.53	50.39	68.20	-17.81	peak
5	16174.000	25.97	21.43	47.40	74.00	-26.60	peak
6	17989.000	22.02	28.40	50.42	74.00	-23.58	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 5V

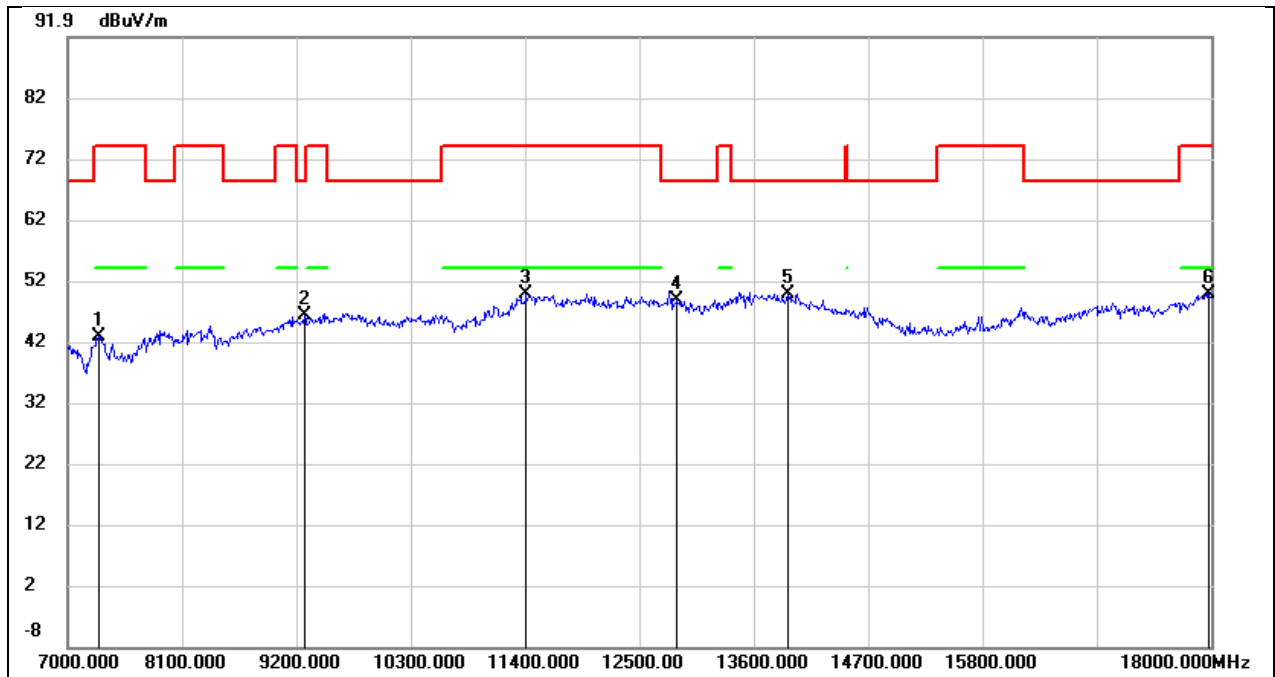


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.40	7.50	42.90	74.00	-31.10	peak
2	9277.000	34.71	11.66	46.37	68.20	-21.83	peak
3	11411.000	32.59	17.24	49.83	74.00	-24.17	peak
4	12863.000	28.26	20.51	48.77	68.20	-19.43	peak
5	13930.000	26.15	23.63	49.78	68.20	-18.42	peak
6	17978.000	21.56	28.31	49.87	74.00	-24.13	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 5V

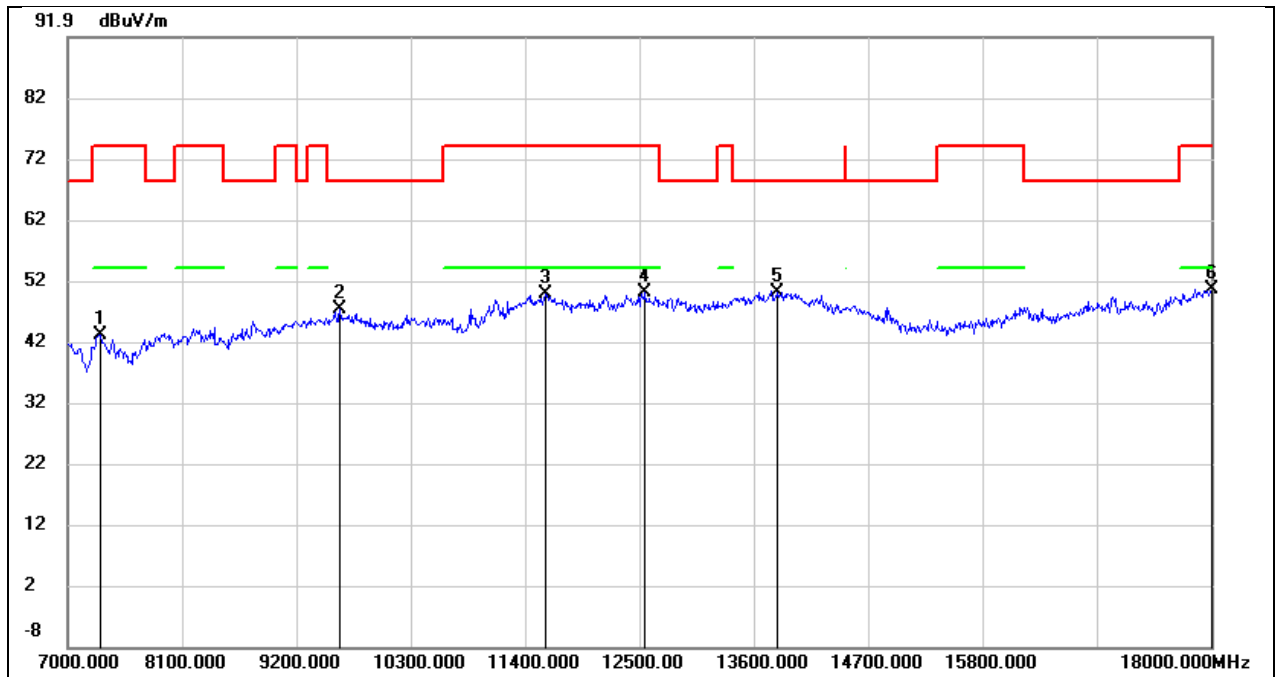


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.55	7.50	43.05	74.00	-30.95	peak
2	9618.000	33.91	13.31	47.22	68.20	-20.98	peak
3	11598.000	31.87	17.88	49.75	74.00	-24.25	peak
4	12555.000	30.22	19.84	50.06	74.00	-23.94	peak
5	13831.000	26.83	23.26	50.09	68.20	-18.11	peak
6	18000.000	21.99	28.51	50.50	74.00	-23.50	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 5V

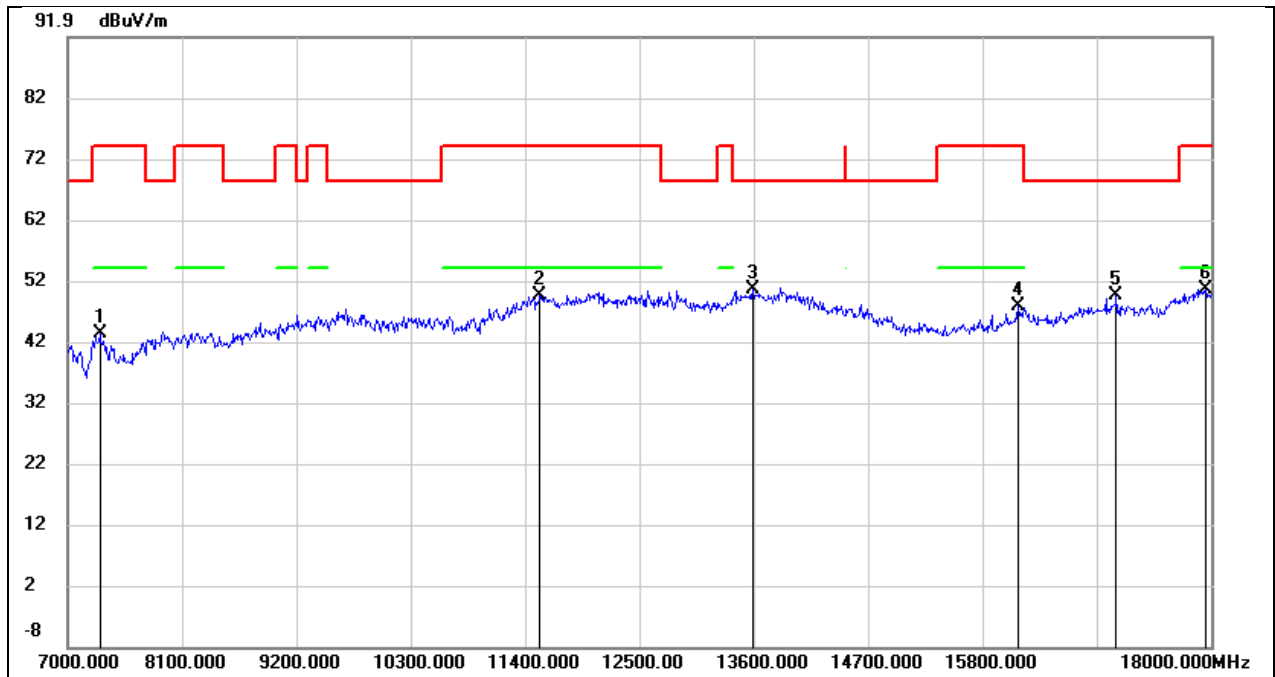


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.83	7.49	43.32	74.00	-30.68	peak
2	11543.000	31.96	17.67	49.63	74.00	-24.37	peak
3	13589.000	28.06	22.58	50.64	68.20	-17.56	peak
4	16141.000	26.54	21.21	47.75	74.00	-26.25	peak
5	17087.000	26.38	23.16	49.54	68.20	-18.66	peak
6	17945.000	22.61	28.01	50.62	74.00	-23.38	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 5V

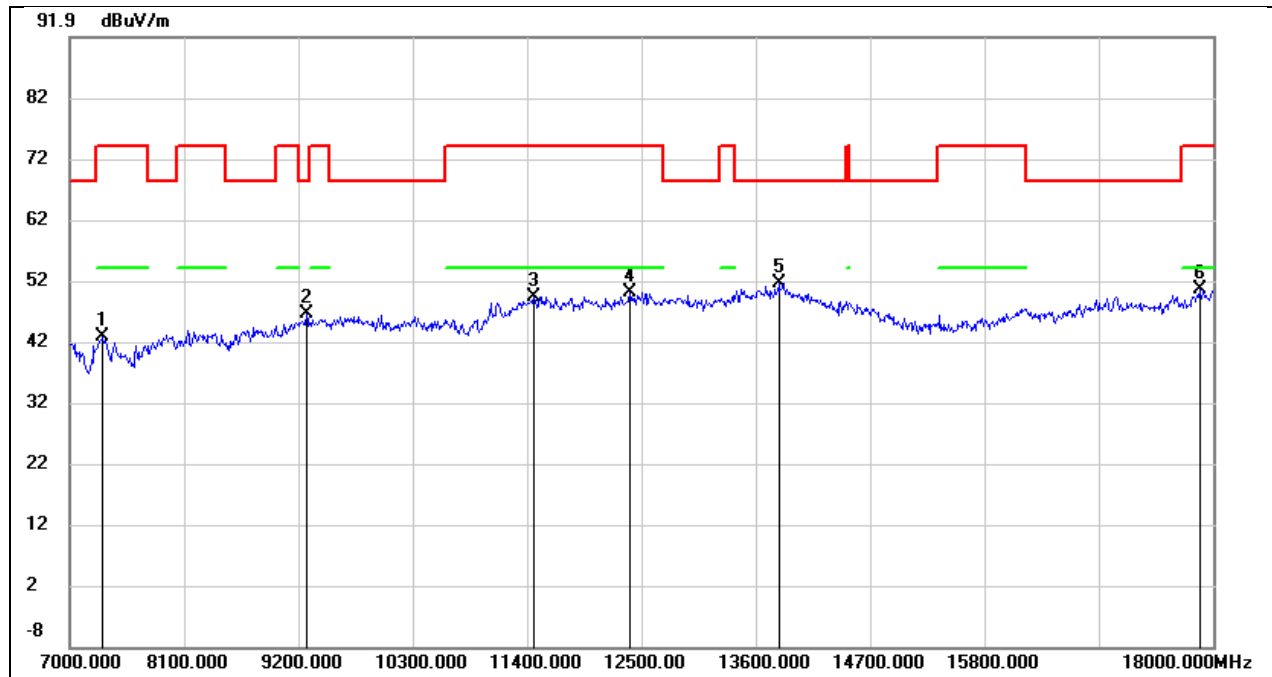


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.35	7.50	42.85	74.00	-31.15	peak
2	9277.000	34.80	11.66	46.46	68.20	-21.74	peak
3	11466.000	31.84	17.42	49.26	74.00	-24.74	peak
4	12390.000	30.34	19.62	49.96	74.00	-24.04	peak
5	13820.000	28.29	23.22	51.51	68.20	-16.69	peak
6	17879.000	23.15	27.39	50.54	74.00	-23.46	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 5V

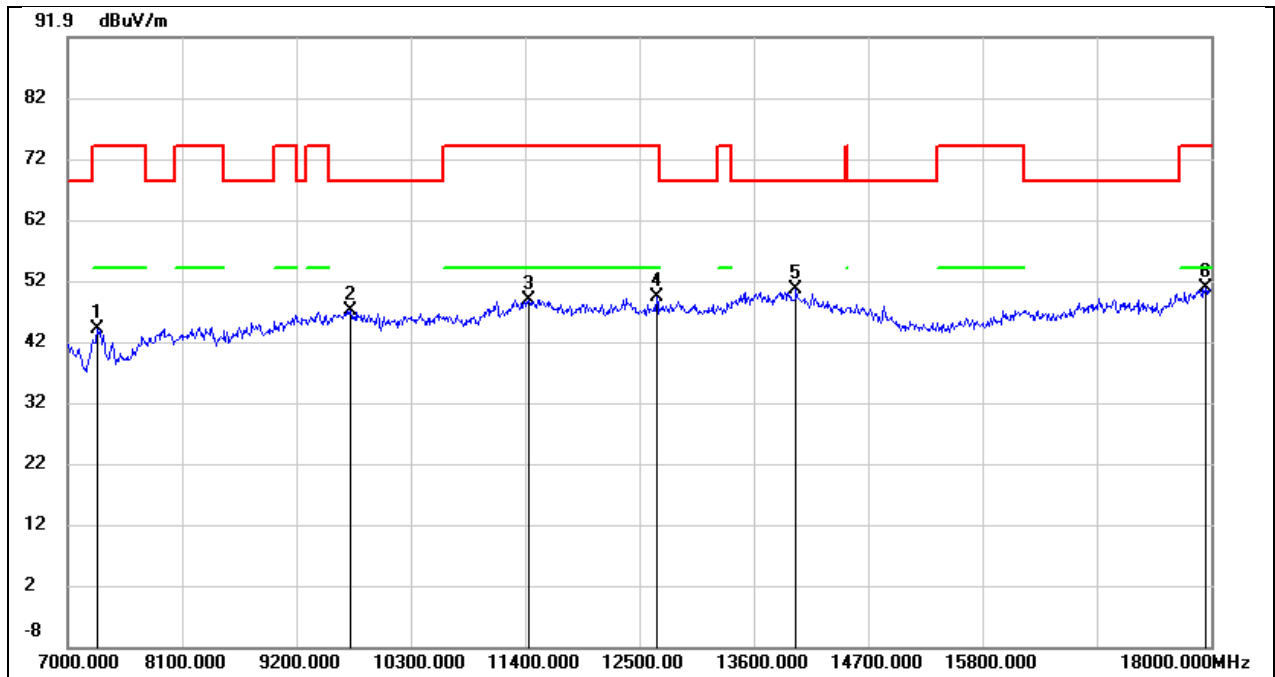


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	36.57	7.49	44.06	74.00	-29.94	peak
2	9717.000	33.43	13.50	46.93	68.20	-21.27	peak
3	11433.000	31.41	17.31	48.72	74.00	-25.28	peak
4	12665.000	29.20	20.09	49.29	74.00	-24.71	peak
5	14007.000	26.59	23.88	50.47	68.20	-17.73	peak
6	17945.000	22.69	28.01	50.70	74.00	-23.30	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 5V

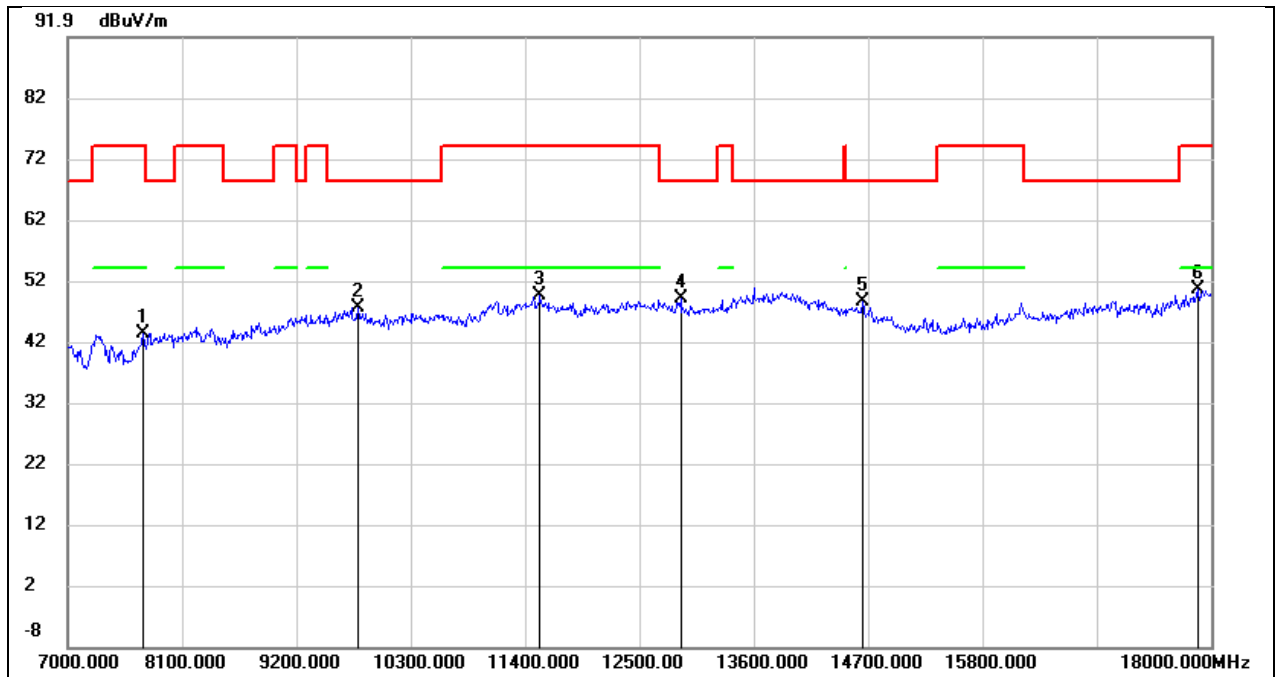


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7726.000	35.53	7.83	43.36	74.00	-30.64	peak
2	9794.000	33.86	13.64	47.50	68.20	-20.70	peak
3	11543.000	31.88	17.67	49.55	74.00	-24.45	peak
4	12896.000	28.50	20.50	49.00	68.20	-19.20	peak
5	14645.000	27.95	20.68	48.63	68.20	-19.57	peak
6	17868.000	23.16	27.29	50.45	74.00	-23.55	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 5V

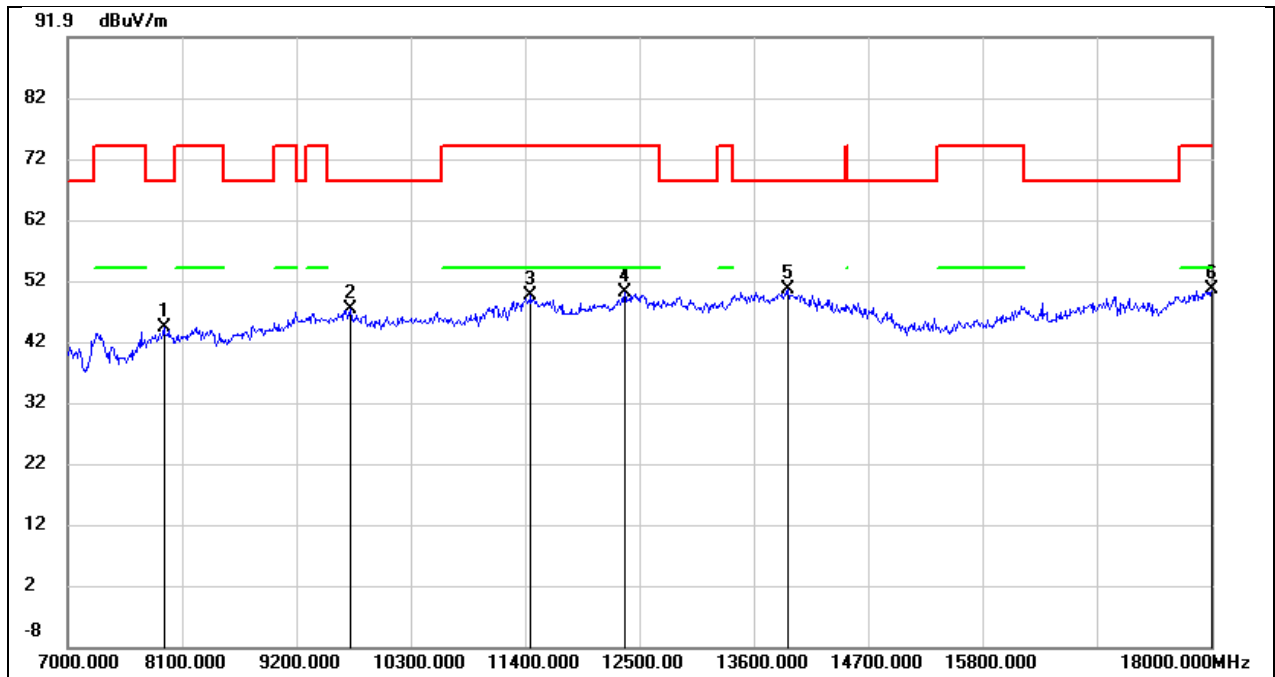


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7924.000	36.29	8.09	44.38	68.20	-23.82	peak
2	9717.000	33.88	13.50	47.38	68.20	-20.82	peak
3	11455.000	32.15	17.38	49.53	74.00	-24.47	peak
4	12357.000	30.45	19.52	49.97	74.00	-24.03	peak
5	13930.000	26.88	23.63	50.51	68.20	-17.69	peak
6	18000.000	22.04	28.51	50.55	74.00	-23.45	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 5V

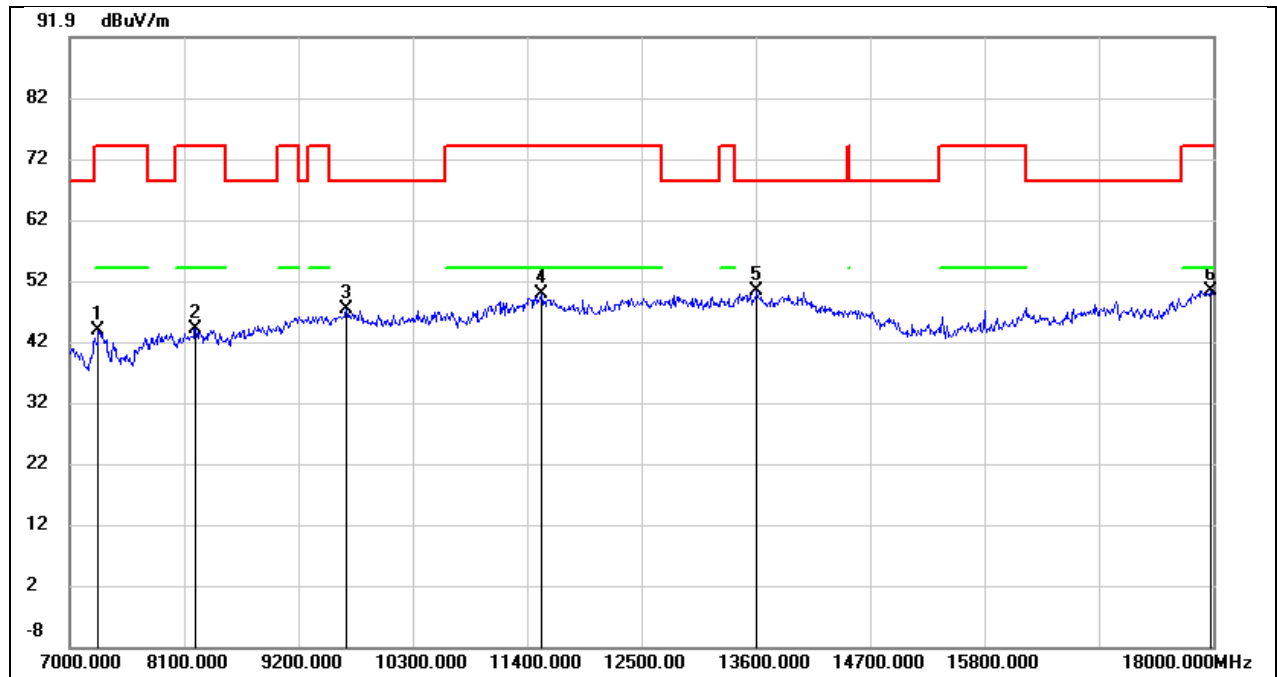


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7275.000	36.17	7.49	43.66	74.00	-30.34	peak
2	8210.000	35.61	8.41	44.02	74.00	-29.98	peak
3	9662.000	33.88	13.39	47.27	68.20	-20.93	peak
4	11543.000	32.09	17.67	49.76	74.00	-24.24	peak
5	13611.000	27.74	22.63	50.37	68.20	-17.83	peak
6	17978.000	22.03	28.31	50.34	74.00	-23.66	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 5V

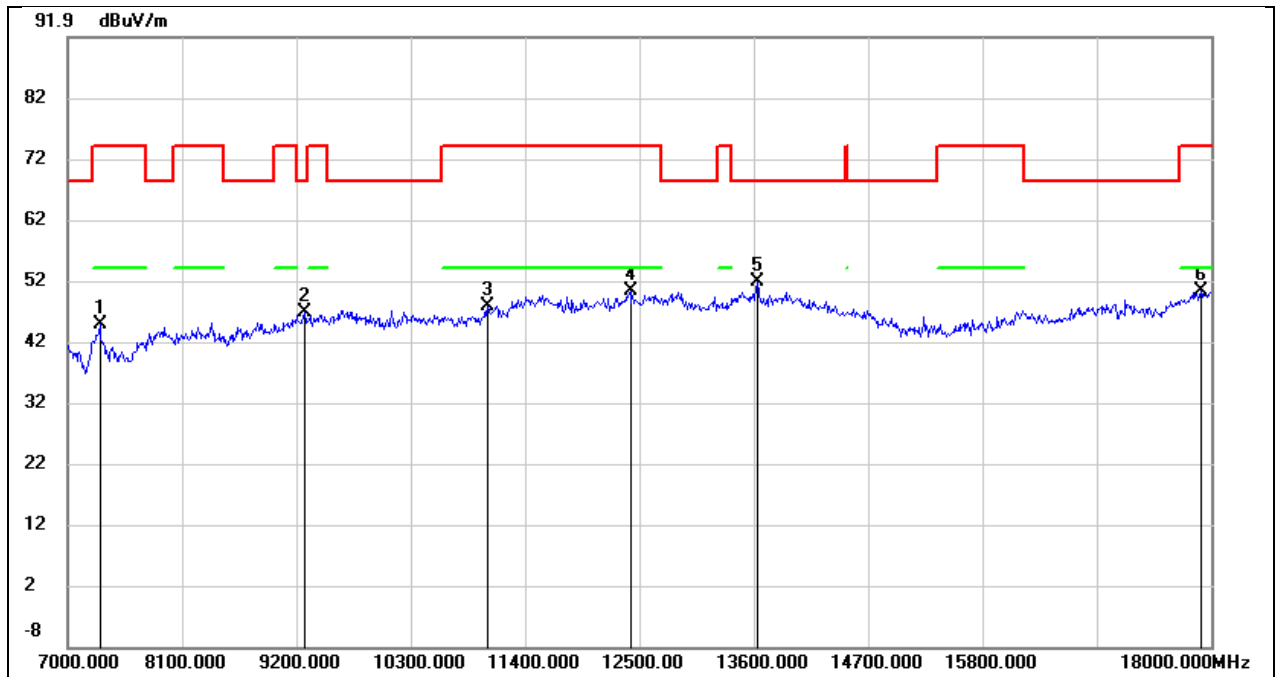


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.18	7.49	44.67	74.00	-29.33	peak
2	9277.000	35.13	11.66	46.79	68.20	-21.41	peak
3	11037.000	32.13	15.62	47.75	74.00	-26.25	peak
4	12412.000	30.66	19.65	50.31	74.00	-23.69	peak
5	13633.000	29.10	22.68	51.78	68.20	-16.42	peak
6	17901.000	22.59	27.60	50.19	74.00	-23.81	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 5V

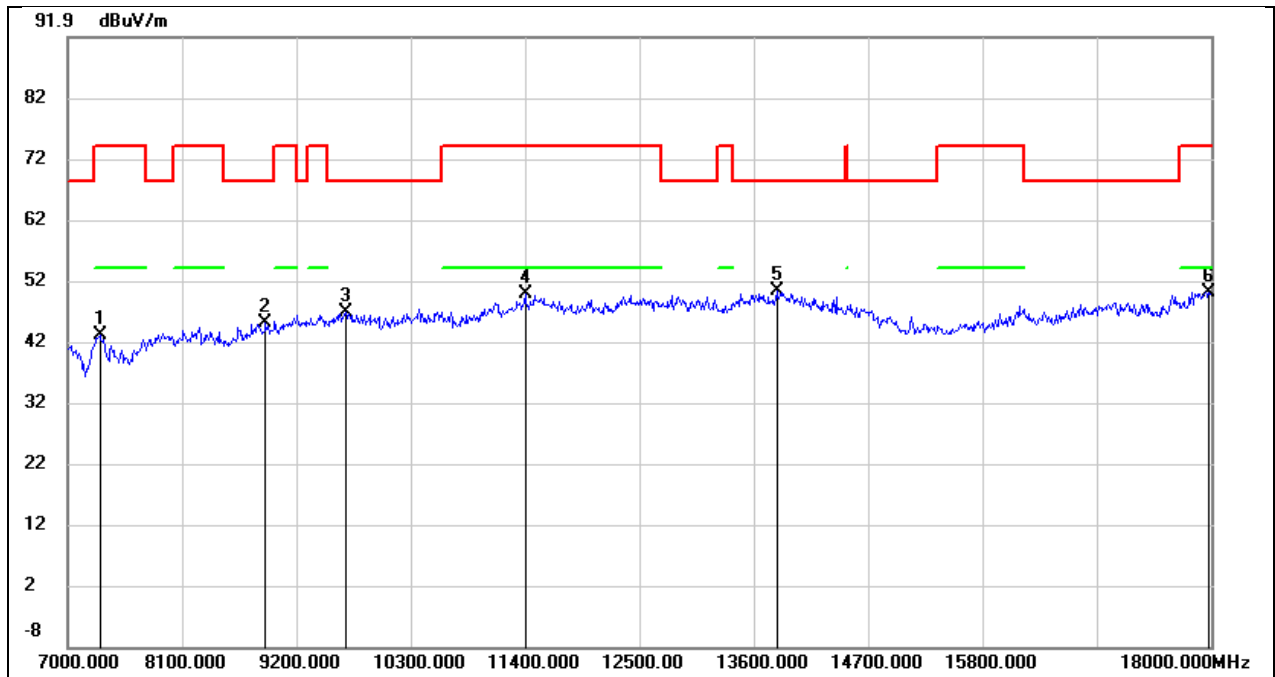


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.43	7.49	42.92	74.00	-31.08	peak
2	8903.000	35.03	10.09	45.12	68.20	-23.08	peak
3	9673.000	33.27	13.42	46.69	68.20	-21.51	peak
4	11400.000	32.54	17.20	49.74	74.00	-24.26	peak
5	13820.000	27.13	23.22	50.35	68.20	-17.85	peak
6	17978.000	21.76	28.31	50.07	74.00	-23.93	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 5V

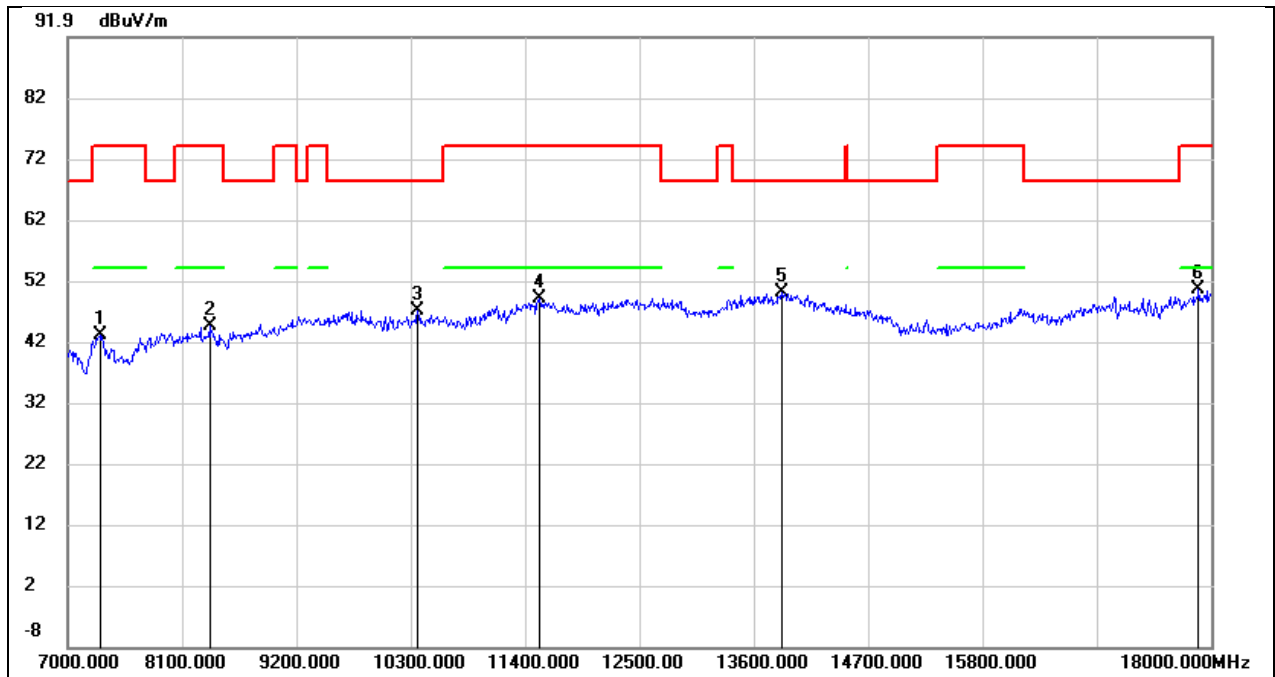


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.66	7.49	43.15	74.00	-30.85	peak
2	8364.000	35.96	8.55	44.51	74.00	-29.49	peak
3	10366.000	33.41	13.66	47.07	68.20	-21.13	peak
4	11543.000	31.39	17.67	49.06	74.00	-24.94	peak
5	13864.000	26.67	23.39	50.06	68.20	-18.14	peak
6	17879.000	23.08	27.39	50.47	74.00	-23.53	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 5V

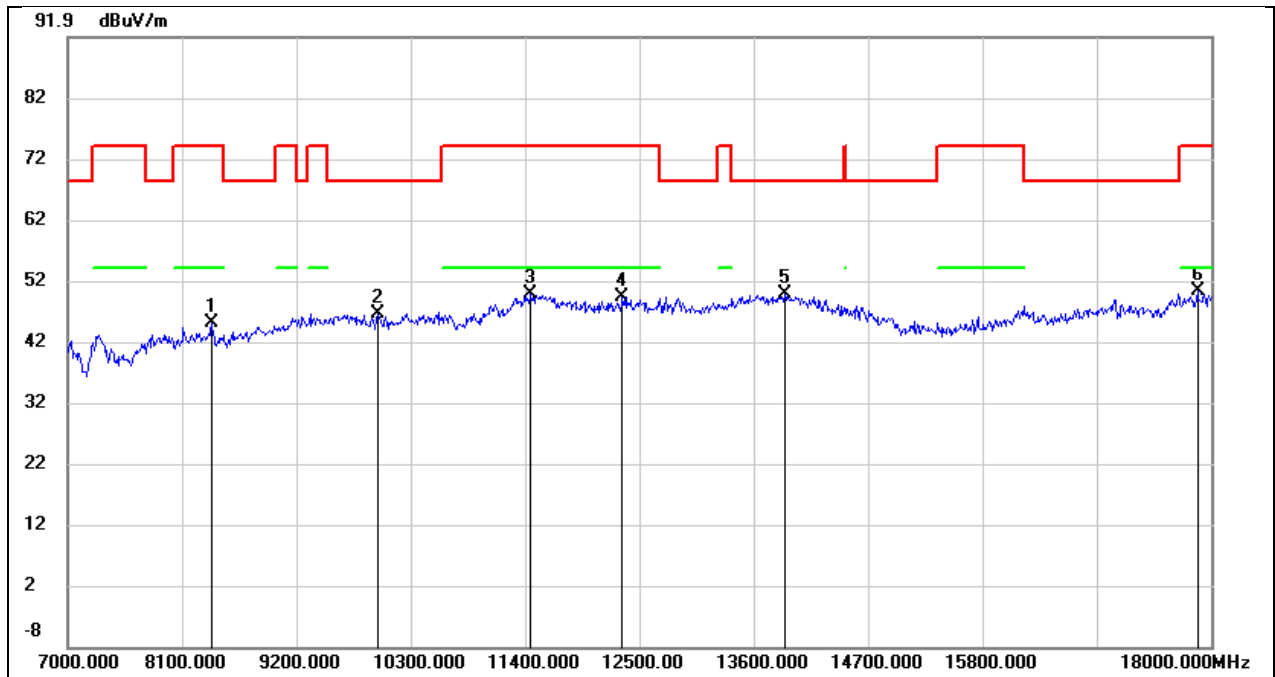


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8386.000	36.44	8.57	45.01	74.00	-28.99	peak
2	9981.000	33.30	13.29	46.59	68.20	-21.61	peak
3	11455.000	32.29	17.38	49.67	74.00	-24.33	peak
4	12335.000	29.83	19.46	49.29	74.00	-24.71	peak
5	13897.000	26.19	23.51	49.70	68.20	-18.50	peak
6	17868.000	23.06	27.29	50.35	74.00	-23.65	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 5V

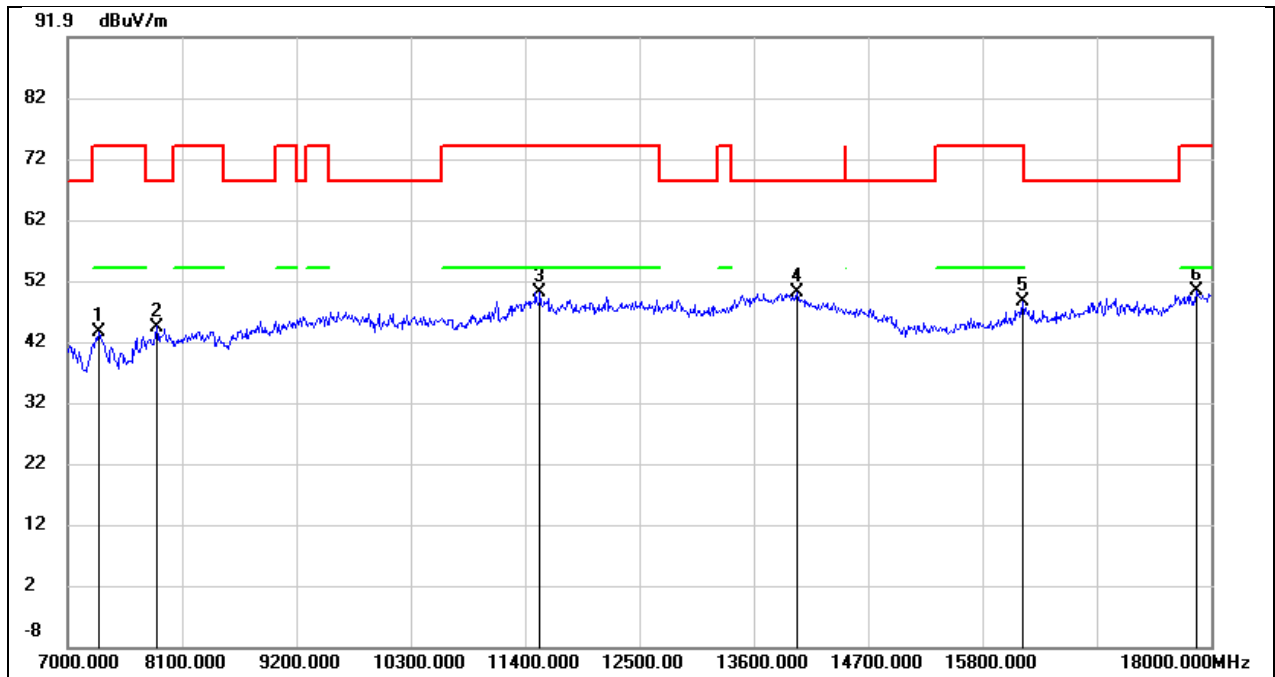


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.92	7.50	43.42	74.00	-30.58	peak
2	7858.000	36.39	8.01	44.40	68.20	-23.80	peak
3	11543.000	32.29	17.67	49.96	74.00	-24.04	peak
4	14018.000	26.14	23.83	49.97	68.20	-18.23	peak
5	16185.000	26.95	21.50	48.45	74.00	-25.55	peak
6	17857.000	23.09	27.18	50.27	74.00	-23.73	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 5V

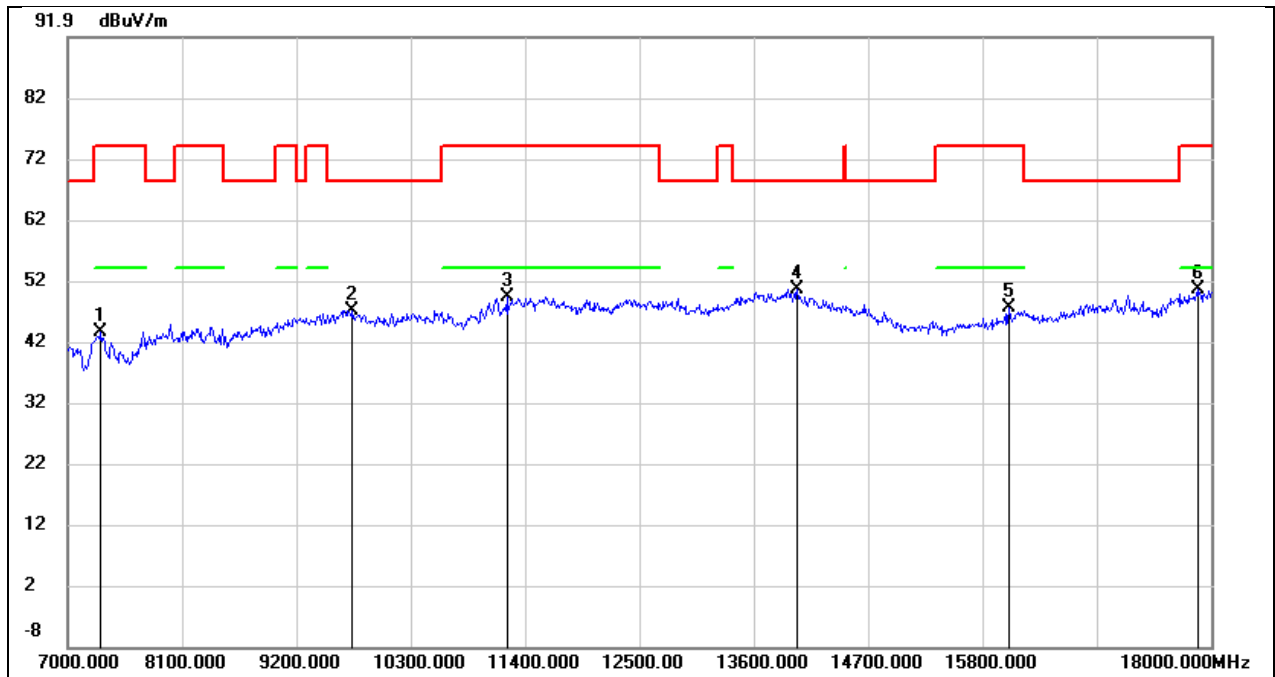


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	36.13	7.50	43.63	74.00	-30.37	peak
2	9739.000	33.42	13.55	46.97	68.20	-21.23	peak
3	11224.000	32.99	16.39	49.38	74.00	-24.62	peak
4	14018.000	26.64	23.83	50.47	68.20	-17.73	peak
5	16053.000	26.85	20.62	47.47	74.00	-26.53	peak
6	17868.000	23.21	27.29	50.50	74.00	-23.50	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 5V

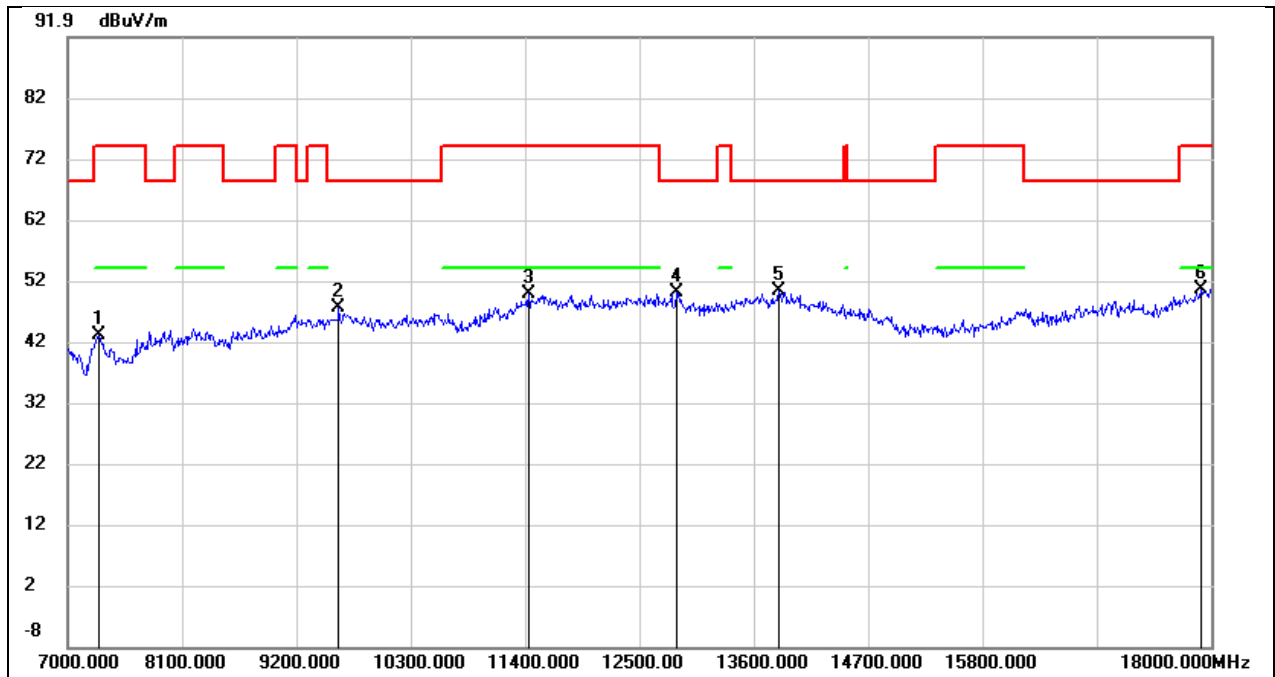


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.43	7.50	42.93	74.00	-31.07	peak
2	9607.000	34.13	13.30	47.43	68.20	-20.77	peak
3	11433.000	32.56	17.31	49.87	74.00	-24.13	peak
4	12852.000	29.39	20.52	49.91	68.20	-18.29	peak
5	13842.000	27.03	23.29	50.32	68.20	-17.88	peak
6	17901.000	23.04	27.60	50.64	74.00	-23.36	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 5V

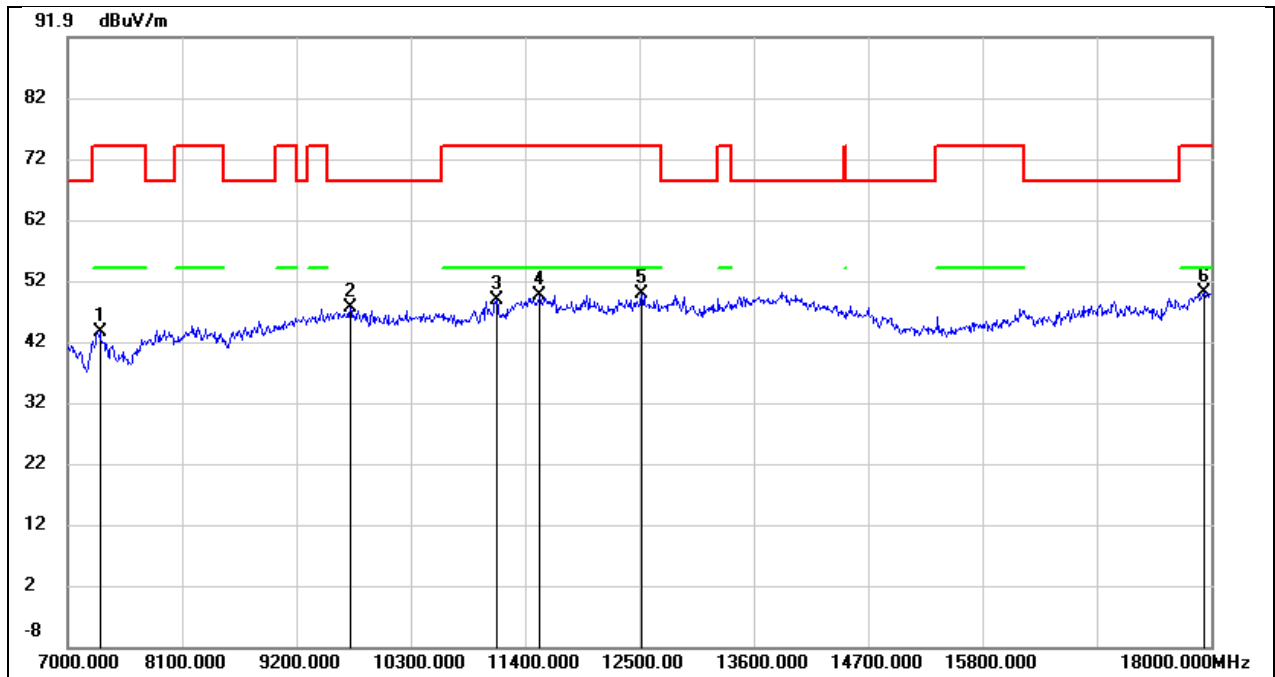


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.11	7.49	43.60	74.00	-30.40	peak
2	9717.000	34.01	13.50	47.51	68.20	-20.69	peak
3	11125.000	32.85	15.98	48.83	74.00	-25.17	peak
4	11543.000	31.90	17.67	49.57	74.00	-24.43	peak
5	12522.000	30.02	19.80	49.82	74.00	-24.18	peak
6	17934.000	22.19	27.90	50.09	74.00	-23.91	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

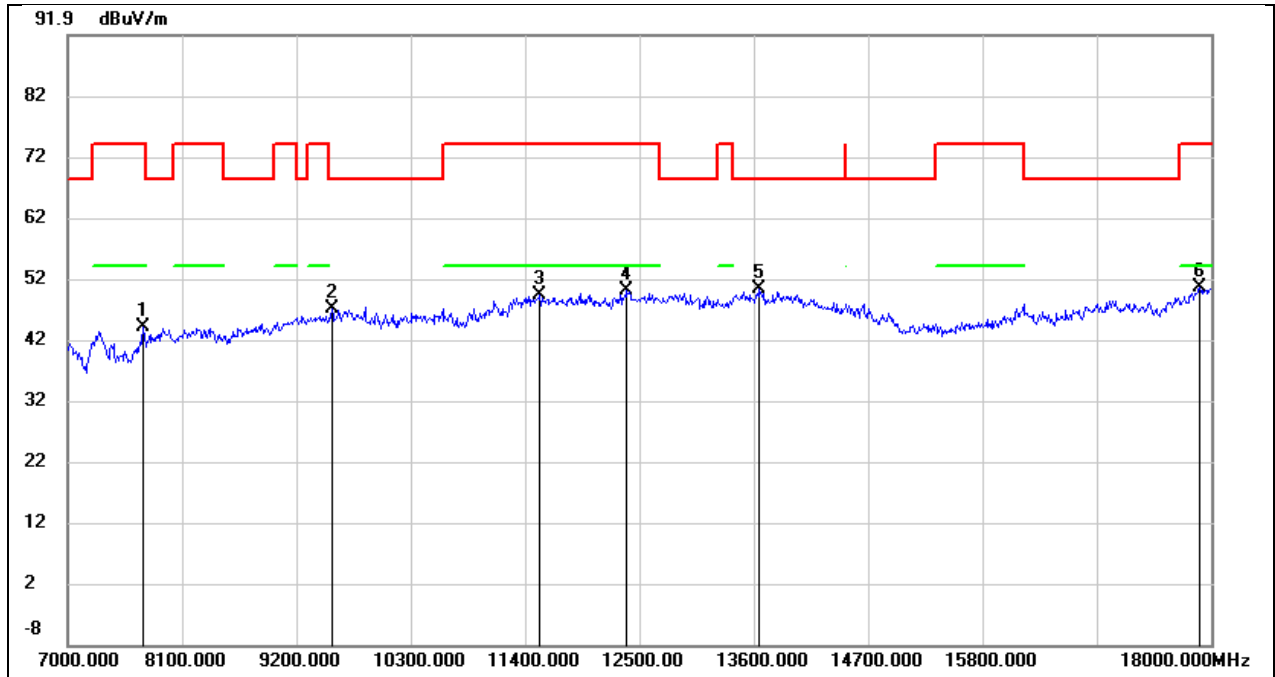


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7726.000	36.16	7.83	43.99	74.00	-30.01	peak
2	9541.000	34.11	12.91	47.02	68.20	-21.18	peak
3	11543.000	31.70	17.67	49.37	74.00	-24.63	peak
4	12379.000	30.53	19.58	50.11	74.00	-23.89	peak
5	13655.000	27.64	22.75	50.39	68.20	-17.81	peak
6	17890.000	22.93	27.49	50.42	74.00	-23.58	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5V

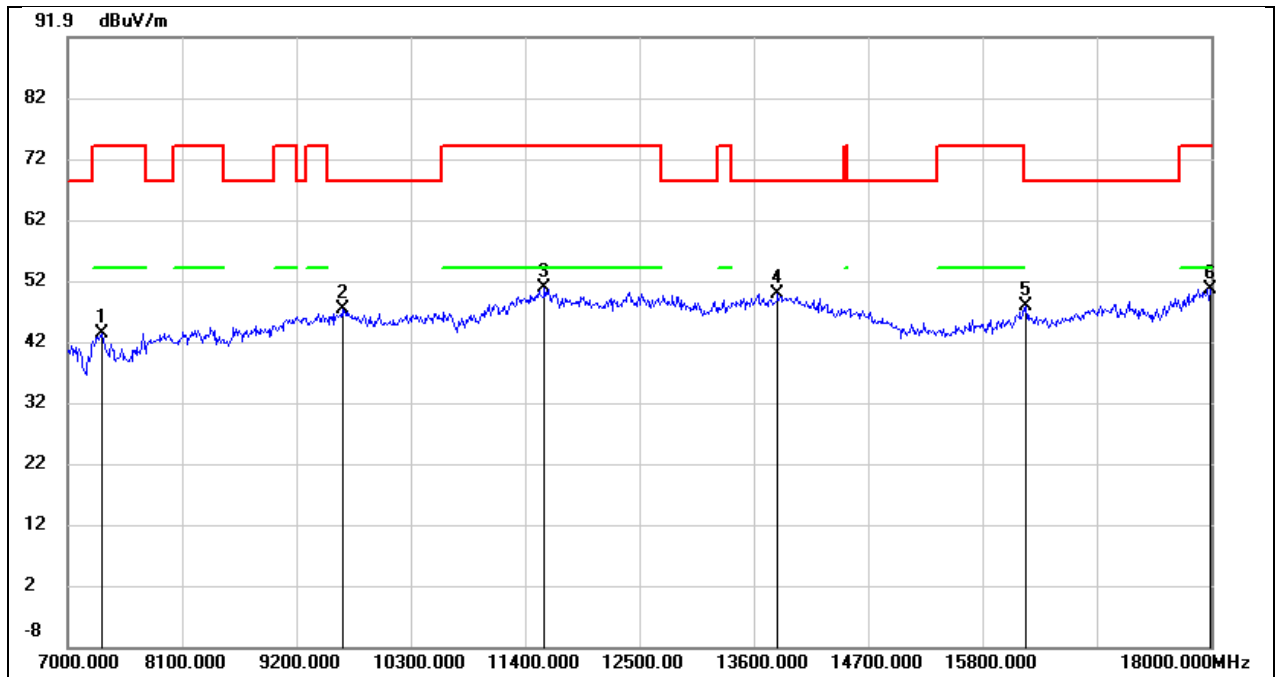


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	35.68	7.50	43.18	74.00	-30.82	peak
2	9640.000	33.80	13.36	47.16	68.20	-21.04	peak
3	11587.000	32.87	17.84	50.71	74.00	-23.29	peak
4	13831.000	26.57	23.26	49.83	68.20	-18.37	peak
5	16218.000	26.14	21.55	47.69	68.20	-20.51	peak
6	17989.000	22.25	28.40	50.65	74.00	-23.35	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 5V

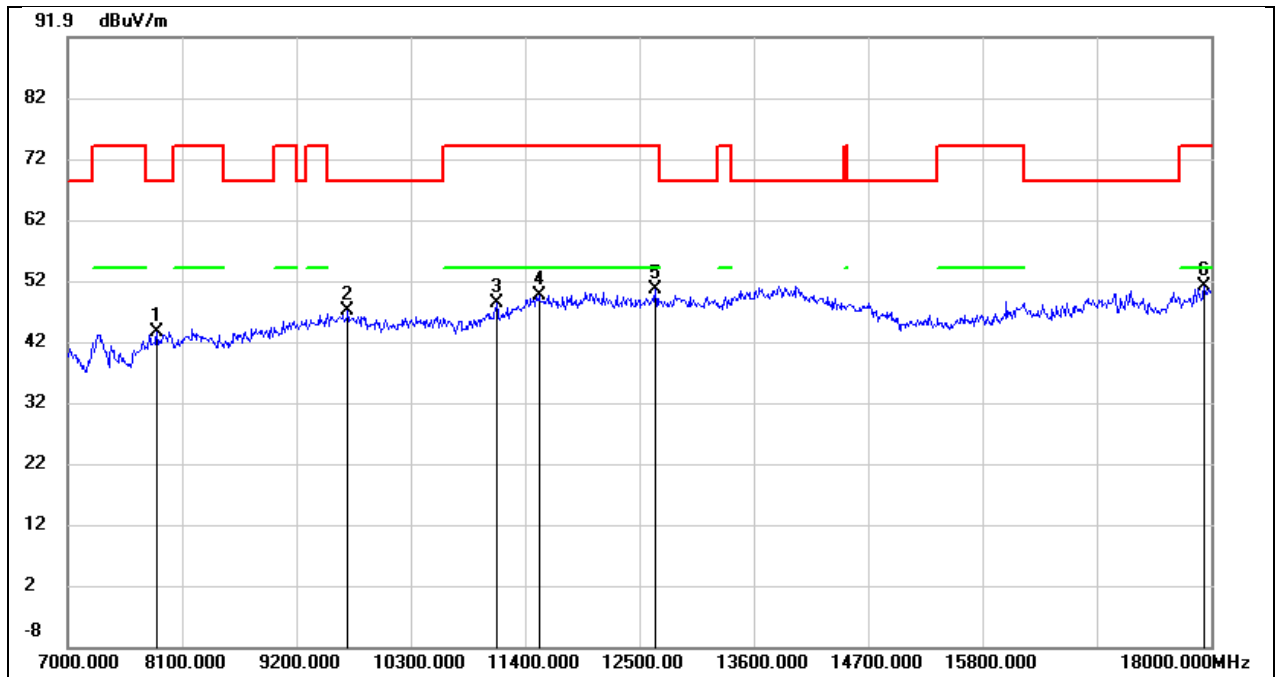


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7858.000	35.44	8.01	43.45	68.20	-24.75	peak
2	9695.000	33.52	13.45	46.97	68.20	-21.23	peak
3	11125.000	32.28	15.98	48.26	74.00	-25.74	peak
4	11532.000	31.91	17.64	49.55	74.00	-24.45	peak
5	12654.000	30.45	20.06	50.51	74.00	-23.49	peak
6	17934.000	23.03	27.90	50.93	74.00	-23.07	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 5V

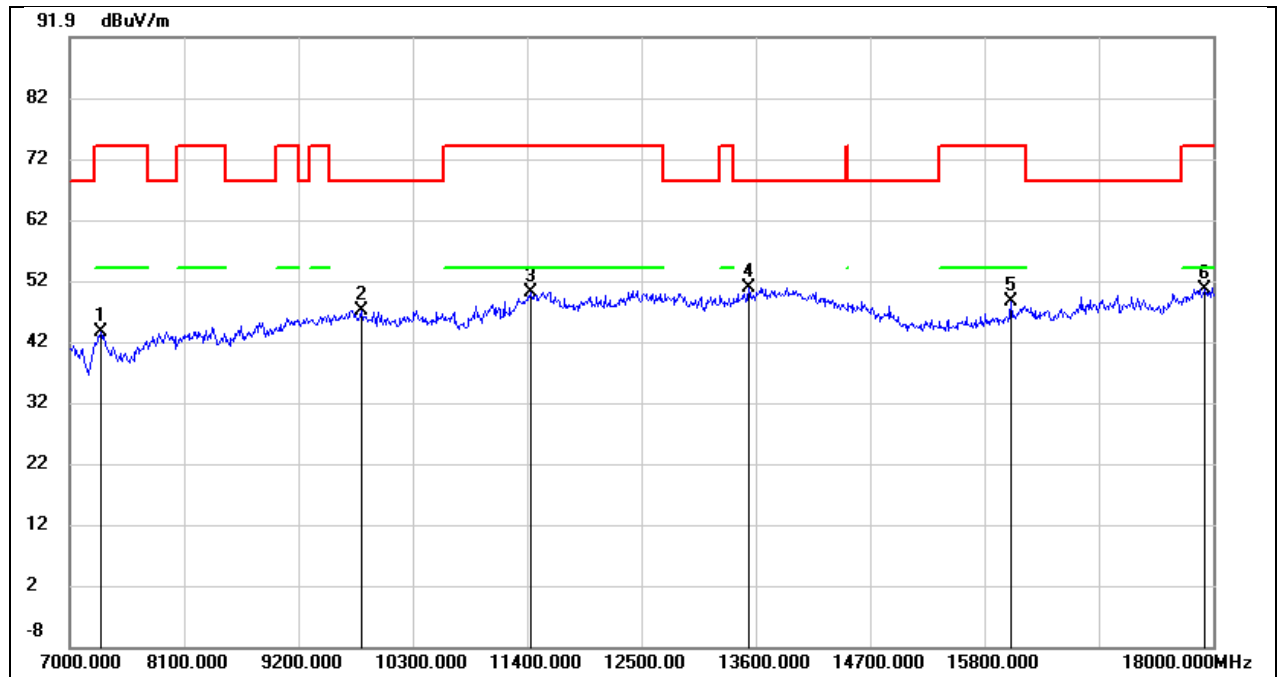


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.03	7.50	43.53	74.00	-30.47	peak
2	9805.000	33.37	13.66	47.03	68.20	-21.17	peak
3	11433.000	32.79	17.31	50.10	74.00	-23.90	peak
4	13534.000	28.39	22.49	50.88	68.20	-17.32	peak
5	16053.000	27.82	20.62	48.44	74.00	-25.56	peak
6	17923.000	22.71	27.79	50.50	74.00	-23.50	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 5V

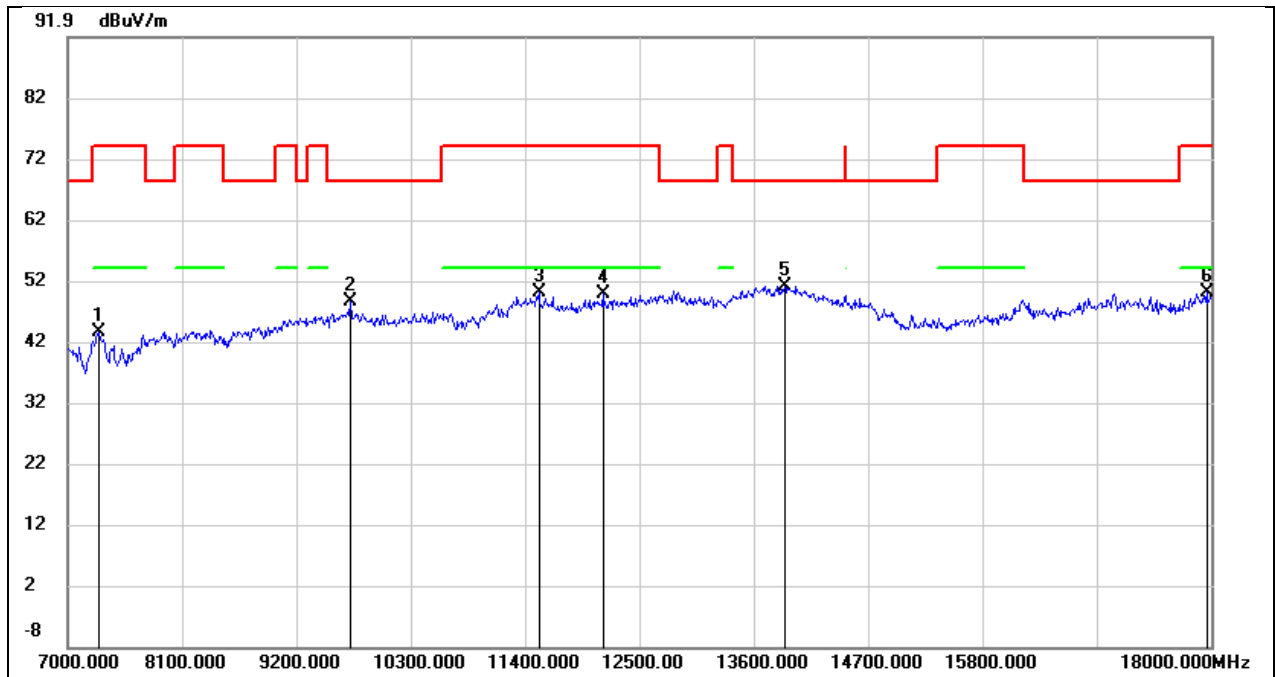


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.92	7.50	43.42	74.00	-30.58	peak
2	9717.000	34.96	13.50	48.46	68.20	-19.74	peak
3	11532.000	32.28	17.64	49.92	74.00	-24.08	peak
4	12148.000	30.73	18.97	49.70	74.00	-24.30	peak
5	13897.000	27.50	23.51	51.01	68.20	-17.19	peak
6	17956.000	21.99	28.10	50.09	74.00	-23.91	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 5V

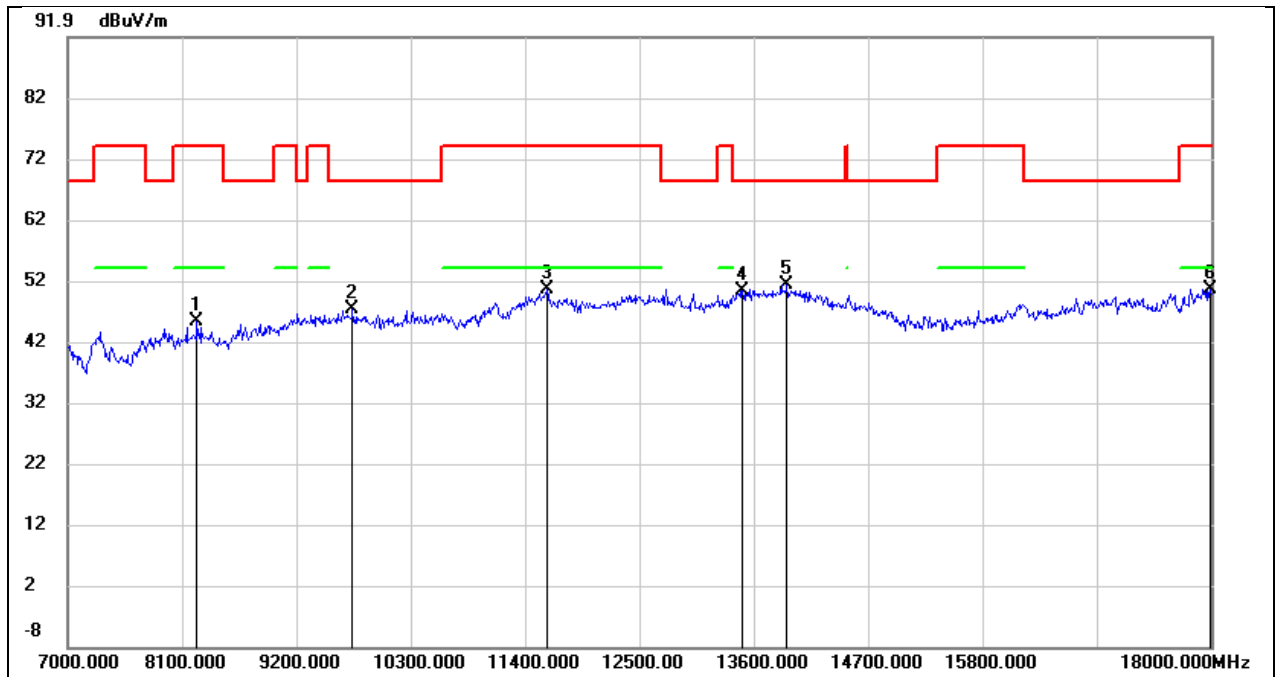


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8243.000	36.80	8.44	45.24	74.00	-28.76	peak
2	9739.000	33.75	13.55	47.30	68.20	-20.90	peak
3	11609.000	32.53	17.88	50.41	74.00	-23.59	peak
4	13490.000	27.96	22.40	50.36	68.20	-17.84	peak
5	13919.000	27.66	23.60	51.26	68.20	-16.94	peak
6	17989.000	22.11	28.40	50.51	74.00	-23.49	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 5V

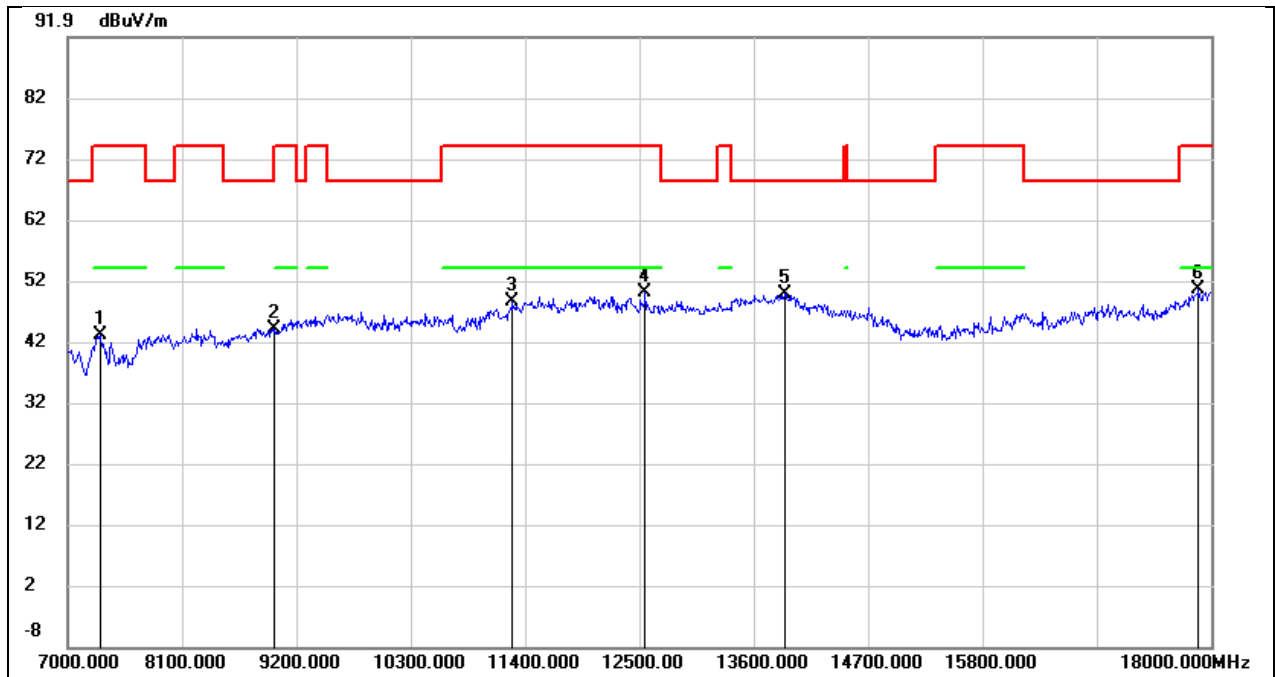


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.42	7.49	42.91	74.00	-31.09	peak
2	8991.000	33.57	10.52	44.09	68.20	-24.11	peak
3	11279.000	32.01	16.64	48.65	74.00	-25.35	peak
4	12555.000	30.21	19.84	50.05	74.00	-23.95	peak
5	13897.000	26.34	23.51	49.85	68.20	-18.35	peak
6	17879.000	23.08	27.39	50.47	74.00	-23.53	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 5V

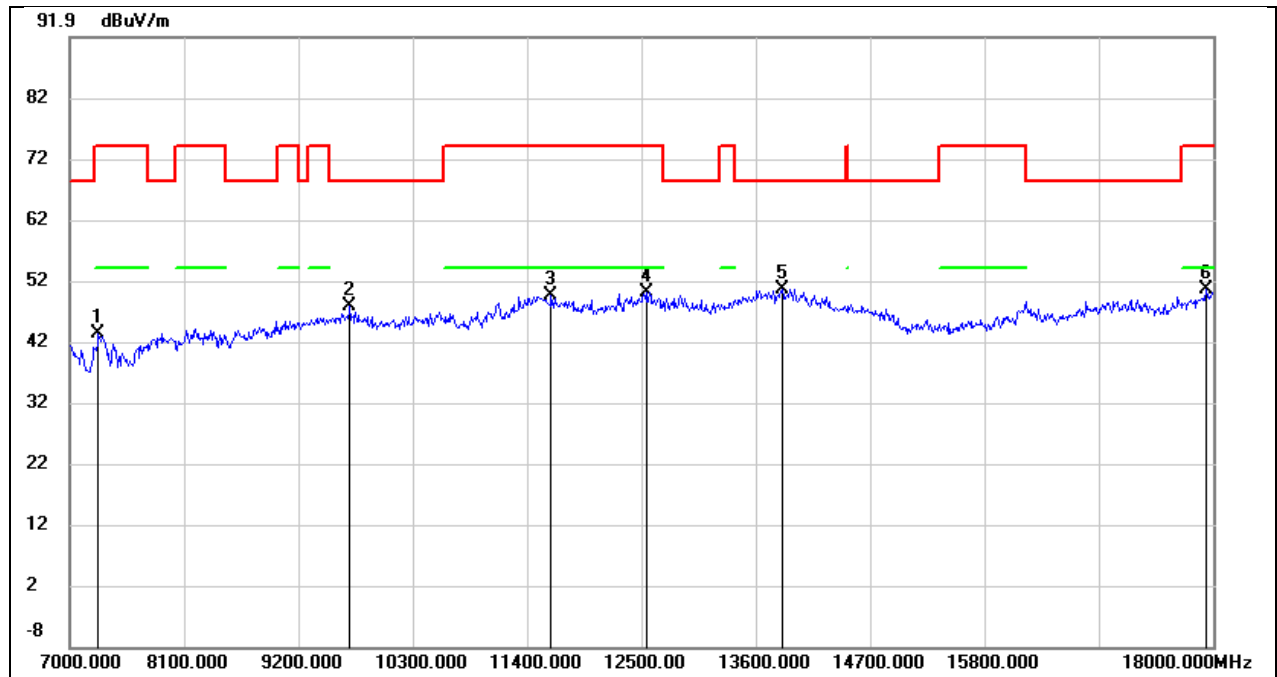


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7275.000	35.72	7.49	43.21	74.00	-30.79	peak
2	9695.000	34.25	13.45	47.70	68.20	-20.50	peak
3	11631.000	31.60	17.88	49.48	74.00	-24.52	peak
4	12544.000	30.30	19.83	50.13	74.00	-23.87	peak
5	13853.000	27.28	23.34	50.62	68.20	-17.58	peak
6	17934.000	22.54	27.90	50.44	74.00	-23.56	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 5V

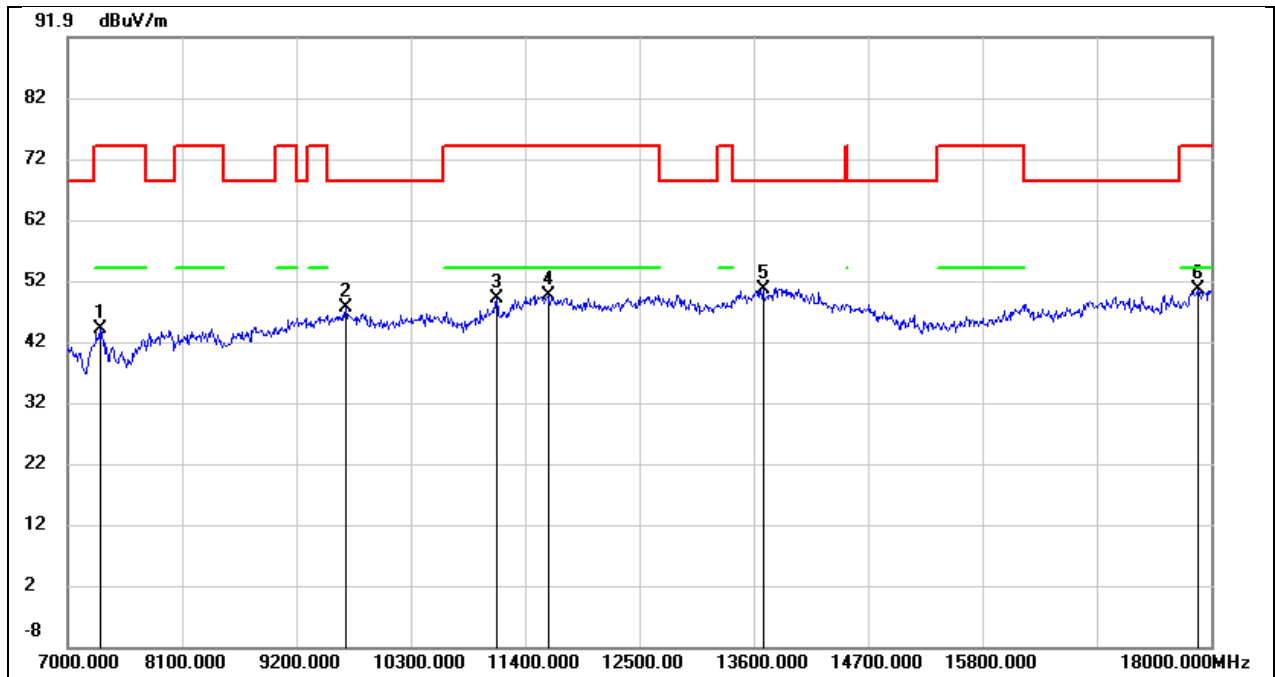


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.52	7.49	44.01	74.00	-29.99	peak
2	9673.000	34.17	13.42	47.59	68.20	-20.61	peak
3	11125.000	32.96	15.98	48.94	74.00	-25.06	peak
4	11620.000	31.70	17.88	49.58	74.00	-24.42	peak
5	13688.000	27.79	22.84	50.63	68.20	-17.57	peak
6	17868.000	23.34	27.29	50.63	74.00	-23.37	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 5V

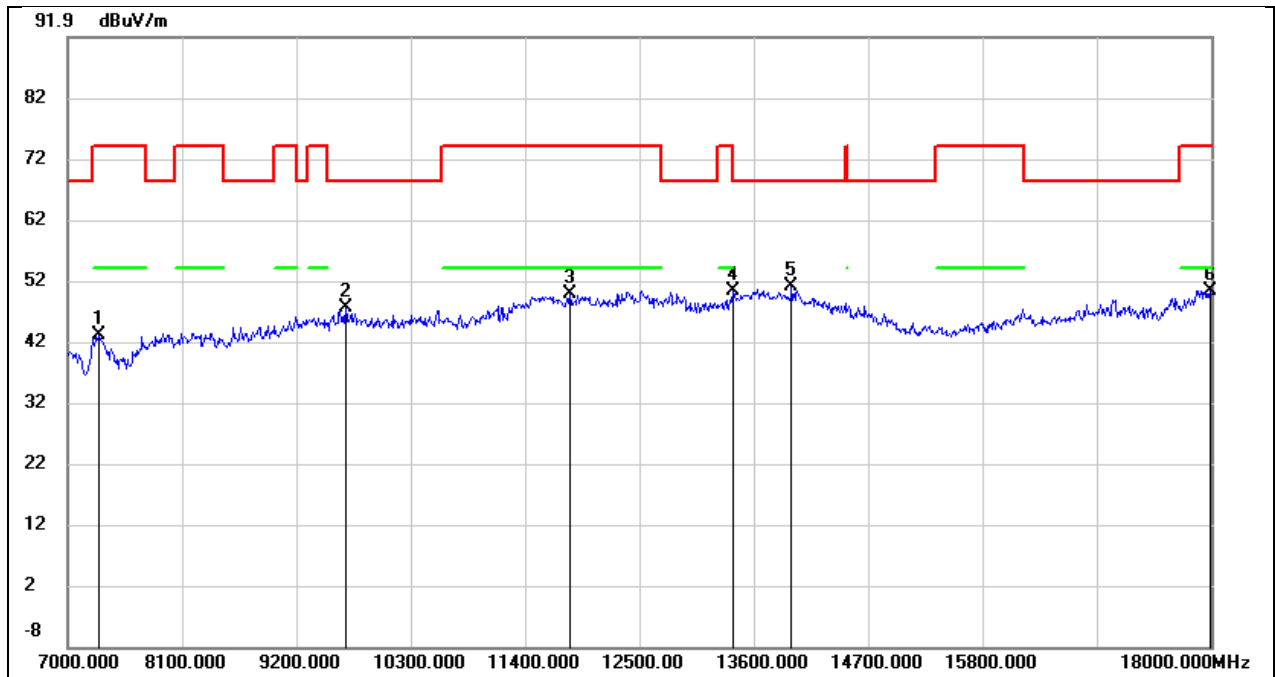


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.54	7.50	43.04	74.00	-30.96	peak
2	9673.000	34.04	13.42	47.46	68.20	-20.74	peak
3	11829.000	31.85	18.02	49.87	74.00	-24.13	peak
4	13402.000	28.18	22.04	50.22	68.20	-17.98	peak
5	13963.000	27.37	23.77	51.14	68.20	-17.06	peak
6	17989.000	21.97	28.40	50.37	74.00	-23.63	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 5V

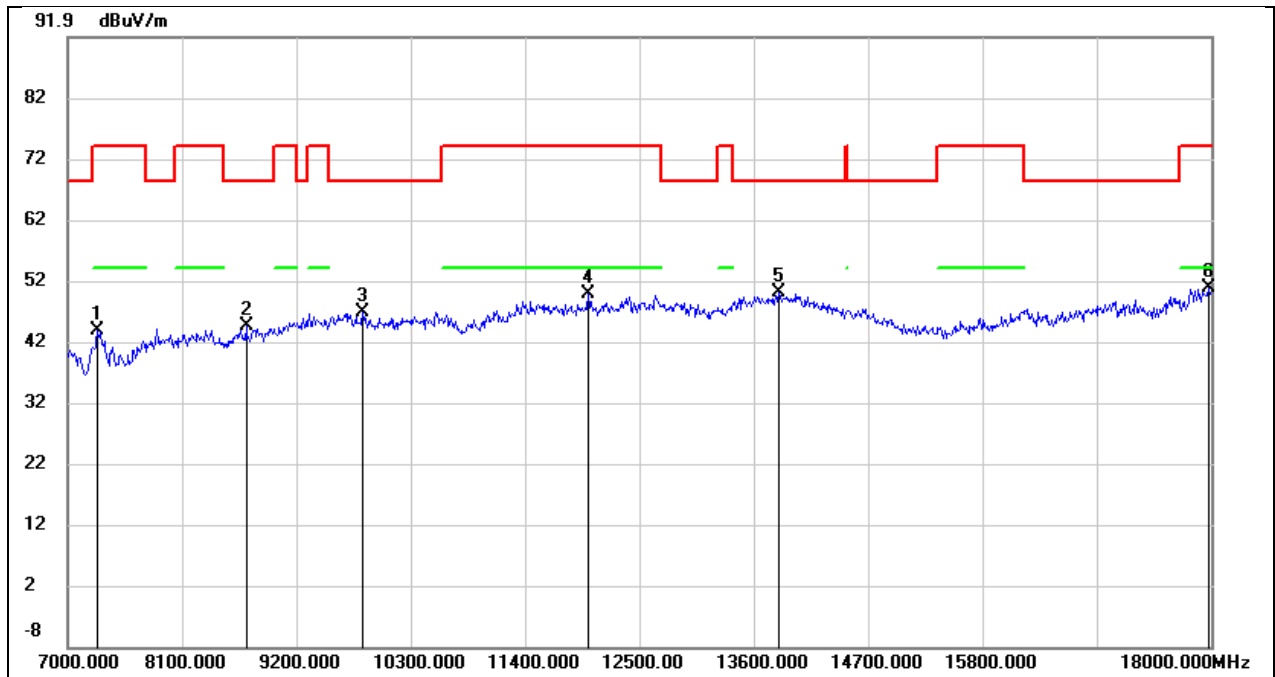


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	36.39	7.49	43.88	74.00	-30.12	peak
2	8716.000	35.27	9.31	44.58	68.20	-23.62	peak
3	9838.000	33.18	13.59	46.77	68.20	-21.43	peak
4	12005.000	31.23	18.62	49.85	74.00	-24.15	peak
5	13842.000	26.85	23.29	50.14	68.20	-18.06	peak
6	17978.000	22.46	28.31	50.77	74.00	-23.23	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 5V

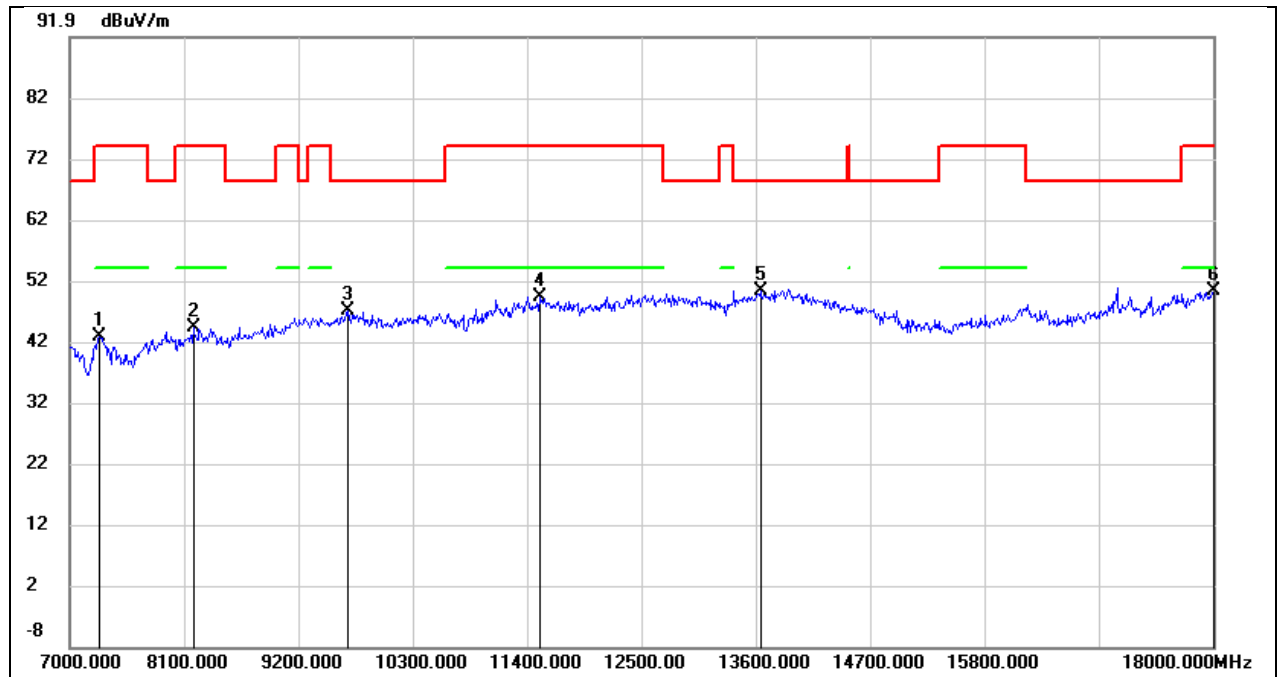


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	35.41	7.49	42.90	74.00	-31.10	peak
2	8188.000	35.88	8.40	44.28	74.00	-29.72	peak
3	9673.000	33.62	13.42	47.04	68.20	-21.16	peak
4	11521.000	31.70	17.60	49.30	74.00	-24.70	peak
5	13644.000	27.59	22.72	50.31	68.20	-17.89	peak
6	18000.000	21.79	28.51	50.30	74.00	-23.70	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 5V

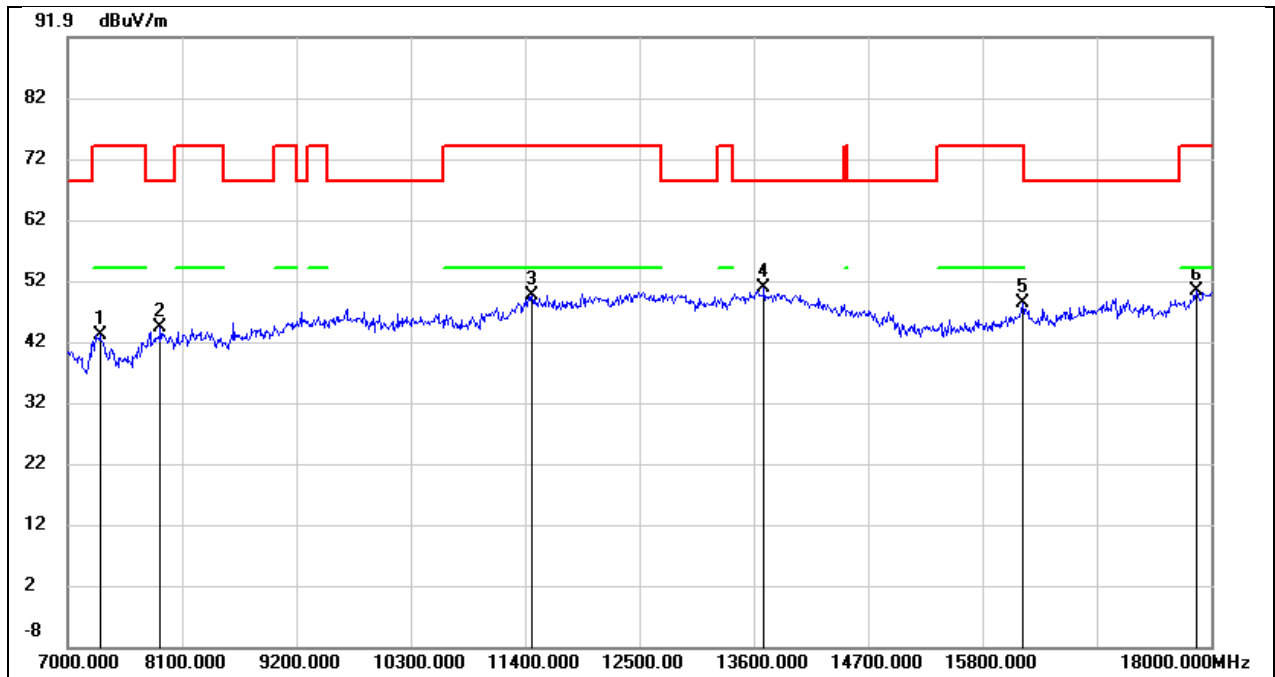


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.58	7.49	43.07	74.00	-30.93	peak
2	7891.000	36.28	8.05	44.33	68.20	-23.87	peak
3	11466.000	32.10	17.42	49.52	74.00	-24.48	peak
4	13699.000	27.98	22.87	50.85	68.20	-17.35	peak
5	16185.000	26.76	21.50	48.26	74.00	-25.74	peak
6	17857.000	23.21	27.18	50.39	74.00	-23.61	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 5V

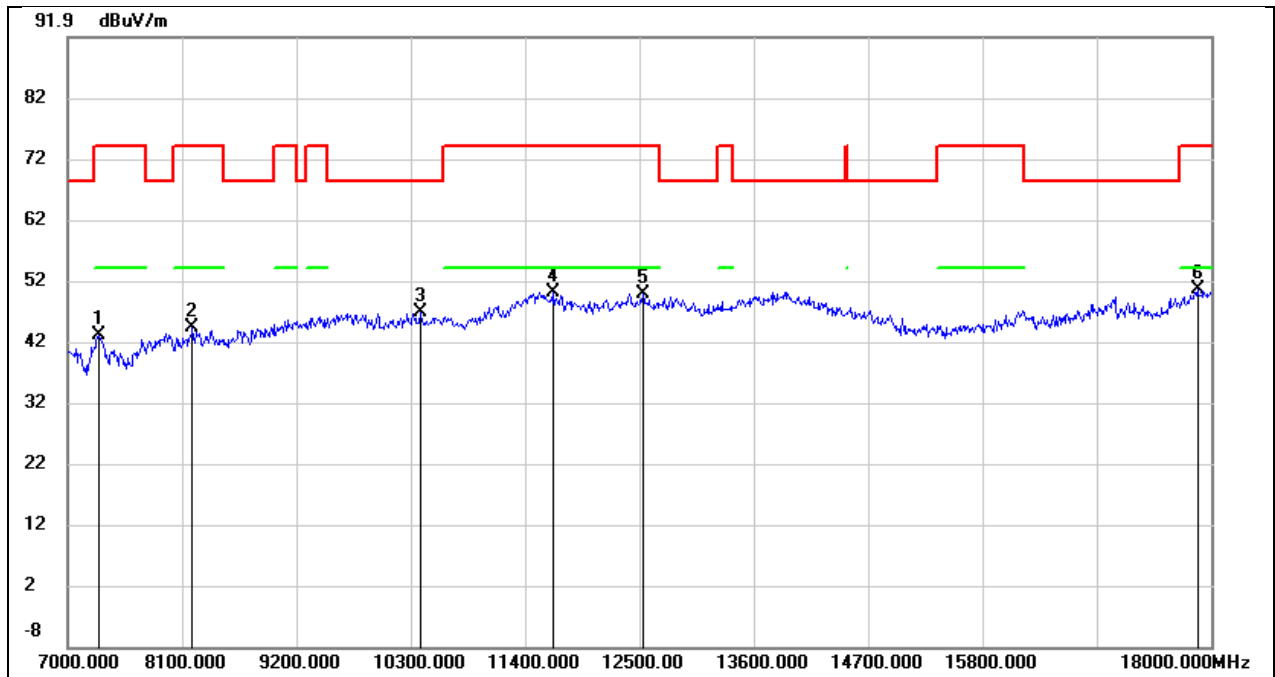


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.60	7.50	43.10	74.00	-30.90	peak
2	8199.000	35.99	8.41	44.40	74.00	-29.60	peak
3	10388.000	33.01	13.70	46.71	68.20	-21.49	peak
4	11675.000	32.21	17.90	50.11	74.00	-23.89	peak
5	12533.000	29.96	19.82	49.78	74.00	-24.22	peak
6	17868.000	23.22	27.29	50.51	74.00	-23.49	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 5V

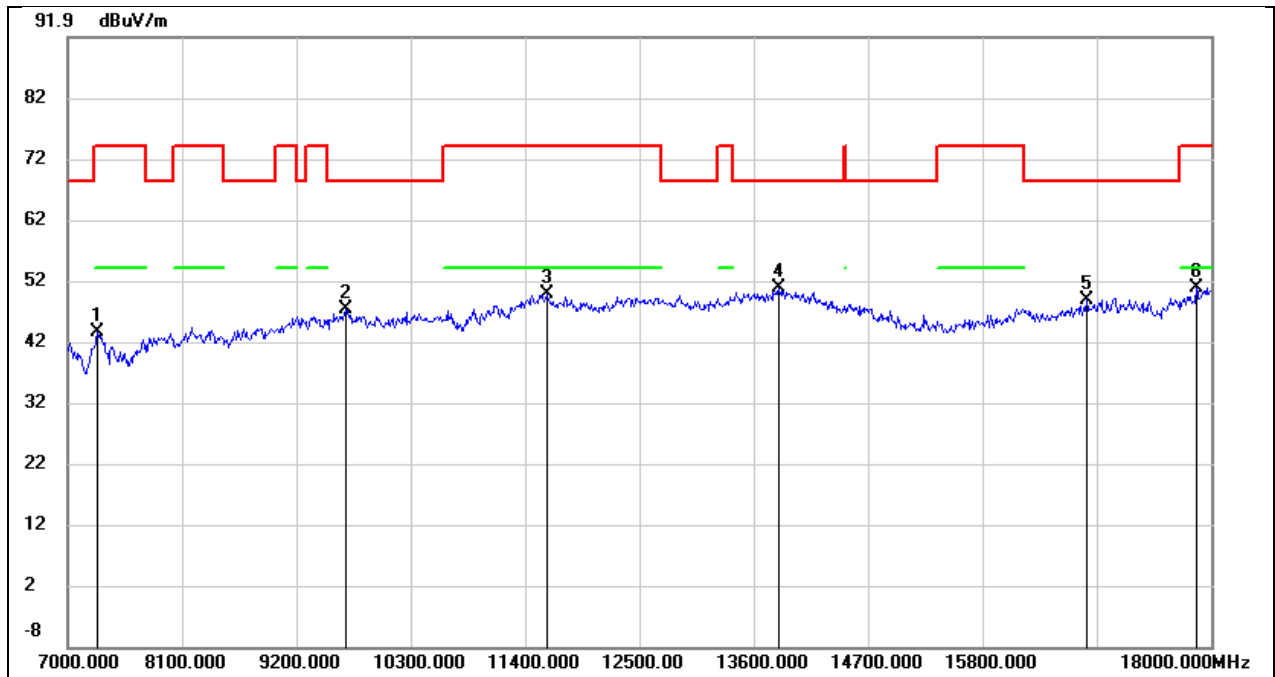


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	36.16	7.49	43.65	74.00	-30.35	peak
2	9673.000	33.90	13.42	47.32	68.20	-20.88	peak
3	11609.000	31.81	17.88	49.69	74.00	-24.31	peak
4	13842.000	27.44	23.29	50.73	68.20	-17.47	peak
5	16801.000	26.83	22.03	48.86	68.20	-19.34	peak
6	17857.000	23.53	27.18	50.71	74.00	-23.29	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 5V

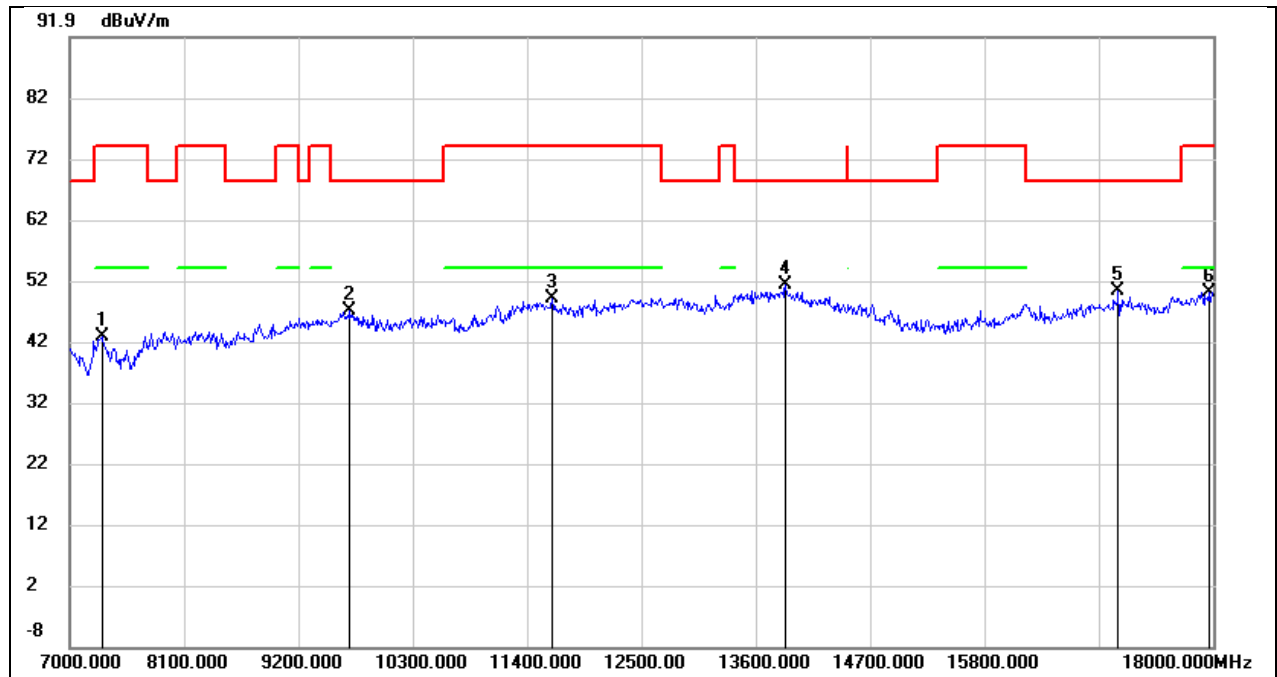


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.23	7.49	42.72	74.00	-31.28	peak
2	9695.000	33.54	13.45	46.99	68.20	-21.21	peak
3	11642.000	31.06	17.88	48.94	74.00	-25.06	peak
4	13886.000	27.78	23.47	51.25	68.20	-16.95	peak
5	17087.000	27.09	23.16	50.25	68.20	-17.95	peak
6	17956.000	22.00	28.10	50.10	74.00	-23.90	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 5V

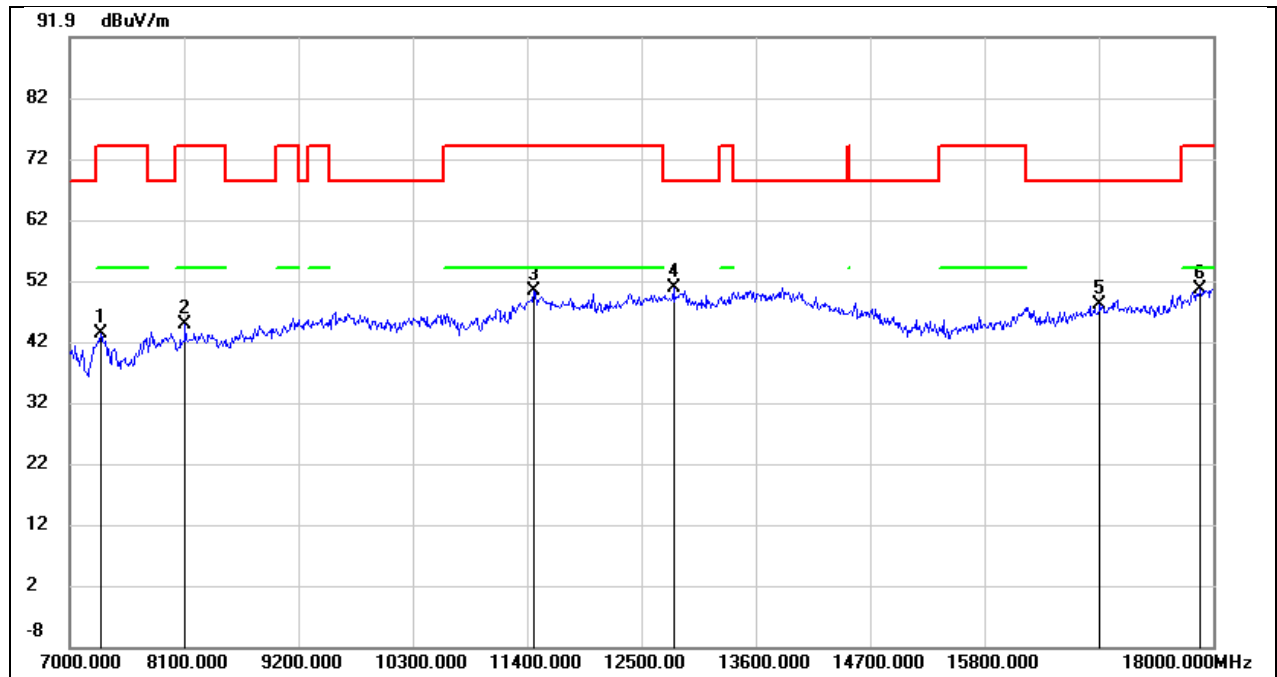


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.75	7.50	43.25	74.00	-30.75	peak
2	8111.000	36.43	8.30	44.73	74.00	-29.27	peak
3	11466.000	32.93	17.42	50.35	74.00	-23.65	peak
4	12808.000	30.14	20.53	50.67	68.20	-17.53	peak
5	16911.000	25.69	22.41	48.10	68.20	-20.10	peak
6	17879.000	23.20	27.39	50.59	74.00	-23.41	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 5V

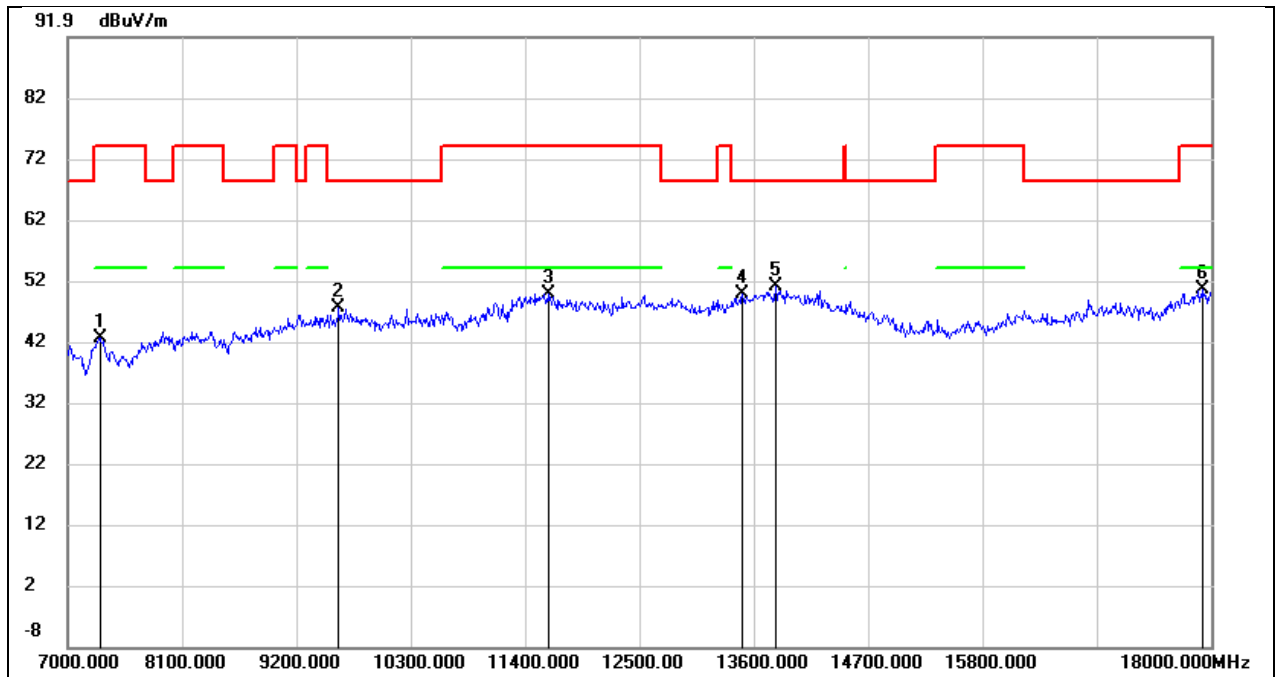


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.16	7.49	42.65	74.00	-31.35	peak
2	9607.000	34.12	13.30	47.42	68.20	-20.78	peak
3	11620.000	31.95	17.88	49.83	74.00	-24.17	peak
4	13490.000	27.32	22.40	49.72	68.20	-18.48	peak
5	13809.000	27.79	23.17	50.96	68.20	-17.24	peak
6	17923.000	22.80	27.79	50.59	74.00	-23.41	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 5V

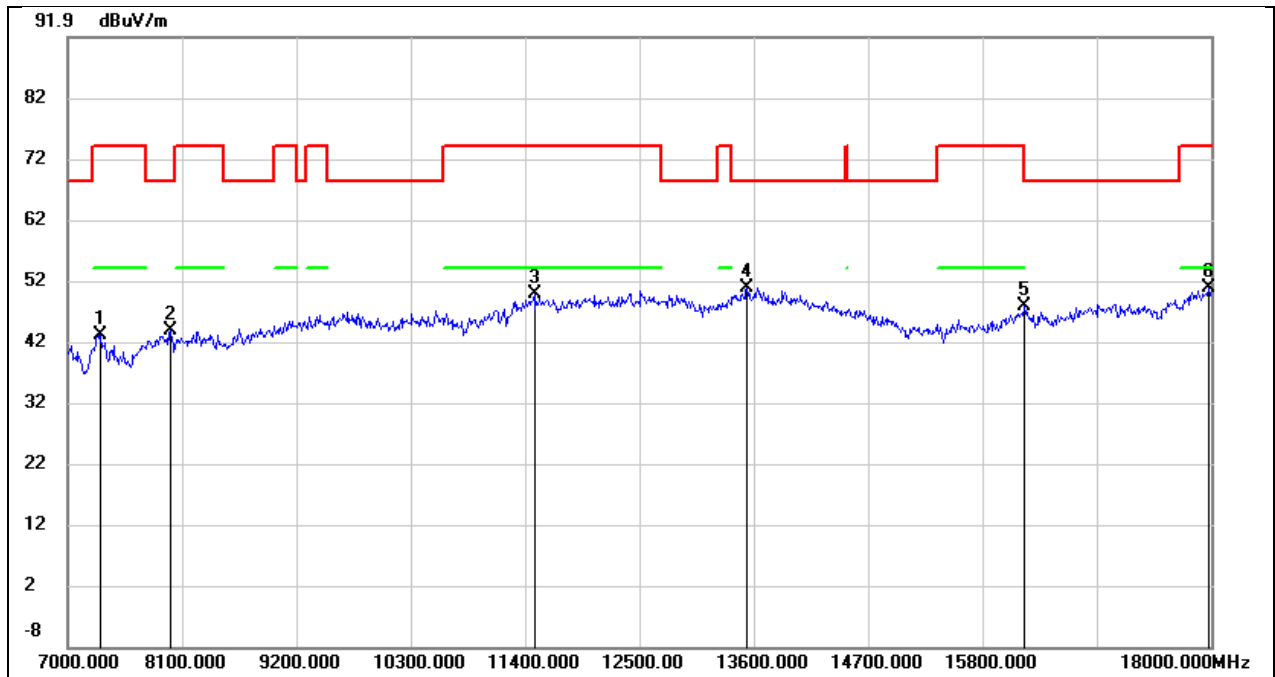


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.61	7.50	43.11	74.00	-30.89	peak
2	7990.000	35.59	8.16	43.75	68.20	-24.45	peak
3	11488.000	32.22	17.49	49.71	74.00	-24.29	peak
4	13534.000	28.27	22.49	50.76	68.20	-17.44	peak
5	16207.000	26.29	21.58	47.87	68.20	-20.33	peak
6	17978.000	22.47	28.31	50.78	74.00	-23.22	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 5V

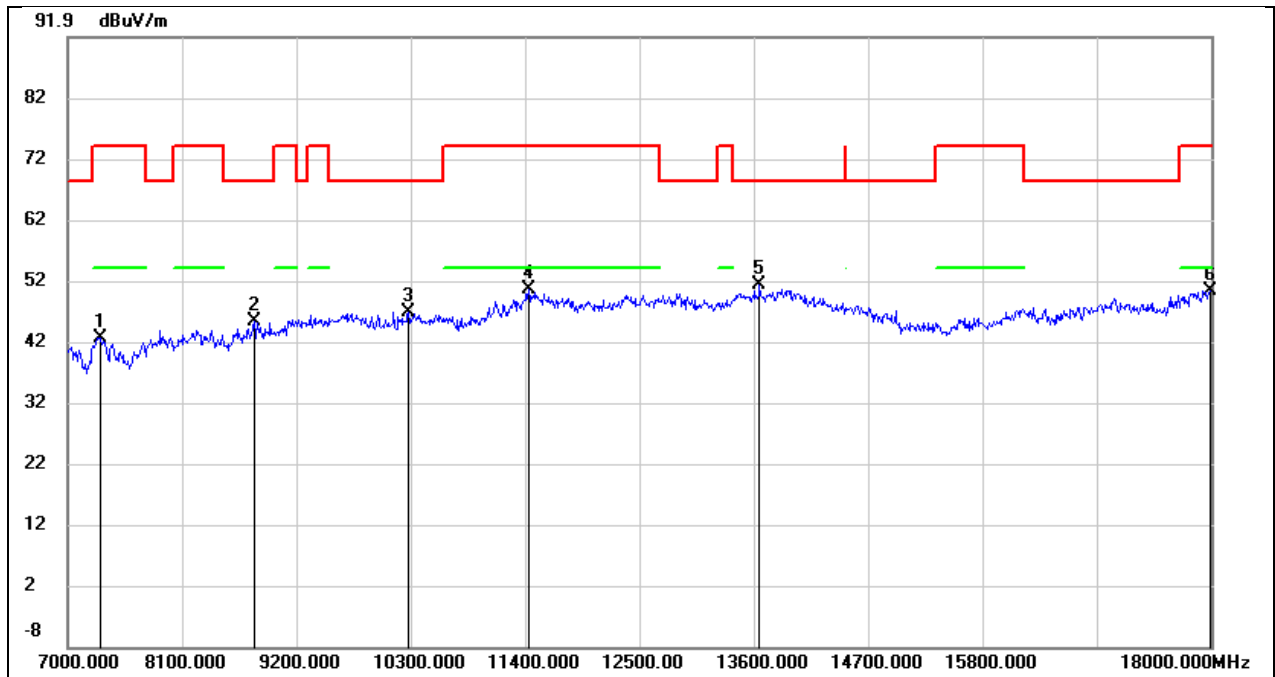


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.00	7.50	42.50	74.00	-31.50	peak
2	8793.000	35.59	9.57	45.16	68.20	-23.04	peak
3	10278.000	33.39	13.48	46.87	68.20	-21.33	peak
4	11433.000	33.21	17.31	50.52	74.00	-23.48	peak
5	13655.000	28.44	22.75	51.19	68.20	-17.01	peak
6	17989.000	21.97	28.40	50.37	74.00	-23.63	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 5V

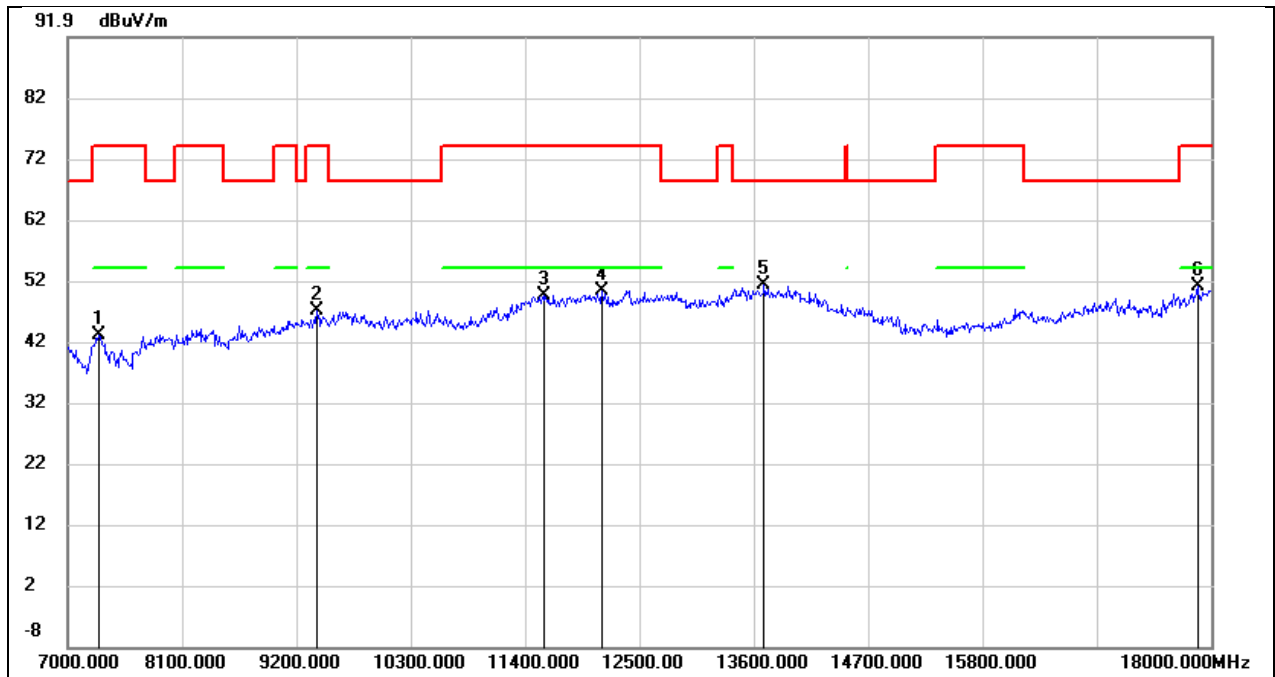


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.42	7.50	42.92	74.00	-31.08	peak
2	9398.000	34.96	12.03	46.99	74.00	-27.01	peak
3	11587.000	31.77	17.84	49.61	74.00	-24.39	peak
4	12137.000	31.42	18.93	50.35	74.00	-23.65	peak
5	13699.000	28.35	22.87	51.22	68.20	-16.98	peak
6	17868.000	23.68	27.29	50.97	74.00	-23.03	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 5V

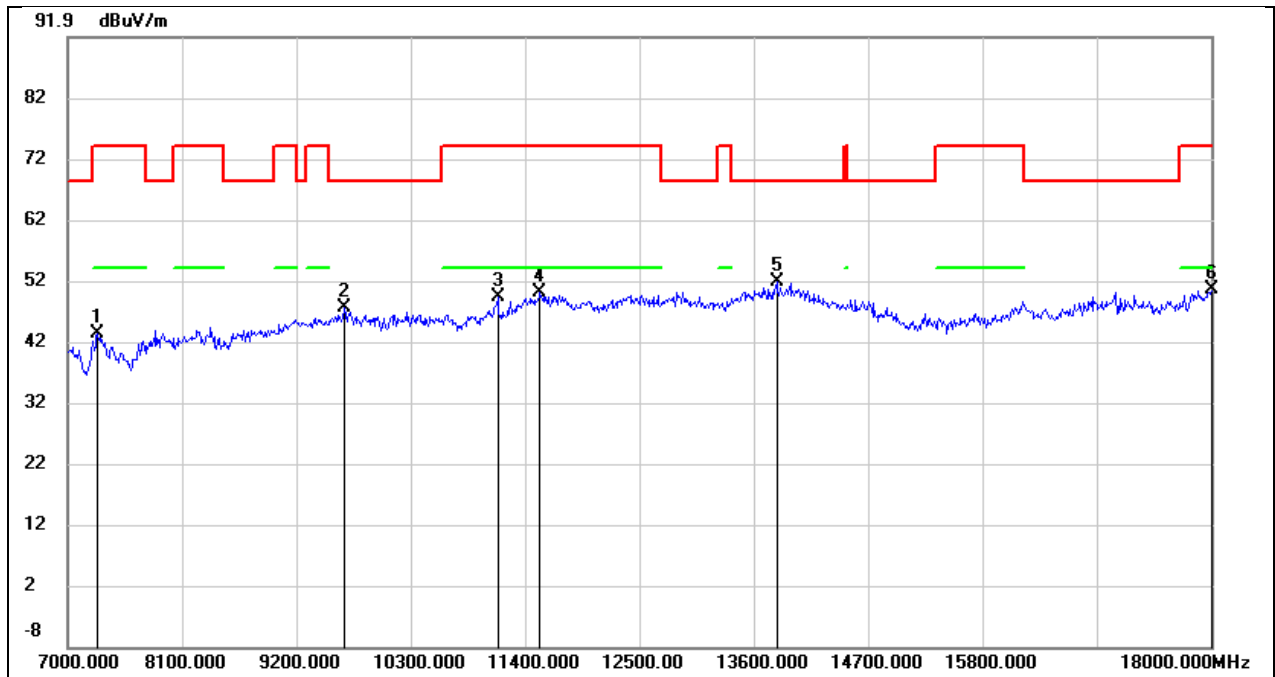


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	35.75	7.49	43.24	74.00	-30.76	peak
2	9662.000	34.20	13.39	47.59	68.20	-20.61	peak
3	11136.000	33.26	16.02	49.28	74.00	-24.72	peak
4	11543.000	32.45	17.67	50.12	74.00	-23.88	peak
5	13820.000	28.44	23.22	51.66	68.20	-16.54	peak
6	18000.000	21.98	28.51	50.49	74.00	-23.51	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 5V

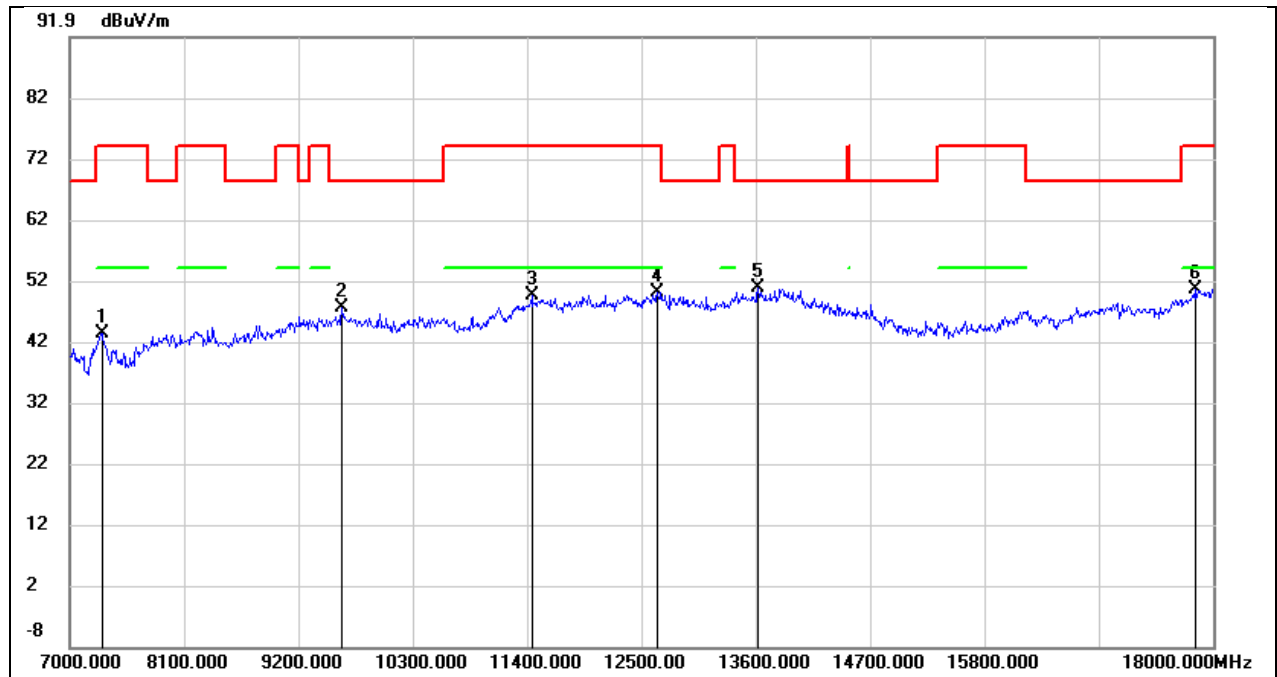


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.75	7.49	43.24	74.00	-30.76	peak
2	9618.000	34.13	13.31	47.44	68.20	-20.76	peak
3	11444.000	32.18	17.35	49.53	74.00	-24.47	peak
4	12654.000	30.08	20.06	50.14	74.00	-23.86	peak
5	13622.000	28.15	22.66	50.81	68.20	-17.39	peak
6	17824.000	23.62	26.88	50.50	74.00	-23.50	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 5V

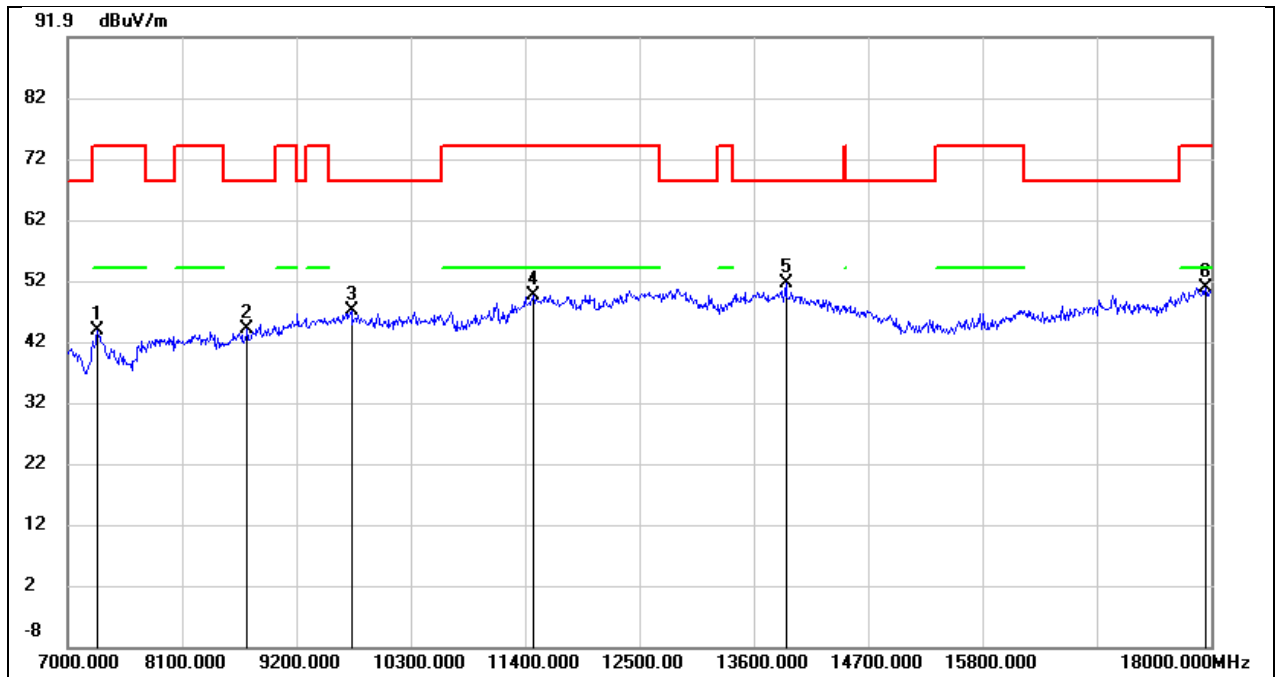


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	36.31	7.49	43.80	74.00	-30.20	peak
2	8727.000	34.69	9.34	44.03	68.20	-24.17	peak
3	9728.000	33.45	13.52	46.97	68.20	-21.23	peak
4	11477.000	31.99	17.46	49.45	74.00	-24.55	peak
5	13908.000	27.88	23.56	51.44	68.20	-16.76	peak
6	17945.000	22.88	28.01	50.89	74.00	-23.11	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 5V

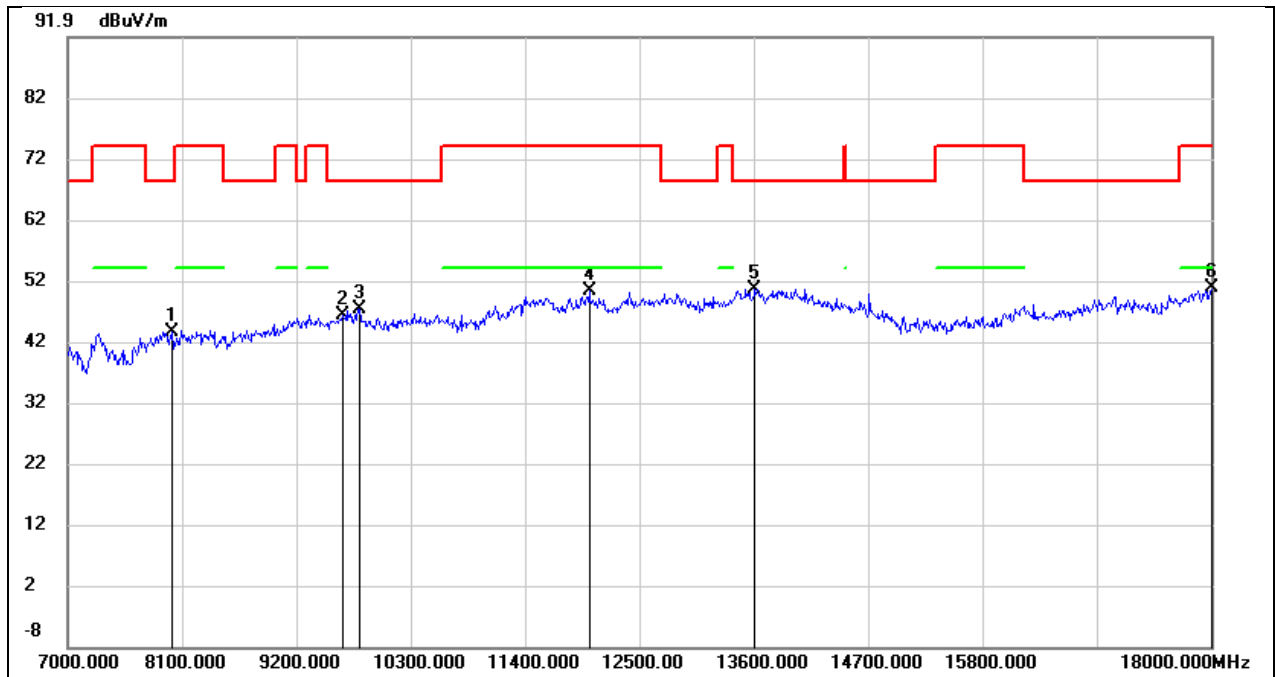


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8001.000	35.46	8.17	43.63	68.20	-24.57	peak
2	9640.000	33.04	13.36	46.40	68.20	-21.80	peak
3	9805.000	33.70	13.66	47.36	68.20	-20.84	peak
4	12016.000	31.64	18.64	50.28	74.00	-23.72	peak
5	13611.000	28.00	22.63	50.63	68.20	-17.57	peak
6	18000.000	22.28	28.51	50.79	74.00	-23.21	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 5V

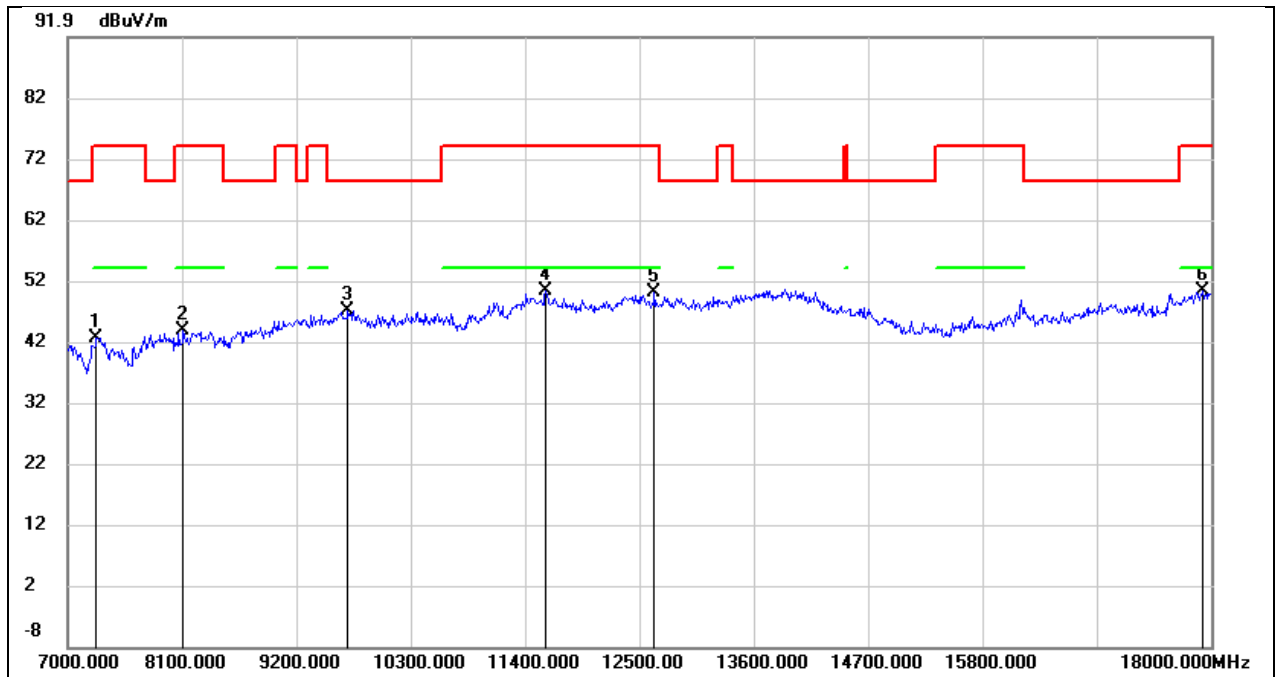


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7275.000	35.09	7.49	42.58	74.00	-31.42	peak
2	8111.000	35.40	8.30	43.70	74.00	-30.30	peak
3	9695.000	33.51	13.45	46.96	68.20	-21.24	peak
4	11598.000	32.46	17.88	50.34	74.00	-23.66	peak
5	12643.000	30.07	20.03	50.10	74.00	-23.90	peak
6	17923.000	22.48	27.79	50.27	74.00	-23.73	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 5V

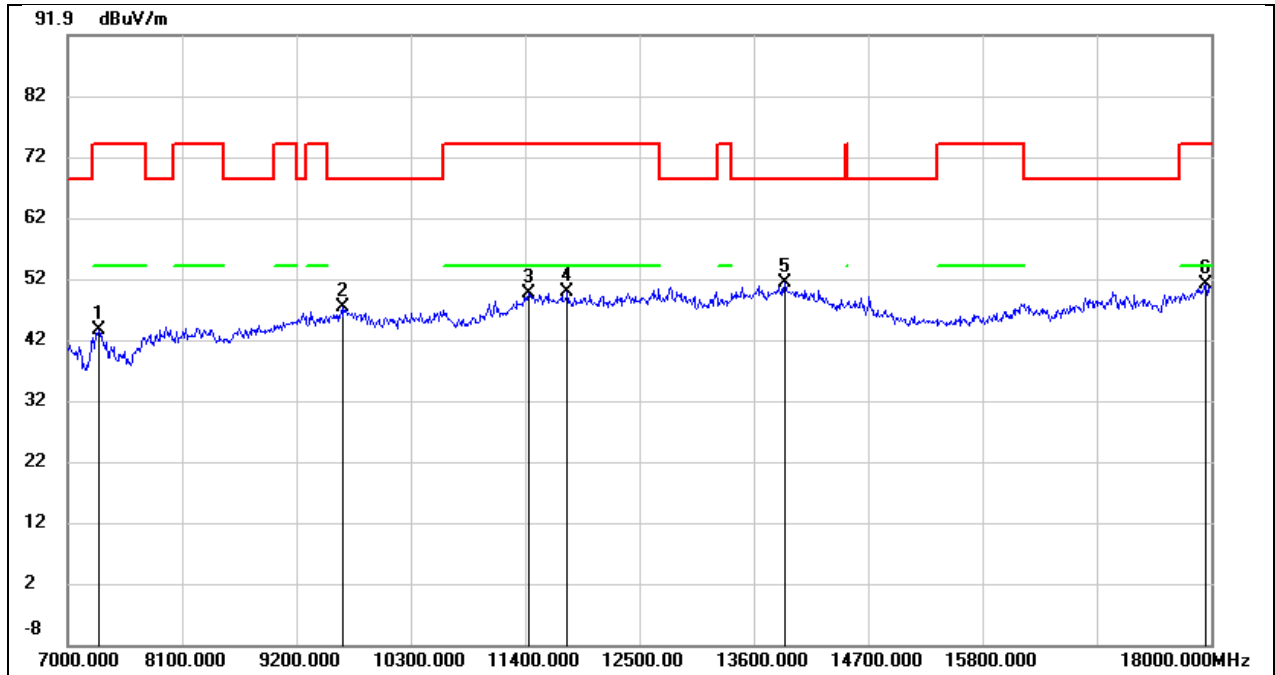


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.09	7.50	43.59	74.00	-30.41	peak
2	9640.000	34.01	13.36	47.37	68.20	-20.83	peak
3	11433.000	32.22	17.31	49.53	74.00	-24.47	peak
4	11807.000	31.85	17.95	49.80	74.00	-24.20	peak
5	13897.000	27.89	23.51	51.40	68.20	-16.80	peak
6	17945.000	22.90	28.01	50.91	74.00	-23.09	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 5V

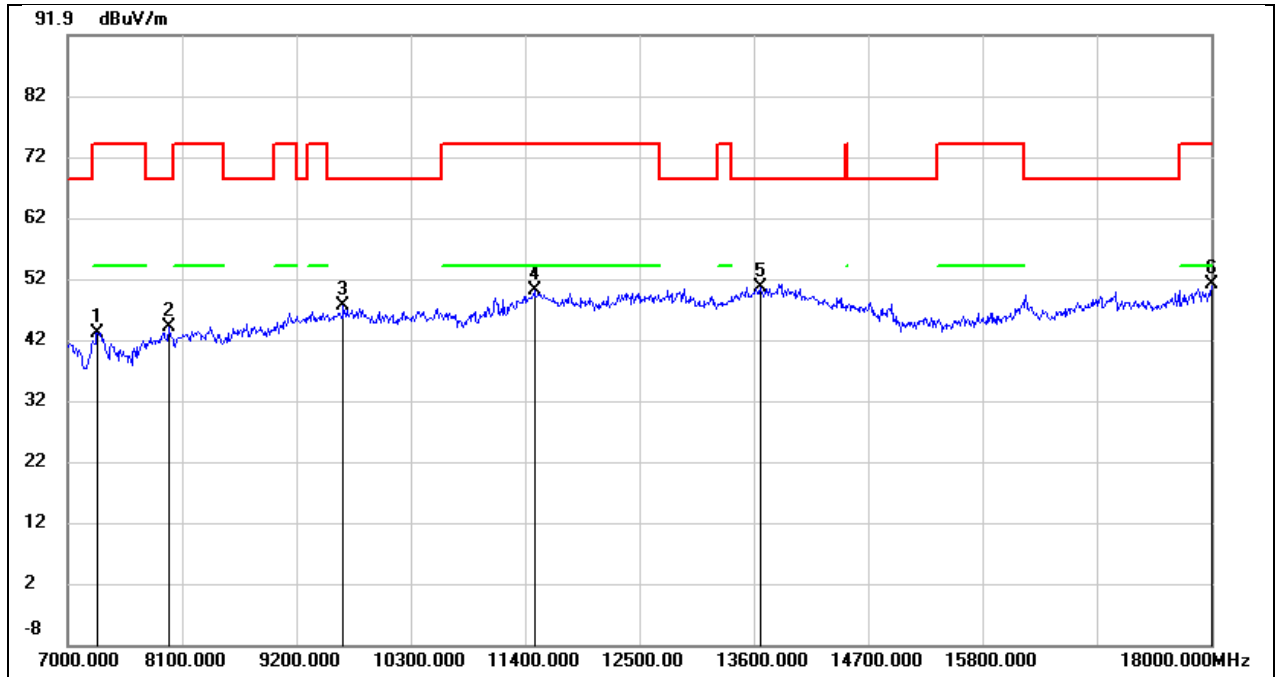


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	35.55	7.49	43.04	74.00	-30.96	peak
2	7968.000	36.01	8.13	44.14	68.20	-24.06	peak
3	9651.000	34.13	13.38	47.51	68.20	-20.69	peak
4	11488.000	32.43	17.49	49.92	74.00	-24.08	peak
5	13666.000	27.71	22.78	50.49	68.20	-17.71	peak
6	18000.000	22.41	28.51	50.92	74.00	-23.08	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 5V

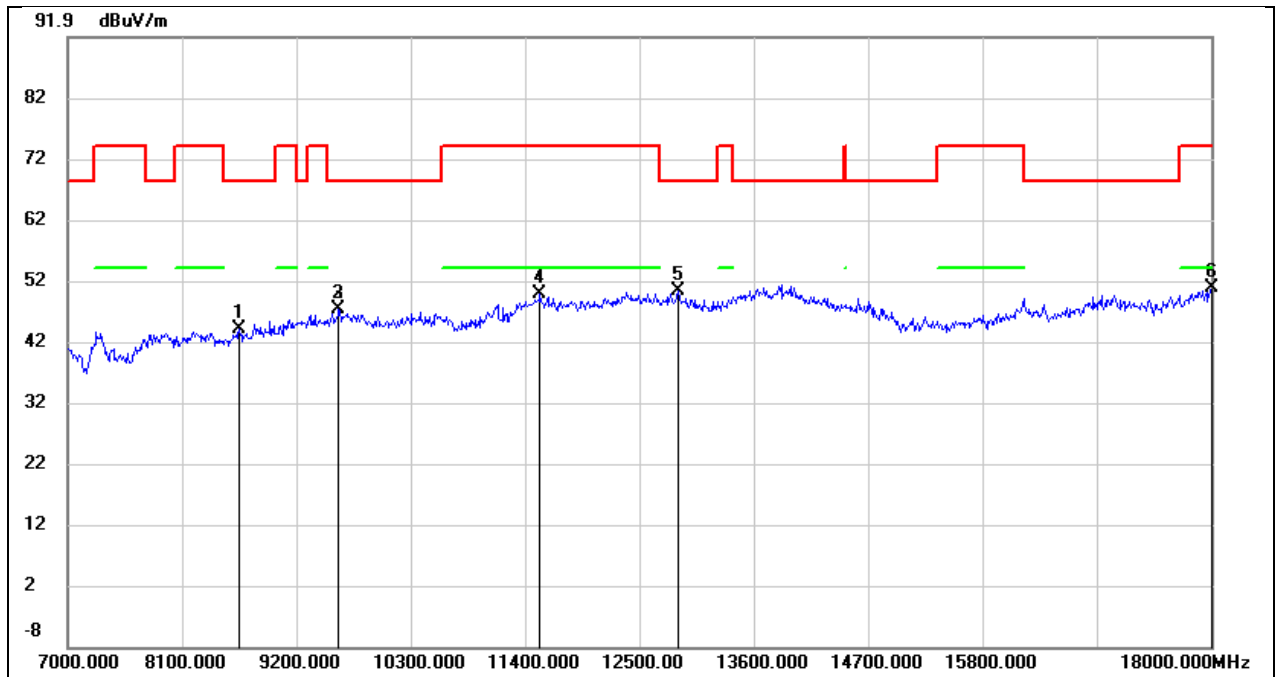


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8650.000	34.87	9.07	43.94	68.20	-24.26	peak
2	9607.000	34.01	13.30	47.31	68.20	-20.89	peak
3	9607.000	34.01	13.30	47.31	68.20	-20.89	peak
4	11543.000	32.16	17.67	49.83	74.00	-24.17	peak
5	12874.000	29.75	20.50	50.25	68.20	-17.95	peak
6	18000.000	22.18	28.51	50.69	74.00	-23.31	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 5V

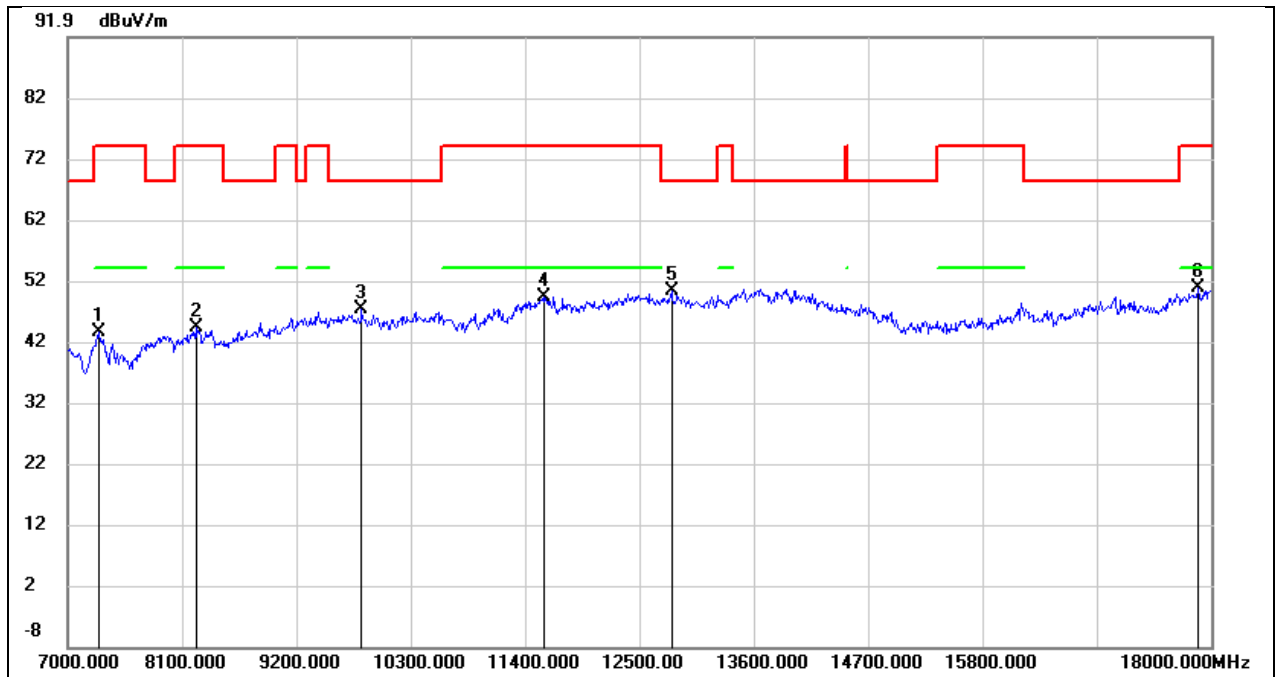


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.94	7.50	43.44	74.00	-30.56	peak
2	8232.000	35.73	8.44	44.17	74.00	-29.83	peak
3	9827.000	33.63	13.61	47.24	68.20	-20.96	peak
4	11587.000	31.42	17.84	49.26	74.00	-24.74	peak
5	12808.000	29.86	20.53	50.39	68.20	-17.81	peak
6	17879.000	23.31	27.39	50.70	74.00	-23.30	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 5V

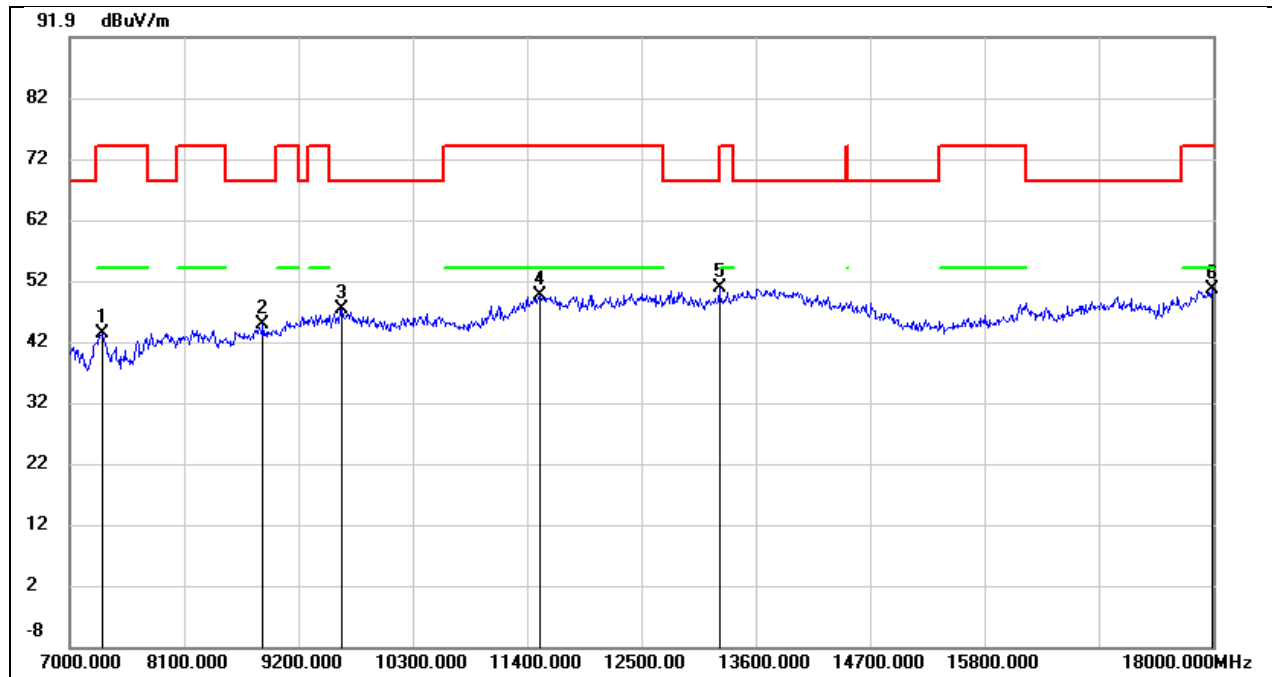


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.86	7.50	43.36	74.00	-30.64	peak
2	8859.000	34.88	9.88	44.76	68.20	-23.44	peak
3	9618.000	33.95	13.31	47.26	68.20	-20.94	peak
4	11521.000	31.91	17.60	49.51	74.00	-24.49	peak
5	13248.000	29.17	21.49	50.66	68.20	-17.54	peak
6	17989.000	22.12	28.40	50.52	74.00	-23.48	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 5V

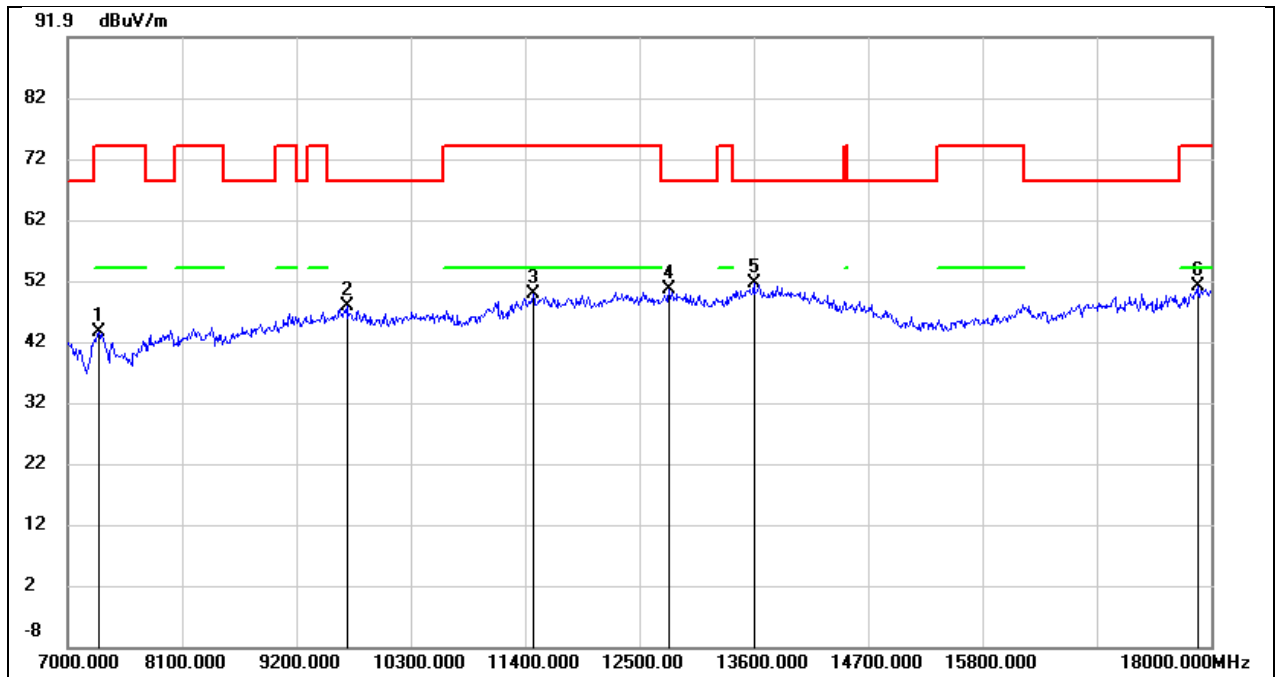


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.11	7.50	43.61	74.00	-30.39	peak
2	9684.000	34.25	13.44	47.69	68.20	-20.51	peak
3	11477.000	32.33	17.46	49.79	74.00	-24.21	peak
4	12786.000	30.09	20.50	50.59	68.20	-17.61	peak
5	13600.000	28.91	22.60	51.51	68.20	-16.69	peak
6	17868.000	23.63	27.29	50.92	74.00	-23.08	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 5V

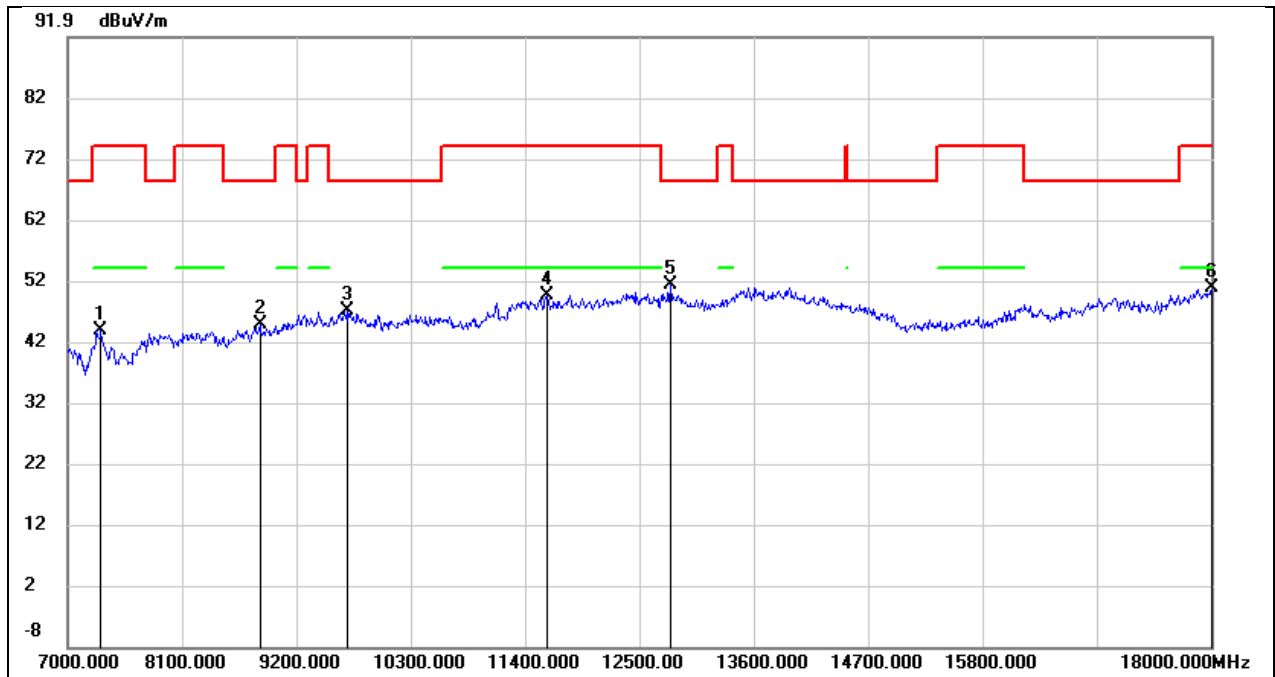


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	36.39	7.50	43.89	74.00	-30.11	peak
2	8848.000	34.87	9.83	44.70	68.20	-23.50	peak
3	9684.000	33.53	13.44	46.97	68.20	-21.23	peak
4	11609.000	31.74	17.88	49.62	74.00	-24.38	peak
5	12797.000	30.63	20.53	51.16	68.20	-17.04	peak
6	18000.000	22.26	28.51	50.77	74.00	-23.23	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 5V

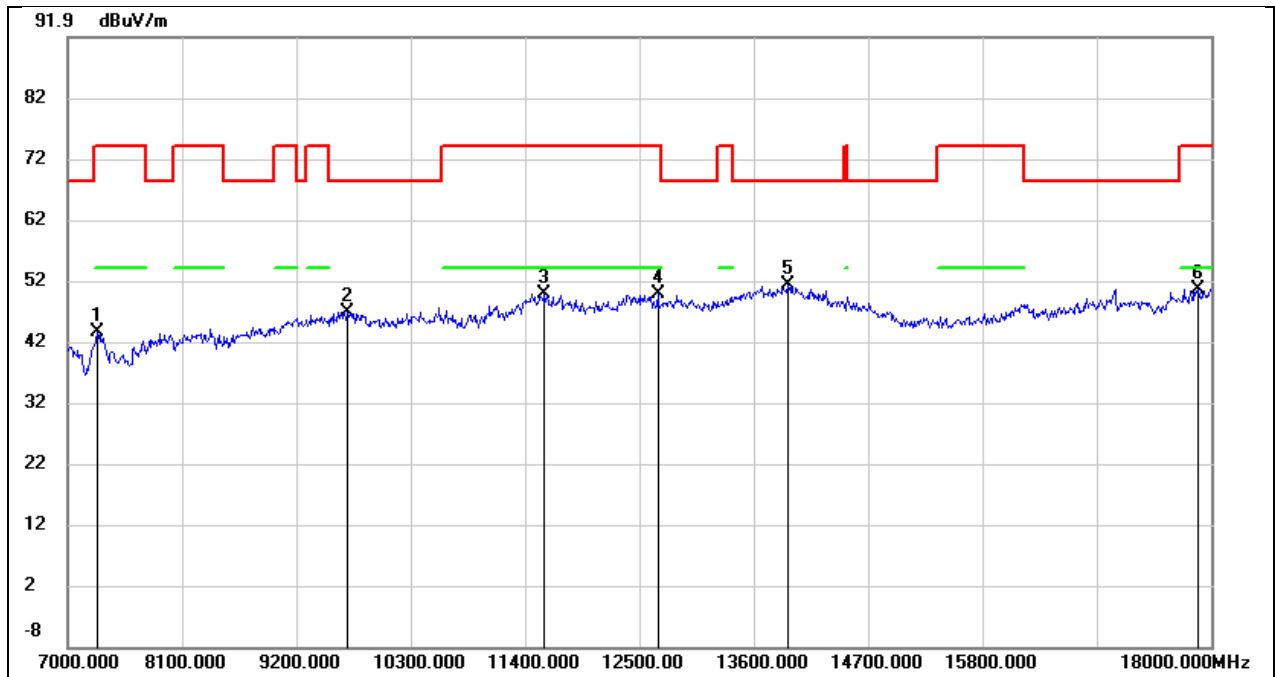


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	36.08	7.49	43.57	74.00	-30.43	peak
2	9684.000	33.39	13.44	46.83	68.20	-21.37	peak
3	11587.000	32.03	17.84	49.87	74.00	-24.13	peak
4	12676.000	29.71	20.14	49.85	74.00	-24.15	peak
5	13930.000	27.69	23.63	51.32	68.20	-16.88	peak
6	17868.000	23.16	27.29	50.45	74.00	-23.55	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 5V

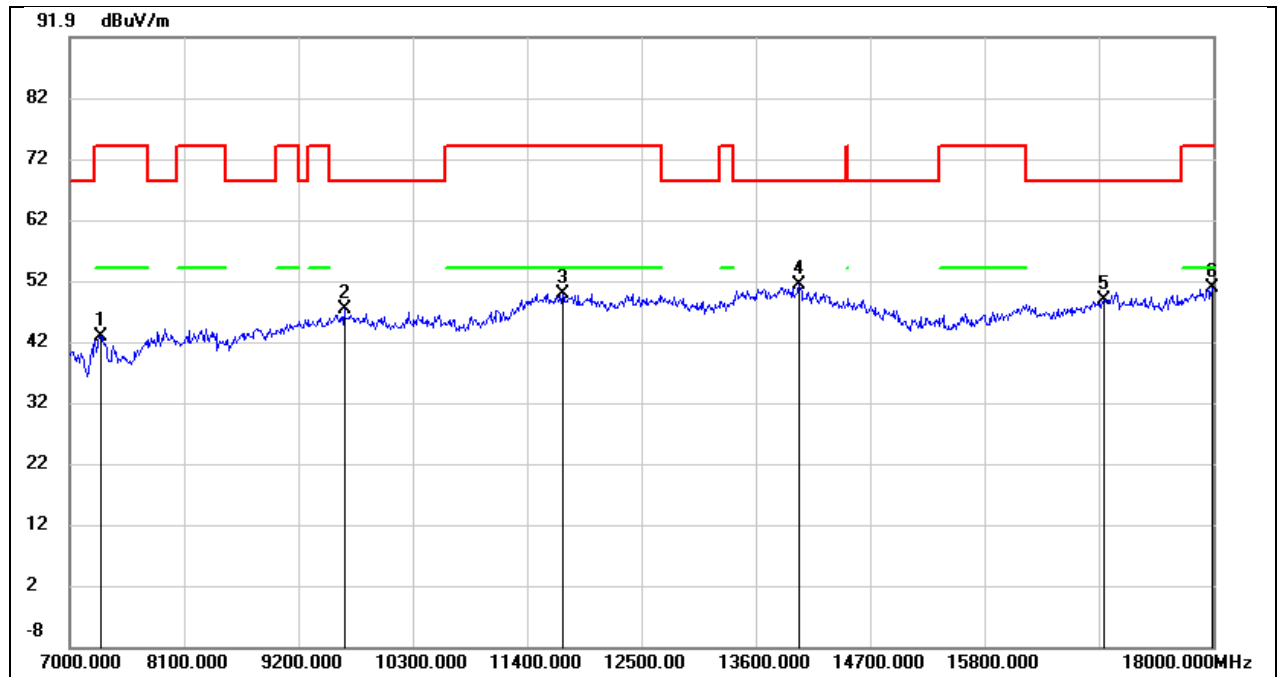


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.40	7.50	42.90	74.00	-31.10	peak
2	9640.000	34.02	13.36	47.38	68.20	-20.82	peak
3	11741.000	31.87	17.91	49.78	74.00	-24.22	peak
4	14018.000	27.40	23.83	51.23	68.20	-16.97	peak
5	16955.000	26.21	22.56	48.77	68.20	-19.43	peak
6	17989.000	22.30	28.40	50.70	74.00	-23.30	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 5V

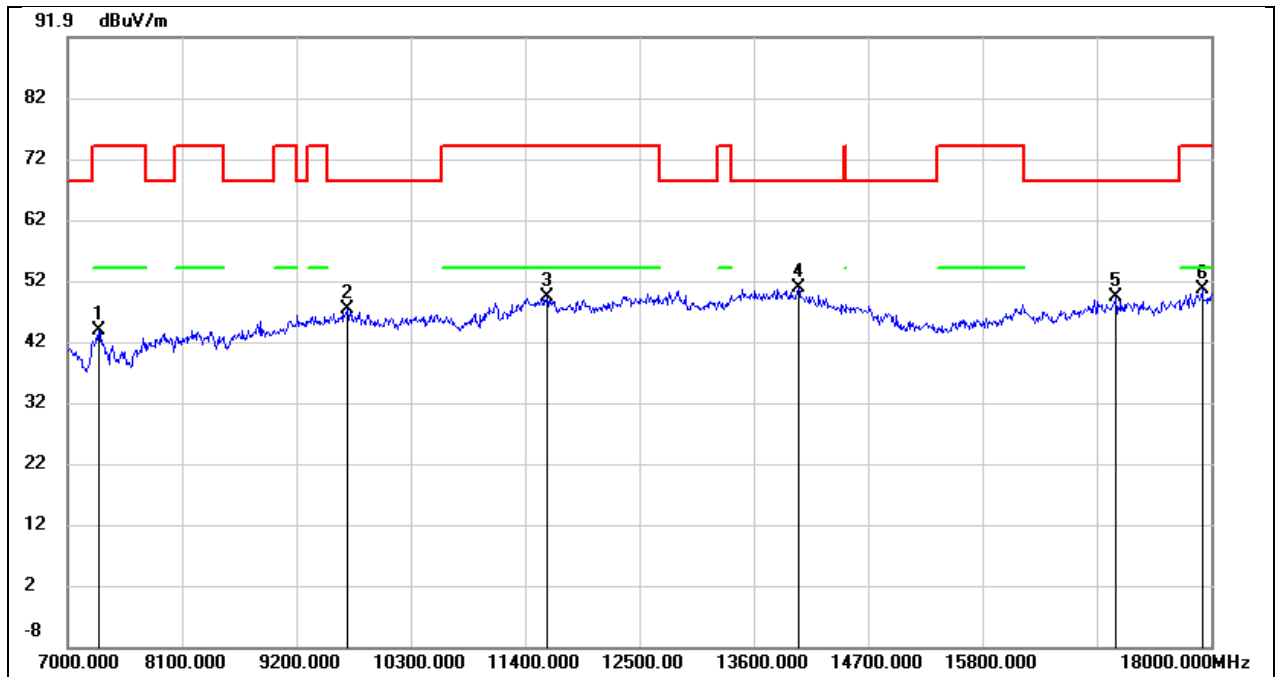


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.23	7.50	43.73	74.00	-30.27	peak
2	9695.000	33.76	13.45	47.21	68.20	-20.99	peak
3	11609.000	31.52	17.88	49.40	74.00	-24.60	peak
4	14029.000	26.95	23.76	50.71	68.20	-17.49	peak
5	17087.000	26.15	23.16	49.31	68.20	-18.89	peak
6	17912.000	22.92	27.70	50.62	74.00	-23.38	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 5V

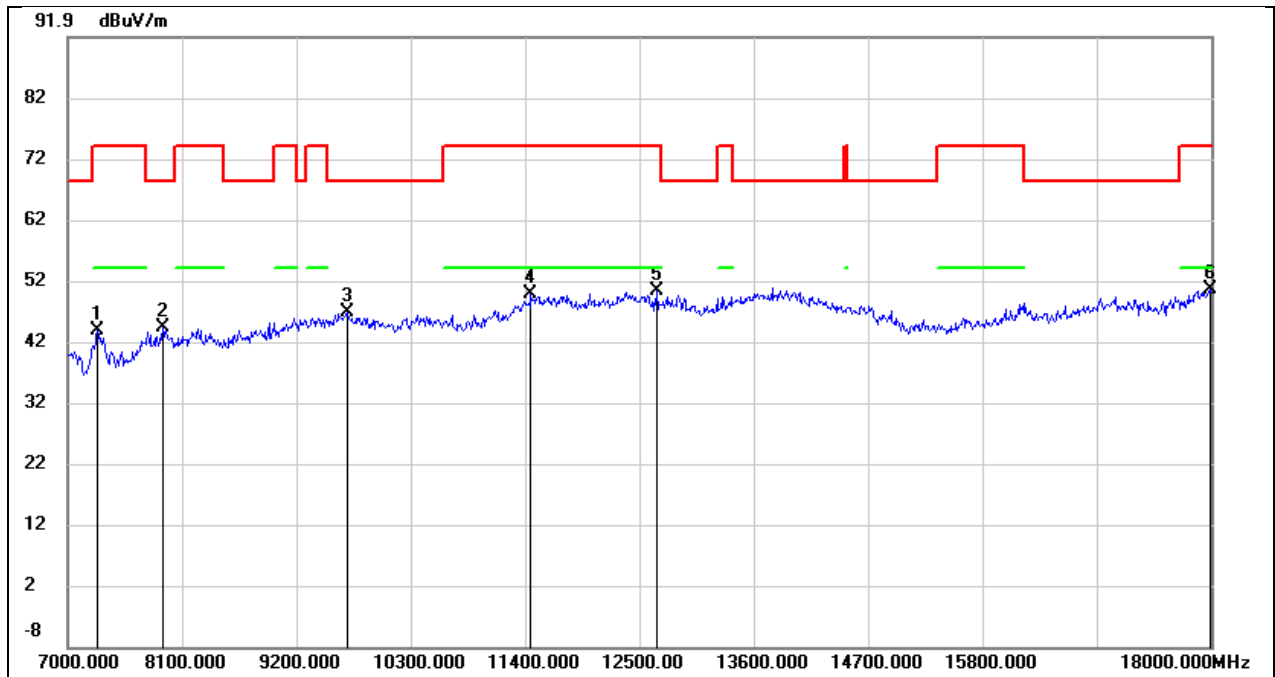


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	36.39	7.49	43.88	74.00	-30.12	peak
2	7913.000	36.20	8.08	44.28	68.20	-23.92	peak
3	9684.000	33.30	13.44	46.74	68.20	-21.46	peak
4	11455.000	32.28	17.38	49.66	74.00	-24.34	peak
5	12665.000	30.17	20.09	50.26	74.00	-23.74	peak
6	17989.000	22.05	28.40	50.45	74.00	-23.55	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 5V

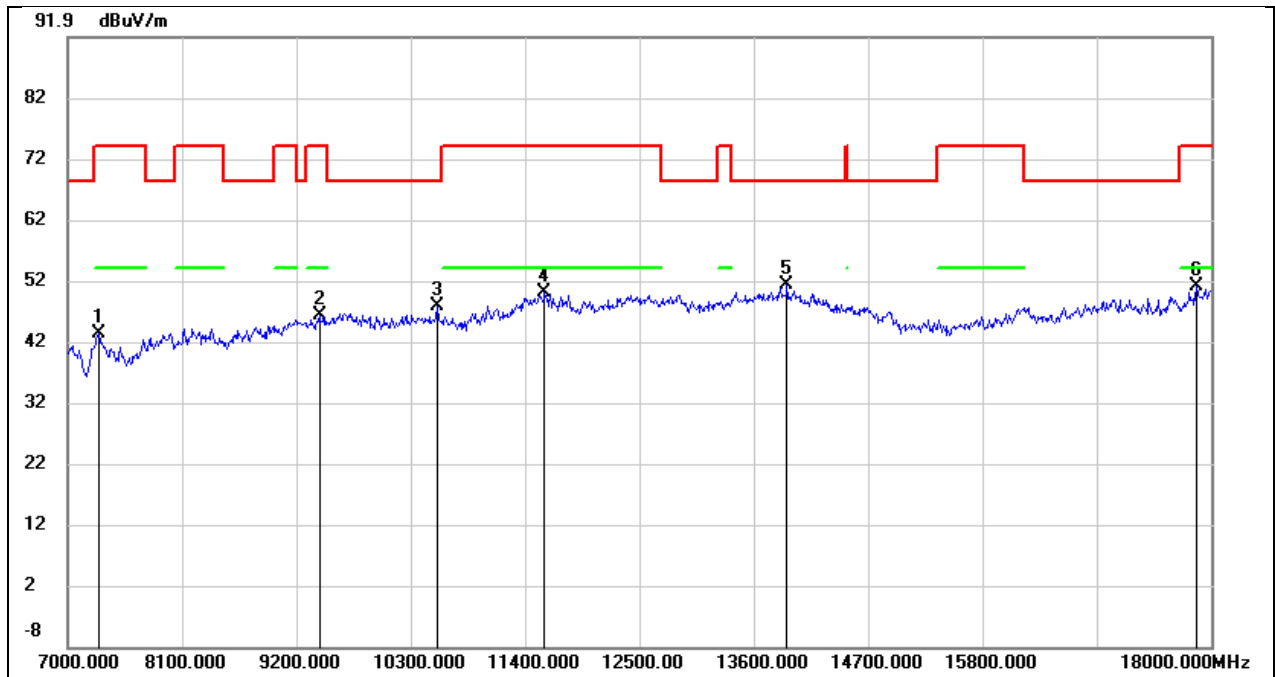


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.89	7.50	43.39	74.00	-30.61	peak
2	9420.000	34.24	12.16	46.40	74.00	-27.60	peak
3	10553.000	33.66	14.18	47.84	68.20	-20.36	peak
4	11587.000	32.27	17.84	50.11	74.00	-23.89	peak
5	13919.000	27.72	23.60	51.32	68.20	-16.88	peak
6	17857.000	23.76	27.18	50.94	74.00	-23.06	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 5V

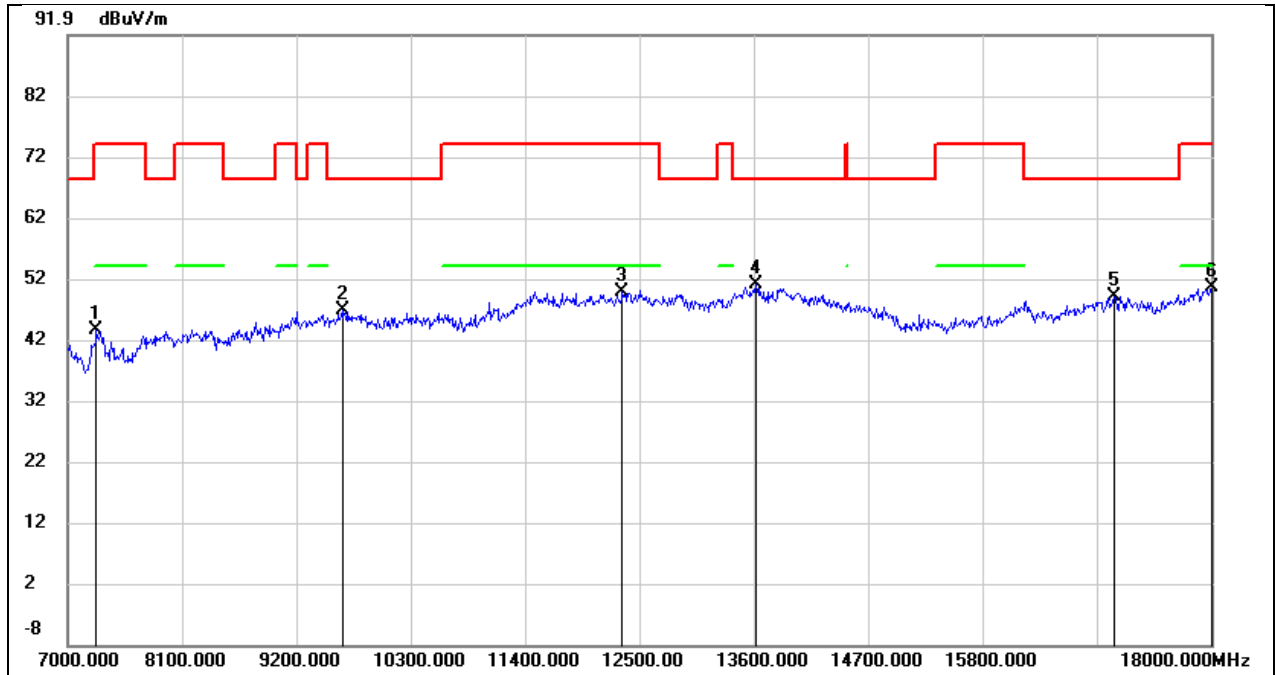


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7275.000	35.92	7.49	43.41	74.00	-30.59	peak
2	9640.000	33.37	13.36	46.73	68.20	-21.47	peak
3	12335.000	30.41	19.46	49.87	74.00	-24.13	peak
4	13622.000	28.45	22.66	51.11	68.20	-17.09	peak
5	17065.000	25.97	23.05	49.02	68.20	-19.18	peak
6	18000.000	22.10	28.51	50.61	74.00	-23.39	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 5V

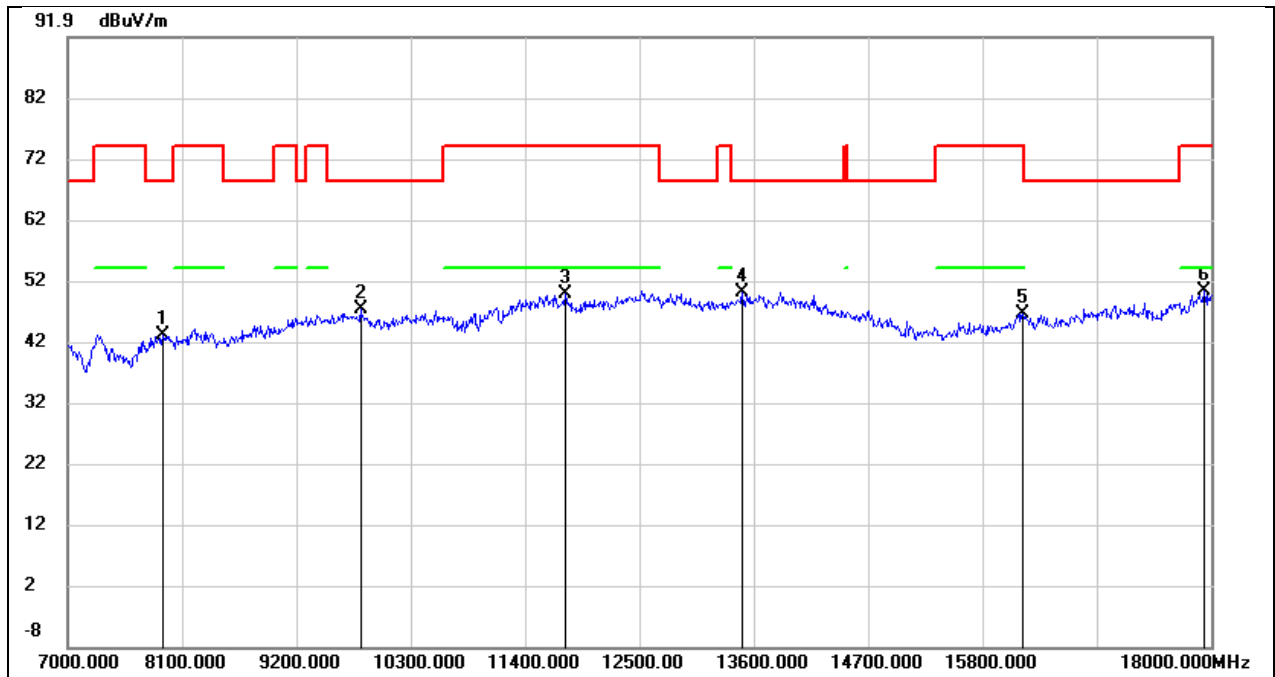


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7913.000	35.06	8.08	43.14	68.20	-25.06	peak
2	9816.000	33.65	13.63	47.28	68.20	-20.92	peak
3	11785.000	31.96	17.92	49.88	74.00	-24.12	peak
4	13490.000	27.68	22.40	50.08	68.20	-18.12	peak
5	16185.000	25.06	21.50	46.56	74.00	-27.44	peak
6	17934.000	22.47	27.90	50.37	74.00	-23.63	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 5V

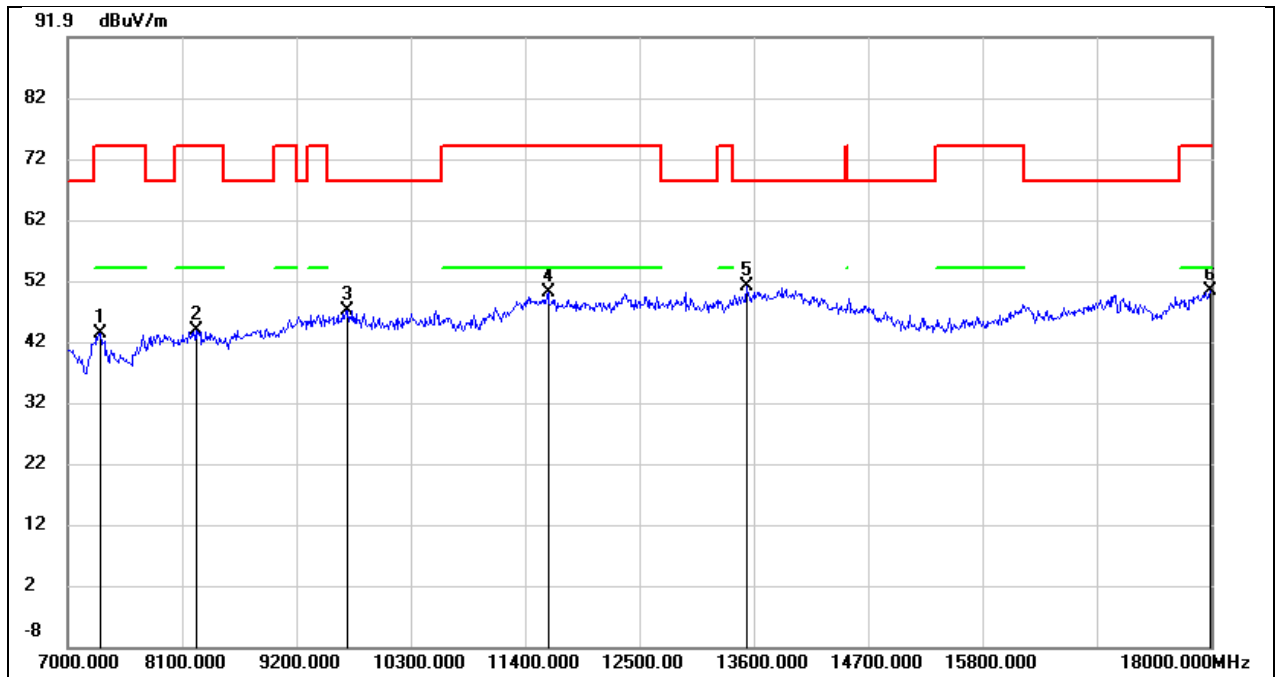


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.88	7.50	43.38	74.00	-30.62	peak
2	8232.000	35.45	8.44	43.89	74.00	-30.11	peak
3	9695.000	33.64	13.45	47.09	68.20	-21.11	peak
4	11620.000	32.04	17.88	49.92	74.00	-24.08	peak
5	13534.000	28.42	22.49	50.91	68.20	-17.29	peak
6	17989.000	21.76	28.40	50.16	74.00	-23.84	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 5V

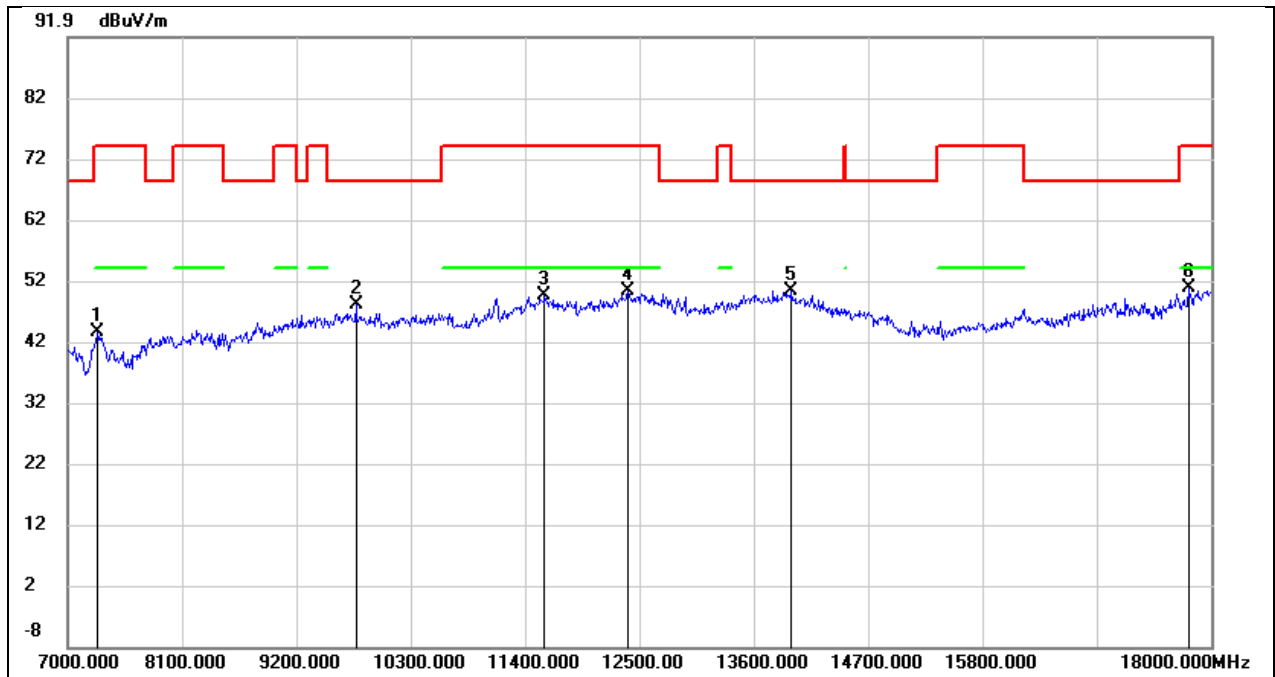


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	36.06	7.49	43.55	74.00	-30.45	peak
2	9772.000	34.47	13.61	48.08	68.20	-20.12	peak
3	11587.000	31.62	17.84	49.46	74.00	-24.54	peak
4	12390.000	30.54	19.62	50.16	74.00	-23.84	peak
5	13963.000	26.57	23.77	50.34	68.20	-17.86	peak
6	17780.000	24.20	26.50	50.70	74.00	-23.30	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 5V

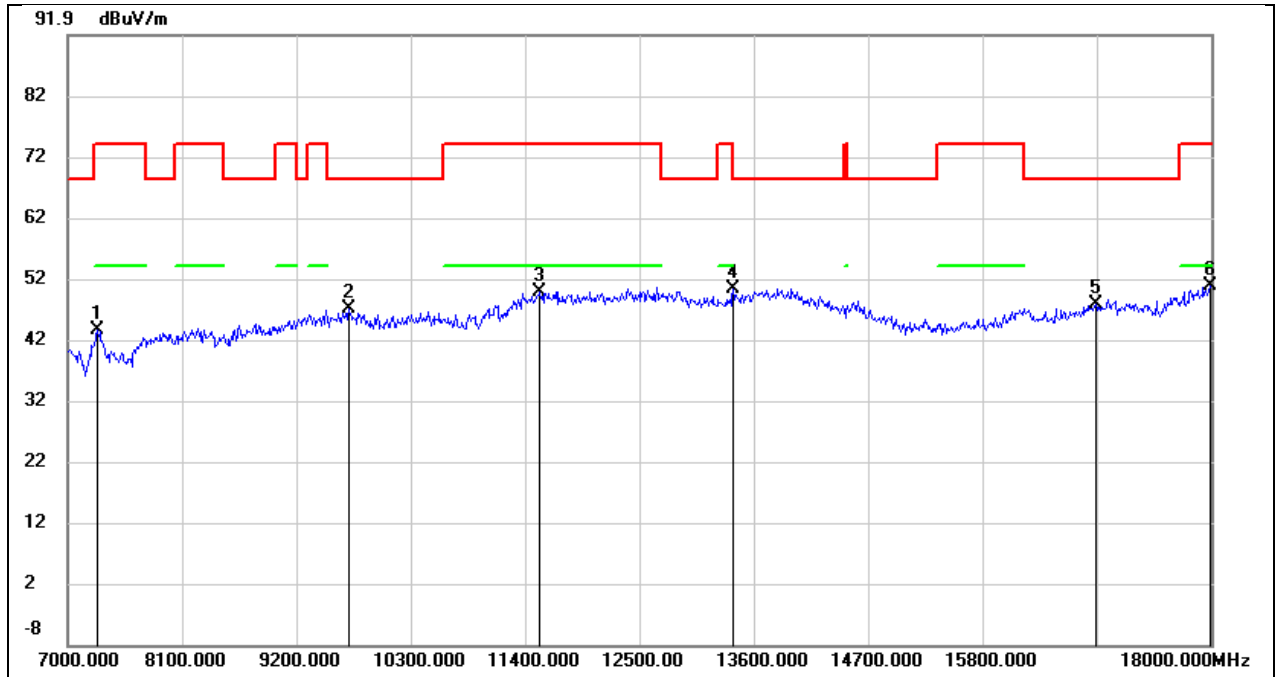


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	36.12	7.49	43.61	74.00	-30.39	peak
2	9706.000	33.53	13.49	47.02	68.20	-21.18	peak
3	11543.000	32.17	17.67	49.84	74.00	-24.16	peak
4	13402.000	28.25	22.04	50.29	68.20	-17.91	peak
5	16889.000	25.47	22.34	47.81	68.20	-20.39	peak
6	17989.000	22.45	28.40	50.85	74.00	-23.15	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 5V

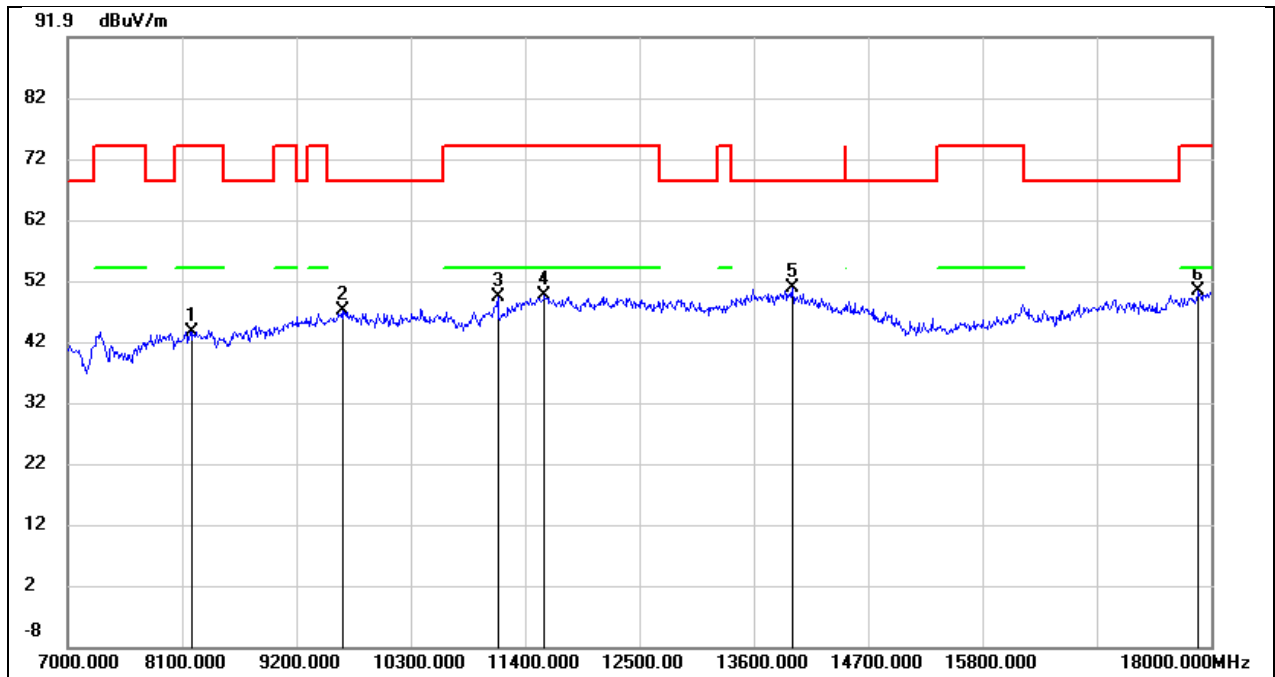


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8199.000	35.14	8.41	43.55	74.00	-30.45	peak
2	9640.000	33.68	13.36	47.04	68.20	-21.16	peak
3	11136.000	33.21	16.02	49.23	74.00	-24.77	peak
4	11587.000	31.80	17.84	49.64	74.00	-24.36	peak
5	13974.000	26.86	23.81	50.67	68.20	-17.53	peak
6	17879.000	22.98	27.39	50.37	74.00	-23.63	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 5V

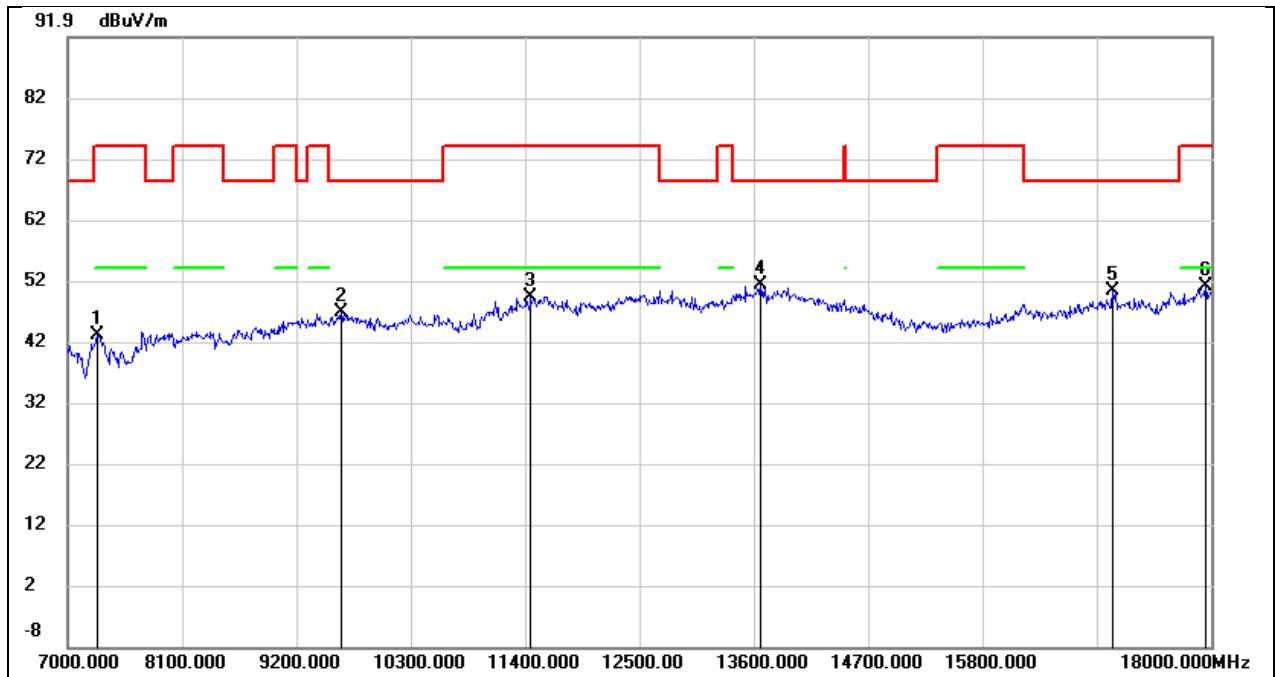


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	35.47	7.49	42.96	74.00	-31.04	peak
2	9629.000	33.56	13.33	46.89	68.20	-21.31	peak
3	11455.000	31.97	17.38	49.35	74.00	-24.65	peak
4	13666.000	28.56	22.78	51.34	68.20	-16.86	peak
5	17054.000	27.23	22.99	50.22	68.20	-17.98	peak
6	17945.000	22.97	28.01	50.98	74.00	-23.02	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 5V

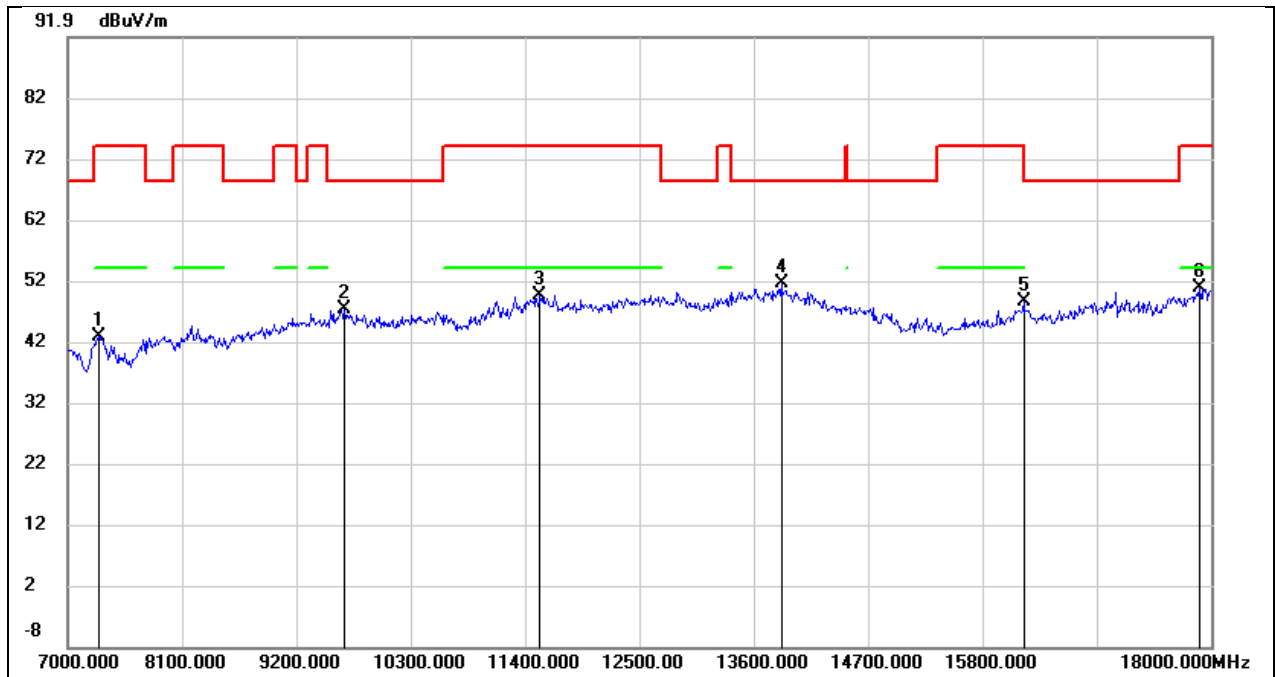


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.29	7.50	42.79	74.00	-31.21	peak
2	9662.000	33.79	13.39	47.18	68.20	-21.02	peak
3	11543.000	31.80	17.67	49.47	74.00	-24.53	peak
4	13864.000	28.11	23.39	51.50	68.20	-16.70	peak
5	16196.000	27.04	21.57	48.61	74.00	-25.39	peak
6	17890.000	23.19	27.49	50.68	74.00	-23.32	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 5V

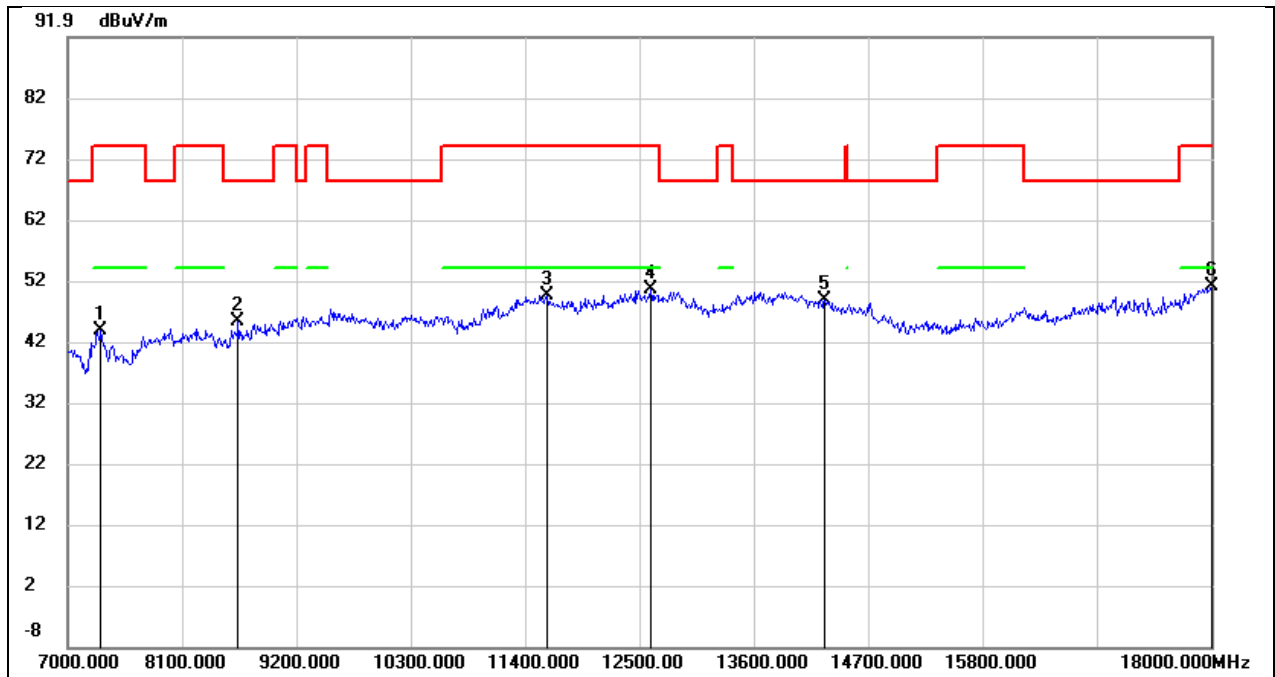


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	36.40	7.50	43.90	74.00	-30.10	peak
2	8639.000	36.28	9.03	45.31	68.20	-22.89	peak
3	11609.000	31.61	17.88	49.49	74.00	-24.51	peak
4	12610.000	30.56	19.92	50.48	74.00	-23.52	peak
5	14282.000	26.38	22.35	48.73	68.20	-19.47	peak
6	18000.000	22.44	28.51	50.95	74.00	-23.05	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 5V

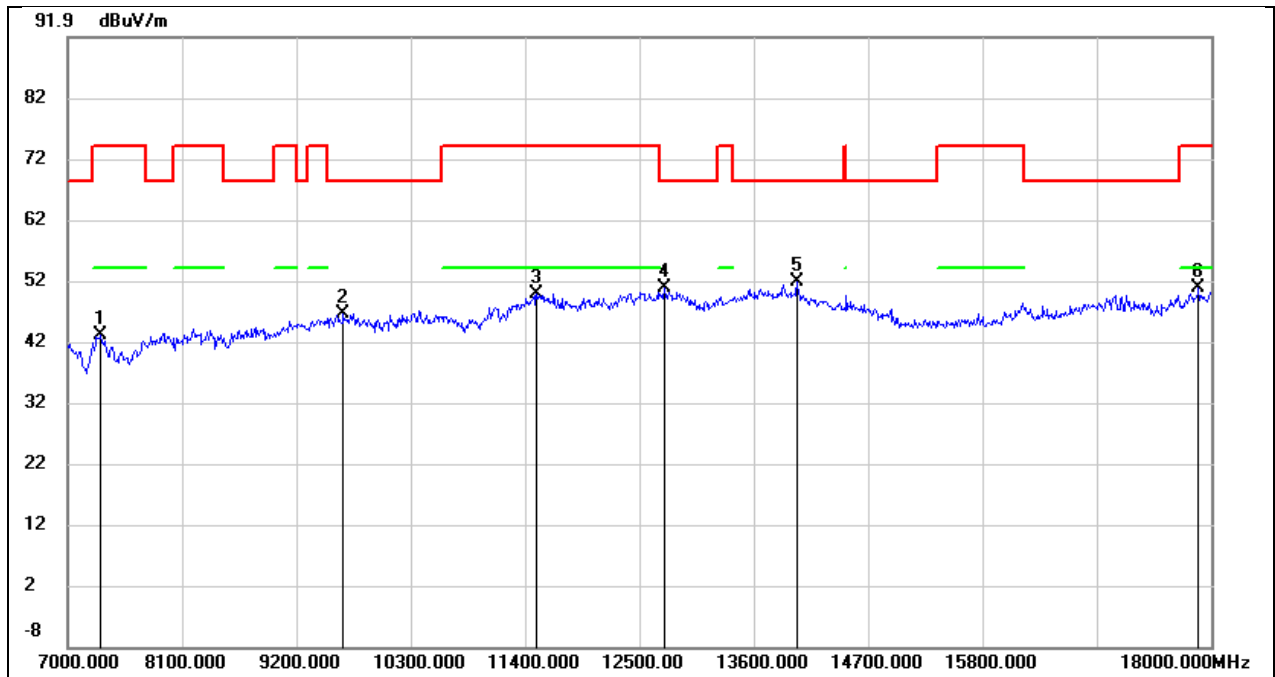


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.56	7.50	43.06	74.00	-30.94	peak
2	9651.000	33.08	13.38	46.46	68.20	-21.74	peak
3	11510.000	32.11	17.57	49.68	74.00	-24.32	peak
4	12742.000	30.30	20.36	50.66	68.20	-17.54	peak
5	14018.000	28.01	23.83	51.84	68.20	-16.36	peak
6	17879.000	23.51	27.39	50.90	74.00	-23.10	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 5V

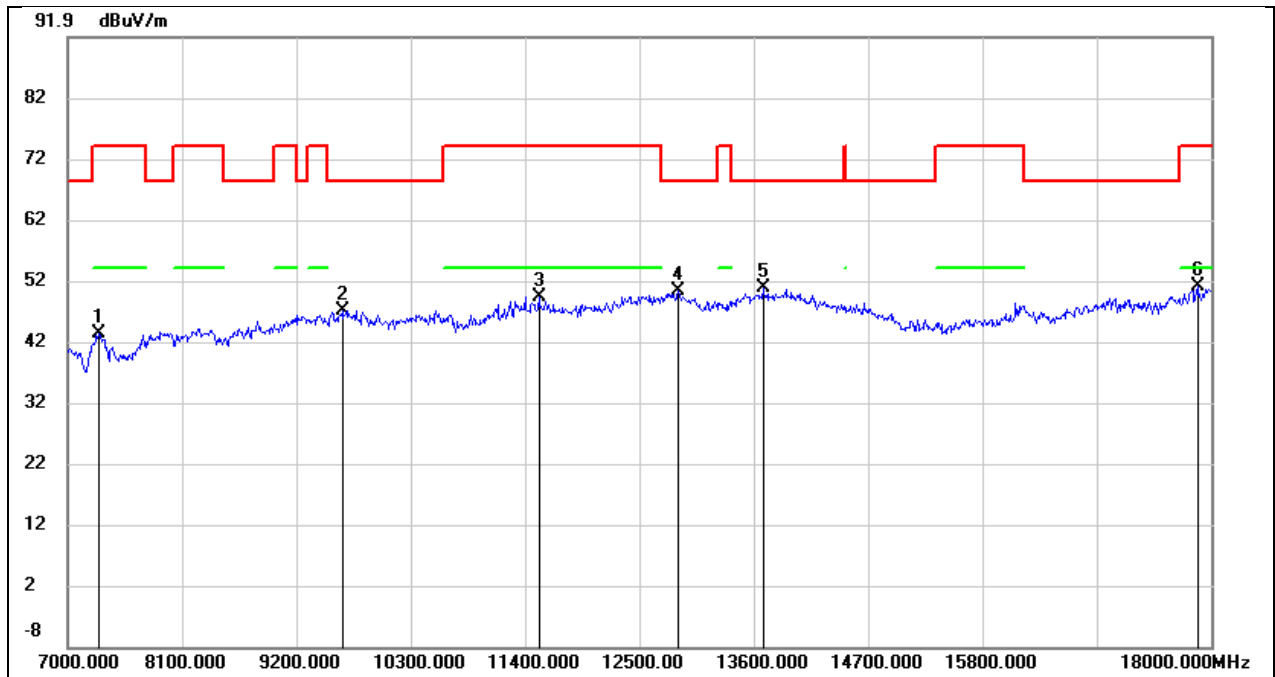


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.73	7.50	43.23	74.00	-30.77	peak
2	9640.000	33.73	13.36	47.09	68.20	-21.11	peak
3	11532.000	31.63	17.64	49.27	74.00	-24.73	peak
4	12874.000	29.77	20.50	50.27	68.20	-17.93	peak
5	13688.000	27.98	22.84	50.82	68.20	-17.38	peak
6	17868.000	23.70	27.29	50.99	74.00	-23.01	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 5V

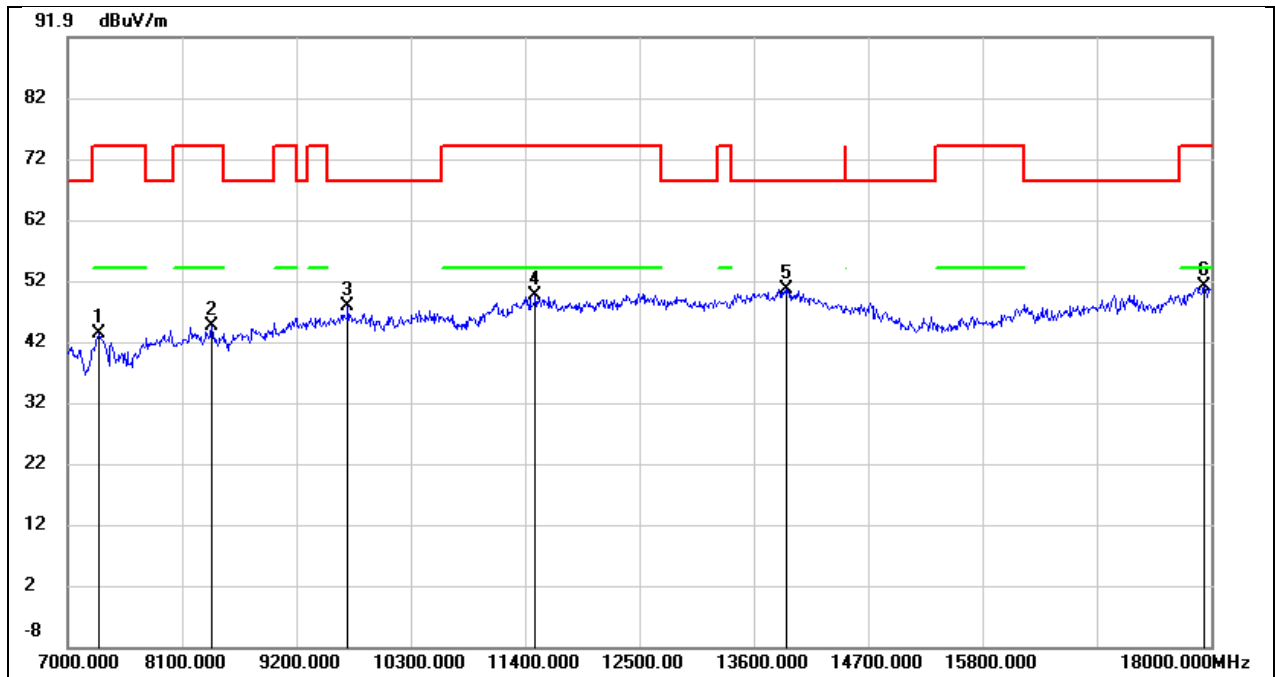


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.70	7.50	43.20	74.00	-30.80	peak
2	8386.000	35.93	8.57	44.50	74.00	-29.50	peak
3	9695.000	34.38	13.45	47.83	68.20	-20.37	peak
4	11499.000	31.98	17.53	49.51	74.00	-24.49	peak
5	13919.000	26.99	23.60	50.59	68.20	-17.61	peak
6	17934.000	23.04	27.90	50.94	74.00	-23.06	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 5V

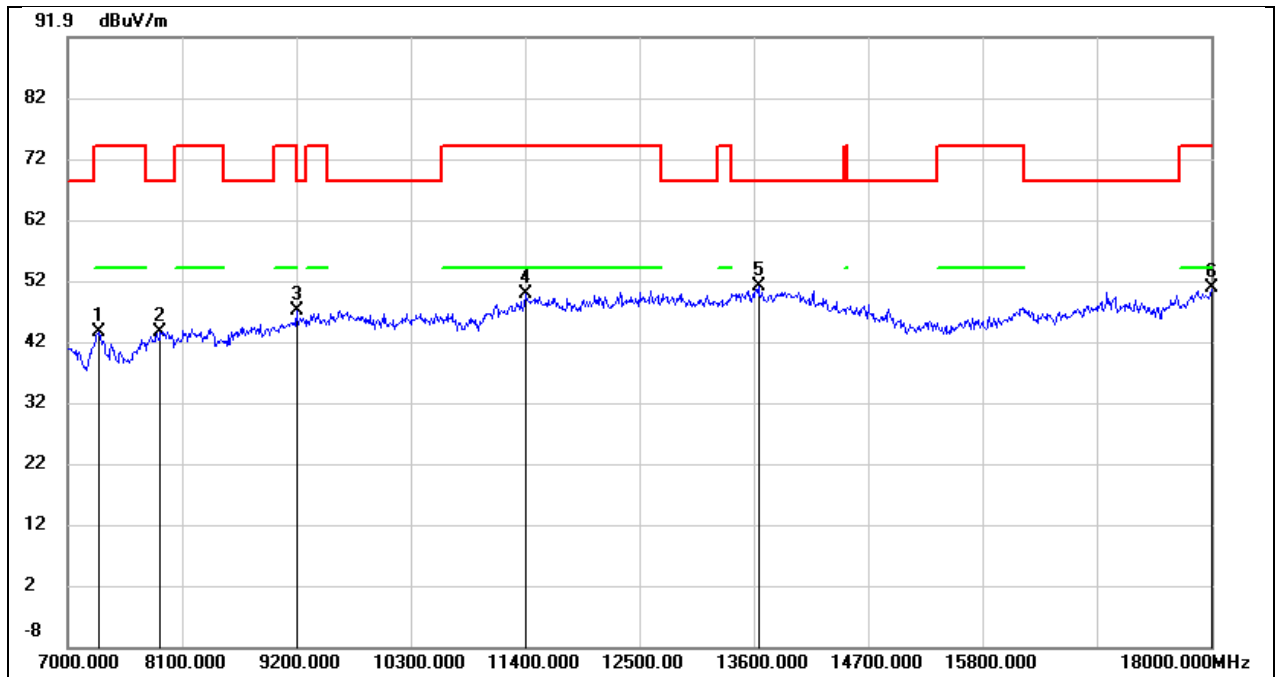


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.03	7.50	43.53	74.00	-30.47	peak
2	7891.000	35.58	8.05	43.63	68.20	-24.57	peak
3	9200.000	35.61	11.42	47.03	68.20	-21.17	peak
4	11400.000	32.49	17.20	49.69	74.00	-24.31	peak
5	13644.000	28.37	22.72	51.09	68.20	-17.11	peak
6	18000.000	22.15	28.51	50.66	74.00	-23.34	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 5V

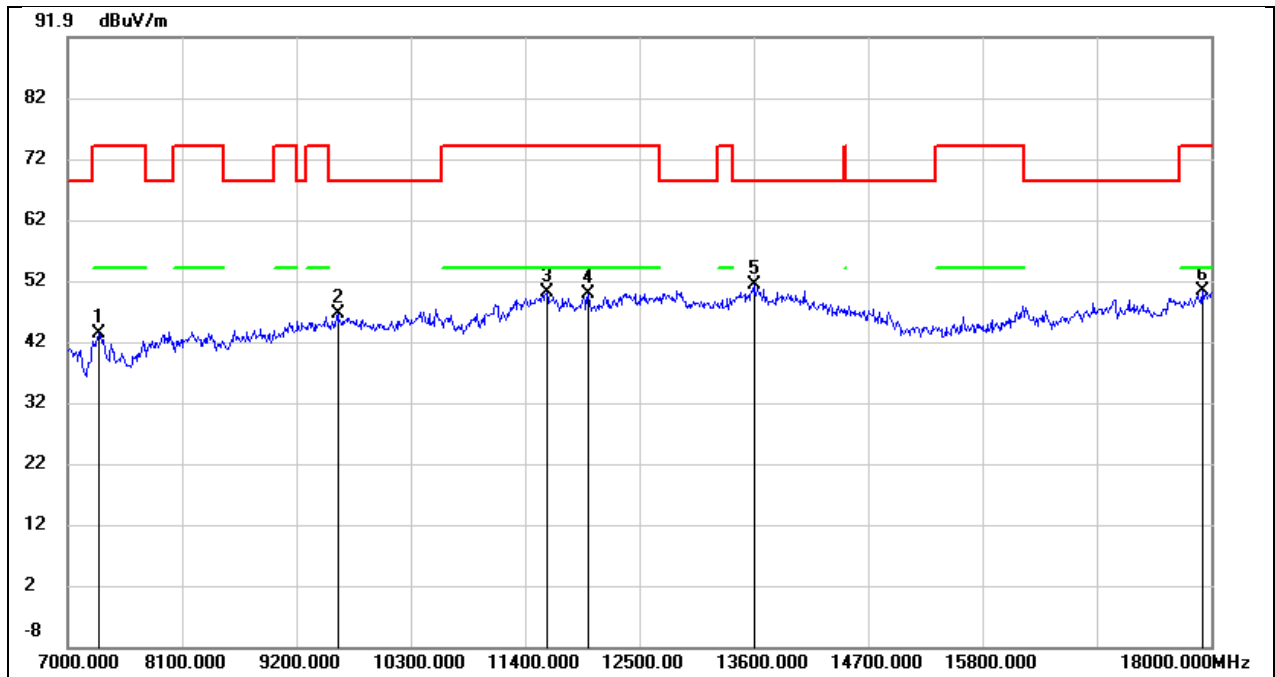


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.81	7.50	43.31	74.00	-30.69	peak
2	9596.000	33.24	13.26	46.50	68.20	-21.70	peak
3	11609.000	32.24	17.88	50.12	74.00	-23.88	peak
4	12005.000	31.14	18.62	49.76	74.00	-24.24	peak
5	13600.000	28.58	22.60	51.18	68.20	-17.02	peak
6	17912.000	22.56	27.70	50.26	74.00	-23.74	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 5V

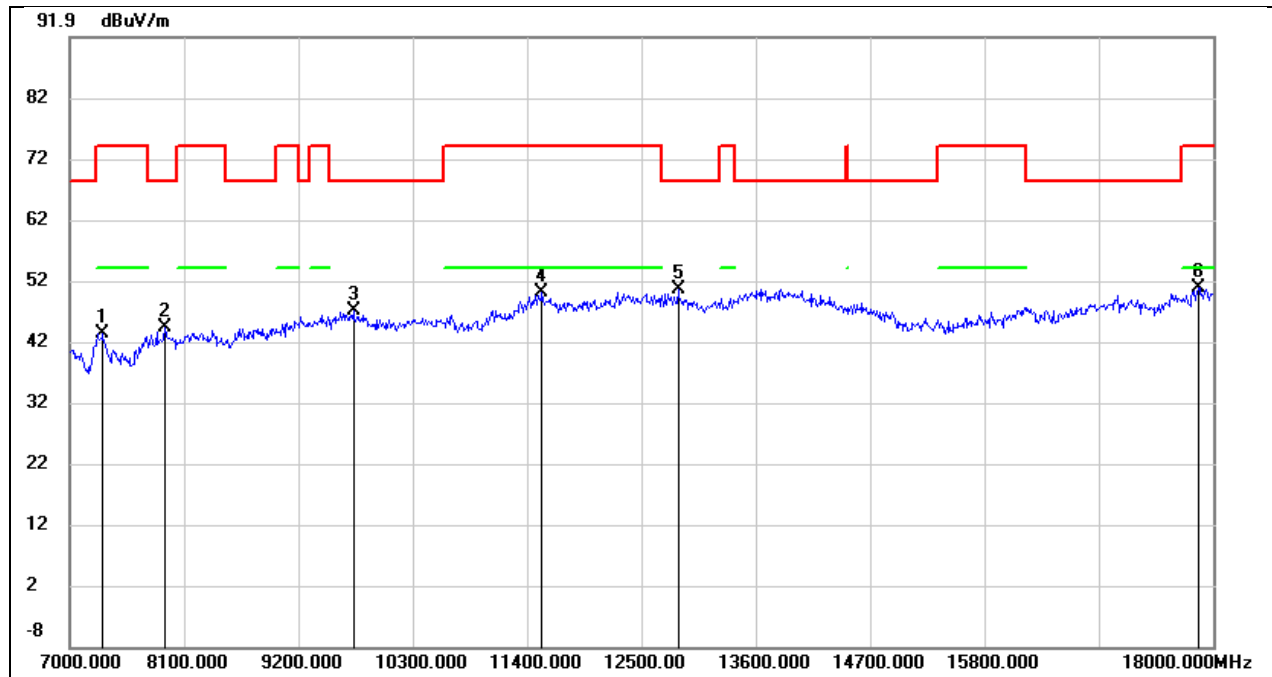


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.88	7.50	43.38	74.00	-30.62	peak
2	7913.000	36.08	8.08	44.16	68.20	-24.04	peak
3	9728.000	33.57	13.52	47.09	68.20	-21.11	peak
4	11543.000	32.24	17.67	49.91	74.00	-24.09	peak
5	12852.000	29.91	20.52	50.43	68.20	-17.77	peak
6	17857.000	23.72	27.18	50.90	74.00	-23.10	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 5V

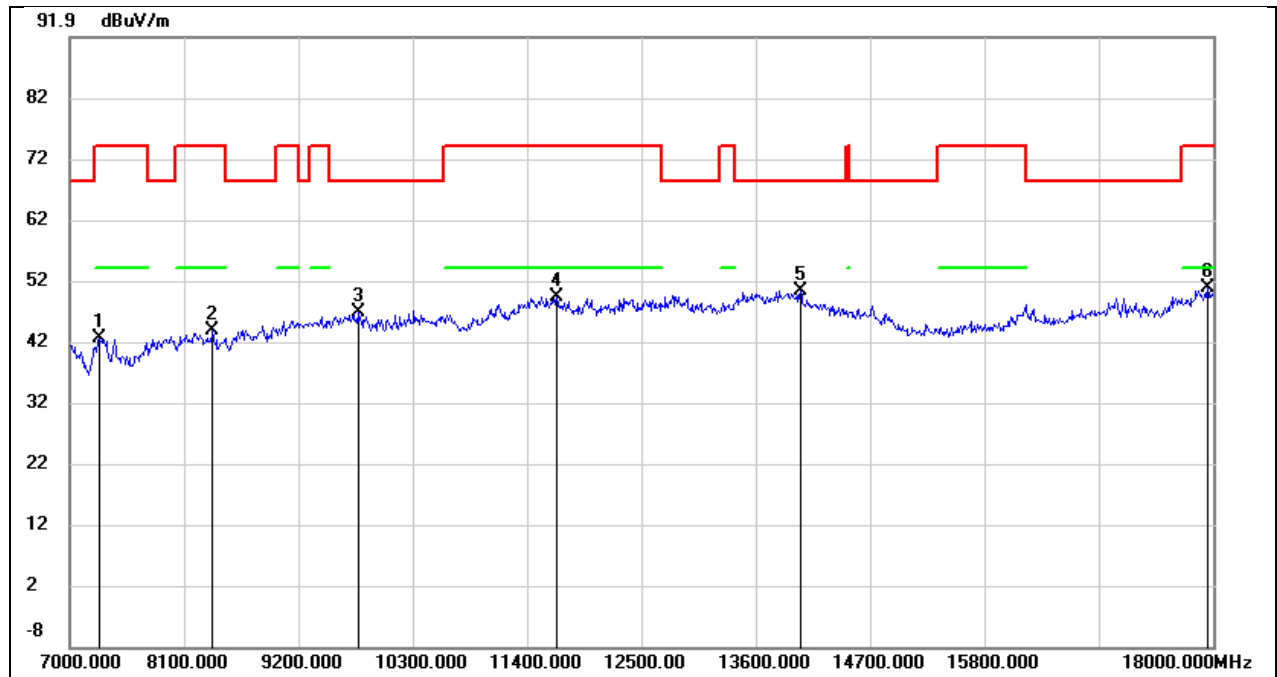


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	35.00	7.49	42.49	74.00	-31.51	peak
2	8375.000	35.24	8.55	43.79	74.00	-30.21	peak
3	9772.000	33.20	13.61	46.81	68.20	-21.39	peak
4	11686.000	31.46	17.91	49.37	74.00	-24.63	peak
5	14029.000	26.49	23.76	50.25	68.20	-17.95	peak
6	17945.000	22.66	28.01	50.67	74.00	-23.33	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 5V

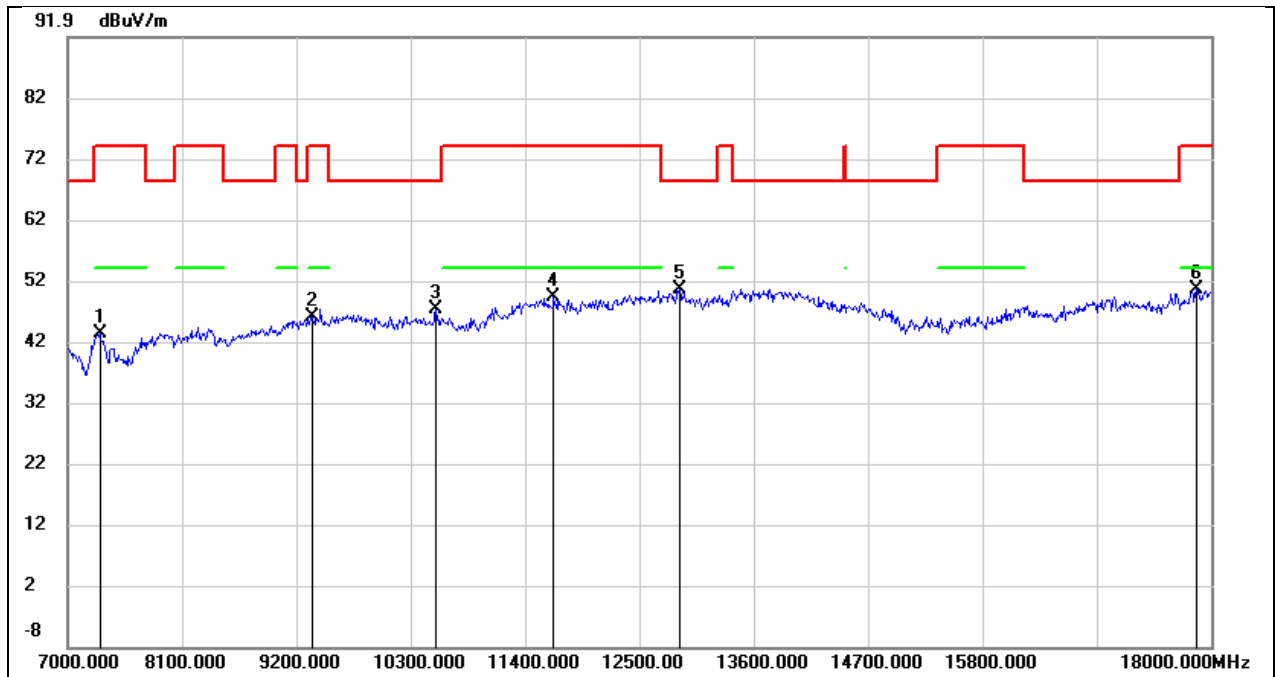


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.77	7.49	43.26	74.00	-30.74	peak
2	9354.000	34.26	11.89	46.15	74.00	-27.85	peak
3	10542.000	33.12	14.15	47.27	68.20	-20.93	peak
4	11675.000	31.46	17.90	49.36	74.00	-24.64	peak
5	12885.000	30.08	20.51	50.59	68.20	-17.61	peak
6	17857.000	23.39	27.18	50.57	74.00	-23.43	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 5V

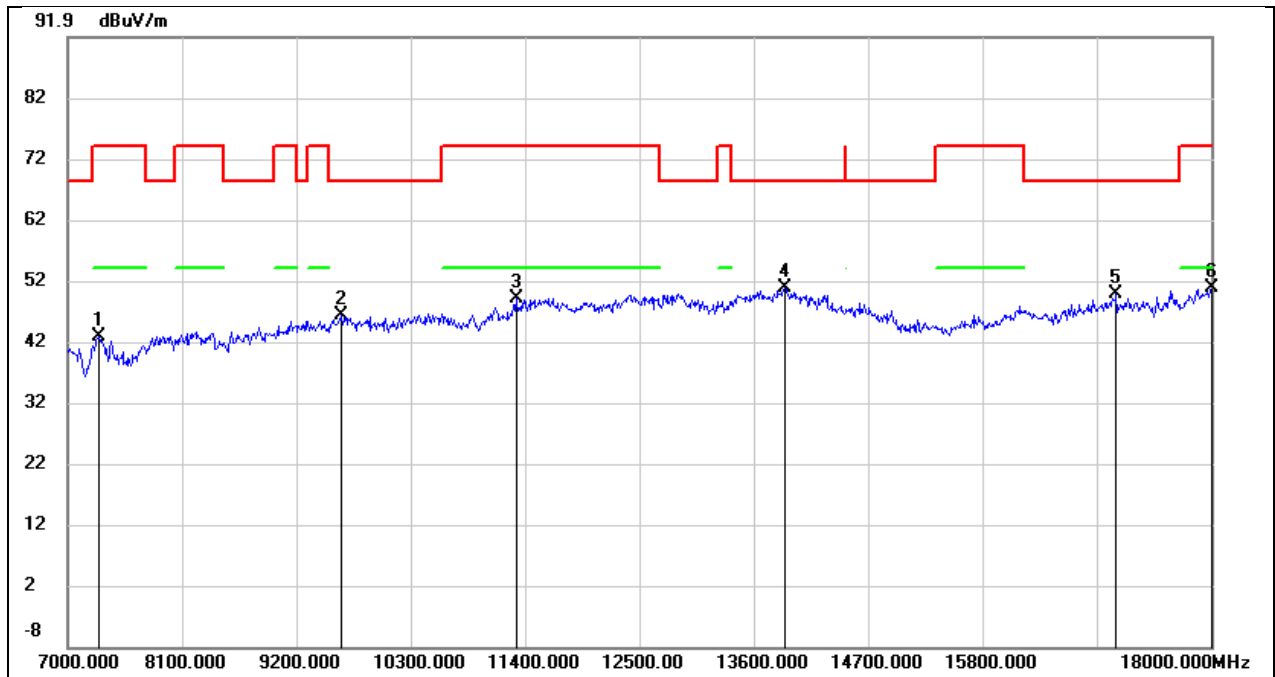


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	35.35	7.50	42.85	74.00	-31.15	peak
2	9629.000	32.91	13.33	46.24	68.20	-21.96	peak
3	11312.000	32.30	16.79	49.09	74.00	-24.91	peak
4	13897.000	27.15	23.51	50.66	68.20	-17.54	peak
5	17087.000	26.71	23.16	49.87	68.20	-18.33	peak
6	18000.000	22.17	28.51	50.68	74.00	-23.32	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 5V

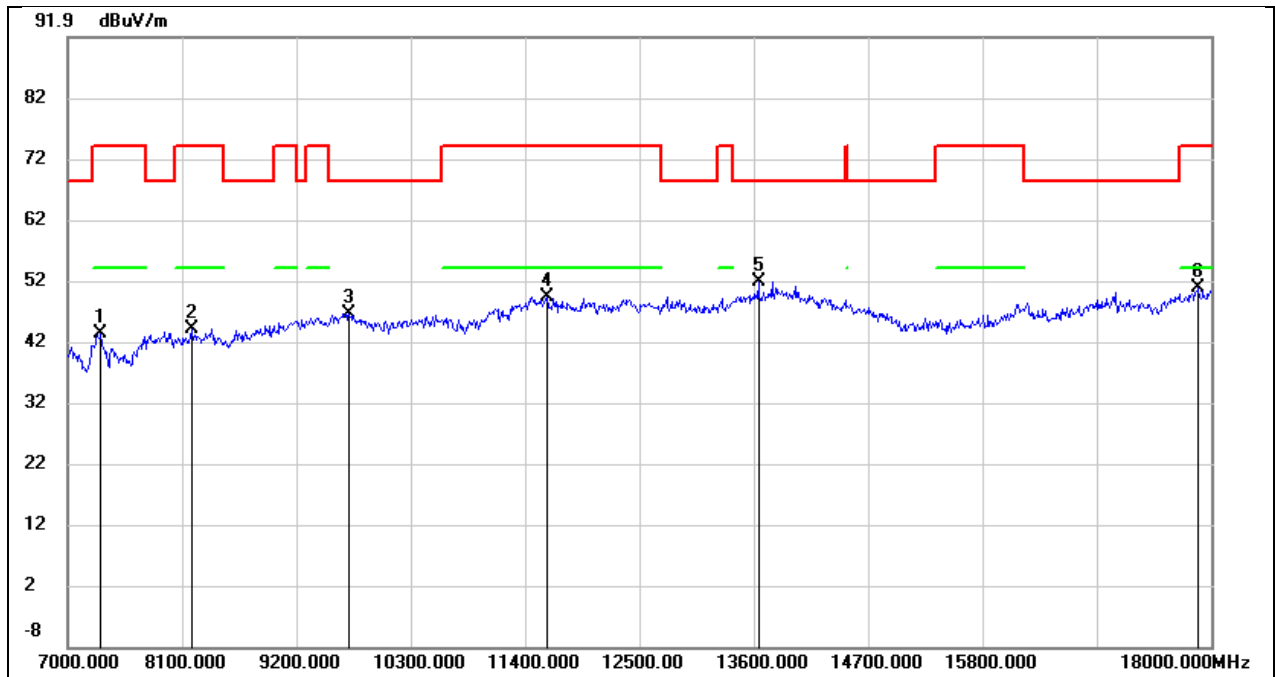

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.76	7.50	43.26	74.00	-30.74	peak
2	8188.000	35.73	8.40	44.13	74.00	-29.87	peak
3	9706.000	33.08	13.49	46.57	68.20	-21.63	peak
4	11609.000	31.45	17.88	49.33	74.00	-24.67	peak
5	13644.000	28.96	22.72	51.68	68.20	-16.52	peak
6	17879.000	23.35	27.39	50.74	74.00	-23.26	peak


Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 5V

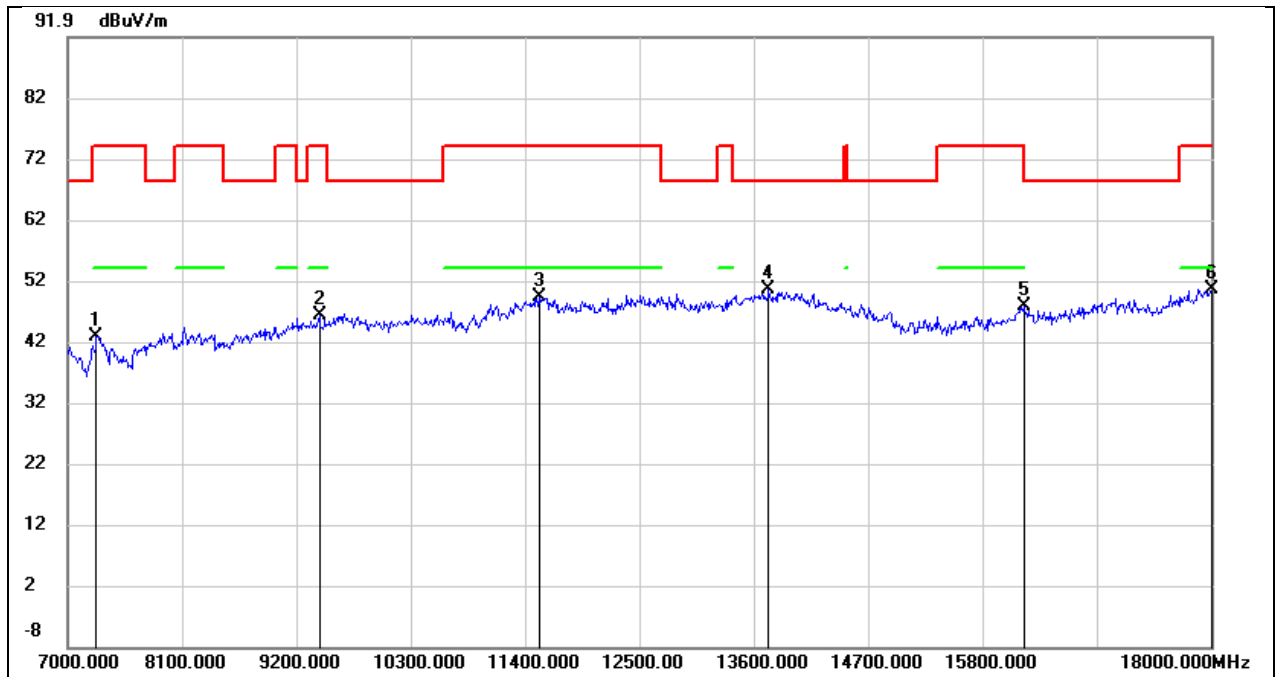

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7275.000	35.25	7.49	42.74	74.00	-31.26	peak
2	9420.000	34.23	12.16	46.39	74.00	-27.61	peak
3	11532.000	31.62	17.64	49.26	74.00	-24.74	peak
4	13743.000	27.49	22.99	50.48	68.20	-17.72	peak
5	16196.000	26.13	21.57	47.70	74.00	-26.30	peak
6	18000.000	22.12	28.51	50.63	74.00	-23.37	peak


8.7. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

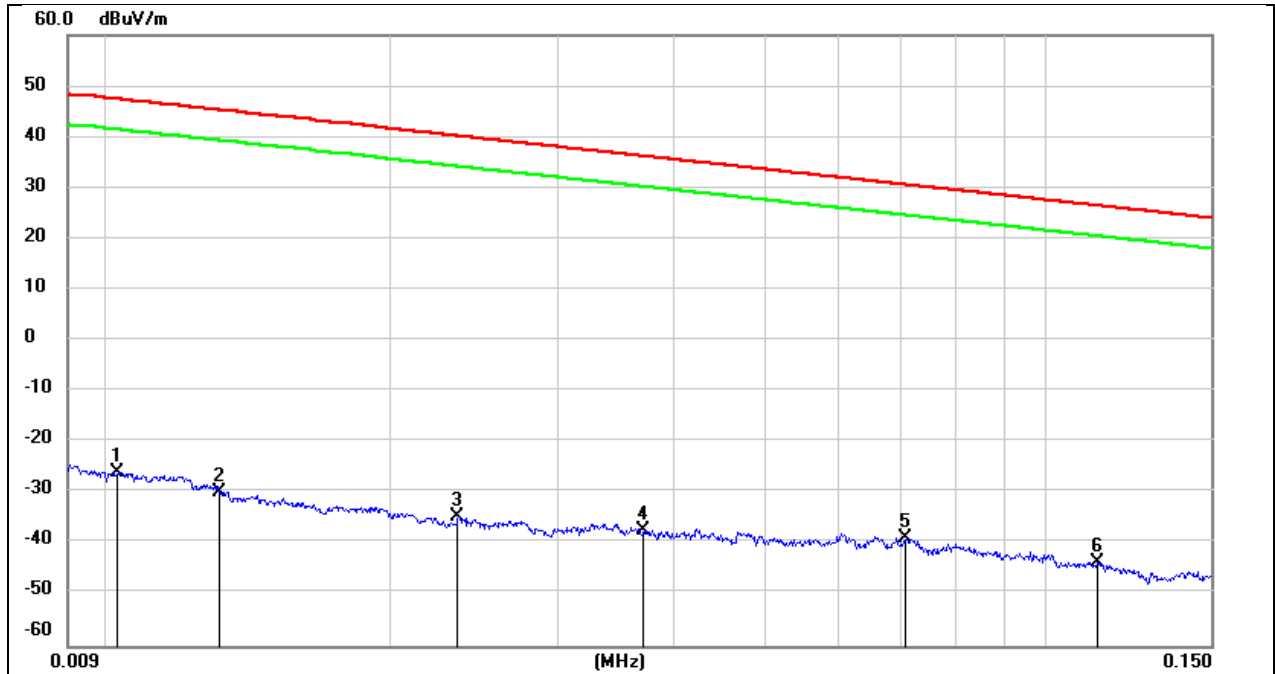


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0102	75.55	-101.40	-25.85	47.43	-77.35	-4.07	-73.28	peak
2	0.0131	71.47	-101.38	-29.91	45.25	-81.41	-6.25	-75.16	peak
3	0.0235	66.61	-101.36	-34.75	40.18	-86.25	-11.32	-74.93	peak
4	0.0371	64.06	-101.42	-37.36	36.21	-88.86	-15.29	-73.57	peak
5	0.0709	62.82	-101.57	-38.75	30.59	-90.25	-20.91	-69.34	peak
6	0.1136	58.03	-101.76	-43.73	26.50	-95.23	-25.00	-70.23	peak

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

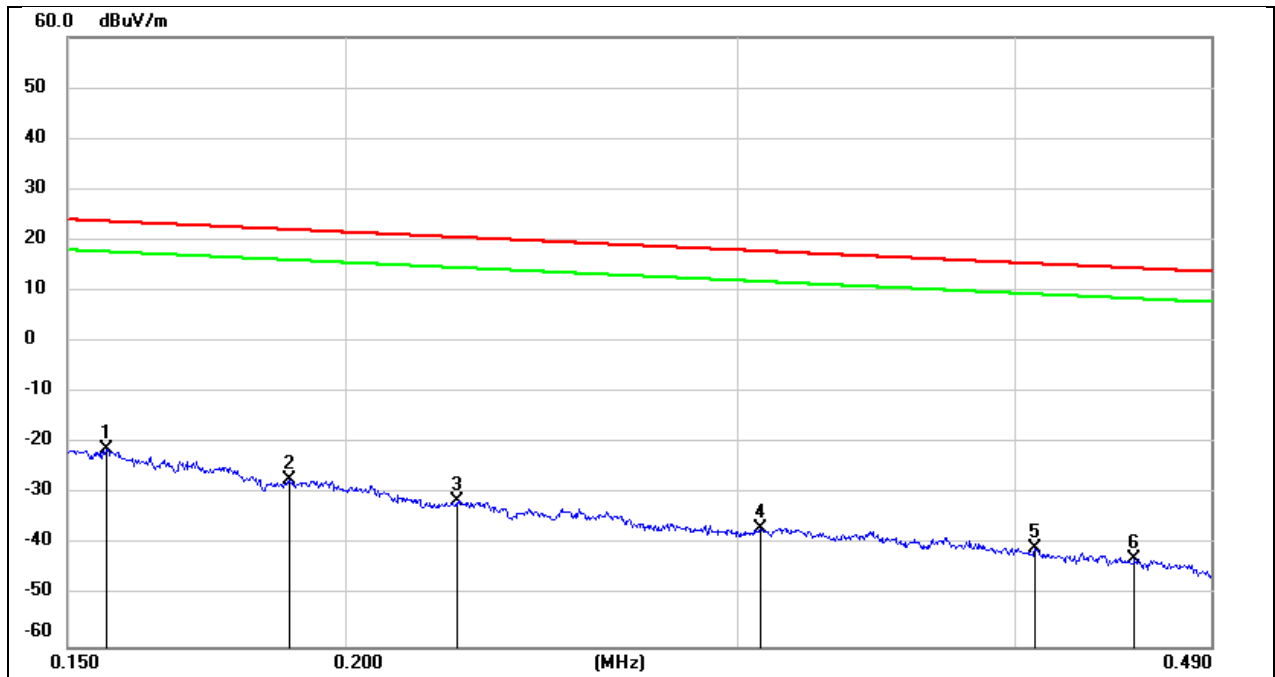

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1562	80.62	-101.65	-21.03	23.73	-72.53	-27.77	-44.76	peak
2	0.1887	74.49	-101.70	-27.21	22.09	-78.71	-29.41	-49.30	peak
3	0.2247	70.38	-101.75	-31.37	20.57	-82.87	-30.93	-51.94	peak
4	0.3074	65.02	-101.86	-36.84	17.85	-88.34	-33.65	-54.69	peak
5	0.4087	61.34	-101.97	-40.63	15.37	-92.13	-36.13	-56.00	peak
6	0.4526	59.18	-102.02	-42.84	14.49	-94.34	-37.01	-57.33	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

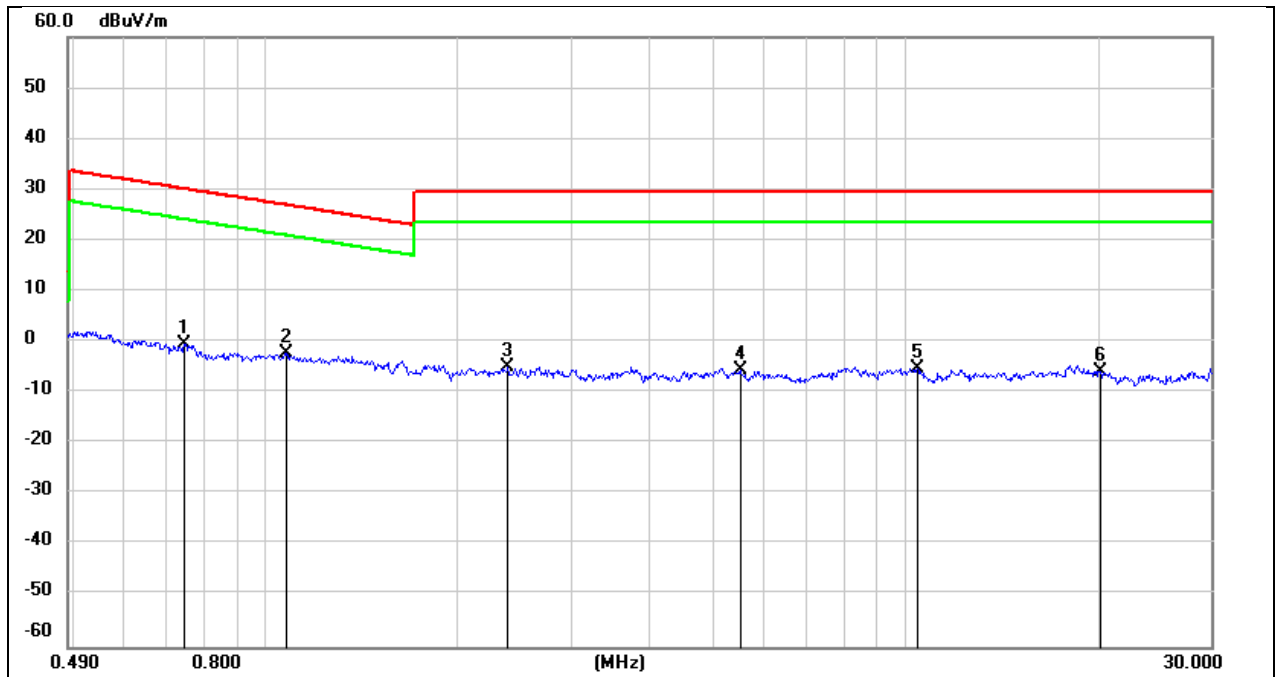

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.7455	61.66	-62.11	-0.45	30.15	-51.95	-21.35	-30.60	peak
2	1.0745	60.12	-62.23	-2.11	26.98	-53.61	-24.52	-29.09	peak
3	2.3887	56.65	-61.72	-5.07	29.54	-56.57	-21.96	-34.61	peak
4	5.5068	55.89	-61.42	-5.53	29.54	-57.03	-21.96	-35.07	peak
5	10.4349	55.65	-60.82	-5.17	29.54	-56.67	-21.96	-34.71	peak
6	20.1732	54.98	-60.82	-5.84	29.54	-57.34	-21.96	-35.38	peak


8.8. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

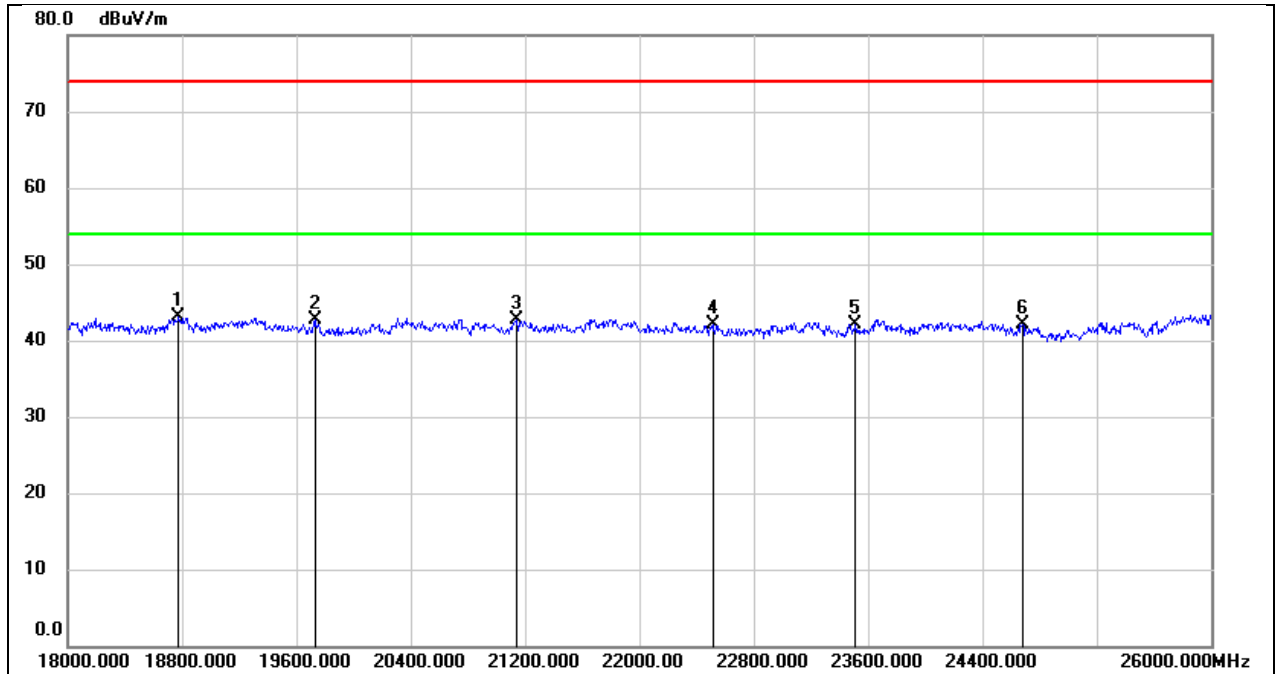

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18776.000	48.42	-5.40	43.02	74.00	-30.98	peak
2	19728.000	47.91	-5.28	42.63	74.00	-31.37	peak
3	21144.000	47.52	-4.82	42.70	74.00	-31.30	peak
4	22512.000	45.91	-3.87	42.04	74.00	-31.96	peak
5	23512.000	45.24	-3.15	42.09	74.00	-31.91	peak
6	24680.000	44.44	-2.31	42.13	74.00	-31.87	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5V

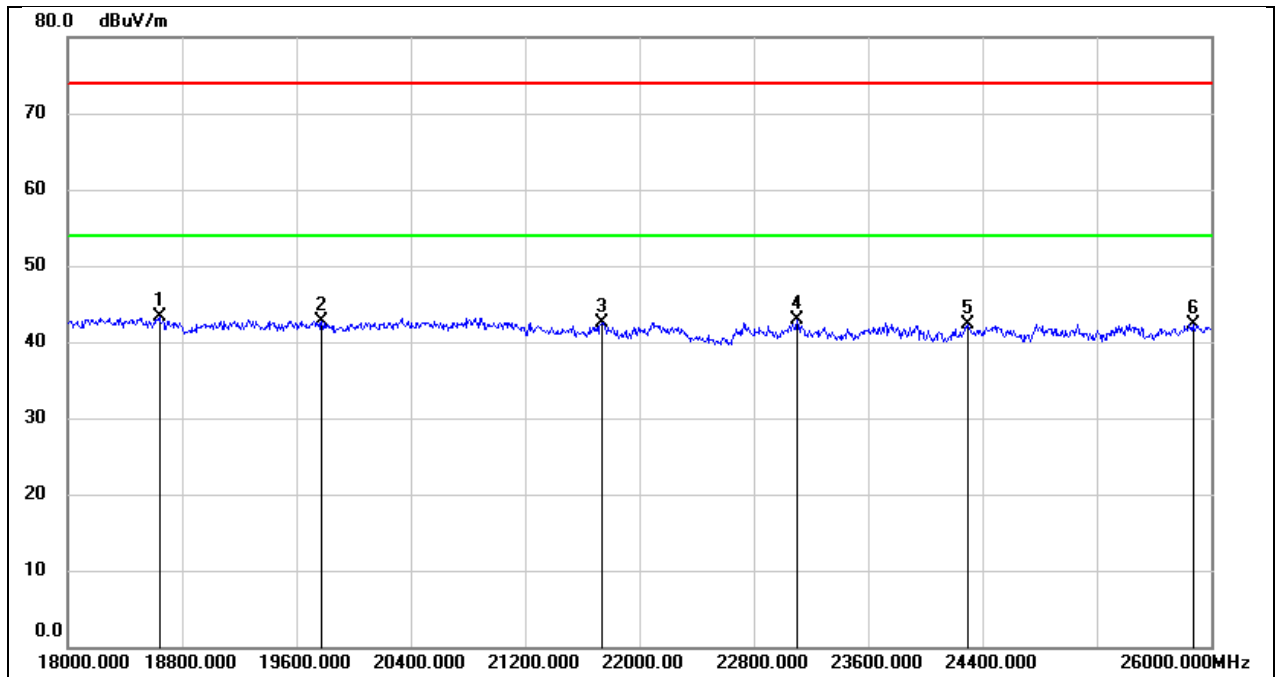

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18640.000	48.61	-5.35	43.26	74.00	-30.74	peak
2	19776.000	47.97	-5.28	42.69	74.00	-31.31	peak
3	21736.000	46.89	-4.35	42.54	74.00	-31.46	peak
4	23104.000	46.35	-3.41	42.94	74.00	-31.06	peak
5	24296.000	44.96	-2.73	42.23	74.00	-31.77	peak
6	25872.000	43.08	-0.83	42.25	74.00	-31.75	peak


8.9. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

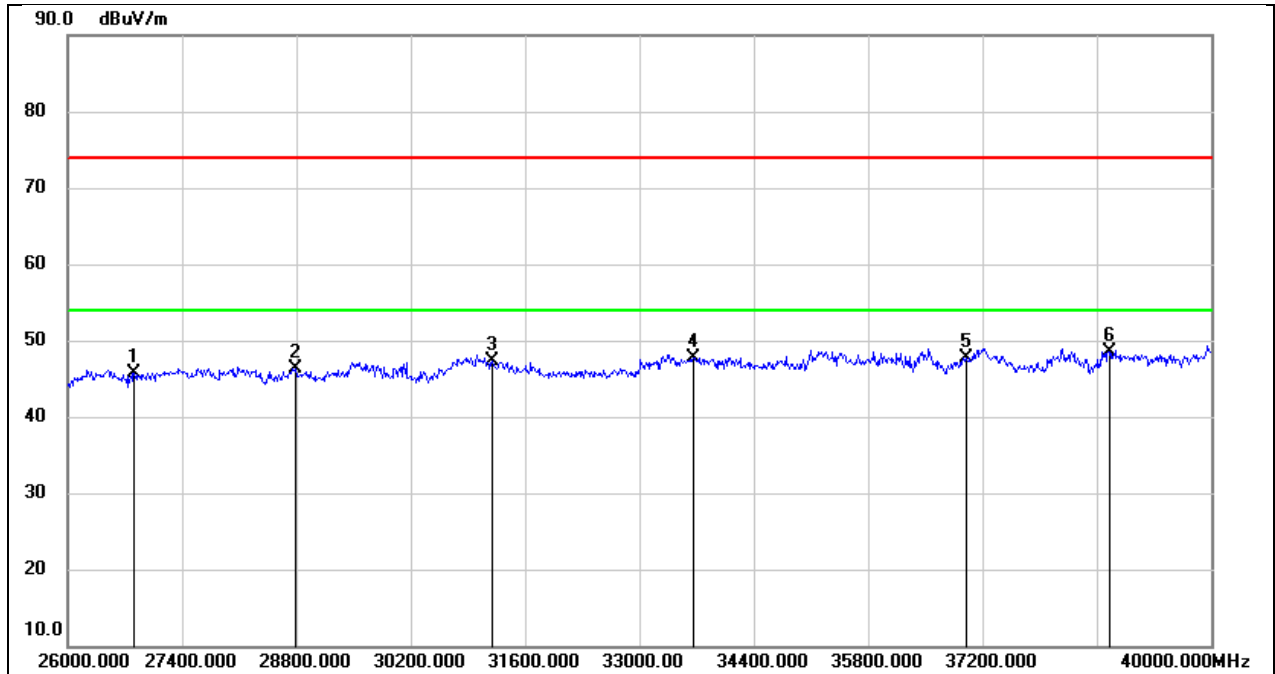

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26812.000	50.28	-4.62	45.66	74.00	-28.34	peak
2	28786.000	46.99	-0.64	46.35	74.00	-27.65	peak
3	31194.000	48.04	-0.80	47.24	74.00	-26.76	peak
4	33658.000	47.28	0.41	47.69	74.00	-26.31	peak
5	37004.000	44.49	3.22	47.71	74.00	-26.29	peak
6	38754.000	44.41	4.10	48.51	74.00	-25.49	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5V

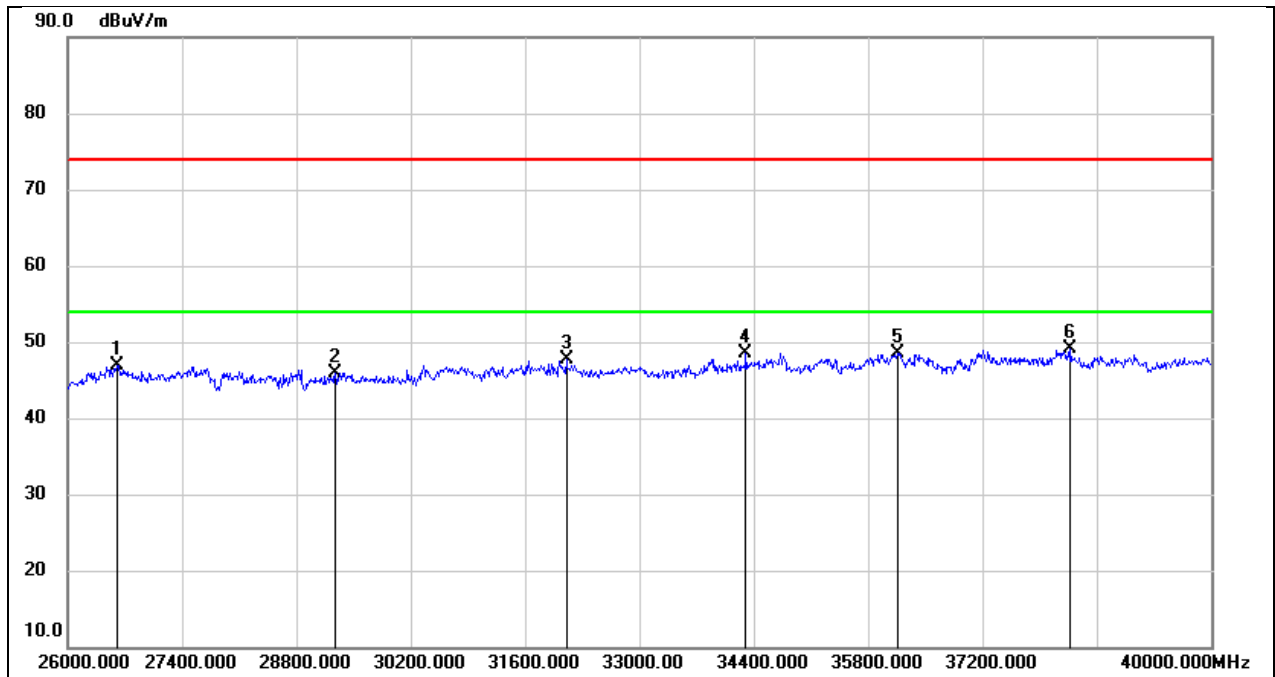

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26602.000	51.78	-4.80	46.98	74.00	-27.02	peak
2	29276.000	47.01	-1.01	46.00	74.00	-28.00	peak
3	32104.000	49.49	-1.75	47.74	74.00	-26.26	peak
4	34302.000	47.45	1.10	48.55	74.00	-25.45	peak
5	36164.000	45.06	3.52	48.58	74.00	-25.42	peak
6	38278.000	45.32	3.82	49.14	74.00	-24.86	peak


8.10. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC5V

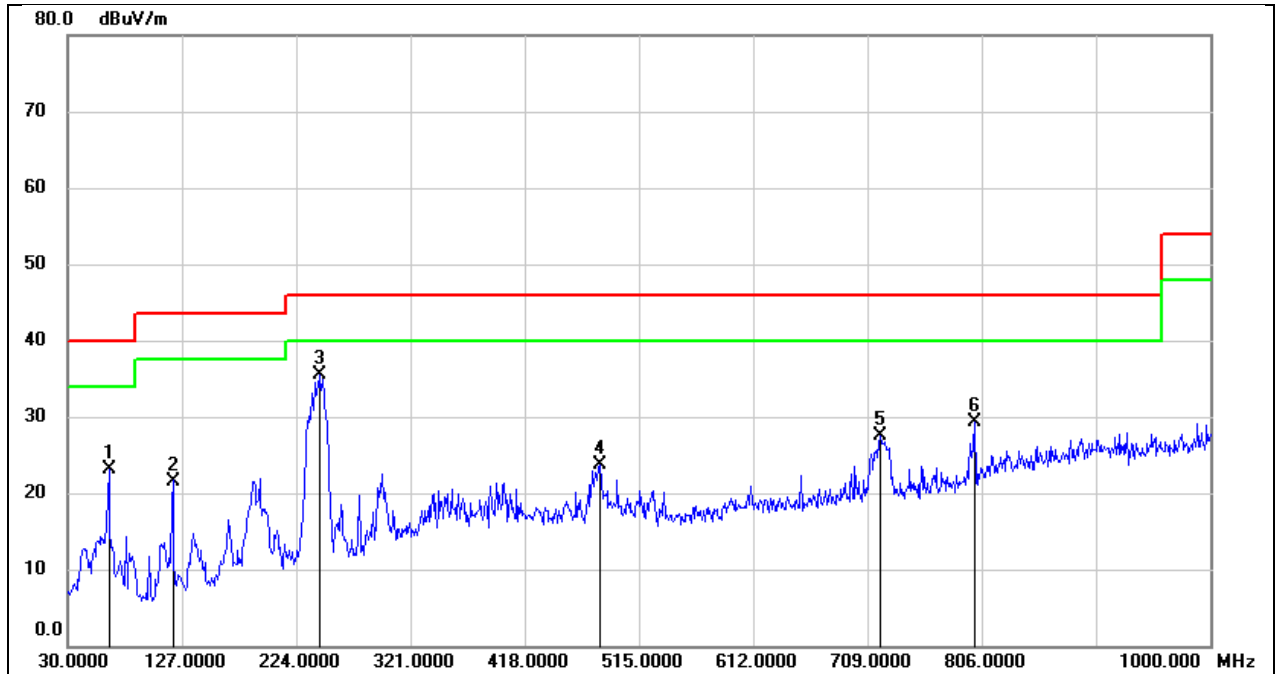

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	64.9200	38.32	-15.12	23.20	40.00	-16.80	QP
2	119.2400	36.37	-14.77	21.60	43.50	-21.90	QP
3	244.3700	49.83	-14.27	35.56	46.00	-10.44	QP
4	482.0200	31.64	-7.85	23.79	46.00	-22.21	QP
5	719.6700	31.49	-3.95	27.54	46.00	-18.46	QP
6	800.1800	31.89	-2.62	29.27	46.00	-16.73	QP

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC5V

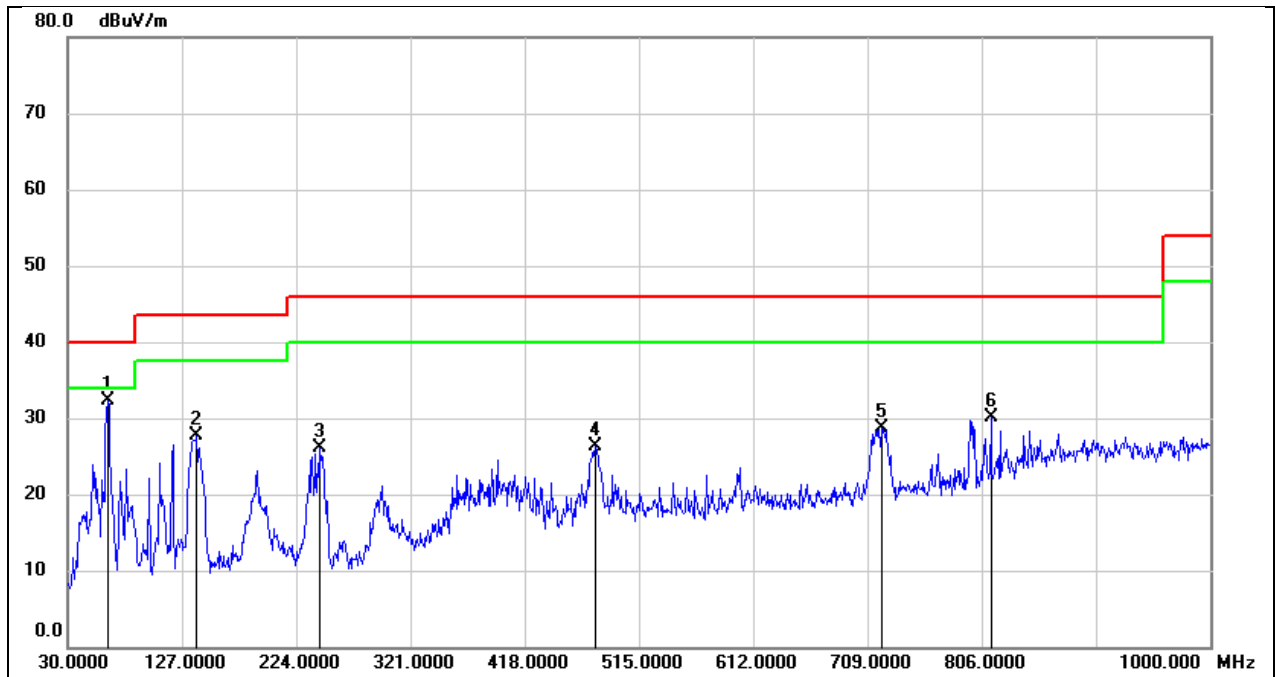

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	63.9500	47.43	-15.07	32.36	40.00	-7.64	QP
2	139.6100	41.67	-14.00	27.67	43.50	-15.83	QP
3	244.3700	40.42	-14.27	26.15	46.00	-19.85	QP
4	478.1400	34.15	-7.88	26.27	46.00	-19.73	QP
5	720.6400	32.72	-3.94	28.78	46.00	-17.22	QP
6	813.7600	32.40	-2.26	30.14	46.00	-15.86	QP

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

*Decreases with the logarithm of the frequency.


TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2020. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

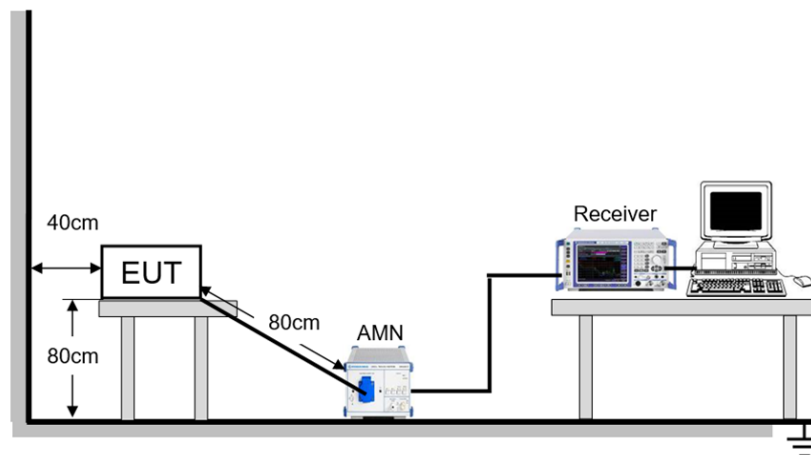

TEST ENVIRONMENT


Temperature	23.1°C	Relative Humidity	57%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	September 22, 2025	Test By	Deacon Tan
-----------	--------------------	---------	------------

TEST RESULTS

Test Mode:	802.11a20	Frequency(MHz):	5180
Line:	Line		

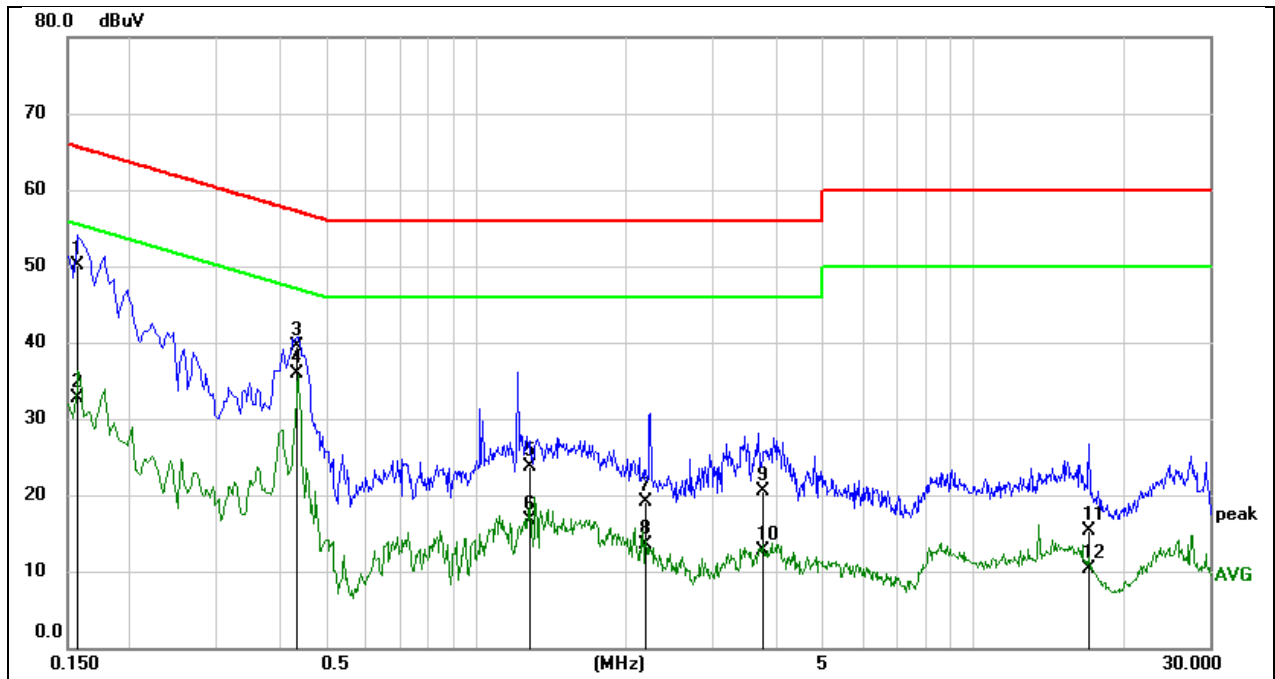


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1578	40.35	9.72	50.07	65.58	-15.51	QP
2	0.1578	23.05	9.72	32.77	55.58	-22.81	AVG
3	0.4368	29.85	9.64	39.49	57.12	-17.63	QP
4	0.4368	26.18	9.64	35.82	47.12	-11.30	AVG
5	1.2827	14.04	9.66	23.70	56.00	-32.30	QP
6	1.2827	7.11	9.66	16.77	46.00	-29.23	AVG
7	2.1913	9.40	9.74	19.14	56.00	-36.86	QP
8	2.1913	3.86	9.74	13.60	46.00	-32.40	AVG
9	3.7708	10.87	9.73	20.60	56.00	-35.40	QP
10	3.7708	3.00	9.73	12.73	46.00	-33.27	AVG
11	17.1089	5.65	9.74	15.39	60.00	-44.61	QP
12	17.1089	0.63	9.74	10.37	50.00	-39.63	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11a20	Frequency(MHz):	5180
Line:	Neutral		

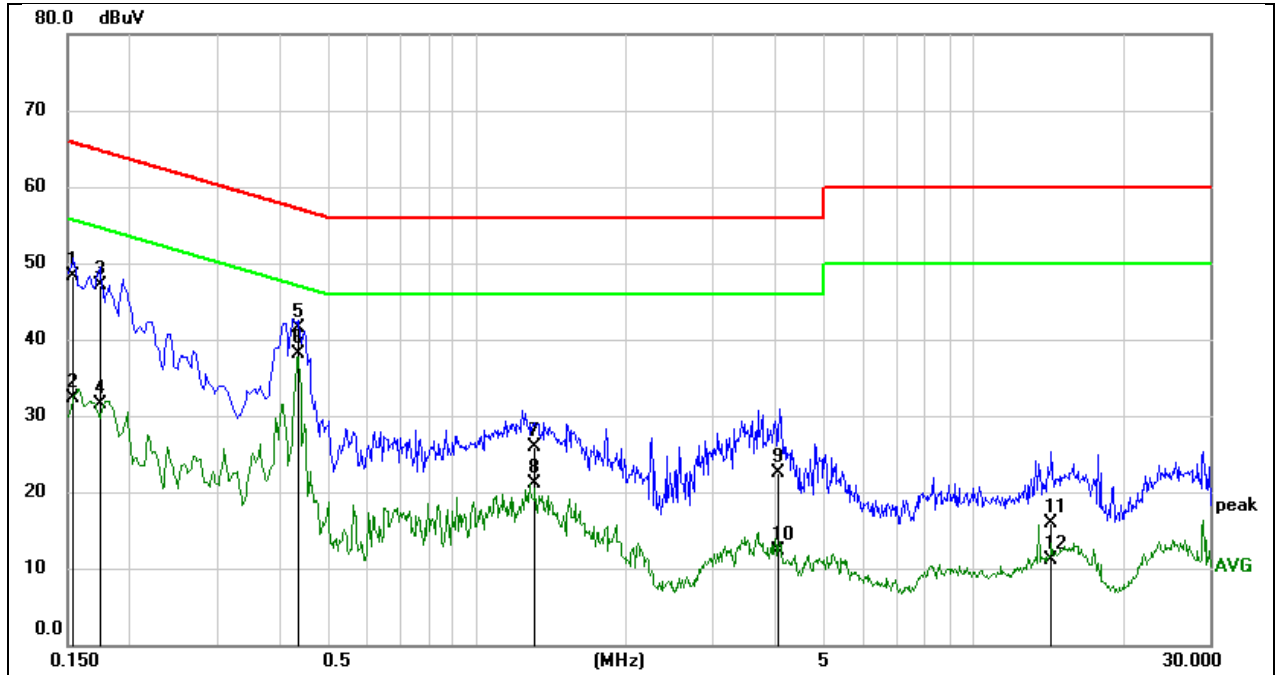

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1543	38.64	9.64	48.28	65.77	-17.49	QP
2	0.1543	22.67	9.64	32.31	55.77	-23.46	AVG
3	0.1751	37.47	9.64	47.11	64.71	-17.60	QP
4	0.1751	21.94	9.64	31.58	54.71	-23.13	AVG
5	0.4376	31.88	9.64	41.52	57.11	-15.59	QP
6	0.4376	28.44	9.64	38.08	47.11	-9.03	AVG
7	1.3117	16.29	9.63	25.92	56.00	-30.08	QP
8	1.3117	11.38	9.63	21.01	46.00	-24.99	AVG
9	4.0614	12.85	9.63	22.48	56.00	-33.52	QP
10	4.0614	2.77	9.63	12.40	46.00	-33.60	AVG
11	14.4468	6.12	9.74	15.86	60.00	-44.14	QP
12	14.4468	1.36	9.74	11.10	50.00	-38.90	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA

11.1. APPENDIX A: EMISSION BANDWIDTH


11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Verdict
11A	Ant1	5180	23.80	5168.16	5191.96	PASS
	Ant2	5180	24.28	5167.92	5192.20	PASS
	Ant1	5200	24.16	5187.60	5211.76	PASS
	Ant2	5200	24.84	5188.00	5212.84	PASS
	Ant1	5240	19.76	5230.08	5249.84	PASS
	Ant2	5240	20.00	5229.96	5249.96	PASS
	Ant1	5260	25.12	5248.00	5273.12	PASS
	Ant2	5260	24.32	5248.84	5273.16	PASS
	Ant1	5280	25.04	5267.44	5292.48	PASS
	Ant2	5280	24.72	5267.72	5292.44	PASS
	Ant1	5320	25.80	5308.04	5333.84	PASS
	Ant2	5320	24.96	5307.52	5332.48	PASS
	Ant1	5500	24.56	5487.64	5512.20	PASS
	Ant2	5500	24.20	5488.28	5512.48	PASS
	Ant1	5580	25.52	5567.52	5593.04	PASS
	Ant2	5580	23.36	5568.36	5591.72	PASS
	Ant1	5700	25.08	5687.48	5712.56	PASS
	Ant2	5700	26.80	5685.92	5712.72	PASS
	Ant1	5720	25.20	5707.00	5732.20	PASS
	Ant2	5720	23.32	5707.84	5731.16	PASS
	Ant1	5720 UNII-2C	18	5707.00	5725	PASS
	Ant2	5720 UNII-2C	17.16	5707.84	5725	PASS
	Ant1	5720 UNII-3	7.2	5725	5732.20	PASS
	Ant2	5720 UNII-3	6.16	5725	5731.16	PASS
	Ant1	5745	23.84	5733.08	5756.92	PASS
	Ant2	5745	23.88	5732.76	5756.64	PASS
	Ant1	5785	23.32	5772.80	5796.12	PASS
	Ant2	5785	24.04	5773.24	5797.28	PASS
	Ant1	5825	25.40	5813.32	5838.72	PASS
	Ant2	5825	23.72	5813.28	5837.00	PASS
11N20MIMO	Ant1	5180	26.12	5167.92	5194.04	PASS
	Ant2	5180	24.12	5168.20	5192.32	PASS
	Ant1	5200	25.28	5186.80	5212.08	PASS
	Ant2	5200	23.92	5188.20	5212.12	PASS
	Ant1	5240	20.16	5229.96	5250.12	PASS
	Ant2	5240	20.32	5229.92	5250.24	PASS
	Ant1	5260	24.76	5248.00	5272.76	PASS
	Ant2	5260	23.88	5248.00	5271.88	PASS
	Ant1	5280	25.20	5267.72	5292.92	PASS
	Ant2	5280	24.04	5267.88	5291.92	PASS
	Ant1	5320	25.76	5307.00	5332.76	PASS
	Ant2	5320	25.40	5306.84	5332.24	PASS
	Ant1	5500	25.64	5487.44	5513.08	PASS
	Ant2	5500	23.40	5487.88	5511.28	PASS
	Ant1	5580	27.60	5567.32	5594.92	PASS
	Ant2	5580	23.64	5567.84	5591.48	PASS
	Ant1	5700	25.40	5687.72	5713.12	PASS
	Ant2	5700	23.92	5687.88	5711.80	PASS
	Ant1	5720	26.28	5706.84	5733.12	PASS
	Ant2	5720	23.48	5707.96	5731.44	PASS
	Ant1	5720 UNII-2C	18.16	5706.84	5725	PASS
	Ant2	5720 UNII-2C	17.04	5707.96	5725	PASS


	Ant1	5720_UNII-3	8.12	5725	5733.12	PASS
	Ant2	5720_UNII-3	6.44	5725	5731.44	PASS
	Ant1	5745	25.40	5732.60	5758.00	PASS
	Ant2	5745	24.64	5733.44	5758.08	PASS
	Ant1	5785	25.12	5772.72	5797.84	PASS
	Ant2	5785	24.64	5772.72	5797.36	PASS
	Ant1	5825	26.36	5811.88	5838.24	PASS
	Ant2	5825	24.04	5813.52	5837.56	PASS
11N40MIMO	Ant1	5190	40.88	5169.60	5210.48	PASS
	Ant2	5190	40.32	5169.92	5210.24	PASS
	Ant1	5230	41.04	5209.68	5250.72	PASS
	Ant2	5230	40.64	5209.84	5250.48	PASS
	Ant1	5270	40.56	5249.76	5290.32	PASS
	Ant2	5270	40.40	5249.84	5290.24	PASS
	Ant1	5310	40.96	5289.60	5330.56	PASS
	Ant2	5310	40.40	5289.84	5330.24	PASS
	Ant1	5510	40.80	5489.76	5530.56	PASS
	Ant2	5510	40.72	5489.76	5530.48	PASS
	Ant1	5550	41.04	5529.60	5570.64	PASS
	Ant2	5550	40.56	5529.76	5570.32	PASS
	Ant1	5670	40.64	5649.76	5690.40	PASS
	Ant2	5670	40.72	5649.68	5690.40	PASS
	Ant1	5710	40.88	5689.68	5730.56	PASS
	Ant2	5710	40.64	5689.84	5730.48	PASS
	Ant1	5710_UNII-2C	35.32	5689.68	5725	PASS
	Ant2	5710_UNII-2C	35.16	5689.84	5725	PASS
	Ant1	5710_UNII-3	5.56	5725	5730.56	PASS
	Ant2	5710_UNII-3	5.48	5725	5730.48	PASS
	Ant1	5755	41.12	5734.52	5775.64	PASS
	Ant2	5755	40.40	5734.92	5775.32	PASS
	Ant1	5795	40.96	5774.52	5815.48	PASS
	Ant2	5795	40.88	5774.60	5815.48	PASS
11AC80MIMO	Ant1	5210	80.32	5170.00	5250.32	PASS
	Ant2	5210	80.16	5170.00	5250.16	PASS
	Ant1	5290	80.32	5250.00	5330.32	PASS
	Ant2	5290	80.00	5250.16	5330.16	PASS
	Ant1	5530	80.32	5490.00	5570.32	PASS
	Ant2	5530	80.00	5490.16	5570.16	PASS
	Ant1	5610	80.32	5570.00	5650.32	PASS
	Ant2	5610	80.16	5570.00	5650.16	PASS
	Ant1	5690	80.64	5649.68	5730.32	PASS
	Ant2	5690	80.00	5650.16	5730.16	PASS
	Ant1	5690_UNII-2C	75.32	5649.68	5725	PASS
	Ant2	5690_UNII-2C	74.84	5650.16	5725	PASS
	Ant1	5690_UNII-3	5.32	5725	5730.32	PASS
	Ant2	5690_UNII-3	5.16	5725	5730.16	PASS
	Ant1	5775	80.00	5735.16	5815.16	PASS
	Ant2	5775	80.00	5735.16	5815.16	PASS
11AX20MIMO	Ant1	5180	21.60	5169.08	5190.68	PASS
	Ant2	5180	23.84	5169.44	5193.28	PASS
	Ant1	5200	22.20	5188.88	5211.08	PASS
	Ant2	5200	21.48	5189.16	5210.64	PASS
	Ant1	5240	20.04	5230.00	5250.04	PASS
	Ant2	5240	20.00	5230.00	5250.00	PASS
	Ant1	5260	21.32	5249.32	5270.64	PASS
	Ant2	5260	21.28	5249.52	5270.80	PASS
	Ant1	5280	21.72	5269.08	5290.80	PASS
	Ant2	5280	22.96	5268.16	5291.12	PASS
	Ant1	5320	21.68	5309.32	5331.00	PASS
	Ant2	5320	22.16	5308.60	5330.76	PASS

	Ant1	5500	21.44	5489.32	5510.76	PASS
	Ant2	5500	21.88	5489.00	5510.88	PASS
	Ant1	5580	22.08	5569.04	5591.12	PASS
	Ant2	5580	21.36	5569.56	5590.92	PASS
	Ant1	5700	27.16	5689.20	5716.36	PASS
	Ant2	5700	21.00	5689.68	5710.68	PASS
	Ant1	5720	22.68	5708.96	5731.64	PASS
	Ant2	5720	21.36	5709.40	5730.76	PASS
	Ant1	5720 UNII-2C	16.04	5708.96	5725	PASS
	Ant2	5720 UNII-2C	15.6	5709.40	5725	PASS
	Ant1	5720 UNII-3	6.64	5725	5731.64	PASS
	Ant2	5720 UNII-3	5.76	5725	5730.76	PASS
	Ant1	5745	21.56	5734.24	5755.80	PASS
	Ant2	5745	21.48	5734.28	5755.76	PASS
	Ant1	5785	21.88	5773.72	5795.60	PASS
	Ant2	5785	23.16	5773.92	5797.08	PASS
	Ant1	5825	22.76	5813.84	5836.60	PASS
	Ant2	5825	23.64	5814.16	5837.80	PASS
11AX40MIMO	Ant1	5190	39.68	5170.24	5209.92	PASS
	Ant2	5190	39.92	5170.16	5210.08	PASS
	Ant1	5230	39.84	5210.16	5250.00	PASS
	Ant2	5230	39.68	5210.16	5249.84	PASS
	Ant1	5270	39.92	5250.16	5290.08	PASS
	Ant2	5270	39.84	5250.16	5290.00	PASS
	Ant1	5310	39.84	5290.16	5330.00	PASS
	Ant2	5310	39.76	5290.16	5329.92	PASS
	Ant1	5510	40.08	5490.08	5530.16	PASS
	Ant2	5510	40.00	5490.08	5530.08	PASS
	Ant1	5550	39.84	5530.16	5570.00	PASS
	Ant2	5550	39.92	5530.08	5570.00	PASS
	Ant1	5670	39.84	5650.16	5690.00	PASS
	Ant2	5670	39.84	5650.16	5690.00	PASS
	Ant1	5710	39.92	5690.08	5730.00	PASS
	Ant2	5710	39.84	5690.16	5730.00	PASS
	Ant1	5710 UNII-2C	34.92	5690.08	5725	PASS
	Ant2	5710 UNII-2C	34.84	5690.16	5725	PASS
	Ant1	5710 UNII-3	5	5725	5730.00	PASS
	Ant2	5710 UNII-3	5	5725	5730.00	PASS
11AX80MIMO	Ant1	5755	39.84	5735.16	5775.00	PASS
	Ant2	5755	39.92	5735.16	5775.08	PASS
	Ant1	5795	40.08	5775.00	5815.08	PASS
	Ant2	5795	39.84	5775.16	5815.00	PASS
	Ant1	5210	80.80	5169.84	5250.64	PASS
	Ant2	5210	80.64	5169.84	5250.48	PASS
	Ant1	5290	80.64	5249.84	5330.48	PASS
	Ant2	5290	80.64	5249.84	5330.48	PASS
	Ant1	5530	80.80	5489.68	5570.48	PASS
	Ant2	5530	80.80	5489.68	5570.48	PASS
	Ant1	5610	80.64	5569.84	5650.48	PASS
	Ant2	5610	80.96	5569.52	5650.48	PASS
	Ant1	5690	80.80	5649.68	5730.48	PASS
	Ant2	5690	80.64	5649.84	5730.48	PASS
	Ant1	5690 UNII-2C	75.32	5649.68	5725	PASS
	Ant2	5690 UNII-2C	75.16	5649.84	5725	PASS
	Ant1	5690 UNII-3	5.48	5725	5730.48	PASS
	Ant2	5690 UNII-3	5.48	5725	5730.48	PASS
	Ant1	5775	80.64	5734.84	5815.48	PASS
	Ant2	5775	80.64	5734.84	5815.48	PASS


11.1.2. Test Graphs

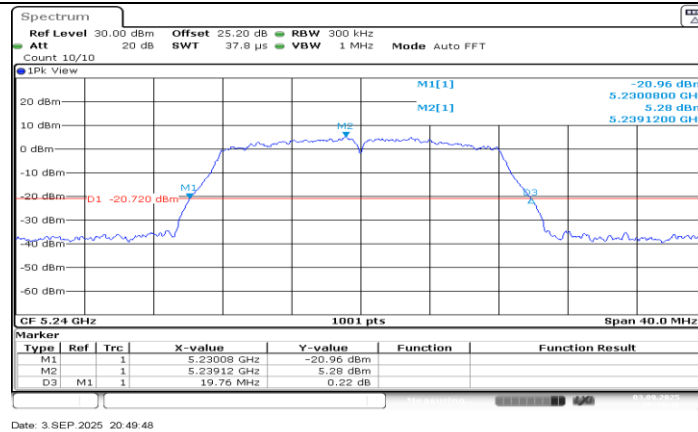


11A Ant1_5240

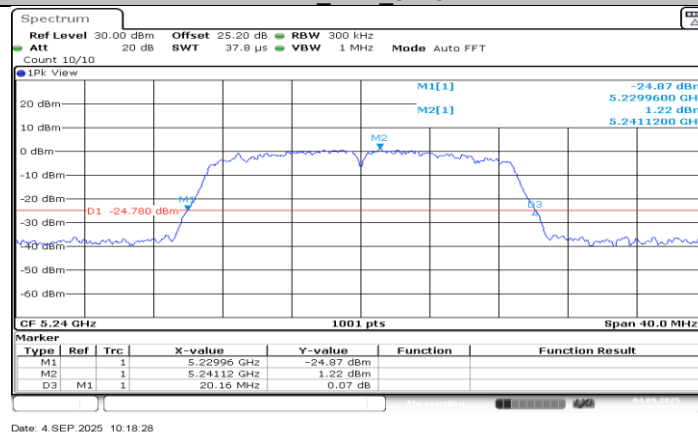


11N20MIMO_Ant1_5240

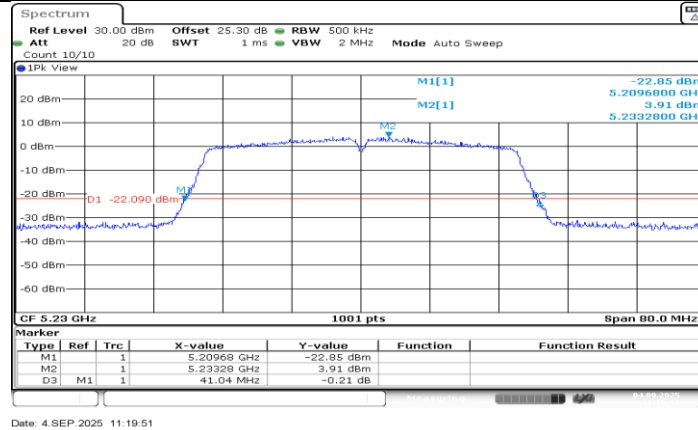


11N40MIMO_Ant1_5230

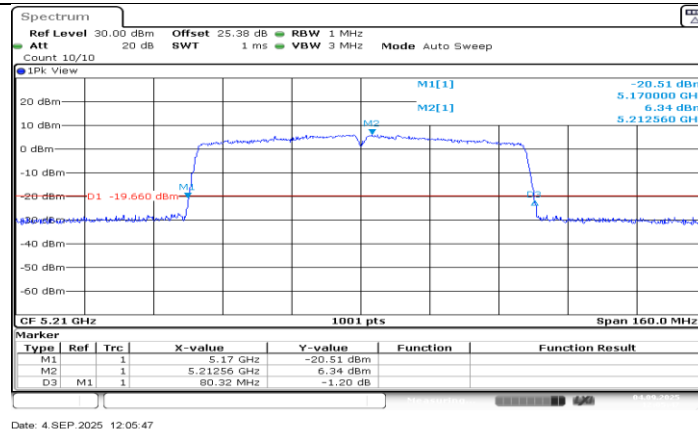


11AC80MIMO_Ant1_5210

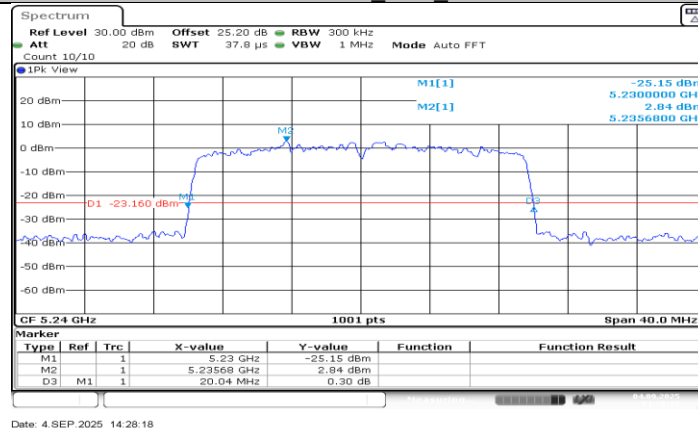

11AX20MIMO_Ant1_5240

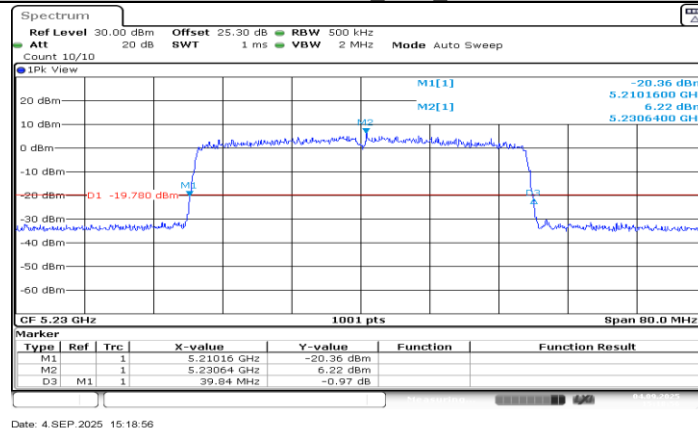

11AX40MIMO_Ant1_5230

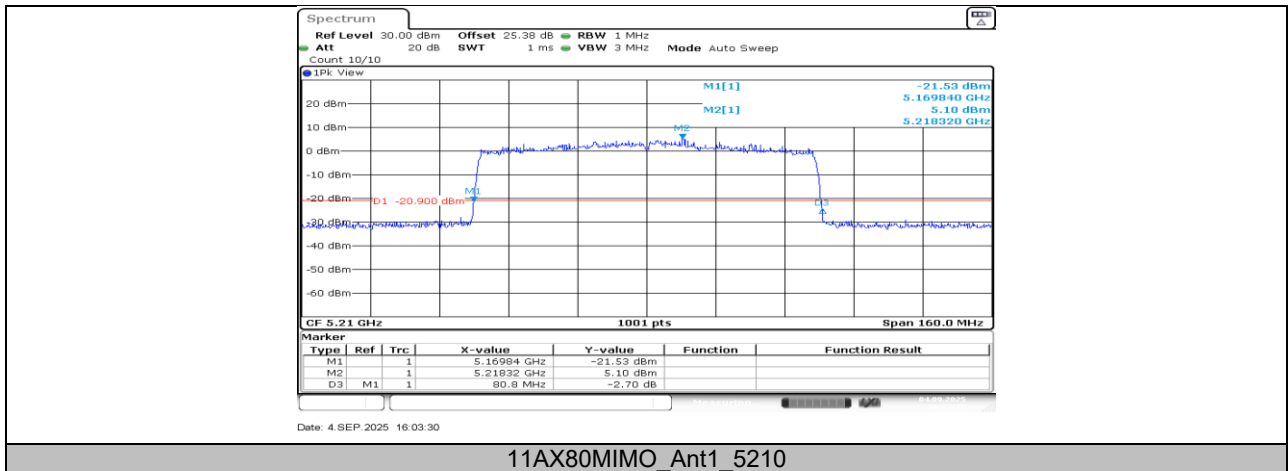

Note:

1. To reduce report size, only one test plot for each mode is recorded in the report as a reference for test settings.
2. According to the UNII-1 high-channel 26dB EBW test results, the right-hand mark is located 26dBc below the EBW peak, which is lower than the 26dBc limit for the channel power reference, and the mark frequency is less than 5250MHz. Although the 26dB bandwidth of the span is insufficient to cover 5350MHz, the test data from the edge of the radiation band clearly shows that the highest point from the upper edge of the UNII-1 high channel to 5350MHz is the upper edge of the UNII-1 high channel. This indicates that this operating frequency also meets the requirement that the frequency at 26dBc referenced to channel power does not exceed 5250MHz under the 1%-5% RBW setting of OCB.

11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH


11.2.1. Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11A	Ant1	5180	18.541	5170.7293	5189.2707	PASS
	Ant2	5180	18.581	5170.6893	5189.2707	PASS
	Ant1	5200	18.661	5190.6094	5209.2707	PASS
	Ant2	5200	18.741	5190.6494	5209.3906	PASS
	Ant1	5240	17.063	5231.4885	5248.5514	PASS
	Ant2	5240	17.143	5231.4486	5248.5914	PASS
	Ant1	5260	18.701	5250.6494	5269.3506	PASS
	Ant2	5260	18.901	5250.5295	5269.4306	PASS
	Ant1	5280	18.661	5270.6094	5289.2707	PASS
	Ant2	5280	18.781	5270.5295	5289.3107	PASS
	Ant1	5320	18.861	5310.6094	5329.4705	PASS
	Ant2	5320	18.821	5310.5694	5329.3906	PASS
	Ant1	5500	18.781	5490.5295	5509.3107	PASS
	Ant2	5500	18.821	5490.4895	5509.3107	PASS
	Ant1	5580	18.701	5570.6094	5589.3107	PASS
	Ant2	5580	18.781	5570.4895	5589.2707	PASS
	Ant1	5700	18.741	5690.5694	5709.3107	PASS
	Ant2	5700	18.661	5690.6094	5709.2707	PASS
	Ant1	5720	18.741	5710.6094	5729.3506	PASS
	Ant2	5720	18.981	5710.4096	5729.3906	PASS
	Ant1	5720 UNII-2C	14.391	5710.6094	5725	PASS
	Ant2	5720 UNII-2C	14.59	5710.4096	5725	PASS
	Ant1	5720 UNII-3	4.351	5725	5729.3506	PASS
	Ant2	5720 UNII-3	4.391	5725	5729.3906	PASS
	Ant1	5745	18.781	5735.6094	5754.3906	PASS
	Ant2	5745	18.981	5735.4496	5754.4306	PASS
	Ant1	5785	18.661	5775.6094	5794.2707	PASS
	Ant2	5785	18.821	5775.6893	5794.5105	PASS
	Ant1	5825	18.821	5815.4895	5834.3107	PASS
	Ant2	5825	18.821	5815.5295	5834.3506	PASS
11N20MIMO	Ant1	5180	19.5	5170.2897	5189.7902	PASS
	Ant2	5180	18.621	5170.7692	5189.3906	PASS
	Ant1	5200	19.7	5190.1698	5209.8701	PASS
	Ant2	5200	18.661	5190.7692	5209.4306	PASS
	Ant1	5240	17.942	5231.0490	5248.9910	PASS
	Ant2	5240	17.702	5231.1688	5248.8711	PASS
	Ant1	5260	19.7	5250.1299	5269.8302	PASS
	Ant2	5260	18.541	5250.7692	5269.3107	PASS
	Ant1	5280	19.78	5270.1299	5289.9101	PASS
	Ant2	5280	18.541	5270.8092	5289.3506	PASS
	Ant1	5320	19.66	5310.2098	5329.8701	PASS
	Ant2	5320	18.701	5310.6893	5329.3906	PASS
	Ant1	5500	19.82	5490.1299	5509.9500	PASS
	Ant2	5500	18.621	5490.7293	5509.3506	PASS
	Ant1	5580	19.74	5570.1299	5589.8701	PASS
	Ant2	5580	18.581	5570.7293	5589.3107	PASS
	Ant1	5700	19.58	5690.2897	5709.8701	PASS
	Ant2	5700	18.661	5690.7293	5709.3906	PASS
	Ant1	5720	19.82	5710.1299	5729.9500	PASS
	Ant2	5720	18.621	5710.7692	5729.3906	PASS
	Ant1	5720 UNII-2C	14.87	5710.1299	5725	PASS
	Ant2	5720 UNII-2C	14.231	5710.7692	5725	PASS
	Ant1	5720 UNII-3	4.95	5725	5729.9500	PASS

	Ant2	5720 UNII-3	4.391	5725	5729.3906	PASS
	Ant1	5745	19.7	5735.3297	5755.0300	PASS
	Ant2	5745	18.621	5735.8092	5754.4306	PASS
	Ant1	5785	19.7	5775.2498	5794.9500	PASS
	Ant2	5785	18.661	5775.7692	5794.4306	PASS
	Ant1	5825	19.74	5815.2498	5834.9900	PASS
	Ant2	5825	18.581	5815.8092	5834.3906	PASS
11N40MIMO	Ant1	5190	36.204	5172.0180	5208.2218	PASS
	Ant2	5190	36.204	5172.0180	5208.2218	PASS
	Ant1	5230	36.364	5211.9381	5248.3017	PASS
	Ant2	5230	36.284	5211.9381	5248.2218	PASS
	Ant1	5270	36.284	5251.9381	5288.2218	PASS
	Ant2	5270	36.444	5251.8581	5288.3017	PASS
	Ant1	5310	36.284	5291.9381	5328.2218	PASS
	Ant2	5310	36.204	5292.0180	5328.2218	PASS
	Ant1	5510	36.364	5491.8581	5528.2218	PASS
	Ant2	5510	36.284	5491.9381	5528.2218	PASS
	Ant1	5550	36.523	5531.7782	5568.3017	PASS
	Ant2	5550	36.364	5531.9381	5568.3017	PASS
	Ant1	5670	36.284	5651.8581	5688.1419	PASS
	Ant2	5670	36.284	5651.9381	5688.2218	PASS
	Ant1	5710	36.444	5691.8581	5728.3017	PASS
	Ant2	5710	36.364	5691.9381	5728.3017	PASS
	Ant1	5710 UNII-2C	33.142	5691.8581	5725	PASS
	Ant2	5710 UNII-2C	33.062	5691.9381	5725	PASS
	Ant1	5710 UNII-3	3.302	5725	5728.3017	PASS
	Ant2	5710 UNII-3	3.302	5725	5728.3017	PASS
	Ant1	5755	36.603	5736.8581	5773.4615	PASS
	Ant2	5755	36.603	5736.8581	5773.4615	PASS
	Ant1	5795	36.683	5776.7782	5813.4615	PASS
	Ant2	5795	36.523	5776.9381	5813.4615	PASS
11AC80MIMO	Ant1	5210	75.604	5172.2777	5247.8821	PASS
	Ant2	5210	75.285	5172.4376	5247.7223	PASS
	Ant1	5290	75.445	5252.4376	5327.8821	PASS
	Ant2	5290	75.445	5252.4376	5327.8821	PASS
	Ant1	5530	75.285	5492.4376	5567.7223	PASS
	Ant2	5530	75.125	5492.5974	5567.7223	PASS
	Ant1	5610	75.445	5572.4376	5647.8821	PASS
	Ant2	5610	75.445	5572.2777	5647.7223	PASS
	Ant1	5690	75.285	5652.4376	5727.7223	PASS
	Ant2	5690	75.285	5652.4376	5727.7223	PASS
	Ant1	5690 UNII-2C	72.562	5652.4376	5725	PASS
	Ant2	5690 UNII-2C	72.562	5652.4376	5725	PASS
	Ant1	5690 UNII-3	2.722	5725	5727.7223	PASS
	Ant2	5690 UNII-3	2.722	5725	5727.7223	PASS
	Ant1	5775	75.445	5737.4376	5812.8821	PASS
	Ant2	5775	75.445	5737.4376	5812.8821	PASS
11AX20MIMO	Ant1	5180	19.261	5170.4096	5189.6703	PASS
	Ant2	5180	19.221	5170.4496	5189.6703	PASS
	Ant1	5200	19.261	5190.3696	5209.6304	PASS
	Ant2	5200	19.261	5190.3696	5209.6304	PASS
	Ant1	5240	18.861	5230.6094	5249.4705	PASS
	Ant2	5240	18.861	5230.6094	5249.4705	PASS
	Ant1	5260	19.221	5250.4496	5269.6703	PASS
	Ant2	5260	19.221	5250.4496	5269.6703	PASS
	Ant1	5280	19.261	5270.3696	5289.6304	PASS
	Ant2	5280	19.181	5270.4496	5289.6304	PASS
	Ant1	5320	19.301	5310.4096	5329.7103	PASS
	Ant2	5320	19.261	5310.4096	5329.6703	PASS
	Ant1	5500	19.261	5490.4096	5509.6703	PASS

	Ant2	5500	19.221	5490.4096	5509.6304	PASS
	Ant1	5580	19.301	5570.4096	5589.7103	PASS
	Ant2	5580	19.221	5570.4496	5589.6703	PASS
	Ant1	5700	19.261	5690.4096	5709.6703	PASS
	Ant2	5700	19.221	5690.4096	5709.6304	PASS
	Ant1	5720	19.261	5710.4496	5729.7103	PASS
	Ant2	5720	19.181	5710.4895	5729.6703	PASS
	Ant1	5720 UNII-2C	14.55	5710.4496	5725	PASS
	Ant2	5720 UNII-2C	14.511	5710.4895	5725	PASS
	Ant1	5720 UNII-3	4.71	5725	5729.7103	PASS
	Ant2	5720 UNII-3	4.67	5725	5729.6703	PASS
	Ant1	5745	19.221	5735.4895	5754.7103	PASS
	Ant2	5745	19.261	5735.4496	5754.7103	PASS
	Ant1	5785	19.261	5775.4096	5794.6703	PASS
	Ant2	5785	19.181	5775.4895	5794.6703	PASS
	Ant1	5825	19.301	5815.4096	5834.7103	PASS
	Ant2	5825	19.221	5815.4496	5834.6703	PASS
11AX40MIMO	Ant1	5190	37.562	5171.2987	5208.8611	PASS
	Ant2	5190	37.802	5171.1389	5208.9411	PASS
	Ant1	5230	37.802	5211.1389	5248.9411	PASS
	Ant2	5230	37.642	5211.2987	5248.9411	PASS
	Ant1	5270	37.722	5251.2188	5288.9411	PASS
	Ant2	5270	37.802	5251.2188	5289.0210	PASS
	Ant1	5310	37.722	5291.2188	5328.9411	PASS
	Ant2	5310	37.642	5291.2188	5328.8611	PASS
	Ant1	5510	37.722	5491.2188	5528.9411	PASS
	Ant2	5510	37.882	5491.1389	5529.0210	PASS
	Ant1	5550	37.882	5531.1389	5569.0210	PASS
	Ant2	5550	37.722	5531.2188	5568.9411	PASS
	Ant1	5670	37.802	5651.2188	5689.0210	PASS
	Ant2	5670	37.802	5651.2188	5689.0210	PASS
	Ant1	5710	37.722	5691.1389	5728.8611	PASS
	Ant2	5710	37.722	5691.2188	5728.9411	PASS
	Ant1	5710 UNII-2C	33.861	5691.1389	5725	PASS
	Ant2	5710 UNII-2C	33.781	5691.2188	5725	PASS
	Ant1	5710 UNII-3	3.861	5725	5728.8611	PASS
	Ant2	5710 UNII-3	3.941	5725	5728.9411	PASS
11AX80MIMO	Ant1	5755	37.722	5736.2188	5773.9411	PASS
	Ant2	5755	37.802	5736.2188	5774.0210	PASS
	Ant1	5795	37.802	5776.2188	5814.0210	PASS
	Ant2	5795	37.802	5776.2188	5814.0210	PASS
	Ant1	5210	77.043	5171.4785	5248.5215	PASS
	Ant2	5210	77.043	5171.6384	5248.6813	PASS
	Ant1	5290	77.043	5251.6384	5328.6813	PASS
	Ant2	5290	77.043	5251.6384	5328.6813	PASS
	Ant1	5530	77.203	5491.4785	5568.6813	PASS
	Ant2	5530	77.043	5491.6384	5568.6813	PASS
	Ant1	5610	77.203	5571.4785	5648.6813	PASS
	Ant2	5610	77.363	5571.4785	5648.8412	PASS
	Ant1	5690	77.043	5651.4785	5728.5215	PASS
	Ant2	5690	77.203	5651.4785	5728.6813	PASS
	Ant1	5690 UNII-2C	73.521	5651.4785	5725	PASS
	Ant2	5690 UNII-2C	73.521	5651.4785	5725	PASS
	Ant1	5690 UNII-3	3.521	5725	5728.5215	PASS
	Ant2	5690 UNII-3	3.681	5725	5728.6813	PASS
	Ant1	5775	77.043	5736.6384	5813.6813	PASS
	Ant2	5775	77.203	5736.6384	5813.8412	PASS

11.2.2. Test Graphs

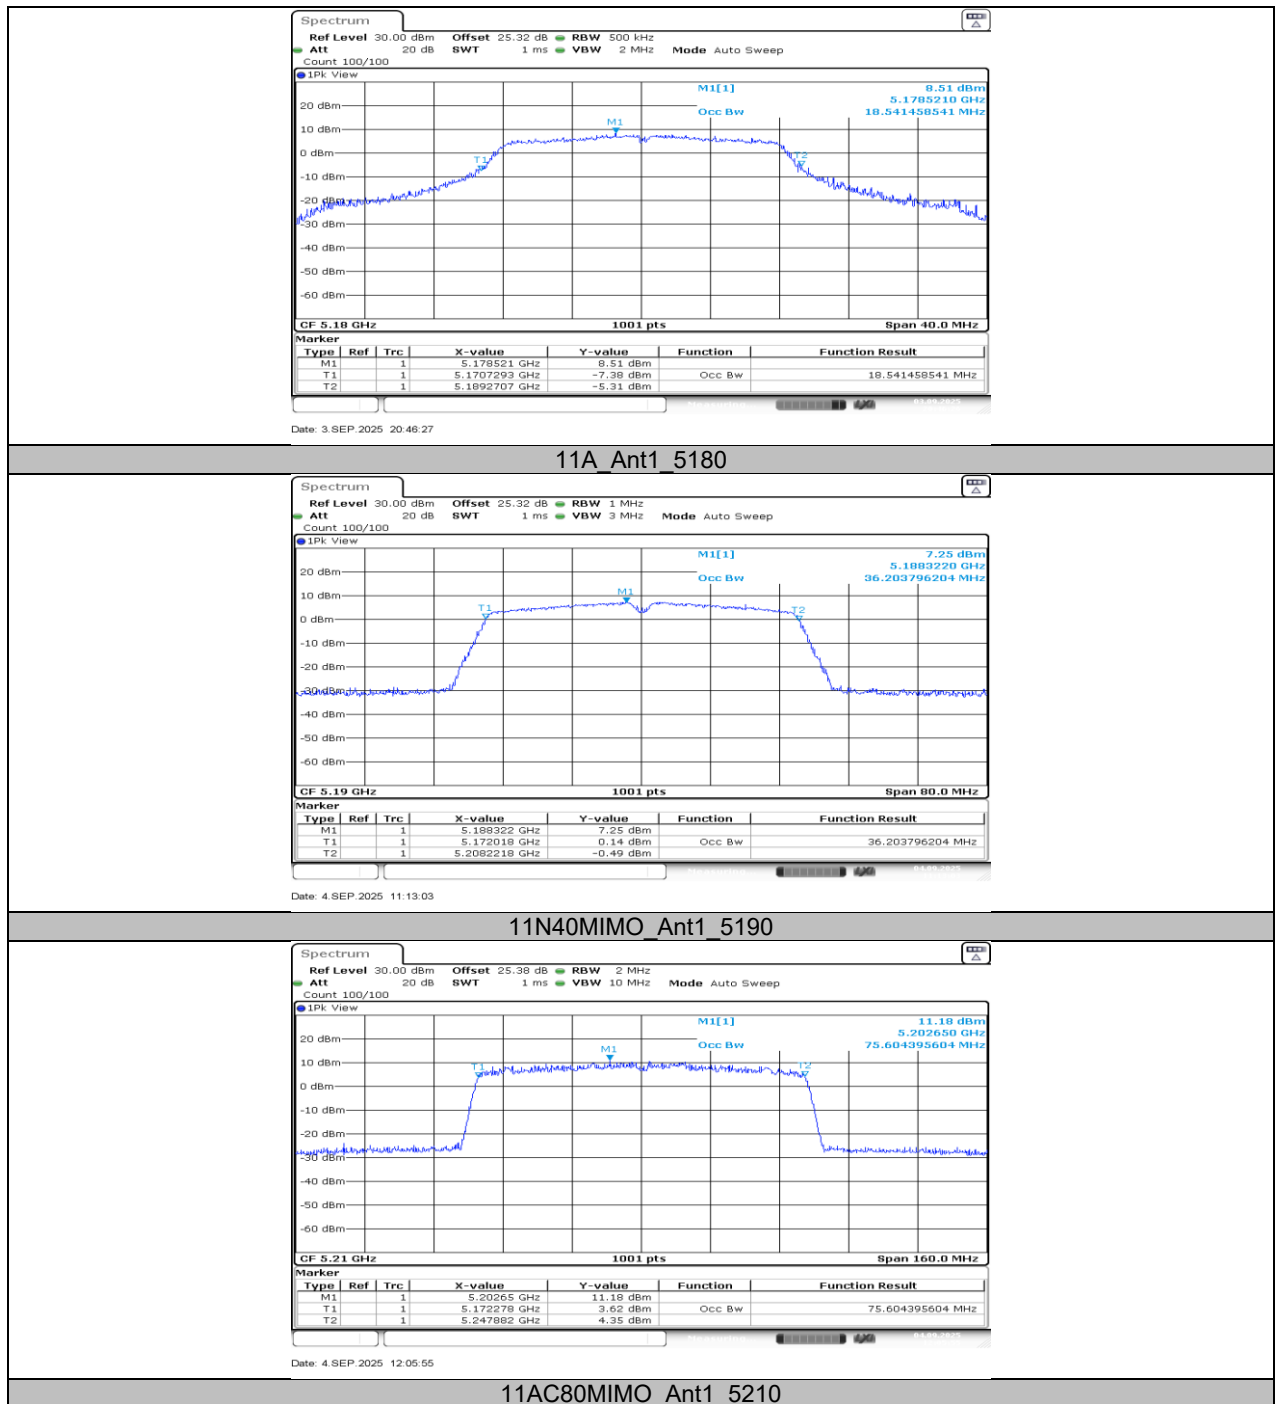

Note: To reduce report size, only one test plot for each bandwidth is recorded in the report as a reference for test settings.


11.3. APPENDIX C: MIN EMISSION BANDWIDTH

11.3.1. Test Result

Test Mode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant2	5720	15.92	5711.84	5727.76	---	---
	Ant2	5720 UNII-2C	13.16	5711.84	5725	---	---
	Ant2	5720 UNII-3	2.76	5725	5727.76	≥ 0.5	PASS
	Ant2	5745	16.32	5736.84	5753.16	≥ 0.5	PASS
	Ant2	5785	16.32	5776.84	5793.16	≥ 0.5	PASS
	Ant2	5825	16.28	5816.84	5833.12	≥ 0.5	PASS
11N20MIMO	Ant2	5720	17.56	5711.28	5728.84	---	---
	Ant2	5720 UNII-2C	13.72	5711.28	5725	---	---
	Ant2	5720 UNII-3	3.84	5725	5728.84	≥ 0.5	PASS
	Ant2	5745	17.60	5736.32	5753.92	≥ 0.5	PASS
	Ant2	5785	17.28	5776.56	5793.84	≥ 0.5	PASS
	Ant2	5825	16.32	5816.92	5833.24	≥ 0.5	PASS
11N40MIMO	Ant2	5710	35.12	5692.56	5727.68	---	---
	Ant2	5710 UNII-2C	32.44	5692.56	5725	---	---
	Ant2	5710 UNII-3	2.68	5725	5727.68	≥ 0.5	PASS
	Ant2	5755	35.04	5737.56	5772.60	≥ 0.5	PASS
	Ant2	5795	35.12	5777.56	5812.68	≥ 0.5	PASS
	Ant2	5690	72.64	5654.96	5727.60	---	---
11AC80MIMO	Ant2	5690 UNII-2C	70.04	5654.96	5725	---	---
	Ant2	5690 UNII-3	2.6	5725	5727.60	≥ 0.5	PASS
	Ant2	5775	75.04	5737.56	5812.60	≥ 0.5	PASS
	Ant2	5720	18.72	5710.68	5729.40	---	---
11AX20MIMO	Ant2	5720 UNII-2C	14.32	5710.68	5725	---	---
	Ant2	5720 UNII-3	4.4	5725	5729.40	≥ 0.5	PASS
	Ant2	5745	18.24	5736.08	5754.32	≥ 0.5	PASS
	Ant2	5785	18.00	5776.16	5794.16	≥ 0.5	PASS
	Ant2	5825	15.60	5817.00	5832.60	≥ 0.5	PASS
	Ant2	5710	37.28	5691.28	5728.56	---	---
11AX40MIMO	Ant2	5710 UNII-2C	33.72	5691.28	5725	---	---
	Ant2	5710 UNII-3	3.56	5725	5728.56	≥ 0.5	PASS
	Ant2	5755	36.56	5736.76	5773.32	≥ 0.5	PASS
	Ant2	5795	37.12	5776.68	5813.80	≥ 0.5	PASS
	Ant2	5690	70.24	5657.36	5727.60	---	---
11AX80MIMO	Ant2	5690 UNII-2C	67.64	5657.36	5725	---	---
	Ant2	5690 UNII-3	2.6	5725	5727.60	≥ 0.5	PASS
	Ant2	5775	72.64	5739.96	5812.60	≥ 0.5	PASS
	Ant2	5720	18.72	5710.68	5729.40	---	---

Note: All antennas have been tested, but only the worst data was recorded in the report.

11.3.2. Test Graphs

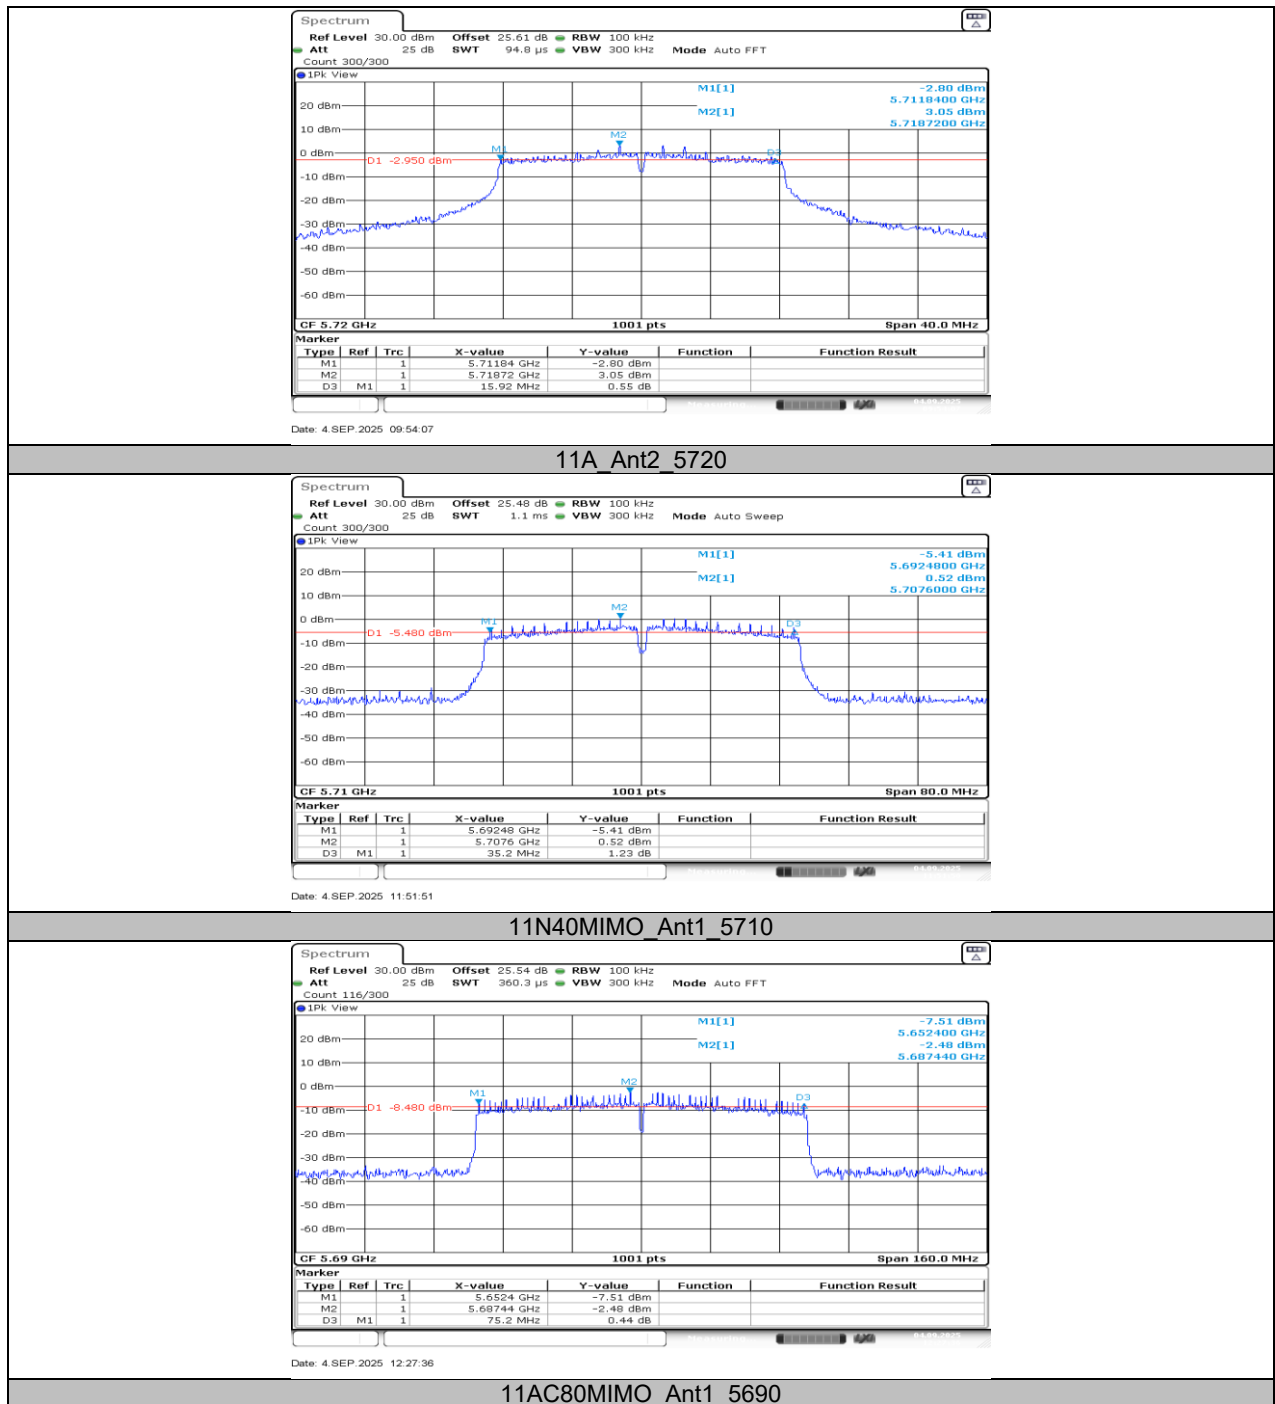

Note: To reduce report size, only one test plot for each bandwidth is recorded in the report as a reference for test settings.