










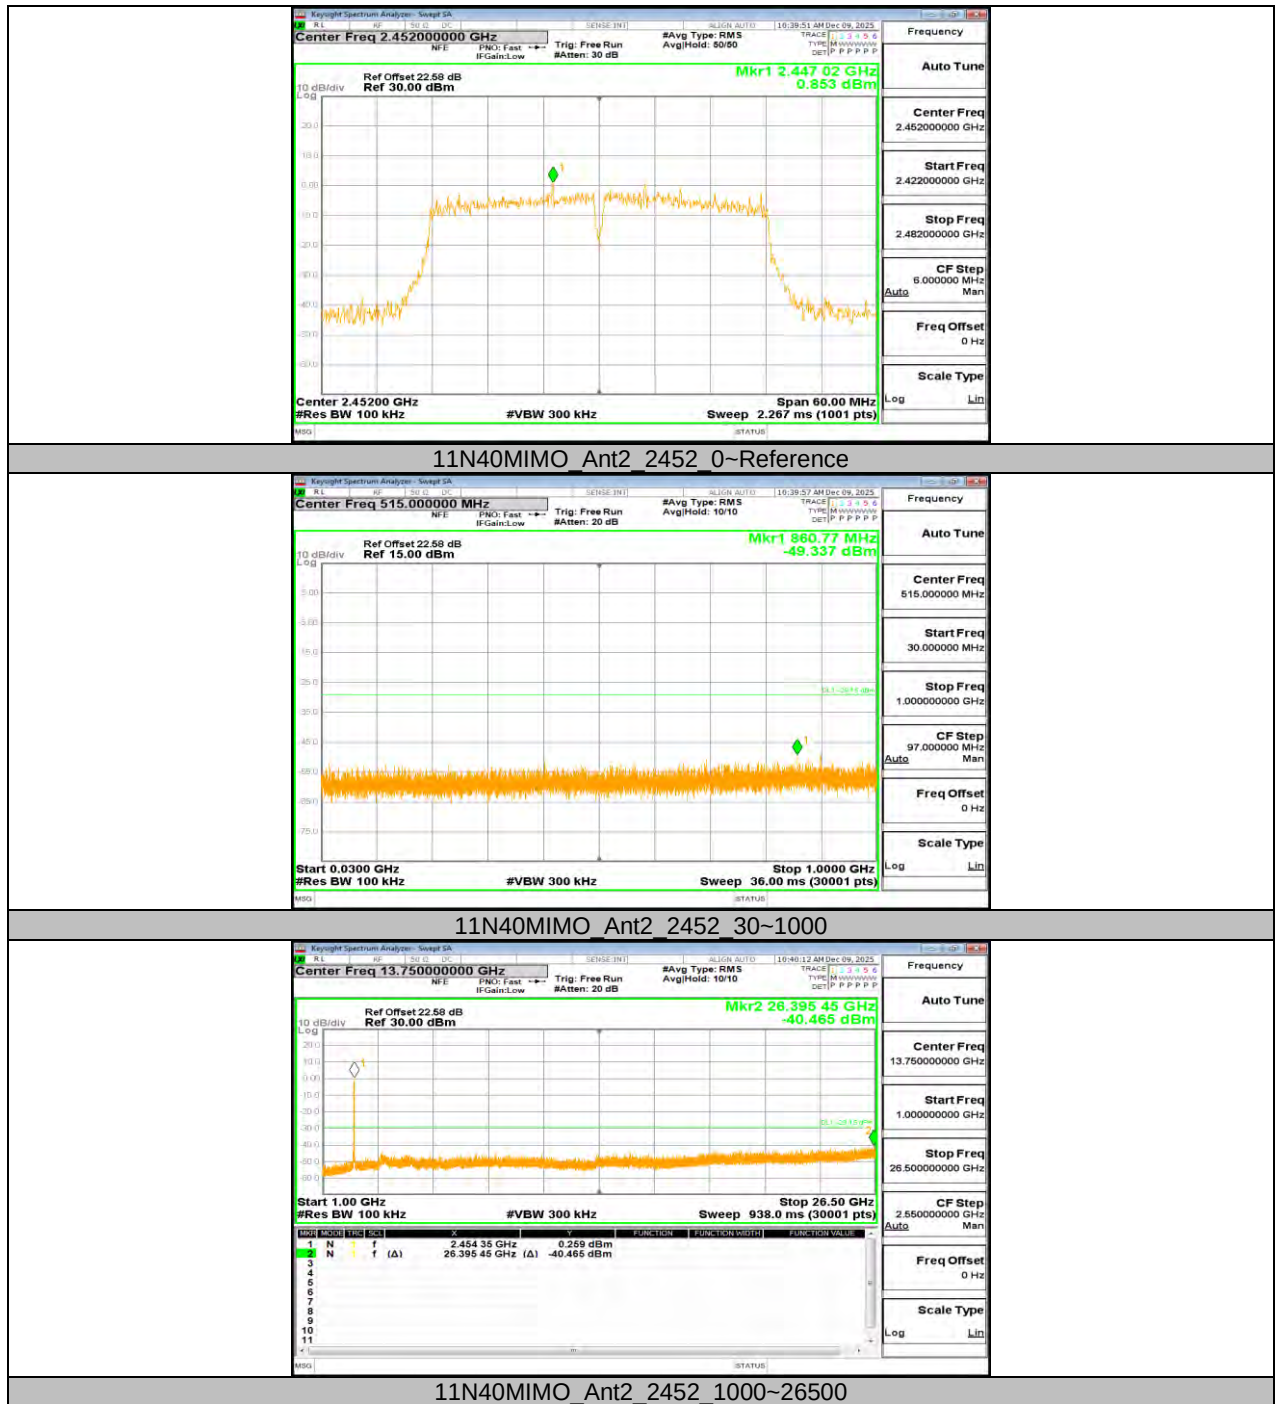





















11.7. APPENDIX G: DUTY CYCLE**11.7.1. Test Result**

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
11B	8.38	9.00	0.9311	93.11	0.31	0.12	0.3
11G	1.39	2.02	0.6881	68.81	1.62	0.72	1
11N20MIMO	1.30	1.93	0.6736	67.36	1.72	0.77	1
11N40MIMO	0.64	1.27	0.5039	50.39	2.98	1.56	3
11AX20MIMO	0.55	1.26	0.4365	43.65	3.60	1.82	3
11AX40MIMO	0.32	0.95	0.3368	33.68	4.73	3.13	5

Note:

Duty Cycle Correction Factor=10log (1/x).


Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

11.7.2. Test Graphs




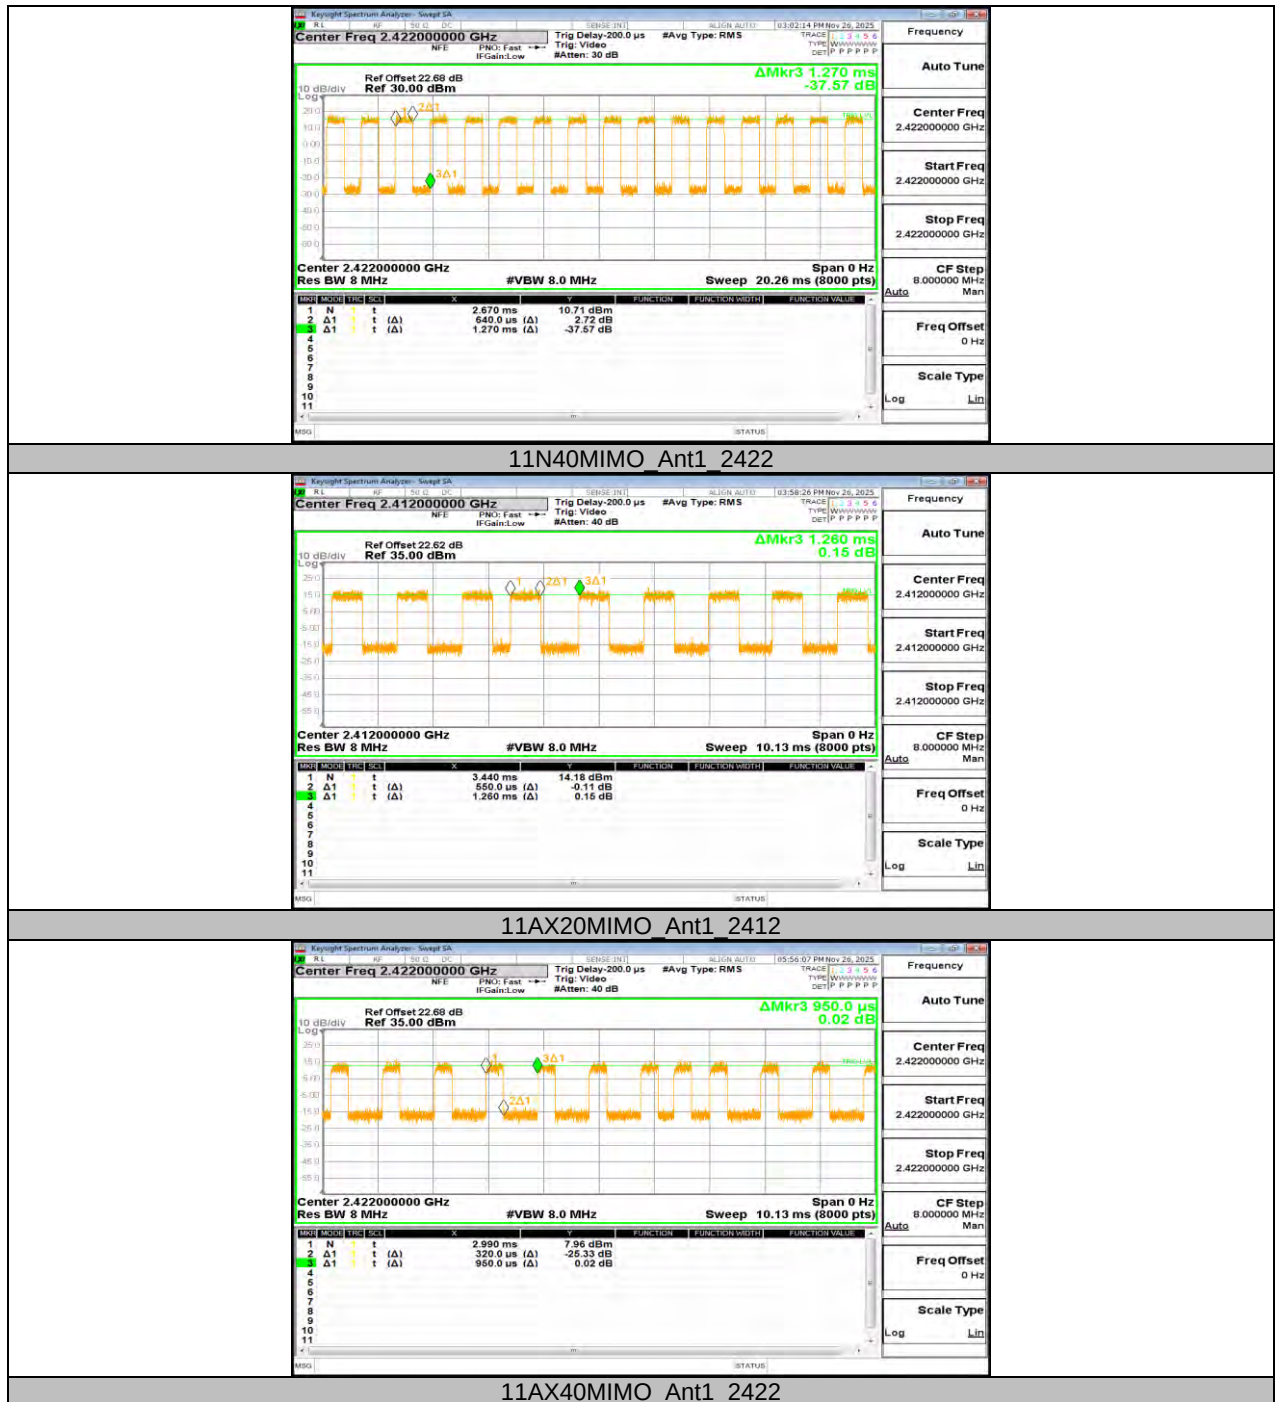

11.8. APPENDIX H: RADIATED BAND EDGE AND SPURIOUS EMISSION

11.8.1. RESTRICTED BANDEDGE

TX Radiated Test Result

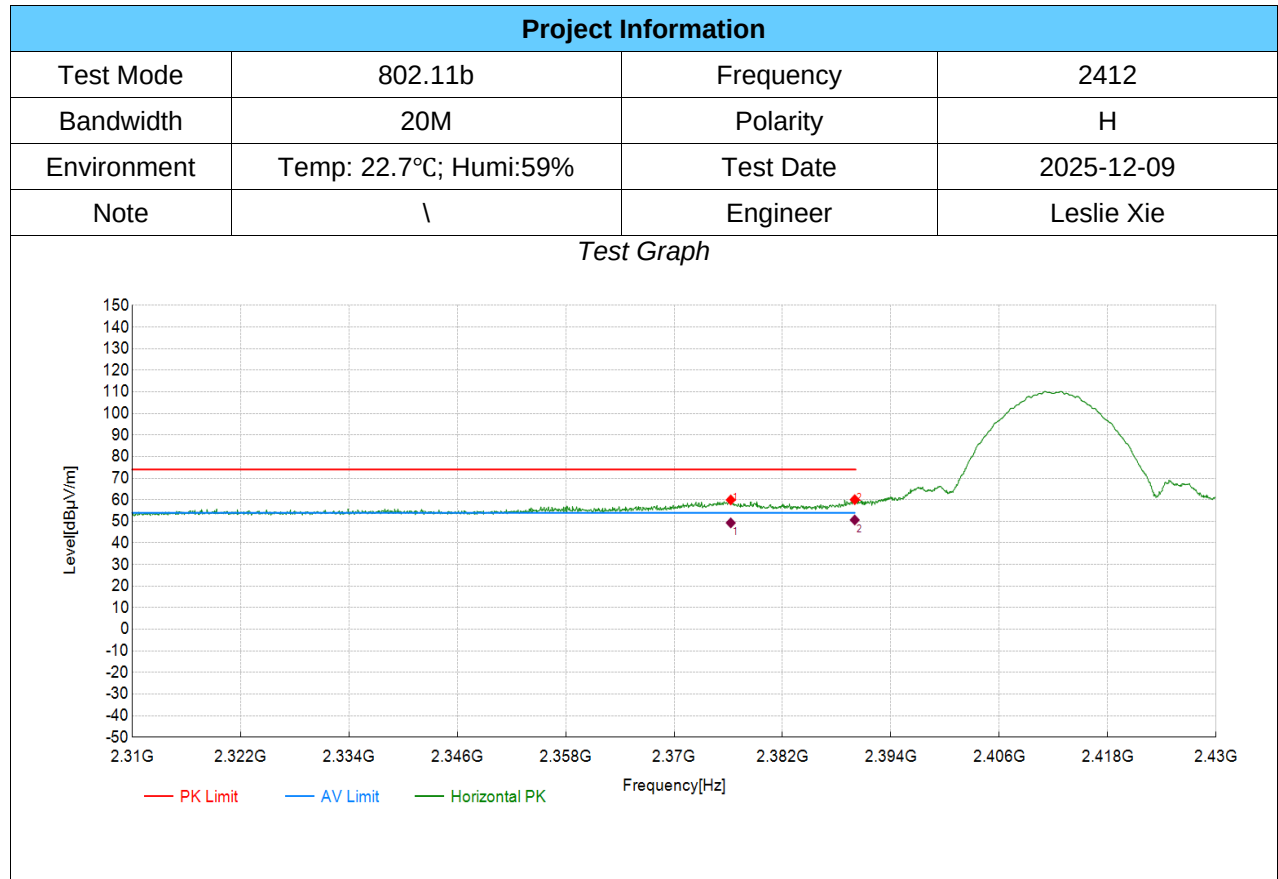


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2376.27	51.20	59.94	8.74	74.00	14.06	PK	Horizontal	PASS
2	2390.00	51.10	60.04	8.94	74.00	13.96	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2376.27	8.74	40.56	49.30	54.00	4.70	Horizontal	PASS
2	2390.00	8.93	41.72	50.65	54.00	3.35	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

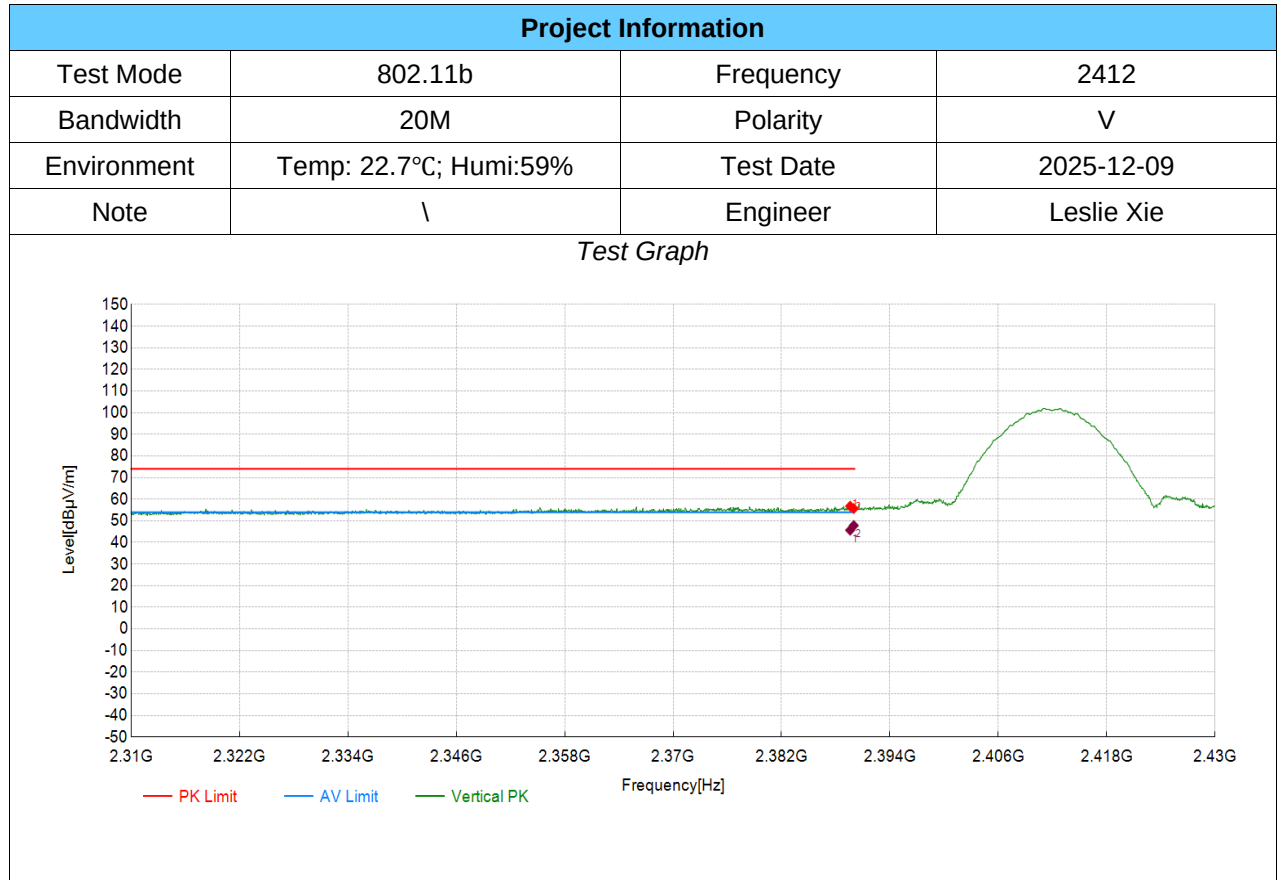

PEAK Data List


NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2389.60	47.84	56.77	8.93	74.00	17.23	PK	Vertical	PASS
2	2390.00	46.73	55.67	8.94	74.00	18.33	PK	Vertical	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2389.60	8.93	36.74	45.67	54.00	8.33	Vertical	PASS
2	2390.00	8.93	38.90	47.83	54.00	6.17	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

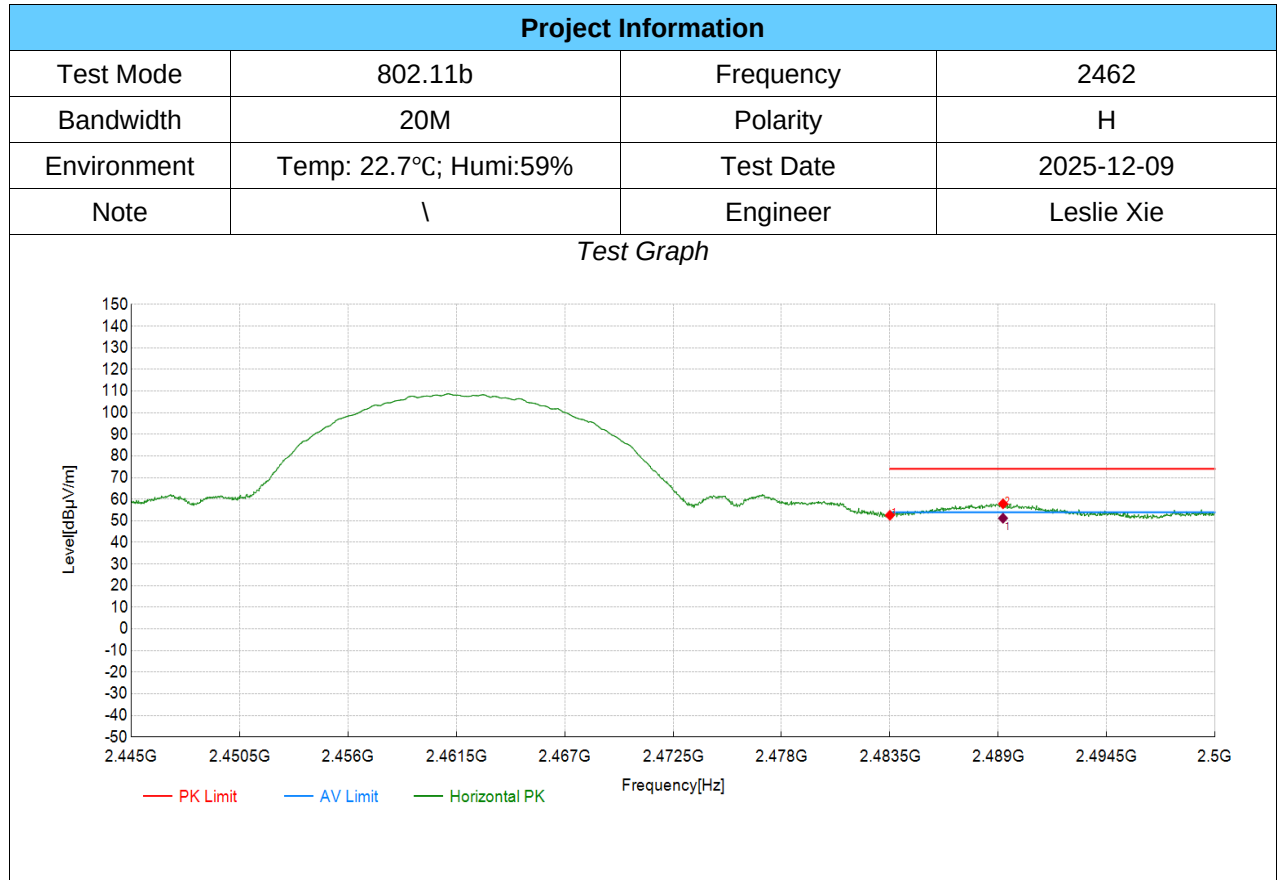


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	42.28	52.56	10.28	74.00	21.44	PK	Horizontal	PASS
2	2489.24	47.52	57.88	10.36	74.00	16.12	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2489.24	10.36	40.84	51.20	54.00	2.80	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

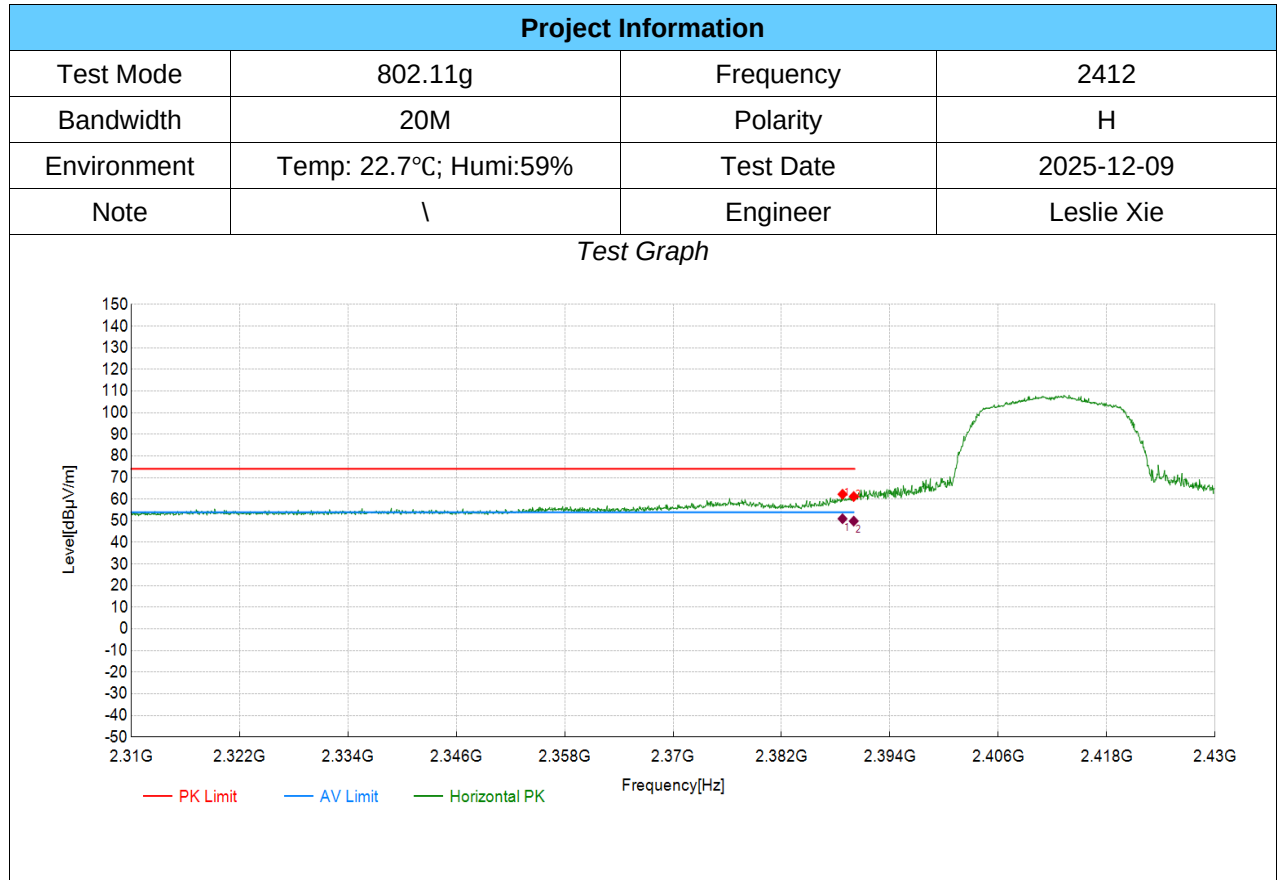


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2388.76	53.38	62.29	8.91	74.00	11.71	PK	Horizontal	PASS
2	2390.00	52.30	61.24	8.94	74.00	12.76	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2388.76	8.91	42.04	50.95	54.00	3.05	Horizontal	PASS
2	2390.00	8.93	40.94	49.87	54.00	4.13	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

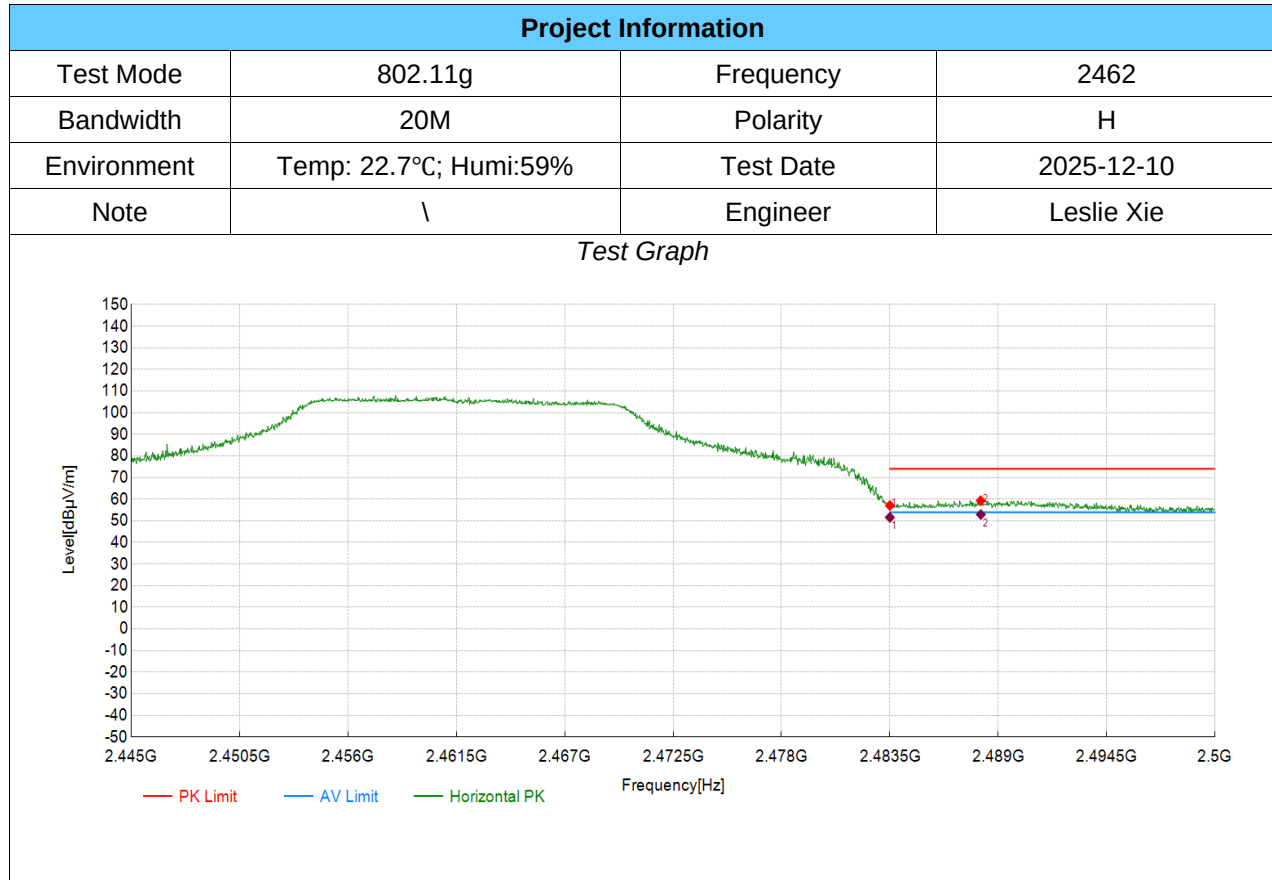

PEAK Data List


NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	46.80	57.08	10.28	74.00	16.92	PK	Horizontal	PASS
2	2488.11	48.97	59.31	10.34	74.00	14.69	PK	Horizontal	PASS

AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2483.50	10.28	41.31	51.59	54.00	2.41	Horizontal	PASS
2	2488.11	10.34	42.58	52.92	54.00	1.08	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

TX Radiated Test Result

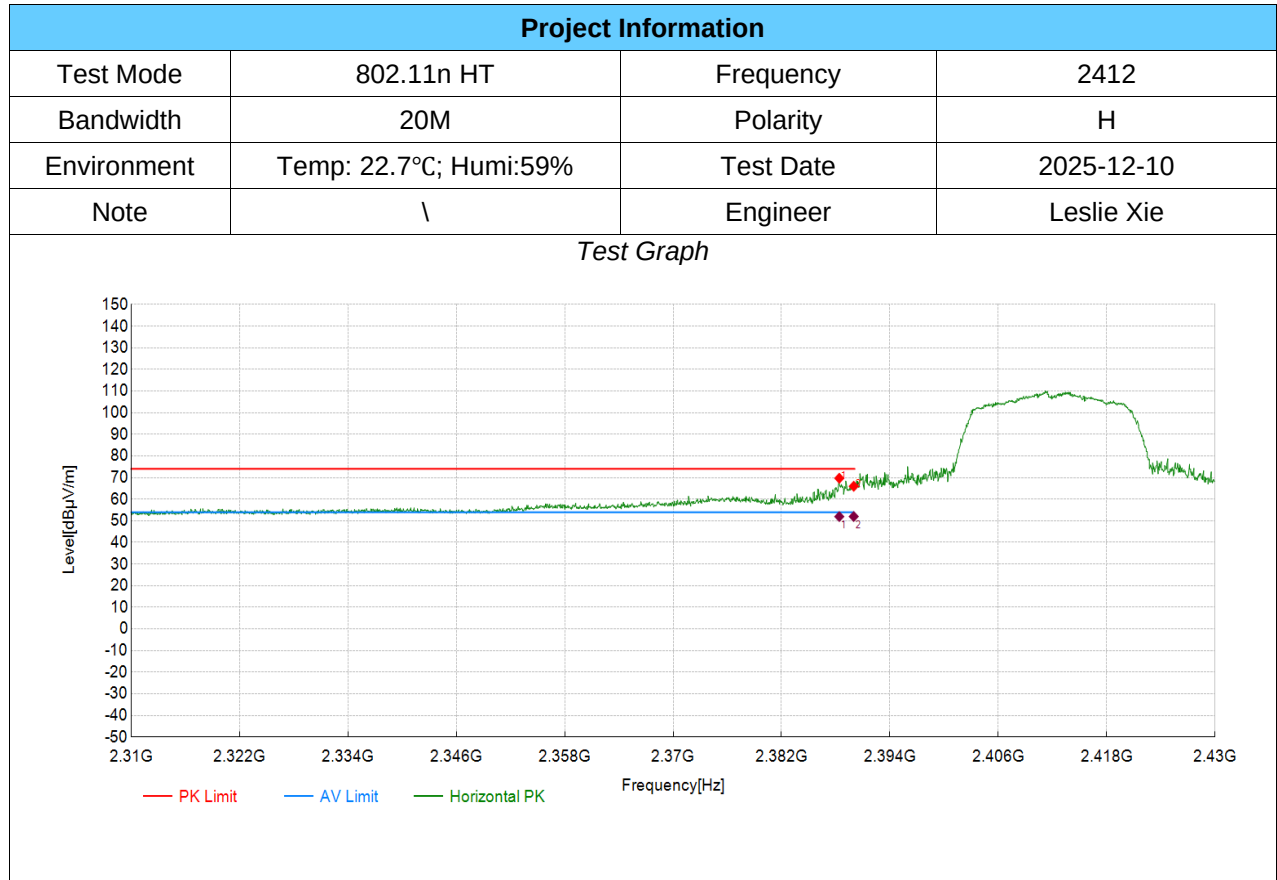


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2388.40	60.78	69.68	8.90	74.00	4.32	PK	Horizontal	PASS
2	2390.00	57.04	65.98	8.94	74.00	8.02	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2388.40	8.90	43.05	51.95	54.00	2.05	Horizontal	PASS
2	2390.00	8.93	43.07	52.00	54.00	2.00	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

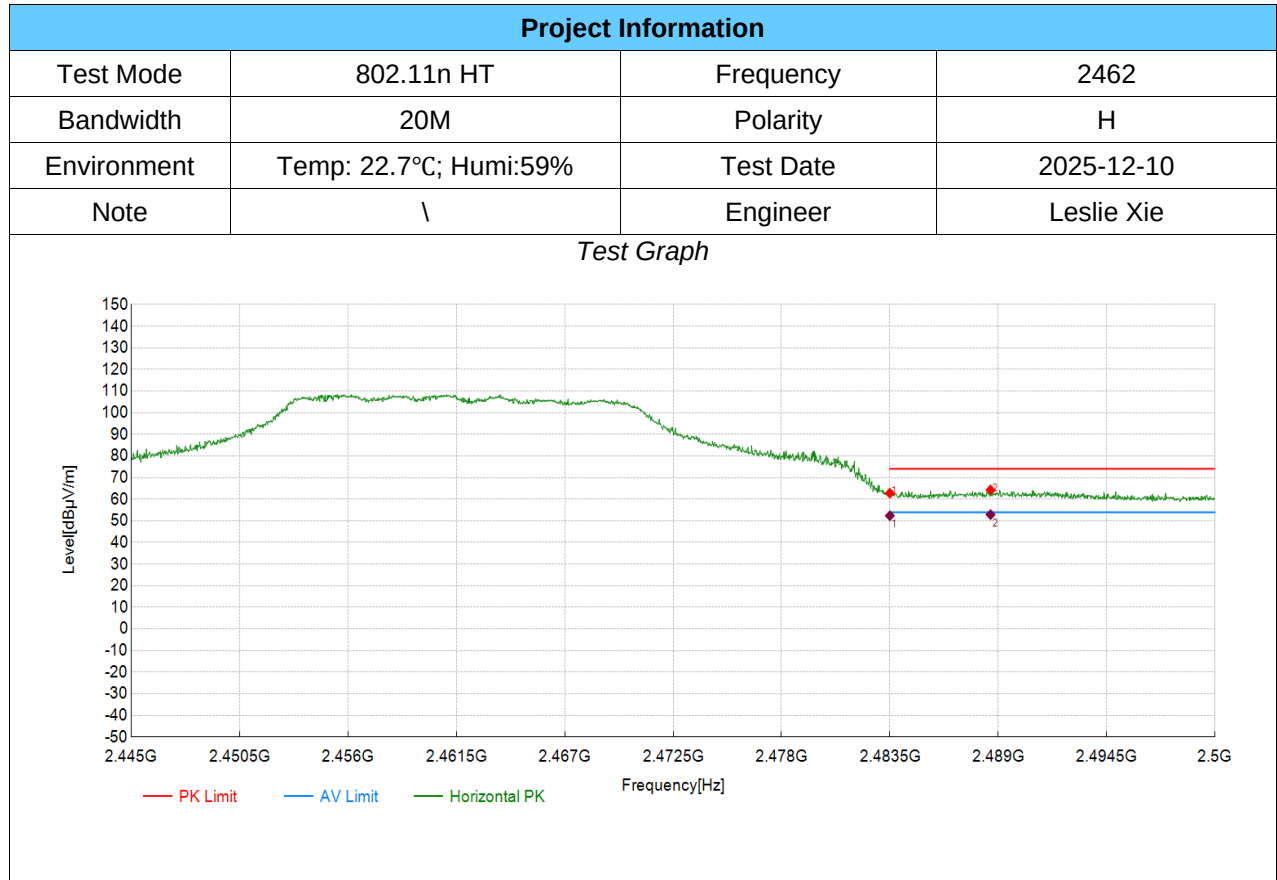


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	52.47	62.75	10.28	74.00	11.25	PK	Horizontal	PASS
2	2488.61	53.92	64.27	10.35	74.00	9.73	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2483.50	10.28	42.10	52.38	54.00	1.62	Horizontal	PASS
2	2488.61	10.35	42.51	52.86	54.00	1.14	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

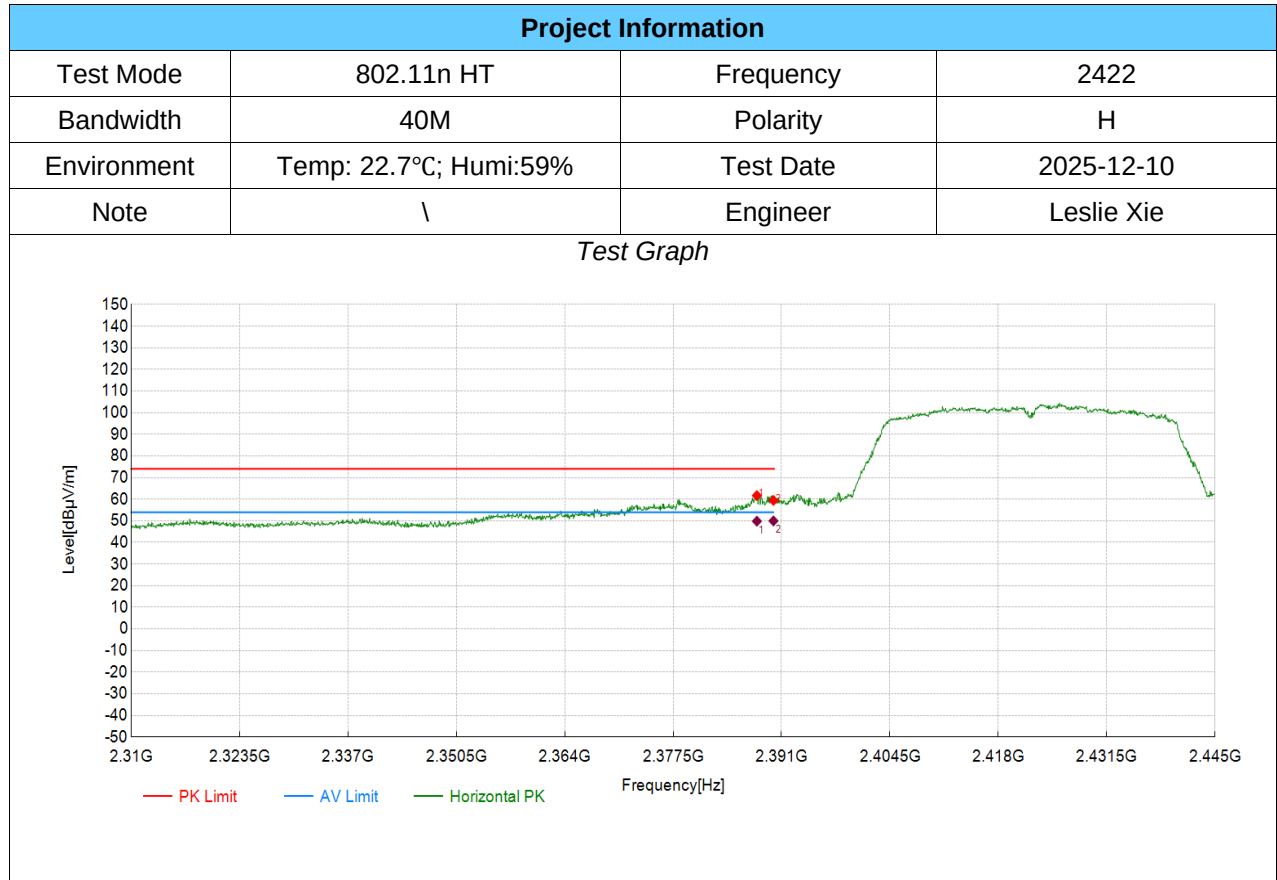


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2387.93	52.81	61.71	8.90	74.00	12.29	PK	Horizontal	PASS
2	2390.00	50.48	59.42	8.94	74.00	14.58	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2387.93	8.90	40.93	49.83	54.00	4.17	Horizontal	PASS
2	2390.00	8.93	41.03	49.96	54.00	4.04	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

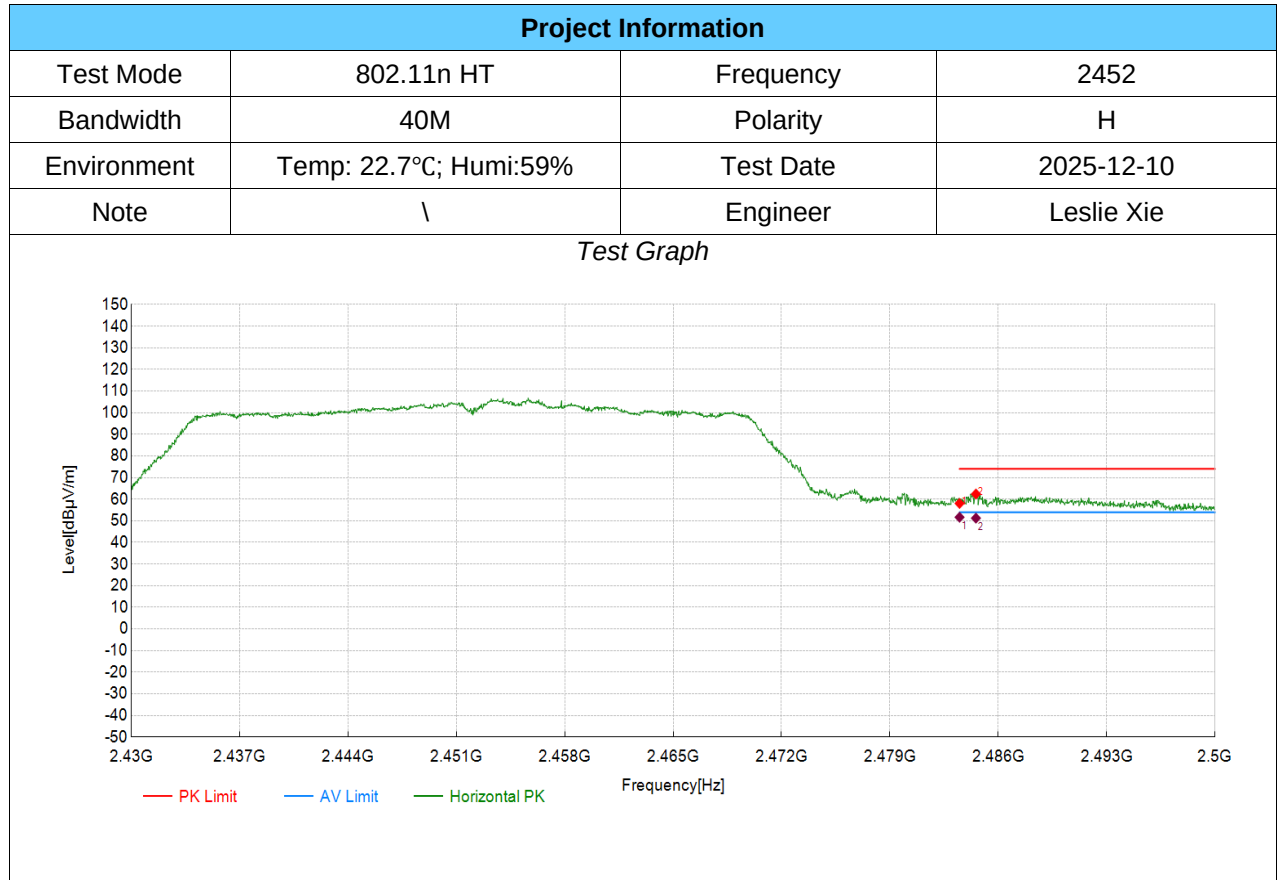


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	47.76	58.04	10.28	74.00	15.96	PK	Horizontal	PASS
2	2484.56	52.10	62.40	10.30	74.00	11.60	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2483.50	10.28	41.37	51.65	54.00	2.35	Horizontal	PASS
2	2484.56	10.30	40.93	51.23	54.00	2.77	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

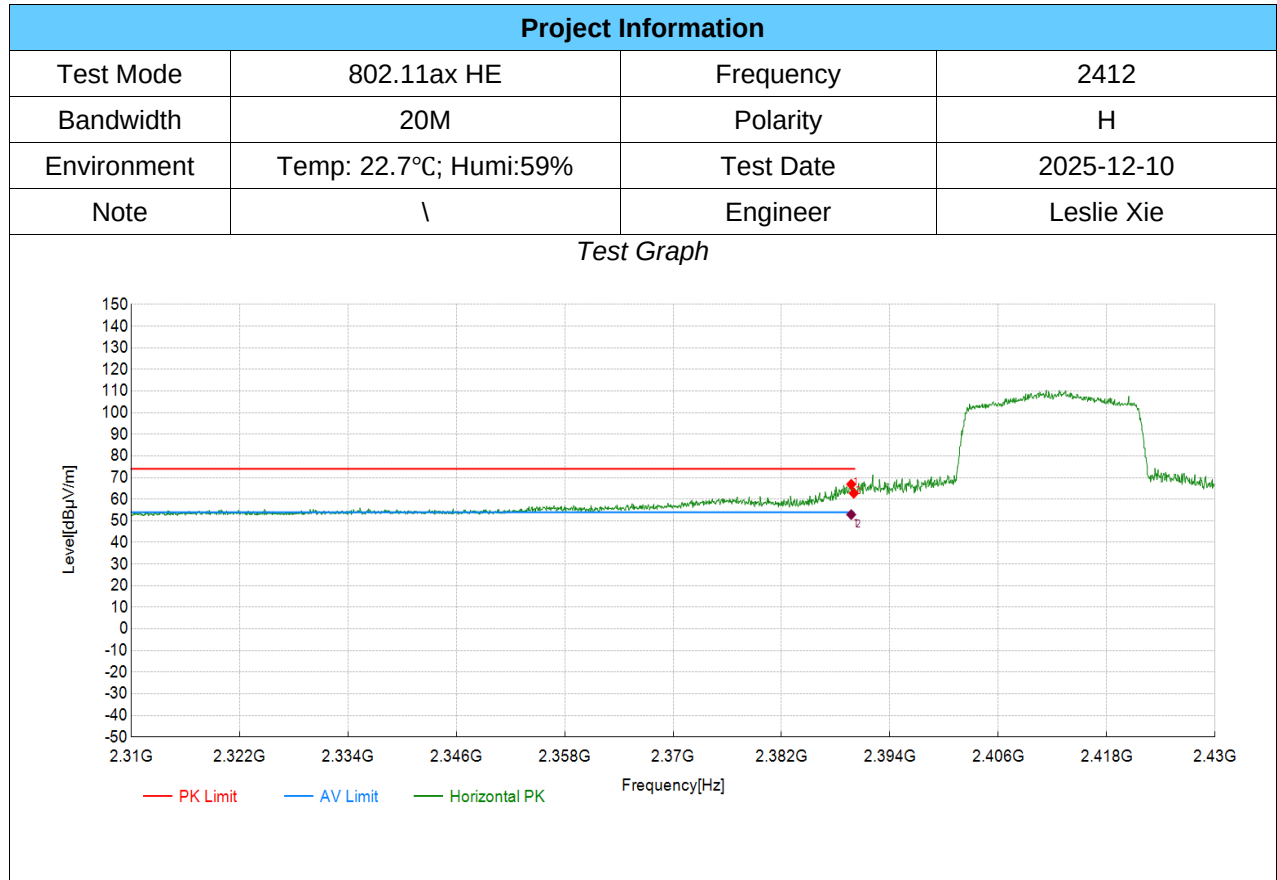


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2389.72	57.98	66.91	8.93	74.00	7.09	PK	Horizontal	PASS
2	2390.00	53.81	62.75	8.94	74.00	11.25	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2389.72	8.93	43.94	52.87	54.00	1.13	Horizontal	PASS
2	2390.00	8.93	43.74	52.67	54.00	1.33	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

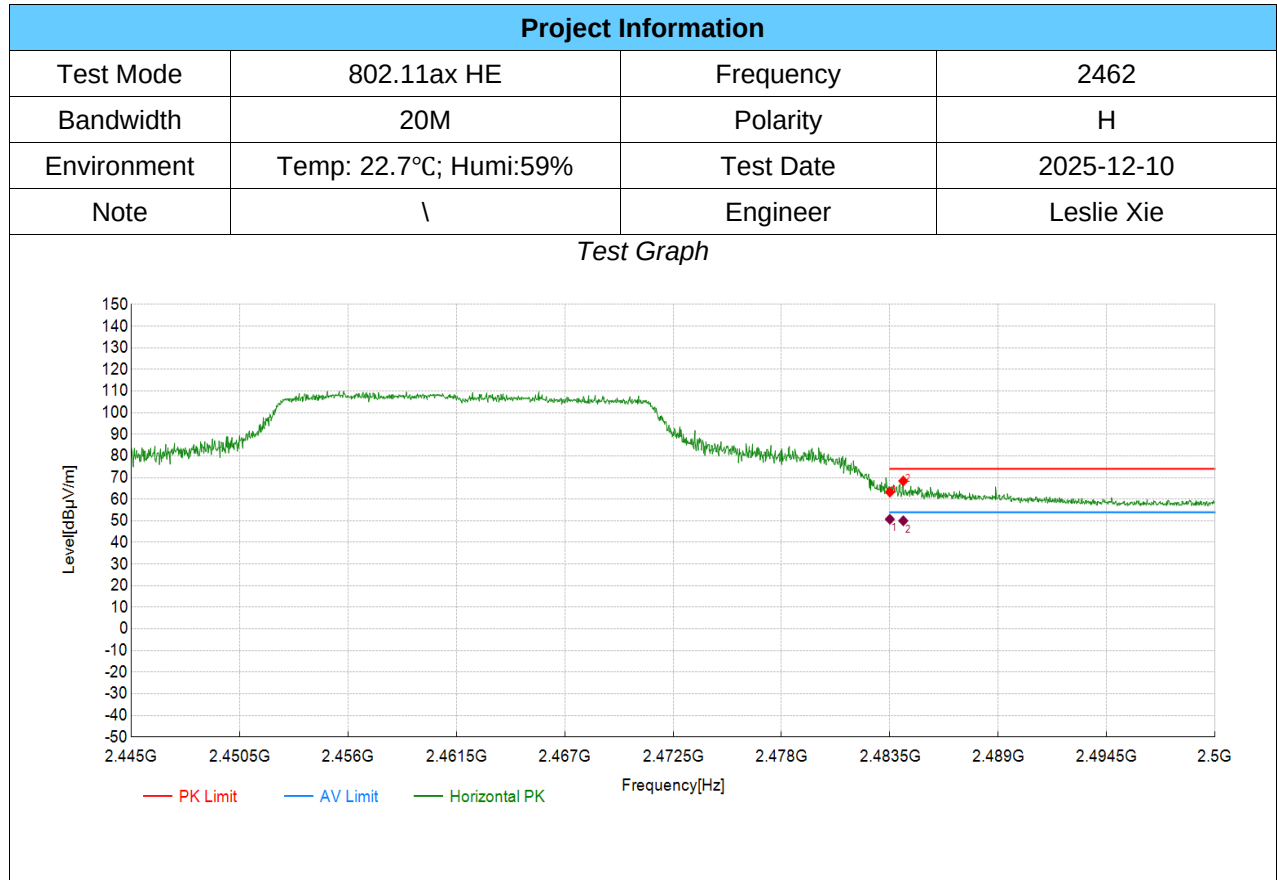


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	52.98	63.26	10.28	74.00	10.74	PK	Horizontal	PASS
2	2484.18	58.13	68.42	10.29	74.00	5.58	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2483.50	10.28	40.44	50.72	54.00	3.28	Horizontal	PASS
2	2484.18	10.29	39.71	50.00	54.00	4.00	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

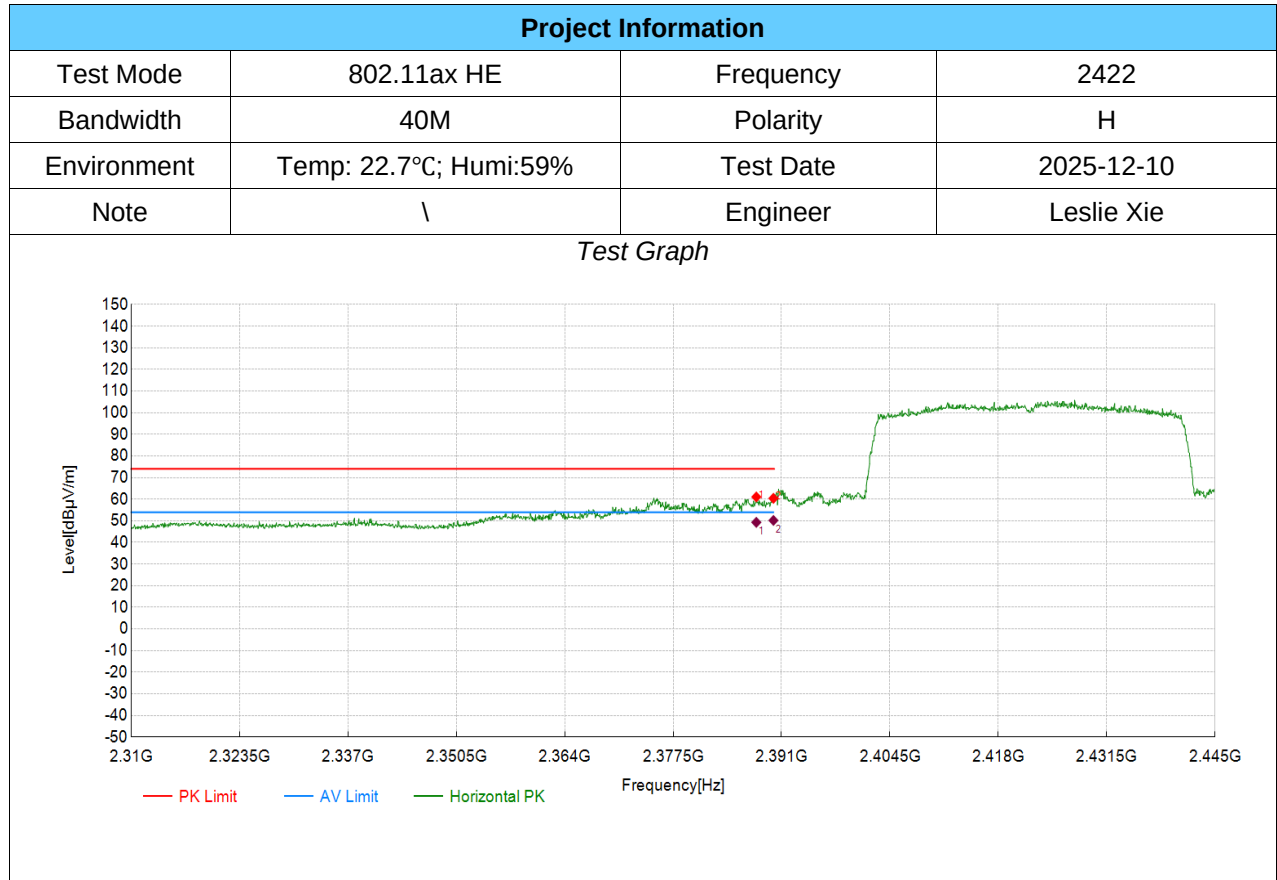


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2387.87	52.14	61.04	8.90	74.00	12.96	PK	Horizontal	PASS
2	2390.00	51.46	60.40	8.94	74.00	13.60	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2387.87	8.90	40.39	49.29	54.00	4.71	Horizontal	PASS
2	2390.00	8.93	41.26	50.19	54.00	3.81	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

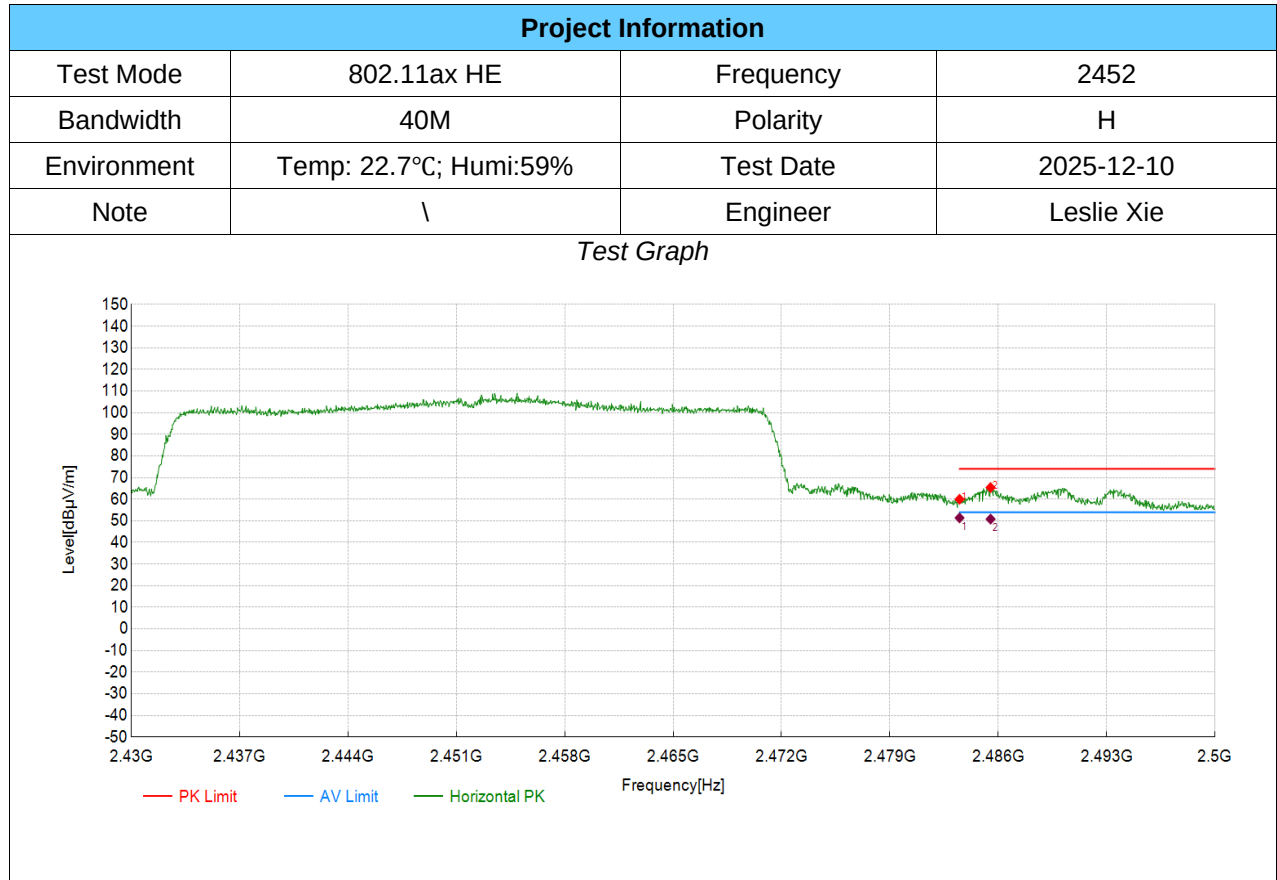

PEAK Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	2483.50	49.69	59.97	10.28	74.00	14.03	PK	Horizontal	PASS
2	2485.50	55.08	65.39	10.31	74.00	8.61	PK	Horizontal	PASS


AVG Data List

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	2483.50	10.28	41.07	51.35	54.00	2.65	Horizontal	PASS
2	2485.50	10.31	40.48	50.79	54.00	3.21	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

11.8.2. SPURIOUS EMISSIONS(1 GHz~3 GHz)


TX Radiated Test Result

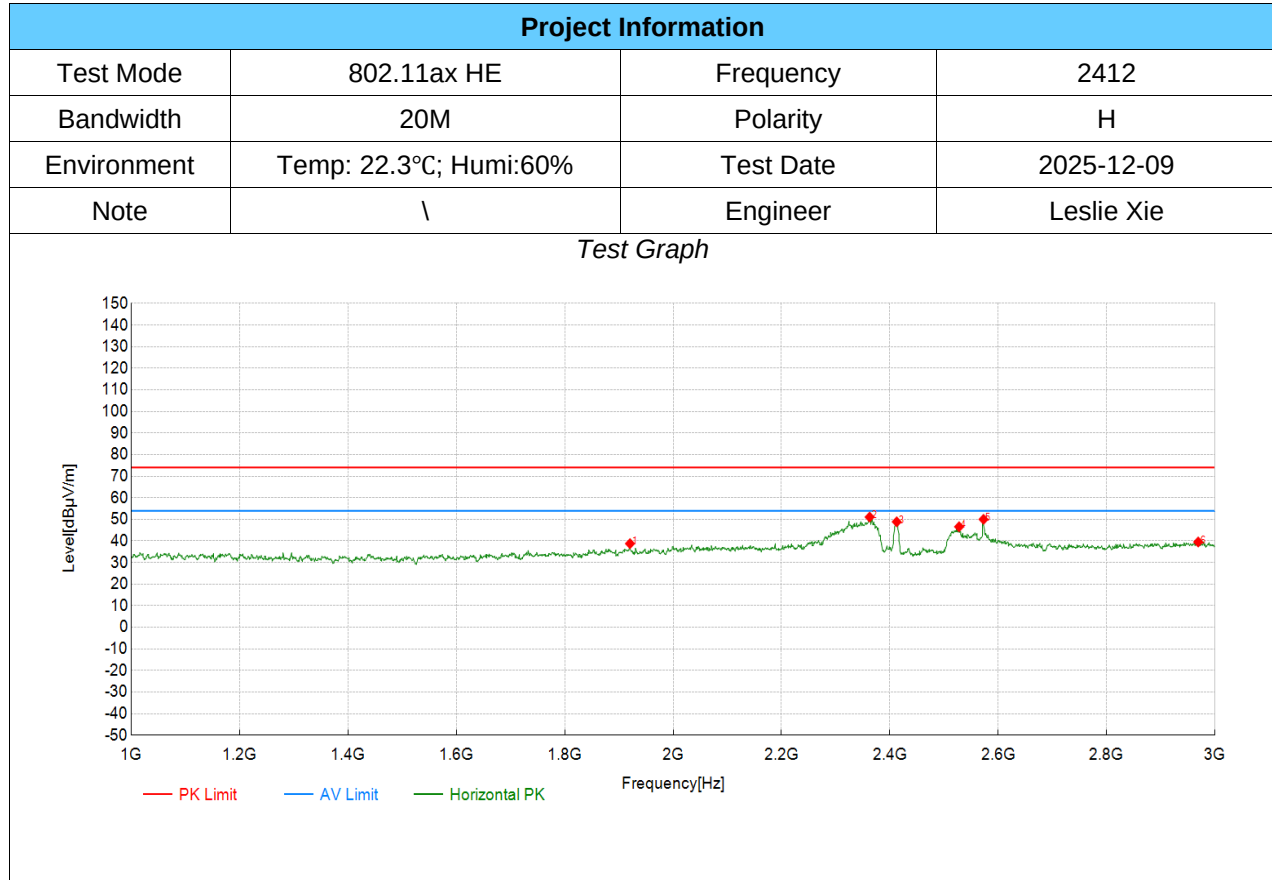

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1920.46	58.75	38.77	-19.98	74.00	35.23	PK	Horizontal	PASS
2	2362.68	69.97	51.09	-18.88	74.00	22.91	PK	Horizontal	PASS
3	2412.00	67.84	48.87	-18.97	/	/	PK	Horizontal	Fundamental
4	2527.76	65.29	46.58	-18.71	74.00	27.42	PK	Horizontal	PASS
5	2572.79	68.54	50.01	-18.53	74.00	23.99	PK	Horizontal	PASS
6	2968.98	56.70	39.53	-17.17	74.00	34.47	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level


TX Radiated Test Result

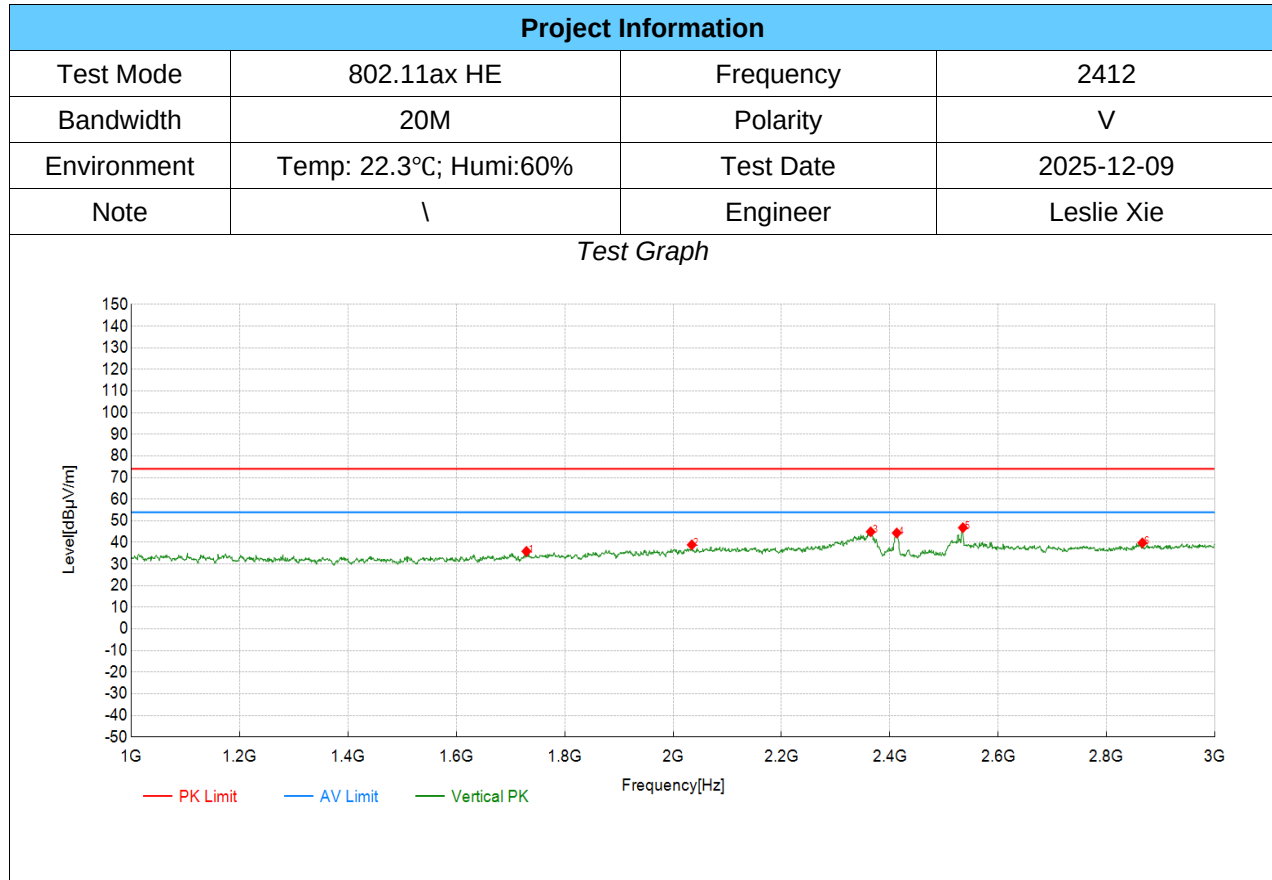

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1729.36	57.24	35.89	-21.35	74.00	38.11	PK	Vertical	PASS
2	2034.52	58.15	38.89	-19.26	74.00	35.11	PK	Vertical	PASS
3	2364.68	63.83	44.94	-18.89	74.00	29.06	PK	Vertical	PASS
4	2412.00	63.35	44.38	-18.97	/	/	PK	Vertical	Fundamental
5	2534.77	65.50	46.81	-18.69	74.00	27.19	PK	Vertical	PASS
6	2865.93	57.23	39.79	-17.44	74.00	34.21	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

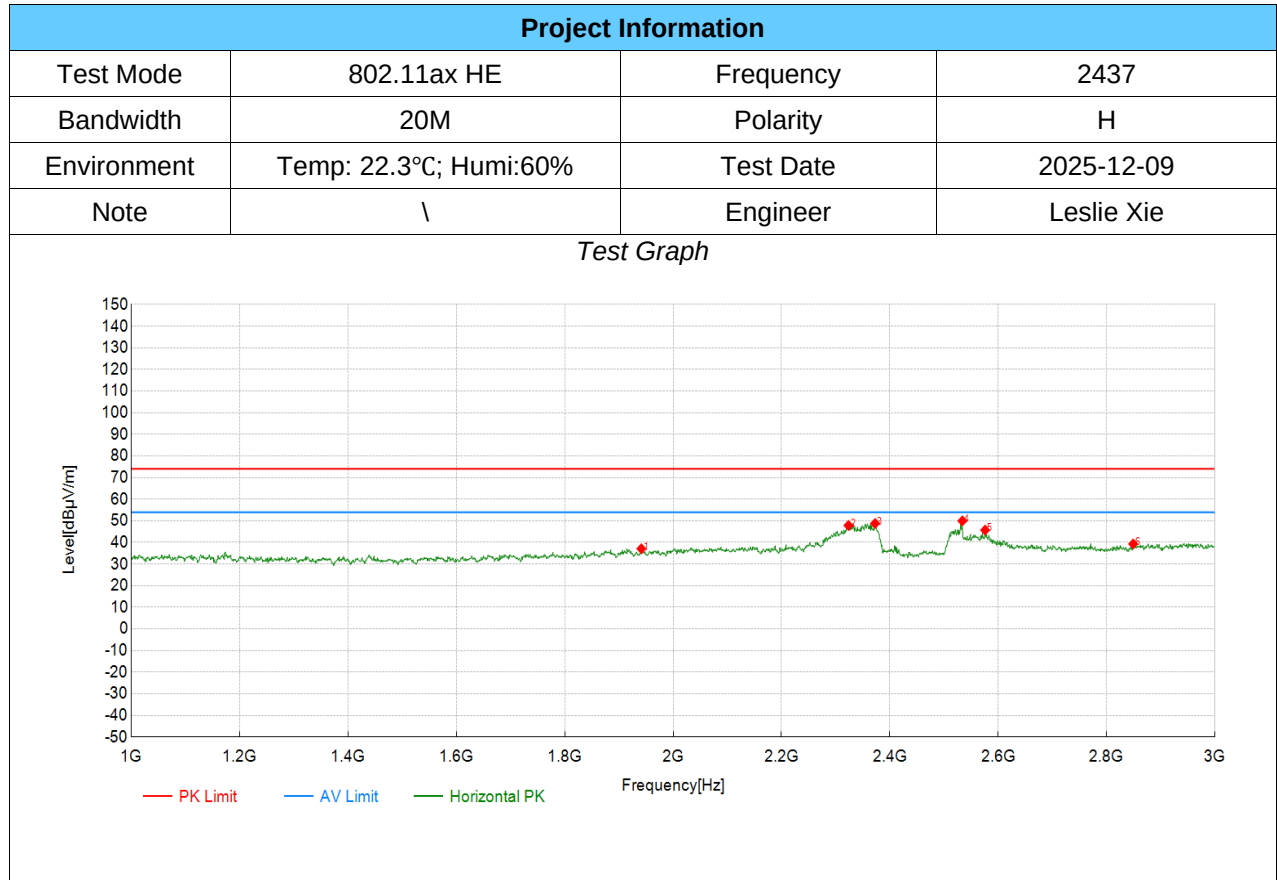

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1941.47	56.91	37.09	-19.82	74.00	36.91	PK	Horizontal	PASS
2	2323.66	66.62	47.84	-18.78	74.00	26.16	PK	Horizontal	PASS
3	2372.69	67.69	48.77	-18.92	74.00	25.23	PK	Horizontal	PASS
4	2533.77	68.65	49.96	-18.69	74.00	24.04	PK	Horizontal	PASS
5	2575.79	64.24	45.72	-18.52	74.00	28.28	PK	Horizontal	PASS
6	2848.92	56.93	39.31	-17.62	74.00	34.69	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

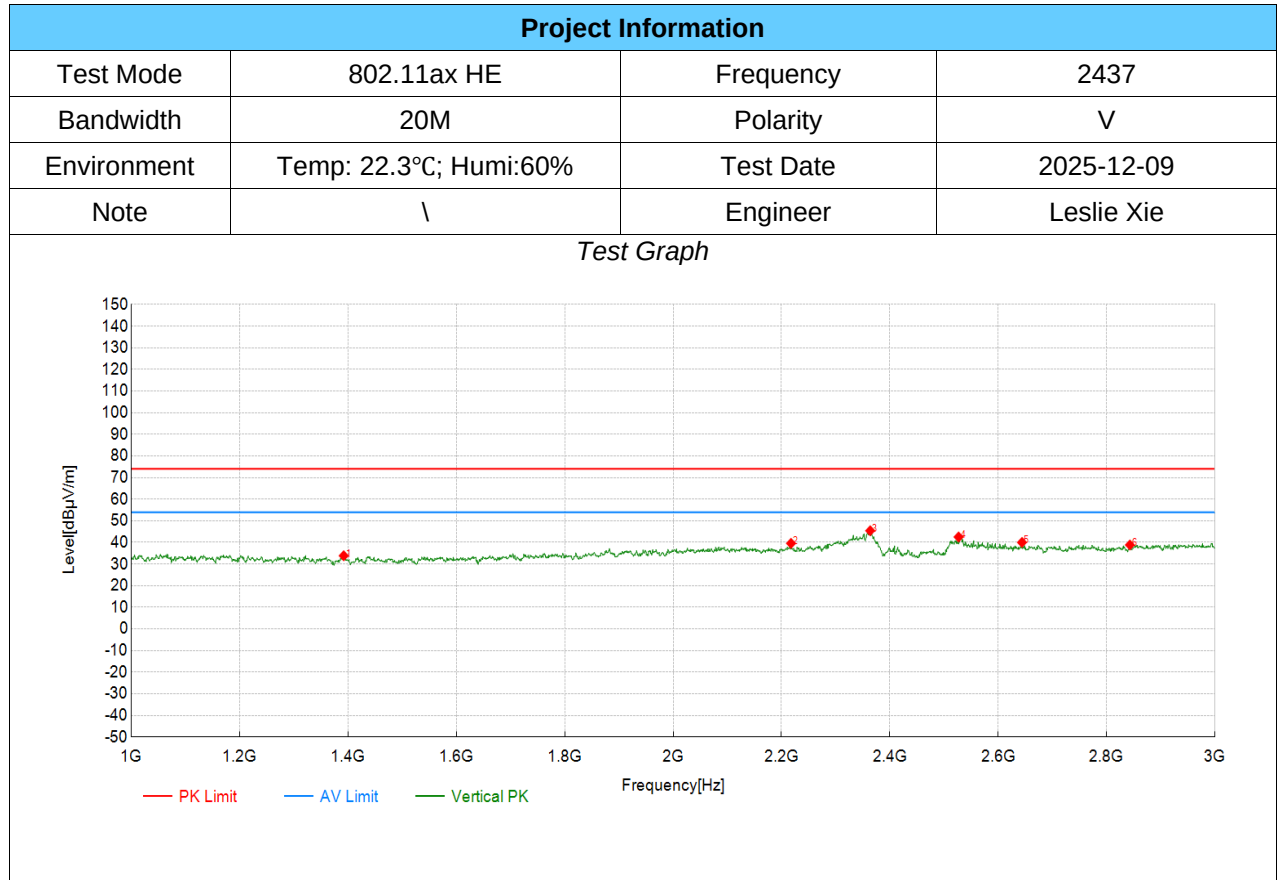

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1392.20	57.01	33.85	-23.16	74.00	40.15	PK	Vertical	PASS
2	2217.61	58.48	39.59	-18.89	74.00	34.41	PK	Vertical	PASS
3	2363.68	64.32	45.43	-18.89	74.00	28.57	PK	Vertical	PASS
4	2526.76	61.23	42.52	-18.71	74.00	31.48	PK	Vertical	PASS
5	2643.82	58.16	40.03	-18.13	74.00	33.97	PK	Vertical	PASS
6	2842.92	56.53	38.85	-17.68	74.00	35.15	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

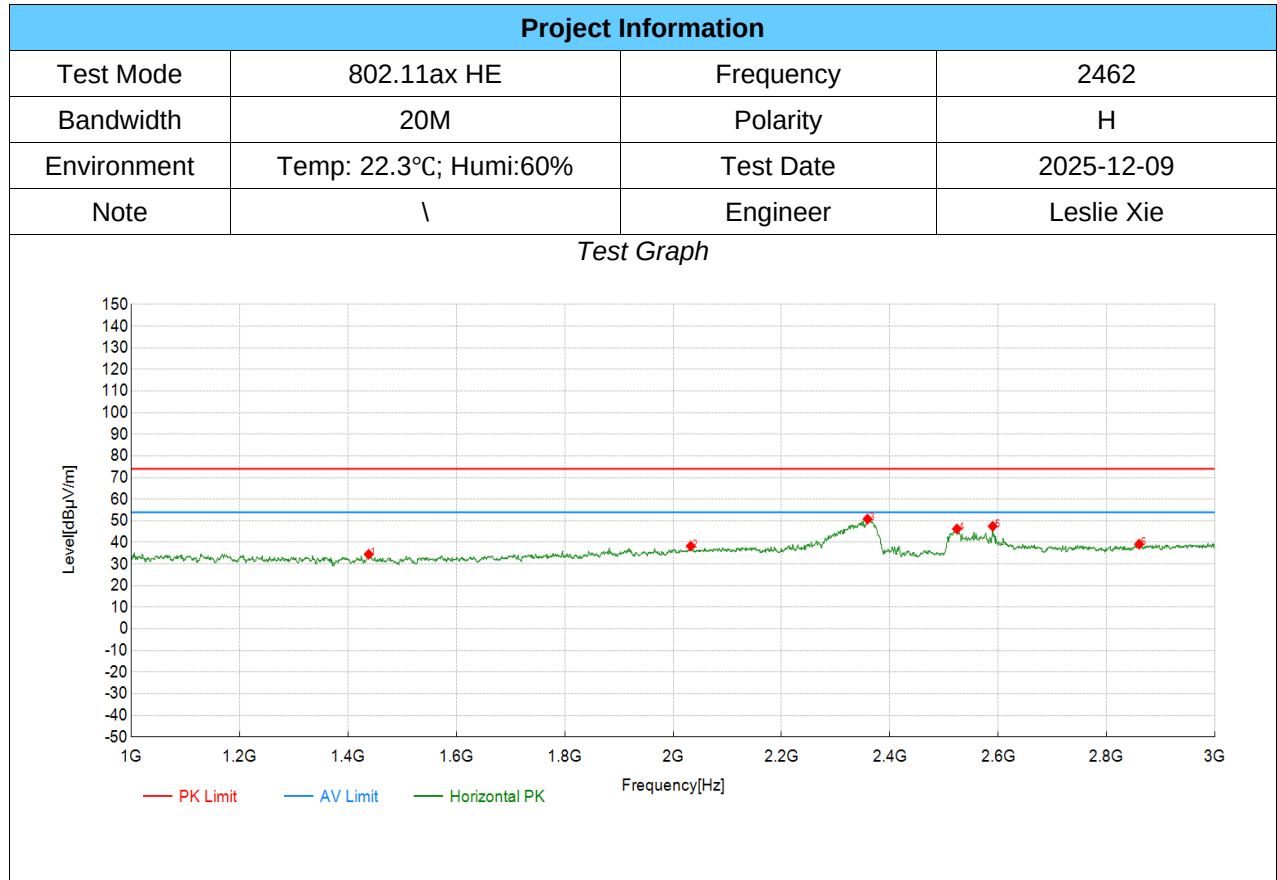

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1438.22	57.84	34.52	-23.32	74.00	39.48	PK	Horizontal	PASS
2	2032.52	57.58	38.32	-19.26	74.00	35.68	PK	Horizontal	PASS
3	2358.68	69.68	50.80	-18.88	74.00	23.20	PK	Horizontal	PASS
4	2523.76	64.98	46.26	-18.72	74.00	27.74	PK	Horizontal	PASS
5	2589.79	65.94	47.48	-18.46	74.00	26.52	PK	Horizontal	PASS
6	2859.93	56.69	39.19	-17.50	74.00	34.81	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level

TX Radiated Test Result

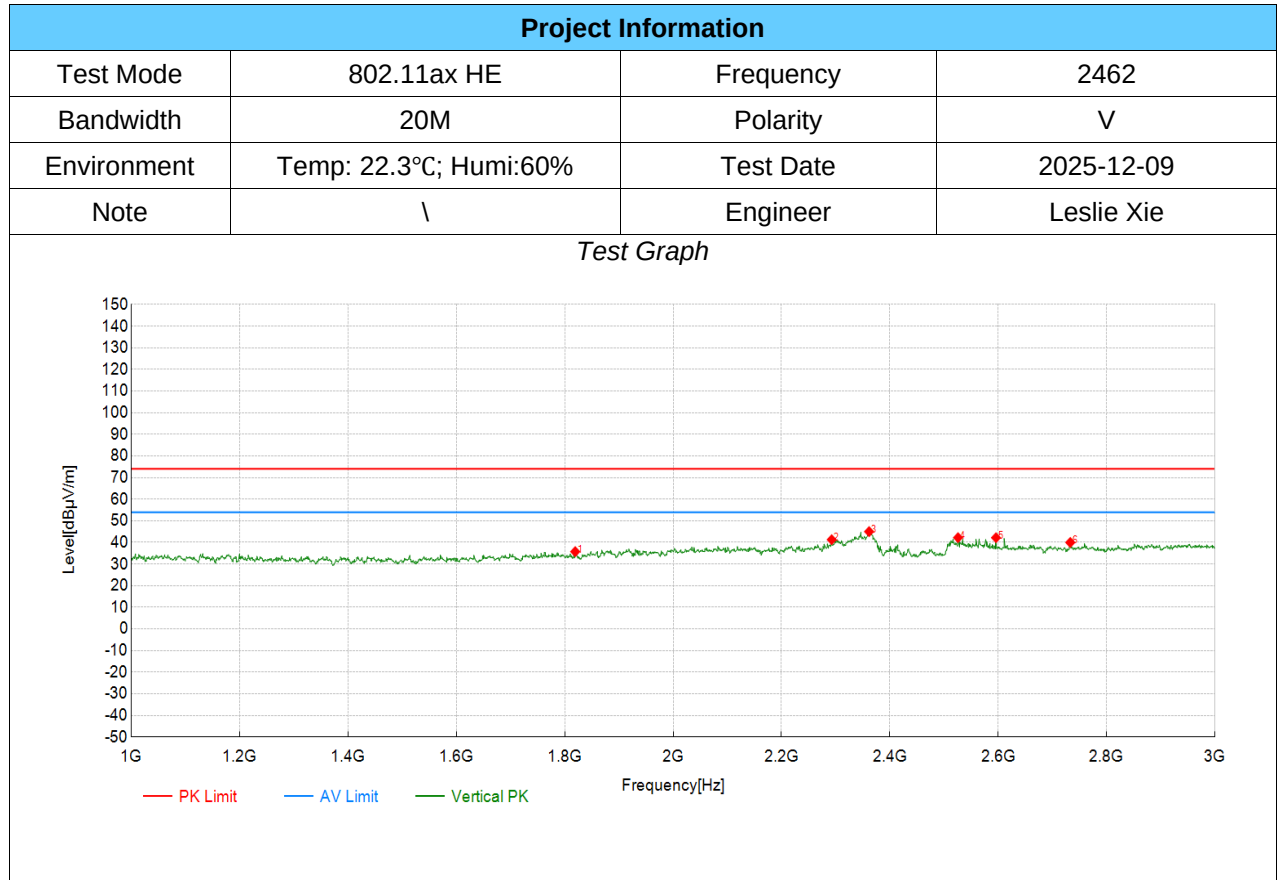


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	1819.41	56.53	35.75	-20.78	74.00	38.25	PK	Vertical	PASS
2	2292.65	60.02	41.29	-18.73	74.00	32.71	PK	Vertical	PASS
3	2361.68	63.88	45.00	-18.88	74.00	29.00	PK	Vertical	PASS
4	2525.76	60.92	42.21	-18.71	74.00	31.79	PK	Vertical	PASS
5	2595.80	60.63	42.20	-18.43	74.00	31.80	PK	Vertical	PASS
6	2732.87	57.86	39.99	-17.87	74.00	34.01	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

11.8.3. SPURIOUS EMISSIONS(3 GHz~18 GHz)


TX Radiated Test Result

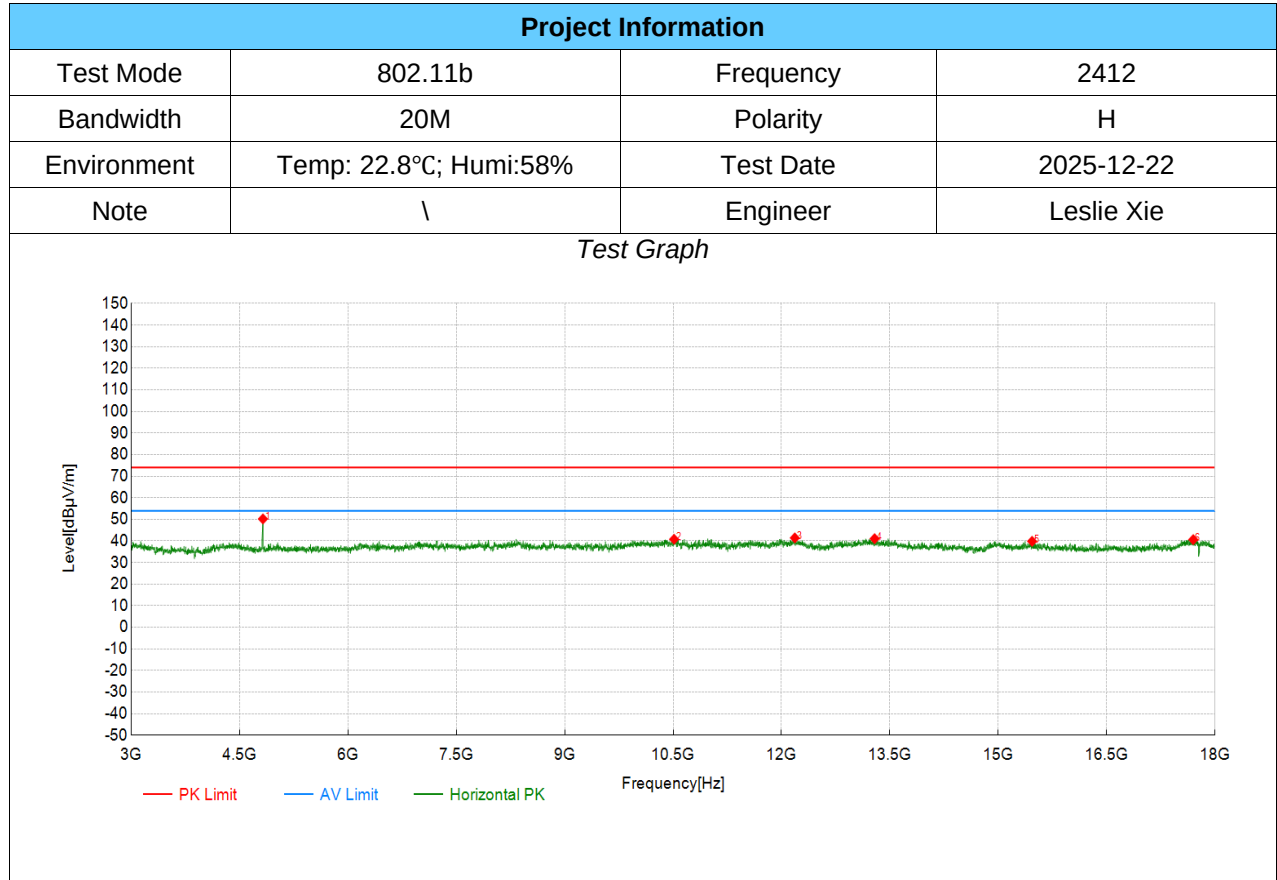

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4824.00	68.41	50.21	-18.20	74.00	23.79	PK	Horizontal	PASS
2	10513.50	50.26	40.81	-9.45	74.00	33.19	PK	Horizontal	PASS
3	12184.50	51.09	41.41	-9.68	74.00	32.59	PK	Horizontal	PASS
4	13288.50	52.00	41.06	-10.94	74.00	32.94	PK	Horizontal	PASS
5	15468.00	49.19	39.84	-9.35	74.00	34.16	PK	Horizontal	PASS
6	17698.50	45.69	40.63	-5.06	74.00	33.37	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

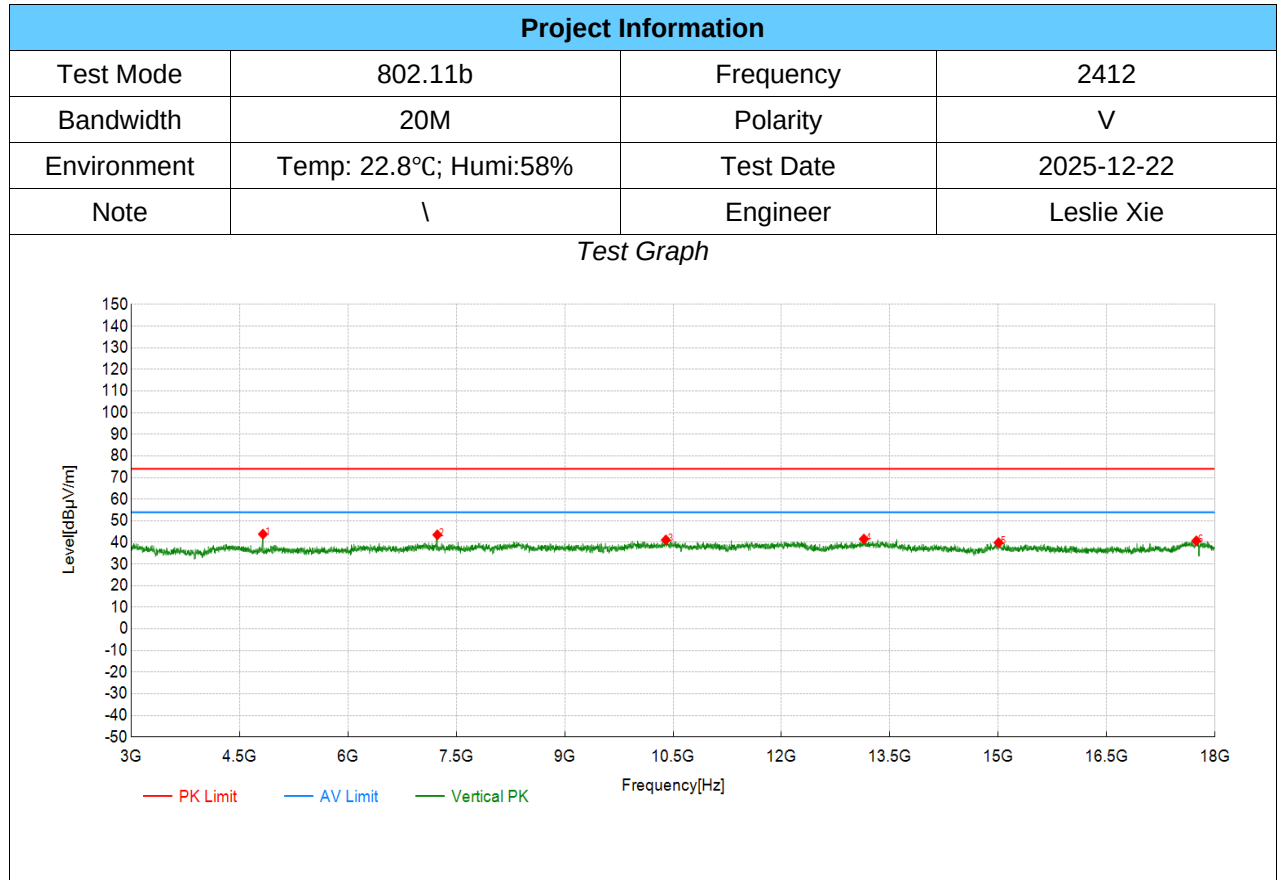

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4824.00	62.02	43.82	-18.20	74.00	30.18	PK	Vertical	PASS
2	7237.50	58.73	43.52	-15.21	74.00	30.48	PK	Vertical	PASS
3	10399.50	50.70	41.17	-9.53	74.00	32.83	PK	Vertical	PASS
4	13140.00	52.51	41.56	-10.95	74.00	32.44	PK	Vertical	PASS
5	15004.50	49.14	39.87	-9.27	74.00	34.13	PK	Vertical	PASS
6	17740.50	45.82	40.74	-5.08	74.00	33.26	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

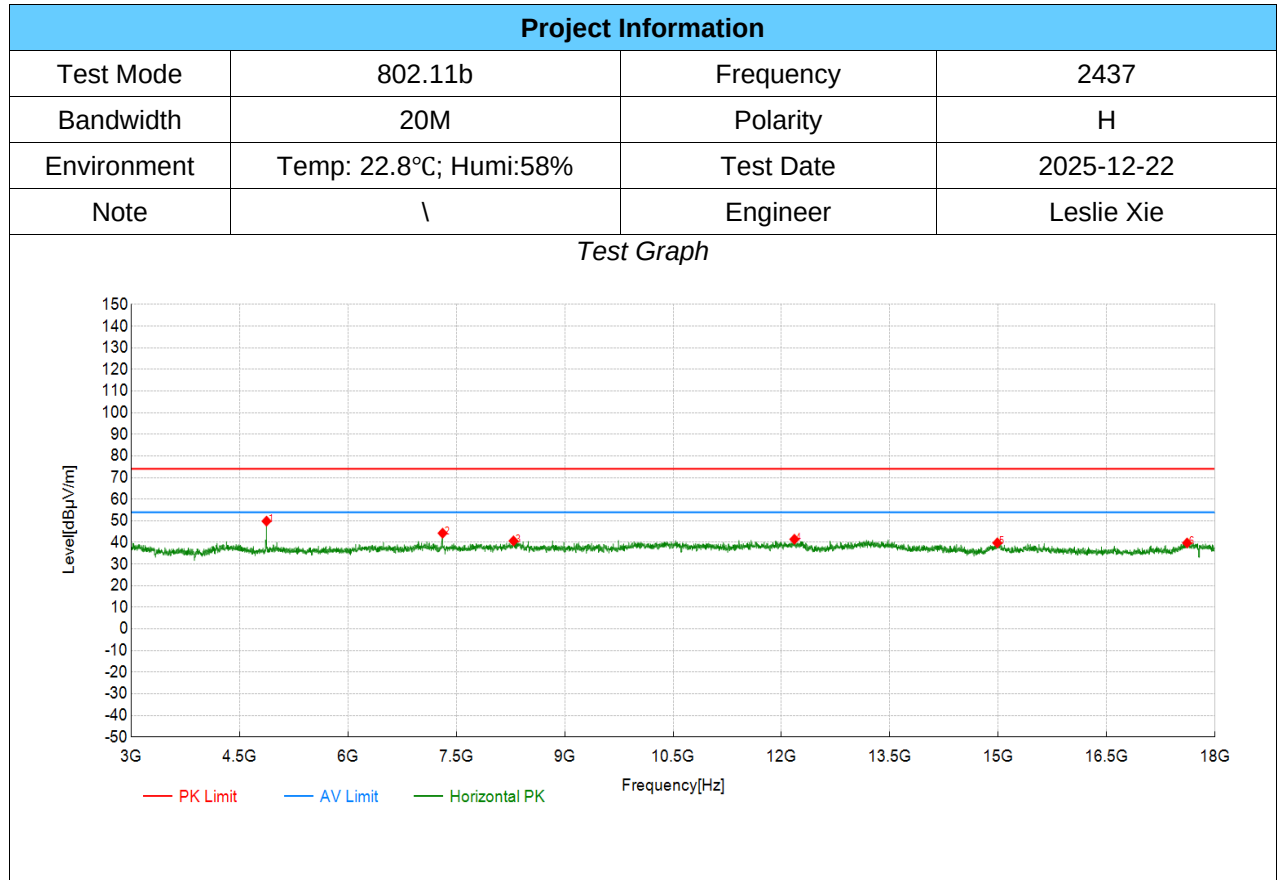

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4873.50	67.80	49.85	-17.95	74.00	24.15	PK	Horizontal	PASS
2	7311.00	59.45	44.27	-15.18	74.00	29.73	PK	Horizontal	PASS
3	8292.00	54.05	40.70	-13.35	74.00	33.30	PK	Horizontal	PASS
4	12178.50	51.13	41.45	-9.68	74.00	32.55	PK	Horizontal	PASS
5	14986.50	49.09	39.80	-9.29	74.00	34.20	PK	Horizontal	PASS
6	17613.00	44.76	39.75	-5.01	74.00	34.25	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

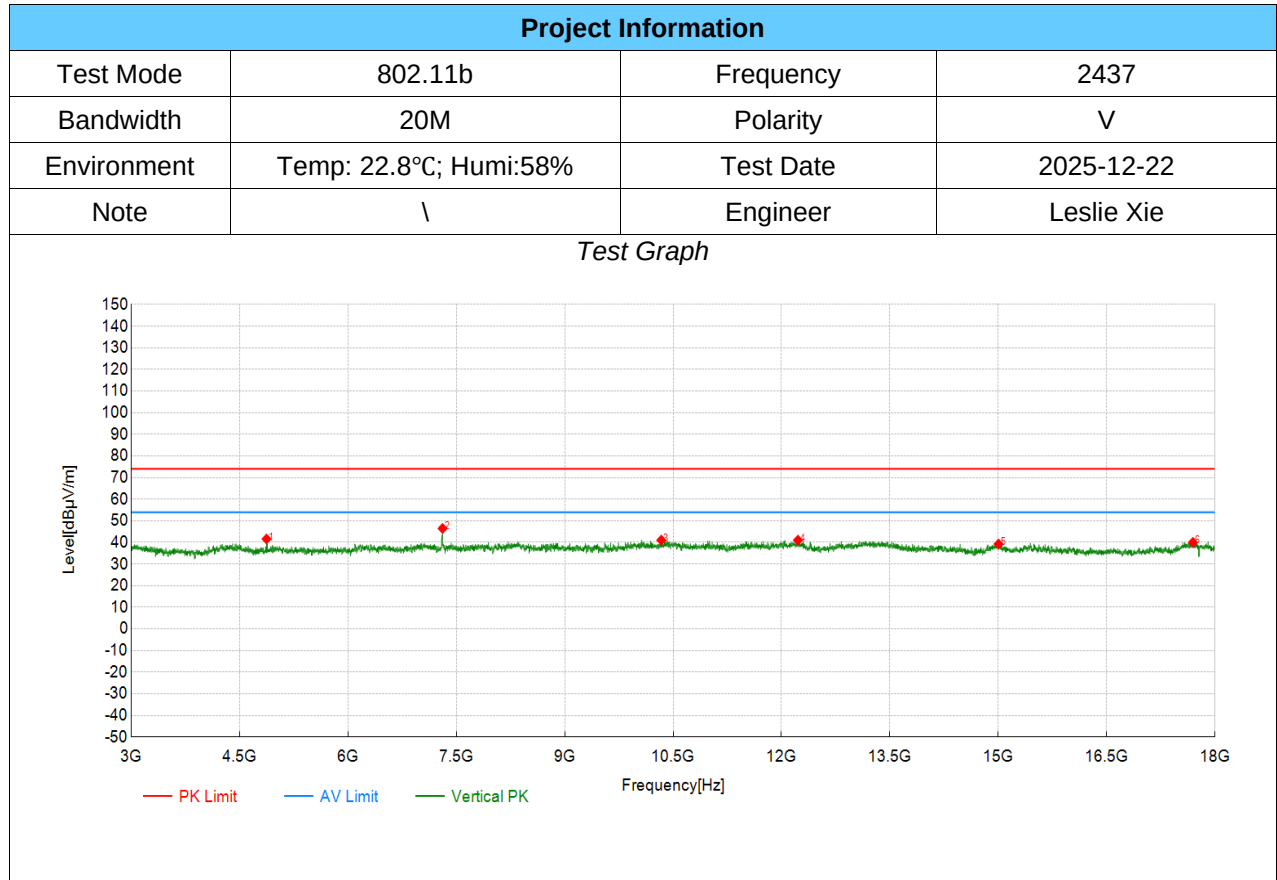

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4873.50	59.54	41.59	-17.95	74.00	32.41	PK	Vertical	PASS
2	7309.50	61.66	46.48	-15.18	74.00	27.52	PK	Vertical	PASS
3	10336.50	51.14	41.07	-10.07	74.00	32.93	PK	Vertical	PASS
4	12228.00	50.93	41.05	-9.88	74.00	32.95	PK	Vertical	PASS
5	15003.00	48.52	39.26	-9.26	74.00	34.74	PK	Vertical	PASS
6	17694.00	45.07	40.02	-5.05	74.00	33.98	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

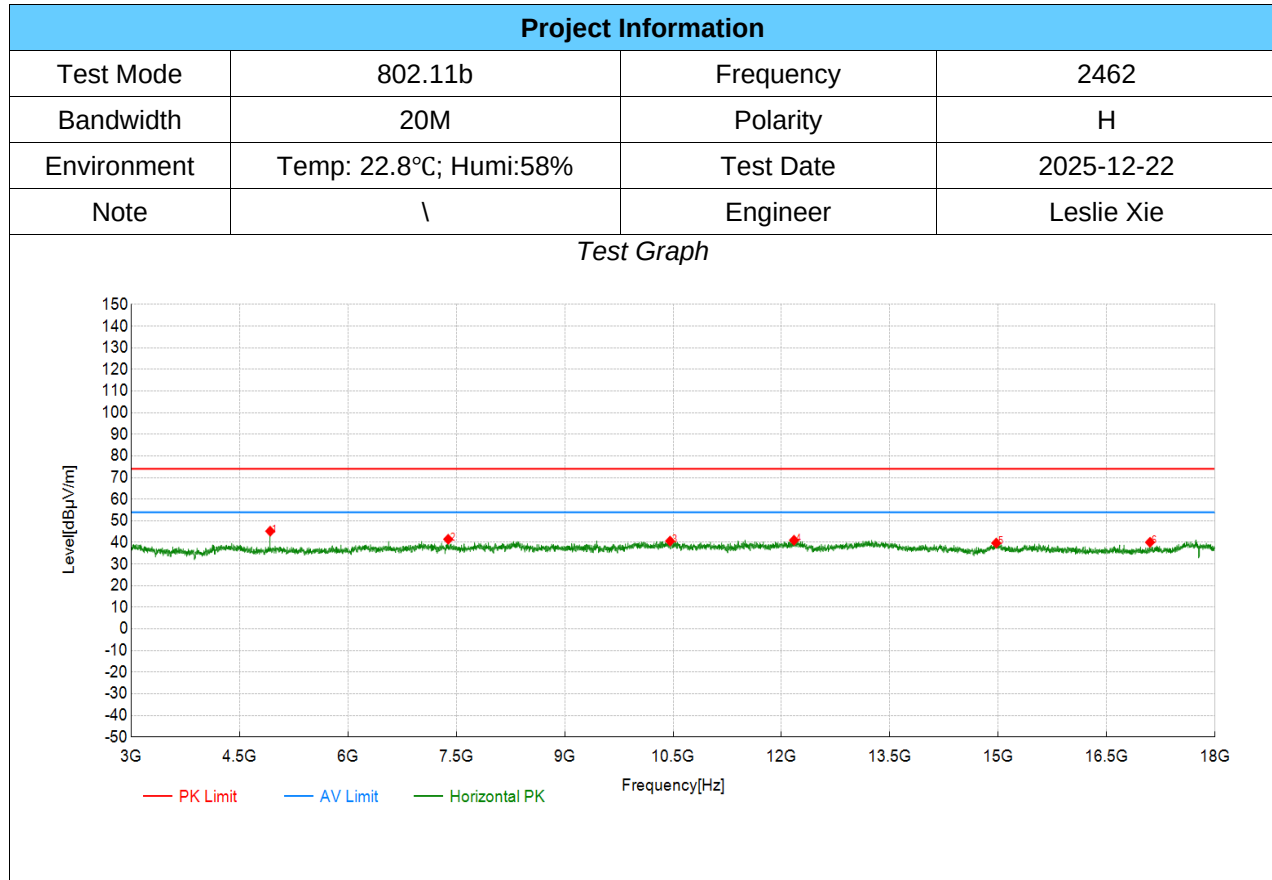

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4924.50	62.88	45.19	-17.69	74.00	28.81	PK	Horizontal	PASS
2	7387.50	56.61	41.47	-15.14	74.00	32.53	PK	Horizontal	PASS
3	10458.00	50.11	40.62	-9.49	74.00	33.38	PK	Horizontal	PASS
4	12172.50	50.68	41.00	-9.68	74.00	33.00	PK	Horizontal	PASS
5	14971.50	49.06	39.71	-9.35	74.00	34.29	PK	Horizontal	PASS
6	17100.00	47.19	40.08	-7.11	74.00	33.92	PK	Horizontal	PASS

Note: (1) Level = Reading + Factor
(2) Margin = Limit - Level


TX Radiated Test Result

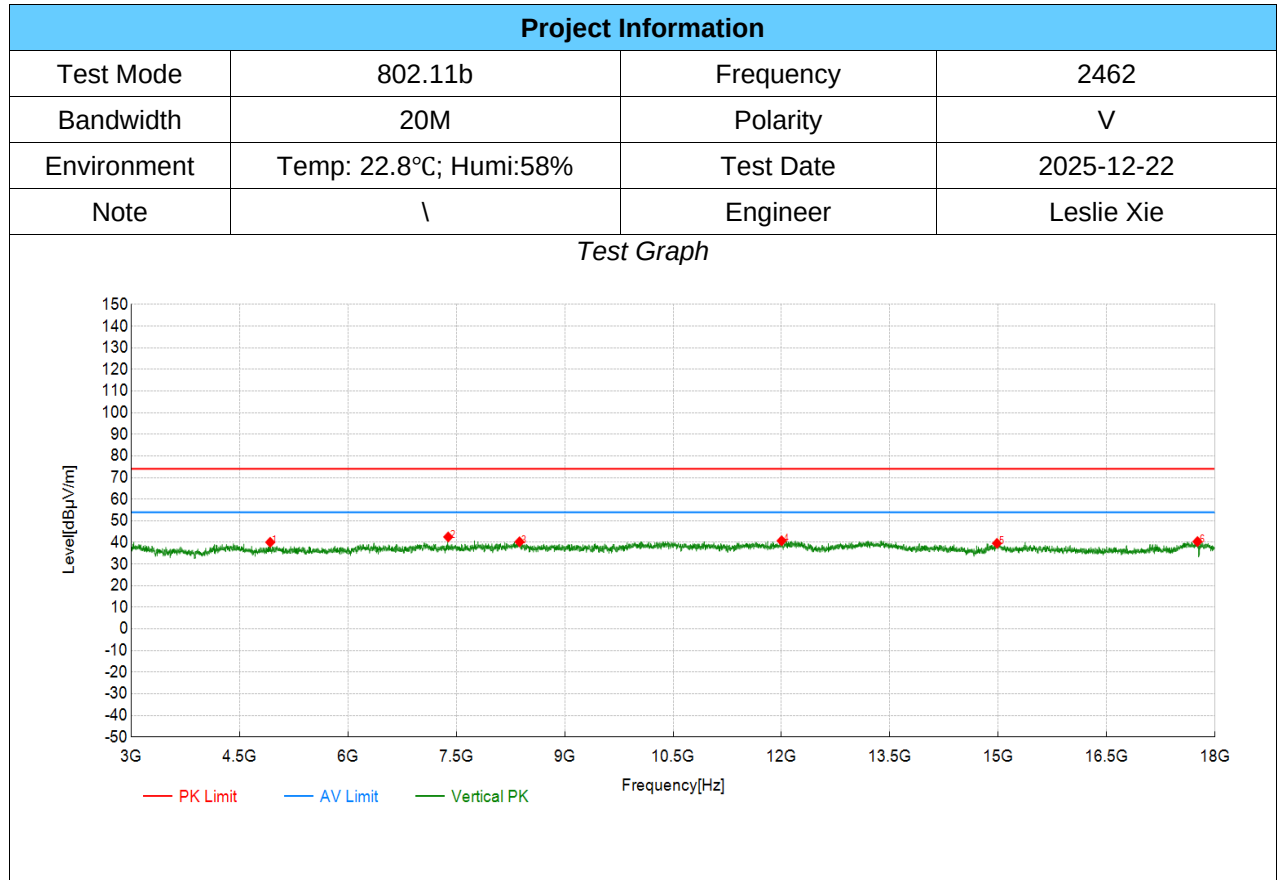

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4924.50	57.76	40.07	-17.69	74.00	33.93	PK	Vertical	PASS
2	7387.50	57.68	42.54	-15.14	74.00	31.46	PK	Vertical	PASS
3	8374.50	52.90	40.30	-12.60	74.00	33.70	PK	Vertical	PASS
4	12001.50	50.30	40.78	-9.52	74.00	33.22	PK	Vertical	PASS
5	14982.00	48.90	39.59	-9.31	74.00	34.41	PK	Vertical	PASS
6	17757.00	45.49	40.39	-5.10	74.00	33.61	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

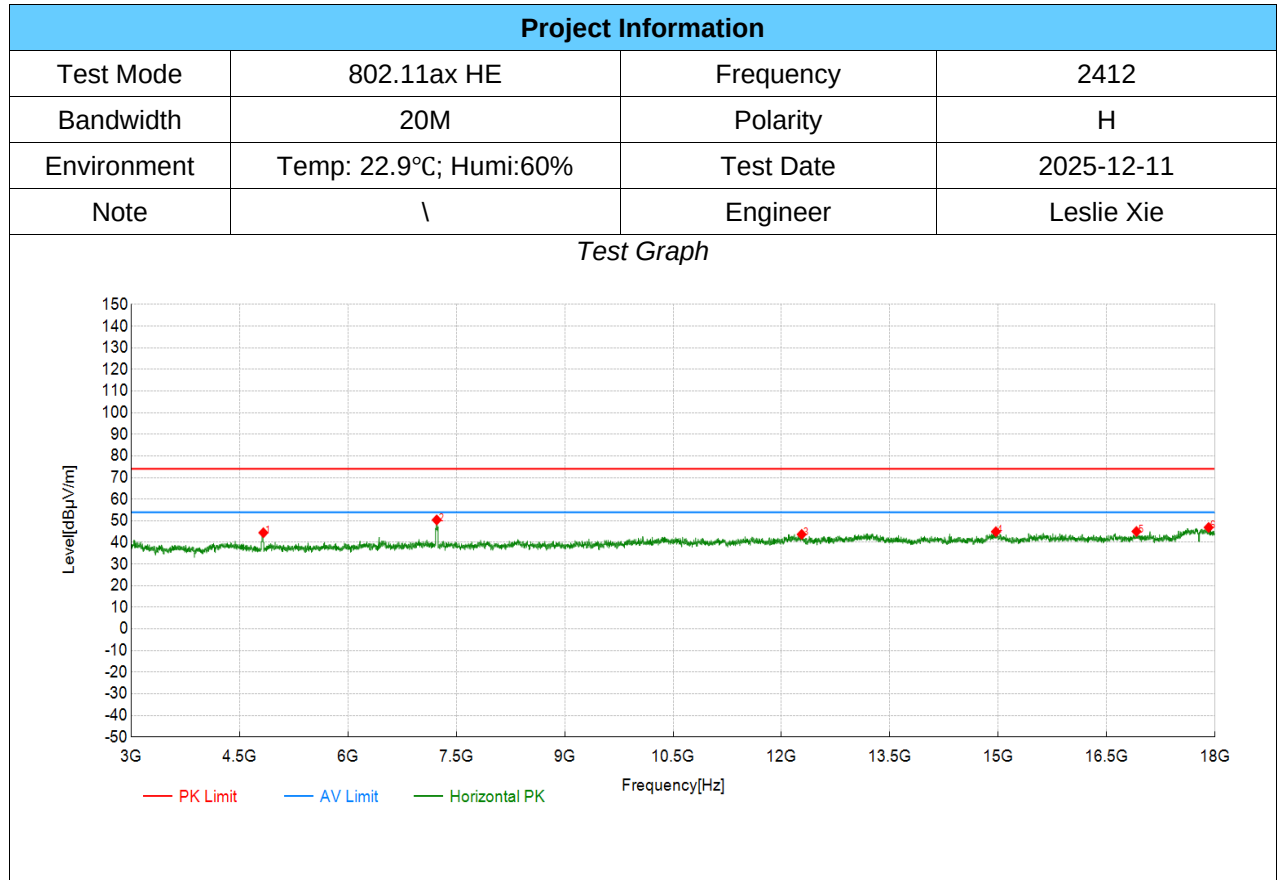

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4830.00	61.89	44.48	-17.41	74.00	29.52	PK	Horizontal	PASS
2	7228.50	64.36	50.40	-13.96	74.00	23.60	PK	Horizontal	PASS
3	12279.00	51.10	43.73	-7.37	74.00	30.27	PK	Horizontal	PASS
4	14967.00	49.78	44.97	-4.81	74.00	29.03	PK	Horizontal	PASS
5	16912.50	46.21	45.07	-1.14	74.00	28.93	PK	Horizontal	PASS
6	17911.50	46.12	46.93	0.81	74.00	27.07	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

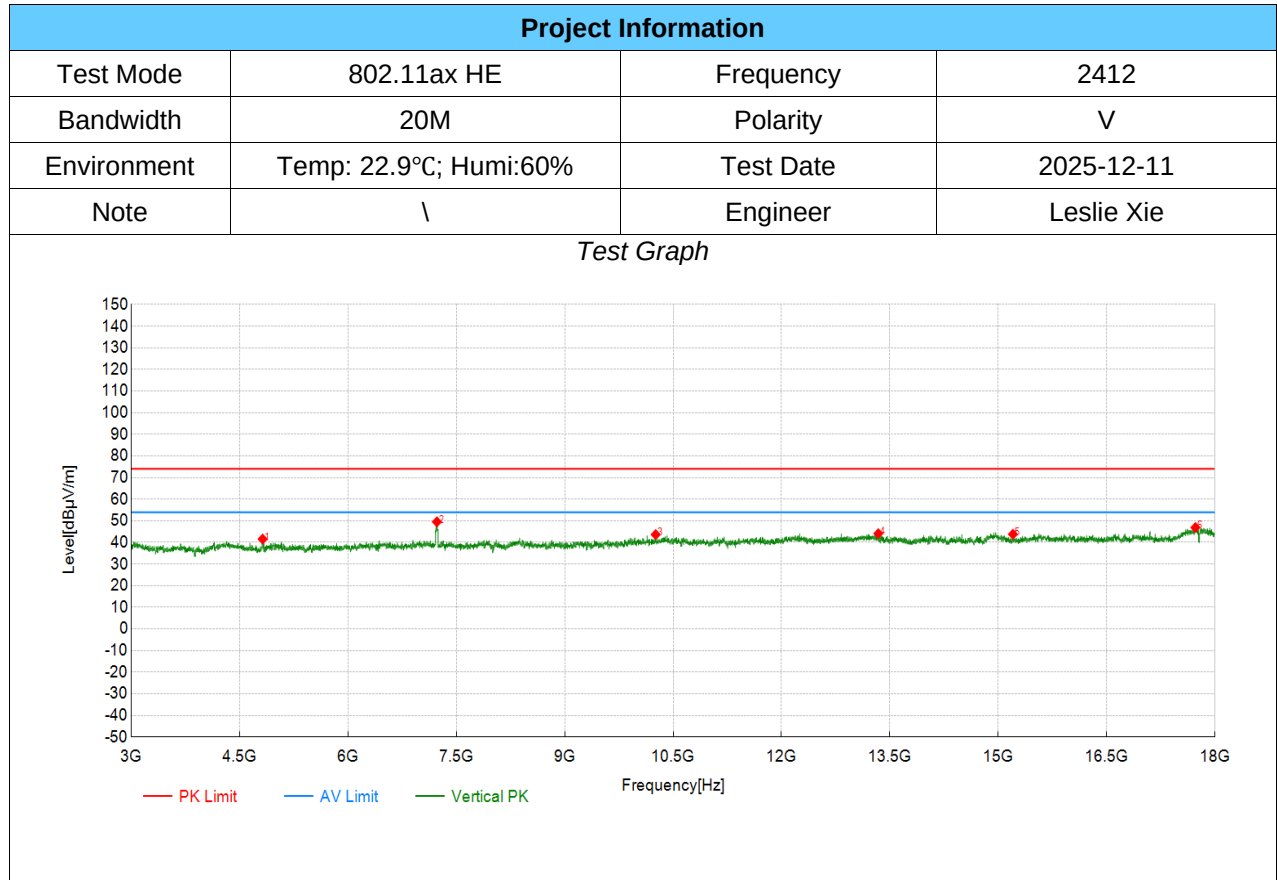

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4819.50	59.16	41.59	-17.57	74.00	32.41	PK	Vertical	PASS
2	7231.50	63.51	49.55	-13.96	74.00	24.45	PK	Vertical	PASS
3	10258.50	52.28	43.64	-8.64	74.00	30.36	PK	Vertical	PASS
4	13339.50	52.15	44.07	-8.08	74.00	29.93	PK	Vertical	PASS
5	15202.50	50.07	43.78	-6.29	74.00	30.22	PK	Vertical	PASS
6	17728.50	45.67	46.89	1.22	74.00	27.11	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

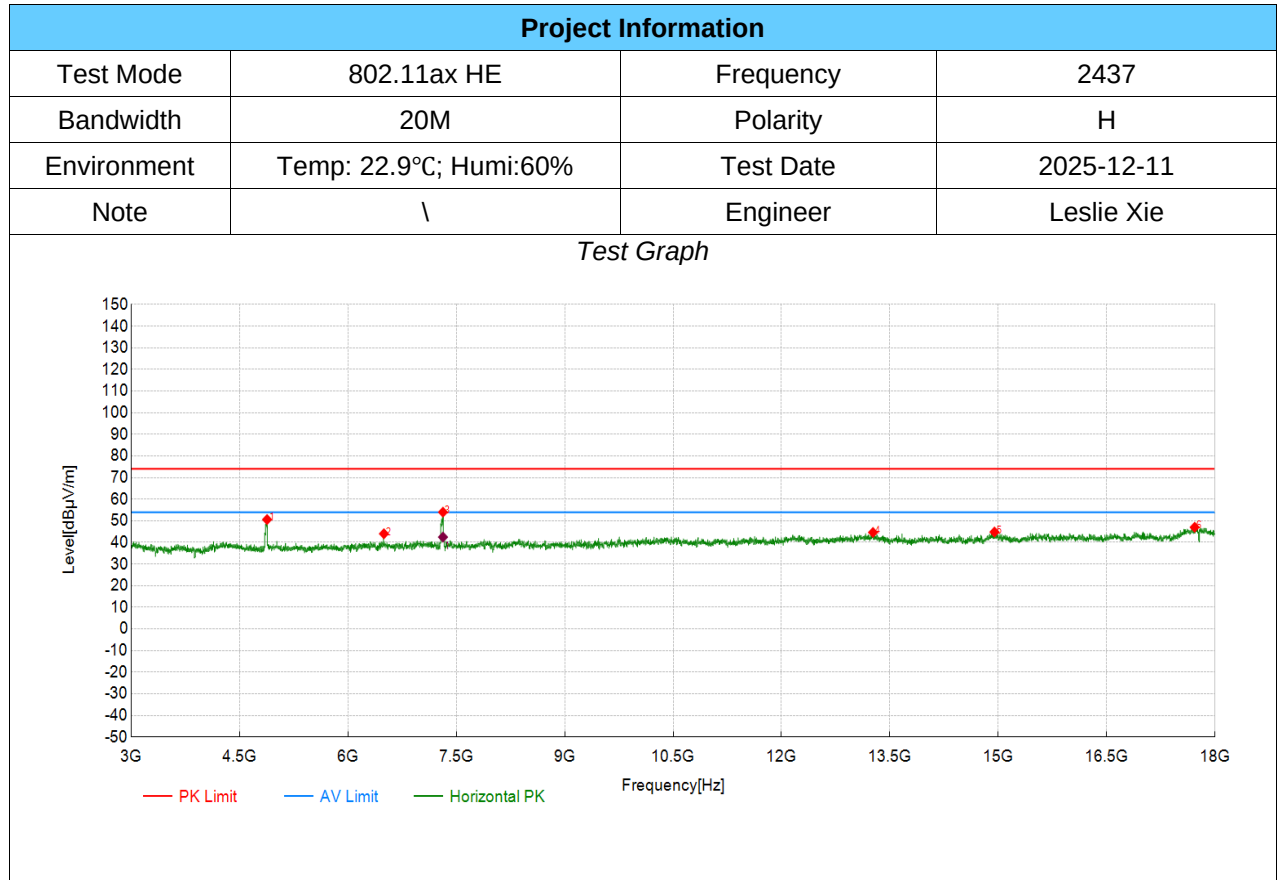


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4881.00	67.21	50.58	-16.63	74.00	23.42	PK	Horizontal	PASS
2	6498.00	58.17	44.01	-14.16	74.00	29.99	PK	Horizontal	PASS
3	7315.50	67.91	54.01	-13.90	74.00	19.99	PK	Horizontal	PASS
4	13266.00	52.33	44.64	-7.69	74.00	29.36	PK	Horizontal	PASS
5	14947.50	49.50	44.81	-4.69	74.00	29.19	PK	Horizontal	PASS
6	17718.00	45.88	47.03	1.15	74.00	26.97	PK	Horizontal	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	7315.50	-15.06	57.54	42.48	54.00	11.52	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

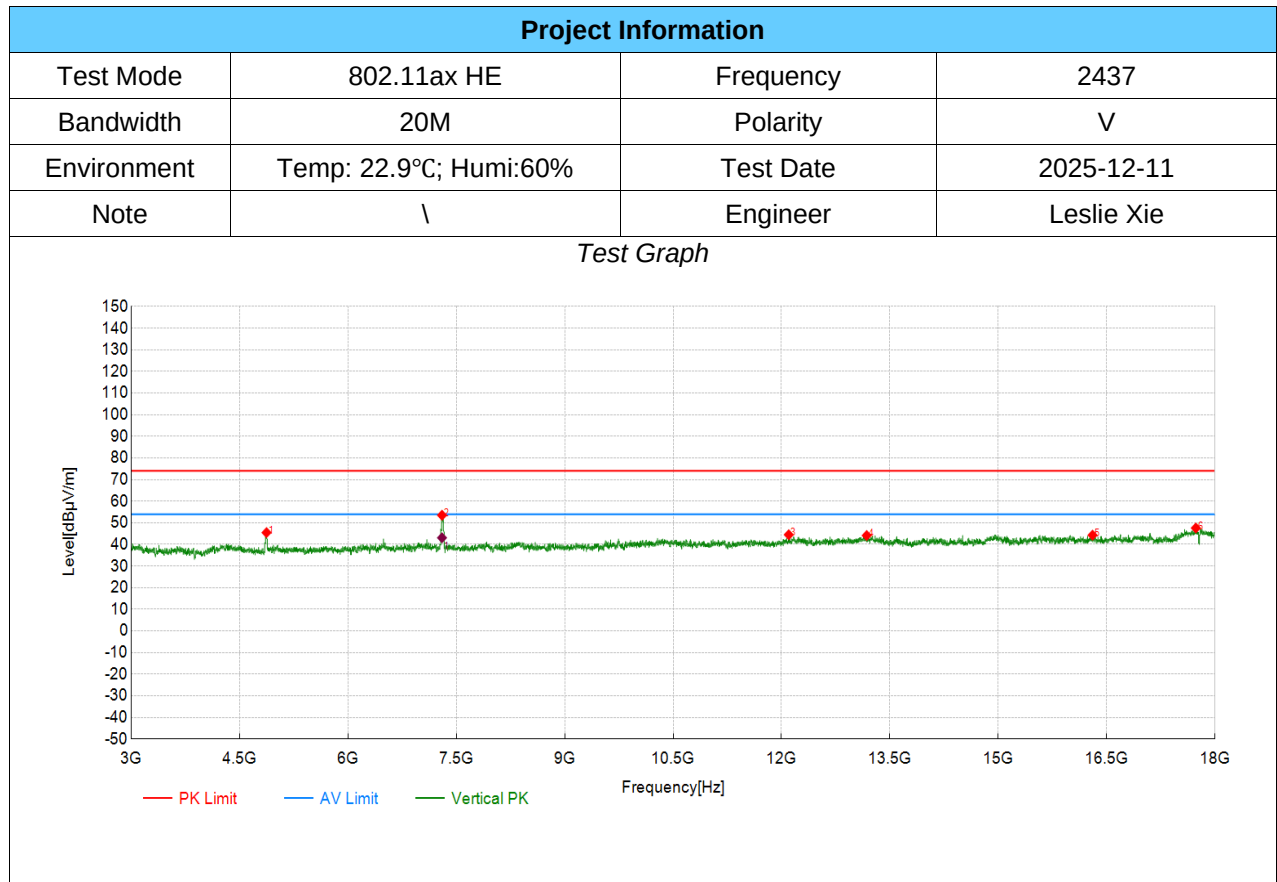


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4873.50	62.22	45.47	-16.75	74.00	28.53	PK	Vertical	PASS
2	7302.00	67.40	53.50	-13.90	74.00	20.50	PK	Vertical	PASS
3	12100.50	51.25	44.49	-6.76	74.00	29.51	PK	Vertical	PASS
4	13179.00	51.83	44.14	-7.69	74.00	29.86	PK	Vertical	PASS
5	16305.00	47.14	44.30	-2.84	74.00	29.70	PK	Vertical	PASS
6	17734.50	46.35	47.59	1.24	74.00	26.41	PK	Vertical	PASS

AVG Data List								
NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity	Verdict
1	7302.00	-15.04	58.11	43.07	54.00	10.93	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


TX Radiated Test Result

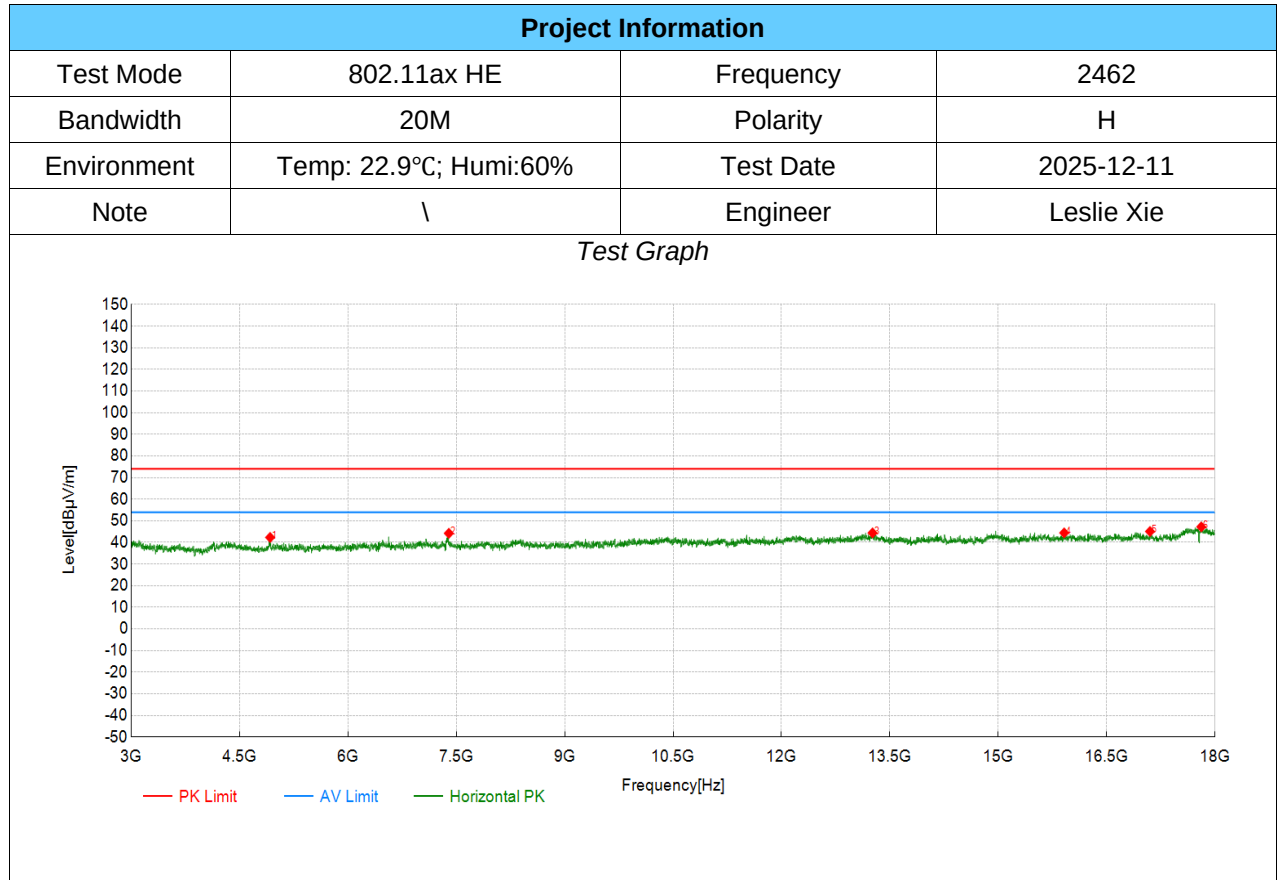

PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4923.00	58.62	42.32	-16.30	74.00	31.68	PK	Horizontal	PASS
2	7396.50	58.05	44.21	-13.84	74.00	29.79	PK	Horizontal	PASS
3	13260.00	52.10	44.41	-7.69	74.00	29.59	PK	Horizontal	PASS
4	15912.00	48.22	44.43	-3.79	74.00	29.57	PK	Horizontal	PASS
5	17100.00	46.47	45.08	-1.39	74.00	28.92	PK	Horizontal	PASS
6	17809.50	45.69	47.20	1.51	74.00	26.80	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

TX Radiated Test Result

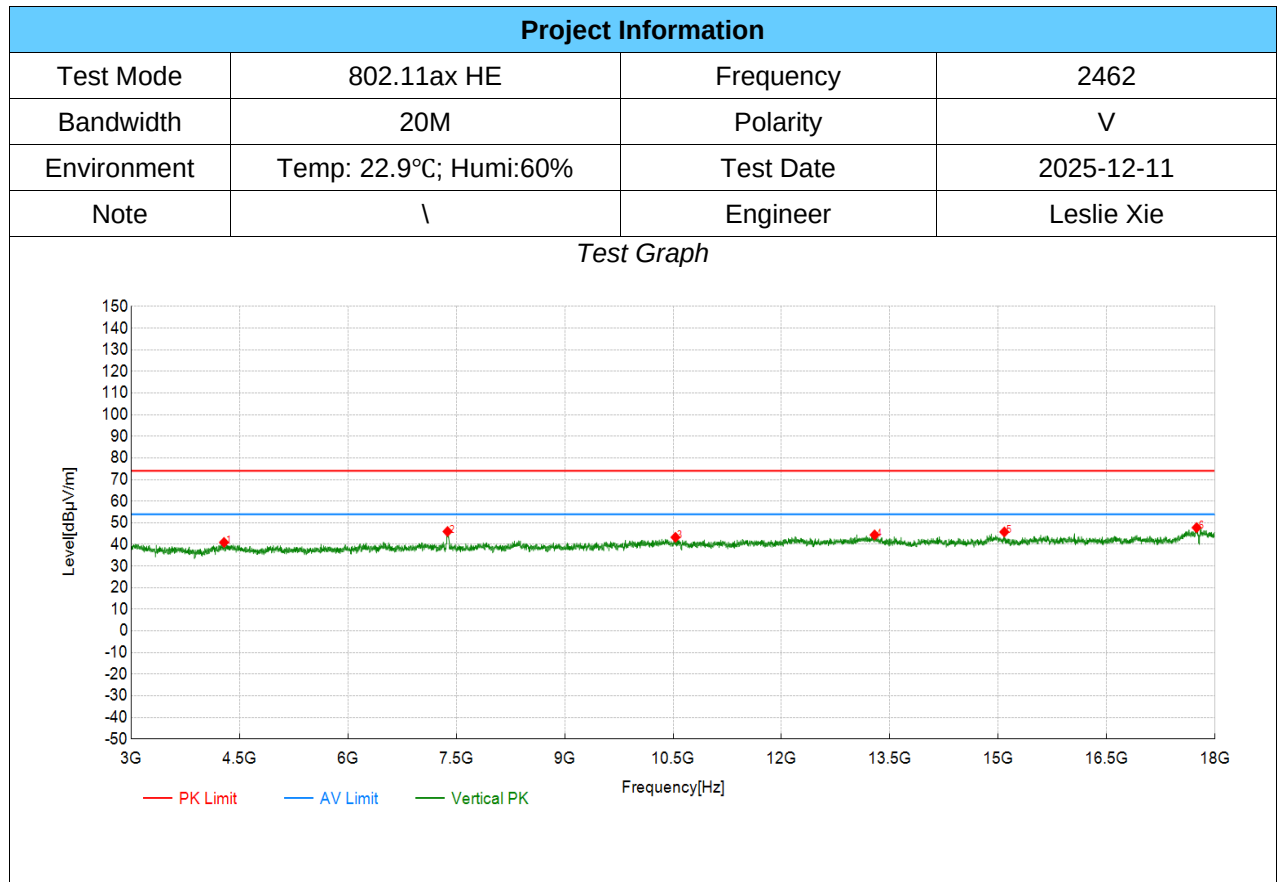


PEAK Data List									
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4285.50	57.14	40.93	-16.21	74.00	33.07	PK	Vertical	PASS
2	7378.50	59.83	45.98	-13.85	74.00	28.02	PK	Vertical	PASS
3	10533.00	50.94	43.29	-7.65	74.00	30.71	PK	Vertical	PASS
4	13288.50	52.11	44.41	-7.70	74.00	29.59	PK	Vertical	PASS
5	15084.00	51.08	45.76	-5.32	74.00	28.24	PK	Vertical	PASS
6	17745.00	46.48	47.77	1.29	74.00	26.23	PK	Vertical	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


11.8.4. SPURIOUS EMISSIONS(9 kHz~30 MHz)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

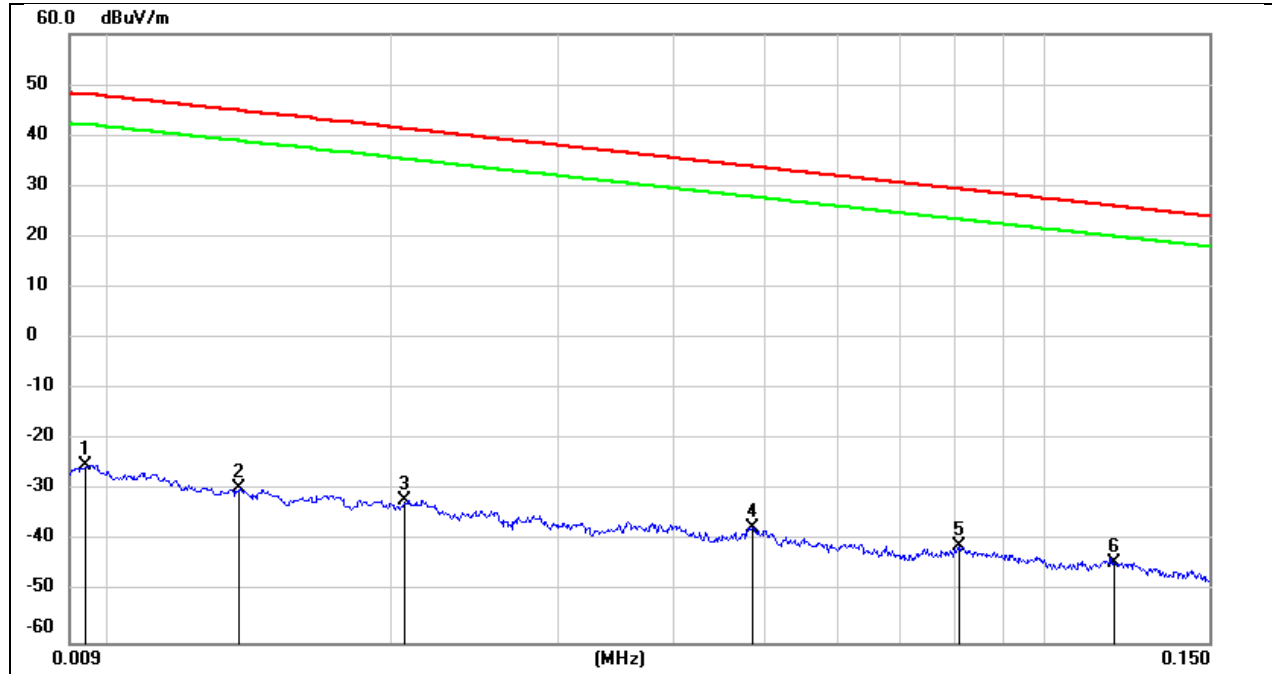


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0094	76.16	-101.35	-25.19	48.05	-76.69	-3.45	-73.24	peak
2	0.0137	71.72	-101.38	-29.66	44.87	-81.16	-6.63	-74.53	peak
3	0.0206	69.42	-101.35	-31.93	41.32	-83.43	-10.18	-73.25	peak
4	0.0485	64.11	-101.47	-37.36	33.88	-88.86	-17.62	-71.24	peak
5	0.0806	60.68	-101.63	-40.95	29.47	-92.45	-22.03	-70.42	peak
6	0.1188	57.56	-101.74	-44.18	26.11	-95.68	-25.39	-70.29	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

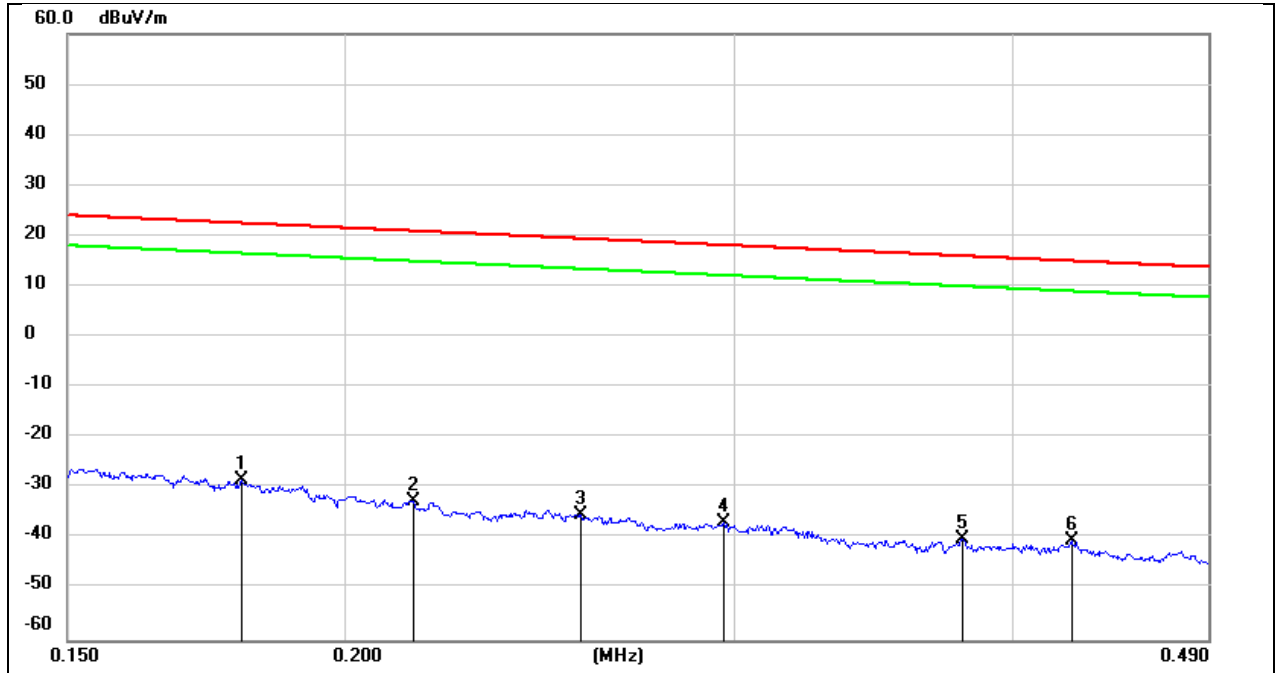

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1796	73.24	-101.68	-28.44	22.52	-79.94	-28.98	-50.96	peak
2	0.2149	69.20	-101.75	-32.55	20.96	-84.05	-30.54	-53.51	peak
3	0.2555	66.57	-101.80	-35.23	19.45	-86.73	-32.05	-54.68	peak
4	0.2963	64.96	-101.85	-36.89	18.17	-88.39	-33.33	-55.06	peak
5	0.3800	62.02	-101.94	-39.92	16.01	-91.42	-35.49	-55.93	peak
6	0.4248	61.59	-101.99	-40.40	15.04	-91.90	-36.46	-55.44	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

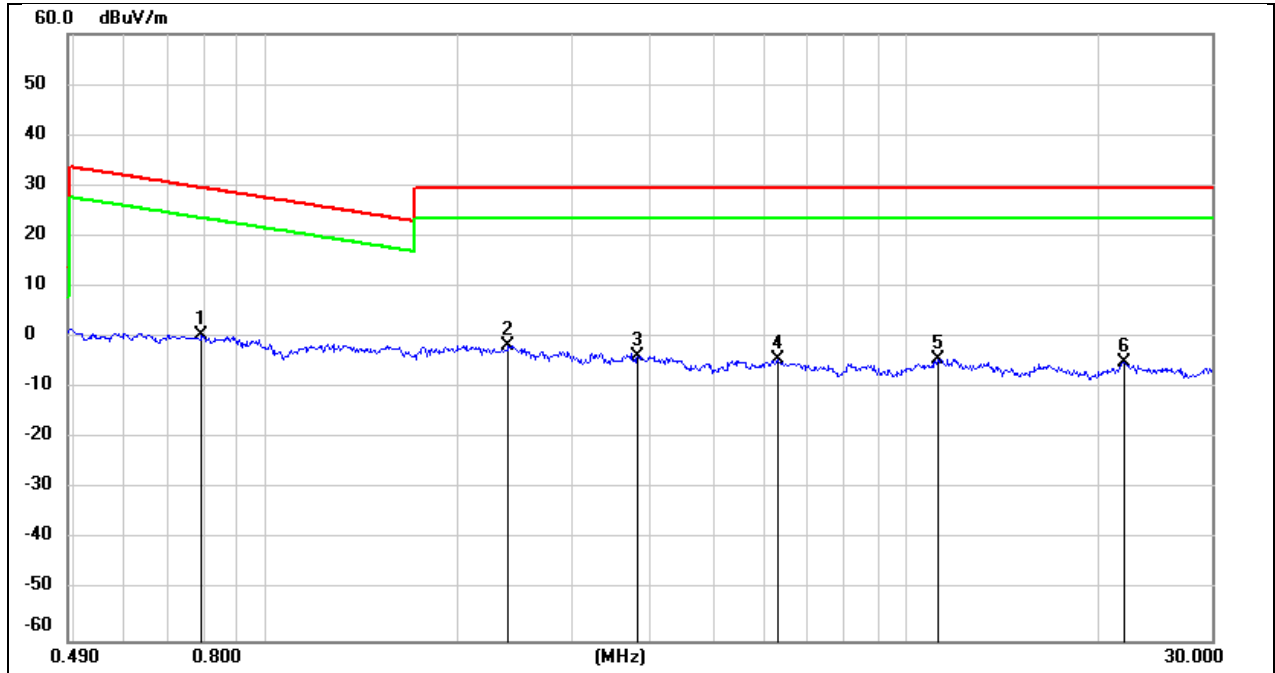

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.7929	62.52	-62.14	0.38	29.62	-51.12	-21.88	-29.24	peak
2	2.3887	60.15	-61.72	-1.57	29.54	-53.07	-21.96	-31.11	peak
3	3.8025	57.75	-61.38	-3.63	29.54	-55.13	-21.96	-33.17	peak
4	6.3033	56.95	-61.31	-4.36	29.54	-55.86	-21.96	-33.90	peak
5	11.2612	56.61	-60.85	-4.24	29.54	-55.74	-21.96	-33.78	peak
6	21.9143	55.72	-60.69	-4.97	29.54	-56.47	-21.96	-34.51	peak


11.8.5. SPURIOUS EMISSIONS(18 GHz~26 GHz)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

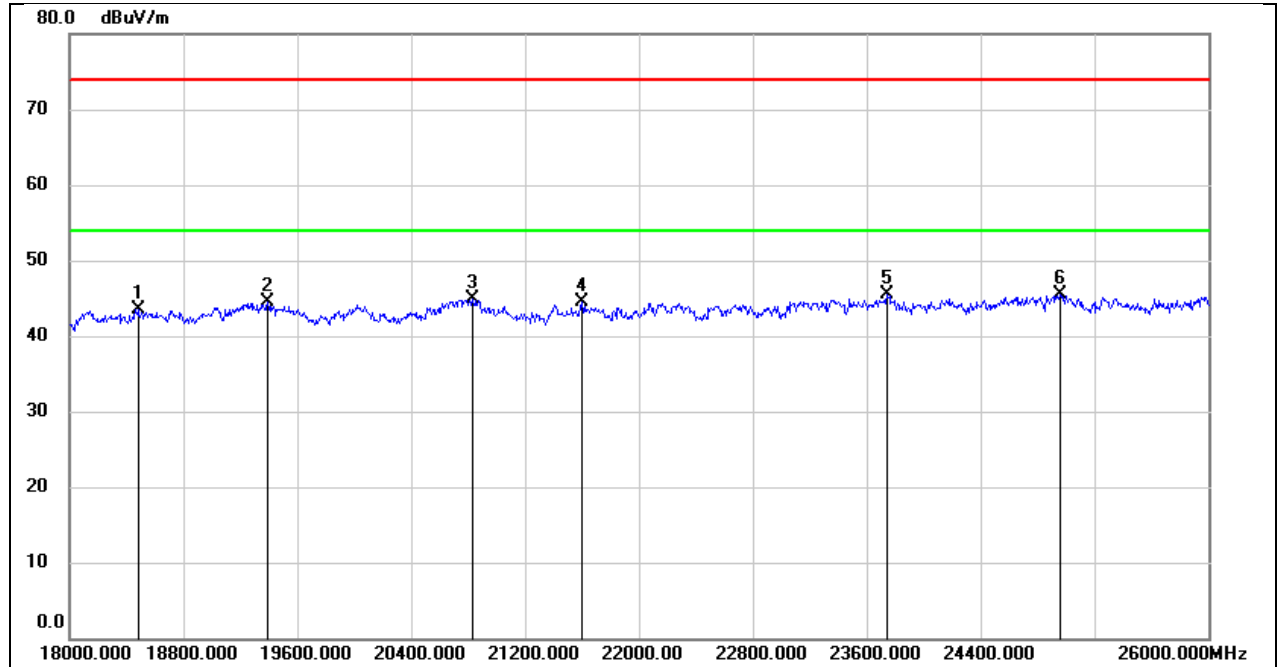

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18480.000	48.81	-5.28	43.53	74.00	-30.47	peak
2	19392.000	50.12	-5.57	44.55	74.00	-29.45	peak
3	20832.000	49.85	-5.04	44.81	74.00	-29.19	peak
4	21600.000	49.02	-4.54	44.48	74.00	-29.52	peak
5	23744.000	48.65	-3.20	45.45	74.00	-28.55	peak
6	24960.000	47.64	-2.14	45.50	74.00	-28.50	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3V

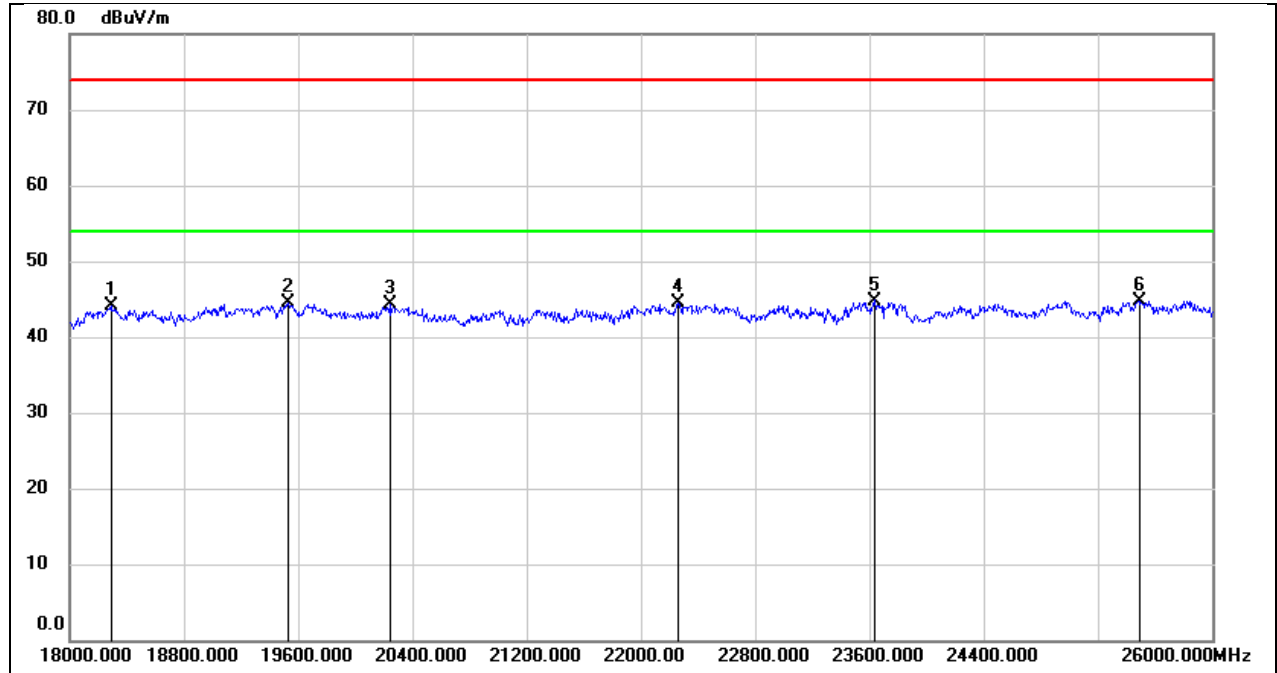

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18288.000	49.69	-5.50	44.19	74.00	-29.81	peak
2	19528.000	50.00	-5.52	44.48	74.00	-29.52	peak
3	20240.000	49.82	-5.61	44.21	74.00	-29.79	peak
4	22256.000	48.66	-4.22	44.44	74.00	-29.56	peak
5	23640.000	47.97	-3.17	44.80	74.00	-29.20	peak
6	25488.000	46.56	-1.77	44.79	74.00	-29.21	peak


11.8.6. SPURIOUS EMISSIONS(30 MHz~1 GHz)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 3.3V

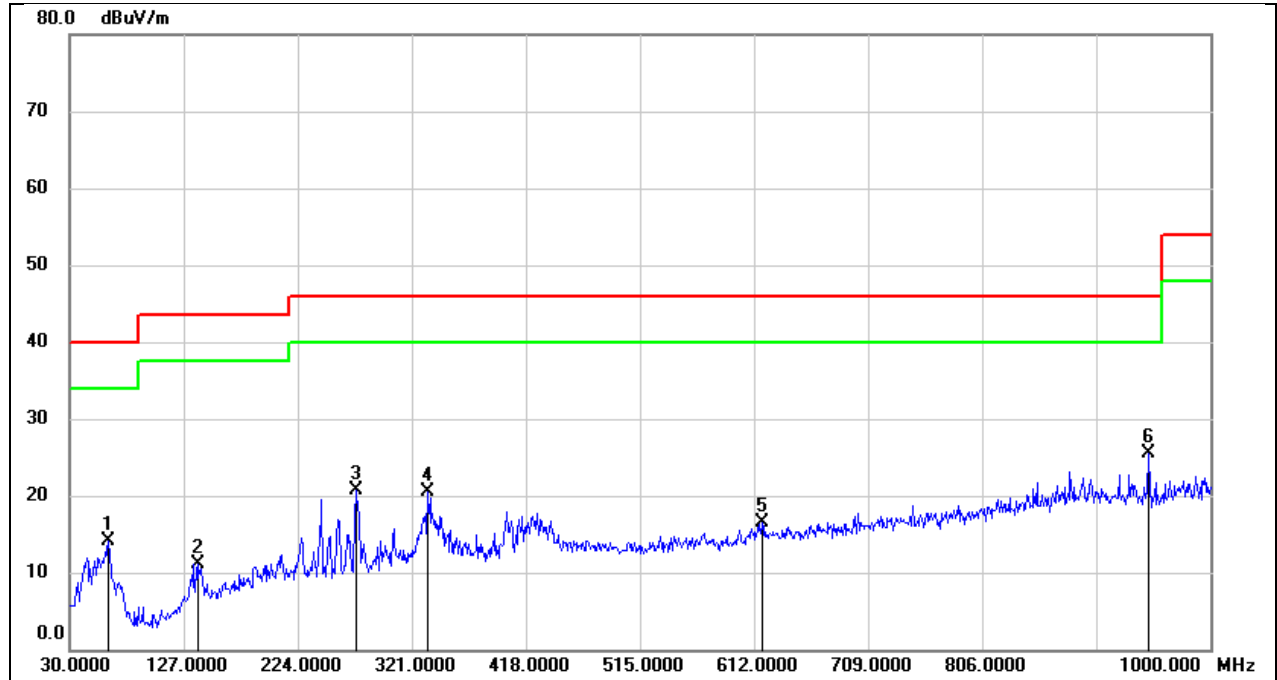

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	62.9800	29.66	-15.52	14.14	40.00	-25.86	peak
2	138.6400	25.92	-14.73	11.19	43.50	-32.31	peak
3	273.4700	34.88	-14.16	20.72	46.00	-25.28	peak
4	334.5799	31.72	-11.29	20.43	46.00	-25.57	peak
5	618.7900	23.78	-7.26	16.52	46.00	-29.48	peak
6	947.6200	28.29	-2.73	25.56	46.00	-20.44	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 3.3V

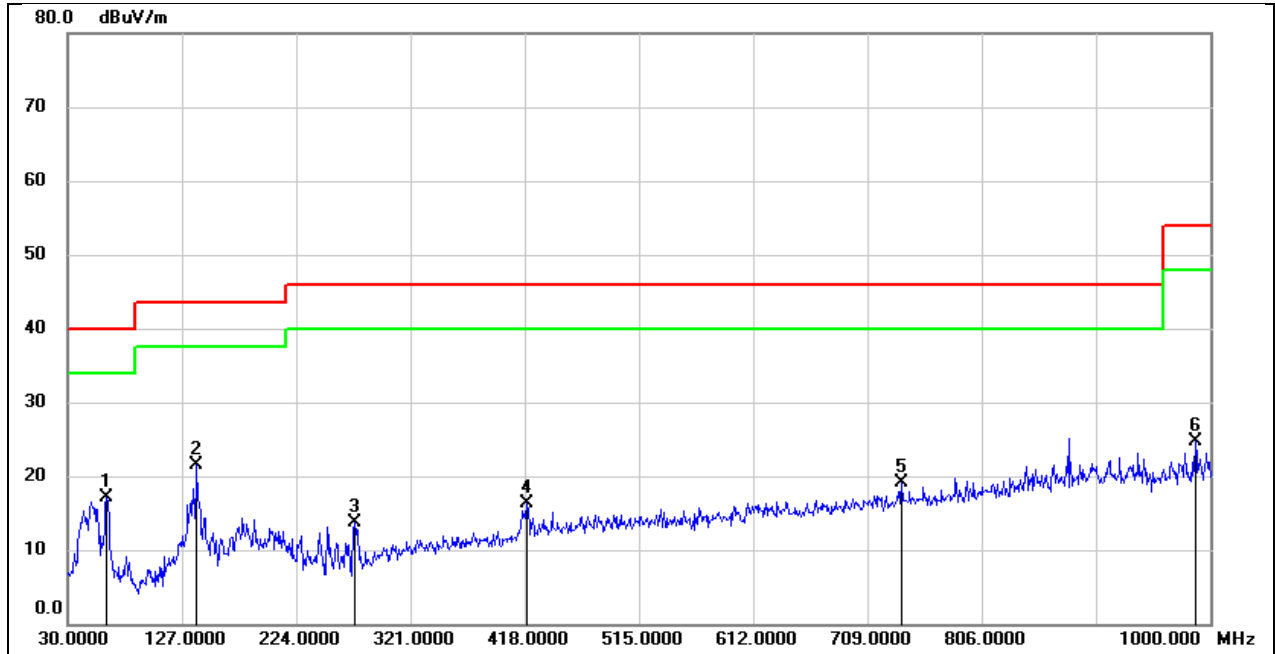

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	62.9800	32.56	-15.52	17.04	40.00	-22.96	peak
2	139.6100	36.20	-14.70	21.50	43.50	-22.00	peak
3	273.4700	27.91	-14.16	13.75	46.00	-32.25	peak
4	419.9400	26.63	-10.32	16.31	46.00	-29.69	peak
5	738.1000	24.39	-5.36	19.03	46.00	-26.97	peak
6	987.3900	26.90	-2.26	24.64	54.00	-29.36	peak

END OF REPORT