

15. Conducted Spurious Emission of BLE


Appendix G: Conducted Spurious Emission

Test Result


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	0~Reference	-8.63	-8.63	---	PASS
BLE_1M	Ant1	2402	30~1000	-8.63	-52.79	≤-28.63	PASS
BLE_1M	Ant1	2402	1000~26500	-8.63	-39.94	≤-28.63	PASS
BLE_1M	Ant1	2440	0~Reference	-9.46	-9.46	---	PASS
BLE_1M	Ant1	2440	30~1000	-9.46	-52.58	≤-29.46	PASS
BLE_1M	Ant1	2440	1000~26500	-9.46	-40.03	≤-29.46	PASS
BLE_1M	Ant1	2480	0~Reference	-11.70	-11.70	---	PASS
BLE_1M	Ant1	2480	30~1000	-11.70	-52.74	≤-31.7	PASS
BLE_1M	Ant1	2480	1000~26500	-11.70	-39.13	≤-31.7	PASS

Test Graphs




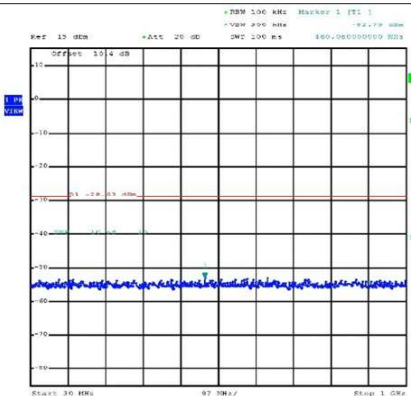


BLE_1M-Ant1-2402-30~1000-PASS

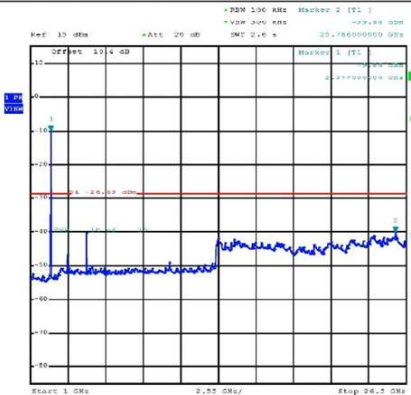

BLE_1M-Ant1-2402-1000~26500-PASS

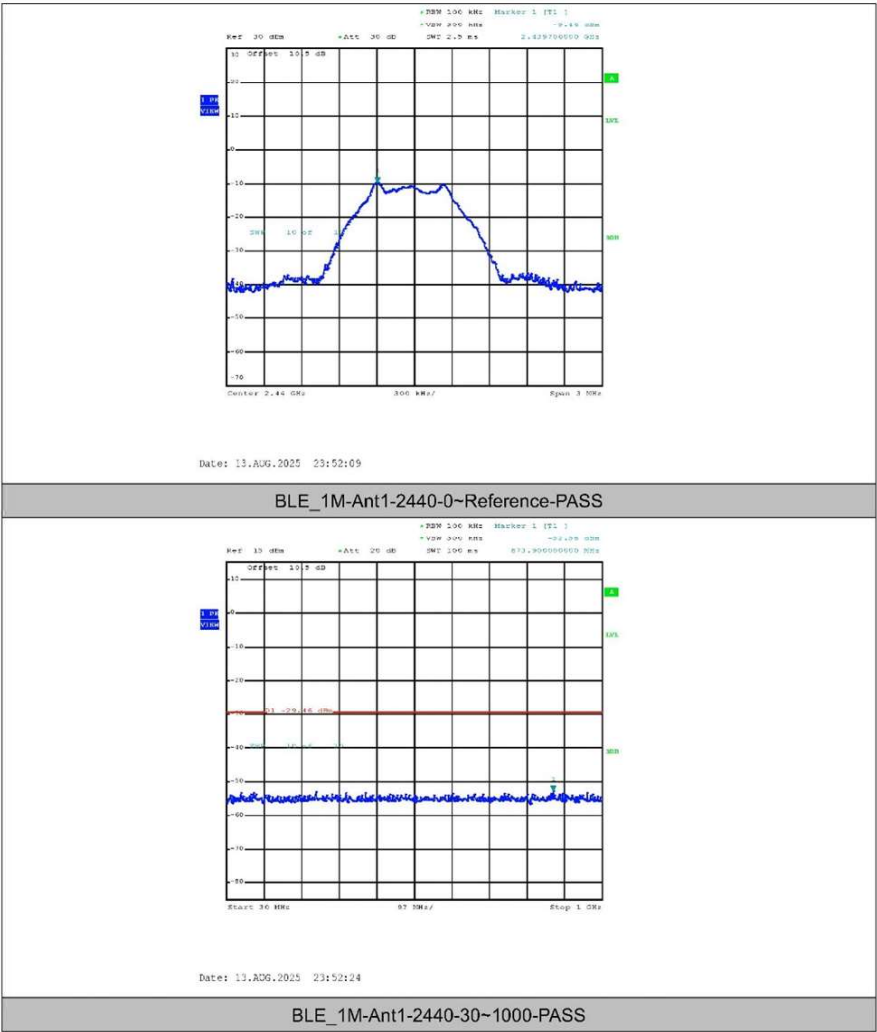

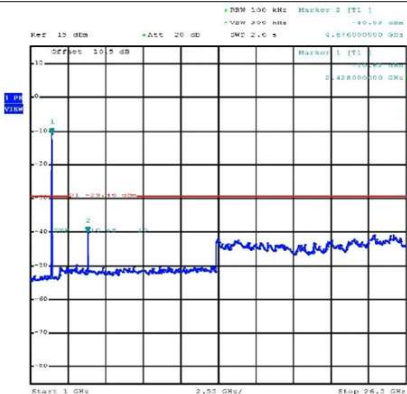


Date: 13.AUG.2025 23:56:08

BLE_1M-Ant1-2440-1000-26500-PASS




Date: 14.AUG.2025 00:02:18

BLE_1M-Ant1-2480-0-Reference-PASS

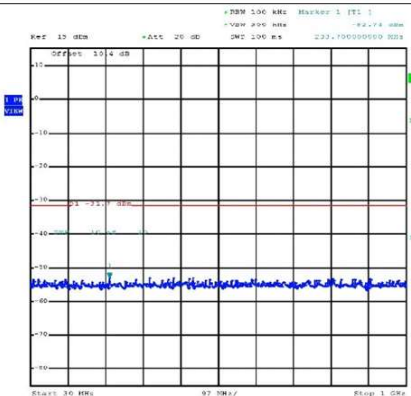

BLE_1M-Ant1-2480-30~1000-PASS

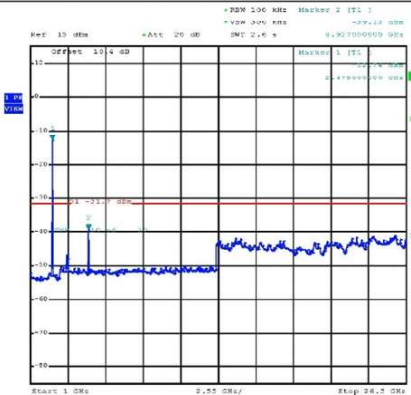

BLE_1M-Ant1-2480-1000~26500-PASS

16. Test Results of Radiated Spurious Emissions


BLE mode

EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE HIGH
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1
Frequency range: 30-1000MHz

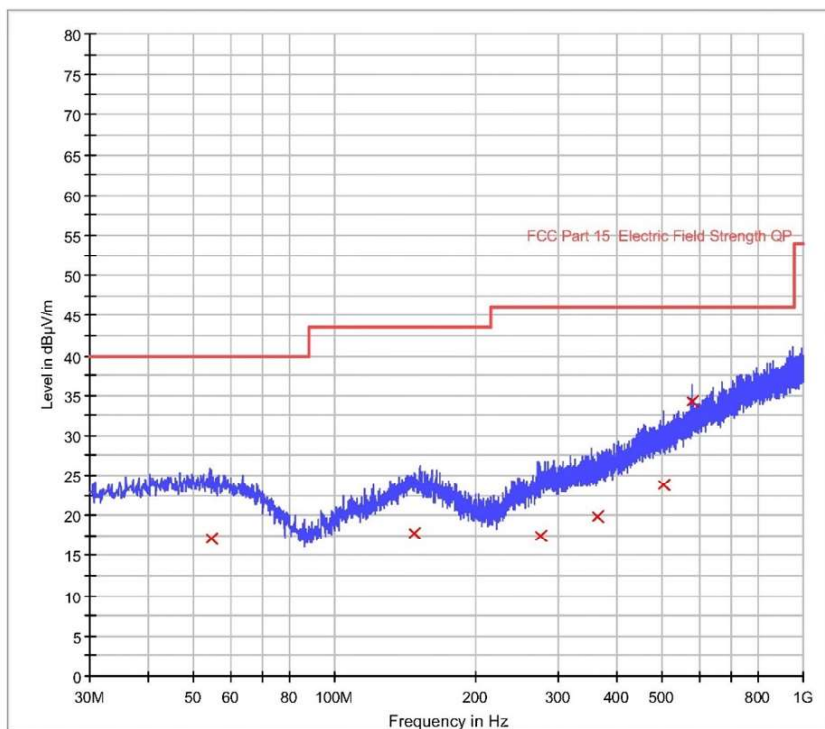

Tested by: *Cesare Gao* 20250731
Reviewed by: *Jacky Chen* 20250808

Limit and Margin

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
54.360000	17.1	1000.0	120.000	H	20.7	22.9	40.0
148.200000	17.8	1000.0	120.000	H	21.2	25.7	43.5
273.840000	17.5	1000.0	120.000	H	21.2	28.5	46.0
362.840000	19.9	1000.0	120.000	H	23.6	26.1	46.0
502.040000	23.8	1000.0	120.000	H	27.4	22.2	46.0
577.560000	34.3	1000.0	120.000	H	29.0	11.7	46.0


Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250731 20250808

EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE HIGH
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1
Frequency range: 30-1000MHz

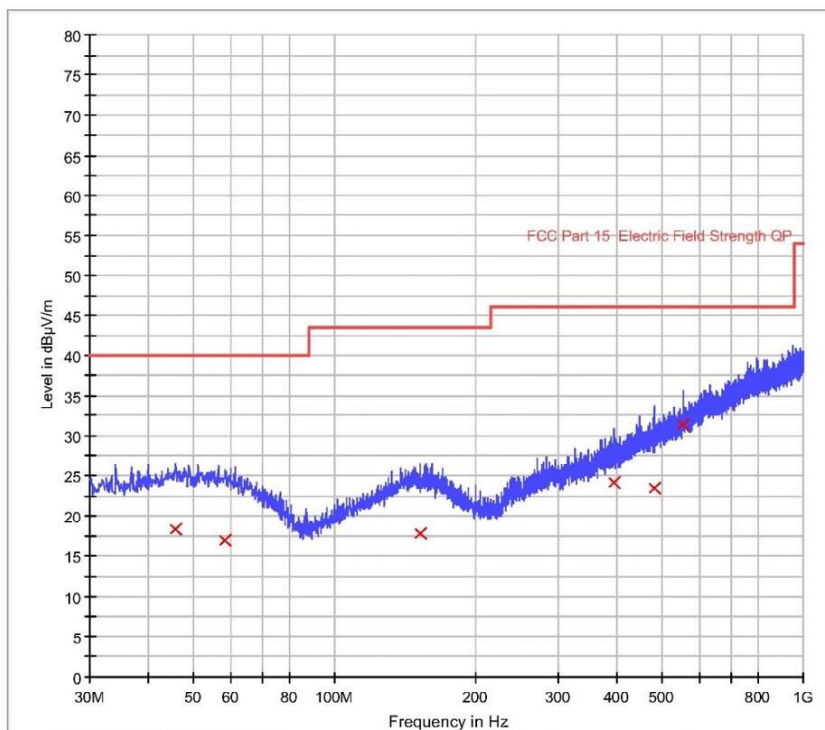

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250731 20250808

Limit and Margin


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
45.640000	18.3	1000.0	120.000	V	20.6	21.7	40.0
58.480000	17.0	1000.0	120.000	V	20.4	23.0	40.0
151.960000	17.8	1000.0	120.000	V	21.3	25.7	43.5
393.280000	24.1	1000.0	120.000	V	24.5	21.9	46.0
479.840000	23.5	1000.0	120.000	V	27.1	22.5	46.0
552.960000	31.4	1000.0	120.000	V	28.5	14.6	46.0

Tested by: *Cesare Gao* 20250731
Reviewed by: *Jacky Chen* 20250808

EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE LOW
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Horizontal
Subrange 1	
Frequency range:	30-1000MHz

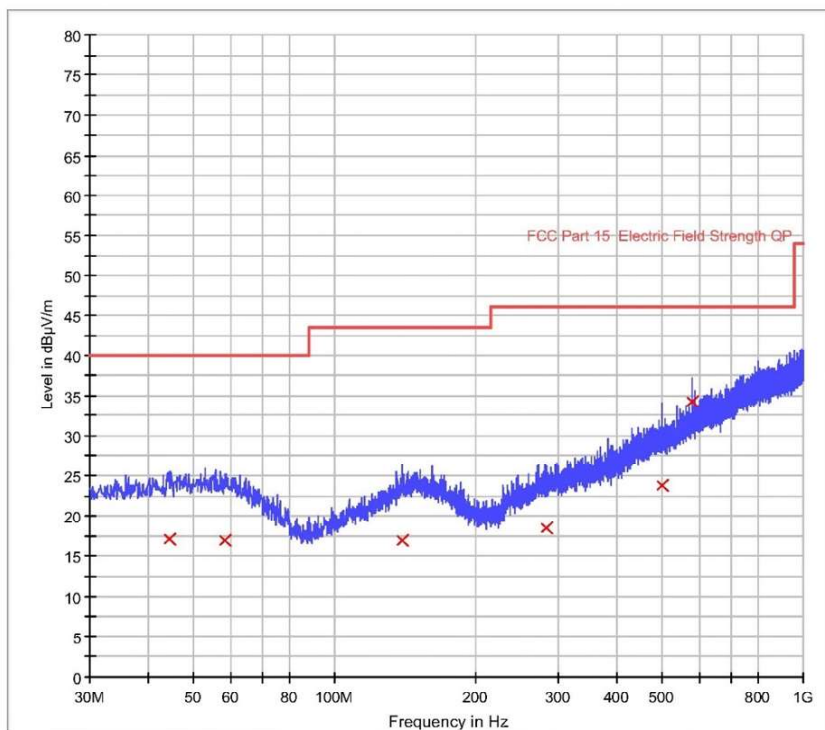

Tested by: *Cesare Gao*
20250731

Reviewed by: *Jacky Chen*
20250808

Limit and Margin

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
44.320000	17.1	1000.0	120.000	H	20.5	22.9	40.0
58.360000	17.0	1000.0	120.000	H	20.4	23.0	40.0
139.360000	16.9	1000.0	120.000	H	20.6	26.6	43.5
282.680000	18.5	1000.0	120.000	H	21.6	27.5	46.0
498.040000	23.9	1000.0	120.000	H	27.3	22.2	46.0
577.560000	34.2	1000.0	120.000	H	29.0	11.8	46.0


Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250731 20250808

EMC Test Record (Emission)

Common Information

Manufacturer:	
Test item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE LOW
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency range:	30-1000MHz

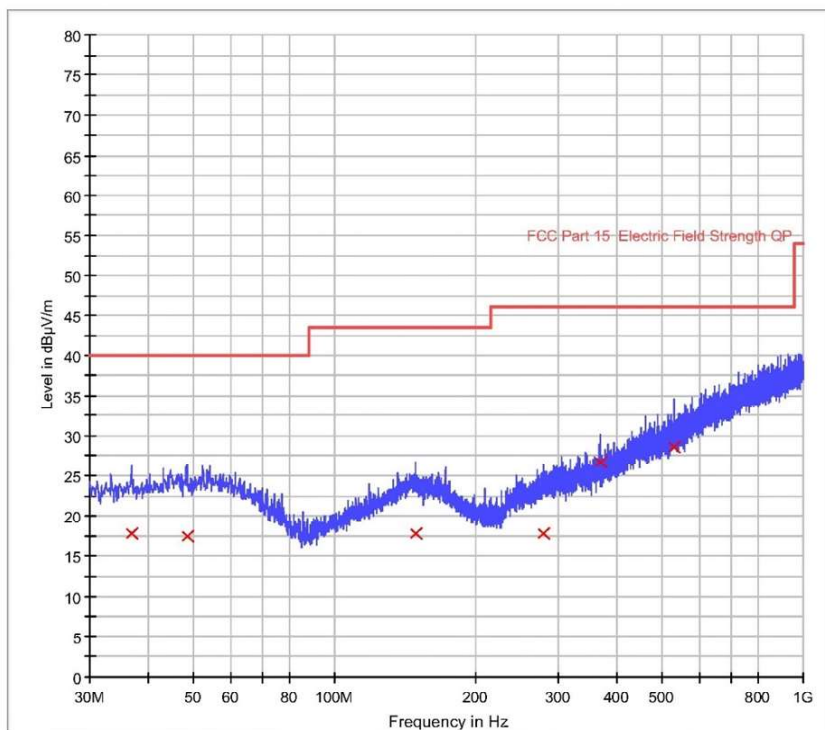

Tested by:	<i>Cesare Gao</i>	Reviewed by:	<i>Jacky Chen</i>
	20250731		20250808

Limit and Margin

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
36.800000	17.8	1000.0	120.000	V	19.9	22.3	40.0
48.320000	17.4	1000.0	120.000	V	20.7	22.6	40.0
148.960000	17.8	1000.0	120.000	V	21.3	25.7	43.5
279.640000	17.8	1000.0	120.000	V	21.5	28.3	46.0
368.640000	26.8	1000.0	120.000	V	23.9	19.2	46.0
528.440000	28.7	1000.0	120.000	V	27.9	17.3	46.0


Tested by: *Cesare Gao* 20250731
Reviewed by: *Jacky Chen* 20250808

EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE MID
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1
Frequency range: 30-1000MHz

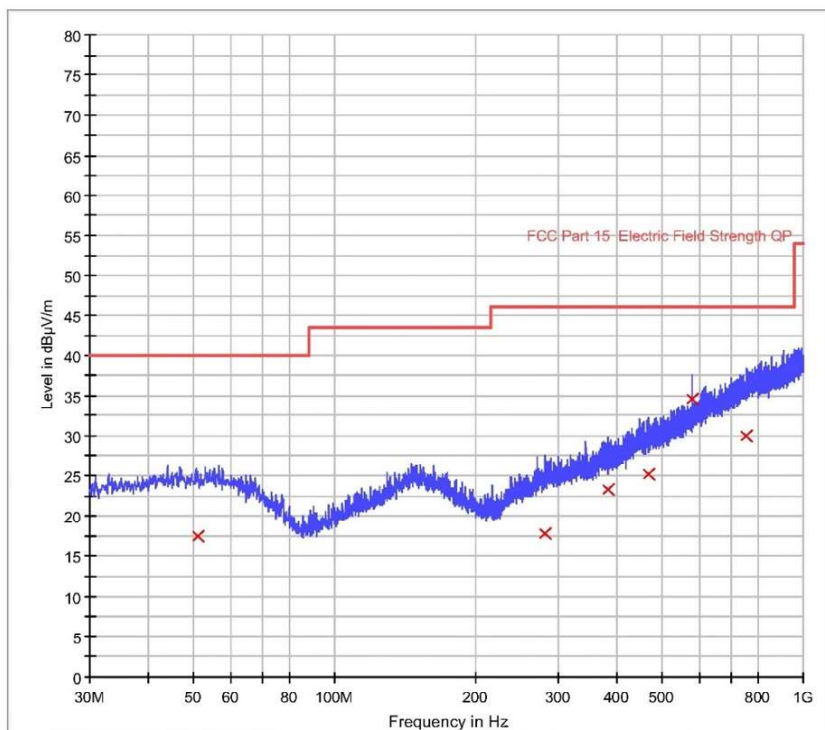

Tested by: *Cesare Gao*
20250731

Reviewed by: *Jacky Chen*
20250808

Limit and Margin

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
51.080000	17.4	1000.0	120.000	H	20.8	22.6	40.0
280.520000	17.8	1000.0	120.000	H	21.5	28.2	46.0
384.040000	23.3	1000.0	120.000	H	24.3	22.8	46.0
467.600000	25.1	1000.0	120.000	H	26.7	20.9	46.0
577.560000	34.6	1000.0	120.000	H	29.0	11.4	46.0
757.360000	29.9	1000.0	120.000	H	32.8	16.1	46.0


Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250731 20250808

EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE MID
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency range:	30-1000MHz

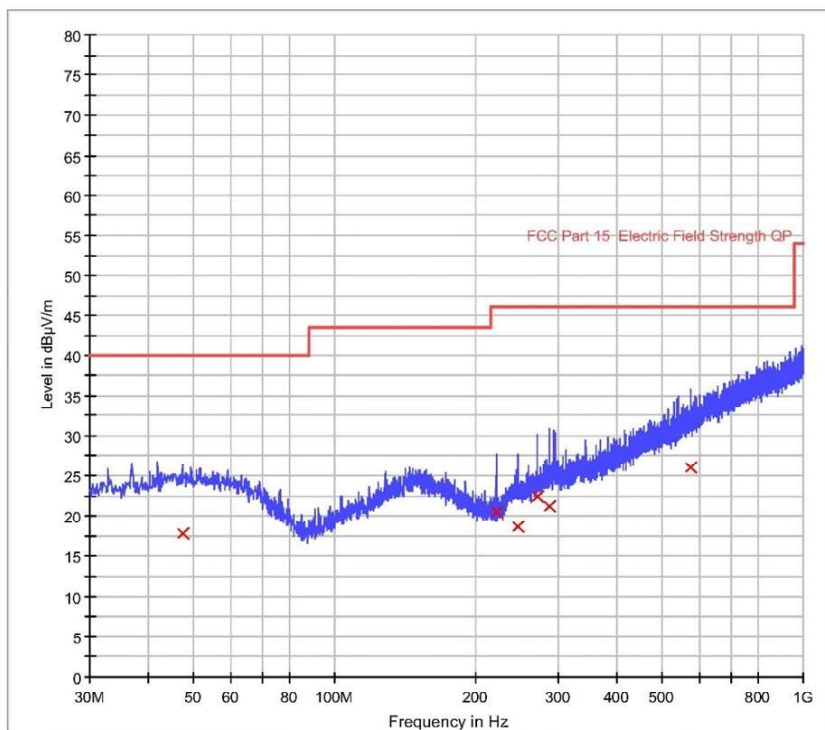

Tested by:	<i>Cesare Gao</i>	Reviewed by:	<i>Jacky Chen</i>
	20250731		20250808

Limit and Margin

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
47.320000	17.8	1000.0	120.000	V	20.7	22.3	40.0
221.200000	20.5	1000.0	120.000	V	17.7	25.5	46.0
245.840000	18.7	1000.0	120.000	V	20.1	27.3	46.0
269.960000	22.4	1000.0	120.000	V	21.0	23.6	46.0
288.000000	21.3	1000.0	120.000	V	21.7	24.7	46.0
576.840000	26.1	1000.0	120.000	V	28.9	19.9	46.0


Tested by: *Cesare Gao* 20250731
Reviewed by: *Jacky Chen* 20250808

EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE HIGH
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Horizontal
Subrange 1	
Frequency Range:	1GHz-18GHz

EMCTT_EREFO11-A02-06_1GHz-18GHz_With PreAMP EXT& Hight-pass filter

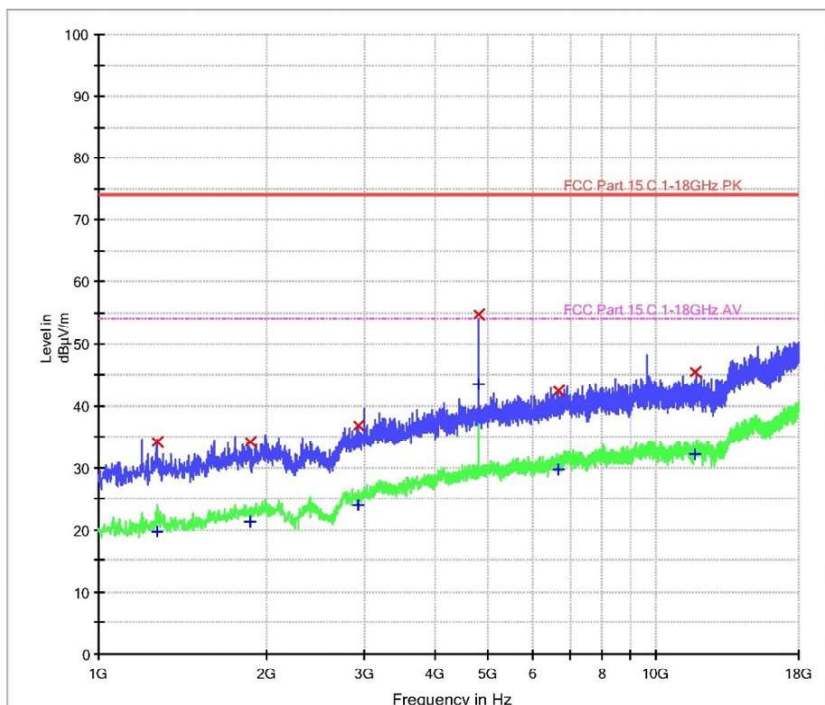

Tested by:	Cesare Qiao	Reviewed by:	Jacky Chen
	20250729		20250808

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
1270.000000	34.1	1000.0	1000.000	H	-23.8	39.9	74.0
1867.000000	34.3	1000.0	1000.000	H	-21.2	39.8	74.0
2923.000000	36.7	1000.0	1000.000	H	-17.3	37.3	74.0
4804.000000	54.8	1000.0	1000.000	H	-12.2	19.2	74.0
6655.000000	42.3	1000.0	1000.000	H	-9.5	31.7	74.0
11767.000000	45.5	1000.0	1000.000	H	-6.0	28.5	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
1270.000000	19.7	1000.0	1000.000	H	-23.8	34.3	54.0
1867.000000	21.3	1000.0	1000.000	H	-21.2	32.7	54.0
2923.000000	23.8	1000.0	1000.000	H	-17.3	30.2	54.0
4804.000000	43.4	1000.0	1000.000	H	-12.2	10.6	54.0
6655.000000	29.6	1000.0	1000.000	H	-9.5	24.4	54.0
11767.000000	32.2	1000.0	1000.000	H	-6.0	21.8	54.0

Tested by: *Cesare Qiao* Reviewed by: *Jacky Chen*
20250729 20250808


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE HIGH
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1
Frequency Range: 1GHz-18GHz

EMCTT_EREFO11-A02-06_1GHz-18GHz_With PreAMP EXT& Hight-pass filter

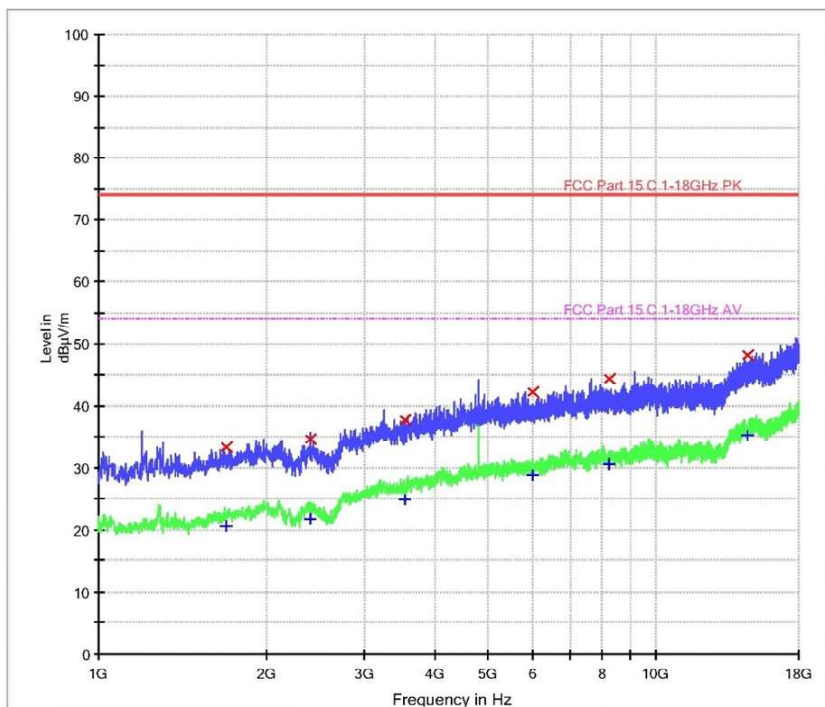

Tested by:	<i>Cesare Gino</i>	Reviewed by:	<i>Jacky Chen</i>
	20250729		20250808

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
1693.000000	33.4	1000.0	1000.000	V	-22.0	40.7	74.0
2396.000000	34.5	1000.0	1000.000	V	-19.3	39.5	74.0
3552.000000	37.6	1000.0	1000.000	V	-15.3	36.4	74.0
5996.000000	42.2	1000.0	1000.000	V	-10.6	31.8	74.0
8240.000000	44.3	1000.0	1000.000	V	-7.9	29.7	74.0
14557.000000	48.1	1000.0	1000.000	V	-2.5	25.9	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
1693.000000	20.7	1000.0	1000.000	V	-22.0	33.3	54.0
2396.000000	21.7	1000.0	1000.000	V	-19.3	32.3	54.0
3552.000000	24.8	1000.0	1000.000	V	-15.3	29.2	54.0
5996.000000	28.8	1000.0	1000.000	V	-10.6	25.2	54.0
8240.000000	30.6	1000.0	1000.000	V	-7.9	23.4	54.0
14557.000000	35.3	1000.0	1000.000	V	-2.5	18.7	54.0

Tested by: *Cesare Gino* Reviewed by: *Jacky Chen*
20250729 20250808


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE LOW
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1
Frequency Range: 1GHz-18GHz

EMCTT_EREFO11-A02-05_1GHz-18GHz_With PreAMP EXT

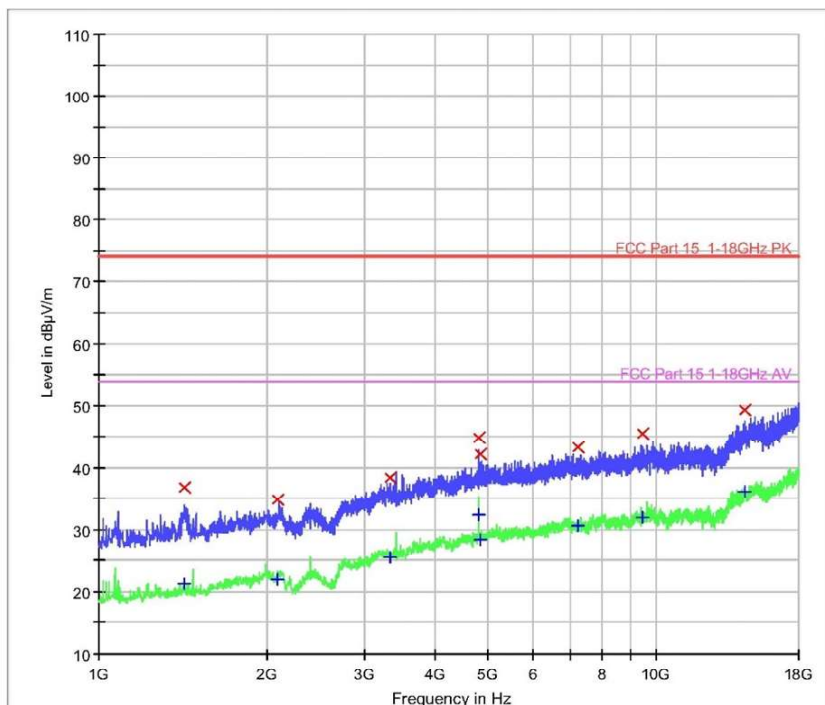

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250729 20250808

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
1425.000000	36.9	1000.0	1000.000	H	-23.3	37.1	74.0
2096.000000	34.8	1000.0	1000.000	H	-20.3	39.2	74.0
3331.000000	38.4	1000.0	1000.000	H	-16.0	35.7	74.0
4804.000000	44.8	1000.0	1000.000	H	-12.2	29.2	74.0
4838.000000	42.3	1000.0	1000.000	H	-12.1	31.8	74.0
7230.000000	43.2	1000.0	1000.000	H	-8.7	30.8	74.0
9438.000000	45.4	1000.0	1000.000	H	-6.6	28.6	74.0
14400.000000	49.3	1000.0	1000.000	H	-2.3	24.7	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
1425.000000	21.3	1000.0	1000.000	H	-23.3	32.7	54.0
2096.000000	22.0	1000.0	1000.000	H	-20.3	32.0	54.0
3331.000000	25.5	1000.0	1000.000	H	-16.0	28.5	54.0
4804.000000	32.5	1000.0	1000.000	H	-12.2	21.5	54.0
4838.000000	28.4	1000.0	1000.000	H	-12.1	25.6	54.0
7230.000000	30.6	1000.0	1000.000	H	-8.7	23.4	54.0
9438.000000	32.0	1000.0	1000.000	H	-6.6	22.0	54.0
14400.000000	36.2	1000.0	1000.000	H	-2.3	17.9	54.0

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250729 20250808


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE LOW
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1
Frequency Range: 1GHz-18GHz

EMCTT_EREFO11-A02-05_1GHz-18GHz_With PreAMP EXT

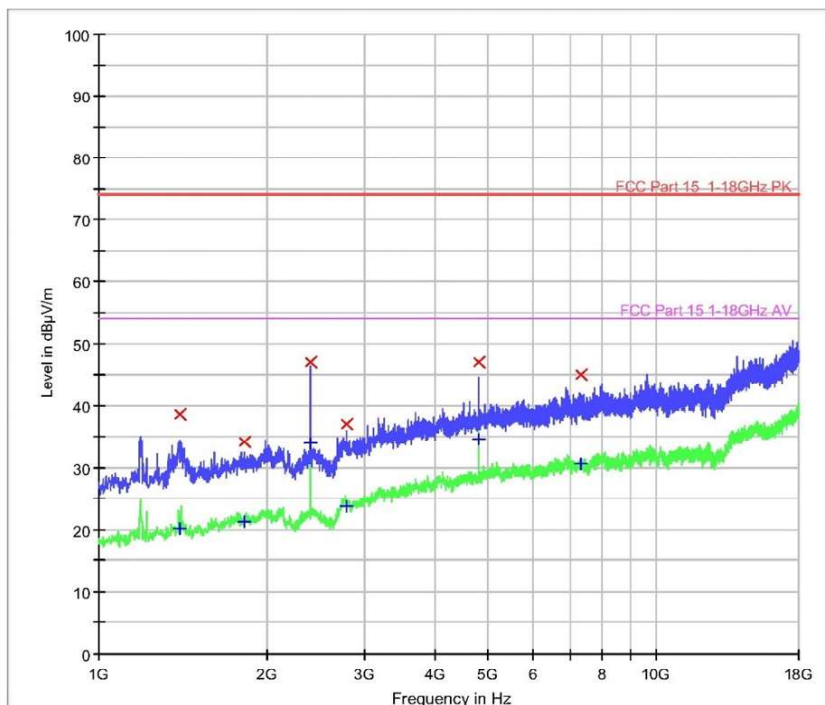

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250729 20250808

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
1399.000000	38.6	1000.0	1000.000	V	-23.4	35.4	74.0
1824.000000	34.2	1000.0	1000.000	V	-21.4	39.8	74.0
2400.375000	47.0	1000.0	1000.000	V	-19.3	27.0	74.0
2782.875000	37.1	1000.0	1000.000	V	-17.8	36.9	74.0
4803.750000	47.0	1000.0	1000.000	V	-12.2	27.0	74.0
7311.250000	45.1	1000.0	1000.000	V	-8.8	28.9	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
1399.000000	20.2	1000.0	1000.000	V	-23.4	33.8	54.0
1824.000000	21.2	1000.0	1000.000	V	-21.4	32.8	54.0
2400.375000	33.9	1000.0	1000.000	V	-19.3	20.1	54.0
2782.875000	23.8	1000.0	1000.000	V	-17.8	30.2	54.0
4803.750000	34.5	1000.0	1000.000	V	-12.2	19.5	54.0
7311.250000	30.6	1000.0	1000.000	V	-8.8	23.5	54.0

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250729 20250808


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES 1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE MID
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1
Frequency Range: 1GHz-18GHz

EMCTT_EREFO11-A02-06_1GHz-18GHz_With PreAMP EXT& Hight-pass filter

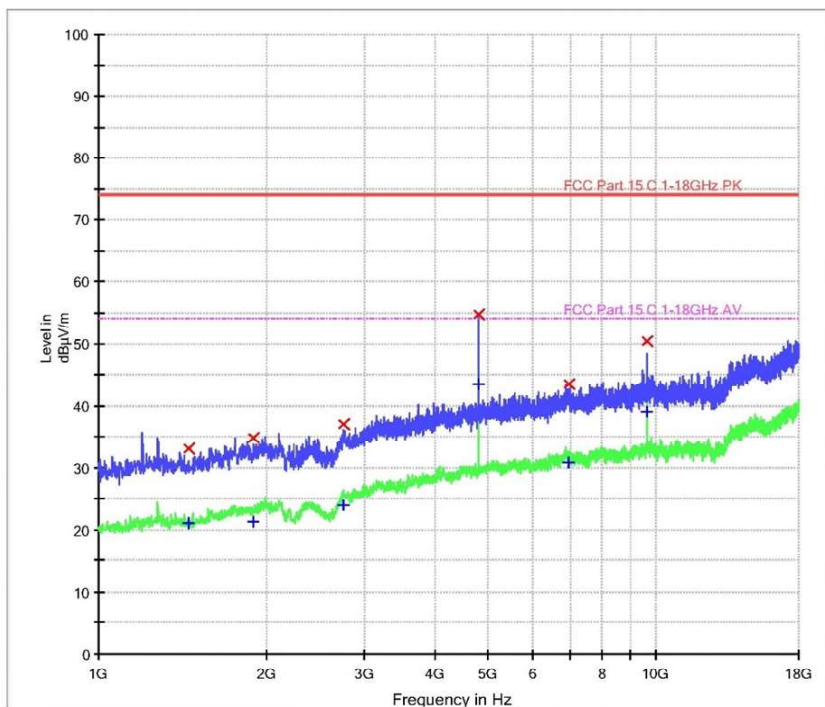

Tested by:	Cesare Qiao	Reviewed by:	Jacky Chen
	20250729		20250808

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1450.000000	33.1	1000.0	1000.000	H	-23.2	40.9	74.0
1899.000000	34.8	1000.0	1000.000	H	-21.1	39.2	74.0
2747.000000	37.1	1000.0	1000.000	H	-17.9	37.0	74.0
4804.000000	54.7	1000.0	1000.000	H	-12.2	19.3	74.0
6967.000000	43.4	1000.0	1000.000	H	-9.1	30.6	74.0
9608.000000	50.4	1000.0	1000.000	H	-6.4	23.6	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1450.000000	21.0	1000.0	1000.000	H	-23.2	33.0	54.0
1899.000000	21.2	1000.0	1000.000	H	-21.1	32.8	54.0
2747.000000	24.0	1000.0	1000.000	H	-17.9	30.0	54.0
4804.000000	43.4	1000.0	1000.000	H	-12.2	10.6	54.0
6967.000000	30.8	1000.0	1000.000	H	-9.1	23.2	54.0
9608.000000	39.1	1000.0	1000.000	H	-6.4	14.9	54.0

Tested by: Cesare Gioia
20250729

Reviewed by: Jacky Chen
20250808


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES 1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE MID
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1
Frequency Range: 1GHz-18GHz

EMCTT_EREFO11-A02-06_1GHz-18GHz_With PreAMP EXT& Hight-pass filter

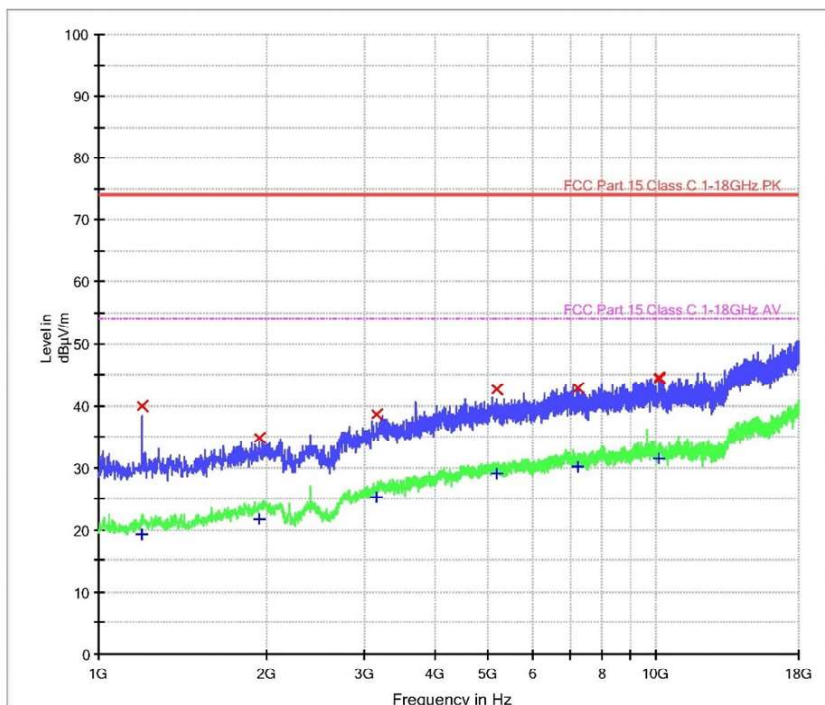

Tested by: *Cesare Qiao* 20250729
Reviewed by: *Jacky Chen* 20250808

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
1195.000000	39.9	1000.0	1000.000	V	-24.0	34.1	74.0
1943.000000	34.8	1000.0	1000.000	V	-20.8	39.2	74.0
3155.000000	38.7	1000.0	1000.000	V	-16.5	35.3	74.0
5180.000000	42.6	1000.0	1000.000	V	-11.4	31.4	74.0
7243.000000	42.9	1000.0	1000.000	V	-8.6	31.1	74.0
10093.000000	44.3	1000.0	1000.000	V	-6.4	29.7	74.0
10093.000000	44.6	1000.0	1000.000	V	-6.4	29.4	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
1195.000000	19.4	1000.0	1000.000	V	-24.0	34.6	54.0
1943.000000	21.7	1000.0	1000.000	V	-20.8	32.3	54.0
3155.000000	25.3	1000.0	1000.000	V	-16.5	28.7	54.0
5180.000000	28.9	1000.0	1000.000	V	-11.4	25.1	54.0
7243.000000	30.2	1000.0	1000.000	V	-8.6	23.8	54.0
10093.000000	31.4	1000.0	1000.000	V	-6.4	22.6	54.0
10093.000000	31.4	1000.0	1000.000	V	-6.4	22.6	54.0

Tested by: Cesare Gioia
20250729

Reviewed by: Jacky Chen
20250808


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE HIGH
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1
Frequency Range: 18GHz-26GHz

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

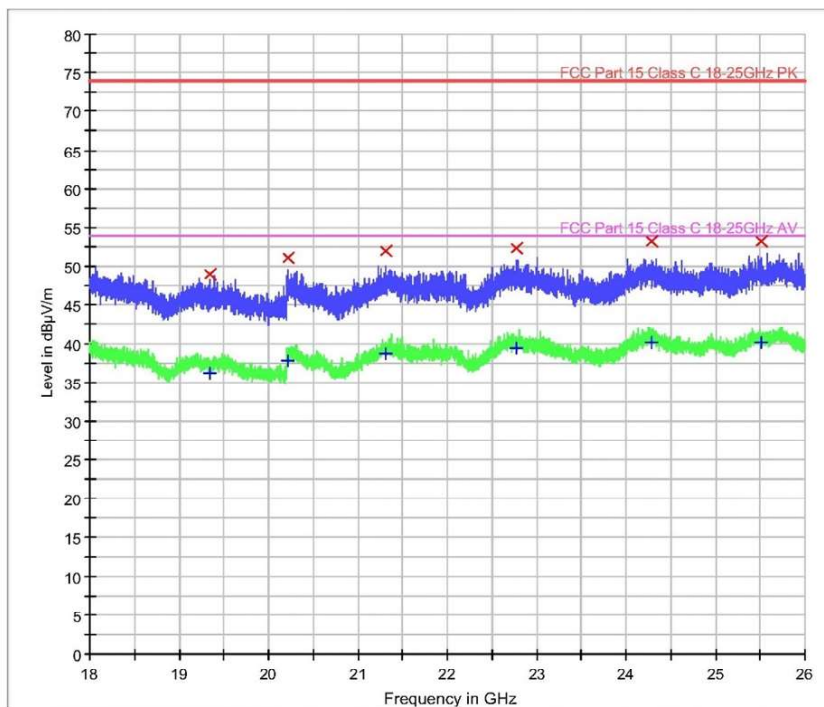

Tested by:	<i>Cesare Gao</i>	Reviewed by:	<i>Jacky Chen</i>
	20250729		20250808

Limit and Margin PK

Frequency (MHz)	MaxPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dB μ V/m)
19346.000000	49.0	1000.0	1000.000	H	6.5	25.0	74.0
20220.000000	51.0	1000.0	1000.000	H	6.1	23.0	74.0
21309.000000	51.9	1000.0	1000.000	H	5.7	22.1	74.0
22774.000000	52.3	1000.0	1000.000	H	6.1	21.7	74.0
24283.000000	53.2	1000.0	1000.000	H	5.8	20.8	74.0
25507.000000	53.2	1000.0	1000.000	H	6.1	20.9	74.0

Limit and Margin AV

Frequency (MHz)	Average (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dB μ V/m)
19346.000000	36.3	1000.0	1000.000	H	6.5	17.8	54.0
20220.000000	37.8	1000.0	1000.000	H	6.1	16.2	54.0
21309.000000	38.6	1000.0	1000.000	H	5.7	15.4	54.0
22774.000000	39.4	1000.0	1000.000	H	6.1	14.6	54.0
24283.000000	40.1	1000.0	1000.000	H	5.8	13.9	54.0
25507.000000	40.0	1000.0	1000.000	H	6.1	14.0	54.0

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250729 20250808


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE HIGH
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1
Frequency Range: 18GHz-26GHz

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

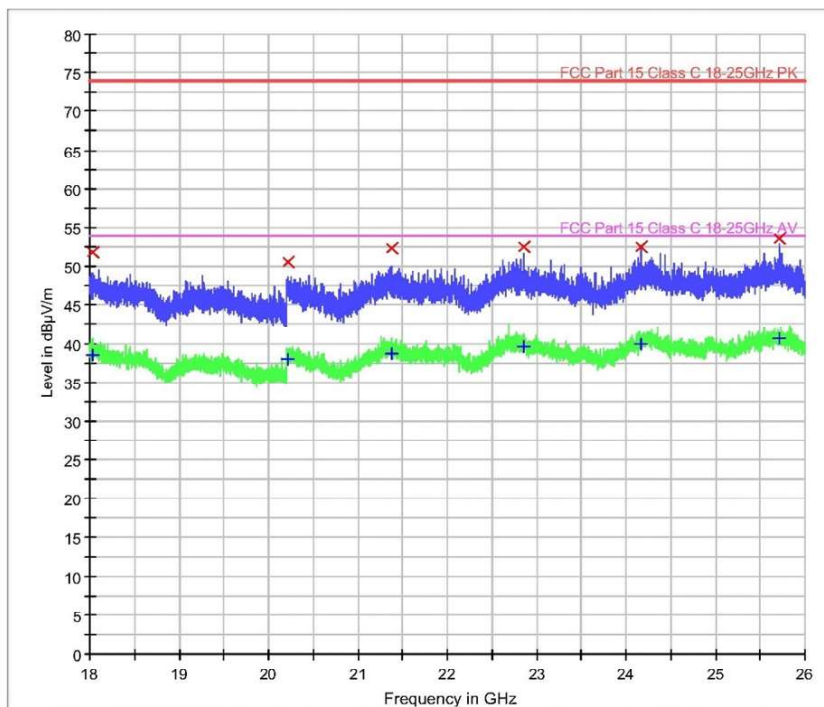

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250729 20250808

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18030.000000	51.7	1000.0	1000.000	V	6.6	22.3	74.0
20216.000000	50.6	1000.0	1000.000	V	6.1	23.4	74.0
21376.000000	52.4	1000.0	1000.000	V	5.7	21.6	74.0
22856.000000	52.6	1000.0	1000.000	V	6.1	21.4	74.0
24166.000000	52.6	1000.0	1000.000	V	5.8	21.4	74.0
25722.000000	53.5	1000.0	1000.000	V	6.0	20.5	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18030.000000	38.4	1000.0	1000.000	V	6.6	15.6	54.0
20216.000000	37.9	1000.0	1000.000	V	6.1	16.1	54.0
21376.000000	38.8	1000.0	1000.000	V	5.7	15.3	54.0
22856.000000	39.5	1000.0	1000.000	V	6.1	14.5	54.0
24166.000000	39.9	1000.0	1000.000	V	5.8	14.1	54.0
25722.000000	40.6	1000.0	1000.000	V	6.0	13.4	54.0

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250729 20250808


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE LOW
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1
Frequency Range: 18GHz-26GHz

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

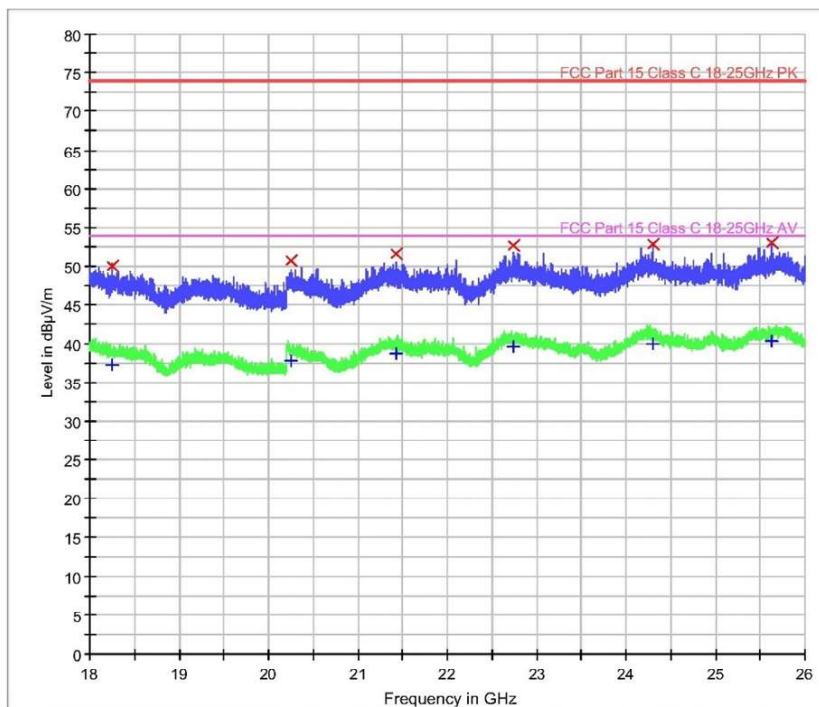

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250729 20250808

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18256.000000	50.0	1000.0	1000.000	H	6.6	24.0	74.0
20248.000000	50.7	1000.0	1000.000	H	6.1	23.3	74.0
21432.000000	51.7	1000.0	1000.000	H	5.8	22.3	74.0
22732.000000	52.7	1000.0	1000.000	H	6.1	21.3	74.0
24305.000000	52.9	1000.0	1000.000	H	5.9	21.2	74.0
25636.000000	53.0	1000.0	1000.000	H	6.1	21.0	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18256.000000	37.2	1000.0	1000.000	H	6.6	16.8	54.0
20248.000000	37.8	1000.0	1000.000	H	6.1	16.2	54.0
21432.000000	38.6	1000.0	1000.000	H	5.8	15.4	54.0
22732.000000	39.5	1000.0	1000.000	H	6.1	14.5	54.0
24305.000000	39.9	1000.0	1000.000	H	5.9	14.1	54.0
25636.000000	40.2	1000.0	1000.000	H	6.1	13.8	54.0

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250729 20250808


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE LOW
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1
Frequency Range: 18GHz-26GHz

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

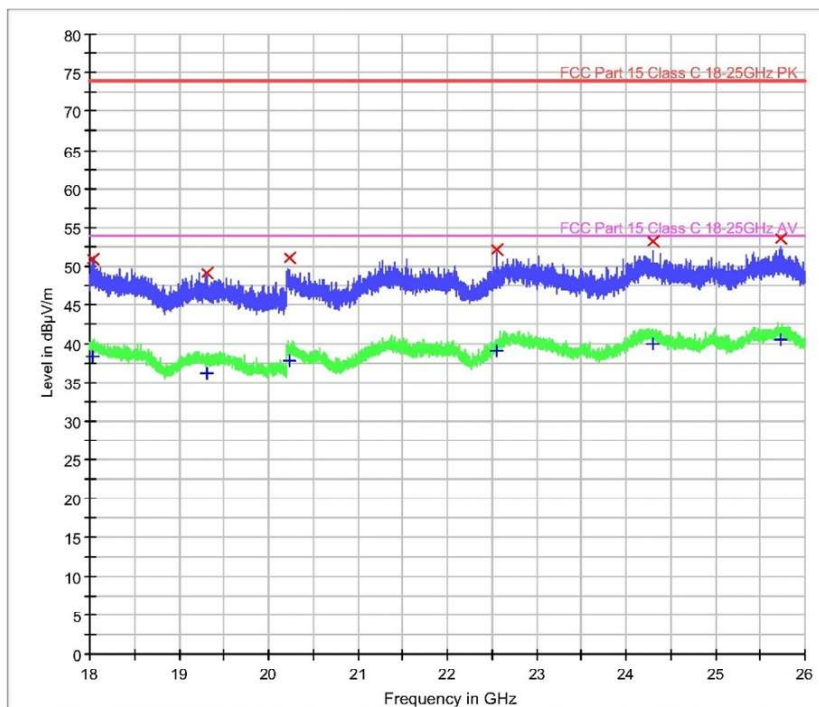

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250729 20250808

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18040.000000	50.9	1000.0	1000.000	V	6.6	23.1	74.0
19313.000000	49.1	1000.0	1000.000	V	6.5	24.9	74.0
20231.000000	51.1	1000.0	1000.000	V	6.1	22.9	74.0
22559.000000	52.2	1000.0	1000.000	V	6.2	21.8	74.0
24305.000000	53.3	1000.0	1000.000	V	5.9	20.7	74.0
25731.000000	53.6	1000.0	1000.000	V	6.0	20.4	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18040.000000	38.4	1000.0	1000.000	V	6.6	15.7	54.0
19313.000000	36.2	1000.0	1000.000	V	6.5	17.8	54.0
20231.000000	37.8	1000.0	1000.000	V	6.1	16.2	54.0
22559.000000	39.0	1000.0	1000.000	V	6.2	15.0	54.0
24305.000000	40.0	1000.0	1000.000	V	5.9	14.0	54.0
25731.000000	40.4	1000.0	1000.000	V	6.0	13.6	54.0

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250729 20250808


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE MID
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1
Frequency Range: 18GHz-26GHz

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

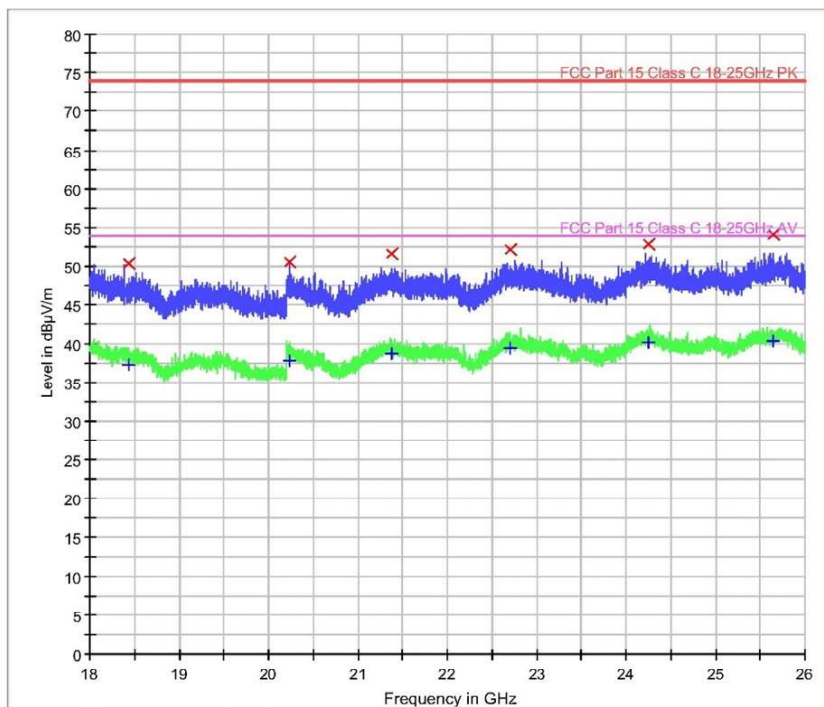

Tested by:	<i>Cesare Gao</i>	Reviewed by:	<i>Jacky Chen</i>
	20250729		20250808

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
18433.000000	50.3	1000.0	1000.000	H	6.5	23.7	74.0
20235.000000	50.6	1000.0	1000.000	H	6.1	23.4	74.0
21373.000000	51.6	1000.0	1000.000	H	5.7	22.4	74.0
22707.000000	52.1	1000.0	1000.000	H	6.2	21.9	74.0
24253.000000	52.9	1000.0	1000.000	H	5.8	21.1	74.0
25648.000000	54.2	1000.0	1000.000	H	6.0	19.8	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
18433.000000	37.2	1000.0	1000.000	H	6.5	16.8	54.0
20235.000000	37.7	1000.0	1000.000	H	6.1	16.3	54.0
21373.000000	38.7	1000.0	1000.000	H	5.7	15.3	54.0
22707.000000	39.4	1000.0	1000.000	H	6.2	14.6	54.0
24253.000000	40.2	1000.0	1000.000	H	5.8	13.8	54.0
25648.000000	40.3	1000.0	1000.000	H	6.0	13.8	54.0

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250729 20250808


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES-1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BLE MID
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1
Frequency Range: 18GHz-26GHz

EMCTT_EREFO11-A02-08_18GHz-25GHz_With PreAMP EXT

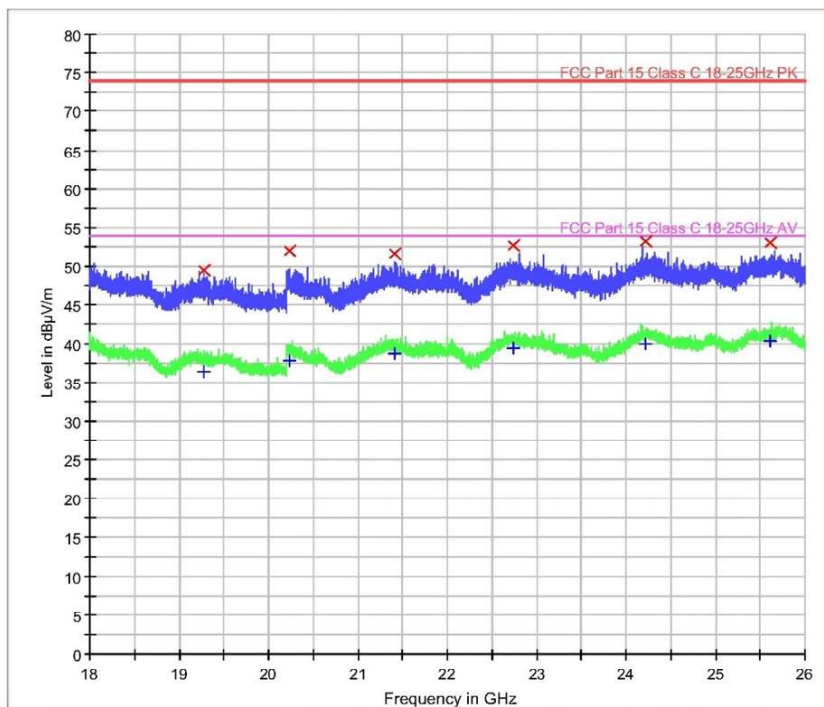

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250729 20250808

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
19284.000000	49.5	1000.0	1000.000	V	6.5	24.5	74.0
20232.000000	52.0	1000.0	1000.000	V	6.1	22.0	74.0
21419.000000	51.7	1000.0	1000.000	V	5.8	22.3	74.0
22736.000000	52.6	1000.0	1000.000	V	6.1	21.4	74.0
24217.000000	53.2	1000.0	1000.000	V	5.8	20.8	74.0
25613.000000	53.1	1000.0	1000.000	V	6.1	20.9	74.0

Limit and Margin av

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
19284.000000	36.4	1000.0	1000.000	V	6.5	17.6	54.0
20232.000000	37.8	1000.0	1000.000	V	6.1	16.2	54.0
21419.000000	38.6	1000.0	1000.000	V	5.8	15.4	54.0
22736.000000	39.5	1000.0	1000.000	V	6.1	14.5	54.0
24217.000000	40.0	1000.0	1000.000	V	5.8	14.0	54.0
25613.000000	40.2	1000.0	1000.000	V	6.1	13.8	54.0

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250729 20250808


BR mode

EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES 1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BR HIGH
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1
Frequency range: 30-1000MHz

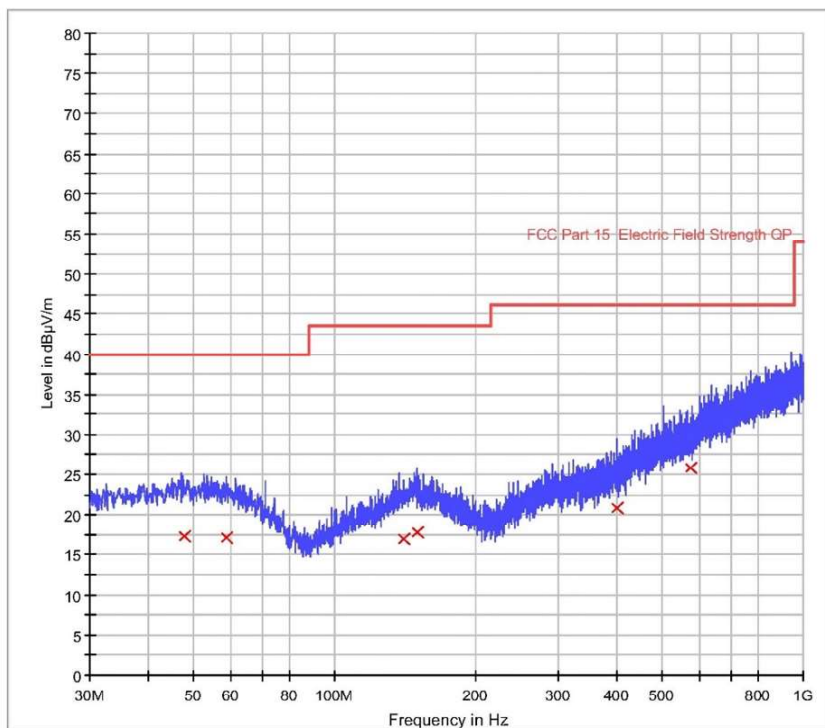

Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250731 20250808

Limit and Margin

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
47.600000	17.3	1000.0	120.000	H	20.7	22.7	40.0
58.720000	17.1	1000.0	120.000	H	20.4	23.0	40.0
140.080000	17.0	1000.0	120.000	H	20.6	26.5	43.5
149.440000	17.9	1000.0	120.000	H	21.3	25.6	43.5
400.280000	20.9	1000.0	120.000	H	24.7	25.1	46.0
573.440000	25.9	1000.0	120.000	H	28.8	20.1	46.0


Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250731 20250808

EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES 1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BR HIGH
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency range:	30-1000MHz

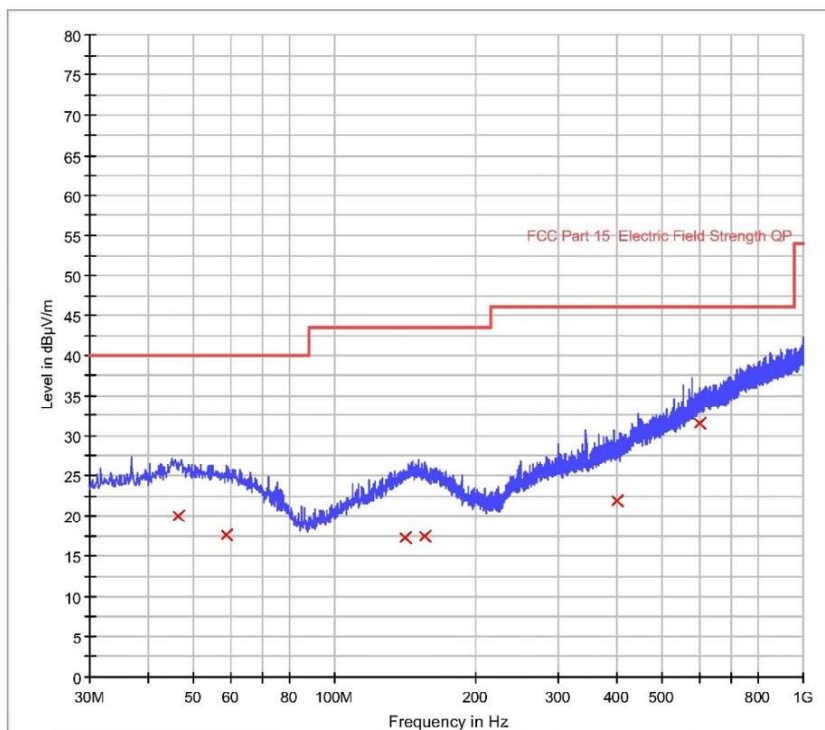

Tested by:	<i>Cesare Gao</i>	Reviewed by:	<i>Jacky Chen</i>
	20250731		20250808

Limit and Margin

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
46.480000	20.0	1000.0	120.000	V	20.7	20.0	40.0
58.720000	17.7	1000.0	120.000	V	20.4	22.3	40.0
141.800000	17.3	1000.0	120.000	V	20.9	26.2	43.5
156.080000	17.4	1000.0	120.000	V	21.2	26.1	43.5
399.320000	21.9	1000.0	120.000	V	24.6	24.1	46.0
602.160000	31.6	1000.0	120.000	V	29.7	14.4	46.0


Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250731 20250808

EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES 1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BR LOW
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1
Frequency range: 30-1000MHz

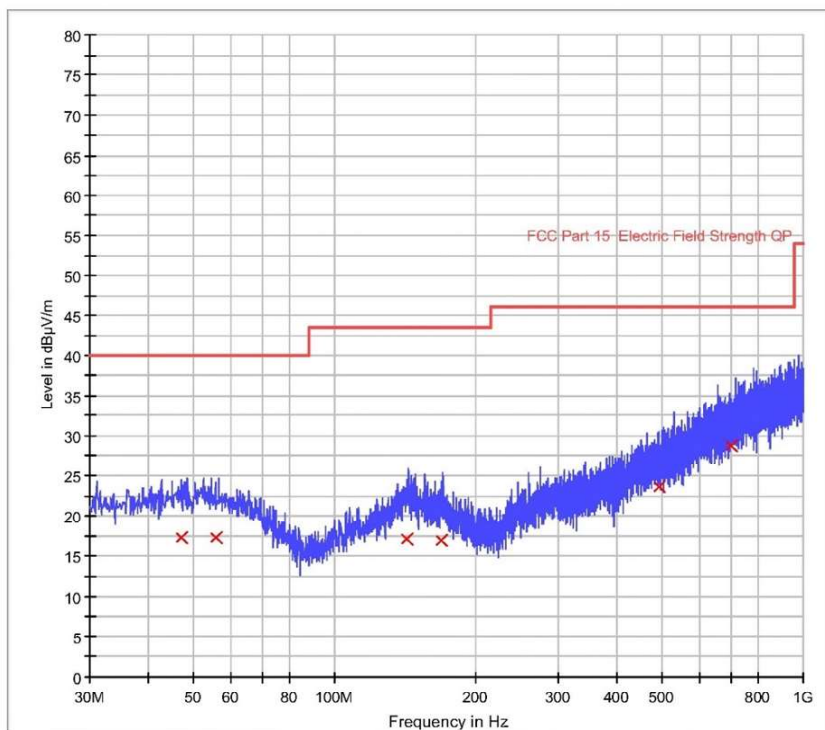

Tested by: *Cesare Gao*
20250731

Reviewed by: *Jacky Chen*
20250808

Limit and Margin

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
47.080000	17.3	1000.0	120.000	H	20.8	22.7	40.0
55.720000	17.3	1000.0	120.000	H	20.6	22.7	40.0
142.280000	17.2	1000.0	120.000	H	20.9	26.3	43.5
168.360000	16.9	1000.0	120.000	H	20.7	26.6	43.5
493.800000	23.7	1000.0	120.000	H	27.3	22.3	46.0
699.800000	28.7	1000.0	120.000	H	31.6	17.3	46.0


Tested by: *Cesare Gao* 20250731
Reviewed by: *Jacky Chen* 20250808

EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES 1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BR LOW
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency range:	30-1000MHz

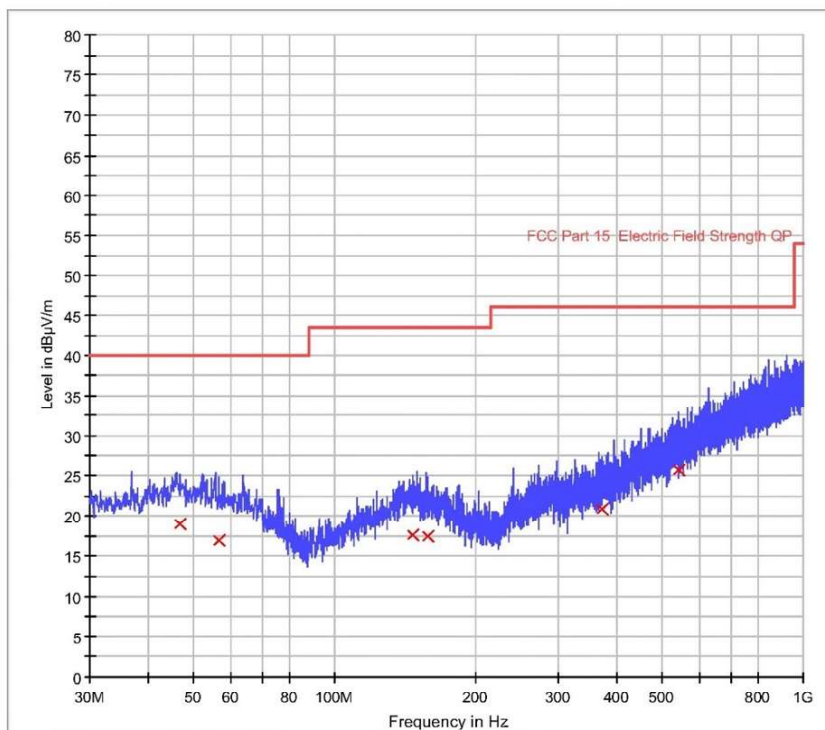

Tested by:	<i>Cesare Gao</i>	Reviewed by:	<i>Jacky Chen</i>
	20250731		20250808

Limit and Margin

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
46.720000	19.1	1000.0	120.000	V	20.7	21.0	40.0
56.560000	17.0	1000.0	120.000	V	20.6	23.0	40.0
146.640000	17.6	1000.0	120.000	V	21.2	25.9	43.5
158.280000	17.5	1000.0	120.000	V	21.1	26.1	43.5
371.680000	20.9	1000.0	120.000	V	24.0	25.1	46.0
540.360000	25.7	1000.0	120.000	V	28.1	20.3	46.0


Tested by: *Cesare Gao* Reviewed by: *Jacky Chen*
20250731 20250808

EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES 1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BR MID
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1
Frequency range: 30-1000MHz

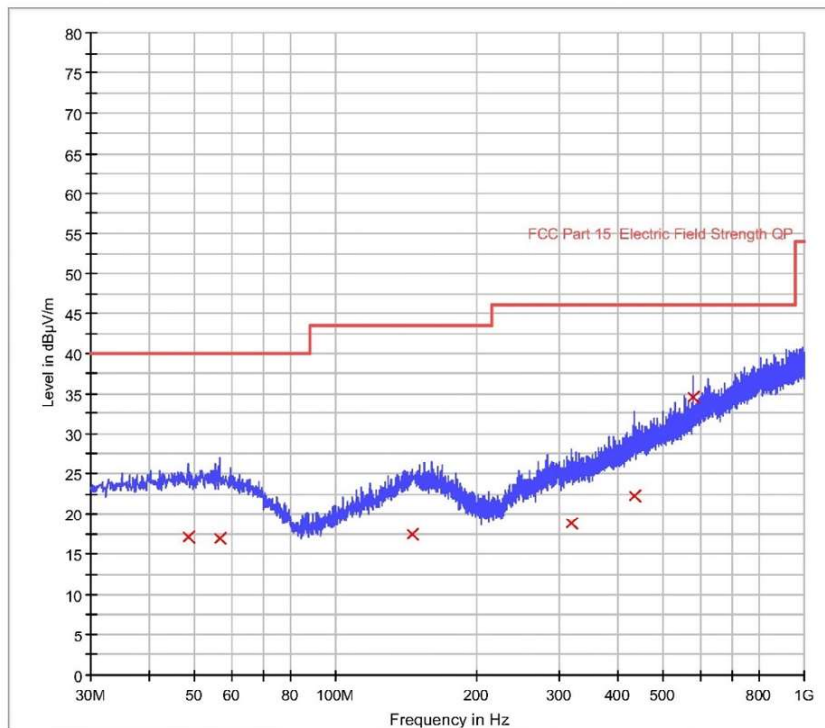

Tested by: *Cesare Gao* 20250731
Reviewed by: *Jacky Chen* 20250808

Limit and Margin

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
48.320000	17.2	1000.0	120.000	H	20.7	22.8	40.0
56.560000	17.0	1000.0	120.000	H	20.6	23.0	40.0
145.320000	17.5	1000.0	120.000	H	21.0	26.0	43.5
318.200000	18.9	1000.0	120.000	H	22.7	27.1	46.0
433.760000	22.3	1000.0	120.000	H	26.0	23.7	46.0
577.560000	34.5	1000.0	120.000	H	29.0	11.5	46.0


Tested by: *Cesare Gao* 20250731
Reviewed by: *Jacky Chen* 20250808

EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES 1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BR MID
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Vertical

Subrange 1	
Frequency range:	30-1000MHz

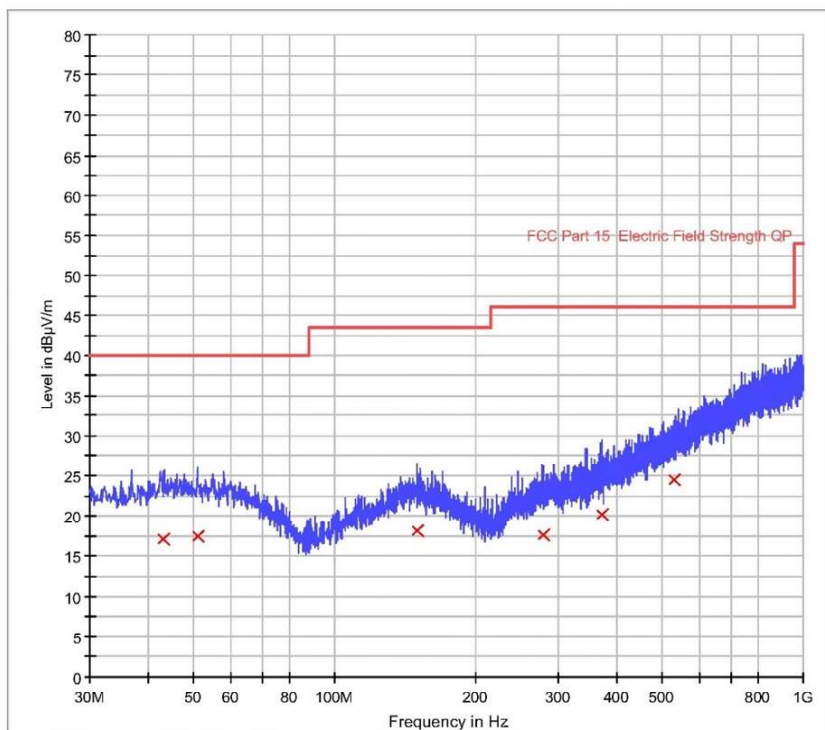

Tested by:	<i>Cesare Gao</i>	Reviewed by:	<i>Jacky Chen</i>
	20250731		20250808

Limit and Margin

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
42.960000	17.2	1000.0	120.000	V	20.4	22.8	40.0
50.960000	17.4	1000.0	120.000	V	20.8	22.6	40.0
150.040000	18.2	1000.0	120.000	V	21.3	25.3	43.5
278.560000	17.7	1000.0	120.000	V	21.5	28.3	46.0
373.000000	20.3	1000.0	120.000	V	24.1	25.8	46.0
528.080000	24.5	1000.0	120.000	V	27.9	21.5	46.0

Tested by: *Cesare Biao* 20250731
Reviewed by: *Jacky Chen* 20250808


EMC Test Record (Emission)

Common Information

Manufacturer:	
Test Item:	Entertainment System
Identification:	ES 1203
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	TX BR HIGH
Climate Condition:	26 °C, 63 %, 101kPa
Test Voltage/ Freq:	AC 120 V / 60 Hz
Receipt No:	170423584
Report No:	
Result:	Pass
Comment:	Test distance is 3m; Horizontal

Subrange 1
Frequency Range: 1GHz-18GHz

EMCTT_EREFO11-A02-06_1GHz-18GHz_With PreAMP EXT& Hight-pass filter

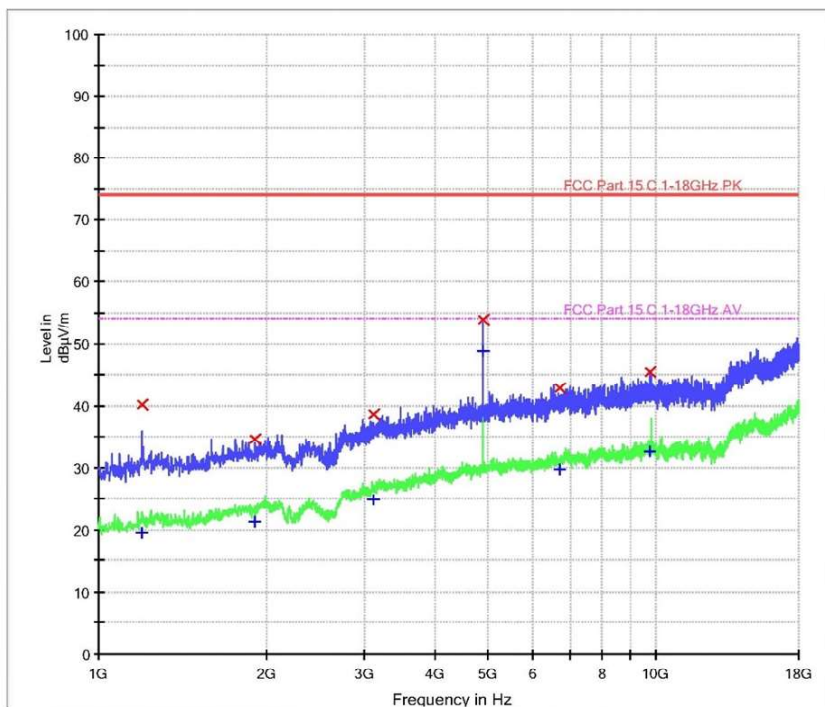

Tested by: *Cesare Qiao* 20250729
Reviewed by: *Jacky Chen* 20250808

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1195.000000	40.2	1000.0	1000.000	H	-24.0	33.9	74.0
1912.000000	34.6	1000.0	1000.000	H	-21.0	39.4	74.0
3121.000000	38.5	1000.0	1000.000	H	-16.6	35.5	74.0
4904.000000	54.0	1000.0	1000.000	H	-11.9	20.0	74.0
6723.000000	42.8	1000.0	1000.000	H	-9.4	31.2	74.0
9715.000000	45.4	1000.0	1000.000	H	-6.3	28.6	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1195.000000	19.6	1000.0	1000.000	H	-24.0	34.4	54.0
1912.000000	21.3	1000.0	1000.000	H	-21.0	32.7	54.0
3121.000000	24.9	1000.0	1000.000	H	-16.6	29.1	54.0
4904.000000	48.8	1000.0	1000.000	H	-11.9	5.3	54.0
6723.000000	29.8	1000.0	1000.000	H	-9.4	24.2	54.0
9715.000000	32.6	1000.0	1000.000	H	-6.3	21.4	54.0

Tested by: Cesare Gioia
20250729

Reviewed by: Jacky Chen
20250808