

1. Effective (Isotropic) Radiated Power Output Data

1.1 GSM850_ERP

1.1.1 Test Result

Band: GSM850								
ENV	Mode		Frequency (MHz)	Conducted Power (dBm)	Gain (dbi)	ERP (dBm)		Verdict
	Network	Subset				Result	Limit	
NTNV	GSM	GSM	824.2	31.99	0.4	30.24	<=38.45	Pass
			836.6	32.40	0.4	30.65	<=38.45	Pass
			848.8	31.99	0.4	30.24	<=38.45	Pass
	GPRS	1 TX Slot	824.2	32.00	0.4	30.25	<=38.45	Pass
		2 TX Slots	824.2	31.10	0.4	29.35	<=38.45	Pass
		3 TX Slots	824.2	29.11	0.4	27.36	<=38.45	Pass
		4 TX Slots	824.2	27.99	0.4	26.24	<=38.45	Pass
		1 TX Slot	836.6	32.42	0.4	30.67	<=38.45	Pass
		2 TX Slots	836.6	31.51	0.4	29.76	<=38.45	Pass
		3 TX Slots	836.6	29.54	0.4	27.79	<=38.45	Pass
		4 TX Slots	836.6	28.57	0.4	26.82	<=38.45	Pass
		1 TX Slot	848.8	32.24	0.4	30.49	<=38.45	Pass
		2 TX Slots	848.8	31.28	0.4	29.53	<=38.45	Pass
		3 TX Slots	848.8	29.41	0.4	27.66	<=38.45	Pass
		4 TX Slots	848.8	28.30	0.4	26.55	<=38.45	Pass
	EGPRS	1 TX Slot	824.2	26.78	0.4	25.03	<=38.45	Pass
		2 TX Slots	824.2	25.71	0.4	23.96	<=38.45	Pass
		3 TX Slots	824.2	23.63	0.4	21.88	<=38.45	Pass
		4 TX Slots	824.2	21.92	0.4	20.17	<=38.45	Pass
		1 TX Slot	836.6	26.84	0.4	25.09	<=38.45	Pass
		2 TX Slots	836.6	25.74	0.4	23.99	<=38.45	Pass
		3 TX Slots	836.6	23.51	0.4	21.76	<=38.45	Pass
		4 TX Slots	836.6	22.23	0.4	20.48	<=38.45	Pass
		1 TX Slot	848.8	26.81	0.4	25.06	<=38.45	Pass
		2 TX Slots	848.8	25.78	0.4	24.03	<=38.45	Pass
		3 TX Slots	848.8	23.55	0.4	21.8	<=38.45	Pass
		4 TX Slots	848.8	22.28	0.4	20.53	<=38.45	Pass

Note1: ERP=Conducted Power+Antenna Gain-2.15

2. Frequency Stability

2.1 GSM850

2.1.1 Test Result

Band: GSM850							
Network	Frequency (MHz)	Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
					Result	Limit	
GSM	824.2	20	3.23	3.777	0.0046	-2.5 to 2.5	Pass
			3.8	-2.841	-0.0034	-2.5 to 2.5	Pass
			4.37	0.387	0.0005	-2.5 to 2.5	Pass

	836.6	-30	3.8	11.591	0.0141	-2.5 to 2.5	Pass	
		-20	3.8	4.229	0.0051	-2.5 to 2.5	Pass	
		-10	3.8	7.264	0.0088	-2.5 to 2.5	Pass	
		0	3.8	5.489	0.0067	-2.5 to 2.5	Pass	
		10	3.8	-3.261	-0.0040	-2.5 to 2.5	Pass	
		30	3.8	11.752	0.0143	-2.5 to 2.5	Pass	
		40	3.8	10.105	0.0123	-2.5 to 2.5	Pass	
		50	3.8	6.296	0.0076	-2.5 to 2.5	Pass	
		20	3.23	12.139	0.0145	-2.5 to 2.5	Pass	
			3.8	11.558	0.0138	-2.5 to 2.5	Pass	
			4.37	6.134	0.0073	-2.5 to 2.5	Pass	
			-30	3.8	18.629	0.0223	-2.5 to 2.5	Pass
			-20	3.8	14.464	0.0173	-2.5 to 2.5	Pass
			-10	3.8	10.170	0.0122	-2.5 to 2.5	Pass
	0		3.8	7.361	0.0088	-2.5 to 2.5	Pass	
	10		3.8	7.652	0.0091	-2.5 to 2.5	Pass	
	30		3.8	5.456	0.0065	-2.5 to 2.5	Pass	
	40		3.8	3.648	0.0044	-2.5 to 2.5	Pass	
	50	3.8	10.590	0.0127	-2.5 to 2.5	Pass		
	848.8	20	3.23	3.745	0.0044	-2.5 to 2.5	Pass	
			3.8	7.749	0.0091	-2.5 to 2.5	Pass	
			4.37	2.873	0.0034	-2.5 to 2.5	Pass	
		-30	3.8	3.455	0.0041	-2.5 to 2.5	Pass	
		-20	3.8	5.359	0.0063	-2.5 to 2.5	Pass	
		-10	3.8	0.194	0.0002	-2.5 to 2.5	Pass	
		0	3.8	6.199	0.0073	-2.5 to 2.5	Pass	
		10	3.8	3.067	0.0036	-2.5 to 2.5	Pass	
		30	3.8	1.388	0.0016	-2.5 to 2.5	Pass	
		40	3.8	8.556	0.0101	-2.5 to 2.5	Pass	
		50	3.8	5.069	0.0060	-2.5 to 2.5	Pass	
GPRS		824.2	20	3.23	4.585	0.0056	-2.5 to 2.5	Pass
	3.8			-1.937	-0.0024	-2.5 to 2.5	Pass	
	4.37			3.390	0.0041	-2.5 to 2.5	Pass	
	-30		3.8	-0.549	-0.0007	-2.5 to 2.5	Pass	
	-20		3.8	-0.420	-0.0005	-2.5 to 2.5	Pass	
	-10		3.8	-3.777	-0.0046	-2.5 to 2.5	Pass	
	0		3.8	3.455	0.0042	-2.5 to 2.5	Pass	
	10		3.8	0.000	0.0000	-2.5 to 2.5	Pass	
	30		3.8	-0.807	-0.0010	-2.5 to 2.5	Pass	
	40		3.8	2.486	0.0030	-2.5 to 2.5	Pass	
	50		3.8	-2.099	-0.0025	-2.5 to 2.5	Pass	
	836.6	20	3.23	6.877	0.0082	-2.5 to 2.5	Pass	
			3.8	8.523	0.0102	-2.5 to 2.5	Pass	
			4.37	9.105	0.0109	-2.5 to 2.5	Pass	
		-30	3.8	10.945	0.0131	-2.5 to 2.5	Pass	
		-20	3.8	4.585	0.0055	-2.5 to 2.5	Pass	
		-10	3.8	4.746	0.0057	-2.5 to 2.5	Pass	
		0	3.8	4.100	0.0049	-2.5 to 2.5	Pass	
		10	3.8	2.228	0.0027	-2.5 to 2.5	Pass	
		30	3.8	5.585	0.0067	-2.5 to 2.5	Pass	
		40	3.8	1.324	0.0016	-2.5 to 2.5	Pass	
		50	3.8	4.488	0.0054	-2.5 to 2.5	Pass	
	848.8	20	3.23	3.422	0.0040	-2.5 to 2.5	Pass	
			3.8	5.779	0.0068	-2.5 to 2.5	Pass	
			4.37	2.938	0.0035	-2.5 to 2.5	Pass	

EGPRS		-30	3.8	7.490	0.0088	-2.5 to 2.5	Pass
		-20	3.8	2.228	0.0026	-2.5 to 2.5	Pass
		-10	3.8	3.810	0.0045	-2.5 to 2.5	Pass
		0	3.8	6.812	0.0080	-2.5 to 2.5	Pass
		10	3.8	4.811	0.0057	-2.5 to 2.5	Pass
		30	3.8	3.487	0.0041	-2.5 to 2.5	Pass
		40	3.8	5.392	0.0064	-2.5 to 2.5	Pass
		50	3.8	3.713	0.0044	-2.5 to 2.5	Pass
	824.2	20	3.23	4.133	0.0050	-2.5 to 2.5	Pass
			3.8	-0.581	-0.0007	-2.5 to 2.5	Pass
			4.37	3.325	0.0040	-2.5 to 2.5	Pass
		-30	3.8	0.194	0.0002	-2.5 to 2.5	Pass
		-20	3.8	3.455	0.0042	-2.5 to 2.5	Pass
		-10	3.8	3.648	0.0044	-2.5 to 2.5	Pass
		0	3.8	2.841	0.0034	-2.5 to 2.5	Pass
		10	3.8	1.356	0.0016	-2.5 to 2.5	Pass
		30	3.8	1.743	0.0021	-2.5 to 2.5	Pass
		40	3.8	1.453	0.0018	-2.5 to 2.5	Pass
		50	3.8	3.229	0.0039	-2.5 to 2.5	Pass
	836.6	20	3.23	2.163	0.0026	-2.5 to 2.5	Pass
			3.8	-1.776	-0.0021	-2.5 to 2.5	Pass
			4.37	2.712	0.0032	-2.5 to 2.5	Pass
		-30	3.8	-2.357	-0.0028	-2.5 to 2.5	Pass
		-20	3.8	-0.484	-0.0006	-2.5 to 2.5	Pass
		-10	3.8	3.035	0.0036	-2.5 to 2.5	Pass
		0	3.8	5.650	0.0068	-2.5 to 2.5	Pass
		10	3.8	1.421	0.0017	-2.5 to 2.5	Pass
		30	3.8	3.229	0.0039	-2.5 to 2.5	Pass
		40	3.8	2.841	0.0034	-2.5 to 2.5	Pass
		50	3.8	1.195	0.0014	-2.5 to 2.5	Pass
	848.8	20	3.23	0.807	0.0010	-2.5 to 2.5	Pass
			3.8	2.841	0.0033	-2.5 to 2.5	Pass
			4.37	10.977	0.0129	-2.5 to 2.5	Pass
		-30	3.8	-0.291	-0.0003	-2.5 to 2.5	Pass
		-20	3.8	7.716	0.0091	-2.5 to 2.5	Pass
		-10	3.8	5.424	0.0064	-2.5 to 2.5	Pass
		0	3.8	4.391	0.0052	-2.5 to 2.5	Pass
		10	3.8	1.453	0.0017	-2.5 to 2.5	Pass
		30	3.8	6.102	0.0072	-2.5 to 2.5	Pass
		40	3.8	1.743	0.0021	-2.5 to 2.5	Pass
		50	3.8	6.522	0.0077	-2.5 to 2.5	Pass

3. Modulation Characteristics


3.1 GSM850



3.1.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	Modulation Characteristics		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	836.6	Refer To Test Graph		Pass

	GPRS	1 TX Slot	836.6	Refer To Test Graph	Pass
	EGPRS	1 TX Slot	836.6	Refer To Test Graph	Pass

3.1.2 Test Graph

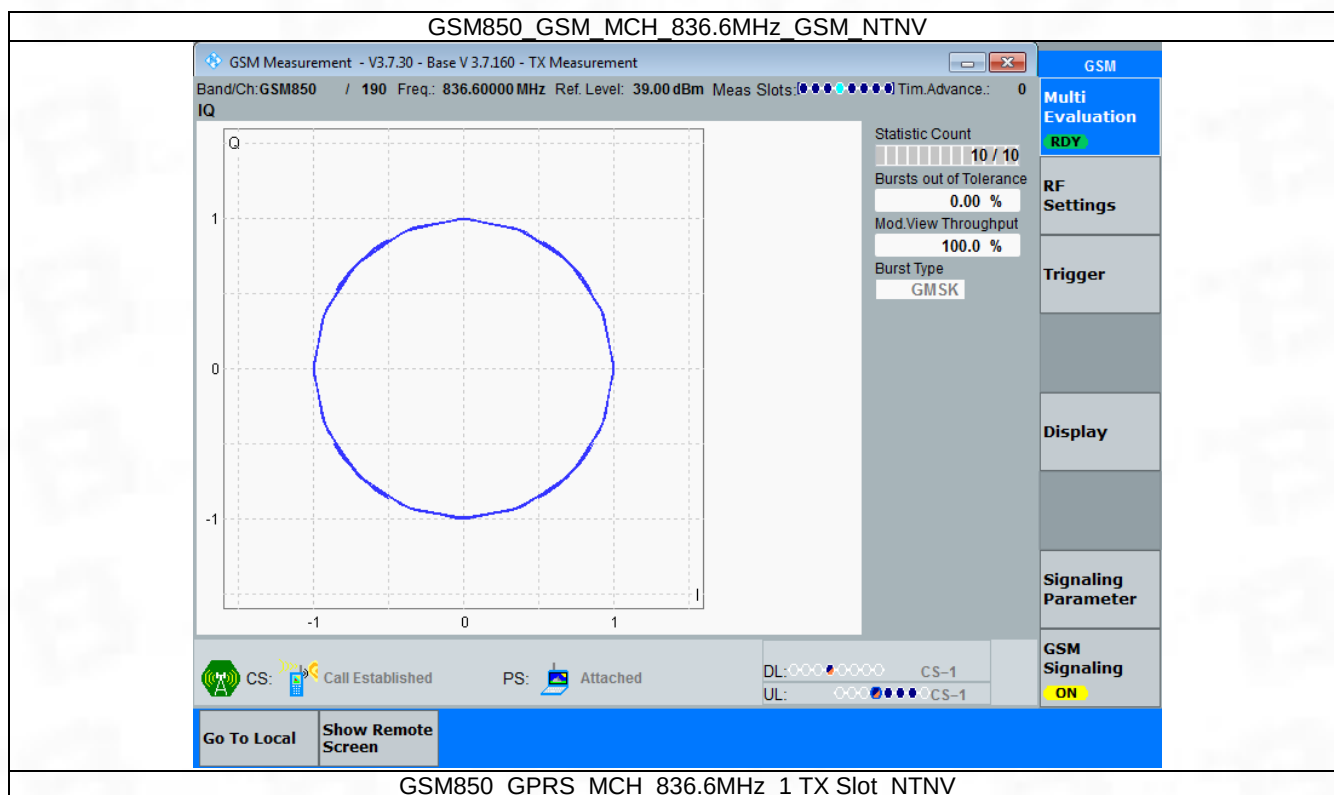

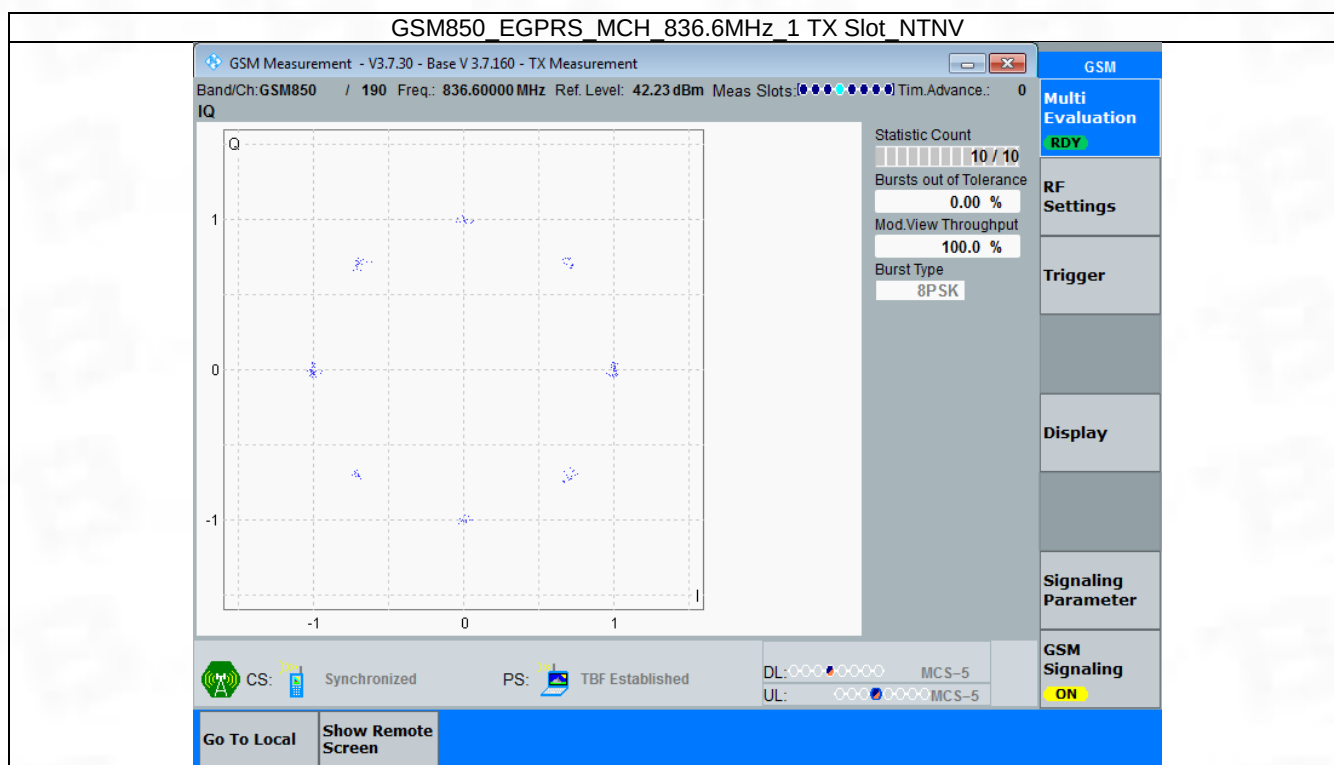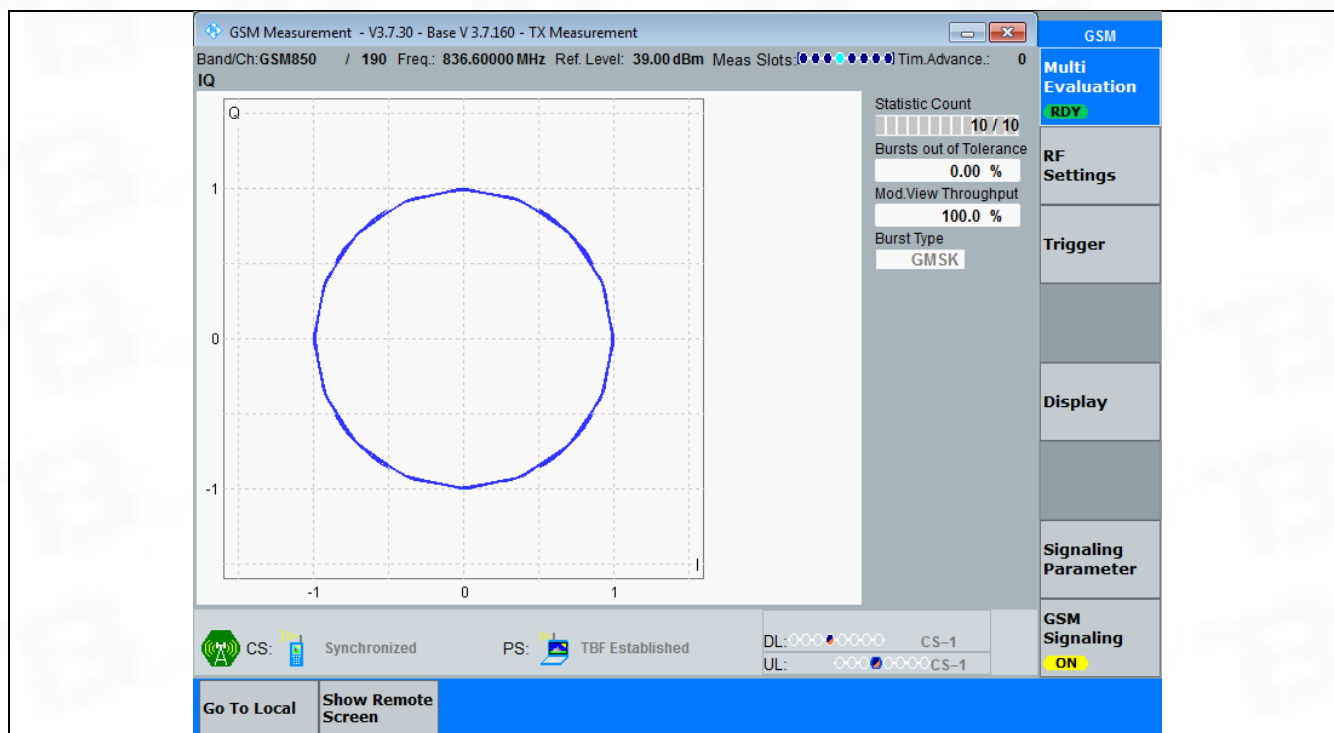


4. 99% & 26dB Bandwidth


4.1 GSM850_OBW

4.1.1 Test Result


Band: GSM850					
ENV	Mode		Frequency (MHz)	99% Occupied Bandwidth (MHz)	Verdict
	Network	Subset		Result	
NTNV	GSM	GSM	824.2	0.246	Pass
			836.6	0.244	Pass
			848.8	0.251	Pass
	GPRS	1 TX Slot	824.2	0.250	Pass
			836.6	0.244	Pass
			848.8	0.246	Pass
	EGPRS	1 TX Slot	824.2	0.247	Pass
			836.6	0.233	Pass
			848.8	0.242	Pass

4.1.2 Test Graph

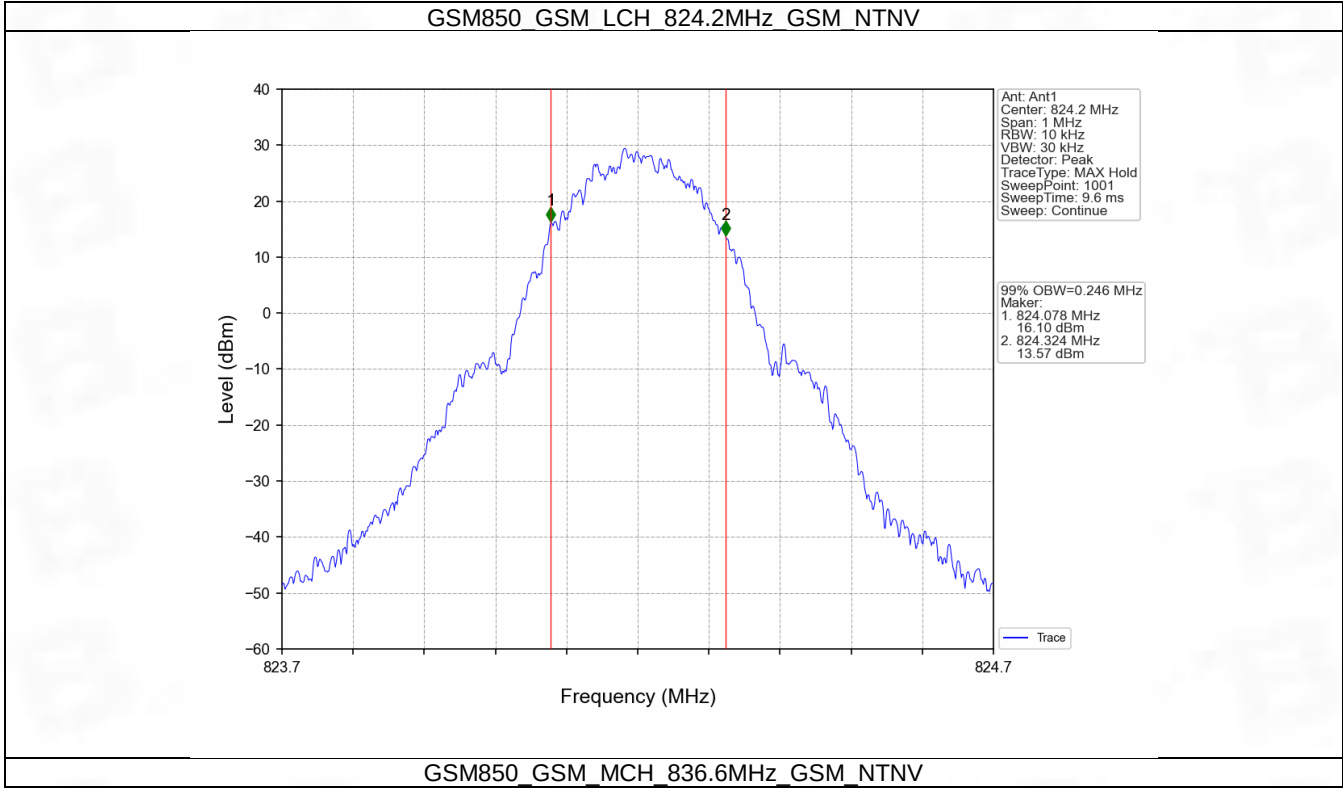


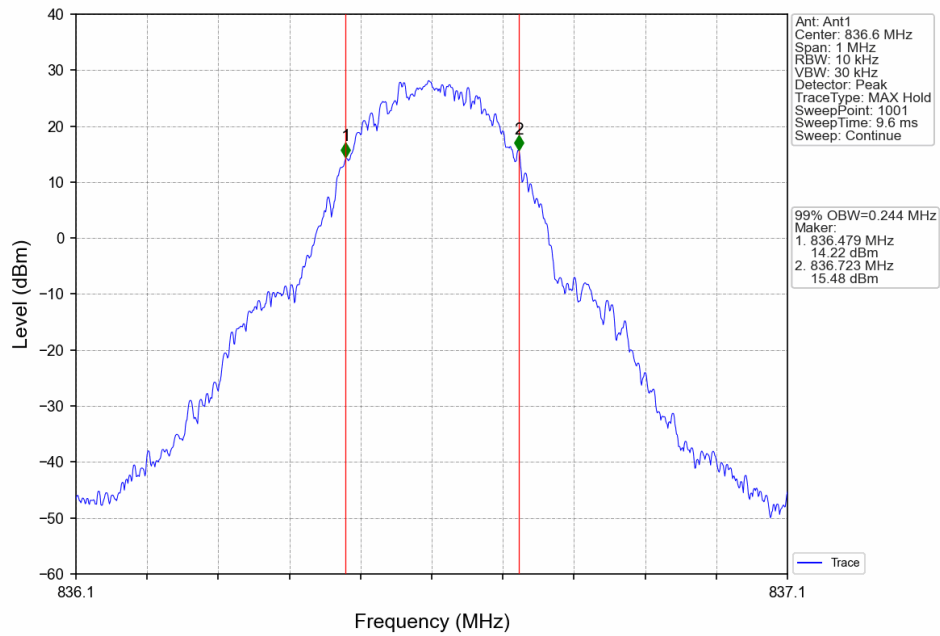


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

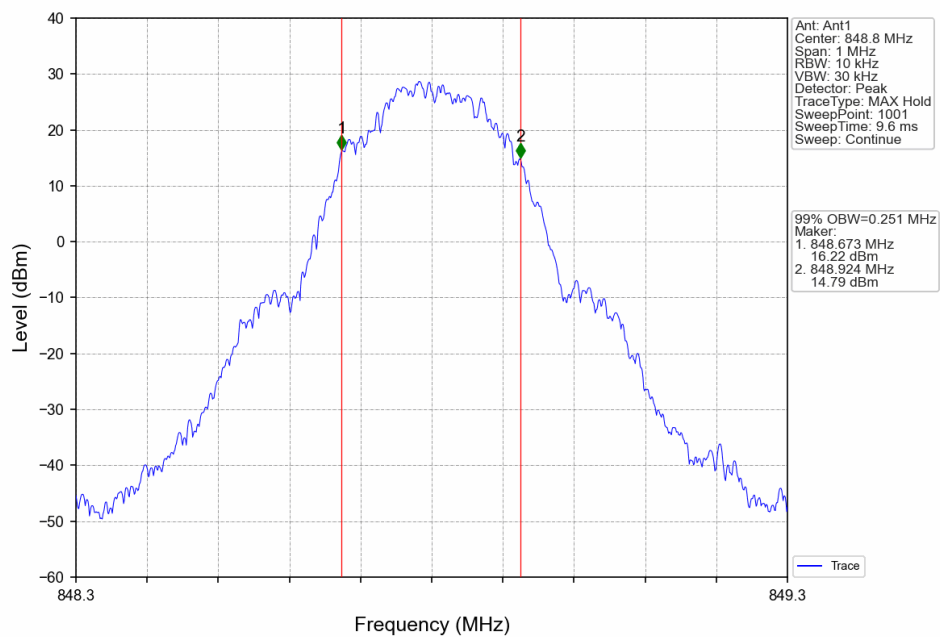


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

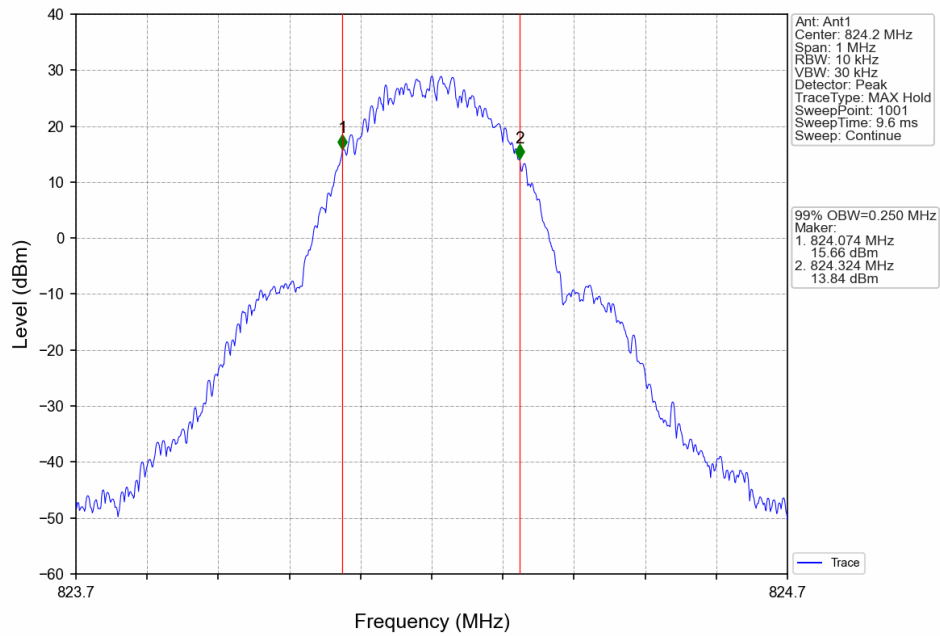


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

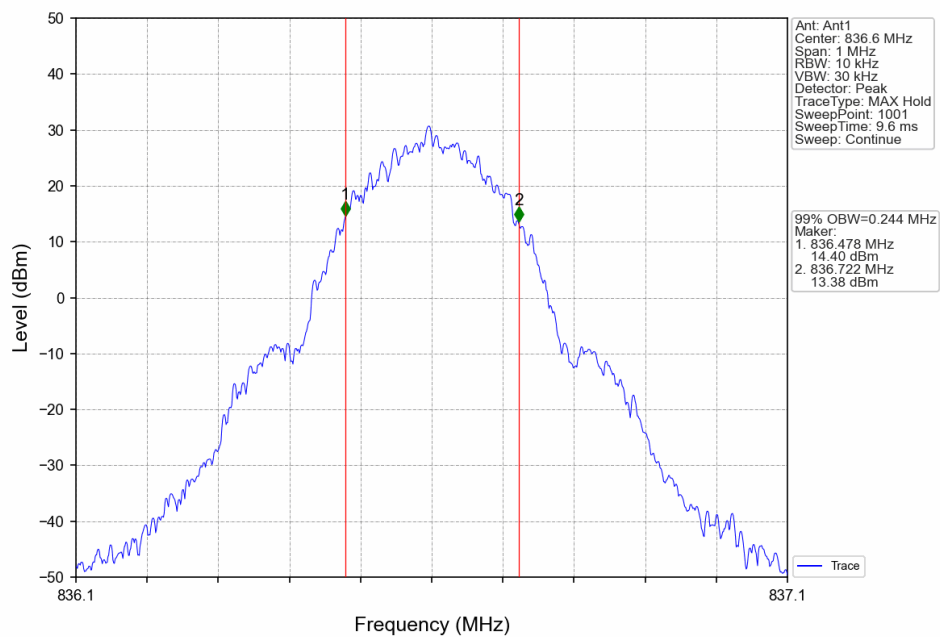


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

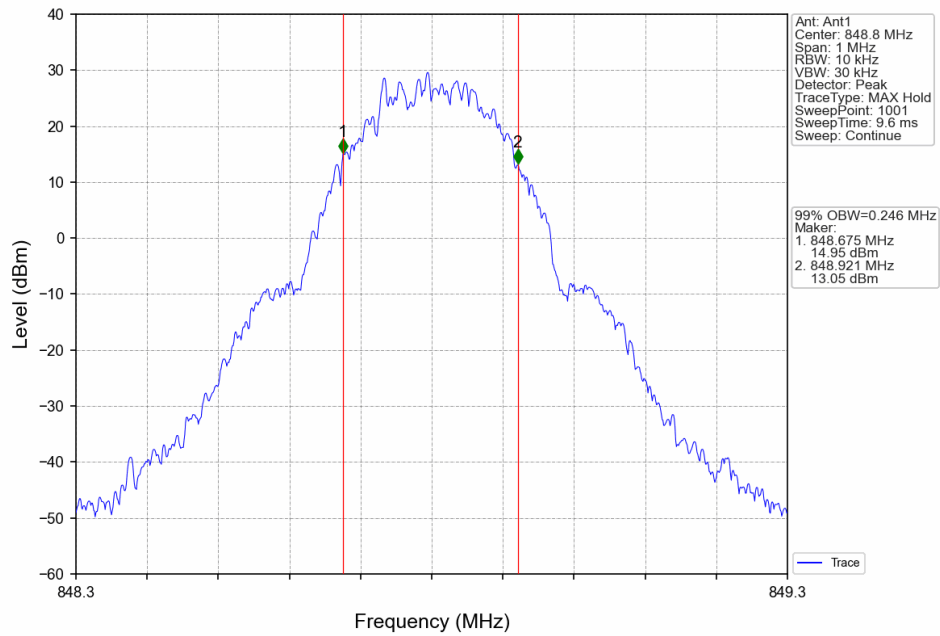


GSM850 EGPRS LCH 824.2MHz 1 TX Slot_NTNV

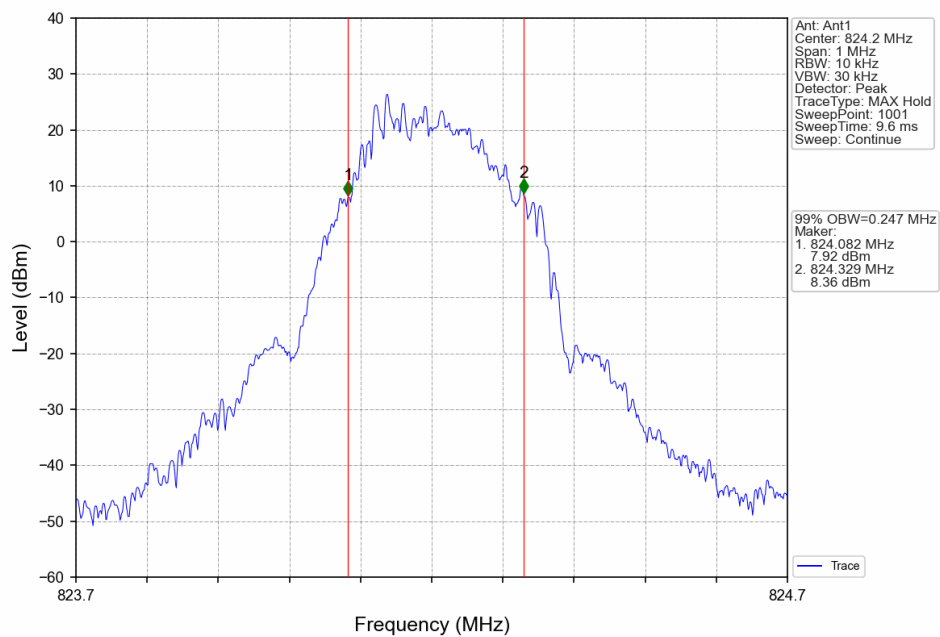

GSM850 EGPRS MCH 836.6MHz 1 TX Slot_NTNV

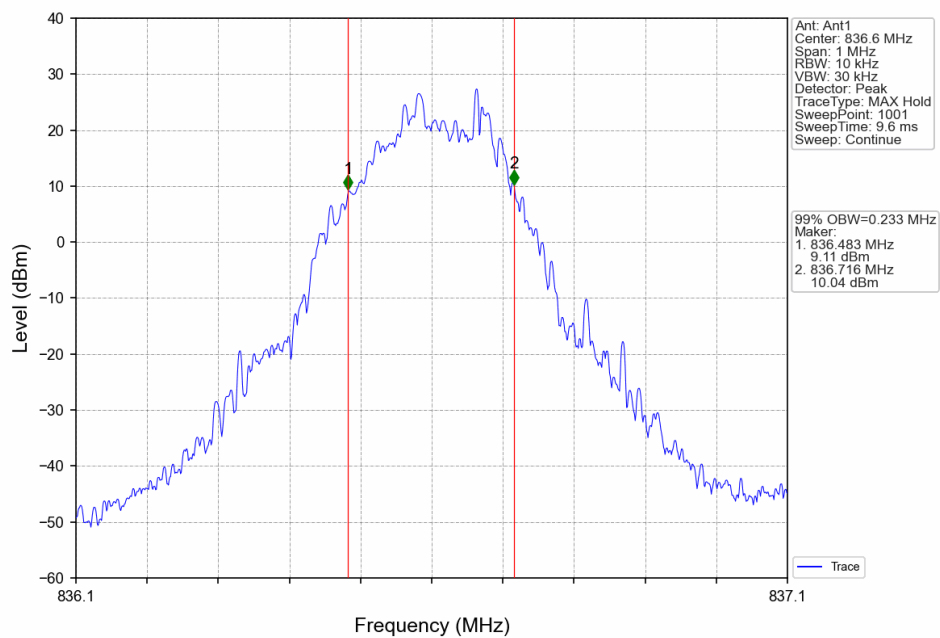

GSM850_EGPRS_HCH_848.8MHz_1 TX Slot_NTNV

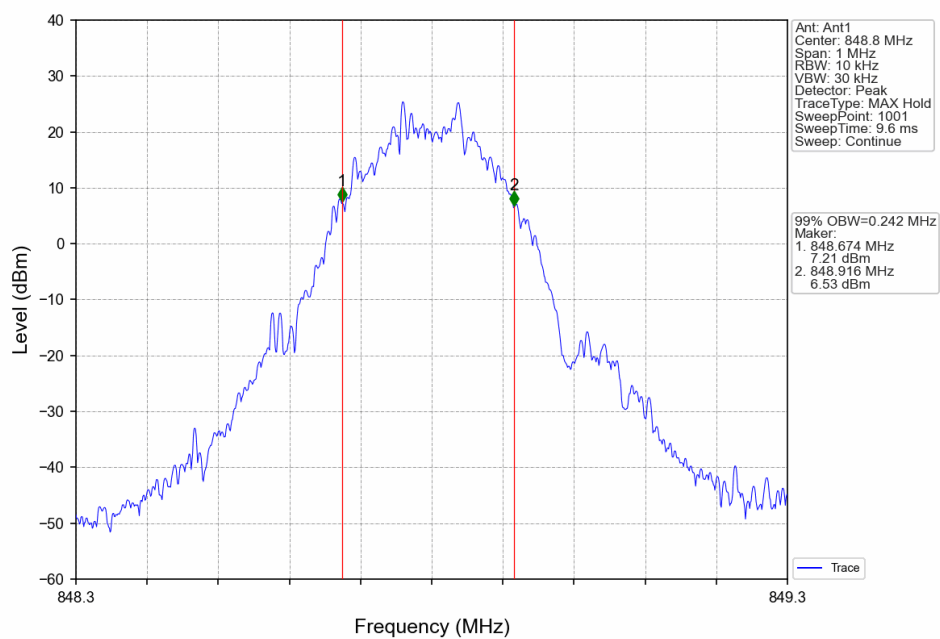



4.2 GSM850_XDB

4.2.1 Test Result


Band: GSM850					
ENV	Mode		Frequency (MHz)	26dB Bandwidth (MHz)	Verdict
	Network	Subset		Result	
NTNV	GSM	GSM	824.2	0.313	Pass
			836.6	0.313	Pass
			848.8	0.315	Pass
	GPRS	1 TX Slot	824.2	0.318	Pass
			836.6	0.314	Pass
			848.8	0.311	Pass
	EGPRS	1 TX Slot	824.2	0.307	Pass
			836.6	0.294	Pass
			848.8	0.308	Pass

4.2.2 Test Graph

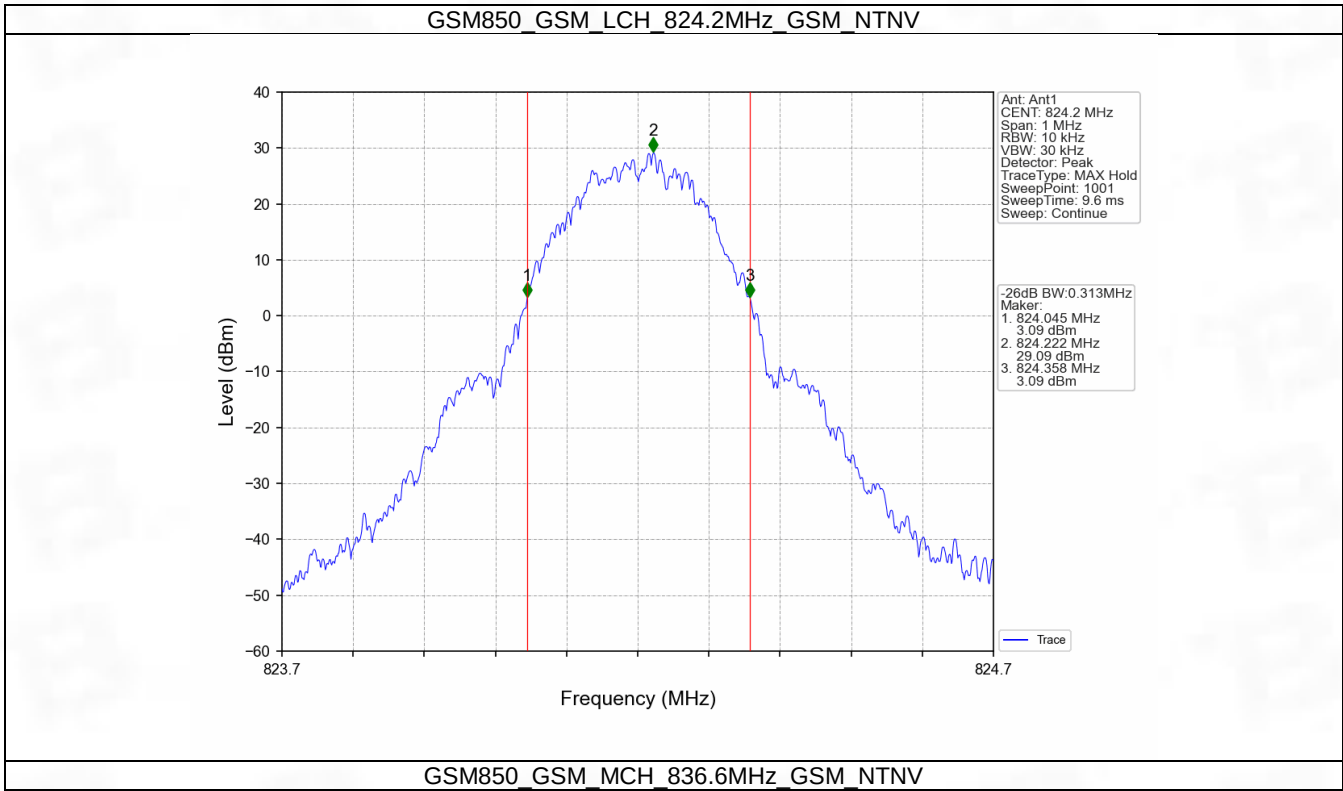


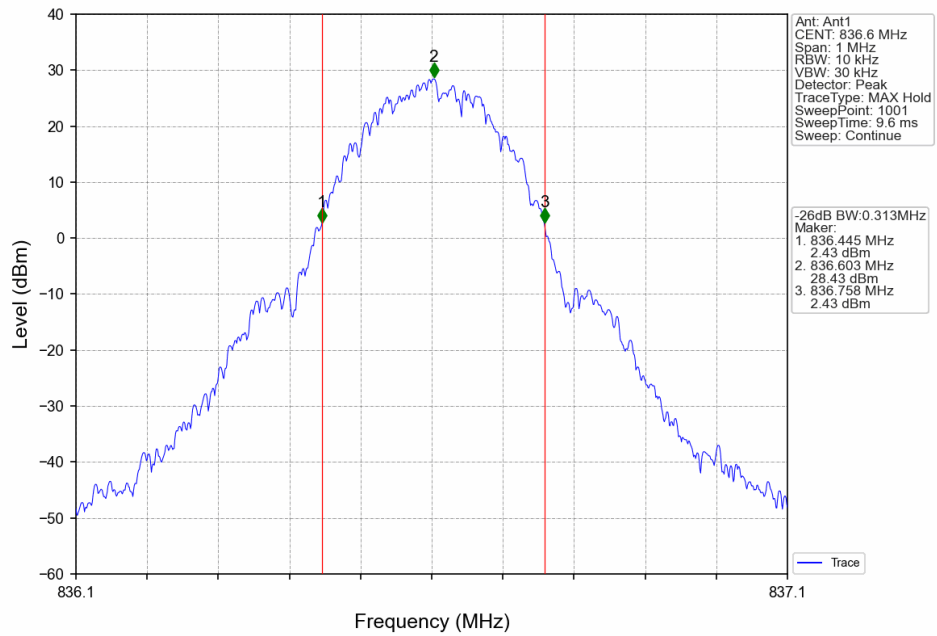


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

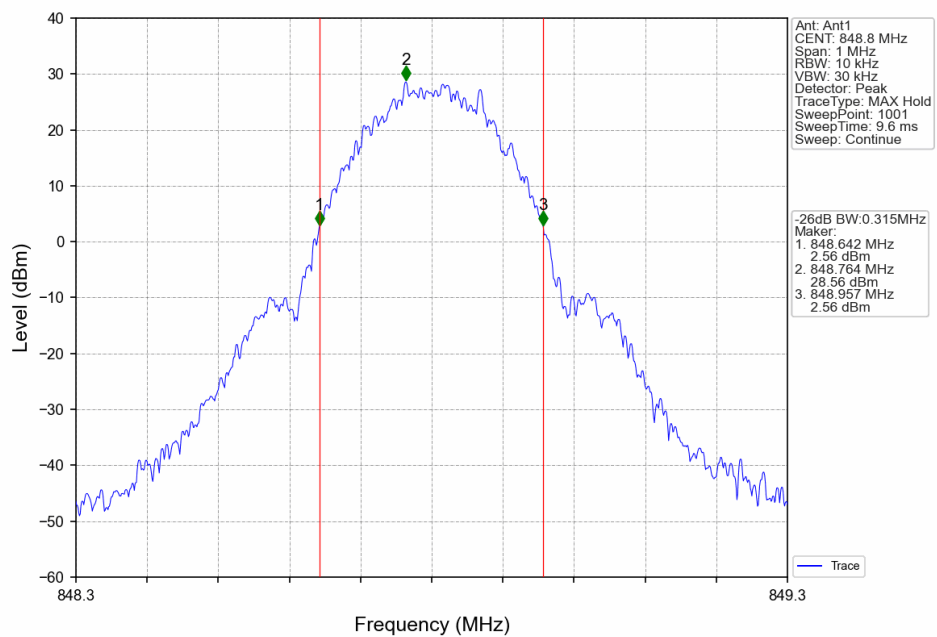


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

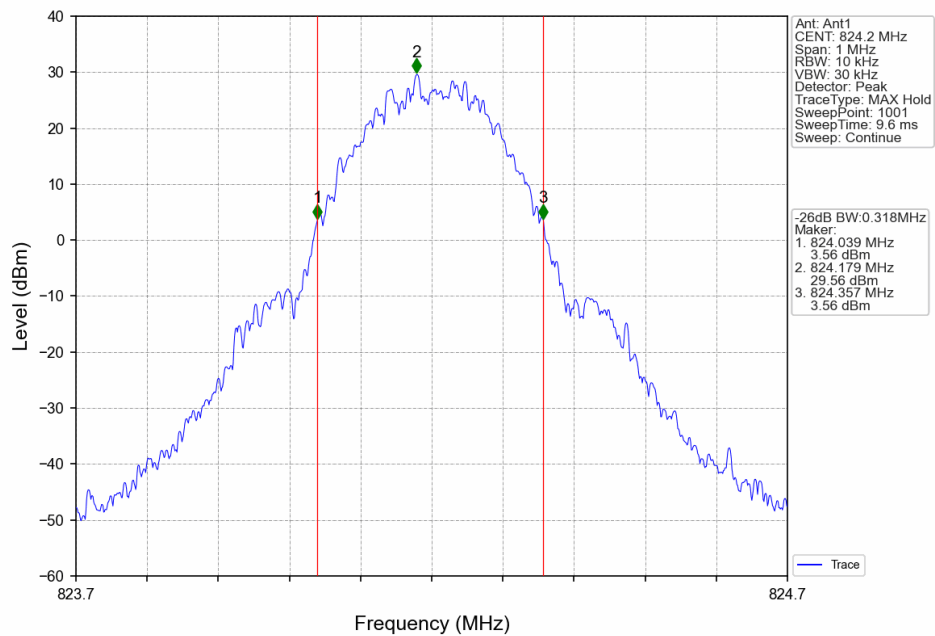


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

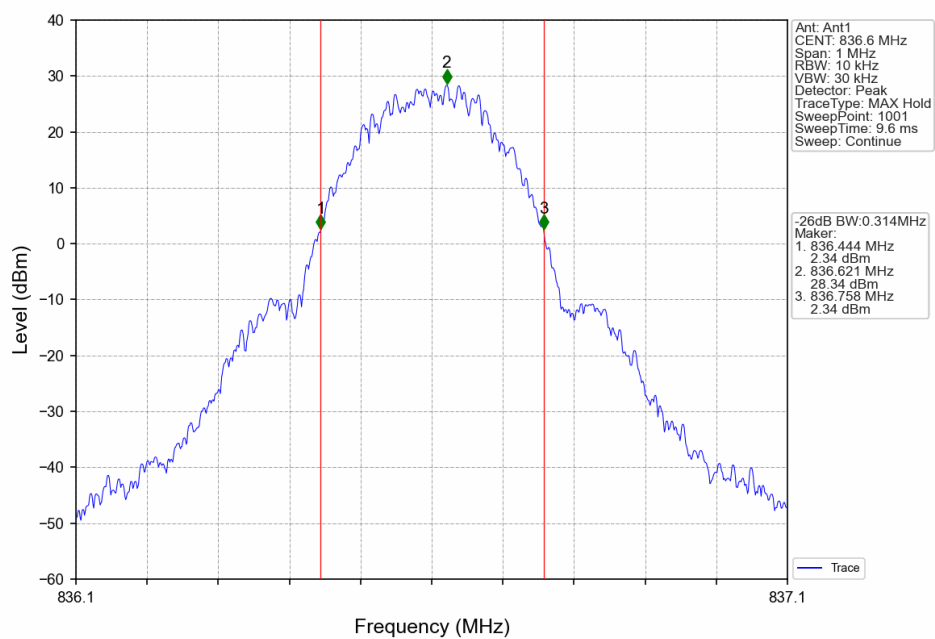


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

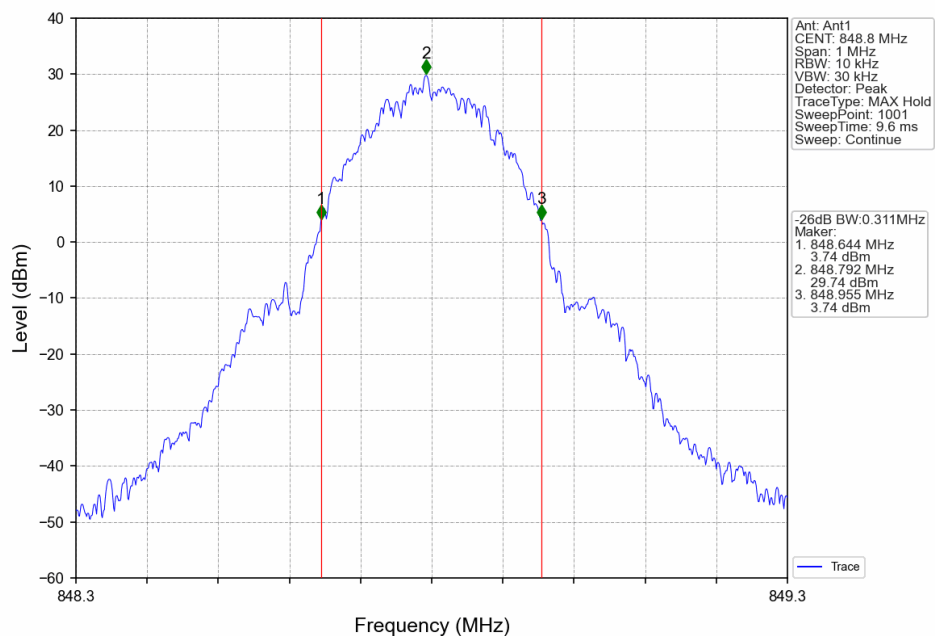


GSM850 EGPRS LCH 824.2MHz_1 TX Slot_NTNV

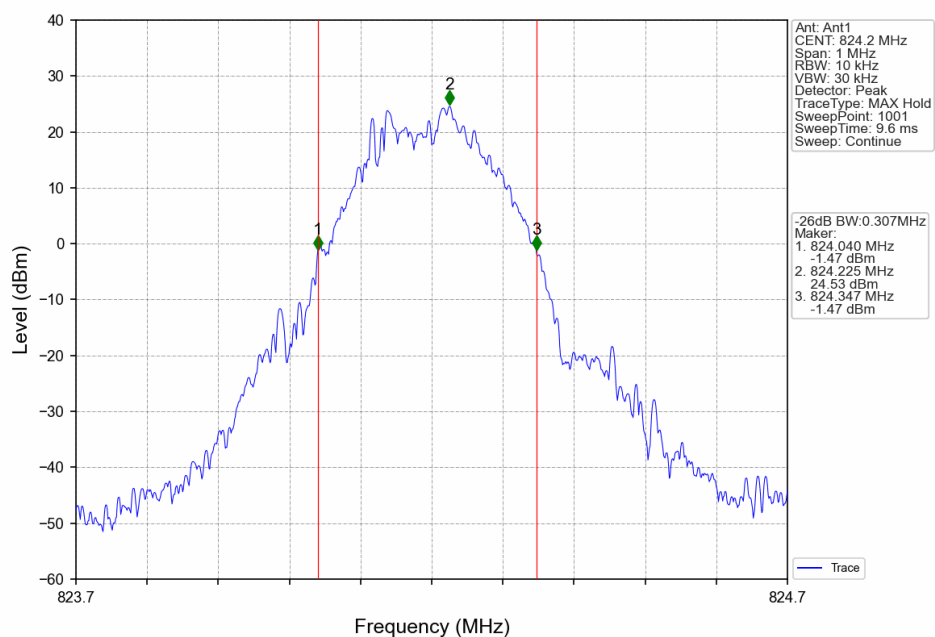

GSM850 EGPRS MCH 836.6MHz_1 TX Slot_NTNV

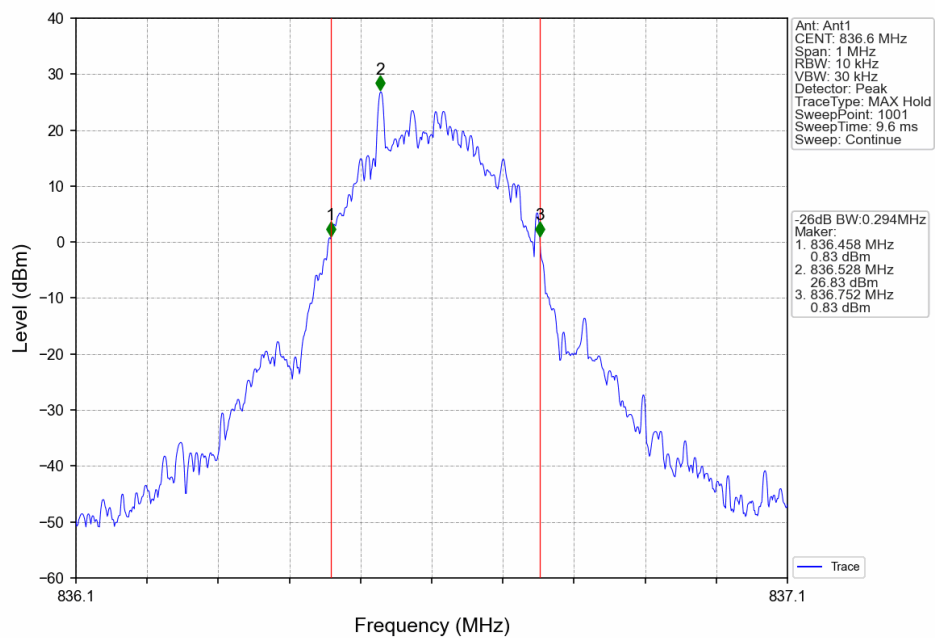

GSM850 EGPRS HCH 848.8MHz 1 TX Slot NTNV

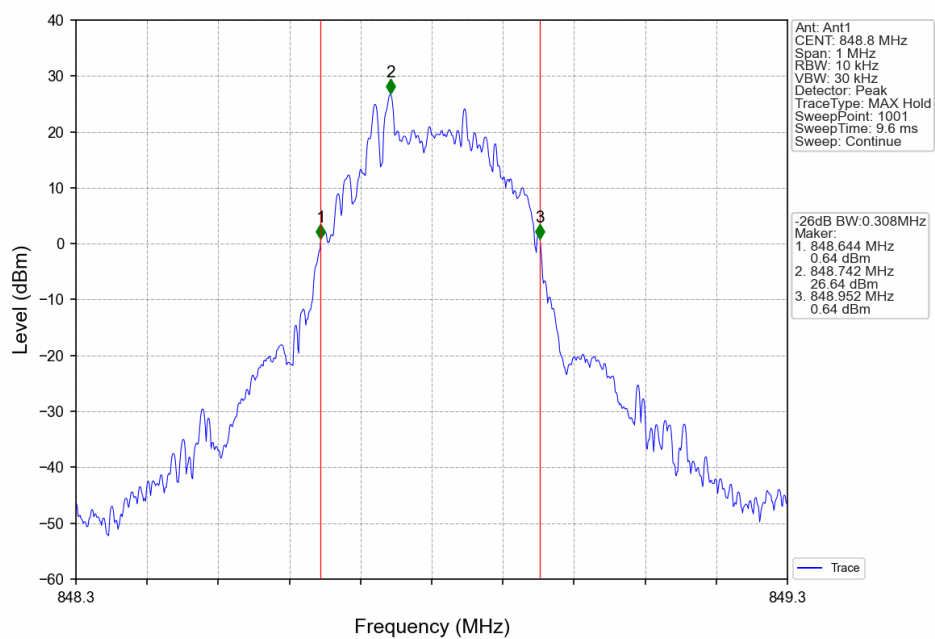


5. Peak-Average Ratio



5.1 GSM850

5.1.1 Test Result



Band: GSM850						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	824.2	9.65	<=13	Pass
			836.6	9.48	<=13	Pass
			848.8	9.23	<=13	Pass
	GPRS	4 TX Slots	824.2	9.75	<=13	Pass
			836.6	3.57	<=13	Pass
			848.8	3.61	<=13	Pass
	EGPRS	4 TX Slots	824.2	6.71	<=13	Pass
			836.6	6.75	<=13	Pass
			848.8	10.95	<=13	Pass



5.1.2 Test Graph

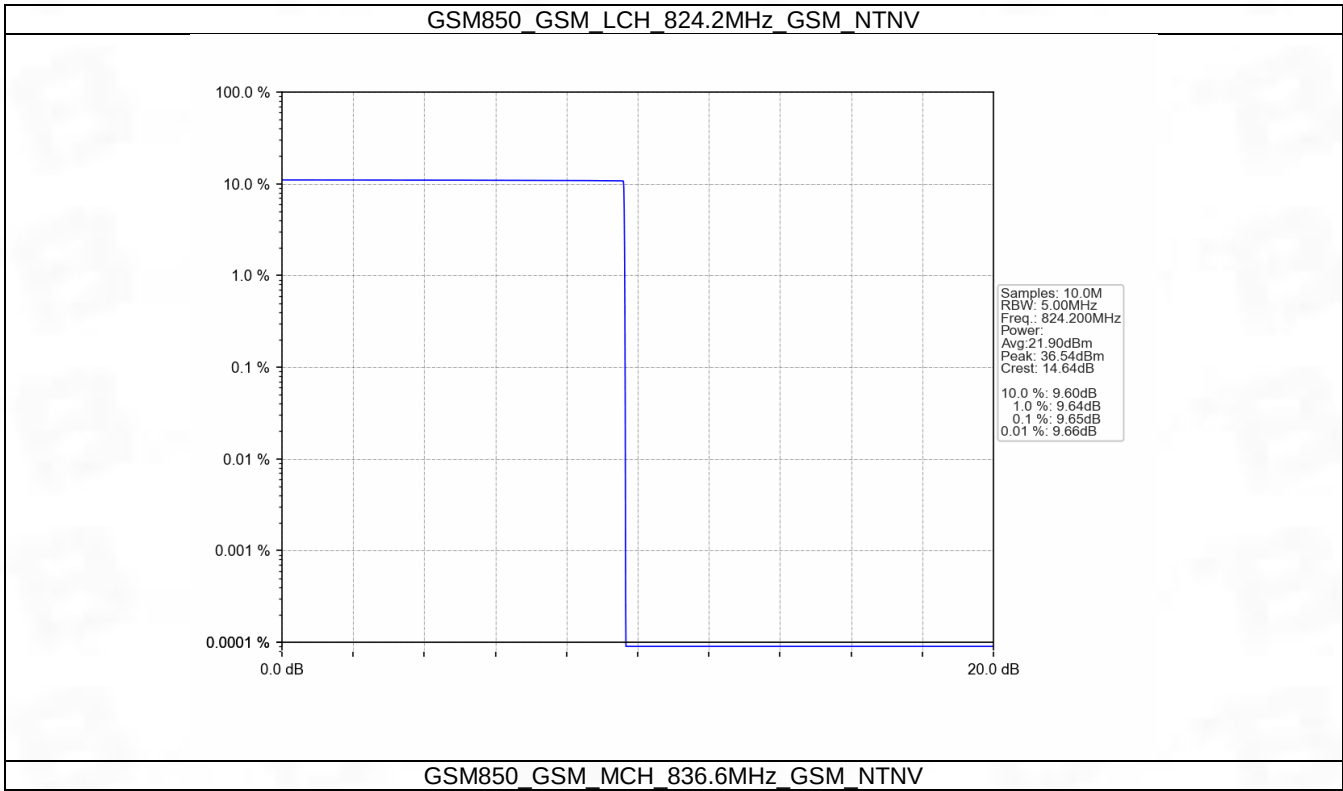


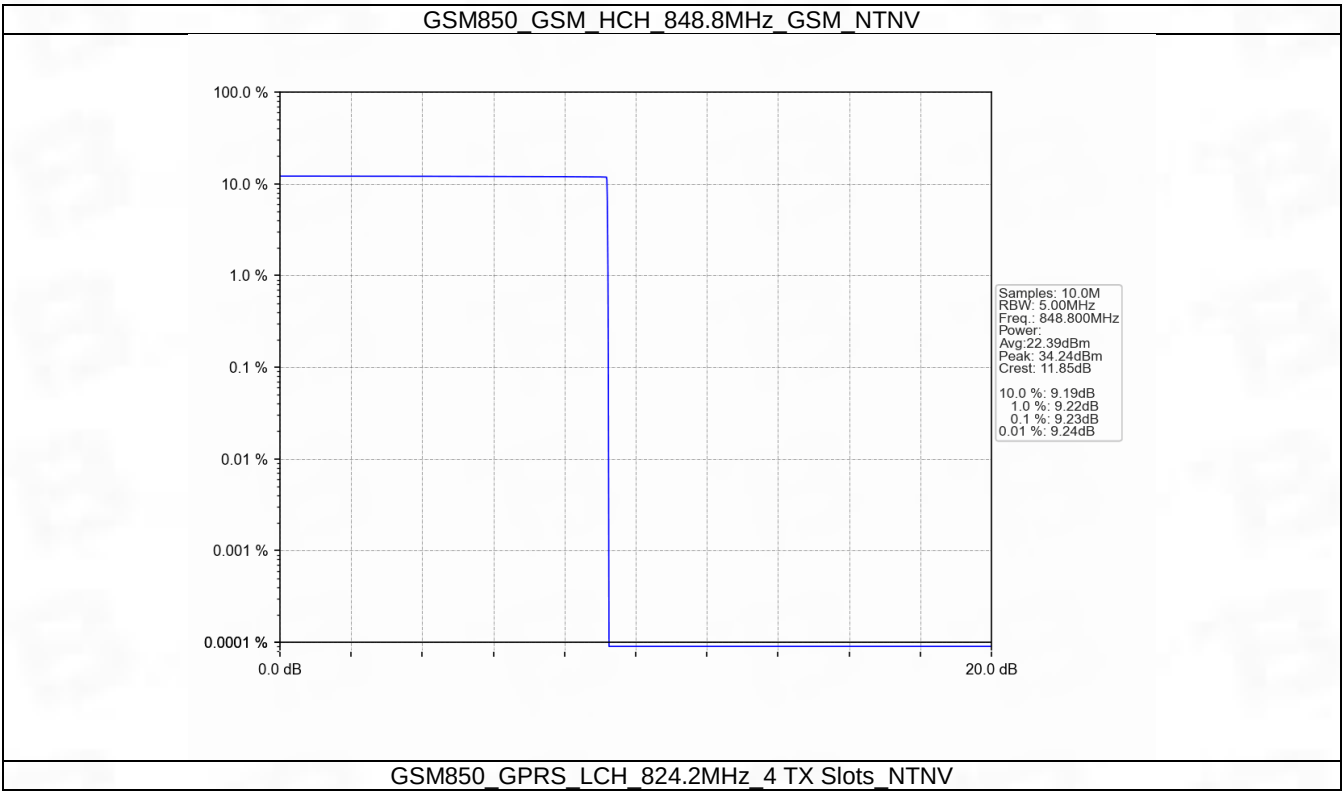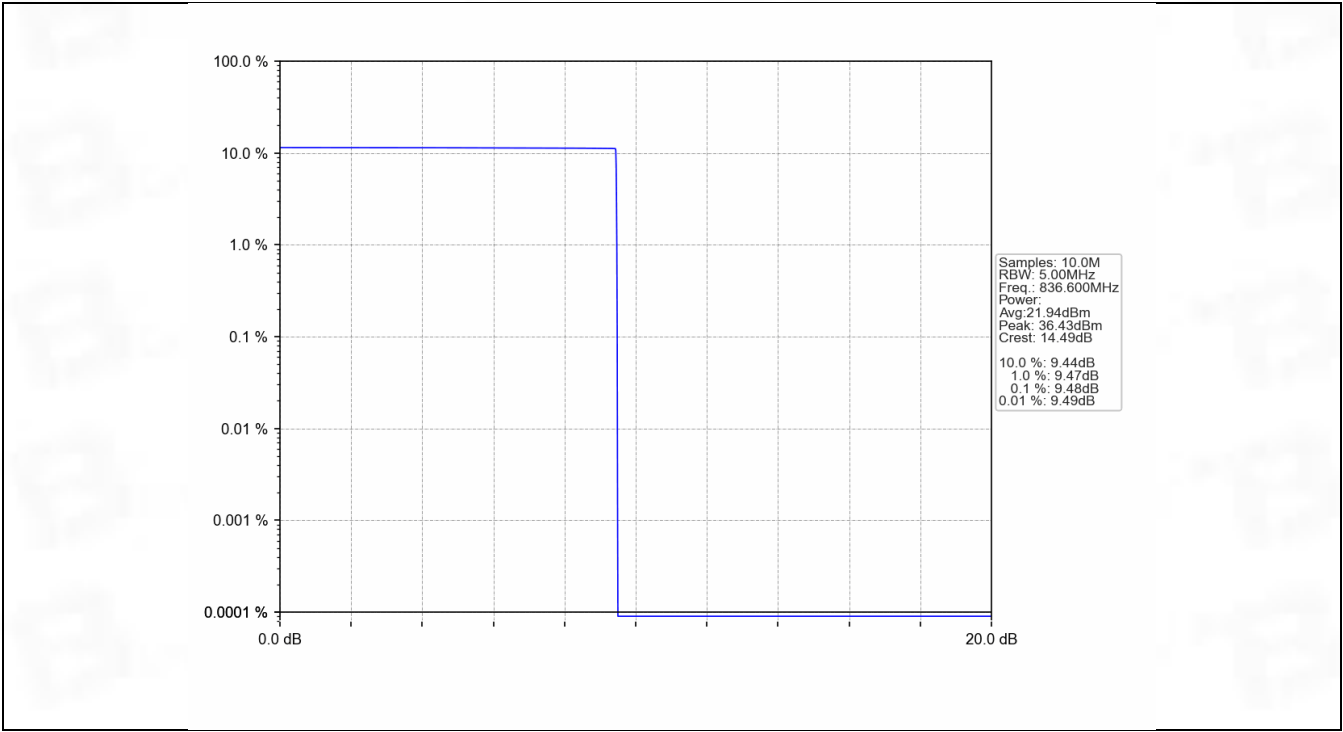


GSM850_GPRS_LCH_824.2MHz_4 TX Slots_NTNV

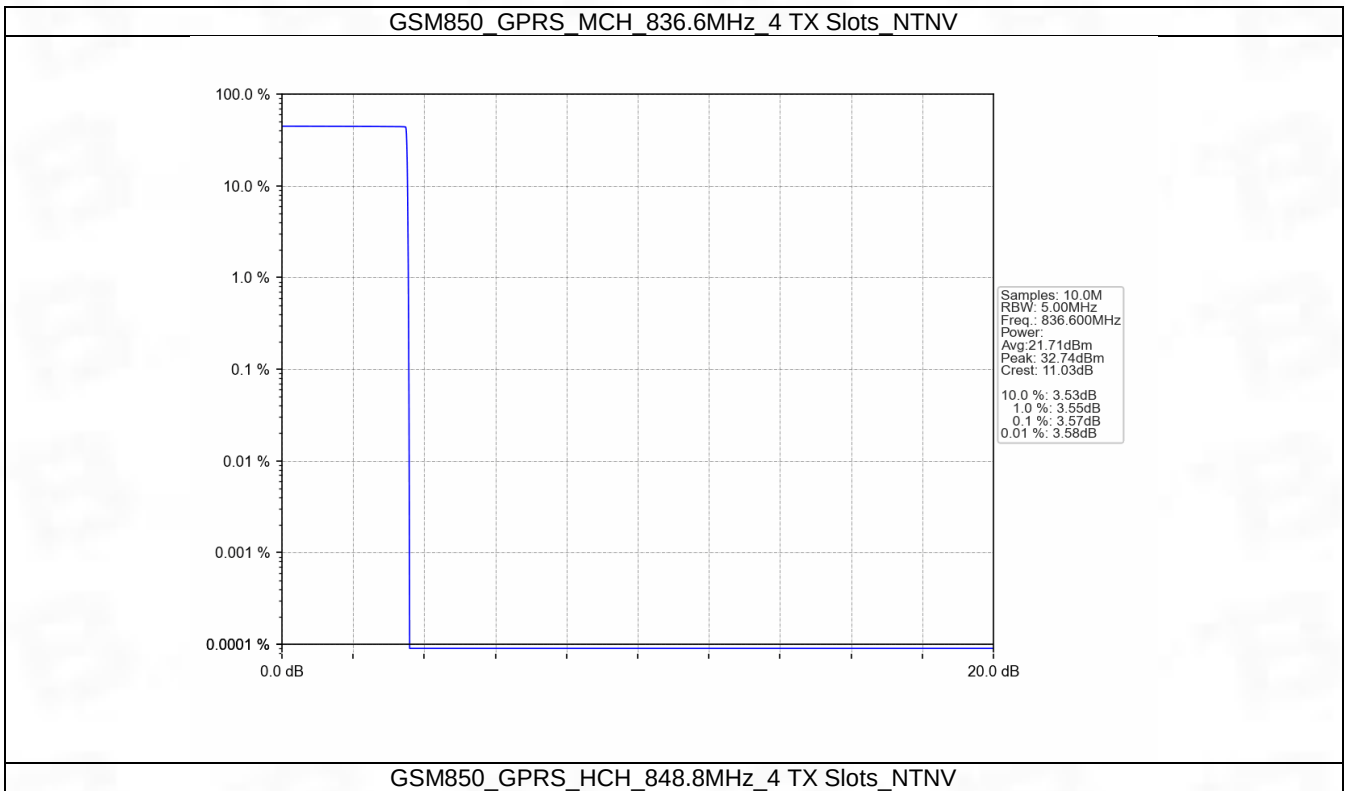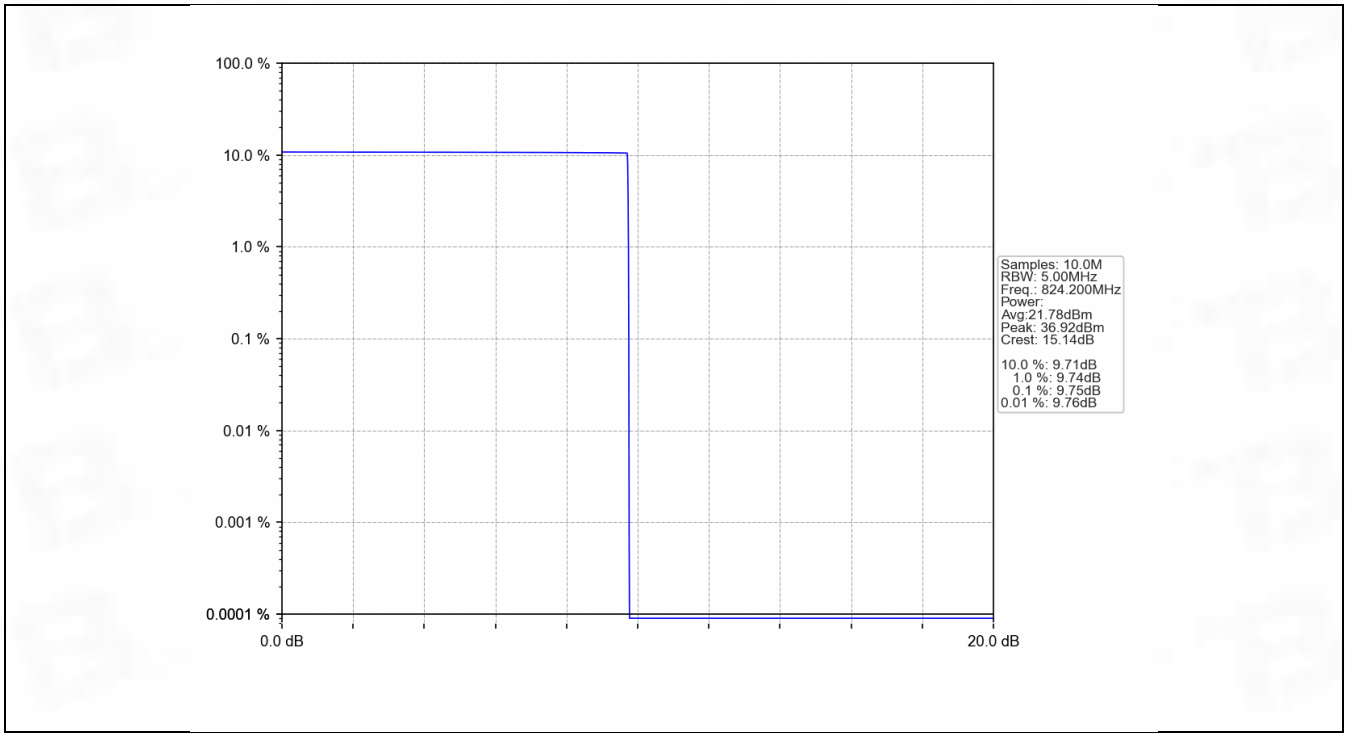

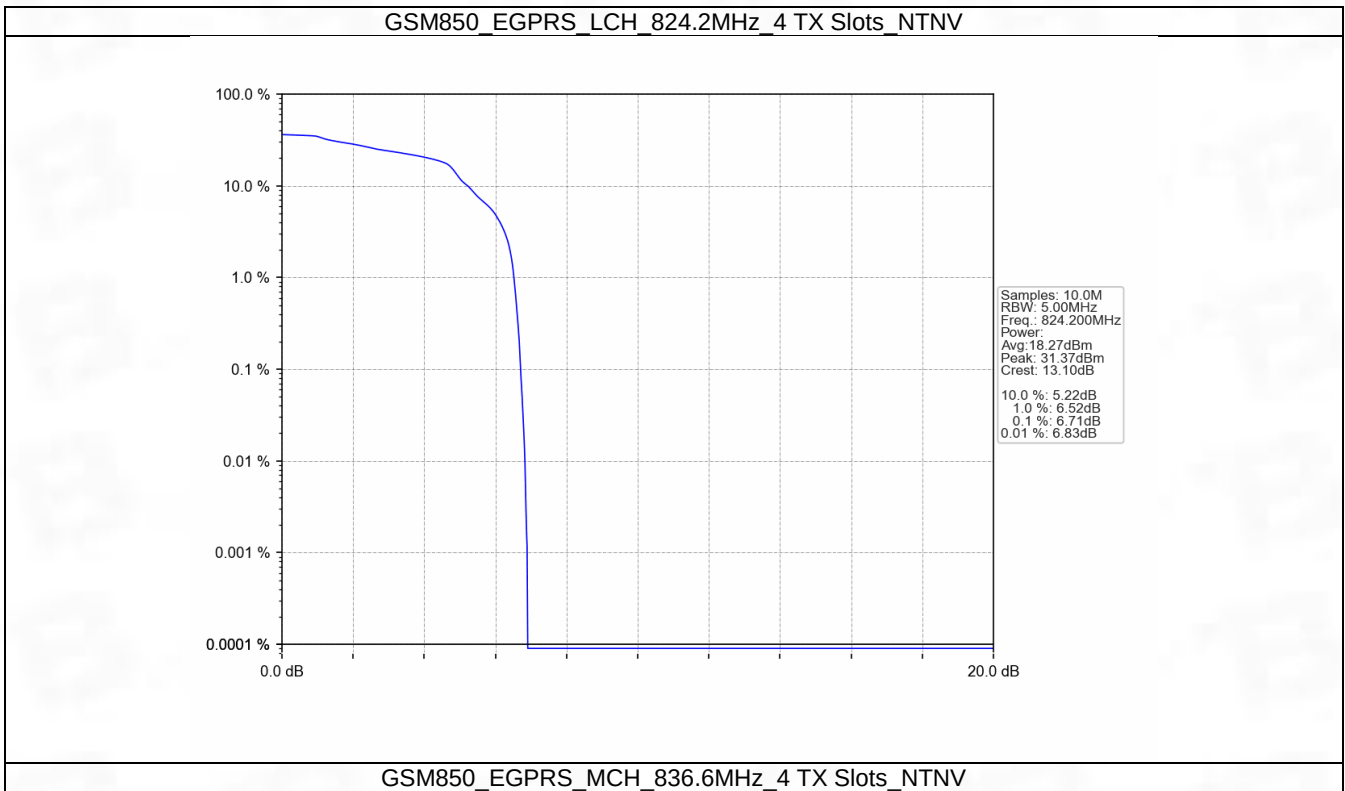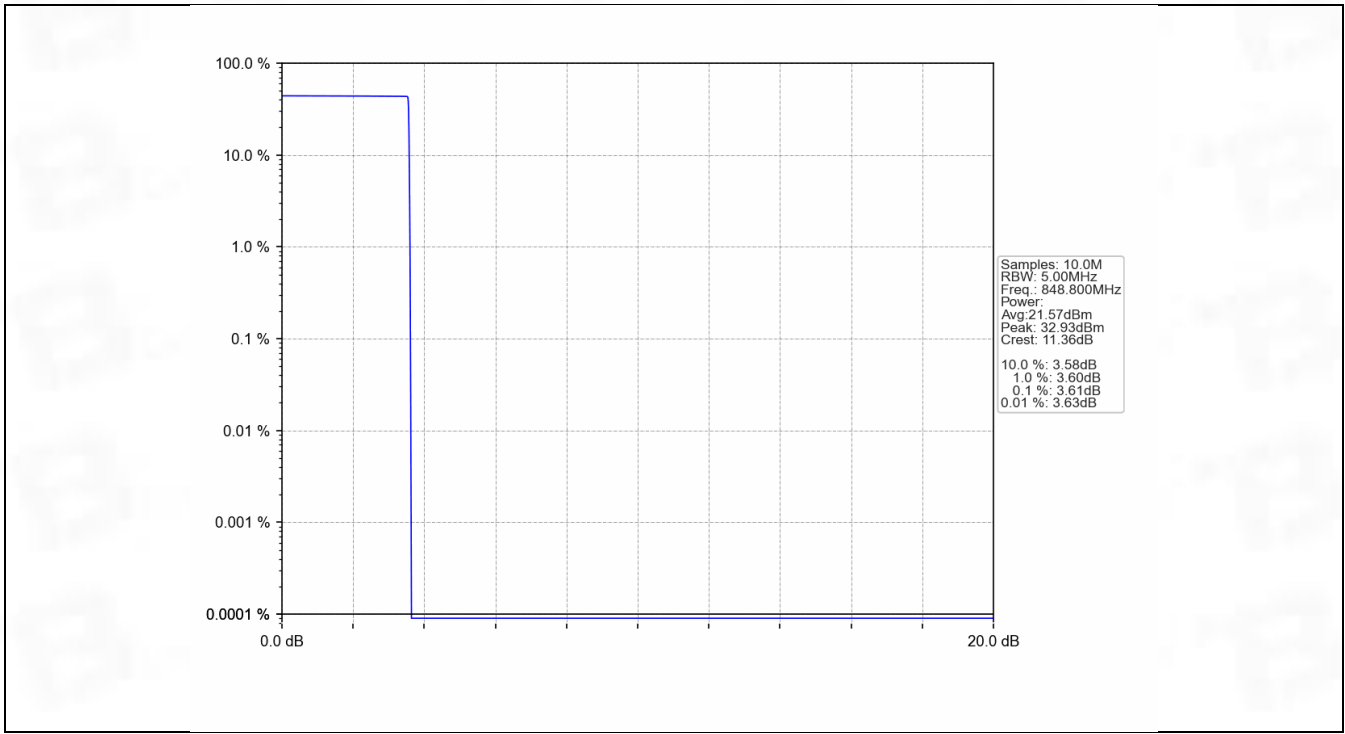

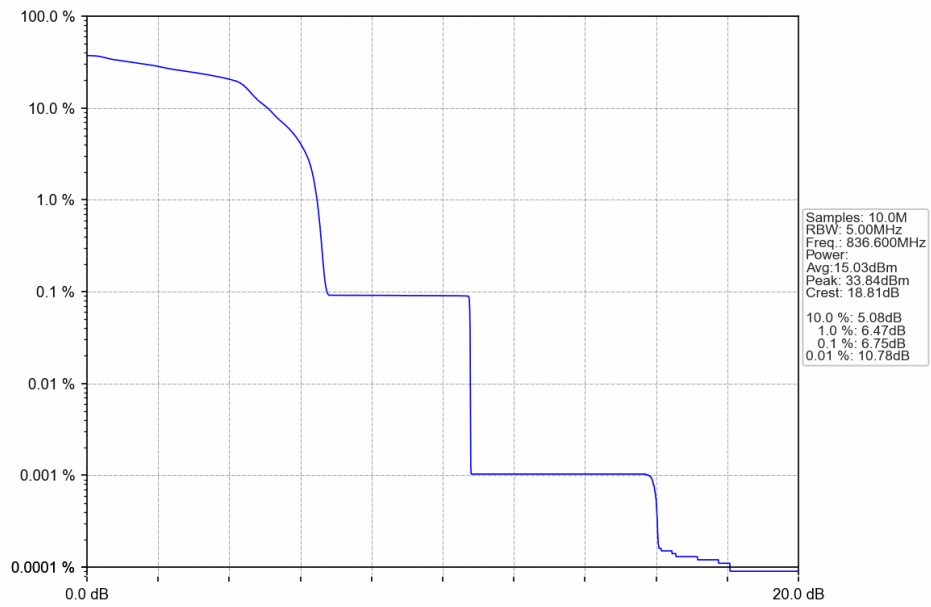

GSM850_EGPRS_HCH_848.8MHz_4 TX Slots_NTNV

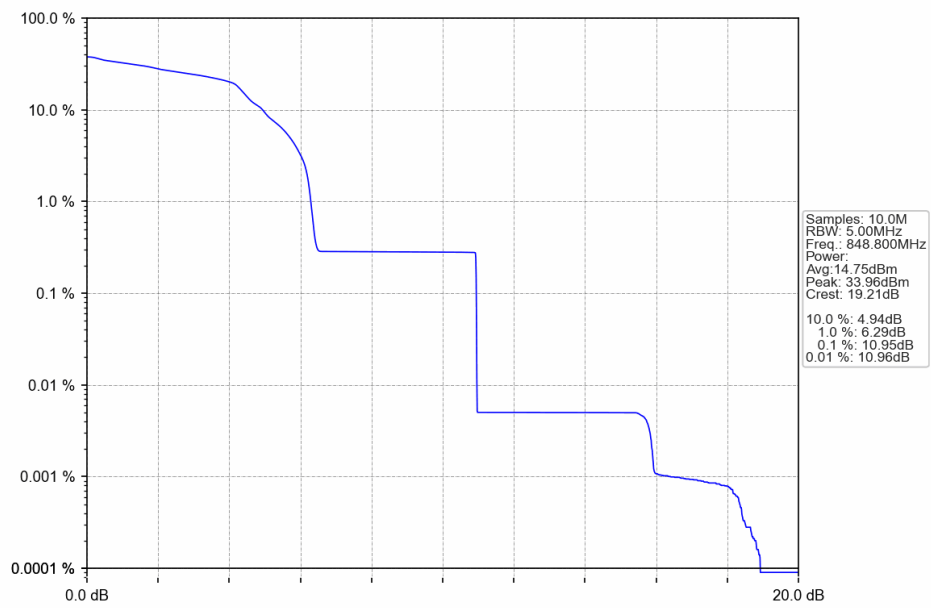


6. Spurious Emission


6.1 GSM850

6.1.1 Test Result


Band: GSM850						
ENV	Mode		Frequency (MHz)	Spurious Emission		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	824.2	Refer To Test Graph		Pass
			836.6	Refer To Test Graph		Pass
			848.8	Refer To Test Graph		Pass
	GPRS	1 TX Slot	824.2	Refer To Test Graph		Pass
			836.6	Refer To Test Graph		Pass
			848.8	Refer To Test Graph		Pass
	EGPRS	1 TX Slot	824.2	Refer To Test Graph		Pass
			836.6	Refer To Test Graph		Pass
			848.8	Refer To Test Graph		Pass

6.1.2 Test Graph

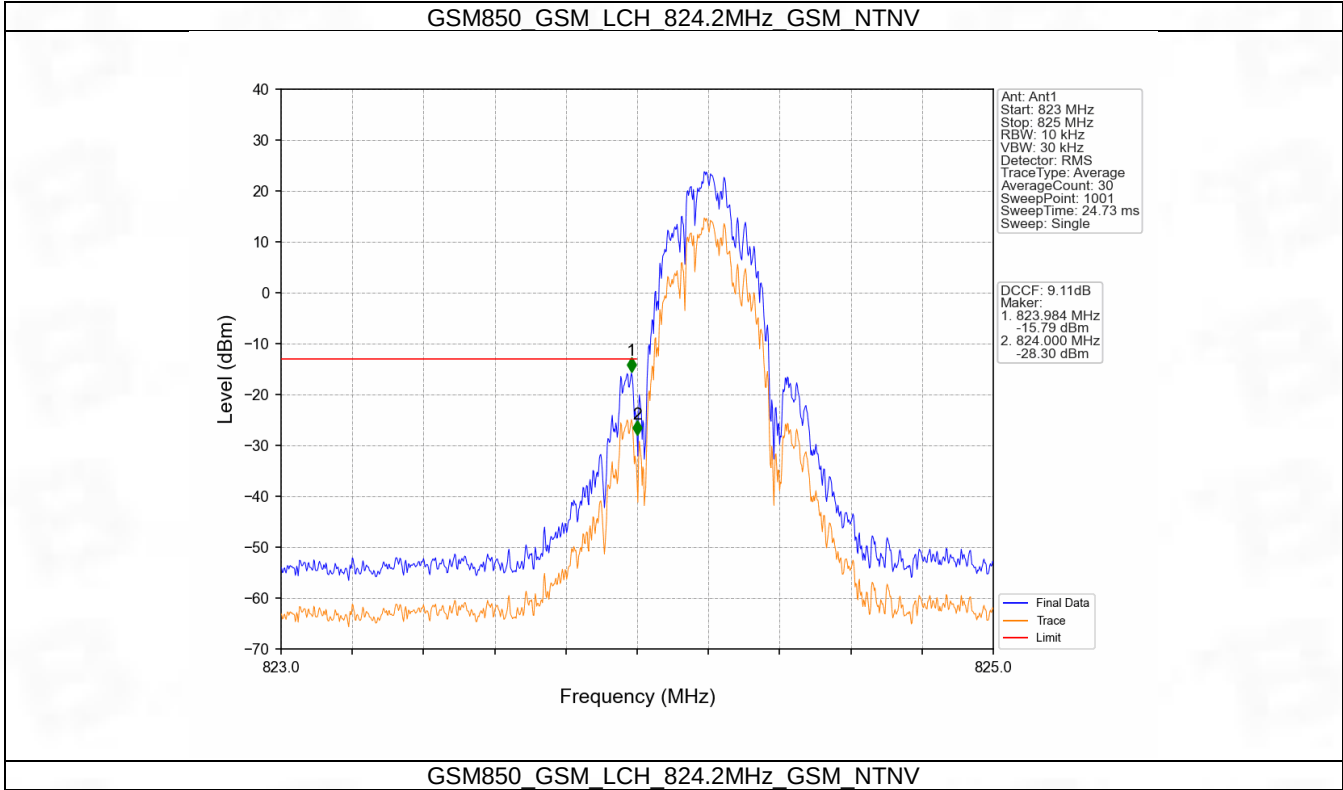


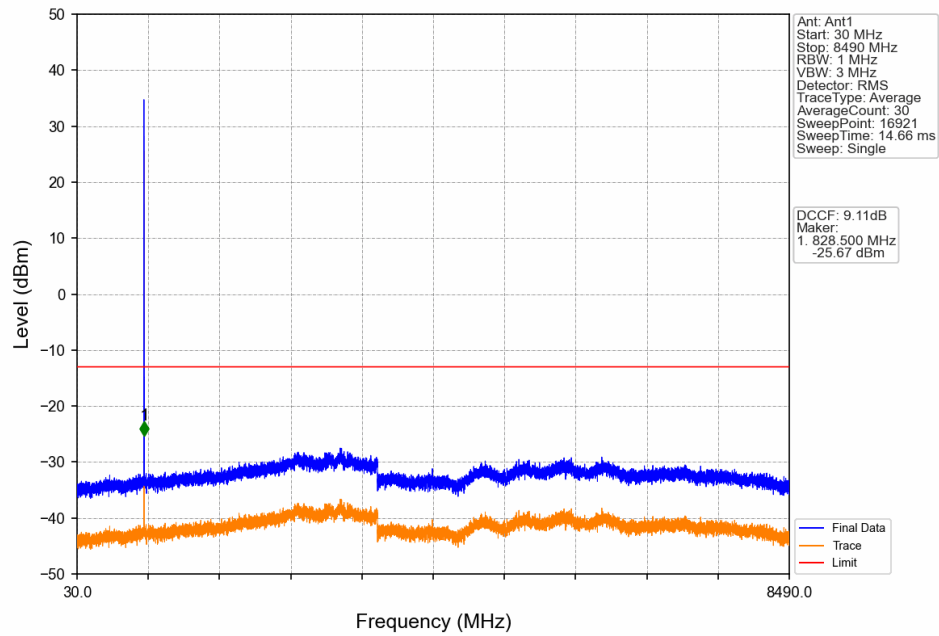


GSM850 GSM MCH 836.6MHz GSM NTN

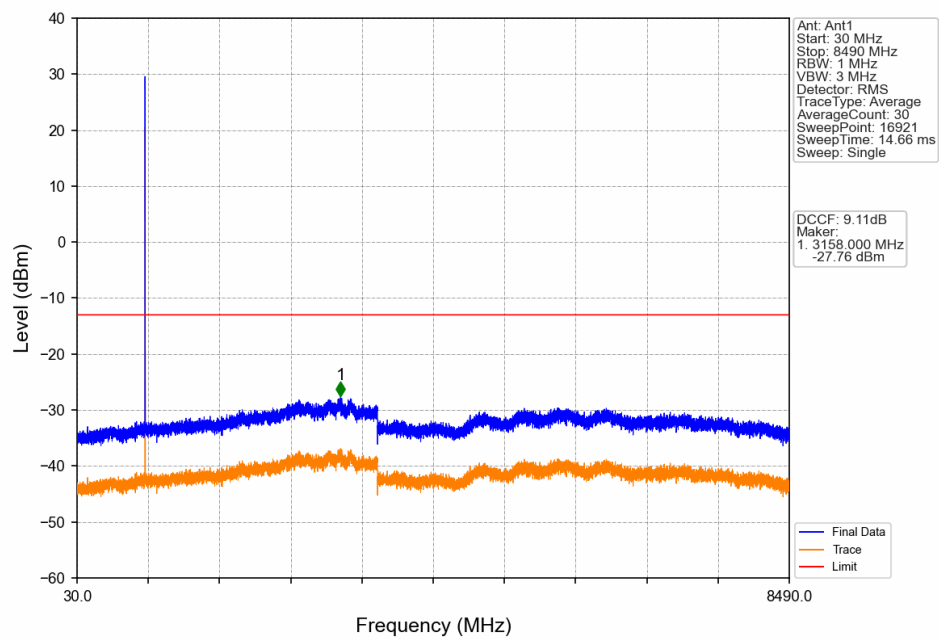


GSM850 GSM HCH 848.8MHz GSM NTN

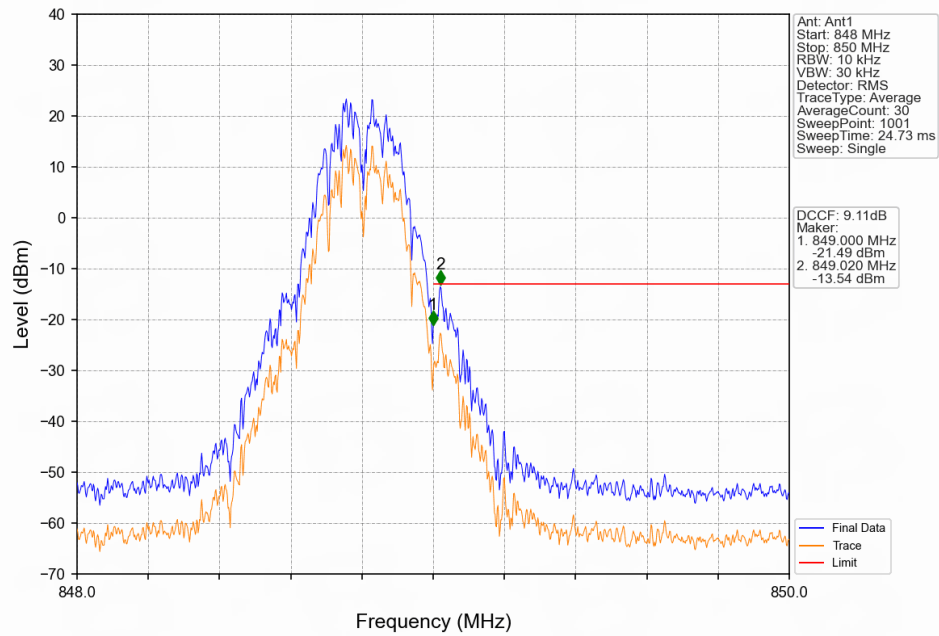


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

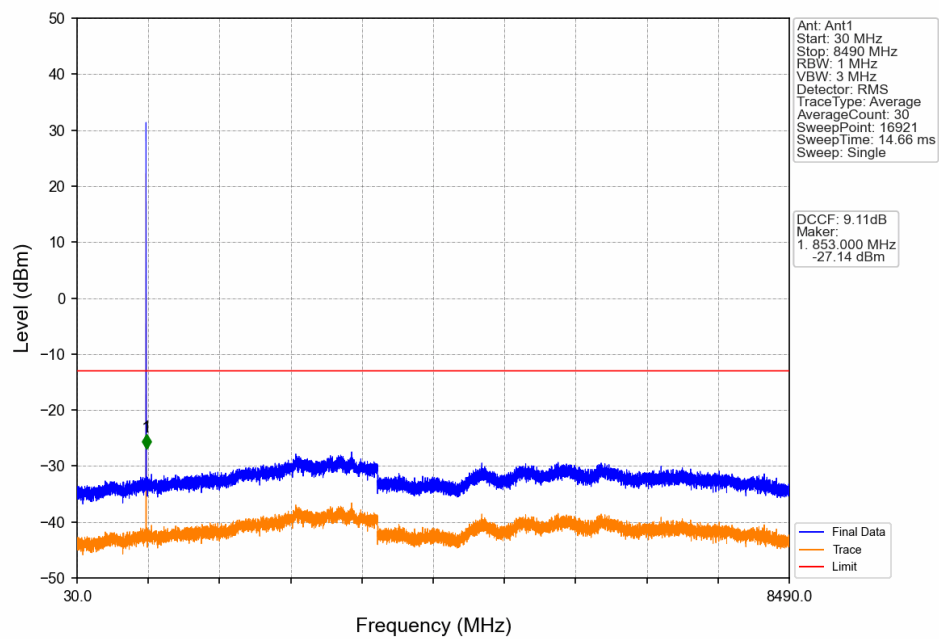


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

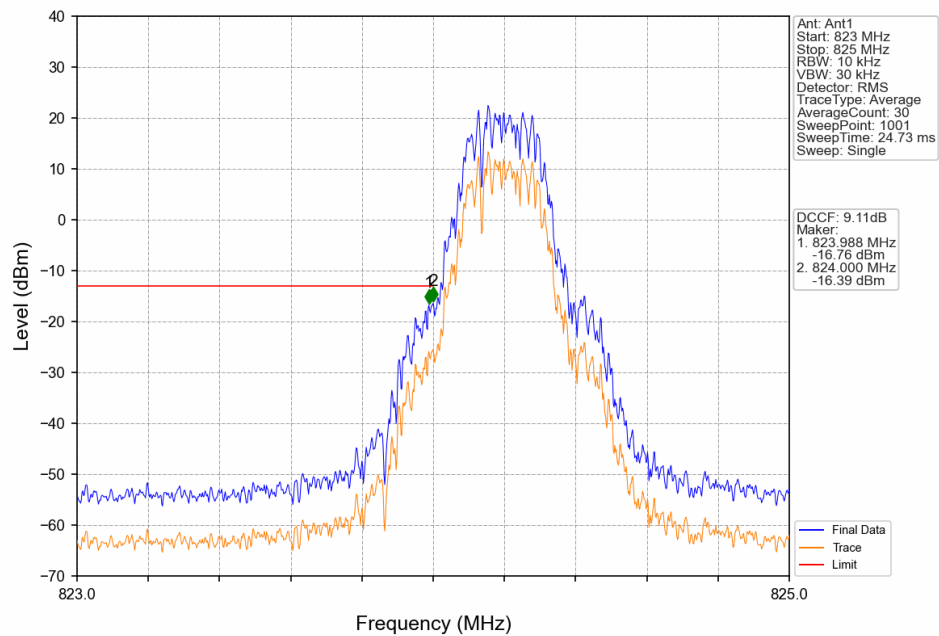


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

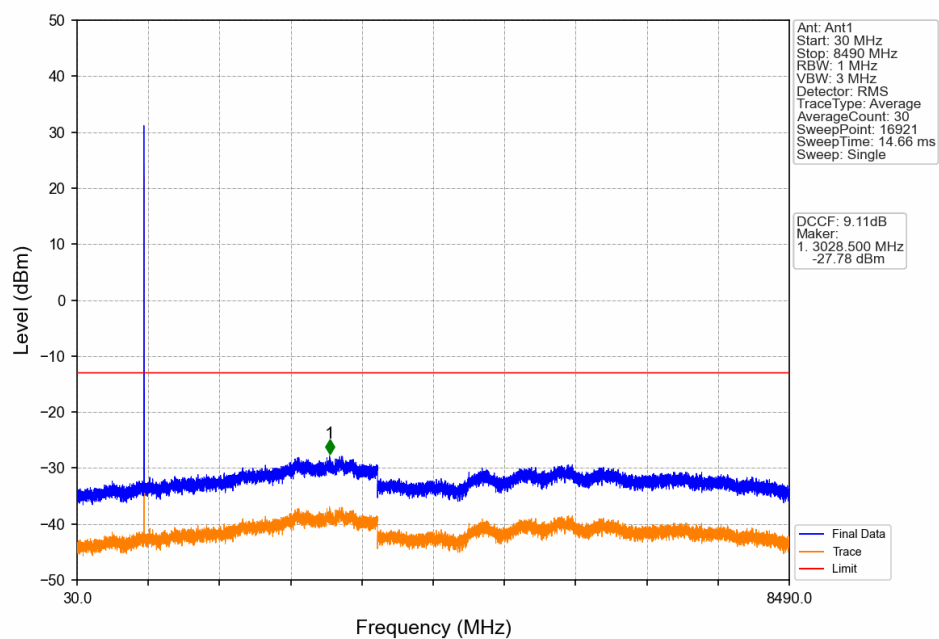


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

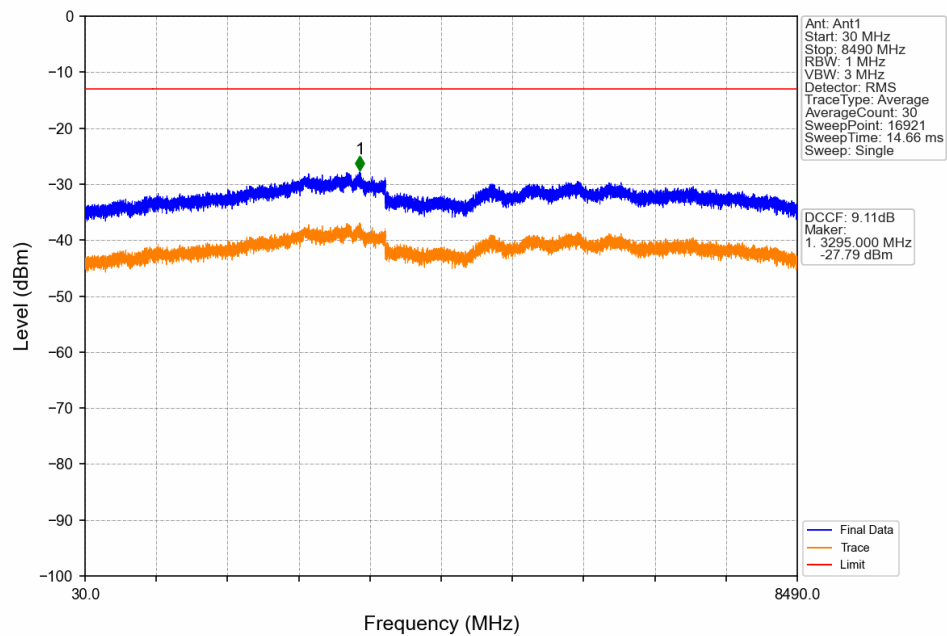


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

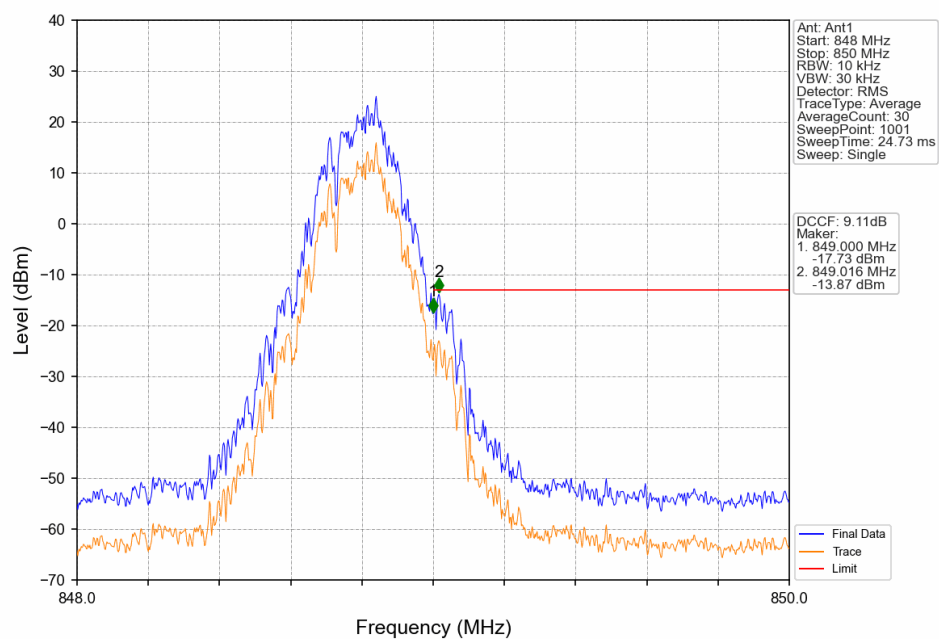


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

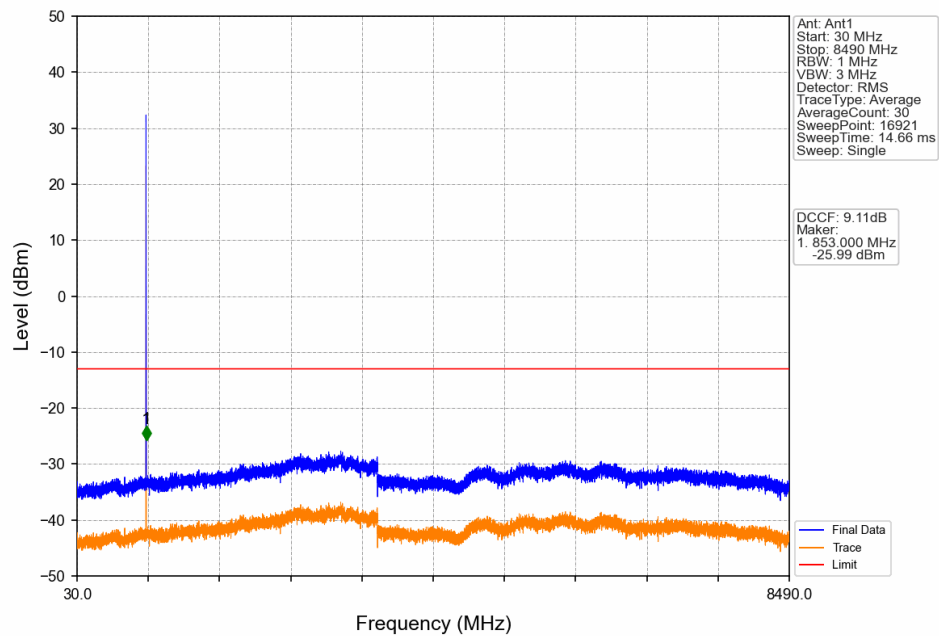


GSM850 EGPRS LCH 824.2MHz 1 TX Slot NTNV

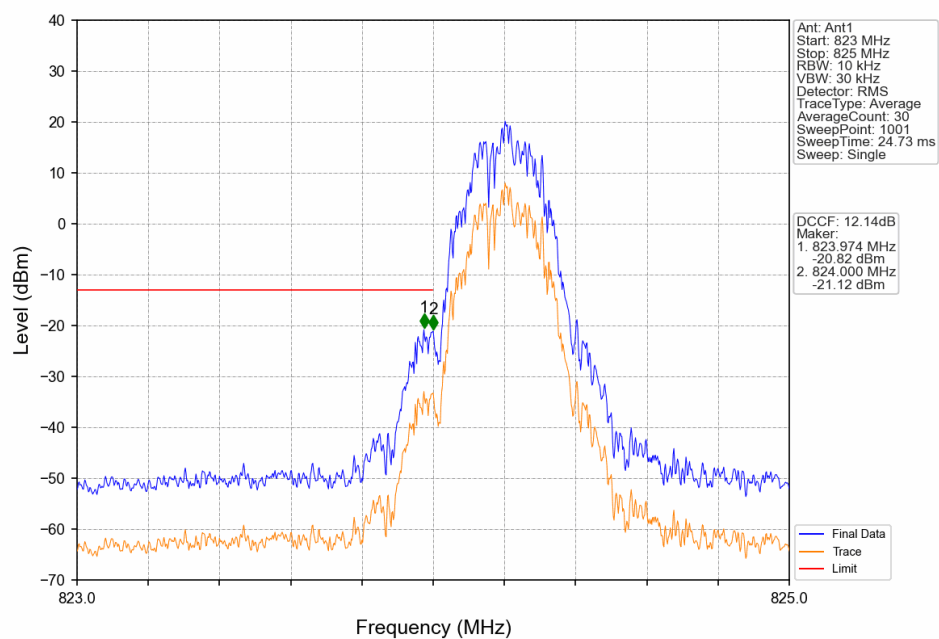

GSM850 EGPRS LCH 824.2MHz 1 TX Slot NTNV

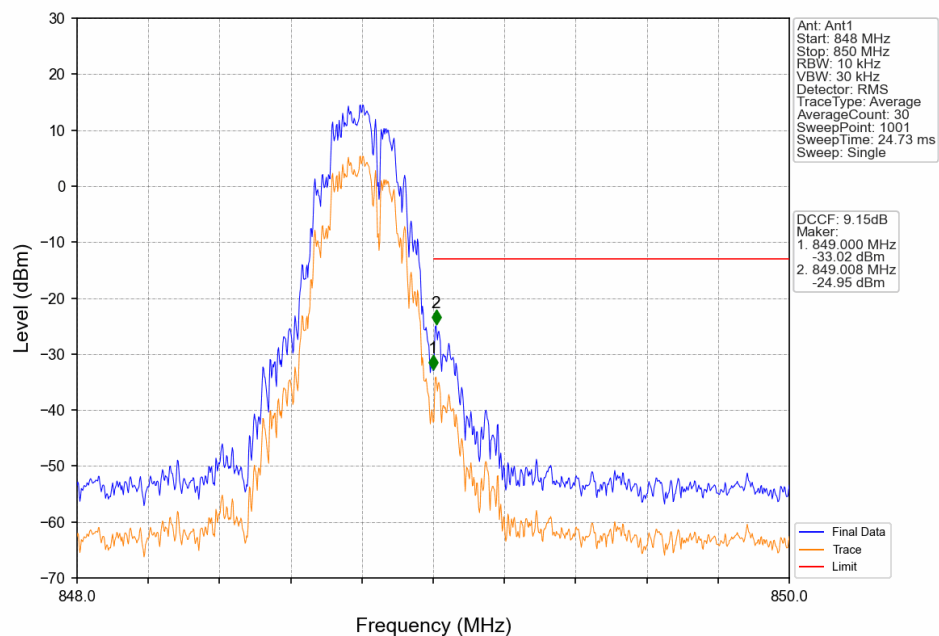

GSM850_EGPRS_HCH_848.8MHz_1 TX Slot_NTNV

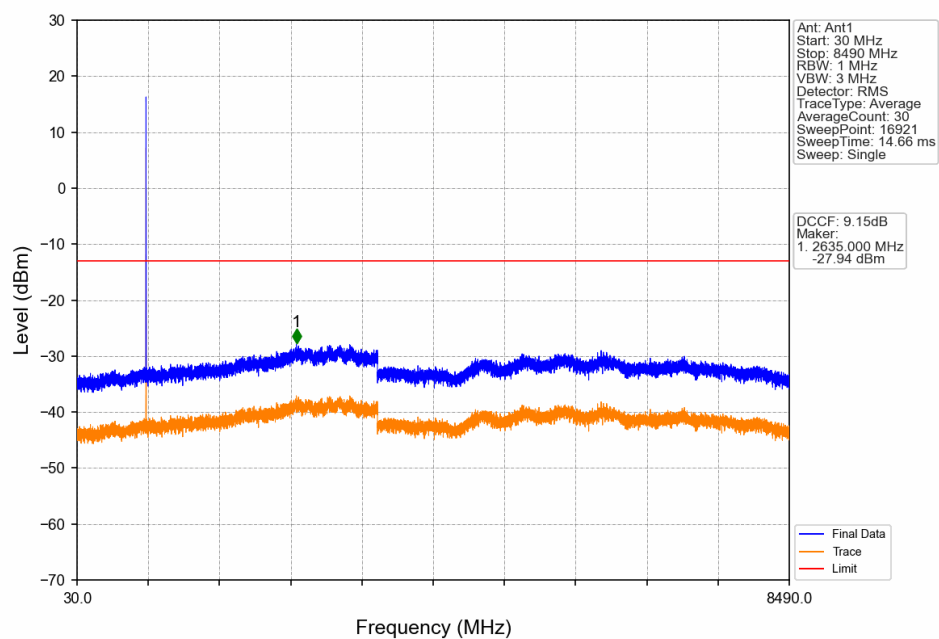

7. Form731

7.1 Form731_Power

7.1.1 Test Result

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
GSM850	0.2	824.2	848.8	1.7458	0.0223	ppm	248KGXW	22H	32.42
GSM850	0.2	824.2	848.8	0.4831	0.0129	ppm	253KG7W	22H	26.84

7.2 Form731_ERP

7.2.1 Test Result

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
GSM850	0.2	824.2	848.8	1.1668	0.0223	ppm	248KGXW	22H	30.67
GSM850	0.2	824.2	848.8	0.3228	0.0129	ppm	253KG7W	22H	25.09