




Frequency: 6260 MHz

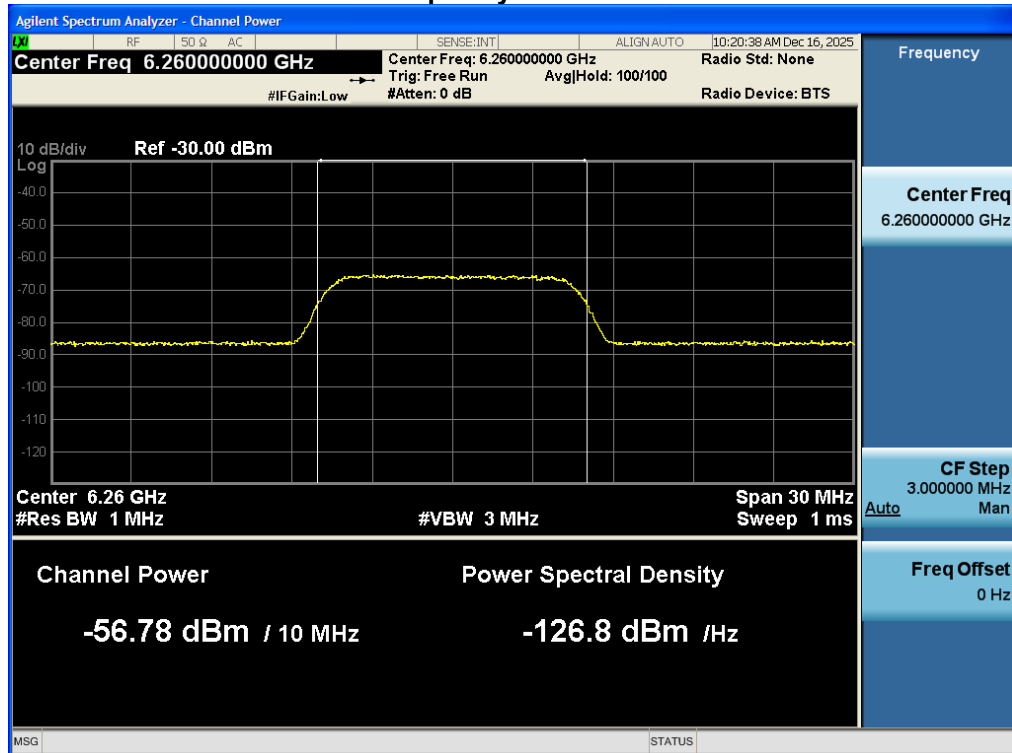


Frequency: 6430 MHz

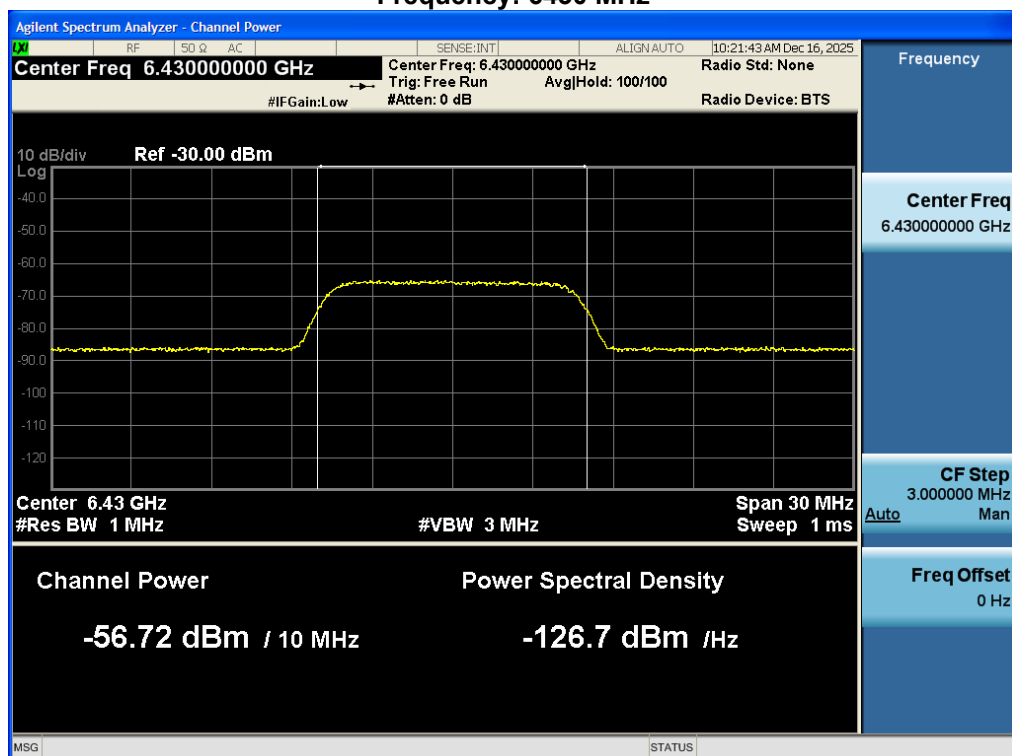


Frequency: 6435 MHz

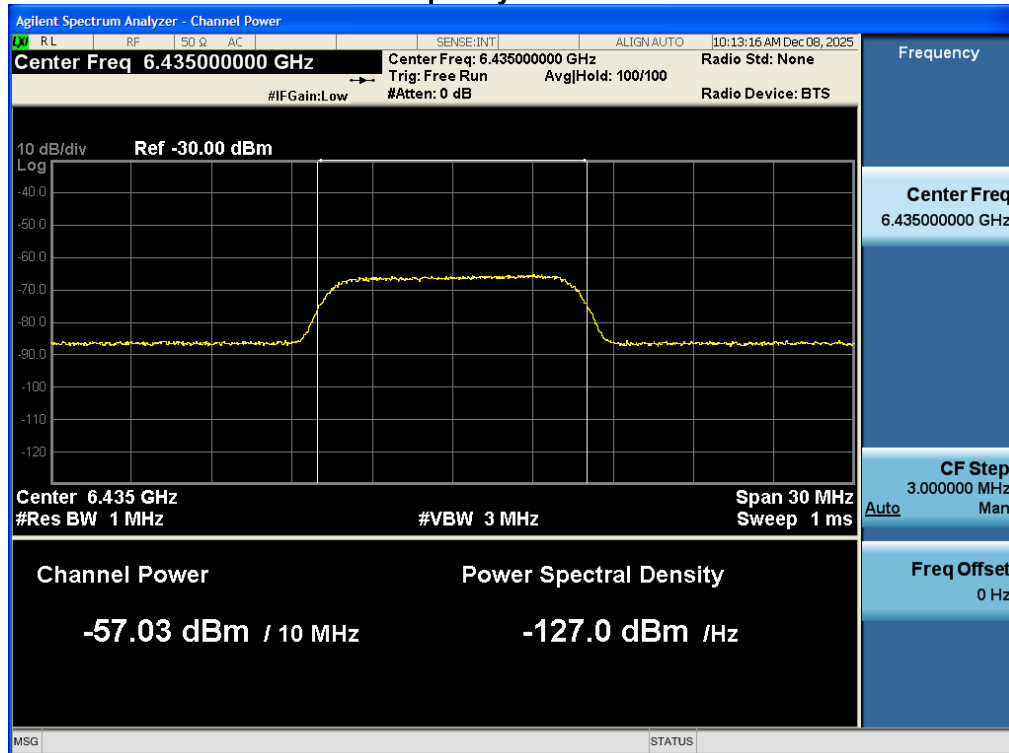


Frequency: 6505 MHz

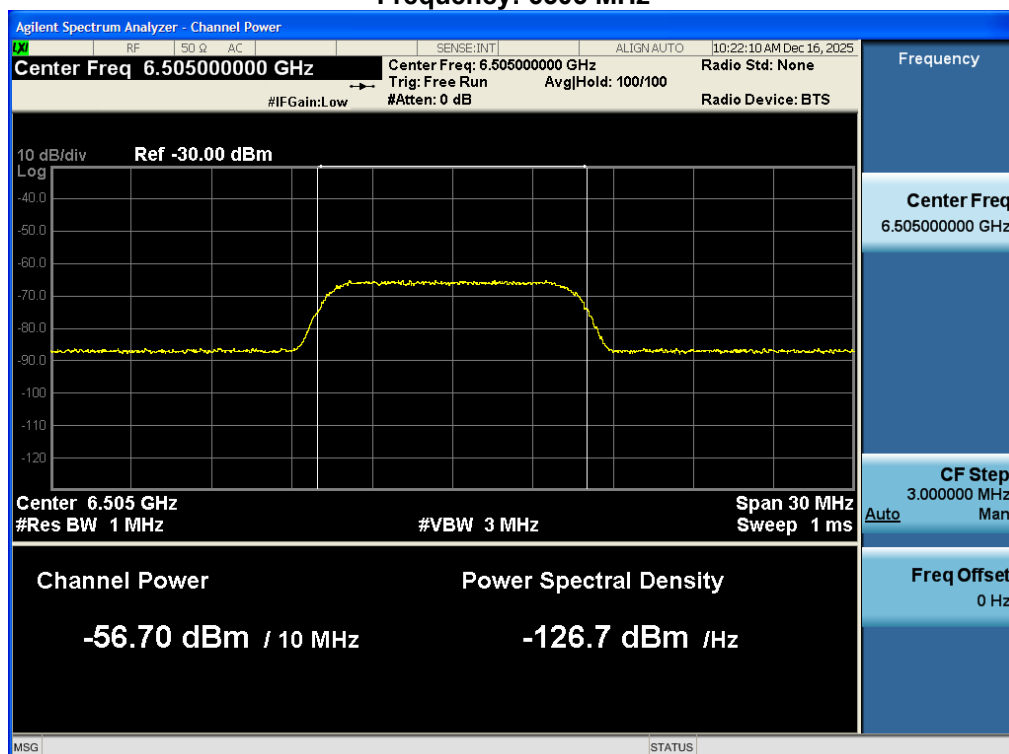


Frequency: 6535 MHz

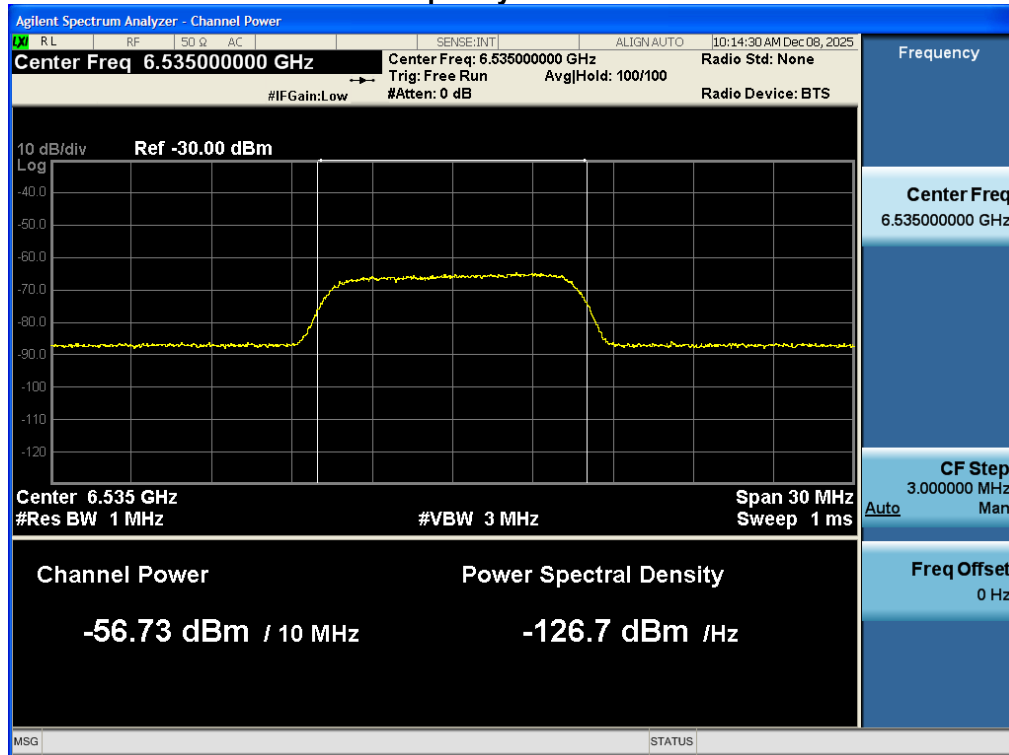


Frequency: 6580 MHz

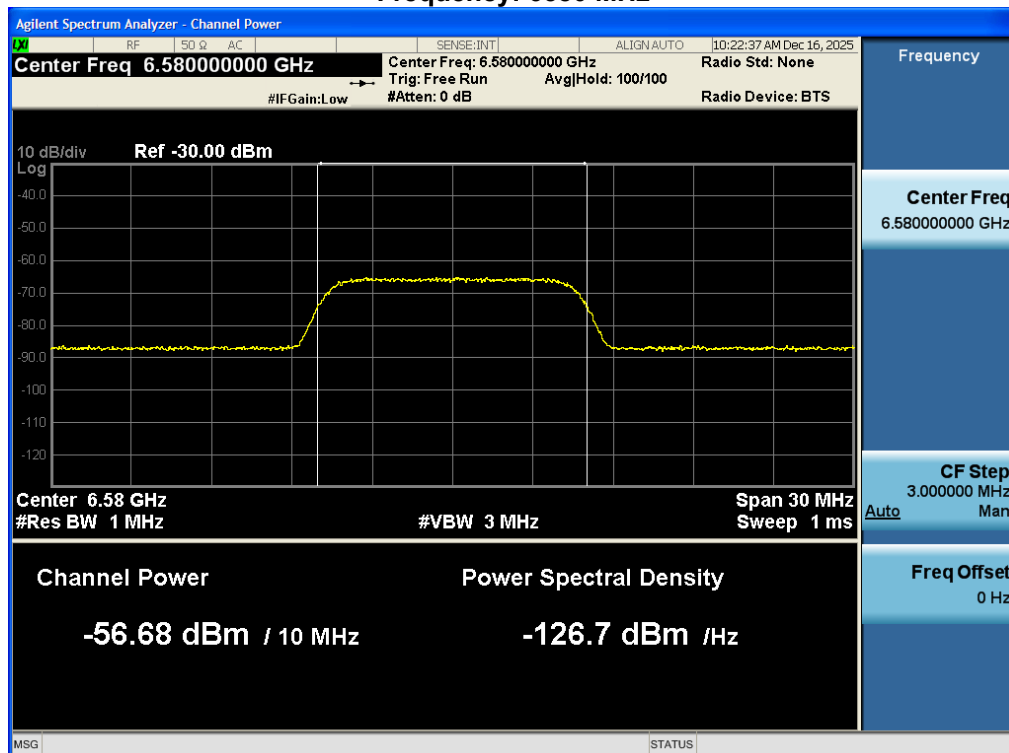


Frequency: 6590 MHz

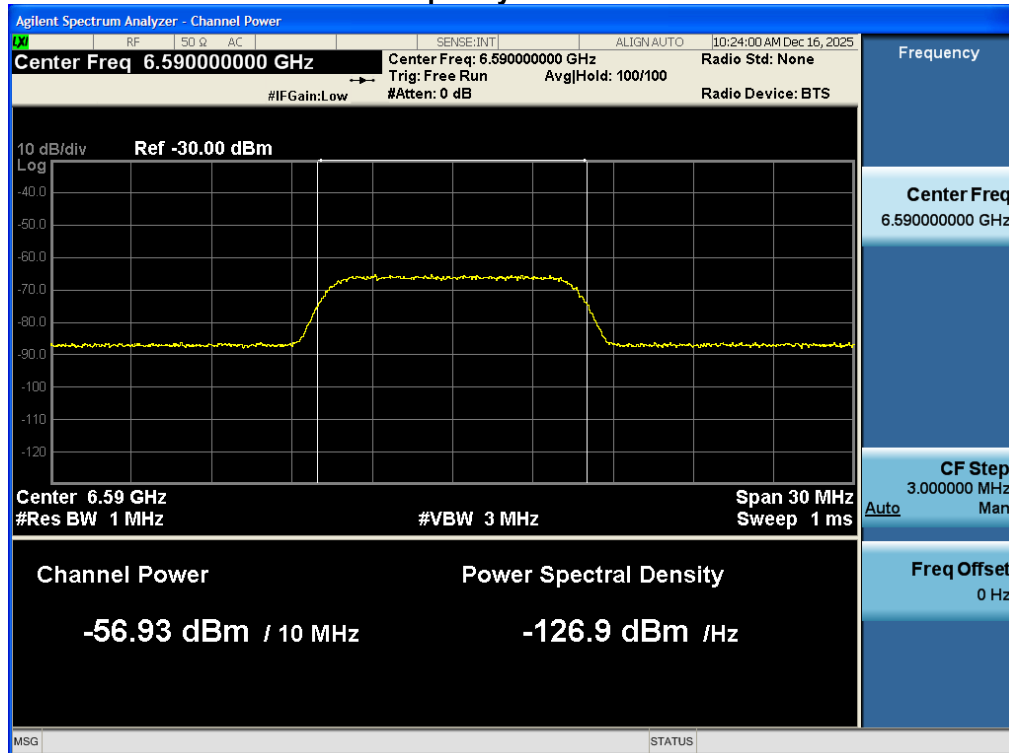


Frequency: 6665 MHz

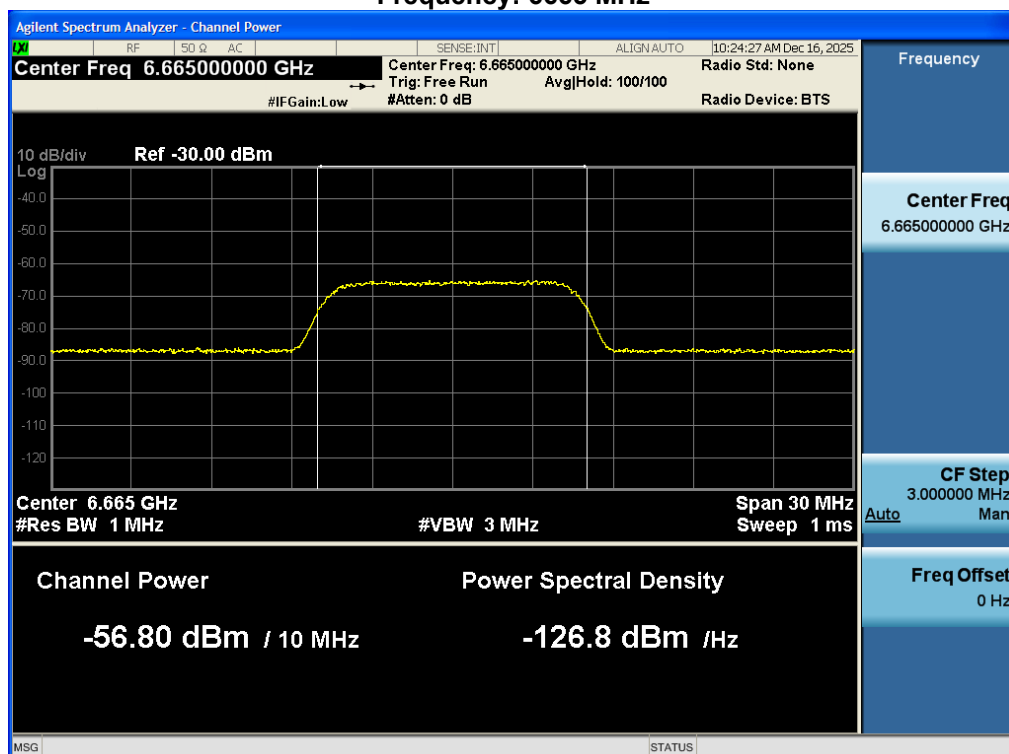


Frequency: 6740 MHz

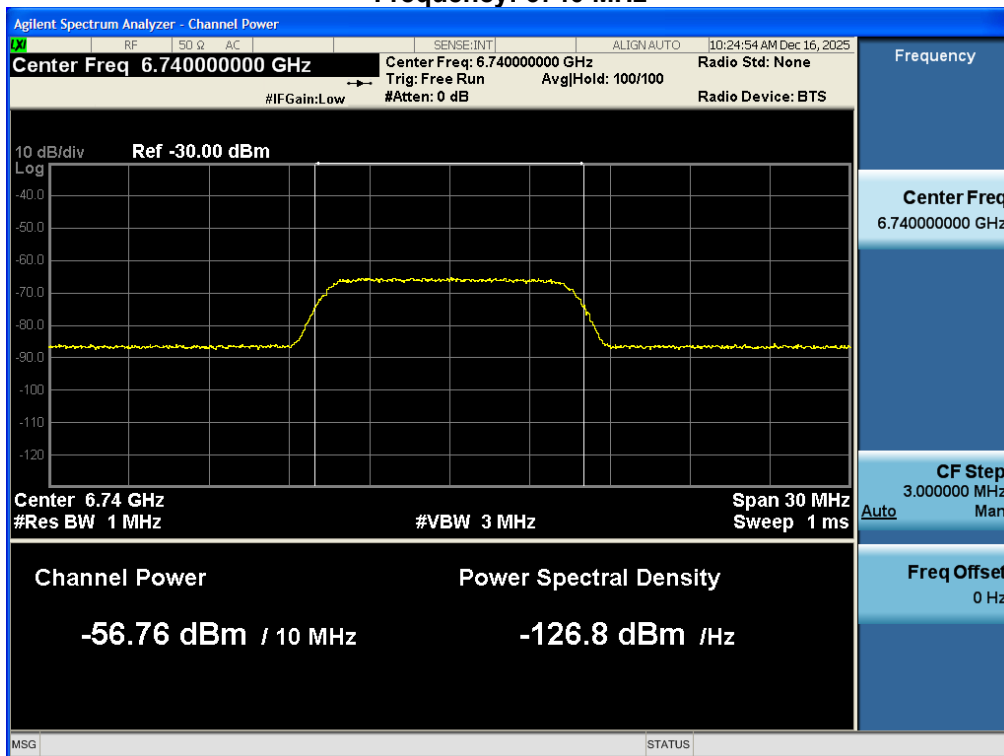


Frequency: 6910 MHz

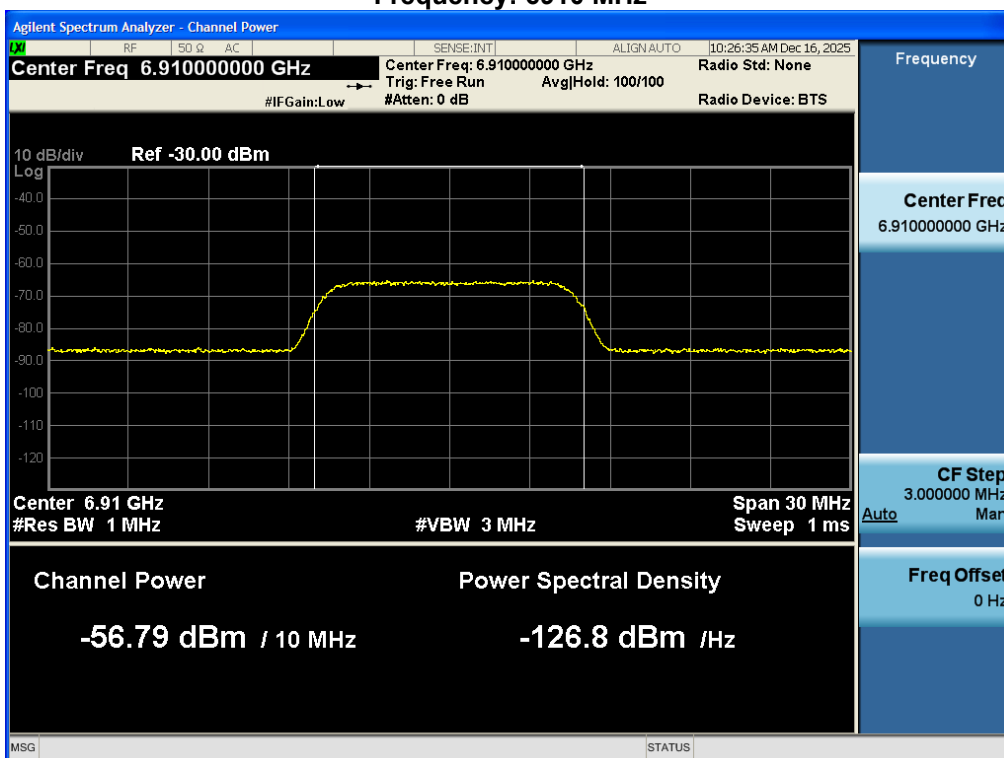


Frequency: 6985 MHz

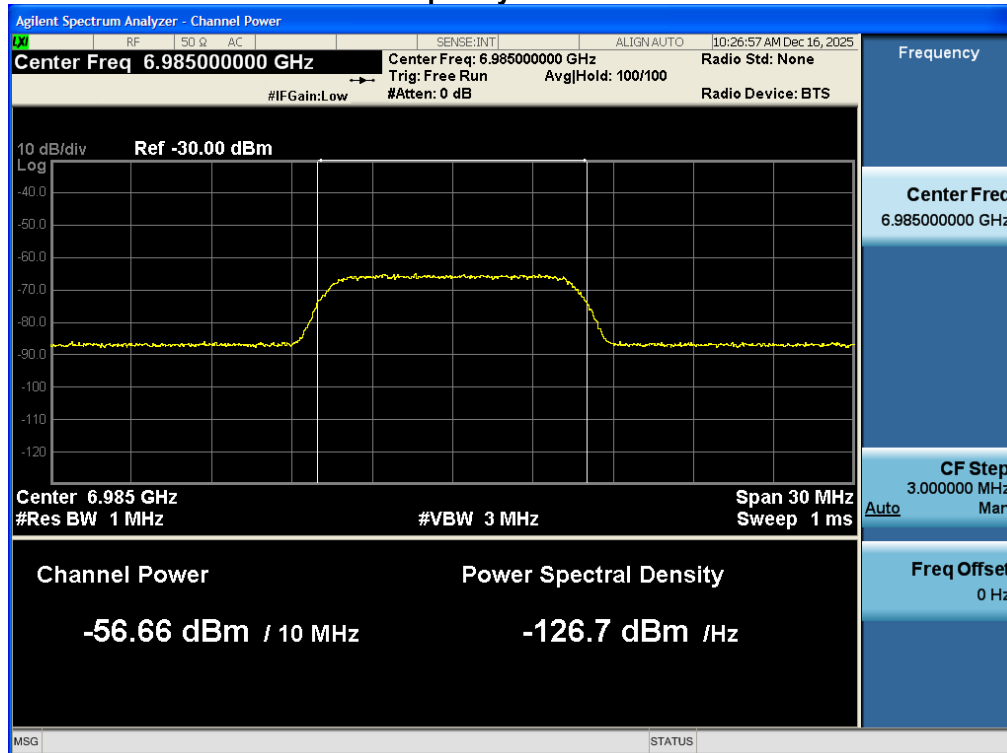

Frequency: 6995 MHz

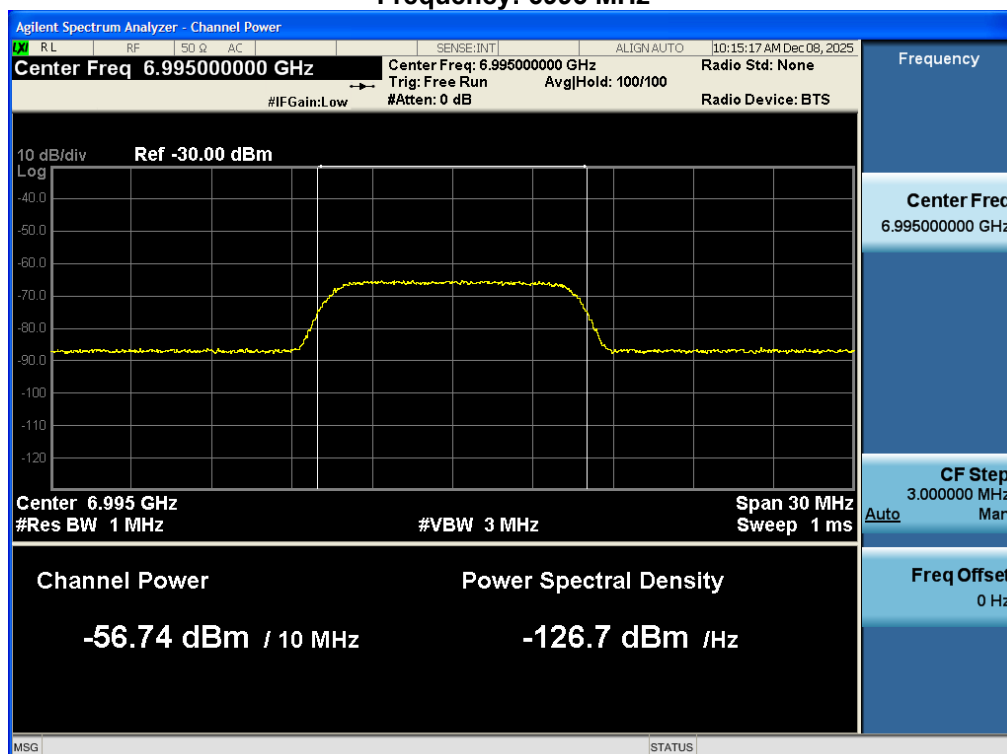

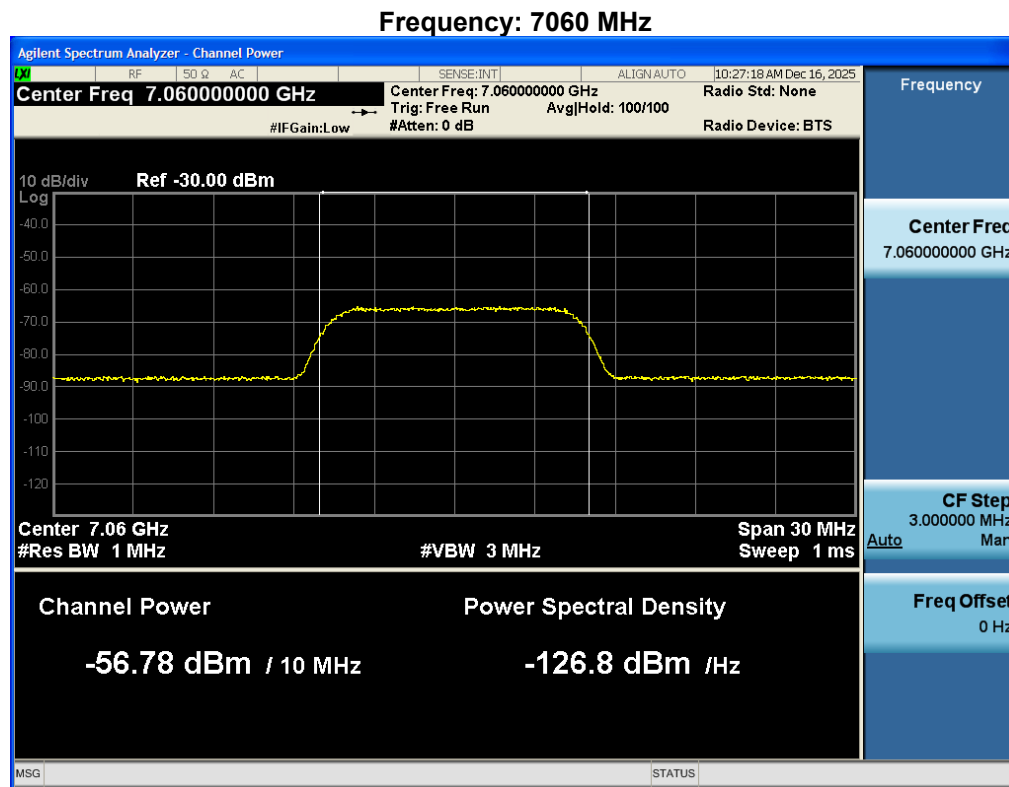

Detection power level and detection probability

UNII Band	5			UNII Band	5		
Channel Number	45			Channel Number	47		
Bandwidth (MHz)	20			Bandwidth (MHz)	160		
EUT Frequency (MHz)	6175			EUT Frequency (MHz)	6185		
AWGN Frequency (MHz)	6175			AWGN Frequency (MHz)	6110		
AWGN Power (dBm)	-66.81	-71.81	-80.00	AWGN Power (dBm)	-66.70	-73.70	-80.00
Antenna Gain (dBi)	5.36			Antenna Gain (dBi)	5.36		
Path Loss (dB)	0.00			Path Loss (dB)	0.00		
Adjusted Power (dBm)	-72.17	-77.17	-85.36	Adjusted Power (dBm)	-72.06	-79.06	-85.36
Detection Limit (dBm)	-62	-62	-62	Detection Limit (dBm)	-62	-62	-62
EUT Tx Status	OFF	Minimal	ON	EUT Tx Status	OFF	Minimal	ON

UNII Band	5			UNII Band	5		
Channel Number	47			Channel Number	47		
Bandwidth (MHz)	160			Bandwidth (MHz)	160		
EUT Frequency (MHz)	6185			EUT Frequency (MHz)	6185		
AWGN Frequency (MHz)	6185			AWGN Frequency (MHz)	6260		
AWGN Power (dBm)	-62.70	-65.70	-80.00	AWGN Power (dBm)	-67.70	-73.70	-80.00
Antenna Gain (dBi)	5.36			Antenna Gain (dBi)	5.36		
Path Loss (dB)	0.00			Path Loss (dB)	0.00		
Adjusted Power (dBm)	-68.06	-71.06	-85.36	Adjusted Power (dBm)	-73.06	-79.06	-85.36
Detection Limit (dBm)	-62	-62	-62	Detection Limit (dBm)	-62	-62	-62
EUT Tx Status	OFF	Minimal	ON	EUT Tx Status	OFF	Minimal	ON

UNII Band	6			UNII Band	6		
Channel Number	97			Channel Number	111		
Bandwidth (MHz)	20			Bandwidth (MHz)	160		
EUT Frequency (MHz)	6435			EUT Frequency (MHz)	6505		
AWGN Frequency (MHz)	6435			AWGN Frequency (MHz)	6430		
AWGN Power (dBm)	-70.03	-73.03	-80.00	AWGN Power (dBm)	-62.71	-74.71	-80.00
Antenna Gain (dBi)	5.36			Antenna Gain (dBi)	5.36		
Path Loss (dB)	0.00			Path Loss (dB)	0.00		
Adjusted Power (dBm)	-75.39	-78.39	-85.36	Adjusted Power (dBm)	-68.07	-80.07	-85.36
Detection Limit (dBm)	-62	-62	-62	Detection Limit (dBm)	-62	-62	-62
EUT Tx Status	OFF	Minimal	ON	EUT Tx Status	OFF	Minimal	ON

UNII Band	6			UNII Band	6		
Channel Number	111			Channel Number	111		
Bandwidth (MHz)	160			Bandwidth (MHz)	160		
EUT Frequency (MHz)	6505			EUT Frequency (MHz)	6505		
AWGN Frequency (MHz)	6505			AWGN Frequency (MHz)	6580		
AWGN Power (dBm)	-60.78	-66.78	-80.00	AWGN Power (dBm)	-62.77	-72.77	-80.00
Antenna Gain (dBi)	5.36			Antenna Gain (dBi)	5.36		
Path Loss (dB)	0.00			Path Loss (dB)	0.00		
Adjusted Power (dBm)	-66.14	-72.14	-85.36	Adjusted Power (dBm)	-68.13	-78.13	-85.36
Detection Limit (dBm)	-62	-62	-62	Detection Limit (dBm)	-62	-62	-62
EUT Tx Status	OFF	Minimal	ON	EUT Tx Status	OFF	Minimal	ON

UNII Band	7		
Channel Number	117		
Bandwidth (MHz)	20		
EUT Frequency (MHz)	6535		
AWGN Frequency (MHz)	6535		
AWGN Power (dBm)	-67.73	-70.73	-80.00
Antenna Gain (dBi)	5.36		
Path Loss (dB)	0.00		
Adjusted Power (dBm)	-73.09	-76.09	-85.36
Detection Limit (dBm)	-62	-62	-62
EUT Tx Status	OFF	Minimal	ON

UNII Band	7		
Channel Number	143		
Bandwidth (MHz)	160		
EUT Frequency (MHz)	6665		
AWGN Frequency (MHz)	6590		
AWGN Power (dBm)	-70.93	-72.93	-80.00
Antenna Gain (dBi)	5.36		
Path Loss (dB)	0.00		
Adjusted Power (dBm)	-76.29	-78.29	-85.36
Detection Limit (dBm)	-62	-62	-62
EUT Tx Status	OFF	Minimal	ON

UNII Band	7		
Channel Number	143		
Bandwidth (MHz)	160		
EUT Frequency (MHz)	6665		
AWGN Frequency (MHz)	6665		
AWGN Power (dBm)	-61.80	-68.80	-80.00
Antenna Gain (dBi)	5.36		
Path Loss (dB)	0.00		
Adjusted Power (dBm)	-67.16	-74.16	-85.36
Detection Limit (dBm)	-62	-62	-62
EUT Tx Status	OFF	Minimal	ON

UNII Band	7		
Channel Number	143		
Bandwidth (MHz)	160		
EUT Frequency (MHz)	6665		
AWGN Frequency (MHz)	6740		
AWGN Power (dBm)	-68.76	-71.76	-80.00
Antenna Gain (dBi)	5.36		
Path Loss (dB)	0.00		
Adjusted Power (dBm)	-74.12	-77.12	-85.36
Detection Limit (dBm)	-62	-62	-62
EUT Tx Status	OFF	Minimal	ON

UNII Band	8		
Channel Number	209		
Bandwidth (MHz)	20		
EUT Frequency (MHz)	6995		
AWGN Frequency (MHz)	6995		
AWGN Power (dBm)	-66.74	-69.74	-80.00
Antenna Gain (dBi)	5.36		
Path Loss (dB)	0.00		
Adjusted Power (dBm)	-72.10	-75.10	-85.36
Detection Limit (dBm)	-62	-62	-62
EUT Tx Status	OFF	Minimal	ON

UNII Band	8		
Channel Number	207		
Bandwidth (MHz)	160		
EUT Frequency (MHz)	6985		
AWGN Frequency (MHz)	6910		
AWGN Power (dBm)	-70.79	-73.79	-80.00
Antenna Gain (dBi)	5.36		
Path Loss (dB)	0.00		
Adjusted Power (dBm)	-76.15	-79.15	-85.36
Detection Limit (dBm)	-62	-62	-62
EUT Tx Status	OFF	Minimal	ON


UNII Band	8		
Channel Number	207		
Bandwidth (MHz)	160		
EUT Frequency (MHz)	6985		
AWGN Frequency (MHz)	6985		
AWGN Power (dBm)	-67.66	-69.66	-80.00
Antenna Gain (dBi)	5.36		
Path Loss (dB)	0.00		
Adjusted Power (dBm)	-73.02	-75.02	-85.36
Detection Limit (dBm)	-62	-62	-62
EUT Tx Status	OFF	Minimal	ON

UNII Band	8		
Channel Number	207		
Bandwidth (MHz)	160		
EUT Frequency (MHz)	6985		
AWGN Frequency (MHz)	7060		
AWGN Power (dBm)	-68.78	-73.78	-80.00
Antenna Gain (dBi)	5.36		
Path Loss (dB)	0.00		
Adjusted Power (dBm)	-74.14	-79.14	-85.36
Detection Limit (dBm)	-62	-62	-62
EUT Tx Status	OFF	Minimal	ON


Bands	Test Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	Interference Frequency (MHz)	Number of Times	Number of Detected	Detection Probability	Detection Probability Limit	Test Result
UNII-5	802.11be	20	45	6175	6175	10	10	100%	90%	Pass
	802.11be	160	47	6185	6110	10	10	100%	90%	Pass
					6185	10	10	100%	90%	Pass
					6260	10	10	100%	90%	Pass
UNII-6	802.11be	20	97	6435	6435	10	9	90%	90%	Pass
	802.11be	160	111	6505	6430	10	10	100%	90%	Pass
					6505	10	10	100%	90%	Pass
					6580	10	9	90%	90%	Pass
UNII-7	802.11be	20	117	6535	6535	10	10	100%	90%	Pass
	802.11be	160	143	6665	6590	10	9	90%	90%	Pass
					6665	10	10	100%	90%	Pass
					6740	10	10	100%	90%	Pass
UNII-8	802.11be	20	209	6995	6995	10	10	100%	90%	Pass
	802.11be	160	207	6985	6910	10	10	100%	90%	Pass
					6985	10	10	100%	90%	Pass
					7060	10	10	100%	90%	Pass

Note: The device did not use either channel puncturing or bandwidth reduction for the purpose of incumbent avoidance.


Contention-Based Protocol EUT Channel: CH45 Incumbent Signal Frequency: 6175 MHz

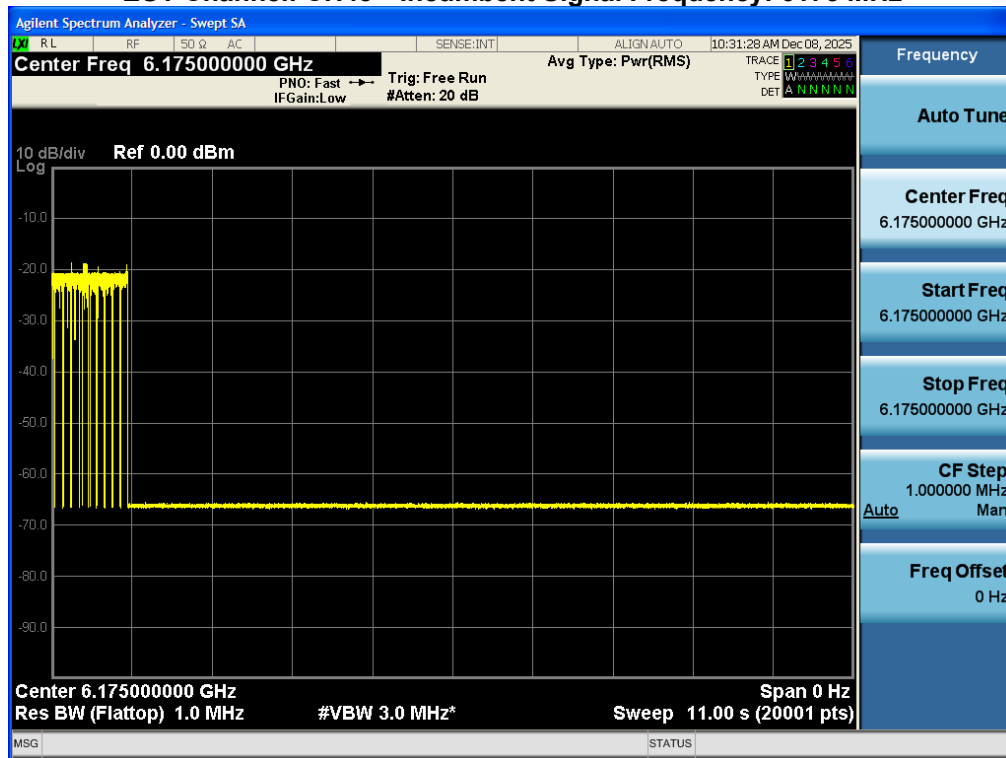


EUT Channel: CH47 Incumbent Signal Frequency: 6110 MHz

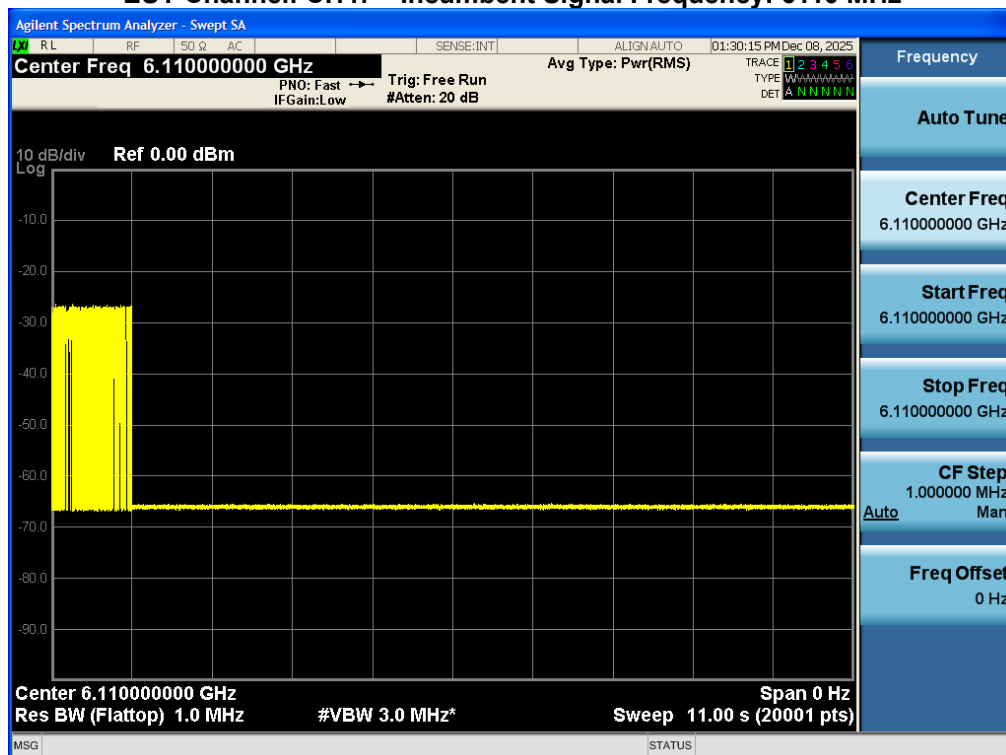


EUT Channel: CH47 Incumbent Signal Frequency: 6185 MHz

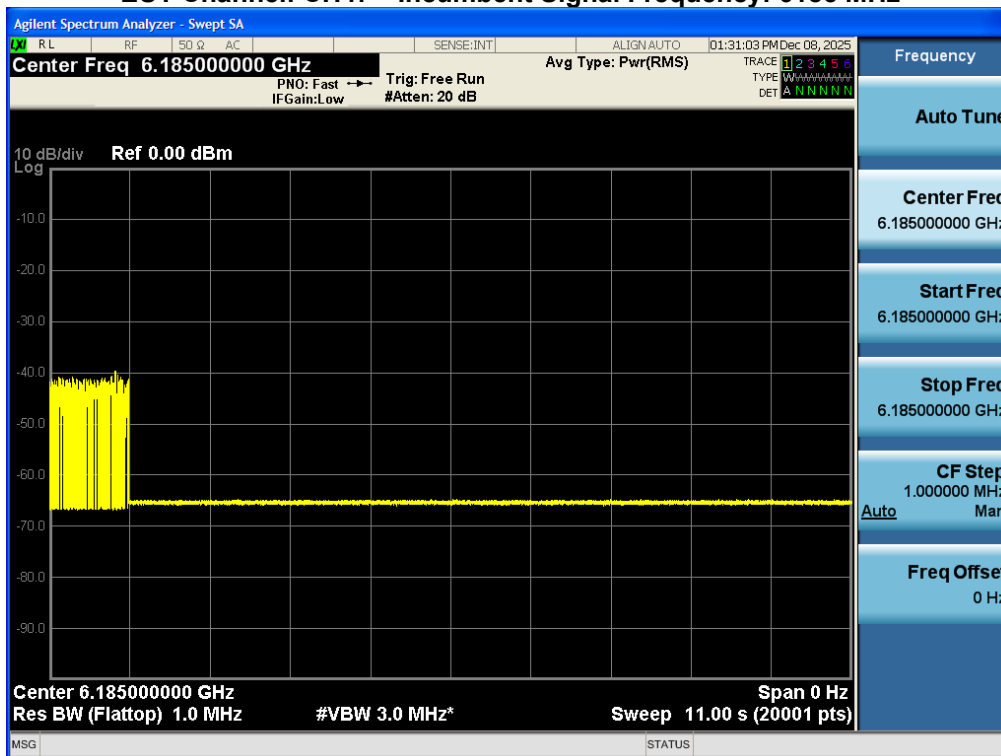


EUT Channel: CH47 Incumbent Signal Frequency: 6260 MHz

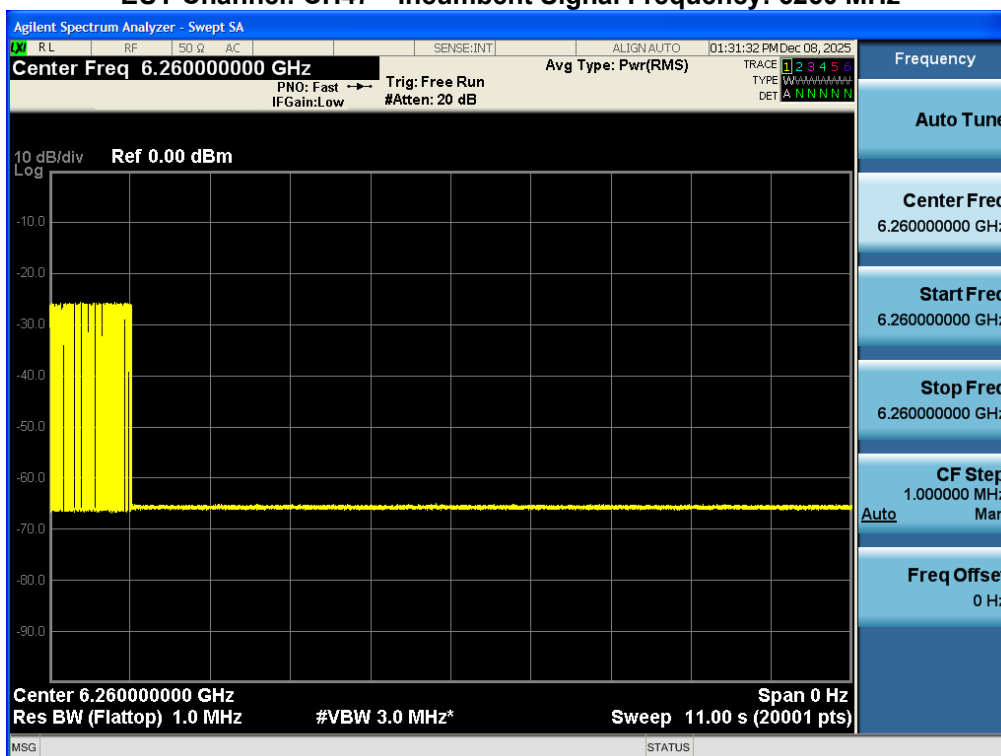


EUT Channel: CH97 Incumbent Signal Frequency: 6435 MHz

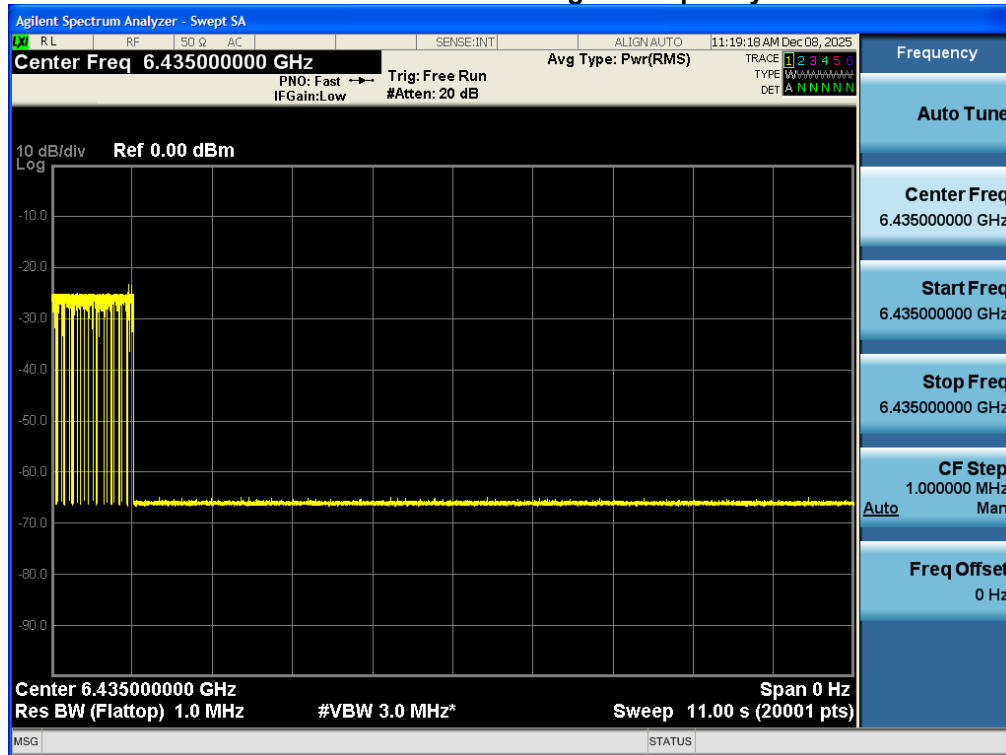


EUT Channel: CH111 Incumbent Signal Frequency: 6430 MHz

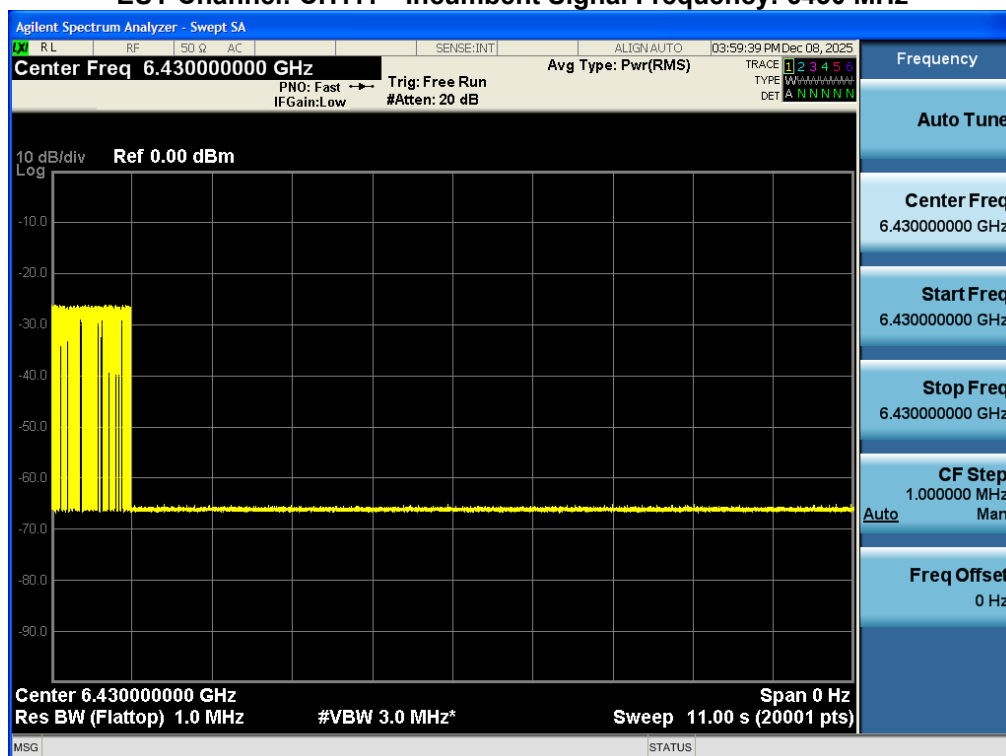


EUT Channel: CH111 Incumbent Signal Frequency: 6505 MHz

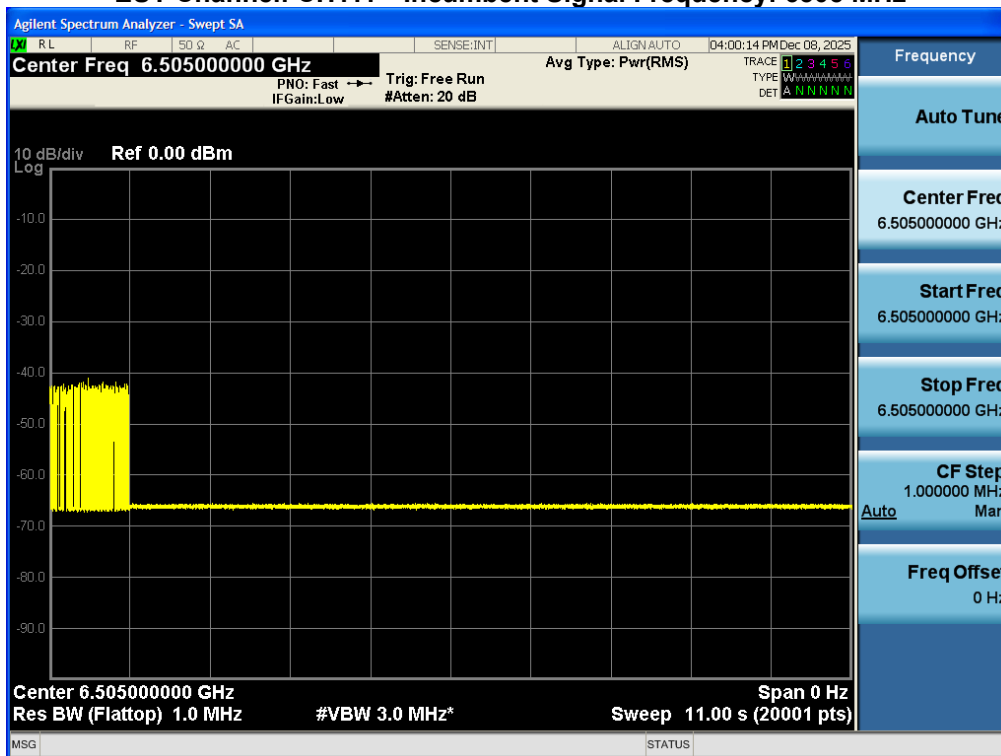


EUT Channel: CH111 Incumbent Signal Frequency: 6580 MHz


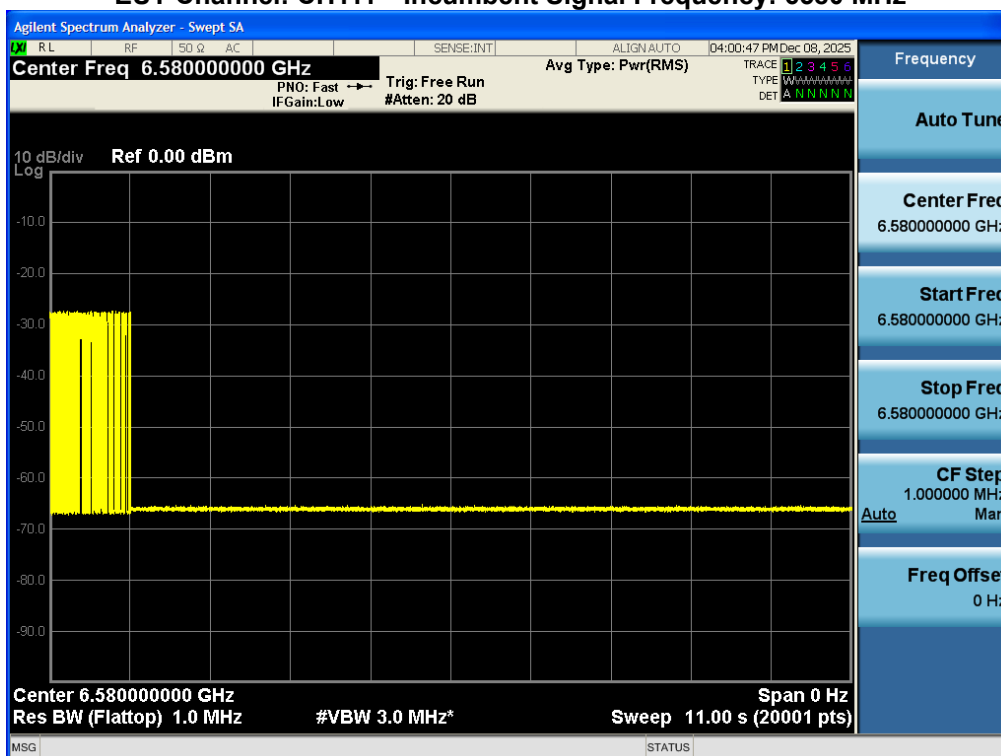


EUT Channel: CH117 Incumbent Signal Frequency: 6535 MHz

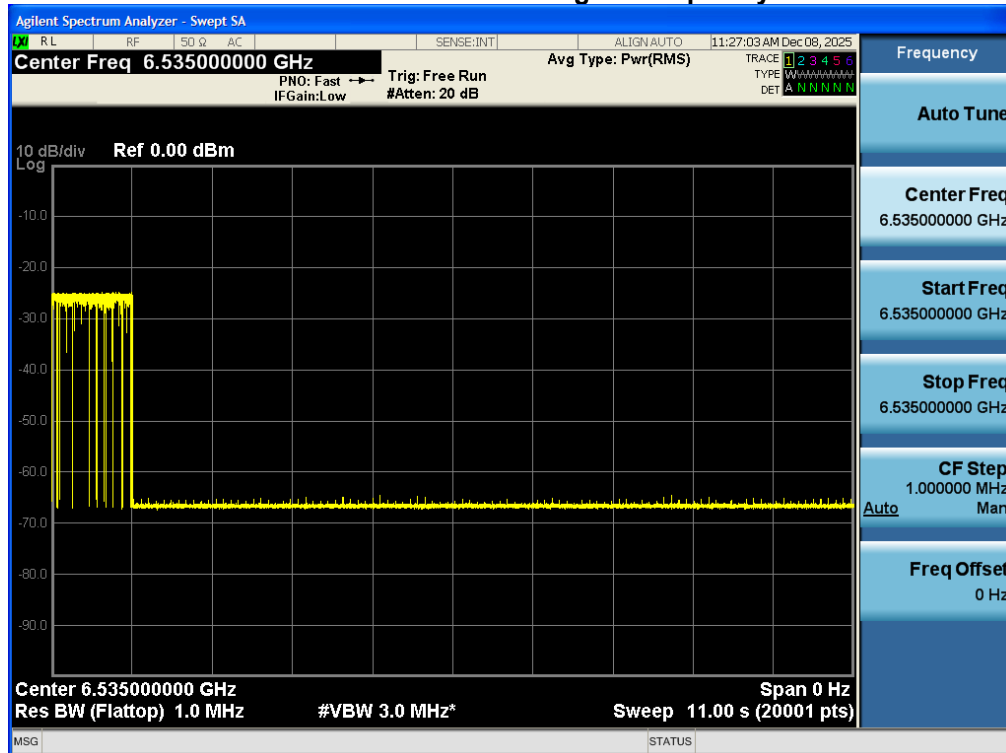


EUT Channel: CH07 Incumbent Signal Frequency: 6590 MHz

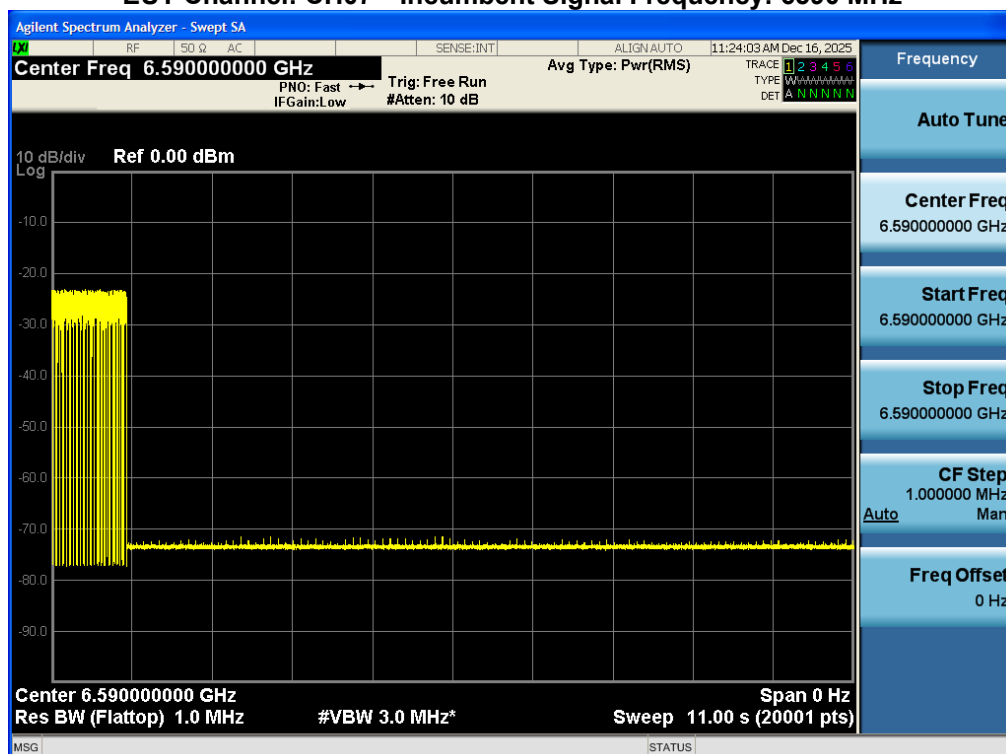


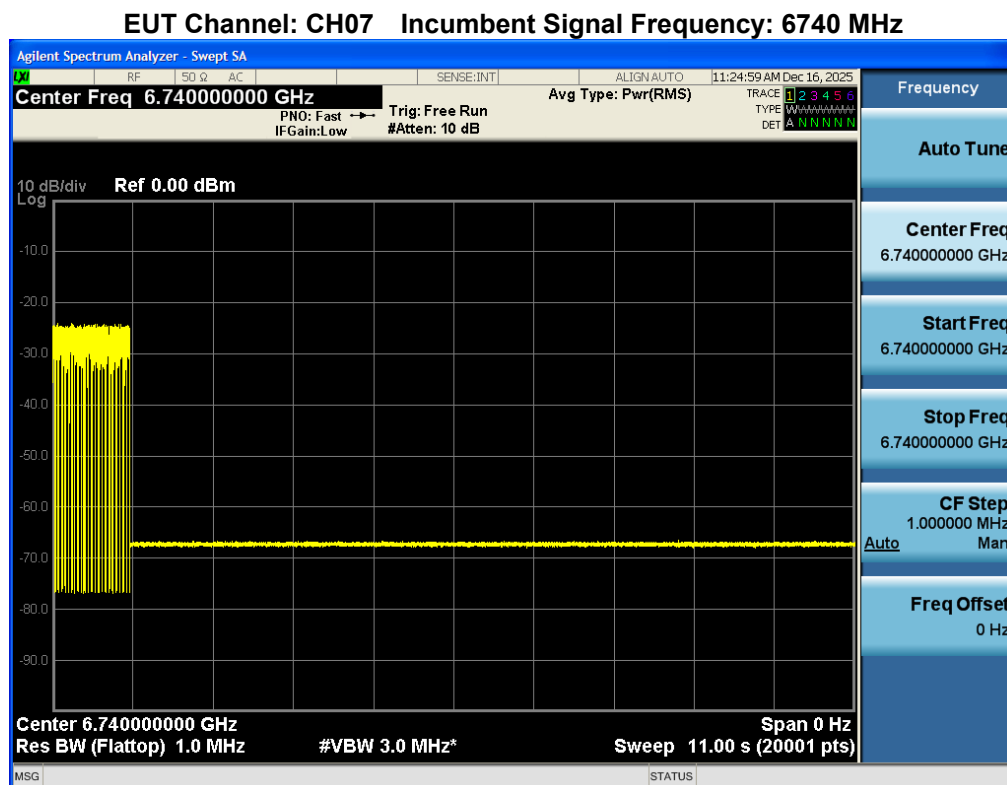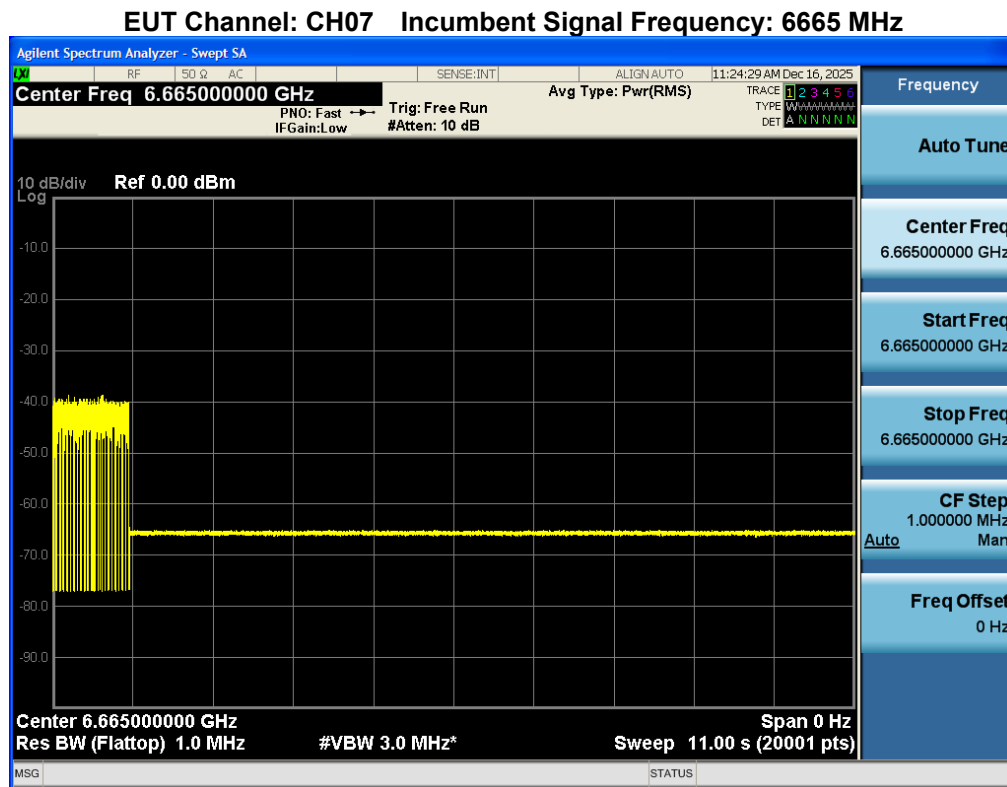


EUT Channel: CH209 Incumbent Signal Frequency: 6995 MHz

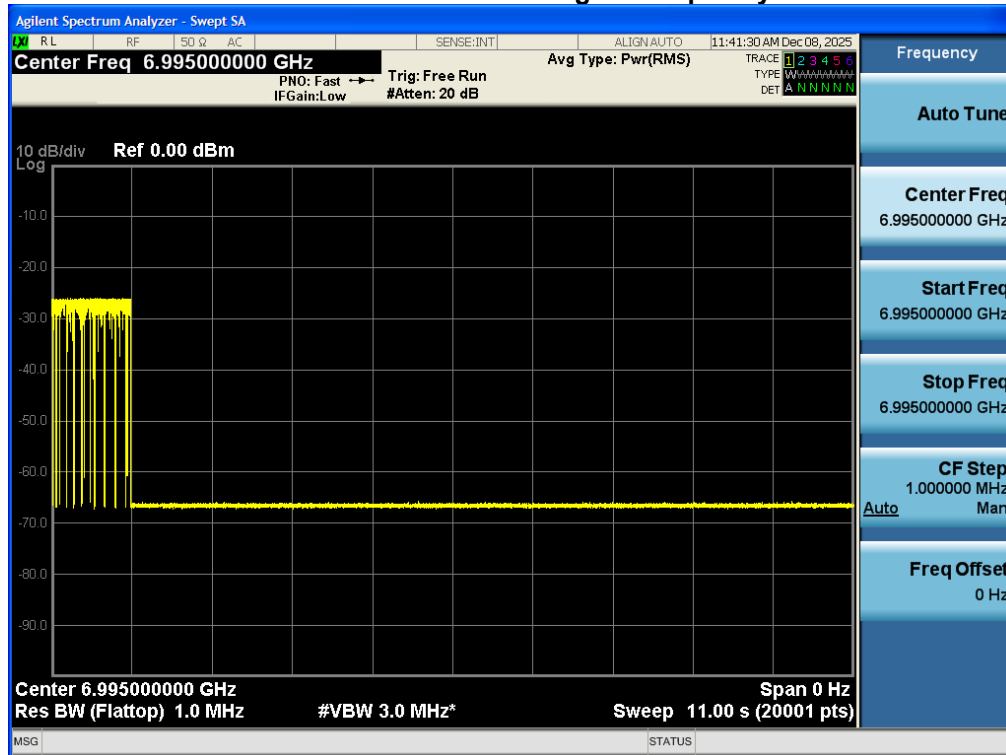


EUT Channel: CH207 Incumbent Signal Frequency: 6910 MHz

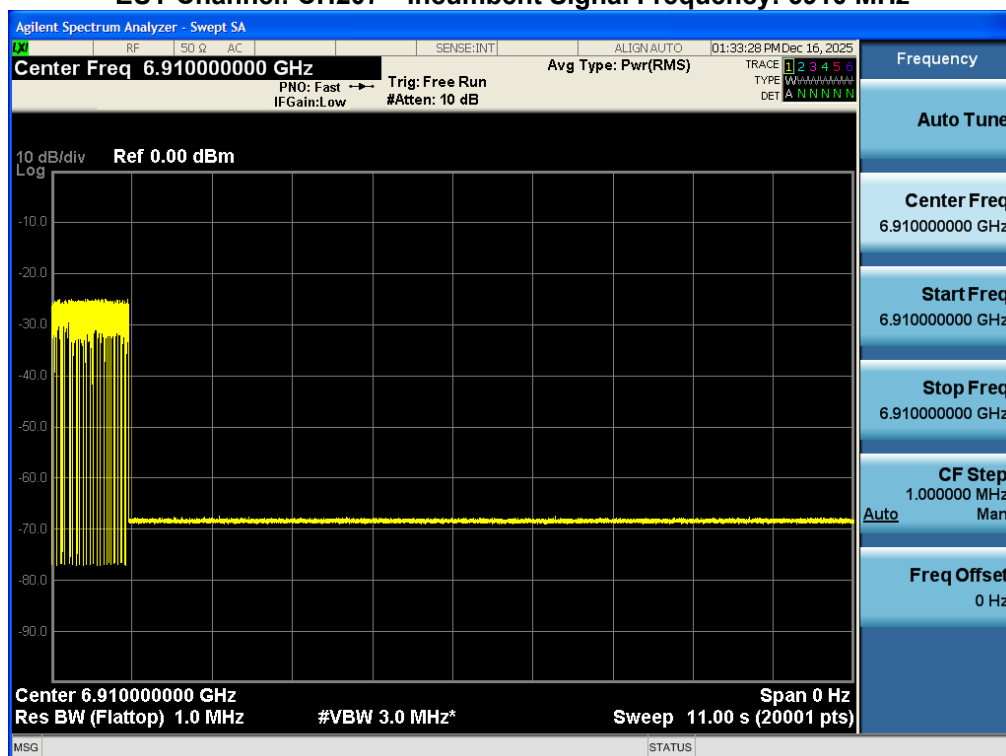

EUT Channel: CH207 Incumbent Signal Frequency: 6985 MHz

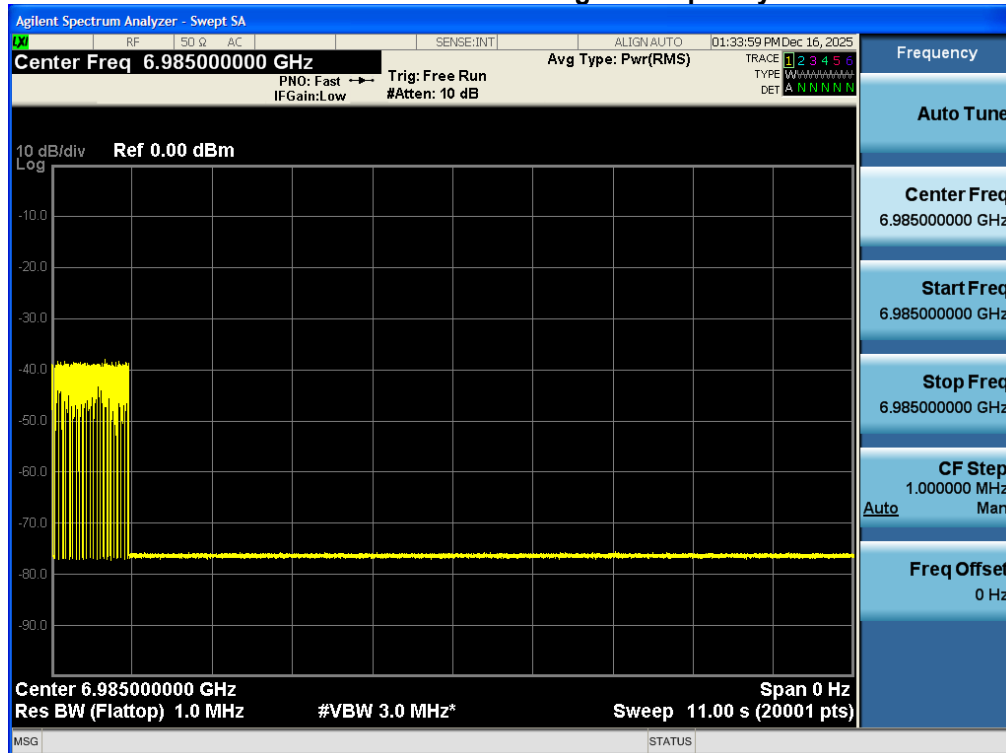

EUT Channel: CH207 Incumbent Signal Frequency: 7060 MHz

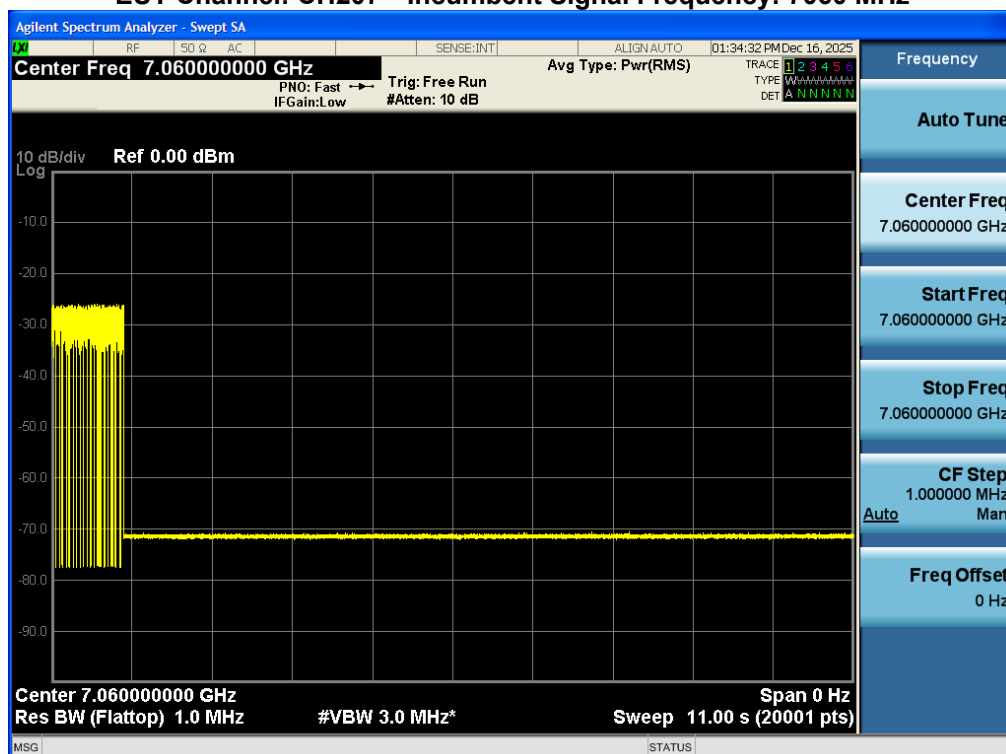

APPENDIX J - FREQUENCY STABILITY

Test Mode	UNII-5
-----------	--------

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)
Center Frequency	5955.0000
3.63	5954.9704
3.3	5954.9694
2.97	5954.9678
Maximum Deviation (MHz)	-0.0322
Maximum Deviation (ppm)	-5.41

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
Center Frequency	5955.0000
0	5954.9778
10	5954.9872
20	5954.9672
30	5954.9696
40	5954.9684
Maximum Deviation (MHz)	-0.0328
Maximum Deviation (ppm)	-5.51

Test Mode	UNII-6
-----------	--------

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)
Center Frequency	6435.0000
3.63	6434.9654
3.3	6434.9646
2.97	6434.9656
Maximum Deviation (MHz)	-0.0354
Maximum Deviation (ppm)	-5.50

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
Center Frequency	6435.0000
0	6434.9774
10	6434.9734
20	6434.9652
30	6434.9664
40	6434.9674
Maximum Deviation (MHz)	-0.0348
Maximum Deviation (ppm)	-5.41

Test Mode	UNII-7
-----------	--------

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)
Center Frequency	6535.0000
3.63	6534.9670
3.3	6534.9672
2.97	6534.9670
Maximum Deviation (MHz)	-0.0330
Maximum Deviation (ppm)	-5.05

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
Center Frequency	6535.0000
0	6534.9704
10	6534.9746
20	6534.9674
30	6534.9672
40	6534.9652
Maximum Deviation (MHz)	-0.0348
Maximum Deviation (ppm)	-5.33

Test Mode	UNII-8
-----------	--------

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)
Center Frequency	6875.0000
3.63	6874.9652
3.3	6874.9652
2.97	6874.9650
Maximum Deviation (MHz)	-0.0348
Maximum Deviation (ppm)	-5.06

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
Center Frequency	6875.0000
0	6874.9728
10	6874.9694
20	6874.9648
30	6874.9776
40	6874.9634
Maximum Deviation (MHz)	-0.0366
Maximum Deviation (ppm)	-5.32

End of Test Report