



802.11n-20 MHz LOW CHANNEL CARRIER LEVEL

802.11n-20 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11n-20 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz


802.11n-20 MHz MIDDLE CHANNEL CARRIER LEVEL

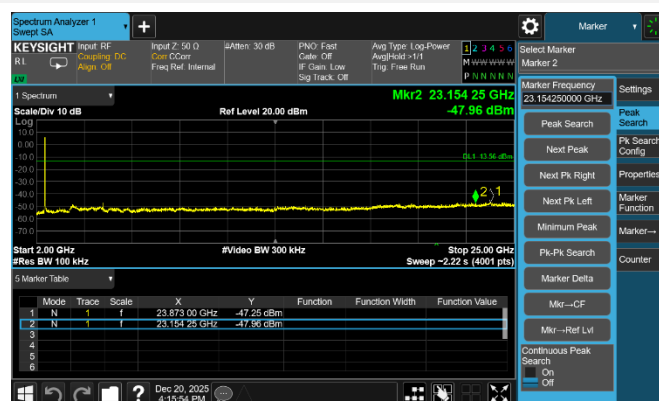

802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

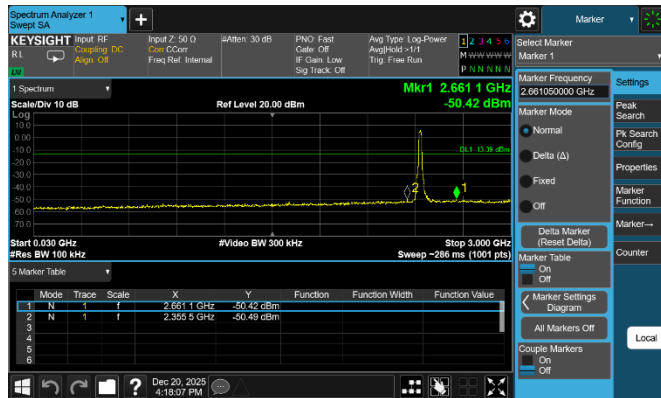

802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

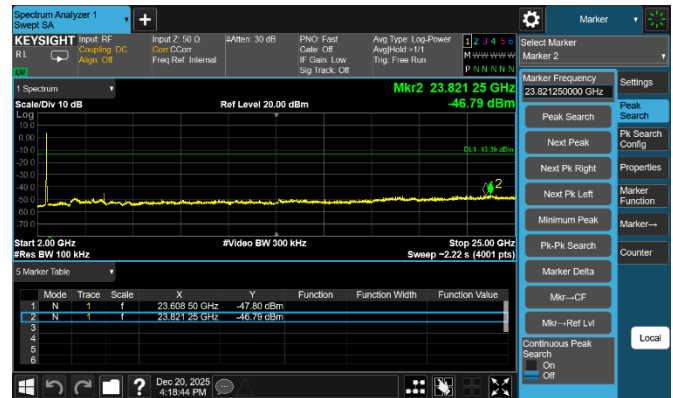


802.11n-20 MHz HIGH CHANNEL CARRIER LEVEL



802.11n-20 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz



802.11n-20 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

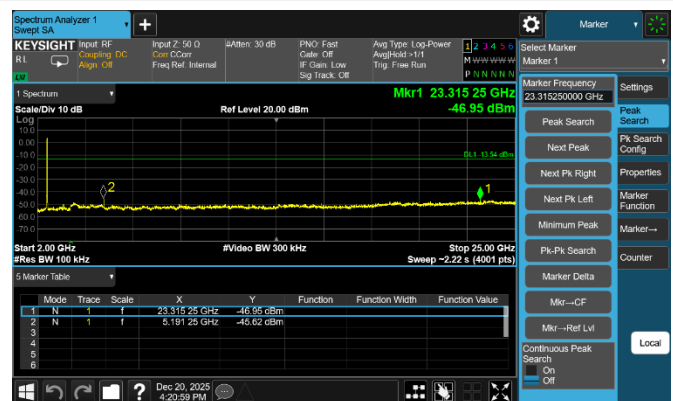

A.4 Band Edge (Authorized-band band-edge)

Note 1: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

Test Data

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-40.08	9.39	-10.61	Pass
High	-46.44	9.32	-10.68	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-28.76	5.33	-14.67	Pass
High	-42.93	5.45	-14.55	Pass

802.11n-20 MHz Mode:


Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-26.28	6.44	-13.56	Pass
High	-36.68	6.46	-13.54	Pass

Test Plots


802.11b LOW CHANNEL, CARRIER LEVEL



802.11b LOW CHANNEL, BAND EDGE

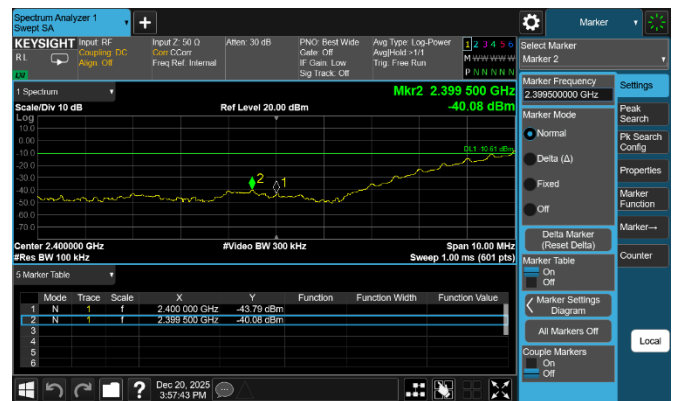

802.11b HIGH CHANNEL, CARRIER LEVEL

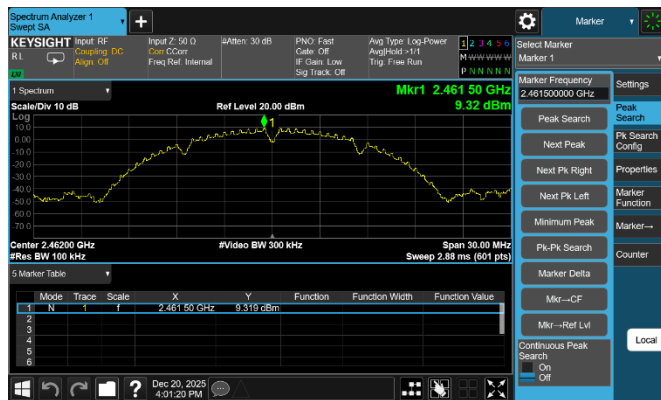


802.11b HIGH CHANNEL, BAND EDGE



802.11g LOW CHANNEL, CARRIER LEVEL




802.11g LOW CHANNEL, BAND EDGE

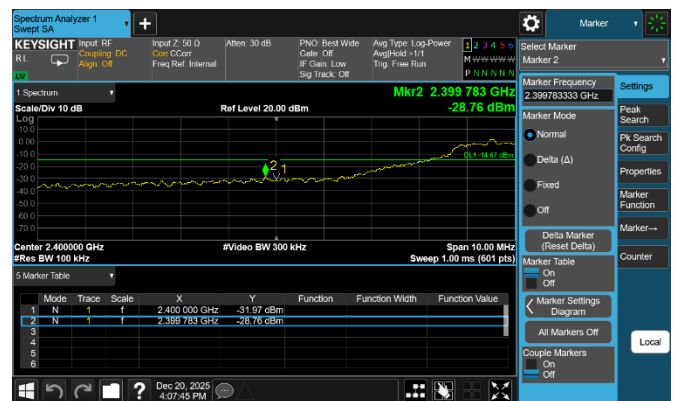

802.11g HIGH CHANNEL, CARRIER LEVEL



802.11g HIGH CHANNEL, BAND EDGE

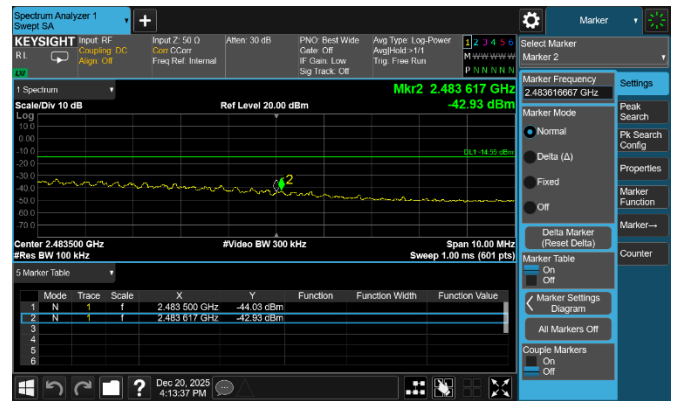

802.11n-20 MHz LOW CHANNEL, CARRIER LEVEL




802.11n-20 MHz LOW CHANNEL, BAND EDGE



802.11n-20 MHz HIGH CHANNEL, CARRIER LEVEL



802.11n-20 MHz HIGH CHANNEL, BAND EDGE

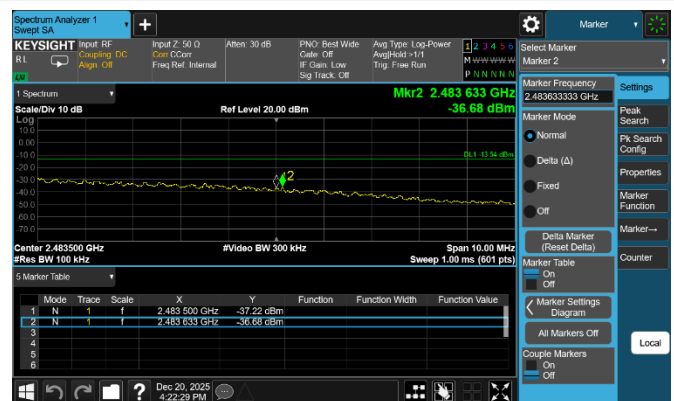

A.5 Conducted Emission


Note 1: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note 2: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note 3: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots


PHASE L

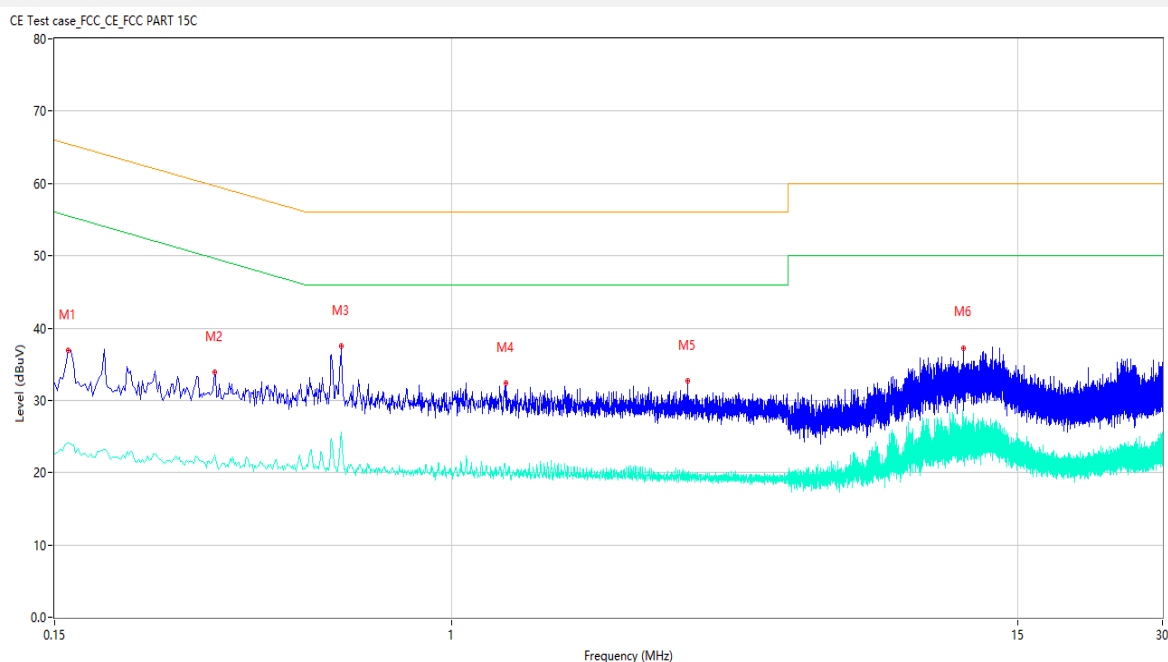

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin(dB)	Detector	Line	Verdict
1	0.160	36.95	10.07	65.46	28.51	Peak	L	Pass
1**	0.160	24.15	10.07	55.46	31.31	AV	L	Pass
2	0.322	33.91	10.12	59.66	25.75	Peak	L	Pass
2**	0.322	22.41	10.12	49.66	27.25	AV	L	Pass
3	0.590	37.49	10.19	56.00	18.51	Peak	L	Pass
3**	0.590	25.64	10.19	46.00	20.36	AV	L	Pass
4	1.300	32.41	10.24	56.00	23.59	Peak	L	Pass
4**	1.300	20.34	10.24	46.00	25.66	AV	L	Pass
5	3.092	32.65	10.38	56.00	23.35	Peak	L	Pass
5**	3.092	19.59	10.38	46.00	26.41	AV	L	Pass
6	11.580	37.27	11.02	60.00	22.73	Peak	L	Pass
6**	11.580	24.92	11.02	50.00	25.08	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

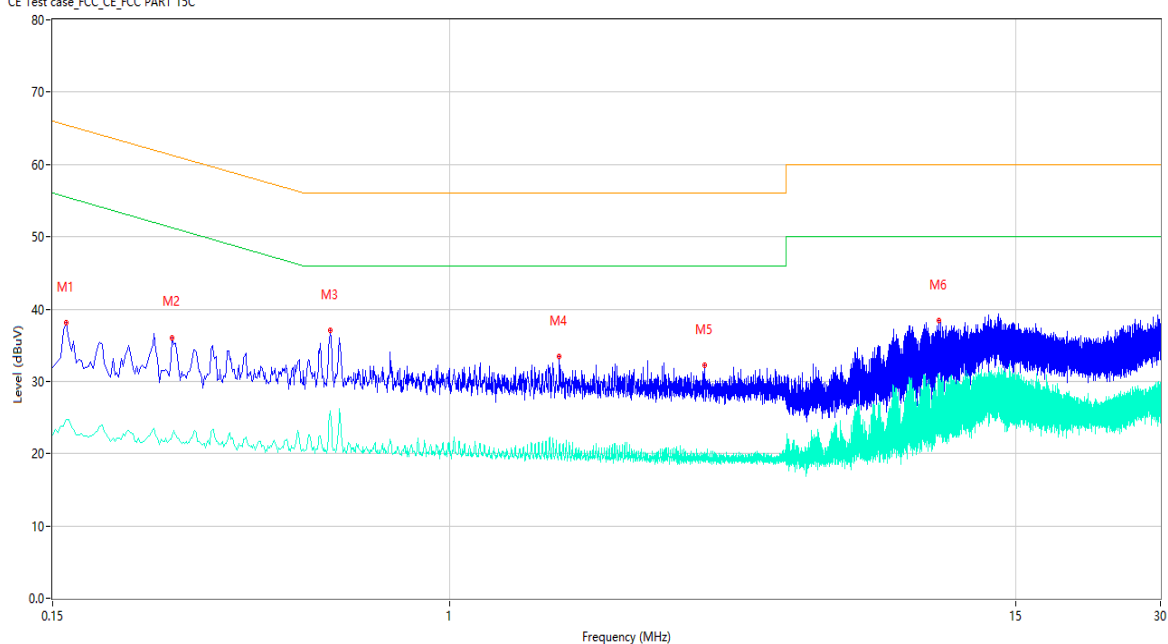

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin(dB)	Detector	Line	Verdict
1	0.160	38.13	10.15	65.46	27.33	Peak	N	Pass
1**	0.160	24.67	10.15	55.46	30.79	AV	N	Pass
2	0.266	36.06	10.15	61.24	25.18	Peak	N	Pass
2**	0.266	22.48	10.15	51.24	28.76	AV	N	Pass
3	0.566	37.05	10.19	56.00	18.95	Peak	N	Pass
3**	0.566	25.84	10.19	46.00	20.16	AV	N	Pass
4	1.694	33.42	10.24	56.00	22.58	Peak	N	Pass
4**	1.694	21.21	10.24	46.00	24.79	AV	N	Pass
5	3.386	32.23	10.33	56.00	23.77	Peak	N	Pass
5**	3.386	20.15	10.33	46.00	25.85	AV	N	Pass
6	10.406	38.39	10.95	60.00	21.61	Peak	N	Pass
6**	10.406	30.88	10.95	50.00	19.12	AV	N	Pass

A.6 Radiated Emission

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Test Data and Plots

30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

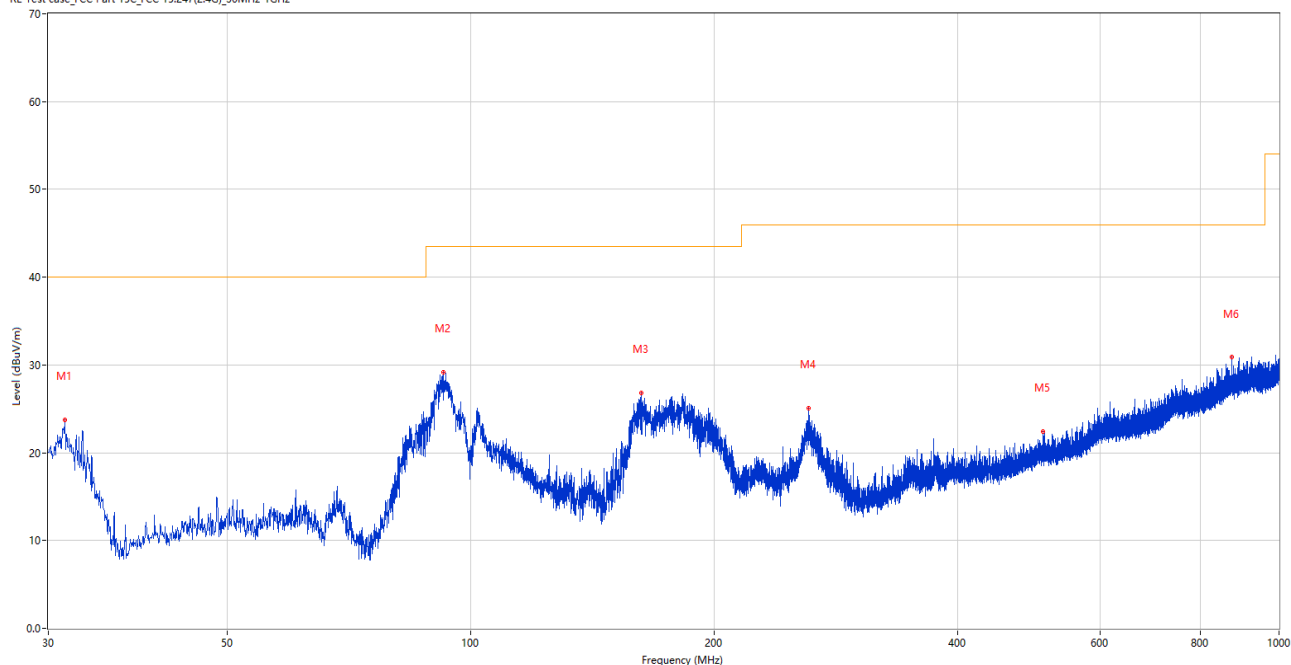

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	31.455	23.72	-28.96	40.0	16.28	Peak	360.00	200	Horizontal	Pass
2	92.468	29.21	-27.34	43.5	14.29	Peak	148.00	200	Horizontal	Pass
3	162.405	26.85	-28.64	43.5	16.65	Peak	99.00	100	Horizontal	Pass
4	262.024	25.05	-24.13	46.0	20.95	Peak	107.00	200	Horizontal	Pass
5	510.344	22.41	-17.69	46.0	23.59	Peak	342.00	100	Horizontal	Pass
6	874.724	30.86	-9.64	46.0	15.14	Peak	360.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

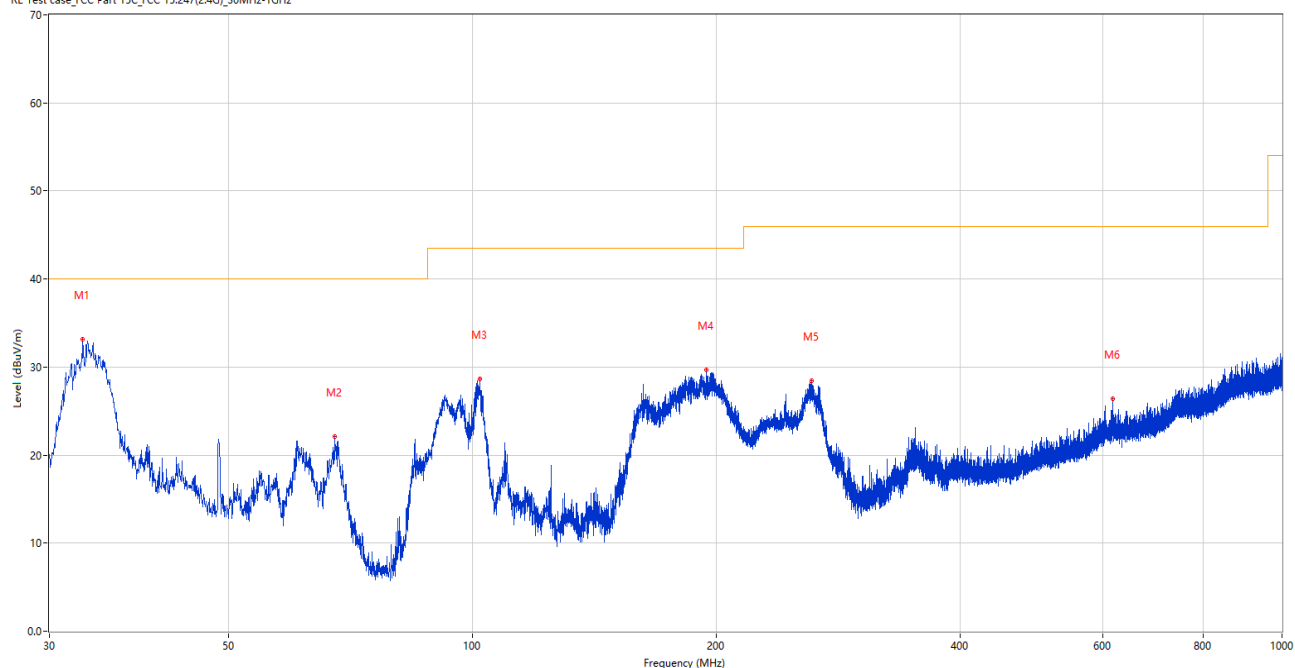


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	33.007	33.12	-28.42	40.0	6.88	Peak	323.00	100	Vertical	Pass
2	67.588	22.08	-28.19	40.0	17.92	Peak	246.00	200	Vertical	Pass
3	101.974	28.62	-26.10	43.5	14.88	Peak	358.00	100	Vertical	Pass
4	194.270	29.69	-25.67	43.5	13.81	Peak	29.00	200	Vertical	Pass
5	262.509	28.47	-24.12	46.0	17.53	Peak	52.00	100	Vertical	Pass
6	618.305	26.43	-14.55	46.0	19.57	Peak	22.00	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

1 GHz to 18 GHz, ANT H 802.11b Middle Channel


RE Test case FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

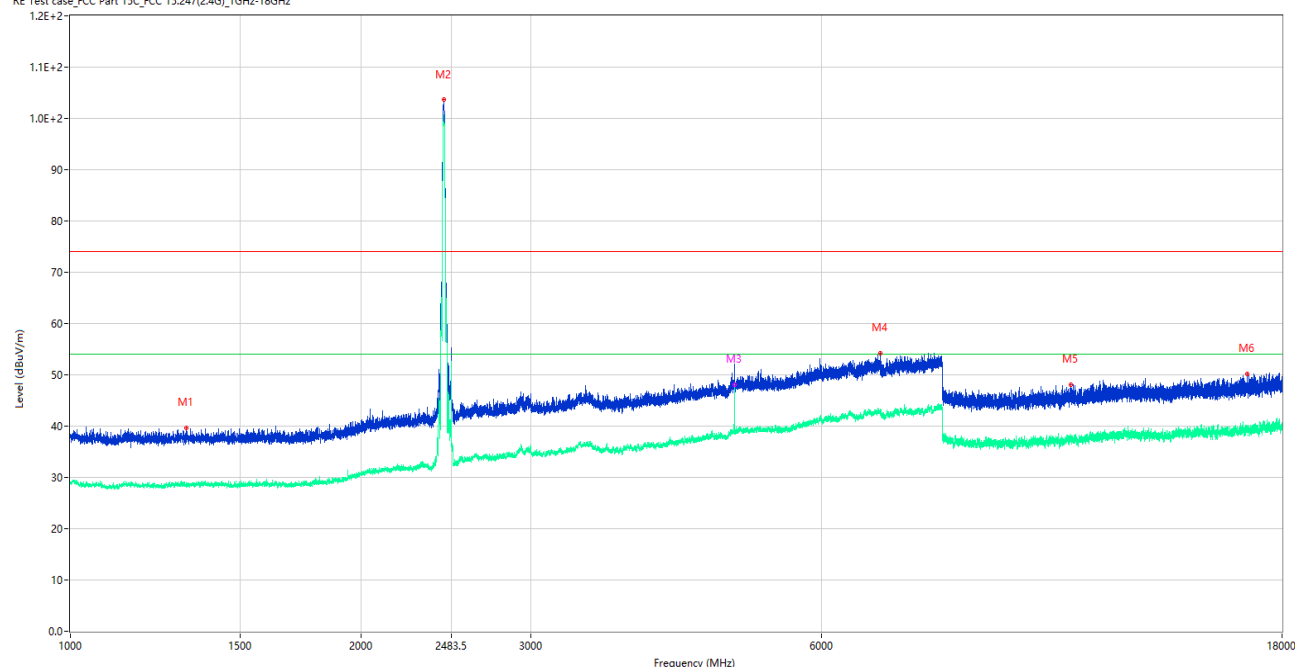

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1319.750	39.70	-15.85	74.0	34.30	Peak	260.00	150	Horizontal	Pass
1**	1319.750	28.13	-15.85	54.0	25.87	AV	260.00	150	Horizontal	Pass
2	2438.250	103.64	-12.38	74.0	-29.64	Peak	23.00	150	Horizontal	N/A
2**	2438.250	100.77	-12.38	54.0	-46.77	AV	23.00	150	Horizontal	N/A
3	4874.500	50.29	-2.25	74.0	23.71	Peak	360.00	150	Horizontal	Pass
3**	4874.500	48.10	-2.25	54.0	5.90	AV	360.00	150	Horizontal	Pass
4	6898.500	54.22	0.63	74.0	19.78	Peak	156.00	150	Horizontal	Pass
4**	6898.500	42.50	0.63	54.0	11.50	AV	156.00	150	Horizontal	Pass
5	10869.500	48.14	-3.27	74.0	25.86	Peak	360.00	150	Horizontal	Pass
5**	10869.500	37.42	-3.27	54.0	16.58	AV	360.00	150	Horizontal	Pass
6	16576.000	50.25	-0.72	74.0	23.75	Peak	94.00	150	Horizontal	Pass
6**	16576.000	39.70	-0.72	54.0	14.30	AV	94.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

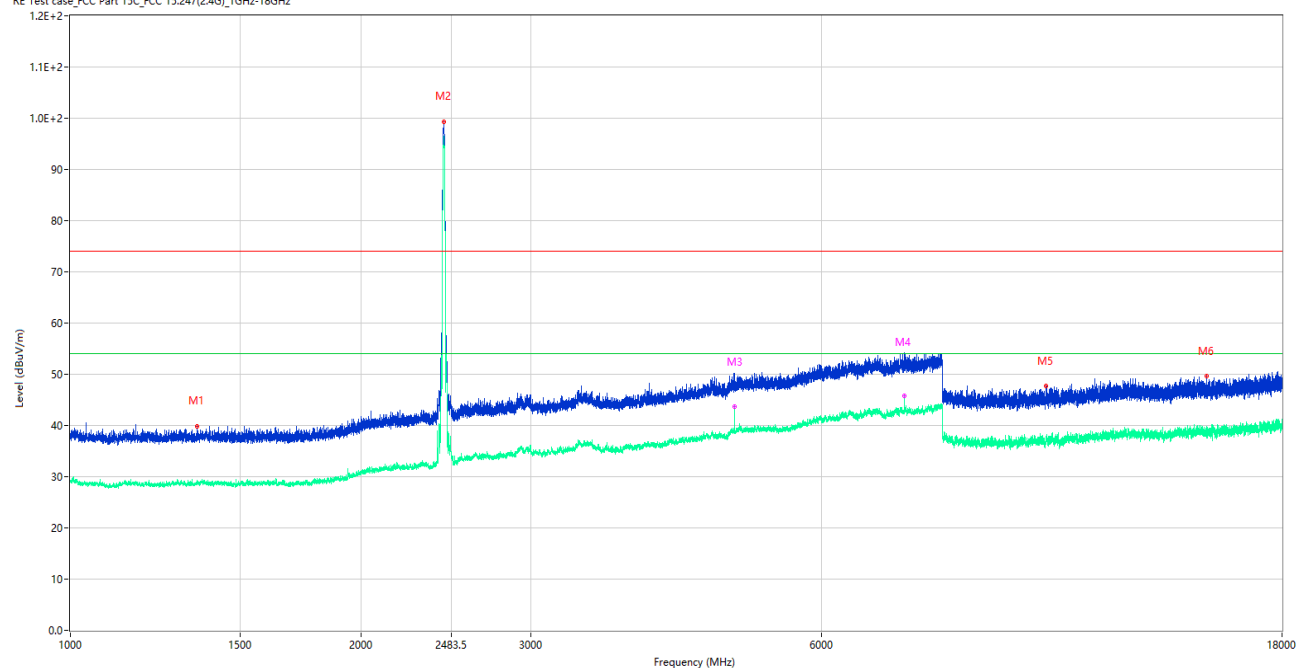

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1354.250	39.84	-15.89	74.0	34.16	Peak	360.00	150	Vertical	Pass
1**	1354.250	28.71	-15.89	54.0	25.29	AV	360.00	150	Vertical	Pass
2	2438.250	99.33	-12.38	74.0	-25.33	Peak	121.00	150	Vertical	N/A
2**	2438.250	96.46	-12.38	54.0	-42.46	AV	121.00	150	Vertical	N/A
3	4874.500	50.05	-2.25	74.0	23.95	Peak	0.00	150	Vertical	Pass
3**	4874.500	43.71	-2.25	54.0	10.29	AV	0.00	150	Vertical	Pass
4	7313.000	52.74	0.66	74.0	21.26	Peak	200.00	150	Vertical	Pass
4**	7313.000	45.84	0.66	54.0	8.16	AV	200.00	150	Vertical	Pass
5	10260.000	47.65	-3.18	74.0	26.35	Peak	38.00	150	Vertical	Pass
5**	10260.000	37.36	-3.18	54.0	16.64	AV	38.00	150	Vertical	Pass
6	15033.500	49.59	-2.28	74.0	24.41	Peak	0.00	150	Vertical	Pass
6**	15033.500	38.96	-2.28	54.0	15.04	AV	0.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

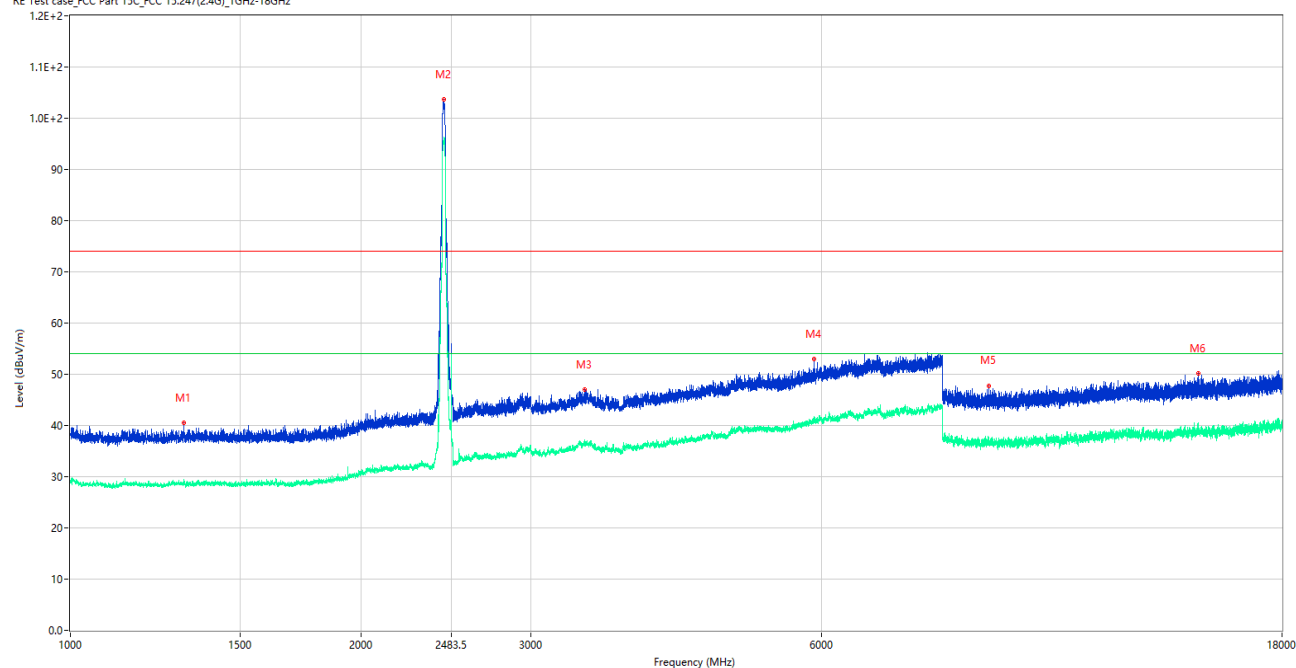

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1311.250	40.54	-15.77	74.0	33.46	Peak	360.00	150	Horizontal	Pass
1**	1311.250	29.09	-15.77	54.0	24.91	AV	360.00	150	Horizontal	Pass
2	2438.500	103.63	-12.37	74.0	-29.63	Peak	31.00	150	Horizontal	N/A
2**	2438.500	96.39	-12.37	54.0	-42.39	AV	31.00	150	Horizontal	N/A
3	3412.000	46.96	-5.29	74.0	27.04	Peak	204.00	150	Horizontal	Pass
3**	3412.000	36.47	-5.29	54.0	17.53	AV	204.00	150	Horizontal	Pass
4	5898.000	52.91	-0.29	74.0	21.09	Peak	78.00	150	Horizontal	Pass
4**	5898.000	41.54	-0.29	54.0	12.46	AV	78.00	150	Horizontal	Pass
5	8950.000	47.75	-4.49	74.0	26.25	Peak	360.00	150	Horizontal	Pass
5**	8950.000	36.50	-4.49	54.0	17.50	AV	360.00	150	Horizontal	Pass
6	14740.500	50.12	-1.75	74.0	23.88	Peak	360.00	150	Horizontal	Pass
6**	14740.500	38.91	-1.75	54.0	15.09	AV	360.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

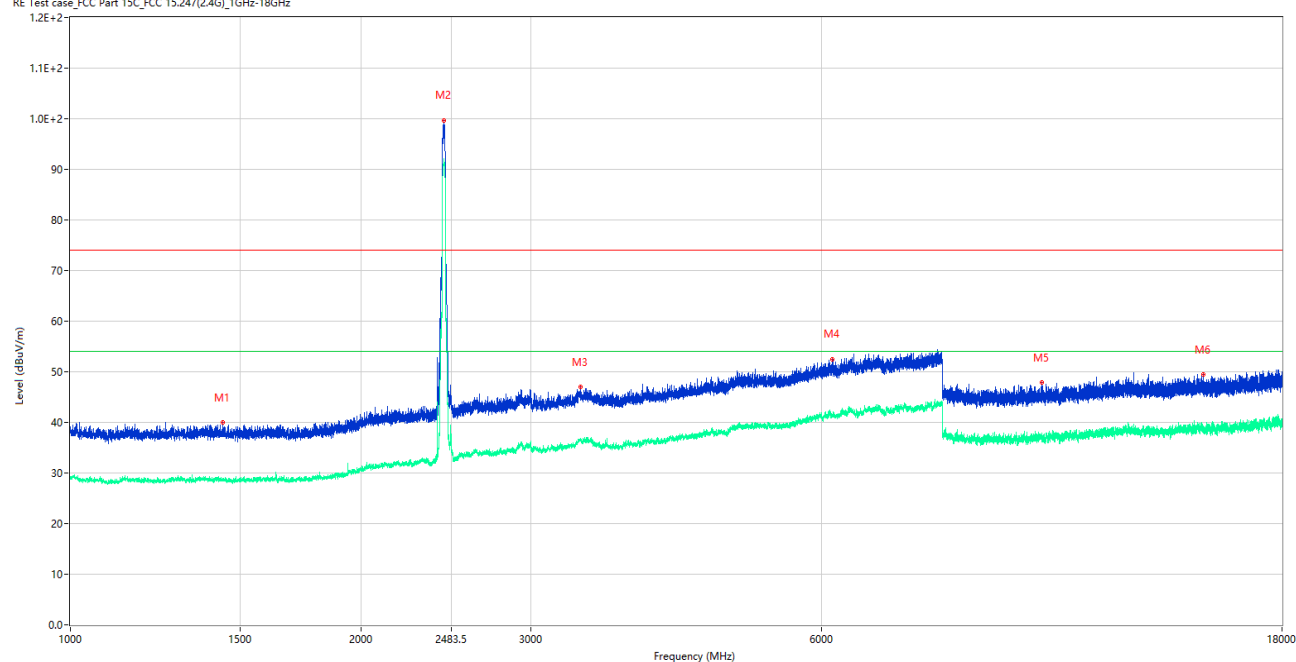

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1437.000	39.95	-15.96	74.0	34.05	Peak	32.00	150	Vertical	Pass
1**	1437.000	28.69	-15.96	54.0	25.31	AV	32.00	150	Vertical	Pass
2	2438.750	99.70	-12.37	74.0	-25.70	Peak	135.00	150	Vertical	N/A
2**	2438.750	92.02	-12.37	54.0	-38.02	AV	135.00	150	Vertical	N/A
3	3375.000	46.99	-4.83	74.0	27.01	Peak	350.00	150	Vertical	Pass
3**	3375.000	36.31	-4.83	54.0	17.69	AV	350.00	150	Vertical	Pass
4	6163.000	52.52	-0.29	74.0	21.48	Peak	215.00	150	Vertical	Pass
4**	6163.000	41.06	-0.29	54.0	12.94	AV	215.00	150	Vertical	Pass
5	10152.500	47.81	-4.32	74.0	26.19	Peak	0.00	150	Vertical	Pass
5**	10152.500	36.92	-4.32	54.0	17.08	AV	0.00	150	Vertical	Pass
6	14921.000	49.43	-1.78	74.0	24.57	Peak	266.00	150	Vertical	Pass
6**	14921.000	38.30	-1.78	54.0	15.70	AV	266.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

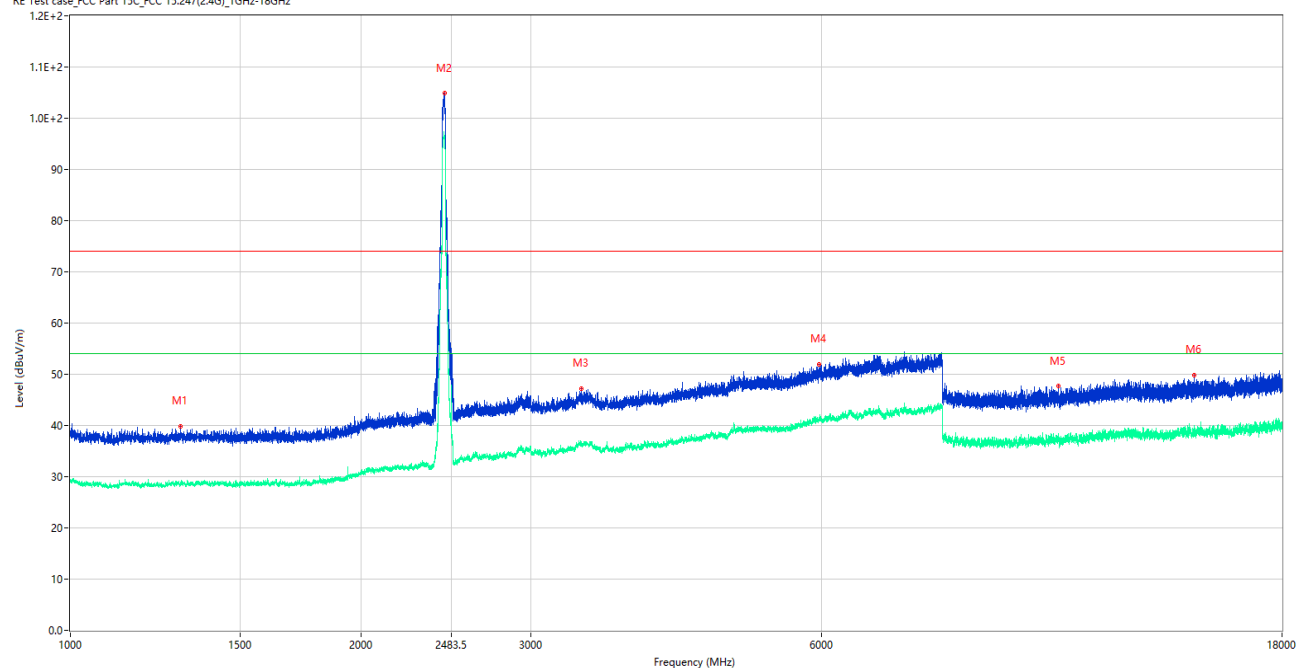

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1300.250	39.87	-15.60	74.0	34.13	Peak	346.00	150	Horizontal	Pass
1**	1300.250	28.59	-15.60	54.0	25.41	AV	346.00	150	Horizontal	Pass
2	2440.250	104.87	-12.37	74.0	-30.87	Peak	22.00	150	Horizontal	N/A
2**	2440.250	96.38	-12.37	54.0	-42.38	AV	22.00	150	Horizontal	N/A
3	3382.000	47.25	-5.22	74.0	26.75	Peak	115.00	150	Horizontal	Pass
3**	3382.000	36.21	-5.22	54.0	17.79	AV	115.00	150	Horizontal	Pass
4	5963.000	52.00	-0.36	74.0	22.00	Peak	234.00	150	Horizontal	Pass
4**	5963.000	41.19	-0.36	54.0	12.81	AV	234.00	150	Horizontal	Pass
5	10559.500	47.68	-3.37	74.0	26.32	Peak	359.00	150	Horizontal	Pass
5**	10559.500	37.09	-3.37	54.0	16.91	AV	359.00	150	Horizontal	Pass
6	14602.000	49.87	-2.57	74.0	24.13	Peak	325.00	150	Horizontal	Pass
6**	14602.000	38.64	-2.57	54.0	15.36	AV	325.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

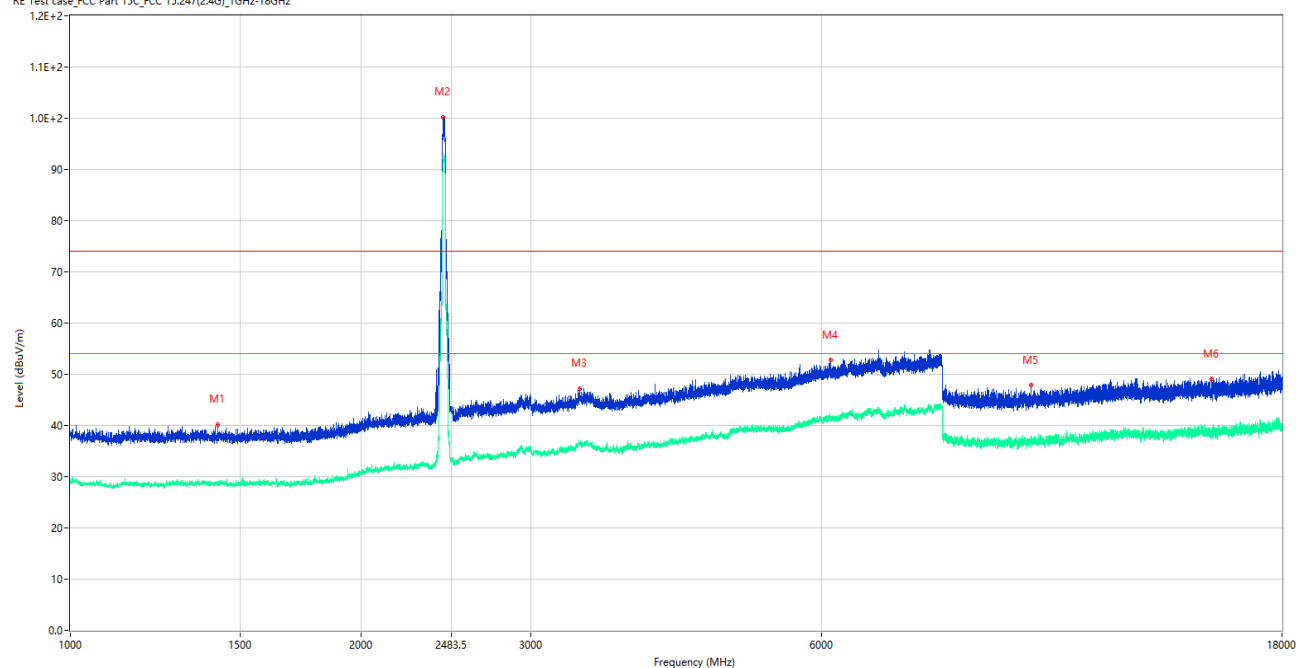

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1421.000	40.15	-15.94	74.0	33.85	Peak	305.00	150	Vertical	Pass
1**	1421.000	28.94	-15.94	54.0	25.06	AV	305.00	150	Vertical	Pass
2	2435.000	100.25	-12.30	74.0	-26.25	Peak	124.00	150	Vertical	N/A
2**	2435.000	91.81	-12.30	54.0	-37.81	AV	124.00	150	Vertical	N/A
3	3371.000	47.23	-4.85	74.0	26.77	Peak	283.00	150	Vertical	Pass
3**	3371.000	35.97	-4.85	54.0	18.03	AV	283.00	150	Vertical	Pass
4	6127.500	52.73	-0.17	74.0	21.27	Peak	235.00	150	Vertical	Pass
4**	6127.500	41.27	-0.17	54.0	12.73	AV	235.00	150	Vertical	Pass
5	9883.500	47.87	-4.09	74.0	26.13	Peak	65.00	150	Vertical	Pass
5**	9883.500	36.47	-4.09	54.0	17.53	AV	65.00	150	Vertical	Pass
6	15219.500	49.07	-1.83	74.0	24.93	Peak	265.00	150	Vertical	Pass
6**	15219.500	38.94	-1.83	54.0	15.06	AV	265.00	150	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note 1: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note 2: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note 3: According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 4: All antenna were pre tested, but only the worst case has been reported in this report.


Test Data and Plots

802.11b LOW CHANNEL




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.16	-4.87	74.0	23.84	Peak	10.16	150	Horizontal	Pass
1**	2390.000	40.34	-4.87	54.0	13.66	AV	10.16	150	Horizontal	Pass
2	2377.700	52.28	-4.23	74.0	21.72	Peak	117.00	150	Horizontal	Pass
2**	2377.700	40.42	-4.23	54.0	13.58	AV	117.00	150	Horizontal	Pass

802.11b HIGH CHANNEL

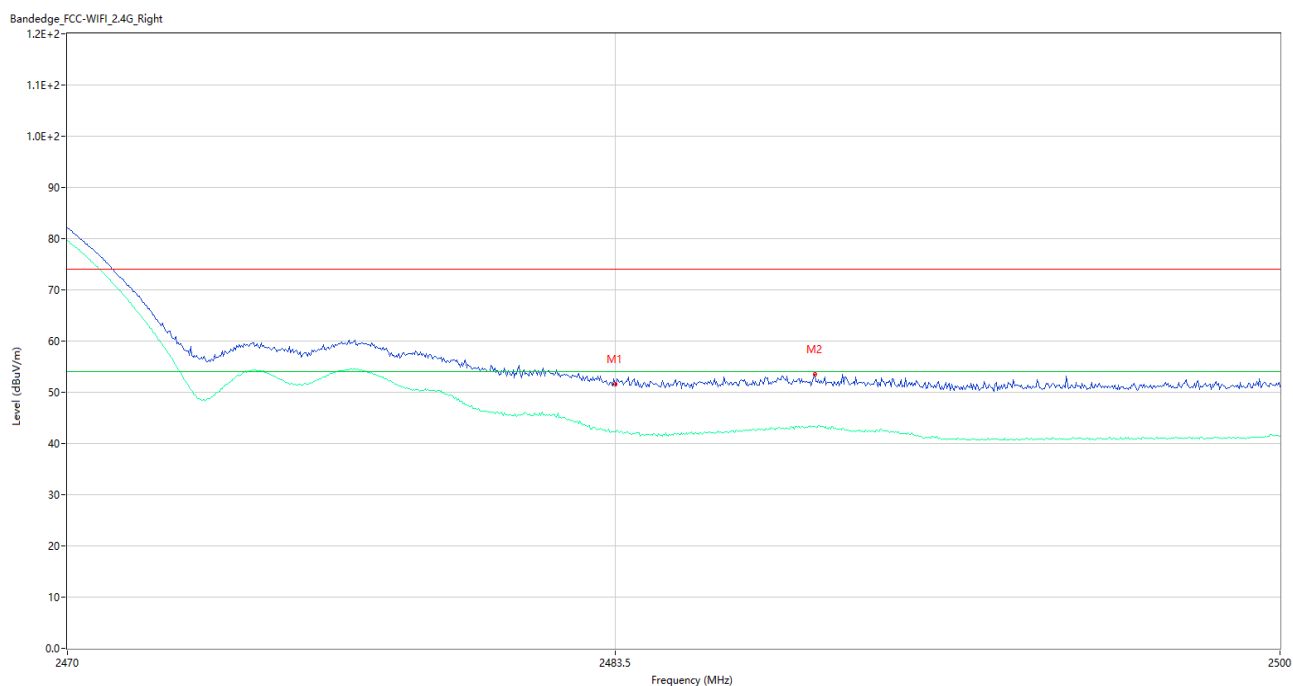


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.57	-3.78	74.0	22.43	Peak	50.00	150	Horizontal	Pass
1**	2483.500	42.32	-3.78	54.0	11.68	AV	50.00	150	Horizontal	Pass
2	2488.450	53.58	-3.82	74.0	20.42	Peak	35.00	150	Horizontal	Pass
2**	2488.450	43.31	-3.82	54.0	10.69	AV	35.00	150	Horizontal	Pass

802.11g LOW CHANNEL

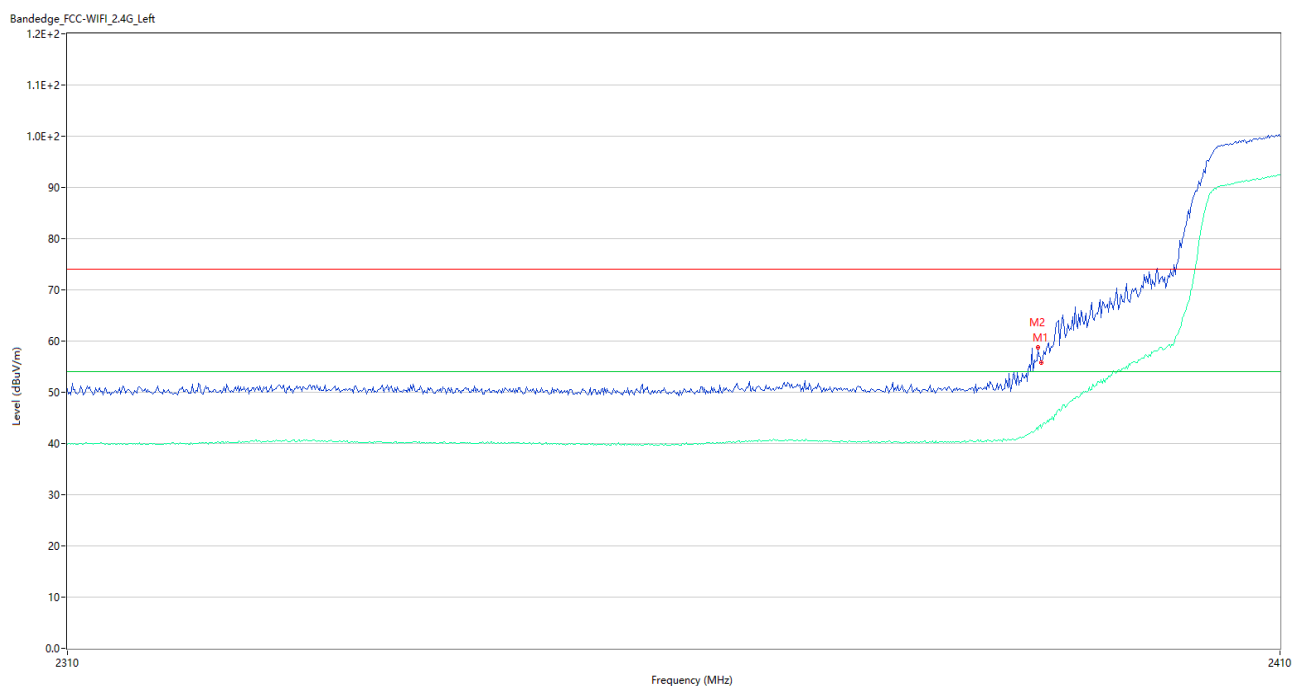


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	55.76	-4.87	74.0	18.24	Peak	19.07	150	Horizontal	Pass
1**	2390.000	42.93	-4.87	54.0	11.07	AV	19.07	150	Horizontal	Pass
2	2389.700	58.76	-4.86	74.0	15.24	Peak	71.00	150	Horizontal	Pass
2**	2389.700	42.70	-4.86	54.0	11.30	AV	71.00	150	Horizontal	Pass

802.11g HIGH CHANNEL

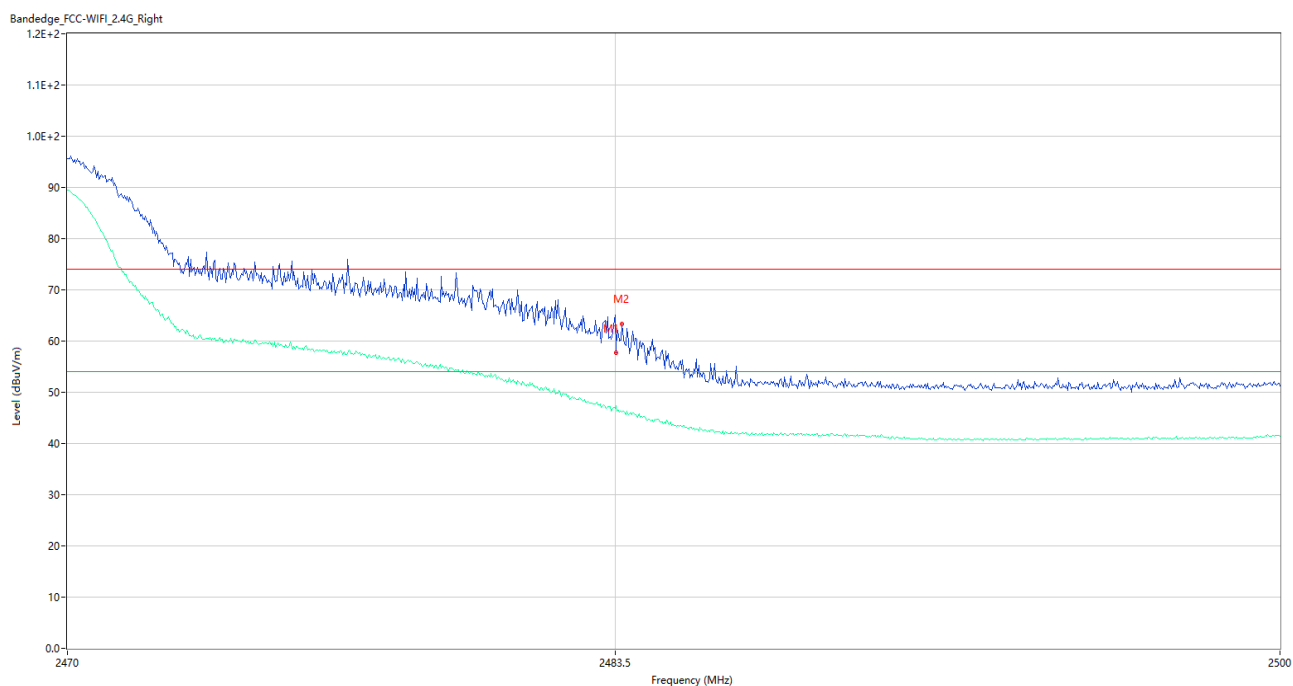


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.72	-3.78	74.0	16.28	Peak	36.00	150	Horizontal	Pass
1**	2483.500	47.45	-3.78	54.0	6.55	AV	36.00	150	Horizontal	Pass
2	2483.680	63.34	-3.78	74.0	10.66	Peak	74.00	150	Horizontal	Pass
2**	2483.680	46.11	-3.78	54.0	7.89	AV	74.00	150	Horizontal	Pass

802.11n20 LOW CHANNEL

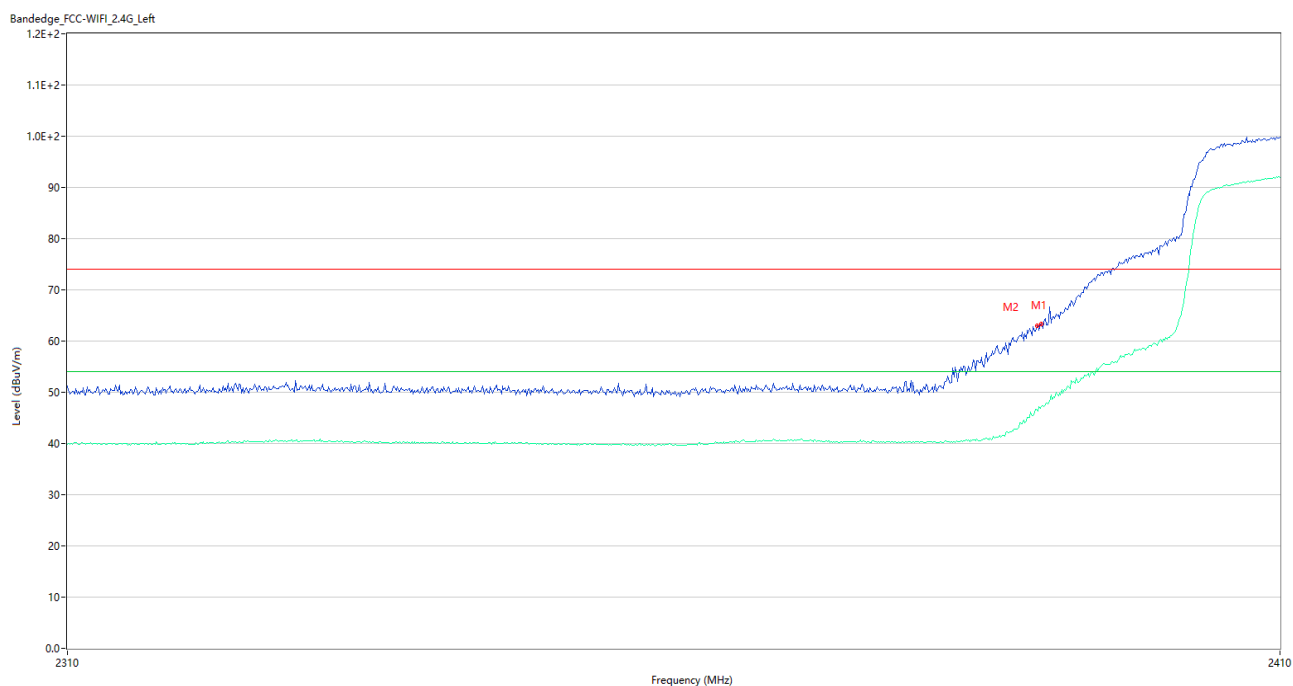

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	63.32	-4.87	74.0	10.68	Peak	33.00	150	Horizontal	Pass
1**	2390.000	47.12	-4.87	54.0	6.88	AV	33.00	150	Horizontal	Pass
2	2389.600	62.97	-4.85	74.0	11.03	Peak	58.00	150	Horizontal	Pass
2**	2389.600	46.43	-4.85	54.0	7.57	AV	58.00	150	Horizontal	Pass

802.11n20 HIGH CHANNEL

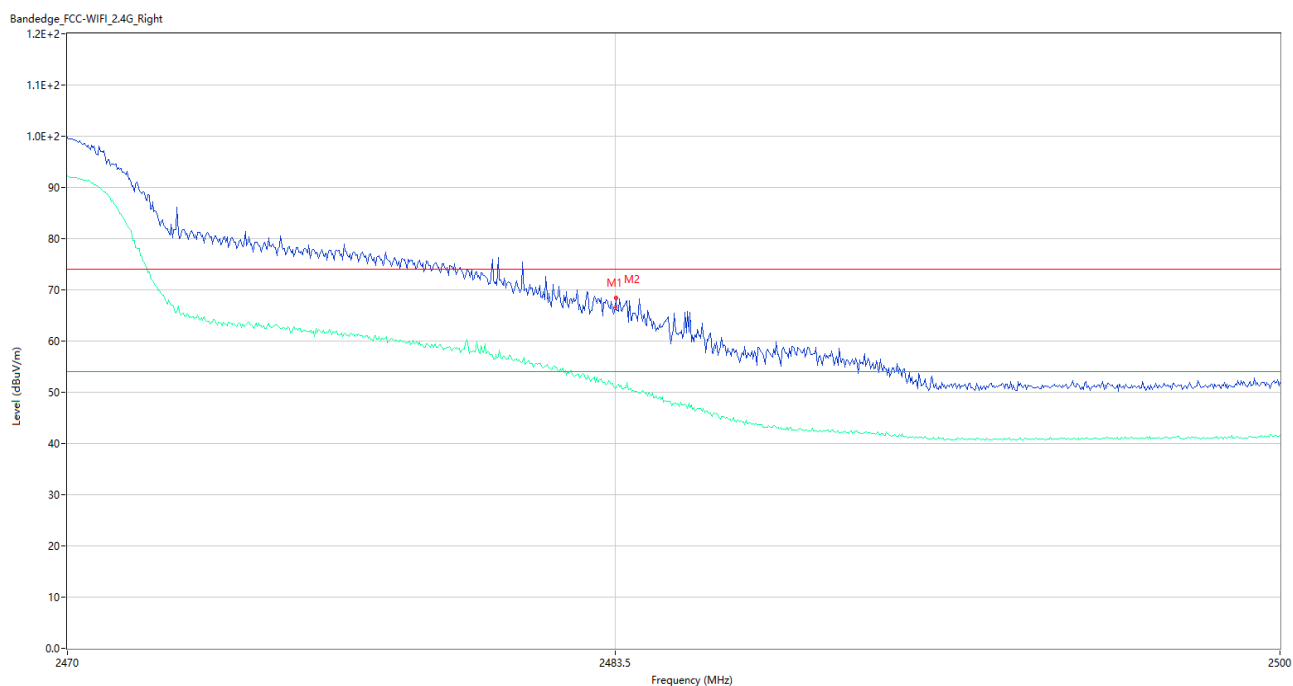

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	66.47	-3.78	74.0	7.53	Peak	34.00	150	Horizontal	Pass
1**	2483.500	50.75	-3.78	54.0	3.25	AV	34.00	150	Horizontal	Pass
2	2483.530	68.49	-3.78	74.0	5.51	Peak	13.00	150	Horizontal	Pass
2**	2483.530	50.83	-3.78	54.0	3.17	AV	13.00	150	Horizontal	Pass

A.8 Power Spectral Density (PSD)

Note: All the configurations were pre tested, only the worst configuration has been reported in this report.

Test Data

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-4.60	8
Middle	-4.98	8
High	-5.17	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-9.29	8
Middle	-7.65	8
High	-8.45	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-8.36	8
Middle	-8.22	8
High	-8.75	8

Test Plots

802.11b LOW CHANNEL




802.11b MIDDLE CHANNEL




802.11b HIGH CHANNEL




802.11g LOW CHANNEL

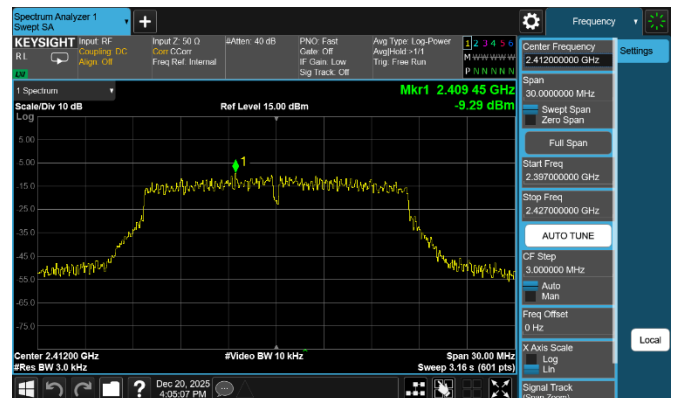


802.11g MIDDLE CHANNEL

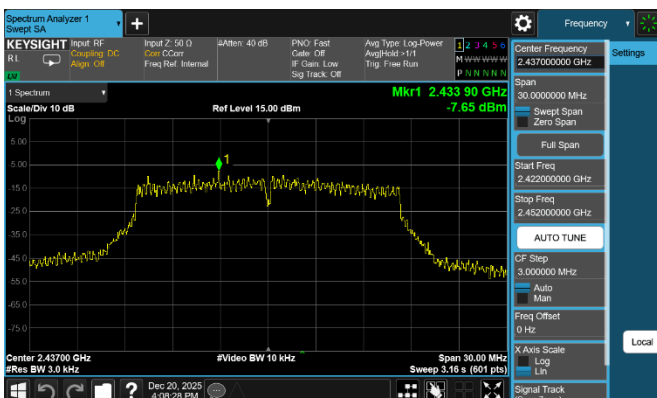


802.11g HIGH CHANNEL

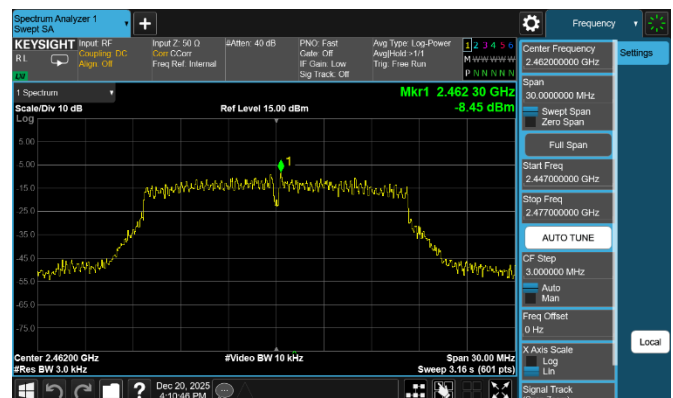

802.11n-20 MHz LOW CHANNEL

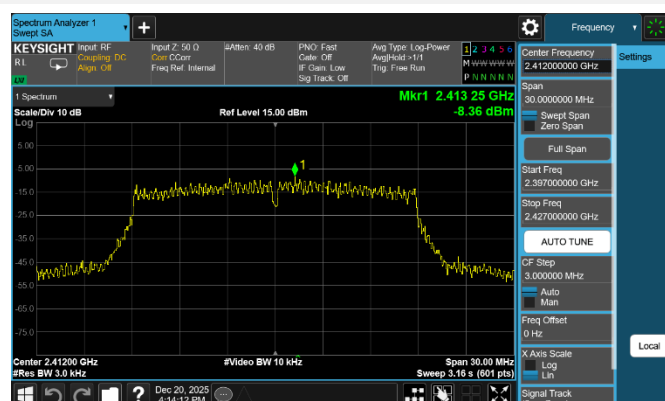

802.11 n-20 MHz MIDDLE CHANNEL

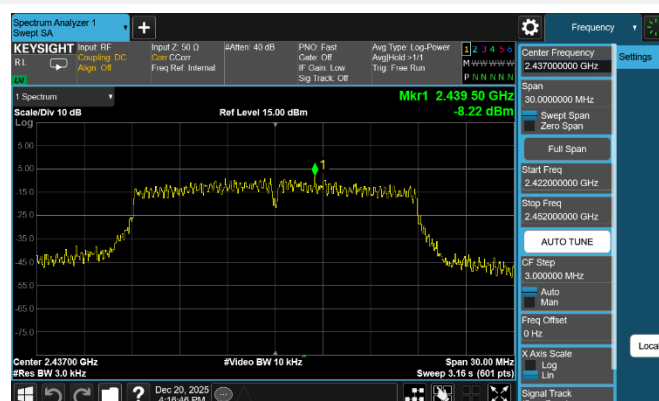

802.11n-20 MHz HIGH CHANNEL



ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SH25C1427-AR-1.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SH25C1427-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SH25C1427-AI.PDF”.

Statement

1. The Testing Center guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. For the report with Accreditation Symbol, the items marked with "☆" are not within the accredited scope.
3. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the test report stamp.
4. The test data and results are only valid for the tested samples provided by the customer.
5. This report shall not be partially reproduced without the written permission of the Testing Center.
6. Any objection shall be raised to the Testing Center within 30 days after receiving the report.

--END OF REPORT--