

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_12.38.06

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11b CH6 P=18.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

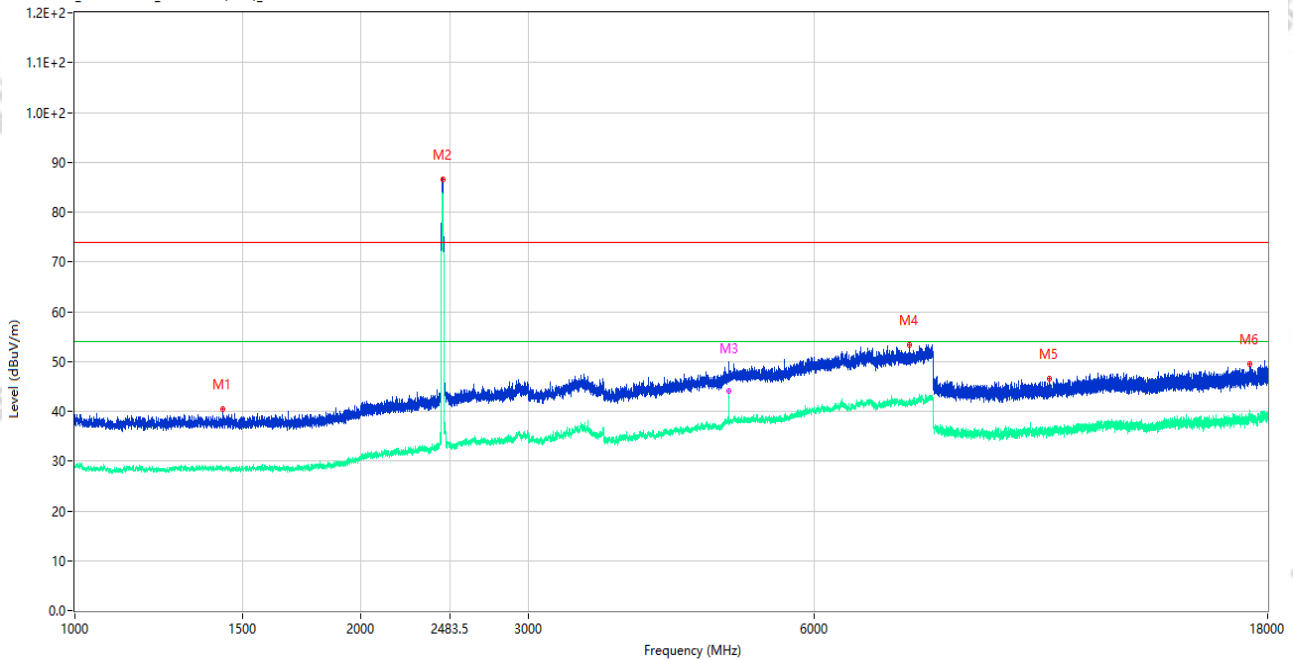

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1431.750	40.34	-15.98	74.0	33.66	Peak	353.00	150	Vertical	Pass
1**	1431.750	28.21	-15.98	54.0	25.79	AV	353.00	150	Vertical	Pass
2	2438.000	86.48	-12.38	74.0	-12.48	Peak	228.00	150	Vertical	N/A
2**	2438.000	83.42	-12.38	54.0	-29.42	AV	228.00	150	Vertical	N/A
3	4874.500	47.33	-2.25	74.0	26.67	Peak	0.00	150	Vertical	Pass
3**	4874.500	42.59	-2.25	54.0	11.41	AV	0.00	150	Vertical	Pass
4	7555.000	53.34	0.89	74.0	20.66	Peak	0.00	150	Vertical	Pass
4**	7555.000	41.82	0.89	54.0	12.18	AV	0.00	150	Vertical	Pass
5	10599.999	46.57	-3.67	74.0	27.43	Peak	220.00	150	Vertical	Pass
5**	10599.999	36.61	-3.67	54.0	17.39	AV	220.00	150	Vertical	Pass
6	17248.999	49.43	-0.64	74.0	24.57	Peak	133.00	150	Vertical	Pass
6**	17248.999	39.42	-0.64	54.0	14.58	AV	133.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_12.42.30

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11b CH6 P=18.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

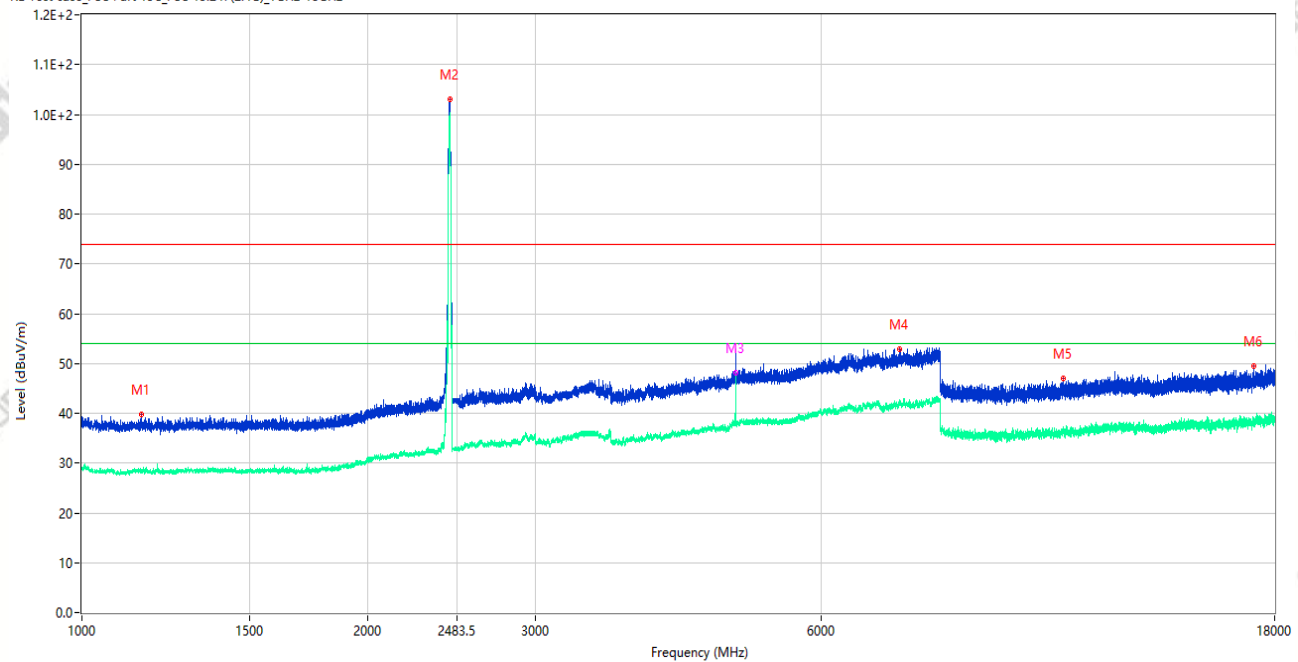

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1154.000	39.82	-15.63	74.0	34.18	Peak	0.00	150	Horizontal	Pass
1**	1154.000	28.46	-15.63	54.0	25.54	AV	0.00	150	Horizontal	Pass
2	2438.250	103.11	-12.38	74.0	-29.11	Peak	234.00	150	Horizontal	N/A
2**	2438.250	100.24	-12.38	54.0	-46.24	AV	234.00	150	Horizontal	N/A
3	4874.500	48.53	-2.25	74.0	25.47	Peak	360.00	150	Horizontal	Pass
3**	4874.500	46.00	-2.25	54.0	8.00	AV	360.00	150	Horizontal	Pass
4	7245.500	52.79	0.91	74.0	21.21	Peak	89.00	150	Horizontal	Pass
4**	7245.500	41.87	0.91	54.0	12.13	AV	89.00	150	Horizontal	Pass
5	10785.500	47.03	-3.04	74.0	26.97	Peak	204.00	150	Horizontal	Pass
5**	10785.500	36.31	-3.04	54.0	17.69	AV	204.00	150	Horizontal	Pass
6	17120.000	49.53	-0.19	74.0	24.47	Peak	0.00	150	Horizontal	Pass
6**	17120.000	38.40	-0.19	54.0	15.60	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_13.05.31

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11g CH6 P=17.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

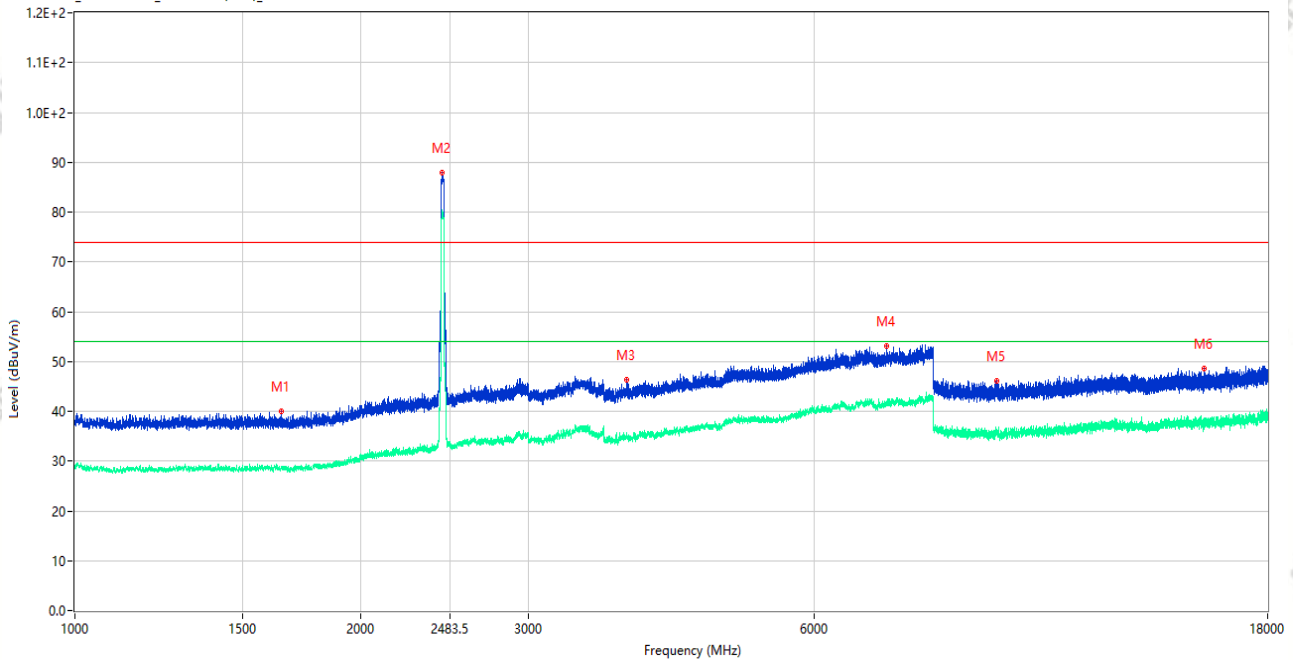

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1647.250	40.00	-16.29	74.0	34.00	Peak	360.00	150	Vertical	Pass
1**	1647.250	28.81	-16.29	54.0	25.19	AV	360.00	150	Vertical	Pass
2	2434.250	87.98	-12.32	74.0	-13.98	Peak	130.00	150	Vertical	N/A
2**	2434.250	80.04	-12.32	54.0	-26.04	AV	130.00	150	Vertical	N/A
3	3806.000	46.34	-4.33	74.0	27.66	Peak	4.00	150	Vertical	Pass
3**	3806.000	34.64	-4.33	54.0	19.36	AV	4.00	150	Vertical	Pass
4	7152.000	53.06	0.16	74.0	20.94	Peak	242.00	150	Vertical	Pass
4**	7152.000	41.80	0.16	54.0	12.20	AV	242.00	150	Vertical	Pass
5	9325.500	46.11	-5.23	74.0	27.89	Peak	360.00	150	Vertical	Pass
5**	9325.500	35.28	-5.23	54.0	18.72	AV	360.00	150	Vertical	Pass
6	15447.000	48.51	-1.76	74.0	25.49	Peak	350.00	150	Vertical	Pass
6**	15447.000	38.12	-1.76	54.0	15.88	AV	350.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_13.01.55

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11g CH6 P=17.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

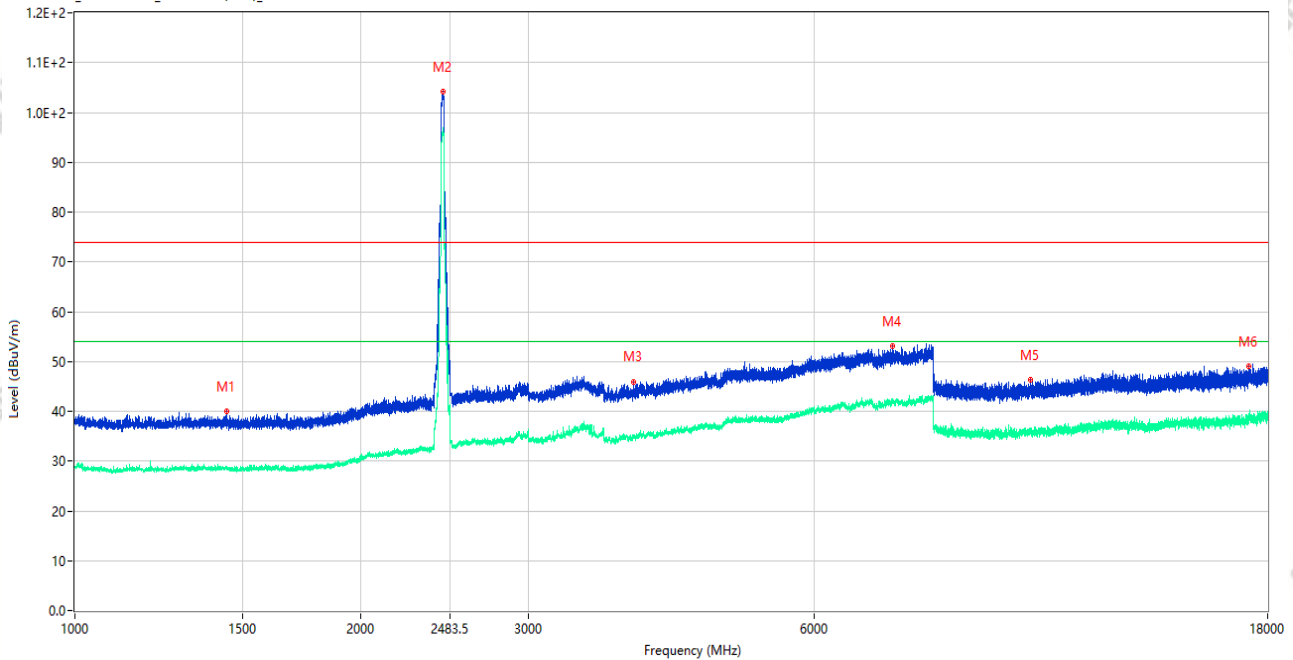

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1444.500	39.95	-15.91	74.0	34.05	Peak	87.00	150	Horizontal	Pass
1**	1444.500	28.07	-15.91	54.0	25.93	AV	87.00	150	Horizontal	Pass
2	2439.750	104.16	-12.37	74.0	-30.16	Peak	234.00	150	Horizontal	N/A
2**	2439.750	96.58	-12.37	54.0	-42.58	AV	234.00	150	Horizontal	N/A
3	3875.500	45.87	-4.84	74.0	28.13	Peak	321.00	150	Horizontal	Pass
3**	3875.500	35.00	-4.84	54.0	19.00	AV	321.00	150	Horizontal	Pass
4	7253.000	53.11	0.84	74.0	20.89	Peak	335.00	150	Horizontal	Pass
4**	7253.000	41.92	0.84	54.0	12.08	AV	335.00	150	Horizontal	Pass
5	10127.500	46.29	-4.02	74.0	27.71	Peak	10.00	150	Horizontal	Pass
5**	10127.500	35.27	-4.02	54.0	18.73	AV	10.00	150	Horizontal	Pass
6	17211.001	48.96	-0.33	74.0	25.04	Peak	10.00	150	Horizontal	Pass
6**	17211.001	38.17	-0.33	54.0	15.83	AV	10.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_13.19.29

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11n20 CH6 P=18.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

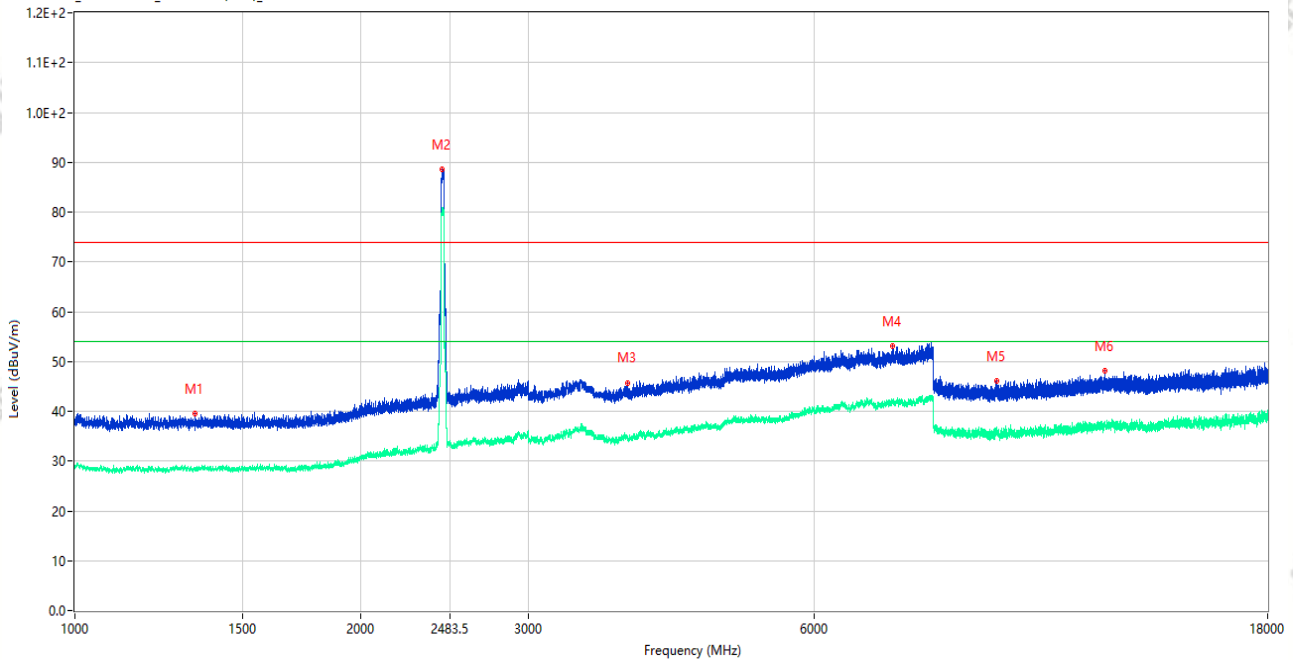

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1339.250	39.44	-16.07	74.0	34.56	Peak	0.00	150	Vertical	Pass
1**	1339.250	28.19	-16.07	54.0	25.81	AV	0.00	150	Vertical	Pass
2	2433.750	88.56	-12.32	74.0	-14.56	Peak	126.00	150	Vertical	N/A
2**	2433.750	80.82	-12.32	54.0	-26.82	AV	126.00	150	Vertical	N/A
3	3816.000	45.70	-4.73	74.0	28.30	Peak	299.00	150	Vertical	Pass
3**	3816.000	34.59	-4.73	54.0	19.41	AV	299.00	150	Vertical	Pass
4	7245.000	53.00	0.91	74.0	21.00	Peak	172.00	150	Vertical	Pass
4**	7245.000	41.87	0.91	54.0	12.13	AV	172.00	150	Vertical	Pass
5	9343.500	46.10	-5.25	74.0	27.90	Peak	205.00	150	Vertical	Pass
5**	9343.500	35.29	-5.25	54.0	18.71	AV	205.00	150	Vertical	Pass
6	12130.000	48.04	-2.85	74.0	25.96	Peak	205.00	150	Vertical	Pass
6**	12130.000	37.80	-2.85	54.0	16.20	AV	205.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_13.27.15

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11n20 CH6 P=18.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

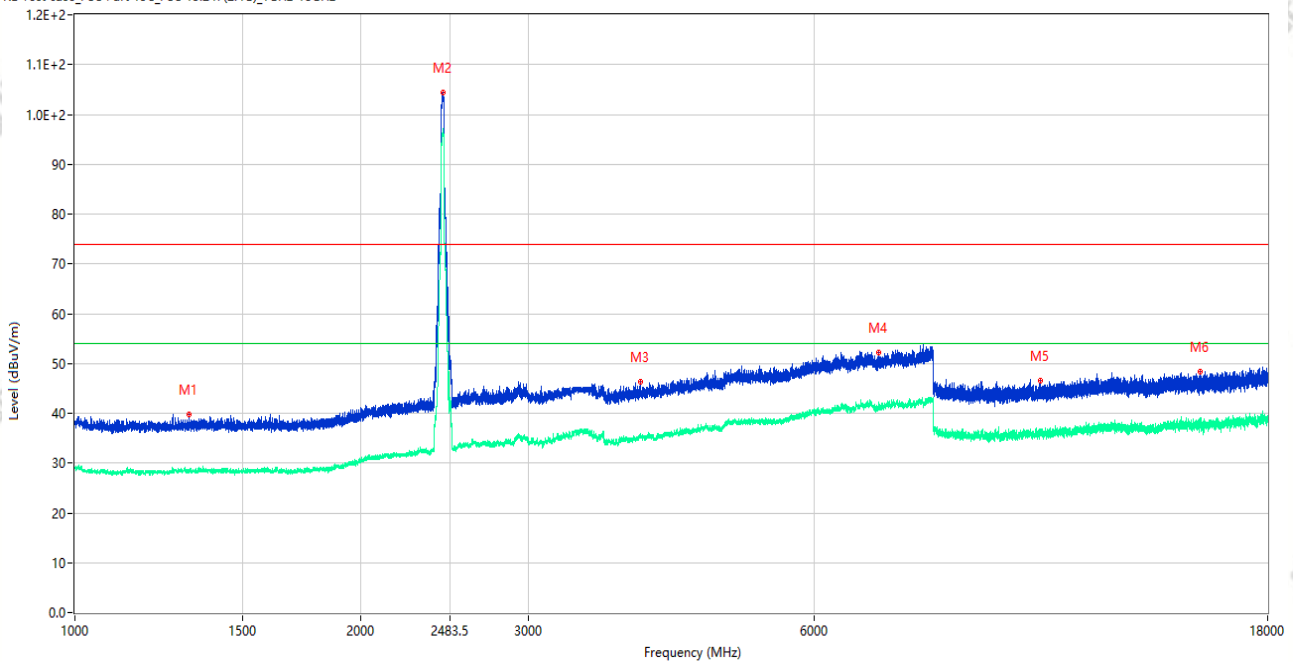

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1317.750	39.71	-15.91	74.0	34.29	Peak	118.00	150	Horizontal	Pass
1**	1317.750	28.04	-15.91	54.0	25.96	AV	118.00	150	Horizontal	Pass
2	2439.000	104.42	-12.37	74.0	-30.42	Peak	234.00	150	Horizontal	N/A
2**	2439.000	97.03	-12.37	54.0	-43.03	AV	234.00	150	Horizontal	N/A
3	3935.000	46.22	-3.64	74.0	27.78	Peak	61.00	150	Horizontal	Pass
3**	3935.000	35.15	-3.64	54.0	18.85	AV	61.00	150	Horizontal	Pass
4	7019.500	52.30	0.43	74.0	21.70	Peak	320.00	150	Horizontal	Pass
4**	7019.500	42.36	0.43	54.0	11.64	AV	320.00	150	Horizontal	Pass
5	10389.500	46.61	-3.32	74.0	27.39	Peak	264.00	150	Horizontal	Pass
5**	10389.500	36.12	-3.32	54.0	17.88	AV	264.00	150	Horizontal	Pass
6	15271.000	48.34	-1.30	74.0	25.66	Peak	134.00	150	Horizontal	Pass
6**	15271.000	37.86	-1.30	54.0	16.14	AV	134.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_12.30.50

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: Normal working Link(2.4G WIFI)


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

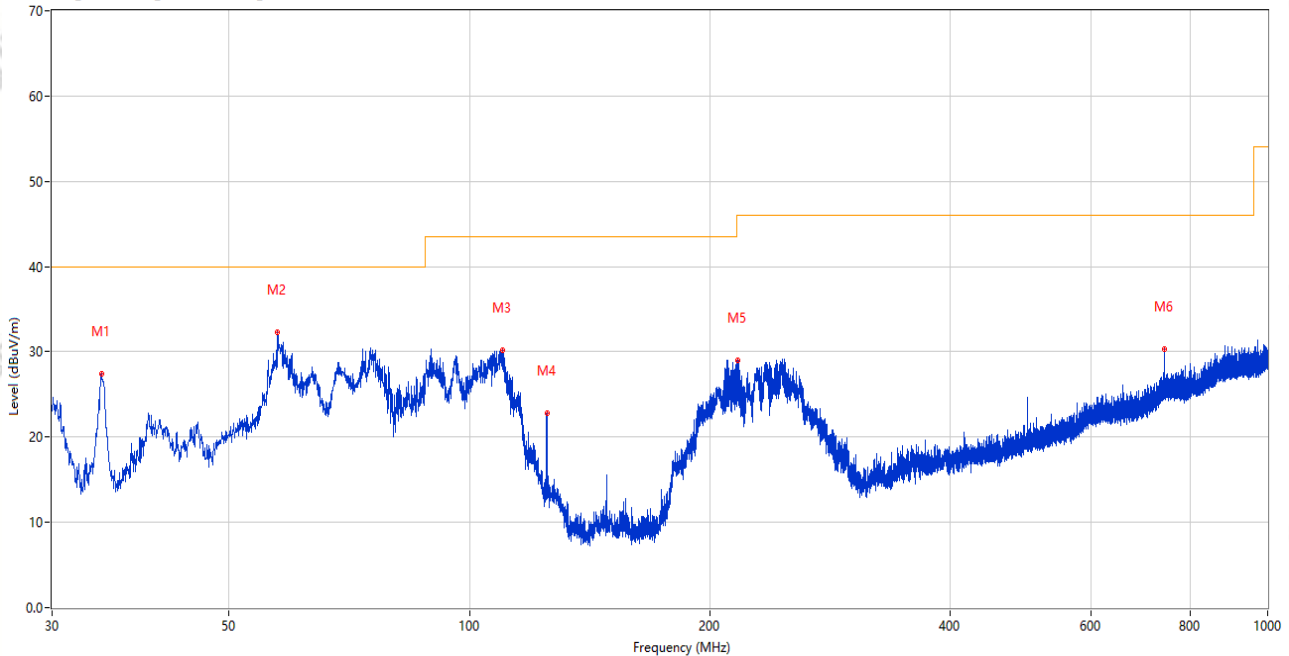

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	34.608	27.46	-27.90	40.0	12.54	Peak	176.00	100	Vertical	Pass
2	57.499	32.33	-25.53	40.0	7.67	Peak	28.00	100	Vertical	Pass
3	109.977	30.16	-26.57	43.5	13.34	Peak	249.00	100	Vertical	Pass
4	125.011	22.75	-28.74	43.5	20.75	Peak	360.00	100	Vertical	Pass
5	216.725	29.02	-26.07	46.0	16.98	Peak	199.00	100	Vertical	Pass
6	742.513	30.36	-11.97	46.0	15.64	Peak	37.00	100	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_12.27.36

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: Normal working Link(2.4G WIFI)


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

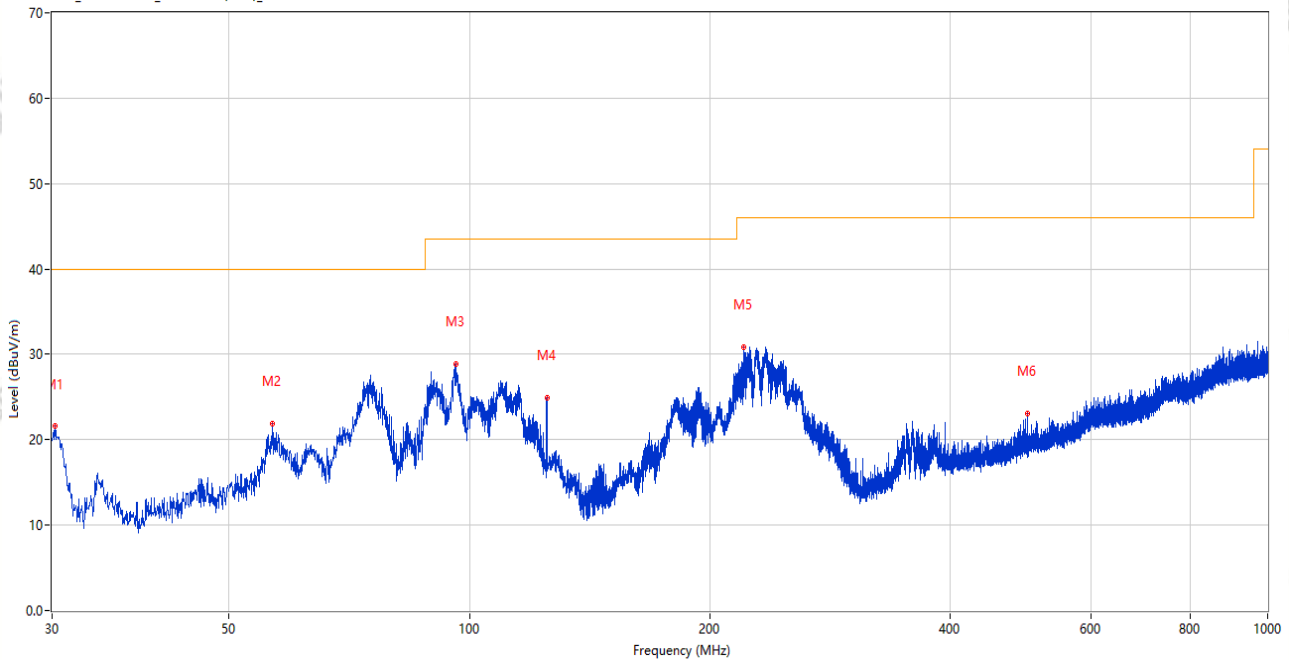

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.291	21.67	-28.94	40.0	18.33	Peak	113.00	100	Horizontal	Pass
2	56.627	21.88	-25.33	40.0	18.12	Peak	67.00	200	Horizontal	Pass
3	96.057	28.84	-26.51	43.5	14.66	Peak	183.00	200	Horizontal	Pass
4	125.011	24.97	-28.74	43.5	18.53	Peak	308.00	200	Horizontal	Pass
5	220.556	30.84	-25.76	46.0	15.16	Peak	299.00	100	Horizontal	Pass
6	499.965	23.05	-18.07	46.0	22.95	Peak	14.00	100	Horizontal	Pass