


Prüfbericht-Nr.: <i>Test Report No.:</i>	17047873 001	Auftrags-Nr.: <i>Order No.:</i>	164031231	Seite 1 von 133 <i>Page 1 of 133</i>																		
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	12.02.2015																			
Auftraggeber: <i>Client:</i>	APAT ELECTRICAL LTD Rm2406, Block A, HuangDu Plaza, 3008YiaTian Road, Shenzhen, China																					
Prüfgegenstand: <i>Test item:</i>	BlueTooth Remote Controller																					
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	NS-SSTK2B																					
Auftrags-Inhalt: <i>Order content:</i>	FCC/IC Certification																					
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.249 CFR47 FCC Part 15: Subpart C Section 15.209 RSS-210 Issue 8 December 2010 RSS-Gen Issue 3 December 2010 FCC KDB Publication 447498 v05r01 RSS-102 Issue 4 March 2010																					
Wareneingangsdatum: <i>Date of receipt:</i>	17.03.2015																					
Prüfmuster-Nr.: <i>Test sample No.:</i>	A01																					
Prüfzeitraum: <i>Testing period:</i>	17.03.2015 - 15.04.2015																					
Ort der Prüfung: <i>Place of testing:</i>	Keyway Testing Technology Co., Ltd.																					
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.																					
Prüfergebnis*: <i>Test result*:</i>	Pass																					
geprüft von / tested by:  07.05.2015 Owen Tian/Senior Project Engineer <table border="1"><thead><tr><th>Datum</th><th>Name / Stellung</th><th>Unterschrift</th></tr><tr><th>Date</th><th>Name / Position</th><th>Signature</th></tr></thead><tbody><tr><td></td><td></td><td></td></tr></tbody></table>		Datum	Name / Stellung	Unterschrift	Date	Name / Position	Signature				kontrolliert von / reviewed by:  07.05.2015 Sam Lin/Technical Certifier <table border="1"><thead><tr><th>Datum</th><th>Name / Stellung</th><th>Unterschrift</th></tr><tr><th>Date</th><th>Name / Position</th><th>Signature</th></tr></thead><tbody><tr><td></td><td></td><td></td></tr></tbody></table>			Datum	Name / Stellung	Unterschrift	Date	Name / Position	Signature			
Datum	Name / Stellung	Unterschrift																				
Date	Name / Position	Signature																				
Datum	Name / Stellung	Unterschrift																				
Date	Name / Position	Signature																				
Sonstiges / Other:																						
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>																				
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested																						
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>																						

Prüfbericht - Nr.: 17047873 001
Test Report No.

Seite 2 von 133
Page 2 of 133

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH AND 99% BANDWIDTH

RESULT: Pass

5.1.3 SPURIOUS EMISSION, FIELD STRENGTH OF FUNDAMENTAL & HARMONICS

RESULT: Pass

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: Pass

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3.	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	7
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	7
3.5	SUBMITTED DOCUMENTS	8
4.	TEST SET-UP AND OPERATION MODES	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	9
4.2	TEST OPERATION AND TEST SOFTWARE	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	9
4.5	TEST SETUP DIAGRAM	10
5.	TEST RESULTS	11
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	11
5.1.1	<i>Antenna Requirement</i>	<i>11</i>
5.1.2	<i>20dB Bandwidth and 99% Bandwidth.....</i>	<i>12</i>
5.1.3	<i>Spurious Emission, Field strength of fundamental & harmonics</i>	<i>13</i>
6.	SAFETY HUMAN EXPOSURE	129
6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE.....	129
6.1.1	<i>Electromagnetic Fields.....</i>	<i>129</i>
7.	PHOTOGRAPHS OF THE TEST SET-UP	130
8.	LIST OF TABLES	133
9.	LIST OF PHOTOGRAPHS	133

1. General Remarks

1.1 Complementary Materials

None.

2. Test Sites

2.1 Test Facilities

Keyway Testing Technology Co., Ltd.

(FCC Registration No.: 370994)

(Test site Industry Canada No.: 9868A)

Buliding 1, Baishun Industrial Zone, Zhangmutou Town,
Dongguan, Guangdong, China

The tests at the test site have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 26,15
Bilog Antenna (30MHz - 1GHz)	ETS-LINDGREEN	3142D	135452	Apr. 26,15
Loop antenna (9kHz - 30MHz)	teseq	HLA6120	22032	Apr. 29,15
3m Semi-anechoic Chamber	ETS-LINDGREEN	966	KW01	Apr. 26,15
Signal Amplifier	SONOMA	310	187016	Apr. 26,15
Signal Amplifier	Agilent	8449B	3008A00251	Apr. 26,15
RF Cable	IMRO	IMRO-400	966 Cable 1#	Apr. 26,15
Antenna Connect	Keyway	KW032	032	Apr. 26,15
MULTI-DEVICE Controller	ETS-LINDGREEN	2090	126913	N/A
Horn Antenna (1GHz - 18GHz)	DAZE	ZN30701	11003	Apr. 26,15
Horn Antenna (18GHz - 26.5GHz)	SCHWARZBECK	BBHA9170	9170-068	Apr. 26,15
Spectrum Analyzer	Agilent	8593E	3911A04271	Apr. 26,15
Spectrum Analyzer	Agilent	E4408B	MY44211125	Apr. 29,15
Signal Amplifier	DAZE	ZN3380C	11001	Apr. 26,15

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

Parameter	Uncertainty
Radiated emission of transmitter, valid up to 26.5 GHz	$< \pm 3.2 \text{ dB}$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

Keyway Testing Technology Co., Ltd. Test facility located Buliding 1, Baishun Industrial Zone, Zhangmutou Town, Dongguan, Guangdong, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a Bluetooth remote controller. It operates at 2.4GHz ISM frequency band. For details refer to the User Manual and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

Technical Specification	Value
Kind of Equipment	BlueTooth Self Timer Shutter
Type Designation	NS-SSTK2B
FCC ID	2AEB3K2B
IC	20010-TK2B
Bluetooth version	3.0
Operating Frequency band	2402 – 2480MHz
Channel separation	1MHz
Extreme Temperature Range	-20~+45°C
Operation Voltage	DC 3V
Modulation	FHSS (GFSK, 8DPSK, $\pi/4$ DQPSK)
Antenna Gain	2.3dBi

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth mode
 - 1. Transmitting
 - 2. Receiving
- B. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

Prüfbericht - Nr.: 17047873 001*Test Report No.***Seite 8 von 133***Page 8 of 133*

3.5 Submitted Documents

- Bill of Material
- PCB Layout
- Photo Document
- Circuit Diagram
- Instruction Manual
- Rating Label

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.4: 2009.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested together with the following accessories:

Description	Manufacturer	Part No.	S/N
Notebook	Lenovo	Lenovo G475	GB14477457

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test


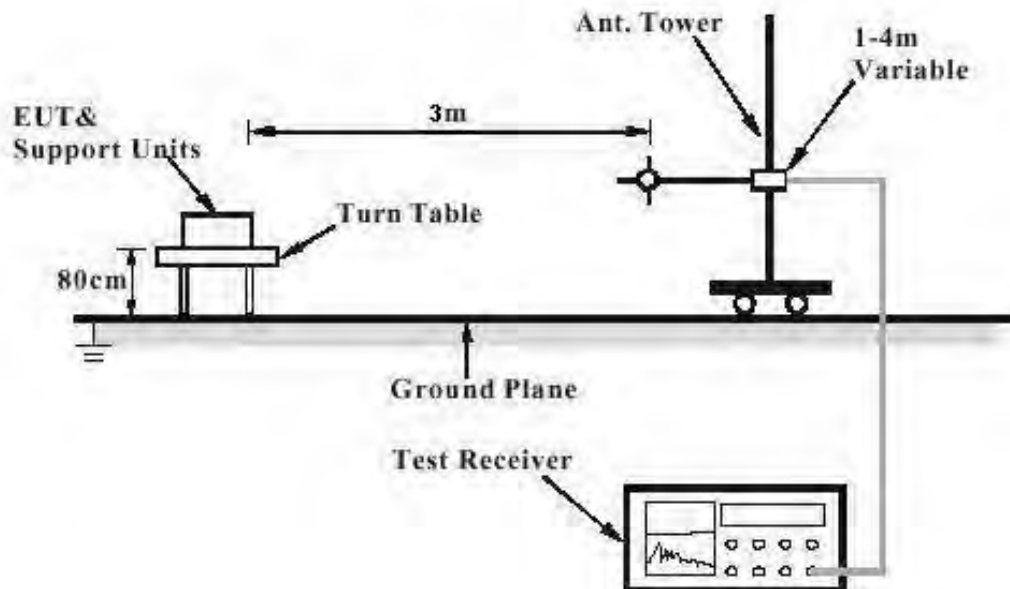


Diagram of Measurement Equipment Configuration for Transmitter Measurement

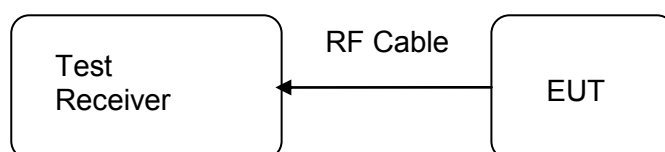

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass**

Test standard	:	Part 15.203 RSS-Gen 7.1.4
Limit	:	the use of antennas with directional gains that do not exceed 6dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 2.3dBi, therefore the EUT is considered sufficient to comply with the provision.

5.1.2 20dB Bandwidth and 99% Bandwidth

RESULT:
Pass

Date of testing : 2015-03-17
 Test standard : FCC Part 15.249
 RSS-210 A8.1(a)
 Basic standard : ANSI C63.4: 2009
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A.1
 Ambient temperature : 24.8°C
 Relative humidity : 56%
 Atmospheric pressure : 101kPa

Table 4: Test result of 20dB & 99% Bandwidth

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)		99% Bandwidth (MHz)	
		BDR	EDR	BDR	EDR
Low Channel	2402	0.928	1.263	0.890	1.182
Mid Channel	2441	0.927	1.256	0.863	1.175
High Channel	2480	0.931	1.257	0.866	1.175

Prüfbericht - Nr.: 17047873 001

Test Report No.

Seite 13 von 133

Page 13 of 133

5.1.3 Spurious Emission, Field strength of fundamental & harmonics**RESULT:****Pass**

Date of testing : 2015-04-15
Test standard : FCC part 15.209, FCC part 15.249(a)
RSS-210 Clause 2.2
Basic standard : ANSI C63.4: 2009
Limits : FCC part 15.209(a)
Kind of test site : 3m Semi-Anechoic Chamber

Test setup

Test Channel : Low/ Middle/ High
Operation mode : A.1
Ambient temperature : 24.8°C
Relative humidity : 56%
Atmospheric pressure : 101kPa


For details refer to following test plot.

Test Plot of Spurious Emission of transmitting



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 93 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

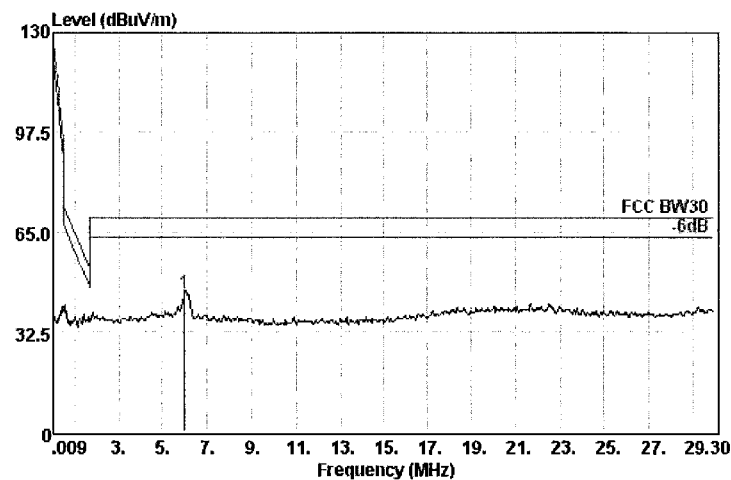


Site : site
 Condition: FCC BW30 3m HLA6120 X
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	6.01	29.47	71.61	2.73	44.87	69.50	-24.63	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 110 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

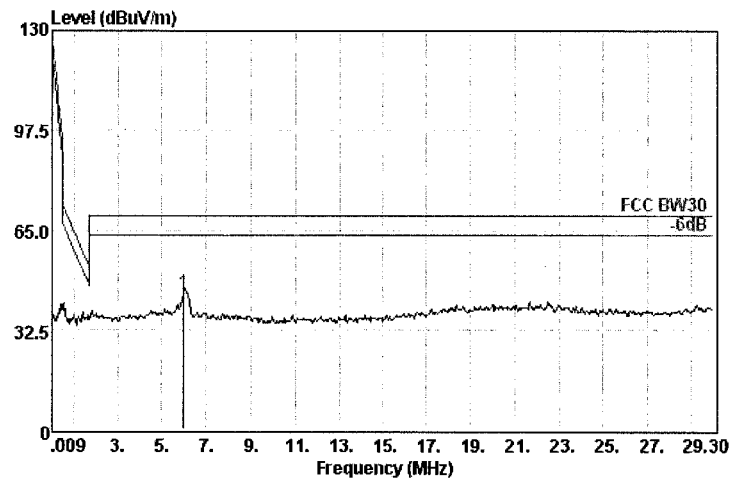


Site : site
 Condition: FCC BW30 3m HLA6120 X
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	6.01	29.47	71.10	2.73	44.36	69.50	-25.14	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 111 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

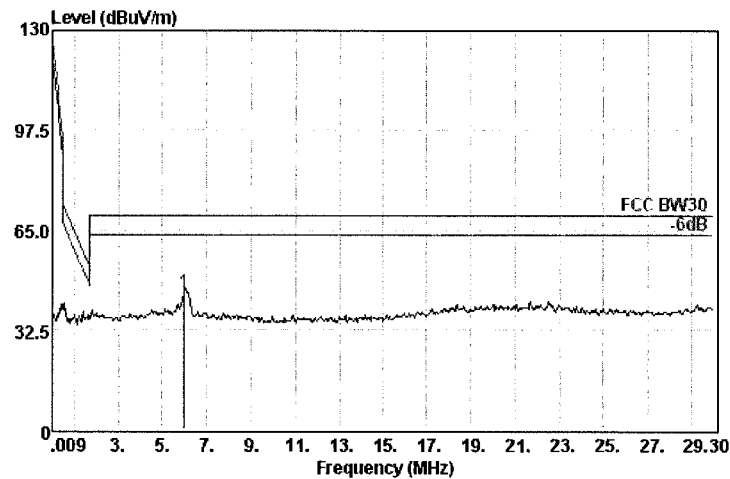


Site : site
 Condition: FCC BW30 3m HLA6120 X
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	6.01	29.47	71.33	2.73	44.59	69.50	-24.91	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 94 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

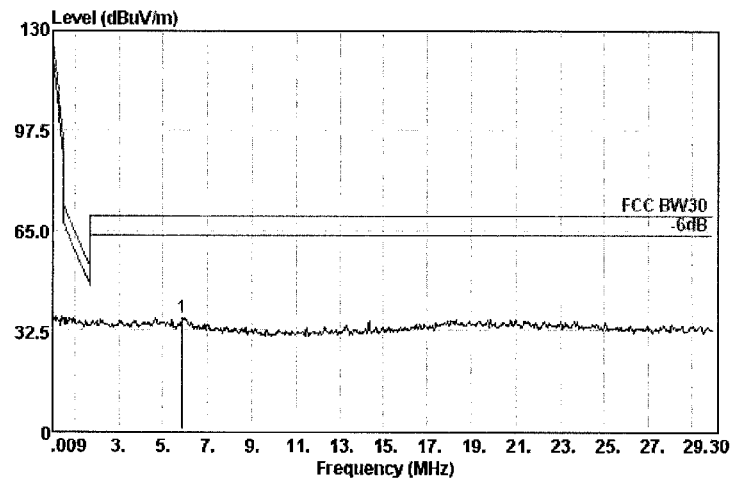


Site : 966 Chamber
 Condition: FCC BW30 3m HLA6120 X
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.6'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	5.86	29.39	62.84	2.74	36.19	69.50	-33.31	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 136 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

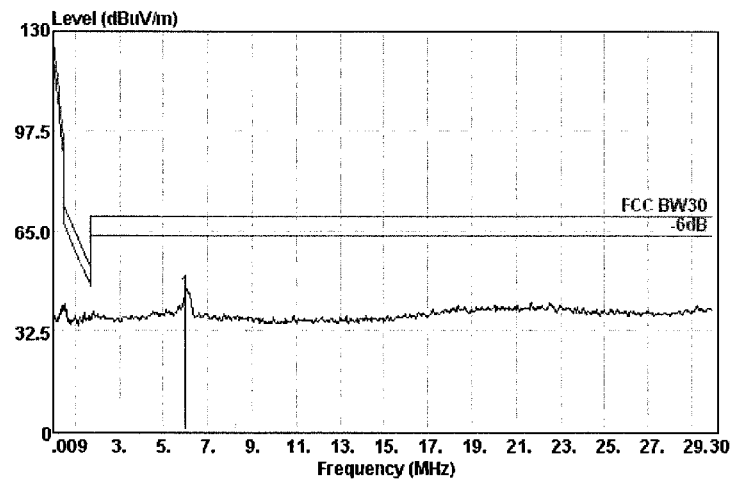


Site : 966 Chamber
 Condition: FCC BW30 3m HLA6120 X
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	6.01	29.47	71.07	2.73	44.33	69.50	-25.17	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhongmoutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 137 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

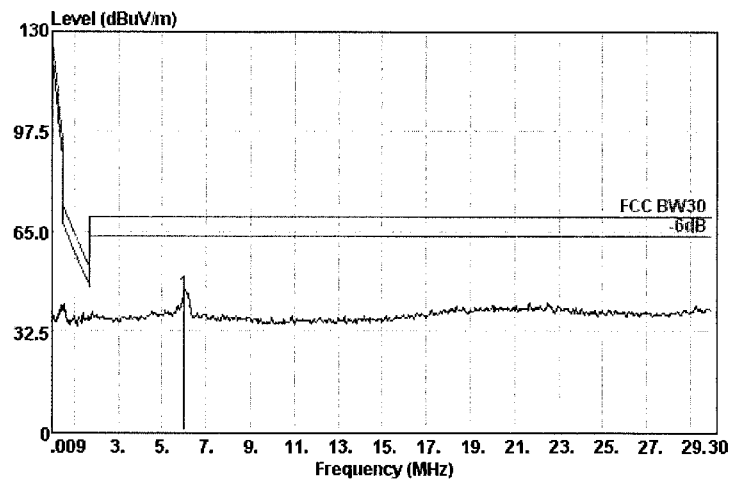


Site : 966 Chamber
 Condition: FCC BW30 3m HLA6120 X
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : High

		Preamp	Read	Cable		Limit	Over	
Freq	Factor	Level	Loss	Level	Line	Limit	Remark	
MHz		dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	6.01	29.47	71.12	2.73	44.38	69.50	-25.12	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 95 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

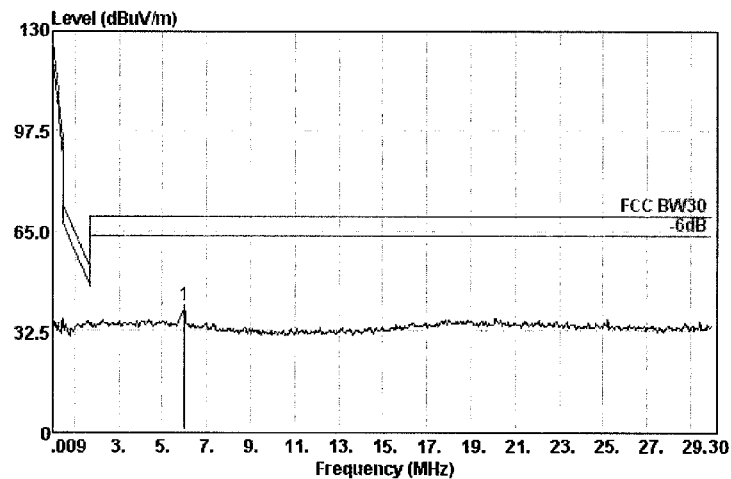


Site : 966 Chamber
 Condition: FCC BW30 3m HLA6120 X
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	6.01	29.47	67.11	2.73	40.37	69.50	-29.13	Peak



Keyway Testing Technology Co.,Ltd.
 Beishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 138 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

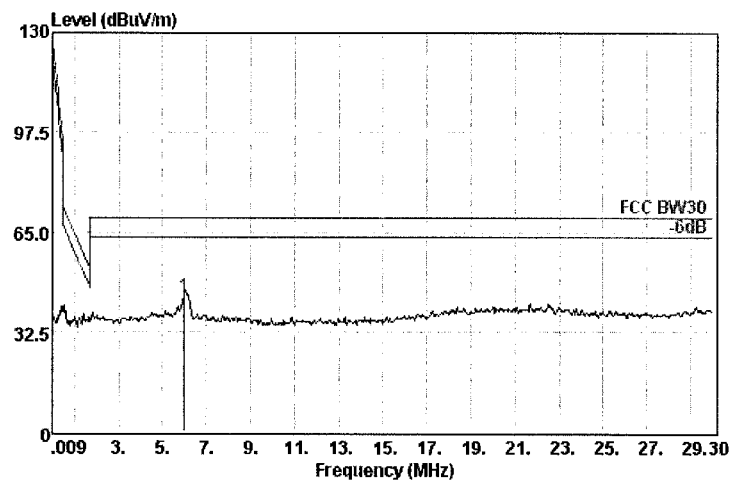


Site : 966 Chamber
 Condition: FCC BW30 3m HLA6120 X
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	6.01	29.47	70.83	2.73	44.09	69.50	-25.41	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 139 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

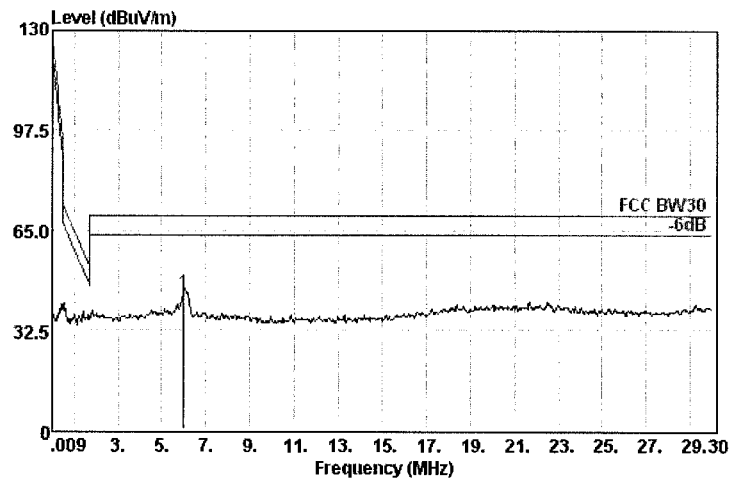


Site : 966 Chamber
 Condition: FCC BW30 3m HLA6120 X
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	6.01	29.47	70.96	2.73	44.22	69.50	-25.28	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 89 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

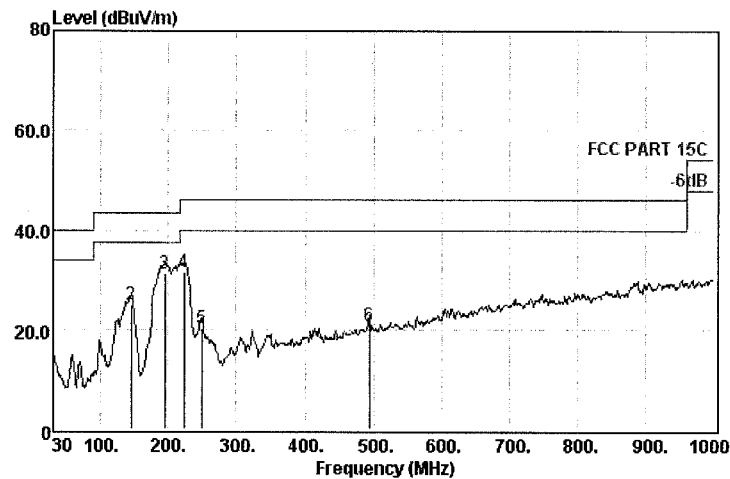


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	28.66	0.56	16.61	40.00	-23.39	QP
2	144.46	31.23	46.32	1.22	24.98	43.50	-18.52	QP
3	194.90	31.11	50.38	1.46	31.27	43.50	-12.23	QP
4	222.06	30.96	49.04	1.53	31.67	46.00	-14.33	QP
5	248.25	30.96	36.59	1.70	20.18	46.00	-25.82	QP
6	493.66	30.59	30.17	2.77	20.95	46.00	-25.05	QP



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 90 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

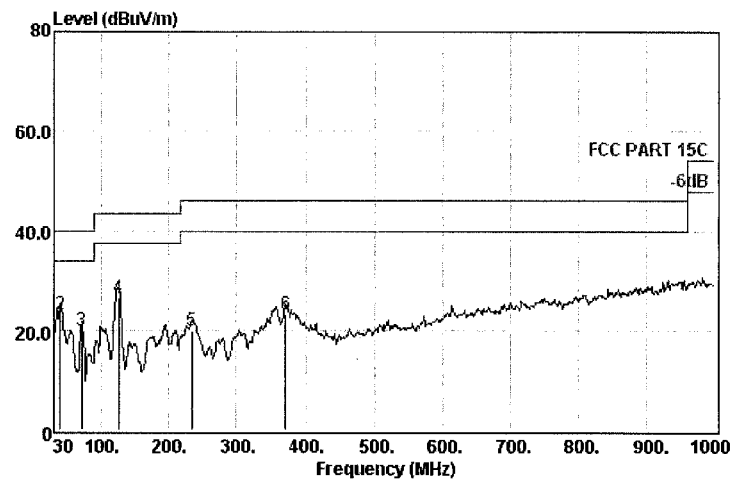


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	35.86	0.56	23.81	40.00	-16.19	QP
2	39.70	31.37	41.02	0.56	23.29	40.00	-16.71	QP
3	70.74	31.32	42.78	0.85	19.85	40.00	-20.15	QP
4	125.06	31.22	48.29	1.12	26.59	43.50	-16.91	QP
5	233.70	30.93	36.95	1.61	20.07	46.00	-25.93	QP
6	371.44	30.62	35.38	2.27	23.20	46.00	-22.80	QP



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 112 File: D:\966 data\15Report\15KW020401CHY.EM6 (135)

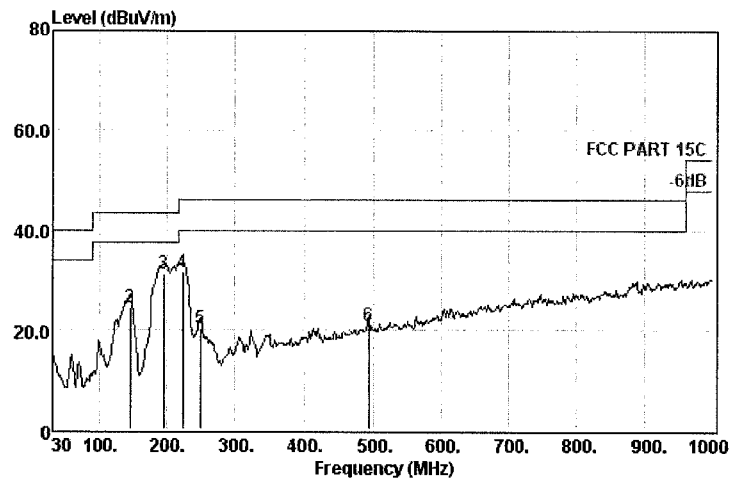


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	29.17	0.56	17.12	40.00	-22.88	QP
2	144.46	31.23	45.70	1.22	24.36	43.50	-19.14	QP
3	194.90	31.11	50.35	1.46	31.24	43.50	-12.26	QP
4	222.06	30.96	48.95	1.53	31.58	46.00	-14.42	QP
5	248.25	30.96	36.58	1.70	20.17	46.00	-25.83	QP
6	493.66	30.59	30.08	2.77	20.86	46.00	-25.14	QP



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 113 File: D:\966 data\15Report\15KW020401CHY.EM6 (135)

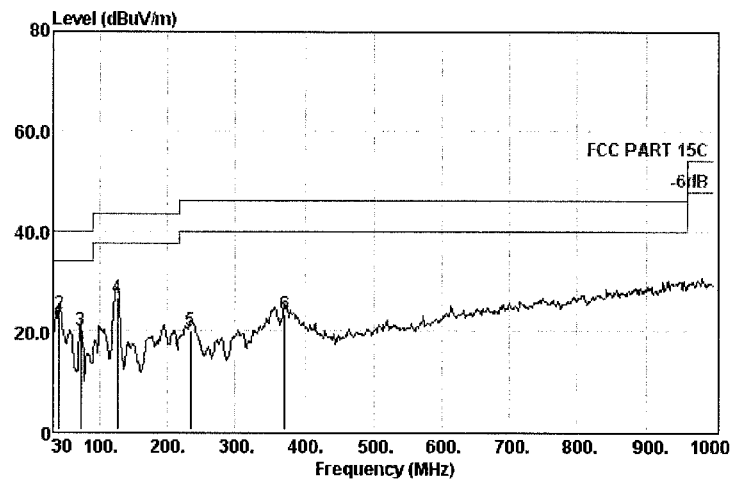


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	36.86	0.56	24.81	40.00	-15.19	QP
2	39.70	31.37	40.95	0.56	23.22	40.00	-16.78	QP
3	70.74	31.32	42.77	0.85	19.84	40.00	-20.16	QP
4	125.06	31.22	48.28	1.12	26.58	43.50	-16.92	QP
5	233.70	30.93	36.93	1.61	20.05	46.00	-25.95	QP
6	371.44	30.62	35.30	2.27	23.12	46.00	-22.88	QP



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 114 File: D:\966 data\15Report\15KW020401CHY.EM6 (135)

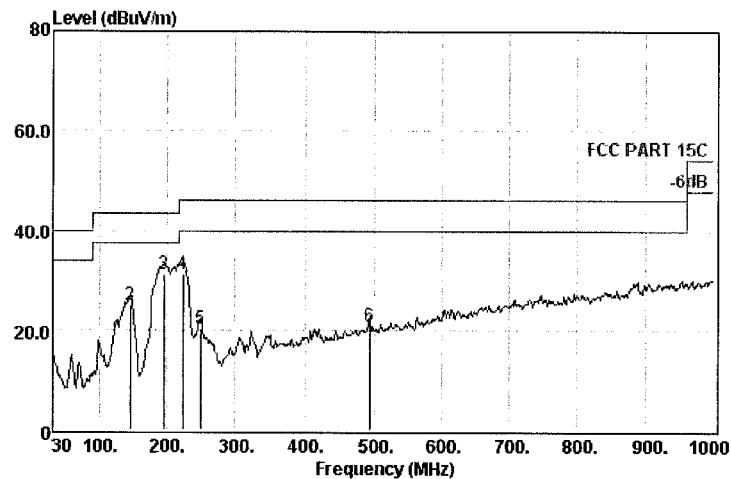


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9°C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	28.58	0.56	16.53	40.00	-23.47	QP
2	144.46	31.23	46.32	1.22	24.98	43.50	-18.52	QP
3	194.90	31.11	50.25	1.46	31.14	43.50	-12.36	QP
4	222.06	30.96	48.63	1.53	31.26	46.00	-14.74	QP
5	248.25	30.96	36.56	1.70	20.15	46.00	-25.85	QP
6	493.66	30.59	30.16	2.77	20.94	46.00	-25.06	QP



Keyway Testing Technology Co.,Ltd.
 Beishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 115 File: D:\966 data\15Report\15KW020401CHY.EM6 (135)

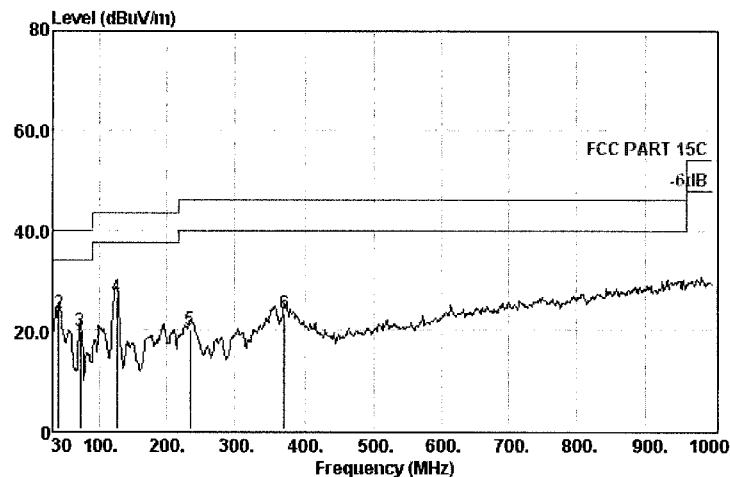


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	35.91	0.56	23.86	40.00	-16.14	QP
2	39.70	31.37	40.89	0.56	23.16	40.00	-16.84	QP
3	70.74	31.32	42.61	0.85	19.68	40.00	-20.32	QP
4	125.06	31.22	48.22	1.12	26.52	43.50	-16.98	QP
5	233.70	30.93	36.90	1.61	20.02	46.00	-25.98	QP
6	371.44	30.62	35.33	2.27	23.15	46.00	-22.85	QP



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 96 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

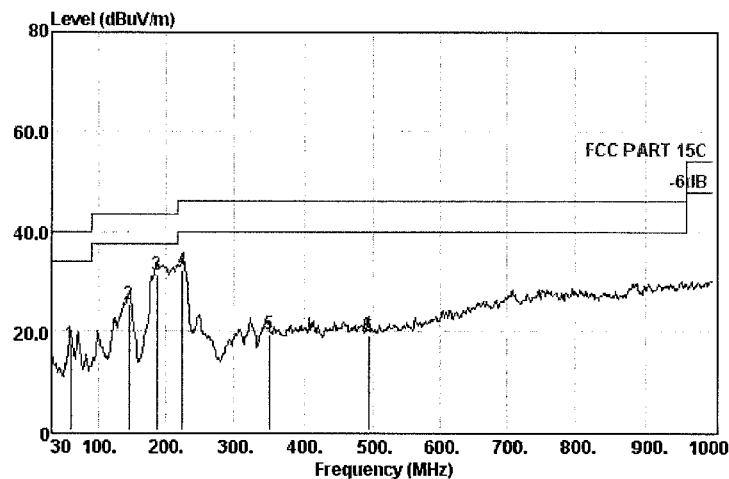


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	57.16	31.36	40.24	0.75	17.36	40.00	-22.64	QP
2	144.46	31.23	46.70	1.22	25.36	43.50	-18.14	QP
3	186.17	31.13	50.74	1.39	31.21	43.50	-12.29	QP
4	224.00	30.95	49.32	1.53	32.05	46.00	-13.95	QP
5	350.10	30.66	32.41	2.10	19.36	46.00	-26.64	QP
6	493.66	30.59	28.37	2.77	19.15	46.00	-26.85	QP



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 97 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

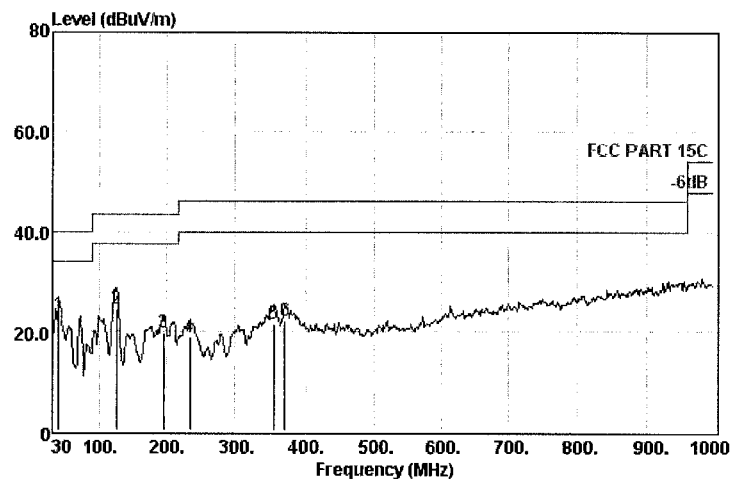


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	39.70	31.37	40.79	0.56	23.06	40.00	-16.94	QP
2	125.06	31.22	46.06	1.12	24.36	43.50	-19.14	QP
3	194.90	31.11	38.79	1.46	19.68	43.50	-23.82	QP
4	233.70	30.93	35.47	1.61	18.59	46.00	-27.41	QP
5	354.95	30.64	33.93	2.18	21.39	46.00	-24.61	QP
6	371.44	30.62	34.07	2.27	21.89	46.00	-24.11	QP



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhongmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 140 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

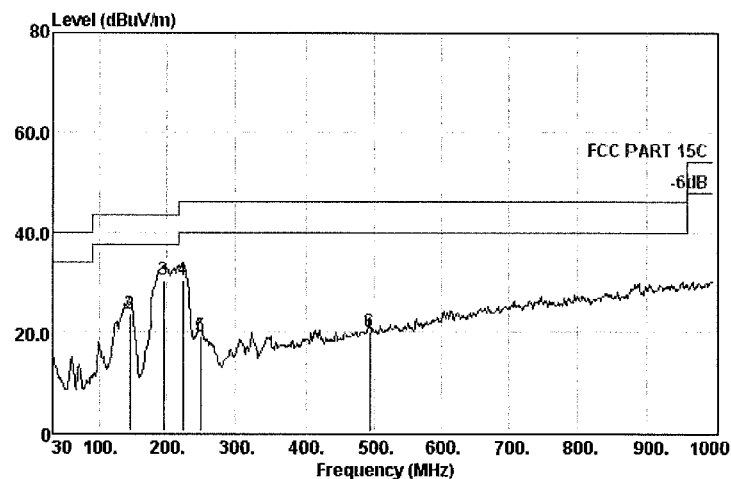


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	28.17	0.56	16.12	40.00	-23.88	QP
2	144.46	31.23	44.70	1.22	23.36	43.50	-20.14	QP
3	194.90	31.11	49.30	1.46	30.19	43.50	-13.31	QP
4	222.06	30.96	47.70	1.53	30.33	46.00	-15.67	QP
5	248.25	30.96	35.58	1.70	19.17	46.00	-26.83	QP
6	493.66	30.59	29.08	2.77	19.86	46.00	-26.14	QP



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 141 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

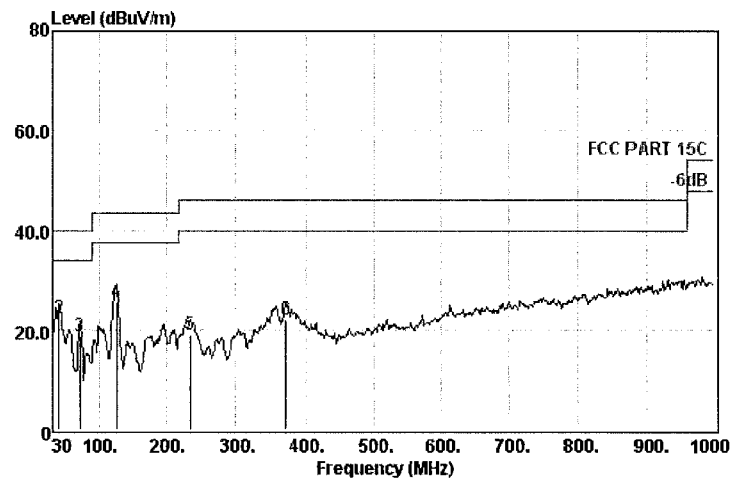


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	35.86	0.56	23.81	40.00	-16.19	QP
2	39.70	31.37	39.95	0.56	22.22	40.00	-17.78	QP
3	70.74	31.32	41.77	0.85	18.84	40.00	-21.16	QP
4	125.06	31.22	47.28	1.12	25.58	43.50	-17.92	QP
5	233.70	30.93	35.93	1.61	19.05	46.00	-26.95	QP
6	371.44	30.62	34.30	2.27	22.12	46.00	-23.88	QP



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 142 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

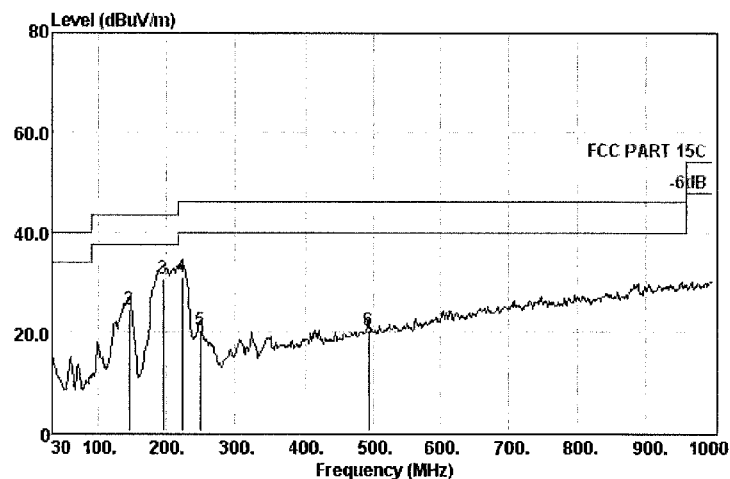


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	28.41	0.56	16.36	40.00	-23.64	QP
2	144.46	31.23	45.69	1.22	24.35	43.50	-19.15	QP
3	194.90	31.11	49.74	1.46	30.63	43.50	-12.87	QP
4	222.06	30.96	48.42	1.53	31.05	46.00	-14.95	QP
5	248.25	30.96	36.74	1.70	20.33	46.00	-25.67	QP
6	493.66	30.59	29.57	2.77	20.35	46.00	-25.65	QP



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 143 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

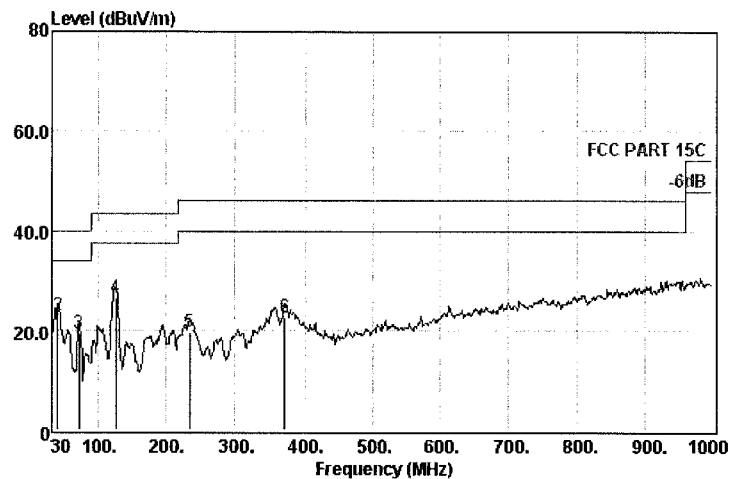


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	35.58	0.56	23.53	40.00	-16.47	QP
2	39.70	31.37	40.75	0.56	23.02	40.00	-16.98	QP
3	70.74	31.32	42.26	0.85	19.33	40.00	-20.67	QP
4	125.06	31.22	48.05	1.12	26.35	43.50	-17.15	QP
5	233.70	30.93	36.56	1.61	19.68	46.00	-26.32	QP
6	371.44	30.62	34.83	2.27	22.65	46.00	-23.35	QP



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 98 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

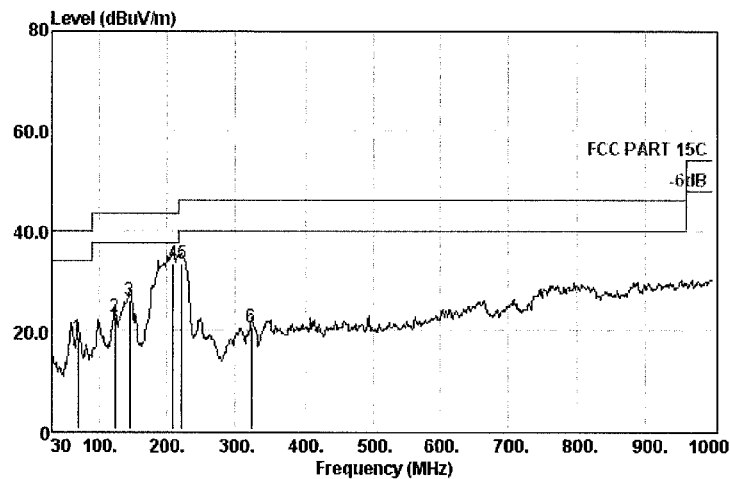


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	68.80	31.32	41.51	0.85	18.52	40.00	-21.48	QP
2	123.12	31.23	44.24	1.12	22.57	43.50	-20.93	QP
3	144.46	31.23	47.32	1.22	25.98	43.50	-17.52	QP
4	208.48	31.08	51.64	1.46	33.43	43.50	-10.07	QP
5	221.09	30.97	50.84	1.53	33.41	46.00	-12.59	QP
6	322.94	30.83	34.93	2.02	20.56	46.00	-25.44	QP



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 99 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

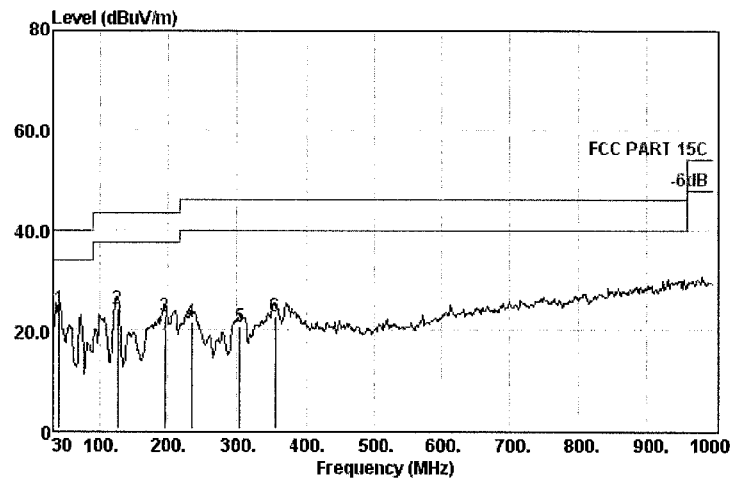


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	39.70	31.37	41.69	0.56	23.96	40.00	-16.04	QP
2	125.06	31.22	45.76	1.12	24.06	43.50	-19.44	QP
3	194.90	31.11	41.70	1.46	22.59	43.50	-20.91	QP
4	233.70	30.93	38.31	1.61	21.43	46.00	-24.57	QP
5	303.54	30.92	35.71	1.94	20.63	46.00	-25.37	QP
6	354.95	30.64	35.21	2.18	22.67	46.00	-23.33	QP



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhongshan
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 144 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

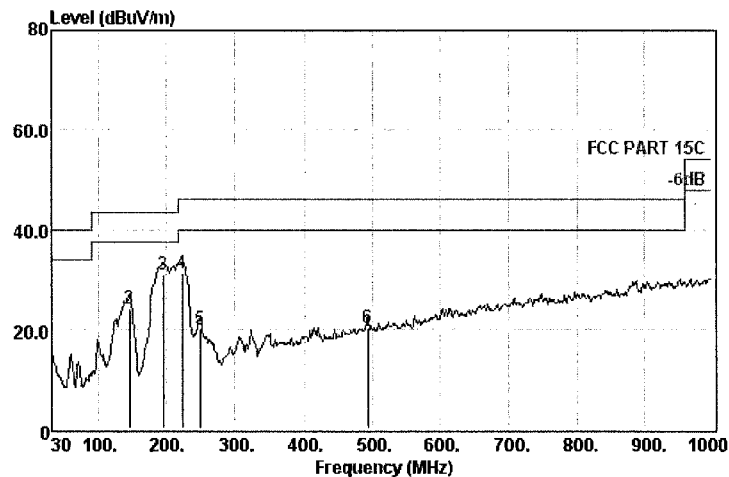


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	29.08	0.56	17.03	40.00	-22.97	QP
2	144.46	31.23	45.46	1.22	24.12	43.50	-19.38	QP
3	194.90	31.11	50.15	1.46	31.04	43.50	-12.46	QP
4	222.06	30.96	48.65	1.53	31.28	46.00	-14.72	QP
5	248.25	30.96	36.46	1.70	20.05	46.00	-25.95	QP
6	493.66	30.59	29.55	2.77	20.33	46.00	-25.67	QP



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 145 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

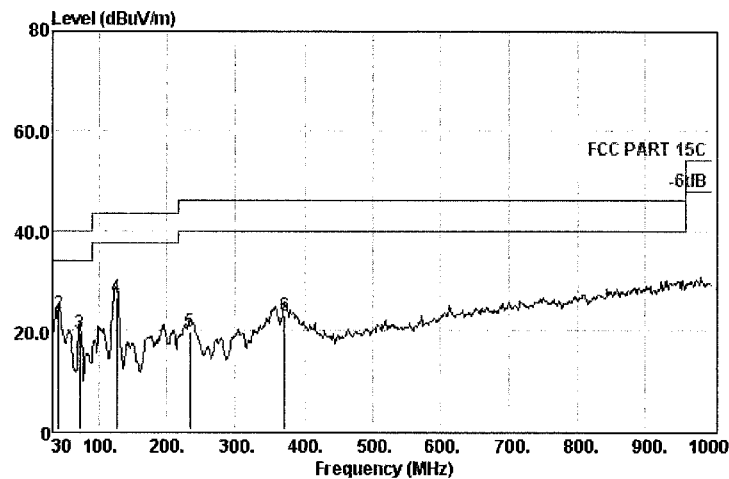


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	36.53	0.56	24.48	40.00	-15.52	QP
2	39.70	31.37	40.79	0.56	23.06	40.00	-16.94	QP
3	70.74	31.32	42.18	0.85	19.25	40.00	-20.75	QP
4	125.06	31.22	48.06	1.12	26.36	43.50	-17.14	QP
5	233.70	30.93	36.56	1.61	19.68	46.00	-26.32	QP
6	371.44	30.62	35.21	2.27	23.03	46.00	-22.97	QP



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 146 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

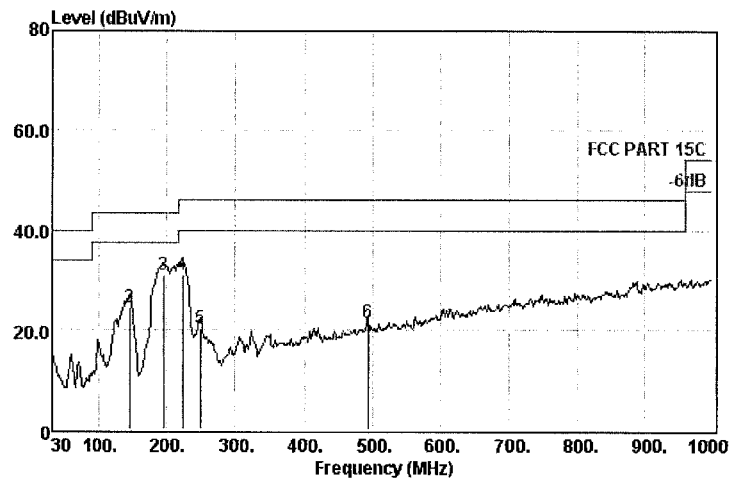


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	28.41	0.56	16.36	40.00	-23.64	QP
2	144.46	31.23	45.67	1.22	24.33	43.50	-19.17	QP
3	194.90	31.11	50.12	1.46	31.01	43.50	-12.49	QP
4	222.06	30.96	48.42	1.53	31.05	46.00	-14.95	QP
5	248.25	30.96	36.72	1.70	20.31	46.00	-25.69	QP
6	493.66	30.59	30.57	2.77	21.35	46.00	-24.65	QP



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 147 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

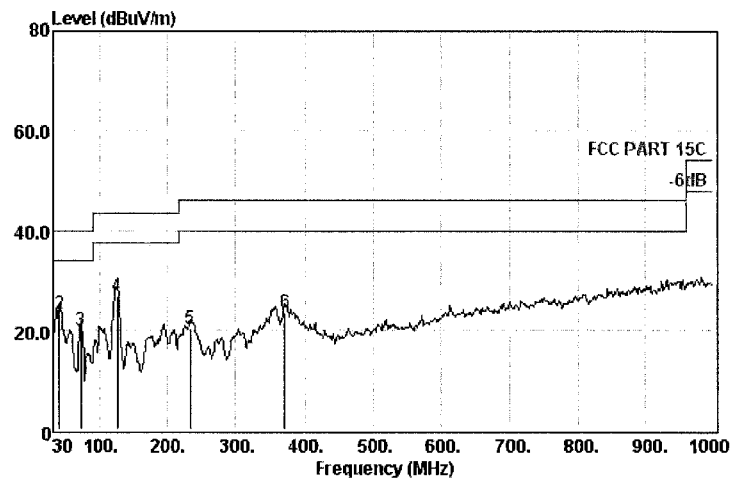


Site : 966 Chamber
 Condition: FCC PART 15C 3m 3142D VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.9'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	30.00	31.41	35.72	0.56	23.67	40.00	-16.33	QP
2	39.70	31.37	40.97	0.56	23.24	40.00	-16.76	QP
3	70.74	31.32	42.96	0.85	20.03	40.00	-19.97	QP
4	125.06	31.22	48.35	1.12	26.65	43.50	-16.85	QP
5	233.70	30.93	37.19	1.61	20.31	46.00	-25.69	QP
6	371.44	30.62	35.53	2.27	23.35	46.00	-22.65	QP



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 37 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

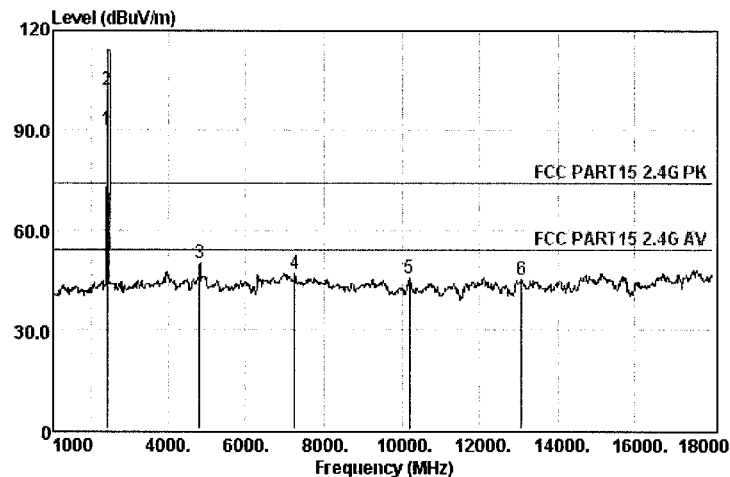


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2402.00	26.32	80.20	7.34	89.94	94.00	-4.06	Average
2	2402.00	26.32	92.35	7.34	102.09	114.00	-11.91	Peak
3	4804.00	27.49	32.41	11.96	49.82	74.00	-24.18	Peak
4	7239.00	27.95	20.84	16.61	46.80	74.00	-27.20	Peak
5	10197.00	28.82	18.52	17.00	45.42	74.00	-28.58	Peak
6	13070.00	29.21	15.02	18.30	45.13	74.00	-28.87	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 38 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

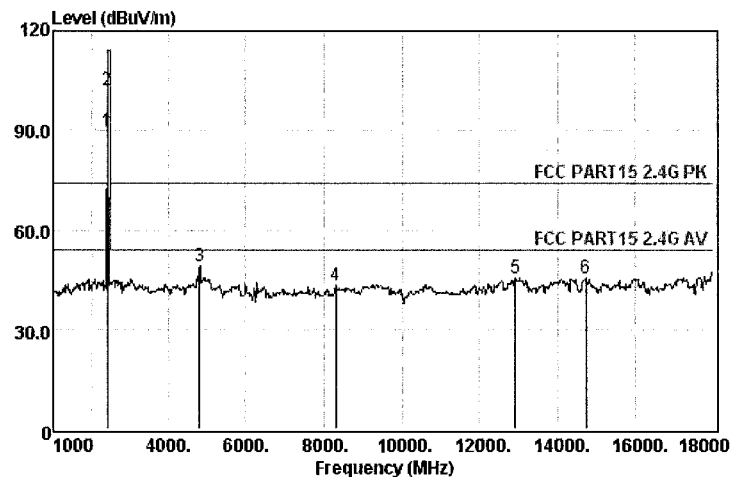


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2402.00	26.32	80.13	7.34	89.87	94.00	-4.13	Average
2	2402.00	26.32	92.35	7.34	102.09	114.00	-11.91	Peak
3	4804.00	27.49	31.75	11.96	49.16	74.00	-24.84	Peak
4	8293.00	28.19	17.96	16.72	43.12	74.00	-30.88	Peak
5	12917.00	29.18	16.08	18.14	45.54	74.00	-28.46	Peak
6	14719.00	29.51	15.34	19.83	45.35	74.00	-28.65	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 40 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

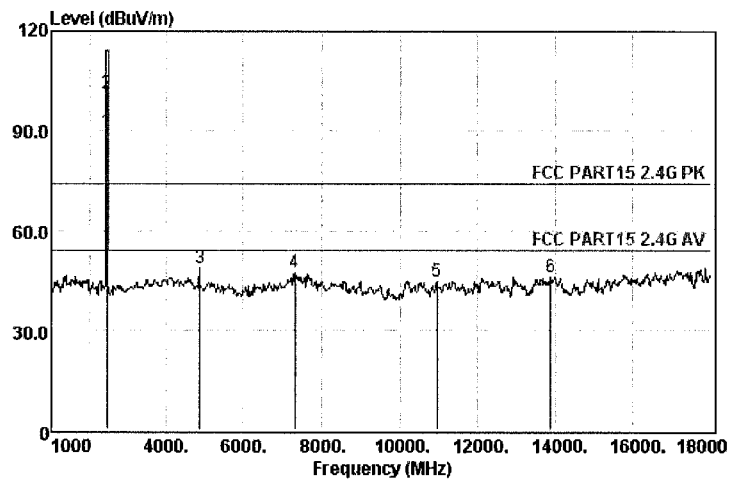


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2441MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2441.00	26.33	79.70	7.48	89.61	94.00	-4.39	Average
2	2441.00	26.33	91.55	7.48	101.46	114.00	-12.54	Peak
3	4882.00	27.53	30.83	12.14	48.55	74.00	-25.45	Peak
4	7307.00	27.96	21.23	16.61	47.20	74.00	-26.80	Peak
5	10962.00	28.90	16.99	17.16	44.73	74.00	-29.27	Peak
6	13869.00	29.37	12.97	19.20	46.17	74.00	-27.83	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 39 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

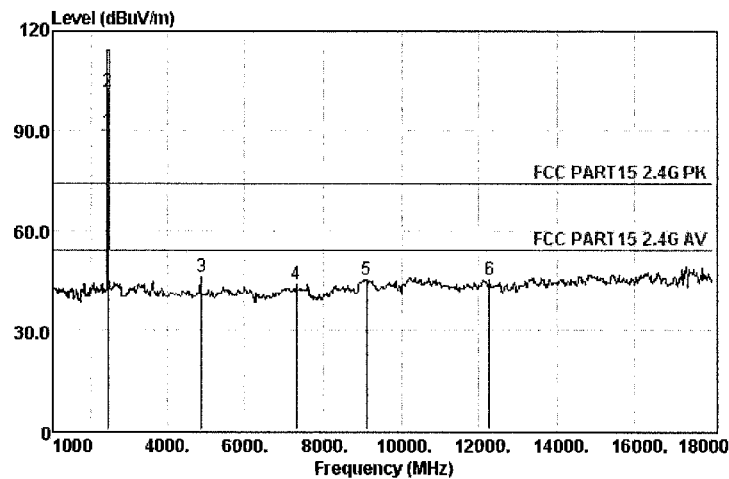


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2441MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2441.00	26.33	79.57	7.48	89.48	94.00	-4.52	Average
2	2441.00	26.33	91.77	7.48	101.68	114.00	-12.32	Peak
3	4882.00	27.53	28.42	12.14	46.14	74.00	-27.86	Peak
4	7307.00	27.96	17.86	16.61	43.83	74.00	-30.17	Peak
5	9092.00	28.43	19.06	16.89	45.02	74.00	-28.98	Peak
6	12271.00	29.05	17.26	17.59	45.26	74.00	-28.74	Peak


 Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 41 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

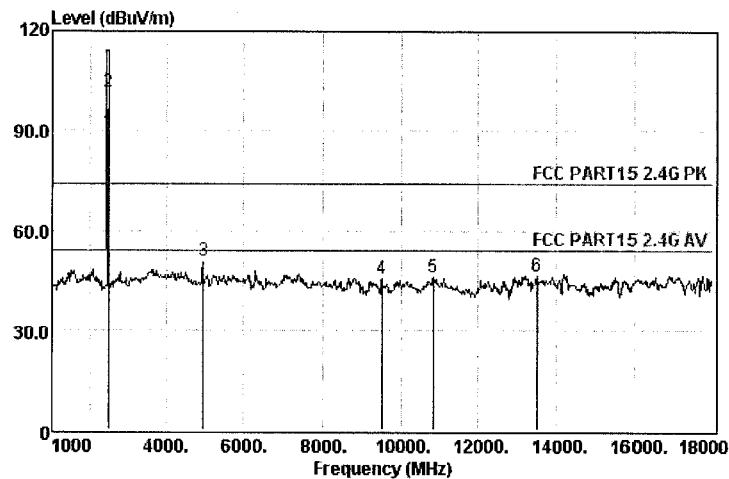

 Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2480.00	26.34	79.55	7.57	89.57	94.00	-4.43	Average
2	2480.00	26.34	91.78	7.57	101.80	114.00	-12.20	Peak
3	4960.00	27.58	32.62	12.36	50.72	74.00	-23.28	Peak
4	9517.00	28.61	19.39	16.92	45.71	74.00	-28.29	Peak
5	10843.00	28.88	18.41	17.13	46.07	74.00	-27.93	Peak
6	13495.00	29.30	13.88	18.77	46.35	74.00	-27.65	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 42 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

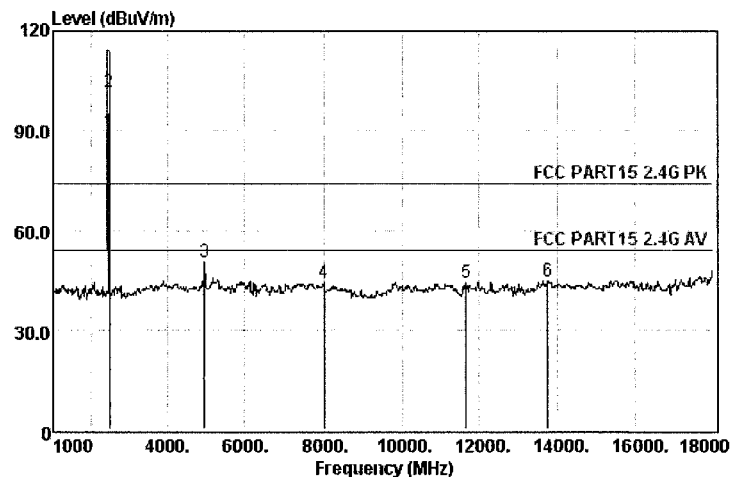


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	2480.00	26.34	79.65	7.57	89.67	94.00	-4.33	Average
2	2480.00	26.34	91.78	7.57	101.80	114.00	-12.20	Peak
3	4960.00	27.58	32.52	12.36	50.62	74.00	-23.38	Peak
4	7987.00	28.10	19.20	16.66	44.19	74.00	-29.81	Peak
5	11659.00	28.97	16.23	17.30	44.30	74.00	-29.70	Peak
6	13750.00	29.35	11.61	19.08	44.59	74.00	-29.41	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 43 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

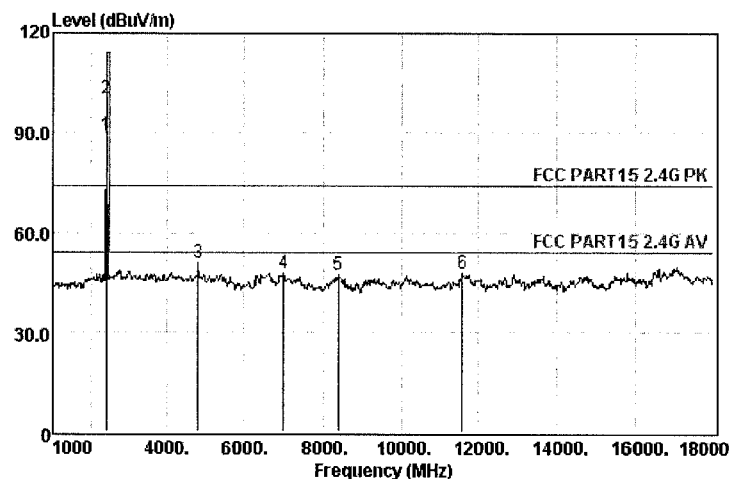


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	2402.00	26.32	79.63	7.34	89.37	94.00	-4.63	Average
2	2402.00	26.32	90.59	7.34	100.33	114.00	-13.67	Peak
3	4804.00	27.49	33.46	11.96	50.87	74.00	-23.13	Peak
4	6984.00	27.90	22.05	16.60	47.91	74.00	-26.09	Peak
5	8378.00	28.21	21.98	16.74	47.21	74.00	-26.79	Peak
6	11591.00	28.96	19.54	17.29	47.68	74.00	-26.32	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 44 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

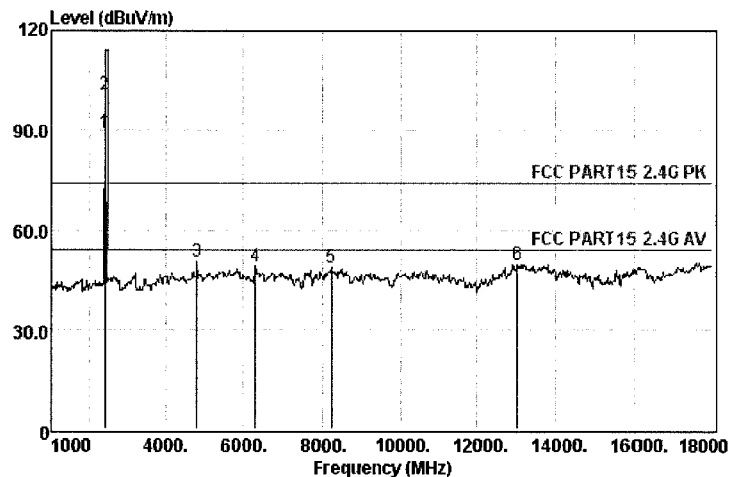


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2402.00	26.32	79.64	7.34	89.38	94.00	-4.62	Average
2	2402.00	26.32	91.13	7.34	100.87	114.00	-13.13	Peak
3	4804.00	27.49	32.97	11.96	50.38	74.00	-23.62	Peak
4	6304.00	27.76	24.61	16.60	49.07	74.00	-24.93	Peak
5	8208.00	28.16	23.45	16.70	48.56	74.00	-25.44	Peak
6	13036.00	29.21	19.74	18.26	49.65	74.00	-24.35	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 46 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

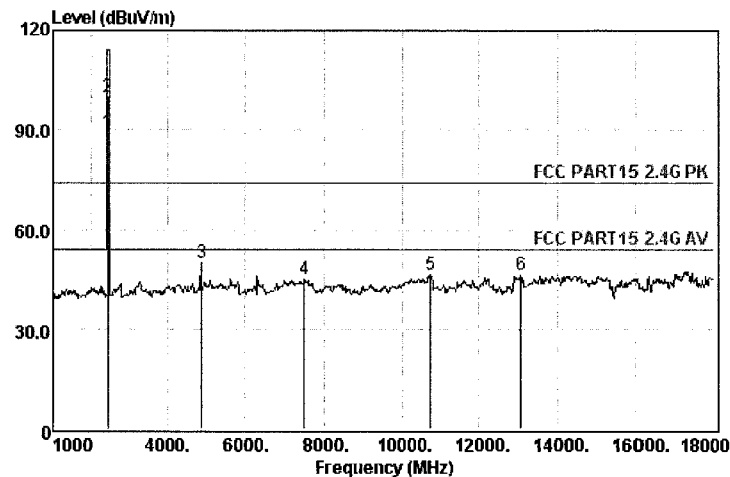


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2441MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	2441.00	26.33	79.36	7.48	89.27	94.00	-4.73	Average
2	2441.00	26.33	90.19	7.48	100.10	114.00	-13.90	Peak
3	4882.00	27.53	32.43	12.14	50.15	74.00	-23.85	Peak
4	7477.00	27.99	18.82	16.63	44.85	74.00	-29.15	Peak
5	10741.00	28.87	18.66	17.11	46.24	74.00	-27.76	Peak
6	13070.00	29.21	16.19	18.30	46.30	74.00	-27.70	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 45 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

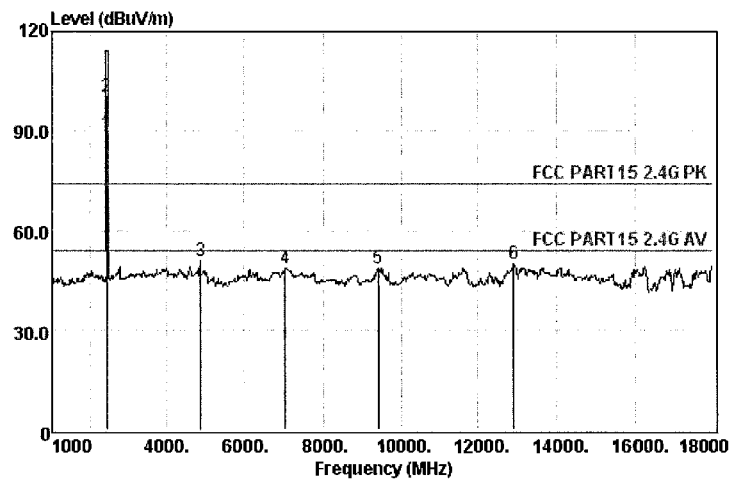


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2441MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	2441.00	26.33	79.42	7.48	89.33	94.00	-4.67	Average
2	2441.00	26.33	90.53	7.48	100.44	114.00	-13.56	Peak
3	4882.00	27.53	32.94	12.14	50.66	74.00	-23.34	Peak
4	7018.00	27.90	22.84	16.60	48.75	74.00	-25.25	Peak
5	9398.00	28.56	22.32	16.91	48.55	74.00	-25.45	Peak
6	12917.00	29.18	20.38	18.14	49.84	74.00	-24.16	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 47 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

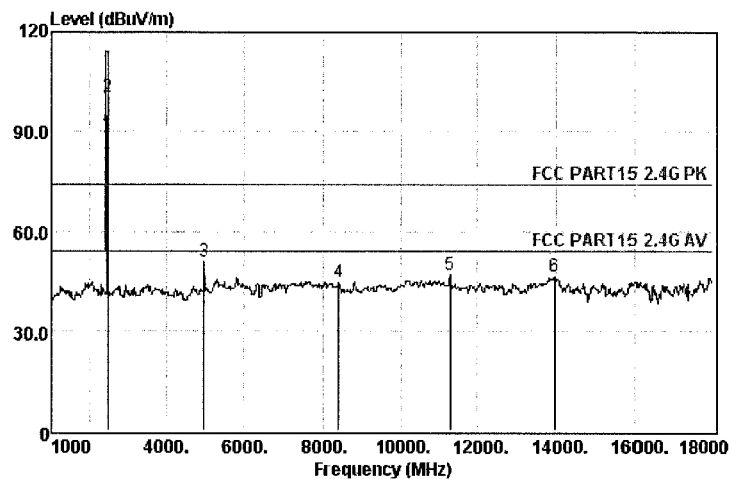


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2480.00	26.34	79.17	7.57	89.19	94.00	-4.81	Average
2	2480.00	26.34	90.44	7.57	100.46	114.00	-13.54	Peak
3	4960.00	27.58	32.54	12.36	50.64	74.00	-23.36	Peak
4	8395.00	28.22	19.54	16.75	44.79	74.00	-29.21	Peak
5	11302.00	28.93	18.72	17.22	46.75	74.00	-27.25	Peak
6	13954.00	29.39	12.82	19.31	46.19	74.00	-27.81	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhongmoutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 48 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

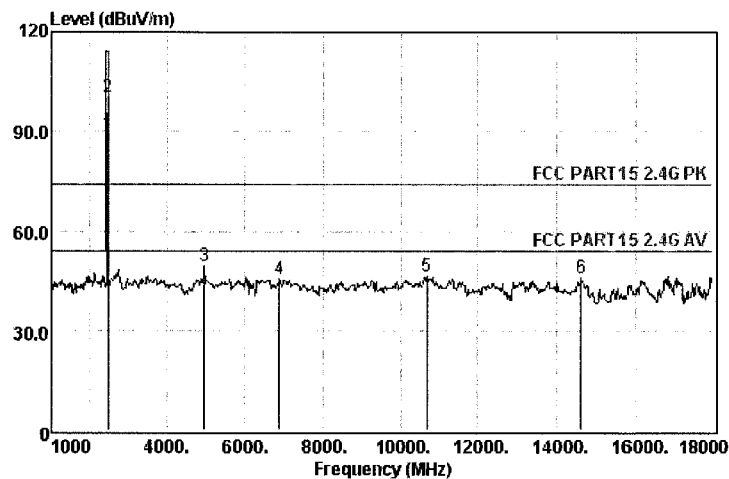


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2480.00	26.34	79.32	7.57	89.34	94.00	-4.66	Average
2	2480.00	26.34	90.35	7.57	100.37	114.00	-13.63	Peak
3	4960.00	27.58	31.46	12.36	49.56	74.00	-24.44	Peak
4	6865.00	27.87	19.80	16.60	45.37	74.00	-28.63	Peak
5	10690.00	28.87	18.98	17.10	46.52	74.00	-27.48	Peak
6	14634.00	29.49	15.52	19.77	45.84	74.00	-28.16	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 50 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

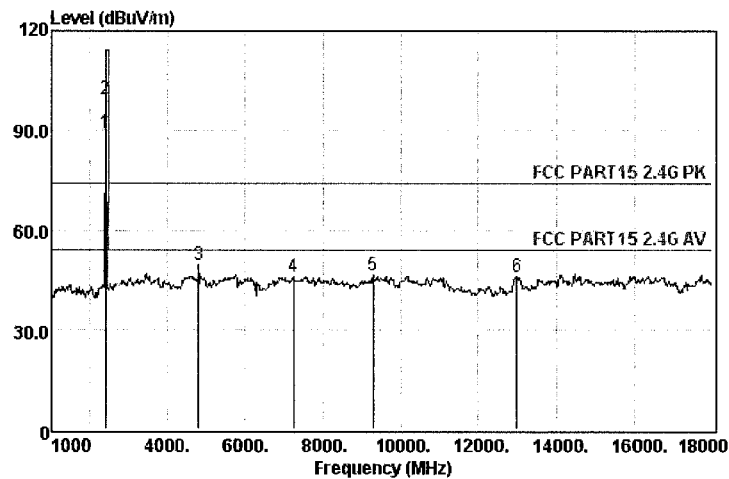


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2402.00	26.32	79.37	7.34	89.11	94.00	-4.89	Average
2	2402.00	26.32	89.78	7.34	99.52	114.00	-14.48	Peak
3	4804.00	27.49	32.11	11.96	49.52	74.00	-24.48	Peak
4	7222.00	27.94	20.20	16.61	46.16	74.00	-27.84	Peak
5	9279.00	28.51	20.09	16.90	46.21	74.00	-27.79	Peak
6	12985.00	29.20	16.20	18.20	45.86	74.00	-28.14	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 49 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

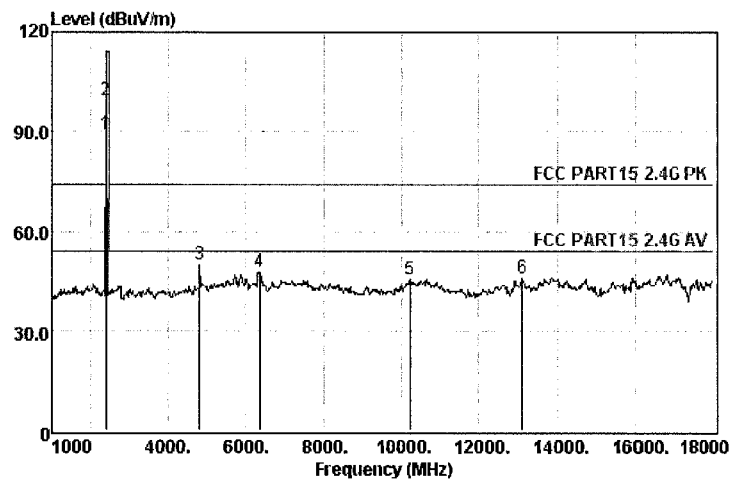


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2402.00	26.32	79.43	7.34	89.17	94.00	-4.83	Average
2	2402.00	26.32	89.76	7.34	99.50	114.00	-14.50	Peak
3	4804.00	27.49	32.38	11.96	49.79	74.00	-24.21	Peak
4	6355.00	27.77	23.27	16.60	47.79	74.00	-26.21	Peak
5	10231.00	28.82	18.47	17.01	45.43	74.00	-28.57	Peak
6	13104.00	29.22	15.46	18.34	45.76	74.00	-28.24	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 51 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

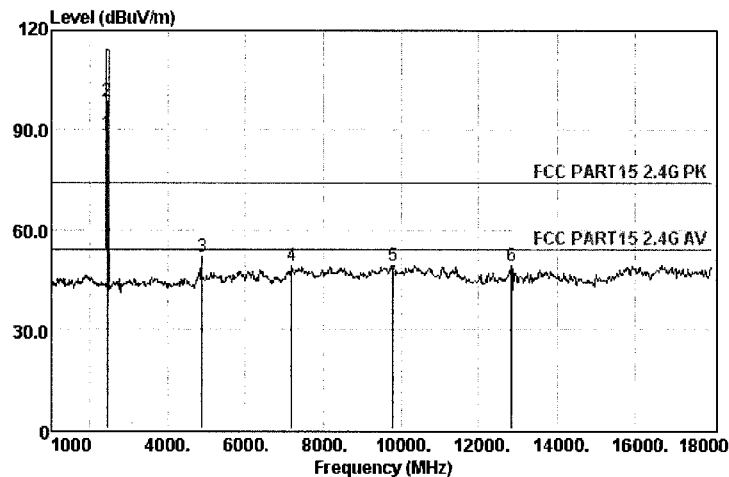


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2441MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2441.00	26.33	78.92	7.48	86.83	94.00	-5.17	Average
2	2441.00	26.33	88.61	7.48	98.52	114.00	-15.48	Peak
3	4882.00	27.53	33.83	12.14	51.55	74.00	-22.45	Peak
4	7171.00	27.93	23.11	16.61	49.06	74.00	-24.94	Peak
5	9789.00	28.72	22.70	16.95	49.16	74.00	-24.84	Peak
6	12832.00	29.17	19.76	18.08	48.97	74.00	-25.03	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhongmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 52 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

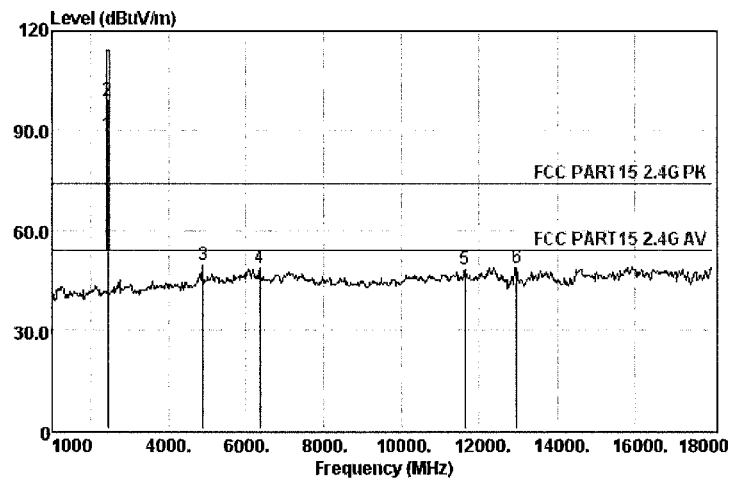


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2441MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2441.00	26.33	78.77	7.48	86.68	94.00	-5.32	Average
2	2441.00	26.33	88.95	7.48	98.86	114.00	-15.14	Peak
3	4882.00	27.53	31.83	12.14	49.55	74.00	-24.45	Peak
4	6355.00	27.77	24.25	16.60	48.77	74.00	-25.23	Peak
5	11642.00	28.96	20.03	17.29	48.12	74.00	-25.88	Peak
6	12951.00	29.19	19.16	18.17	48.72	74.00	-25.28	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 53 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

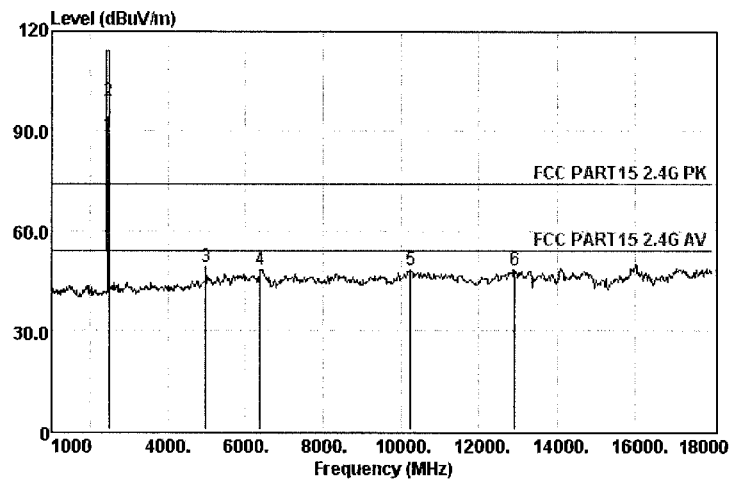


Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2480.00	26.34	78.92	7.57	88.94	94.00	-5.06	Average
2	2480.00	26.34	88.91	7.57	98.93	114.00	-15.07	Peak
3	4960.00	27.58	31.02	12.36	49.12	74.00	-24.88	Peak
4	6372.00	27.77	23.78	16.60	48.32	74.00	-25.68	Peak
5	10248.00	28.83	20.99	17.02	47.98	74.00	-26.02	Peak
6	12917.00	29.18	18.89	18.14	48.35	74.00	-25.65	Peak


 Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 54 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

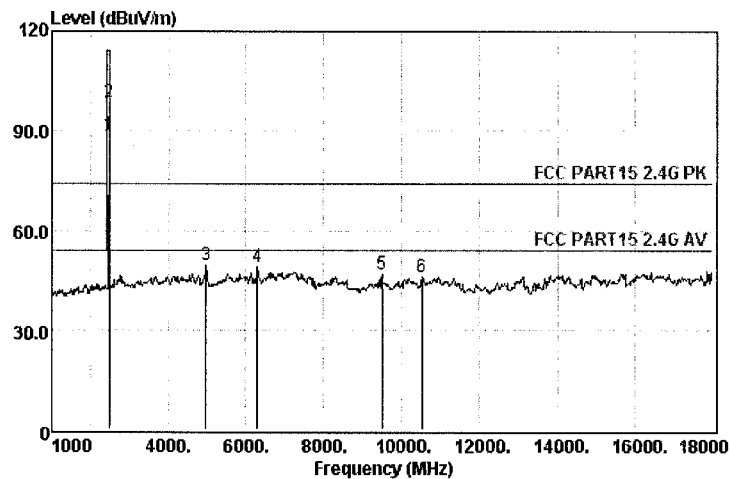

 Site : 966 Chamber
 Condition: FCC PART15 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2480.00	26.34	78.95	7.57	88.97	94.00	-5.03	Average
2	2480.00	26.34	88.75	7.57	98.77	114.00	-15.23	Peak
3	4960.00	27.58	31.53	12.36	49.63	74.00	-24.37	Peak
4	6304.00	27.76	24.58	16.60	49.04	74.00	-24.96	Peak
5	9517.00	28.61	20.52	16.92	46.84	74.00	-27.16	Peak
6	10537.00	28.85	18.61	17.07	46.05	74.00	-27.95	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 180 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

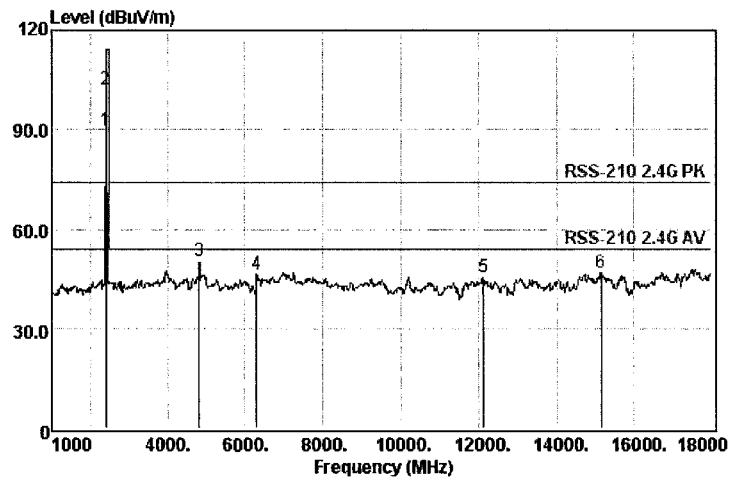


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2402.00	26.32	79.94	7.34	89.68	94.00	-4.32	Average
2	2402.00	26.32	92.58	7.34	102.32	114.00	-11.68	Peak
3	4804.00	27.49	32.90	11.96	50.31	74.00	-23.69	Peak
4	6304.00	27.76	22.15	16.60	46.61	74.00	-27.39	Peak
5	12118.00	29.02	17.63	17.47	45.50	74.00	-28.50	Peak
6	15144.00	29.57	17.76	20.09	46.75	74.00	-27.25	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 181 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

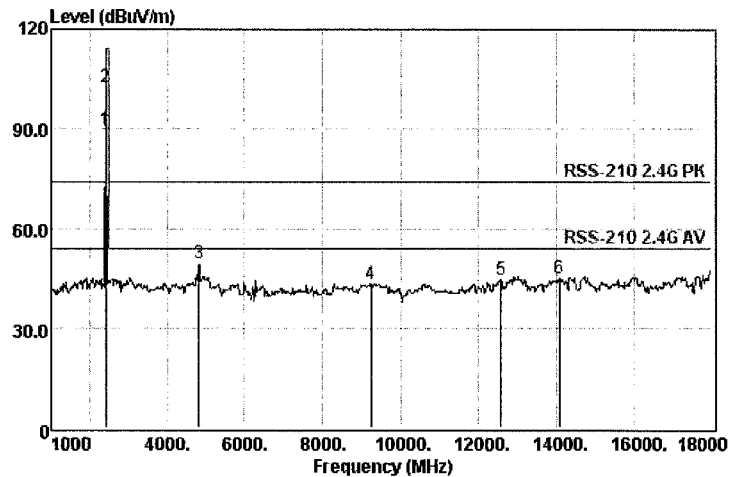


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	2402.00	26.32	79.89	7.34	89.63	94.00	-4.37	Average
2	2402.00	26.32	92.68	7.34	102.42	114.00	-11.58	Peak
3	4804.00	27.49	31.94	11.96	49.35	74.00	-24.65	Peak
4	9245.00	28.50	17.40	16.90	43.49	74.00	-30.51	Peak
5	12577.00	29.12	16.14	17.85	44.57	74.00	-29.43	Peak
6	14073.00	29.41	12.14	19.41	45.24	74.00	-28.76	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 183 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

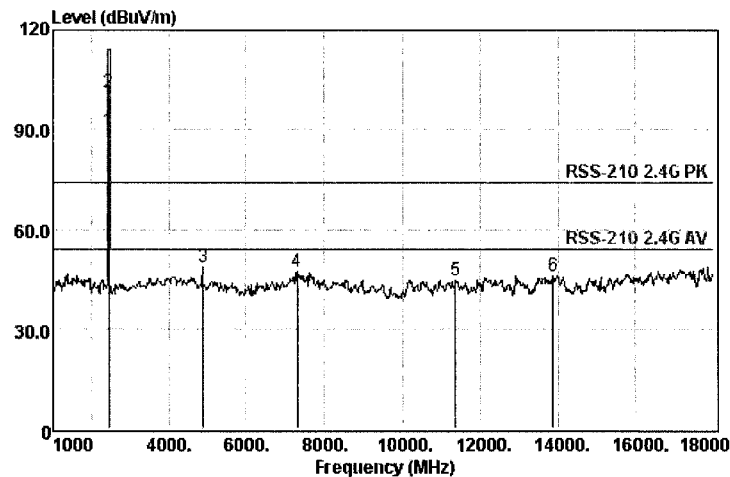


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2441MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2441.00	26.33	79.70	7.48	89.61	94.00	-4.39	Average
2	2441.00	26.33	91.55	7.48	101.46	114.00	-12.54	Peak
3	4882.00	27.53	30.83	12.14	48.55	74.00	-25.45	Peak
4	7307.00	27.96	21.23	16.61	47.20	74.00	-26.80	Peak
5	11353.00	28.94	16.71	17.24	44.79	74.00	-29.21	Peak
6	13869.00	29.37	12.97	19.20	46.17	74.00	-27.83	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 182 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

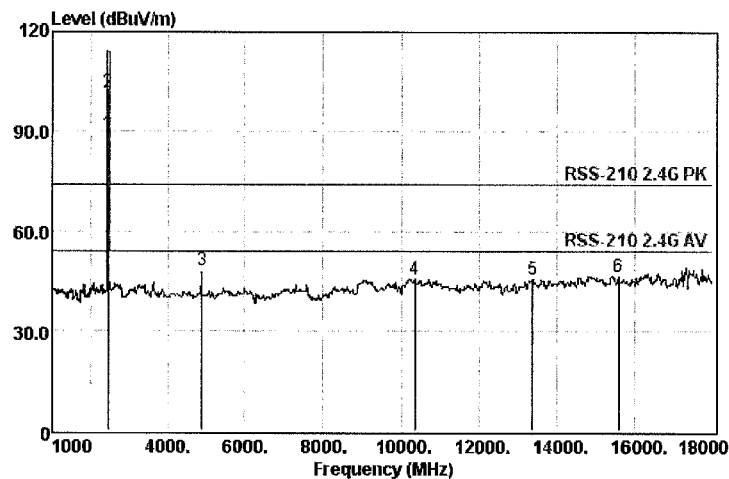


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2441MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2441.00	26.33	79.30	7.48	89.21	94.00	-4.79	Average
2	2441.00	26.33	91.96	7.48	101.87	114.00	-12.13	Peak
3	4882.00	27.53	30.60	12.14	48.32	74.00	-25.68	Peak
4	10350.00	28.84	18.40	17.04	45.56	74.00	-28.44	Peak
5	13376.00	29.27	13.48	18.65	45.30	74.00	-28.70	Peak
6	15586.00	29.64	17.09	20.37	46.55	74.00	-27.45	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 184 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

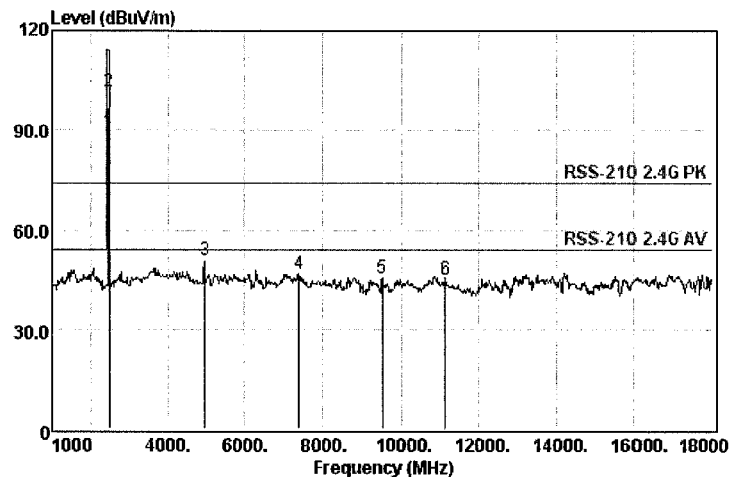


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2480.00	26.34	79.55	7.57	89.57	94.00	-4.43	Average
2	2480.00	26.34	91.78	7.57	101.80	114.00	-12.20	Peak
3	4960.00	27.58	32.62	12.36	50.72	74.00	-23.28	Peak
4	7392.00	27.98	21.01	16.62	47.01	74.00	-26.99	Peak
5	9517.00	28.61	19.39	16.92	45.71	74.00	-28.29	Peak
6	11132.00	28.91	17.20	17.19	45.09	74.00	-28.91	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 185 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

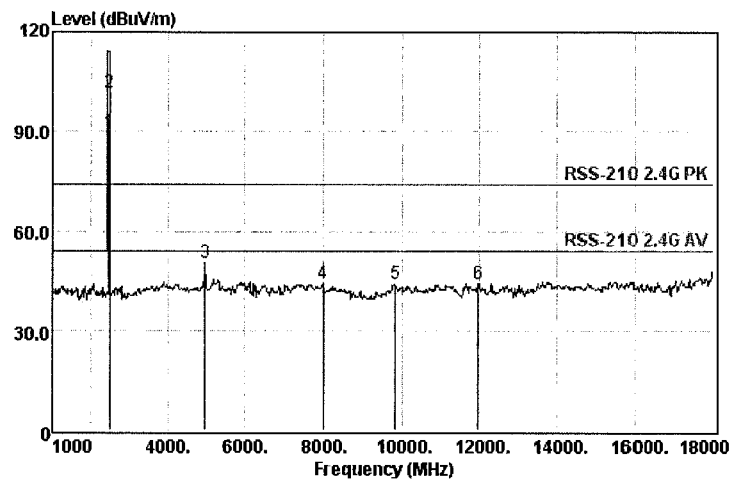


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2480.00	26.34	79.65	7.57	89.67	94.00	-4.33	Average
2	2480.00	26.34	91.78	7.57	101.80	114.00	-12.20	Peak
3	4960.00	27.58	32.52	12.36	50.62	74.00	-23.38	Peak
4	7987.00	28.10	19.20	16.66	44.19	74.00	-29.81	Peak
5	9840.00	28.74	17.56	16.95	44.05	74.00	-29.95	Peak
6	11965.00	29.00	16.53	17.36	44.32	74.00	-29.68	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 186 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

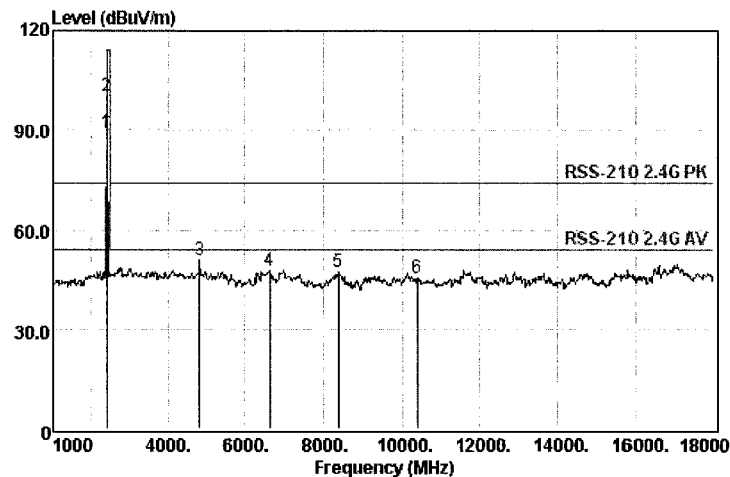


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : Bluetooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2402.00	26.32	79.63	7.34	89.37	94.00	-4.63	Average
2	2402.00	26.32	90.59	7.34	100.33	114.00	-13.67	Peak
3	4804.00	27.49	33.46	11.96	50.87	74.00	-23.13	Peak
4	6610.00	27.82	22.56	16.60	47.51	74.00	-26.49	Peak
5	8378.00	28.21	21.98	16.74	47.21	74.00	-26.79	Peak
6	10384.00	28.84	18.21	17.04	45.42	74.00	-28.58	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 187 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

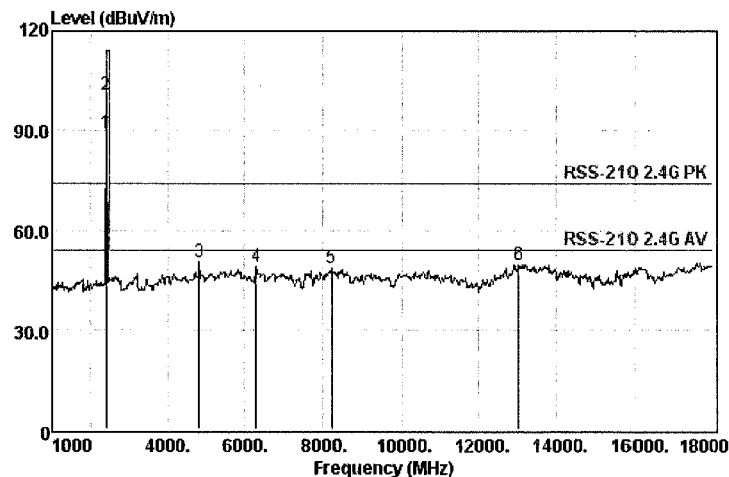


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	2402.00	26.32	79.64	7.34	89.38	94.00	-4.62	Average
2	2402.00	26.32	91.13	7.34	100.87	114.00	-13.13	Peak
3	4804.00	27.49	32.97	11.96	50.38	74.00	-23.62	Peak
4	6304.00	27.76	24.61	16.60	49.07	74.00	-24.93	Peak
5	8208.00	28.16	23.45	16.70	48.56	74.00	-25.44	Peak
6	13036.00	29.21	19.74	18.26	49.65	74.00	-24.35	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 189 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

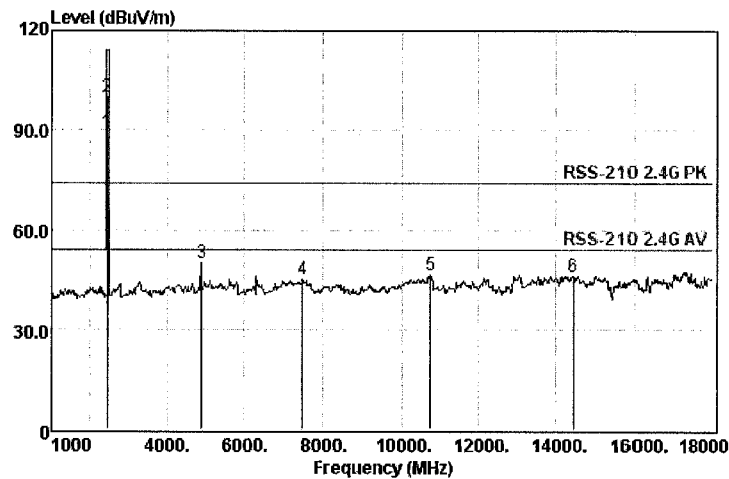


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2441MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2441.00	26.33	79.36	7.48	89.27	94.00	-4.73	Average
2	2441.00	26.33	90.19	7.48	100.10	114.00	-13.90	Peak
3	4882.00	27.53	32.43	12.14	50.15	74.00	-23.85	Peak
4	7477.00	27.99	18.82	16.63	44.85	74.00	-29.15	Peak
5	10741.00	28.87	18.66	17.11	46.24	74.00	-27.76	Peak
6	14447.00	29.47	15.07	19.64	46.14	74.00	-27.86	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 188 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

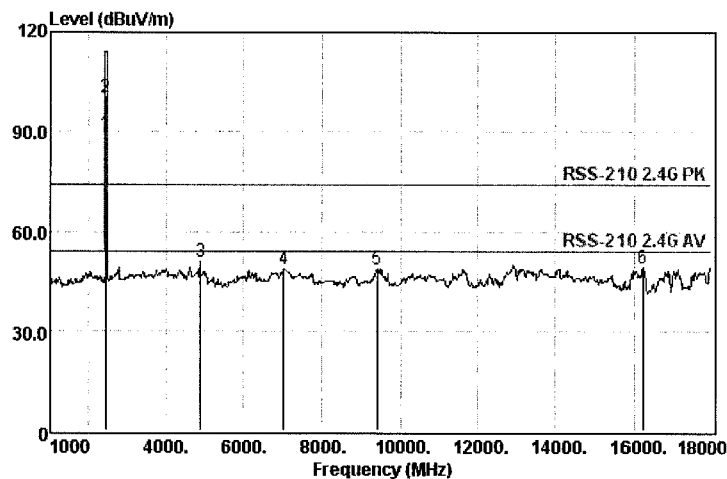


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 VERTICAL
 EUT : Bluetooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2441MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2441.00	26.33	79.42	7.48	89.33	94.00	-4.67	Average
2	2441.00	26.33	90.53	7.48	100.44	114.00	-13.56	Peak
3	4882.00	27.53	32.94	12.14	50.66	74.00	-23.34	Peak
4	7018.00	27.90	22.84	16.60	48.75	74.00	-25.25	Peak
5	9398.00	28.56	22.32	16.91	48.55	74.00	-25.45	Peak
6	16198.00	29.78	16.47	20.77	49.00	74.00	-25.00	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhongmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 190 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

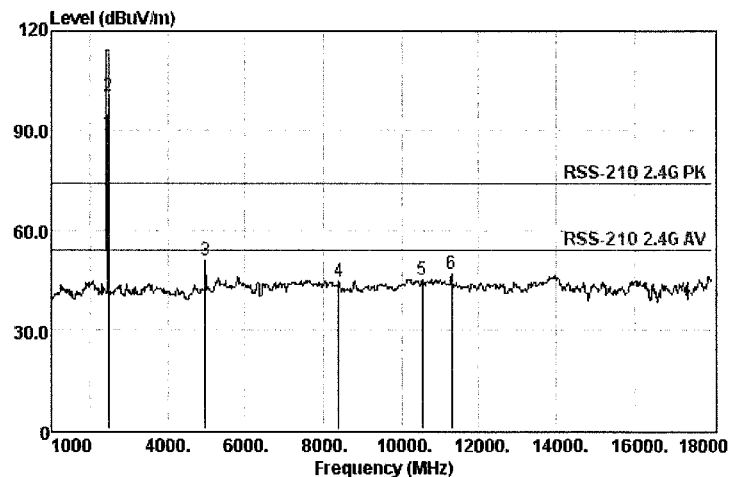


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2480.00	26.34	79.17	7.57	89.19	94.00	-4.81	Average
2	2480.00	26.34	90.44	7.57	100.46	114.00	-13.54	Peak
3	4960.00	27.58	32.54	12.36	50.64	74.00	-23.36	Peak
4	8395.00	28.22	19.54	16.75	44.79	74.00	-29.21	Peak
5	10537.00	28.85	17.82	17.07	45.26	74.00	-28.74	Peak
6	11302.00	28.93	18.72	17.22	46.75	74.00	-27.25	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhongmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 191 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

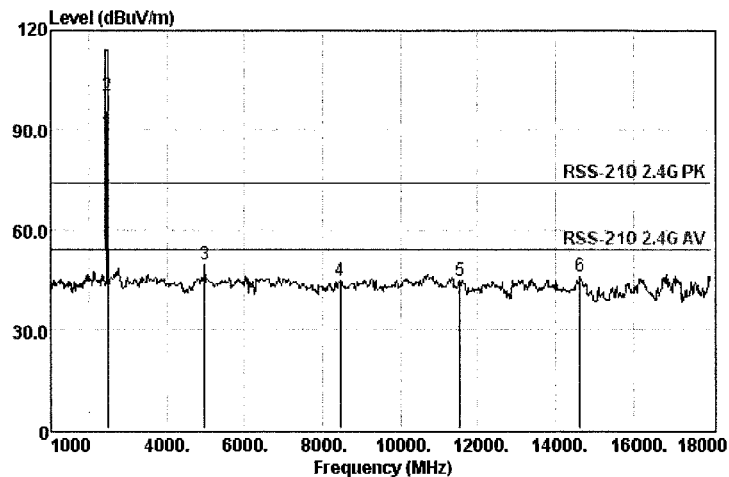


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	2480.00	26.34	79.32	7.57	89.34	94.00	-4.66	Average
2	2480.00	26.34	90.35	7.57	100.37	114.00	-13.63	Peak
3	4960.00	27.58	31.46	12.36	49.56	74.00	-24.44	Peak
4	8446.00	28.23	19.37	16.76	44.66	74.00	-29.34	Peak
5	11540.00	28.95	16.39	17.27	44.58	74.00	-29.42	Peak
6	14634.00	29.49	15.52	19.77	45.84	74.00	-28.16	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 193 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

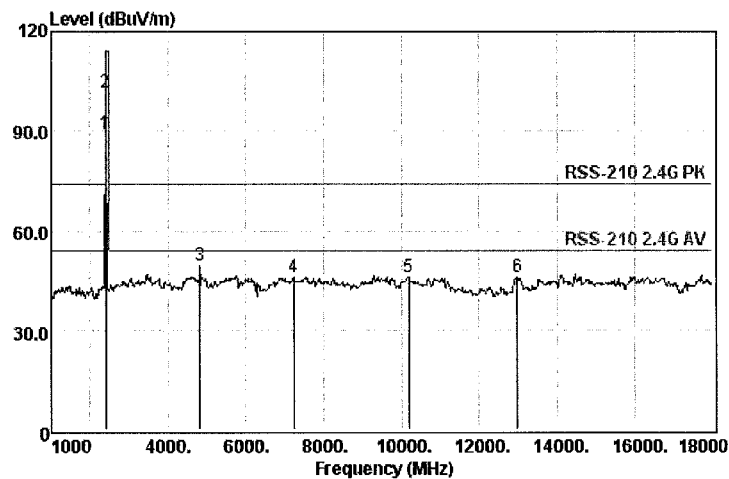


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2402.00	26.32	79.58	7.34	89.32	94.00	-4.68	Average
2	2402.00	26.32	91.79	7.34	101.53	114.00	-12.47	Peak
3	4804.00	27.49	32.22	11.96	49.63	74.00	-24.37	Peak
4	7222.00	27.94	20.20	16.61	46.16	74.00	-27.84	Peak
5	10197.00	28.82	19.02	17.00	45.92	74.00	-28.08	Peak
6	12985.00	29.20	16.20	18.20	45.86	74.00	-28.14	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 192 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

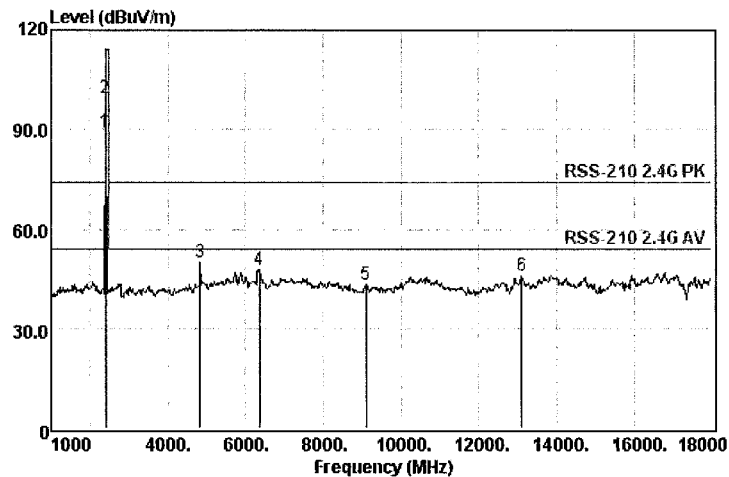


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2402.00	26.32	79.43	7.34	89.17	94.00	-4.83	Average
2	2402.00	26.32	89.76	7.34	99.50	114.00	-14.50	Peak
3	4804.00	27.49	32.38	11.96	49.79	74.00	-24.21	Peak
4	6355.00	27.77	23.27	16.60	47.79	74.00	-26.21	Peak
5	9092.00	28.43	17.37	16.89	43.33	74.00	-30.67	Peak
6	13104.00	29.22	15.46	18.34	45.76	74.00	-28.24	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 194 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

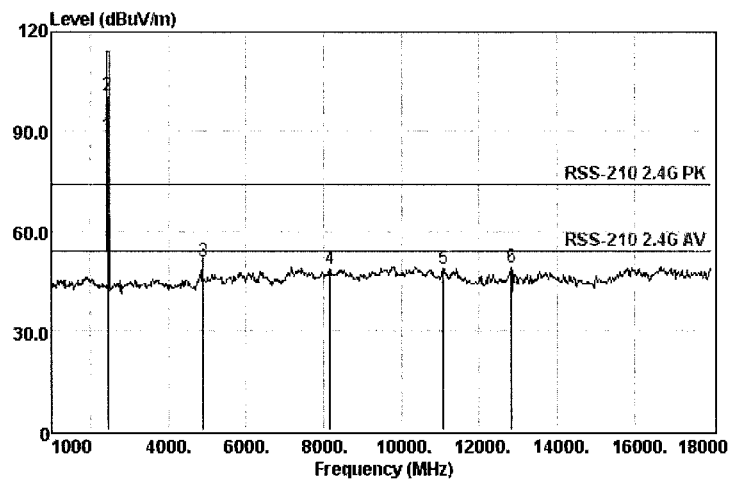


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2441MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2441.00	26.33	79.06	7.48	88.97	94.00	-5.03	Average
2	2441.00	26.33	90.74	7.48	100.65	114.00	-13.35	Peak
3	4882.00	27.53	32.96	12.14	50.68	74.00	-23.32	Peak
4	8157.00	28.15	23.43	16.69	48.49	74.00	-25.51	Peak
5	11081.00	28.91	20.71	17.18	48.55	74.00	-25.45	Peak
6	12832.00	29.17	19.76	18.08	48.97	74.00	-25.03	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 195 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

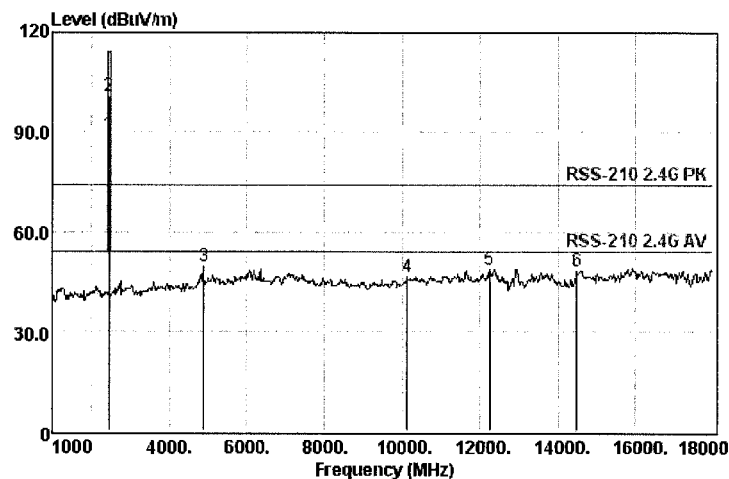


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2441MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2441.00	26.33	79.41	7.48	89.32	94.00	-4.68	Average
2	2441.00	26.33	90.98	7.48	100.89	114.00	-13.11	Peak
3	4882.00	27.53	31.64	12.14	49.36	74.00	-24.64	Peak
4	10129.00	28.81	19.49	16.99	46.28	74.00	-27.72	Peak
5	12254.00	29.05	20.75	17.58	48.73	74.00	-25.27	Peak
6	14464.00	29.47	17.24	19.65	48.22	74.00	-25.78	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhongmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 196 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

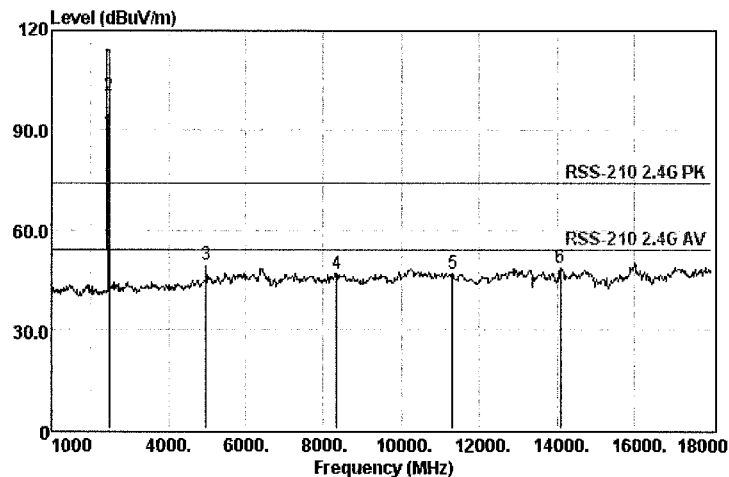


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2480.00	26.34	79.00	7.57	89.02	94.00	-4.98	Average
2	2480.00	26.34	90.56	7.57	100.58	114.00	-13.42	Peak
3	4960.00	27.58	31.53	12.36	49.63	74.00	-24.37	Peak
4	8344.00	28.20	21.79	16.73	47.00	74.00	-27.00	Peak
5	11319.00	28.93	18.96	17.23	47.01	74.00	-26.99	Peak
6	14073.00	29.41	15.51	19.41	48.61	74.00	-25.39	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 197 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

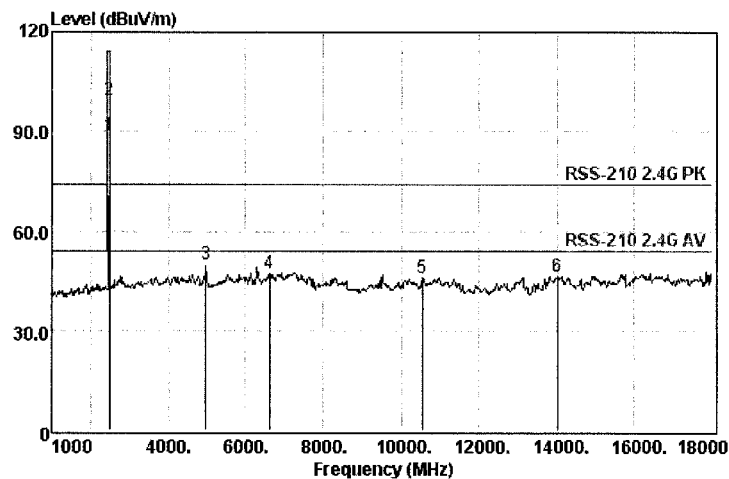


Site : 966 Chamber
 Condition: RSS-210 2.4G PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2480.00	26.34	78.97	7.57	88.99	94.00	-5.01	Average
2	2480.00	26.34	89.36	7.57	99.38	114.00	-14.62	Peak
3	4960.00	27.58	31.92	12.36	50.02	74.00	-23.98	Peak
4	6610.00	27.82	22.31	16.60	47.26	74.00	-26.74	Peak
5	10537.00	28.85	18.61	17.07	46.05	74.00	-27.95	Peak
6	13988.00	29.40	12.97	19.35	46.40	74.00	-27.60	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 101 File: D:\966 data\15Report\15KW020401CHY.EM6 (135)

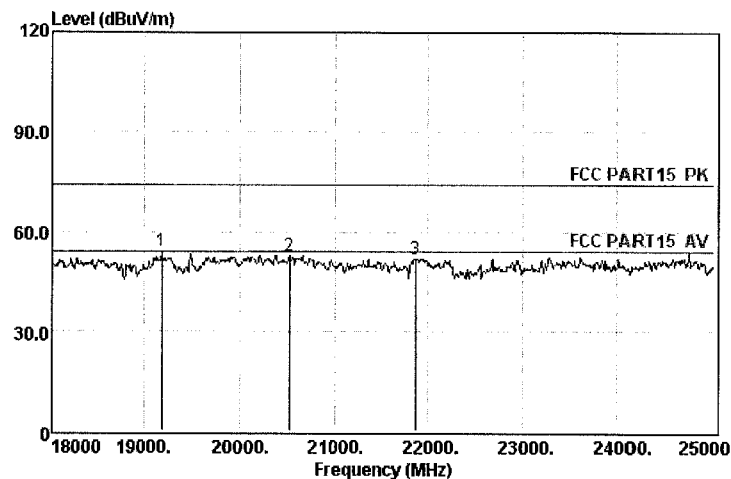


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	42.69	17.83	54.02	74.00	-19.98	Peak
2	20520.00	32.30	38.55	19.04	52.85	74.00	-21.15	Peak
3	21864.00	33.20	36.67	20.07	51.96	74.00	-22.04	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 100 File: D:\966 data\15Report\15KW020401CHY.EM6 (135)

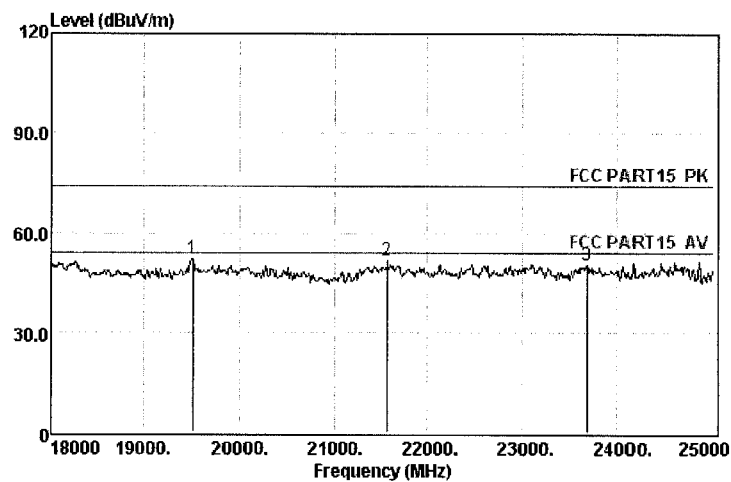


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19512.00	32.60	39.84	18.17	52.15	74.00	-21.85	Peak
2	21570.00	32.99	36.73	19.83	51.84	74.00	-22.16	Peak
3	23677.00	33.09	30.56	23.29	50.58	74.00	-23.42	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 119 File: D:\966 data\15Report\15KW020401CHY.EM6 (135)

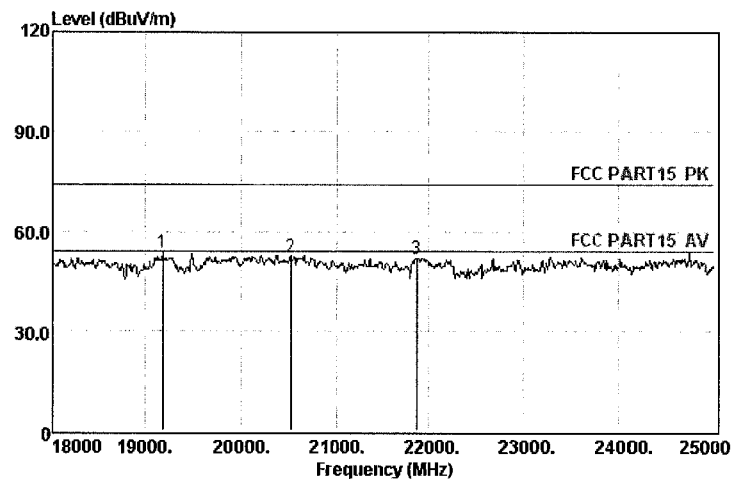


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	42.34	17.83	53.67	74.00	-20.33	Peak
2	20520.00	32.30	38.08	19.04	52.38	74.00	-21.62	Peak
3	21864.00	33.20	36.58	20.07	51.87	74.00	-22.13	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 118 File: D:\966 data\15Report\15KW020401CHY.EM6 (135)

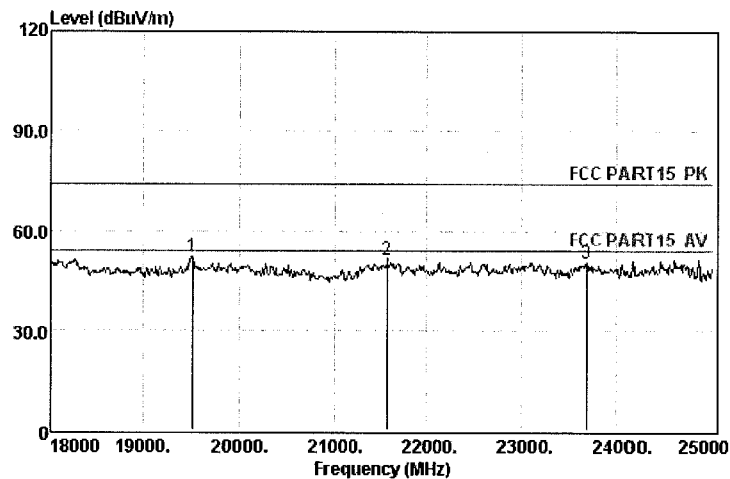


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19512.00	32.60	39.74	18.17	52.05	74.00	-21.95	Peak
2	21570.00	32.99	36.25	19.83	51.36	74.00	-22.64	Peak
3	23677.00	33.09	30.36	23.29	50.38	74.00	-23.62	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 117 File: D:\966 data\15Report\15KW020401CHY.EM6 (135)

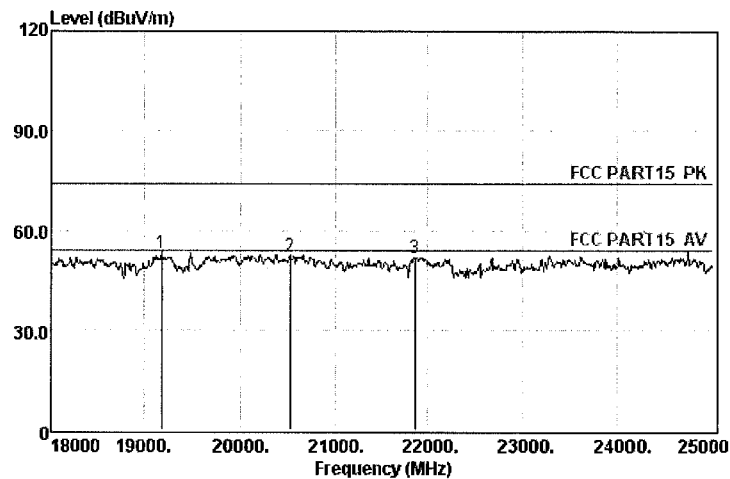


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	41.93	17.83	53.26	74.00	-20.74	Peak
2	20520.00	32.30	38.08	19.04	52.38	74.00	-21.62	Peak
3	21864.00	33.20	36.39	20.07	51.68	74.00	-22.32	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 116 File: D:\966 data\15Report\15KW020401CHY.EM6 (135)

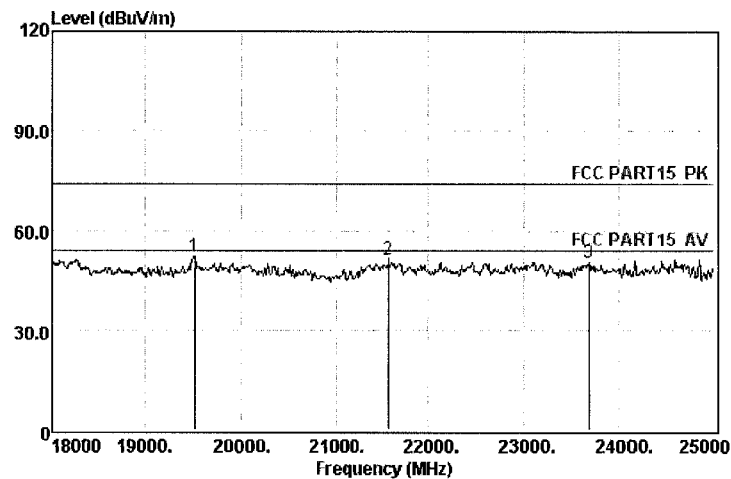


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 VERTICAL
 EUT : Bluetooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19512.00	32.60	39.80	18.17	52.11	74.00	-21.89	Peak
2	21570.00	32.99	36.25	19.83	51.36	74.00	-22.64	Peak
3	23677.00	33.09	30.36	23.29	50.38	74.00	-23.62	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 102 File: D:\966 data\15Report\15KW020401CHY.EM6 (135)

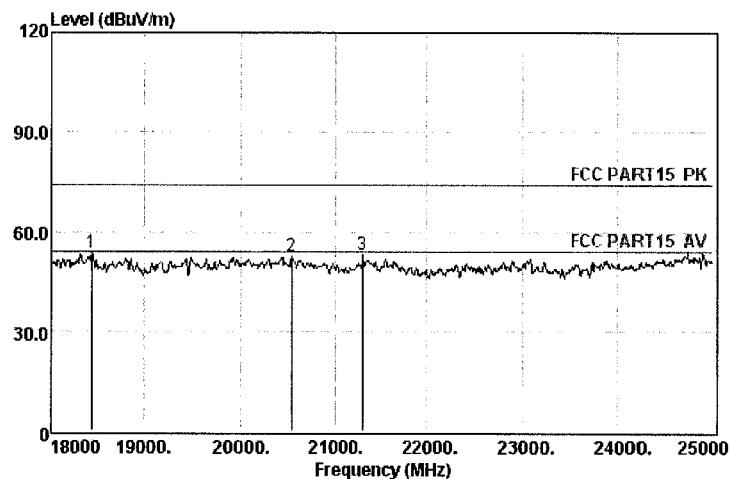


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	18434.00	32.63	42.76	17.26	53.33	74.00	-20.67	Peak
2	20534.00	32.30	38.53	19.05	52.85	74.00	-21.15	Peak
3	21304.00	32.80	38.20	19.62	53.15	74.00	-20.85	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 103 File: D:\966 data\15Report\15KW020401CHY.EM6 (135)

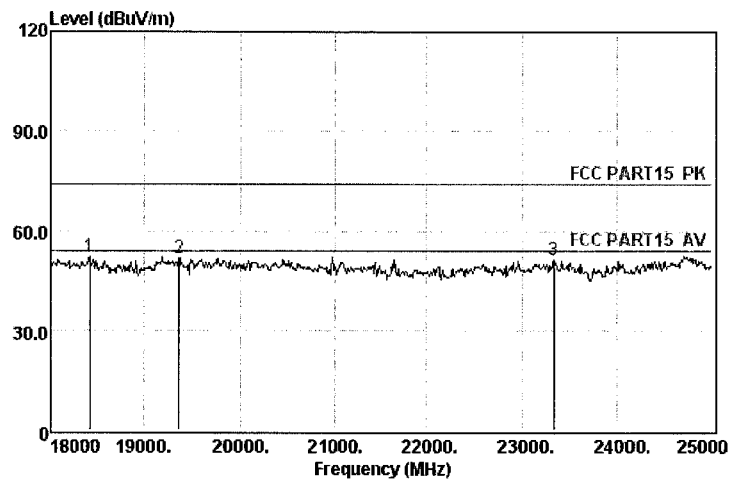


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	18420.00	32.61	41.45	17.25	52.02	74.00	-21.98	Peak
2	19365.00	32.78	40.08	18.01	51.94	74.00	-22.06	Peak
3	23320.00	32.78	31.76	22.86	51.39	74.00	-22.61	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 171 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

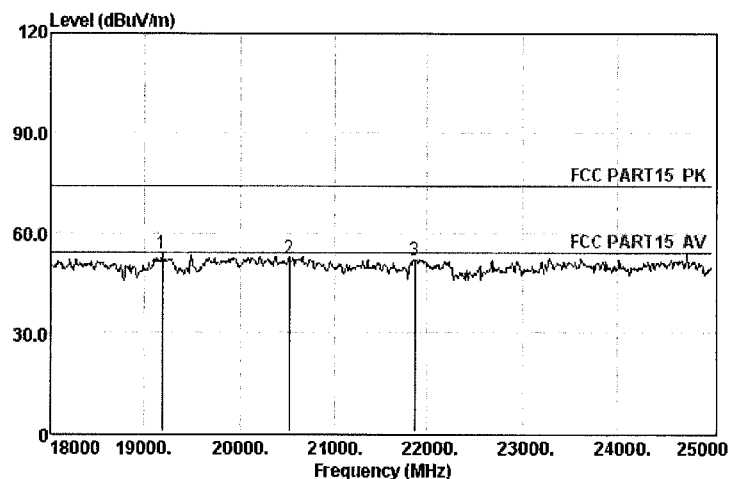


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	42.34	17.83	53.67	74.00	-20.33	Peak
2	20520.00	32.30	38.08	19.04	52.38	74.00	-21.62	Peak
3	21864.00	33.20	36.58	20.07	51.87	74.00	-22.13	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 170 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

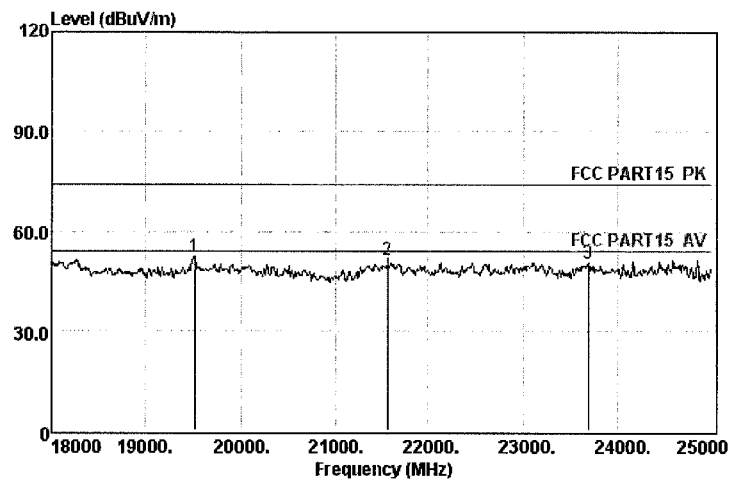


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19512.00	32.60	39.74	18.17	52.05	74.00	-21.95	Peak
2	21570.00	32.99	36.25	19.83	51.36	74.00	-22.64	Peak
3	23677.00	33.09	30.36	23.29	50.38	74.00	-23.62	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 169 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

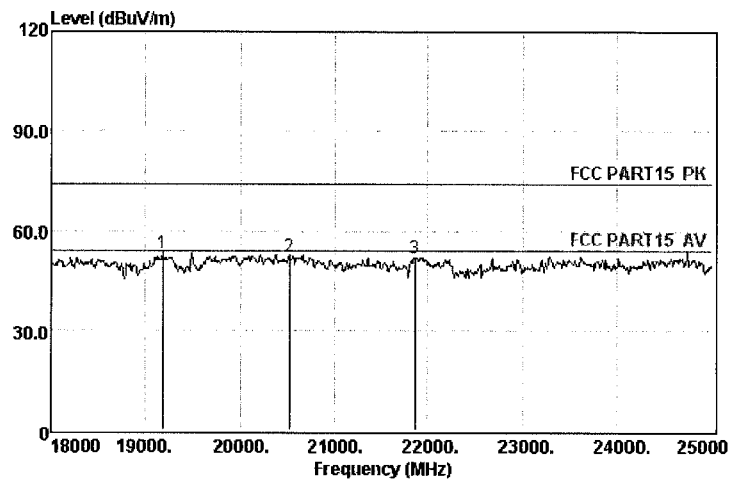


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	41.93	17.83	53.26	74.00	-20.74	Peak
2	20520.00	32.30	38.08	19.04	52.38	74.00	-21.62	Peak
3	21864.00	33.20	36.39	20.07	51.68	74.00	-22.32	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 168 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

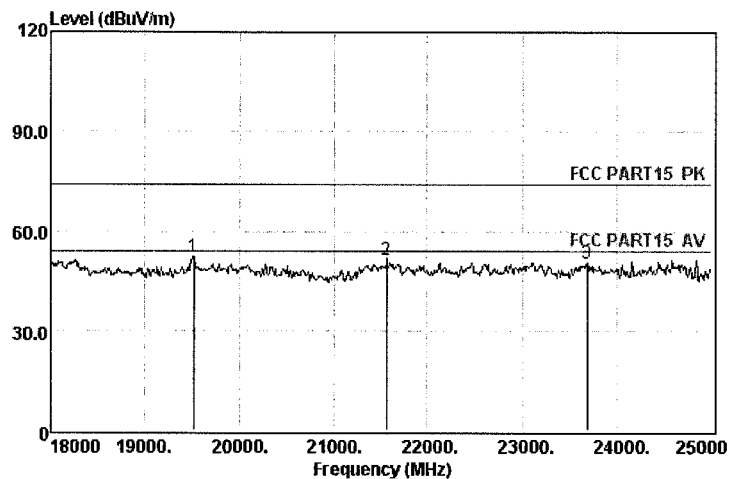


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19512.00	32.60	39.80	18.17	52.11	74.00	-21.89	Peak
2	21570.00	32.99	36.25	19.83	51.36	74.00	-22.64	Peak
3	23677.00	33.09	30.36	23.29	50.38	74.00	-23.62	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 105 File: D:\966 data\15Report\15KW020401CHY.EM6 (135)

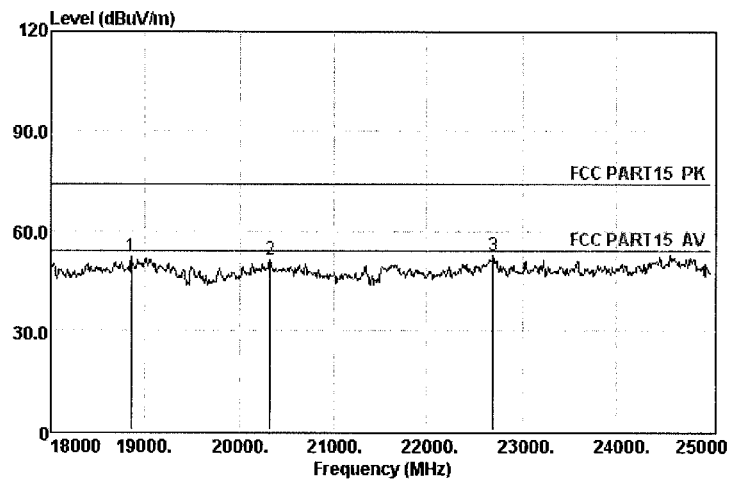


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	18854.00	33.08	41.68	17.53	52.37	74.00	-21.63	Peak
2	20324.00	32.18	37.06	18.90	51.17	74.00	-22.83	Peak
3	22690.00	32.74	34.46	21.77	52.55	74.00	-21.45	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 104 File: D:\966 data\15Report\15KW020401CHY.EM6 (135)

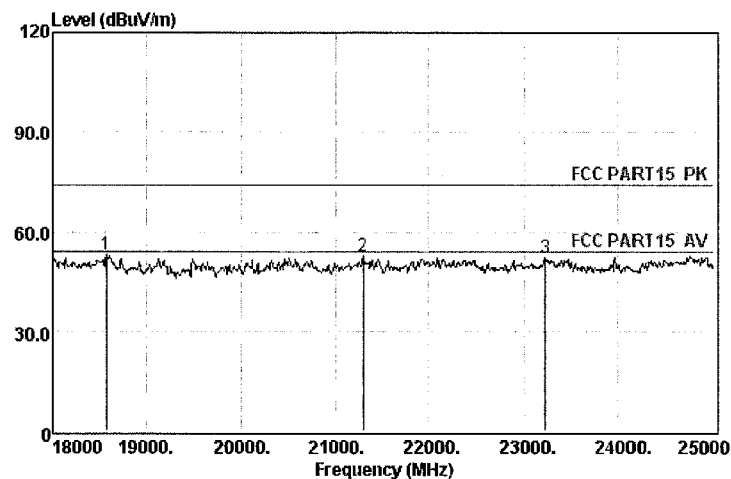


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	18574.00	32.78	42.68	17.35	53.29	74.00	-20.71	Peak
2	21304.00	32.80	37.61	19.62	52.56	74.00	-21.44	Peak
3	23215.00	32.68	32.74	22.74	52.27	74.00	-21.73	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 167 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

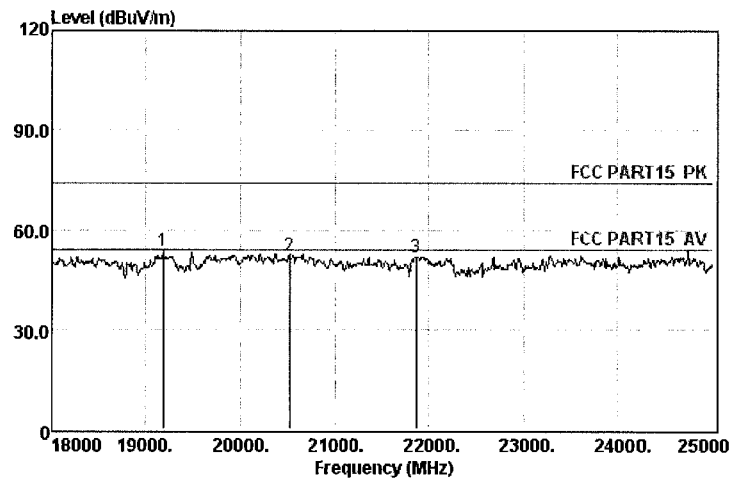


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	42.34	17.83	53.67	74.00	-20.33	Peak
2	20520.00	32.30	38.08	19.04	52.38	74.00	-21.62	Peak
3	21864.00	33.20	36.58	20.07	51.87	74.00	-22.13	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 166 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

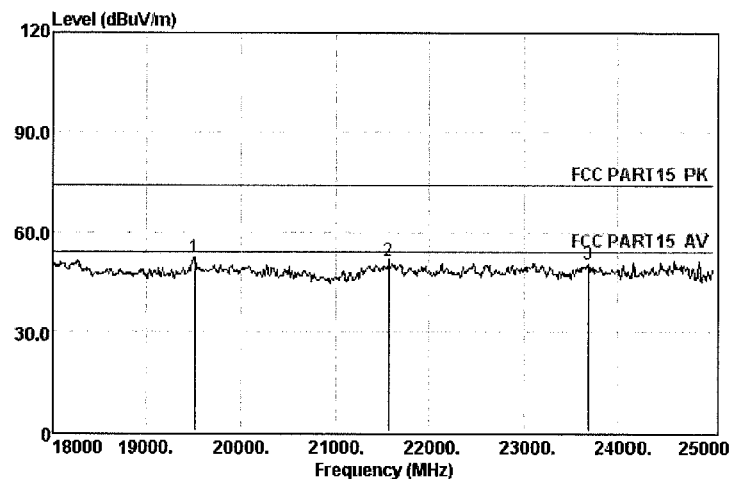


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	19512.00	32.60	39.74	18.17	52.05	74.00	-21.95	Peak
2	21570.00	32.99	36.25	19.83	51.36	74.00	-22.64	Peak
3	23677.00	33.09	30.36	23.29	50.38	74.00	-23.62	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 165 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

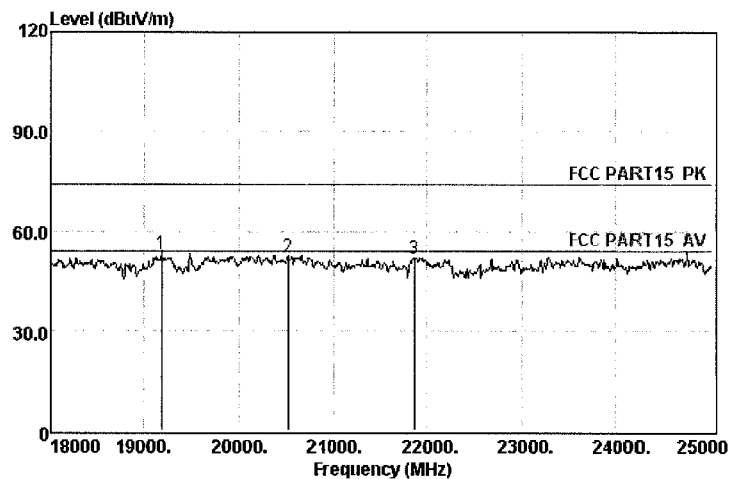


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	41.93	17.83	53.26	74.00	-20.74	Peak
2	20520.00	32.30	38.08	19.04	52.38	74.00	-21.62	Peak
3	21864.00	33.20	36.39	20.07	51.68	74.00	-22.32	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 164 File: D:\966 data\15Report\15KW020401CHY.EM6 (171)

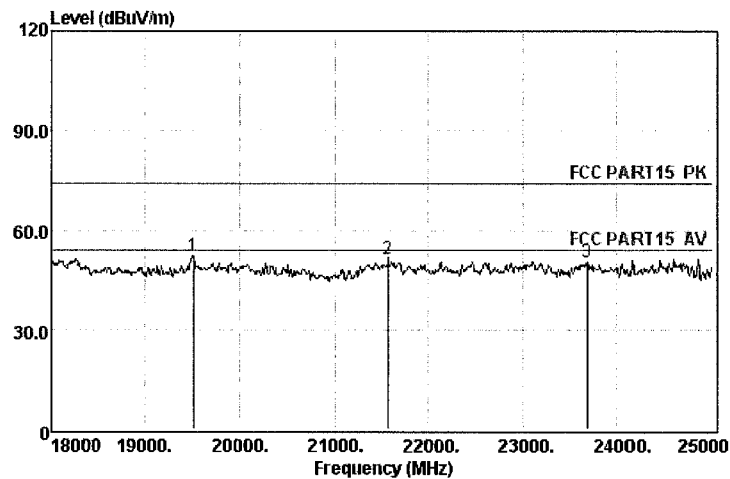


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19512.00	32.60	39.80	18.17	52.11	74.00	-21.89	Peak
2	21570.00	32.99	36.25	19.83	51.36	74.00	-22.64	Peak
3	23677.00	33.09	30.36	23.29	50.38	74.00	-23.62	Peak


 Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 199 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

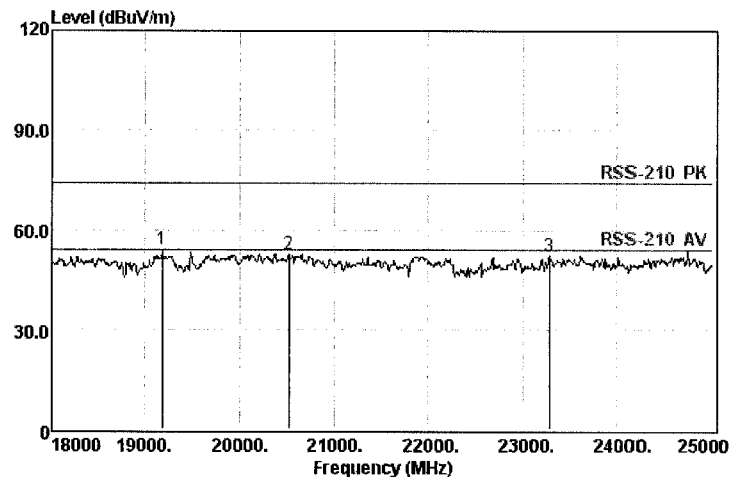

 Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	42.69	17.83	54.02	74.00	-19.98	Peak
2	20520.00	32.30	38.55	19.04	52.85	74.00	-21.15	Peak
3	23271.00	32.73	32.83	22.80	52.41	74.00	-21.59	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 198 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

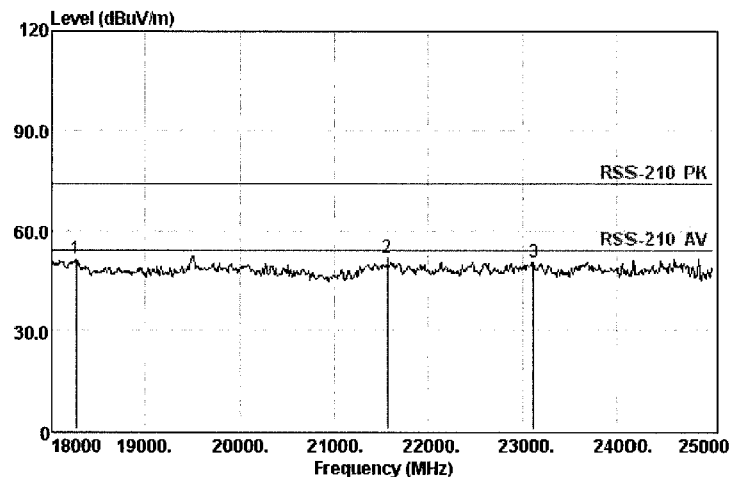


Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	18266.00	32.45	40.84	17.15	51.36	74.00	-22.64	Peak
2	21570.00	32.99	36.73	19.83	51.84	74.00	-22.16	Peak
3	23110.00	32.59	31.05	22.61	50.46	74.00	-23.54	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 201 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

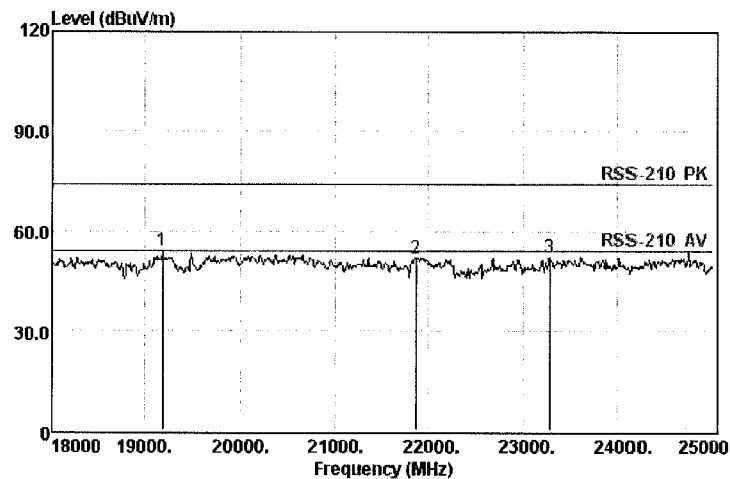


Site : 966 Chamber
 Condition: RSS-210 PK 3m BBH9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	42.69	17.83	54.02	74.00	-19.98	Peak
2	21864.00	33.20	36.67	20.07	51.96	74.00	-22.04	Peak
3	23271.00	32.73	32.83	22.80	52.41	74.00	-21.59	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 200 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

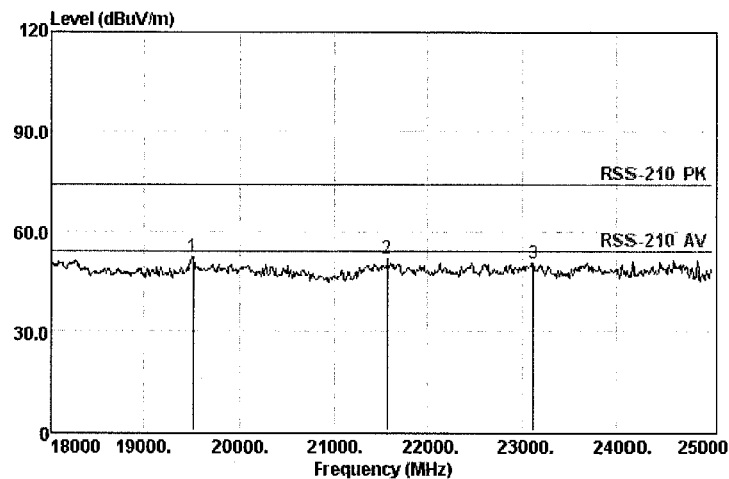


Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	19512.00	32.60	39.84	18.17	52.15	74.00	-21.85	Peak
2	21570.00	32.99	36.73	19.83	51.84	74.00	-22.16	Peak
3	23110.00	32.59	31.05	22.61	50.46	74.00	-23.54	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 203 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

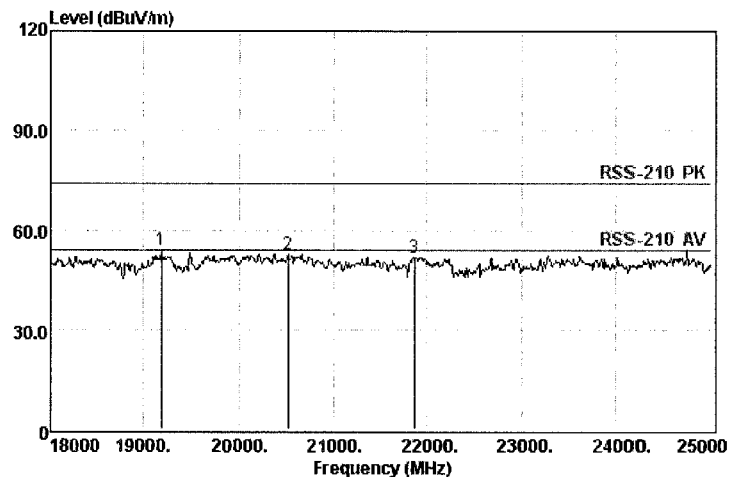


Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	42.69	17.83	54.02	74.00	-19.98	Peak
2	20520.00	32.30	38.55	19.04	52.85	74.00	-21.15	Peak
3	21864.00	33.20	36.67	20.07	51.96	74.00	-22.04	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 202 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

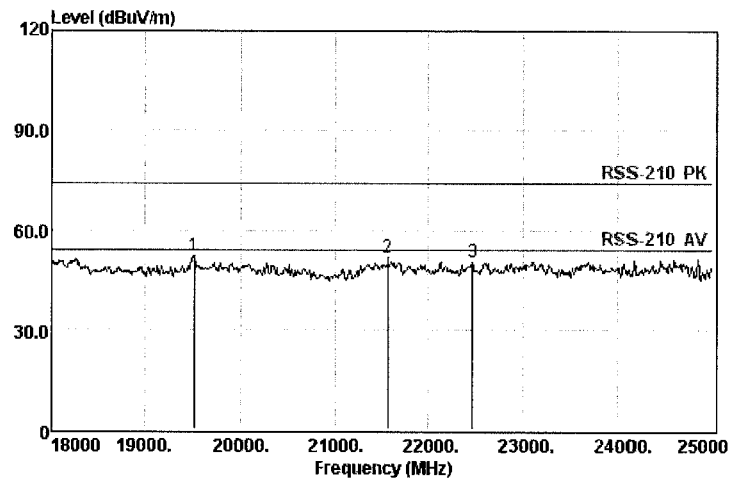


Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	19512.00	32.60	39.84	18.17	52.15	74.00	-21.85	Peak
2	21570.00	32.99	36.73	19.83	51.84	74.00	-22.16	Peak
3	22466.00	32.92	33.34	21.26	50.55	74.00	-23.45	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 204 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

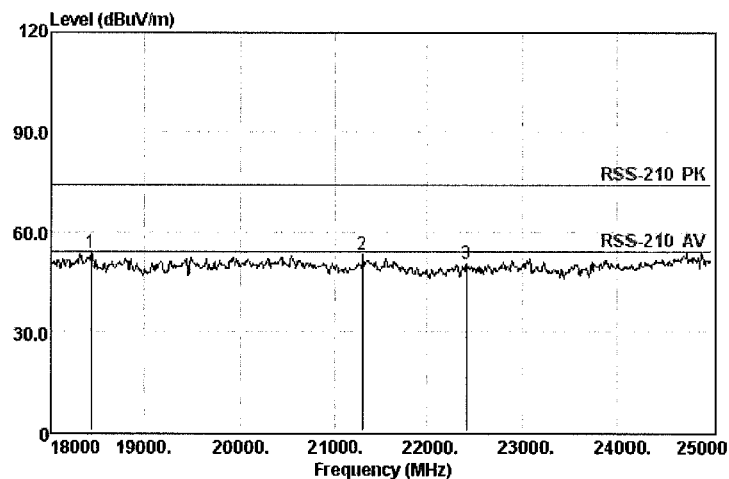


Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	18434.00	32.63	42.76	17.26	53.33	74.00	-20.67	Peak
2	21304.00	32.80	38.20	19.62	53.15	74.00	-20.85	Peak
3	22410.00	32.96	33.29	21.13	50.29	74.00	-23.71	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 205 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

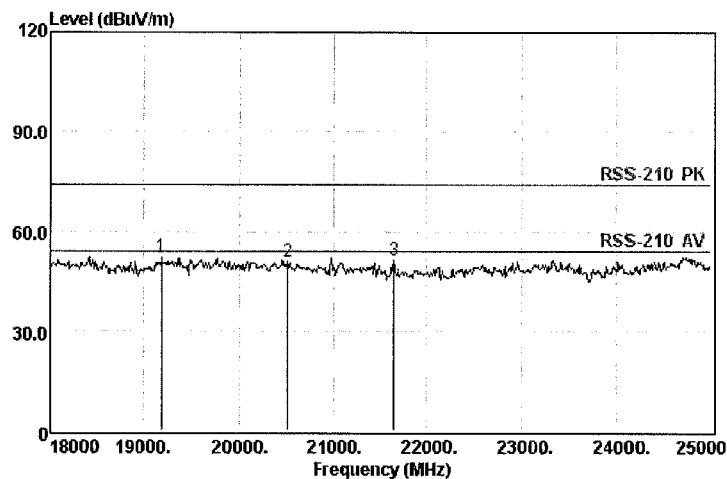


Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	40.77	17.83	52.10	74.00	-21.90	Peak
2	20506.00	32.29	36.68	19.03	50.97	74.00	-23.03	Peak
3	21654.00	33.05	35.94	19.90	51.10	74.00	-22.90	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 207 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

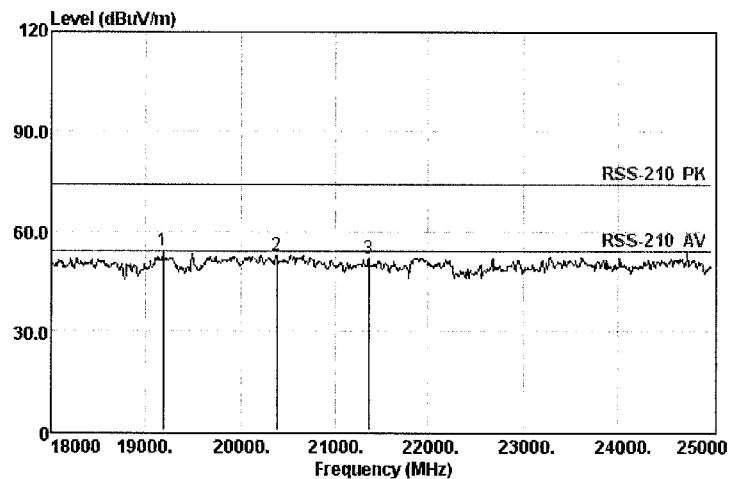


Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	42.69	17.83	54.02	74.00	-19.98	Peak
2	20360.00	32.21	38.53	18.94	52.70	74.00	-21.30	Peak
3	21360.00	32.84	36.90	19.66	51.88	74.00	-22.12	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 206 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

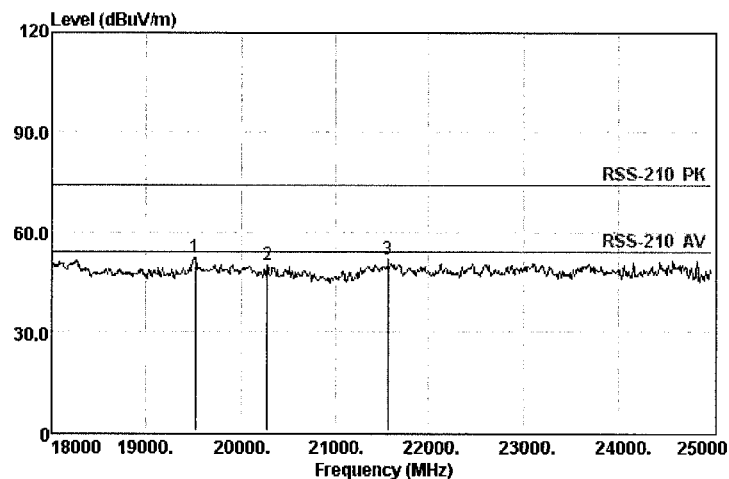


Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	19512.00	32.60	39.84	18.17	52.15	74.00	-21.85	Peak
2	20275.00	32.15	35.72	18.87	49.79	74.00	-24.21	Peak
3	21570.00	32.99	36.73	19.83	51.84	74.00	-22.16	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 209 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

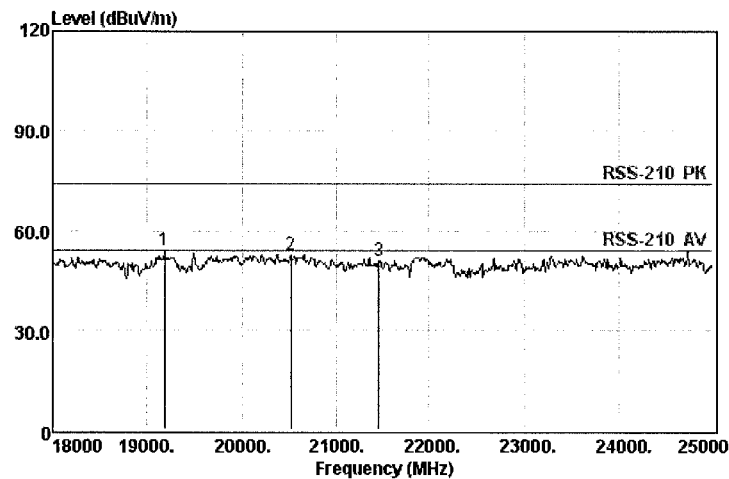


Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	42.69	17.83	54.02	74.00	-19.98	Peak
2	20520.00	32.30	38.55	19.04	52.85	74.00	-21.15	Peak
3	21465.00	32.92	35.94	19.75	50.98	74.00	-23.02	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 208 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

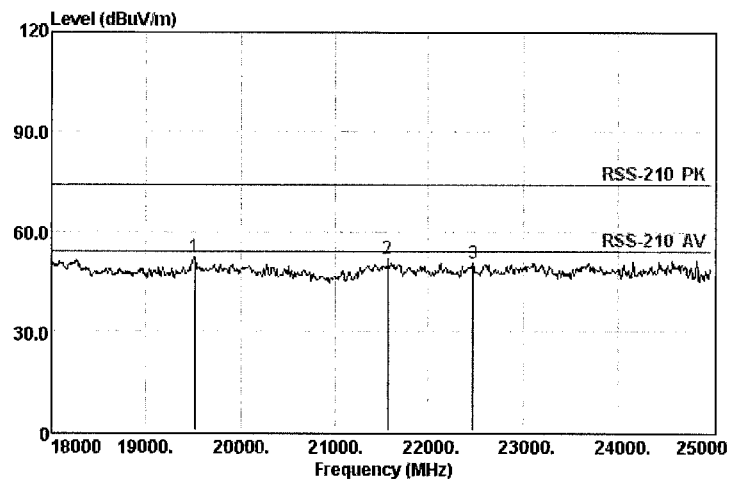


Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19512.00	32.60	39.84	18.17	52.15	74.00	-21.85	Peak
2	21570.00	32.99	36.73	19.83	51.84	74.00	-22.16	Peak
3	22466.00	32.92	33.34	21.26	50.55	74.00	-23.45	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhongshan
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 211 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

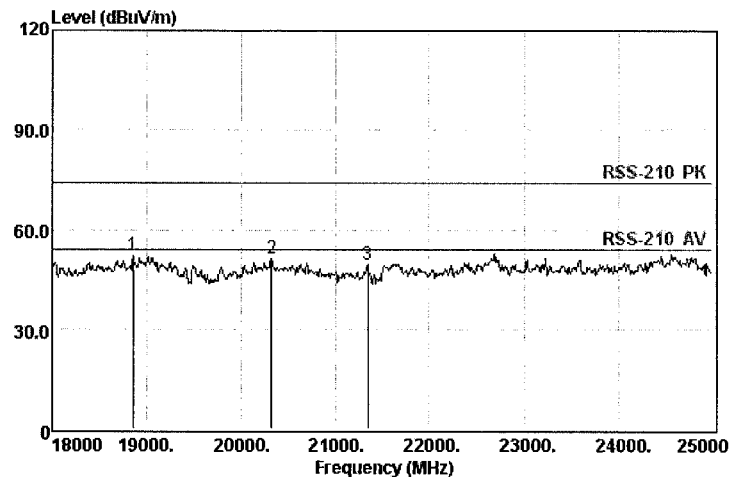


Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	18854.00	33.08	41.68	17.53	52.37	74.00	-21.63	Peak
2	20324.00	32.18	37.06	18.90	51.17	74.00	-22.83	Peak
3	21346.00	32.83	34.54	19.65	49.51	74.00	-24.49	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 210 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

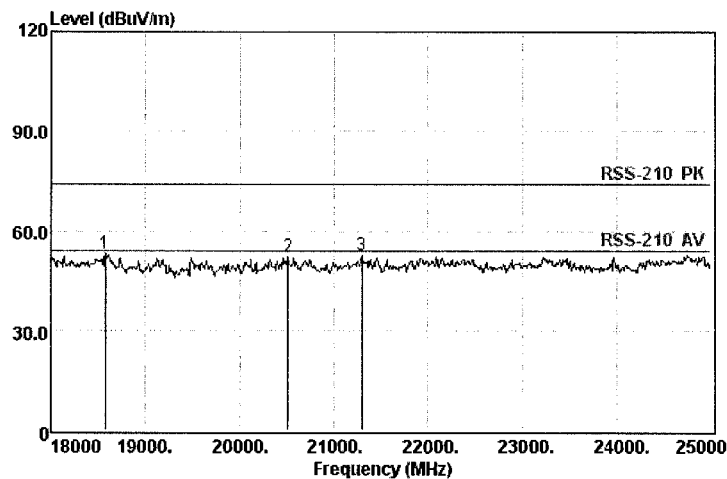


Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : Low

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	18574.00	32.78	42.68	17.35	53.29	74.00	-20.71	Peak
2	20506.00	32.29	37.82	19.03	52.11	74.00	-21.89	Peak
3	21304.00	32.80	37.61	19.62	52.56	74.00	-21.44	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 213 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

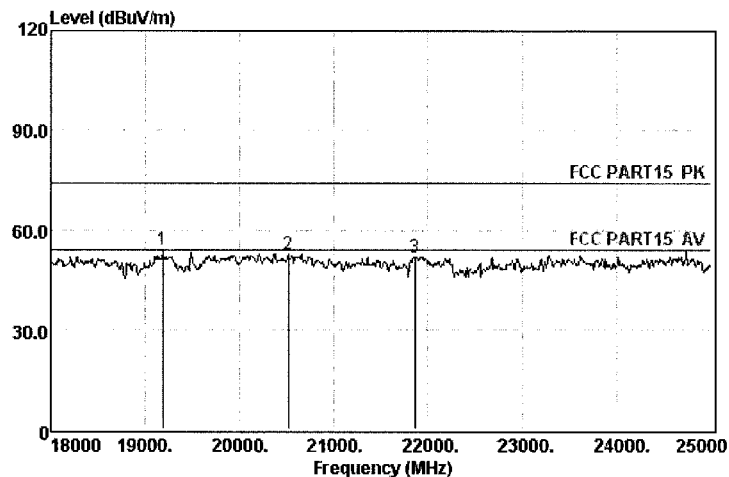


Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	42.69	17.83	54.02	74.00	-19.98	Peak
2	20520.00	32.30	38.55	19.04	52.85	74.00	-21.15	Peak
3	21864.00	33.20	36.67	20.07	51.96	74.00	-22.04	Peak


 Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 212 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

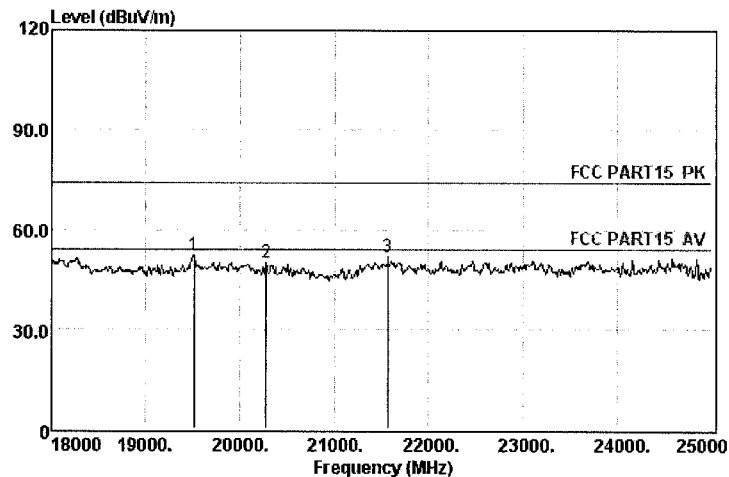

 Site : 966 Chamber
 Condition: FCC PART15 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : Middle

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	19512.00	32.60	39.84	18.17	52.15	74.00	-21.85	Peak
2	20275.00	32.15	35.72	18.87	49.79	74.00	-24.21	Peak
3	21570.00	32.99	36.73	19.83	51.84	74.00	-22.16	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 215 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

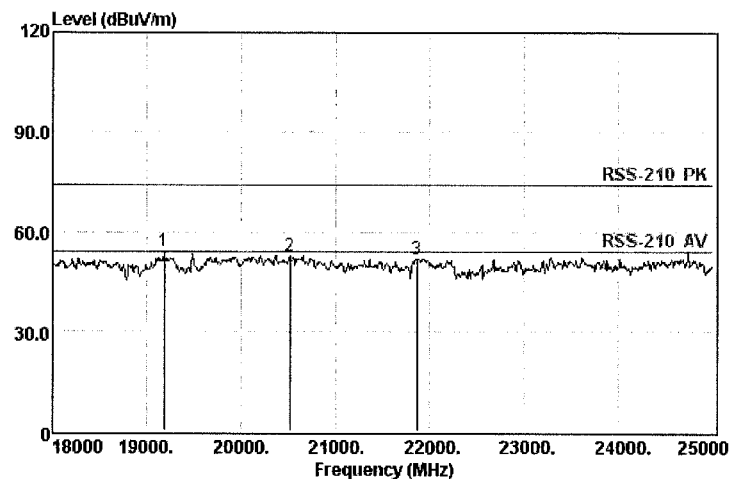


Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : High

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	19190.00	33.00	42.69	17.83	54.02	74.00	-19.98	Peak
2	20520.00	32.30	38.55	19.04	52.85	74.00	-21.15	Peak
3	21864.00	33.20	36.67	20.07	51.96	74.00	-22.04	Peak



Keyway Testing Technology Co.,Ltd.
 Beishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 214 File: D:\966 data\15Report\15KW020401CHY.EM6 (215)

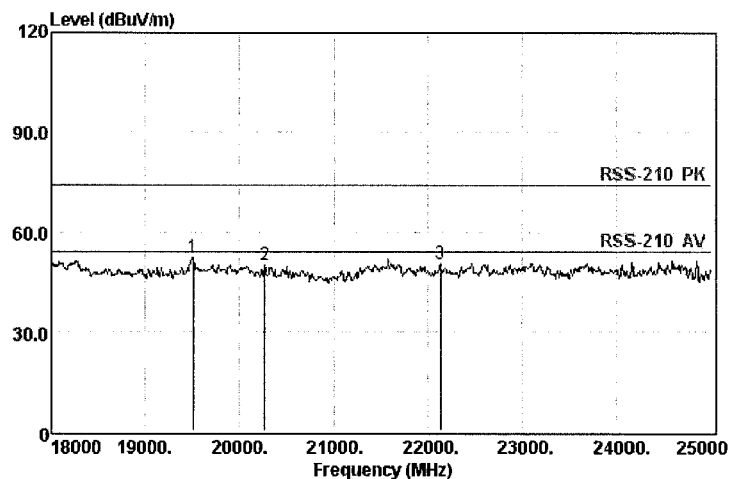

Site : 966 Chamber
 Condition: RSS-210 PK 3m BBHA9170 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK
 : High


		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	19512.00	32.60	39.84	18.17	52.15	74.00	-21.85	Peak
2	20275.00	32.15	35.72	18.87	49.79	74.00	-24.21	Peak
3	22130.00	33.18	34.46	20.49	50.37	74.00	-23.63	Peak

Test Plot of Frequency Band Edge



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhongmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 22 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

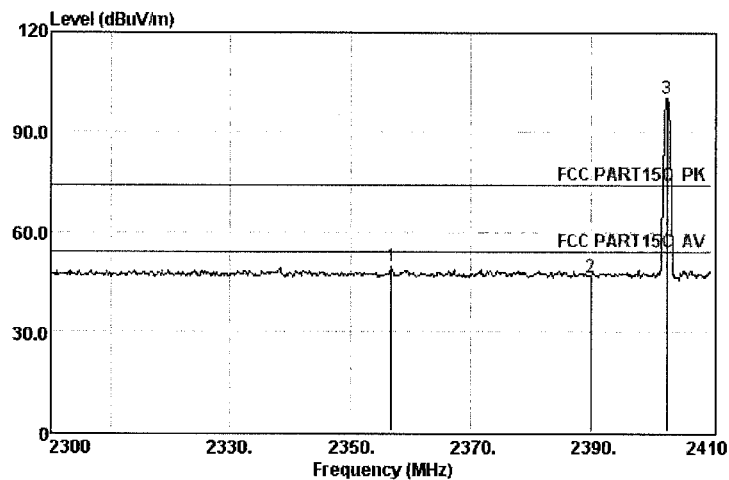


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dBuV	dB	dBuV/m	dBuV/m	dB
1	2356.65		26.31	39.72	7.25	49.35	74.00	-24.65 Peak
2	2389.98		26.32	36.78	7.34	46.52	74.00	-27.48 Peak
3 *	2402.52		26.32	90.68	7.39	100.48	74.00	26.48 Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 21 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

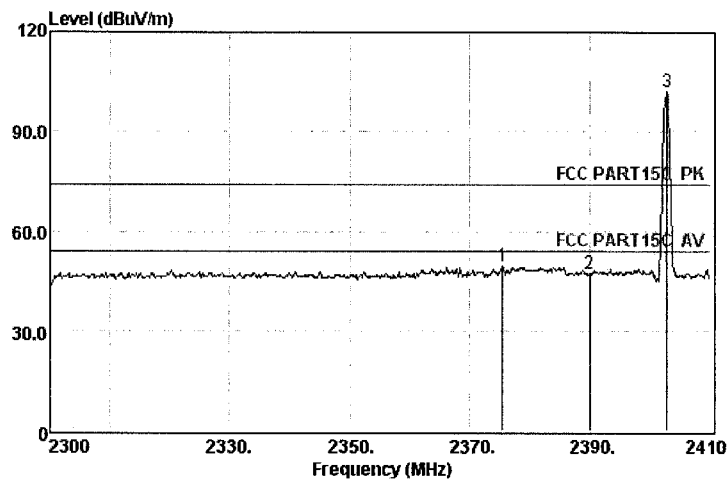


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2375.35	26.31	39.96	7.30	49.65	74.00	-24.35	Peak
2	2389.98	26.32	37.39	7.34	47.13	74.00	-26.87	Peak
3 *	2402.63	26.32	92.16	7.39	101.96	74.00	27.96	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 23 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

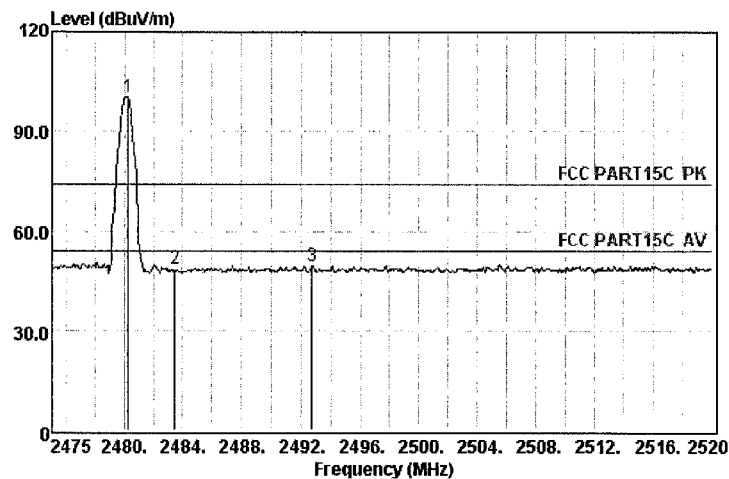


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2480MHz

		Preamp	Read	Cable	Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB
1 *	2480.25	26.34	90.57	7.57	100.59	74.00	26.59 Peak
2	2483.50	26.34	38.61	7.57	48.63	74.00	-25.37 Peak
3	2492.75	26.35	39.57	7.61	49.63	74.00	-24.37 Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 24 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

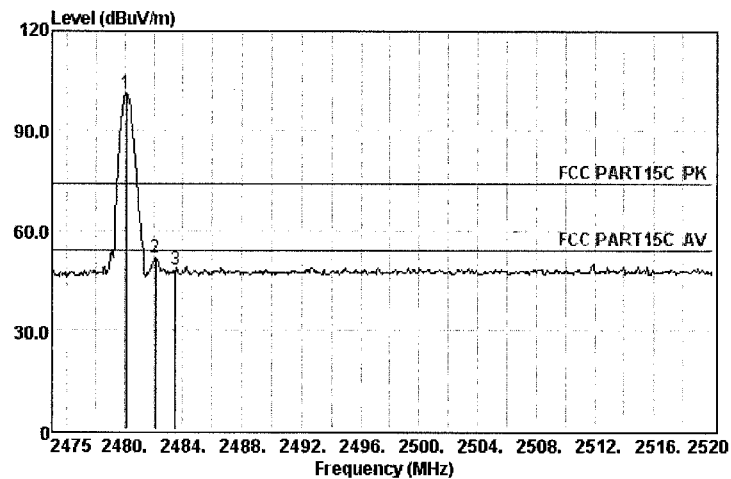


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1 *	2480.10	26.34	91.22	7.57	101.24	74.00	27.24	Peak
2	2482.10	26.34	41.57	7.57	51.59	74.00	-22.41	Peak
3	2483.50	26.34	38.04	7.57	48.06	74.00	-25.94	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 25 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

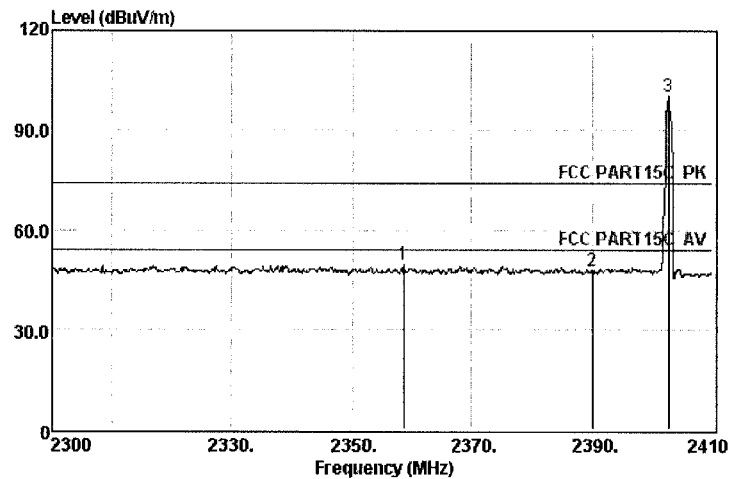


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB	
1	2358.52	26.31	39.74	7.25	49.37	74.00	-24.63	Peak
2	2389.98	26.32	37.92	7.34	47.66	74.00	-26.34	Peak
3 *	2402.52	26.32	90.59	7.39	100.39	74.00	26.39	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 26 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

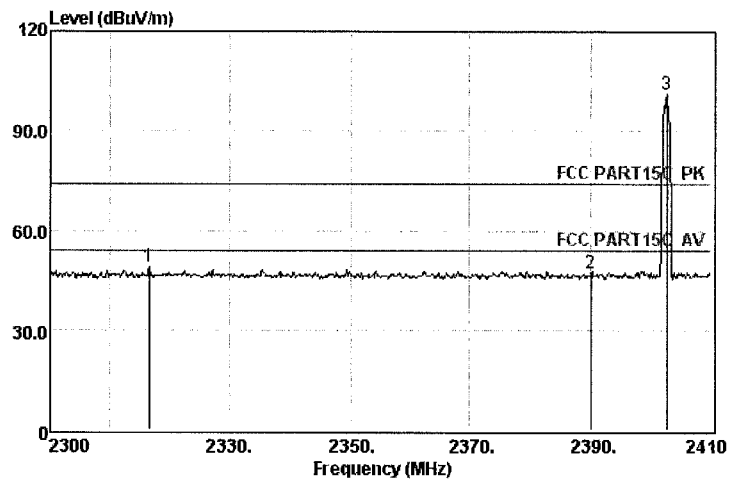


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 VERTICAL
 EUT : Bluetooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2316.72	26.29	39.34	7.16	48.86	74.00	-25.14	Peak
2	2389.98	26.32	37.60	7.34	47.34	74.00	-26.66	Peak
3 *	2402.52	26.32	91.33	7.39	101.13	74.00	27.13	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 28 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

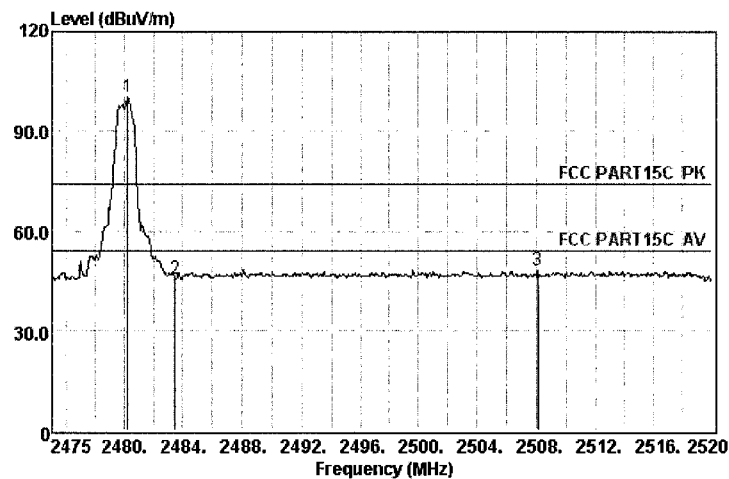


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1 *	2480.25	26.34	90.52	7.57	100.54	74.00	26.54	Peak
2	2483.50	26.34	35.64	7.57	45.66	74.00	-28.34	Peak
3	2508.10	26.35	37.98	7.61	48.08	74.00	-25.92	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 27 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

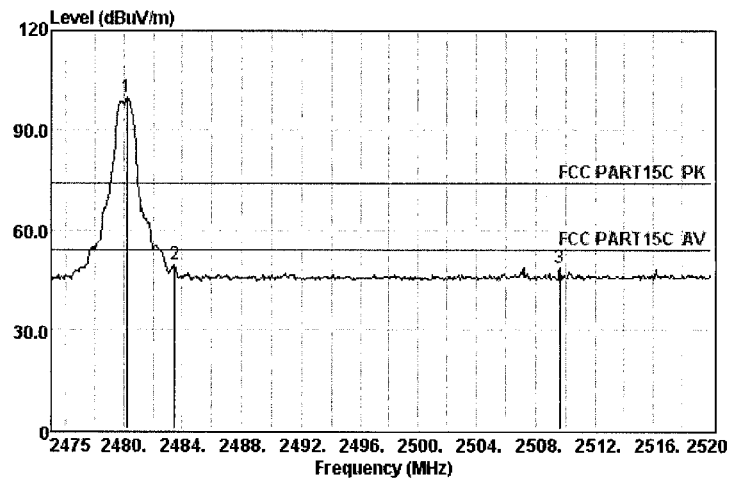


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: PI/4 DPSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1 *	2480.20	26.34	90.03	7.57	100.05	74.00	26.05	Peak
2	2483.50	26.34	39.50	7.57	49.52	74.00	-24.48	Peak
3	2509.60	26.35	38.41	7.61	48.51	74.00	-25.49	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 30 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

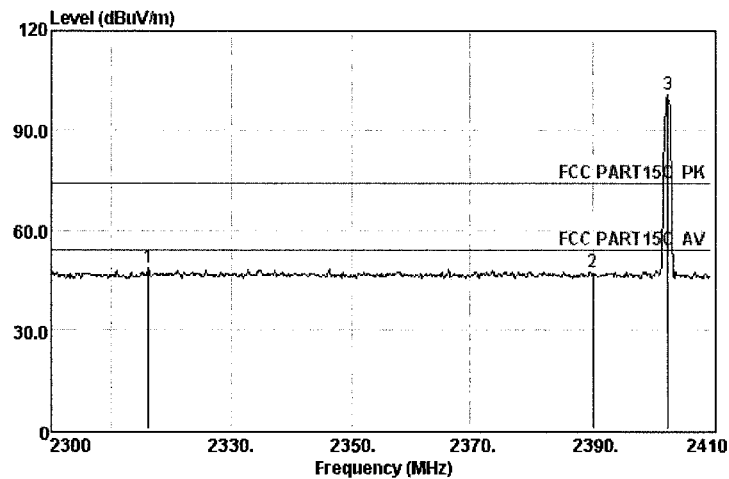


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 HORIZONTAL
 EUT : Bluetooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2316.28	26.29	38.89	7.16	46.41	74.00	-25.59	Peak
2	2389.98	26.32	37.64	7.34	47.38	74.00	-26.62	Peak
3 *	2402.63	26.32	91.07	7.39	100.87	74.00	26.87	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 29 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

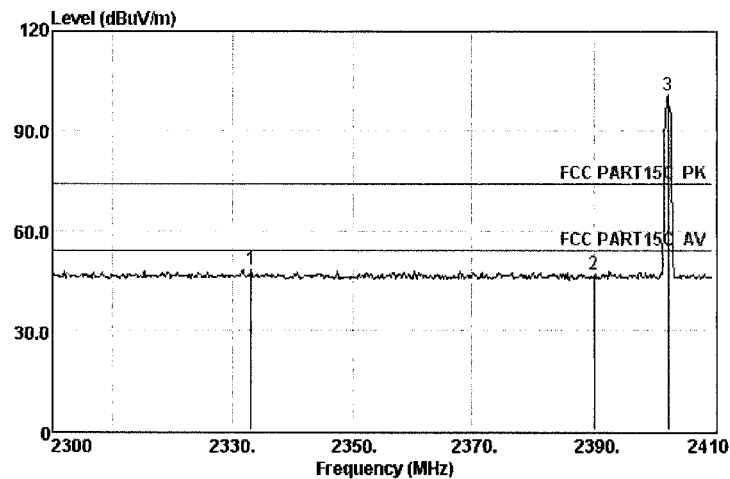


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2333.00	26.30	38.46	7.21	48.03	74.00	-25.97	Peak
2	2389.98	26.32	37.06	7.34	46.80	74.00	-27.20	Peak
3 *	2402.52	26.32	90.90	7.39	100.70	74.00	26.70	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 31 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

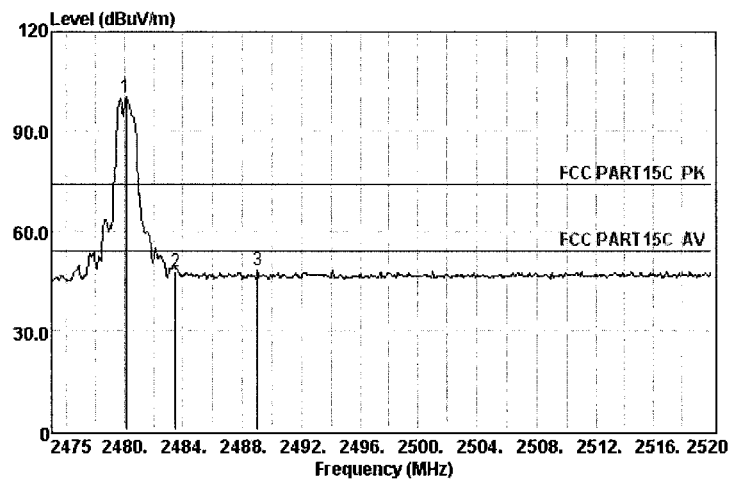


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 HORIZONTAL
 EUT : Bluetooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1 *	2480.10	26.34	90.40	7.57	100.42	74.00	26.42	Peak
2	2483.50	26.34	37.68	7.57	47.70	74.00	-26.30	Peak
3	2489.00	26.35	38.27	7.57	48.29	74.00	-25.71	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 32 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

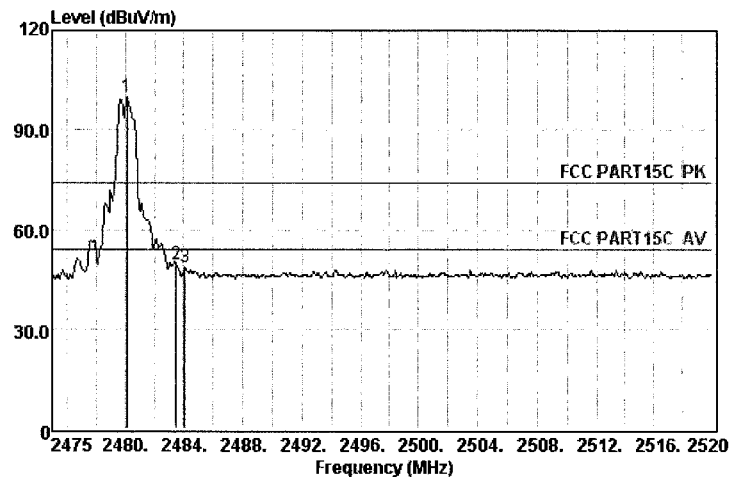


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: 8DPSK 2480MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1 *	2480.10	26.34	89.69	7.57	99.91	74.00	25.91	Peak
2	2483.50	26.34	39.57	7.57	49.59	74.00	-24.41	Peak
3	2484.10	26.34	38.45	7.57	48.47	74.00	-25.53	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 36 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

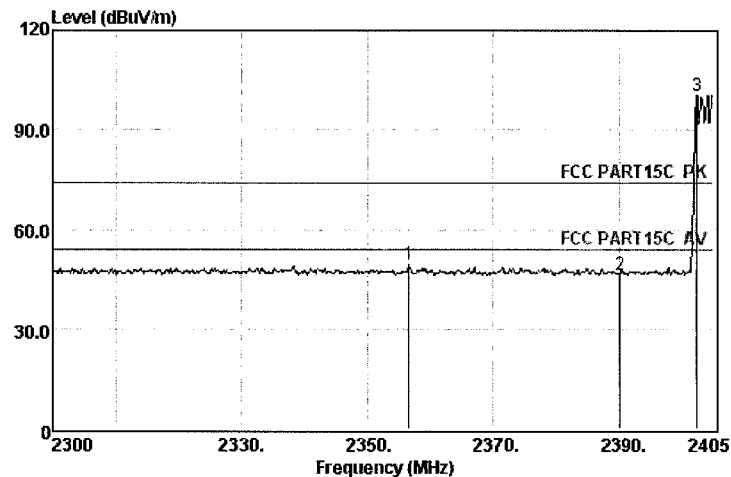


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2402MHz

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1	2356.65		26.31	39.72	7.25	49.35	74.00	-24.65 Peak
2	2389.98		26.32	36.78	7.34	46.52	74.00	-27.48 Peak
3 *	2402.52		26.32	90.68	7.39	100.48	74.00	26.48 Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 35 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

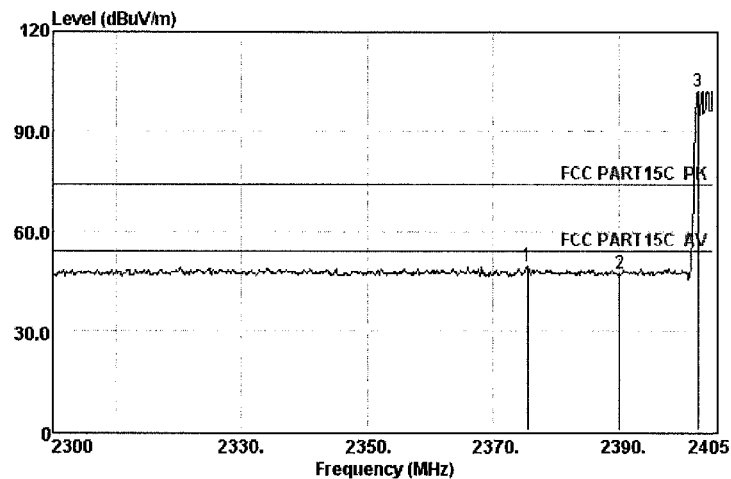


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2402MHz
 : Hopping on

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	2375.35	26.31	39.96	7.30	49.65	74.00	-24.35	Peak
2	2389.98	26.32	37.39	7.34	47.13	74.00	-26.87	Peak
3 *	2402.63	26.32	92.16	7.39	101.96	74.00	27.96	Peak



Keyway Testing Technology Co., Ltd.
 Baishun Industrial Zone, Zhangmutou
 Town, Dongguan, Guangdong, China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 34 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

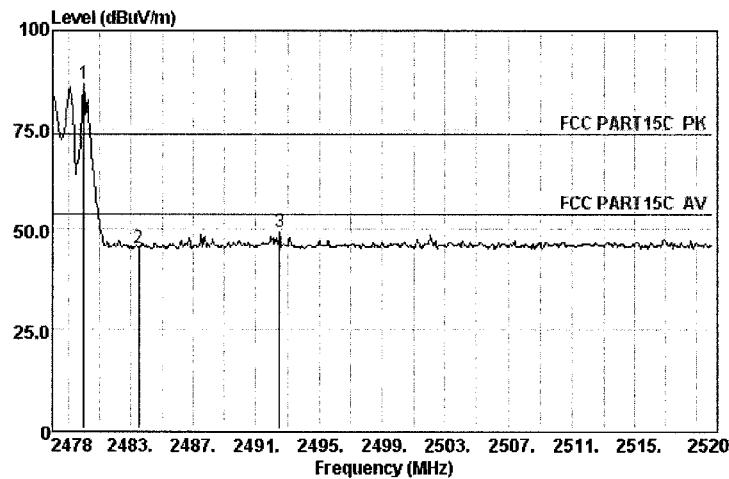


Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 HORIZONTAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2480MHz
 : Hopping on

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz		dB	dB	dBuV/m	dBuV/m	dB	
1 *	2480.00	26.34	76.43	7.57	86.45	74.00	12.45	Peak
2	2483.50	26.34	35.43	7.57	45.45	74.00	-28.55	Peak
3	2492.50	26.35	39.45	7.61	49.51	74.00	-24.49	Peak



Keyway Testing Technology Co.,Ltd.
 Baishun Industrial Zone,Zhangmutou
 Town,Dongguan,Guangdong,China
 Tel: 0769-87182258
 Fax: 0769-87181058
 Mail: kwtest@keywaytest.com

Data: 33 File: D:\966 data\15Report\15KW020401CHY.EM6 (129)

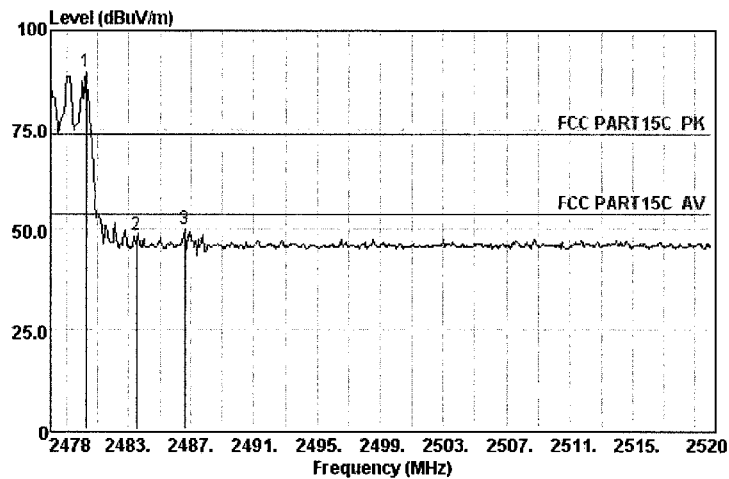

Site : 966 Chamber
 Condition: FCC PART15C PK 3m ZN30701 VERTICAL
 EUT : BlueTooth Remote Controller
 M/N : NS-SSTK2B
 Power : DC 3V
 Test By : Cissy
 Comment : Temp:24.8'C Humi:56% Press:101.52kPa
 Test Mode: GFSK 2480MHz
 : Hopping on

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1 *	2480.25	26.34	79.68	7.57	89.70	74.00	15.70	Peak
2	2483.50	26.34	38.55	7.57	48.57	74.00	-25.43	Peak
3	2486.60	26.34	40.20	7.57	50.22	74.00	-23.78	Peak

6. Safety Human exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:**Pass**

Test standard : RSS-102 Issue 5
FCC KDB Publication 447498 v05r02

The maximum radiated power of the transmitter is 5.9mW (7.771dBm/103dBμV/m) only, which is less than 7mW. Hence the EUT is exempted from routine evaluation limits (SAR Evaluation) according to clause 2.5.1 of RSS-102 Issue 5.

Since maximum radiated power of the transmitter is 5.9mW < 19mW, and the distance from EUT to human is 10mm, hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01 General RF Exposure Guidance v05r02.

7. Photographs of the Test Set-Up

Photograph 1: Set-up for Spurious Emissions below 30MHz



Photograph 2: Set-up for Spurious Emissions of 30MHz – 1GHz



Photograph 3: Set-up for Spurious Emissions of 1 – 18GHz of FCC



Photograph 4: Set-up for Spurious Emissions of 1 – 18GHz of IC



Photograph 5: Set-up for Spurious Emissions of 18 – 25GHz of FCC



Photograph 6: Set-up for Spurious Emissions of 18 – 25GHz of IC



8. List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Measurement Uncertainty	6
Table 3: Technical Specification of EUT	7
Table 4: Test result of 20dB & 99% Bandwidth.....	12

9. List of Photographs

Photograph 1: Set-up for Spurious Emissions below 30MHz	130
Photograph 2: Set-up for Spurious Emissions of 30MHz – 1GHz.....	130
Photograph 3: Set-up for Spurious Emissions of 1 – 18GHz of FCC.....	131
Photograph 4: Set-up for Spurious Emissions of 1 – 18GHz of IC	131
Photograph 5: Set-up for Spurious Emissions of 18 – 25GHz of FCC.....	132
Photograph 6: Set-up for Spurious Emissions of 18 – 25GHz of IC	132