38.6G ~40G Avg	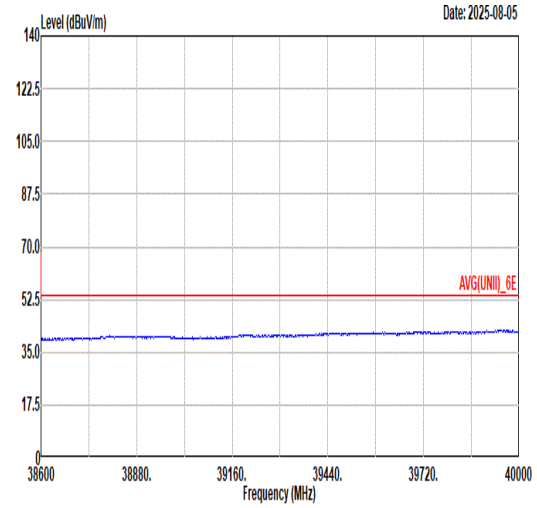 Site : 03CH12-HY Condition: AVG(UNII)_6E 1m SHF_00994_250109 HORIZONTAL	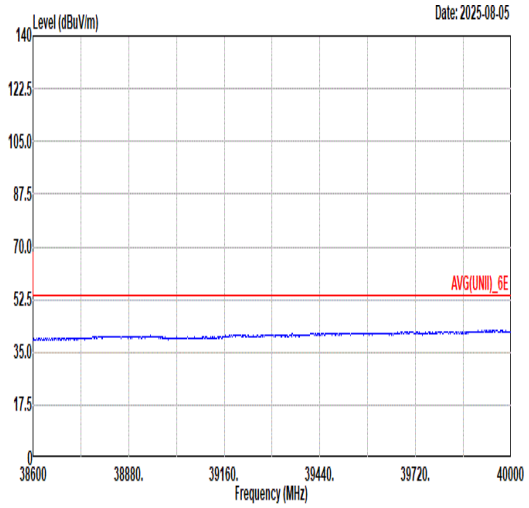 Site : 03CH12-HY Condition: AVG(UNII)_6E 1m SHF_00994_250109 VERTICAL

Mode	30	
	Harmonic	
	U-NII-7_6.525-6.875_802.11be EHT320_CH127_RU 996T*4_6585MHz	
ANT	4	
Pol.	Horizontal	Vertical
Peak Avg	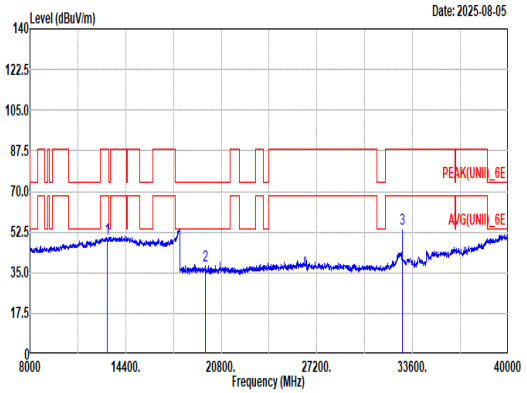 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 13170.00 49.52 88.20 -38.68 58.40 39.72 17.85 66.85 0.40 -- -- Peak 2 19755.00 38.30 74.00 -35.70 42.15 38.59 20.25 53.15 -9.54 -- -- PEAK 3 32925.00 53.86 88.20 -34.34 48.33 41.00 26.60 52.53 -9.54 100 341 Peak	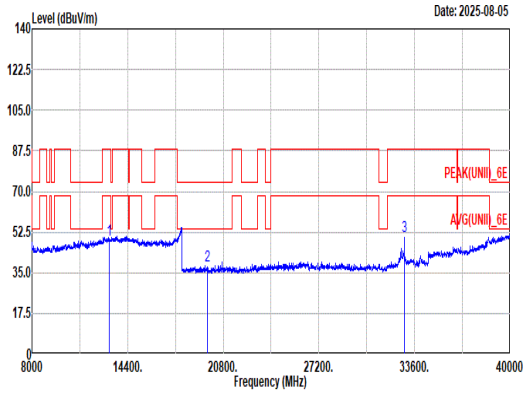 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 13170.00 49.09 88.20 -39.11 57.97 39.72 17.85 66.85 0.40 -- -- Peak 2 19755.00 38.15 74.00 -35.85 42.00 38.59 20.25 53.15 -9.54 -- -- PEAK 3 32925.00 50.78 88.20 -37.42 45.25 41.00 26.60 52.53 -9.54 100 346 Peak

Mode	30	
	Harmonic	
	U-NII-7_6.525-6.875_802.11be EHT320_CH127_RU 996T*4_6585MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	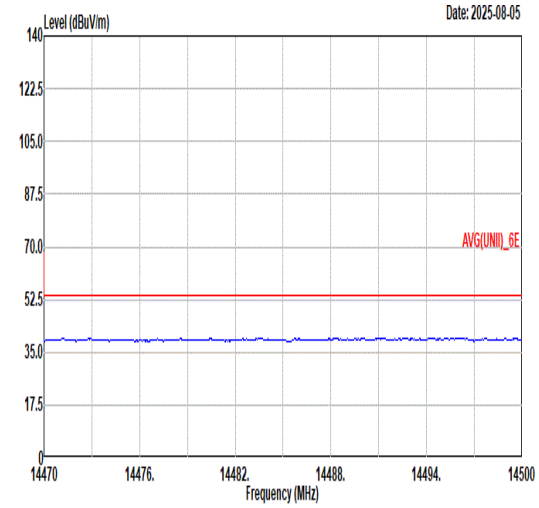 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL	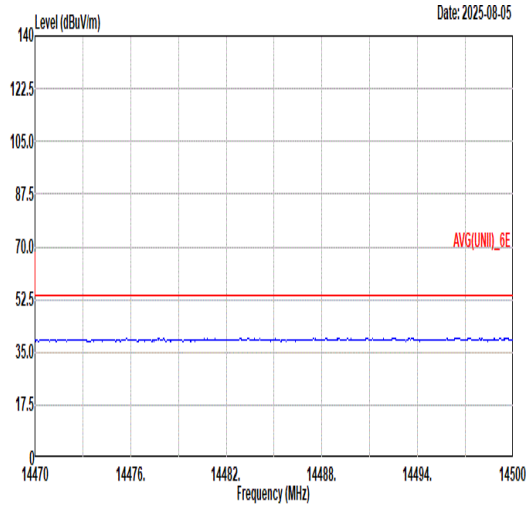 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	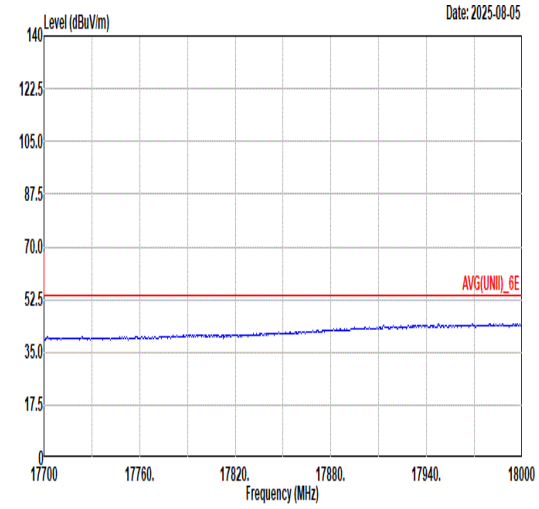 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL	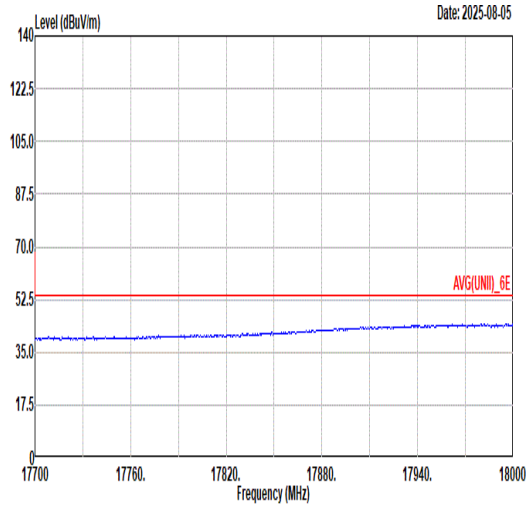 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL

38.6G ~40G Avg	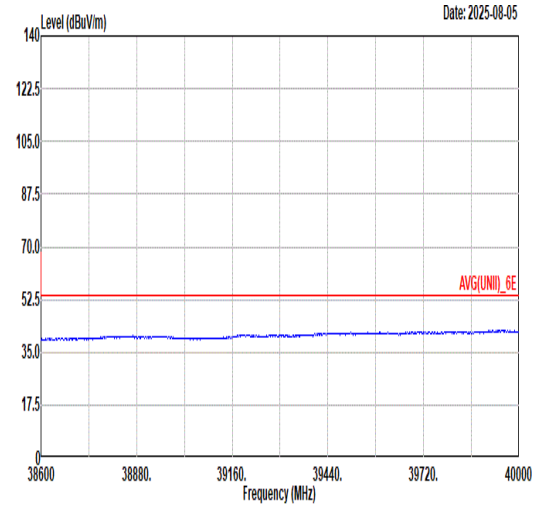 Site : 03CH12-HY Condition: AVG(UNII)_6E 1m SHF_00994_250109 HORIZONTAL	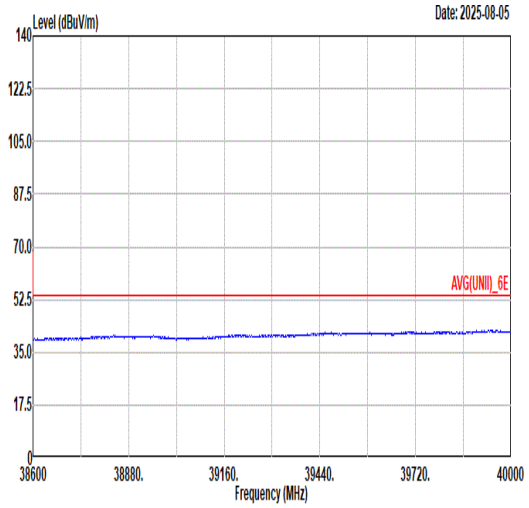 Site : 03CH12-HY Condition: AVG(UNII)_6E 1m SHF_00994_250109 VERTICAL

Mode	31	
	Harmonic	
	U-NII-7_6.525-6.875_802.11be EHT160_CH143_RU 996T*2_6665MHz	
ANT	4	
Pol.	Horizontal	Vertical
Peak Avg	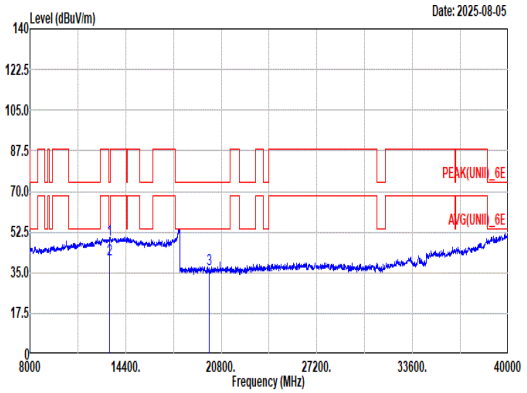 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 13330.00 49.34 74.00 -24.66 57.84 40.08 17.98 66.96 0.40 -- -- Peak 2 13330.00 40.55 54.00 -13.45 49.05 40.08 17.98 66.96 0.40 -- -- Average 3 19995.00 36.55 74.00 -37.45 40.34 38.49 20.36 53.10 -9.54 -- -- Peak	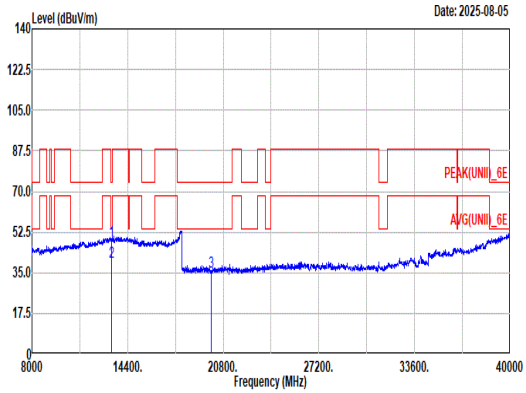 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 13330.00 48.34 74.00 -25.66 56.84 40.08 17.98 66.96 0.40 -- -- Peak 2 13330.00 39.87 54.00 -14.13 48.37 40.08 17.98 66.96 0.40 -- -- Average 3 19995.00 35.16 74.00 -38.84 38.95 38.49 20.36 53.10 -9.54 -- -- Peak

Mode	31	
	Harmonic	
	U-NII-7_6.525-6.875_802.11be EHT160_CH143_RU 996T*2_6665MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	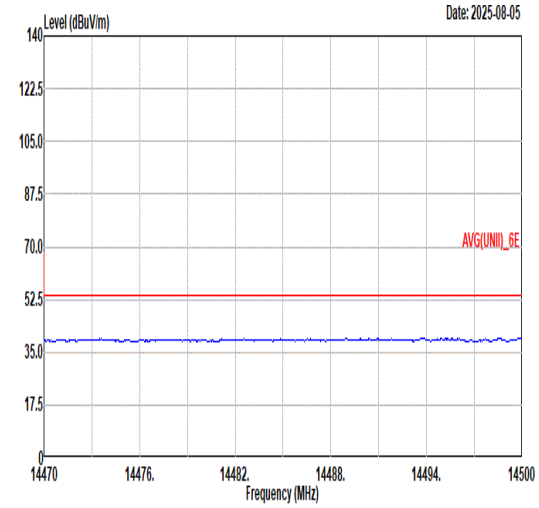 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL	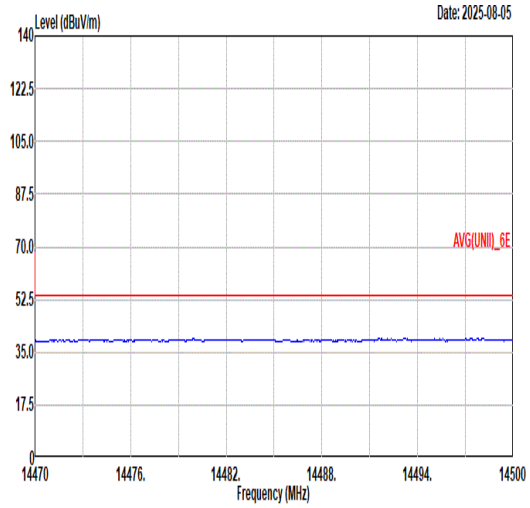 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	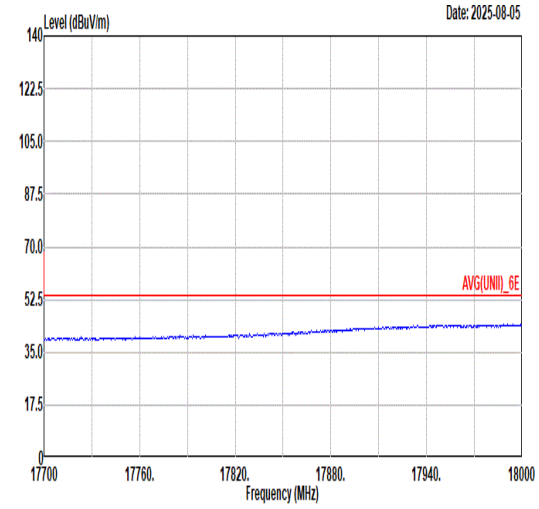 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL	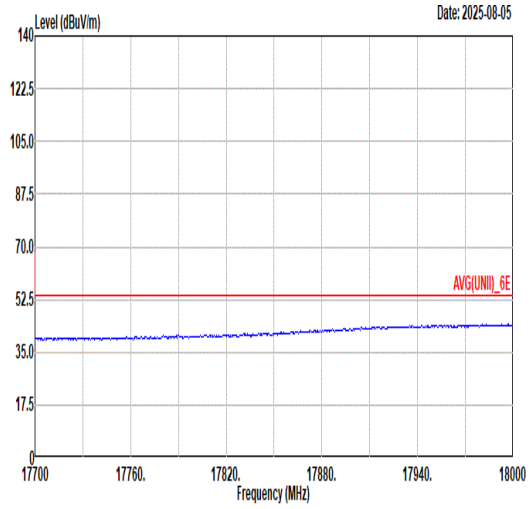 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL

38.6G ~40G Avg	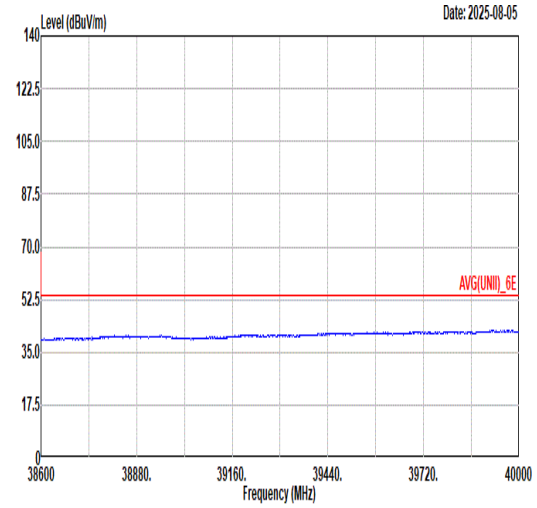 Site : 03CH12-HY Condition: AVG(UNII)_6E 1m SHF_00994_250109 HORIZONTAL	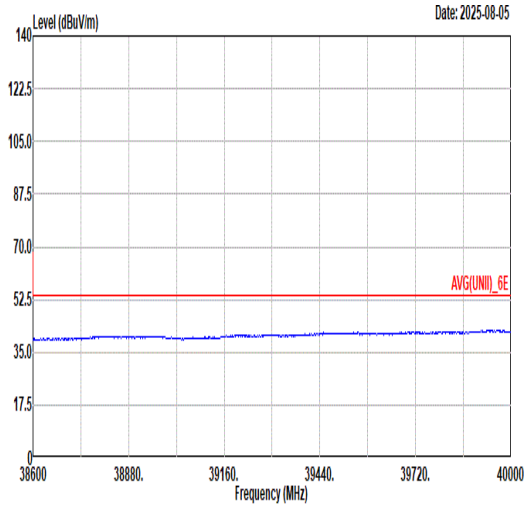 Site : 03CH12-HY Condition: AVG(UNII)_6E 1m SHF_00994_250109 VERTICAL

Mode	32	
	Band Edge	
	U-NII-8_6.875-7.125_802.11be EHT20_CH233_RU 242T_7115MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	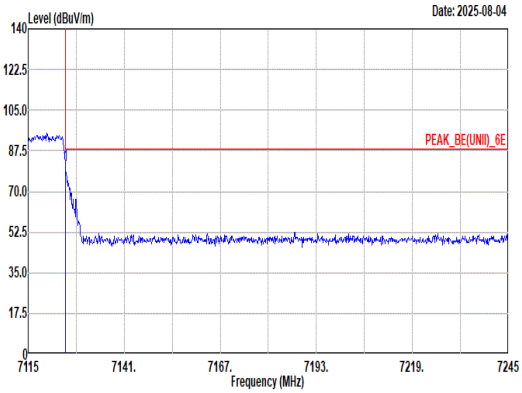 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7125.01 81.32 88.20 -6.88 67.81 36.75 12.96 36.20 0.00 105 302 PEAK	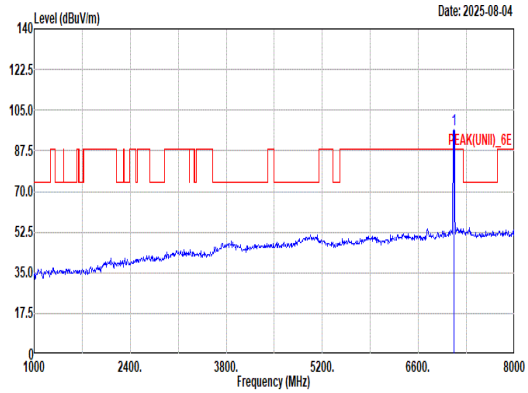 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7115.00 96.93 ------ ------ 83.45 36.71 12.96 36.19 0.00 105 302 PEAK
Avg	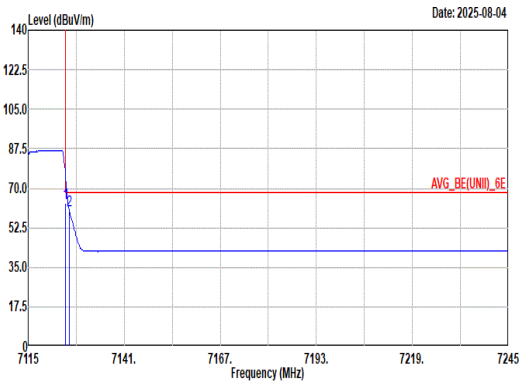 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7125.01 63.53 68.20 -4.67 50.02 36.75 12.96 36.20 0.00 105 302 AVERAGE 2 7126.05 60.42 68.20 -7.78 46.90 36.76 12.96 36.20 0.00 105 302 AVERAGE	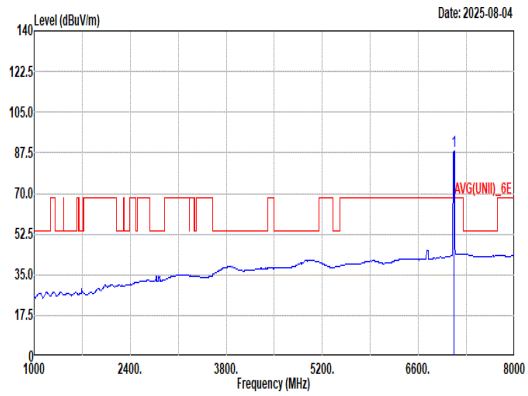 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7115.00 88.32 ------ ------ 74.80 36.75 12.96 36.19 0.00 105 302 AVERAGE

Mode	32	
	Band Edge	
	U-NII-8_6.875-7.125_802.11be EHT20_CH233_RU 242T_7115MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	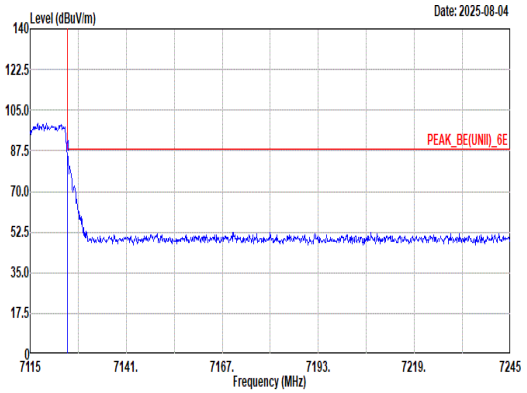 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 7125.01 85.67 88.20 -2.53 72.16 36.75 12.96 36.20 0.00 100 203 PEAK	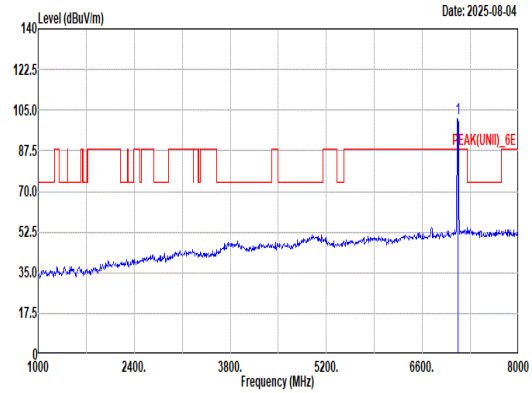 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 7115.00 101.26 ------ ------ 87.82 36.67 12.95 36.18 0.00 100 203 PEAK
Avg	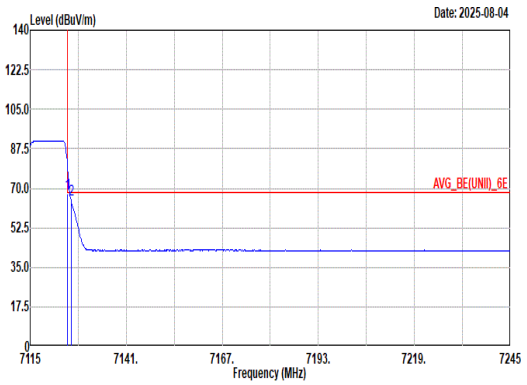 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto 1 7125.01 67.79 68.20 -0.41 54.28 36.75 12.96 36.20 0.00 100 203 AVERAGE 2 7126.05 64.86 68.20 -3.34 51.34 36.76 12.96 36.20 0.00 100 203 AVERAGE	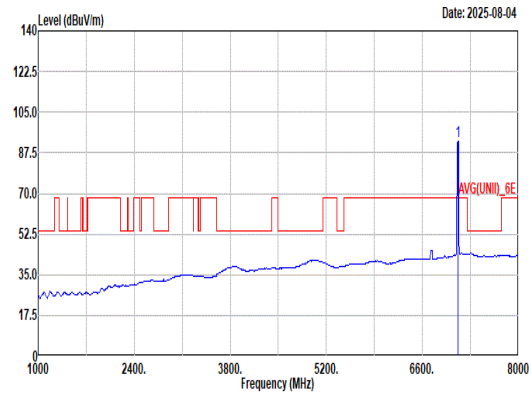 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto 1 7115.00 92.54 ------ ------ 79.02 36.75 12.96 36.19 0.00 100 203 AVERAGE

Mode	33	
	Band Edge	
	U-NII-8_6.875-7.125_802.11be EHT40_CH227_RU 484T_7085MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	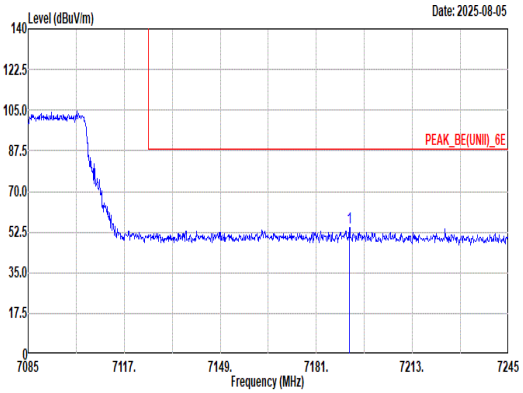 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7192.04 54.39 88.20 -33.81 40.53 37.07 13.04 36.25 0.00 100 303 PEAK	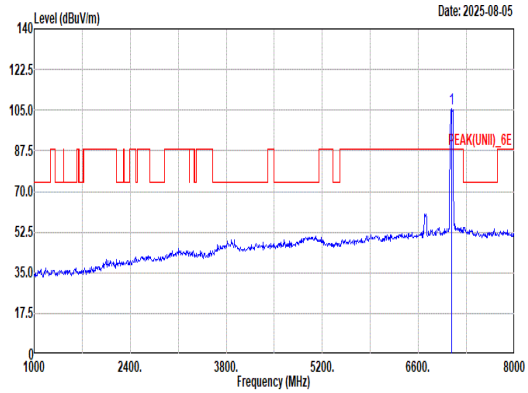 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7085.00 105.69 ------ ------ 92.40 36.53 12.92 36.16 0.00 100 303 PEAK
Avg	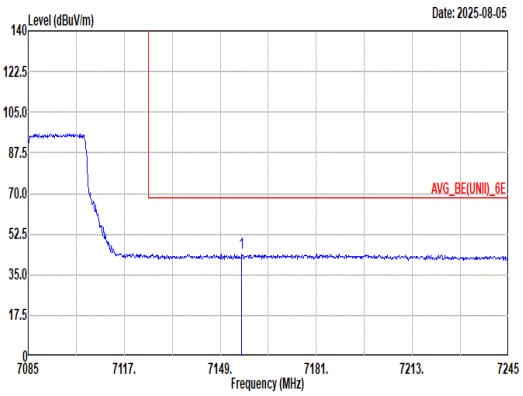 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7156.20 44.14 68.20 -24.06 30.44 36.92 13.00 36.22 0.00 100 303 AVERAGE	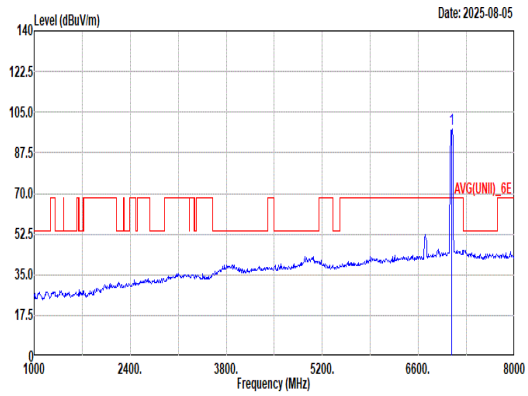 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7085.00 97.81 ------ ------ 84.50 36.56 12.92 36.17 0.00 100 303 AVERAGE

Mode	33	
	Band Edge	
	U-NII-8_6.875-7.125_802.11be EHT40_CH227_RU 484T_7085MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	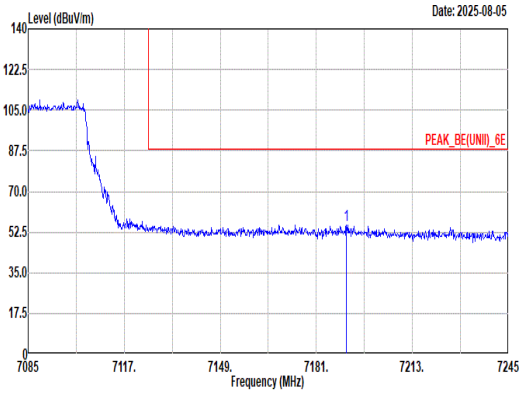 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7190.92 55.54 88.20 -32.66 41.69 37.06 13.04 36.25 0.00 100 200 PEAK	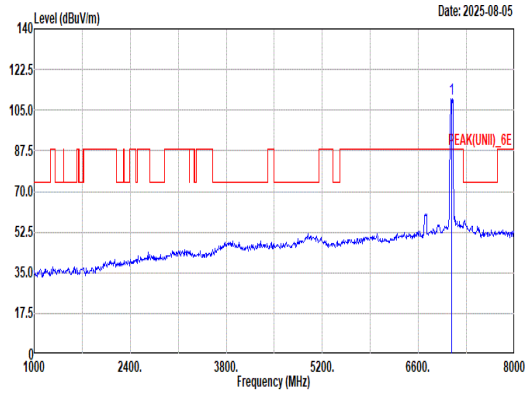 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7085.00 109.78 ------ ------ 96.43 36.59 12.93 36.17 0.00 100 200 PEAK
Avg	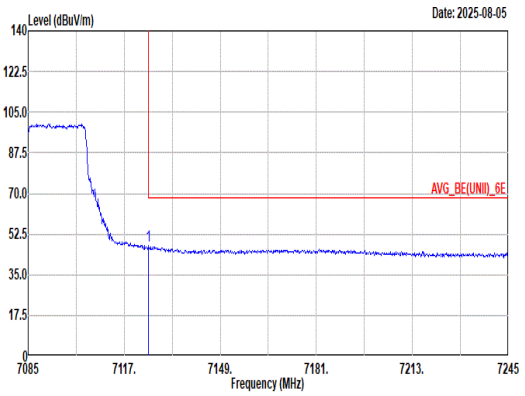 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7125.16 47.51 68.20 -20.69 34.00 36.75 12.96 36.20 0.00 100 200 AVERAGE	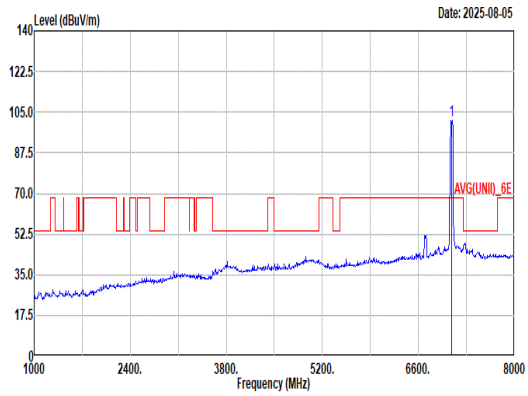 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7085.00 101.60 ------ ------ 88.25 36.59 12.93 36.17 0.00 100 200 AVERAGE

Mode	34	
	Band Edge	
	U-NII-8_6.875-7.125_802.11be EHT80_CH215_RU 996T_7025MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	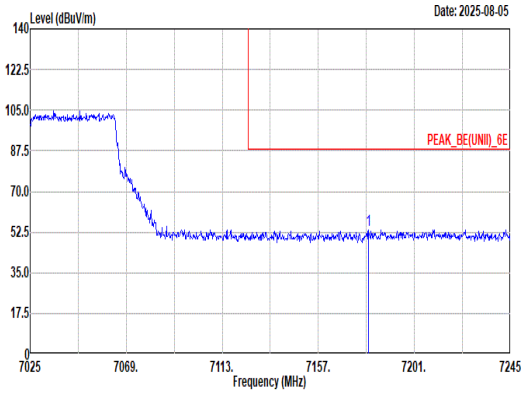 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 7180.10 53.34 88.20 -34.86 39.53 37.02 13.03 36.24 0.00 100 327 PEAK	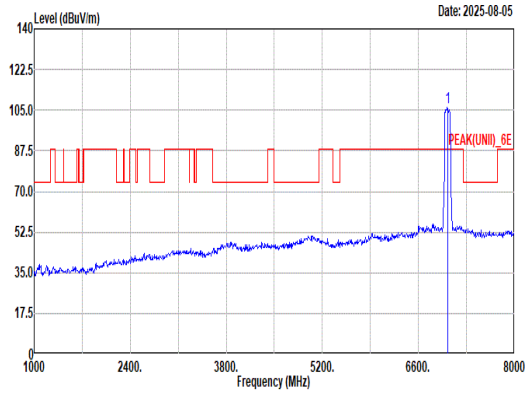 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7025.00 106.25 ------ ------ 93.25 36.28 12.84 36.12 0.00 100 327 PEAK
Avg	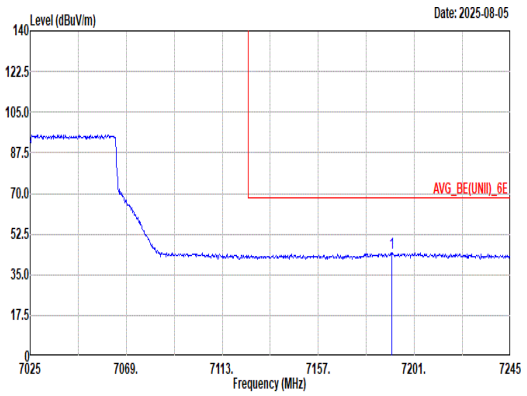 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7190.66 44.43 68.20 -23.77 30.57 37.06 13.04 36.24 0.00 100 327 AVERAGE	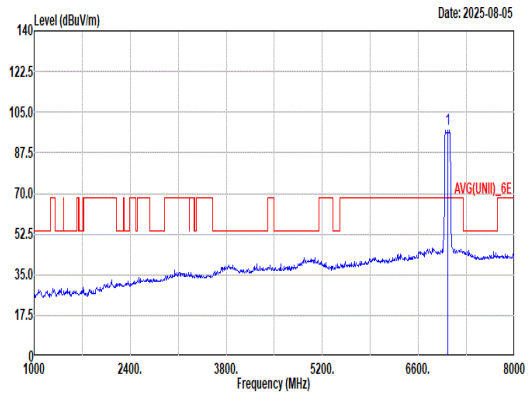 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7025.00 97.54 ------ ------ 84.64 36.18 12.81 36.09 0.00 100 327 AVERAGE

Mode	34	
	Band Edge	
	U-NII-8_6.875-7.125_802.11be EHT80_CH215_RU 996T_7025MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	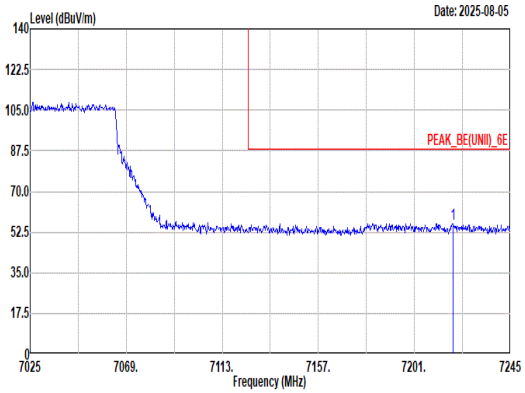 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7218.60 56.20 88.20 -32.00 42.30 37.10 13.07 36.27 0.00 100 198 PEAK	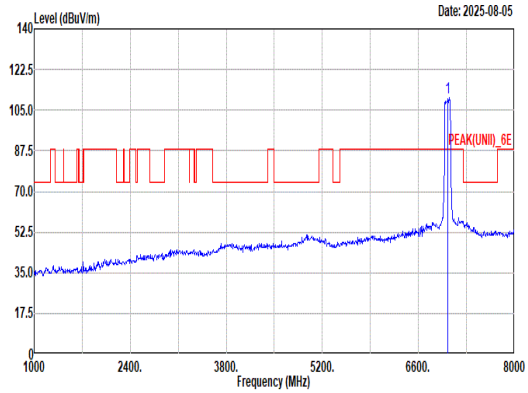 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7025.00 110.58 ------ ------ 97.45 36.39 12.88 36.14 0.00 100 198 PEAK
Avg	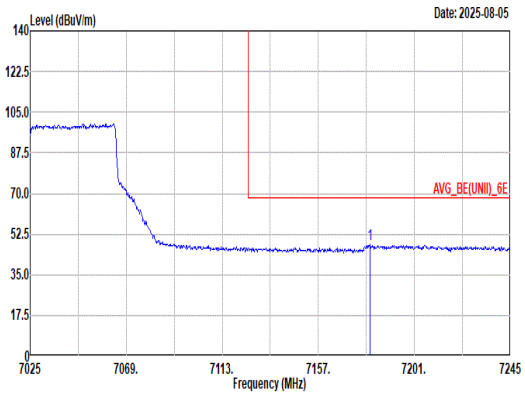 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7180.54 47.99 68.20 -20.21 34.18 37.02 13.03 36.24 0.00 100 198 AVERAGE	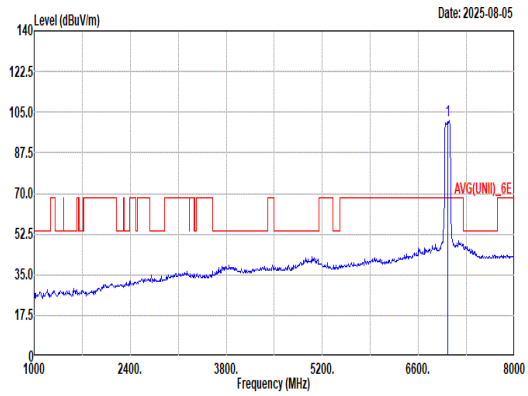 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7025.00 101.57 ------ ------ 88.44 36.39 12.88 36.14 0.00 100 198 AVERAGE

Mode	35	
	Harmonic	
	U-NII-7_6.525-6.875_802.11be EHT160_CH175_RU 996T*2_6825MHz	
ANT	4	
Pol.	Horizontal	Vertical
Peak Avg	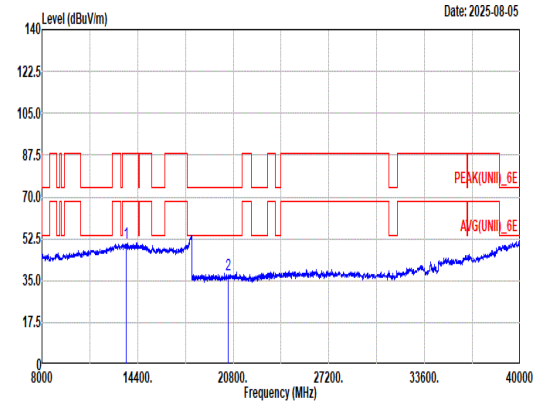 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 13650.00 50.49 88.20 -37.71 58.38 40.50 18.24 67.03 0.40 -- -- PEAK 2 20475.00 37.38 74.00 -36.62 40.53 38.60 20.60 52.81 -9.54 -- -- PEAK	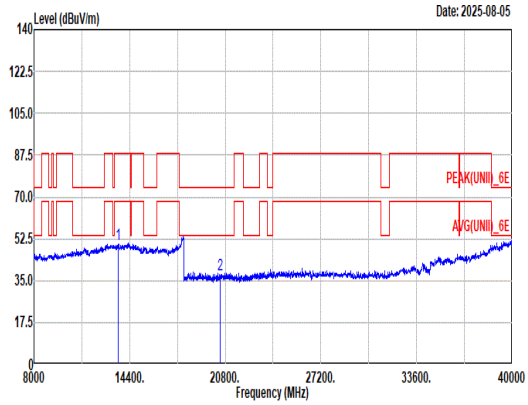 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 13650.00 50.22 88.20 -37.98 58.11 40.50 18.24 67.03 0.40 -- -- PEAK 2 20475.00 37.71 74.00 -36.29 40.86 38.60 20.60 52.81 -9.54 -- -- PEAK

Mode	35	
	Harmonic	
	U-NII-7_6.525-6.875_802.11be EHT160_CH175_RU 996T*2_6825MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	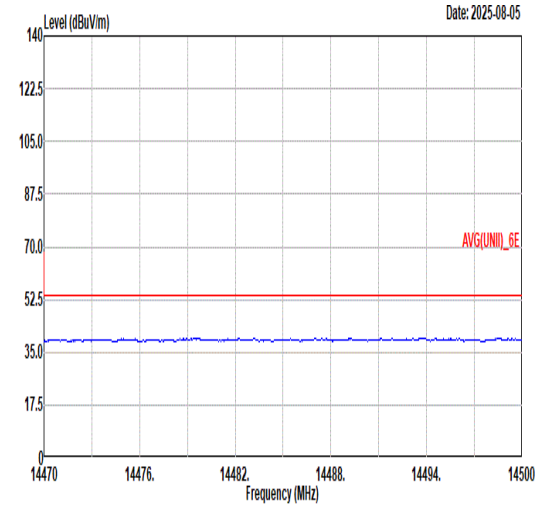 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL	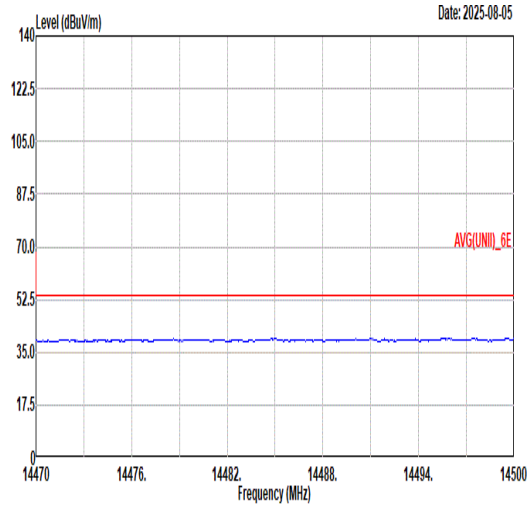 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	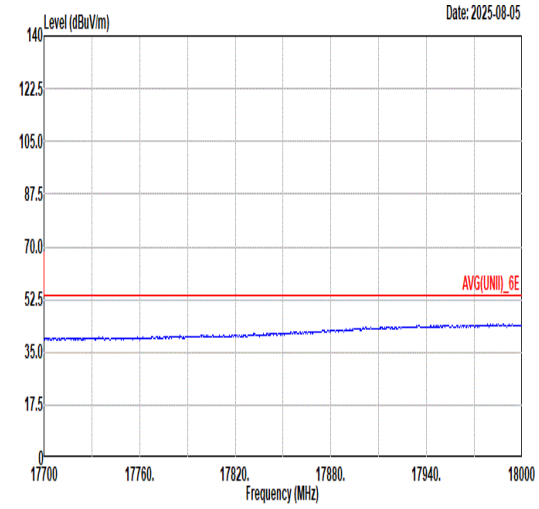 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL	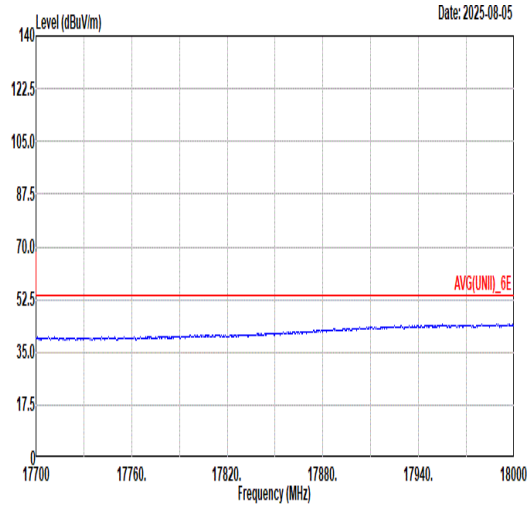 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL

38.6G ~40G Avg	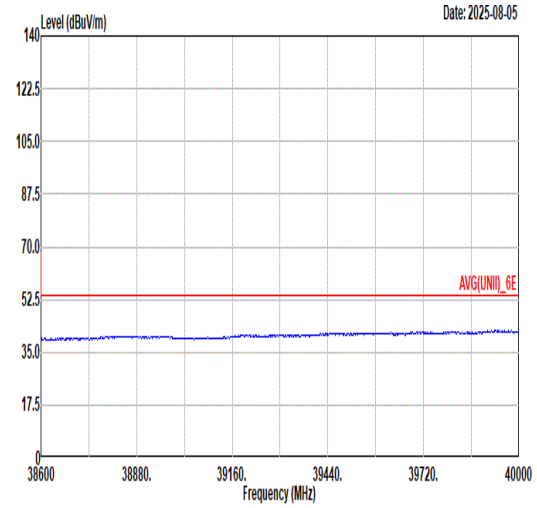 Site : 03CH12-HY Condition: AVG(UNII)_6E 1m SHF_00994_250109 HORIZONTAL	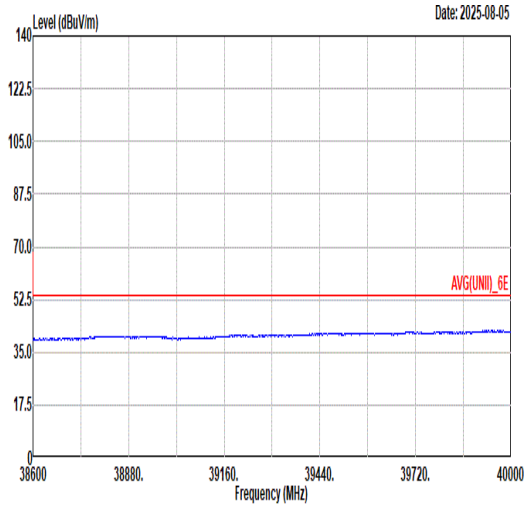 Site : 03CH12-HY Condition: AVG(UNII)_6E 1m SHF_00994_250109 VERTICAL

Mode	36	
	Band Edge	
	U-NII-8_6.875-7.125_802.11be EHT160_CH207_RU 996T*2_6985MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	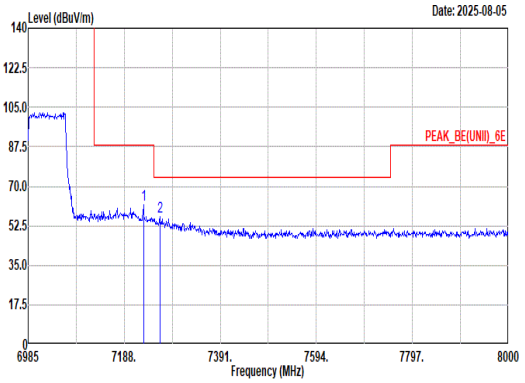 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7228.60 62.00 88.20 -26.20 48.10 37.10 13.07 36.27 0.00 100 331 PEAK 2 7263.11 56.74 74.00 -17.26 42.84 37.10 13.10 36.30 0.00 100 331 PEAK	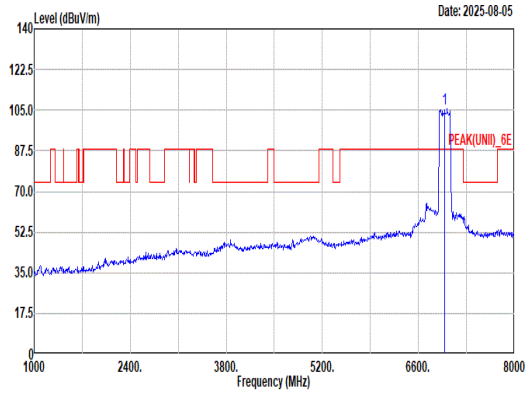 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 6985.00 105.40 ------ ------ 92.40 36.28 12.84 36.12 0.00 100 331 PEAK
Avg	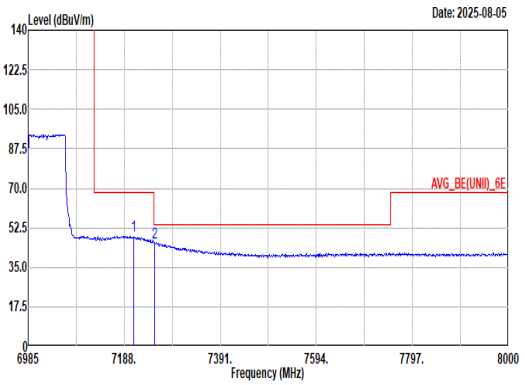 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7207.29 48.97 68.20 -19.23 35.07 37.10 13.06 36.26 0.00 100 331 AVERAGE 2 7252.96 46.16 54.00 -7.84 32.25 37.10 13.10 36.29 0.00 100 331 AVERAGE	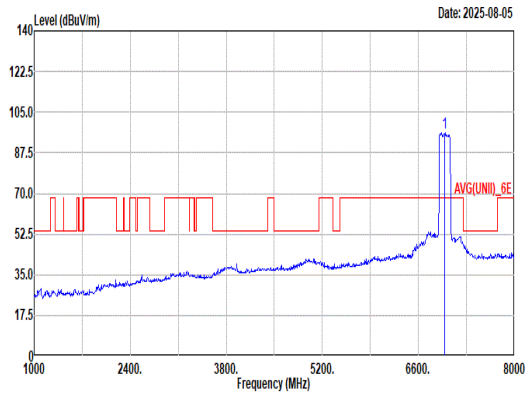 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 6985.00 96.27 ------ ------ 83.35 36.20 12.82 36.10 0.00 100 331 AVERAGE

Mode	36	
	Band Edge	
	U-NII-8_6.875-7.125_802.11be EHT160_CH207_RU 996T*2_6985MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	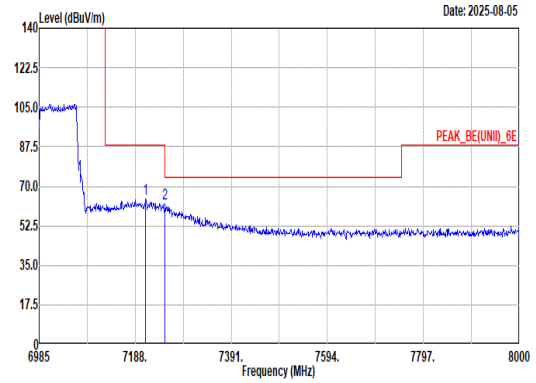 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7210.33 64.26 88.20 -23.94 50.36 37.10 13.06 36.26 0.00 104 196 PEAK 2 7250.93 62.13 74.00 -11.87 48.23 37.10 13.09 36.29 0.00 104 196 PEAK	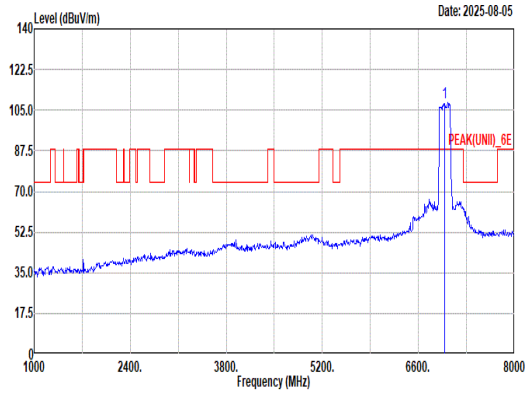 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 6985.00 108.11 ------ ------ 95.07 36.31 12.85 36.12 0.00 104 196 PEAK
Avg	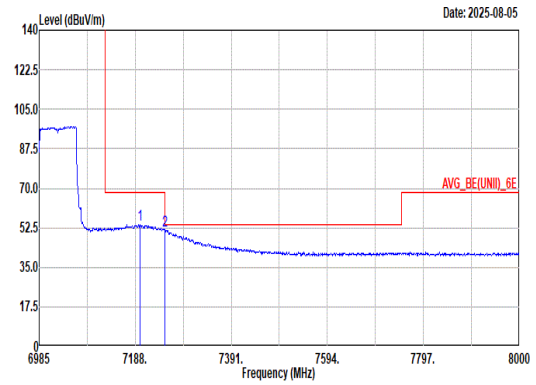 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7198.15 54.06 68.20 -14.14 40.17 37.09 13.05 36.25 0.00 104 196 AVERAGE 2 7250.93 51.42 54.00 -2.58 37.52 37.10 13.09 36.29 0.00 104 196 AVERAGE	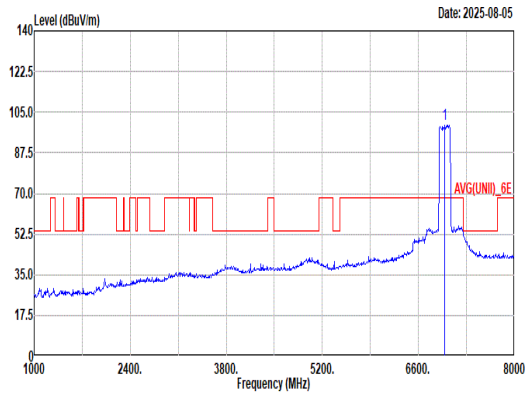 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 6985.00 99.72 ------ ------ 86.75 36.25 12.83 36.11 0.00 104 196 AVERAGE

Mode	36	
	Harmonic	
	U-NII-8_6.875-7.125_802.11be EHT160_CH207_RU 996T*2_6985MHz	
ANT	4	
Pol.	Horizontal	Vertical
Peak Avg	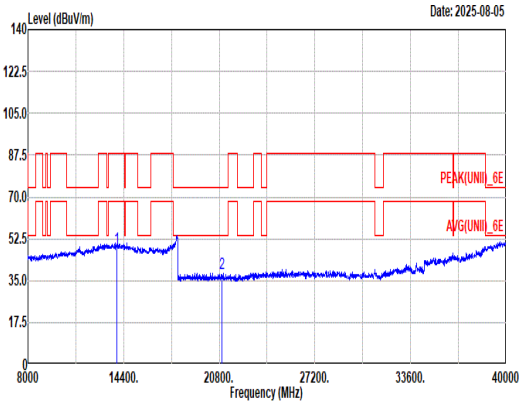 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 13970.00 48.38 88.20 -39.82 55.73 40.66 18.51 66.91 0.39 -- -- Peak 2 20955.00 38.21 74.00 -35.79 40.72 38.90 20.84 52.71 -9.54 -- -- PEAK	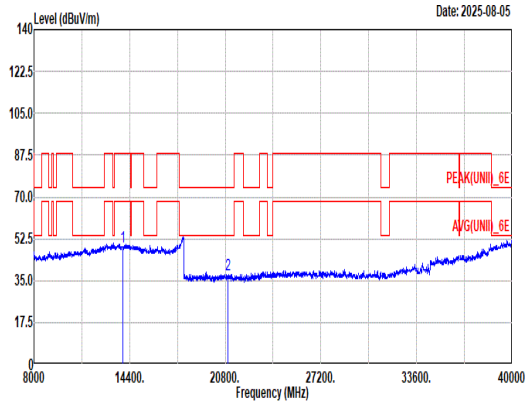 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 13970.00 49.25 88.20 -38.95 56.60 40.66 18.51 66.91 0.39 -- -- Peak 2 20955.00 37.33 74.00 -36.67 39.84 38.90 20.84 52.71 -9.54 -- -- PEAK

Mode	36	
	Harmonic	
	U-NII-8_6.875-7.125_802.11be EHT160_CH207_RU 996T*2_6985MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	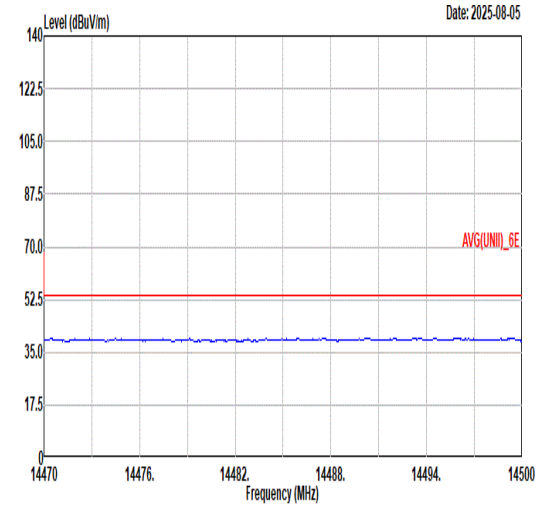 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL	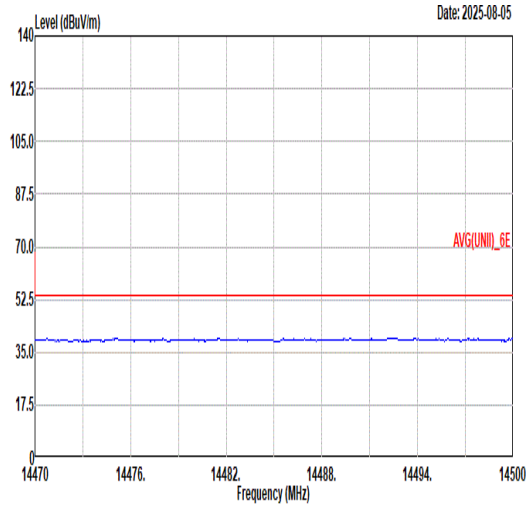 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	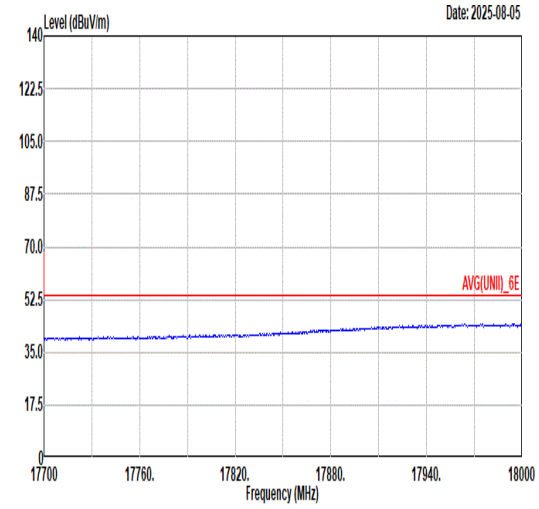 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL	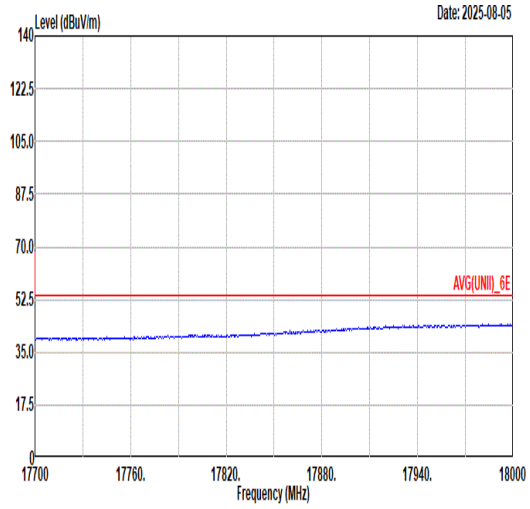 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL

38.6G ~40G Avg	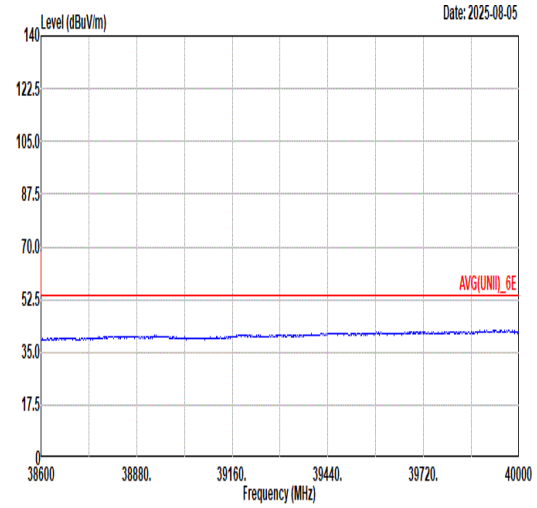 Site : 03CH12-HY Condition: AVG(UNII)_6E 1m SHF_00994_250109 HORIZONTAL	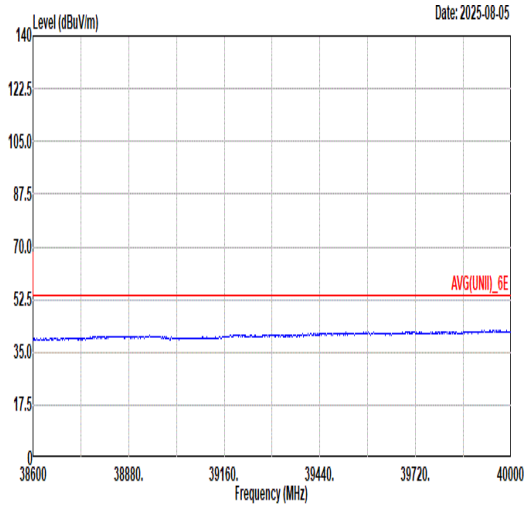 Site : 03CH12-HY Condition: AVG(UNII)_6E 1m SHF_00994_250109 VERTICAL

Mode	37	
	Band Edge	
	U-NII-7_6.525-6.875_802.11be EHT320_CH159_RU 996T*4_6745MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	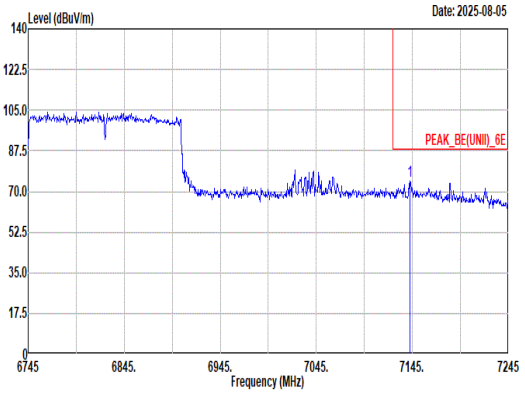 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7142.50 74.48 88.20 -13.72 60.86 36.85 12.98 36.21 0.00 100 299 PEAK	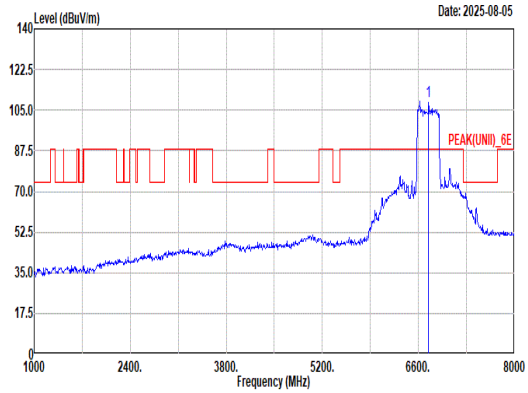 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 6745.00 108.57 ------ ------ 95.80 36.04 12.38 35.65 0.00 100 299 PEAK
Avg	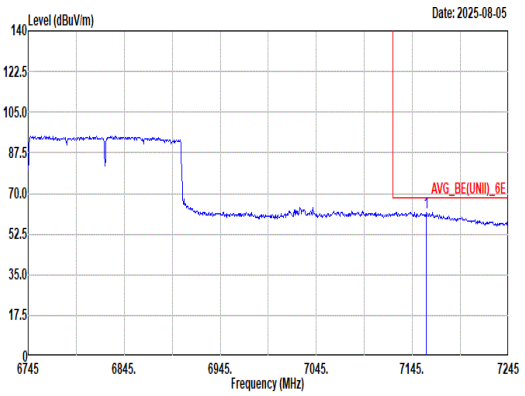 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7159.50 62.07 68.20 -6.13 48.35 36.94 13.00 36.22 0.00 100 299 AVERAGE	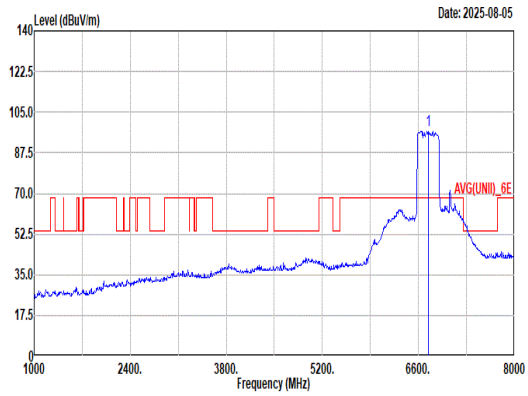 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 6745.00 97.04 ------ ------ 84.17 36.20 12.46 35.79 0.00 100 299 AVERAGE

Mode	37	
	Band Edge	
	U-NII-7_6.525-6.875_802.11be EHT320_CH159_RU 996T*4_6745MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	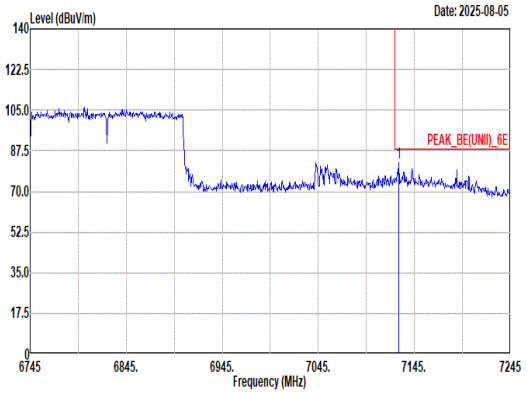 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7129.00 82.19 88.20 -6.01 68.65 36.77 12.97 36.20 0.00 100 195 PEAK	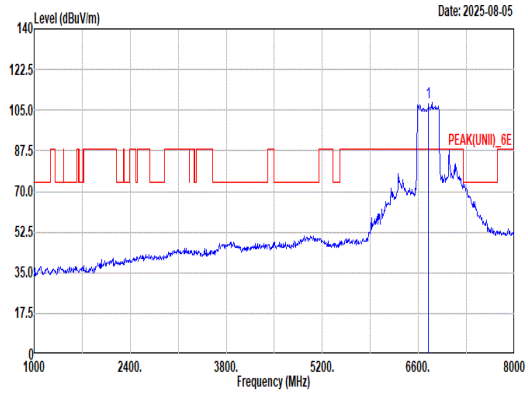 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 6745.00 108.23 ------ ------ 95.48 36.11 12.50 35.86 0.00 100 195 PEAK
Avg	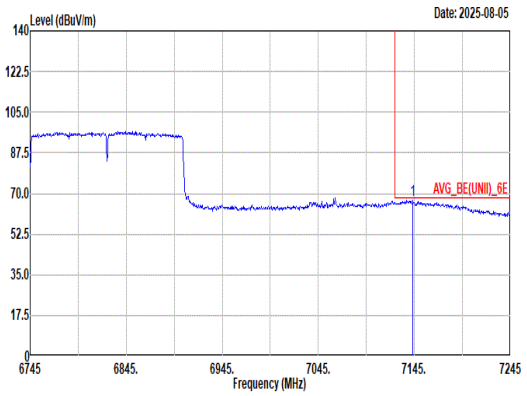 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7143.50 67.14 68.20 -1.06 53.50 36.86 12.99 36.21 0.00 100 195 AVERAGE	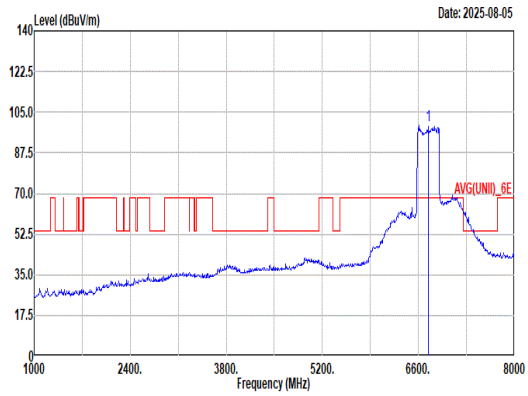 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 6745.00 99.47 ------ ------ 86.70 36.03 12.38 35.64 0.00 100 195 AVERAGE

Mode	37	
	Harmonic	
	U-NII-7_6.525-6.875_802.11be EHT320_CH159_RU 996T*4_6745MHz	
ANT	4	
Pol.	Horizontal	Vertical
Peak Avg	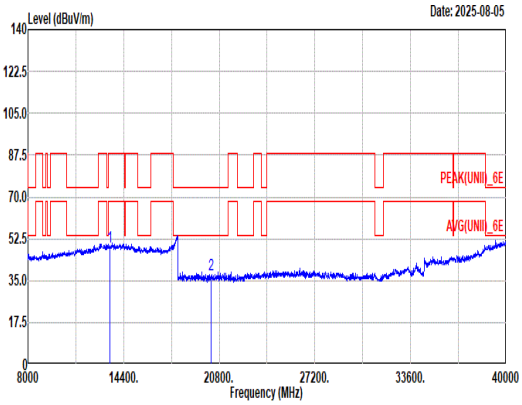 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 13490.00 48.90 88.20 -39.30 57.17 40.30 18.11 67.08 0.40 -- -- Peak 2 20235.00 37.51 74.00 -36.49 14.87 -- 22.33 0.00 0.31 -- -- PEAK	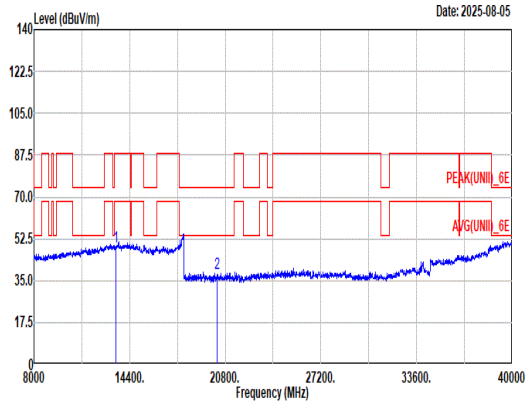 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 13490.00 49.07 88.20 -39.13 57.34 40.30 18.11 67.08 0.40 -- -- Peak 2 20235.00 37.85 74.00 -36.15 15.21 -- 22.33 0.00 0.31 -- -- PEAK

Mode	37	
	Harmonic	
	U-NII-7_6.525-6.875_802.11be EHT320_CH159_RU 996T*4_6745MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	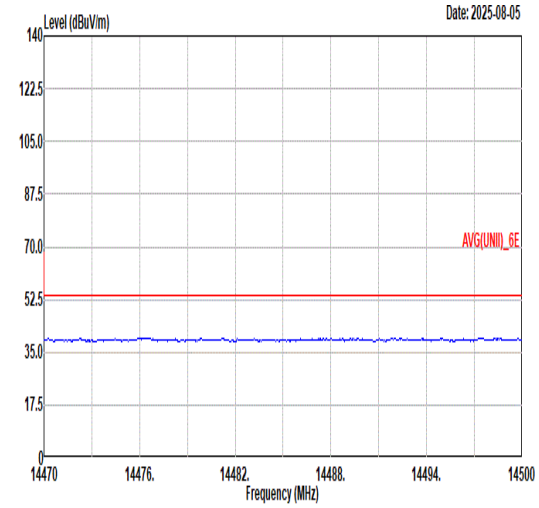 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL	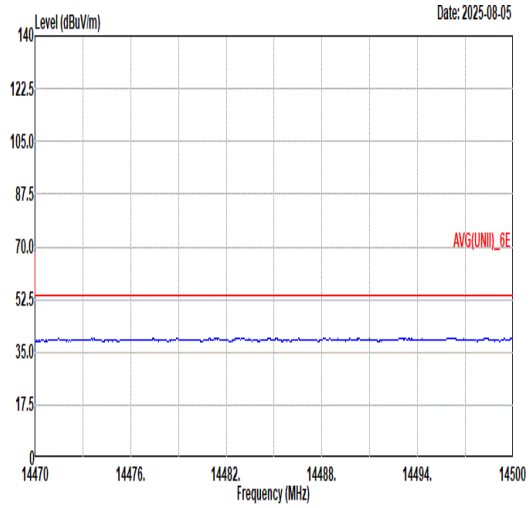 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	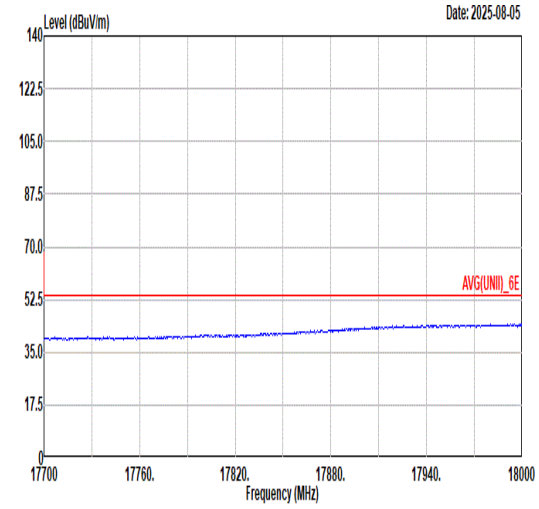 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL	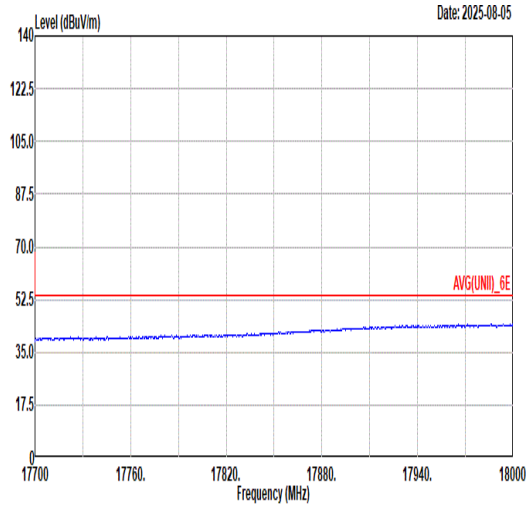 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL

38.6G ~40G Avg	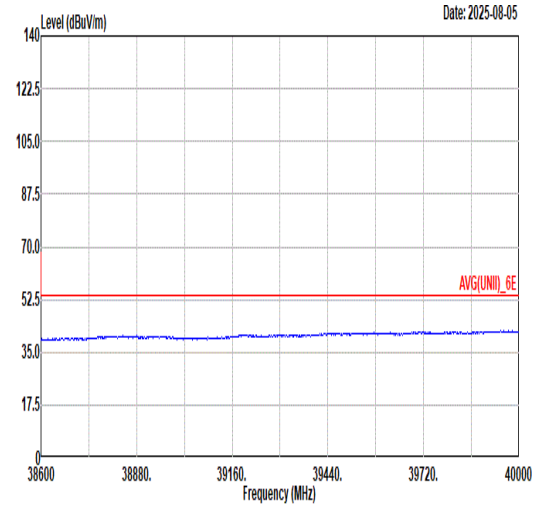 Site : 03CH12-HY Condition: AVG(UNII)_6E 1m SHF_00994_250109 HORIZONTAL	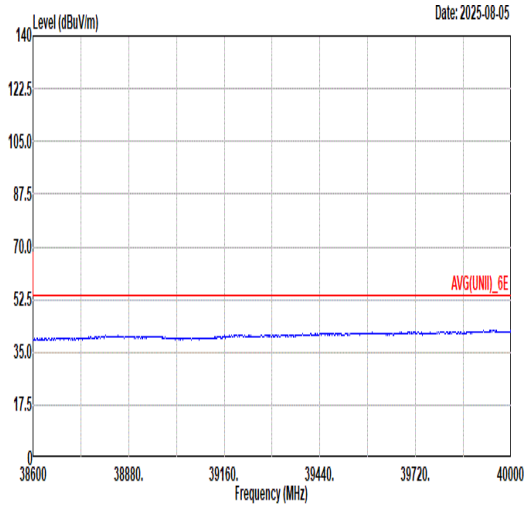 Site : 03CH12-HY Condition: AVG(UNII)_6E 1m SHF_00994_250109 VERTICAL

Mode	38	
	Band Edge	
	U-NII-8_6.875-7.125_802.11be EHT320_CH191_RU 996T*4_6905MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	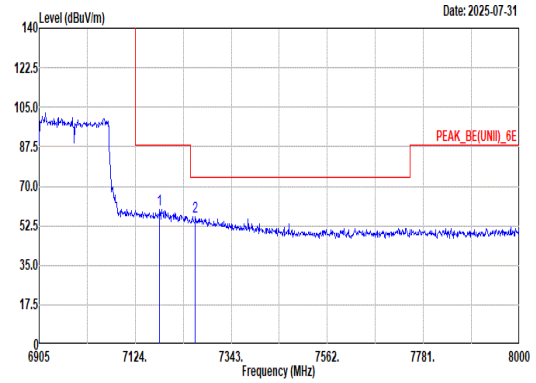 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7179.85 59.69 88.20 -28.51 45.88 37.02 13.03 36.24 0.00 107 299 PEAK 2 7260.88 56.72 74.00 -17.28 42.82 37.10 13.10 36.30 0.00 107 299 PEAK	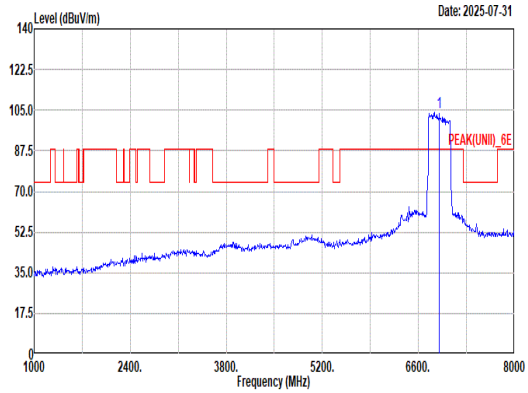 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 6905.00 104.20 ------ ------ 91.45 36.10 12.55 35.90 0.00 107 299 PEAK
Avg	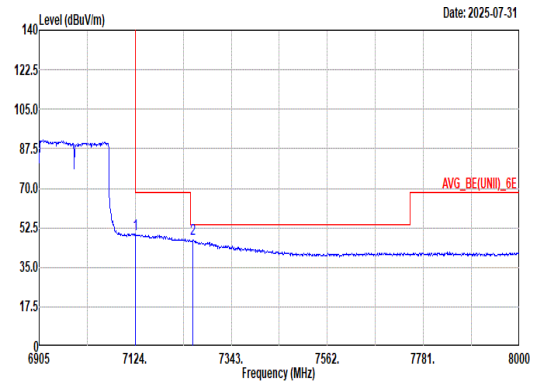 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7125.10 49.77 68.20 -18.43 36.26 36.75 12.96 36.20 0.00 107 299 AVERAGE 2 7255.40 47.37 54.00 -6.63 33.46 37.10 13.10 36.29 0.00 107 299 AVERAGE	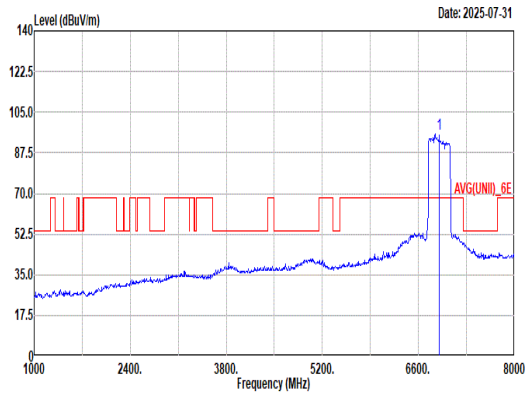 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 6905.00 95.69 ------ ------ 82.93 36.10 12.57 35.91 0.00 107 299 AVERAGE

Mode	38	
	Band Edge	
	U-NII-8_6.875-7.125_802.11be EHT320_CH191_RU 996T*4_6905MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	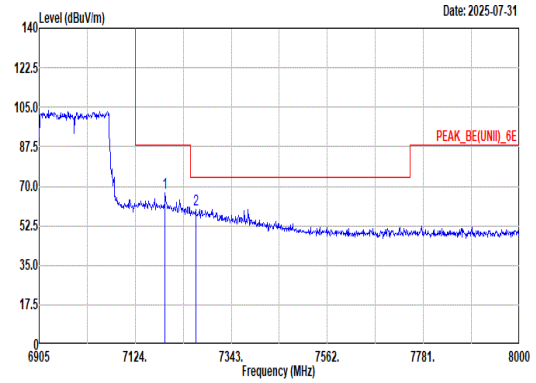 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7191.89 67.09 88.20 -21.11 53.23 37.07 13.04 36.25 0.00 100 199 PEAK 2 7261.97 59.70 74.00 -14.30 45.80 37.10 13.10 36.30 0.00 100 199 PEAK	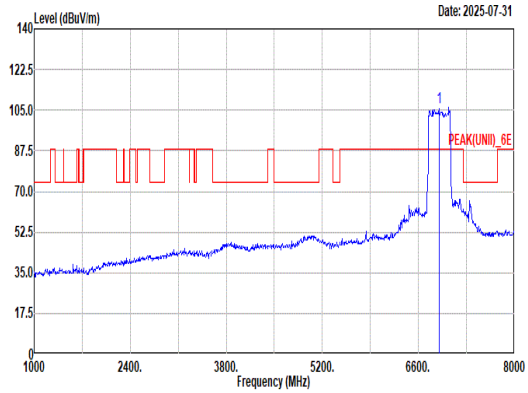 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 6905.00 106.37 ------ ------ 93.68 36.01 12.67 35.99 0.00 100 199 PEAK
Avg	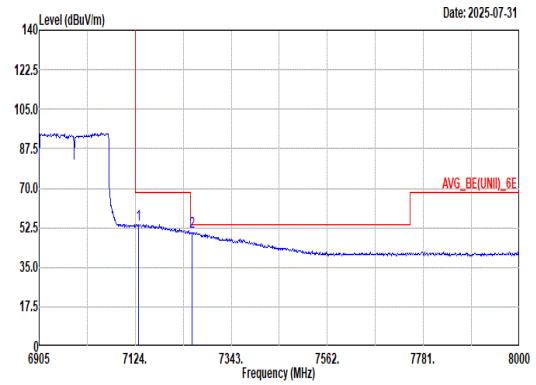 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7131.67 54.01 68.20 -14.19 40.45 36.79 12.97 36.20 0.00 100 199 AVERAGE 2 7254.31 50.59 54.00 -3.41 36.68 37.10 13.10 36.29 0.00 100 199 AVERAGE	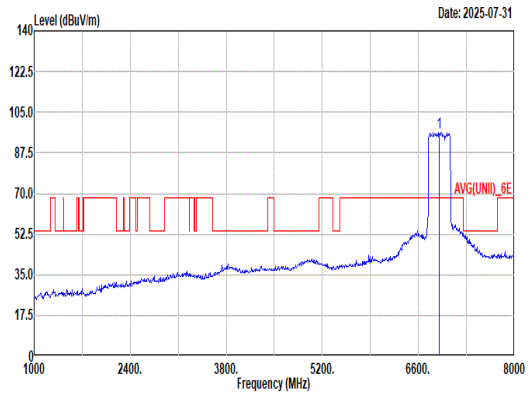 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 6905.00 96.39 ------ ------ 83.70 36.01 12.65 35.97 0.00 100 199 AVERAGE

Mode	38	
	Harmonic	
	U-NII-8_6.875-7.125_802.11be EHT320_CH191_RU 996T*4_6905MHz	
ANT	4	
Pol.	Horizontal	Vertical
Peak Avg	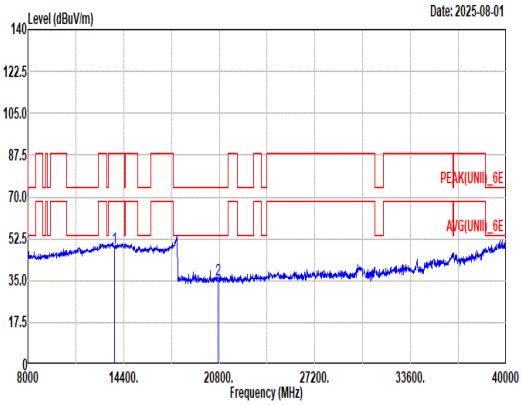 Site : 03CH12-HY Condition: PEAK(UNII)_6E 1m SHF_00994_250109 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 13810.00 48.59 88.20 -39.61 56.40 40.40 18.37 66.97 0.39 -- -- Peak 2 20715.00 35.37 74.00 -38.63 38.18 38.77 20.72 52.76 -9.54 -- -- PEAK	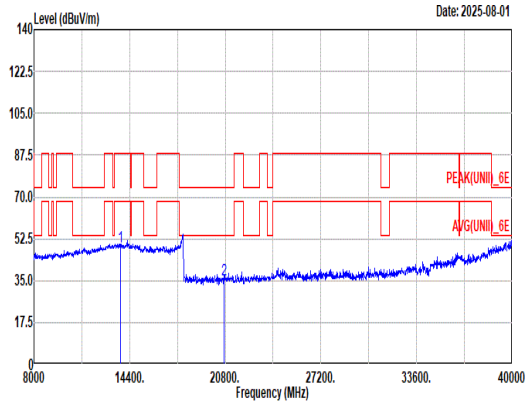 Site : 03CH12-HY Condition: PEAK(UNII)_6E 1m SHF_00994_250109 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 13810.00 49.00 88.20 -39.20 56.81 40.40 18.37 66.97 0.39 -- -- Peak 2 20715.00 35.13 74.00 -38.87 37.94 38.77 20.72 52.76 -9.54 -- -- PEAK

Mode	38	
	Harmonic	
	U-NII-8_6.875-7.125_802.11be EHT320_CH191_RU 996T*4_6905MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	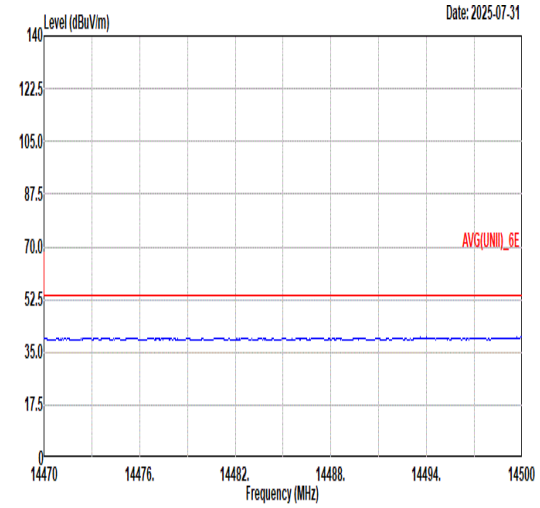 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL	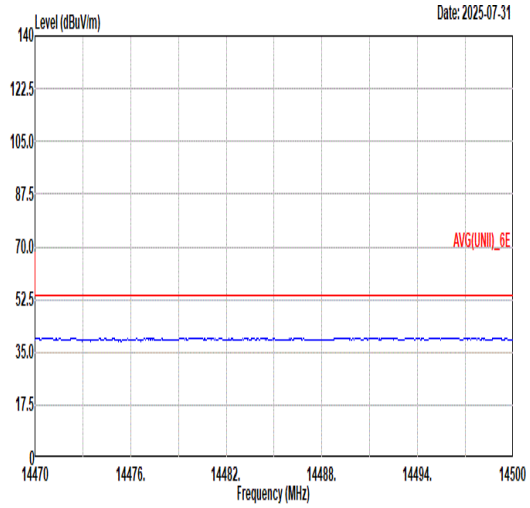 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL
17.7G ~18G Avg	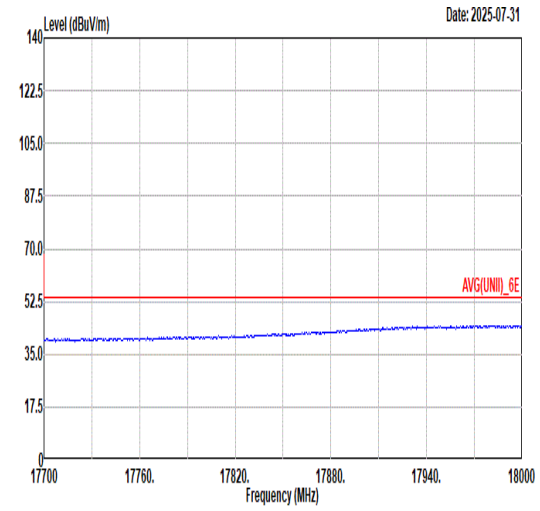 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL	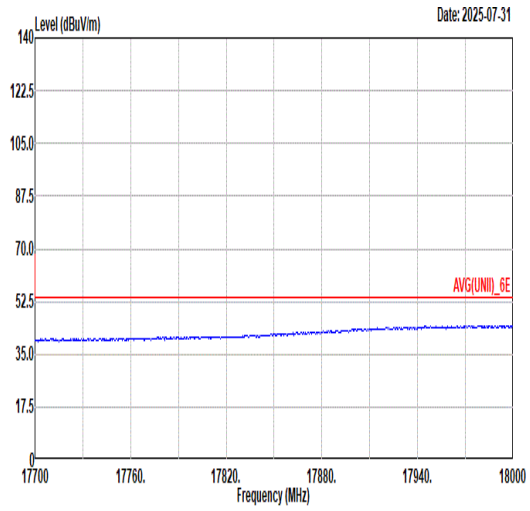 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL

38.6G ~40G Avg	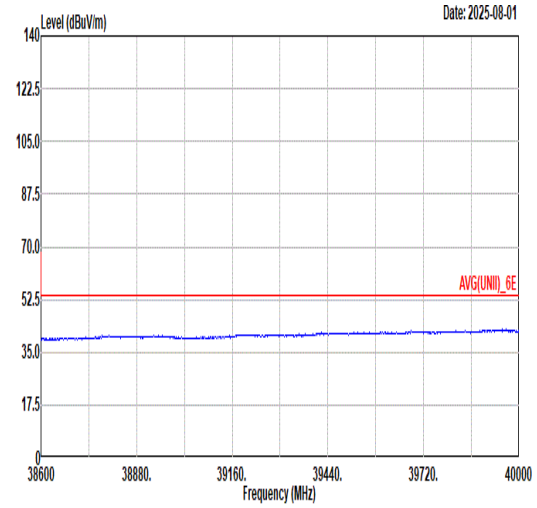 Site : 03CH12-HY Condition: AVG(UNII)_6E 1m SHF_00994_250109 HORIZONTAL	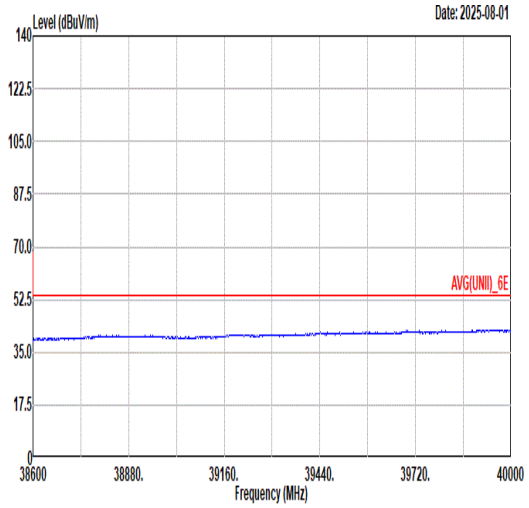 Site : 03CH12-HY Condition: AVG(UNII)_6E 1m SHF_00994_250109 VERTICAL

<N_{ss} = 2>

Mode	1	
	Band Edge	
	U-NII-5_5.925-6.425_802.11be EHT20_CH1_RU 242T_5955MHz	
ANT	4+5(STBC)	
Pol.	Horizontal	Fundamental
Peak	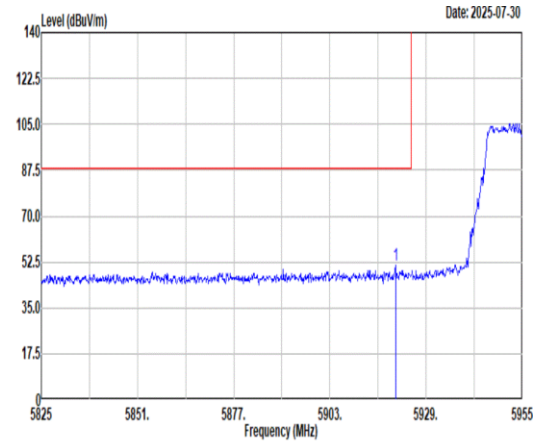 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5920.68 51.27 88.20 -36.93 40.32 34.36 11.70 35.11 0.00 100 277 PEAK	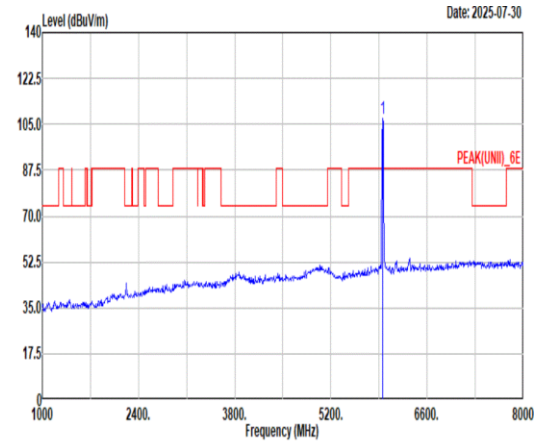 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5955.00 107.04 ------ ------ 96.15 34.29 11.76 35.16 0.00 100 277 PEAK
Avg	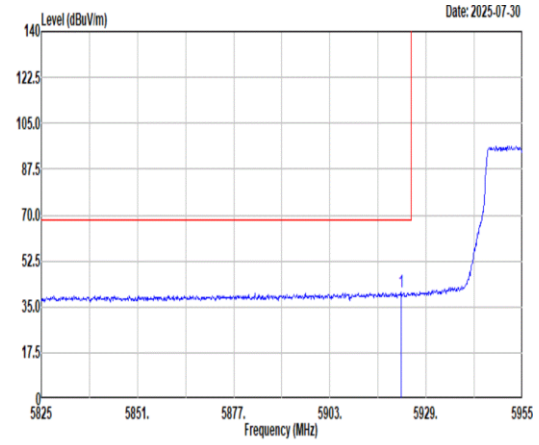 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5922.24 40.84 68.20 -27.36 29.90 34.36 11.70 35.12 0.00 100 277 AVERAGE	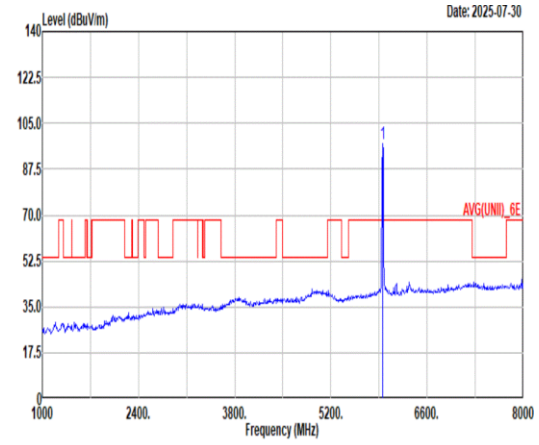 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5955.00 97.27 ------ ------ 86.38 34.29 11.76 35.16 0.00 100 277 AVERAGE

Mode	1	
	Band Edge	
	U-NII-5_5.925-6.425_802.11be EHT20_CH1_RU 242T_5955MHz	
ANT	4+5(STBC)	
Pol.	Vertical	Fundamental
Peak	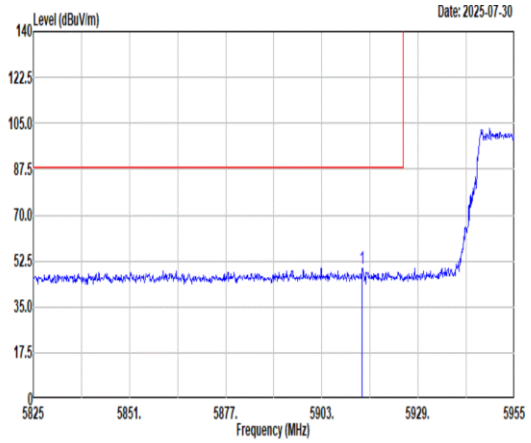 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5913.92 49.89 88.20 -38.31 38.94 34.37 11.69 35.11 0.00 100 186 PEAK	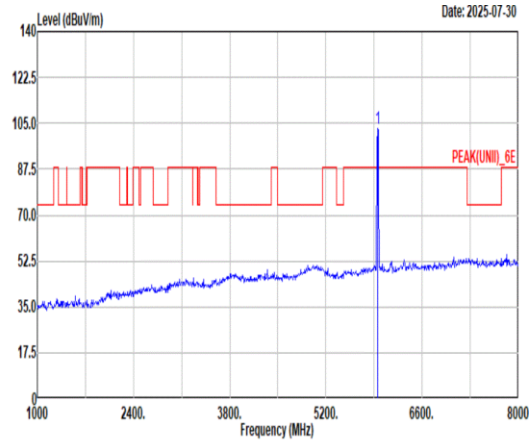 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5955.00 102.77 ------ ------ 91.87 34.30 11.75 35.15 0.00 100 186 PEAK
Avg	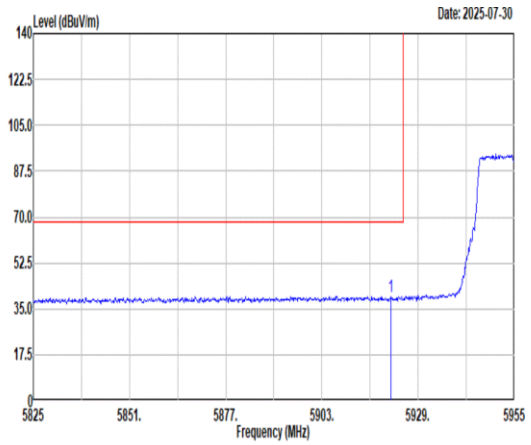 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5921.59 39.87 68.20 -28.33 28.93 34.36 11.70 35.12 0.00 100 186 AVERAGE	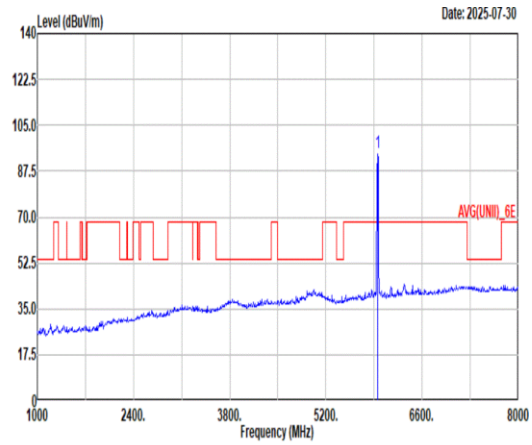 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5955.00 94.42 ------ ------ 83.52 34.30 11.75 35.15 0.00 100 186 AVERAGE

Mode	2	
	Band Edge	
	U-NII-5_5.925-6.425_802.11be EHT40_CH3_RU 484T_5965MHz	
ANT	4+5(STBC)	
Pol.	Horizontal	Fundamental
Peak	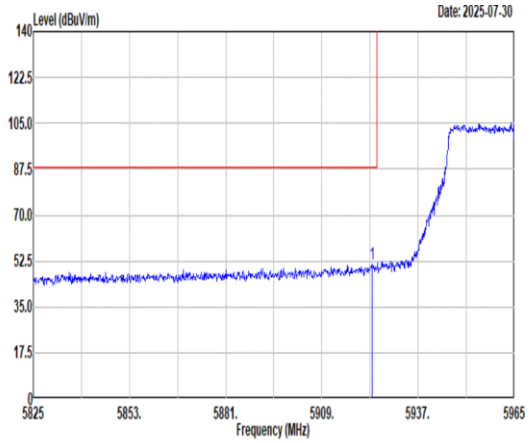 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.56 51.08 88.20 -37.12 40.14 34.35 11.71 35.12 0.00 105 276 PEAK	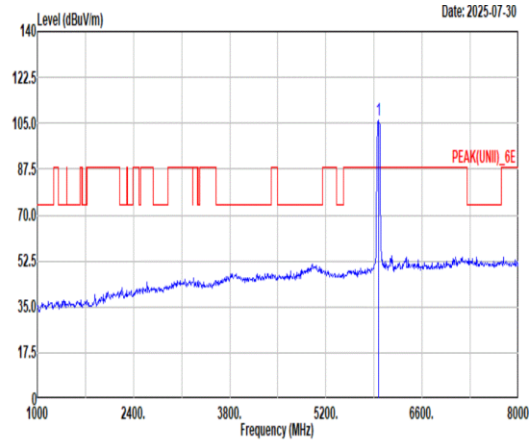 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5965.00 105.97 ------ ------ 95.09 34.27 11.78 35.17 0.00 105 276 PEAK
Avg	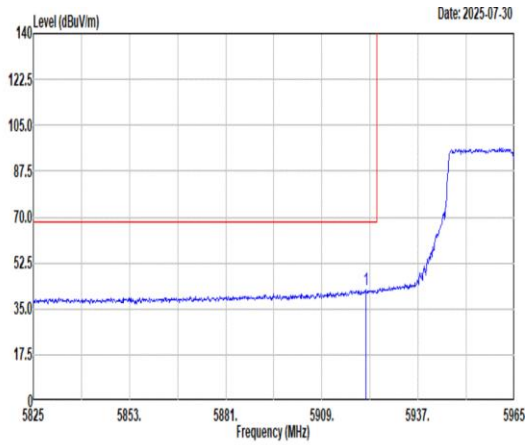 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5921.74 42.31 68.20 -25.89 31.37 34.36 11.70 35.12 0.00 105 276 AVERAGE	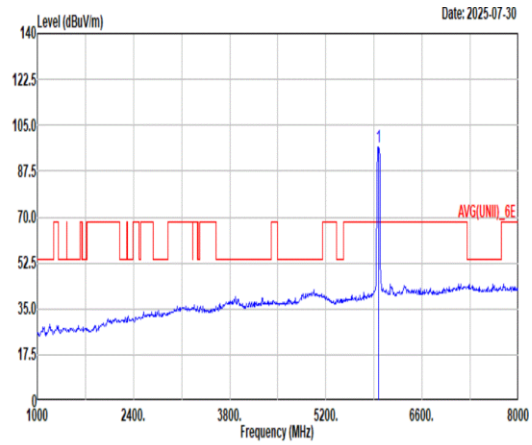 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5965.00 96.77 ------ ------ 85.88 34.29 11.76 35.16 0.00 105 276 AVERAGE

Mode	2	
	Band Edge	
	U-NII-5_5.925-6.425_802.11be EHT40_CH3_RU 484T_5965MHz	
ANT	4+5(STBC)	
Pol.	Vertical	Fundamental
Peak	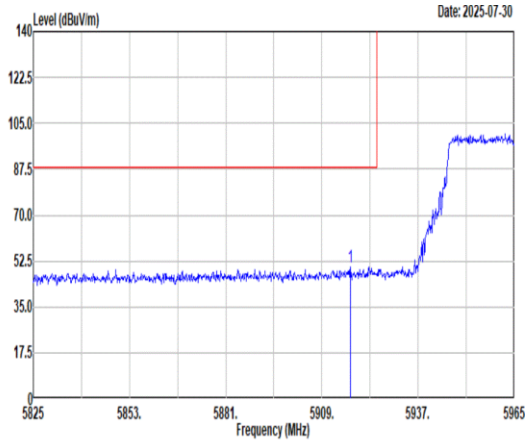 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5917.26 50.27 88.20 -37.93 39.31 34.37 11.70 35.11 0.00 113 174 PEAK	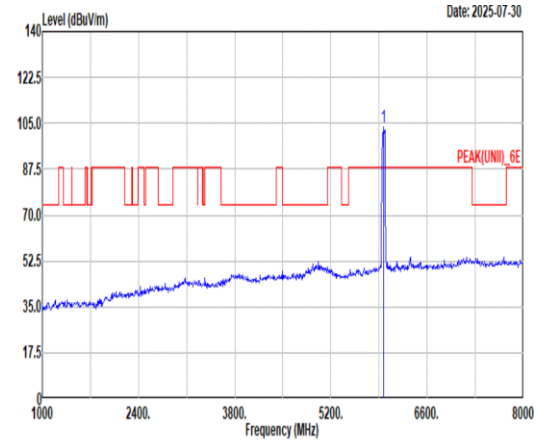 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5965.00 103.44 ------ ------ 92.56 34.26 11.79 35.17 0.00 113 174 PEAK
Avg	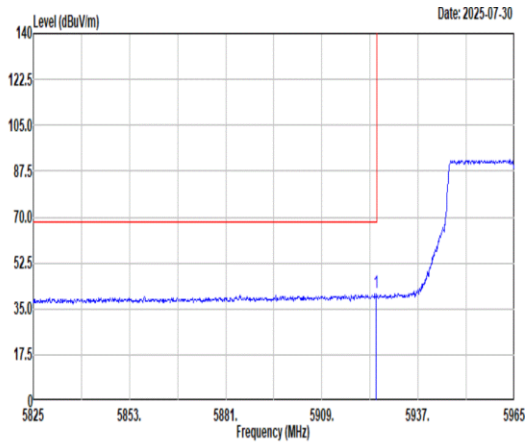 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.82 41.03 68.20 -27.17 30.09 34.35 11.71 35.12 0.00 113 174 AVERAGE	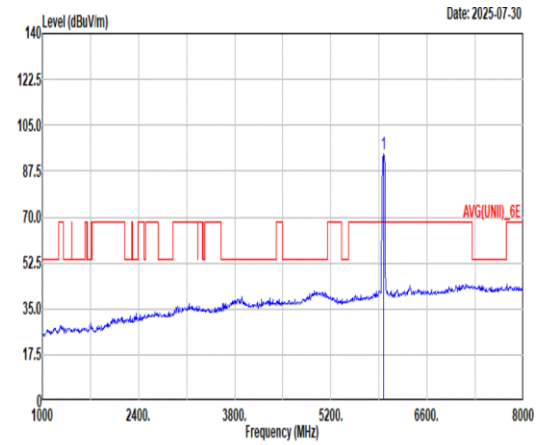 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5965.00 93.98 ------ ------ 83.10 34.26 11.79 35.17 0.00 113 174 AVERAGE

Mode	3	
	Band Edge	
	U-NII-5_5.925-6.425_802.11be EHT80_CH7_RU 996T_5985MHz	
ANT	4+5(STBC)	
Pol.	Horizontal	Fundamental
Peak	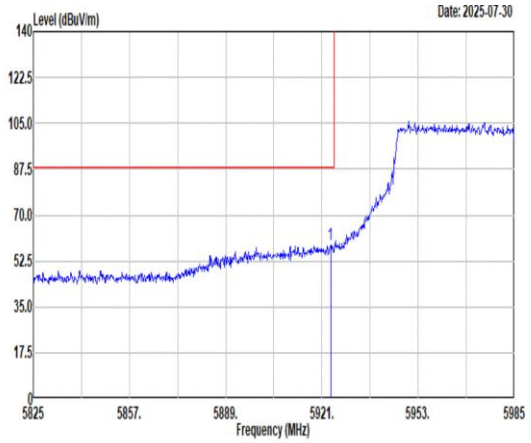 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.88 58.44 88.20 -29.76 47.50 34.35 11.71 35.12 0.00 105 275 PEAK	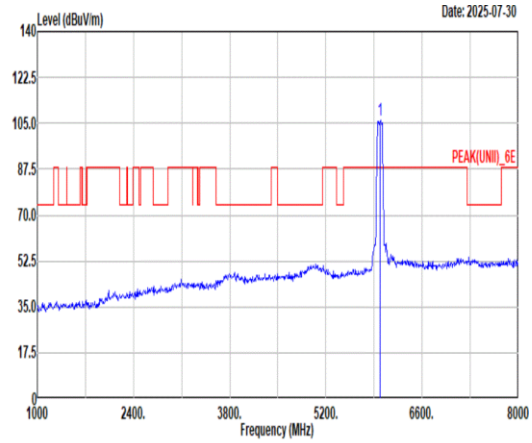 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5985.00 106.25 ------ ------ 95.42 34.20 11.84 35.21 0.00 105 275 PEAK
Avg	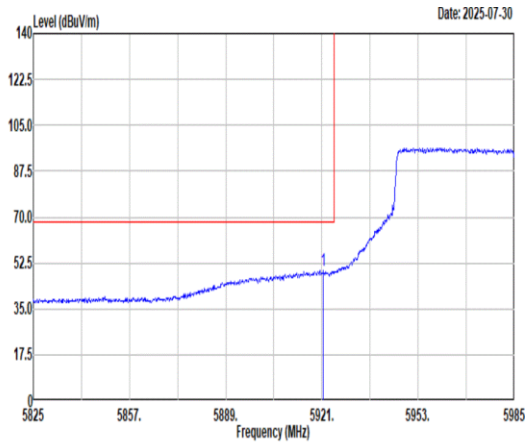 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5921.48 49.71 68.20 -18.49 38.77 34.36 11.70 35.12 0.00 105 275 AVERAGE	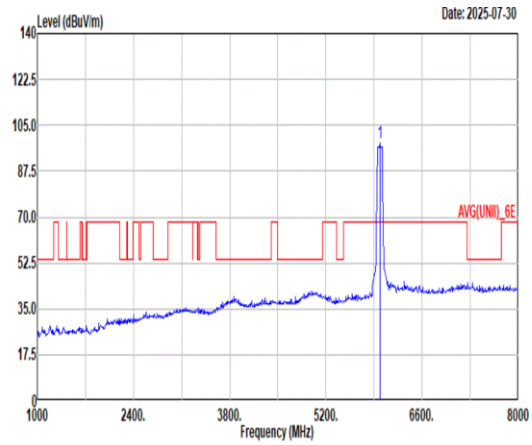 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5985.00 98.34 ------ ------ 87.49 34.23 11.81 35.19 0.00 105 275 AVERAGE

Mode	3	
	Band Edge	
	U-NII-5_5.925-6.425_802.11be EHT80_CH7_RU 996T_5985MHz	
ANT	4+5(STBC)	
Pol.	Vertical	Fundamental
Peak	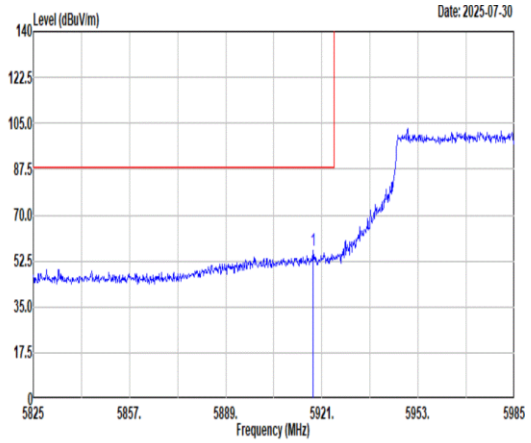 Site : 03CH12-HY Condition: PEAK_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5918.12 56.34 88.20 -31.86 45.39 34.36 11.70 35.11 0.00 103 173 PEAK	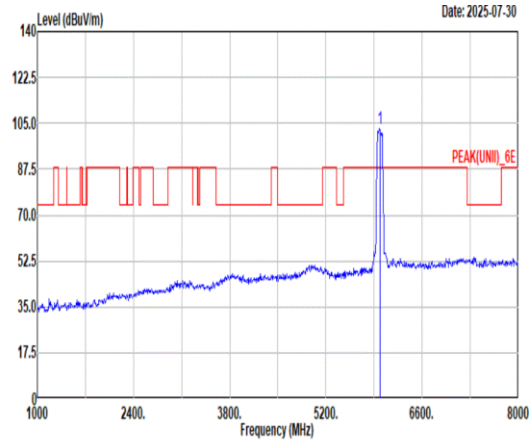 Site : 03CH12-HY Condition: PEAK(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5985.00 102.86 ------ ------ 91.99 34.25 11.80 35.18 0.00 103 173 PEAK
Avg	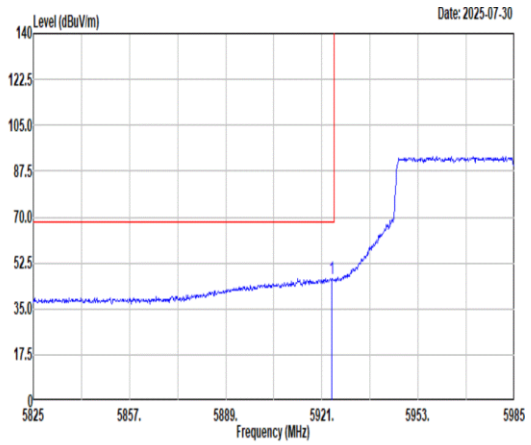 Site : 03CH12-HY Condition: AVG_BE(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.20 46.65 68.20 -21.55 35.71 34.35 11.71 35.12 0.00 103 173 AVERAGE	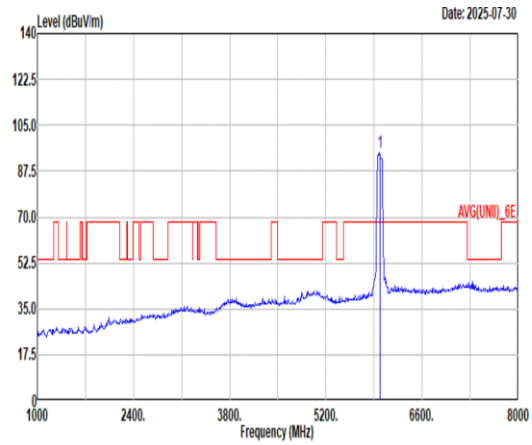 Site : 03CH12-HY Condition: AVG(UNII)_6E 3m 9120D-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5985.00 94.64 ------ ------ 83.77 34.25 11.80 35.18 0.00 103 173 AVERAGE