| Mode | 10 | |
|---|---|---|
| | Band Edge | |
| | 2400-2483.5_Bluetooth-LE GSFK _CH00_2402MHz | |
| ANT | 1 | |
| Pol. | Horizontal | Fundamental |
| Peak | 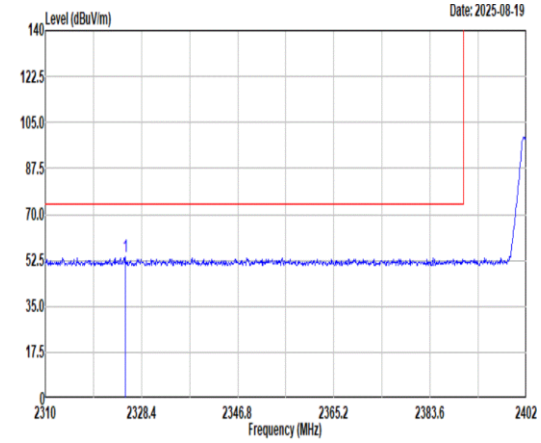 <br>Site : 03CH12-HY<br>Condition: PEAK_BE_74 3m 9120D-02114-250702 HORIZONTAL<br>: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2325.27 53.87 74.00 -20.13 43.88 27.40 6.67 34.11 10.03 279 156 PEAK | 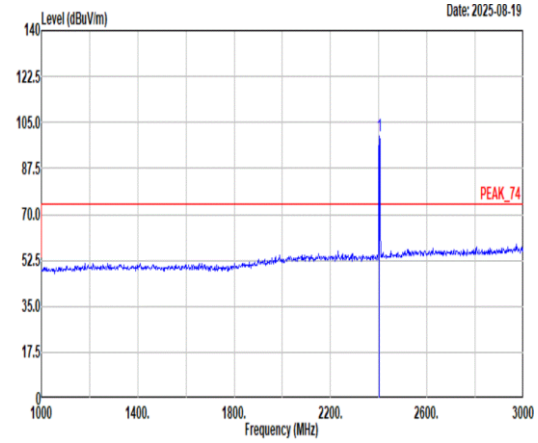 <br>Site : 03CH12-HY<br>Condition: PEAK_74 3m 9120D-02114-250702 HORIZONTAL<br>: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2402.00 99.69 ------ ------ 89.63 27.40 6.78 34.15 10.03 279 156 PEAK |
| Avg | 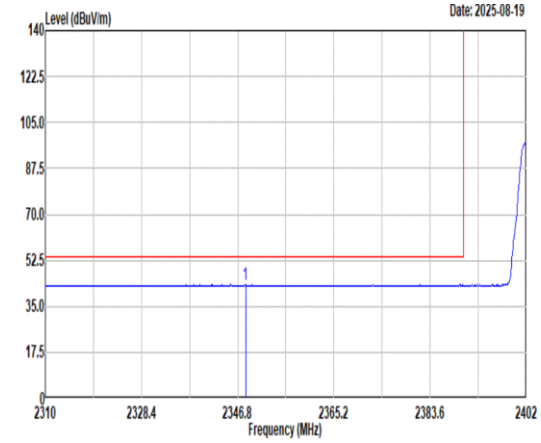 <br>Site : 03CH12-HY<br>Condition: AVG_BE_54 3m 9120D-02114-250702 HORIZONTAL<br>: RBW:1000.000kHz VBW:1.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2348.27 43.22 54.00 -10.78 33.21 27.40 6.70 34.12 10.03 279 156 AVERAGE | 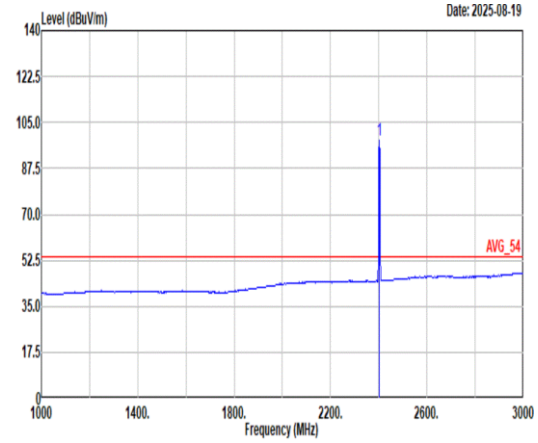 <br>Site : 03CH12-HY<br>Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL<br>: RBW:1000.000kHz VBW:1.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2402.00 98.20 ------ ------ 88.14 27.40 6.78 34.15 10.03 279 156 AVERAGE |

| Mode | 10 | |
|---|---|---|
| | Band Edge | |
| | 2400-2483.5_Bluetooth-LE GSFK _CH00_2402MHz | |
| ANT | 1 | |
| Pol. | Vertical | Fundamental |
| Peak | 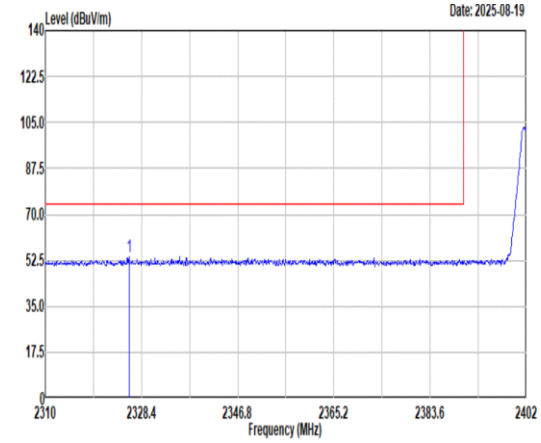 <br>Site : 03CH12-HY<br>Condition: PEAK_BE_74 3m 9120D-02114-250702 VERTICAL<br>: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2326.01 53.95 74.00 -20.05 43.96 27.40 6.67 34.11 10.03 267 177 PEAK | 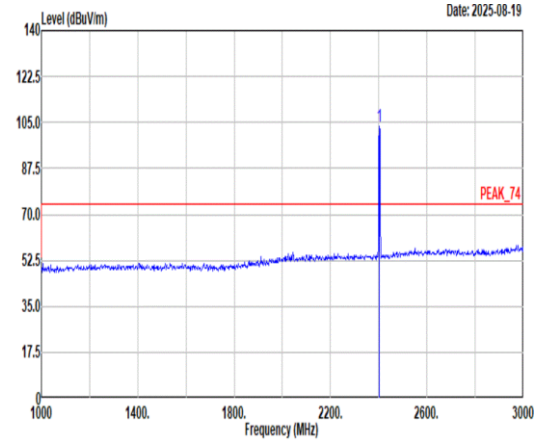 <br>Site : 03CH12-HY<br>Condition: PEAK_74 3m 9120D-02114-250702 VERTICAL<br>: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2402.00 103.42 ------ ------ 93.36 27.40 6.78 34.15 10.03 267 177 PEAK |
| Avg | 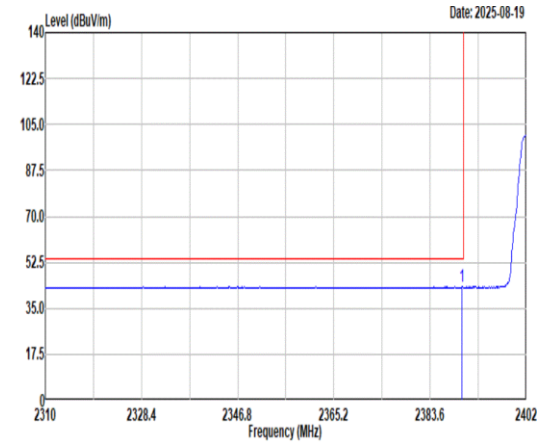 <br>Site : 03CH12-HY<br>Condition: AVG_BE_54 3m 9120D-02114-250702 VERTICAL<br>: RBW:1000.000kHz VBW:1.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2389.67 43.43 54.00 -10.57 33.38 27.40 6.77 34.15 10.03 267 177 AVERAGE | 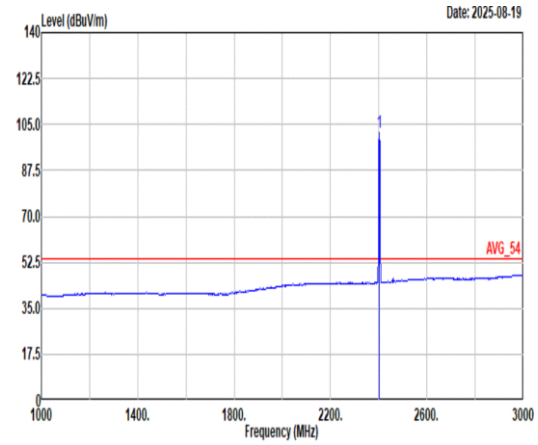 <br>Site : 03CH12-HY<br>Condition: AVG_54 3m 9120D-02114-250702 VERTICAL<br>: RBW:1000.000kHz VBW:1.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2402.00 101.73 ------ ------ 91.67 27.40 6.78 34.15 10.03 267 177 AVERAGE |

| Mode | 10 | |
|---|---|---|
| | Harmonic | |
| | 2400-2483.5_Bluetooth-LE GSFK _CH00_2402MHz | |
| ANT | 1 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 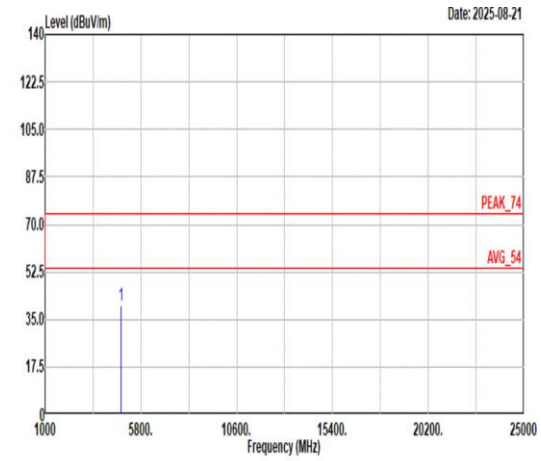 <br><br>Site : 03CH12-HY<br>Condition: PEAK_74 3m 9120D-02114-250702 HORIZONTAL<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 4804.00 40.22 74.00 -33.78 64.63 32.32 10.28 67.45 0.44 -- -- PEAK | 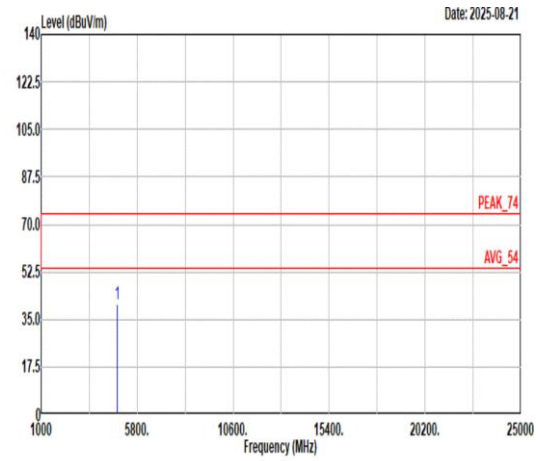 <br><br>Site : 03CH12-HY<br>Condition: PEAK_74 3m 9120D-02114-250702 VERTICAL<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 4804.00 40.63 74.00 -33.37 65.04 32.32 10.28 67.45 0.44 -- -- PEAK |

| Mode | 11 | |
|---|---|---|
| | Band Edge - L | |
| | 2400-2483.5_Bluetooth-LE GSFK _CH19_2440MHz | |
| ANT | 1 | |
| Pol. | Horizontal | Fundamental |
| Peak | 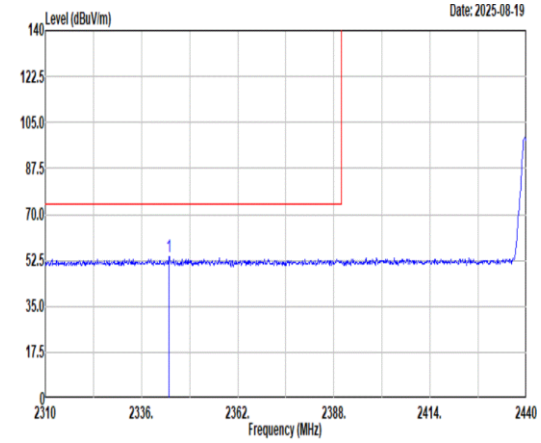 <br>Site : 03CH12-HY<br>Condition: PEAK_BE_74 3m 9120D-02114-250702 HORIZONTAL<br>: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2343.41 53.95 74.00 -20.05 43.94 27.40 6.70 34.12 10.03 300 152 PEAK | 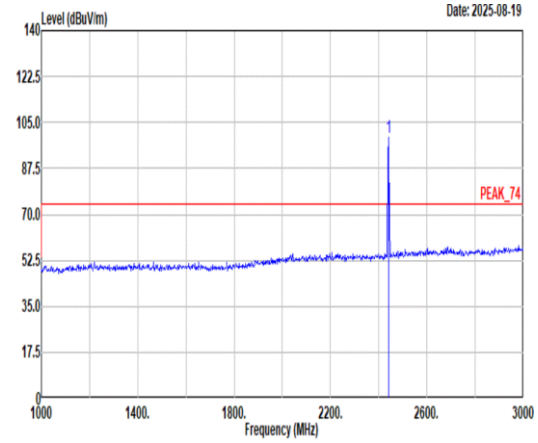 <br>Site : 03CH12-HY<br>Condition: PEAK_74 3m 9120D-02114-250702 HORIZONTAL<br>: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2440.00 99.39 ------ ------ 89.10 27.60 6.84 34.18 10.03 300 152 PEAK |
| Avg | 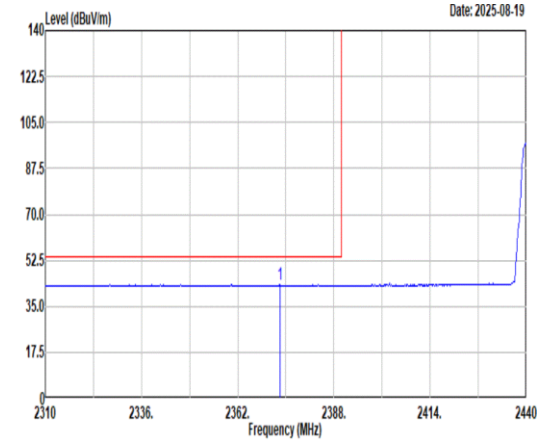 <br>Site : 03CH12-HY<br>Condition: AVG_BE_54 3m 9120D-02114-250702 HORIZONTAL<br>: RBW:1000.000kHz VBW:1.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2373.44 43.26 54.00 -10.74 33.33 27.30 6.74 34.14 10.03 300 152 AVERAGE | 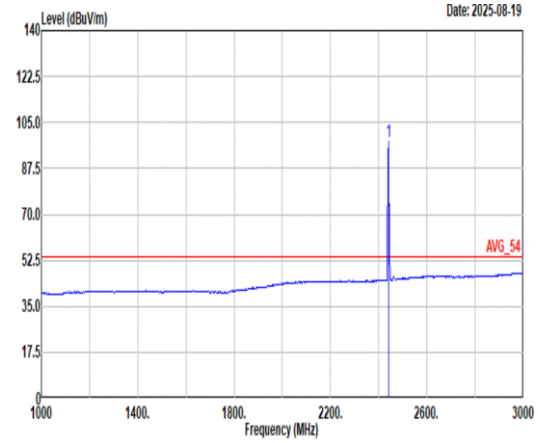 <br>Site : 03CH12-HY<br>Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL<br>: RBW:1000.000kHz VBW:1.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2440.00 97.72 ------ ------ 87.43 27.60 6.84 34.18 10.03 300 152 AVERAGE |

| Mode | 11 | |
|---|---|---|
| | Band Edge - R | |
| | 2400-2483.5_Bluetooth-LE GSFK _CH19_2440MHz | |
| ANT | 1 | |
| Pol. | Horizontal | Fundamental |
| Peak | 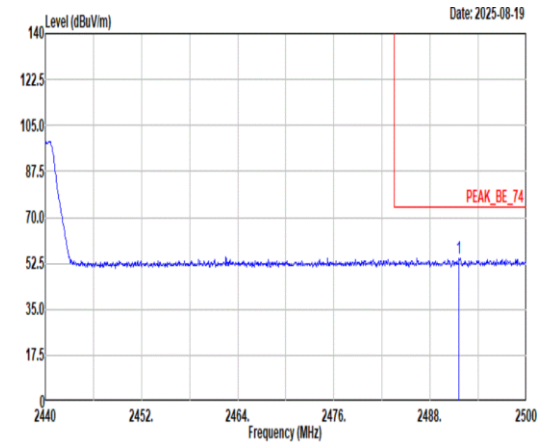 <br>Site : 03CH12-HY<br>Condition: PEAK_BE_74 3m 9120D-02114-250702 HORIZONTAL<br>: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto<br><br>Limit Read Ant Cable Preamp Aux APos TPos<br>Freq Level Line Margin Level Factor Loss Factor Factor Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2491.60 54.42 74.00 -19.58 43.67 28.02 6.91 34.21 10.03 300 152 PEAK | Blank |
| Avg | 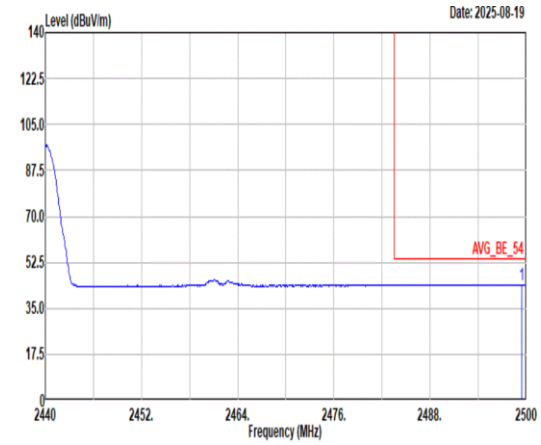 <br>Site : 03CH12-HY<br>Condition: AVG_BE_54 3m 9120D-02114-250702 HORIZONTAL<br>: RBW:1000.000kHz VBW:1.000kHz SWT:Auto<br><br>Limit Read Ant Cable Preamp Aux APos TPos<br>Freq Level Line Margin Level Factor Loss Factor Factor Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2499.46 44.11 54.00 -9.89 33.28 28.09 6.92 34.21 10.03 300 152 AVERAGE | Blank |

| Mode | 11 | |
|---|---|---|
| | Band Edge - L | |
| | 2400-2483.5_Bluetooth-LE GSFK _CH19_2440MHz | |
| ANT | 1 | |
| Pol. | Vertical | Fundamental |
| Peak | 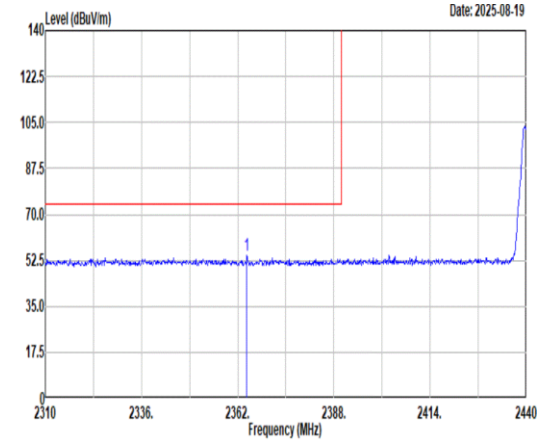 <br>Site : 03CH12-HY<br>Condition: PEAK_BE_74 3m 9120D-02114-250702 VERTICAL<br>: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2364.47 54.36 74.00 -19.64 44.43 27.30 6.73 34.13 10.03 254 176 PEAK | 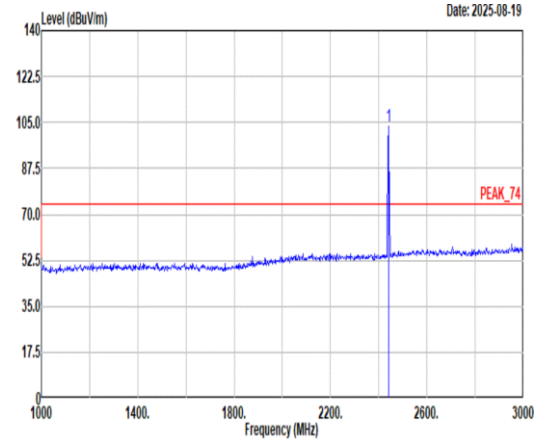 <br>Site : 03CH12-HY<br>Condition: PEAK_74 3m 9120D-02114-250702 VERTICAL<br>: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2440.00 103.53 ------ ------ 93.24 27.60 6.84 34.18 10.03 254 176 PEAK |
| Avg | 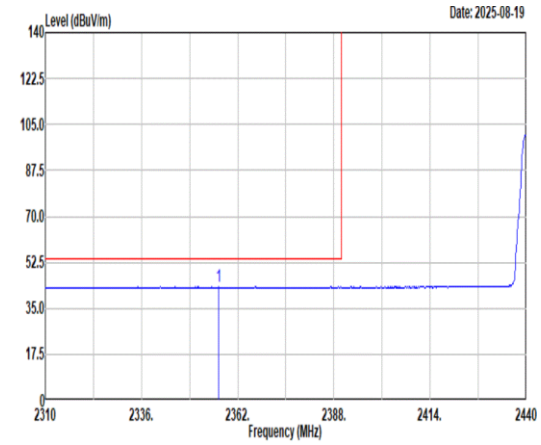 <br>Site : 03CH12-HY<br>Condition: AVG_BE_54 3m 9120D-02114-250702 VERTICAL<br>: RBW:1000.000kHz VBW:1.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2356.80 43.15 54.00 -10.85 33.20 27.33 6.72 34.13 10.03 254 176 AVERAGE | 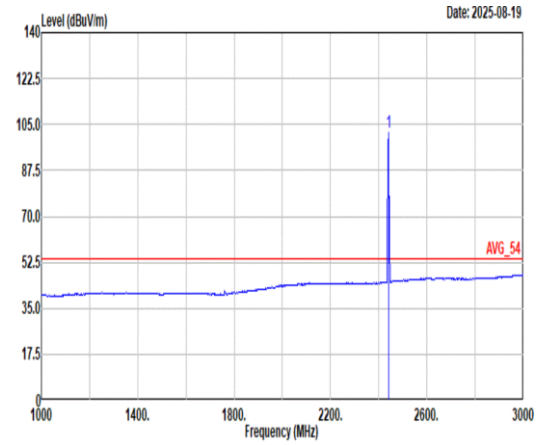 <br>Site : 03CH12-HY<br>Condition: AVG_54 3m 9120D-02114-250702 VERTICAL<br>: RBW:1000.000kHz VBW:1.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2440.00 102.12 ------ ------ 91.83 27.60 6.84 34.18 10.03 254 176 AVERAGE |

| Mode | 11 | |
|---|---|---|
| | Band Edge - R | |
| | 2400-2483.5_Bluetooth-LE GSFK _CH19_2440MHz | |
| ANT | 1 | |
| Pol. | Vertical | Fundamental |
| Peak | 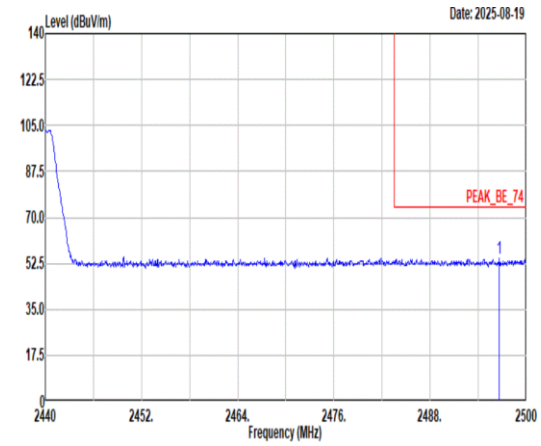 <br>Site : 03CH12-HY<br>Condition: PEAK_BE_74 3m 9120D-02114-250702 VERTICAL<br>: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto<br><br>Limit Read Ant Cable Preamp Aux APos TPos<br>Freq Level Line Margin Level Factor Loss Factor Factor Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2496.64 54.26 74.00 -19.74 43.45 28.07 6.92 34.21 10.03 254 176 PEAK | Blank |
| Avg | 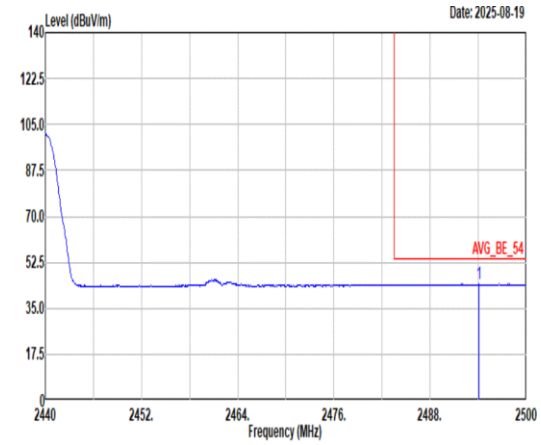 <br>Site : 03CH12-HY<br>Condition: AVG_BE_54 3m 9120D-02114-250702 VERTICAL<br>: RBW:1000.000kHz VBW:1.000kHz SWT:Auto<br><br>Limit Read Ant Cable Preamp Aux APos TPos<br>Freq Level Line Margin Level Factor Loss Factor Factor Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2494.06 44.24 54.00 -9.76 33.46 28.04 6.92 34.21 10.03 254 176 AVERAGE | Blank |

| Mode | 11 | |
|---|---|---|
| | Harmonic | |
| | 2400-2483.5_Bluetooth-LE GSFK _CH19_2440MHz | |
| ANT | 1 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 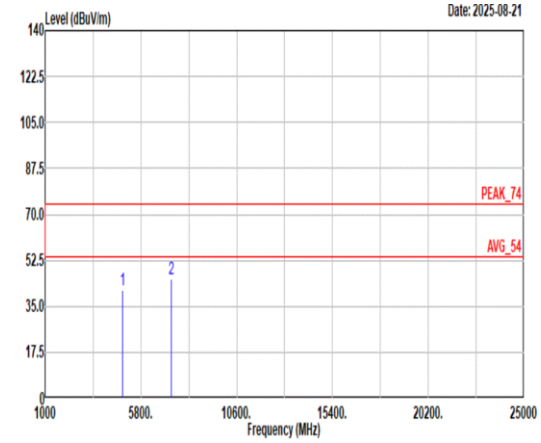 <br><br>Site : 03CH12-HY<br>Condition: PEAK_74 3m 9120D-02114-250702 HORIZONTAL<br><br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 4880.00 41.17 74.00 -32.83 64.77 32.84 10.45 67.41 0.52 -- -- PEAK<br>2 7320.00 45.38 74.00 -28.62 61.54 37.10 13.15 66.61 0.20 -- -- PEAK | 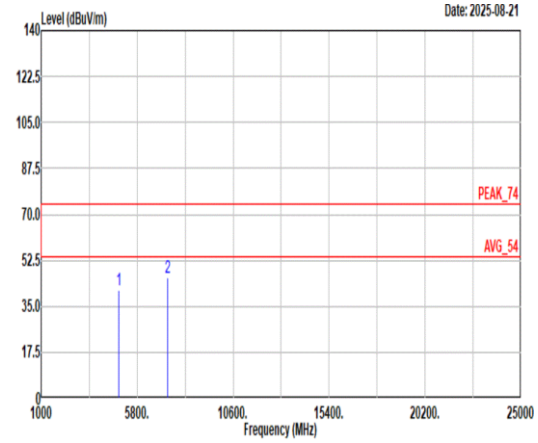 <br><br>Site : 03CH12-HY<br>Condition: PEAK_74 3m 9120D-02114-250702 VERTICAL<br><br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 4880.00 40.99 74.00 -33.01 64.59 32.84 10.45 67.41 0.52 -- -- PEAK<br>2 7320.00 46.17 74.00 -27.83 62.33 37.10 13.15 66.61 0.20 -- -- PEAK |

| Mode | 12 | |
|---|---|---|
| | Band Edge | |
| | 2400-2483.5_Bluetooth-LE GSFK_CH39_2480MHz | |
| ANT | 1 | |
| Pol. | Horizontal | Fundamental |
| Peak | 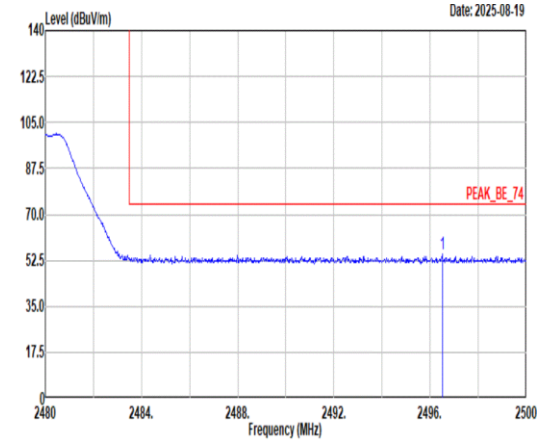 <br>Site : 03CH12-HY<br>Condition: PEAK_BE_74 3m 9120D-02114-250702 HORIZONTAL<br>: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2496.50 54.82 74.00 -19.18 44.01 28.07 6.92 34.21 10.03 363 183 PEAK | 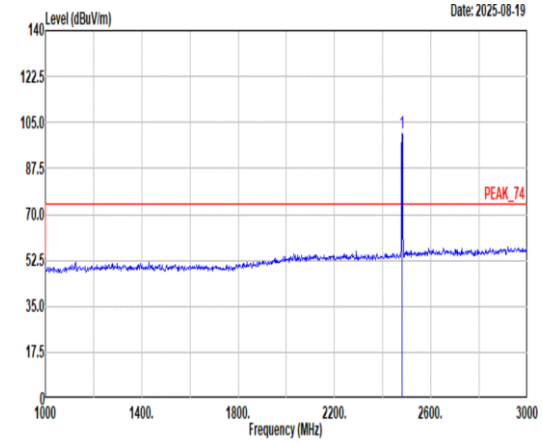 <br>Site : 03CH12-HY<br>Condition: PEAK_74 3m 9120D-02114-250702 HORIZONTAL<br>: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2480.00 101.02 ------ ------ 90.39 27.90 6.90 34.20 10.03 363 183 PEAK |
| Avg | 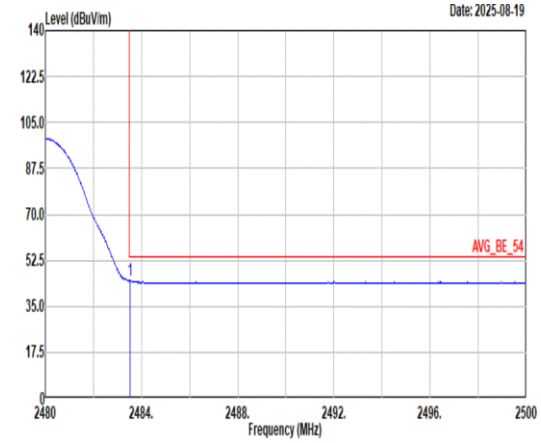 <br>Site : 03CH12-HY<br>Condition: AVG_BE_54 3m 9120D-02114-250702 HORIZONTAL<br>: RBW:1000.000kHz VBW:1.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2483.52 44.75 54.00 -9.25 34.08 27.94 6.90 34.20 10.03 363 183 AVERAGE | 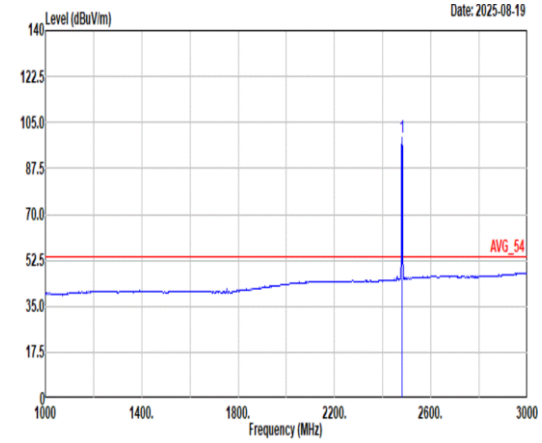 <br>Site : 03CH12-HY<br>Condition: AVG_54 3m 9120D-02114-250702 HORIZONTAL<br>: RBW:1000.000kHz VBW:1.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2480.00 99.51 ------ ------ 88.88 27.90 6.90 34.20 10.03 363 183 AVERAGE |

| Mode | 12 | |
|---|---|---|
| | Band Edge | |
| | 2400-2483.5_Bluetooth-LE GSFK_CH39_2480MHz | |
| ANT | 1 | |
| Pol. | Vertical | Fundamental |
| Peak | 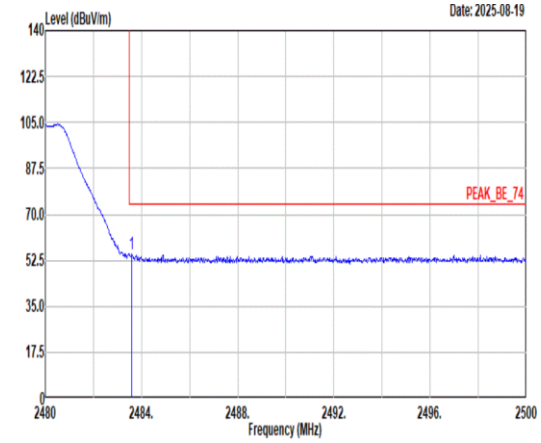 <br>Site : 03CH12-HY<br>Condition: PEAK_BE_74 3m 9120D-02114-250702 VERTICAL<br>: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2483.60 54.85 74.00 -19.15 44.18 27.94 6.90 34.20 10.03 240 175 PEAK | 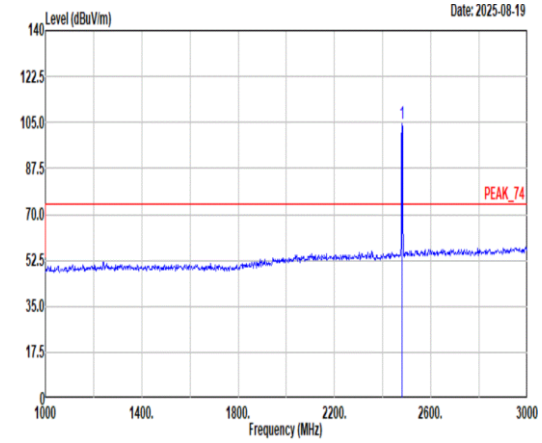 <br>Site : 03CH12-HY<br>Condition: PEAK_74 3m 9120D-02114-250702 VERTICAL<br>: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2480.00 104.53 ------ ------ 93.90 27.90 6.90 34.20 10.03 240 175 PEAK |
| Avg | 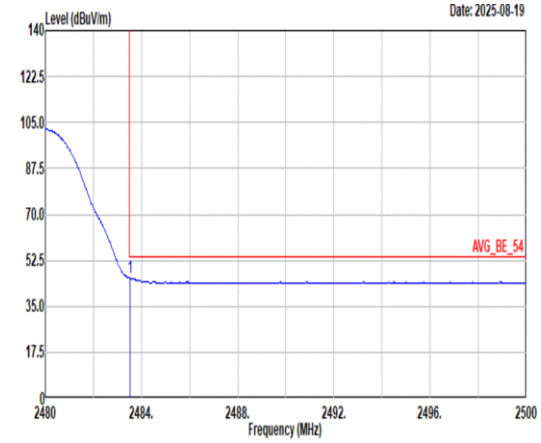 <br>Site : 03CH12-HY<br>Condition: AVG_BE_54 3m 9120D-02114-250702 VERTICAL<br>: RBW:1000.000kHz VBW:1.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2483.52 45.78 54.00 -8.22 35.11 27.94 6.90 34.20 10.03 240 175 AVERAGE | 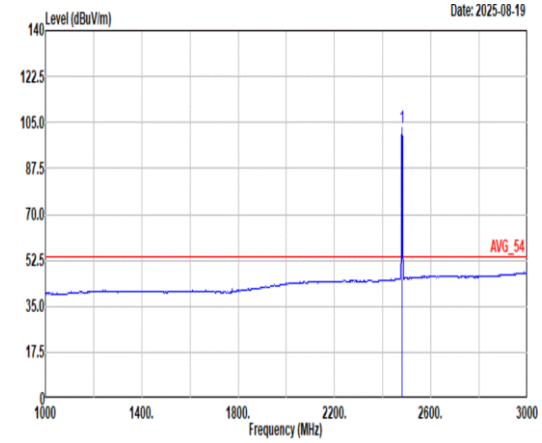 <br>Site : 03CH12-HY<br>Condition: AVG_54 3m 9120D-02114-250702 VERTICAL<br>: RBW:1000.000kHz VBW:1.000kHz SWT:Auto<br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 2480.00 103.02 ------ ------ 92.39 27.90 6.90 34.20 10.03 240 175 AVERAGE |

| Mode | 12 | |
|---|---|---|
| | Harmonic | |
| | 2400-2483.5_Bluetooth-LE GSFK_CH39_2480MHz | |
| ANT | 1 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 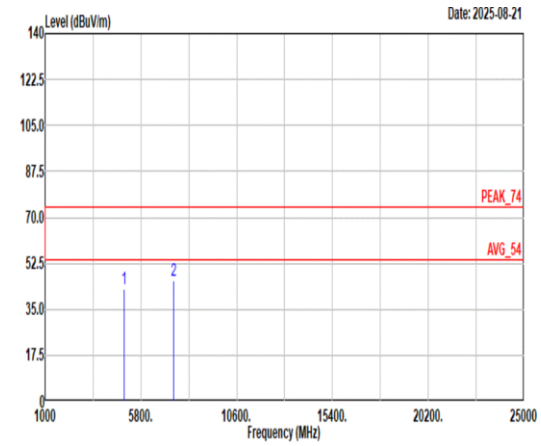 <br><br>Site : 03CH12-HY<br>Condition: PEAK_74 3m 9120D-02114-250702 HORIZONTAL<br><br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 4960.00 42.65 74.00 -31.35 65.37 33.44 10.63 67.38 0.59 -- -- PEAK<br>2 7440.00 45.77 74.00 -28.23 62.23 36.74 13.25 66.66 0.21 -- -- PEAK | 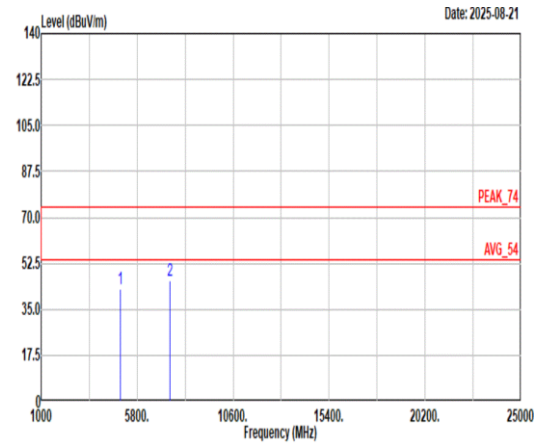 <br><br>Site : 03CH12-HY<br>Condition: PEAK_74 3m 9120D-02114-250702 VERTICAL<br><br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg<br>1 4960.00 42.77 74.00 -31.23 65.49 33.44 10.63 67.38 0.59 -- -- PEAK<br>2 7440.00 46.12 74.00 -27.88 62.58 36.74 13.25 66.66 0.21 -- -- PEAK |

| Mode | 13 | |
|---|---|---|
| | LF | |
| | 2400-2483.5_Bluetooth-LE GSFK_CH39_2480MHz | |
| ANT | 1 | |
| Pol. | Horizontal | Vertical |
| QP/ Peak | 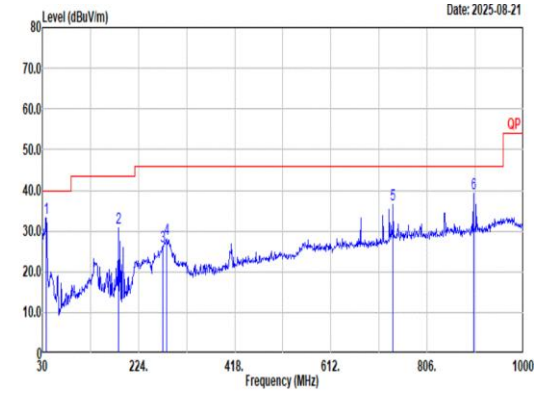 <br>Site : 03CH12-HY<br>Condition: QP 3m Bilog_37059_20241127 HORIZONTAL | 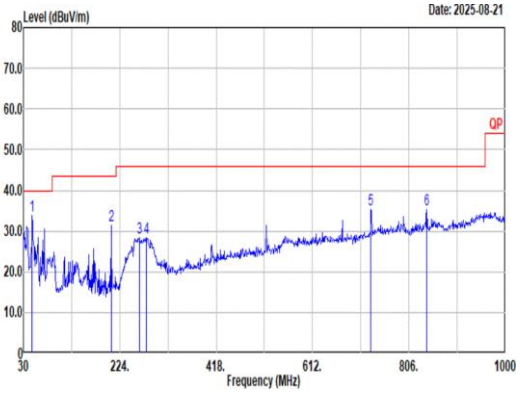 <br>Site : 03CH12-HY<br>Condition: QP 3m Bilog_37059_20241127 VERTICAL |

Horizontal:

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | Aux Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | |
| 1 | 37.76 | 33.29 | 40.00 | -6.71 | 41.13 | 21.02 | 0.88 | 29.78 | 0.04 | -- | -- | Peak |
| 2 | 184.23 | 30.72 | 43.50 | -12.78 | 43.21 | 15.12 | 1.89 | 29.61 | 0.11 | -- | -- | Peak |
| 3 | 272.50 | 26.16 | 46.00 | -19.84 | 34.36 | 18.87 | 2.29 | 29.51 | 0.15 | -- | -- | Peak |
| 4 | 281.23 | 28.15 | 46.00 | -17.85 | 36.19 | 18.98 | 2.33 | 29.50 | 0.15 | -- | -- | Peak |
| 5 | 737.13 | 36.67 | 46.00 | -9.33 | 33.16 | 28.18 | 3.75 | 28.74 | 0.32 | -- | -- | Peak |
| 6 | 899.12 | 39.33 | 46.00 | -6.67 | 33.94 | 29.23 | 4.17 | 28.43 | 0.42 | -- | -- | Peak |

Vertical:

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | Aux Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | dB | cm | deg | |
| 1 | 47.46 | 33.82 | 40.00 | -6.18 | 46.78 | 15.83 | 0.99 | 29.82 | 0.04 | -- | -- | Peak |
| 2 | 206.54 | 31.37 | 43.50 | -12.13 | 43.59 | 15.31 | 1.97 | 29.63 | 0.13 | -- | -- | Peak |
| 3 | 262.80 | 28.38 | 46.00 | -17.62 | 35.39 | 20.12 | 2.24 | 29.52 | 0.15 | -- | -- | Peak |
| 4 | 278.32 | 28.39 | 46.00 | -17.61 | 36.54 | 18.88 | 2.32 | 29.50 | 0.15 | -- | -- | Peak |
| 5 | 729.37 | 35.46 | 46.00 | -10.54 | 32.33 | 27.82 | 3.74 | 28.75 | 0.32 | -- | -- | Peak |
| 6 | 841.89 | 35.45 | 46.00 | -10.55 | 30.55 | 29.09 | 4.00 | 28.56 | 0.37 | -- | -- | Peak |

# Appendix D. Duty Cycle Plots

| Antenna | Band | Duty Cycle (%) | T(us) | 1/T(kHz) | VBW Setting |
|---|---|---|---|---|---|
| 1 | Bluetooth - LE for 125Kbps | 97.43 | 17050 | 0.06 | 62Hz |
| 1 | Bluetooth - LE for 500Kbps | 56.61 | 1062 | 0.94 | 1kHz |
| 1 | Bluetooth - LE for 1Mbps | 85.20 | 2130 | 0.47 | 510Hz |
| 1 | Bluetooth - LE for 2Mbps | 57.02 | 1072 | 0.93 | 1kHz |

**Bluetooth - LE for 125Kbps**

**Bluetooth - LE for 500Kbps**

**Bluetooth - LE for 1Mbps**

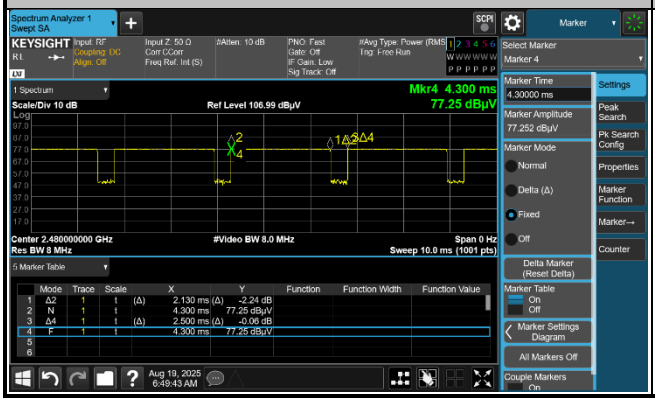

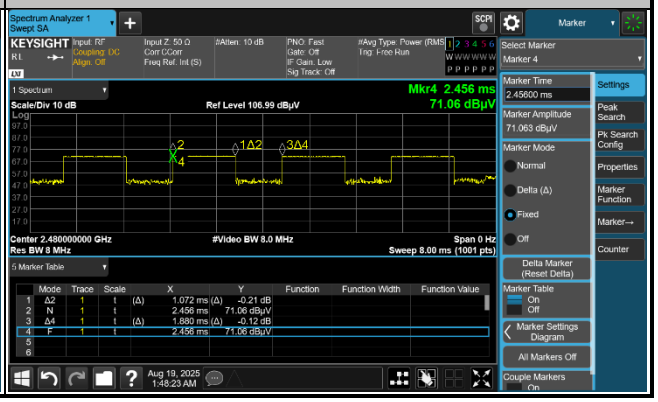
**Bluetooth - LE for 2Mbps**