



Mode	4																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH00_2402MHz																																																																																																															
ANT	Antenna 1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-08-15 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2274.00</td><td>56.75</td><td>74.00</td><td>-17.25</td><td>50.09</td><td>27.14</td><td>6.52</td><td>36.93</td><td>9.93</td><td>400</td><td>324 Peak</td></tr><tr><td>2</td><td>2274.00</td><td>50.98</td><td>54.00</td><td>-3.02</td><td>44.32</td><td>27.14</td><td>6.52</td><td>36.93</td><td>9.93</td><td>400</td><td>324 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2274.00	56.75	74.00	-17.25	50.09	27.14	6.52	36.93	9.93	400	324 Peak	2	2274.00	50.98	54.00	-3.02	44.32	27.14	6.52	36.93	9.93	400	324 Average	Level (dBuV/m) Date: 2026-08-15 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2274.00</td><td>56.99</td><td>74.00</td><td>-17.01</td><td>50.33</td><td>27.14</td><td>6.52</td><td>36.93</td><td>9.93</td><td>104</td><td>287 Peak</td></tr><tr><td>2</td><td>2274.00</td><td>51.49</td><td>54.00</td><td>-2.51</td><td>44.83</td><td>27.14</td><td>6.52</td><td>36.93</td><td>9.93</td><td>104</td><td>287 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2274.00	56.99	74.00	-17.01	50.33	27.14	6.52	36.93	9.93	104	287 Peak	2	2274.00	51.49	54.00	-2.51	44.83	27.14	6.52	36.93	9.93	104	287 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2274.00	56.75	74.00	-17.25	50.09	27.14	6.52	36.93	9.93	400	324 Peak																																																																																																					
2	2274.00	50.98	54.00	-3.02	44.32	27.14	6.52	36.93	9.93	400	324 Average																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2274.00	56.99	74.00	-17.01	50.33	27.14	6.52	36.93	9.93	104	287 Peak																																																																																																					
2	2274.00	51.49	54.00	-2.51	44.83	27.14	6.52	36.93	9.93	104	287 Average																																																																																																					







Mode	5																																																																															
	Band Edge - L																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH19_2440MHz																																																																															
ANT	Antenna 1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2026-08-15 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2311.69</td><td>56.22</td><td>74.00</td><td>-17.78</td><td>49.44</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>355</td><td>317</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2311.69	56.22	74.00	-17.78	49.44	27.20	6.58	36.93	9.93	355	317	Peak	Level (dBuV/m) Date: 2026-08-15 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>103.57</td><td>-----</td><td>-----</td><td>96.32</td><td>27.50</td><td>6.76</td><td>36.94</td><td>9.93</td><td>355</td><td>317</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2440.00	103.57	-----	-----	96.32	27.50	6.76	36.94	9.93	355	317	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	2311.69	56.22	74.00	-17.78	49.44	27.20	6.58	36.93	9.93	355	317	Peak																																																																				
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	2440.00	103.57	-----	-----	96.32	27.50	6.76	36.94	9.93	355	317	Peak																																																																				
Avg	Level (dBuV/m) Date: 2026-08-15 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2311.69</td><td>50.95</td><td>54.00</td><td>-3.05</td><td>44.17</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>355</td><td>317</td><td>Average</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2311.69	50.95	54.00	-3.05	44.17	27.20	6.58	36.93	9.93	355	317	Average	Level (dBuV/m) Date: 2026-08-15 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>102.06</td><td>-----</td><td>-----</td><td>94.81</td><td>27.50</td><td>6.76</td><td>36.94</td><td>9.93</td><td>355</td><td>317</td><td>Average</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2440.00	102.06	-----	-----	94.81	27.50	6.76	36.94	9.93	355	317	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	2311.69	50.95	54.00	-3.05	44.17	27.20	6.58	36.93	9.93	355	317	Average																																																																				
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	2440.00	102.06	-----	-----	94.81	27.50	6.76	36.94	9.93	355	317	Average																																																																				



	5											
Mode	Band Edge - R											
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH19_2440MHz											
ANT	Antenna 1											
Pol.	Horizontal						Fundamental					
Peak	</											

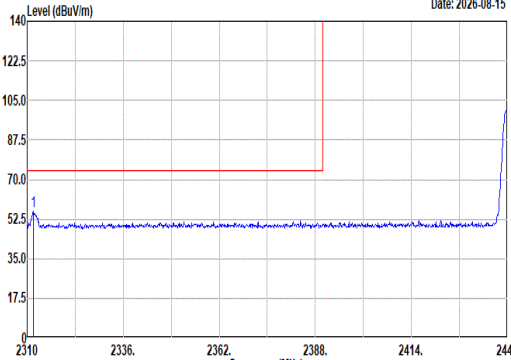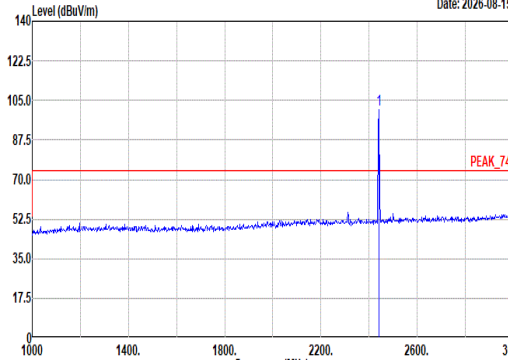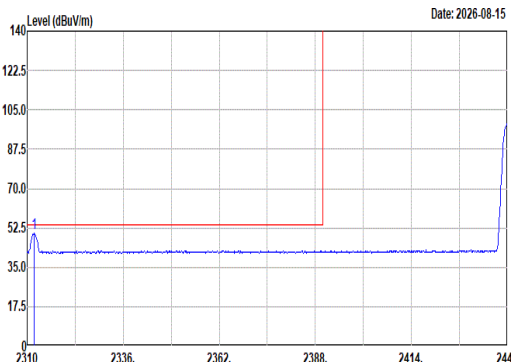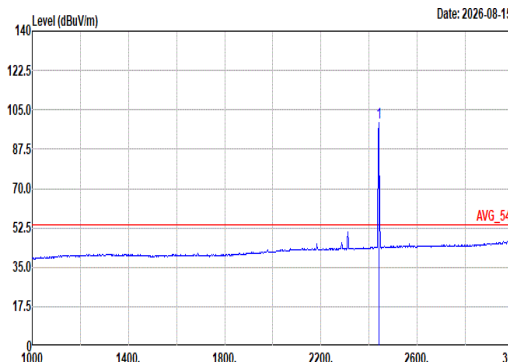

		5																																																																																								
Mode	Band Edge - L																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH19_2440MHz																																																																																									
ANT	Antenna 1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-08-15  Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2311.69</td><td>56.11</td><td>74.00</td><td>-17.89</td><td>49.33</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>167</td><td>290</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2311.69	56.11	74.00	-17.89	49.33	27.20	6.58	36.93	9.93	167	290	Peak	Level (dBuV/m) Date: 2026-08-15  Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>100.95</td><td>-----</td><td>-----</td><td>93.70</td><td>27.50</td><td>6.76</td><td>36.94</td><td>9.93</td><td>167</td><td>290</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2440.00	100.95	-----	-----	93.70	27.50	6.76	36.94	9.93	167	290	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2311.69	56.11	74.00	-17.89	49.33	27.20	6.58	36.93	9.93	167	290	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2440.00	100.95	-----	-----	93.70	27.50	6.76	36.94	9.93	167	290	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-08-15  Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2311.82</td><td>49.93</td><td>54.00</td><td>-4.07</td><td>43.15</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>167</td><td>290</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2311.82	49.93	54.00	-4.07	43.15	27.20	6.58	36.93	9.93	167	290	Average	Level (dBuV/m) Date: 2026-08-15  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>99.46</td><td>-----</td><td>-----</td><td>92.21</td><td>27.50</td><td>6.76</td><td>36.94</td><td>9.93</td><td>167</td><td>290</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2440.00	99.46	-----	-----	92.21	27.50	6.76	36.94	9.93	167	290	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2311.82	49.93	54.00	-4.07	43.15	27.20	6.58	36.93	9.93	167	290	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2440.00	99.46	-----	-----	92.21	27.50	6.76	36.94	9.93	167	290	Average																																																																														







Mode	5																																																	
	Band Edge - R																																																	
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH19_2440MHz																																																	
ANT	Antenna 1																																																	
Pol.	Vertical						Fundamental																																											
Peak	Date: 2026-08-15 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2494.48</td><td>52.52</td><td>74.00</td><td>-21.48</td><td>44.87</td><td>27.84</td><td>6.83</td><td>36.95</td><td>9.93</td><td>167</td><td>290</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2494.48	52.52	74.00	-21.48	44.87	27.84	6.83	36.95	9.93	167	290	Peak	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1 2494.48	52.52	74.00	-21.48	44.87	27.84	6.83	36.95	9.93	167	290	Peak																																							
Avg	Date: 2026-08-15 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2484.76</td><td>42.98</td><td>54.00</td><td>-11.02</td><td>35.43</td><td>27.75</td><td>6.82</td><td>36.95</td><td>9.93</td><td>167</td><td>290</td><td>Average</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2484.76	42.98	54.00	-11.02	35.43	27.75	6.82	36.95	9.93	167	290	Average	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1 2484.76	42.98	54.00	-11.02	35.43	27.75	6.82	36.95	9.93	167	290	Average																																							



Mode	5																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH19_2440MHz																																																																																																															
ANT	Antenna 1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-08-15 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2312.00</td><td>57.65</td><td>74.00</td><td>-16.35</td><td>50.87</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>370</td><td>314 Peak</td></tr><tr><td>2</td><td>2312.00</td><td>52.44</td><td>54.00</td><td>-1.56</td><td>45.66</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>370</td><td>314 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2312.00	57.65	74.00	-16.35	50.87	27.20	6.58	36.93	9.93	370	314 Peak	2	2312.00	52.44	54.00	-1.56	45.66	27.20	6.58	36.93	9.93	370	314 Average	Level (dBuV/m) Date: 2026-08-15 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2312.00</td><td>57.48</td><td>74.00</td><td>-16.52</td><td>50.70</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>180</td><td>207 Peak</td></tr><tr><td>2</td><td>2312.00</td><td>52.15</td><td>54.00</td><td>-1.85</td><td>45.37</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>180</td><td>207 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2312.00	57.48	74.00	-16.52	50.70	27.20	6.58	36.93	9.93	180	207 Peak	2	2312.00	52.15	54.00	-1.85	45.37	27.20	6.58	36.93	9.93	180	207 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2312.00	57.65	74.00	-16.35	50.87	27.20	6.58	36.93	9.93	370	314 Peak																																																																																																					
2	2312.00	52.44	54.00	-1.56	45.66	27.20	6.58	36.93	9.93	370	314 Average																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2312.00	57.48	74.00	-16.52	50.70	27.20	6.58	36.93	9.93	180	207 Peak																																																																																																					
2	2312.00	52.15	54.00	-1.85	45.37	27.20	6.58	36.93	9.93	180	207 Average																																																																																																					

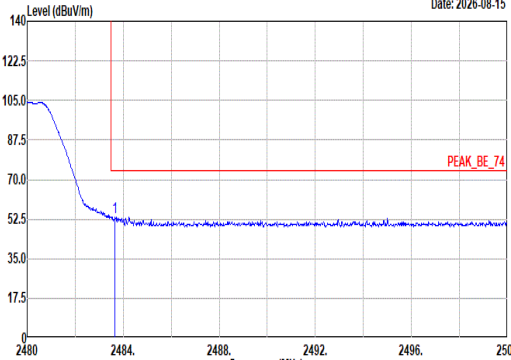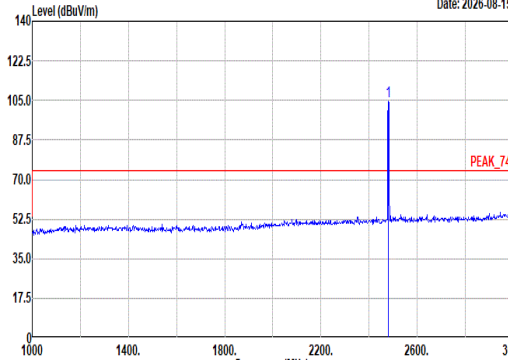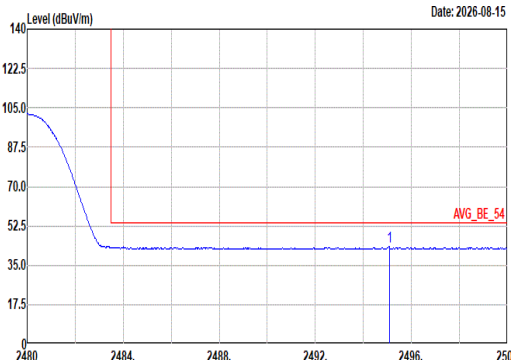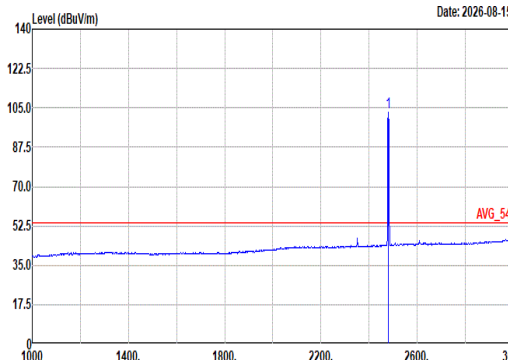

	6																																																																																			
Mode	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH39_2480MHz																																																																																			
ANT	Antenna 1																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-08-15  Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.66</td><td>53.51</td><td>74.00</td><td>-20.49</td><td>45.98</td><td>27.74</td><td>6.81</td><td>36.95</td><td>9.93</td><td>118</td><td>174</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.66	53.51	74.00	-20.49	45.98	27.74	6.81	36.95	9.93	118	174	Peak	Level (dBuV/m) Date: 2026-08-15  Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>104.47</td><td>-----</td><td>-----</td><td>96.98</td><td>27.70</td><td>6.81</td><td>36.95</td><td>9.93</td><td>118</td><td>174</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	104.47	-----	-----	96.98	27.70	6.81	36.95	9.93	118	174	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2483.66	53.51	74.00	-20.49	45.98	27.74	6.81	36.95	9.93	118	174	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	104.47	-----	-----	96.98	27.70	6.81	36.95	9.93	118	174	Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-08-15  Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2495.00</td><td>43.18</td><td>54.00</td><td>-10.82</td><td>35.52</td><td>27.85</td><td>6.83</td><td>36.95</td><td>9.93</td><td>118</td><td>174</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2495.00	43.18	54.00	-10.82	35.52	27.85	6.83	36.95	9.93	118	174	Average	Level (dBuV/m) Date: 2026-08-15  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>103.00</td><td>-----</td><td>-----</td><td>95.51</td><td>27.70</td><td>6.81</td><td>36.95</td><td>9.93</td><td>118</td><td>174</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	103.00	-----	-----	95.51	27.70	6.81	36.95	9.93	118	174	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2495.00	43.18	54.00	-10.82	35.52	27.85	6.83	36.95	9.93	118	174	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	103.00	-----	-----	95.51	27.70	6.81	36.95	9.93	118	174	Average																																																																									



Mode	6																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH39_2480MHz																																																																																			
ANT	Antenna 1																																																																																			
Pol.	Vertical						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-08-15 PEAK_BE_74 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2499.74</td><td>52.69</td><td>74.00</td><td>-21.31</td><td>44.98</td><td>27.90</td><td>6.83</td><td>36.95</td><td>9.93</td><td>100</td><td>94</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2499.74	52.69	74.00	-21.31	44.98	27.90	6.83	36.95	9.93	100	94	Peak	Level (dBuV/m) Date: 2026-08-15 PEAK_74 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>100.41</td><td>-----</td><td>-----</td><td>92.92</td><td>27.70</td><td>6.81</td><td>36.95</td><td>9.93</td><td>100</td><td>94</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	100.41	-----	-----	92.92	27.70	6.81	36.95	9.93	100	94	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2499.74	52.69	74.00	-21.31	44.98	27.90	6.83	36.95	9.93	100	94	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	100.41	-----	-----	92.92	27.70	6.81	36.95	9.93	100	94	Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-08-15 AVG_BE_54 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2498.68</td><td>43.08</td><td>54.00</td><td>-10.92</td><td>35.38</td><td>27.89</td><td>6.83</td><td>36.95</td><td>9.93</td><td>100</td><td>94</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2498.68	43.08	54.00	-10.92	35.38	27.89	6.83	36.95	9.93	100	94	Average	Level (dBuV/m) Date: 2026-08-15 AVG_54 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>98.93</td><td>-----</td><td>-----</td><td>91.44</td><td>27.70</td><td>6.81</td><td>36.95</td><td>9.93</td><td>100</td><td>94</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	98.93	-----	-----	91.44	27.70	6.81	36.95	9.93	100	94	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2498.68	43.08	54.00	-10.92	35.38	27.89	6.83	36.95	9.93	100	94	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	98.93	-----	-----	91.44	27.70	6.81	36.95	9.93	100	94	Average																																																																									



Mode	6																																																																																									
	Harmonic																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH39_2480MHz																																																																																									
ANT	Antenna 1																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-08-15 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2352.00</td><td>58.42</td><td>74.00</td><td>-15.58</td><td>51.59</td><td>27.20</td><td>6.64</td><td>36.94</td><td>9.93</td><td>370 312 Peak</td></tr><tr><td>2</td><td>2352.00</td><td>53.50</td><td>54.00</td><td>-0.50</td><td>46.67</td><td>27.20</td><td>6.64</td><td>36.94</td><td>9.93</td><td>370 312 Average</td></tr></table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2352.00	58.42	74.00	-15.58	51.59	27.20	6.64	36.94	9.93	370 312 Peak	2	2352.00	53.50	54.00	-0.50	46.67	27.20	6.64	36.94	9.93	370 312 Average	Level (dBuV/m) Date: 2026-08-15 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 VERTICAL <table><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2352.00</td><td>58.85</td><td>74.00</td><td>-15.15</td><td>52.02</td><td>27.20</td><td>6.64</td><td>36.94</td><td>9.93</td><td>100 284 Peak</td></tr><tr><td>2</td><td>2352.00</td><td>52.31</td><td>54.00</td><td>-1.69</td><td>45.48</td><td>27.20</td><td>6.64</td><td>36.94</td><td>9.93</td><td>100 284 Average</td></tr></table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2352.00	58.85	74.00	-15.15	52.02	27.20	6.64	36.94	9.93	100 284 Peak	2	2352.00	52.31	54.00	-1.69	45.48	27.20	6.64	36.94	9.93	100 284 Average
		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2352.00	58.42	74.00	-15.58	51.59	27.20	6.64	36.94	9.93	370 312 Peak																																																																																
2	2352.00	53.50	54.00	-0.50	46.67	27.20	6.64	36.94	9.93	370 312 Average																																																																																
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2352.00	58.85	74.00	-15.15	52.02	27.20	6.64	36.94	9.93	100 284 Peak																																																																																
2	2352.00	52.31	54.00	-1.69	45.48	27.20	6.64	36.94	9.93	100 284 Average																																																																																



Mode	7																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH39_2480MHz																																																																																																																																																																																					
ANT	Antenna 1																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QPI Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: QP 3m B1LOG_40103 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>87.23</td><td>30.64</td><td>40.00</td><td>-9.36</td><td>46.00</td><td>14.53</td><td>1.34</td><td>32.11</td><td>0.00 -- Peak</td></tr><tr><td>2</td><td>116.33</td><td>36.90</td><td>43.50</td><td>-6.60</td><td>50.12</td><td>17.32</td><td>1.50</td><td>32.11</td><td>0.07 -- Peak</td></tr><tr><td>3</td><td>247.28</td><td>28.46</td><td>46.00</td><td>-17.54</td><td>39.99</td><td>18.10</td><td>2.22</td><td>31.97</td><td>0.12 -- Peak</td></tr><tr><td>4</td><td>429.64</td><td>30.77</td><td>46.00</td><td>-15.23</td><td>37.27</td><td>22.45</td><td>2.87</td><td>31.92</td><td>0.10 -- Peak</td></tr><tr><td>5</td><td>739.07</td><td>33.68</td><td>46.00</td><td>-12.32</td><td>33.59</td><td>28.11</td><td>3.75</td><td>31.91</td><td>0.14 -- Peak</td></tr><tr><td>6</td><td>859.35</td><td>37.68</td><td>46.00</td><td>-8.32</td><td>35.81</td><td>29.19</td><td>4.03</td><td>31.52</td><td>0.17 -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	87.23	30.64	40.00	-9.36	46.00	14.53	1.34	32.11	0.00 -- Peak	2	116.33	36.90	43.50	-6.60	50.12	17.32	1.50	32.11	0.07 -- Peak	3	247.28	28.46	46.00	-17.54	39.99	18.10	2.22	31.97	0.12 -- Peak	4	429.64	30.77	46.00	-15.23	37.27	22.45	2.87	31.92	0.10 -- Peak	5	739.07	33.68	46.00	-12.32	33.59	28.11	3.75	31.91	0.14 -- Peak	6	859.35	37.68	46.00	-8.32	35.81	29.19	4.03	31.52	0.17 -- Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: QP 3m B1LOG_40103 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>87.23</td><td>28.19</td><td>40.00</td><td>-11.81</td><td>44.35</td><td>14.53</td><td>1.34</td><td>32.11</td><td>0.00 100 296 QP</td></tr><tr><td>2</td><td>114.39</td><td>32.88</td><td>43.50</td><td>-10.62</td><td>46.21</td><td>17.22</td><td>1.49</td><td>32.11</td><td>0.07 100 149 QP</td></tr><tr><td>3</td><td>250.19</td><td>29.72</td><td>46.00</td><td>-16.28</td><td>40.87</td><td>18.47</td><td>2.23</td><td>31.97</td><td>0.12 -- Peak</td></tr><tr><td>4</td><td>429.64</td><td>37.13</td><td>46.00</td><td>-8.87</td><td>43.63</td><td>22.45</td><td>2.87</td><td>31.92</td><td>0.10 -- Peak</td></tr><tr><td>5</td><td>731.31</td><td>39.40</td><td>46.00</td><td>-6.60</td><td>39.78</td><td>27.67</td><td>3.74</td><td>31.93</td><td>0.14 -- Peak</td></tr><tr><td>6</td><td>859.35</td><td>35.69</td><td>46.00</td><td>-10.31</td><td>33.82</td><td>29.19</td><td>4.03</td><td>31.52</td><td>0.17 -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	87.23	28.19	40.00	-11.81	44.35	14.53	1.34	32.11	0.00 100 296 QP	2	114.39	32.88	43.50	-10.62	46.21	17.22	1.49	32.11	0.07 100 149 QP	3	250.19	29.72	46.00	-16.28	40.87	18.47	2.23	31.97	0.12 -- Peak	4	429.64	37.13	46.00	-8.87	43.63	22.45	2.87	31.92	0.10 -- Peak	5	731.31	39.40	46.00	-6.60	39.78	27.67	3.74	31.93	0.14 -- Peak	6	859.35	35.69	46.00	-10.31	33.82	29.19	4.03	31.52	0.17 -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	87.23	30.64	40.00	-9.36	46.00	14.53	1.34	32.11	0.00 -- Peak																																																																																																																																																																													
2	116.33	36.90	43.50	-6.60	50.12	17.32	1.50	32.11	0.07 -- Peak																																																																																																																																																																													
3	247.28	28.46	46.00	-17.54	39.99	18.10	2.22	31.97	0.12 -- Peak																																																																																																																																																																													
4	429.64	30.77	46.00	-15.23	37.27	22.45	2.87	31.92	0.10 -- Peak																																																																																																																																																																													
5	739.07	33.68	46.00	-12.32	33.59	28.11	3.75	31.91	0.14 -- Peak																																																																																																																																																																													
6	859.35	37.68	46.00	-8.32	35.81	29.19	4.03	31.52	0.17 -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	87.23	28.19	40.00	-11.81	44.35	14.53	1.34	32.11	0.00 100 296 QP																																																																																																																																																																													
2	114.39	32.88	43.50	-10.62	46.21	17.22	1.49	32.11	0.07 100 149 QP																																																																																																																																																																													
3	250.19	29.72	46.00	-16.28	40.87	18.47	2.23	31.97	0.12 -- Peak																																																																																																																																																																													
4	429.64	37.13	46.00	-8.87	43.63	22.45	2.87	31.92	0.10 -- Peak																																																																																																																																																																													
5	731.31	39.40	46.00	-6.60	39.78	27.67	3.74	31.93	0.14 -- Peak																																																																																																																																																																													
6	859.35	35.69	46.00	-10.31	33.82	29.19	4.03	31.52	0.17 -- Peak																																																																																																																																																																													



Mode	8																																																																																																
	SHF																																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH39_2480MHz																																																																																																
ANT	Antenna 1																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak	Level (dBuV/m) Date: 2026-08-10 PEAK_74 AVG_54 Frequency (MHz) Site : 03CH13-HY Condition: PEAK_74 1m SHF_00994 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>24785.77</td><td>44.76</td><td>74.00</td><td>-29.24</td><td>40.85</td><td>39.67</td><td>27.11</td><td>53.33</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24785.77	44.76	74.00	-29.24	40.85	39.67	27.11	53.33	-9.54	--	PEAK	Level (dBuV/m) Date: 2026-08-10 PEAK_74 AVG_54 Frequency (MHz) Site : 03CH13-HY Condition: PEAK_74 1m SHF_00994 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>24914.36</td><td>44.18</td><td>74.00</td><td>-29.82</td><td>40.11</td><td>39.73</td><td>27.13</td><td>53.25</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24914.36	44.18	74.00	-29.82	40.11	39.73	27.13	53.25	-9.54	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	24785.77	44.76	74.00	-29.24	40.85	39.67	27.11	53.33	-9.54	--	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	24914.36	44.18	74.00	-29.82	40.11	39.73	27.13	53.25	-9.54	--	PEAK																																																																																						



Mode	9																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH00_2402MHz																																																																																									
ANT	Antenna 2																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2375.75</td><td>51.28</td><td>74.00</td><td>-22.72</td><td>44.42</td><td>27.20</td><td>6.67</td><td>36.94</td><td>9.93</td><td>283</td><td>130</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2375.75	51.28	74.00	-22.72	44.42	27.20	6.67	36.94	9.93	283	130	Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2402.00</td><td>100.91</td><td>-----</td><td>-----</td><td>93.89</td><td>27.32</td><td>6.71</td><td>36.94</td><td>9.93</td><td>283</td><td>130</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2402.00	100.91	-----	-----	93.89	27.32	6.71	36.94	9.93	283	130	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2375.75	51.28	74.00	-22.72	44.42	27.20	6.67	36.94	9.93	283	130	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2402.00	100.91	-----	-----	93.89	27.32	6.71	36.94	9.93	283	130	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2316.14</td><td>42.10</td><td>54.00</td><td>-11.90</td><td>35.32</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>283</td><td>130</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2316.14	42.10	54.00	-11.90	35.32	27.20	6.58	36.93	9.93	283	130	Average	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2402.00</td><td>100.22</td><td>-----</td><td>-----</td><td>93.20</td><td>27.32</td><td>6.71</td><td>36.94</td><td>9.93</td><td>283</td><td>130</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2402.00	100.22	-----	-----	93.20	27.32	6.71	36.94	9.93	283	130	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2316.14	42.10	54.00	-11.90	35.32	27.20	6.58	36.93	9.93	283	130	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2402.00	100.22	-----	-----	93.20	27.32	6.71	36.94	9.93	283	130	Average																																																																														







	9																																																																																															
Mode	Band Edge																																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH00_2402MHz																																																																																															
ANT	Antenna 2																																																																																															
Pol.	Vertical					Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2366.64</td><td>52.07</td><td>74.00</td><td>-21.93</td><td>45.22</td><td>27.20</td><td>6.66</td><td>36.94</td><td>9.93</td><td>398 360 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2366.64	52.07	74.00	-21.93	45.22	27.20	6.66	36.94	9.93	398 360 Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>92.53</td><td>-----</td><td>-----</td><td>85.51</td><td>27.32</td><td>6.71</td><td>36.94</td><td>9.93</td><td>398 360 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.53	-----	-----	85.51	27.32	6.71	36.94	9.93	398 360 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2366.64	52.07	74.00	-21.93	45.22	27.20	6.66	36.94	9.93	398 360 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2402.00	92.53	-----	-----	85.51	27.32	6.71	36.94	9.93	398 360 Peak																																																																																						
Avg	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.77</td><td>42.10</td><td>54.00</td><td>-11.90</td><td>35.13</td><td>27.29</td><td>6.69</td><td>36.94</td><td>9.93</td><td>398 360 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.77	42.10	54.00	-11.90	35.13	27.29	6.69	36.94	9.93	398 360 Average	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>91.91</td><td>-----</td><td>-----</td><td>84.89</td><td>27.32</td><td>6.71</td><td>36.94</td><td>9.93</td><td>398 360 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	91.91	-----	-----	84.89	27.32	6.71	36.94	9.93	398 360 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2388.77	42.10	54.00	-11.90	35.13	27.29	6.69	36.94	9.93	398 360 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2402.00	91.91	-----	-----	84.89	27.32	6.71	36.94	9.93	398 360 Average																																																																																						







	9																																																																																																																									
Mode	Harmonic																																																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH00_2402MHz																																																																																																																									
ANT	Antenna 2																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2274.00</td><td>56.77</td><td>74.00</td><td>-17.23</td><td>50.11</td><td>27.14</td><td>6.52</td><td>36.93</td><td>9.93</td><td>300 136 Peak</td></tr><tr><td>2 2274.00</td><td>51.83</td><td>54.00</td><td>-2.17</td><td>45.17</td><td>27.14</td><td>6.52</td><td>36.93</td><td>9.93</td><td>300 136 Average</td></tr><tr><td>3 4804.00</td><td>44.86</td><td>74.00</td><td>-29.14</td><td>35.63</td><td>32.22</td><td>10.19</td><td>33.63</td><td>0.45</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2274.00	56.77	74.00	-17.23	50.11	27.14	6.52	36.93	9.93	300 136 Peak	2 2274.00	51.83	54.00	-2.17	45.17	27.14	6.52	36.93	9.93	300 136 Average	3 4804.00	44.86	74.00	-29.14	35.63	32.22	10.19	33.63	0.45	-- -- Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2274.00</td><td>53.92</td><td>74.00</td><td>-20.08</td><td>47.26</td><td>27.14</td><td>6.52</td><td>36.93</td><td>9.93</td><td>400 196 Peak</td></tr><tr><td>2 2274.00</td><td>45.25</td><td>54.00</td><td>-8.75</td><td>38.59</td><td>27.14</td><td>6.52</td><td>36.93</td><td>9.93</td><td>400 196 Average</td></tr><tr><td>3 4804.00</td><td>45.45</td><td>74.00</td><td>-28.55</td><td>36.22</td><td>32.22</td><td>10.19</td><td>33.63</td><td>0.45</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2274.00	53.92	74.00	-20.08	47.26	27.14	6.52	36.93	9.93	400 196 Peak	2 2274.00	45.25	54.00	-8.75	38.59	27.14	6.52	36.93	9.93	400 196 Average	3 4804.00	45.45	74.00	-28.55	36.22	32.22	10.19	33.63	0.45	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 2274.00	56.77	74.00	-17.23	50.11	27.14	6.52	36.93	9.93	300 136 Peak																																																																																																																	
2 2274.00	51.83	54.00	-2.17	45.17	27.14	6.52	36.93	9.93	300 136 Average																																																																																																																	
3 4804.00	44.86	74.00	-29.14	35.63	32.22	10.19	33.63	0.45	-- -- Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 2274.00	53.92	74.00	-20.08	47.26	27.14	6.52	36.93	9.93	400 196 Peak																																																																																																																	
2 2274.00	45.25	54.00	-8.75	38.59	27.14	6.52	36.93	9.93	400 196 Average																																																																																																																	
3 4804.00	45.45	74.00	-28.55	36.22	32.22	10.19	33.63	0.45	-- -- Peak																																																																																																																	

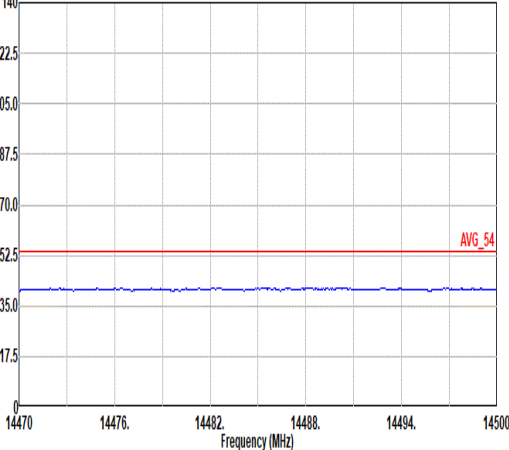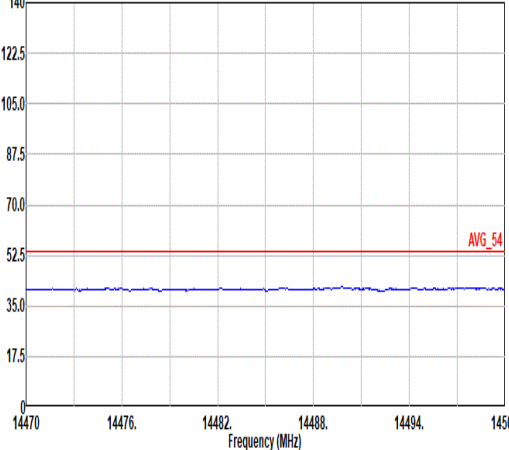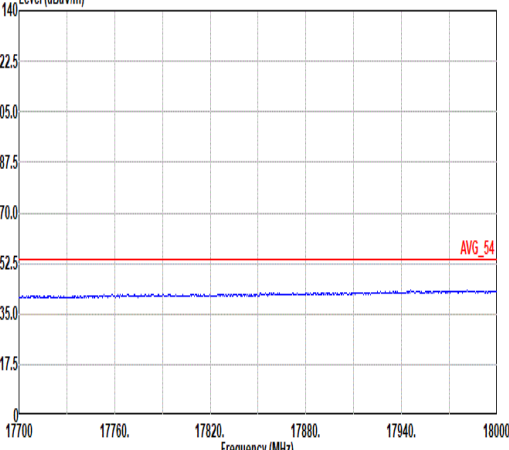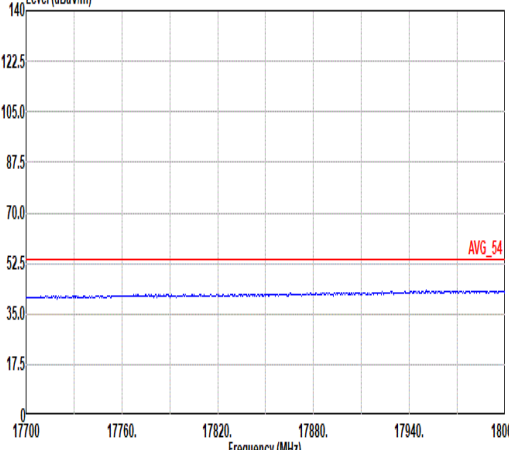

Mode	9	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH00_2402MHz	
ANT	Antenna 2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL
	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL

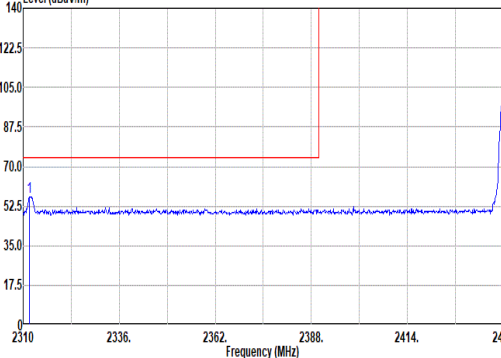
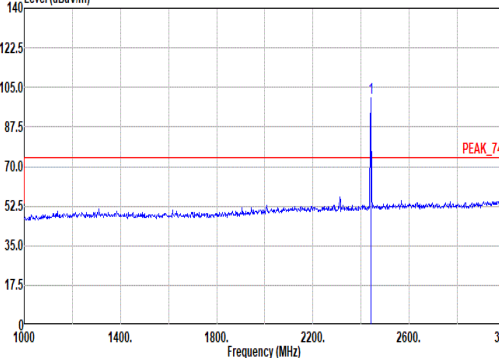
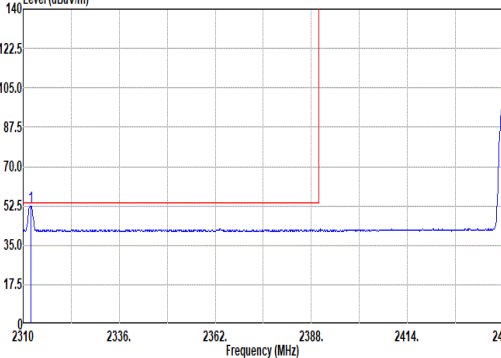
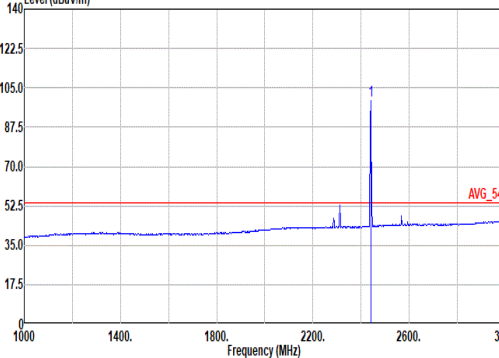


		10																																																																																								
Mode		Band Edge - L																																																																																								
		2400-2483.5 Bluetooth-LE_GSKF_1Mbps_CH19_2440MHz																																																																																								
ANT		Antenna 2																																																																																								
Pol.		Horizontal						Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2026-08-08  Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2311.69</td><td>56.58</td><td>74.00</td><td>-17.42</td><td>49.00</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>282</td><td>135</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2311.69	56.58	74.00	-17.42	49.00	27.20	6.58	36.93	9.93	282	135	Peak	Level (dBuV/m) Date: 2026-08-08  Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>100.15</td><td>-----</td><td>-----</td><td>92.90</td><td>27.50</td><td>6.76</td><td>36.94</td><td>9.93</td><td>282</td><td>135</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2440.00	100.15	-----	-----	92.90	27.50	6.76	36.94	9.93	282	135	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2311.69	56.58	74.00	-17.42	49.00	27.20	6.58	36.93	9.93	282	135	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2440.00	100.15	-----	-----	92.90	27.50	6.76	36.94	9.93	282	135	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-08-08  Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2312.00</td><td>52.43</td><td>54.00</td><td>-1.57</td><td>45.65</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>282</td><td>135</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2312.00	52.43	54.00	-1.57	45.65	27.20	6.58	36.93	9.93	282	135	Average	Level (dBuV/m) Date: 2026-08-08  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>99.52</td><td>-----</td><td>-----</td><td>92.27</td><td>27.50</td><td>6.76</td><td>36.94</td><td>9.93</td><td>282</td><td>135</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2440.00	99.52	-----	-----	92.27	27.50	6.76	36.94	9.93	282	135	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2312.00	52.43	54.00	-1.57	45.65	27.20	6.58	36.93	9.93	282	135	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2440.00	99.52	-----	-----	92.27	27.50	6.76	36.94	9.93	282	135	Average																																																																														



Mode	10																																																	
	Band Edge - R																																																	
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH19_2440MHz																																																	
ANT	Antenna 2																																																	
Pol.	Horizontal						Fundamental																																											
Peak	Level (dBuV/m) Date: 2026-08-08 PEAK_BE_74 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_9120D_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2484.34</td><td>53.11</td><td>74.00</td><td>-20.89</td><td>45.57</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93</td><td>282</td><td>135</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2484.34	53.11	74.00	-20.89	45.57	27.74	6.82	36.95	9.93	282	135	Peak	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1 2484.34	53.11	74.00	-20.89	45.57	27.74	6.82	36.95	9.93	282	135	Peak																																							
Avg	Level (dBuV/m) Date: 2026-08-08 AVG_BE_54 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_9120D_1326 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2497.54</td><td>42.57</td><td>54.00</td><td>-11.43</td><td>34.88</td><td>27.88</td><td>6.83</td><td>36.95</td><td>9.93</td><td>282</td><td>135</td><td>Average</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2497.54	42.57	54.00	-11.43	34.88	27.88	6.83	36.95	9.93	282	135	Average	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1 2497.54	42.57	54.00	-11.43	34.88	27.88	6.83	36.95	9.93	282	135	Average																																							

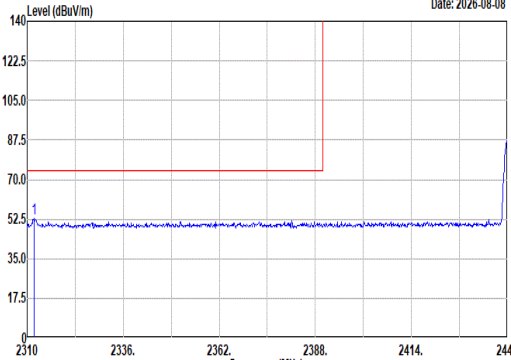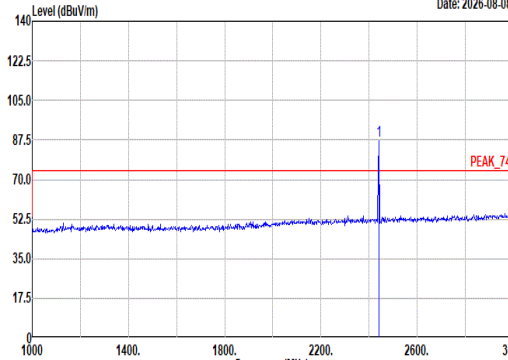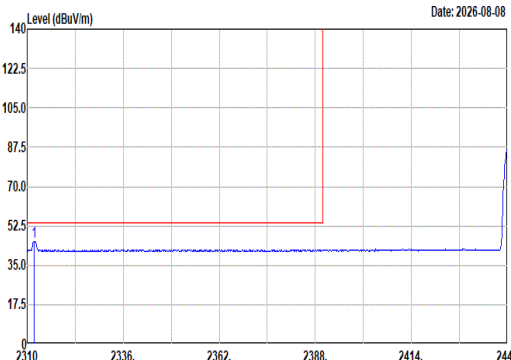
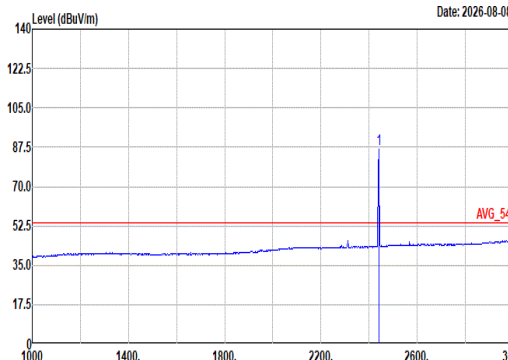


		10																																																																															
Mode	Band Edge - L																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH19_2440MHz																																																																																
ANT	Antenna 2																																																																																
Pol.	Vertical					Fundamental																																																																											
Peak	Level (dBuV/m) Date: 2026-08-08  Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2311.95</td><td>53.05</td><td>74.00</td><td>-20.95</td><td>46.27</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>400</td><td>79 Peak</td></tr></tbody></table>						Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2311.95	53.05	74.00	-20.95	46.27	27.20	6.58	36.93	9.93	400	79 Peak	Level (dBuV/m) Date: 2026-08-08  Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>87.19</td><td>-----</td><td>79.94</td><td>27.50</td><td>6.76</td><td>36.94</td><td>9.93</td><td>400</td><td>79 Peak</td></tr></tbody></table>						Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2440.00	87.19	-----	79.94	27.50	6.76	36.94	9.93	400	79 Peak
		Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	2311.95	53.05	74.00	-20.95	46.27	27.20	6.58	36.93	9.93	400	79 Peak																																																																						
	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	2440.00	87.19	-----	79.94	27.50	6.76	36.94	9.93	400	79 Peak																																																																							
Avg	Level (dBuV/m) Date: 2026-08-08  Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2311.95</td><td>45.59</td><td>54.00</td><td>-8.41</td><td>38.81</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>400</td><td>79 Average</td></tr></tbody></table>						Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2311.95	45.59	54.00	-8.41	38.81	27.20	6.58	36.93	9.93	400	79 Average	Level (dBuV/m) Date: 2026-08-08  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>86.53</td><td>-----</td><td>79.28</td><td>27.50</td><td>6.76</td><td>36.94</td><td>9.93</td><td>400</td><td>79 Average</td></tr></tbody></table>						Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2440.00	86.53	-----	79.28	27.50	6.76	36.94	9.93	400	79 Average
		Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	2311.95	45.59	54.00	-8.41	38.81	27.20	6.58	36.93	9.93	400	79 Average																																																																						
	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	2440.00	86.53	-----	79.28	27.50	6.76	36.94	9.93	400	79 Average																																																																							



Mode	10											
	Band Edge - R											
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH19_2440MHz											
ANT	Antenna 2											
Pol.	Vertical						Fundamental					
Peak	</											

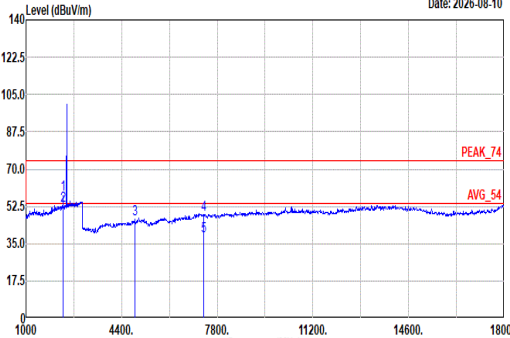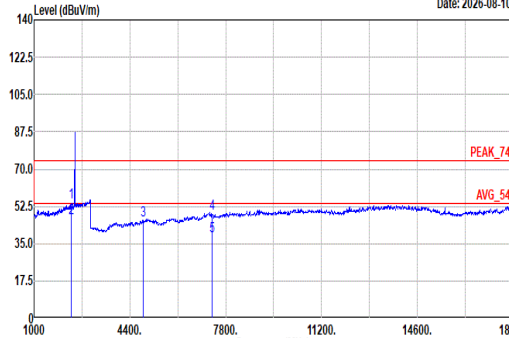

Mode	10										
	Harmonic										
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH19_2440MHz										
ANT	Antenna 2										
Pol.	Horizontal					Vertical					
Peak Avg											
	Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 HORIZONTAL					Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 VERTICAL					
	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	2312.00	58.23	74.00	-15.77	51.45	27.20	6.58	36.93	9.93	281	147 Peak
2	2312.00	52.67	54.00	-1.33	45.89	27.20	6.58	36.93	9.93	281	147 Average
3	4880.00	46.41	74.00	-27.59	36.83	32.56	10.07	33.59	0.54	--	-- Peak
4	7320.00	48.84	74.00	-25.16	35.92	36.66	11.72	36.04	0.58	--	-- Peak
5	7320.00	38.66	54.00	-15.34	25.74	36.66	11.72	36.04	0.58	--	-- Average
	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	2312.00	54.43	74.00	-19.57	47.65	27.20	6.58	36.93	9.93	400	86 Peak
2	2312.00	46.85	54.00	-7.15	40.07	27.20	6.58	36.93	9.93	400	86 Average
3	4880.00	46.18	74.00	-27.82	36.00	32.56	10.07	33.59	0.54	--	-- Peak
4	7320.00	49.11	74.00	-24.89	36.19	36.66	11.72	36.04	0.58	--	-- Peak
5	7320.00	38.73	54.00	-15.27	25.81	36.66	11.72	36.04	0.58	--	-- Average







Mode	10	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH19_2440MHz	
ANT	Antenna 2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL
	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL



		11																																																																																		
Mode	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH39_2480MHz																																																																																			
ANT	Antenna 2																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-08-10 PEAK_BE_74 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2490.40</td><td>52.38</td><td>74.00</td><td>-21.62</td><td>44.69</td><td>27.88</td><td>6.83</td><td>36.95</td><td>9.93</td><td>308</td><td>121</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2490.40	52.38	74.00	-21.62	44.69	27.88	6.83	36.95	9.93	308	121	Peak	Level (dBuV/m) Date: 2026-08-10 PEAK_74 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>100.01</td><td>-----</td><td>-----</td><td>92.52</td><td>27.70</td><td>6.81</td><td>36.95</td><td>9.93</td><td>308</td><td>121</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	100.01	-----	-----	92.52	27.70	6.81	36.95	9.93	308	121	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2490.40	52.38	74.00	-21.62	44.69	27.88	6.83	36.95	9.93	308	121	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	100.01	-----	-----	92.52	27.70	6.81	36.95	9.93	308	121	Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-08-10 AVG_BE_54 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2484.66</td><td>42.88</td><td>54.00</td><td>-11.12</td><td>35.33</td><td>27.75</td><td>6.82</td><td>36.95</td><td>9.93</td><td>308</td><td>121</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2484.66	42.88	54.00	-11.12	35.33	27.75	6.82	36.95	9.93	308	121	Average	Level (dBuV/m) Date: 2026-08-10 AVG_54 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>99.35</td><td>-----</td><td>-----</td><td>91.86</td><td>27.70</td><td>6.81</td><td>36.95</td><td>9.93</td><td>308</td><td>121</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	99.35	-----	-----	91.86	27.70	6.81	36.95	9.93	308	121	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2484.66	42.88	54.00	-11.12	35.33	27.75	6.82	36.95	9.93	308	121	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	99.35	-----	-----	91.86	27.70	6.81	36.95	9.93	308	121	Average																																																																									

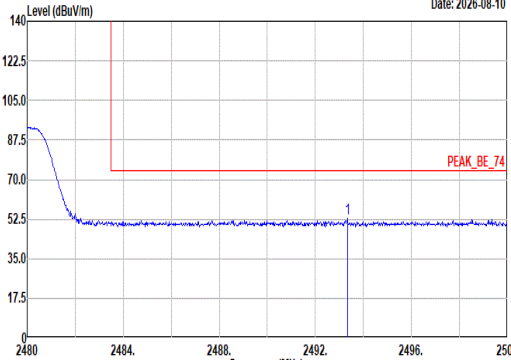
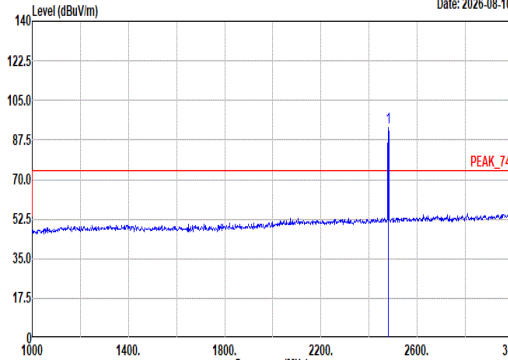
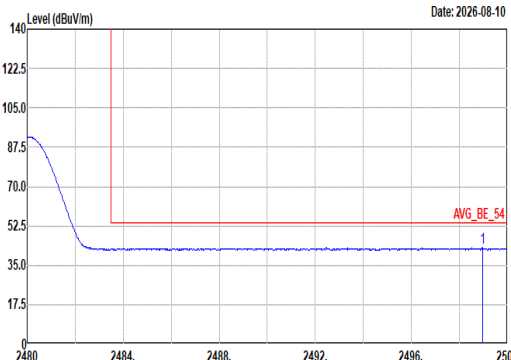
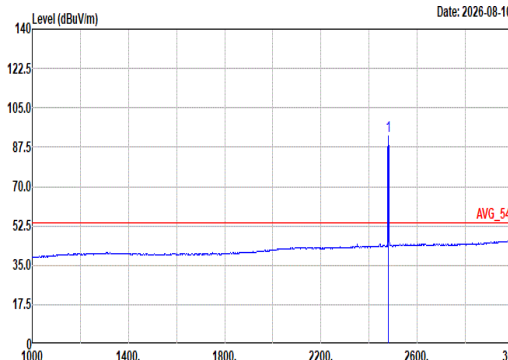


		11																																																																																		
Mode	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH39_2480MHz																																																																																			
ANT	Antenna 2																																																																																			
Pol.	Vertical						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2493.34</td><td>52.57</td><td>74.00</td><td>-21.43</td><td>44.93</td><td>27.83</td><td>6.83</td><td>36.95</td><td>9.93</td><td>293</td><td>332</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2493.34	52.57	74.00	-21.43	44.93	27.83	6.83	36.95	9.93	293	332	Peak	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>93.07</td><td>-----</td><td>-----</td><td>85.58</td><td>27.70</td><td>6.81</td><td>36.95</td><td>9.93</td><td>293</td><td>332</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	93.07	-----	-----	85.58	27.70	6.81	36.95	9.93	293	332	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2493.34	52.57	74.00	-21.43	44.93	27.83	6.83	36.95	9.93	293	332	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	93.07	-----	-----	85.58	27.70	6.81	36.95	9.93	293	332	Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2498.96</td><td>42.63</td><td>54.00</td><td>-11.37</td><td>34.93</td><td>27.89</td><td>6.83</td><td>36.95</td><td>9.93</td><td>293</td><td>332</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2498.96	42.63	54.00	-11.37	34.93	27.89	6.83	36.95	9.93	293	332	Average	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>92.38</td><td>-----</td><td>-----</td><td>84.89</td><td>27.70</td><td>6.81</td><td>36.95</td><td>9.93</td><td>293</td><td>332</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	92.38	-----	-----	84.89	27.70	6.81	36.95	9.93	293	332	Average
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2498.96	42.63	54.00	-11.37	34.93	27.89	6.83	36.95	9.93	293	332	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	92.38	-----	-----	84.89	27.70	6.81	36.95	9.93	293	332	Average																																																																									



Mode	11																																																																																																																																																																	
	Harmonic																																																																																																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH39_2480MHz																																																																																																																																																																	
ANT	Antenna 2																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2352.00</td><td>56.94</td><td>74.00</td><td>-17.06</td><td>50.11</td><td>27.20</td><td>6.64</td><td>36.94</td><td>9.93</td><td>200 132 Peak</td></tr><tr><td>2 2352.00</td><td>51.40</td><td>54.00</td><td>-2.60</td><td>44.57</td><td>27.20</td><td>6.64</td><td>36.94</td><td>9.93</td><td>200 132 Average</td></tr><tr><td>3 4960.00</td><td>46.28</td><td>74.00</td><td>-27.72</td><td>36.39</td><td>32.06</td><td>9.94</td><td>33.54</td><td>0.63</td><td>-- -- Peak</td></tr><tr><td>4 7440.00</td><td>48.89</td><td>74.00</td><td>-25.11</td><td>36.34</td><td>36.24</td><td>11.79</td><td>36.13</td><td>0.65</td><td>-- -- Peak</td></tr><tr><td>5 7440.00</td><td>38.11</td><td>54.00</td><td>-15.89</td><td>25.56</td><td>36.24</td><td>11.79</td><td>36.13</td><td>0.65</td><td>-- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2352.00	56.94	74.00	-17.06	50.11	27.20	6.64	36.94	9.93	200 132 Peak	2 2352.00	51.40	54.00	-2.60	44.57	27.20	6.64	36.94	9.93	200 132 Average	3 4960.00	46.28	74.00	-27.72	36.39	32.06	9.94	33.54	0.63	-- -- Peak	4 7440.00	48.89	74.00	-25.11	36.34	36.24	11.79	36.13	0.65	-- -- Peak	5 7440.00	38.11	54.00	-15.89	25.56	36.24	11.79	36.13	0.65	-- -- Average	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2352.00</td><td>54.99</td><td>74.00</td><td>-19.01</td><td>48.16</td><td>27.20</td><td>6.64</td><td>36.94</td><td>9.93</td><td>400 349 Peak</td></tr><tr><td>2 2352.00</td><td>46.06</td><td>54.00</td><td>-7.94</td><td>39.23</td><td>27.20</td><td>6.64</td><td>36.94</td><td>9.93</td><td>400 349 Average</td></tr><tr><td>3 4960.00</td><td>45.27</td><td>74.00</td><td>-28.73</td><td>35.30</td><td>32.06</td><td>9.94</td><td>33.54</td><td>0.63</td><td>-- -- Peak</td></tr><tr><td>4 7440.00</td><td>47.95</td><td>74.00</td><td>-26.05</td><td>35.40</td><td>36.24</td><td>11.79</td><td>36.13</td><td>0.65</td><td>-- -- Peak</td></tr><tr><td>5 7440.00</td><td>38.09</td><td>54.00</td><td>-15.91</td><td>25.54</td><td>36.24</td><td>11.79</td><td>36.13</td><td>0.65</td><td>-- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2352.00	54.99	74.00	-19.01	48.16	27.20	6.64	36.94	9.93	400 349 Peak	2 2352.00	46.06	54.00	-7.94	39.23	27.20	6.64	36.94	9.93	400 349 Average	3 4960.00	45.27	74.00	-28.73	35.30	32.06	9.94	33.54	0.63	-- -- Peak	4 7440.00	47.95	74.00	-26.05	35.40	36.24	11.79	36.13	0.65	-- -- Peak	5 7440.00	38.09	54.00	-15.91	25.54	36.24	11.79	36.13	0.65	-- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																									
1 2352.00	56.94	74.00	-17.06	50.11	27.20	6.64	36.94	9.93	200 132 Peak																																																																																																																																																									
2 2352.00	51.40	54.00	-2.60	44.57	27.20	6.64	36.94	9.93	200 132 Average																																																																																																																																																									
3 4960.00	46.28	74.00	-27.72	36.39	32.06	9.94	33.54	0.63	-- -- Peak																																																																																																																																																									
4 7440.00	48.89	74.00	-25.11	36.34	36.24	11.79	36.13	0.65	-- -- Peak																																																																																																																																																									
5 7440.00	38.11	54.00	-15.89	25.56	36.24	11.79	36.13	0.65	-- -- Average																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																									
1 2352.00	54.99	74.00	-19.01	48.16	27.20	6.64	36.94	9.93	400 349 Peak																																																																																																																																																									
2 2352.00	46.06	54.00	-7.94	39.23	27.20	6.64	36.94	9.93	400 349 Average																																																																																																																																																									
3 4960.00	45.27	74.00	-28.73	35.30	32.06	9.94	33.54	0.63	-- -- Peak																																																																																																																																																									
4 7440.00	47.95	74.00	-26.05	35.40	36.24	11.79	36.13	0.65	-- -- Peak																																																																																																																																																									
5 7440.00	38.09	54.00	-15.91	25.54	36.24	11.79	36.13	0.65	-- -- Average																																																																																																																																																									



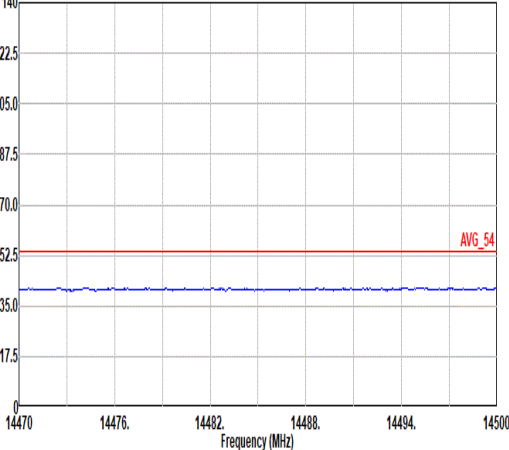
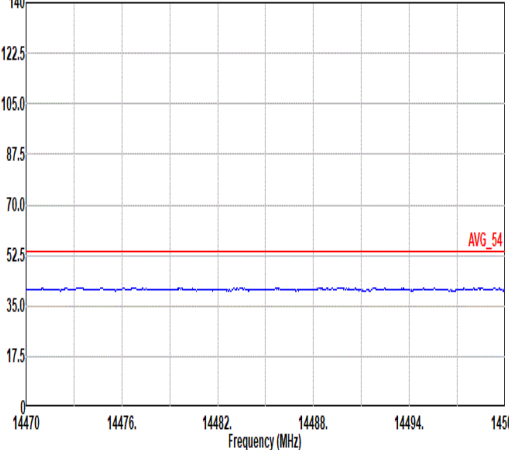
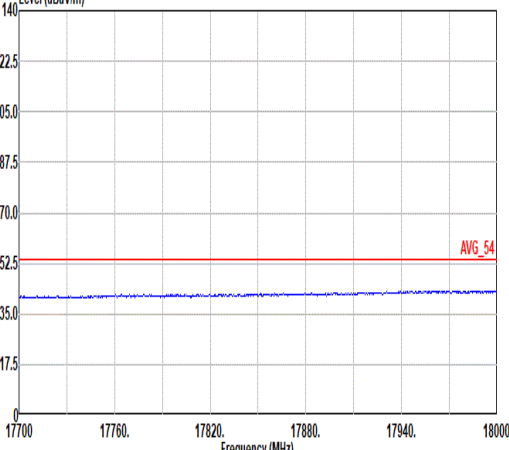
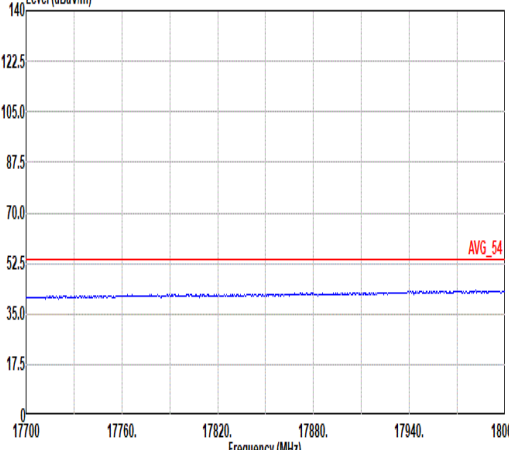


Mode	11	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH39_2480MHz	
ANT	Antenna 2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL
	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL



		12																																																																																	
Mode	Band Edge																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH00_2402MHz																																																																																		
ANT	Antenna 2																																																																																		
Pol.	Horizontal																																																																																		
Peak	Fundamental																																																																																		
	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2353.25</td><td>51.59</td><td>74.00</td><td>-22.41</td><td>44.76</td><td>27.20</td><td>6.64</td><td>36.94</td><td>9.93</td><td>398</td><td>360</td><td>Peak</td></tr></table> Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2402.00</td><td>85.00</td><td>-----</td><td>-----</td><td>77.98</td><td>27.32</td><td>6.71</td><td>36.94</td><td>9.93</td><td>398</td><td>360</td><td>Peak</td></tr></table>											Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2353.25	51.59	74.00	-22.41	44.76	27.20	6.64	36.94	9.93	398	360	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2402.00	85.00	-----	-----	77.98	27.32	6.71	36.94	9.93	398	360	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2353.25	51.59	74.00	-22.41	44.76	27.20	6.64	36.94	9.93	398	360	Peak																																																																								
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2402.00	85.00	-----	-----	77.98	27.32	6.71	36.94	9.93	398	360	Peak																																																																								
Avg	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2379.84</td><td>42.81</td><td>54.00</td><td>-11.19</td><td>35.94</td><td>27.20</td><td>6.68</td><td>36.94</td><td>9.93</td><td>398</td><td>360</td><td>Average</td></tr></table> Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2402.00</td><td>83.40</td><td>-----</td><td>-----</td><td>76.38</td><td>27.32</td><td>6.71</td><td>36.94</td><td>9.93</td><td>398</td><td>360</td><td>Average</td></tr></table>											Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2379.84	42.81	54.00	-11.19	35.94	27.20	6.68	36.94	9.93	398	360	Average	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2402.00	83.40	-----	-----	76.38	27.32	6.71	36.94	9.93	398	360	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2379.84	42.81	54.00	-11.19	35.94	27.20	6.68	36.94	9.93	398	360	Average																																																																								
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2402.00	83.40	-----	-----	76.38	27.32	6.71	36.94	9.93	398	360	Average																																																																								

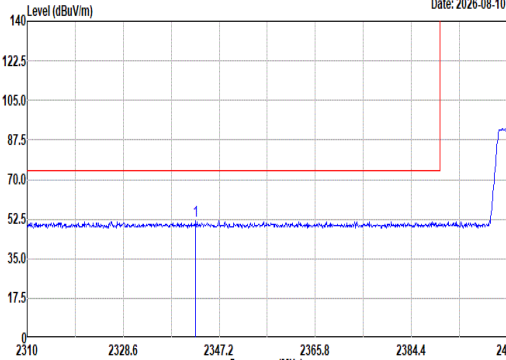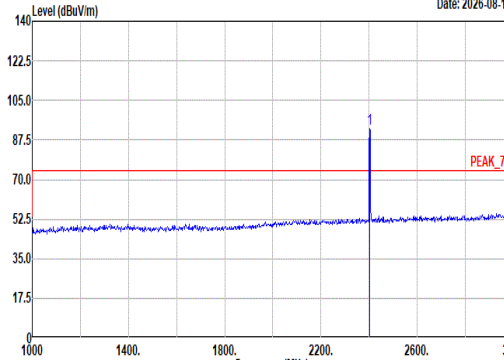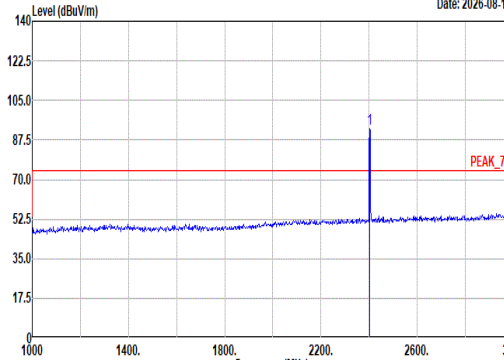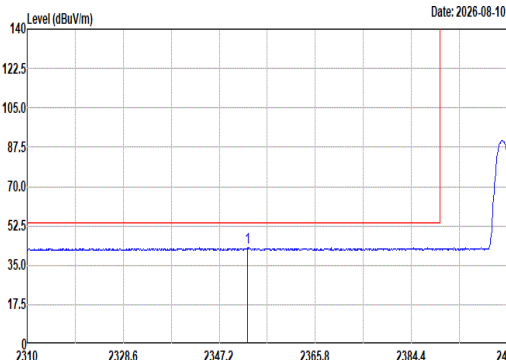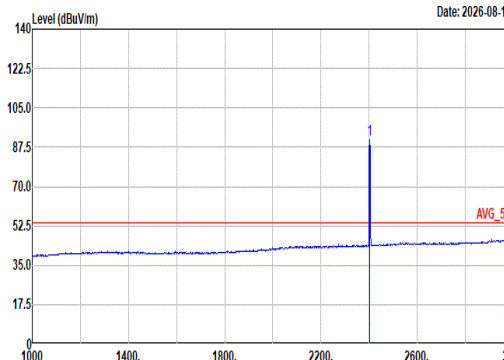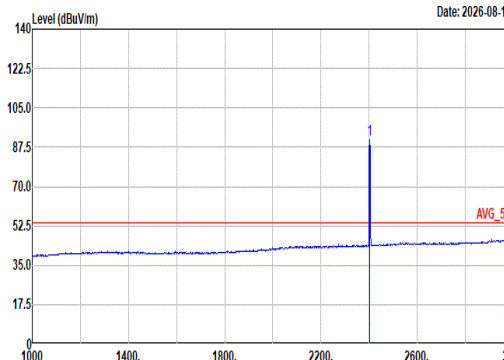

Mode	12																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH00_2402MHz																																																																																									
ANT	Antenna 2																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2342.64</td><td>51.96</td><td>74.00</td><td>-22.04</td><td>45.14</td><td>27.20</td><td>6.62</td><td>36.93</td><td>9.93</td><td>397 4 Peak</td></tr></table> <td colspan="5"> Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2402.00</td><td>92.63</td><td>-----</td><td>85.61</td><td>27.32</td><td>6.71</td><td>36.94</td><td>9.93</td><td>397</td><td>4 Peak</td></tr></table> </td>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2342.64	51.96	74.00	-22.04	45.14	27.20	6.62	36.93	9.93	397 4 Peak	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2402.00</td><td>92.63</td><td>-----</td><td>85.61</td><td>27.32</td><td>6.71</td><td>36.94</td><td>9.93</td><td>397</td><td>4 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2402.00	92.63	-----	85.61	27.32	6.71	36.94	9.93	397	4 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2342.64	51.96	74.00	-22.04	45.14	27.20	6.62	36.93	9.93	397 4 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2402.00	92.63	-----	85.61	27.32	6.71	36.94	9.93	397	4 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2352.69</td><td>42.63</td><td>54.00</td><td>-11.37</td><td>35.00</td><td>27.20</td><td>6.64</td><td>36.94</td><td>9.93</td><td>397 4 Average</td></tr></table> <td colspan="5"> Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2402.00</td><td>91.09</td><td>-----</td><td>84.07</td><td>27.32</td><td>6.71</td><td>36.94</td><td>9.93</td><td>397</td><td>4 Average</td></tr></table> </td>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2352.69	42.63	54.00	-11.37	35.00	27.20	6.64	36.94	9.93	397 4 Average	Level (dBuV/m) Date: 2026-08-10  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2402.00</td><td>91.09</td><td>-----</td><td>84.07</td><td>27.32</td><td>6.71</td><td>36.94</td><td>9.93</td><td>397</td><td>4 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2402.00	91.09	-----	84.07	27.32	6.71	36.94	9.93	397	4 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2352.69	42.63	54.00	-11.37	35.00	27.20	6.64	36.94	9.93	397 4 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2402.00	91.09	-----	84.07	27.32	6.71	36.94	9.93	397	4 Average																																																																																	



Mode	12																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH00_2402MHz																																																																																																															
ANT	Antenna 2																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2274.00</td><td>57.33</td><td>74.00</td><td>-16.67</td><td>50.67</td><td>27.14</td><td>6.52</td><td>36.93</td><td>9.93</td><td>300</td><td>137 Peak</td></tr><tr><td>2</td><td>2274.00</td><td>51.54</td><td>54.00</td><td>-2.46</td><td>44.88</td><td>27.14</td><td>6.52</td><td>36.93</td><td>9.93</td><td>300</td><td>137 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2274.00	57.33	74.00	-16.67	50.67	27.14	6.52	36.93	9.93	300	137 Peak	2	2274.00	51.54	54.00	-2.46	44.88	27.14	6.52	36.93	9.93	300	137 Average	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2274.00</td><td>53.97</td><td>74.00</td><td>-20.03</td><td>47.31</td><td>27.14</td><td>6.52</td><td>36.93</td><td>9.93</td><td>400</td><td>197 Peak</td></tr><tr><td>2</td><td>2274.00</td><td>45.74</td><td>54.00</td><td>-8.26</td><td>39.08</td><td>27.14</td><td>6.52</td><td>36.93</td><td>9.93</td><td>400</td><td>197 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2274.00	53.97	74.00	-20.03	47.31	27.14	6.52	36.93	9.93	400	197 Peak	2	2274.00	45.74	54.00	-8.26	39.08	27.14	6.52	36.93	9.93	400	197 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2274.00	57.33	74.00	-16.67	50.67	27.14	6.52	36.93	9.93	300	137 Peak																																																																																																					
2	2274.00	51.54	54.00	-2.46	44.88	27.14	6.52	36.93	9.93	300	137 Average																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2274.00	53.97	74.00	-20.03	47.31	27.14	6.52	36.93	9.93	400	197 Peak																																																																																																					
2	2274.00	45.74	54.00	-8.26	39.08	27.14	6.52	36.93	9.93	400	197 Average																																																																																																					







		13																																																																																	
Mode	Band Edge - L																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH19_2440MHz																																																																																		
ANT	Antenna 2																																																																																		
Pol.	Horizontal						Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2026-08-08 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2311.56</td><td>56.92</td><td>74.00</td><td>-17.08</td><td>50.14</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>292</td><td>139</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2311.56	56.92	74.00	-17.08	50.14	27.20	6.58	36.93	9.93	292	139	Peak	Level (dBuV/m) Date: 2026-08-08 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2440.00</td><td>99.73</td><td>-----</td><td>-----</td><td>92.48</td><td>27.50</td><td>6.76</td><td>36.94</td><td>9.93</td><td>292</td><td>139</td><td>Peak</td></tr></tbody></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2440.00	99.73	-----	-----	92.48	27.50	6.76	36.94	9.93	292	139	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2311.56	56.92	74.00	-17.08	50.14	27.20	6.58	36.93	9.93	292	139	Peak																																																																								
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2440.00	99.73	-----	-----	92.48	27.50	6.76	36.94	9.93	292	139	Peak																																																																								
Avg	Level (dBuV/m) Date: 2026-08-08 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2311.95</td><td>52.11</td><td>54.00</td><td>-1.89</td><td>45.33</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>292</td><td>139</td><td>Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2311.95	52.11	54.00	-1.89	45.33	27.20	6.58	36.93	9.93	292	139	Average	Level (dBuV/m) Date: 2026-08-08 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2440.00</td><td>98.22</td><td>-----</td><td>-----</td><td>90.97</td><td>27.50</td><td>6.76</td><td>36.94</td><td>9.93</td><td>292</td><td>139</td><td>Average</td></tr></tbody></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2440.00	98.22	-----	-----	90.97	27.50	6.76	36.94	9.93	292	139	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2311.95	52.11	54.00	-1.89	45.33	27.20	6.58	36.93	9.93	292	139	Average																																																																								
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2440.00	98.22	-----	-----	90.97	27.50	6.76	36.94	9.93	292	139	Average																																																																								



Mode	13																																																		
	Band Edge - R																																																		
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH19_2440MHz																																																		
ANT	Antenna 2																																																		
Pol.	Horizontal						Fundamental																																												
Peak	Level (dBuV/m) Date: 2026-08-08 PEAK_BE_74 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2497.12</td><td>52.39</td><td>74.00</td><td>-21.61</td><td>44.71</td><td>27.87</td><td>6.83</td><td>36.95</td><td>9.93</td><td></td><td>292</td><td>139</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2497.12	52.39	74.00	-21.61	44.71	27.87	6.83	36.95	9.93		292	139	Peak	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1 2497.12	52.39	74.00	-21.61	44.71	27.87	6.83	36.95	9.93		292	139	Peak																																							
Avg	Level (dBuV/m) Date: 2026-08-08 AVG_BE_54 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.92</td><td>43.37</td><td>54.00</td><td>-10.63</td><td>35.84</td><td>27.74</td><td>6.81</td><td>36.95</td><td>9.93</td><td></td><td>292</td><td>139</td><td>Average</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.92	43.37	54.00	-10.63	35.84	27.74	6.81	36.95	9.93		292	139	Average	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1 2483.92	43.37	54.00	-10.63	35.84	27.74	6.81	36.95	9.93		292	139	Average																																							

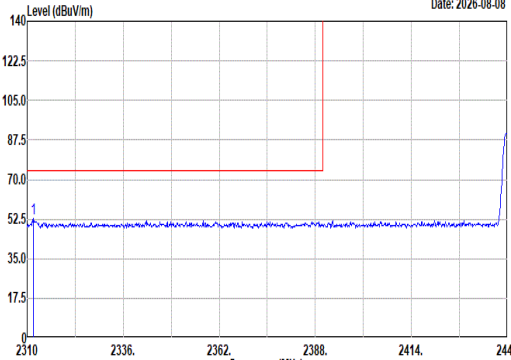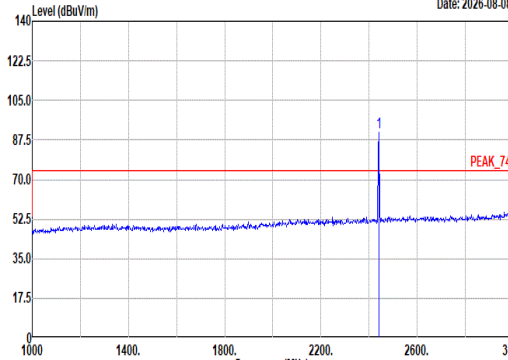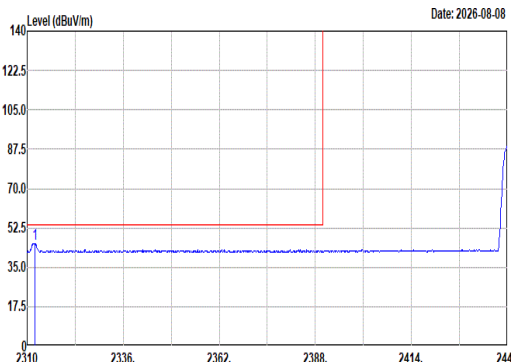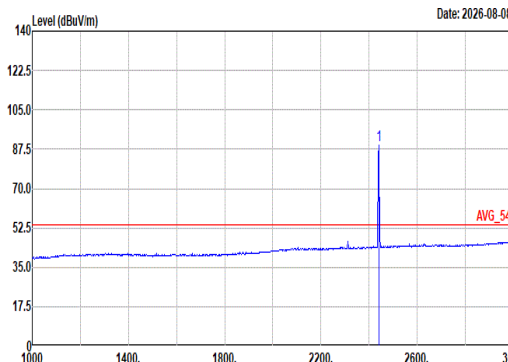

		13																																																																																								
Mode	Band Edge - L																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH19_2440MHz																																																																																									
ANT	Antenna 2																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-08-08  Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2311.69</td><td>52.69</td><td>74.00</td><td>-21.31</td><td>45.91</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>400</td><td>88</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2311.69	52.69	74.00	-21.31	45.91	27.20	6.58	36.93	9.93	400	88	Peak	Level (dBuV/m) Date: 2026-08-08  Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>90.81</td><td>-----</td><td>-----</td><td>83.56</td><td>27.50</td><td>6.76</td><td>36.94</td><td>9.93</td><td>400</td><td>88</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2440.00	90.81	-----	-----	83.56	27.50	6.76	36.94	9.93	400	88	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2311.69	52.69	74.00	-21.31	45.91	27.20	6.58	36.93	9.93	400	88	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2440.00	90.81	-----	-----	83.56	27.50	6.76	36.94	9.93	400	88	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-08-08  Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2312.00</td><td>45.54</td><td>54.00</td><td>-8.46</td><td>38.76</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>400</td><td>88</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2312.00	45.54	54.00	-8.46	38.76	27.20	6.58	36.93	9.93	400	88	Average	Level (dBuV/m) Date: 2026-08-08  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>89.31</td><td>-----</td><td>-----</td><td>82.06</td><td>27.50</td><td>6.76</td><td>36.94</td><td>9.93</td><td>400</td><td>88</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2440.00	89.31	-----	-----	82.06	27.50	6.76	36.94	9.93	400	88	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2312.00	45.54	54.00	-8.46	38.76	27.20	6.58	36.93	9.93	400	88	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2440.00	89.31	-----	-----	82.06	27.50	6.76	36.94	9.93	400	88	Average																																																																														



Mode	13											
	Band Edge - R											
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH19_2440MHz											
ANT	Antenna 2											
Pol.	Vertical						Fundamental					
Peak	</											



Mode	13																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH19_2440MHz																																																																																																																													
ANT	Antenna 2																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg	Level (dBuV/m) Date: 2026-08-08 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2312.00</td><td>57.61</td><td>74.00</td><td>-16.39</td><td>50.83</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>283</td><td>140</td><td>Peak</td></tr><tr><td>2</td><td>2312.00</td><td>52.44</td><td>54.00</td><td>-1.56</td><td>45.66</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>283</td><td>140</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2312.00	57.61	74.00	-16.39	50.83	27.20	6.58	36.93	9.93	283	140	Peak	2	2312.00	52.44	54.00	-1.56	45.66	27.20	6.58	36.93	9.93	283	140	Average	Level (dBuV/m) Date: 2026-08-08 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2312.00</td><td>54.48</td><td>74.00</td><td>-19.52</td><td>47.70</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>400</td><td>83</td><td>Peak</td></tr><tr><td>2</td><td>2312.00</td><td>47.02</td><td>54.00</td><td>-6.98</td><td>40.24</td><td>27.20</td><td>6.58</td><td>36.93</td><td>9.93</td><td>400</td><td>83</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2312.00	54.48	74.00	-19.52	47.70	27.20	6.58	36.93	9.93	400	83	Peak	2	2312.00	47.02	54.00	-6.98	40.24	27.20	6.58	36.93	9.93	400	83	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2312.00	57.61	74.00	-16.39	50.83	27.20	6.58	36.93	9.93	283	140	Peak																																																																																																																		
2	2312.00	52.44	54.00	-1.56	45.66	27.20	6.58	36.93	9.93	283	140	Average																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	2312.00	54.48	74.00	-19.52	47.70	27.20	6.58	36.93	9.93	400	83	Peak																																																																																																																		
2	2312.00	47.02	54.00	-6.98	40.24	27.20	6.58	36.93	9.93	400	83	Average																																																																																																																		



		14									
Mode	Band Edge										
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH39_2480MHz										
ANT	Antenna 2										
Pol.	Horizontal										
Peak	Fundamental										
	Fundamental										
Peak	Horizontal										
	Horizontal										
Avg	Fundamental										
	Fundamental										

Date: 2026-08-10																																															
Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																															
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2491.88</td><td>52.73</td><td>74.00</td><td>-21.27</td><td>45.11</td><td>27.82</td><td>6.82</td><td>36.95</td><td>9.93</td><td>307</td><td>121</td><td>Peak</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2491.88	52.73	74.00	-21.27	45.11	27.82	6.82	36.95	9.93	307	121	Peak
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 2491.88	52.73	74.00	-21.27	45.11	27.82	6.82	36.95	9.93	307	121	Peak																																				

Date: 2026-08-10																																															
Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																															
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>100.05</td><td>-----</td><td>-----</td><td>92.56</td><td>27.70</td><td>6.81</td><td>36.95</td><td>9.93</td><td>307</td><td>121</td><td>Peak</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	100.05	-----	-----	92.56	27.70	6.81	36.95	9.93	307	121	Peak
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 2480.00	100.05	-----	-----	92.56	27.70	6.81	36.95	9.93	307	121	Peak																																				

Date: 2026-08-10																																															
Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto																																															
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2407.36</td><td>43.40</td><td>54.00</td><td>-10.60</td><td>35.83</td><td>27.77</td><td>6.82</td><td>36.95</td><td>9.93</td><td>307</td><td>121</td><td>Average</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2407.36	43.40	54.00	-10.60	35.83	27.77	6.82	36.95	9.93	307	121	Average
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 2407.36	43.40	54.00	-10.60	35.83	27.77	6.82	36.95	9.93	307	121	Average																																				

Date: 2026-08-10																																															
Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto																																															
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>98.57</td><td>-----</td><td>-----</td><td>91.00</td><td>27.70</td><td>6.81</td><td>36.95</td><td>9.93</td><td>307</td><td>121</td><td>Average</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	98.57	-----	-----	91.00	27.70	6.81	36.95	9.93	307	121	Average
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 2480.00	98.57	-----	-----	91.00	27.70	6.81	36.95	9.93	307	121	Average																																				



		14																																																																																	
Mode	Band Edge																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH39_2480MHz																																																																																		
ANT	Antenna 2																																																																																		
Pol.	Vertical						Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2490.16</td><td>52.75</td><td>74.00</td><td>-21.25</td><td>45.15</td><td>27.00</td><td>6.82</td><td>36.95</td><td>9.93</td><td>292</td><td>334</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2490.16	52.75	74.00	-21.25	45.15	27.00	6.82	36.95	9.93	292	334	Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2480.00</td><td>92.46</td><td>-----</td><td>-----</td><td>84.97</td><td>27.70</td><td>6.81</td><td>36.95</td><td>9.93</td><td>292</td><td>334</td><td>Peak</td></tr></tbody></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	92.46	-----	-----	84.97	27.70	6.81	36.95	9.93	292	334	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2490.16	52.75	74.00	-21.25	45.15	27.00	6.82	36.95	9.93	292	334	Peak																																																																								
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2480.00	92.46	-----	-----	84.97	27.70	6.81	36.95	9.93	292	334	Peak																																																																								
Avg	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2499.58</td><td>43.40</td><td>54.00</td><td>-10.60</td><td>35.69</td><td>27.90</td><td>6.83</td><td>36.95</td><td>9.93</td><td>292</td><td>334</td><td>Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2499.58	43.40	54.00	-10.60	35.69	27.90	6.83	36.95	9.93	292	334	Average	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2480.00</td><td>90.95</td><td>-----</td><td>-----</td><td>83.46</td><td>27.70</td><td>6.81</td><td>36.95</td><td>9.93</td><td>292</td><td>334</td><td>Average</td></tr></tbody></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	90.95	-----	-----	83.46	27.70	6.81	36.95	9.93	292	334	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2499.58	43.40	54.00	-10.60	35.69	27.90	6.83	36.95	9.93	292	334	Average																																																																								
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2480.00	90.95	-----	-----	83.46	27.70	6.81	36.95	9.93	292	334	Average																																																																								



Mode	14																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_2Mbps_CH39_2480MHz																																																																																																																			
ANT	Antenna 2																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2352.00</td><td>56.92</td><td>74.00</td><td>-17.08</td><td>50.09</td><td>27.20</td><td>6.64</td><td>36.94</td><td>9.93</td><td>200</td><td>133</td><td>Peak</td></tr><tr><td>2</td><td>2352.00</td><td>51.21</td><td>54.00</td><td>-2.79</td><td>44.38</td><td>27.20</td><td>6.64</td><td>36.94</td><td>9.93</td><td>200</td><td>133</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2352.00	56.92	74.00	-17.08	50.09	27.20	6.64	36.94	9.93	200	133	Peak	2	2352.00	51.21	54.00	-2.79	44.38	27.20	6.64	36.94	9.93	200	133	Average	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2352.00</td><td>53.42</td><td>74.00</td><td>-20.58</td><td>46.59</td><td>27.20</td><td>6.64</td><td>36.94</td><td>9.93</td><td>400</td><td>349</td><td>Peak</td></tr><tr><td>2</td><td>2352.00</td><td>45.20</td><td>54.00</td><td>-8.80</td><td>38.37</td><td>27.20</td><td>6.64</td><td>36.94</td><td>9.93</td><td>400</td><td>349</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2352.00	53.42	74.00	-20.58	46.59	27.20	6.64	36.94	9.93	400	349	Peak	2	2352.00	45.20	54.00	-8.80	38.37	27.20	6.64	36.94	9.93	400	349	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2352.00	56.92	74.00	-17.08	50.09	27.20	6.64	36.94	9.93	200	133	Peak																																																																																																								
2	2352.00	51.21	54.00	-2.79	44.38	27.20	6.64	36.94	9.93	200	133	Average																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	2352.00	53.42	74.00	-20.58	46.59	27.20	6.64	36.94	9.93	400	349	Peak																																																																																																								
2	2352.00	45.20	54.00	-8.80	38.37	27.20	6.64	36.94	9.93	400	349	Average																																																																																																								



Mode	15																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH19_2440MHz																																																																																																																																																																																					
ANT	Antenna 2																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QP/ Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: QP 3m B1L06_40103 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>81.41</td><td>30.61</td><td>40.00</td><td>-9.39</td><td>47.50</td><td>13.84</td><td>1.30</td><td>32.10</td><td>0.07 -- Peak</td></tr><tr><td>2</td><td>113.42</td><td>23.18</td><td>43.50</td><td>-20.32</td><td>36.53</td><td>17.21</td><td>1.48</td><td>32.11</td><td>0.07 200 97 QP</td></tr><tr><td>3</td><td>247.28</td><td>28.67</td><td>46.00</td><td>-17.33</td><td>40.20</td><td>18.10</td><td>2.22</td><td>31.97</td><td>0.12 -- -- Peak</td></tr><tr><td>4</td><td>429.64</td><td>29.13</td><td>46.00</td><td>-16.87</td><td>35.63</td><td>22.45</td><td>2.87</td><td>31.92</td><td>0.10 -- -- Peak</td></tr><tr><td>5</td><td>644.98</td><td>33.19</td><td>46.00</td><td>-12.81</td><td>35.11</td><td>26.44</td><td>3.53</td><td>32.02</td><td>0.13 -- -- Peak</td></tr><tr><td>6</td><td>859.35</td><td>37.51</td><td>46.00</td><td>-8.49</td><td>35.64</td><td>29.19</td><td>4.03</td><td>31.52</td><td>0.17 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	81.41	30.61	40.00	-9.39	47.50	13.84	1.30	32.10	0.07 -- Peak	2	113.42	23.18	43.50	-20.32	36.53	17.21	1.48	32.11	0.07 200 97 QP	3	247.28	28.67	46.00	-17.33	40.20	18.10	2.22	31.97	0.12 -- -- Peak	4	429.64	29.13	46.00	-16.87	35.63	22.45	2.87	31.92	0.10 -- -- Peak	5	644.98	33.19	46.00	-12.81	35.11	26.44	3.53	32.02	0.13 -- -- Peak	6	859.35	37.51	46.00	-8.49	35.64	29.19	4.03	31.52	0.17 -- -- Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: QP 3m B1L06_40103 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>87.23</td><td>31.80</td><td>40.00</td><td>-8.20</td><td>47.96</td><td>14.53</td><td>1.34</td><td>32.11</td><td>0.06 -- -- Peak</td></tr><tr><td>2</td><td>116.33</td><td>30.17</td><td>43.50</td><td>-13.33</td><td>43.39</td><td>17.32</td><td>1.50</td><td>32.11</td><td>0.07 100 252 QP</td></tr><tr><td>3</td><td>247.28</td><td>29.11</td><td>46.00</td><td>-16.89</td><td>40.64</td><td>18.10</td><td>2.22</td><td>31.97</td><td>0.12 -- -- Peak</td></tr><tr><td>4</td><td>429.64</td><td>37.15</td><td>46.00</td><td>-8.85</td><td>43.65</td><td>22.45</td><td>2.87</td><td>31.92</td><td>0.10 -- -- Peak</td></tr><tr><td>5</td><td>730.34</td><td>39.77</td><td>46.00</td><td>-6.23</td><td>40.18</td><td>27.65</td><td>3.73</td><td>31.93</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>859.35</td><td>36.70</td><td>46.00</td><td>-9.30</td><td>34.83</td><td>29.19</td><td>4.03</td><td>31.52</td><td>0.17 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	87.23	31.80	40.00	-8.20	47.96	14.53	1.34	32.11	0.06 -- -- Peak	2	116.33	30.17	43.50	-13.33	43.39	17.32	1.50	32.11	0.07 100 252 QP	3	247.28	29.11	46.00	-16.89	40.64	18.10	2.22	31.97	0.12 -- -- Peak	4	429.64	37.15	46.00	-8.85	43.65	22.45	2.87	31.92	0.10 -- -- Peak	5	730.34	39.77	46.00	-6.23	40.18	27.65	3.73	31.93	0.14 -- -- Peak	6	859.35	36.70	46.00	-9.30	34.83	29.19	4.03	31.52	0.17 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																																														
1	81.41	30.61	40.00	-9.39	47.50	13.84	1.30	32.10	0.07 -- Peak																																																																																																																																																																													
2	113.42	23.18	43.50	-20.32	36.53	17.21	1.48	32.11	0.07 200 97 QP																																																																																																																																																																													
3	247.28	28.67	46.00	-17.33	40.20	18.10	2.22	31.97	0.12 -- -- Peak																																																																																																																																																																													
4	429.64	29.13	46.00	-16.87	35.63	22.45	2.87	31.92	0.10 -- -- Peak																																																																																																																																																																													
5	644.98	33.19	46.00	-12.81	35.11	26.44	3.53	32.02	0.13 -- -- Peak																																																																																																																																																																													
6	859.35	37.51	46.00	-8.49	35.64	29.19	4.03	31.52	0.17 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																																														
1	87.23	31.80	40.00	-8.20	47.96	14.53	1.34	32.11	0.06 -- -- Peak																																																																																																																																																																													
2	116.33	30.17	43.50	-13.33	43.39	17.32	1.50	32.11	0.07 100 252 QP																																																																																																																																																																													
3	247.28	29.11	46.00	-16.89	40.64	18.10	2.22	31.97	0.12 -- -- Peak																																																																																																																																																																													
4	429.64	37.15	46.00	-8.85	43.65	22.45	2.87	31.92	0.10 -- -- Peak																																																																																																																																																																													
5	730.34	39.77	46.00	-6.23	40.18	27.65	3.73	31.93	0.14 -- -- Peak																																																																																																																																																																													
6	859.35	36.70	46.00	-9.30	34.83	29.19	4.03	31.52	0.17 -- -- Peak																																																																																																																																																																													




Mode	16																																																																																					
	SHF																																																																																					
	2400-2483.5_Bluetooth-LE_GSKF_1Mbps_CH19_2440MHz																																																																																					
ANT	Antenna 2																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_74 1m SHF_00994 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>24699.02</td><td>44.54</td><td>74.00</td><td>-29.46</td><td>40.66</td><td>39.70</td><td>27.10</td><td>53.38</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	24699.02	44.54	74.00	-29.46	40.66	39.70	27.10	53.38	-9.54	--	PEAK	Level (dBuV/m) Date: 2026-08-10 Site : 03CH13-HY Condition: PEAK_74 1m SHF_00994 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>24634.60</td><td>44.45</td><td>74.00</td><td>-29.55</td><td>40.64</td><td>39.67</td><td>27.10</td><td>53.42</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	24634.60	44.45	74.00	-29.55	40.64	39.67	27.10	53.42	-9.54	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																														
1	24699.02	44.54	74.00	-29.46	40.66	39.70	27.10	53.38	-9.54	--	PEAK																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																														
1	24634.60	44.45	74.00	-29.55	40.64	39.67	27.10	53.42	-9.54	--	PEAK																																																																											



Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
Ant. 1	Bluetooth - LE for 1Mbps	62.50	390	2.56	2.7kHz
Ant. 1	Bluetooth - LE for 2Mbps	32.91	206	4.85	5.1kHz
Ant. 2	Bluetooth - LE for 1Mbps	62.30	390	2.56	2.7kHz
Ant. 2	Bluetooth - LE for 2Mbps	32.91	206	4.85	5.1kHz

<Ant. 1>

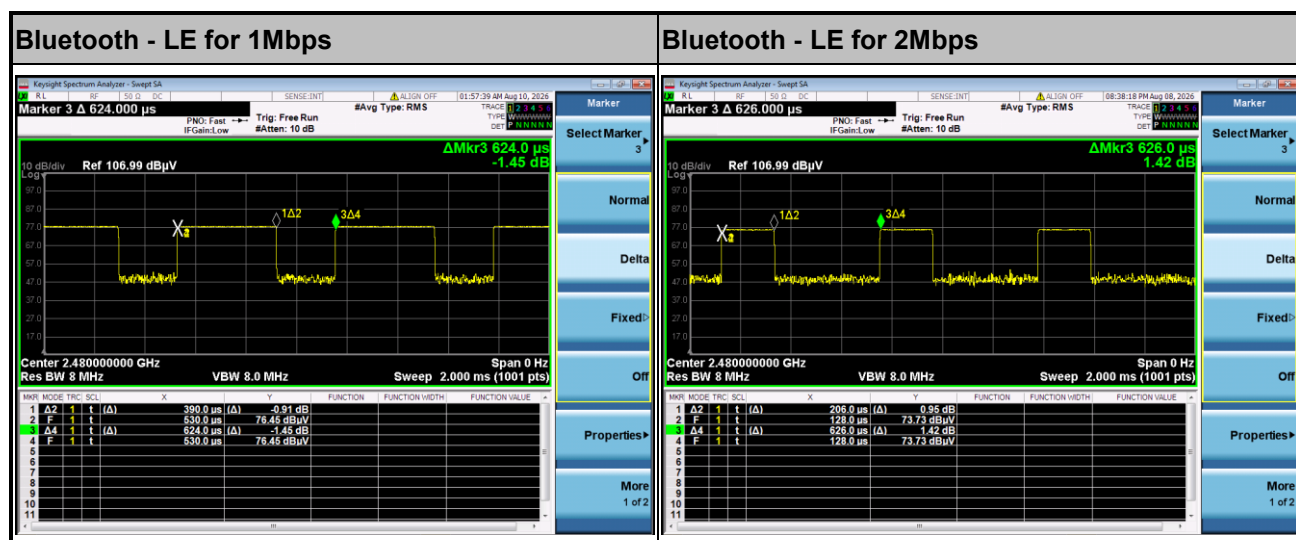

<Ant. 2>

