



Test Mode: 36; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

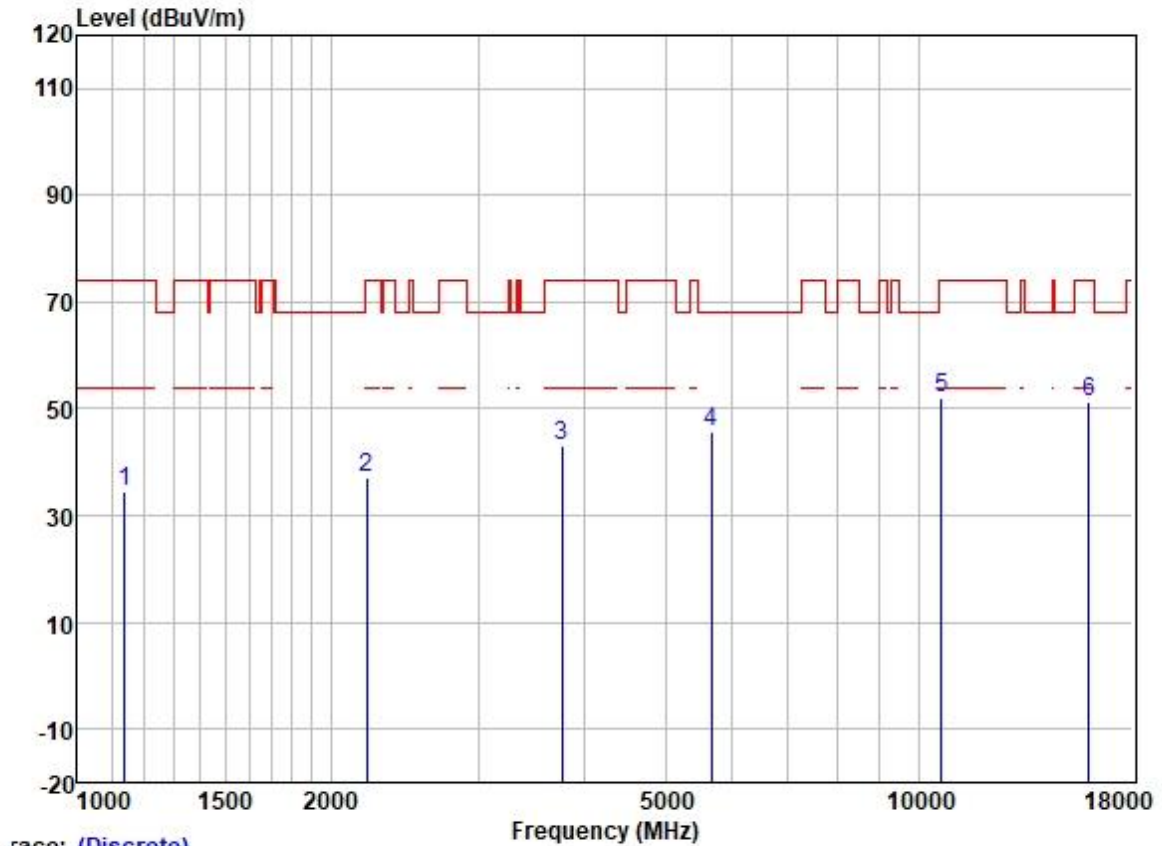


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1137.226	46.07	24.45	2.25	38.43	34.34	74.00	-39.66	HORIZONTAL	Peak
2	2206.564	45.09	26.65	3.21	37.65	37.30	74.00	-36.70	HORIZONTAL	Peak
3	3771.197	46.03	29.45	4.59	36.86	43.21	74.00	-30.79	HORIZONTAL	Peak
4	5675.852	44.17	31.99	6.38	36.89	45.65	68.20	-22.55	HORIZONTAL	Peak
5	10640.000	42.27	39.63	7.48	37.33	52.05	74.00	-21.95	HORIZONTAL	Peak
6	15960.000	38.52	38.37	9.85	35.40	51.34	74.00	-22.66	HORIZONTAL	Peak

Test Mode: 36; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

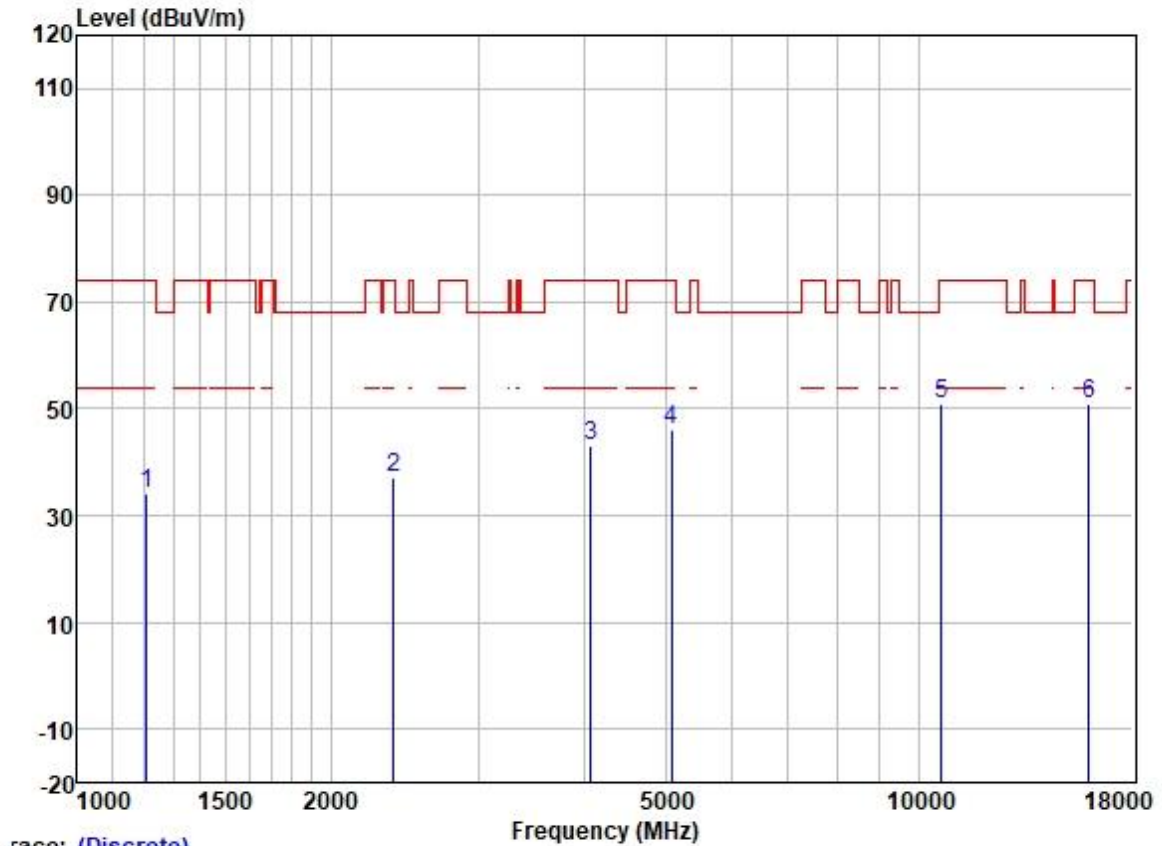


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1210.110	45.41	24.74	2.33	38.39	34.09	74.00	-39.91	VERTICAL	Peak
2	2373.806	43.82	27.30	3.45	37.60	36.97	74.00	-37.03	VERTICAL	Peak
3	4083.420	45.55	29.92	4.60	36.80	43.27	74.00	-30.73	VERTICAL	Peak
4	5091.523	45.64	31.71	5.66	36.86	46.15	74.00	-27.85	VERTICAL	Peak
5	10640.000	41.14	39.63	7.48	37.33	50.92	74.00	-23.08	VERTICAL	Peak
6	15960.000	38.27	38.37	9.85	35.40	51.09	74.00	-22.91	VERTICAL	Peak

Test Mode: 36; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

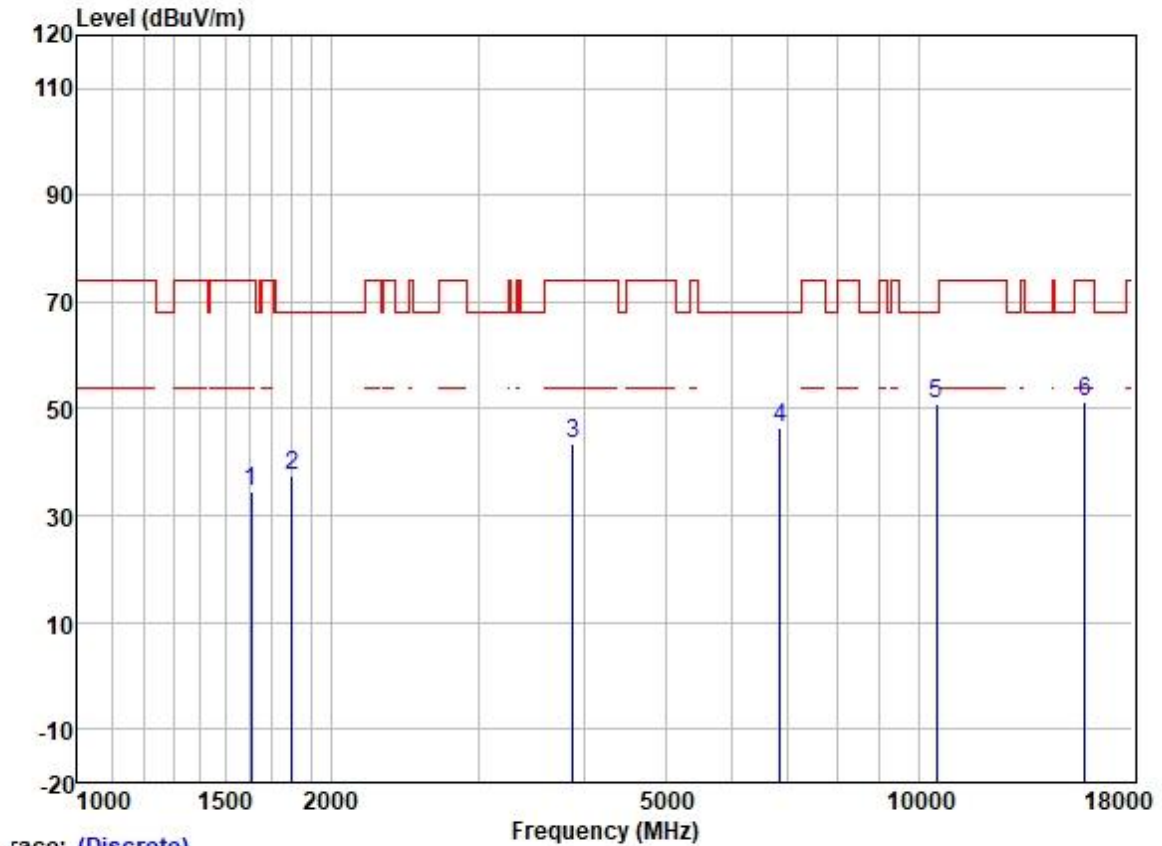

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1610.064	44.05	25.59	2.80	37.98	34.46	74.00	-39.54	HORIZONTAL	Peak
2	1801.573	46.49	25.95	3.00	37.81	37.63	68.20	-30.57	HORIZONTAL	Peak
3	3886.210	45.96	29.67	4.60	36.83	43.40	74.00	-30.60	HORIZONTAL	Peak
4	6850.729	42.94	34.78	5.82	37.15	46.39	68.20	-21.81	HORIZONTAL	Peak
5	10520.000	41.30	39.50	7.42	37.35	50.87	68.20	-17.33	HORIZONTAL	Peak
6	15780.000	38.12	38.70	9.86	35.39	51.29	74.00	-22.71	HORIZONTAL	Peak


Test Mode: 36; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

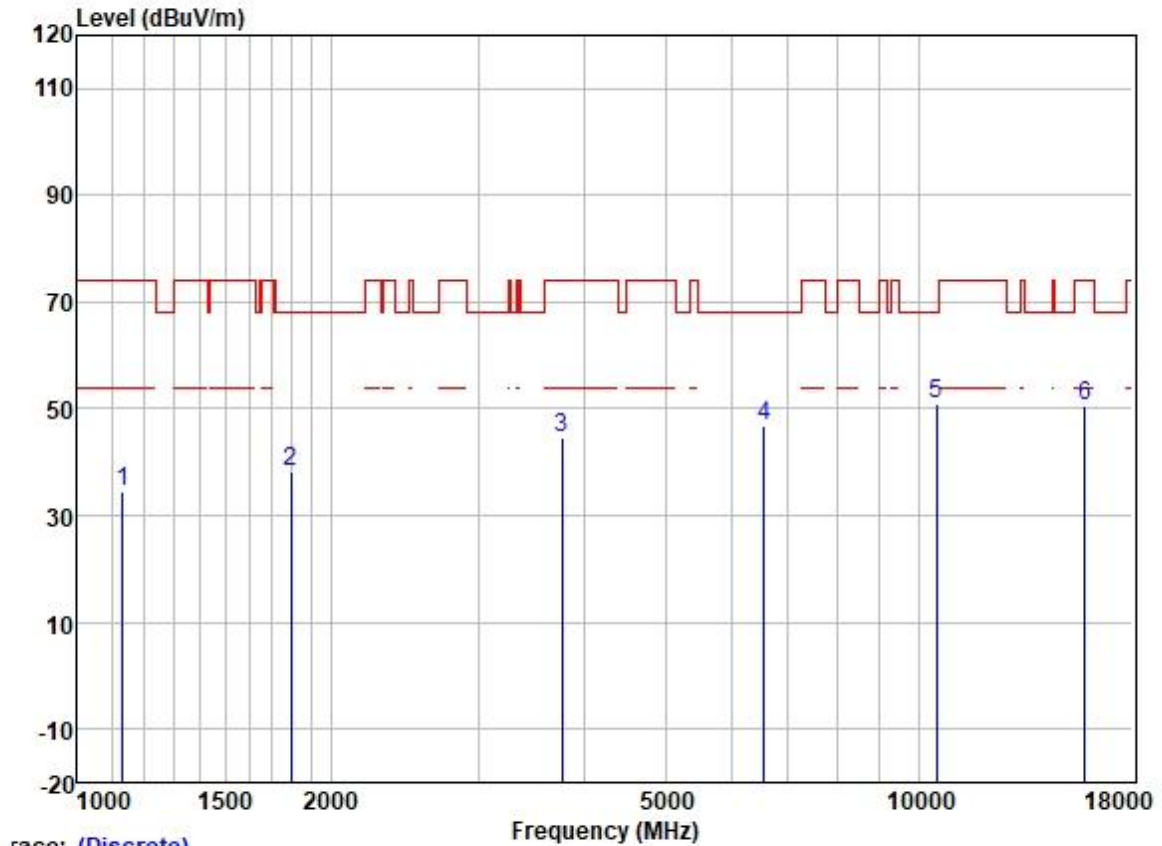

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1133.442	46.42	24.44	2.22	38.43	34.65	74.00	VERTICAL	Peak
2	1794.614	47.28	25.93	2.99	37.81	38.39	68.20	VERTICAL	Peak
3	3768.123	47.50	29.45	4.59	36.86	44.68	74.00	VERTICAL	Peak
4	6547.551	43.89	34.06	5.84	37.03	46.76	68.20	VERTICAL	Peak
5	10520.000	41.42	39.50	7.42	37.35	50.99	68.20	VERTICAL	Peak
6	15780.000	37.48	38.70	9.86	35.39	50.65	74.00	VERTICAL	Peak

Test Mode: 36; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

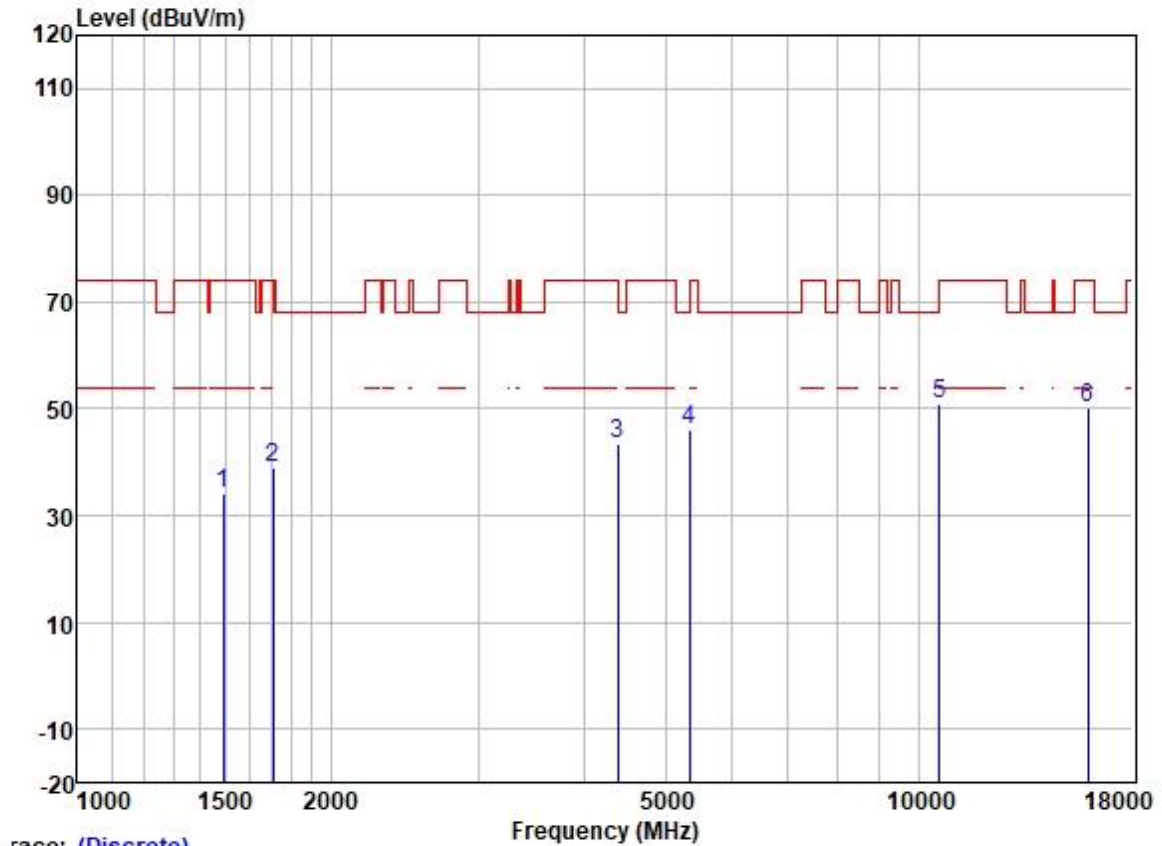


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1491.380	43.99	25.49	2.79	38.10	34.17	74.00	-39.83	HORIZONTAL Peak
2	1710.120	48.50	25.74	2.82	37.89	39.17	68.20	-29.03	HORIZONTAL Peak
3	4394.121	44.91	30.66	4.70	36.81	43.46	74.00	-30.54	HORIZONTAL Peak
4	5345.098	45.20	31.77	6.05	36.88	46.14	68.20	-22.06	HORIZONTAL Peak
5	10600.000	41.32	39.59	7.46	37.34	51.03	68.20	-17.17	HORIZONTAL Peak
6	15900.000	37.36	38.44	9.86	35.40	50.26	74.00	-23.74	HORIZONTAL Peak

Test Mode: 36; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

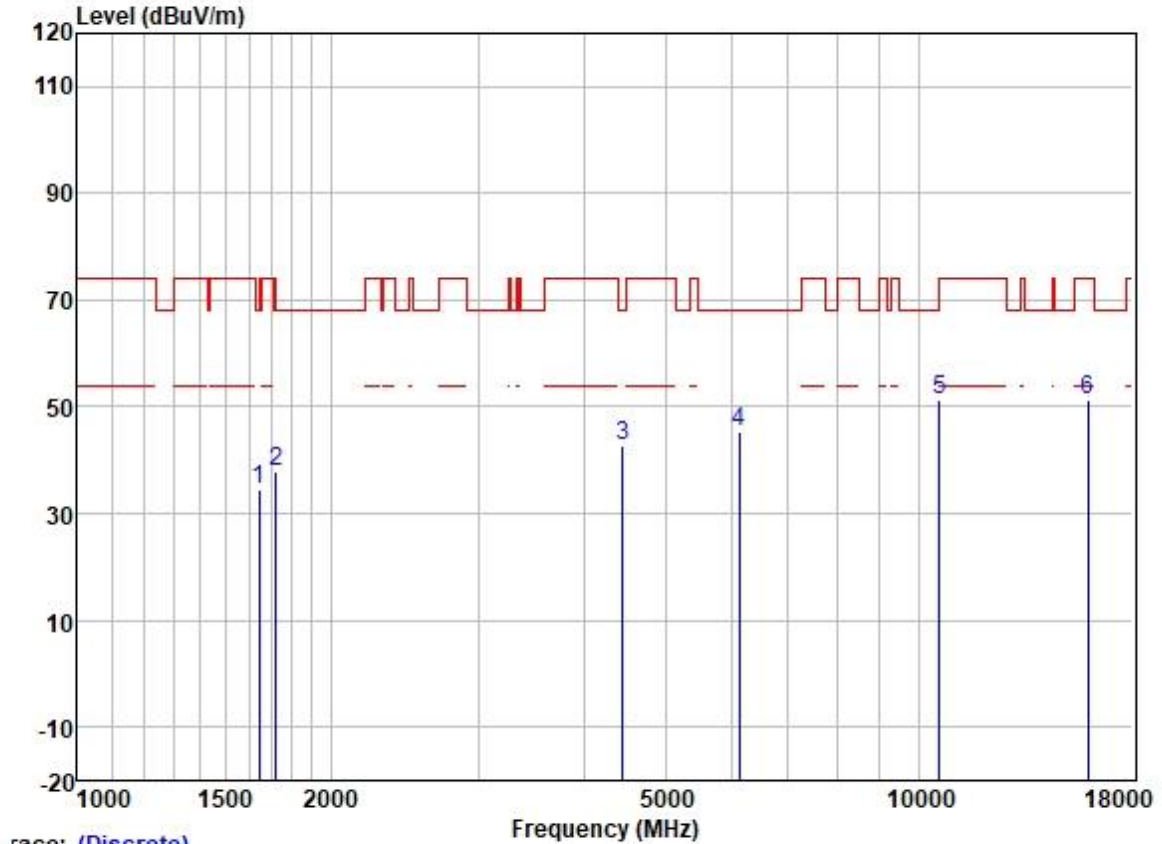


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1645.153	44.12	25.63	2.80	37.93	34.62	68.20	-33.58	VERTICAL	Peak
2	1720.941	47.04	25.77	2.83	37.87	37.77	74.00	-36.23	VERTICAL	Peak
3	4452.412	43.93	30.75	4.88	36.81	42.75	68.20	-25.45	VERTICAL	Peak
4	6119.185	43.54	32.72	6.13	36.92	45.47	68.20	-22.73	VERTICAL	Peak
5	10600.000	41.62	39.59	7.46	37.34	51.33	68.20	-16.87	VERTICAL	Peak
6	15900.000	38.44	38.44	9.86	35.40	51.34	74.00	-22.66	VERTICAL	Peak

Test Mode: 36; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

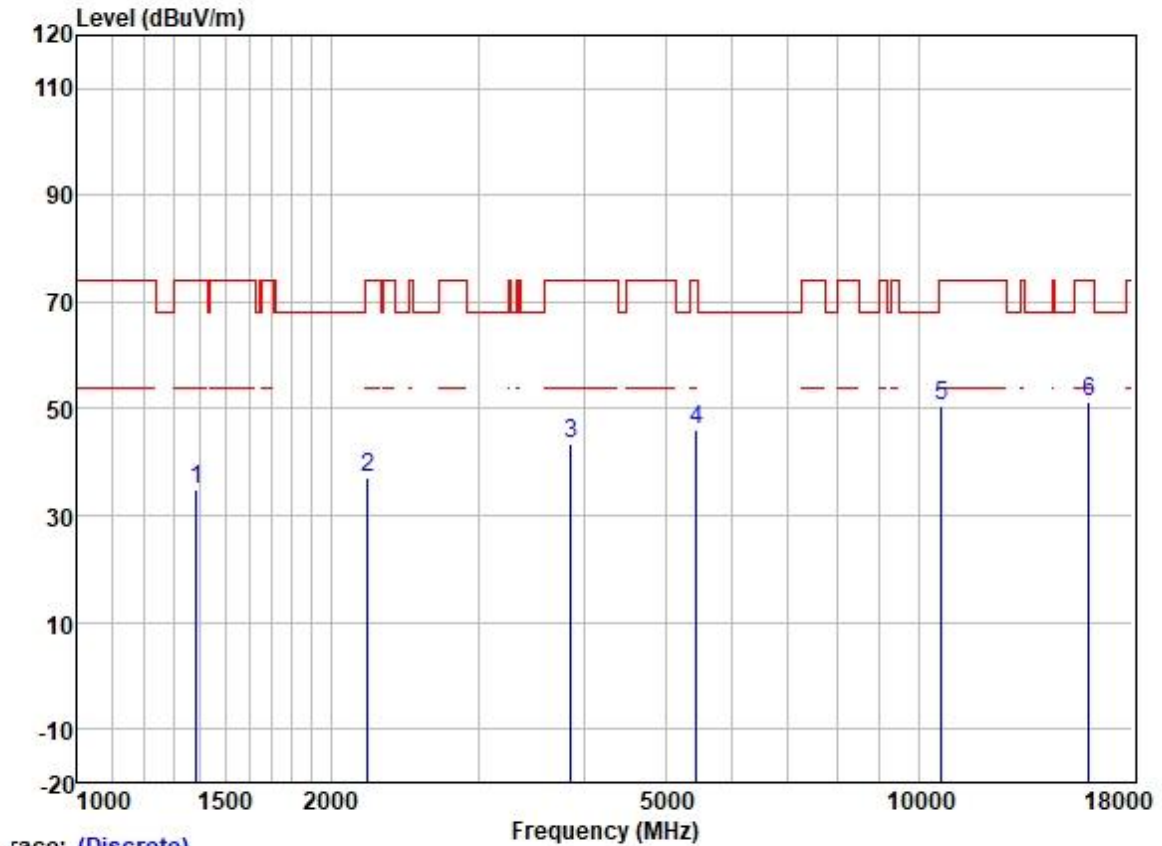


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1383.224	45.27	25.37	2.60	38.25	34.99	74.00	-39.01	HORIZONTAL Peak
2	2215.837	45.03	26.68	3.21	37.64	37.28	74.00	-36.72	HORIZONTAL Peak
3	3859.823	46.09	29.62	4.60	36.84	43.47	74.00	-30.53	HORIZONTAL Peak
4	5443.818	45.04	31.79	6.20	36.88	46.15	74.00	-27.85	HORIZONTAL Peak
5	10640.000	40.74	39.63	7.48	37.33	50.52	74.00	-23.48	HORIZONTAL Peak
6	15960.000	38.63	38.37	9.85	35.40	51.45	74.00	-22.55	HORIZONTAL Peak

Test Mode: 36; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

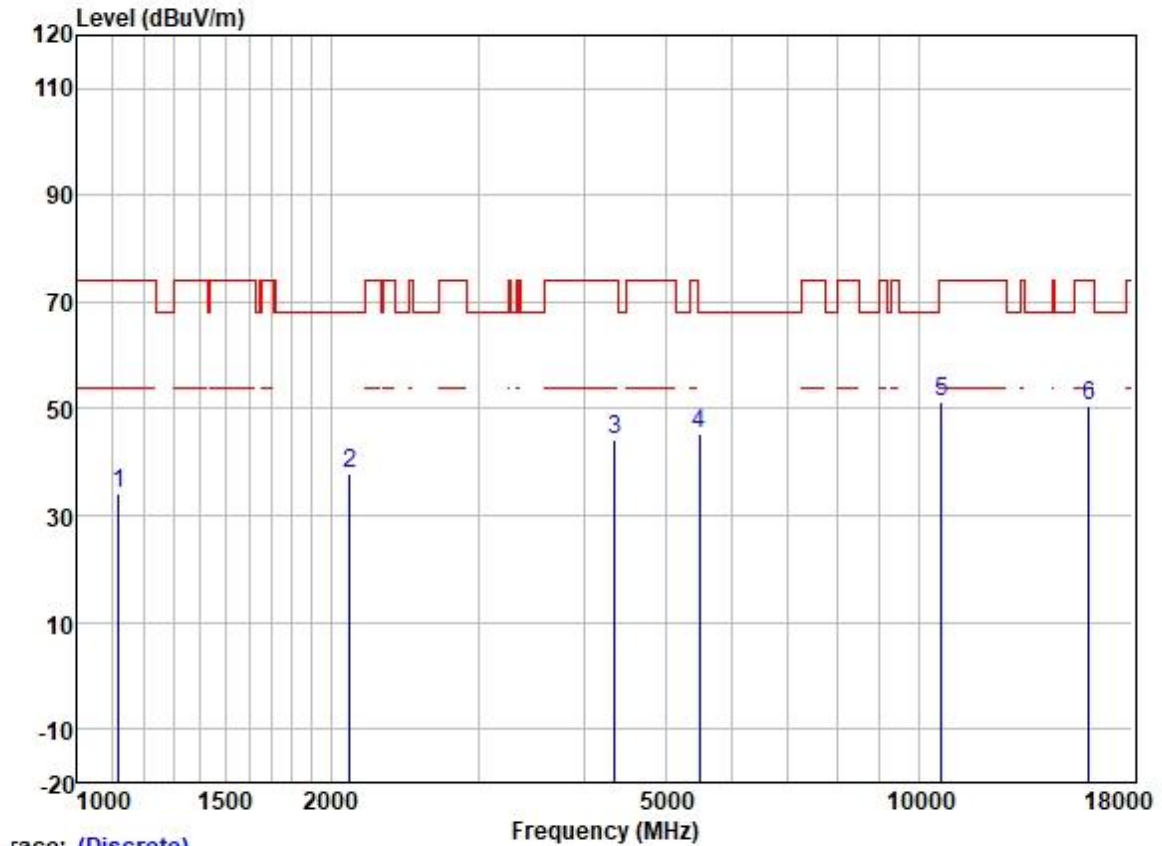


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1118.627	46.05	24.41	2.24	38.43	34.27	74.00	-39.73	VERTICAL	Peak
2	2105.564	45.96	26.31	3.16	37.68	37.75	68.20	-30.45	VERTICAL	Peak
3	4353.453	45.70	30.59	4.68	36.81	44.16	74.00	-29.84	VERTICAL	Peak
4	5487.642	44.17	31.80	6.36	36.88	45.45	68.20	-22.75	VERTICAL	Peak
5	10640.000	41.55	39.63	7.48	37.33	51.33	74.00	-22.67	VERTICAL	Peak
6	15960.000	37.81	38.37	9.85	35.40	50.63	74.00	-23.37	VERTICAL	Peak

Test Mode: 36; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

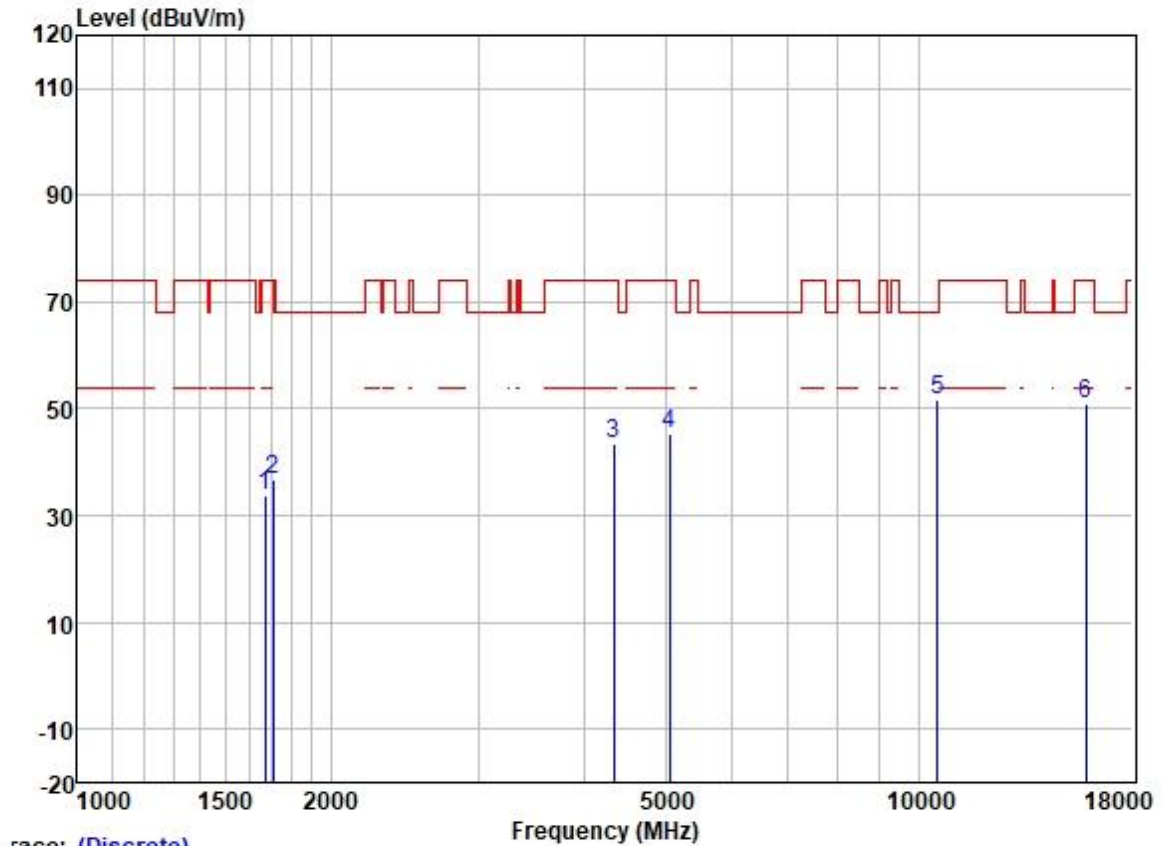


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1673.100	43.33	25.67	2.80	37.91	33.89	74.00	-40.11	HORIZONTAL	Peak
2	1706.971	46.20	25.73	2.81	37.89	36.85	74.00	-37.15	HORIZONTAL	Peak
3	4342.054	44.87	30.57	4.67	36.81	43.30	74.00	-30.70	HORIZONTAL	Peak
4	5061.258	44.94	31.71	5.67	36.86	45.46	74.00	-28.54	HORIZONTAL	Peak
5	10540.000	41.94	39.53	7.43	37.35	51.55	68.20	-16.65	HORIZONTAL	Peak
6	15810.000	37.92	38.61	9.86	35.39	51.00	74.00	-23.00	HORIZONTAL	Peak

Test Mode: 36; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

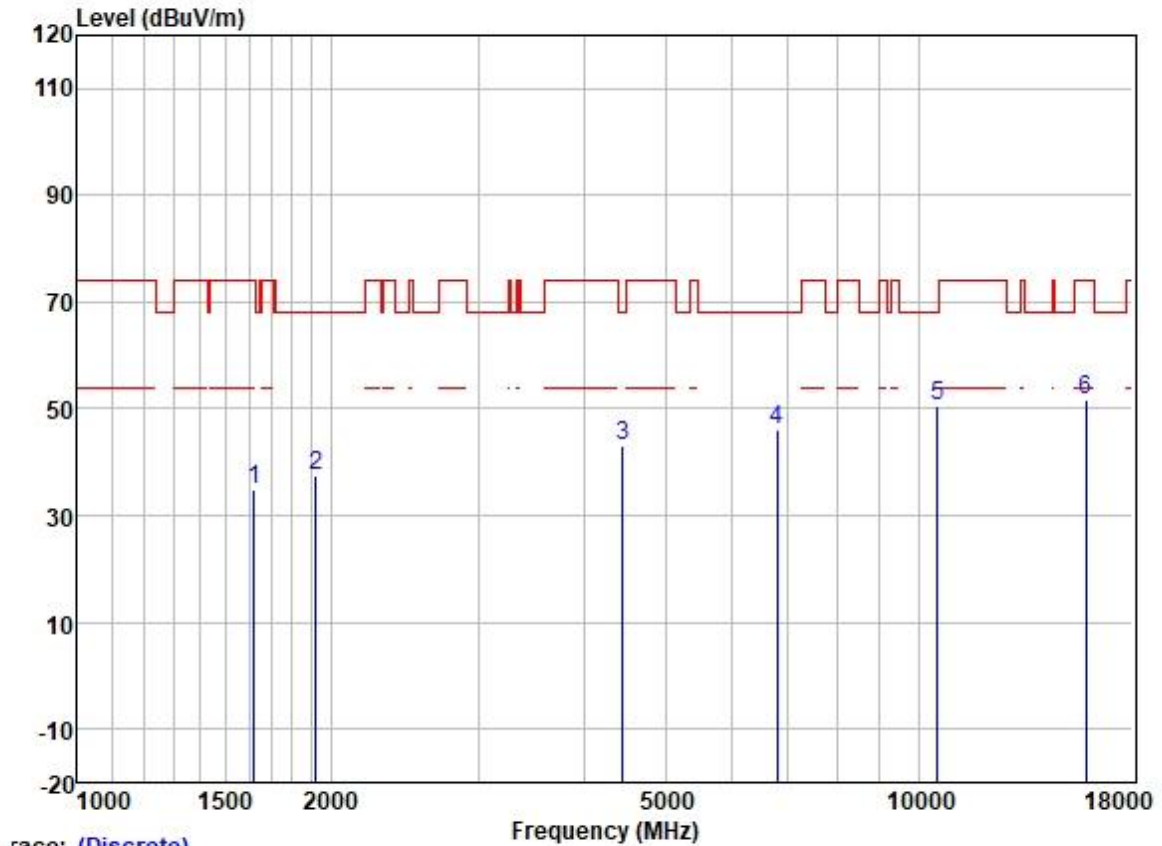

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1620.918	44.26	25.60	2.80	37.95	34.71	74.00	-39.29	VERTICAL Peak
2	1920.934	46.15	26.06	2.94	37.74	37.41	68.20	-30.79	VERTICAL Peak
3	4453.012	44.41	30.75	4.88	36.81	43.23	68.20	-24.97	VERTICAL Peak
4	6786.081	42.77	34.66	5.82	37.11	46.14	68.20	-22.06	VERTICAL Peak
5	10540.000	40.83	39.53	7.43	37.35	50.44	68.20	-17.76	VERTICAL Peak
6	15810.000	38.75	38.61	9.86	35.39	51.83	74.00	-22.17	VERTICAL Peak

Test Mode: 36; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

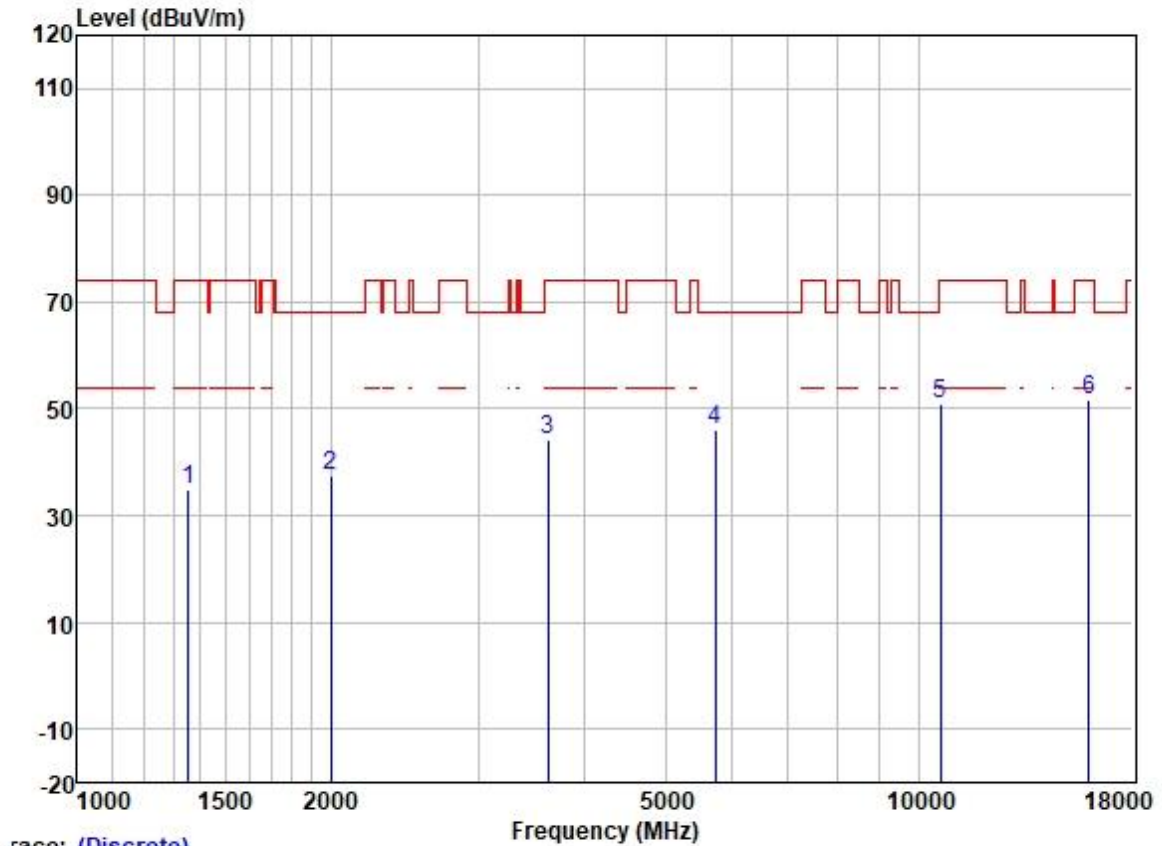

race: (Discrete)


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1354.263	45.37	25.32	2.60	38.27	35.02	74.00	-38.98	HORIZONTAL	Peak
2	2004.058	45.84	26.11	3.10	37.70	37.35	68.20	-30.85	HORIZONTAL	Peak
3	3628.322	47.49	29.09	4.51	36.90	44.19	74.00	-29.81	HORIZONTAL	Peak
4	5734.807	44.81	32.07	6.25	36.89	46.24	68.20	-21.96	HORIZONTAL	Peak
5	10620.000	41.38	39.59	7.46	37.34	51.09	74.00	-22.91	HORIZONTAL	Peak
6	15930.000	38.71	38.37	9.85	35.40	51.53	74.00	-22.47	HORIZONTAL	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 36; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

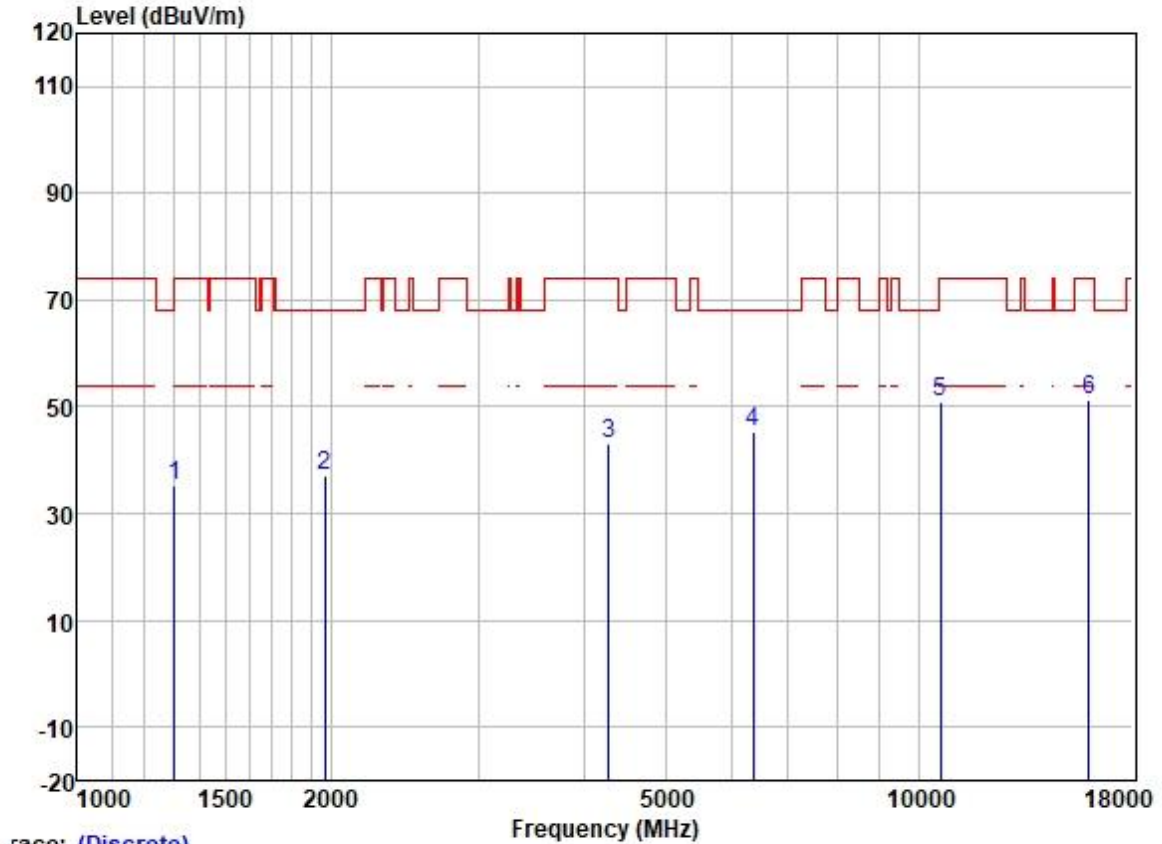


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1306.039	45.71	25.21	2.60	38.31	35.21	74.00	-38.79	VERTICAL Peak
2	1970.424	45.69	26.09	3.05	37.71	37.12	68.20	-31.08	VERTICAL Peak
3	4278.700	44.93	30.42	4.63	36.81	43.17	74.00	-30.83	VERTICAL Peak
4	6352.299	42.61	33.63	5.92	36.97	45.19	68.20	-23.01	VERTICAL Peak
5	10620.000	41.28	39.59	7.46	37.34	50.99	74.00	-23.01	VERTICAL Peak
6	15930.000	38.64	38.37	9.85	35.40	51.46	74.00	-22.54	VERTICAL Peak

Test Mode: 36; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

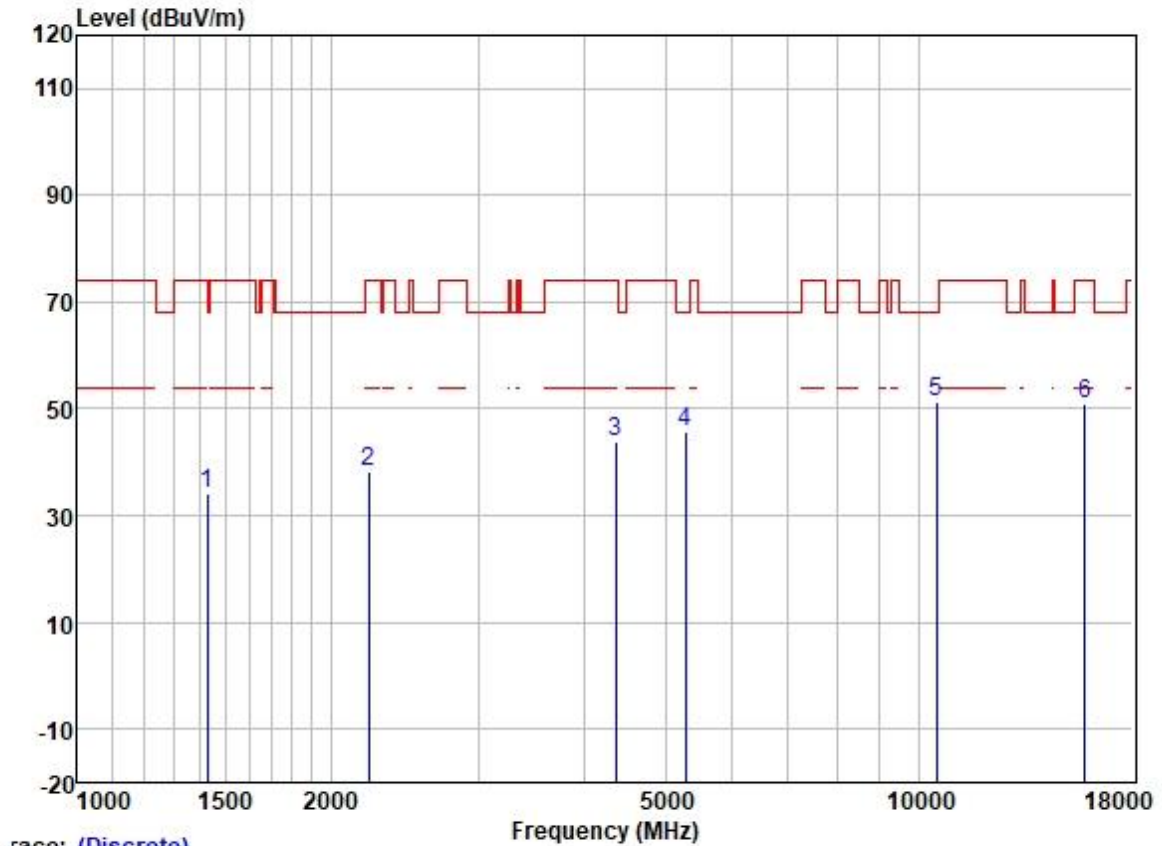


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Remark
1	1427.906	44.32	25.43	2.65	38.20	34.20	68.20	-34.00	HORIZONTAL Peak
2	2221.585	45.88	26.72	3.22	37.64	38.18	74.00	-35.82	HORIZONTAL Peak
3	4362.720	45.23	30.62	4.68	36.81	43.72	74.00	-30.28	HORIZONTAL Peak
4	5279.502	44.64	31.76	6.00	36.87	45.53	68.20	-22.67	HORIZONTAL Peak
5	10520.000	41.87	39.50	7.42	37.35	51.44	68.20	-16.76	HORIZONTAL Peak
6	15780.000	37.67	38.70	9.86	35.39	50.84	74.00	-23.16	HORIZONTAL Peak

Test Mode: 36; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

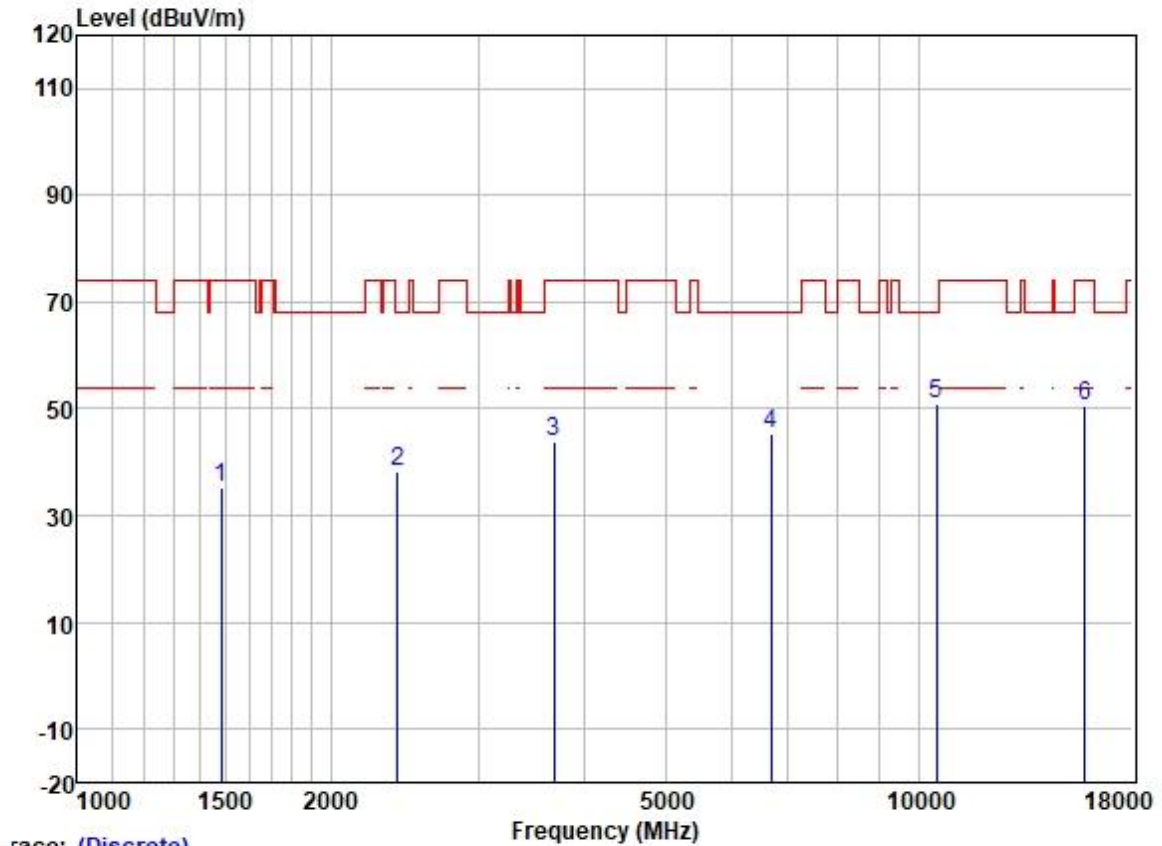


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1480.812	45.03	25.48	2.77	38.13	35.15	74.00	-38.85	VERTICAL Peak
2	2399.760	45.03	27.35	3.50	37.59	38.29	68.20	-29.91	VERTICAL Peak
3	3683.825	46.94	29.20	4.54	36.88	43.80	74.00	-30.20	VERTICAL Peak
4	6683.977	42.12	34.33	5.83	37.07	45.21	68.20	-22.99	VERTICAL Peak
5	10520.000	41.39	39.50	7.42	37.35	50.96	68.20	-17.24	VERTICAL Peak
6	15780.000	37.31	38.70	9.86	35.39	50.48	74.00	-23.52	VERTICAL Peak

Test Mode: 36; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

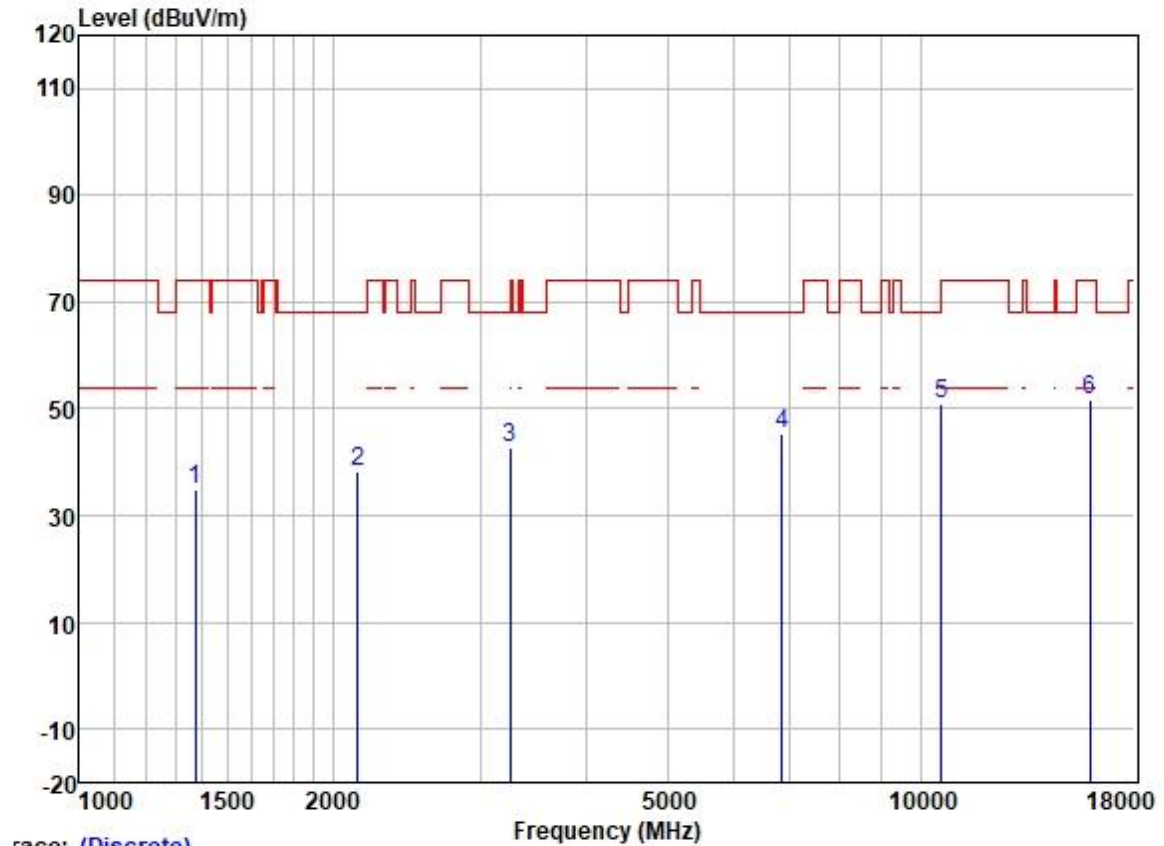

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1372.101	45.04	25.35	2.60	38.25	34.74	74.00	-39.26	HORIZONTAL	Peak
2	2144.775	46.13	26.41	3.18	37.66	38.06	68.20	-30.14	HORIZONTAL	Peak
3	3254.672	47.00	28.68	4.03	37.06	42.65	68.20	-25.55	HORIZONTAL	Peak
4	6852.990	41.85	34.78	5.82	37.15	45.30	68.20	-22.90	HORIZONTAL	Peak
5	10600.000	41.26	39.59	7.46	37.34	50.97	68.20	-17.23	HORIZONTAL	Peak
6	15900.000	38.70	38.44	9.86	35.40	51.60	74.00	-22.40	HORIZONTAL	Peak


Test Mode: 36; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

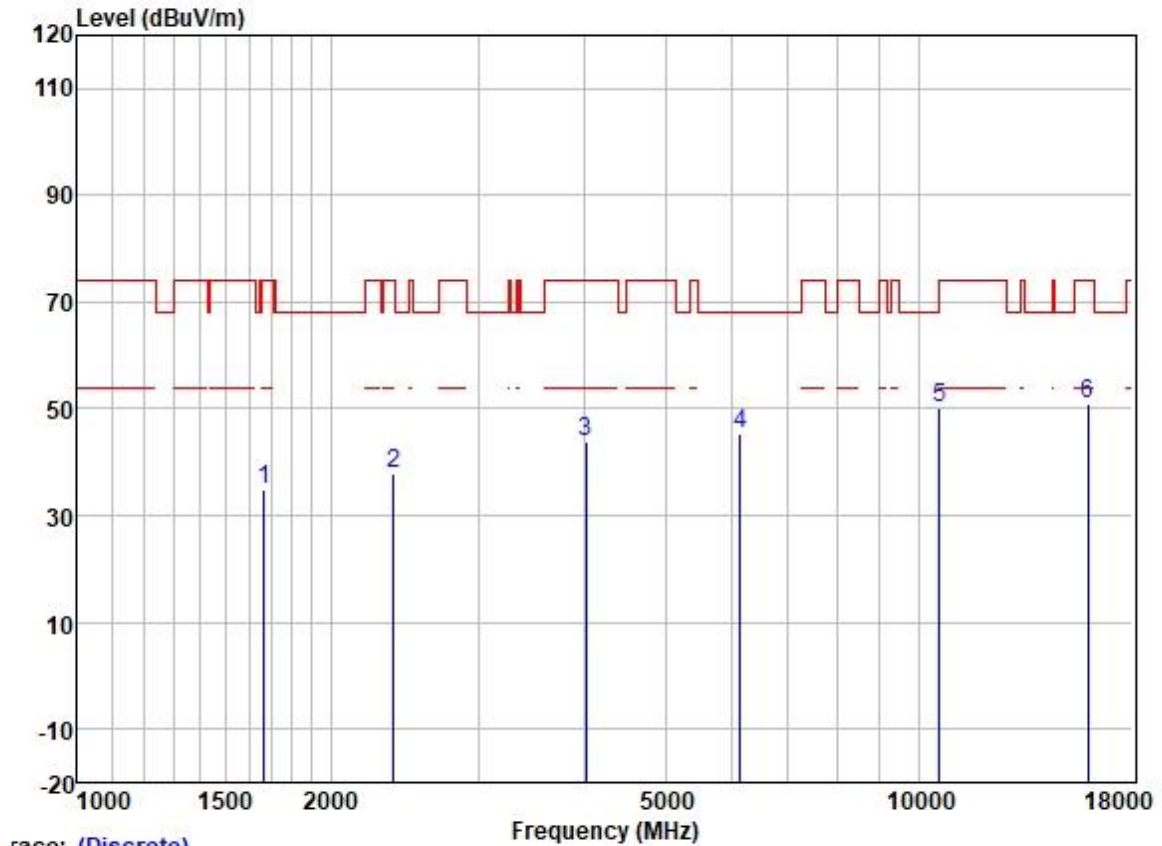

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1666.678	44.26	25.66	2.80	37.91	34.81	74.00	-39.19	VERTICAL Peak
2	2376.676	44.58	27.31	3.46	37.60	37.75	74.00	-36.25	VERTICAL Peak
3	4027.202	46.25	29.83	4.60	36.80	43.88	74.00	-30.12	VERTICAL Peak
4	6133.862	43.38	32.77	6.12	36.92	45.35	68.20	-22.85	VERTICAL Peak
5	10600.000	40.58	39.59	7.46	37.34	50.29	68.20	-17.91	VERTICAL Peak
6	15900.000	38.14	38.44	9.86	35.40	51.04	74.00	-22.96	VERTICAL Peak

Test Mode: 36; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

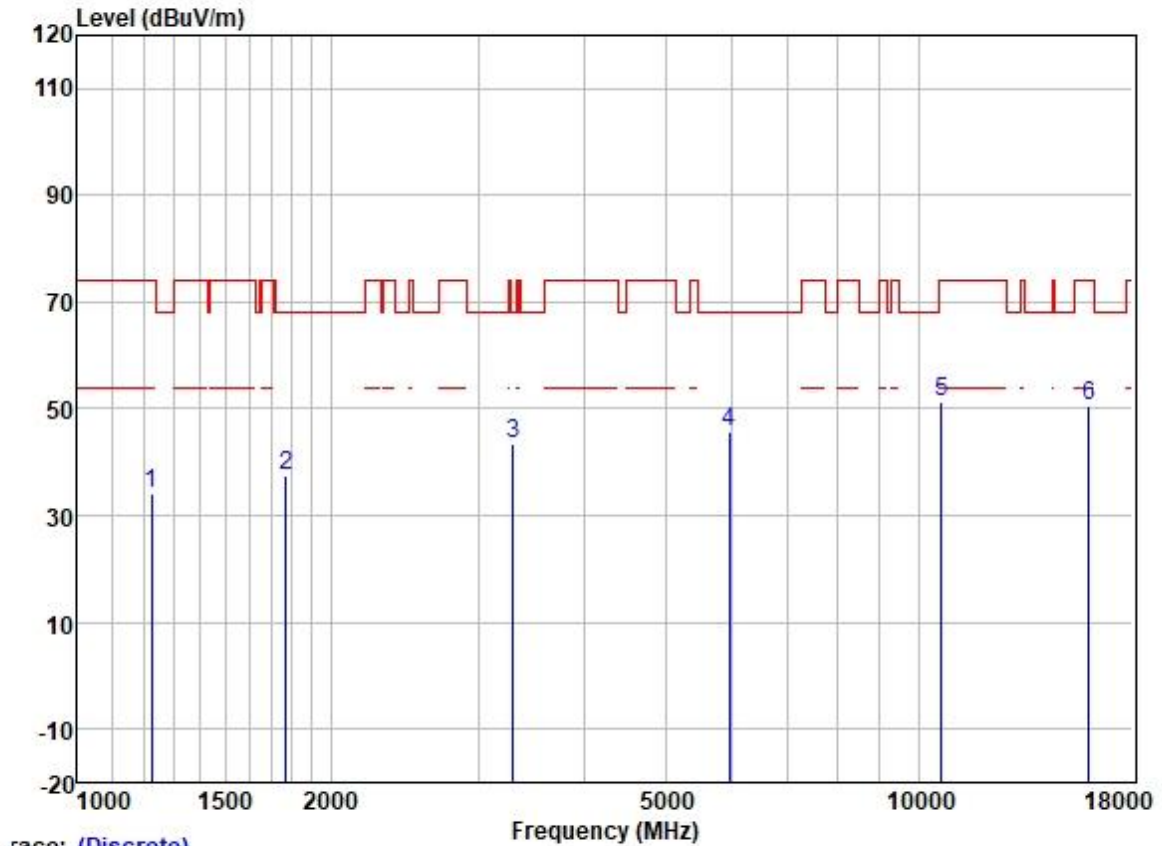


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1224.284	45.31	24.85	2.31	38.37	34.10	74.00	-39.90	HORIZONTAL	Peak
2	1771.072	46.55	25.90	2.95	37.83	37.57	68.20	-30.63	HORIZONTAL	Peak
3	3297.226	47.83	28.75	4.06	37.03	43.61	68.20	-24.59	HORIZONTAL	Peak
4	5963.829	44.30	32.37	6.10	36.90	45.87	68.20	-22.33	HORIZONTAL	Peak
5	10640.000	41.36	39.63	7.48	37.33	51.14	74.00	-22.86	HORIZONTAL	Peak
6	15960.000	37.88	38.37	9.85	35.40	50.70	74.00	-23.30	HORIZONTAL	Peak

Test Mode: 36; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

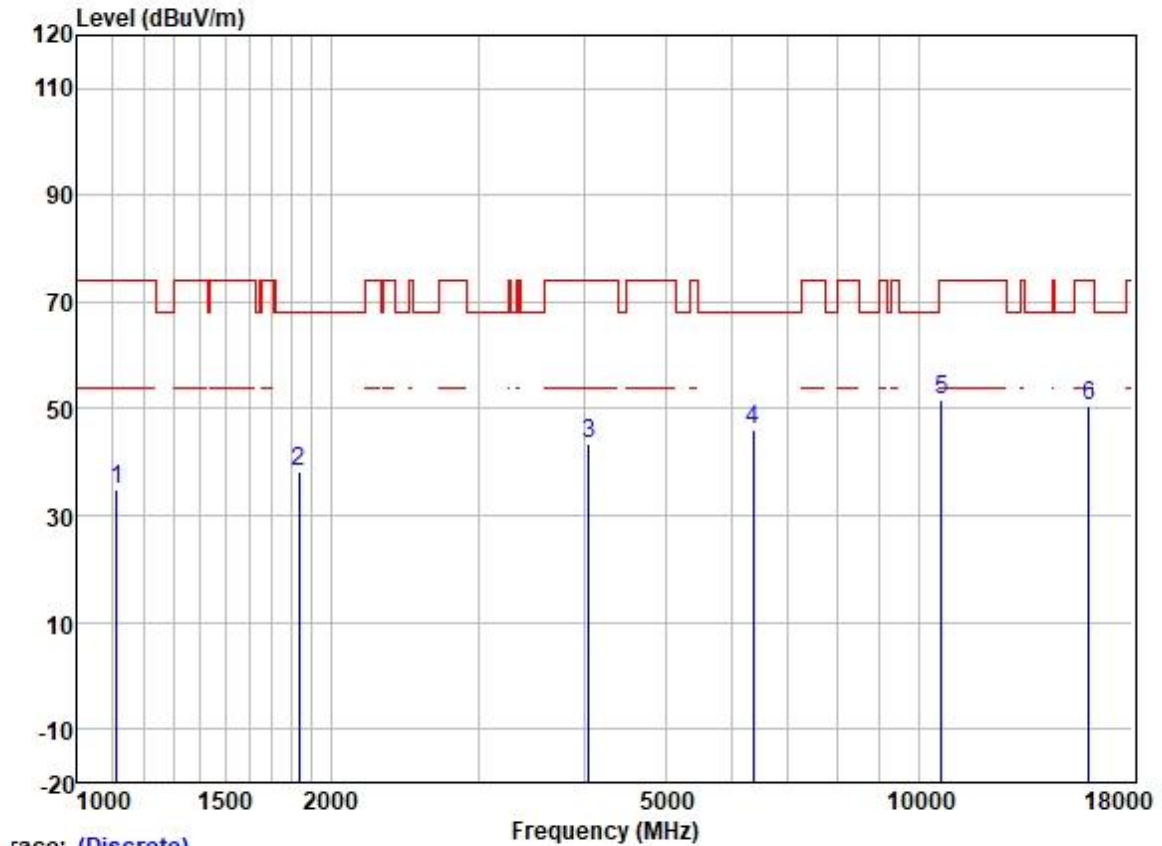

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1113.202	46.55	24.39	2.26	38.43	34.77	74.00	-39.23	VERTICAL	Peak
2	1836.493	47.14	25.98	2.96	37.80	38.28	68.20	-29.92	VERTICAL	Peak
3	4055.580	45.69	29.87	4.60	36.80	43.36	74.00	-30.64	VERTICAL	Peak
4	6352.223	43.68	33.63	5.92	36.97	46.26	68.20	-21.94	VERTICAL	Peak
5	10640.000	42.08	39.63	7.48	37.33	51.86	74.00	-22.14	VERTICAL	Peak
6	15960.000	37.87	38.37	9.85	35.40	50.69	74.00	-23.31	VERTICAL	Peak


Test Mode: 36; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

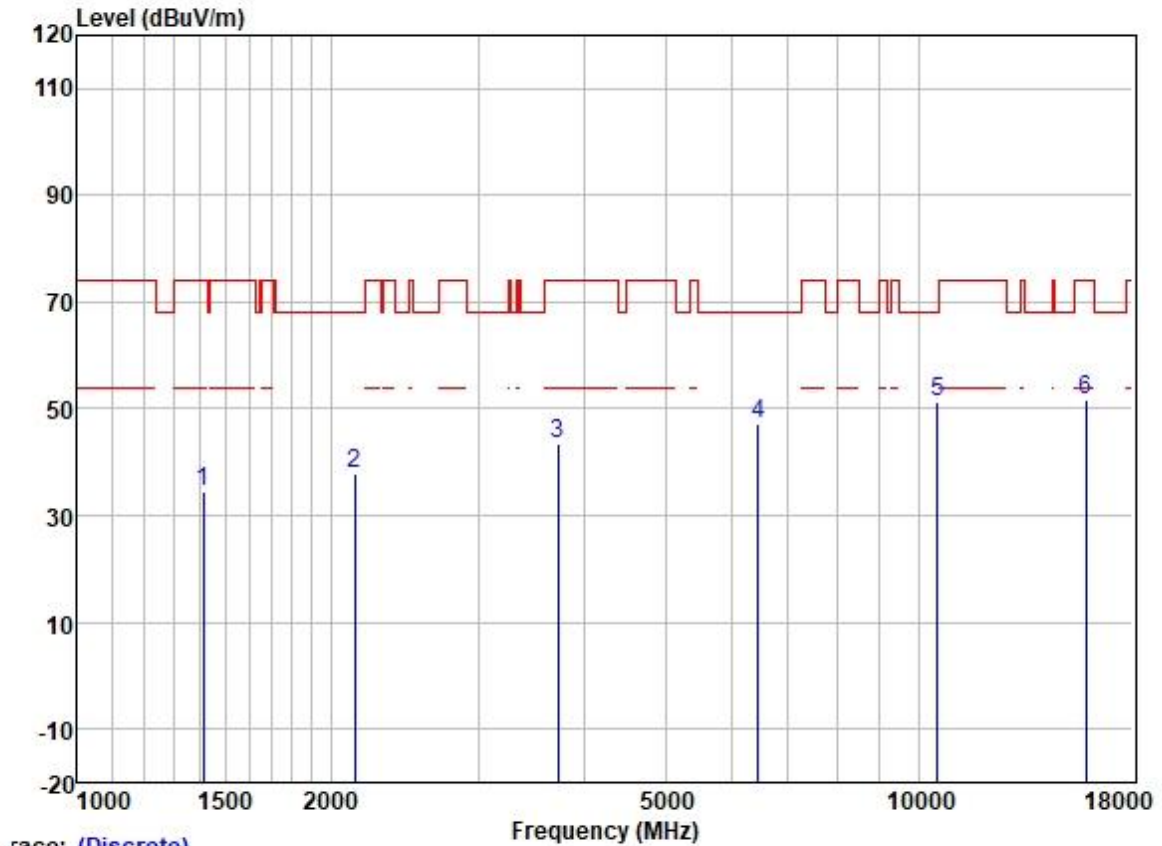

race: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1409.835	44.81	25.40	2.62	38.22	34.61	74.00	-39.39	HORIZONTAL Peak
2	2137.936	46.02	26.39	3.18	37.66	37.93	68.20	-30.27	HORIZONTAL Peak
3	3727.856	46.61	29.31	4.57	36.87	43.62	74.00	-30.38	HORIZONTAL Peak
4	6448.656	44.49	33.88	5.87	37.00	47.24	68.20	-20.96	HORIZONTAL Peak
5	10540.000	41.59	39.53	7.43	37.35	51.20	68.20	-17.00	HORIZONTAL Peak
6	15810.000	38.58	38.61	9.86	35.39	51.66	74.00	-22.34	HORIZONTAL Peak

Test Mode: 36; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

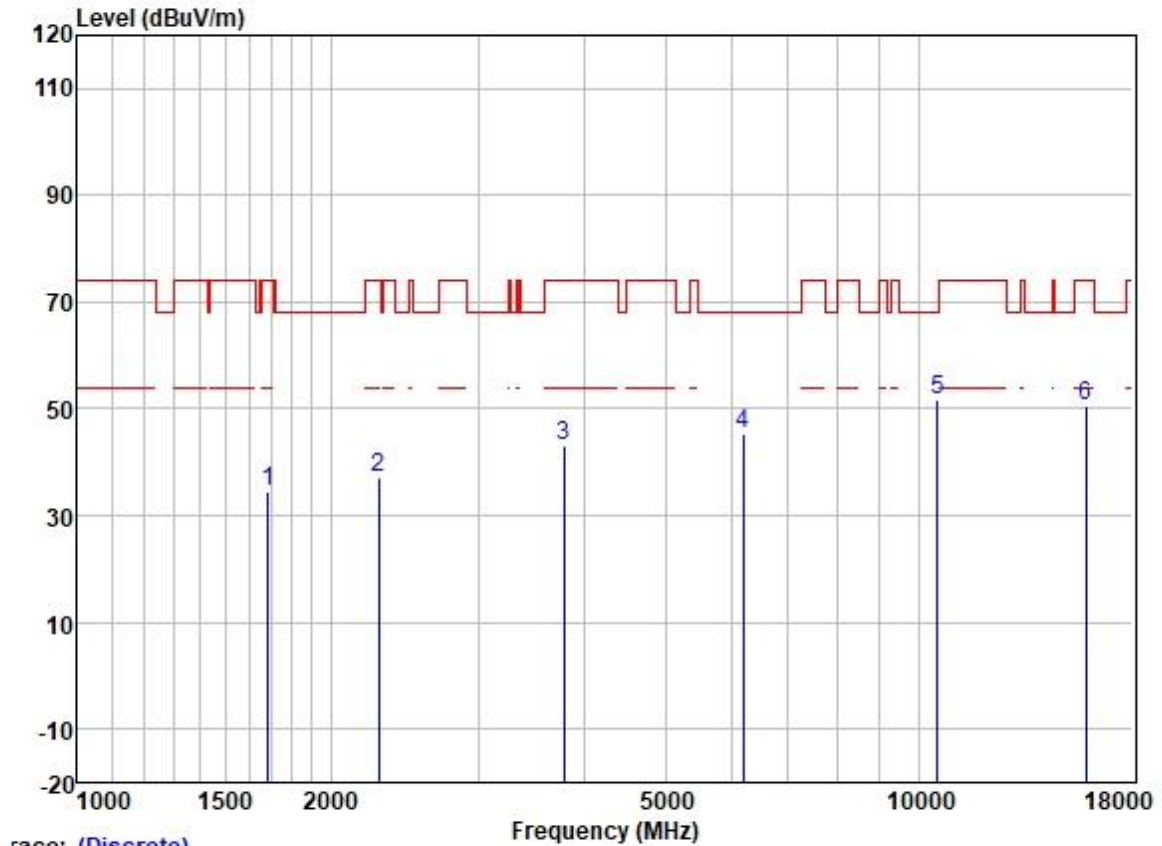

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1687.385	43.78	25.69	2.80	37.91	34.36	74.00	-39.64	VERTICAL Peak
2	2278.598	44.46	27.03	3.28	37.63	37.14	74.00	-36.86	VERTICAL Peak
3	3786.218	45.71	29.50	4.60	36.86	42.95	74.00	-31.05	VERTICAL Peak
4	6184.532	43.29	32.89	6.09	36.93	45.34	68.20	-22.86	VERTICAL Peak
5	10540.000	41.90	39.53	7.43	37.35	51.51	68.20	-16.69	VERTICAL Peak
6	15810.000	37.53	38.61	9.86	35.39	50.61	74.00	-23.39	VERTICAL Peak


Test Mode: 36; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

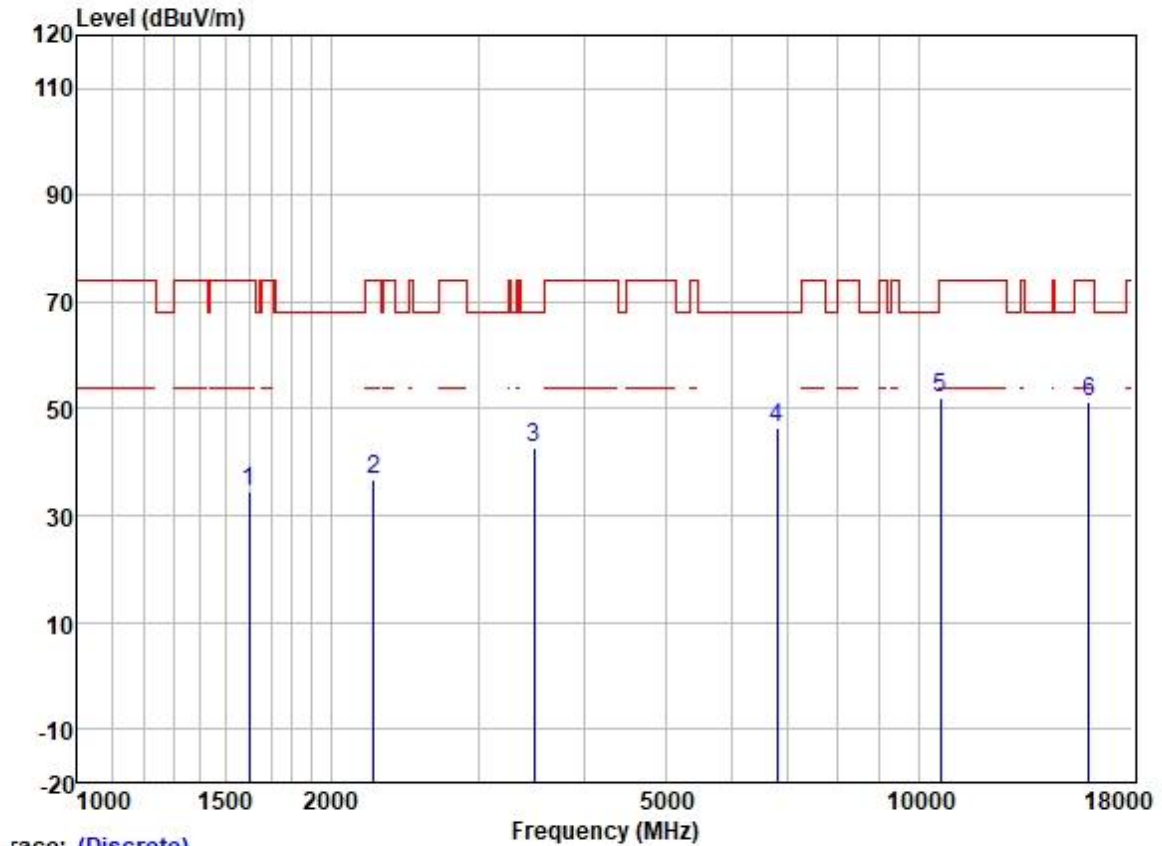

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1602.008	44.09	25.58	2.80	37.98	34.49	74.00	-39.51	HORIZONTAL Peak
2	2248.795	44.33	26.88	3.25	37.64	36.82	74.00	-37.18	HORIZONTAL Peak
3	3490.627	46.43	28.89	4.27	36.94	42.65	68.20	-25.55	HORIZONTAL Peak
4	6787.193	42.92	34.66	5.82	37.11	46.29	68.20	-21.91	HORIZONTAL Peak
5	10620.000	42.38	39.59	7.46	37.34	52.09	74.00	-21.91	HORIZONTAL Peak
6	15930.000	38.47	38.37	9.85	35.40	51.29	74.00	-22.71	HORIZONTAL Peak

Test Mode: 36; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

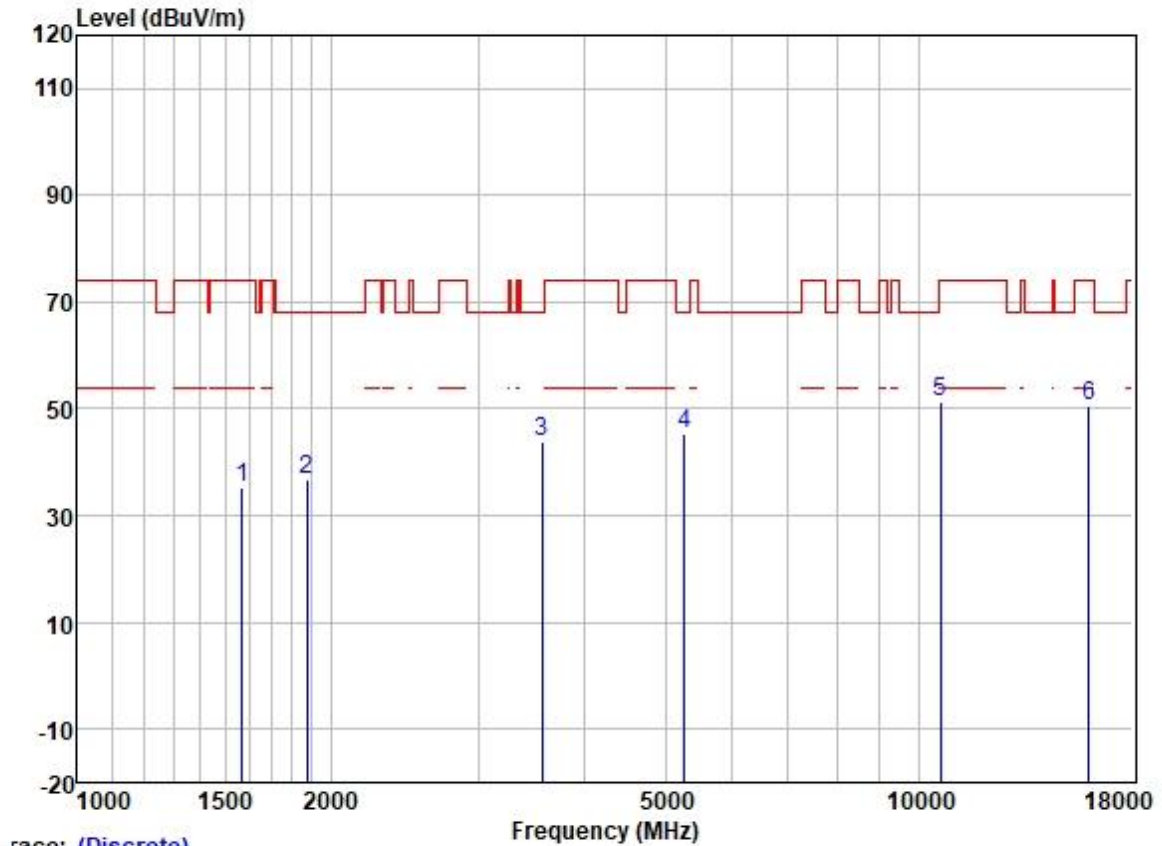


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1570.571	44.90	25.55	2.80	38.00	35.25	74.00	-38.75	VERTICAL Peak
2	1875.429	45.69	26.02	2.92	37.77	36.86	68.20	-31.34	VERTICAL Peak
3	3569.689	47.25	28.99	4.45	36.92	43.77	68.20	-24.43	VERTICAL Peak
4	5276.163	44.63	31.75	5.80	36.87	45.31	68.20	-22.89	VERTICAL Peak
5	10620.000	41.51	39.59	7.46	37.34	51.22	74.00	-22.78	VERTICAL Peak
6	15930.000	37.91	38.37	9.85	35.40	50.73	74.00	-23.27	VERTICAL Peak

Test Mode: 36; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

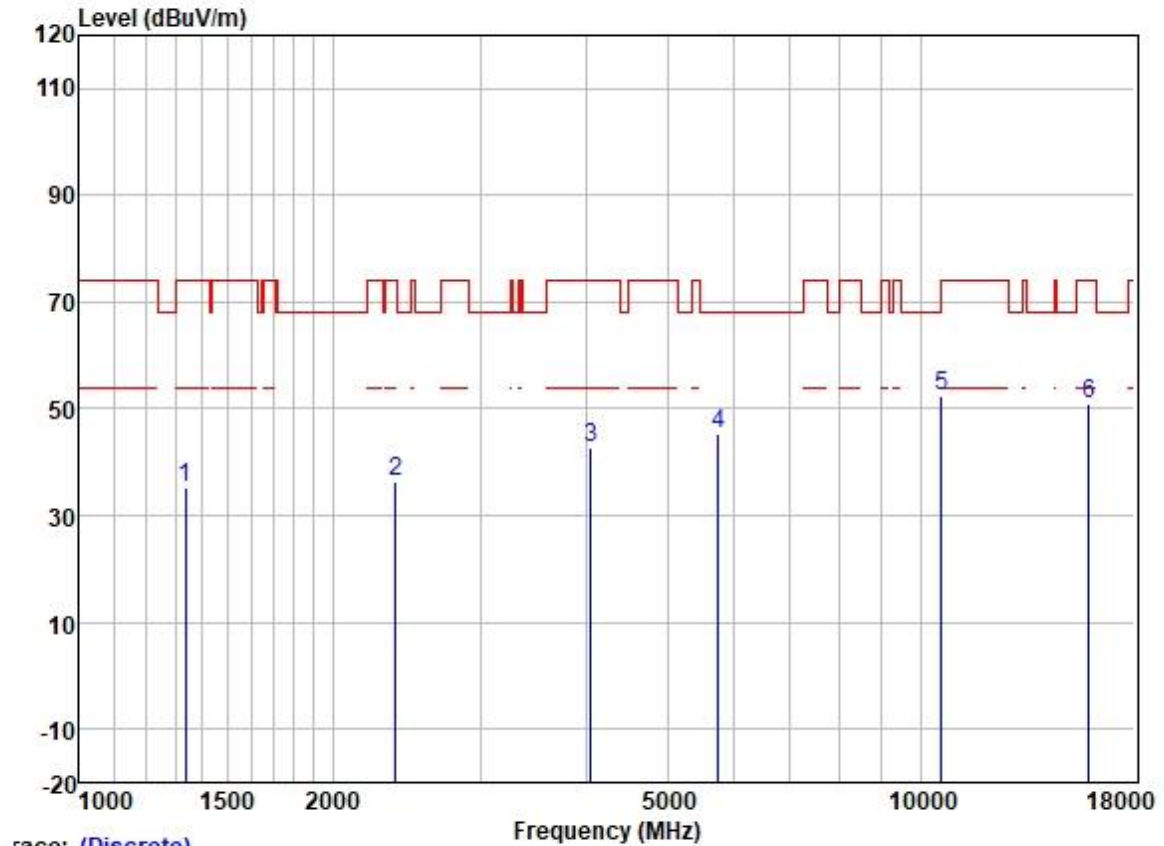


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1337.891	45.71	25.29	2.60	38.27	35.33	74.00	-38.67	HORIZONTAL	Peak
2	2376.759	43.37	27.31	3.46	37.60	36.54	74.00	-37.46	HORIZONTAL	Peak
3	4050.487	44.98	29.87	4.60	36.80	42.65	74.00	-31.35	HORIZONTAL	Peak
4	5744.336	43.98	32.10	6.20	36.89	45.39	68.20	-22.81	HORIZONTAL	Peak
5	10580.000	42.89	39.56	7.45	37.34	52.56	68.20	-15.64	HORIZONTAL	Peak
6	15870.000	37.92	38.52	9.86	35.40	50.90	74.00	-23.10	HORIZONTAL	Peak

Test Mode: 36; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

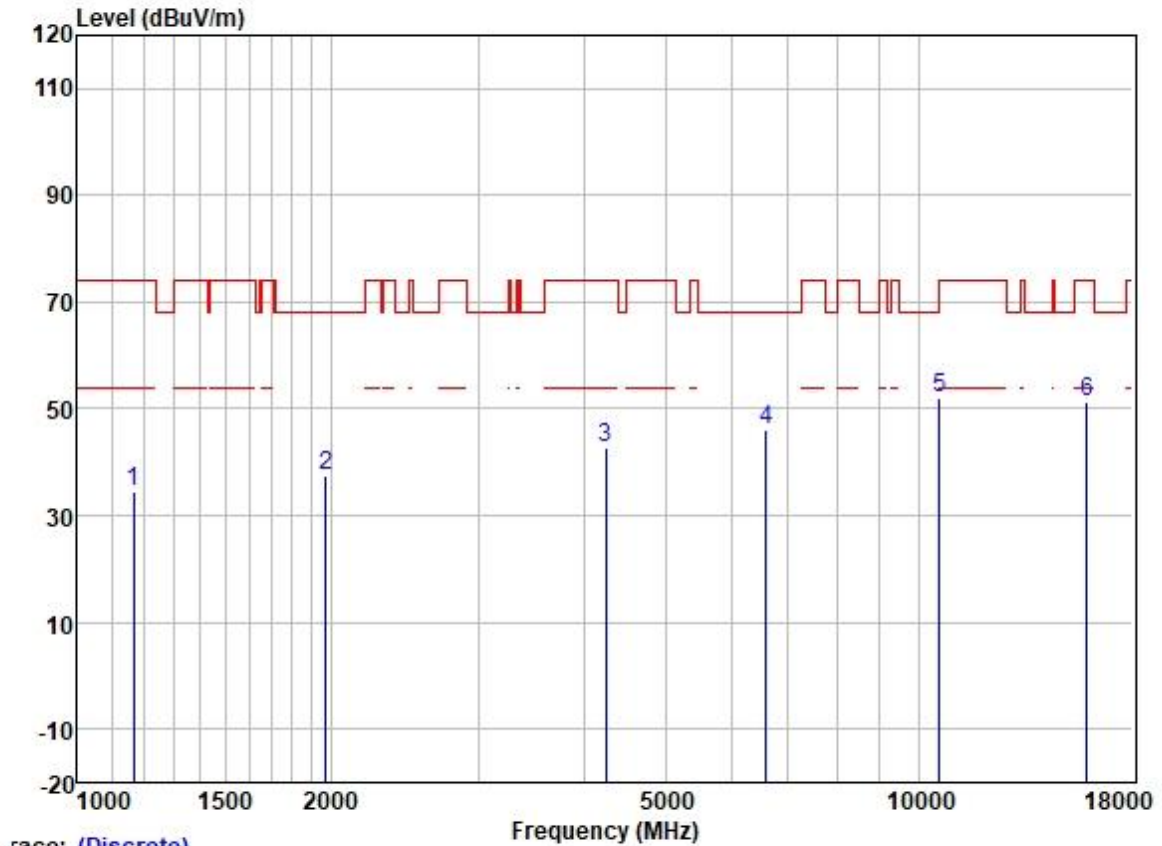


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1165.751	45.87	24.54	2.39	38.40	34.40	74.00	VERTICAL	Peak
2	1973.330	46.15	26.09	3.05	37.71	37.58	68.20	VERTICAL	Peak
3	4252.692	44.49	30.34	4.62	36.81	42.64	74.00	VERTICAL	Peak
4	6589.733	43.17	34.13	5.84	37.04	46.10	68.20	VERTICAL	Peak
5	10580.000	42.26	39.56	7.45	37.34	51.93	68.20	VERTICAL	Peak
6	15870.000	38.28	38.52	9.86	35.40	51.26	74.00	VERTICAL	Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

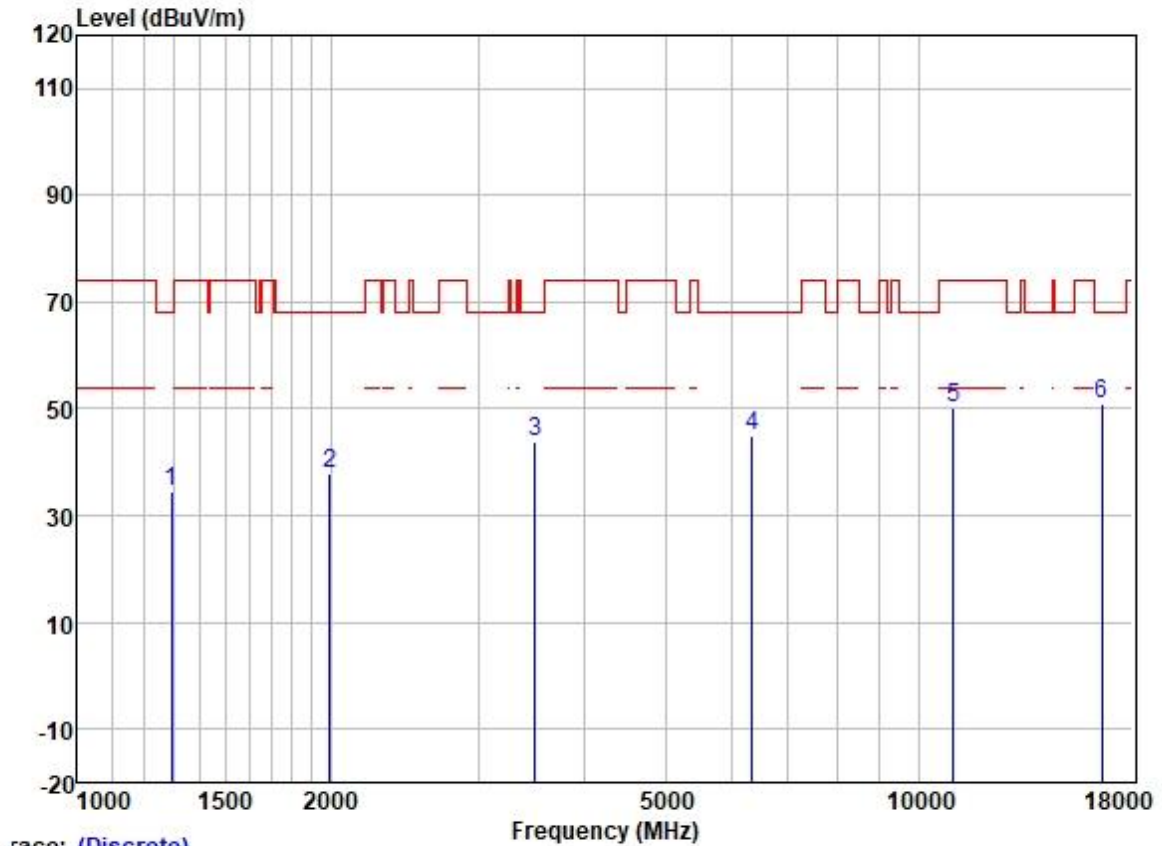


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1292.092	45.21	25.18	2.57	38.31	34.65	68.20	-33.55	HORIZONTAL Peak
2	1997.607	46.43	26.10	3.09	37.70	37.92	68.20	-30.28	HORIZONTAL Peak
3	3498.066	47.47	28.90	4.30	36.94	43.73	68.20	-24.47	HORIZONTAL Peak
4	6348.344	42.45	33.57	5.94	36.97	44.99	68.20	-23.21	HORIZONTAL Peak
5	11000.000	39.50	40.10	7.71	37.25	50.06	74.00	-23.94	HORIZONTAL Peak
6	16500.000	37.24	39.60	9.44	35.38	50.90	68.20	-17.30	HORIZONTAL Peak

Test Mode: 38; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

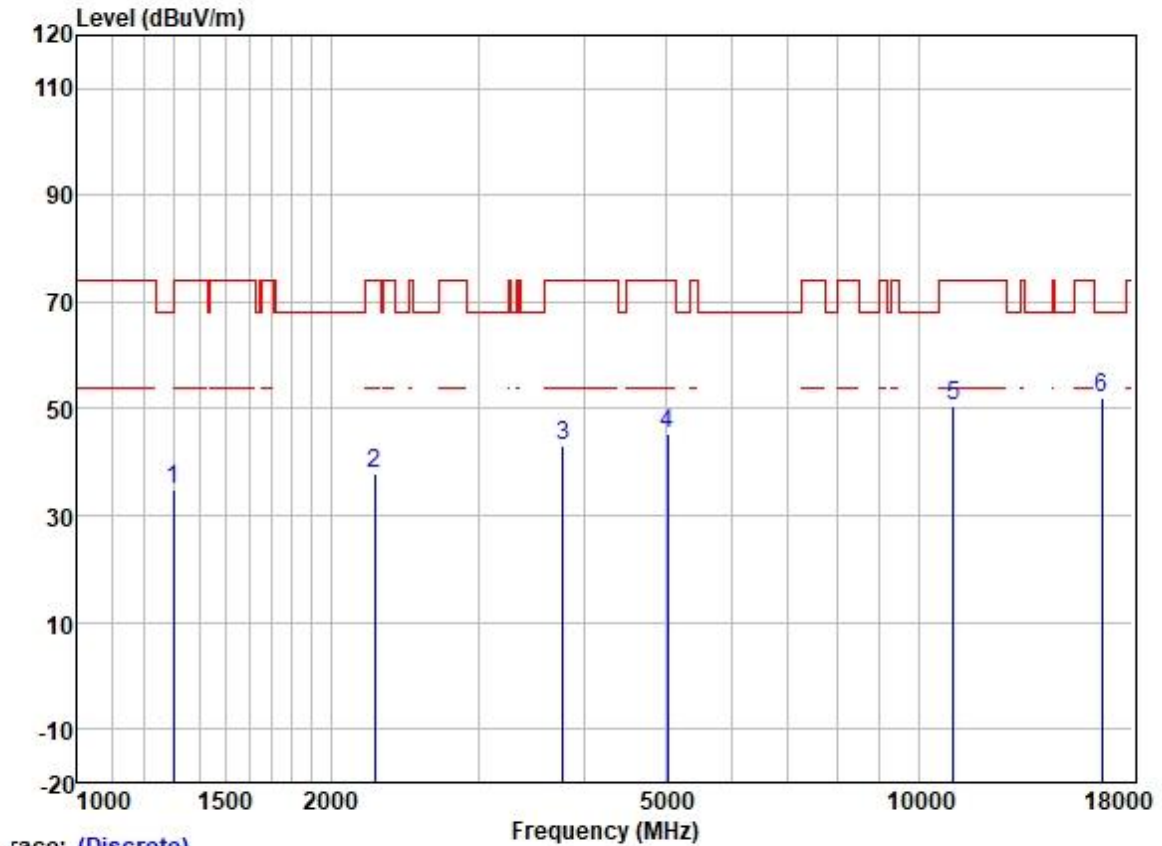


	Freq	Read	Antenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1299.474	45.34	25.20	2.60	38.31	34.83	68.20	-33.37	VERTICAL	Peak
2	2258.985	45.22	26.95	3.27	37.64	37.80	74.00	-36.20	VERTICAL	Peak
3	3776.738	45.93	29.47	4.59	36.86	43.13	74.00	-30.87	VERTICAL	Peak
4	5032.107	44.91	31.70	5.69	36.85	45.45	74.00	-28.55	VERTICAL	Peak
5	11000.000	39.98	40.10	7.71	37.25	50.54	74.00	-23.46	VERTICAL	Peak
6	16500.000	38.24	39.60	9.44	35.38	51.90	68.20	-16.30	VERTICAL	Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

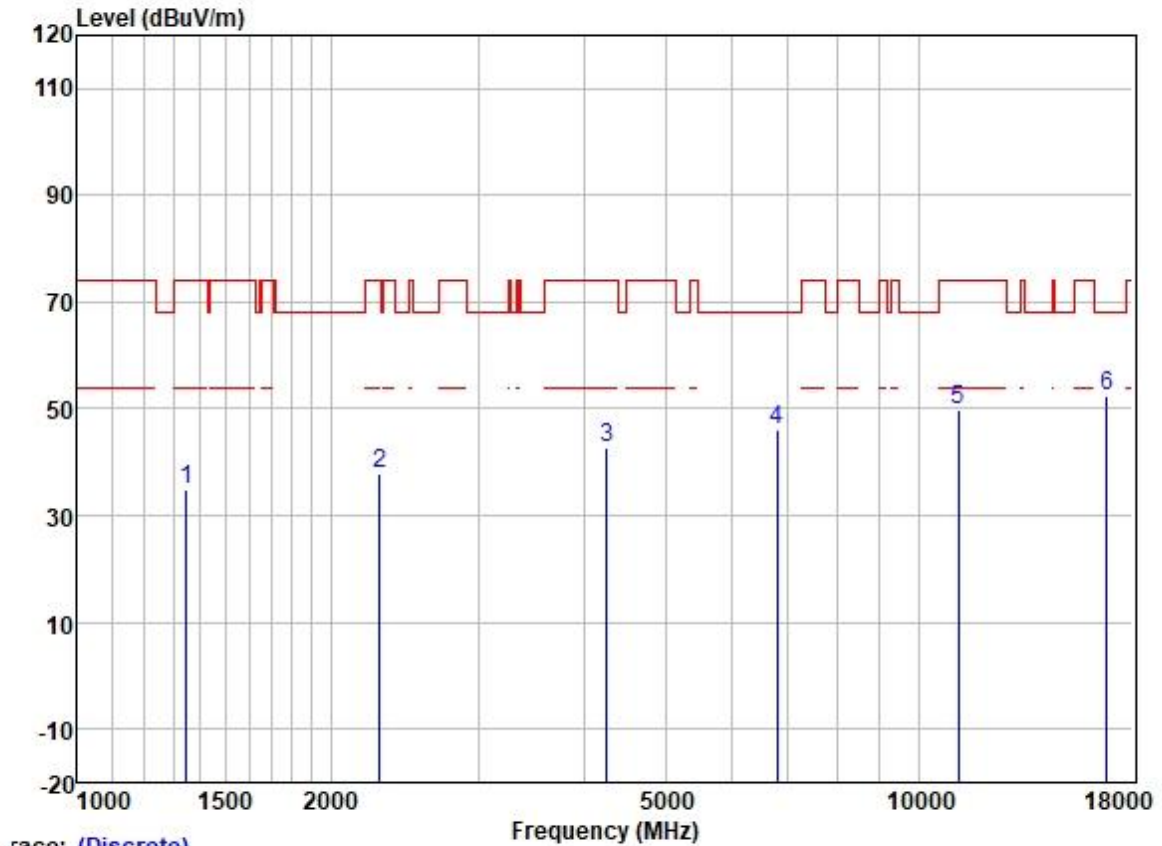


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1347.014	45.09	25.31	2.60	38.27	34.73	74.00	-39.27	HORIZONTAL	Peak
2	2287.255	45.18	27.06	3.29	37.63	37.90	74.00	-36.10	HORIZONTAL	Peak
3	4262.786	44.68	30.38	4.63	36.81	42.88	74.00	-31.12	HORIZONTAL	Peak
4	6799.290	42.77	34.66	5.82	37.12	46.13	68.20	-22.07	HORIZONTAL	Peak
5	11160.000	39.11	40.04	7.90	37.21	49.84	74.00	-24.16	HORIZONTAL	Peak
6	16740.000	38.00	40.49	9.41	35.37	52.53	68.20	-15.67	HORIZONTAL	Peak

Test Mode: 38; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

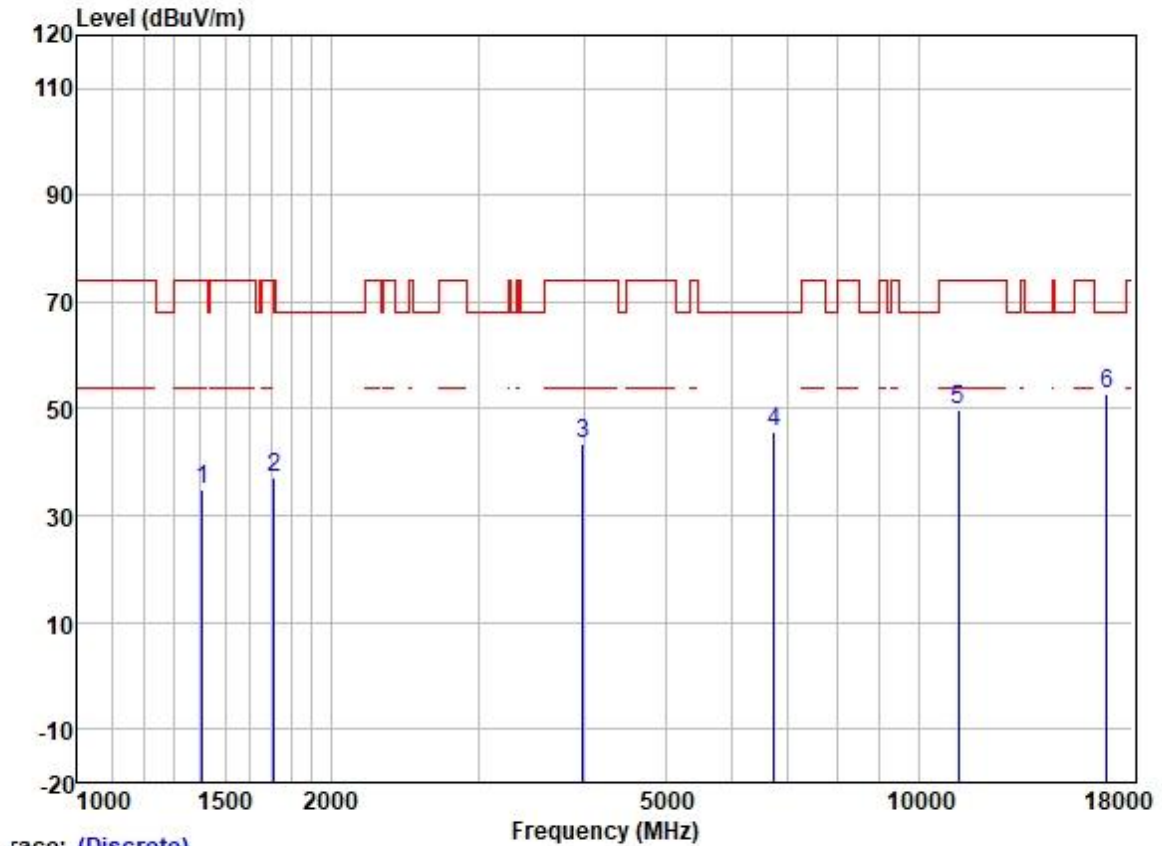


	Freq	Read	Antenna	Cable	Preamp		Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1409.212	44.95	25.40	2.62	38.22	34.75	74.00	-39.25	VERTICAL	Peak
2	1714.168	46.60	25.74	2.82	37.87	37.29	68.20	-30.91	VERTICAL	Peak
3	3990.537	45.93	29.79	4.60	36.80	43.52	74.00	-30.48	VERTICAL	Peak
4	6728.402	42.66	34.50	5.82	37.09	45.89	68.20	-22.31	VERTICAL	Peak
5	11160.000	39.08	40.04	7.90	37.21	49.81	74.00	-24.19	VERTICAL	Peak
6	16740.000	38.15	40.49	9.41	35.37	52.68	68.20	-15.52	VERTICAL	Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

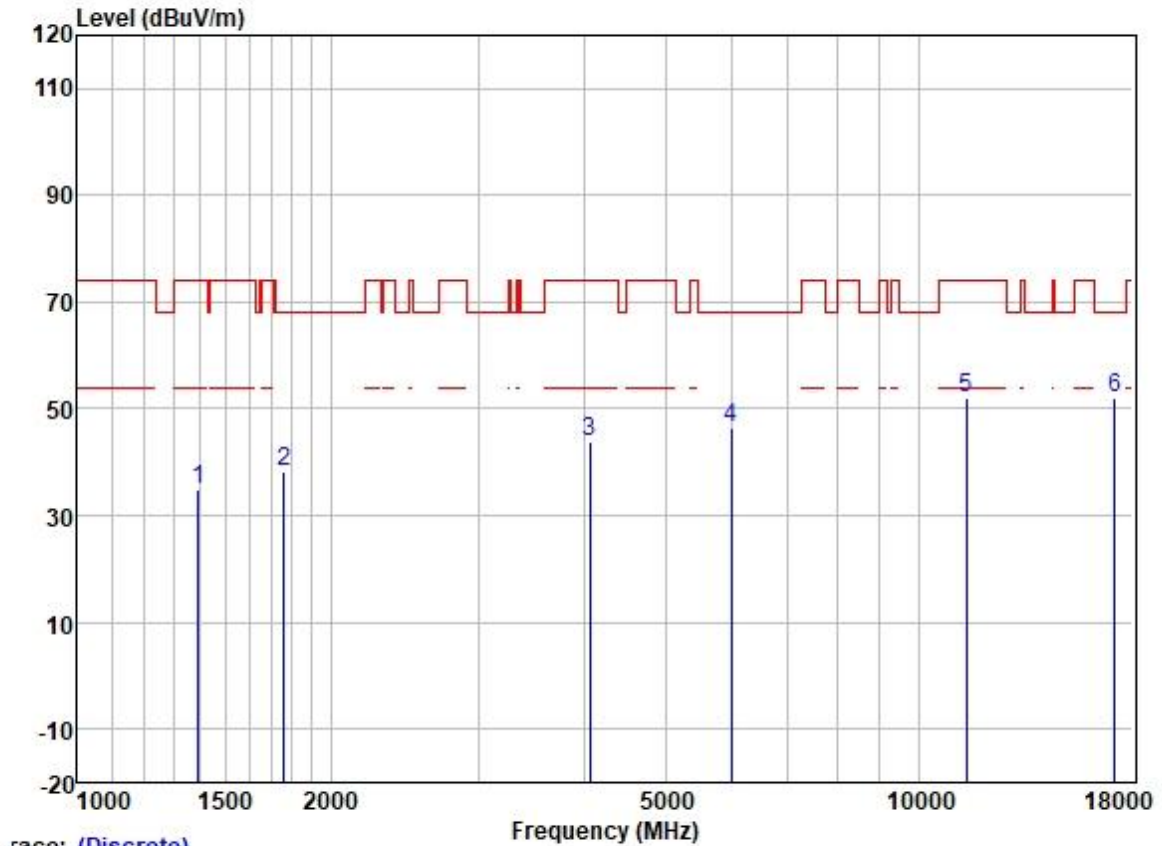


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1393.294	45.06	25.38	2.60	38.22	34.82	74.00	-39.18	HORIZONTAL Peak
2	1762.459	47.37	25.88	2.93	37.85	38.33	68.20	-29.87	HORIZONTAL Peak
3	4065.370	46.16	29.88	4.60	36.80	43.84	74.00	-30.16	HORIZONTAL Peak
4	5987.730	44.95	32.39	6.15	36.90	46.59	68.20	-21.61	HORIZONTAL Peak
5	11400.000	41.09	39.94	8.28	37.16	52.15	74.00	-21.85	HORIZONTAL Peak
6	17100.000	35.35	42.32	9.63	35.34	51.96	68.20	-16.24	HORIZONTAL Peak

Test Mode: 38; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

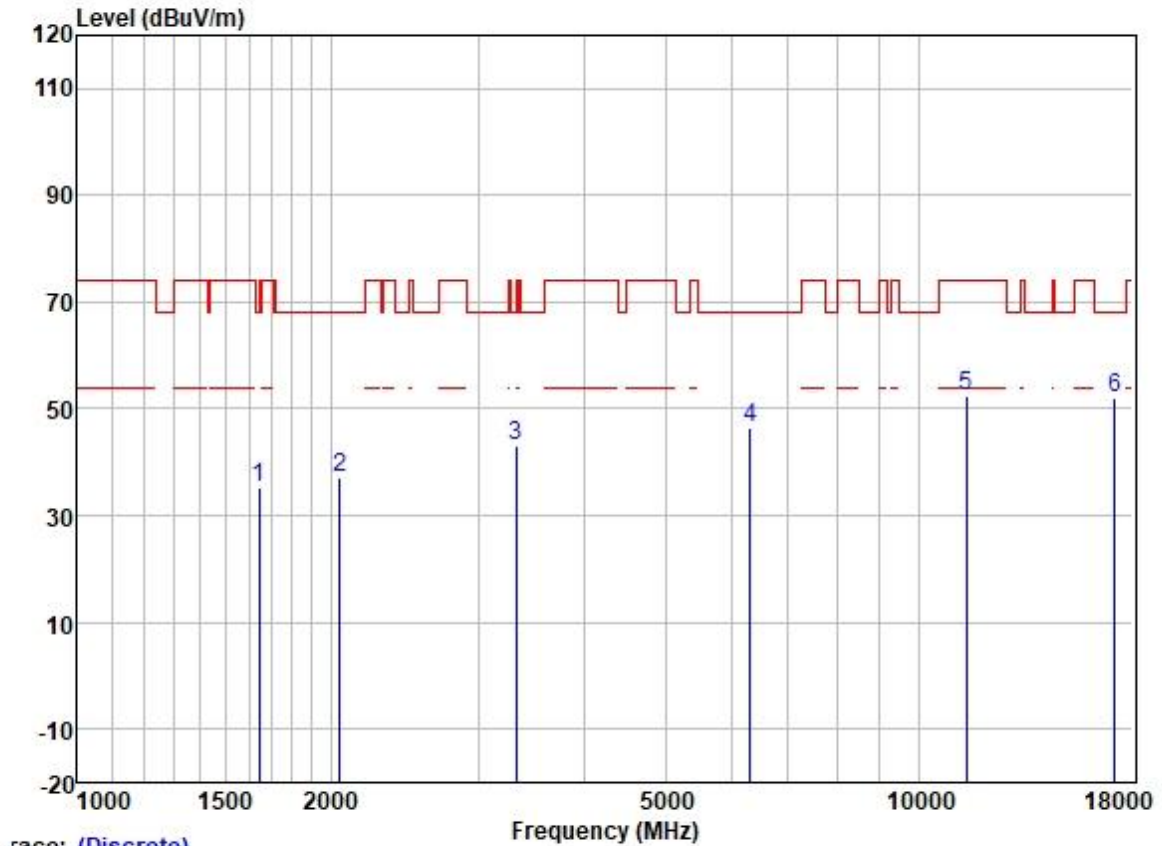


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1644.748	44.80	25.63	2.80	37.93	35.30	68.20	-32.90	VERTICAL Peak
2	2049.681	45.58	26.18	3.12	37.69	37.19	68.20	-31.01	VERTICAL Peak
3	3320.724	47.15	28.77	4.07	37.02	42.97	68.20	-25.23	VERTICAL Peak
4	6312.505	44.14	33.44	5.97	36.97	46.58	68.20	-21.62	VERTICAL Peak
5	11400.000	41.35	39.94	8.28	37.16	52.41	74.00	-21.59	VERTICAL Peak
6	17100.000	35.30	42.32	9.63	35.34	51.91	68.20	-16.29	VERTICAL Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

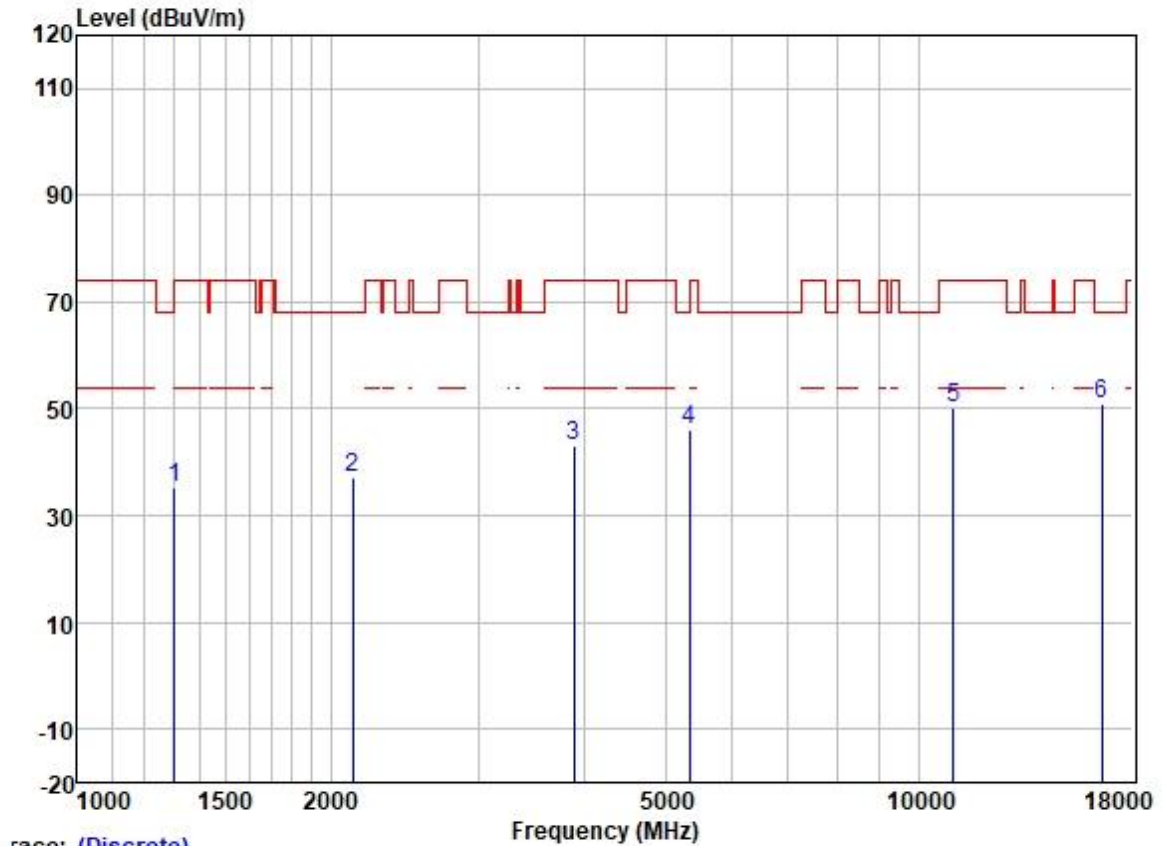

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1305.416	45.83	25.21	2.60	38.31	35.33	74.00	-38.67	HORIZONTAL Peak
2	2126.944	45.41	26.36	3.17	37.67	37.27	68.20	-30.93	HORIZONTAL Peak
3	3897.853	45.49	29.69	4.60	36.82	42.96	74.00	-31.04	HORIZONTAL Peak
4	5347.184	45.31	31.77	6.05	36.88	46.25	68.20	-21.95	HORIZONTAL Peak
5	11000.000	39.52	40.10	7.71	37.25	50.08	74.00	-23.92	HORIZONTAL Peak
6	16500.000	37.38	39.60	9.44	35.38	51.04	68.20	-17.16	HORIZONTAL Peak


Test Mode: 38; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

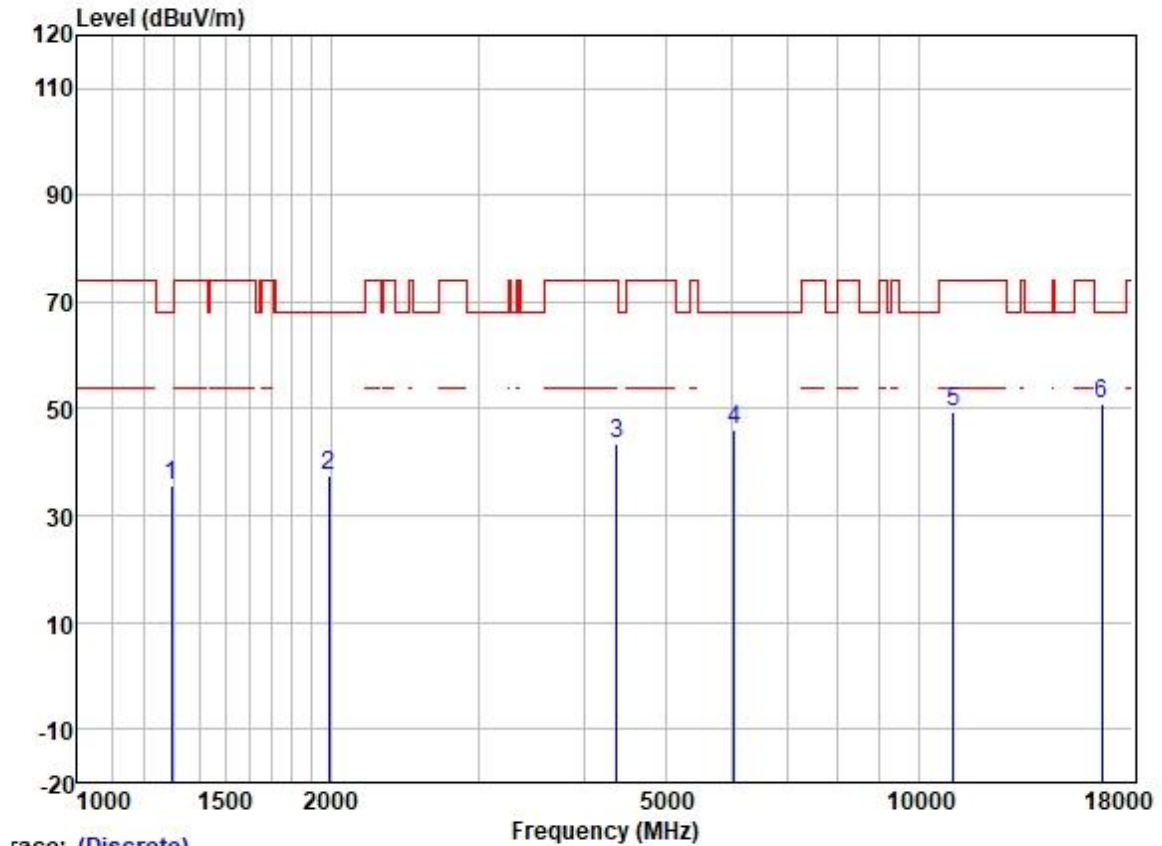

race: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1294.940	46.16	25.18	2.57	38.31	35.60	68.20	-32.60	VERTICAL Peak
2	1988.459	46.02	26.09	3.08	37.70	37.49	68.20	-30.71	VERTICAL Peak
3	4374.469	45.02	30.64	4.69	36.81	43.54	74.00	-30.46	VERTICAL Peak
4	6036.092	44.34	32.48	6.18	36.90	46.10	68.20	-22.10	VERTICAL Peak
5	11000.000	38.78	40.10	7.71	37.25	49.34	74.00	-24.66	VERTICAL Peak
6	16500.000	37.45	39.60	9.44	35.38	51.11	68.20	-17.09	VERTICAL Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

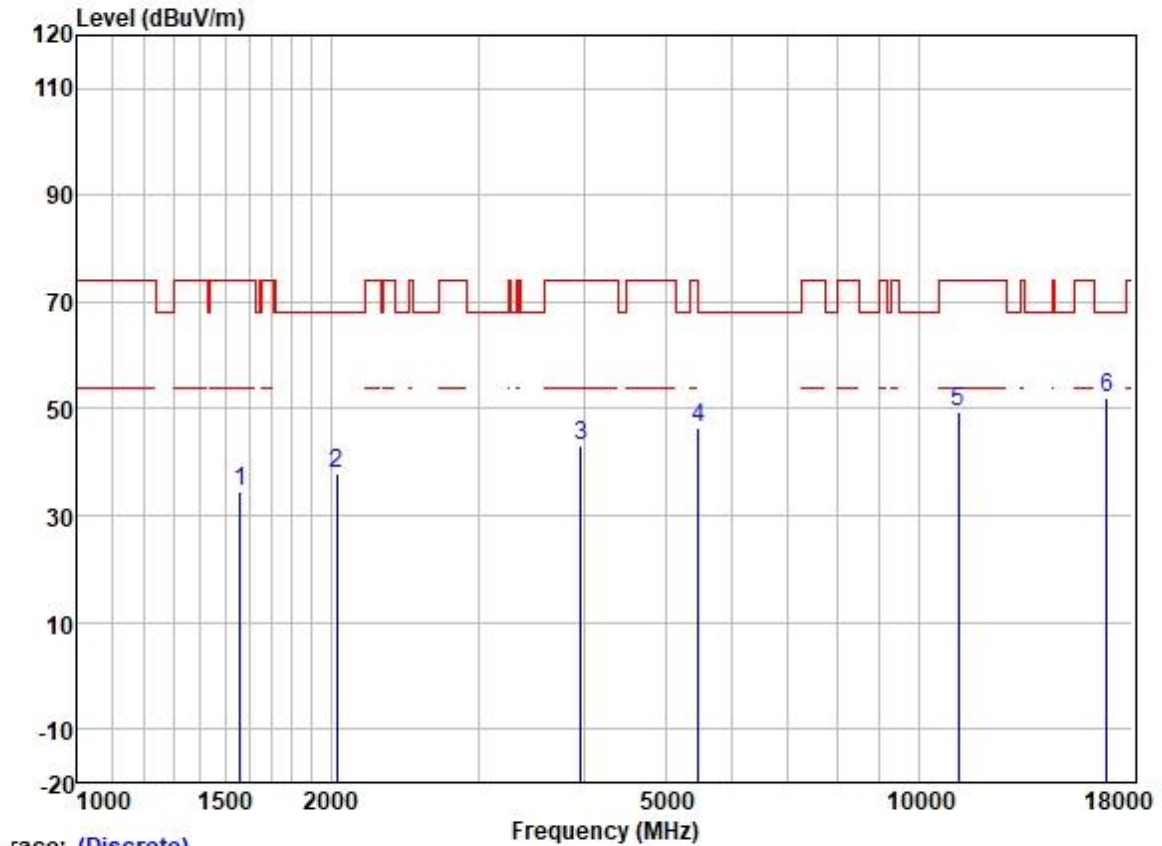


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1560.947	44.09	25.54	2.80	38.03	34.40	74.00	-39.60	HORIZONTAL Peak
2	2034.548	46.10	26.16	3.11	37.69	37.68	68.20	-30.52	HORIZONTAL Peak
3	3972.680	45.57	29.77	4.60	36.81	43.13	74.00	-30.87	HORIZONTAL Peak
4	5478.639	45.21	31.80	6.31	36.88	46.44	68.20	-21.76	HORIZONTAL Peak
5	11160.000	38.79	40.04	7.90	37.21	49.52	74.00	-24.48	HORIZONTAL Peak
6	16740.000	37.59	40.49	9.41	35.37	52.12	68.20	-16.08	HORIZONTAL Peak

Test Mode: 38; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

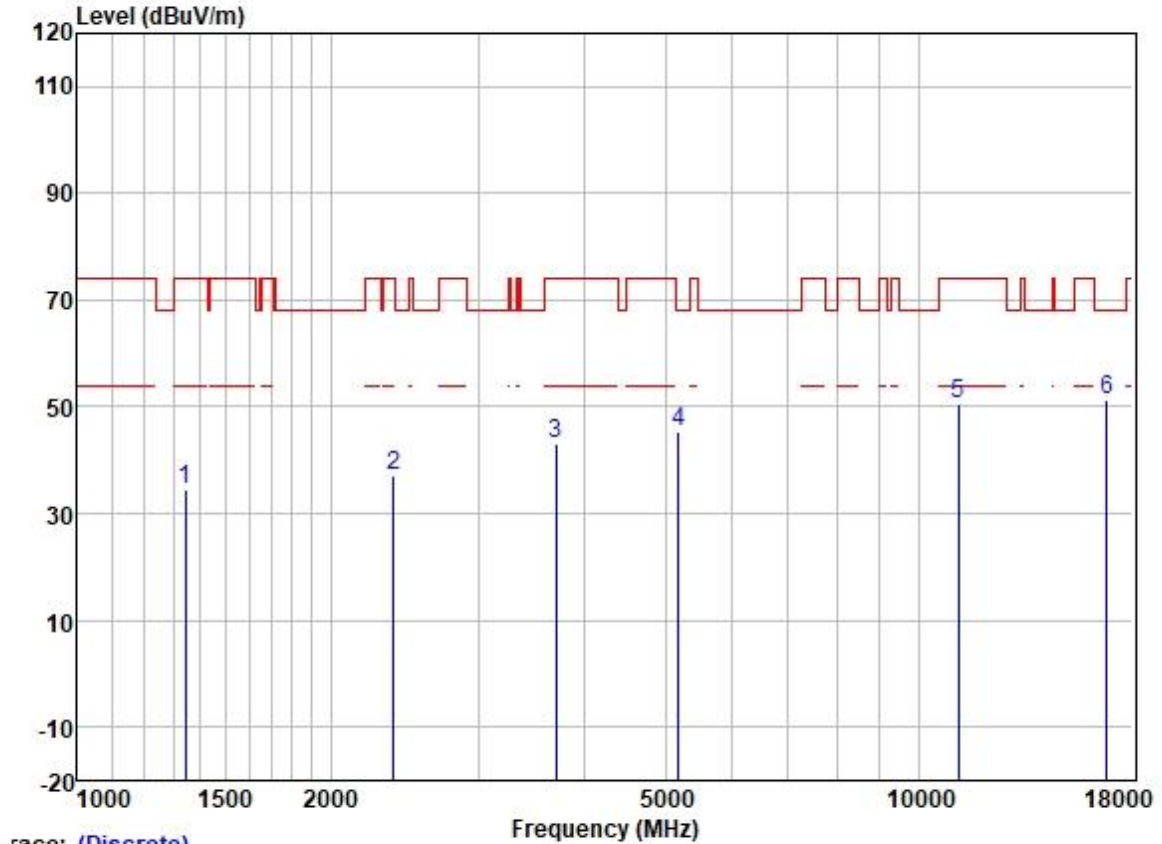


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1345.618	44.95	25.31	2.60	38.27	34.59	74.00	-39.41	VERTICAL Peak
2	2376.007	43.81	27.30	3.45	37.60	36.96	74.00	-37.04	VERTICAL Peak
3	3707.692	46.21	29.25	4.56	36.88	43.14	74.00	-30.86	VERTICAL Peak
4	5181.218	45.04	31.73	5.61	36.87	45.51	68.20	-22.69	VERTICAL Peak
5	11160.000	39.90	40.04	7.90	37.21	50.63	74.00	-23.37	VERTICAL Peak
6	16740.000	36.95	40.49	9.41	35.37	51.48	68.20	-16.72	VERTICAL Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

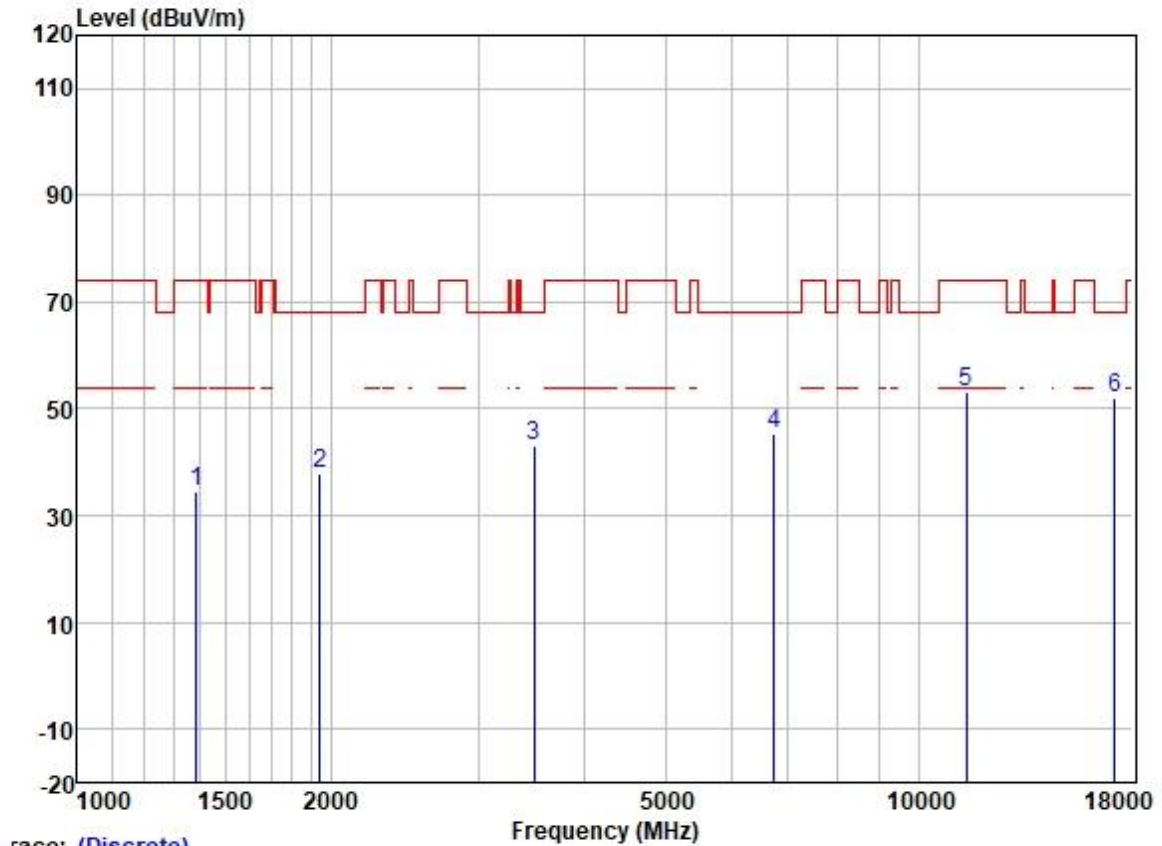


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1383.606	44.66	25.37	2.60	38.25	34.38	74.00	-39.62	HORIZONTAL	Peak
2	1941.899	46.37	26.07	2.99	37.73	37.70	68.20	-30.50	HORIZONTAL	Peak
3	3492.841	46.96	28.90	4.30	36.94	43.22	68.20	-24.98	HORIZONTAL	Peak
4	6733.630	42.03	34.50	5.82	37.09	45.26	68.20	-22.94	HORIZONTAL	Peak
5	11400.000	42.00	39.94	8.28	37.16	53.06	74.00	-20.94	HORIZONTAL	Peak
6	17100.000	35.62	42.32	9.63	35.34	52.23	68.20	-15.97	HORIZONTAL	Peak

Test Mode: 38; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

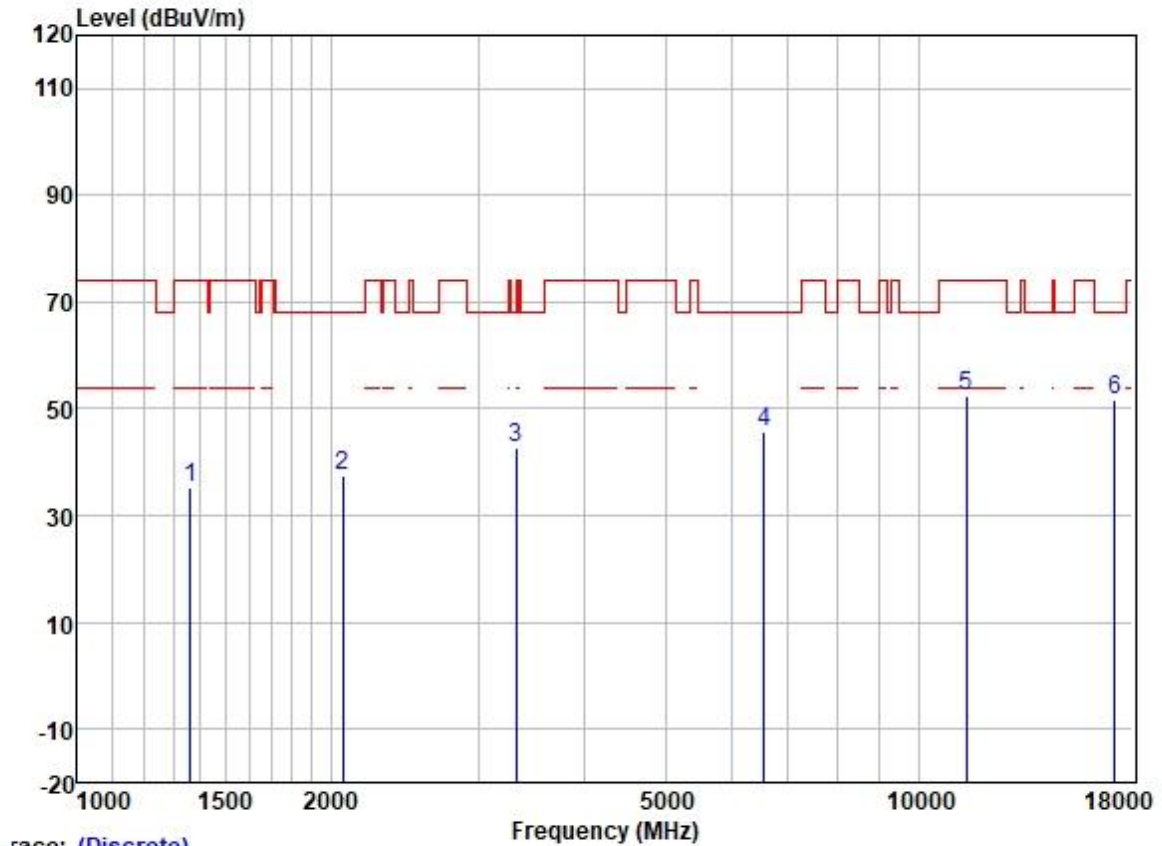


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1362.445	45.55	25.33	2.60	38.27	35.21	74.00	-38.79	VERTICAL Peak
2	2065.844	45.86	26.22	3.13	37.68	37.53	68.20	-30.67	VERTICAL Peak
3	3322.028	47.00	28.77	4.07	37.02	42.82	68.20	-25.38	VERTICAL Peak
4	6550.921	42.96	34.06	5.84	37.03	45.83	68.20	-22.37	VERTICAL Peak
5	11400.000	41.20	39.94	8.28	37.16	52.26	74.00	-21.74	VERTICAL Peak
6	17100.000	34.92	42.32	9.63	35.34	51.53	68.20	-16.67	VERTICAL Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

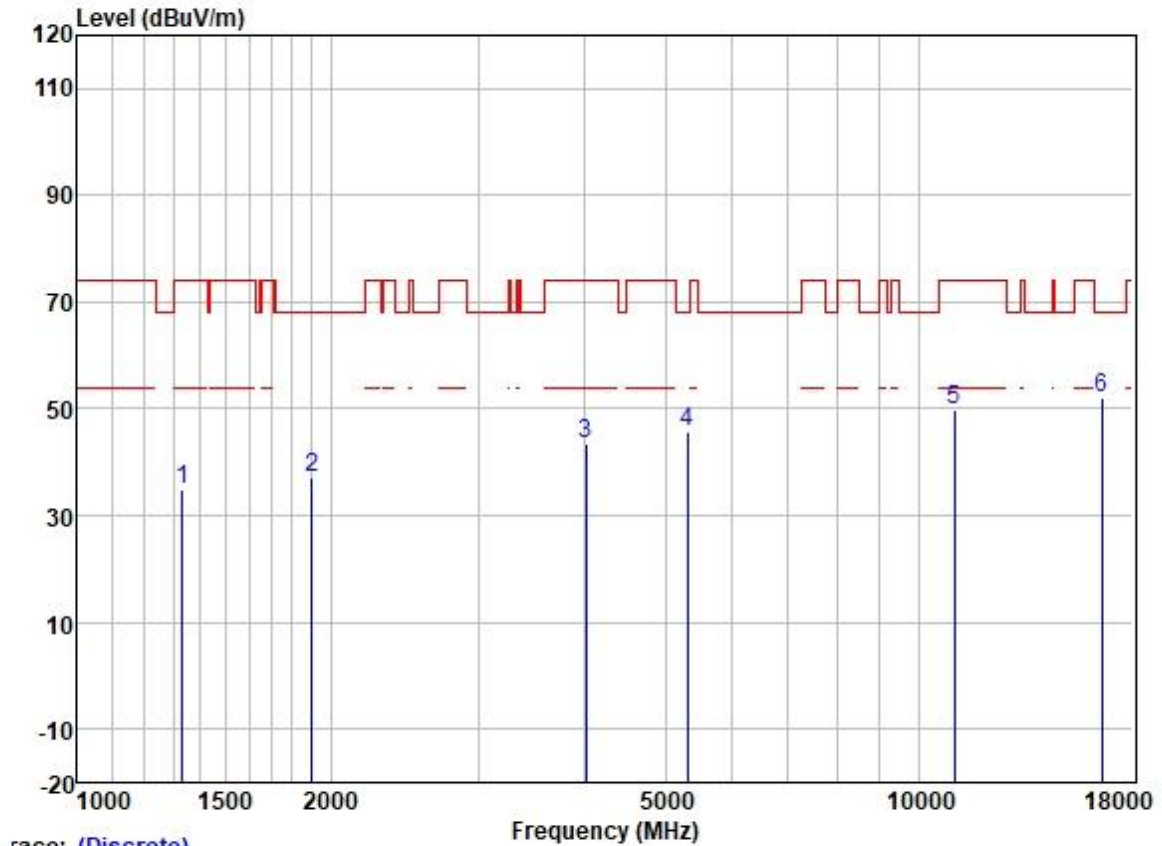


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1332.185	45.26	25.28	2.60	38.29	34.85	74.00	-39.15	HORIZONTAL Peak
2	1899.296	46.01	26.04	2.90	37.75	37.20	68.20	-31.00	HORIZONTAL Peak
3	4022.314	45.84	29.83	4.60	36.80	43.47	74.00	-30.53	HORIZONTAL Peak
4	5310.963	44.54	31.77	6.08	36.87	45.52	68.20	-22.68	HORIZONTAL Peak
5	11020.000	39.13	40.10	7.71	37.24	49.70	74.00	-24.30	HORIZONTAL Peak
6	16530.000	38.08	39.76	9.44	35.38	51.90	68.20	-16.30	HORIZONTAL Peak

Test Mode: 38; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

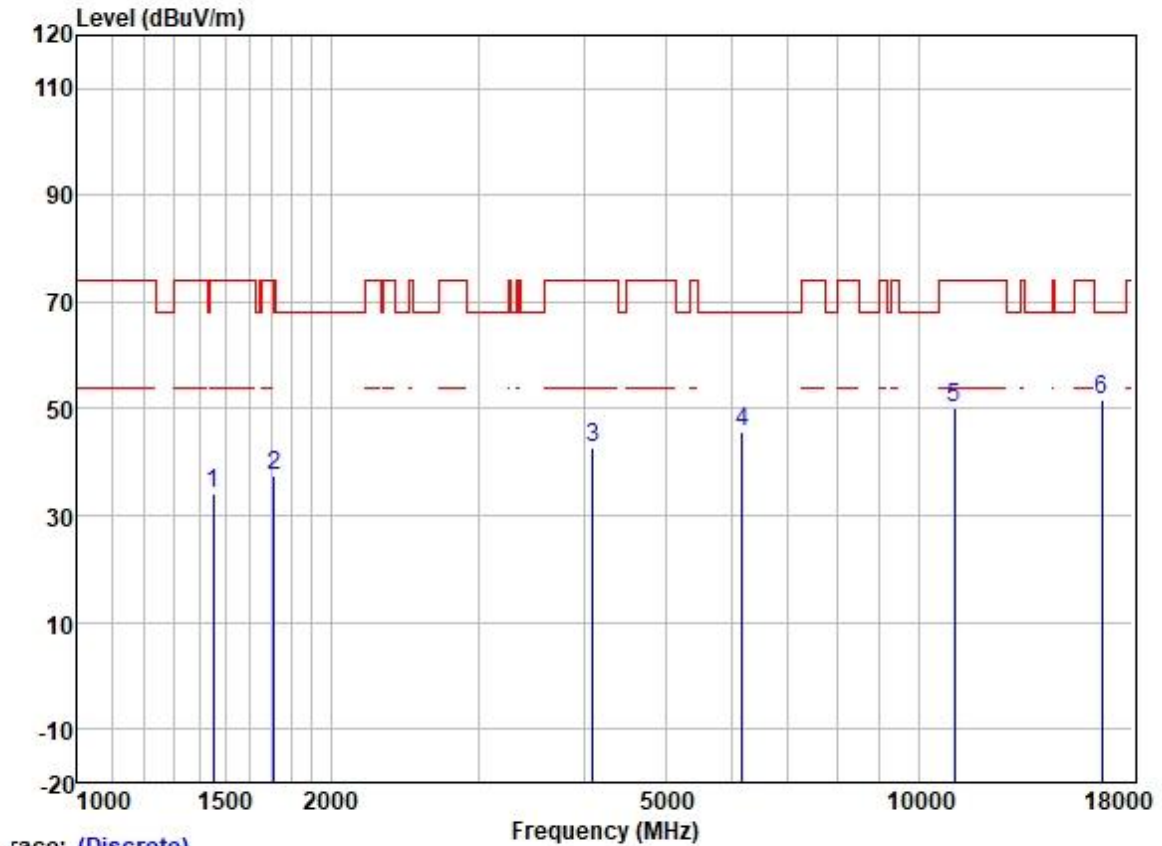


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1451.137	44.11	25.45	2.71	38.17	34.10	74.00	-39.90	VERTICAL Peak
2	1714.592	46.86	25.76	2.82	37.87	37.57	68.20	-30.63	VERTICAL Peak
3	4100.942	45.00	29.94	4.60	36.80	42.74	74.00	-31.26	VERTICAL Peak
4	6168.290	43.89	32.83	6.10	36.93	45.89	68.20	-22.31	VERTICAL Peak
5	11020.000	39.48	40.10	7.71	37.24	50.05	74.00	-23.95	VERTICAL Peak
6	16530.000	37.86	39.76	9.44	35.38	51.68	68.20	-16.52	VERTICAL Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

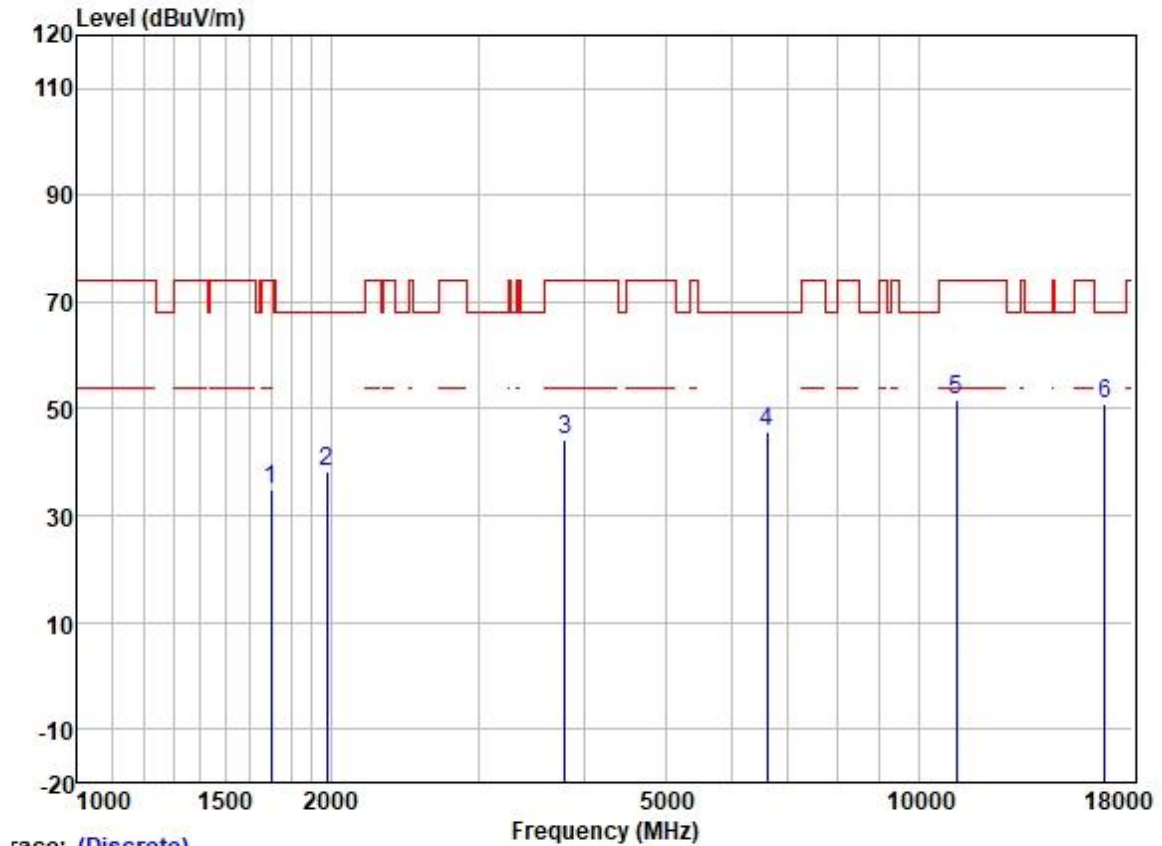


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1699.803	44.29	25.72	2.80	37.89	34.92	74.00	-39.08	HORIZONTAL	Peak
2	1978.465	46.95	26.09	3.06	37.71	38.39	68.20	-29.81	HORIZONTAL	Peak
3	3794.136	46.79	29.50	4.60	36.85	44.04	74.00	-29.96	HORIZONTAL	Peak
4	6615.677	42.77	34.20	5.83	37.05	45.75	68.20	-22.45	HORIZONTAL	Peak
5	11100.000	41.11	40.07	7.82	37.22	51.78	74.00	-22.22	HORIZONTAL	Peak
6	16650.000	36.71	40.10	9.43	35.38	50.86	68.20	-17.34	HORIZONTAL	Peak

Test Mode: 38; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

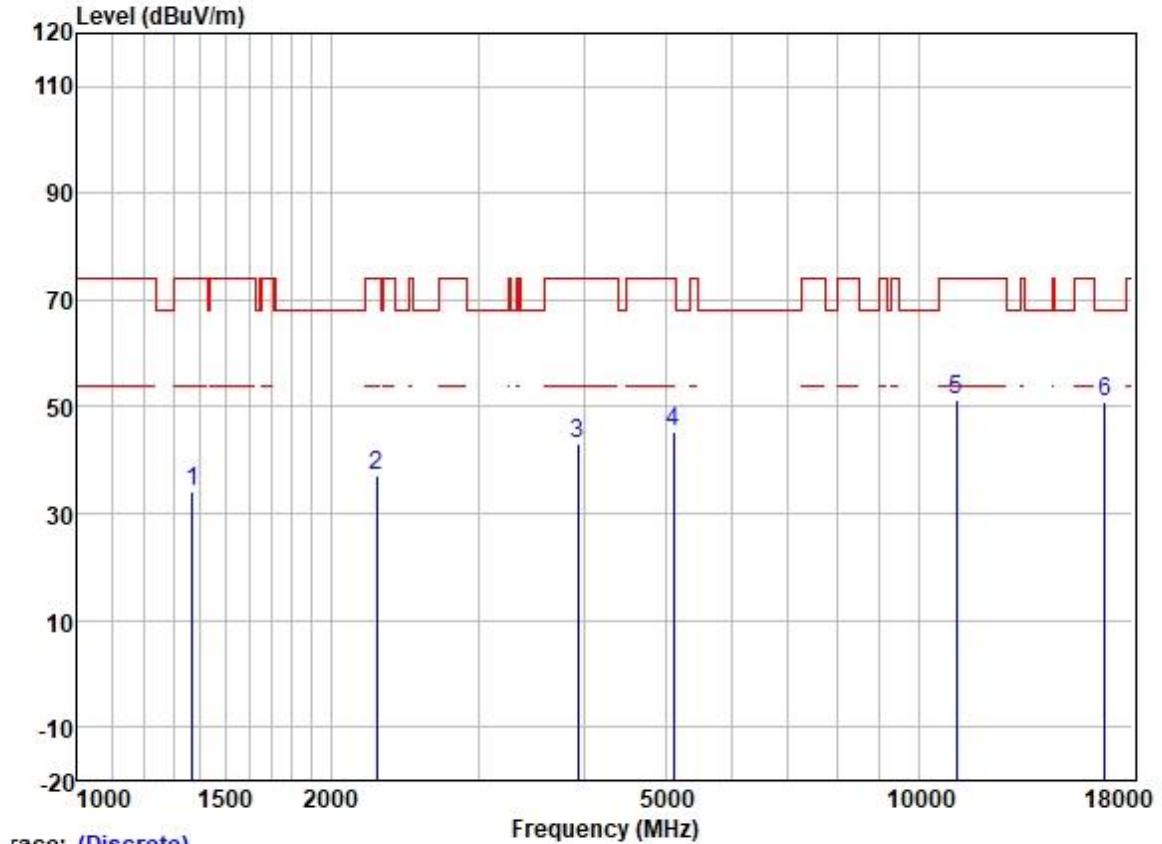


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1371.354	44.52	25.35	2.60	38.25	34.22	74.00	-39.78	VERTICAL Peak
2	2268.603	44.38	26.98	3.27	37.63	37.00	74.00	-37.00	VERTICAL Peak
3	3935.829	45.60	29.73	4.60	36.82	43.11	74.00	-30.89	VERTICAL Peak
4	5107.583	44.92	31.72	5.65	36.86	45.43	74.00	-28.57	VERTICAL Peak
5	11100.000	40.50	40.07	7.82	37.22	51.17	74.00	-22.83	VERTICAL Peak
6	16650.000	36.89	40.10	9.43	35.38	51.04	68.20	-17.16	VERTICAL Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

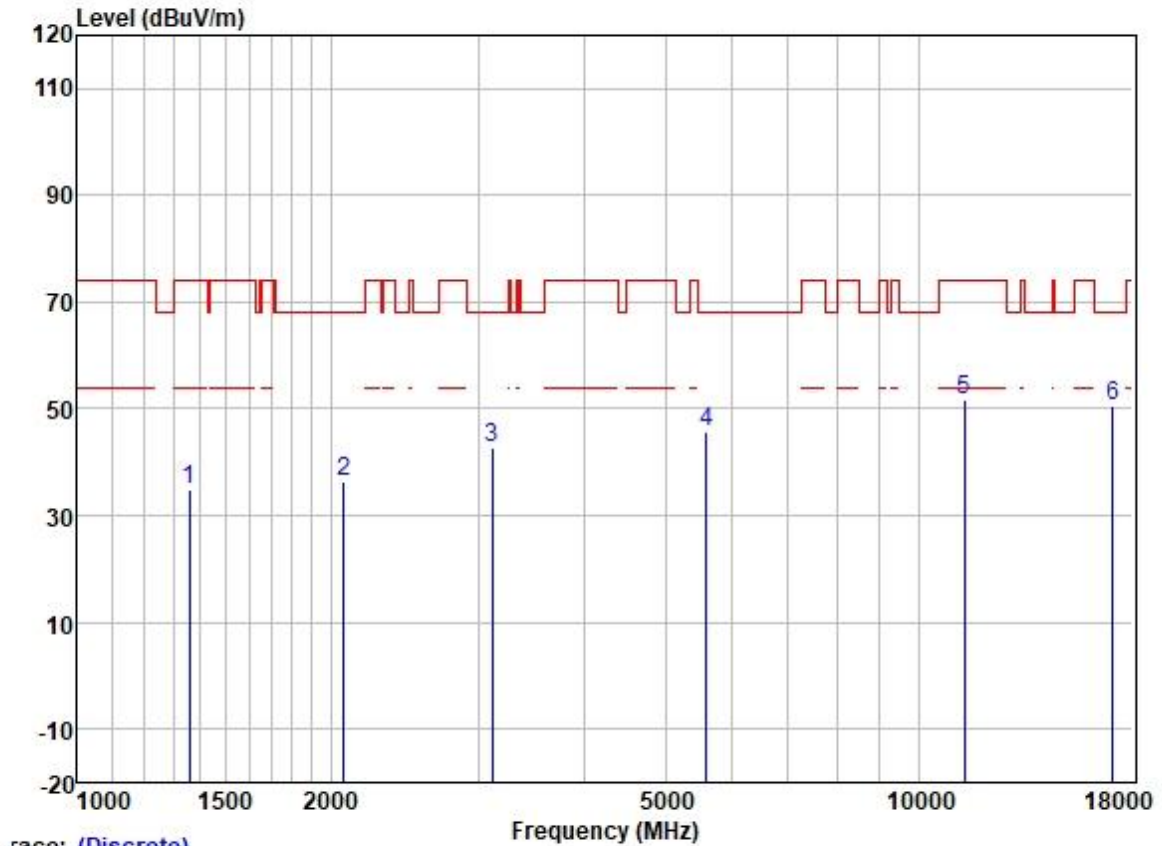

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1357.290	45.19	25.33	2.60	38.27	34.85	74.00	-39.15	HORIZONTAL	Peak
2	2072.168	44.71	26.23	3.13	37.68	36.39	68.20	-31.81	HORIZONTAL	Peak
3	3116.149	47.52	28.49	3.92	37.14	42.79	68.20	-25.41	HORIZONTAL	Peak
4	5592.660	44.45	31.89	6.30	36.89	45.75	68.20	-22.45	HORIZONTAL	Peak
5	11340.000	40.60	39.97	8.18	37.17	51.58	74.00	-22.42	HORIZONTAL	Peak
6	17010.000	34.93	41.75	9.39	35.35	50.72	68.20	-17.48	HORIZONTAL	Peak


Test Mode: 38; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

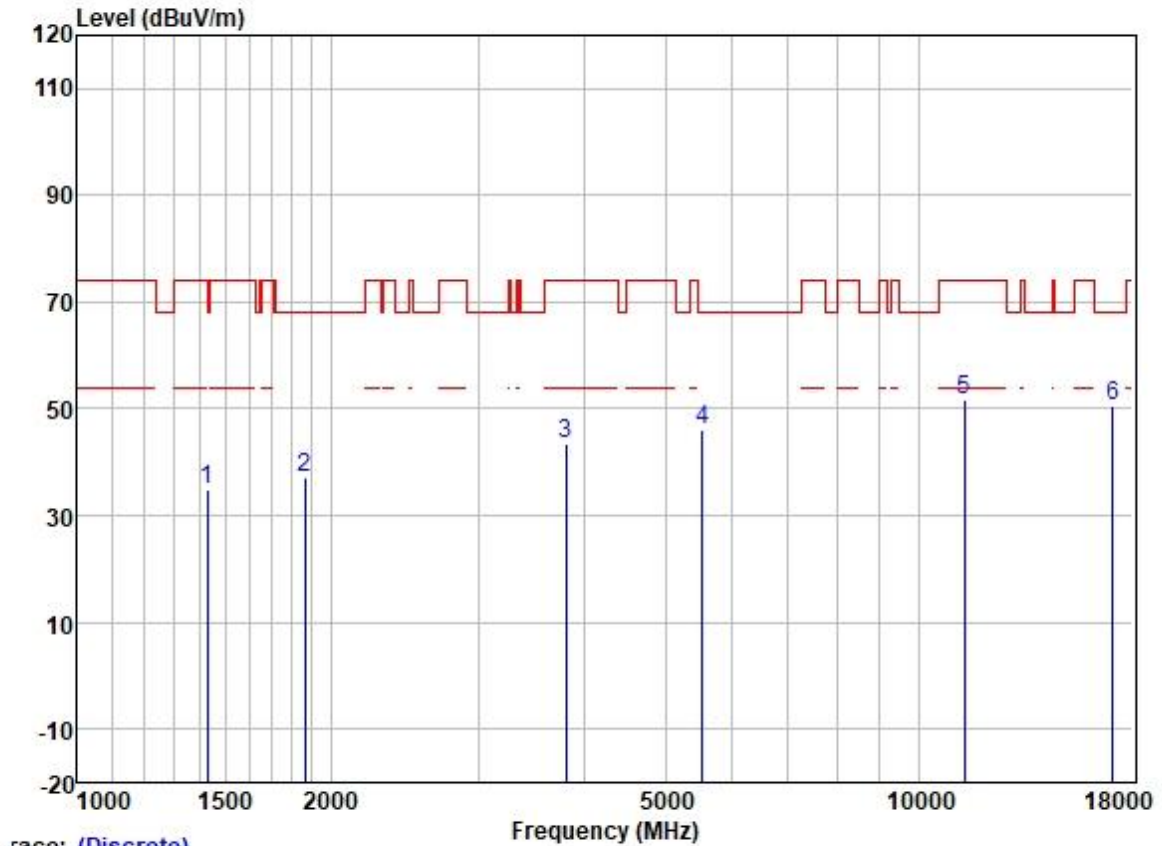

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1426.962	45.13	25.43	2.65	38.20	35.01	74.00	-38.99	VERTICAL Peak
2	1866.568	46.13	26.01	2.93	37.77	37.30	68.20	-30.90	VERTICAL Peak
3	3806.687	46.10	29.52	4.60	36.85	43.37	74.00	-30.63	VERTICAL Peak
4	5531.002	44.76	31.83	6.37	36.89	46.07	68.20	-22.13	VERTICAL Peak
5	11340.000	40.86	39.97	8.18	37.17	51.84	74.00	-22.16	VERTICAL Peak
6	17010.000	34.95	41.75	9.39	35.35	50.74	68.20	-17.46	VERTICAL Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

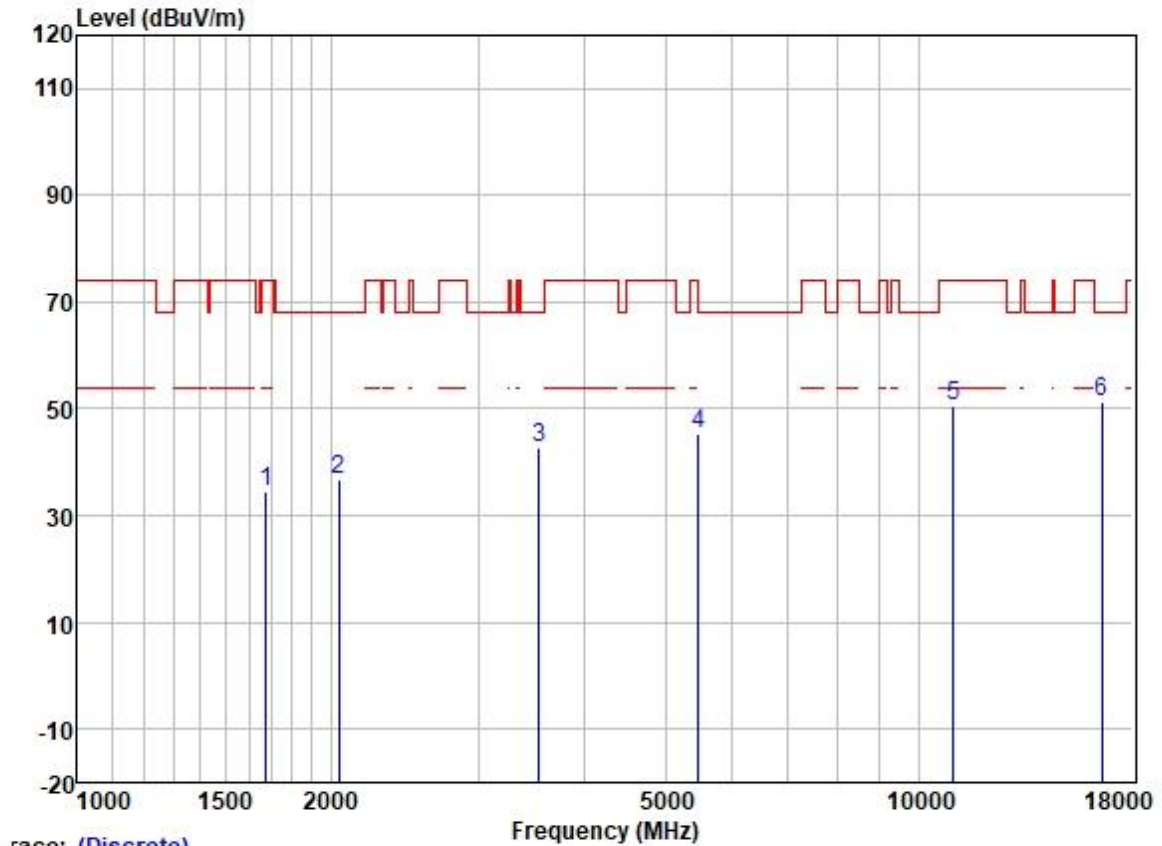


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1677.434	43.84	25.68	2.80	37.91	34.41	74.00	-39.59	HORIZONTAL Peak
2	2045.727	45.07	26.18	3.12	37.69	36.68	68.20	-31.52	HORIZONTAL Peak
3	3543.573	46.20	28.96	4.42	36.92	42.66	68.20	-25.54	HORIZONTAL Peak
4	5476.306	44.19	31.80	6.31	36.88	45.42	68.20	-22.78	HORIZONTAL Peak
5	11000.000	39.91	40.10	7.71	37.25	50.47	74.00	-23.53	HORIZONTAL Peak
6	16500.000	37.72	39.60	9.44	35.38	51.38	68.20	-16.82	HORIZONTAL Peak

Test Mode: 38; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

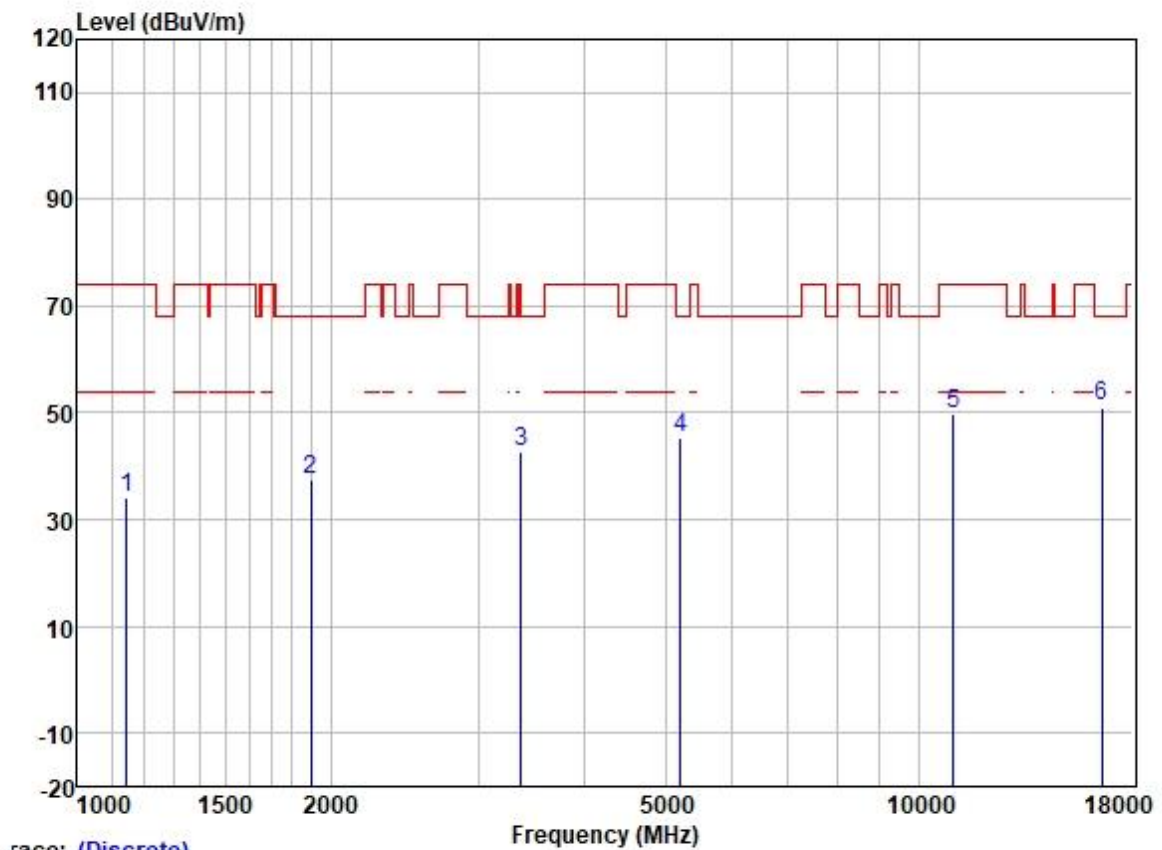


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1143.163	45.78	24.47	2.30	38.42	34.13	74.00	-39.87	VERTICAL Peak
2	1894.970	46.48	26.04	2.90	37.75	37.67	68.20	-30.53	VERTICAL Peak
3	3368.393	46.96	28.82	4.09	36.99	42.88	68.20	-25.32	VERTICAL Peak
4	5212.460	44.91	31.74	5.65	36.87	45.43	68.20	-22.77	VERTICAL Peak
5	11000.000	39.24	40.10	7.71	37.25	49.80	74.00	-24.20	VERTICAL Peak
6	16500.000	37.46	39.60	9.44	35.38	51.12	68.20	-17.08	VERTICAL Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

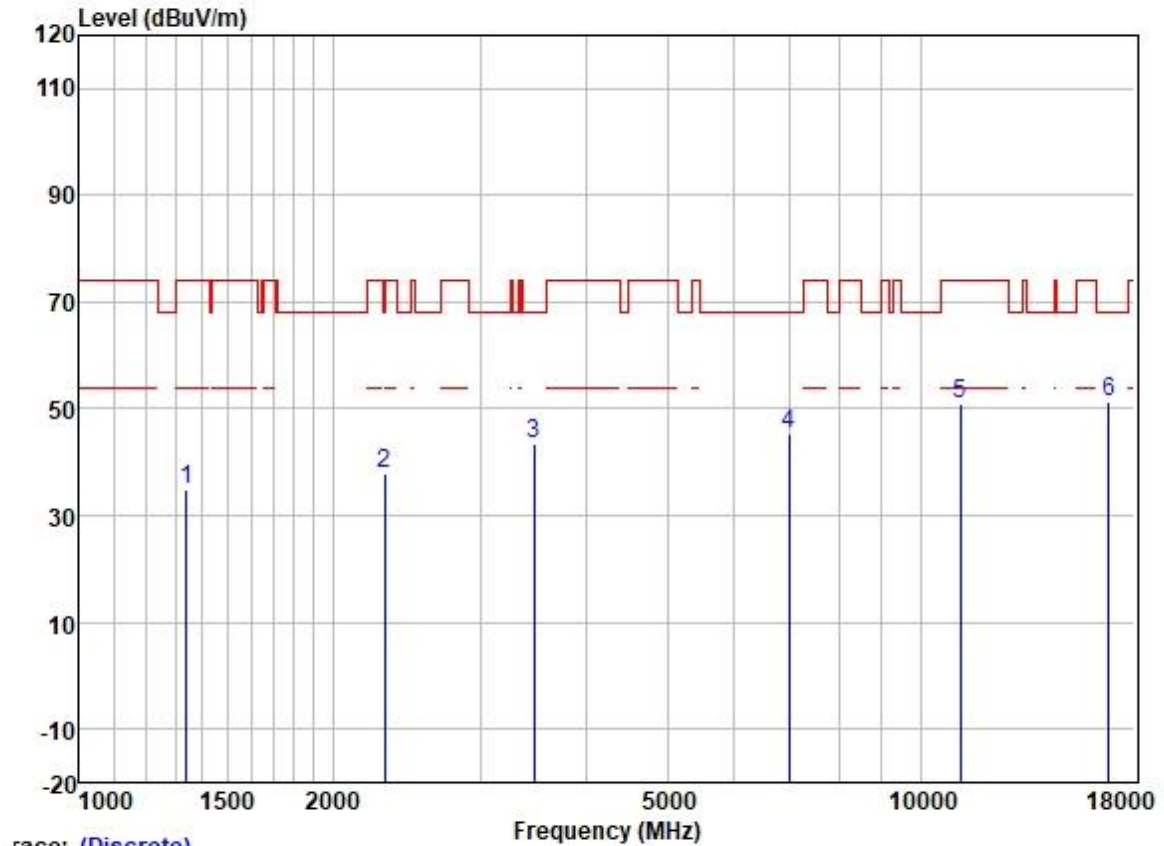


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1340.344	45.35	25.29	2.60	38.27	34.97	74.00	-39.03	HORIZONTAL Peak
2	2303.650	45.21	27.13	3.31	37.62	38.03	68.20	-30.17	HORIZONTAL Peak
3	3472.447	47.22	28.89	4.25	36.95	43.41	68.20	-24.79	HORIZONTAL Peak
4	6976.857	41.95	34.97	5.81	37.23	45.50	68.20	-22.70	HORIZONTAL Peak
5	11160.000	40.29	40.04	7.90	37.21	51.02	74.00	-22.98	HORIZONTAL Peak
6	16740.000	36.88	40.49	9.41	35.37	51.41	68.20	-16.79	HORIZONTAL Peak

Test Mode: 38; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

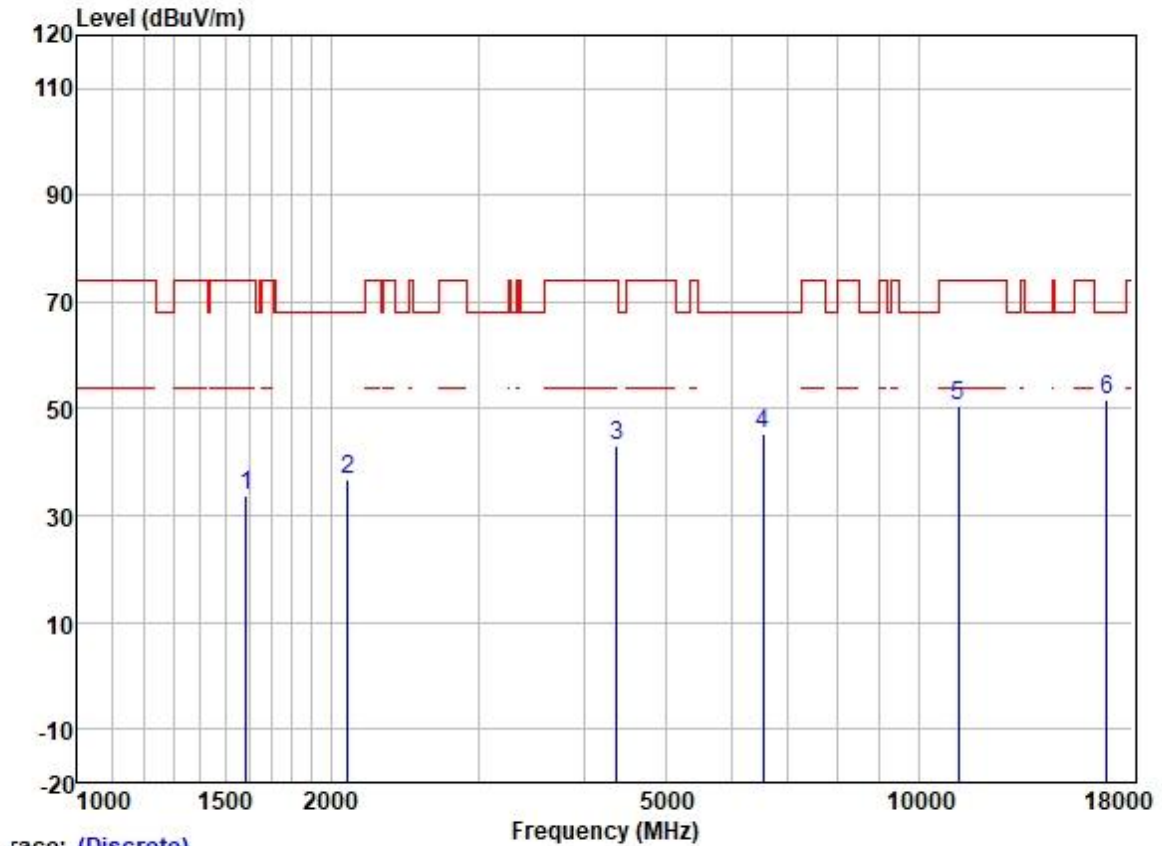

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1588.041	43.41	25.57	2.80	37.98	33.80	74.00	-40.20	VERTICAL Peak
2	2098.963	44.95	26.30	3.15	37.68	36.72	68.20	-31.48	VERTICAL Peak
3	4377.246	44.71	30.64	4.69	36.81	43.23	74.00	-30.77	VERTICAL Peak
4	6539.867	42.63	34.06	5.84	37.03	45.50	68.20	-22.70	VERTICAL Peak
5	11160.000	39.69	40.04	7.90	37.21	50.42	74.00	-23.58	VERTICAL Peak
6	16740.000	37.18	40.49	9.41	35.37	51.71	68.20	-16.49	VERTICAL Peak


Test Mode: 38; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

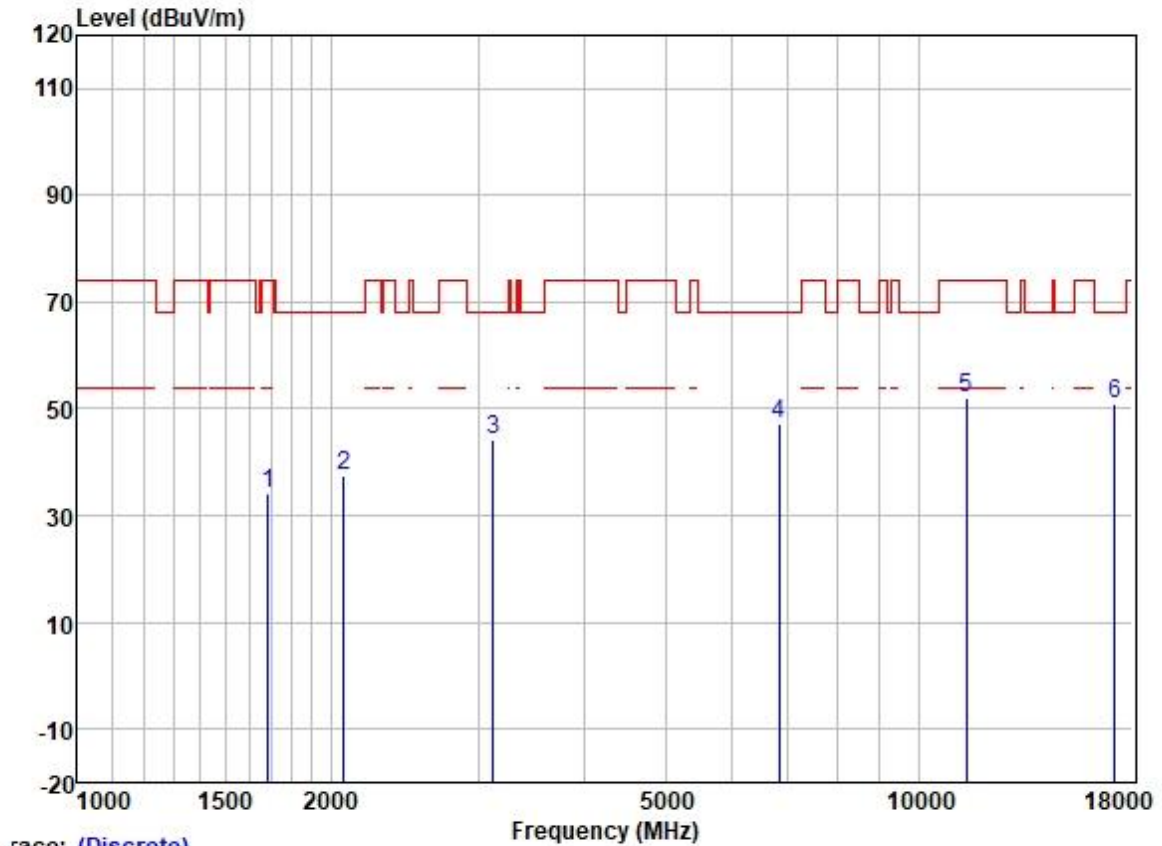

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1684.493	43.63	25.68	2.80	37.91	34.20	74.00	-39.80	HORIZONTAL Peak
2	2071.390	45.93	26.23	3.13	37.68	37.61	68.20	-30.59	HORIZONTAL Peak
3	3122.734	48.79	28.50	3.94	37.14	44.09	68.20	-24.11	HORIZONTAL Peak
4	6828.606	43.62	34.74	5.82	37.13	47.05	68.20	-21.15	HORIZONTAL Peak
5	11400.000	40.82	39.94	8.28	37.16	51.88	74.00	-22.12	HORIZONTAL Peak
6	17100.000	34.44	42.32	9.63	35.34	51.05	68.20	-17.15	HORIZONTAL Peak

Test Mode: 38; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

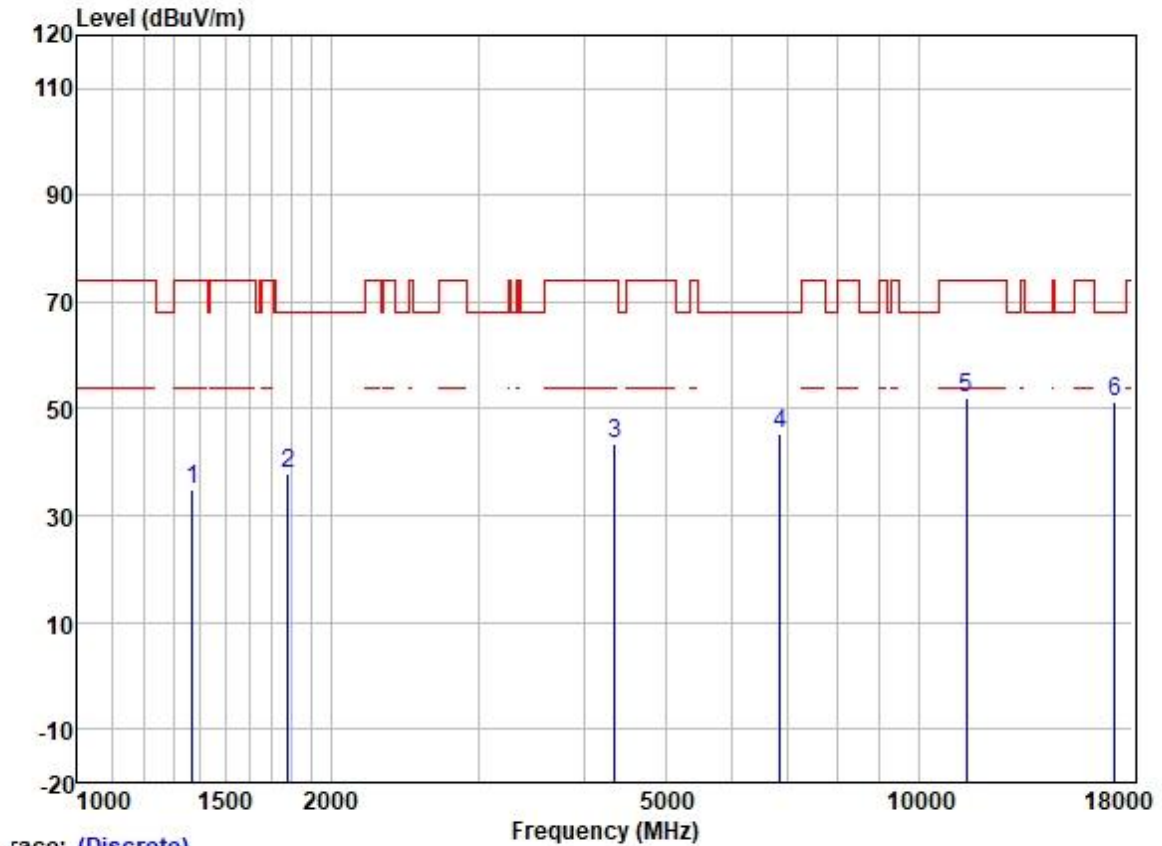


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1368.269	45.05	25.34	2.60	38.25	34.74	74.00	-39.26	VERTICAL Peak
2	1778.356	46.85	25.91	2.96	37.83	37.89	68.20	-30.31	VERTICAL Peak
3	4358.359	44.92	30.59	4.68	36.81	43.38	74.00	-30.62	VERTICAL Peak
4	6849.561	41.96	34.78	5.82	37.15	45.41	68.20	-22.79	VERTICAL Peak
5	11400.000	41.07	39.94	8.28	37.16	52.13	74.00	-21.87	VERTICAL Peak
6	17100.000	34.83	42.32	9.63	35.34	51.44	68.20	-16.76	VERTICAL Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

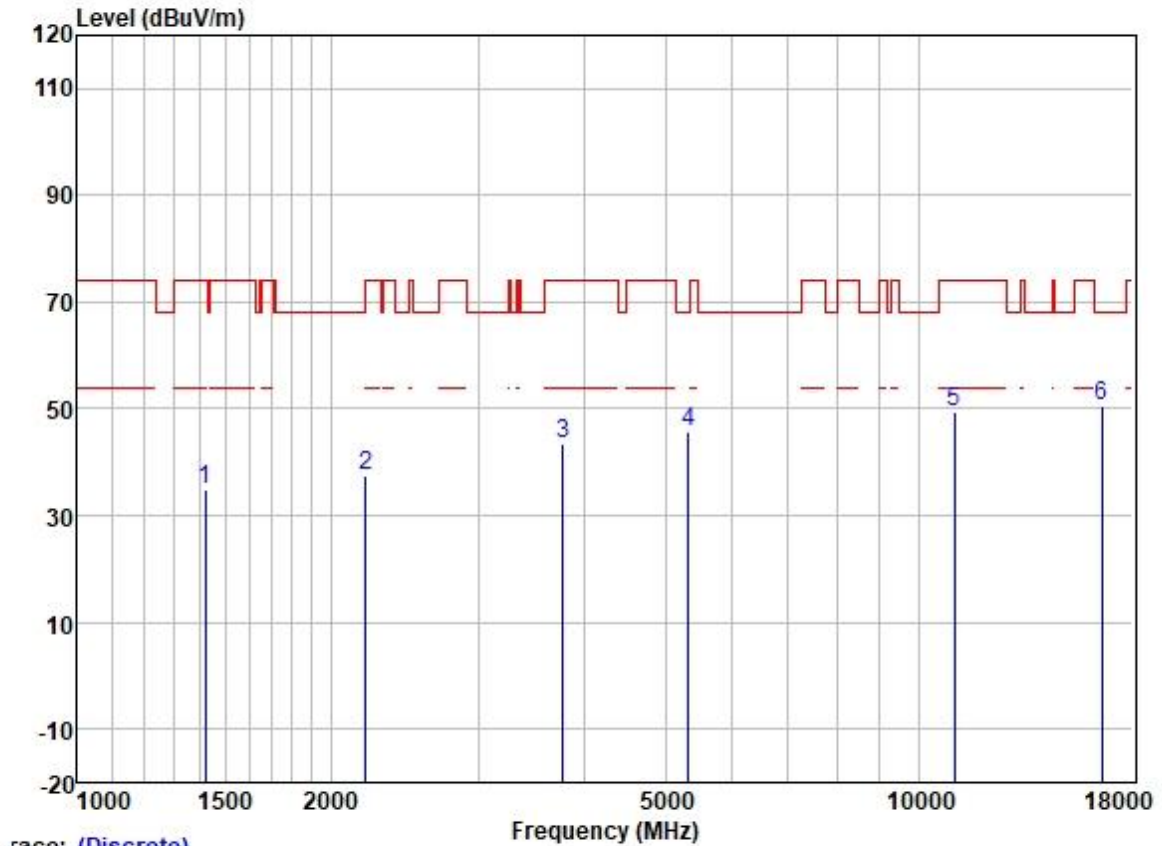


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1420.306	45.14	25.42	2.63	38.20	34.99	74.00	-39.01	HORIZONTAL Peak
2	2200.205	45.25	26.62	3.20	37.65	37.42	74.00	-36.58	HORIZONTAL Peak
3	3775.590	46.43	29.47	4.59	36.86	43.63	74.00	-30.37	HORIZONTAL Peak
4	5330.390	44.81	31.77	6.07	36.88	45.77	68.20	-22.43	HORIZONTAL Peak
5	11020.000	38.86	40.10	7.71	37.24	49.43	74.00	-24.57	HORIZONTAL Peak
6	16530.000	36.82	39.76	9.44	35.38	50.64	68.20	-17.56	HORIZONTAL Peak

Test Mode: 38; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

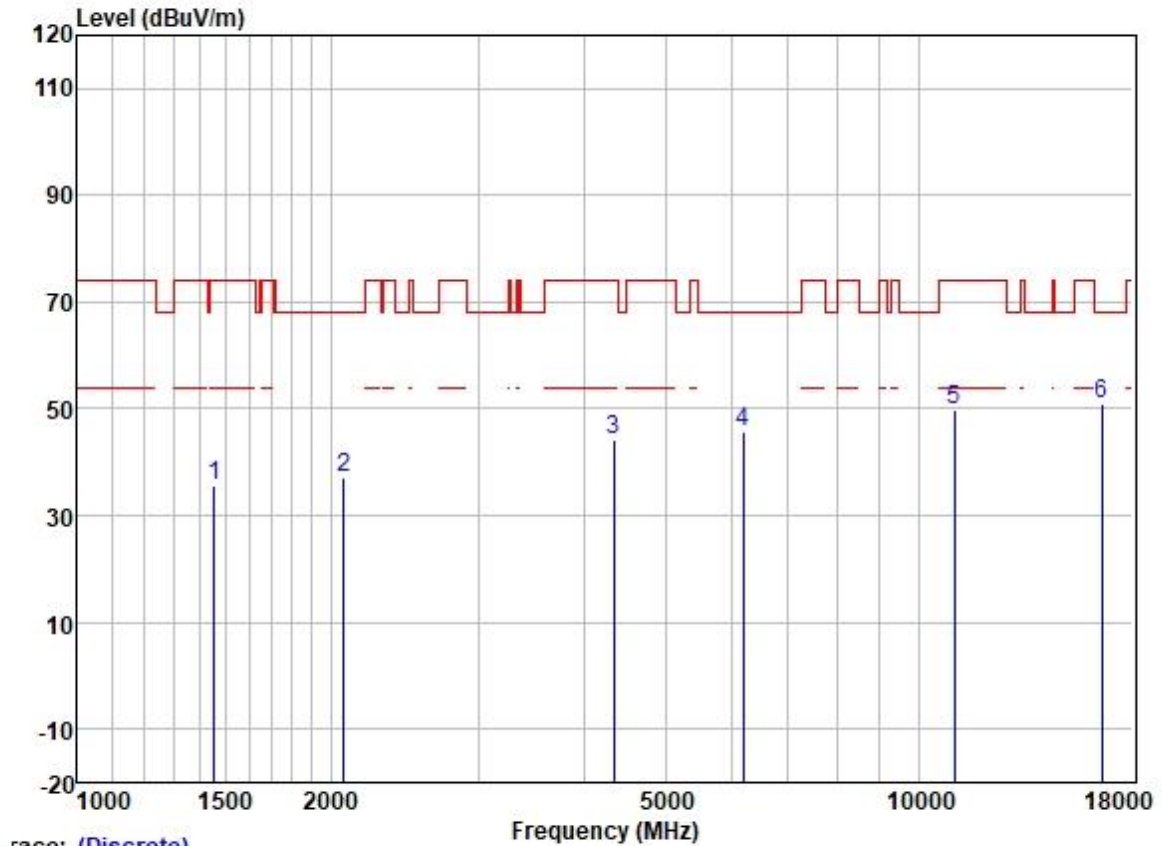


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1456.613	45.80	25.46	2.72	38.17	35.81	74.00	-38.19	VERTICAL Peak
2	2072.398	45.40	26.23	3.13	37.68	37.08	68.20	-31.12	VERTICAL Peak
3	4345.768	45.63	30.57	4.67	36.81	44.06	74.00	-29.94	VERTICAL Peak
4	6196.318	43.71	32.96	6.07	36.94	45.80	68.20	-22.40	VERTICAL Peak
5	11020.000	39.18	40.10	7.71	37.24	49.75	74.00	-24.25	VERTICAL Peak
6	16530.000	37.05	39.76	9.44	35.38	50.87	68.20	-17.33	VERTICAL Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:middle

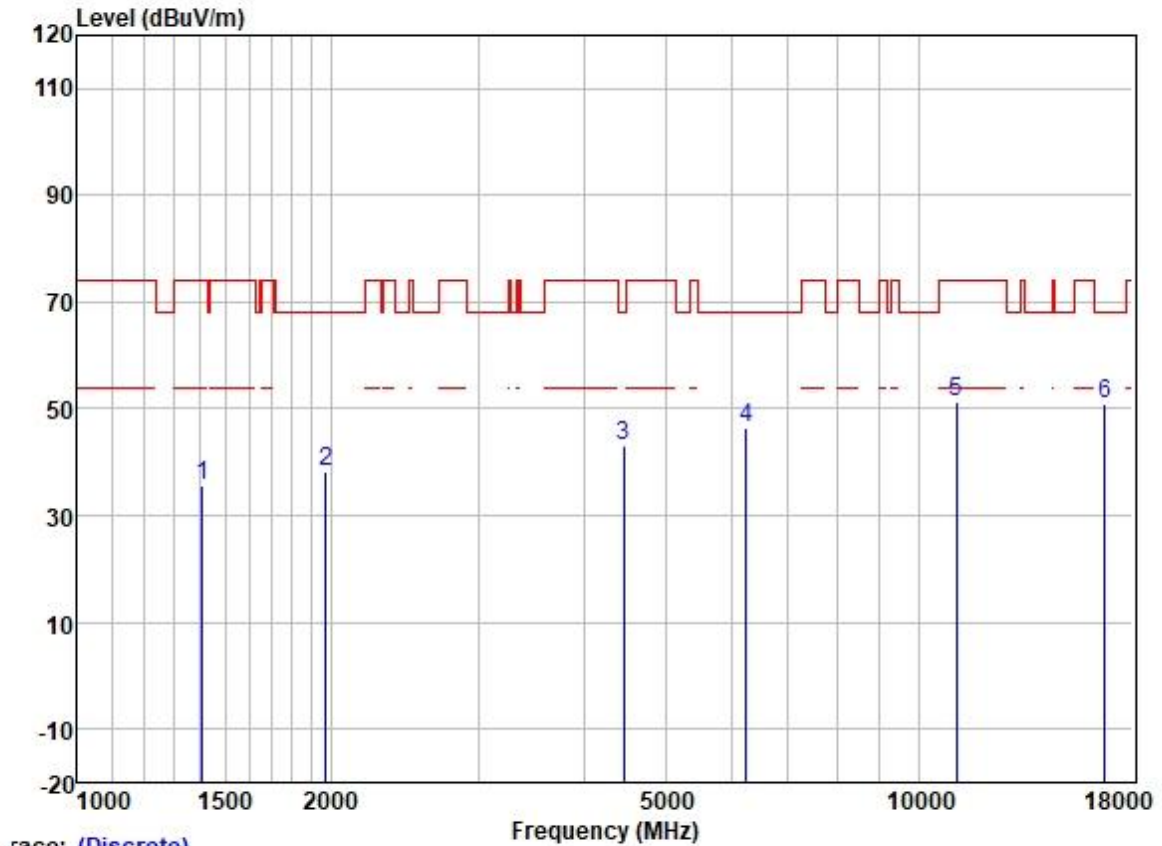

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1409.462	45.81	25.40	2.62	38.22	35.61	74.00	-38.39	HORIZONTAL Peak
2	1975.828	46.67	26.09	3.06	37.71	38.11	68.20	-30.09	HORIZONTAL Peak
3	4467.400	44.12	30.77	4.93	36.81	43.01	68.20	-25.19	HORIZONTAL Peak
4	6238.576	44.24	33.11	6.04	36.95	46.44	68.20	-21.76	HORIZONTAL Peak
5	11100.000	40.67	40.07	7.82	37.22	51.34	74.00	-22.66	HORIZONTAL Peak
6	16650.000	36.65	40.10	9.43	35.38	50.80	68.20	-17.40	HORIZONTAL Peak


Test Mode: 38; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:middle

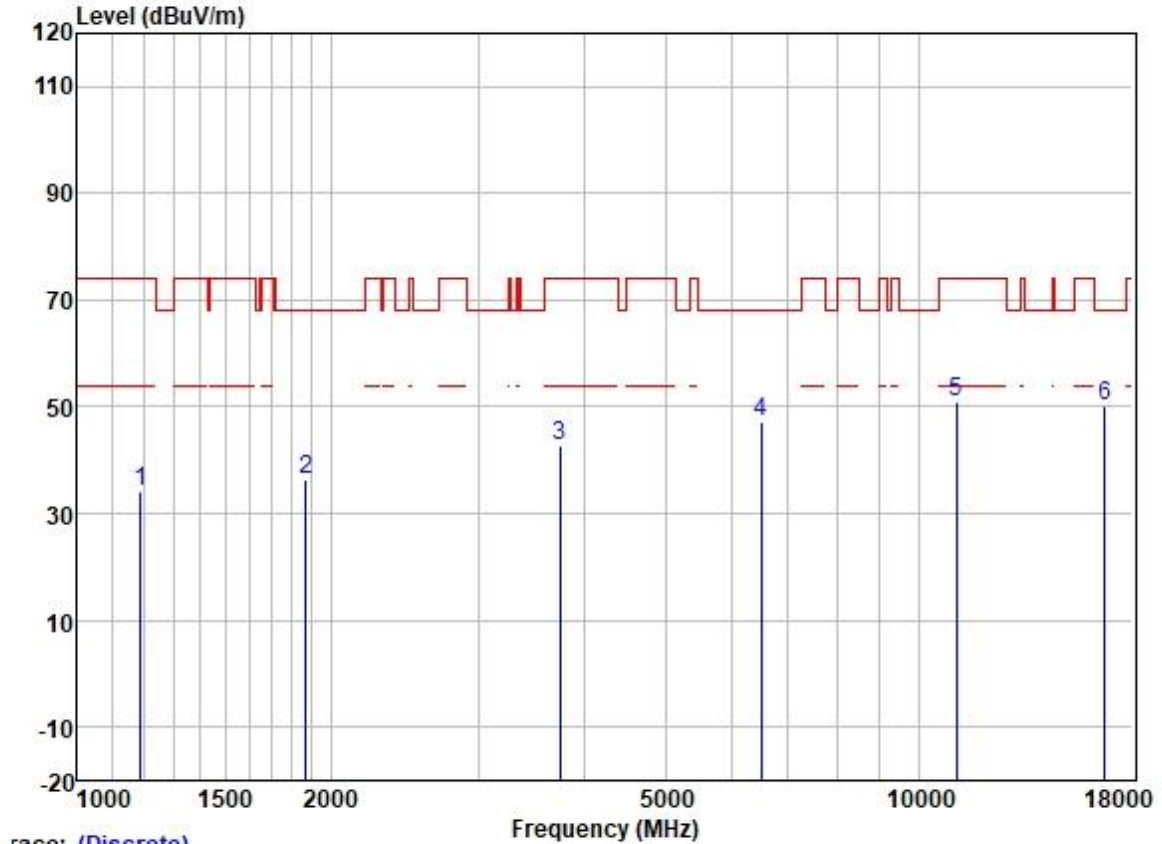

race: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1188.958	45.45	24.63	2.36	38.39	34.05	74.00	-39.95	VERTICAL	Peak
2	1869.671	45.28	26.01	2.93	37.77	36.45	68.20	-31.75	VERTICAL	Peak
3	3748.016	45.54	29.39	4.58	36.86	42.65	74.00	-31.35	VERTICAL	Peak
4	6504.112	44.19	34.00	5.84	37.01	47.02	68.20	-21.18	VERTICAL	Peak
5	11100.000	40.14	40.07	7.82	37.22	50.81	74.00	-23.19	VERTICAL	Peak
6	16650.000	36.00	40.10	9.43	35.38	50.15	68.20	-18.05	VERTICAL	Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

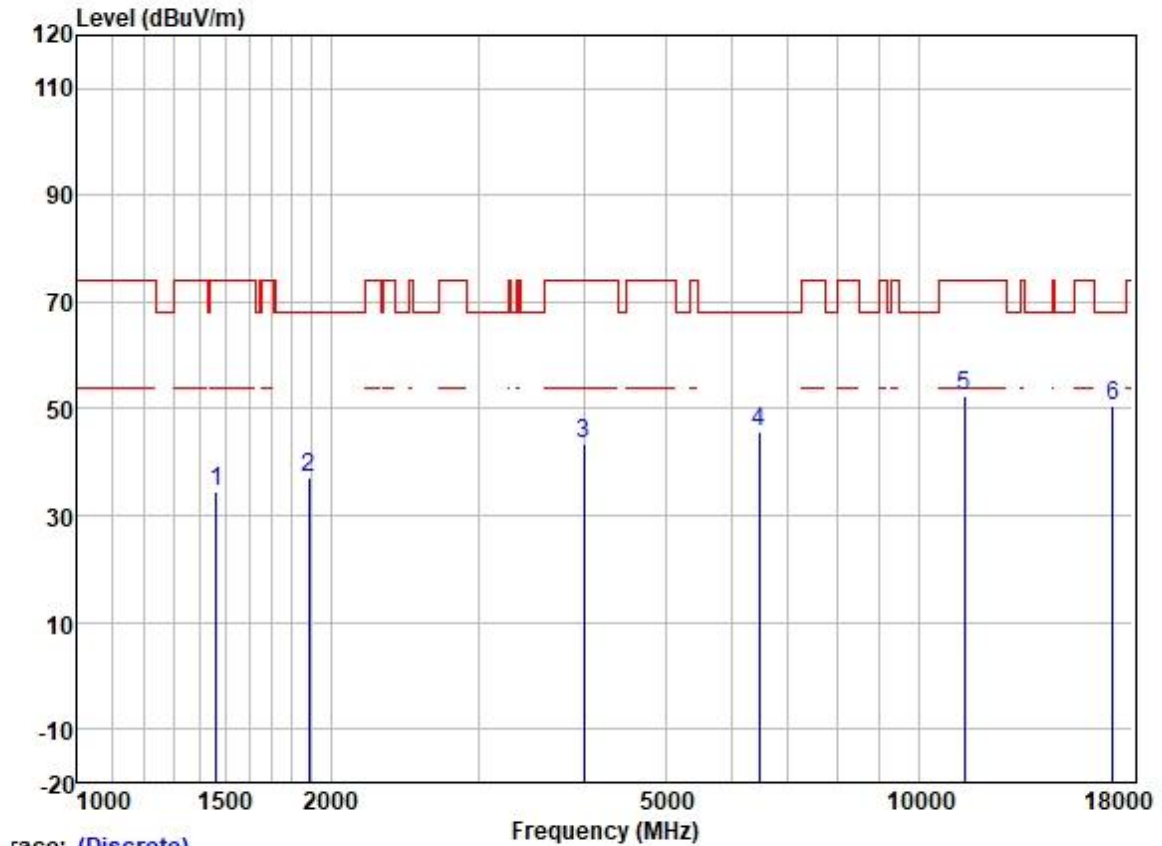


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1460.738	44.54	25.46	2.73	38.17	34.56	74.00	-39.44	HORIZONTAL Peak
2	1886.824	45.95	26.03	2.91	37.77	37.12	68.20	-31.08	HORIZONTAL Peak
3	3999.245	45.84	29.80	4.60	36.80	43.44	74.00	-30.56	HORIZONTAL Peak
4	6468.538	42.81	33.92	5.86	37.00	45.59	68.20	-22.61	HORIZONTAL Peak
5	11340.000	41.56	39.97	8.18	37.17	52.54	74.00	-21.46	HORIZONTAL Peak
6	17010.000	34.76	41.75	9.39	35.35	50.55	68.20	-17.65	HORIZONTAL Peak

Test Mode: 38; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

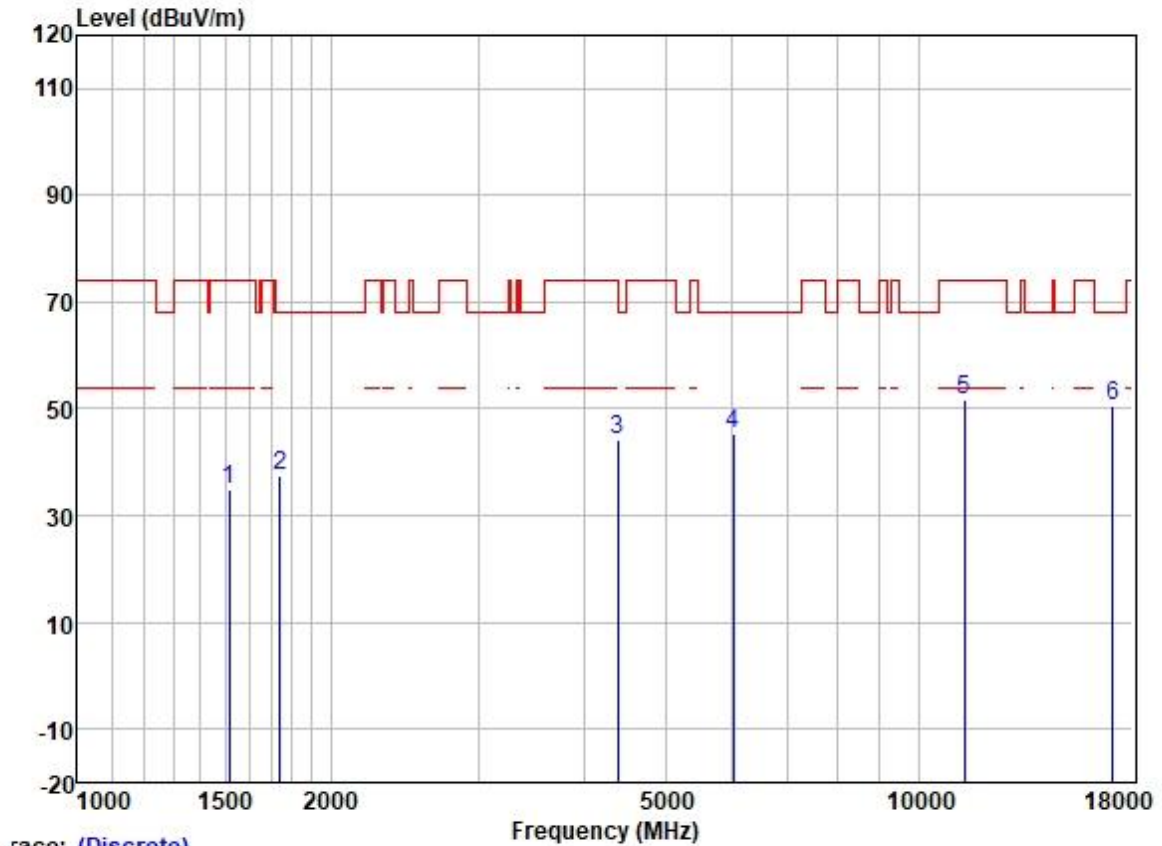


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1515.235	44.76	25.51	2.80	38.07	35.00	74.00	-39.00	VERTICAL Peak
2	1739.816	46.71	25.83	2.87	37.85	37.56	68.20	-30.64	VERTICAL Peak
3	4389.061	45.61	30.66	4.70	36.81	44.16	74.00	-29.84	VERTICAL Peak
4	6031.006	43.61	32.48	6.18	36.90	45.37	68.20	-22.83	VERTICAL Peak
5	11340.000	40.57	39.97	8.18	37.17	51.55	74.00	-22.45	VERTICAL Peak
6	17010.000	34.89	41.75	9.39	35.35	50.68	68.20	-17.52	VERTICAL Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

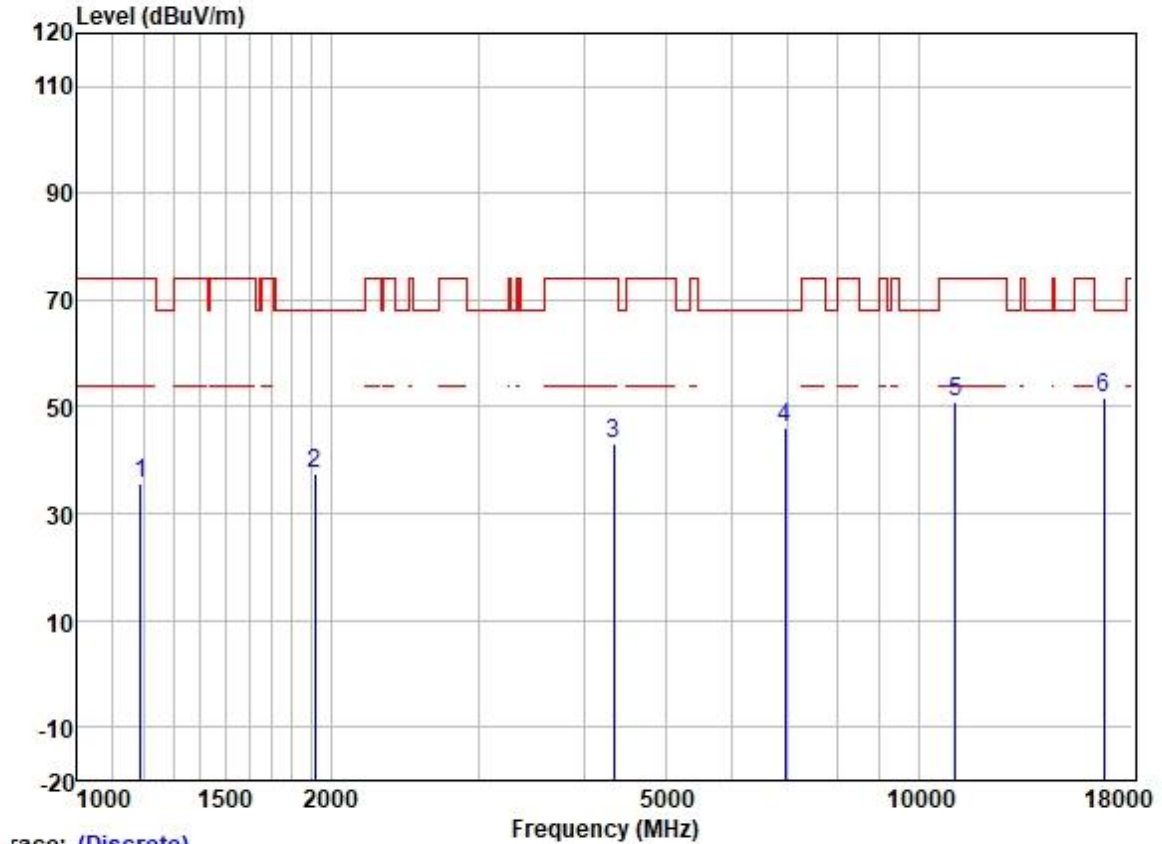


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1188.114	46.97	24.63	2.36	38.39	35.57	74.00	-38.43	HORIZONTAL	Peak
2	1913.842	46.23	26.05	2.93	37.74	37.47	68.20	-30.73	HORIZONTAL	Peak
3	4336.691	44.83	30.57	4.67	36.81	43.26	74.00	-30.74	HORIZONTAL	Peak
4	6932.472	42.41	34.92	5.81	37.19	45.95	68.20	-22.25	HORIZONTAL	Peak
5	11060.000	40.34	40.09	7.74	37.23	50.94	74.00	-23.06	HORIZONTAL	Peak
6	16590.000	37.65	39.93	9.43	35.38	51.63	68.20	-16.57	HORIZONTAL	Peak

Test Mode: 38; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

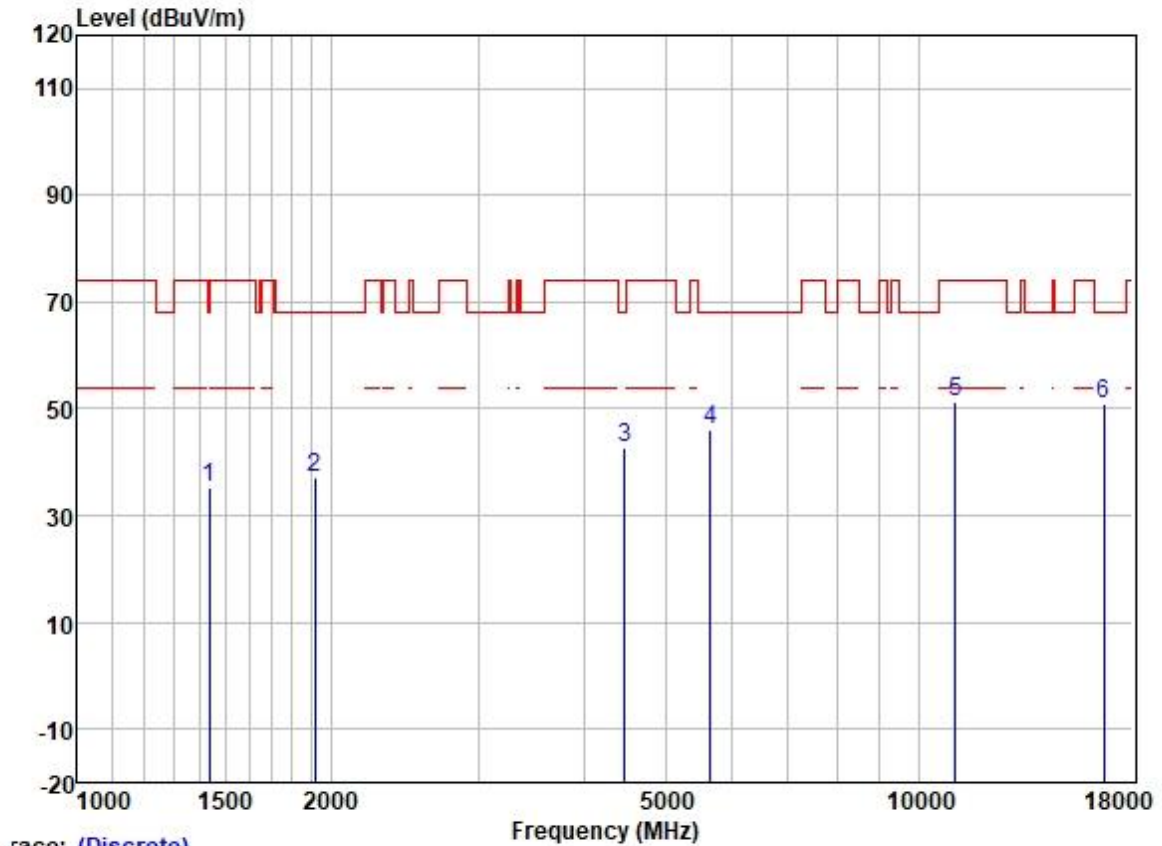


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1433.824	45.25	25.44	2.67	38.20	35.16	68.20	-33.04	VERTICAL Peak
2	1914.594	45.95	26.05	2.93	37.74	37.19	68.20	-31.01	VERTICAL Peak
3	4469.416	43.85	30.77	4.93	36.81	42.74	68.20	-25.46	VERTICAL Peak
4	5660.600	44.46	31.97	6.37	36.89	45.91	68.20	-22.29	VERTICAL Peak
5	11060.000	40.58	40.09	7.74	37.23	51.18	74.00	-22.82	VERTICAL Peak
6	16590.000	36.90	39.93	9.43	35.38	50.88	68.20	-17.32	VERTICAL Peak

Test Mode: 38; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

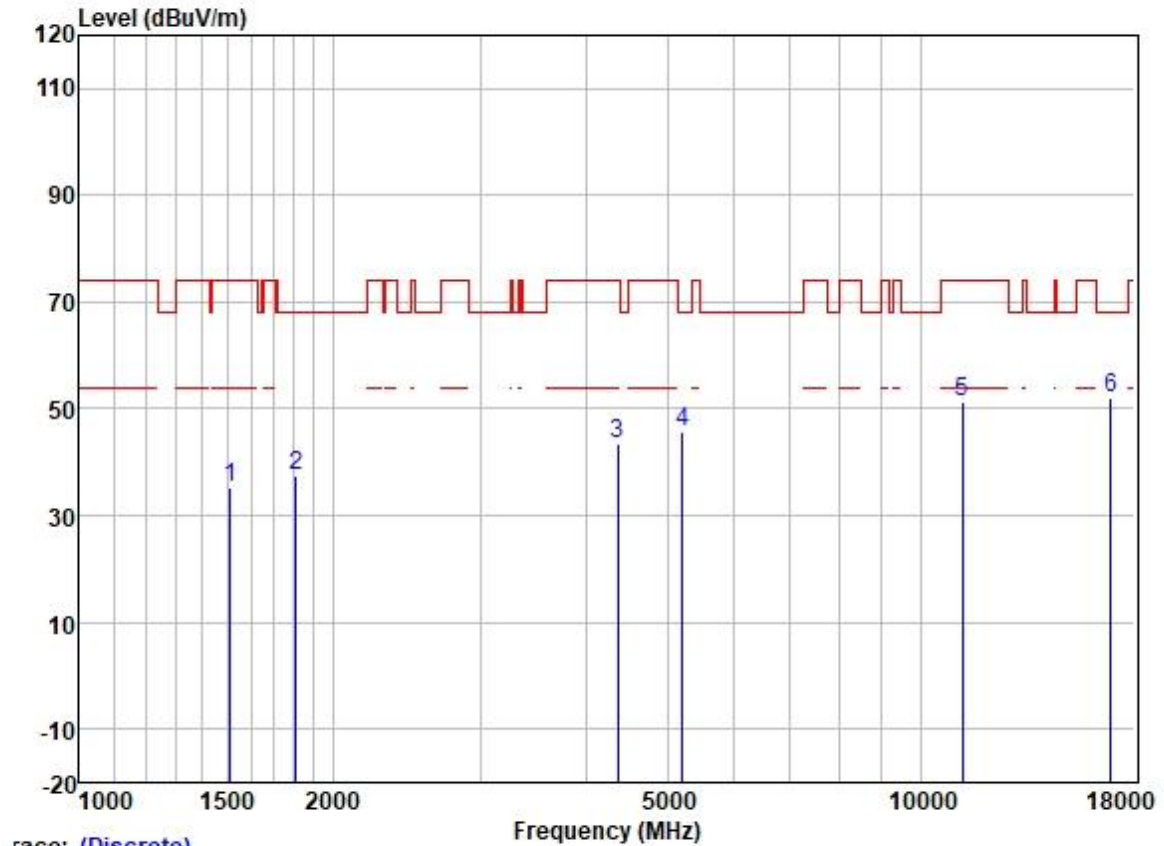

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1513.314	44.87	25.51	2.80	38.07	35.11	74.00	-38.89	HORIZONTAL Peak
2	1810.055	46.18	25.95	2.99	37.81	37.31	68.20	-30.89	HORIZONTAL Peak
3	4364.602	44.90	30.62	4.68	36.81	43.39	74.00	-30.61	HORIZONTAL Peak
4	5212.310	45.03	31.74	5.65	36.87	45.55	68.20	-22.65	HORIZONTAL Peak
5	11220.000	40.68	40.03	7.95	37.19	51.47	74.00	-22.53	HORIZONTAL Peak
6	16830.000	36.93	40.94	9.40	35.37	51.90	68.20	-16.30	HORIZONTAL Peak


Test Mode: 38; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

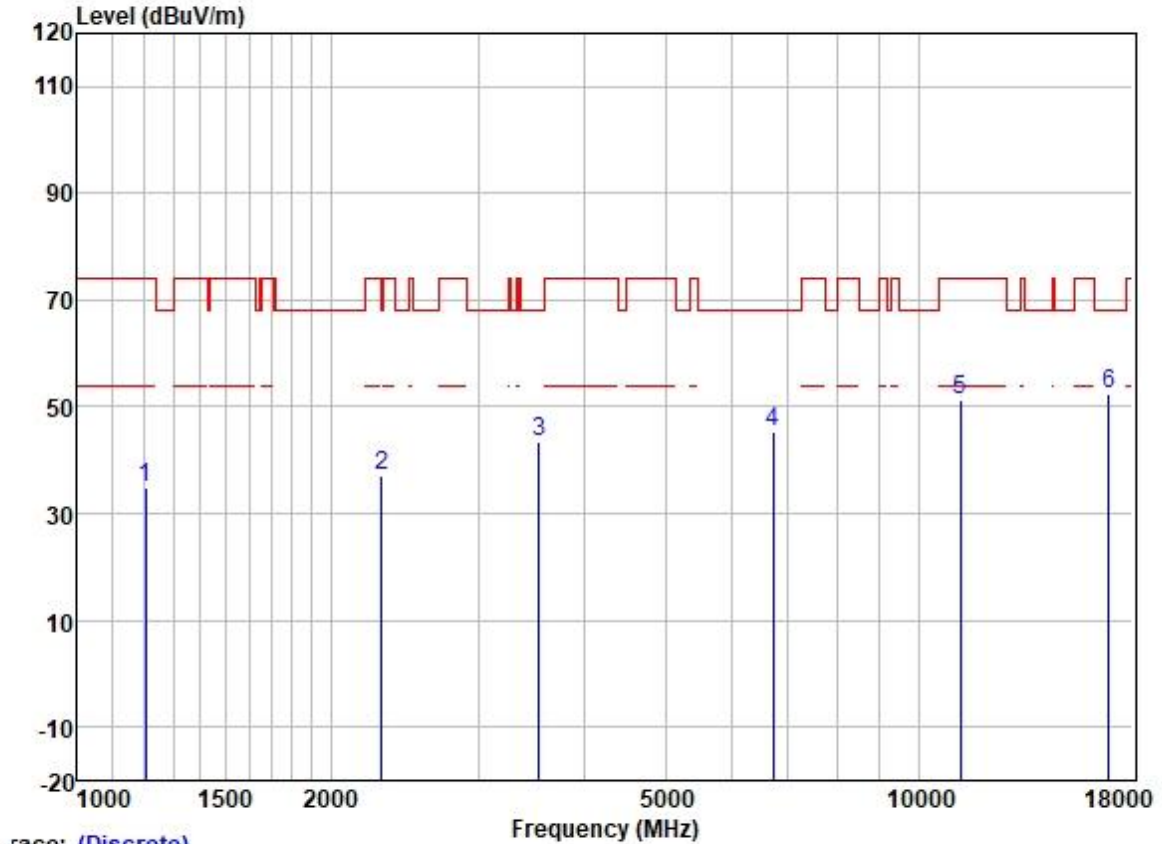

race: (Discrete)


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1204.172	46.36	24.70	2.34	38.39	35.01	74.00	-38.99	VERTICAL	Peak
2	2299.807	44.31	27.11	3.30	37.62	37.10	74.00	-36.90	VERTICAL	Peak
3	3535.030	46.92	28.95	4.40	36.93	43.34	68.20	-24.86	VERTICAL	Peak
4	6712.921	42.29	34.44	5.83	37.09	45.47	68.20	-22.73	VERTICAL	Peak
5	11220.000	40.69	40.03	7.95	37.19	51.48	74.00	-22.52	VERTICAL	Peak
6	16830.000	37.59	40.94	9.40	35.37	52.56	68.20	-15.64	VERTICAL	Peak

Test Mode: 40; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

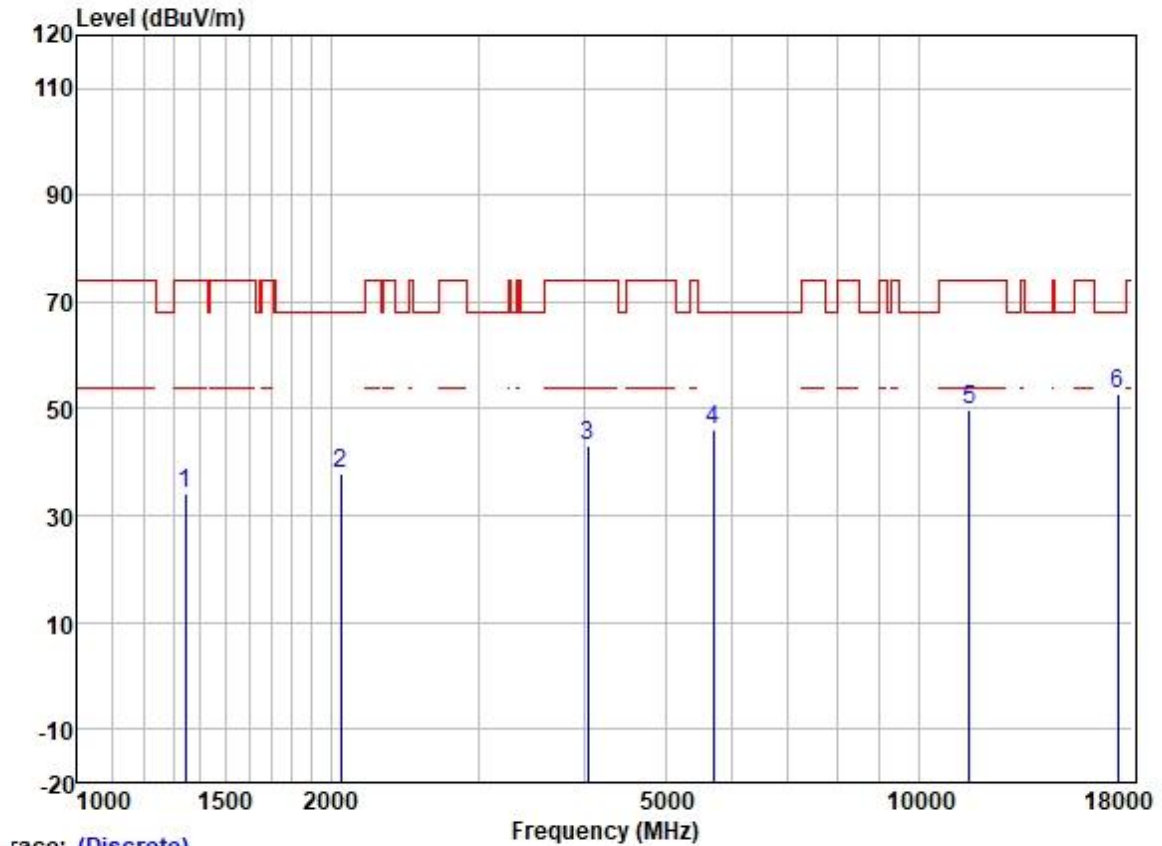

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1343.059	44.59	25.30	2.60	38.27	34.22	74.00	-39.78	HORIZONTAL	Peak
2	2056.450	46.17	26.19	3.12	37.69	37.79	68.20	-30.41	HORIZONTAL	Peak
3	4045.422	45.28	29.87	4.60	36.80	42.95	74.00	-31.05	HORIZONTAL	Peak
4	5698.628	44.39	32.01	6.40	36.89	45.91	68.20	-22.29	HORIZONTAL	Peak
5	11490.000	38.54	39.90	8.41	37.15	49.70	74.00	-24.30	HORIZONTAL	Peak
6	17235.000	35.05	43.01	10.08	35.33	52.81	68.20	-15.39	HORIZONTAL	Peak


Test Mode: 40; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

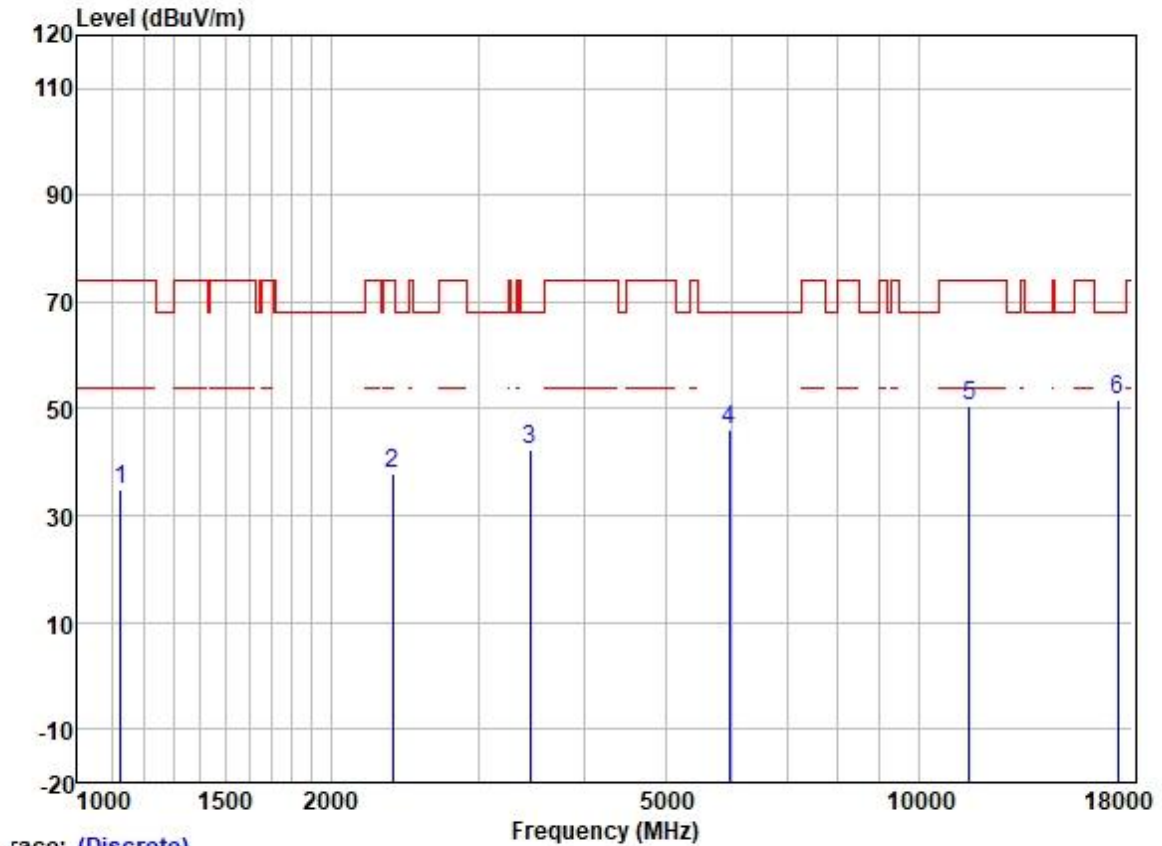

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1126.989	46.59	24.42	2.21	38.43	34.79	74.00	-39.21	VERTICAL Peak
2	2369.504	44.87	27.28	3.43	37.60	37.98	74.00	-36.02	VERTICAL Peak
3	3449.000	46.33	28.87	4.18	36.96	42.42	68.20	-25.78	VERTICAL Peak
4	5950.356	44.55	32.36	6.05	36.90	46.06	68.20	-22.14	VERTICAL Peak
5	11490.000	39.22	39.90	8.41	37.15	50.38	74.00	-23.62	VERTICAL Peak
6	17235.000	33.85	43.01	10.08	35.33	51.61	68.20	-16.59	VERTICAL Peak

Test Mode: 40; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

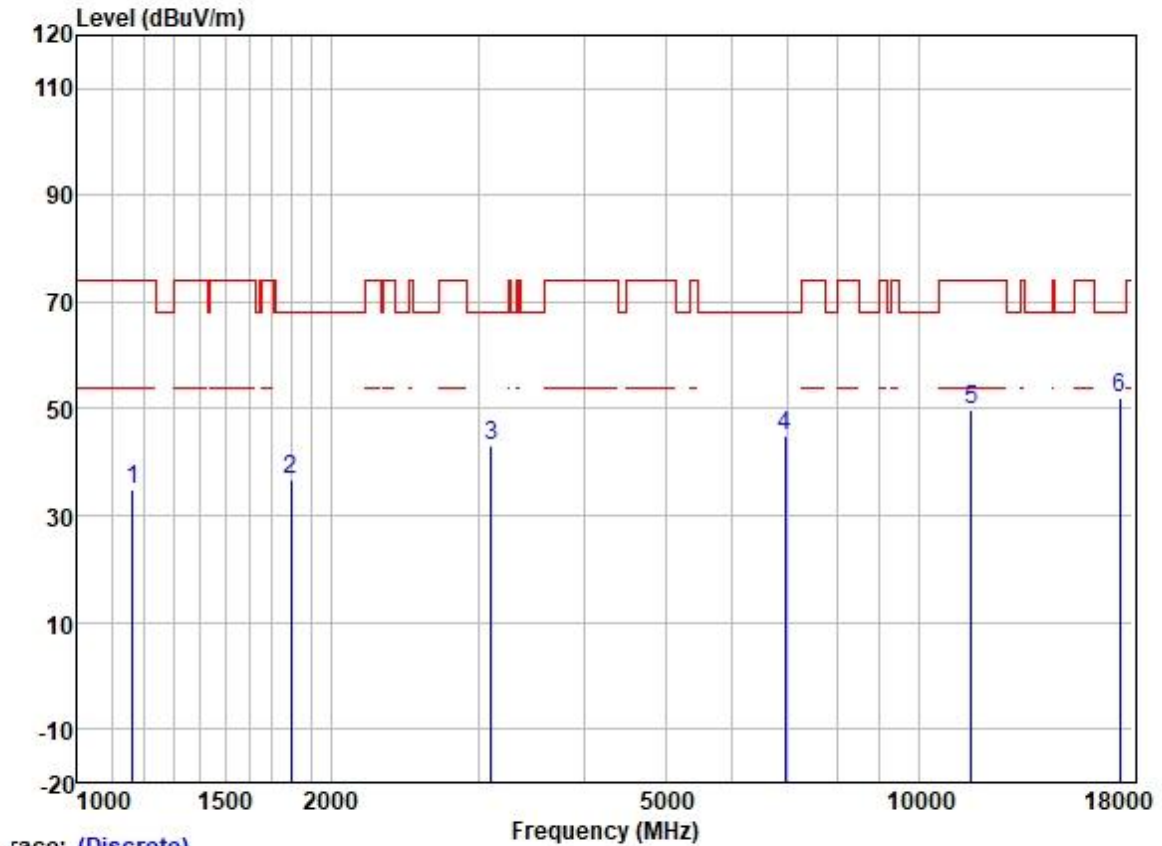


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1161.734	46.35	24.53	2.40	38.42	34.86	74.00	-39.14	HORIZONTAL	Peak
2	1793.778	45.67	25.93	2.99	37.81	36.78	68.20	-31.42	HORIZONTAL	Peak
3	3105.122	47.70	28.48	3.91	37.16	42.93	68.20	-25.27	HORIZONTAL	Peak
4	6932.185	41.42	34.92	5.81	37.19	44.96	68.20	-23.24	HORIZONTAL	Peak
5	11570.000	38.93	39.78	8.38	37.14	49.95	74.00	-24.05	HORIZONTAL	Peak
6	17355.000	33.67	43.40	10.39	35.32	52.14	68.20	-16.06	HORIZONTAL	Peak

Test Mode: 40; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

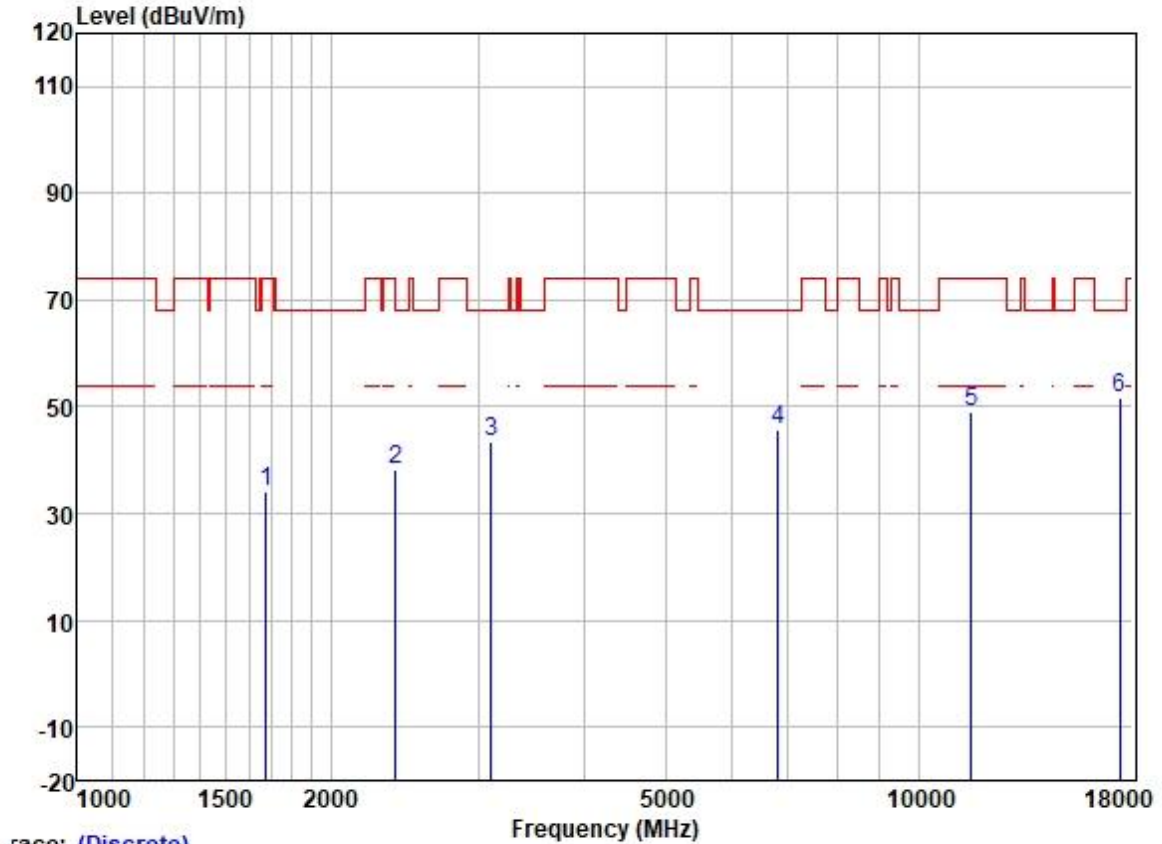


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1676.722	43.49	25.68	2.80	37.91	34.06	74.00	-39.94	VERTICAL	Peak
2	2388.376	44.85	27.33	3.48	37.59	38.07	74.00	-35.93	VERTICAL	Peak
3	3104.069	48.18	28.48	3.91	37.16	43.41	68.20	-24.79	VERTICAL	Peak
4	6811.546	42.13	34.70	5.82	37.12	45.53	68.20	-22.67	VERTICAL	Peak
5	11570.000	38.23	39.78	8.38	37.14	49.25	74.00	-24.75	VERTICAL	Peak
6	17355.000	33.06	43.40	10.39	35.32	51.53	68.20	-16.67	VERTICAL	Peak

Test Mode: 40; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

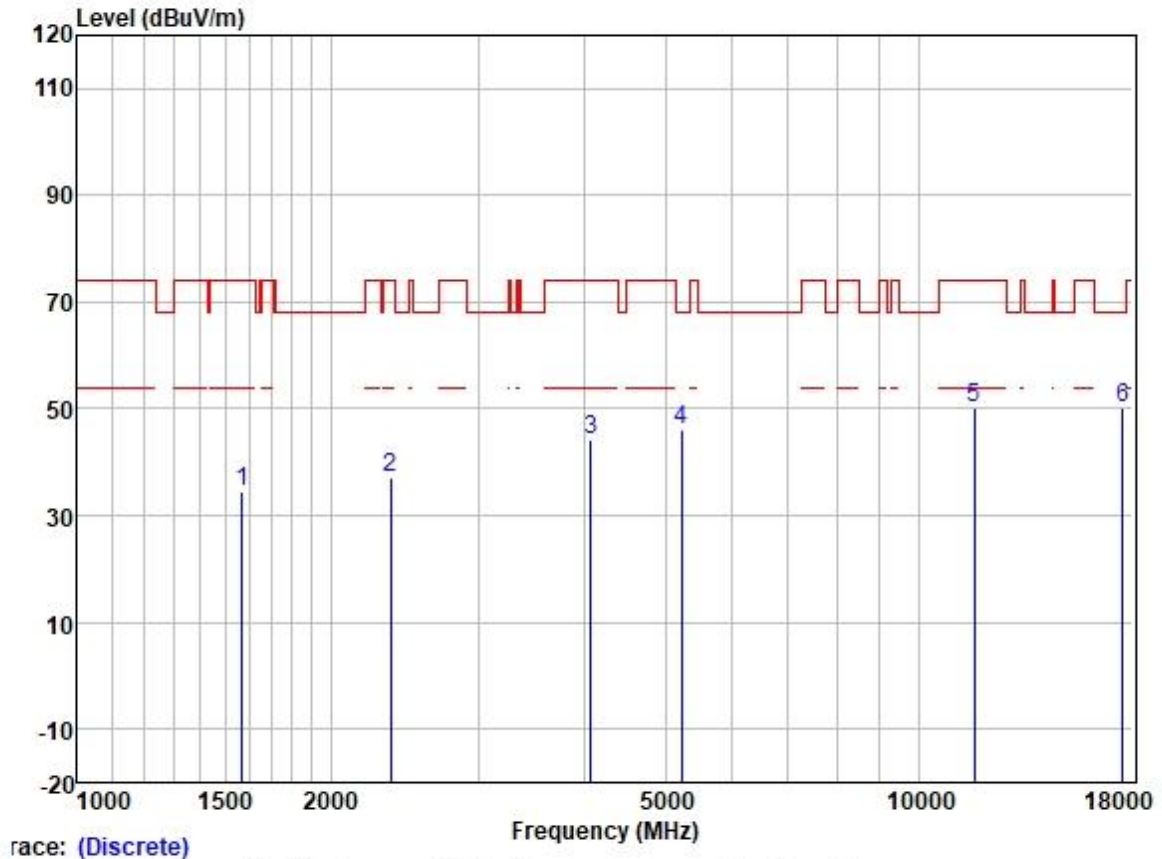


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1568.829	44.10	25.55	2.80	38.00	34.45	74.00	-39.55	HORIZONTAL	Peak
2	2356.490	43.97	27.27	3.42	37.61	37.05	74.00	-36.95	HORIZONTAL	Peak
3	4074.281	46.54	29.90	4.60	36.80	44.24	74.00	-29.76	HORIZONTAL	Peak
4	5227.706	45.37	31.74	5.70	36.87	45.94	68.20	-22.26	HORIZONTAL	Peak
5	11650.000	39.28	39.65	8.35	37.13	50.15	74.00	-23.85	HORIZONTAL	Peak
6	17475.000	30.98	43.90	10.77	35.32	50.33	68.20	-17.87	HORIZONTAL	Peak

Test Mode: 40; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

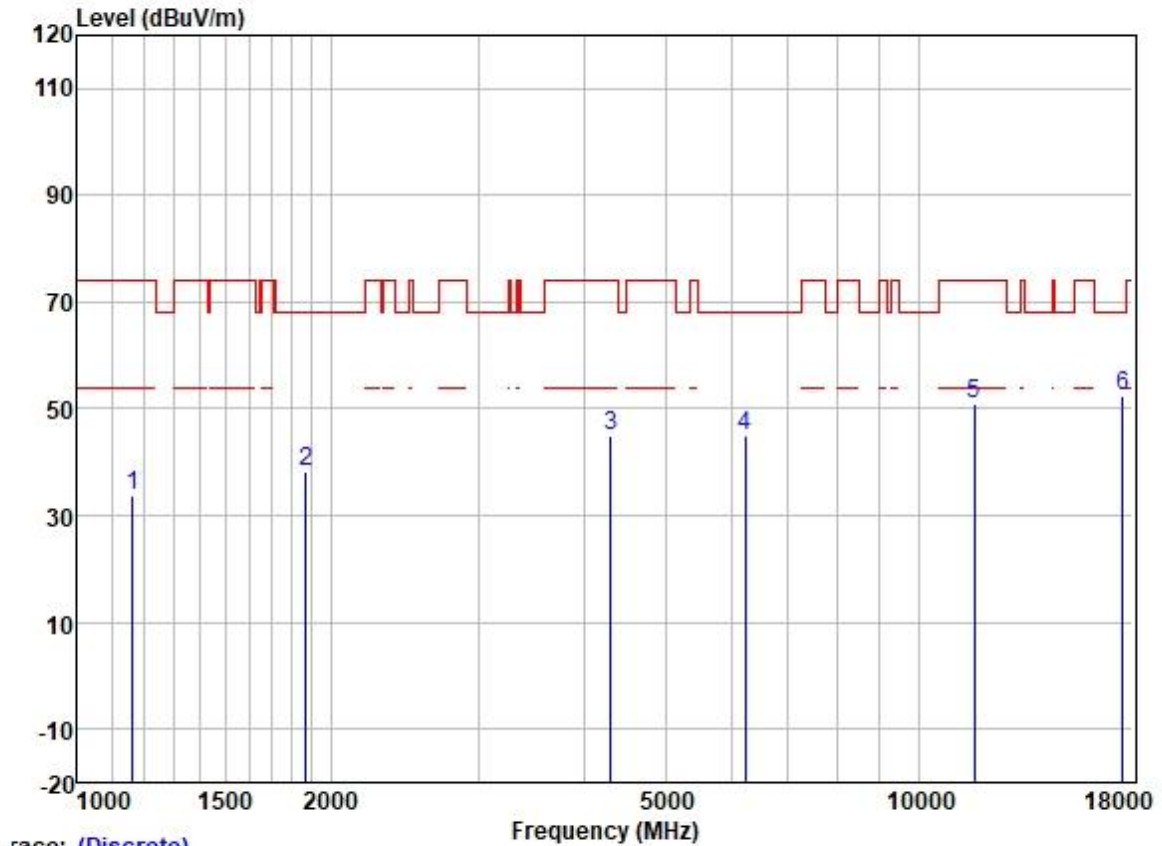


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1162.800	45.24	24.53	2.40	38.40	33.77	74.00	-40.23	VERTICAL Peak
2	1867.901	46.90	26.01	2.93	37.77	38.07	68.20	-30.13	VERTICAL Peak
3	4310.095	46.55	30.48	4.65	36.81	44.87	74.00	-29.13	VERTICAL Peak
4	6228.521	42.87	33.11	6.04	36.94	45.08	68.20	-23.12	VERTICAL Peak
5	11650.000	40.05	39.65	8.35	37.13	50.92	74.00	-23.08	VERTICAL Peak
6	17475.000	33.14	43.90	10.77	35.32	52.49	68.20	-15.71	VERTICAL Peak

Test Mode: 40; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

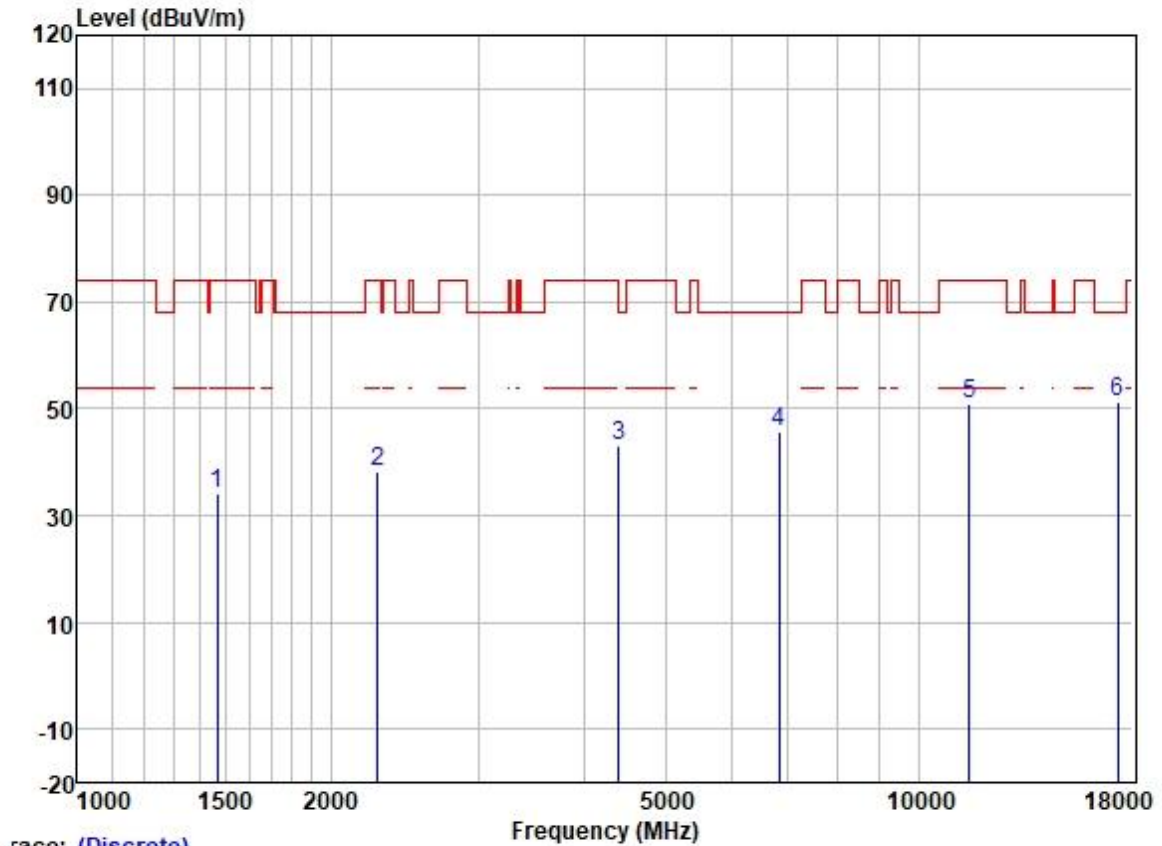


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1467.578	43.91	25.47	2.75	38.13	34.00	74.00	-40.00	HORIZONTAL Peak
2	2277.868	45.66	27.03	3.28	37.63	38.34	74.00	-35.66	HORIZONTAL Peak
3	4398.654	44.62	30.66	4.70	36.81	43.17	74.00	-30.83	HORIZONTAL Peak
4	6821.262	42.41	34.70	5.82	37.13	45.80	68.20	-22.40	HORIZONTAL Peak
5	11490.000	39.95	39.90	8.41	37.15	51.11	74.00	-22.89	HORIZONTAL Peak
6	17235.000	33.41	43.01	10.08	35.33	51.17	68.20	-17.03	HORIZONTAL Peak

Test Mode: 40; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

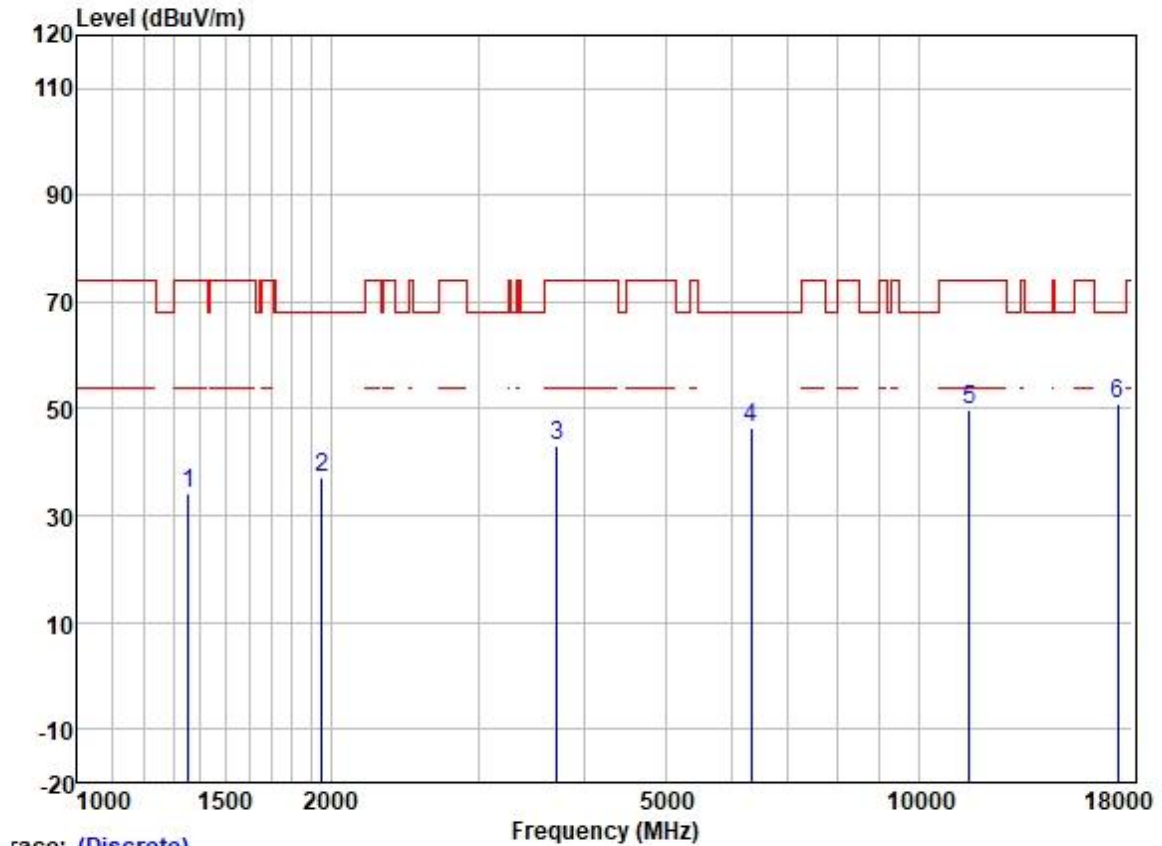

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1353.780	44.51	25.32	2.60	38.27	34.16	74.00	-39.84	VERTICAL Peak
2	1953.357	45.77	26.08	3.01	37.73	37.13	68.20	-31.07	VERTICAL Peak
3	3720.894	46.06	29.31	4.57	36.87	43.07	74.00	-30.93	VERTICAL Peak
4	6327.587	43.85	33.51	5.95	36.97	46.34	68.20	-21.86	VERTICAL Peak
5	11490.000	38.80	39.90	8.41	37.15	49.96	74.00	-24.04	VERTICAL Peak
6	17235.000	33.33	43.01	10.08	35.33	51.09	68.20	-17.11	VERTICAL Peak

Test Mode: 40; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

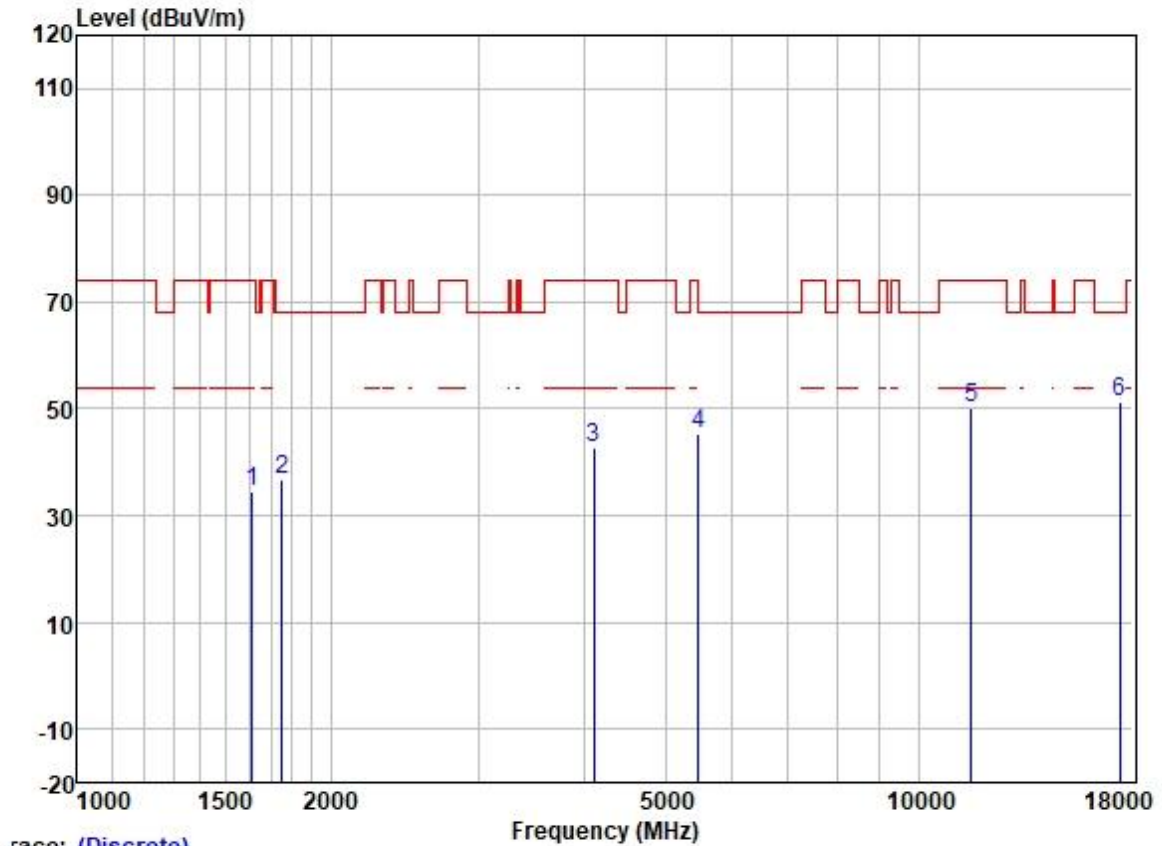

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Remark
1	1613.763	44.11	25.60	2.80	37.95	34.56	74.00	-39.44	HORIZONTAL Peak
2	1753.458	46.01	25.86	2.90	37.85	36.92	68.20	-31.28	HORIZONTAL Peak
3	4113.116	45.08	29.96	4.60	36.80	42.84	74.00	-31.16	HORIZONTAL Peak
4	5478.456	44.09	31.80	6.31	36.88	45.32	68.20	-22.88	HORIZONTAL Peak
5	11570.000	39.30	39.78	8.38	37.14	50.32	74.00	-23.68	HORIZONTAL Peak
6	17355.000	32.95	43.40	10.39	35.32	51.42	68.20	-16.78	HORIZONTAL Peak