


|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2A_TX AX(HE20) Mode |
|-----------|--------------------------|


| Channel | Frequency<br>(MHz) | 26 dB Bandwidth<br>(MHz) | 99 % Occupied Bandwidth<br>(MHz) |
|---------|--------------------|--------------------------|----------------------------------|
| 52      | 5260               | 29.760                   | 19.680                           |
| 60      | 5300               | 27.520                   | 19.560                           |
| 64      | 5320               | 32.480                   | 19.680                           |

CH52

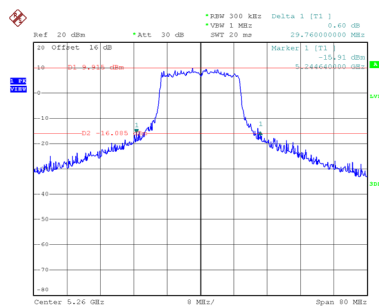


Date: 5.JAN.2026 15:48:57

**CH60**  
26 dB Bandwidth

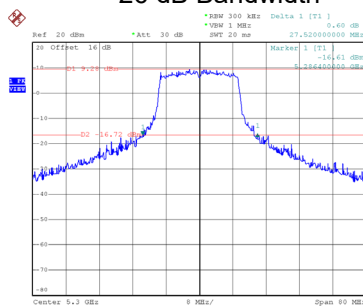


Date: 5.JAN.2026 15:55:22

CH64

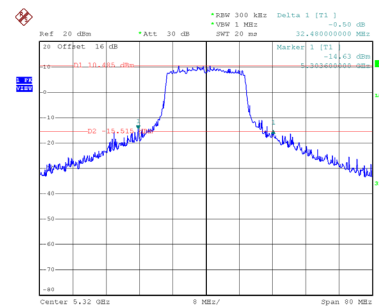


Date: 5.JAN.2026 15:57:10


## 99 % Occupied Bandwidth

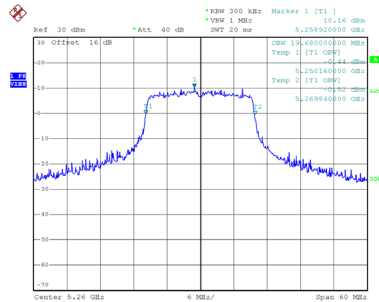

Date: 5.JAN.2026 15:49:09

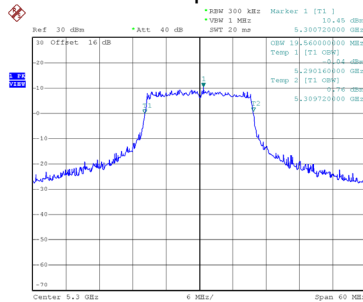

Date: 5.JAN.2026 15:55:35

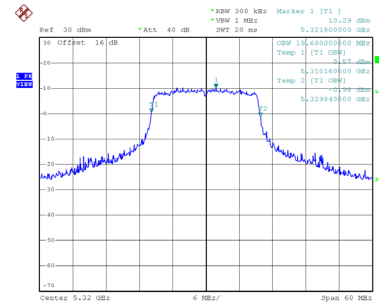


Date: 5.JAN.2026 15:57:22

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2A_TX AX(HE40) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 54      | 5270            | 52.800                | 40.200                        |
| 62      | 5310            | 53.600                | 40.000                        |

CH54

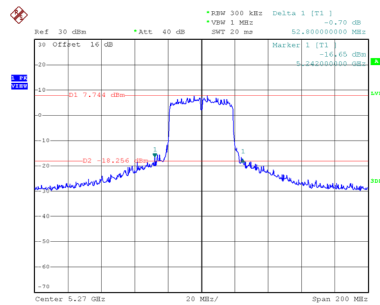


Date: 5.JAN.2026 16:14:45

CH62  
26 dB Bandwidth

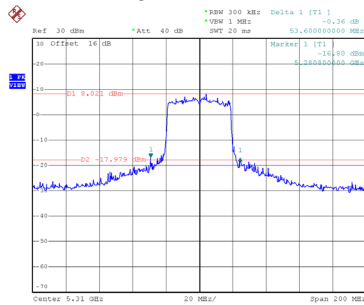


Date: 5.JAN.2026 16:15:41

99 % Occupied Bandwidth

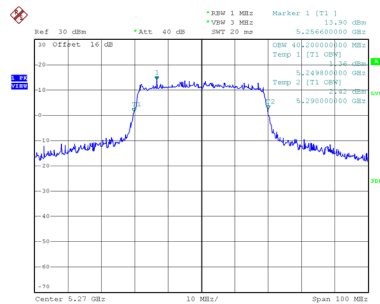

Date: 5.JAN.2026 16:14:58

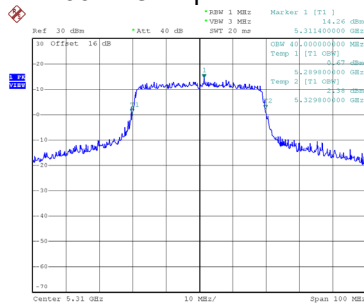


Date: 5.JAN.2026 16:15:53

|           |                   |
|-----------|-------------------|
| Test Mode | UNII-2C_TX A Mode |
|-----------|-------------------|


| Channel | Frequency<br>(MHz) | 26 dB Bandwidth<br>(MHz) | 99 % Occupied Bandwidth<br>(MHz) |
|---------|--------------------|--------------------------|----------------------------------|
| 100     | 5500               | 28.800                   | 18.120                           |
| 116     | 5580               | 31.920                   | 18.000                           |
| 140     | 5700               | 31.560                   | 18.120                           |

# CH100

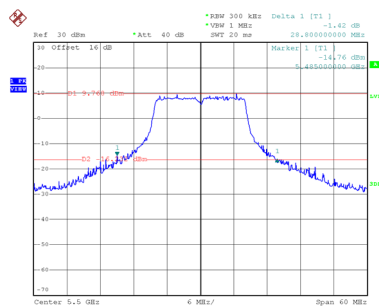


Date: 5.JAN.2026 15:29:58

**CH116**  
26 dB Bandwidth

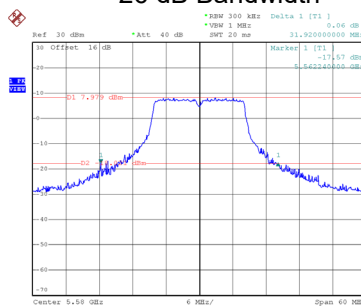


Date: 5.JAN.2026 15:31:01

## CH140

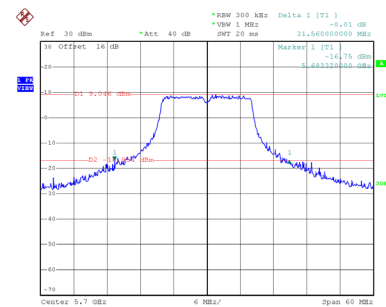


Date: 5.JAN.2026 15:33:26


99 % Occupied Bandwidth

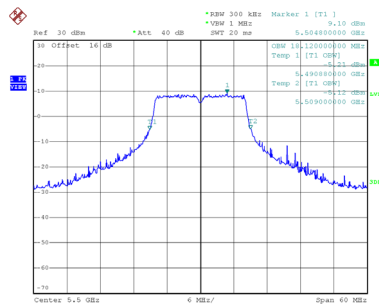

Date: 5.JAN.2026 15:30:10

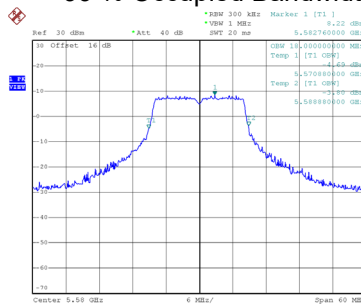

Date: 5.JAN.2026 15:31:14

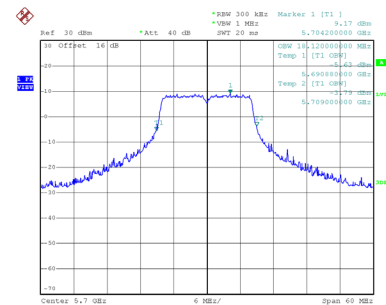


Date: 5.JAN.2026 15:33:39

Test Mode UNII-2C\_TX AX(HE20) Mode


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 100     | 5500            | 27.360                | 19.680                        |
| 116     | 5580            | 27.680                | 19.680                        |
| 140     | 5700            | 27.360                | 19.680                        |

CH100

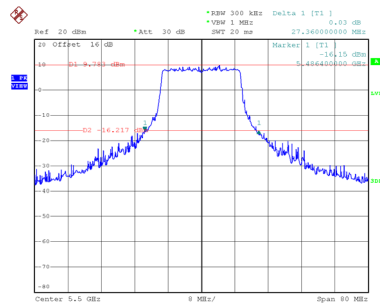


Date: 5.JAN.2026 15:58:07

CH116  
26 dB Bandwidth

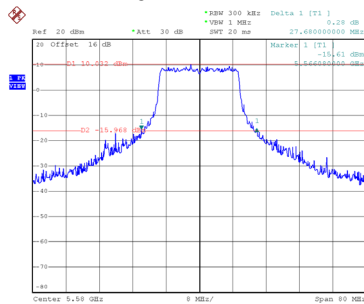


Date: 5.JAN.2026 15:59:06

CH140

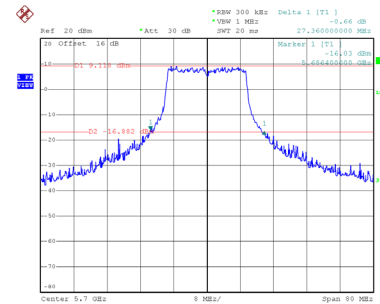


Date: 5.JAN.2026 15:59:53


99 % Occupied Bandwidth

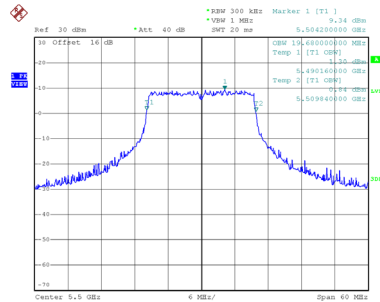

Date: 5.JAN.2026 15:58:20

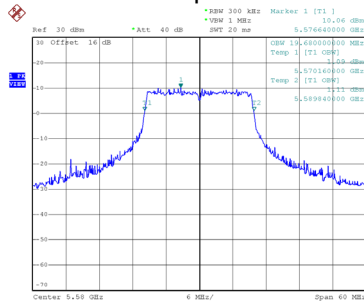

Date: 5.JAN.2026 15:59:18

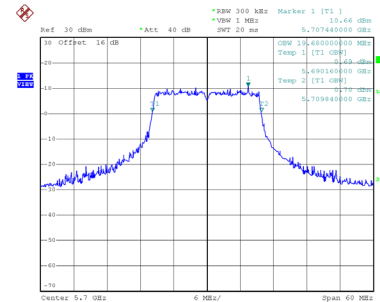


Date: 5.JAN.2026 16:00:06

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 102     | 5510            | 46.000                | 39.600                        |
| 110     | 5550            | 46.000                | 39.600                        |
| 134     | 5670            | 47.600                | 39.600                        |

CH102

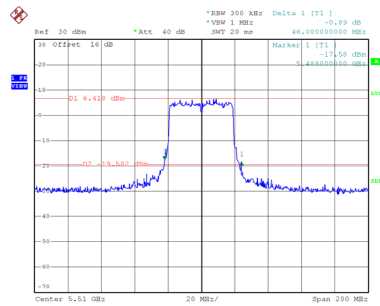


Date: 5.JAN.2026 16:17:31

CH110  
26 dB Bandwidth

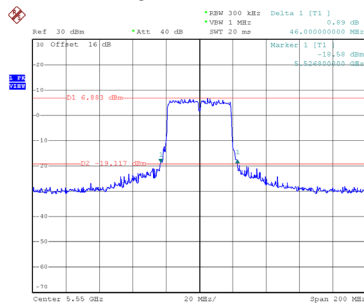


Date: 5.JAN.2026 16:19:53

CH134

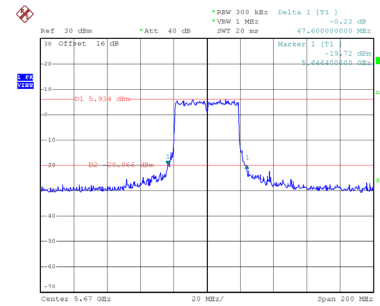


Date: 5.JAN.2026 16:21:23


99 % Occupied Bandwidth

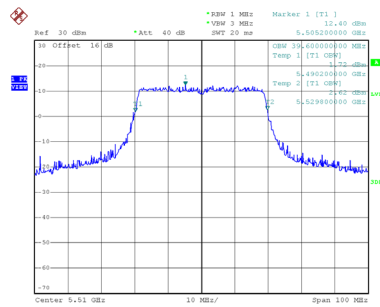

Date: 5.JAN.2026 16:17:44

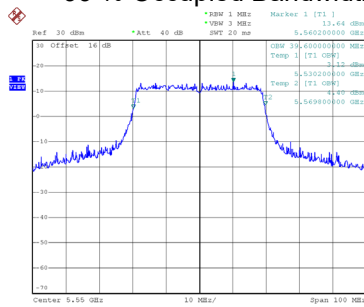

Date: 5.JAN.2026 16:20:05

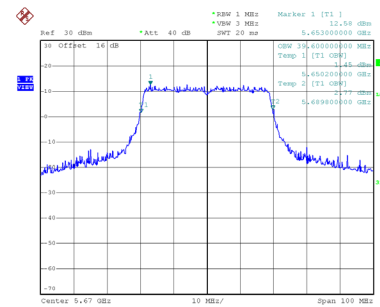


Date: 5.JAN.2026 16:21:35

Test Mode UNII-3\_TX A Mode


| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (MHz) | Result |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|--------|
| 149     | 5745            | 16.320               | 17.880                        | 0.5                             | Pass   |
| 157     | 5785            | 16.320               | 18.120                        | 0.5                             | Pass   |
| 165     | 5825            | 16.320               | 18.120                        | 0.5                             | Pass   |

CH149

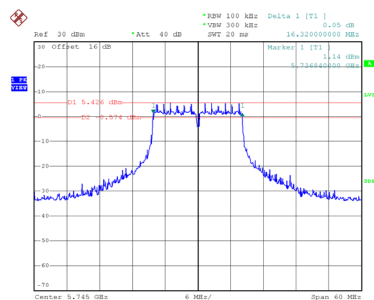


Date: 5.JAN.2026 15:34:06

CH157  
6 dB Bandwidth

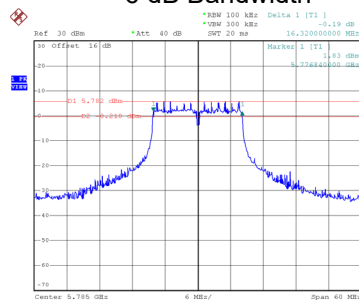


Date: 5.JAN.2026 15:38:16

CH165

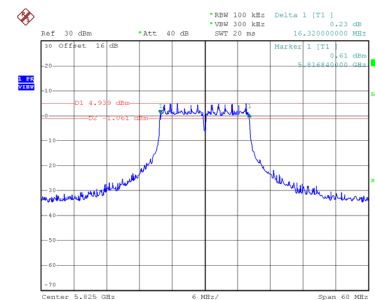


Date: 5.JAN.2026 15:38:54


99 % Occupied Bandwidth

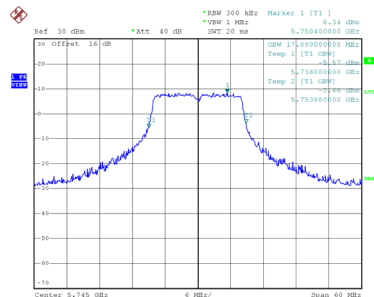

Date: 5.JAN.2026 15:34:19

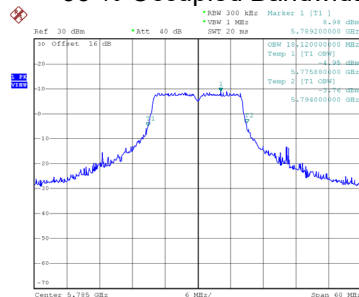

Date: 5.JAN.2026 15:38:29

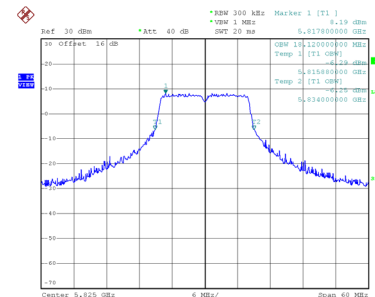


Date: 5.JAN.2026 15:39:07

Test Mode UNII-3\_TX AX(HE20) Mode


| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (MHz) | Result |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|--------|
| 149     | 5745            | 18.960               | 19.680                        | 0.5                             | Pass   |
| 157     | 5785            | 18.960               | 19.680                        | 0.5                             | Pass   |
| 165     | 5825            | 18.960               | 19.680                        | 0.5                             | Pass   |

CH149

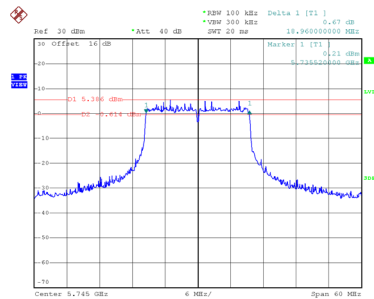


Date: 5.JAN.2026 16:00:55

CH157  
6 dB Bandwidth

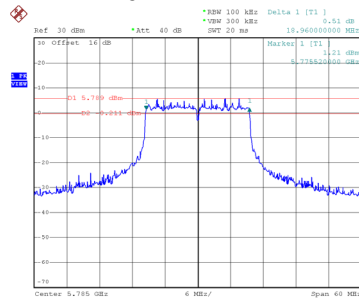


Date: 5.JAN.2026 16:01:56

CH165

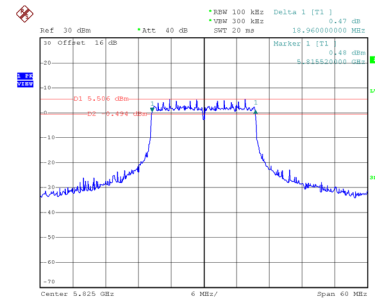


Date: 5.JAN.2026 16:04:54


99 % Occupied Bandwidth

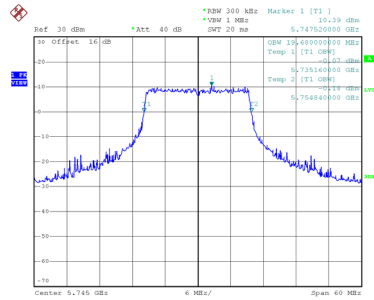

Date: 5.JAN.2026 16:01:07

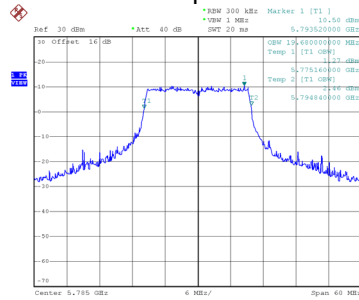

Date: 5.JAN.2026 16:02:09

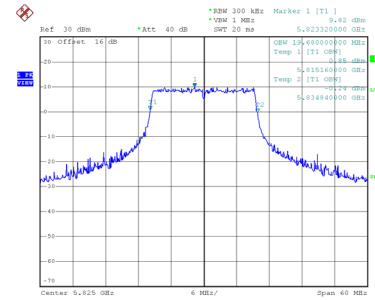


Date: 5.JAN.2026 16:05:07

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-3_TX AX(HE40) Mode |
|-----------|-------------------------|


| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (MHz) | Result |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|--------|
| 151     | 5755            | 38.200               | 39.600                        | 0.5                             | Pass   |
| 159     | 5795            | 38.200               | 39.800                        | 0.5                             | Pass   |

CH151

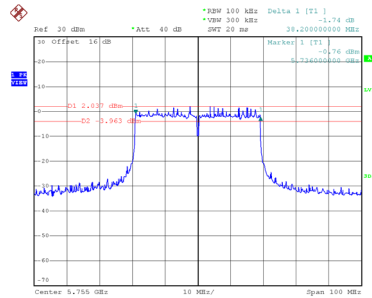


Date: 5.JAN.2026 16:24:27

CH159  
6 dB Bandwidth

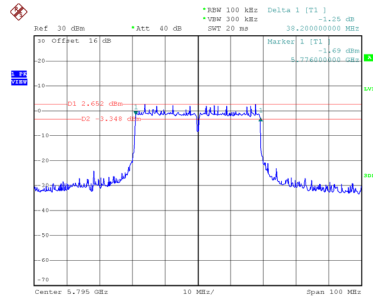


Date: 5.JAN.2026 16:26:02

99 % Occupied Bandwidth

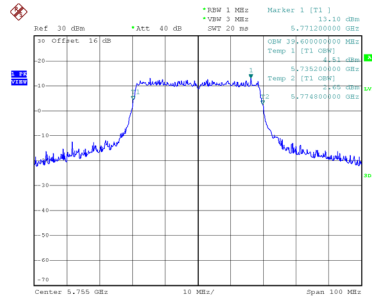

Date: 5.JAN.2026 16:24:40

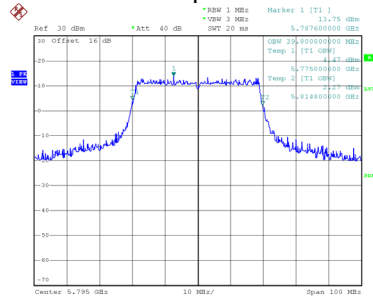

Date: 5.JAN.2026 16:26:15

## **APPENDIX F - MAXIMUM OUTPUT POWER**

|           |                  |
|-----------|------------------|
| Test Mode | UNII-1_TX A Mode |
|-----------|------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor (dB) | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result |
|---------|-----------------|--------------------|------------------|----------------------------------|------------------|----------------|--------|
| 36      | 5180            | 13.51              | 0.43             | 13.94                            | 23.98            | 0.2500         | Pass   |
| 40      | 5200            | 17.14              | 0.43             | 17.57                            | 23.98            | 0.2500         | Pass   |
| 48      | 5240            | 17.08              | 0.43             | 17.51                            | 23.98            | 0.2500         | Pass   |

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX AX(HE20) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor (dB) | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result |
|---------|-----------------|--------------------|------------------|----------------------------------|------------------|----------------|--------|
| 36      | 5180            | 15.03              | 0.18             | 15.21                            | 23.98            | 0.2500         | Pass   |
| 40      | 5200            | 17.47              | 0.18             | 17.65                            | 23.98            | 0.2500         | Pass   |
| 48      | 5240            | 17.87              | 0.18             | 18.05                            | 23.98            | 0.2500         | Pass   |

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX AX(HE40) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor (dB) | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result |
|---------|-----------------|--------------------|------------------|----------------------------------|------------------|----------------|--------|
| 38      | 5190            | 14.36              | 0.16             | 14.52                            | 23.98            | 0.2500         | Pass   |
| 46      | 5230            | 17.79              | 0.16             | 17.95                            | 23.98            | 0.2500         | Pass   |

|           |                   |
|-----------|-------------------|
| Test Mode | UNII-2A_TX A Mode |
|-----------|-------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor (dB) | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result |
|---------|-----------------|--------------------|------------------|----------------------------------|------------------|----------------|--------|
| 52      | 5260            | 17.35              | 0.43             | 17.78                            | 23.98            | 0.2500         | Pass   |
| 60      | 5300            | 17.11              | 0.43             | 17.54                            | 23.98            | 0.2500         | Pass   |
| 64      | 5320            | 17.02              | 0.43             | 17.45                            | 23.98            | 0.2500         | Pass   |

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2A_TX AX(HE20) Mode |
|-----------|--------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor (dB) | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result |
|---------|-----------------|--------------------|------------------|----------------------------------|------------------|----------------|--------|
| 52      | 5260            | 17.16              | 0.18             | 17.34                            | 23.98            | 0.2500         | Pass   |
| 60      | 5300            | 17.03              | 0.18             | 17.21                            | 23.98            | 0.2500         | Pass   |
| 64      | 5320            | 16.16              | 0.18             | 16.34                            | 23.98            | 0.2500         | Pass   |

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2A_TX AX(HE40) Mode |
|-----------|--------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor (dB) | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result |
|---------|-----------------|--------------------|------------------|----------------------------------|------------------|----------------|--------|
| 54      | 5270            | 17.46              | 0.16             | 17.62                            | 23.98            | 0.2500         | Pass   |
| 62      | 5310            | 14.52              | 0.16             | 14.68                            | 23.98            | 0.2500         | Pass   |

|           |                   |
|-----------|-------------------|
| Test Mode | UNII-2C_TX A Mode |
|-----------|-------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor (dB) | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result |
|---------|-----------------|--------------------|------------------|----------------------------------|------------------|----------------|--------|
| 100     | 5500            | 17.02              | 0.43             | 17.45                            | 23.98            | 0.2500         | Pass   |
| 116     | 5580            | 17.07              | 0.43             | 17.50                            | 23.98            | 0.2500         | Pass   |
| 140     | 5700            | 13.06              | 0.43             | 13.49                            | 23.98            | 0.2500         | Pass   |

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode |
|-----------|--------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor (dB) | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result |
|---------|-----------------|--------------------|------------------|----------------------------------|------------------|----------------|--------|
| 100     | 5500            | 16.22              | 0.18             | 16.40                            | 23.98            | 0.2500         | Pass   |
| 116     | 5580            | 17.28              | 0.18             | 17.46                            | 23.98            | 0.2500         | Pass   |
| 140     | 5700            | 12.14              | 0.18             | 12.32                            | 23.98            | 0.2500         | Pass   |

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode |
|-----------|--------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor (dB) | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result |
|---------|-----------------|--------------------|------------------|----------------------------------|------------------|----------------|--------|
| 102     | 5510            | 14.18              | 0.16             | 14.34                            | 23.98            | 0.2500         | Pass   |
| 110     | 5550            | 17.39              | 0.16             | 17.55                            | 23.98            | 0.2500         | Pass   |
| 134     | 5670            | 14.31              | 0.16             | 14.47                            | 23.98            | 0.2500         | Pass   |

|           |                  |
|-----------|------------------|
| Test Mode | UNII-3_TX A Mode |
|-----------|------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor (dB) | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result |
|---------|-----------------|--------------------|------------------|----------------------------------|------------------|----------------|--------|
| 149     | 5745            | 17.03              | 0.43             | 17.46                            | 30.00            | 1.0000         | Pass   |
| 157     | 5785            | 17.65              | 0.43             | 18.08                            | 30.00            | 1.0000         | Pass   |
| 165     | 5825            | 17.31              | 0.43             | 17.74                            | 30.00            | 1.0000         | Pass   |

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-3_TX AX(HE20) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor (dB) | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result |
|---------|-----------------|--------------------|------------------|----------------------------------|------------------|----------------|--------|
| 149     | 5745            | 13.63              | 0.18             | 13.81                            | 30.00            | 1.0000         | Pass   |
| 157     | 5785            | 17.76              | 0.18             | 17.94                            | 30.00            | 1.0000         | Pass   |
| 165     | 5825            | 17.43              | 0.18             | 17.61                            | 30.00            | 1.0000         | Pass   |

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-3_TX AX(HE40) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Duty Factor (dB) | Output Power + Duty Factor (dBm) | Max. Limit (dBm) | Max. Limit (W) | Result |
|---------|-----------------|--------------------|------------------|----------------------------------|------------------|----------------|--------|
| 151     | 5755            | 17.34              | 0.16             | 17.50                            | 30.00            | 1.0000         | Pass   |
| 159     | 5795            | 17.56              | 0.16             | 17.72                            | 30.00            | 1.0000         | Pass   |

Note: Output power = Measure result + Cable loss


## **APPENDIX G - POWER SPECTRAL DENSITY**

Test Mode UNII-1\_TX A Mode

| Channel | Frequency (MHz) | Power Spectral Density (dBm/MHz) | Duty Factor (dB) | Power Spectral Density + Duty Factor (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|---------|-----------------|----------------------------------|------------------|------------------------------------------------|----------------------|--------|
| 36      | 5180            | 3.17                             | 0.43             | 3.61                                           | 11.00                | Pass   |
| 40      | 5200            | 2.76                             | 0.43             | 3.20                                           | 11.00                | Pass   |
| 48      | 5240            | 2.90                             | 0.43             | 3.34                                           | 11.00                | Pass   |



Date: 5.JAN.2026 14:09:18

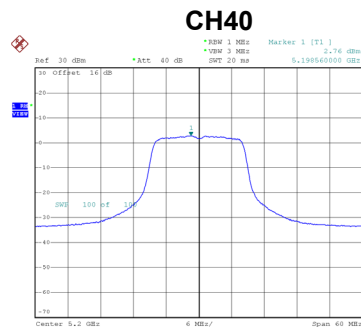


Date: 5.JAN.2026 14:10:04



Date: 5.JAN.2026 14:10:58

Test Mode UNII-1\_TX AX(HE20) Mode

| Channel | Frequency (MHz) | Power Spectral Density (dBm/MHz) | Duty Factor (dB) | Power Spectral Density + Duty Factor (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|---------|-----------------|----------------------------------|------------------|------------------------------------------------|----------------------|--------|
| 36      | 5180            | 3.98                             | 0.18             | 4.16                                           | 11.00                | Pass   |
| 40      | 5200            | 4.93                             | 0.18             | 5.11                                           | 11.00                | Pass   |
| 48      | 5240            | 3.77                             | 0.18             | 3.95                                           | 11.00                | Pass   |

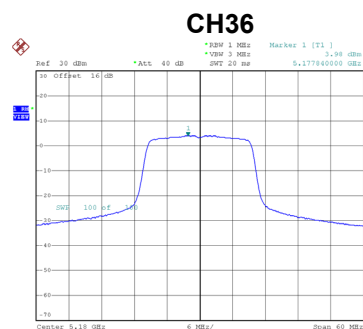

Date: 5.JAN.2026 14:37:42




Date: 5.JAN.2026 14:40:37




Date: 5.JAN.2026 14:41:18

Test Mode UNII-1\_TX AX(HE40) Mode

| Channel | Frequency (MHz) | Power Spectral Density (dBm/MHz) | Duty Factor (dB) | Power Spectral Density + Duty Factor (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|---------|-----------------|----------------------------------|------------------|------------------------------------------------|----------------------|--------|
| 38      | 5190            | 1.90                             | 0.16             | 2.06                                           | 11.00                | Pass   |
| 46      | 5230            | 1.75                             | 0.16             | 1.91                                           | 11.00                | Pass   |

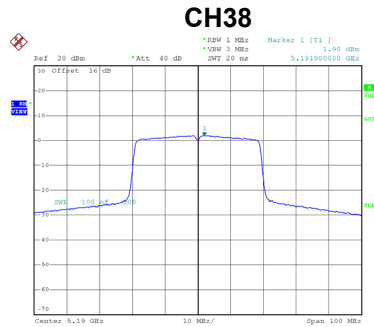


Date: 5.JAN.2026 14:52:18

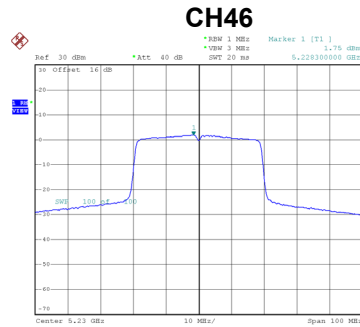


Date: 5.JAN.2026 14:54:16

Test Mode UNII-2A\_TX A Mode


| Channel | Frequency (MHz) | Power Spectral Density (dBm/MHz) | Duty Factor (dB) | Power Spectral Density + Duty Factor (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|---------|-----------------|----------------------------------|------------------|------------------------------------------------|----------------------|--------|
| 52      | 5260            | 3.25                             | 0.43             | 3.68                                           | 11.00                | Pass   |
| 60      | 5300            | 2.89                             | 0.43             | 3.32                                           | 11.00                | Pass   |
| 64      | 5320            | 2.67                             | 0.43             | 3.10                                           | 11.00                | Pass   |

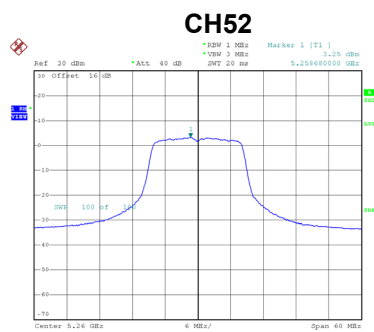

Date: 5.JAN.2026 14:11:24

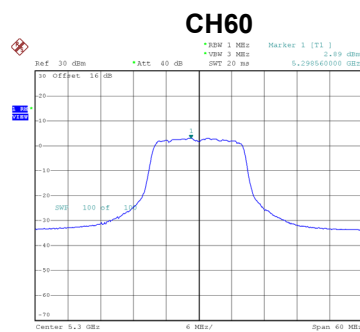


Date: 5.JAN.2026 14:12:01

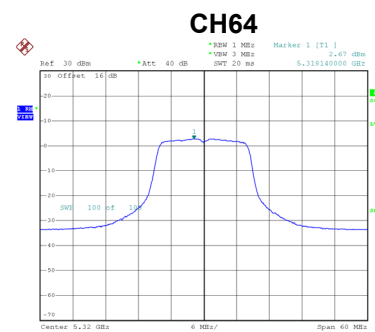


Date: 5.JAN.2026 14:12:42

Test Mode UNII-2A\_TX AX(HE20) Mode


| Channel | Frequency (MHz) | Power Spectral Density (dBm/MHz) | Duty Factor (dB) | Power Spectral Density + Duty Factor (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|---------|-----------------|----------------------------------|------------------|------------------------------------------------|----------------------|--------|
| 52      | 5260            | 4.03                             | 0.18             | 4.21                                           | 11.00                | Pass   |
| 60      | 5300            | 3.34                             | 0.18             | 3.52                                           | 11.00                | Pass   |
| 64      | 5320            | 4.62                             | 0.18             | 4.80                                           | 11.00                | Pass   |

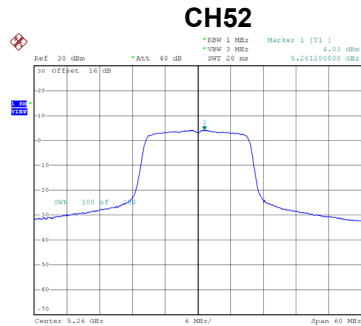

Date: 5.JAN.2026 14:42:05

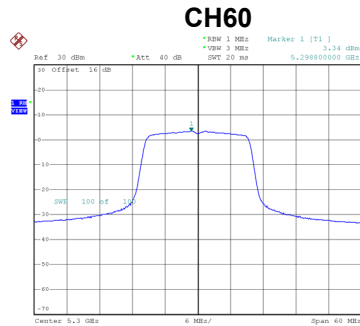


Date: 5.JAN.2026 14:42:41

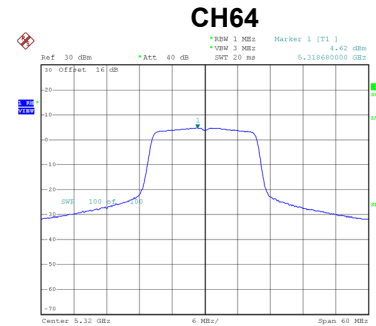


Date: 5.JAN.2026 14:43:16

Test Mode UNII-2A\_TX AX(HE40) Mode

| Channel | Frequency (MHz) | Power Spectral Density (dBm/MHz) | Duty Factor (dB) | Power Spectral Density + Duty Factor (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|---------|-----------------|----------------------------------|------------------|------------------------------------------------|----------------------|--------|
| 54      | 5270            | 1.82                             | 0.16             | 1.98                                           | 11.00                | Pass   |
| 62      | 5310            | 1.43                             | 0.16             | 1.60                                           | 11.00                | Pass   |

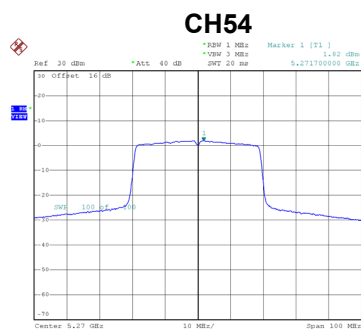


Date: 5.JAN.2026 14:54:59

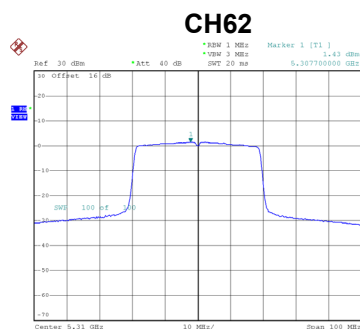

Date: 5.JAN.2026 15:10:27

Test Mode UNII-2C\_TX A Mode


| Channel | Frequency (MHz) | Power Spectral Density (dBm/MHz) | Duty Factor (dB) | Power Spectral Density + Duty Factor (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|---------|-----------------|----------------------------------|------------------|------------------------------------------------|----------------------|--------|
| 100     | 5500            | 4.56                             | 0.43             | 5.00                                           | 11.00                | Pass   |
| 116     | 5580            | 4.22                             | 0.43             | 4.65                                           | 11.00                | Pass   |
| 140     | 5700            | 4.99                             | 0.43             | 5.42                                           | 11.00                | Pass   |

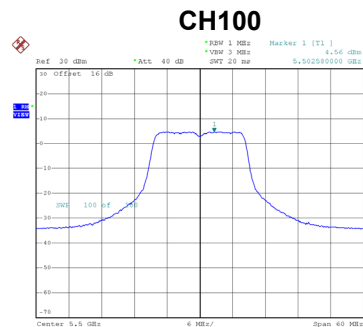

Date: 5.JAN.2026 14:13:25




Date: 5.JAN.2026 14:15:19

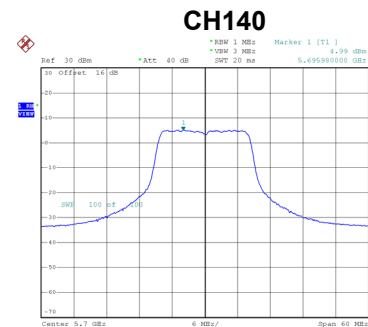


Date: 5.JAN.2026 14:16:07

Test Mode UNII-2C\_TX AX(HE20) Mode

| Channel | Frequency (MHz) | Power Spectral Density (dBm/MHz) | Duty Factor (dB) | Power Spectral Density + Duty Factor (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|---------|-----------------|----------------------------------|------------------|------------------------------------------------|----------------------|--------|
| 100     | 5500            | 3.84                             | 0.18             | 4.02                                           | 11.00                | Pass   |
| 116     | 5580            | 3.65                             | 0.18             | 3.83                                           | 11.00                | Pass   |
| 140     | 5700            | 3.44                             | 0.18             | 3.62                                           | 11.00                | Pass   |

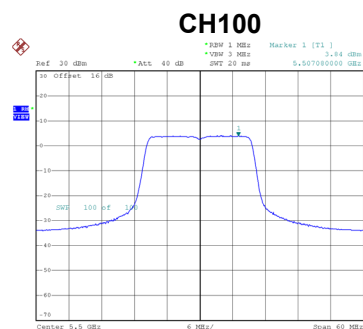

Date: 5.JAN.2026 14:44:07

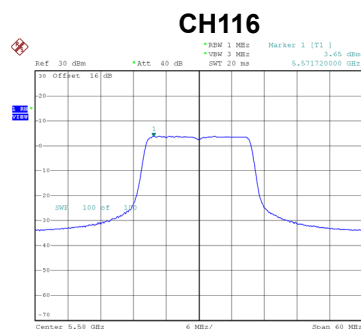


Date: 5.JAN.2026 14:45:23




Date: 5.JAN.2026 14:46:11

Test Mode UNII-2C\_TX AX(HE40) Mode


| Channel | Frequency (MHz) | Power Spectral Density (dBm/MHz) | Duty Factor (dB) | Power Spectral Density + Duty Factor (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|---------|-----------------|----------------------------------|------------------|------------------------------------------------|----------------------|--------|
| 102     | 5510            | 0.36                             | 0.16             | 0.52                                           | 11.00                | Pass   |
| 110     | 5550            | 1.43                             | 0.16             | 1.60                                           | 11.00                | Pass   |
| 134     | 5670            | 0.43                             | 0.16             | 0.59                                           | 11.00                | Pass   |

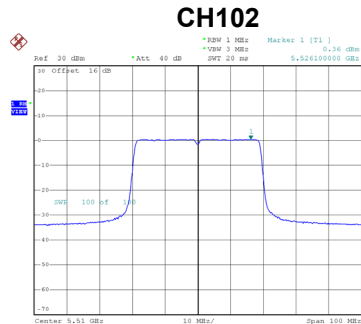

Date: 5.JAN.2026 15:11:50

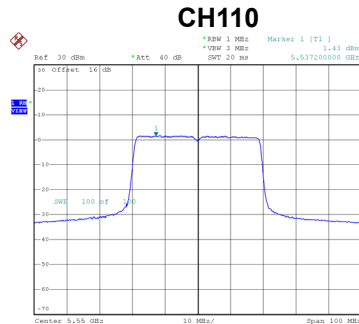

Date: 5.JAN.2026 15:12:38

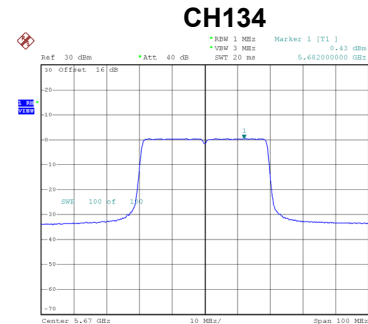


Date: 5.JAN.2026 15:13:42


Test Mode UNII-3\_TX A Mode

| Channel | Frequency (MHz) | Power Spectral Density (dBm/100 kHz) | Power Spectral Density (dBm/500 kHz) | Duty Factor (dB) | Power Spectral Density + Duty Factor (dBm/500 kHz) | Max. Limit (dBm/500 kHz) | Result |
|---------|-----------------|--------------------------------------|--------------------------------------|------------------|----------------------------------------------------|--------------------------|--------|
| 149     | 5745            | -4.06                                | 2.93                                 | 0.43             | 3.36                                               | 30.00                    | Pass   |
| 157     | 5785            | -3.65                                | 3.34                                 | 0.43             | 3.78                                               | 30.00                    | Pass   |
| 165     | 5825            | -4.18                                | 2.81                                 | 0.43             | 3.24                                               | 30.00                    | Pass   |


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log(500\text{ kHz} / 100\text{ kHz}) = PSD_{dBm/100\text{ kHz}} + 6.99\text{ dB}$

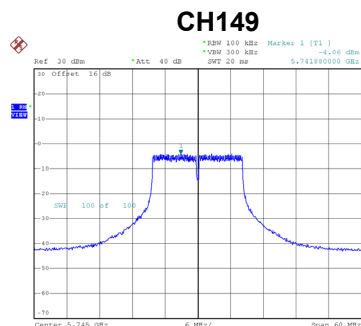

Date: 5.JAN.2026 14:17:02

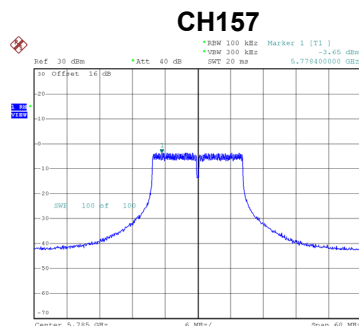

Date: 5.JAN.2026 14:18:00

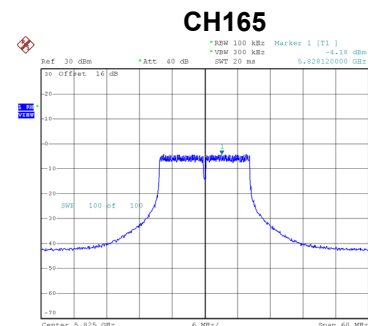


Date: 5.JAN.2026 14:19:23


Test Mode UNII-3\_TX AX(HE20) Mode

| Channel | Frequency (MHz) | Power Spectral Density (dBm/100 kHz) | Power Spectral Density (dBm/500 kHz) | Duty Factor (dB) | Power Spectral Density + Duty Factor (dBm/500 kHz) | Max. Limit (dBm/500 kHz) | Result |
|---------|-----------------|--------------------------------------|--------------------------------------|------------------|----------------------------------------------------|--------------------------|--------|
| 149     | 5745            | -5.50                                | 1.49                                 | 0.18             | 1.66                                               | 30.00                    | Pass   |
| 157     | 5785            | -5.09                                | 1.89                                 | 0.18             | 2.07                                               | 30.00                    | Pass   |
| 165     | 5825            | -5.49                                | 1.50                                 | 0.18             | 1.68                                               | 30.00                    | Pass   |


NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log(500\text{ kHz} / 100\text{ kHz}) = PSD_{dBm/100\text{ kHz}} + 6.99\text{ dB}$

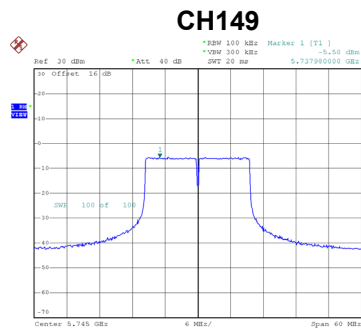

Date: 5.JAN.2026 14:46:58

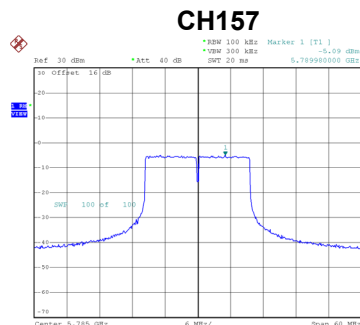

Date: 5.JAN.2026 14:48:36

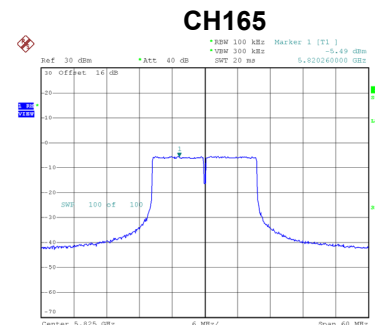


Date: 5.JAN.2026 14:49:13


Test Mode UNII-3\_TX AX(HE40) Mode

| Channel | Frequency (MHz) | Power Spectral Density (dBm/100 kHz) | Power Spectral Density (dBm/500 kHz) | Duty Factor (dB) | Power Spectral Density + Duty Factor (dBm/500 kHz) | Max. Limit (dBm/500 kHz) | Result |
|---------|-----------------|--------------------------------------|--------------------------------------|------------------|----------------------------------------------------|--------------------------|--------|
| 151     | 5755            | -8.36                                | -1.37                                | 0.16             | -1.21                                              | 30.00                    | Pass   |
| 159     | 5795            | -8.08                                | -1.09                                | 0.16             | -0.93                                              | 30.00                    | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log(500\text{ kHz} / 100\text{ kHz}) = PSD_{dBm/100\text{ kHz}} + 6.99\text{ dB}$

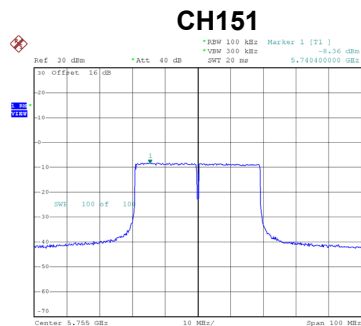

Date: 5.JAN.2026 15:14:28

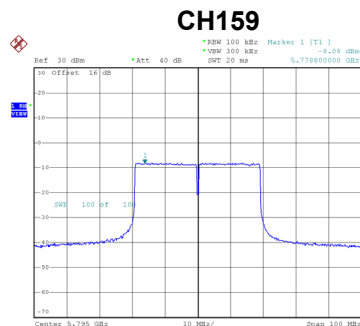

Date: 5.JAN.2026 15:15:18

## **APPENDIX H - FREQUENCY STABILITY**

|           |        |
|-----------|--------|
| Test Mode | UNII-1 |
|-----------|--------|

### Voltage vs. Frequency Stability

| Voltage (V)             | Measurement Frequency (MHz) |
|-------------------------|-----------------------------|
| Center Frequency        | 5180.0000                   |
| 120                     | 5180.0000                   |
| 132                     | 5180.0000                   |
| 108                     | 5179.9800                   |
| Maximum Deviation (MHz) | 0.0200                      |
| Maximum Deviation (ppm) | 3.86                        |

### Temperature vs. Frequency Stability

| Temperature (°C)        | Measurement Frequency (MHz) |
|-------------------------|-----------------------------|
| Center Frequency        | 5180.0000                   |
| 0                       | 5179.9800                   |
| 10                      | 5180.0200                   |
| 20                      | 5180.0000                   |
| 30                      | 5179.9800                   |
| 40                      | 5180.0000                   |
| Maximum Deviation (MHz) | 0.0200                      |
| Maximum Deviation (ppm) | -3.86                       |

|           |         |
|-----------|---------|
| Test Mode | UNII-2A |
|-----------|---------|

#### Voltage vs. Frequency Stability

| Voltage (V)             | Measurement Frequency (MHz) |
|-------------------------|-----------------------------|
| Center Frequency        | 5260.0000                   |
| 120                     | 5260.0200                   |
| 132                     | 5260.0000                   |
| 108                     | 5260.0000                   |
| Maximum Deviation (MHz) | 0.0200                      |
| Maximum Deviation (ppm) | -3.80                       |

#### Temperature vs. Frequency Stability

| Temperature (°C)        | Measurement Frequency (MHz) |
|-------------------------|-----------------------------|
| Center Frequency        | 5260.0000                   |
| 0                       | 5260.0000                   |
| 10                      | 5260.0000                   |
| 20                      | 5260.0200                   |
| 30                      | 5260.0000                   |
| 40                      | 5260.0000                   |
| Maximum Deviation (MHz) | 0.0200                      |
| Maximum Deviation (ppm) | 3.80                        |

|           |         |
|-----------|---------|
| Test Mode | UNII-2C |
|-----------|---------|

#### Voltage vs. Frequency Stability

| Voltage (V)             | Measurement Frequency (MHz) |
|-------------------------|-----------------------------|
| Center Frequency        | 5500.0000                   |
| 120                     | 5499.9800                   |
| 132                     | 5500.0000                   |
| 108                     | 5500.0000                   |
| Maximum Deviation (MHz) | 0.0200                      |
| Maximum Deviation (ppm) | 3.64                        |

#### Temperature vs. Frequency Stability

| Temperature (°C)        | Measurement Frequency (MHz) |
|-------------------------|-----------------------------|
| Center Frequency        | 5500.0000                   |
| 0                       | 5499.9800                   |
| 10                      | 5500.0200                   |
| 20                      | 5499.9800                   |
| 30                      | 5500.0000                   |
| 40                      | 5500.0200                   |
| Maximum Deviation (MHz) | 0.0200                      |
| Maximum Deviation (ppm) | -3.64                       |

|           |        |
|-----------|--------|
| Test Mode | UNII-3 |
|-----------|--------|

### Voltage vs. Frequency Stability

| Voltage (V)             | Measurement Frequency (MHz) |
|-------------------------|-----------------------------|
| Center Frequency        | 5745.0000                   |
| 120                     | 5744.9800                   |
| 132                     | 5745.0200                   |
| 108                     | 5745.0000                   |
| Maximum Deviation (MHz) | 0.0200                      |
| Maximum Deviation (ppm) | 3.48                        |

### Temperature vs. Frequency Stability

| Temperature (°C)        | Measurement Frequency (MHz) |
|-------------------------|-----------------------------|
| Center Frequency        | 5745.0000                   |
| 0                       | 5745.0000                   |
| 10                      | 5745.0000                   |
| 20                      | 5744.9800                   |
| 30                      | 5745.0200                   |
| 40                      | 5744.9800                   |
| Maximum Deviation (MHz) | 0.0200                      |
| Maximum Deviation (ppm) | -3.48                       |

**End of Test Report**