




Test data

2.4GWIFI:


For 30-1000MHz

Horizontal:

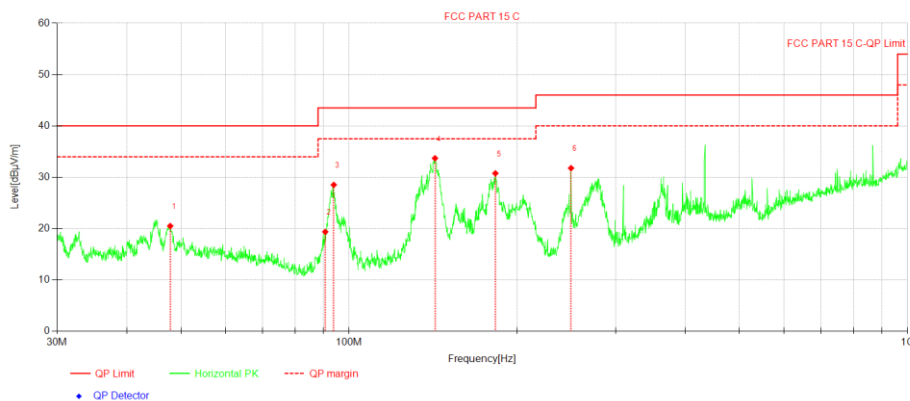

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	47.83	28.59	-8.08	20.51	40.00	19.49	100	331	PK
2	90.64	33.20	-13.82	19.38	43.50	24.12	200	145	PK
3	93.88	42.04	-13.51	28.53	43.50	14.97	200	354	PK
4	142.49	42.03	-8.32	33.71	43.50	9.79	200	114	PK
5	182.77	40.46	-9.69	30.77	43.50	12.73	200	162	PK
6	249.72	40.72	-8.94	31.78	46.00	14.22	100	153	PK


Vertical :

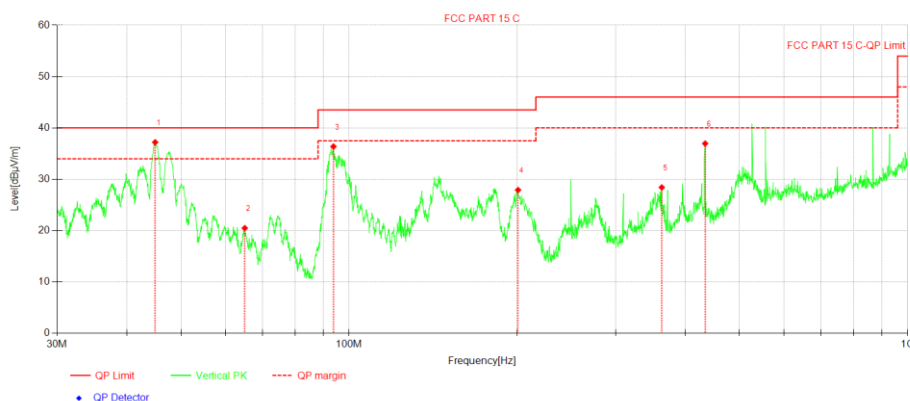

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	44.95	45.46	-8.25	37.21	40.00	2.79	100	178	PK
2	65.04	29.81	-9.32	20.49	40.00	19.51	100	108	PK
3	93.77	49.91	-13.53	36.38	43.50	7.12	100	90	PK
4	200.69	39.00	-11.08	27.92	43.50	15.58	100	297	PK
5	362.98	33.87	-5.45	28.42	46.00	17.58	200	284	PK
6	434.07	40.17	-3.21	36.96	46.00	9.04	100	273	PK


**11B 2412MHz**

Horizontal:

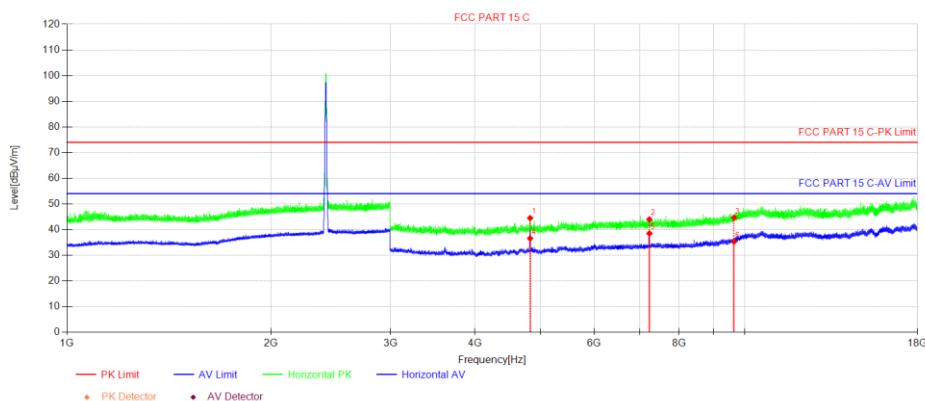

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	4824.09	49.14	-4.63	44.51	74.00	29.49	150	8	PK
2	7236.21	45.71	-1.70	44.01	74.00	29.99	150	289	PK
3	9648.33	43.60	1.07	44.67	74.00	29.33	150	217	PK
4	4824.09	41.22	-4.63	36.59	54.00	17.41	150	26	AV
5	7236.21	40.21	-1.70	38.51	54.00	15.49	150	289	AV
6	9648.33	34.26	1.07	35.33	54.00	18.67	150	44	AV


Vertical:

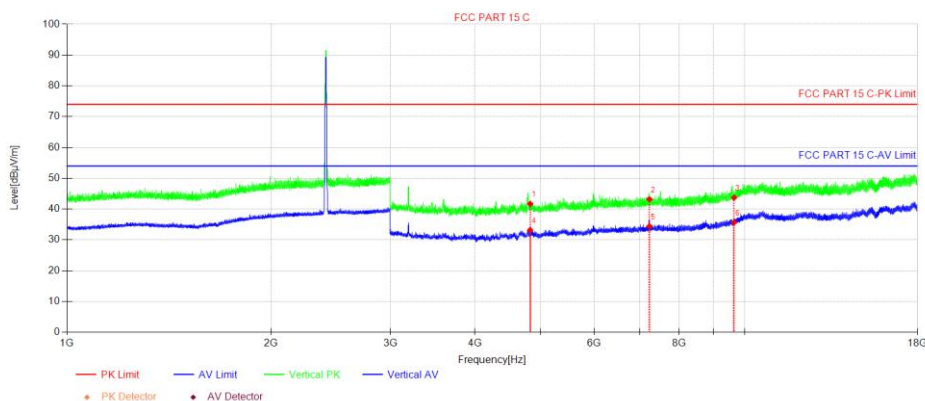

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	4824.09	46.35	-4.63	41.72	74.00	32.28	150	149	PK
2	7236.21	44.91	-1.70	43.21	74.00	30.79	150	98	PK
3	9648.33	42.66	1.07	43.73	74.00	30.27	150	271	PK
4	4824.09	37.83	-4.63	33.20	54.00	20.80	150	304	AV
5	7236.21	36.13	-1.70	34.43	54.00	19.57	150	64	AV
6	9648.33	34.60	1.07	35.67	54.00	18.33	150	254	AV


**11B 2412MHz**

Horizontal:

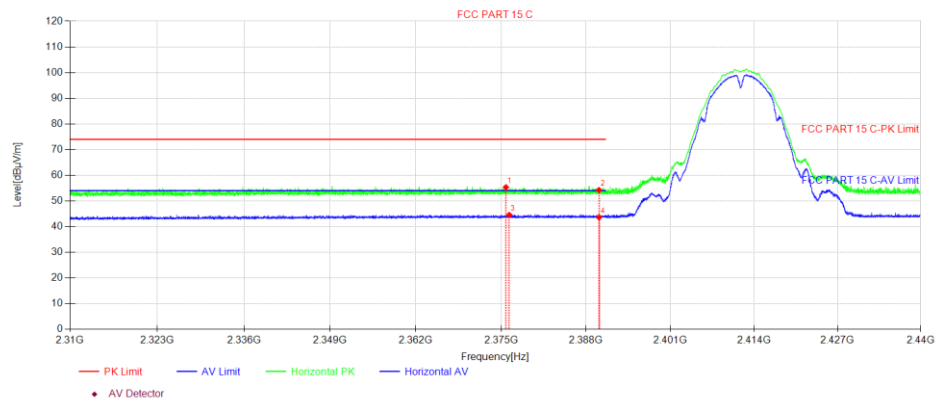

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	2375.72	56.19	-0.85	55.34	74.00	18.66	150	156	PK
2	2390.01	55.04	-0.80	54.24	74.00	19.76	150	136	PK
3	2376.24	45.42	-0.84	44.58	54.00	9.42	150	324	AV
4	2390.01	44.43	-0.80	43.63	54.00	10.37	150	38	AV


Vertical:

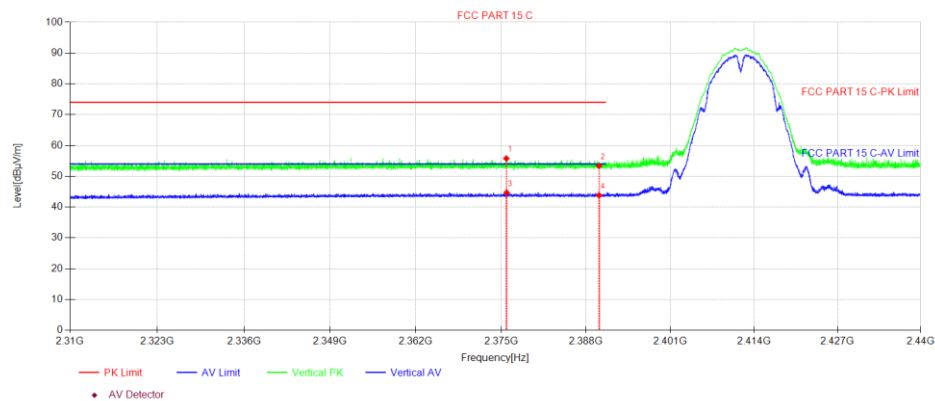

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	2375.79	56.62	-0.85	55.77	74.00	18.23	150	345	PK
2	2390.01	54.19	-0.80	53.39	74.00	20.61	150	26	PK
3	2375.85	45.54	-0.85	44.69	54.00	9.31	150	109	AV
4	2390.01	44.63	-0.80	43.83	54.00	10.17	150	165	AV


**11B 2437MHz**

Horizontal:

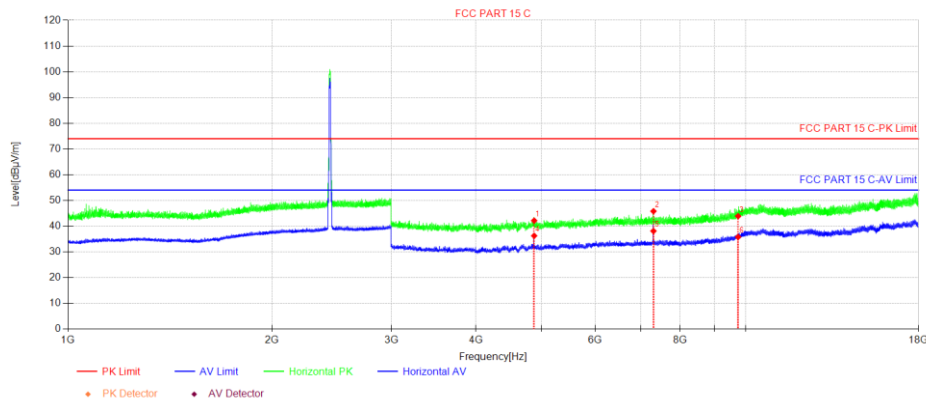

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	4874.34	46.87	-4.70	42.17	74.00	31.83	150	17	PK
2	7311.22	47.36	-1.53	45.83	74.00	28.17	150	287	PK
3	9748.09	42.35	1.56	43.91	74.00	30.09	150	178	PK
4	4874.34	40.98	-4.70	36.28	54.00	17.72	150	35	AV
5	7311.22	39.66	-1.53	38.13	54.00	15.87	150	287	AV
6	9748.09	34.27	1.56	35.83	54.00	18.17	150	55	AV


Vertical:

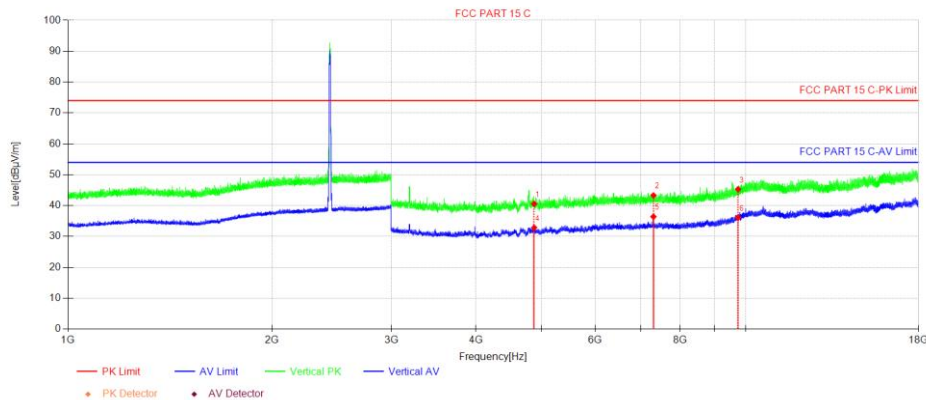

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	4874.34	45.27	-4.70	40.57	74.00	33.43	150	91	PK
2	7311.22	44.83	-1.53	43.30	74.00	30.70	150	107	PK
3	9748.09	43.73	1.56	45.29	74.00	28.71	150	91	PK
4	4874.34	37.57	-4.70	32.87	54.00	21.13	150	143	AV
5	7311.22	37.95	-1.53	36.42	54.00	17.58	150	181	AV
6	9748.09	34.63	1.56	36.19	54.00	17.81	150	181	AV


**11B 2462MHz**

Horizontal:

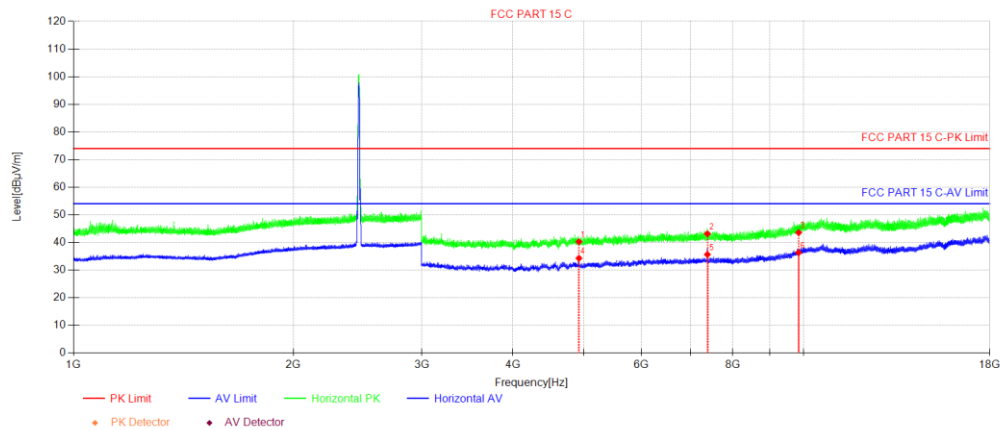

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	4924.60	45.07	-4.79	40.28	74.00	33.72	150	357	PK
2	7386.22	44.49	-1.32	43.17	74.00	30.83	150	0	PK
3	9848.59	41.59	2.00	43.59	74.00	30.41	150	91	PK
4	4924.60	39.10	-4.79	34.31	54.00	19.69	150	17	AV
5	7386.22	36.97	-1.32	35.65	54.00	18.35	150	307	AV
6	9848.59	34.35	2.00	36.35	54.00	17.65	150	181	AV


Vertical:

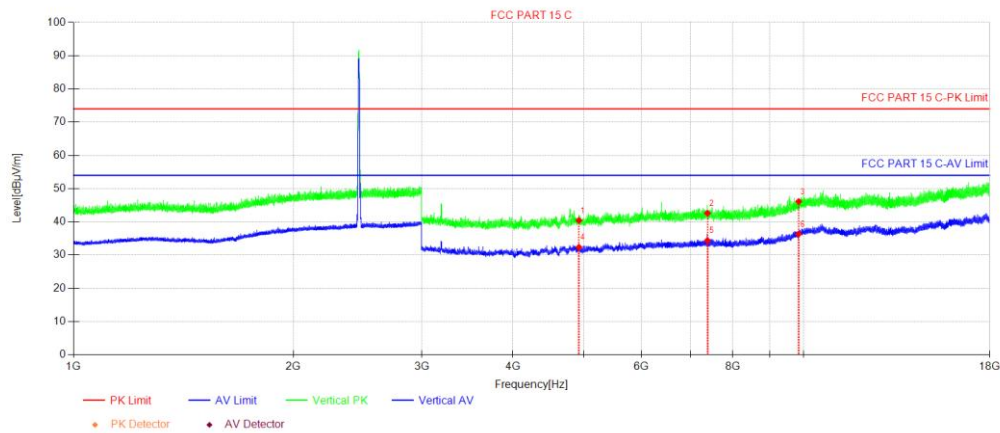

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	4924.60	45.22	-4.79	40.43	74.00	33.57	150	122	PK
2	7386.22	43.96	-1.32	42.64	74.00	31.36	150	197	PK
3	9848.59	44.13	2.00	46.13	74.00	27.87	150	303	PK
4	4924.60	37.16	-4.79	32.37	54.00	21.63	150	158	AV
5	7386.22	35.73	-1.32	34.41	54.00	19.59	150	179	AV
6	9848.59	34.36	2.00	36.36	54.00	17.64	150	179	AV


**11B 2462MHz**

Horizontal:

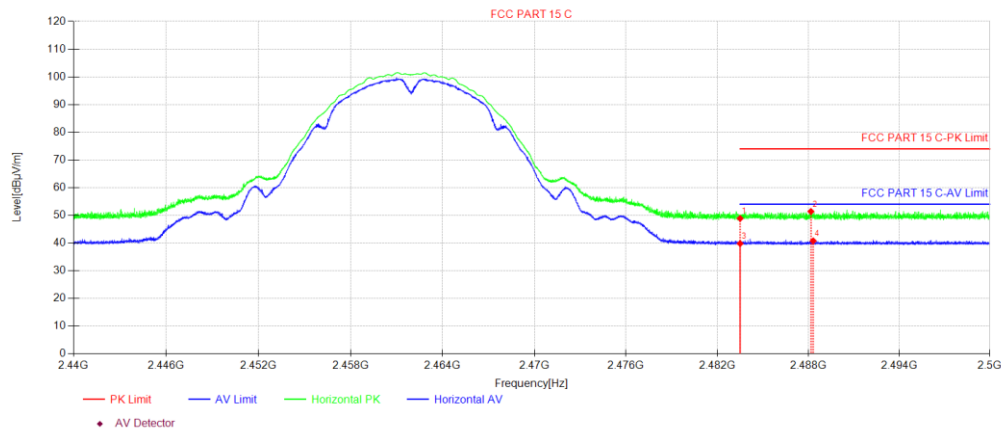

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	2483.50	49.18	-0.29	48.89	74.00	25.11	150	82	PK
2	2488.17	51.67	-0.26	51.41	74.00	22.59	150	340	PK
3	2483.50	40.10	-0.29	39.81	54.00	14.19	150	360	AV
4	2488.32	41.04	-0.26	40.78	54.00	13.22	150	59	AV

Vertical:

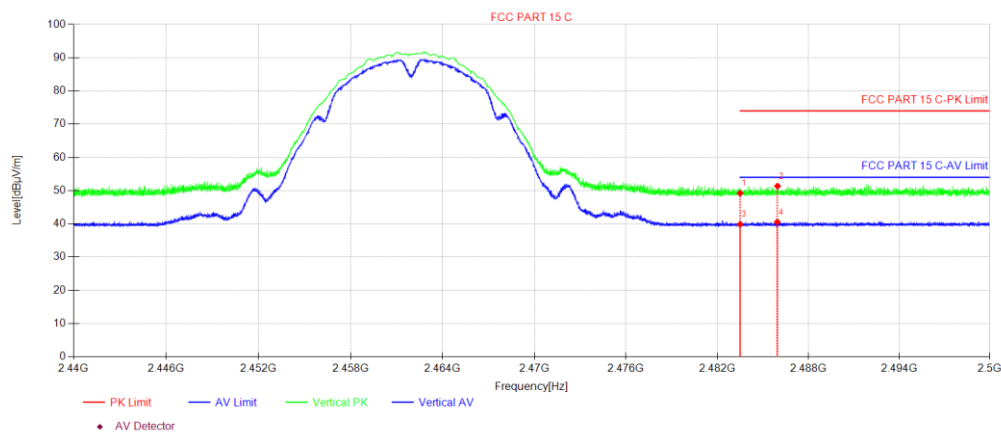


NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	2483.50	49.53	-0.29	49.24	74.00	24.76	150	164	PK
2	2485.97	51.65	-0.27	51.38	74.00	22.62	150	345	PK
3	2483.50	40.15	-0.29	39.86	54.00	14.14	150	356	AV
4	2485.95	40.83	-0.27	40.56	54.00	13.44	150	312	AV



900M transfer image


904MHz(QPSK1.4MHz)

Horizontal:

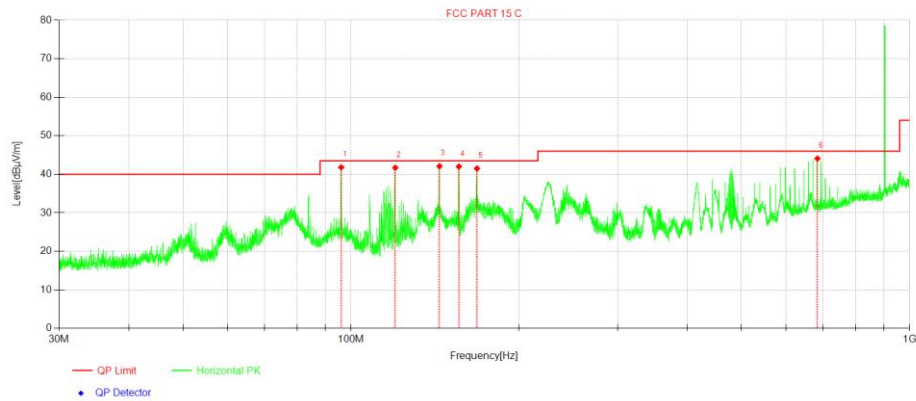

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	96.00	55.04	-13.22	41.82	43.50	1.68	100	199	PK
2	119.98	51.99	-10.29	41.70	43.50	1.80	100	183	PK
3	143.98	50.32	-8.22	42.10	43.50	1.40	100	178	PK
4	155.96	49.79	-7.79	42.00	43.50	1.50	100	289	PK
5	168.00	49.65	-8.15	41.50	43.50	2.00	100	164	PK
6	684.03	42.01	2.08	44.09	46.00	1.91	100	137	PK


Vertical:

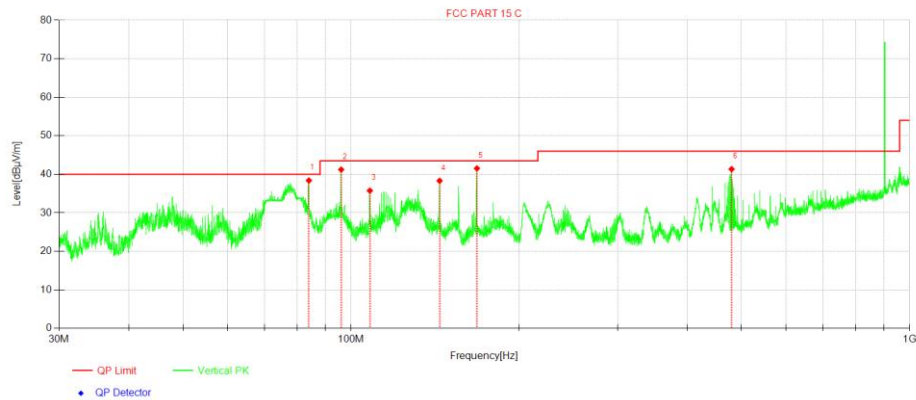

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	84.02	51.84	-13.45	38.39	40.00	1.61	100	317	PK
2	96.00	54.44	-13.22	41.22	43.50	2.28	100	129	PK
3	108.04	47.22	-11.46	35.76	43.50	7.74	100	313	PK
4	144.03	46.54	-8.22	38.32	43.50	5.18	100	0	PK
5	168.00	49.68	-8.15	41.53	43.50	1.97	100	298	PK
6	480.02	43.58	-2.24	41.34	46.00	4.66	100	109	PK


**915MHz(QPSK1.4MHz)**

Horizontal:

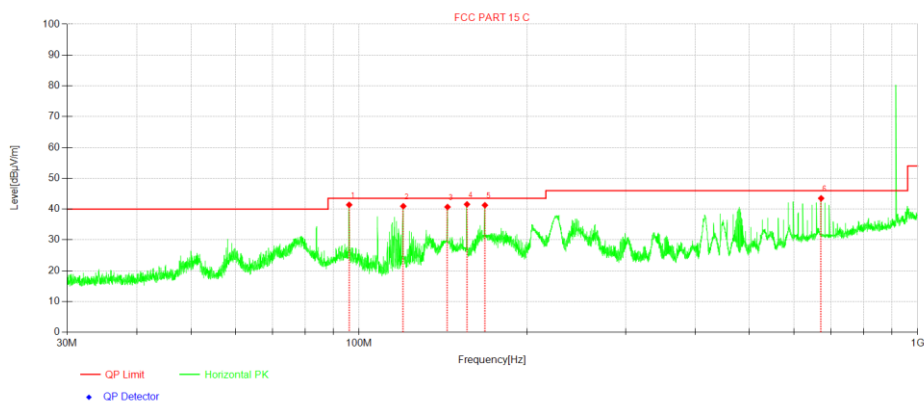

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	96.00	54.61	-13.22	41.39	43.50	2.11	100	209	PK
2	119.98	51.24	-10.29	40.95	43.50	2.55	100	199	PK
3	143.98	48.91	-8.22	40.69	43.50	2.81	100	190	PK
4	156.02	49.34	-7.79	41.55	43.50	1.95	100	290	PK
5	168.00	49.42	-8.15	41.27	43.50	2.23	100	157	PK
6	671.90	41.74	1.76	43.50	46.00	2.50	100	137	PK


Vertical:

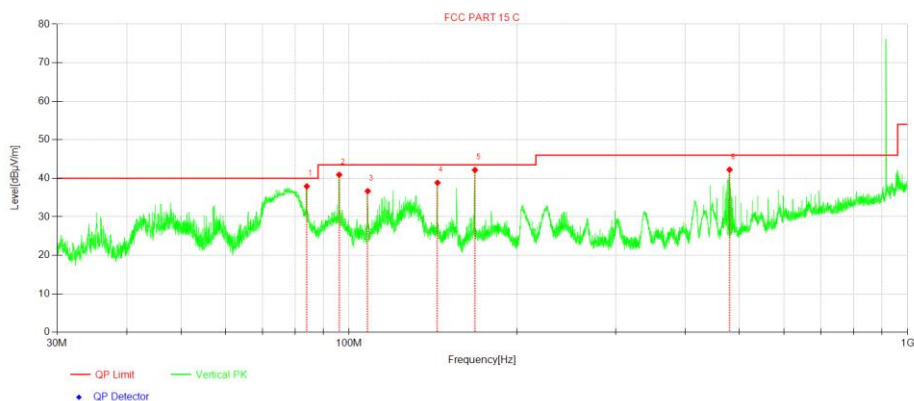

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	83.99	51.38	-13.45	37.93	40.00	2.07	100	311	PK
2	96.00	54.15	-13.22	40.93	43.50	2.57	100	360	PK
3	108.00	48.13	-11.46	36.67	43.50	6.83	100	229	PK
4	143.98	47.07	-8.22	38.85	43.50	4.65	100	0	PK
5	168.00	50.30	-8.15	42.15	43.50	1.35	100	294	PK
6	480.02	44.47	-2.24	42.23	46.00	3.77	100	106	PK


**926MHz(QPSK1.4MHz)**

Horizontal:

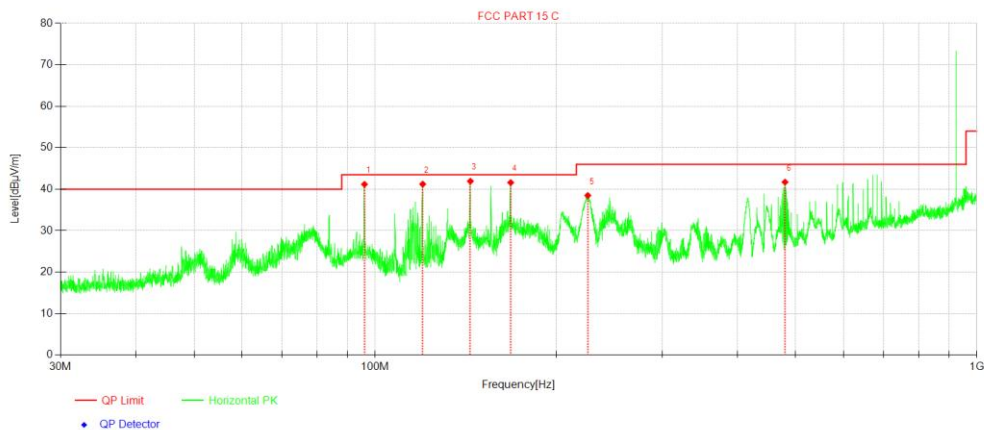

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	96.00	54.40	-13.22	41.18	43.50	2.32	100	196	PK
2	119.98	51.52	-10.29	41.23	43.50	2.27	100	178	PK
3	143.98	50.15	-8.22	41.93	43.50	1.57	100	185	PK
4	168.00	49.75	-8.15	41.60	43.50	1.90	100	285	PK
5	225.62	49.43	-10.94	38.49	46.00	7.51	100	262	PK
6	480.02	43.96	-2.24	41.72	46.00	4.28	100	338	PK


Vertical:

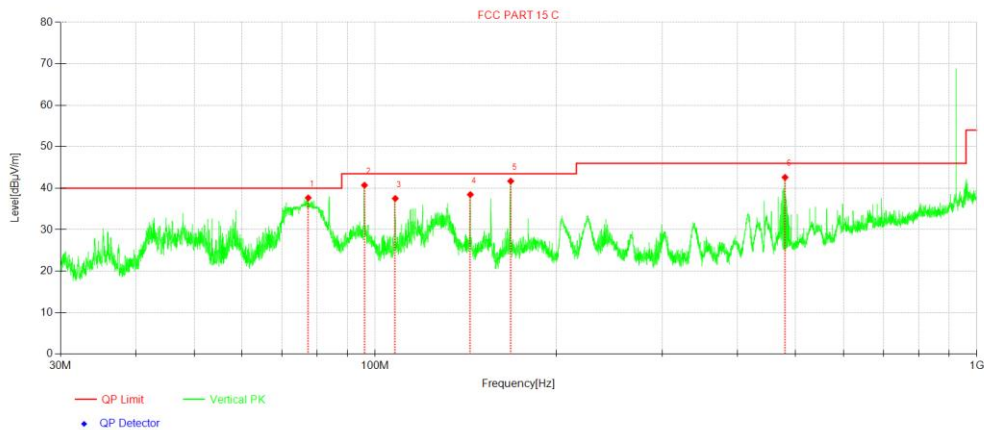

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	77.40	49.52	-11.85	37.67	40.00	2.33	100	220	PK
2	96.00	53.94	-13.22	40.72	43.50	2.78	100	2	PK
3	108.00	48.99	-11.46	37.53	43.50	5.97	100	229	PK
4	143.98	46.69	-8.22	38.47	43.50	5.03	100	342	PK
5	168.00	49.86	-8.15	41.71	43.50	1.79	100	317	PK
6	480.02	44.86	-2.24	42.62	46.00	3.38	100	110	PK


**2.4GHz Transfer Image****2403.5MHz(QPSK1.4MHz)**

Horizontal:

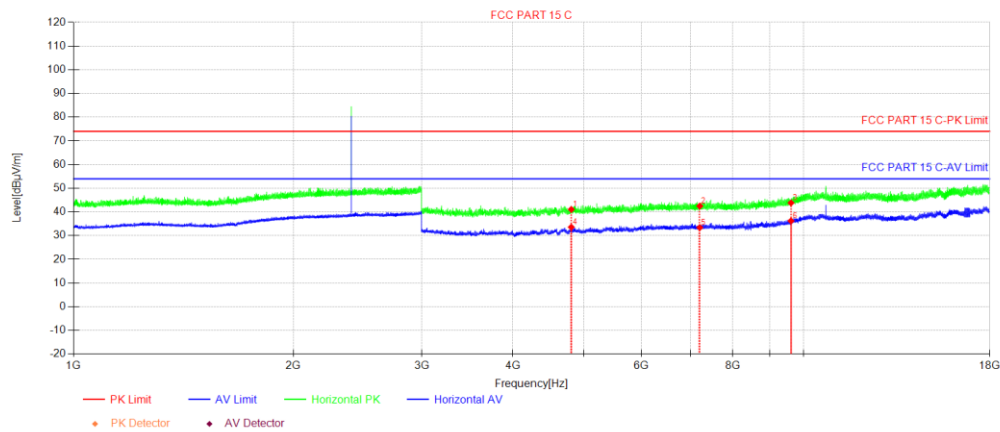

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	4807.59	45.67	-4.61	41.06	74.00	32.94	150	116	PK
2	7210.71	44.24	-1.75	42.49	74.00	31.51	150	205	PK
3	9614.58	42.89	0.90	43.79	74.00	30.21	150	325	PK
4	4807.59	38.17	-4.61	33.56	54.00	20.44	150	290	AV
5	7210.71	35.15	-1.75	33.40	54.00	20.60	150	1	AV
6	9614.58	35.31	0.90	36.21	54.00	17.79	150	12	AV


Vertical:

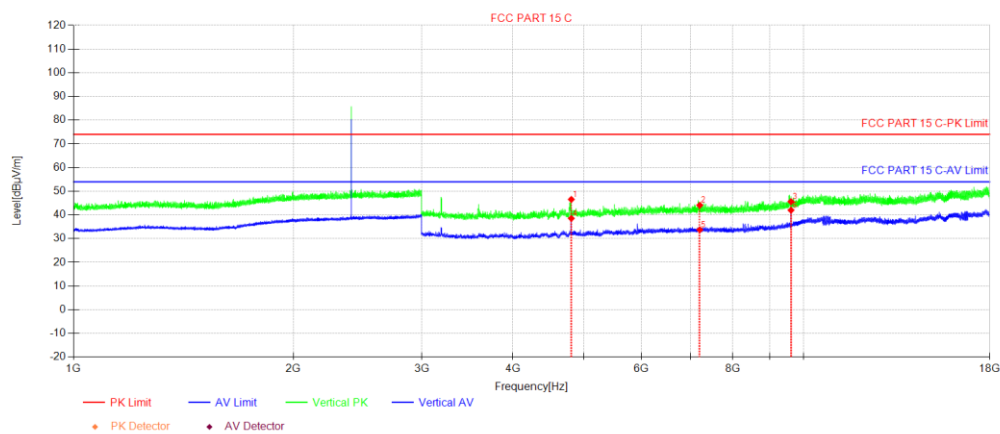

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	4807.59	51.16	-4.61	46.55	74.00	27.45	150	7	PK
2	7210.71	45.84	-1.75	44.09	74.00	29.91	150	253	PK
3	9614.58	44.72	0.90	45.62	74.00	28.38	150	288	PK
4	4807.59	43.15	-4.61	38.54	54.00	15.46	150	341	AV
5	7210.71	35.48	-1.75	33.73	54.00	20.27	150	114	AV
6	9614.58	41.10	0.90	42.00	54.00	12.00	150	288	AV


**2403.5MHz(QPSK1.4MHz)**

Horizontal:

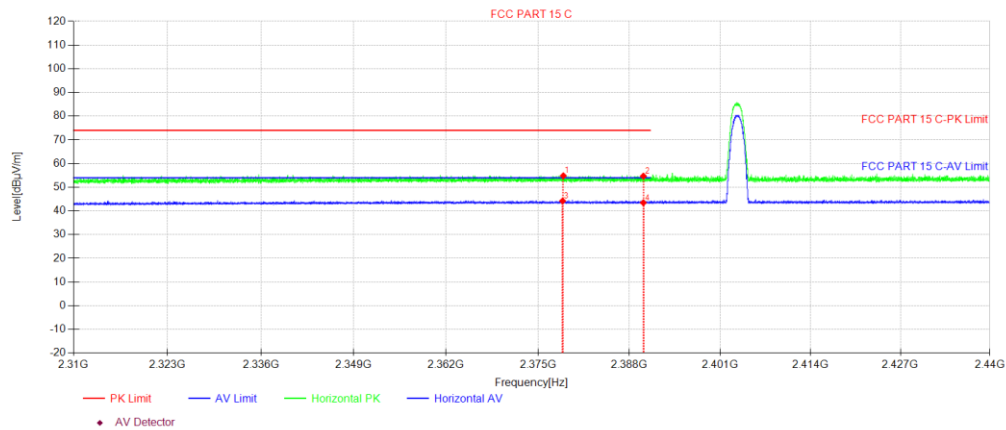

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	2378.61	55.69	-0.84	54.85	74.00	19.15	150	172	PK
2	2390.01	55.49	-0.80	54.69	74.00	19.31	150	152	PK
3	2378.50	45.03	-0.84	44.19	54.00	9.81	150	152	AV
4	2390.01	44.25	-0.80	43.45	54.00	10.55	150	182	AV

Vertical:

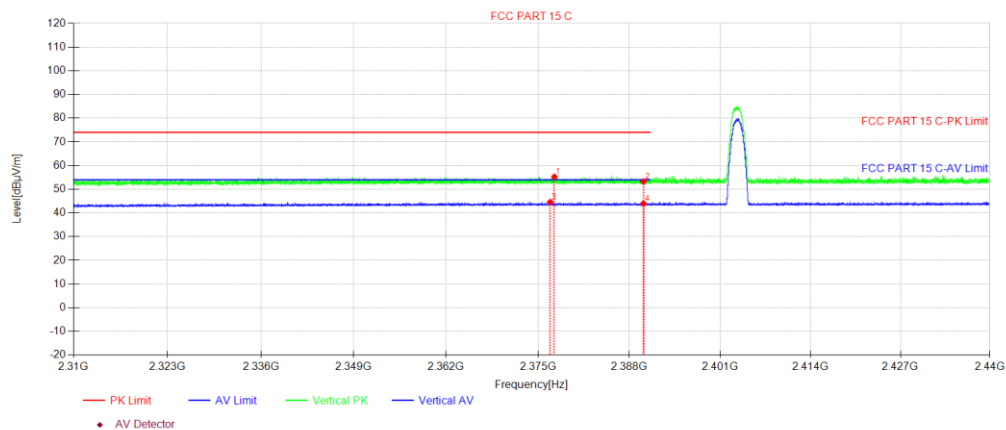


NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	2377.33	56.08	-0.84	55.24	74.00	18.76	150	356	PK
2	2390.01	54.03	-0.80	53.23	74.00	20.77	150	326	PK
3	2376.74	45.39	-0.84	44.55	54.00	9.45	150	79	AV
4	2390.01	44.72	-0.80	43.92	54.00	10.08	150	141	AV




2439.5MHz(QPSK1.4MHz)

Horizontal:

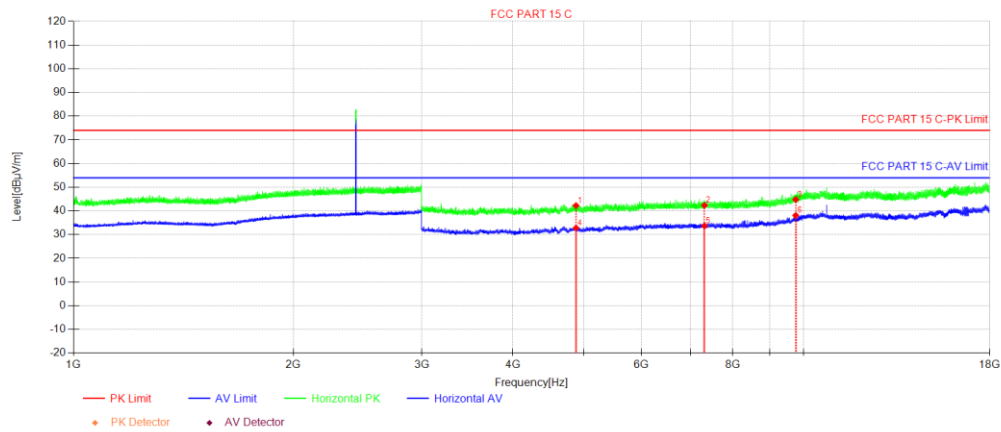

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	4879.59	46.94	-4.70	42.24	74.00	31.76	150	290	PK
2	7318.72	43.83	-1.50	42.33	74.00	31.67	150	149	PK
3	9758.59	43.19	1.62	44.81	74.00	29.19	150	80	PK
4	4879.59	37.47	-4.70	32.77	54.00	21.23	150	273	AV
5	7318.72	35.18	-1.50	33.68	54.00	20.32	150	238	AV
6	9758.59	36.48	1.62	38.10	54.00	15.90	150	0	AV


Vertical:

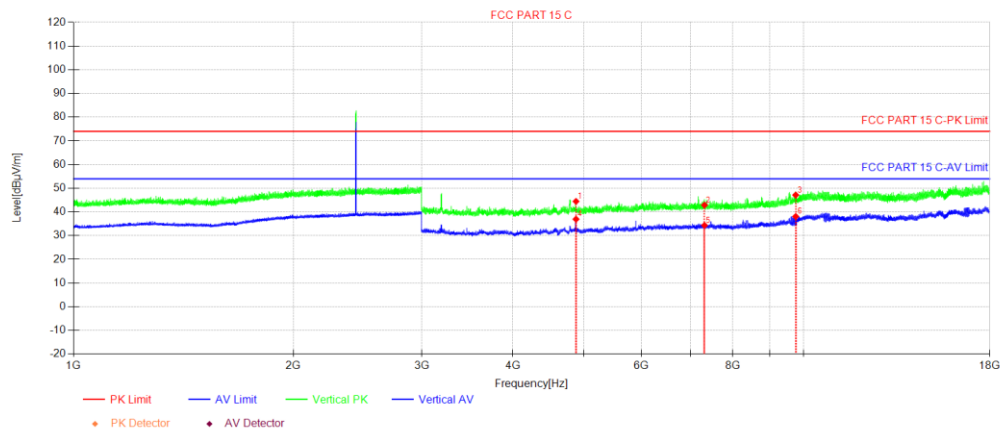

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	4879.59	49.14	-4.70	44.44	74.00	29.56	150	219	PK
2	7318.72	44.38	-1.50	42.88	74.00	31.12	150	63	PK
3	9758.59	45.50	1.62	47.12	74.00	26.88	150	305	PK
4	4879.59	41.64	-4.70	36.94	54.00	17.06	150	341	AV
5	7318.72	35.81	-1.50	34.31	54.00	19.69	150	12	AV
6	9758.59	36.45	1.62	38.07	54.00	15.93	150	305	AV


**2475MHz(QPSK1.4MHz)**

Horizontal:

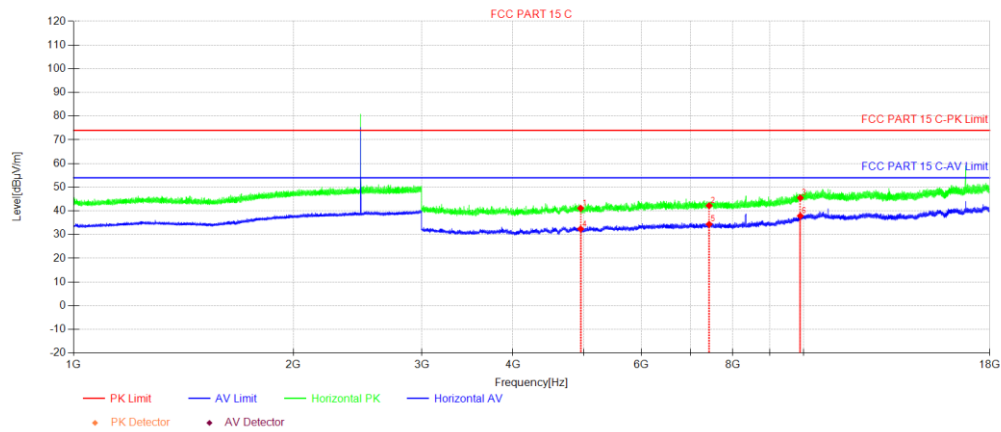

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	4951.60	45.97	-4.85	41.12	74.00	32.88	150	39	PK
2	7426.72	43.55	-1.33	42.22	74.00	31.78	150	288	PK
3	9902.60	43.31	2.20	45.51	74.00	28.49	150	147	PK
4	4951.60	37.23	-4.85	32.38	54.00	21.62	150	218	AV
5	7426.72	35.71	-1.33	34.38	54.00	19.62	150	323	AV
6	9902.60	35.69	2.20	37.89	54.00	16.11	150	0	AV


Vertical:

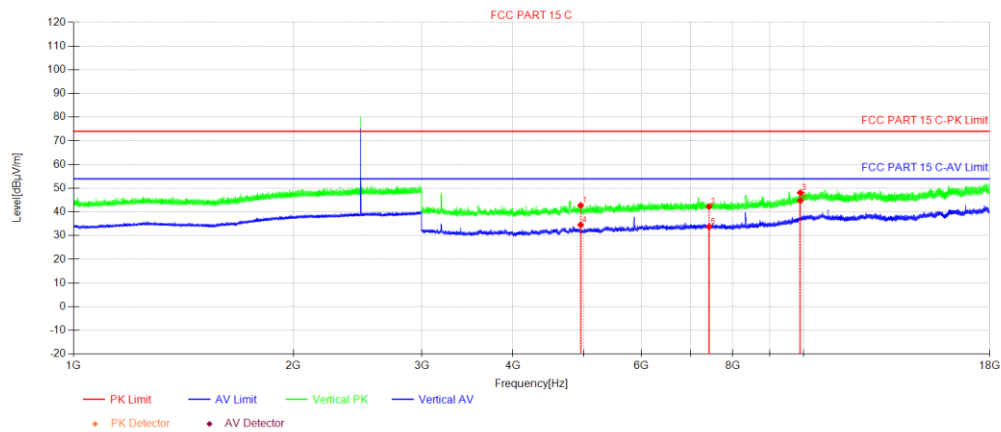

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	4951.60	47.57	-4.85	42.72	74.00	31.28	150	322	PK
2	7426.72	43.55	-1.33	42.22	74.00	31.78	150	111	PK
3	9902.60	45.88	2.20	48.08	74.00	25.92	150	305	PK
4	4951.60	39.36	-4.85	34.51	54.00	19.49	150	253	AV
5	7426.72	35.07	-1.33	33.74	54.00	20.26	150	305	AV
6	9902.60	42.62	2.20	44.82	54.00	9.18	150	305	AV


**2475MHz(QPSK1.4MHz)**

Horizontal:

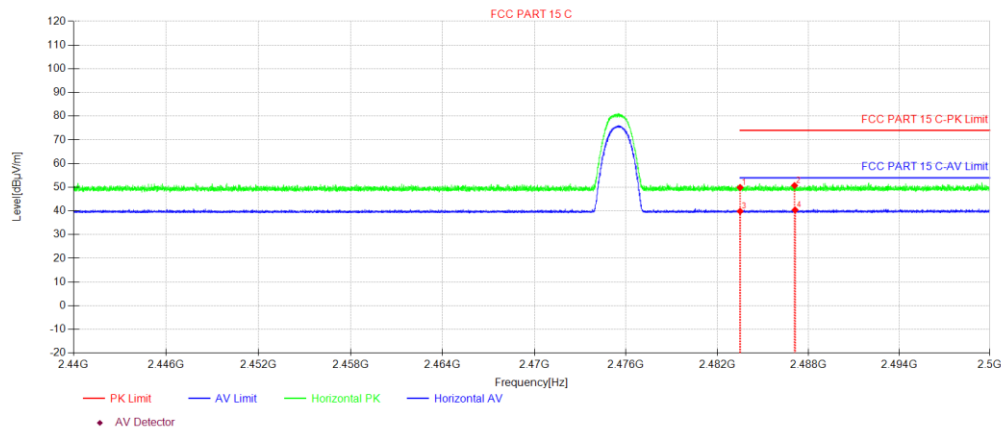

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	2483.50	50.18	-0.29	49.89	74.00	24.11	150	228	PK
2	2487.09	50.97	-0.26	50.71	74.00	23.29	150	281	PK
3	2483.50	40.14	-0.29	39.85	54.00	14.15	150	228	AV
4	2487.13	40.64	-0.26	40.38	54.00	13.62	150	68	AV

Vertical:

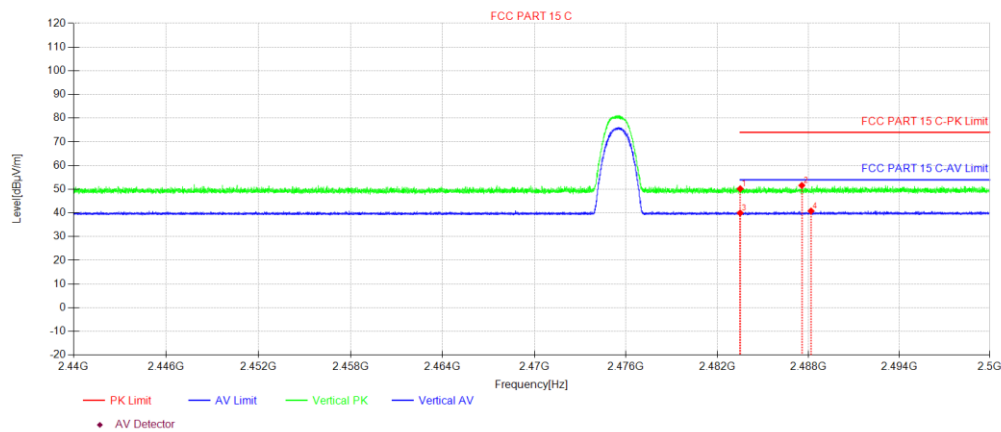

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector
1	2483.51	50.48	-0.29	50.19	74.00	23.81	150	121	PK
2	2487.57	51.86	-0.26	51.60	74.00	22.40	150	356	PK
3	2483.51	40.26	-0.29	39.97	54.00	14.03	150	14	AV
4	2488.18	41.06	-0.26	40.80	54.00	13.20	150	325	AV



Note:

1. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including Ant.Factor and the Cable Factor etc.), The basic equation is as follows:

Result Level= Reading Level + Correct Factor(including Ant.Factor, Cable Factor etc.)

2. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

3. The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be report.

4. All channels had been pre-test,only the worst case was reported.

---END REPORT---