




-6dB Bandwidth 802.11n(HT20) 5825MHz

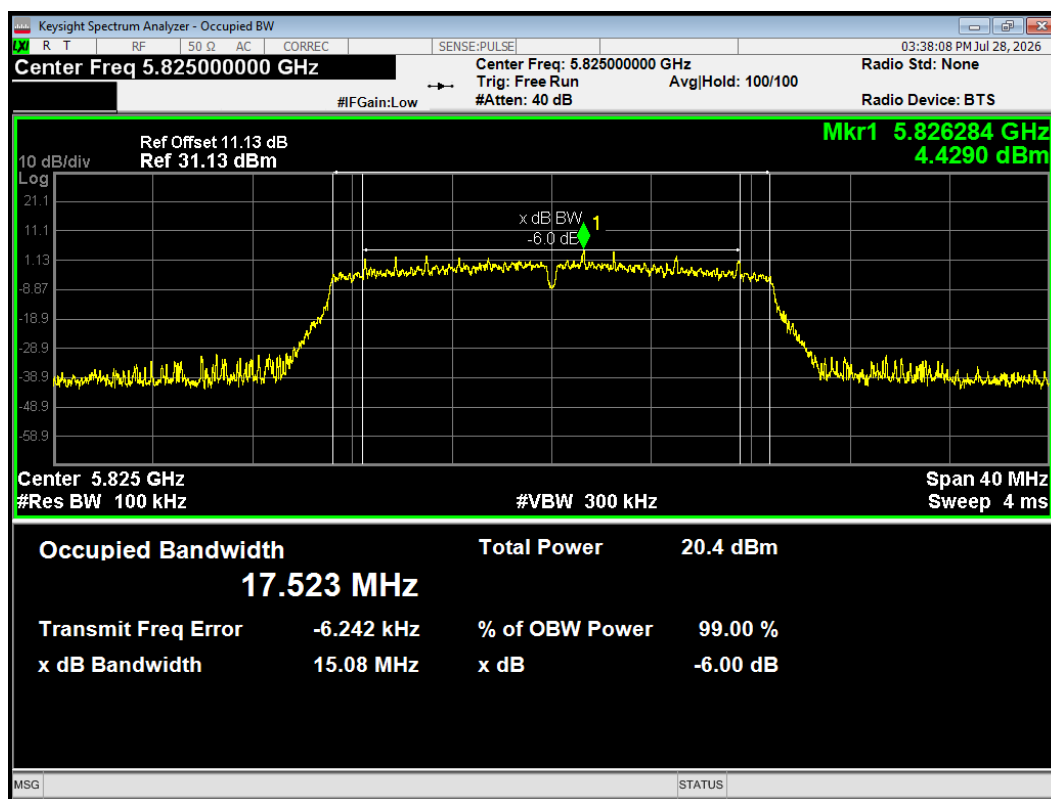


-6dB Bandwidth 802.11n(HT40) 5710MHz

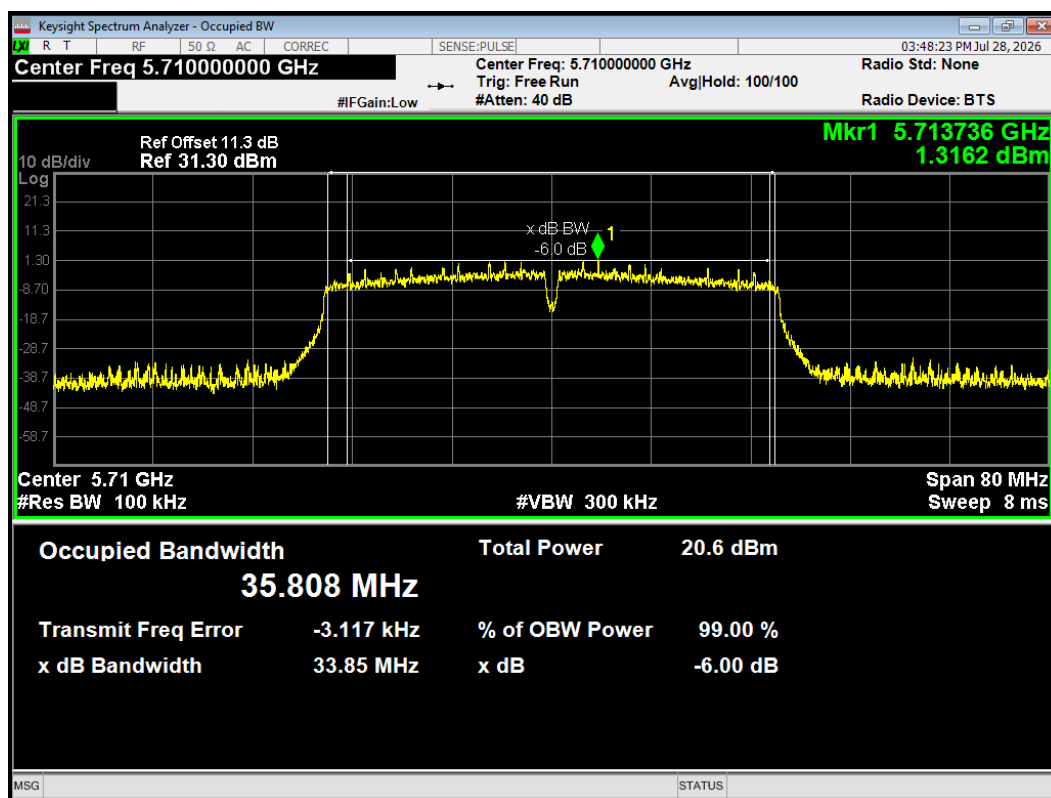

-6dB Bandwidth 802.11n(HT40) 5755MHz

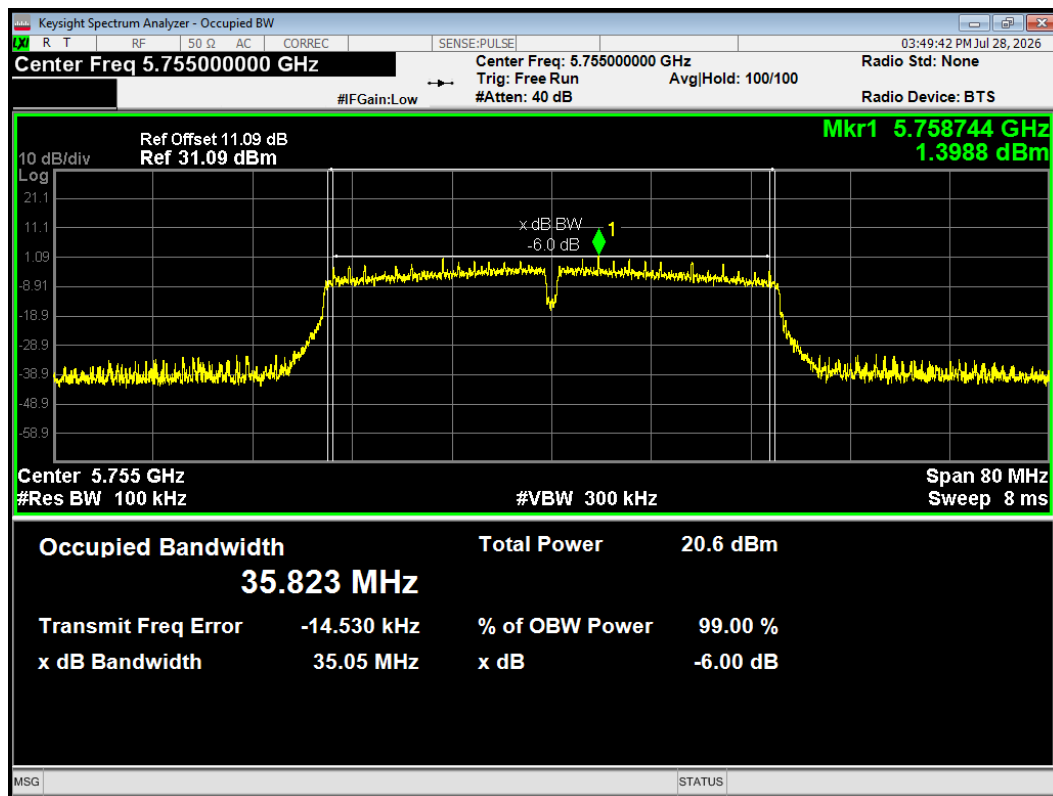

-6dB Bandwidth 802.11n(HT40) 5795MHz

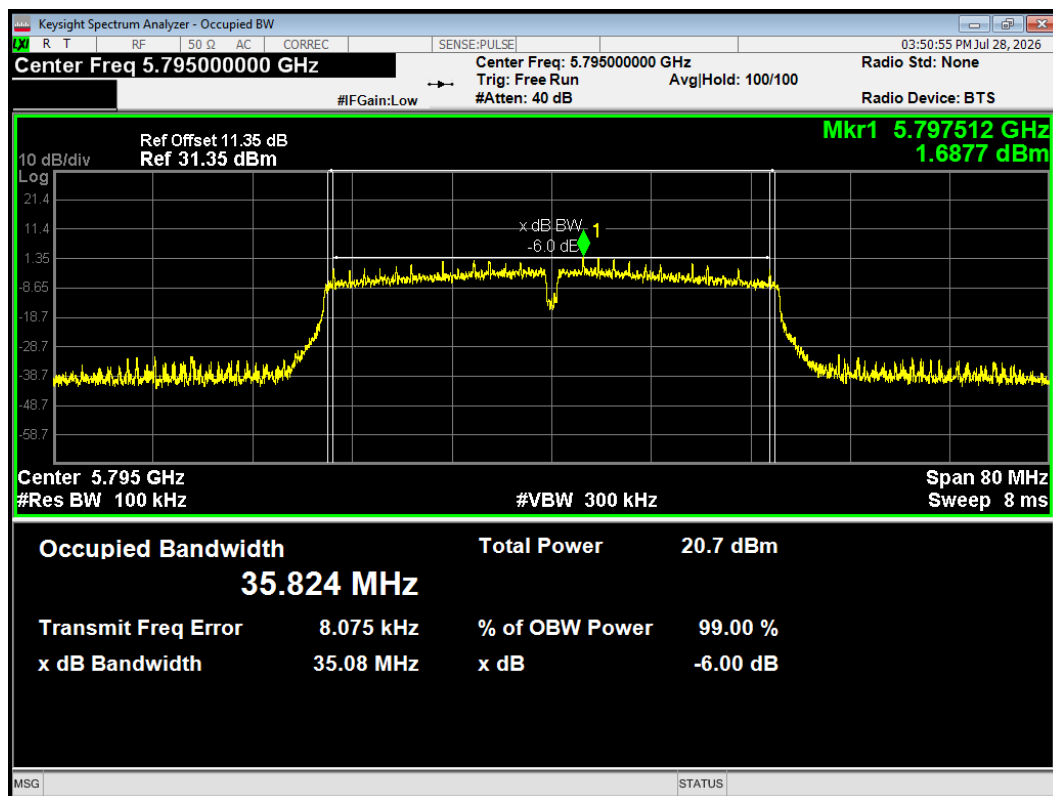

6.2. Average Power Output

Mode	Duty cycle	Duty cycle correction Factor (dB)
802.11a	0.969	0.13
802.11n HT20	0.967	0.14
802.11n HT40	0.936	0.29
802.11ac VHT20	0.967	0.14
802.11ac VHT40	0.938	0.28
802.11ac VHT80	0.881	0.55
Note: when Duty cycle ≥ 0.98 , Duty cycle correction Factor not required.		

U-NII-1

Test Mode	Channel/ Frequency (MHz)	Power Index
802.11a	36/5180	16
	40/5200	16
	48/5240	16
802.11n HT20	36/5180	15
	40/5200	15
	48/5240	15
802.11n HT40	38/5190	16.5
	46/5230	16.5
802.11ac VHT20	36/5180	15
	40/5200	15
	48/5240	15
802.11ac VHT40	38/5190	15
	46/5230	15
802.11ac VHT80	42/5210	15

U-NII-2A

Test Mode	Channel/ Frequency (MHz)	Power Index
802.11a	52/5260	16
	60/5300	16
	64/5320	16
802.11n HT20	52/5260	15
	60/5300	15
	64/5320	15
802.11n HT40	54/5270	16.5
	62/5310	16.5
802.11ac VHT20	52/5260	15
	60/5300	15
	64/5320	15
802.11ac VHT40	54/5270	15
	62/5310	15
802.11ac VHT80	58/5290	15

U-NII-2C

Test Mode	Channel/ Frequency (MHz)	Power Index
802.11a	100/5500	16
	120/5600	16
	140/5700	16
	144/5720	16
802.11n HT20	100/5500	15
	120/5600	15
	140/5700	15
	144/5720	15
802.11n HT40	102/5510	16.5
	118/5590	16.5
	134/5670	16.5
	142/5710	16.5
802.11ac VHT20	100/5500	15
	120/5600	15
	140/5700	15
	144/5720	15
802.11ac VHT40	102/5510	15
	118/5590	15
	134/5670	15
	142/5710	15
802.11ac VHT80	122/5610	15
	138/5690	15

U-NII-3

Test Mode	Channel/ Frequency (MHz)	Power Index
802.11a	144/5720	16
	149/5745	16
	157/5785	16
	165/5825	16
802.11n HT20	144/5720	15
	149/5745	15
	157/5785	15
	165/5825	15
802.11n HT40	142/5710	16.5
	151/5755	16.5
	159/5795	16.5
802.11ac VHT20	144/5720	15
	149/5745	15
	157/5785	15
	165/5825	15
802.11ac VHT40	142/5710	15
	151/5755	15
	159/5795	15
802.11ac VHT80	138/5690	15
	155/5775	15

Test Mode		Channel/ Frequency (MHz)	B=26 dB bandwidth (MHz)	Limit 11 dBm + 10 log B (dBm)	Final Limit (dBm)	
U-NII-2A	802.11a	52/5260	20.23	24.06	24.00	
		60/5300	20.27	24.07	24.00	
		64/5320	19.94	24.00	24.00	
	802.11n HT20	52/5260	20.24	24.06	24.00	
		60/5300	20.40	24.10	24.00	
		64/5320	20.31	24.08	24.00	
	802.11n HT40	54/5270	41.07	27.14	24.00	
		62/5310	40.64	27.09	24.00	
	802.11ac VHT20	52/5260	20.47	24.11	24.00	
		60/5300	20.46	24.11	24.00	
		64/5320	20.24	24.06	24.00	
	802.11ac VHT40	54/5270	40.65	27.09	24.00	
		62/5310	40.86	27.11	24.00	
802.11ac VHT80	58/5290	80.70	30.07	24.00		
U-NII-2C	802.11a	100/5500	19.93	23.99	24.00	
		120/5600	19.95	24.00	24.00	
		140/5700	20.04	24.02	24.00	
		144/5720	19.98	24.01	24.00	
	802.11n HT20	100/5500	20.44	24.11	24.00	
		120/5600	20.31	24.08	24.00	
		140/5700	20.18	24.05	24.00	
		144/5720	20.24	24.06	24.00	
	802.11n HT40	102/5510	40.58	27.08	24.00	
		118/5590	40.48	27.07	24.00	
		134/5670	40.67	27.09	24.00	
		142/5710	40.20	27.04	24.00	
	802.11ac VHT20	100/5500	20.26	24.07	24.00	
		120/5600	20.09	24.03	24.00	
		140/5700	20.21	24.06	24.00	
		144/5720	20.57	24.13	24.00	
	802.11ac VHT40	102/5510	40.51	27.08	24.00	
		118/5590	40.65	27.09	24.00	
		134/5670	41.13	27.14	24.00	
		142/5710	40.91	27.12	24.00	
	802.11ac VHT80	122/5610	81.06	30.09	24.00	
		138/5690	81.02	30.09	24.00	
	Note: 250mW=24dBm					

U-NII-1

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	36/5180	13.61	13.74	24.00	PASS
	40/5200	13.73	13.86	24.00	PASS
	48/5240	13.68	13.81	24.00	PASS
802.11n HT20	36/5180	13.65	13.79	24.00	PASS
	40/5200	13.79	13.93	24.00	PASS
	48/5240	13.51	13.65	24.00	PASS
802.11n HT40	38/5190	13.62	13.91	24.00	PASS
	46/5230	13.40	13.69	24.00	PASS
802.11ac VHT20	36/5180	13.13	13.27	24.00	PASS
	40/5200	13.16	13.30	24.00	PASS
	48/5240	12.85	12.99	24.00	PASS
802.11ac VHT40	38/5190	13.07	13.35	24.00	PASS
	46/5230	12.81	13.09	24.00	PASS
802.11ac VHT80	42/5210	12.84	13.39	24.00	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					

U-NII-2A

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	52/5260	14.46	14.59	24.00	PASS
	60/5300	14.39	14.52	24.00	PASS
	64/5320	14.40	14.53	24.00	PASS
802.11n HT20	52/5260	13.75	13.89	24.00	PASS
	60/5300	13.63	13.77	24.00	PASS
	64/5320	13.74	13.88	24.00	PASS
802.11n HT40	54/5270	13.61	13.90	24.00	PASS
	62/5310	13.42	13.71	24.00	PASS
802.11ac VHT20	52/5260	13.22	13.36	24.00	PASS
	60/5300	13.24	13.38	24.00	PASS
	64/5320	13.24	13.38	24.00	PASS
802.11ac VHT40	54/5270	13.17	13.45	24.00	PASS
	62/5310	12.93	13.21	24.00	PASS
802.11ac VHT80	58/5290	13.02	13.57	24.00	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					

U-NII-2C

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	100/5500	14.64	14.77	24.00	PASS
	120/5600	14.39	14.52	24.00	PASS
	140/5700	15.04	15.17	24.00	PASS
	144/5720	14.47	14.60	24.00	PASS
802.11n HT20	100/5500	14.05	14.19	24.00	PASS
	120/5600	13.61	13.75	24.00	PASS
	140/5700	14.39	14.53	24.00	PASS
	144/5720	13.59	13.73	24.00	PASS
802.11n HT40	102/5510	13.95	14.24	24.00	PASS
	118/5590	13.46	13.75	24.00	PASS
	134/5670	13.95	14.24	24.00	PASS
	142/5710	14.02	14.31	24.00	PASS
802.11ac VHT20	100/5500	13.66	13.80	24.00	PASS
	120/5600	13.27	13.41	24.00	PASS
	140/5700	13.86	14.00	24.00	PASS
	144/5720	13.12	13.26	24.00	PASS
802.11ac VHT40	102/5510	13.40	13.68	24.00	PASS
	118/5590	13.12	13.40	24.00	PASS
	134/5670	13.45	13.73	24.00	PASS
	142/5710	13.58	13.86	24.00	PASS
802.11ac VHT80	122/5610	13.01	13.56	24.00	PASS
	138/5690	13.36	13.91	24.00	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					

U-NII-3

Test Mode	Channel/ Frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11a	144/5720	6.47	6.60	30.00	PASS
	149/5745	15.03	15.16	30.00	PASS
	157/5785	15.10	15.23	30.00	PASS
	165/5825	15.03	15.16	30.00	PASS
802.11n HT20	144/5720	6.11	6.25	30.00	PASS
	149/5745	14.36	14.50	30.00	PASS
	157/5785	14.46	14.60	30.00	PASS
	165/5825	14.35	14.49	30.00	PASS
802.11n HT40	142/5710	1.21	1.50	30.00	PASS
	151/5755	14.09	14.38	30.00	PASS
	159/5795	14.36	14.65	30.00	PASS
802.11ac VHT20	144/5720	5.60	5.74	30.00	PASS
	149/5745	13.84	13.98	30.00	PASS
	157/5785	14.00	14.14	30.00	PASS
	165/5825	13.85	13.99	30.00	PASS
802.11ac VHT40	142/5710	0.73	1.01	30.00	PASS
	151/5755	13.56	13.84	30.00	PASS
	159/5795	13.90	14.18	30.00	PASS
802.11ac VHT80	138/5690	-2.38	-1.83	30.00	PASS
	155/5775	13.70	14.25	30.00	PASS
Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor					

6.3. Frequency Stability

Voltage (V)	Temperature (°C)	U-NII-1 Test Results			
		5200MHz			
		1min	2min	5min	10min
7.7	-10	5199.980450	5199.984204	5199.979254	5199.977280
7.7	0	5199.983915	5199.986237	5199.978077	5199.974836
7.7	10	5199.975513	5199.981130	5199.973996	5199.971418
7.7	20	5199.975254	5199.972332	5199.969766	5199.962563
7.7	30	5199.970888	5199.964974	5199.966891	5199.954536
7.7	40	5199.968873	5199.956381	5199.965765	5199.946858
7.7	50	5199.966721	5199.950898	5199.961810	5199.941538
6	20	5199.963813	5199.947493	5199.951872	5199.939623
8.8	20	5199.960974	5199.944461	5199.948491	5199.931416
Max. ΔMHz		-0.039026	-0.055539	-0.051509	-0.068584
PPM		-7.505000	-10.680577	-9.905577	-13.189231

Voltage (V)	Temperature (°C)	U-NII-2A Test Results			
		5300MHz			
		1min	2min	5min	10min
7.7	-10	5300.004450	5299.985614	5299.986294	5299.982691
7.7	0	5300.004207	5299.986909	5299.982194	5299.986697
7.7	10	5299.999455	5299.986902	5299.975168	5299.977926
7.7	20	5299.997841	5299.986039	5299.967940	5299.974813
7.7	30	5299.995025	5299.978538	5299.959915	5299.971751
7.7	40	5299.992649	5299.977339	5299.956148	5299.961957
7.7	50	5299.986795	5299.971781	5299.946444	5299.957514
6	20	5299.978245	5299.962598	5299.943225	5299.950731
8.8	20	5299.978201	5299.961577	5299.937201	5299.946790
Max. ΔMHz		-0.021799	-0.038423	-0.062799	-0.053210
PPM		-4.113019	-7.249623	-11.848868	-10.039623

Voltage (V)	Temperature (°C)	U-NII-2C Test Results			
		5580MHz			
		1min	2min	5min	10min
7.7	-10	5579.988042	5579.984257	5579.983488	5579.974830
7.7	0	5579.990286	5579.982778	5579.978386	5579.968769
7.7	10	5579.989698	5579.974475	5579.971448	5579.964912
7.7	20	5579.981308	5579.968013	5579.966073	5579.961481
7.7	30	5579.980828	5579.958824	5579.959779	5579.959098
7.7	40	5579.972874	5579.949108	5579.959730	5579.949467
7.7	50	5579.969881	5579.941084	5579.957199	5579.944409
6	20	5579.969852	5579.939525	5579.948835	5579.936774
8.8	20	5579.961910	5579.929662	5579.940322	5579.930768
Max. ΔMHz		-0.038090	-0.070338	-0.059678	-0.069232
PPM		-6.826165	-12.605376	-10.694982	-12.407168

Voltage (V)	Temperature (°C)	U-NII-3 Test Results			
		5785MHz			
		1min	2min	5min	10min
7.7	-10	5785.003817	5785.005376	5784.986290	5784.995235
7.7	0	5785.003147	5785.000886	5784.986737	5784.991091
7.7	10	5784.993801	5784.998781	5784.980293	5784.990786
7.7	20	5784.987227	5784.991939	5784.977693	5784.987760
7.7	30	5784.984502	5784.988201	5784.976541	5784.978889
7.7	40	5784.982350	5784.979984	5784.973773	5784.970161
7.7	50	5784.981497	5784.971820	5784.972339	5784.960326
6	20	5784.980887	5784.963154	5784.968414	5784.954319
8.8	20	5784.973274	5784.953250	5784.961531	5784.952406
Max. ΔMHz		-0.026726	-0.046750	-0.038469	-0.047594
PPM		-4.619879	-8.081245	-6.649784	-8.227139

6.4. Power Spectral Density

U-NII-1

Mode	Channel/ Frequency (MHz)	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	36/5180	4.12	4.25	11	PASS
	40/5200	4.29	4.42	11	PASS
	48/5240	3.92	4.05	11	PASS
802.11n HT20	36/5180	4.04	4.18	11	PASS
	40/5200	4.09	4.23	11	PASS
	48/5240	3.69	3.83	11	PASS
802.11n HT40	38/5190	0.86	1.15	11	PASS
	46/5230	0.81	1.10	11	PASS
802.11ac VHT20	36/5180	4.04	4.18	11	PASS
	40/5200	4.09	4.23	11	PASS
	48/5240	3.69	3.83	11	PASS
802.11ac VHT40	38/5190	0.86	1.14	11	PASS
	46/5230	0.81	1.09	11	PASS
802.11ac VHT80	42/5210	4.04	4.59	11	PASS
Note: Power Spectral Density =Read Value+Duty cycle correction factor					

U-NII-2A

Mode	Channel /Frequency (MHz)	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	52/5260	4.93	5.06	11	PASS
	60/5300	4.76	4.89	11	PASS
	64/5320	4.65	4.78	11	PASS
802.11n HT20	52/5260	3.85	3.99	11	PASS
	60/5300	4.14	4.28	11	PASS
	64/5320	4.13	4.27	11	PASS
802.11n HT40	54/5270	0.71	1.00	11	PASS
	62/5310	0.84	1.13	11	PASS
802.11ac VHT20	52/5260	3.49	3.63	11	PASS
	60/5300	3.33	3.47	11	PASS
	64/5320	3.42	3.56	11	PASS
802.11ac VHT40	54/5270	0.54	0.82	11	PASS
	62/5310	0.56	0.84	11	PASS
802.11ac VHT80	58/5290	-2.77	-2.22	11	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor

U-NII-2C


Mode	Channel /Frequency (MHz)	Read Value (dBm /MHz)	Power Spectral Density (dBm /MHz)	Limit (dBm /MHz)	Conclusion
802.11a	100/5500	5.03	5.16	11	PASS
	120/5600	4.74	4.87	11	PASS
	140/5700	5.75	5.88	11	PASS
	144/5720	5.63	5.76	11	PASS
802.11n HT20	100/5500	4.42	4.56	11	PASS
	120/5600	3.96	4.10	11	PASS
	140/5700	4.95	5.09	11	PASS
	144/5720	4.88	5.02	11	PASS
802.11n HT40	102/5510	1.71	2.00	11	PASS
	118/5590	0.68	0.97	11	PASS
	134/5670	1.29	1.58	11	PASS
	142/5710	1.74	2.03	11	PASS
802.11ac VHT20	100/5500	4.16	4.30	11	PASS
	120/5600	3.66	3.80	11	PASS
	140/5700	4.23	4.37	11	PASS
	144/5720	4.19	4.33	11	PASS
802.11ac VHT40	102/5510	0.98	1.26	11	PASS
	118/5590	0.45	0.73	11	PASS
	134/5670	1.07	1.35	11	PASS
	142/5710	1.16	1.44	11	PASS
802.11ac VHT80	122/5610	-2.69	-2.14	11	PASS
	138/5690	-2.52	-1.97	11	PASS
Note: Power Spectral Density =Read Value+Duty cycle correction factor					

U-NII-3


Mode	Channel /Frequency (MHz)	Read Value (dBm/510kHz)	Power Spectral Density (dBm/510kHz)	Limit (dBm/500kHz)	Conclusion
802.11a	144/5720	0.81	0.94	30	PASS
	149/5745	2.53	2.66	30	PASS
	157/5785	2.69	2.82	30	PASS
	165/5825	2.52	2.65	30	PASS
802.11n HT20	144/5720	-0.60	-0.46	30	PASS
	149/5745	1.64	1.78	30	PASS
	157/5785	1.78	1.92	30	PASS
	165/5825	1.79	1.93	30	PASS
802.11n HT40	142/5710	-5.06	-4.77	30	PASS
	151/5755	-1.21	-0.92	30	PASS
	159/5795	-0.89	-0.60	30	PASS
802.11ac VHT20	144/5720	-1.15	-1.01	30	PASS
	149/5745	1.09	1.23	30	PASS
	157/5785	1.21	1.35	30	PASS
	165/5825	1.32	1.46	30	PASS
802.11ac VHT40	142/5710	-5.96	-5.68	30	PASS
	151/5755	-1.55	-1.27	30	PASS
	159/5795	-1.81	-1.53	30	PASS
802.11ac VHT80	138/5690	-9.39	-8.84	30	PASS
	155/5775	-4.85	-4.30	30	PASS
Note: PSD=Read Value+Duty cycle correction factor					

U-NII-1


PSD 802.11a 5180MHz

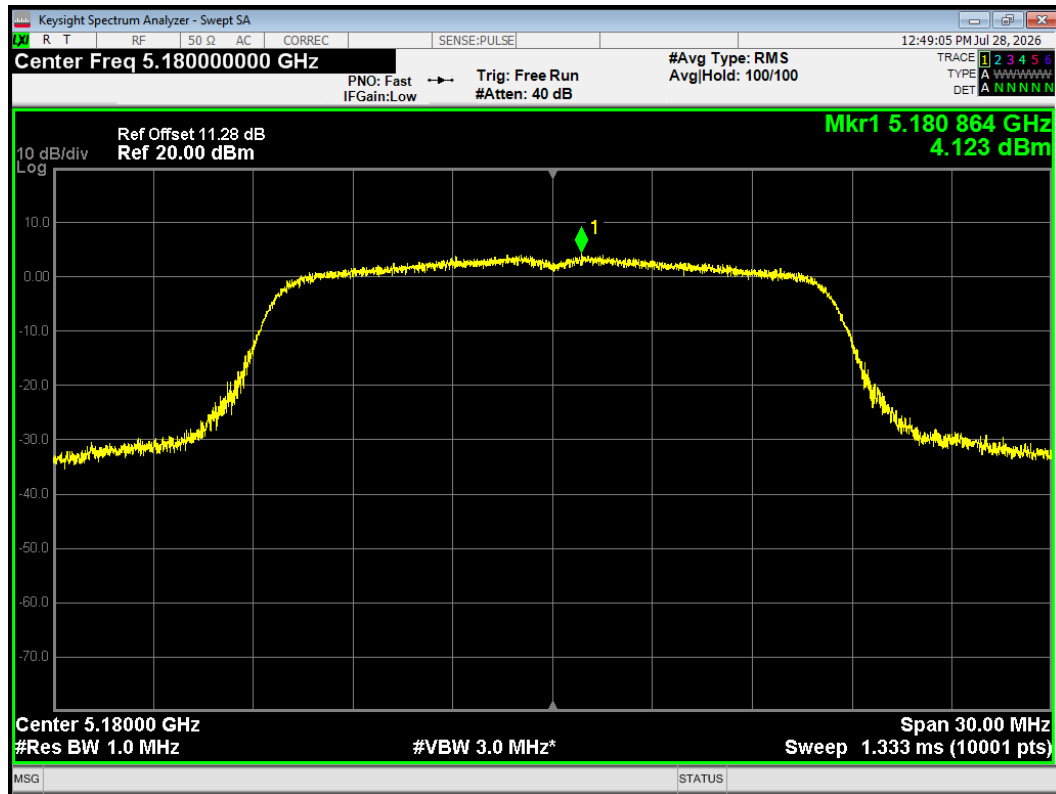


PSD 802.11a 5200MHz

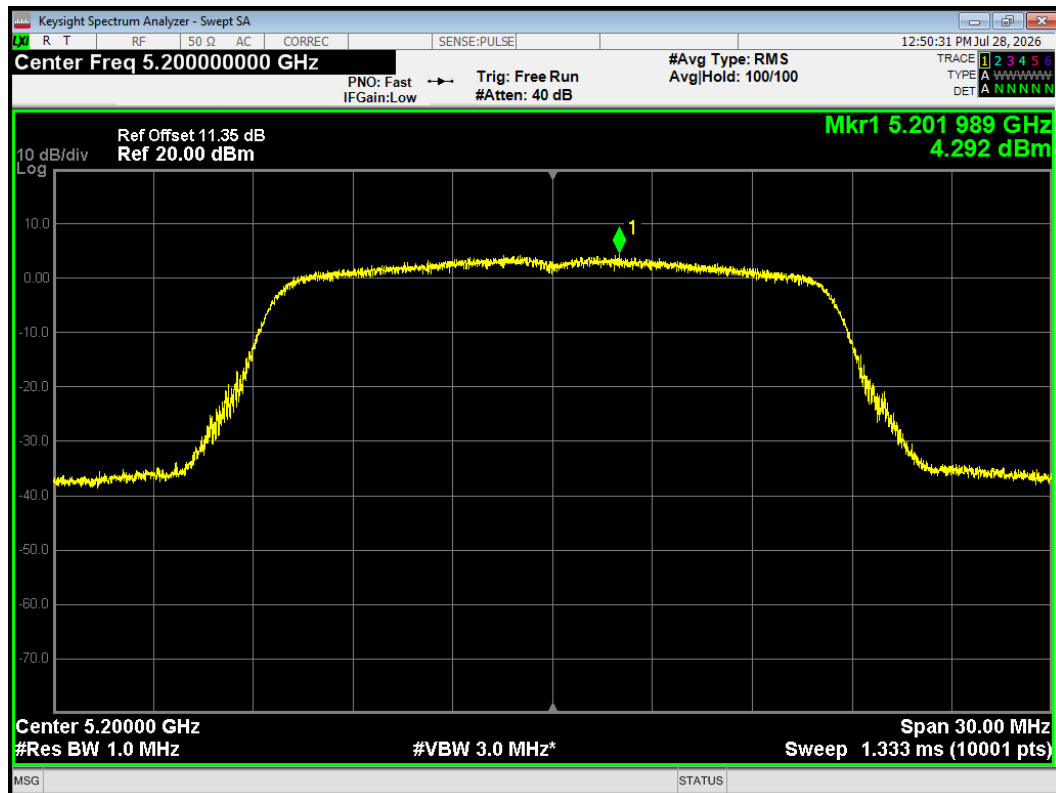


PSD 802.11a 5240MHz

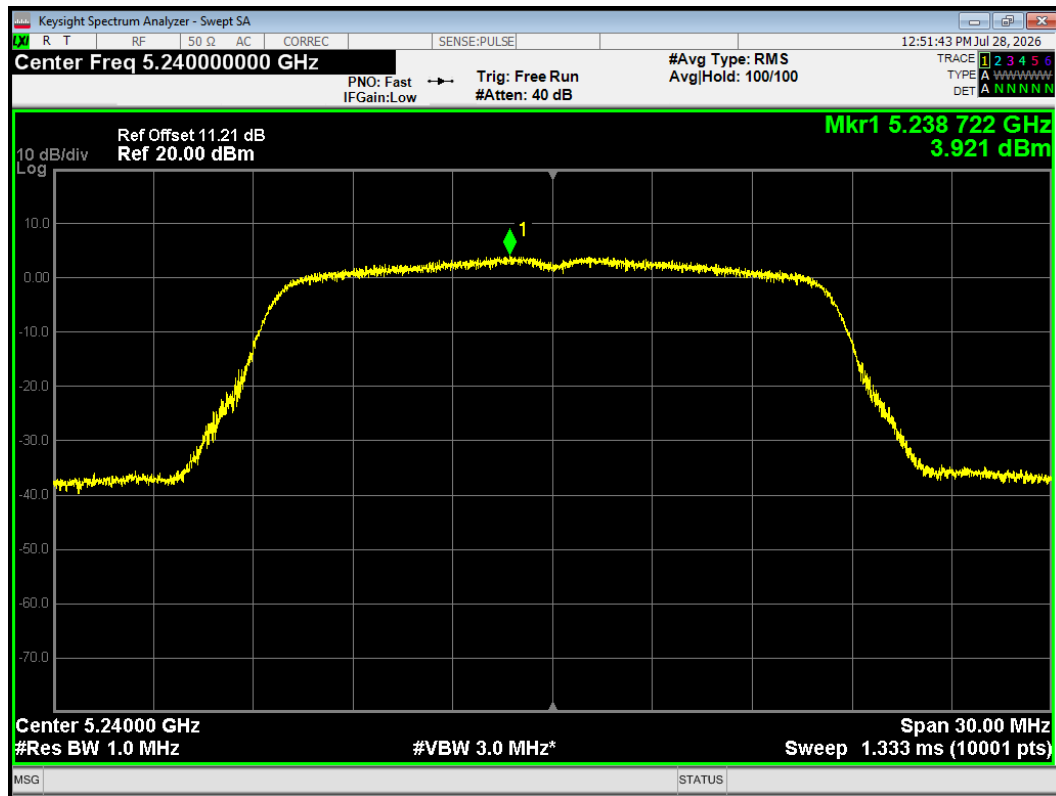


PSD 802.11ac(VHT20) 5180MHz

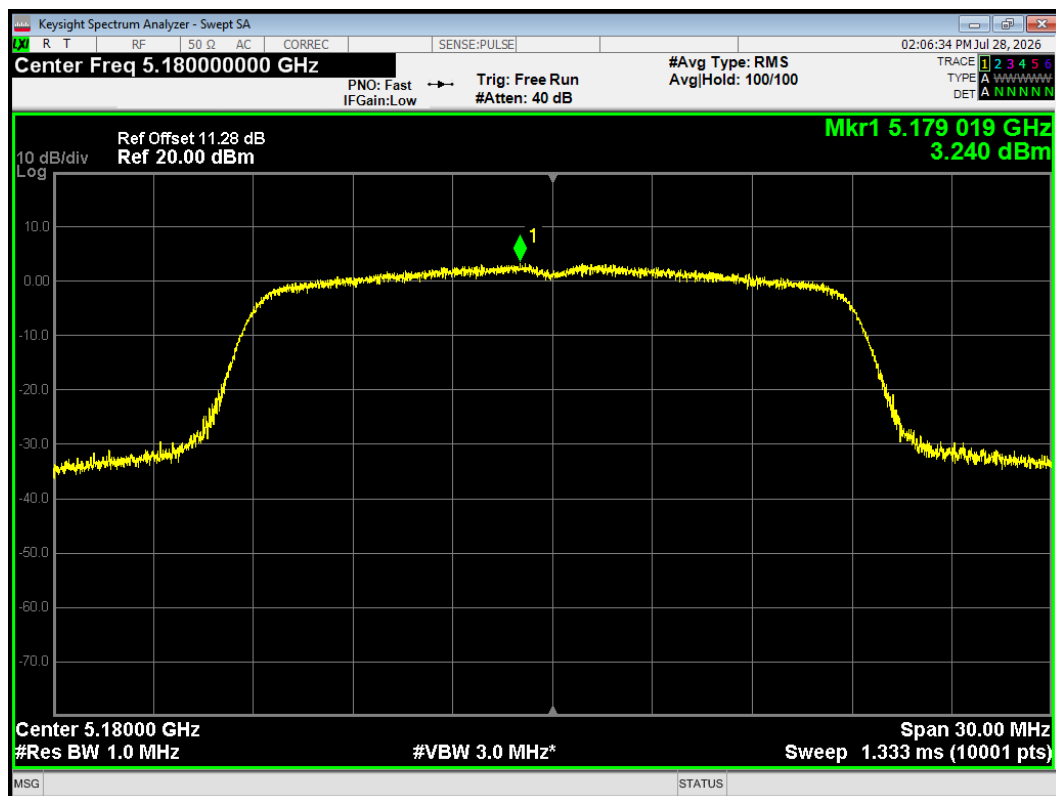


PSD 802.11ac(VHT20) 5200MHz

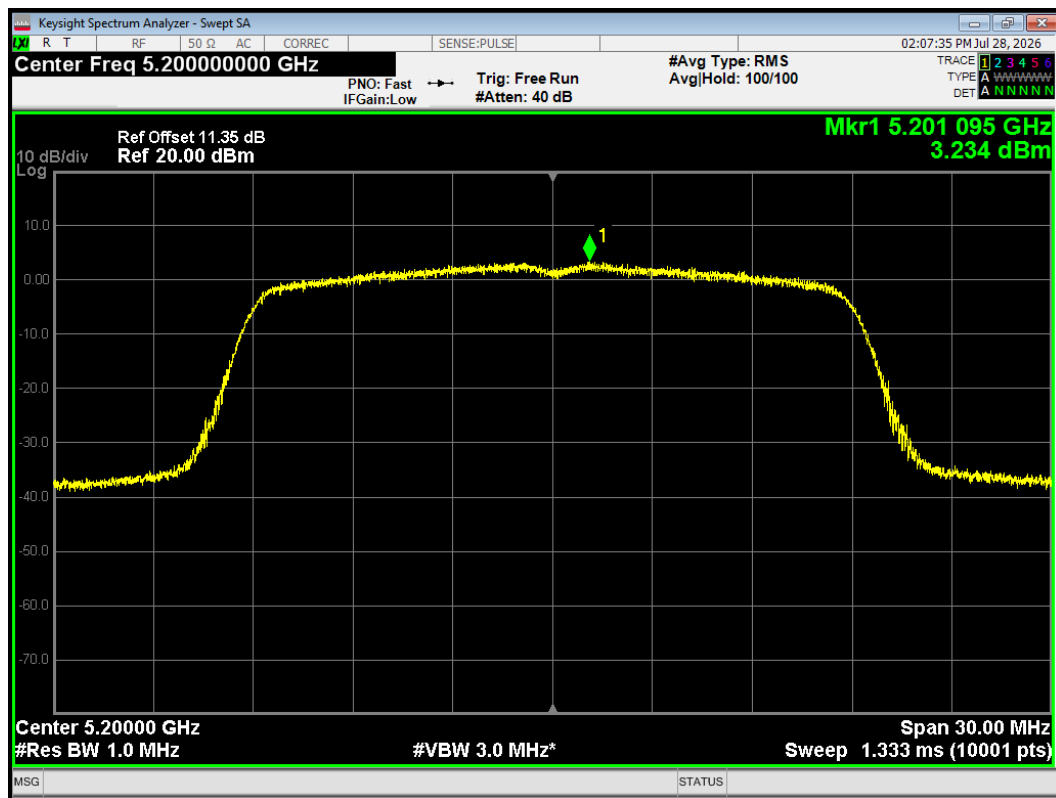


PSD 802.11ac(VHT20) 5240MHz

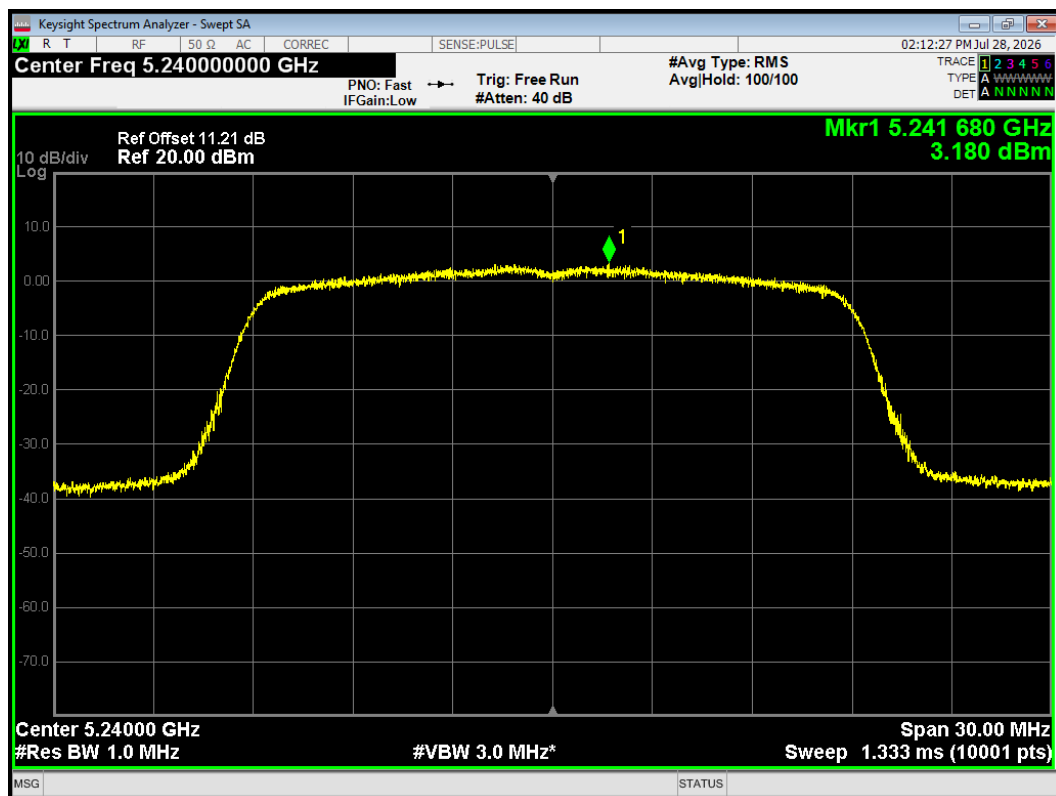


PSD 802.11ac(VHT40) 5190MHz

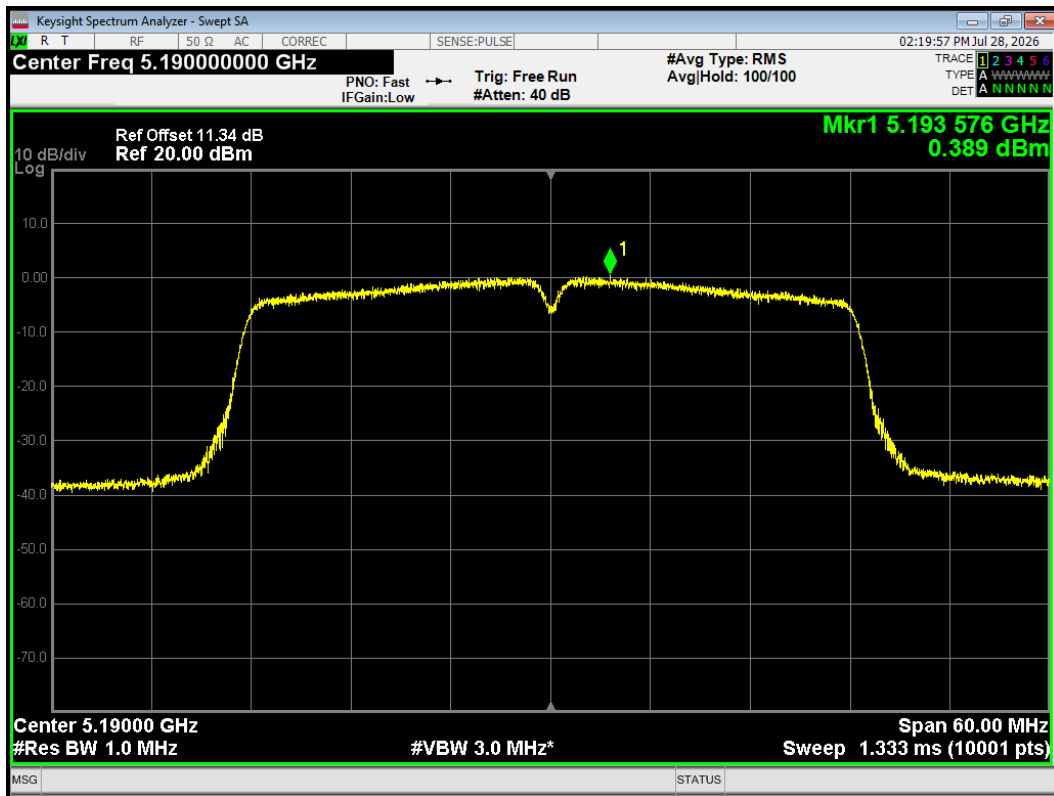


PSD 802.11ac(VHT40) 5230MHz

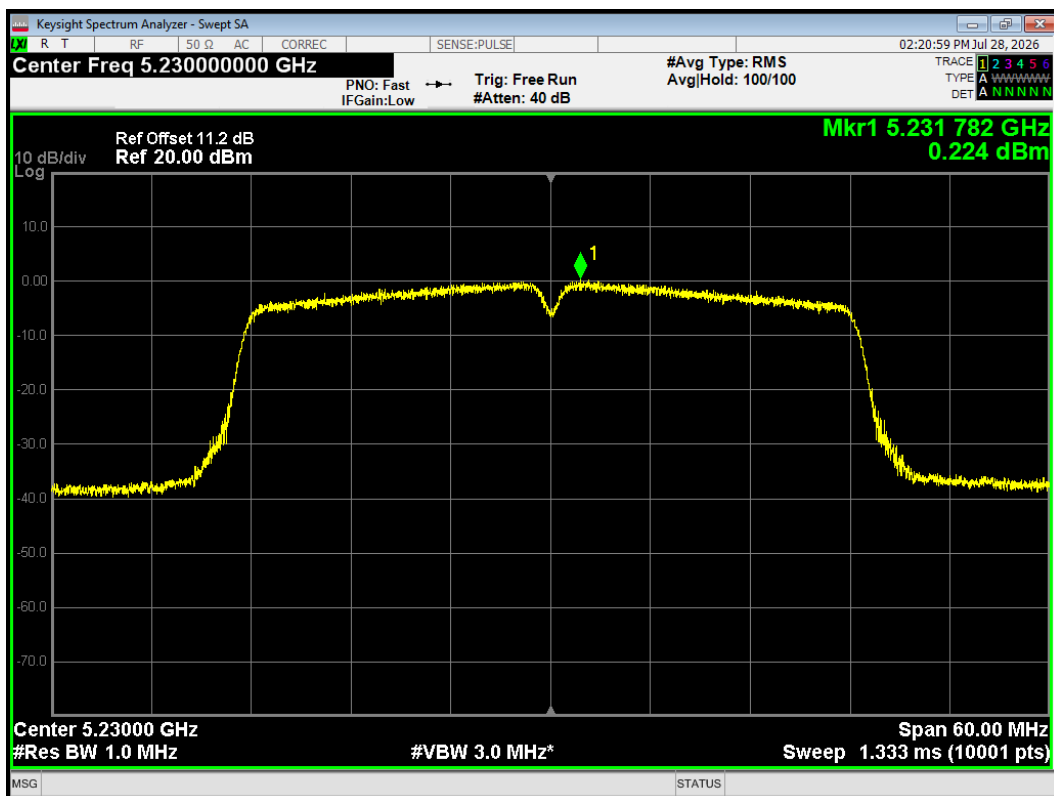


PSD 802.11ac(VHT80) 5210MHz

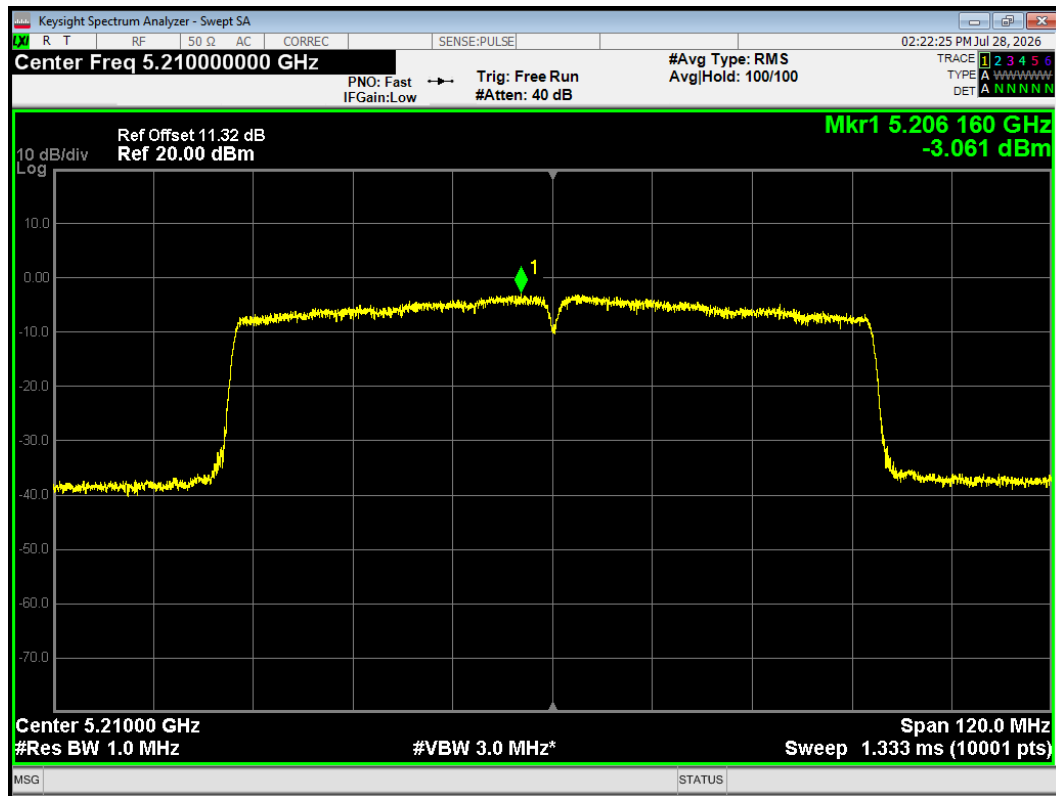


PSD 802.11n(HT20) 5180MHz

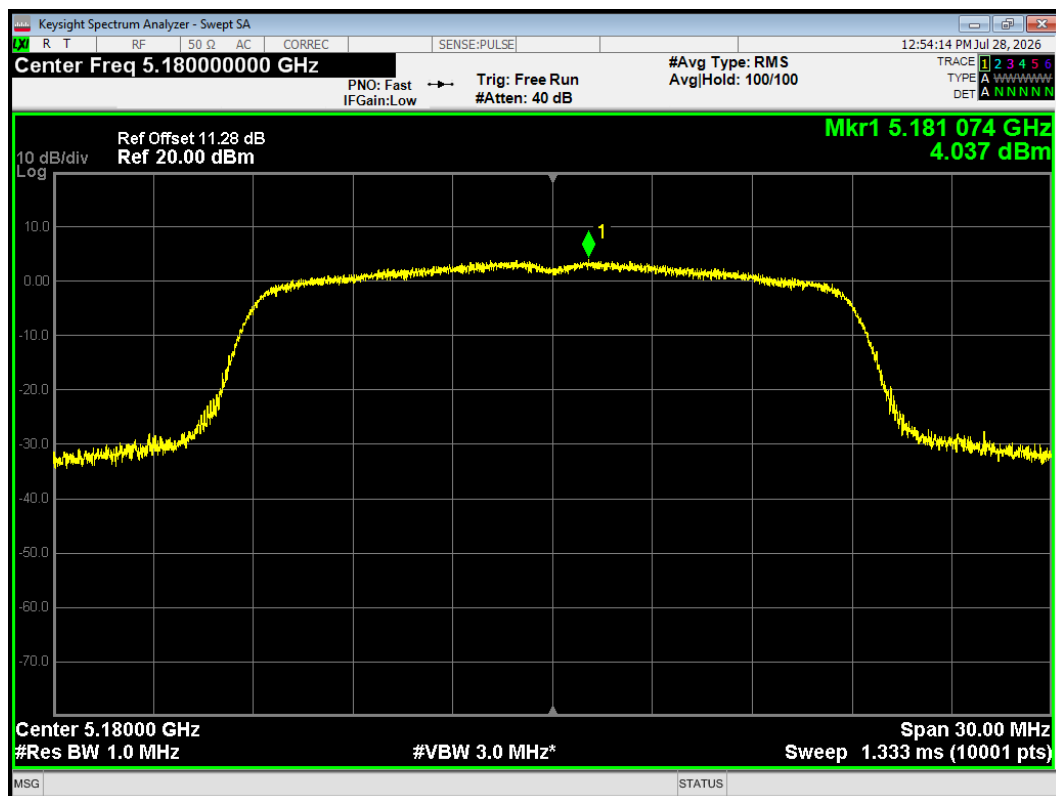


PSD 802.11n(HT20) 5200MHz

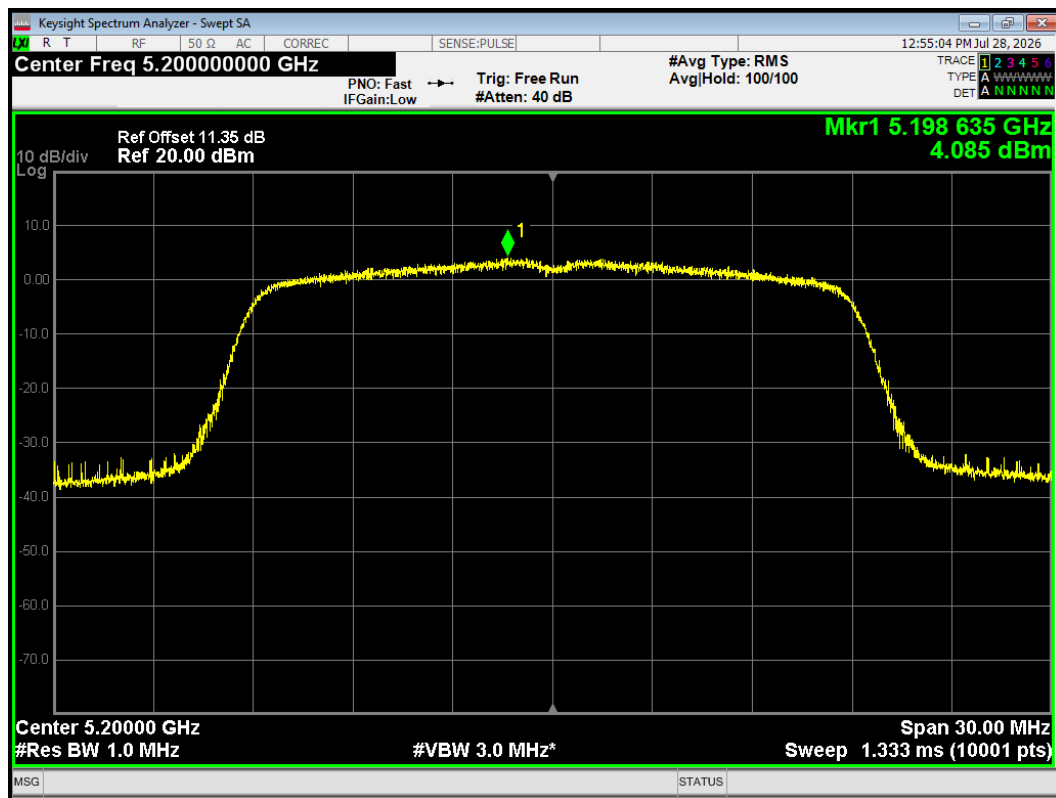


PSD 802.11n(HT20) 5240MHz

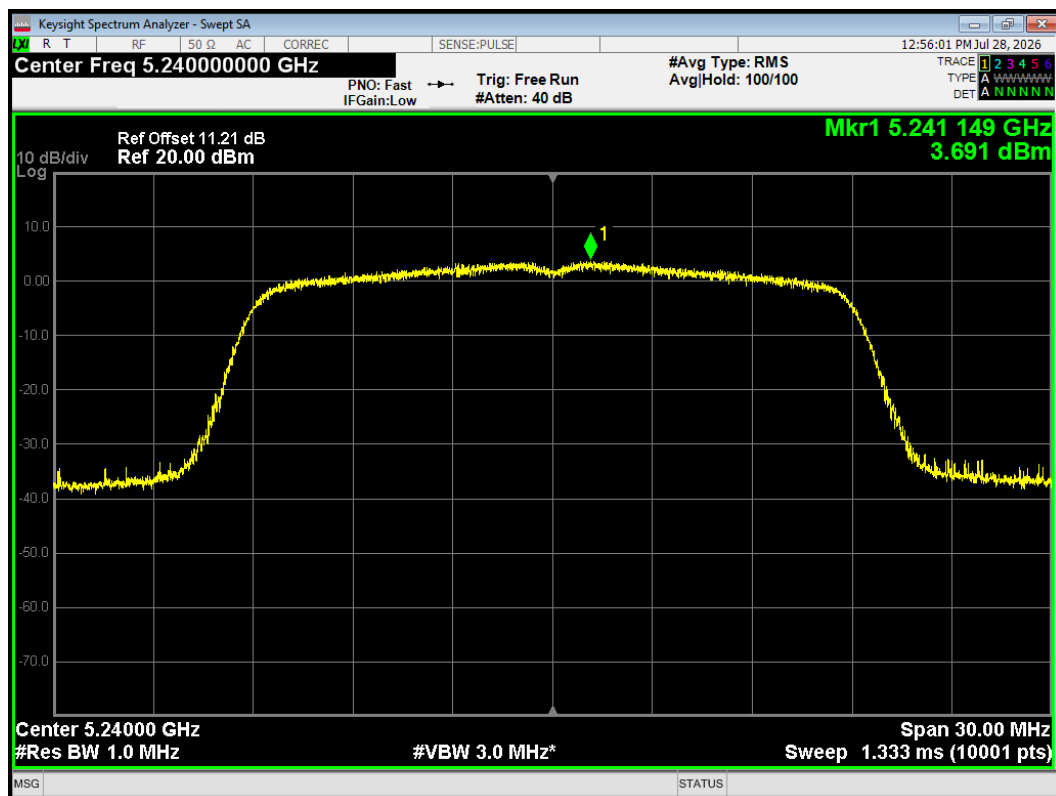


PSD 802.11n(HT40) 5190MHz

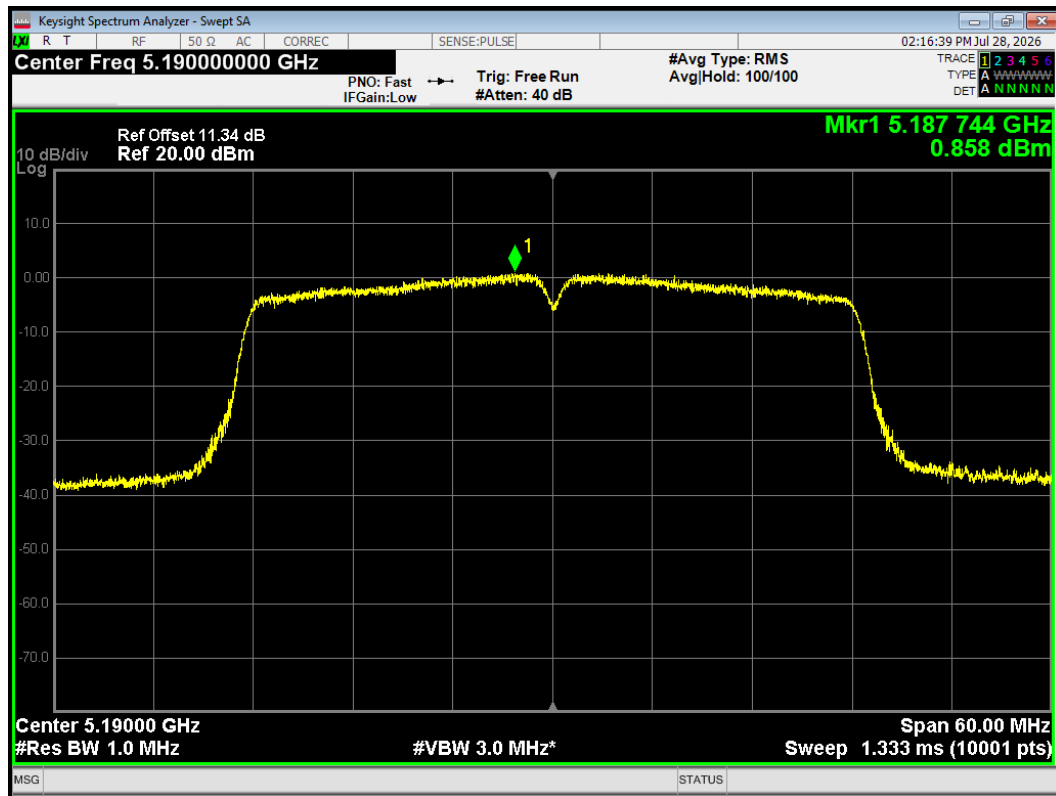


PSD 802.11n(HT40) 5230MHz

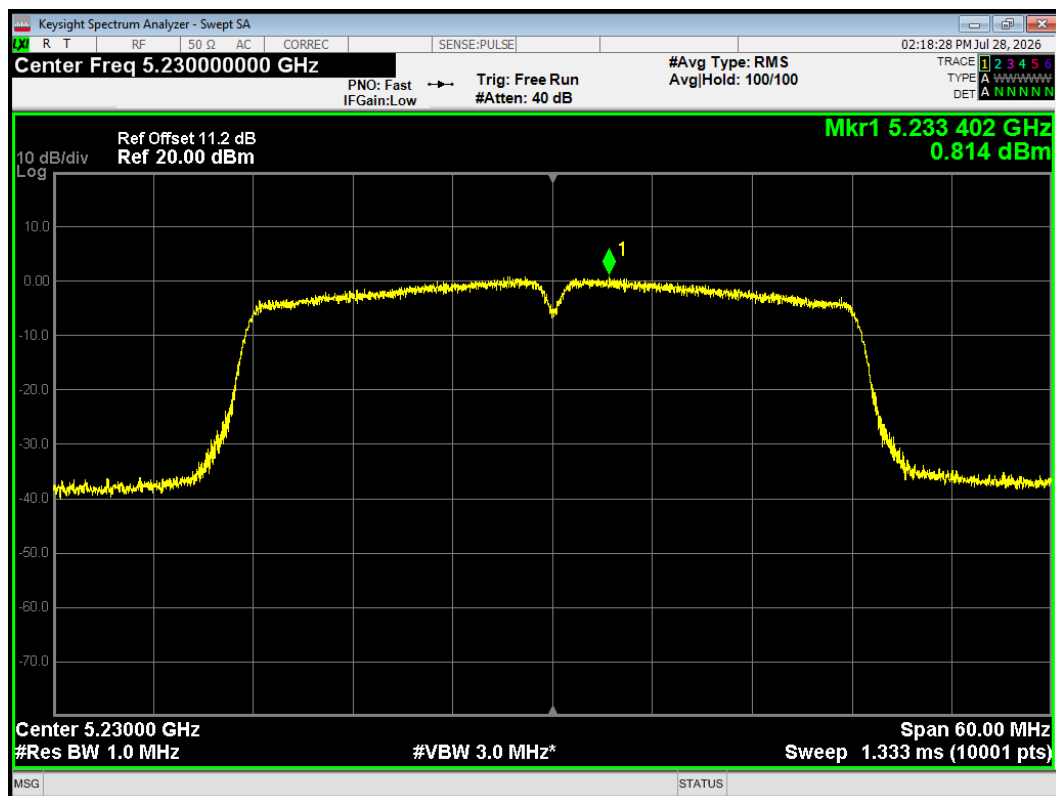


PSD 802.11a 5260MHz

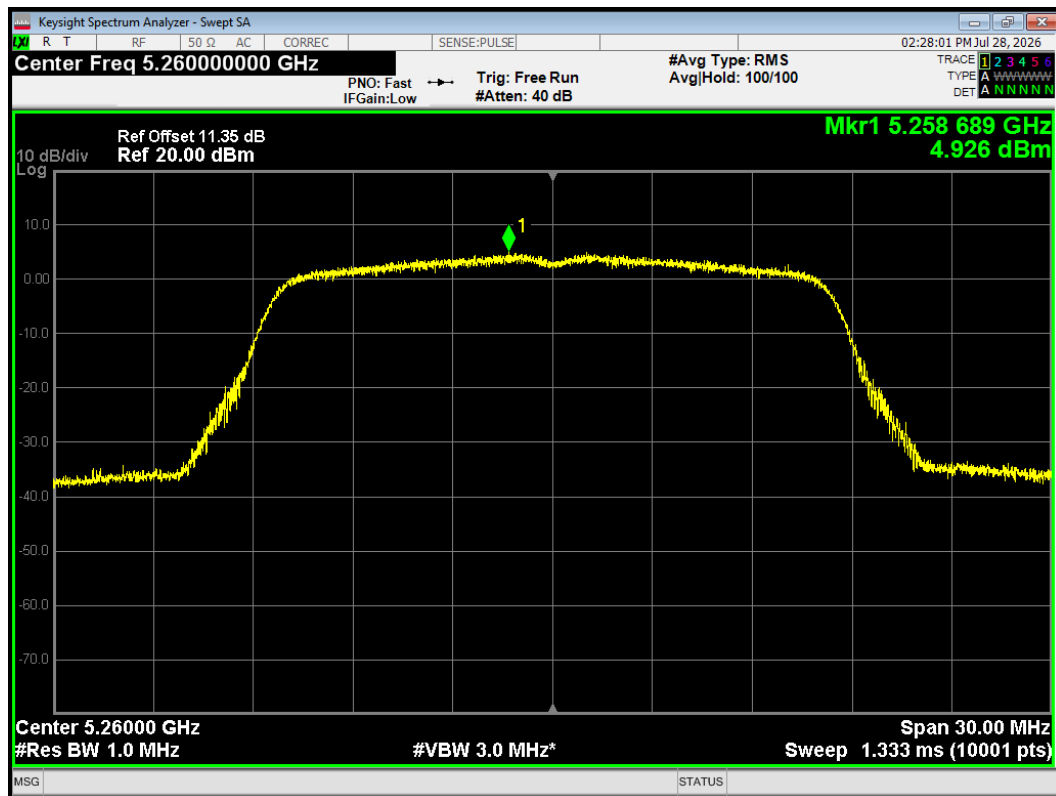


PSD 802.11a 5300MHz

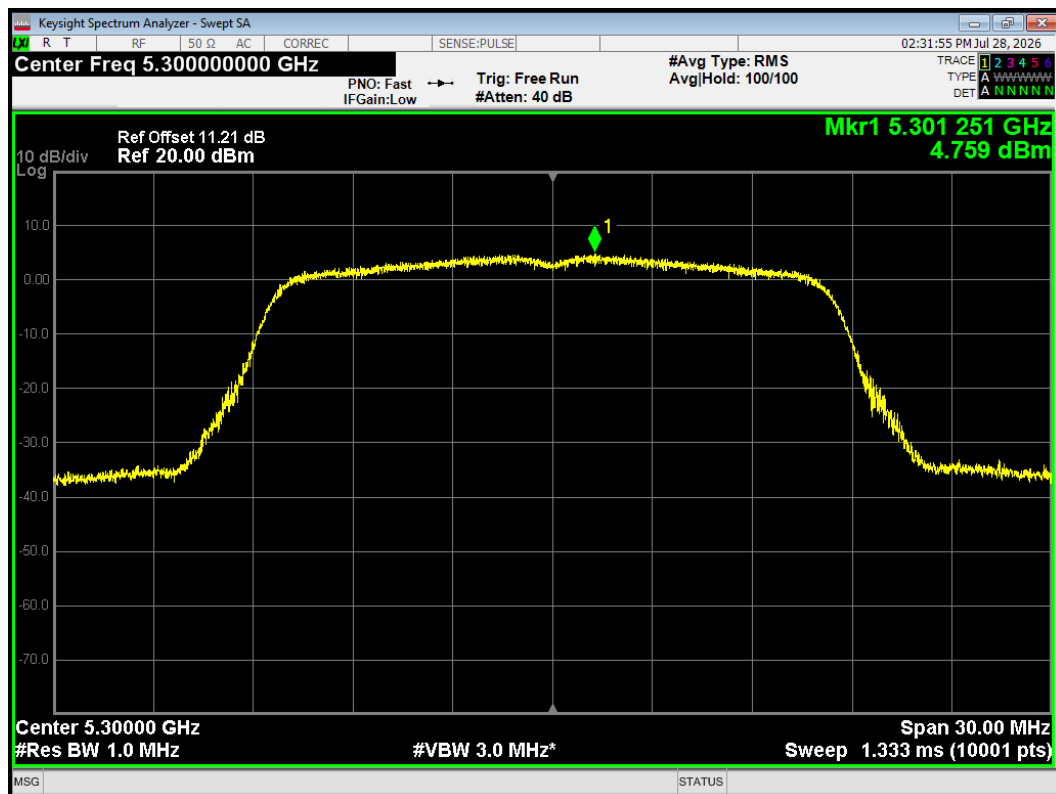


PSD 802.11a 5320MHz

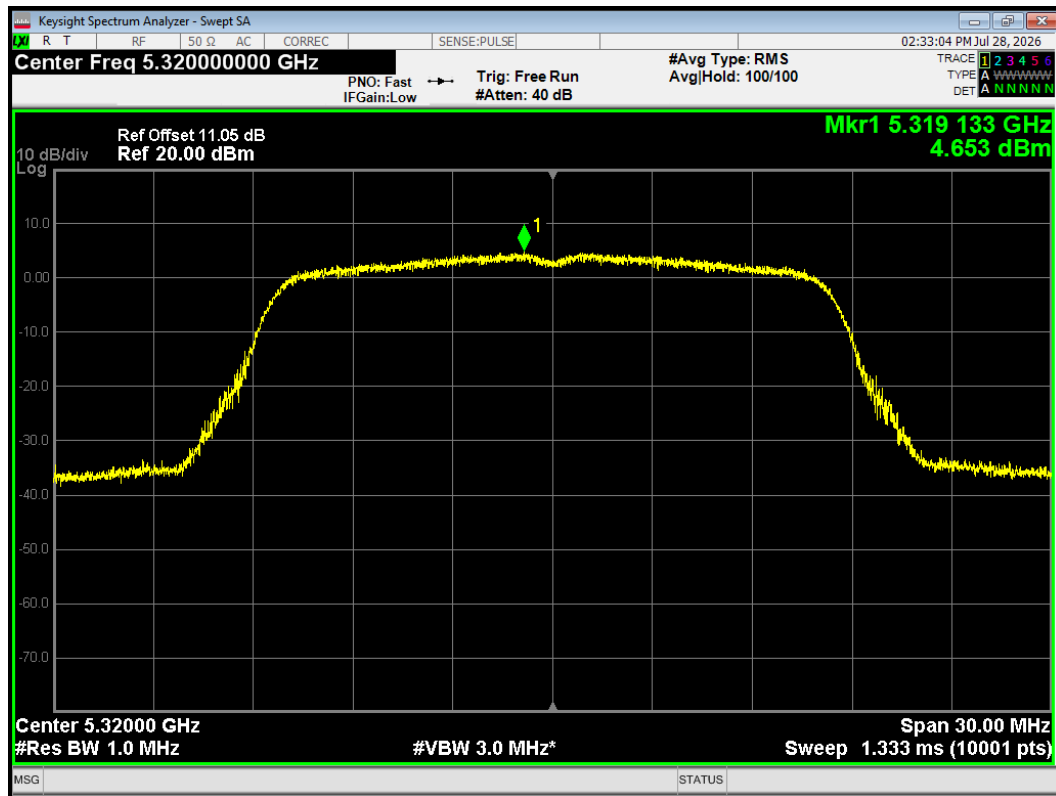


PSD 802.11ac(VHT20) 5260MHz

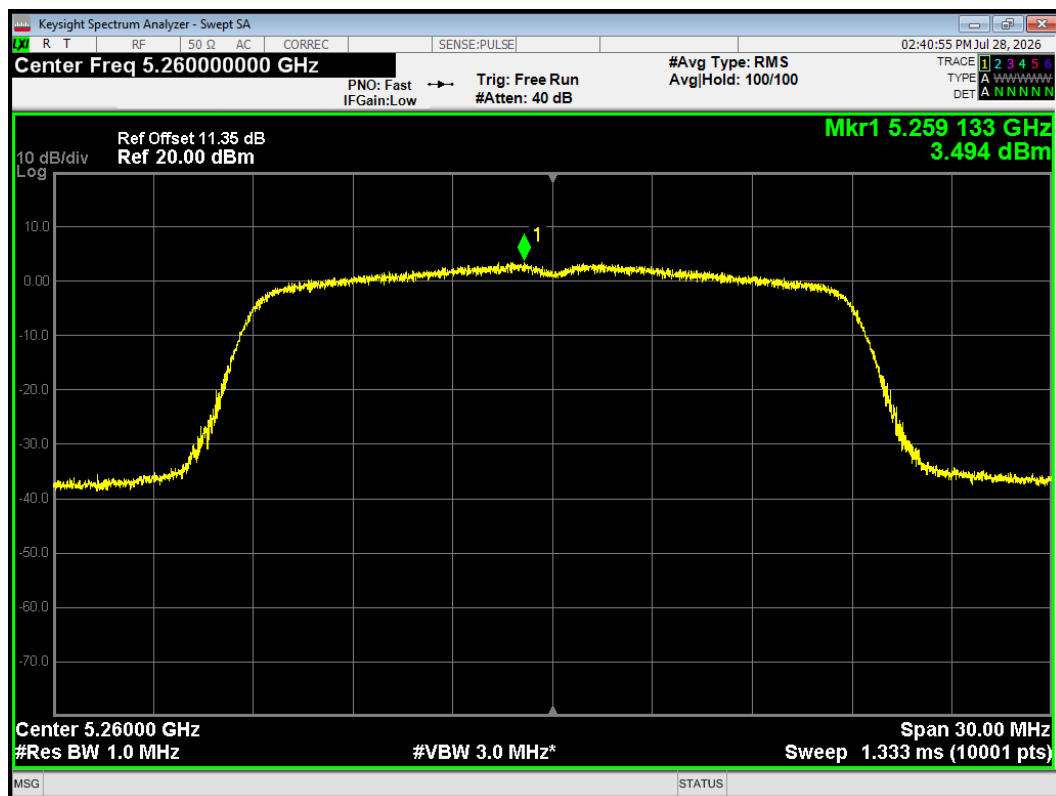


PSD 802.11ac(VHT20) 5300MHz

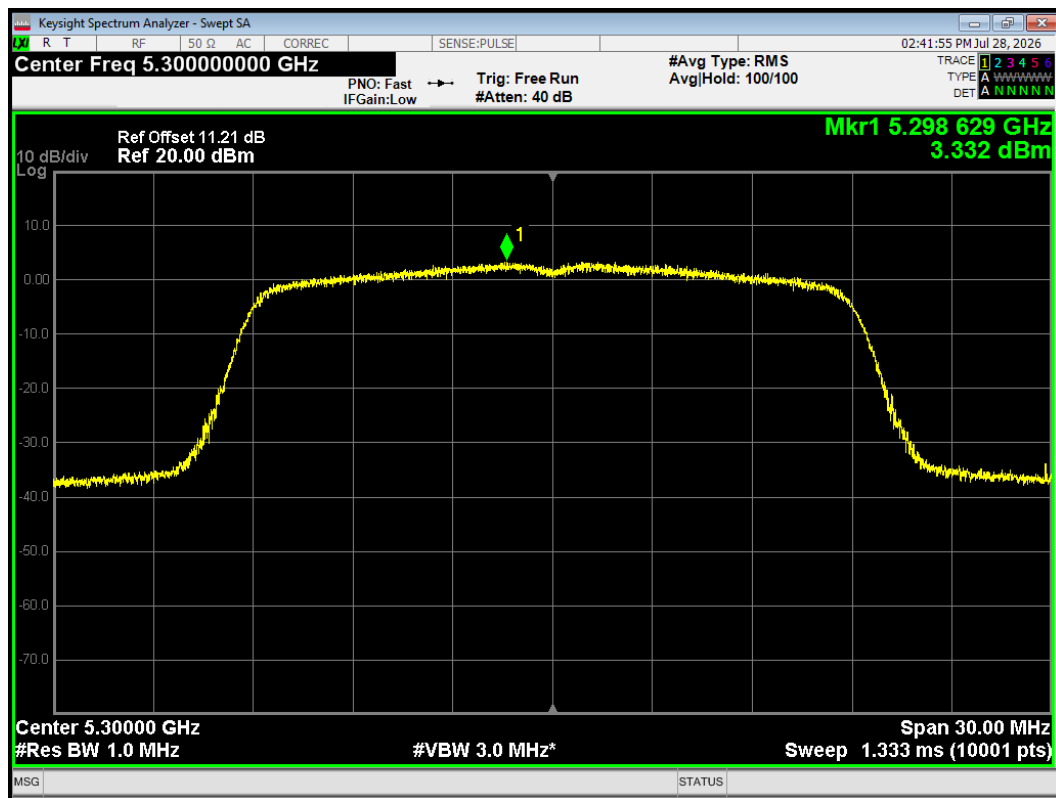


PSD 802.11ac(VHT20) 5320MHz

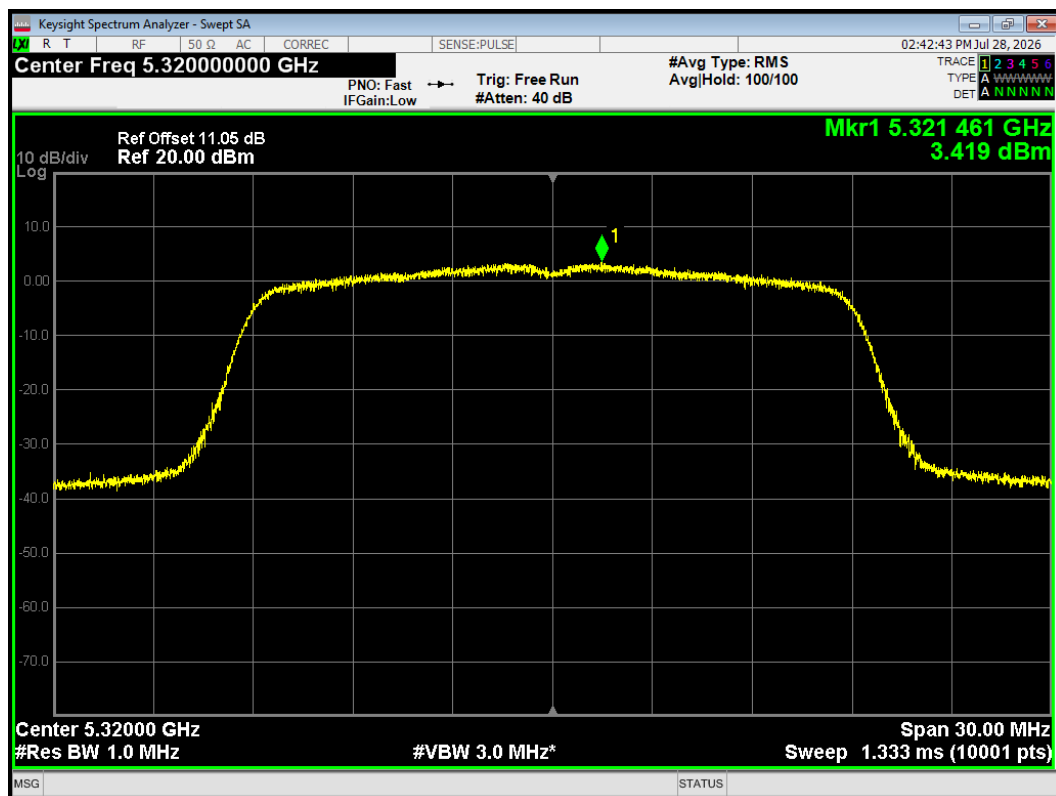


PSD 802.11ac(VHT40) 5270MHz

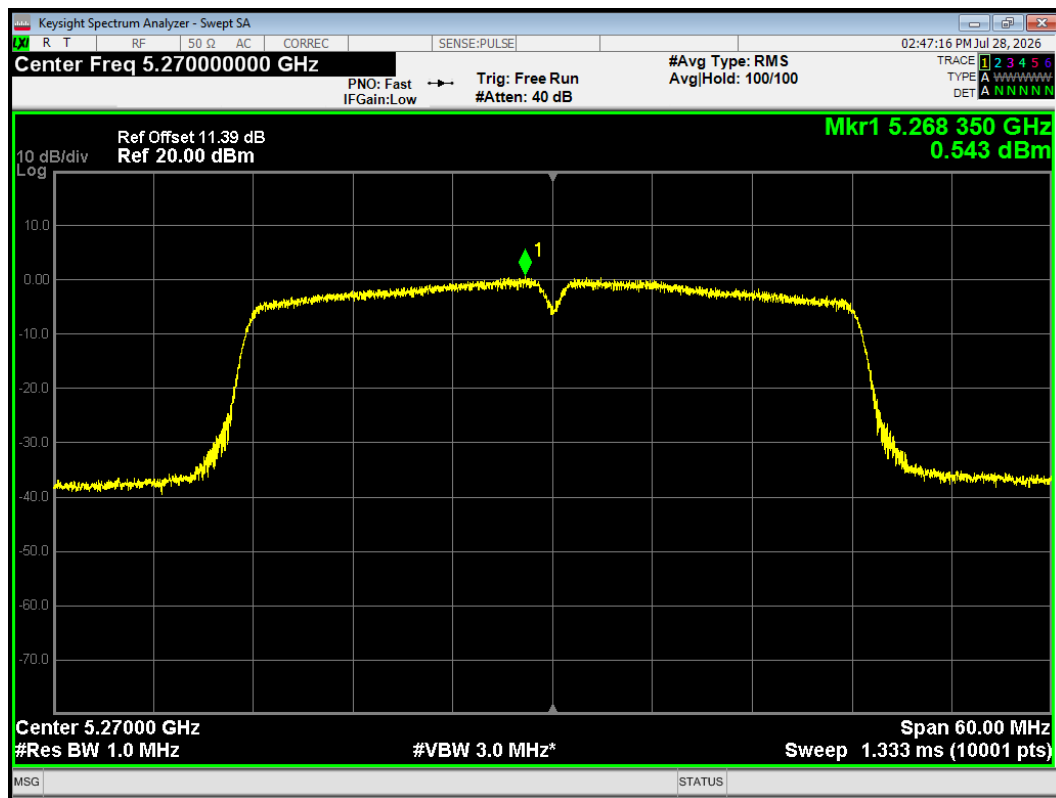


PSD 802.11ac(VHT40) 5310MHz

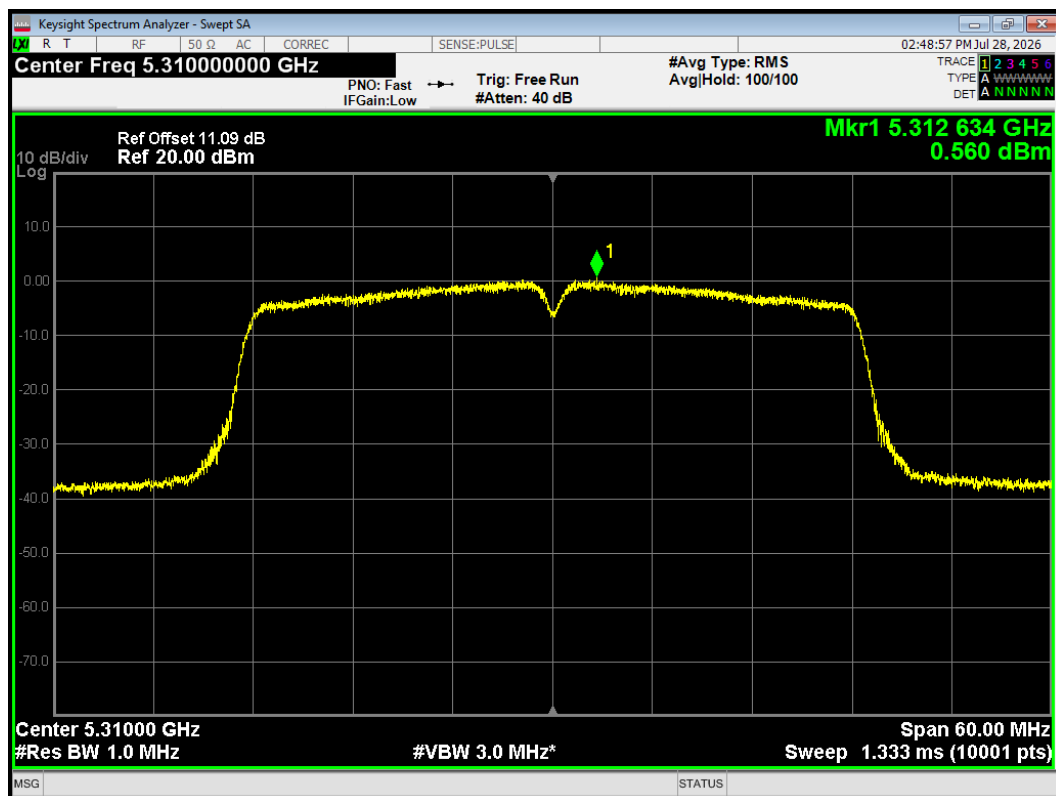


PSD 802.11ac(VHT80) 5290MHz

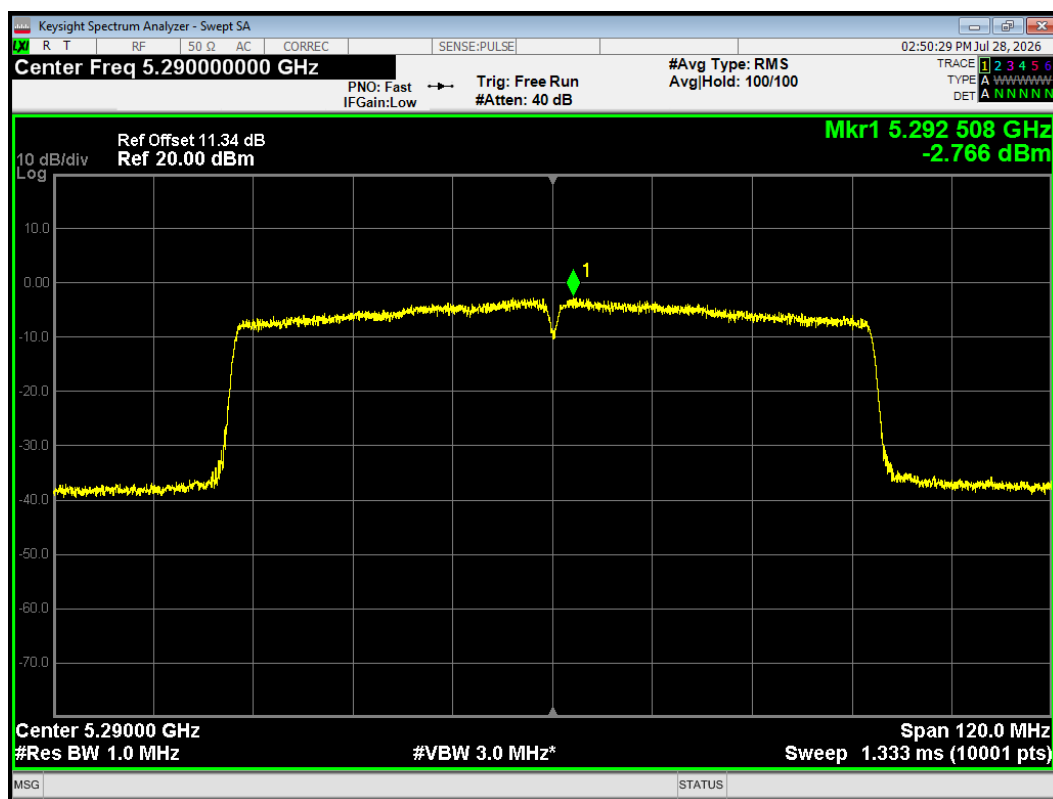


PSD 802.11n(HT20) 5260MHz

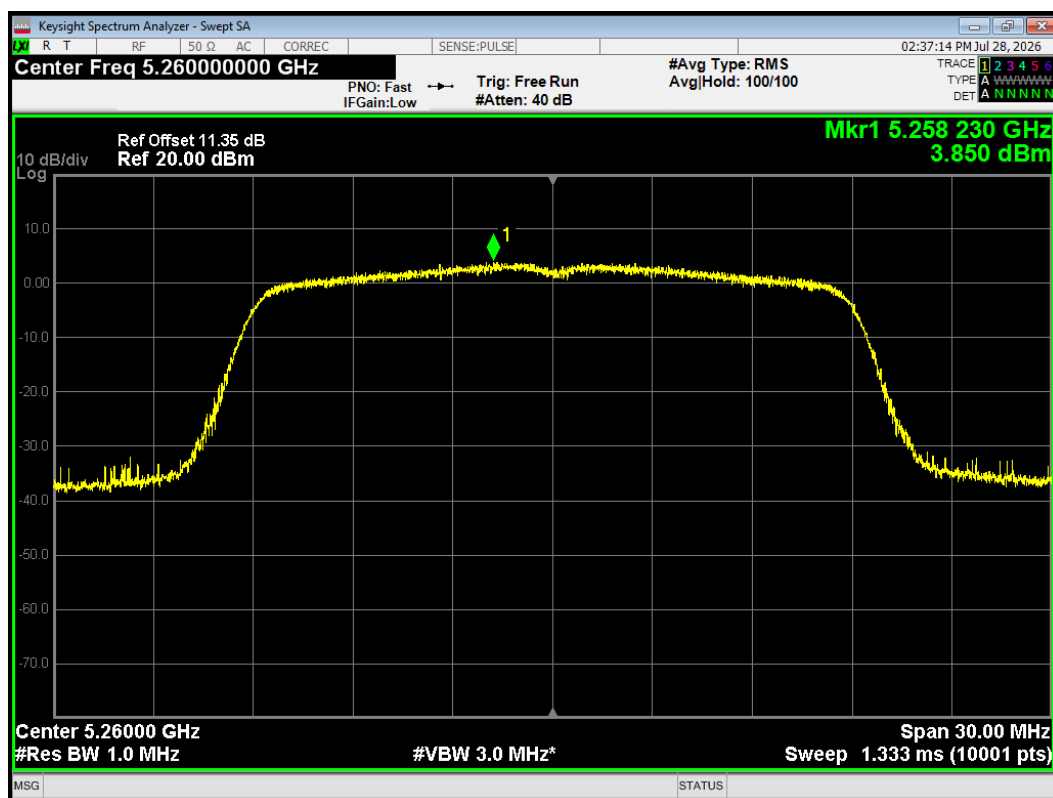


PSD 802.11n(HT20) 5300MHz

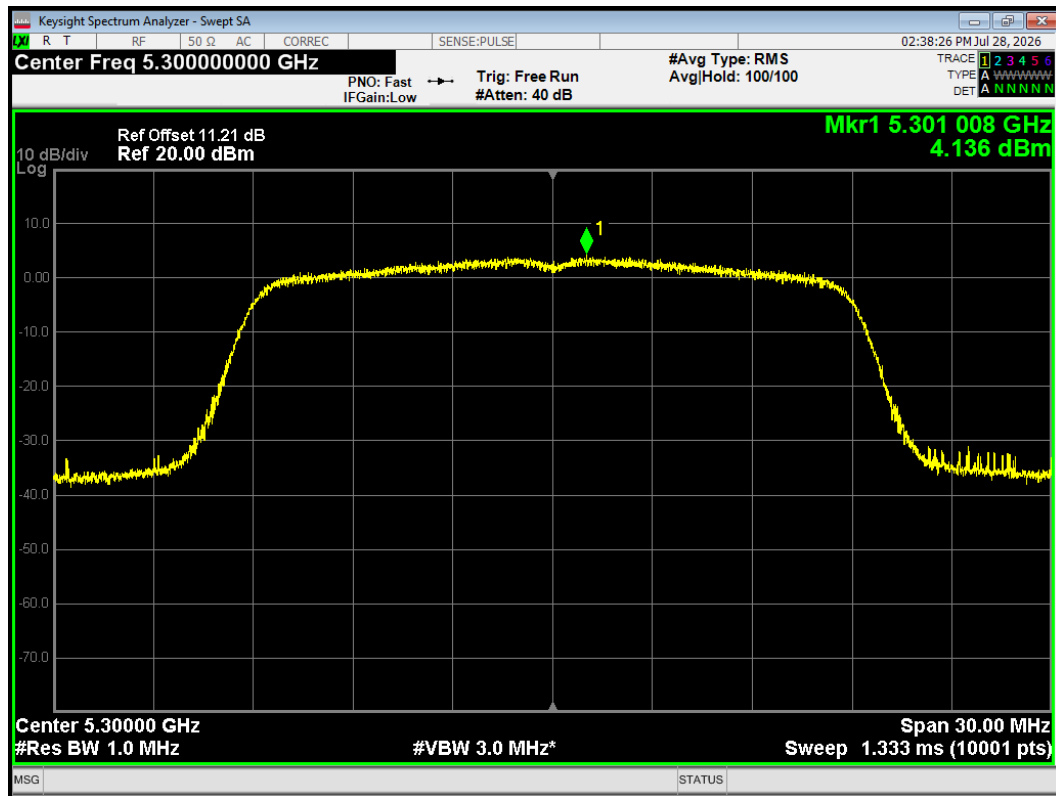


PSD 802.11n(HT20) 5320MHz

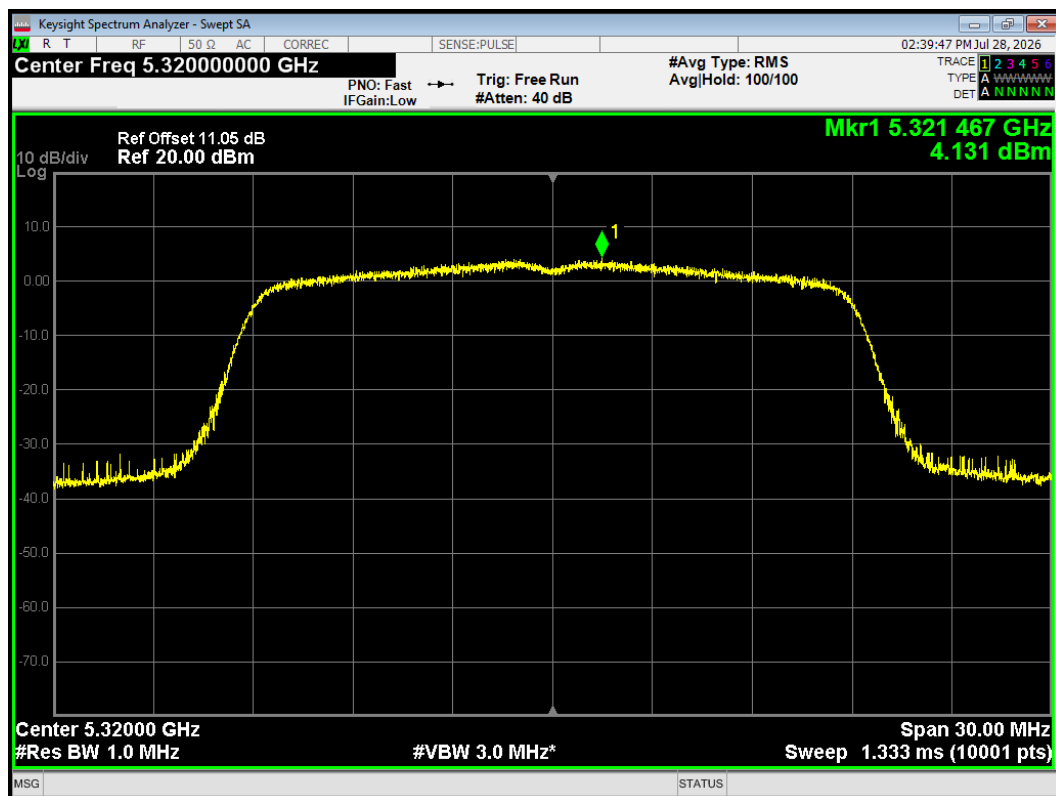


PSD 802.11n(HT40) 5270MHz

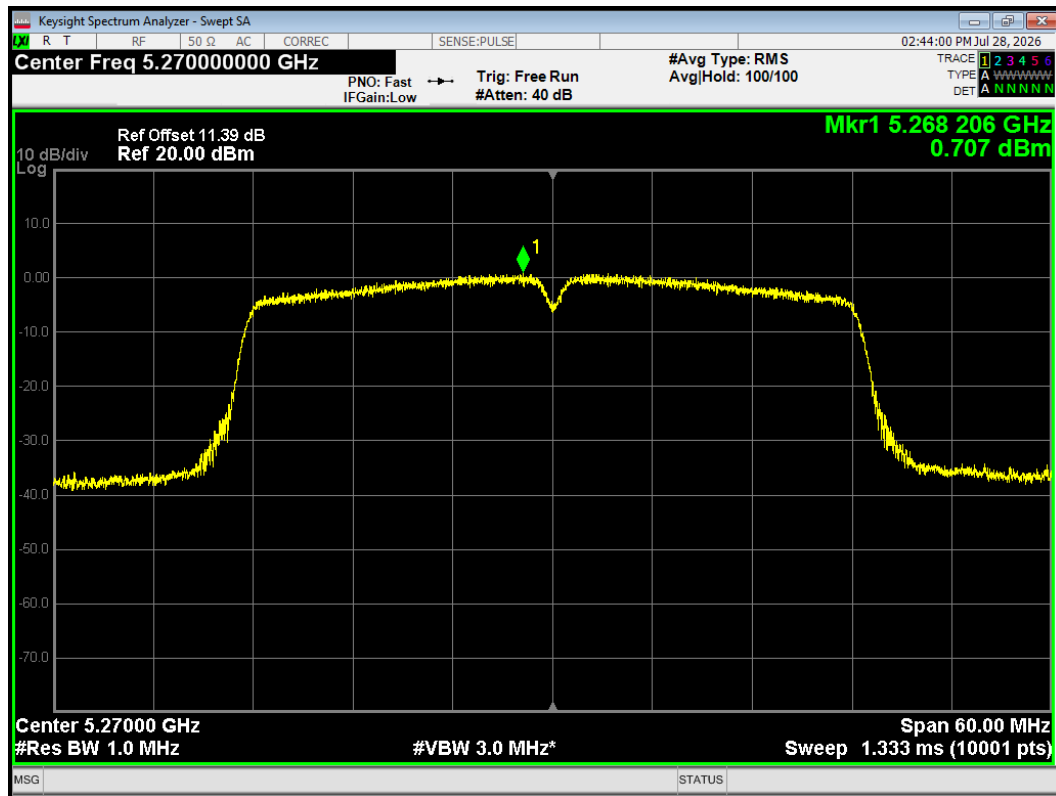


PSD 802.11n(HT40) 5310MHz

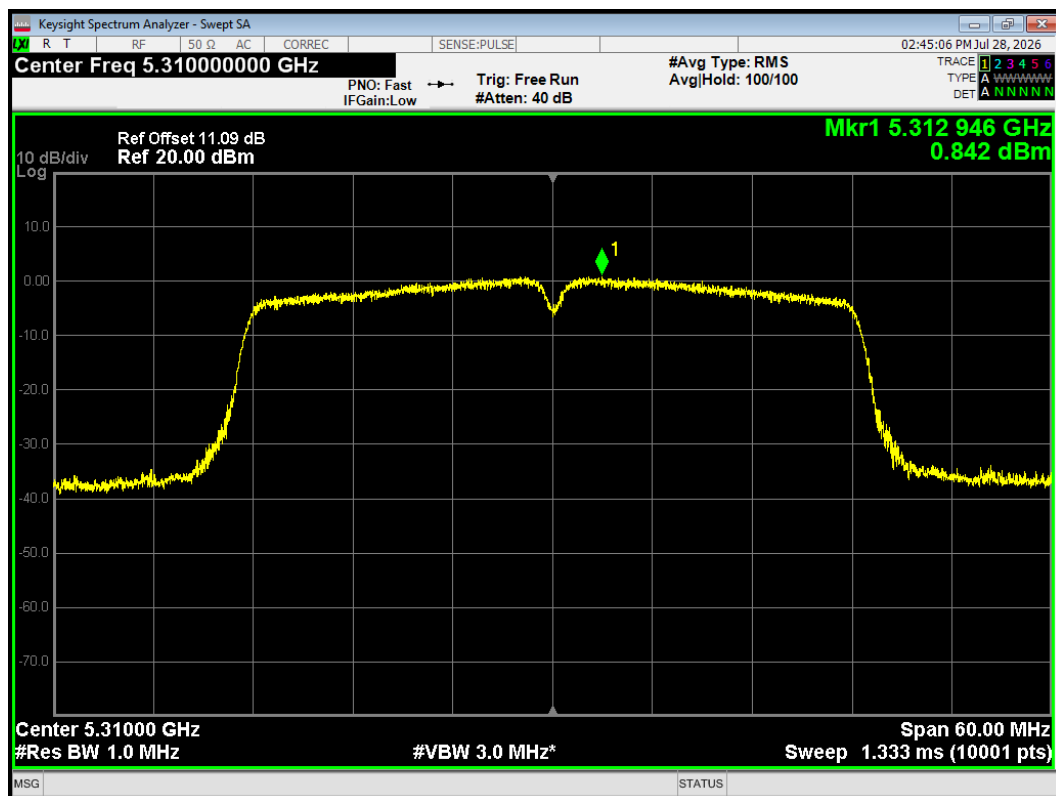


PSD 802.11a 5500MHz

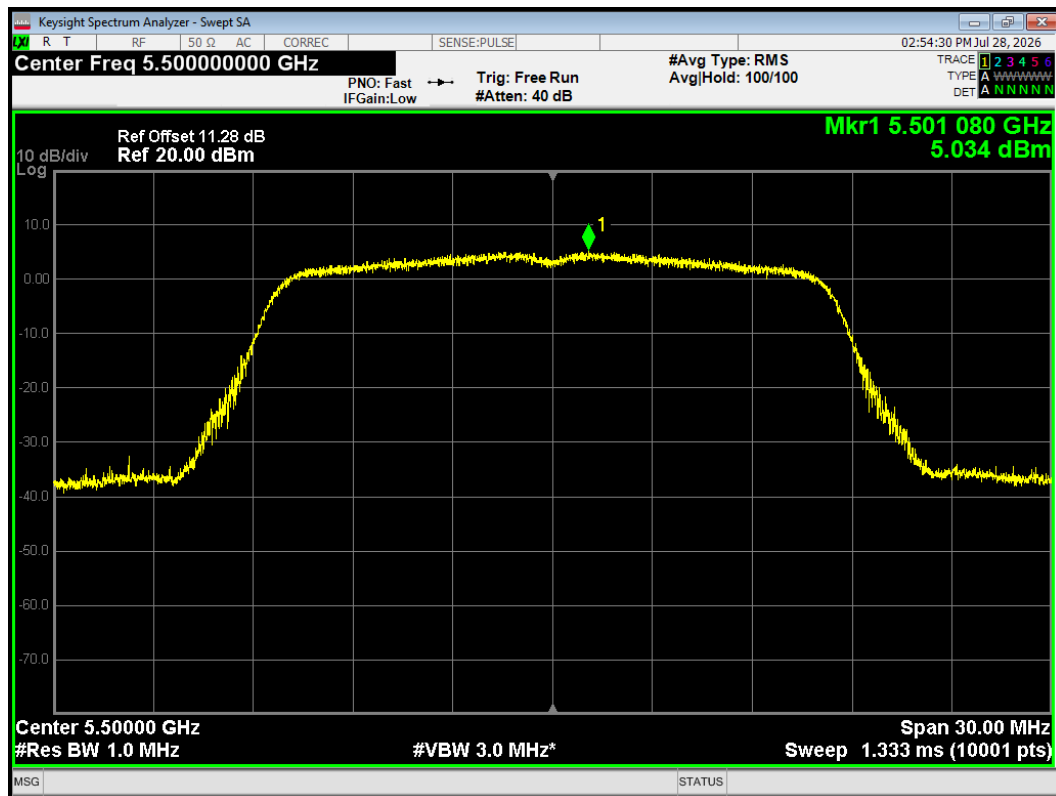


PSD 802.11a 5600MHz

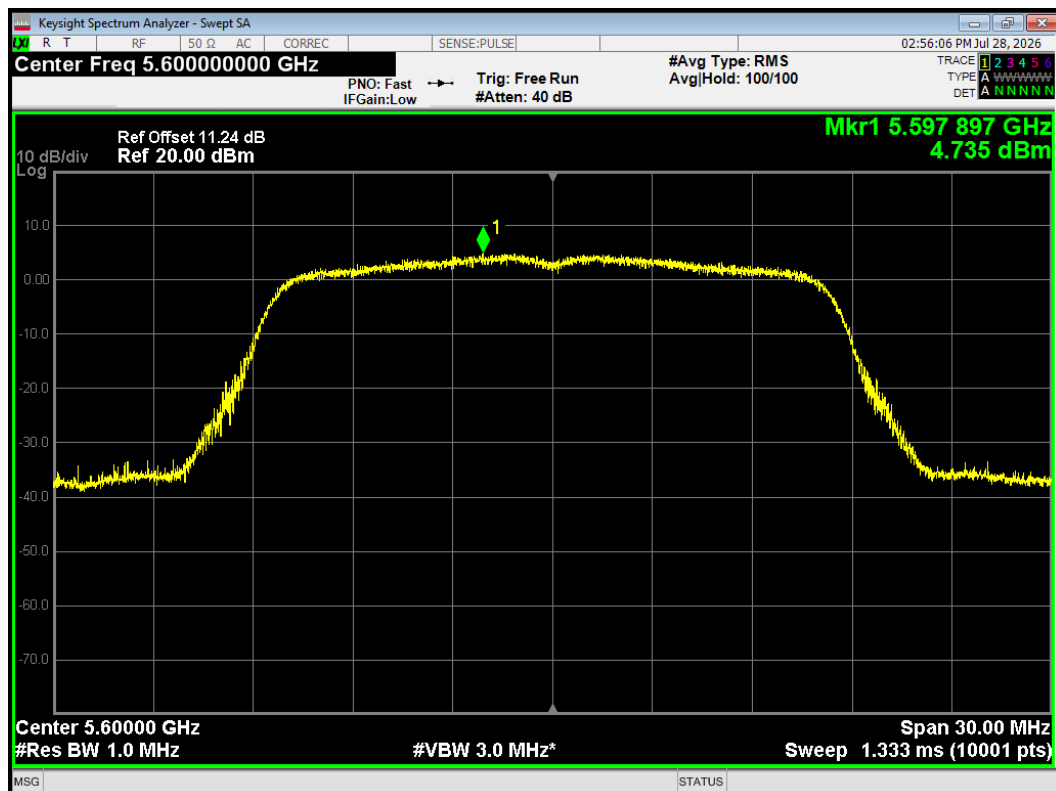


PSD 802.11a 5700MHz

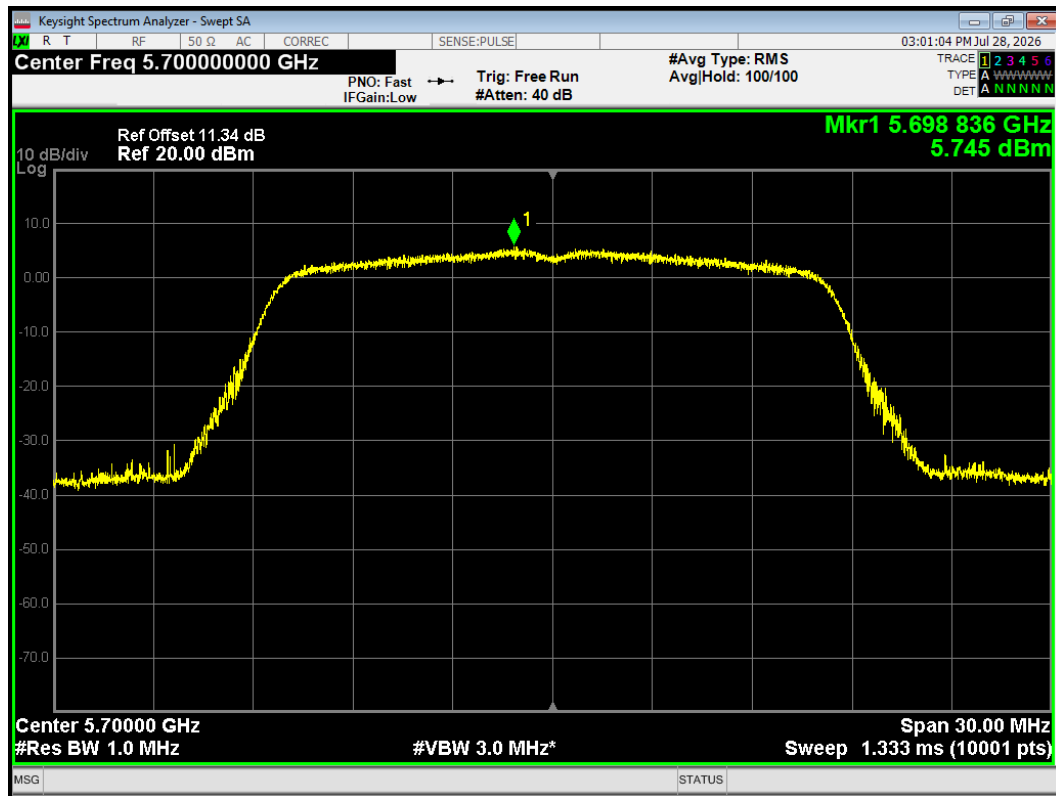


PSD 802.11a 5720MHz

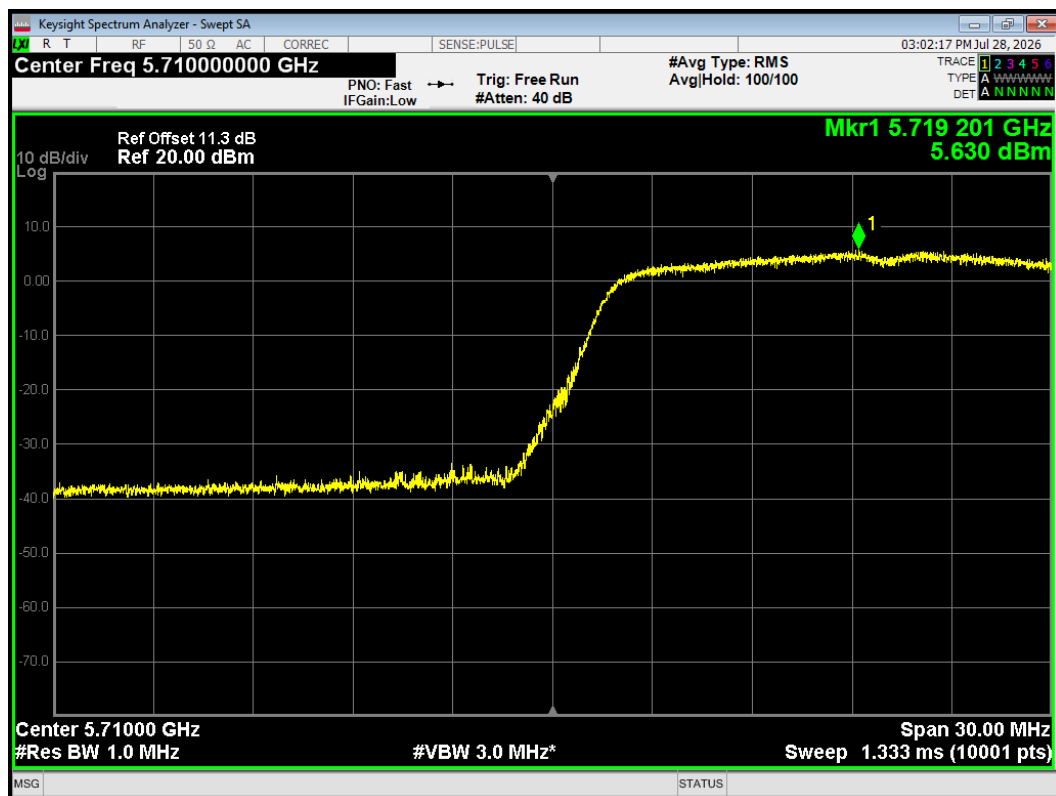


PSD 802.11ac(VHT20) 5500MHz

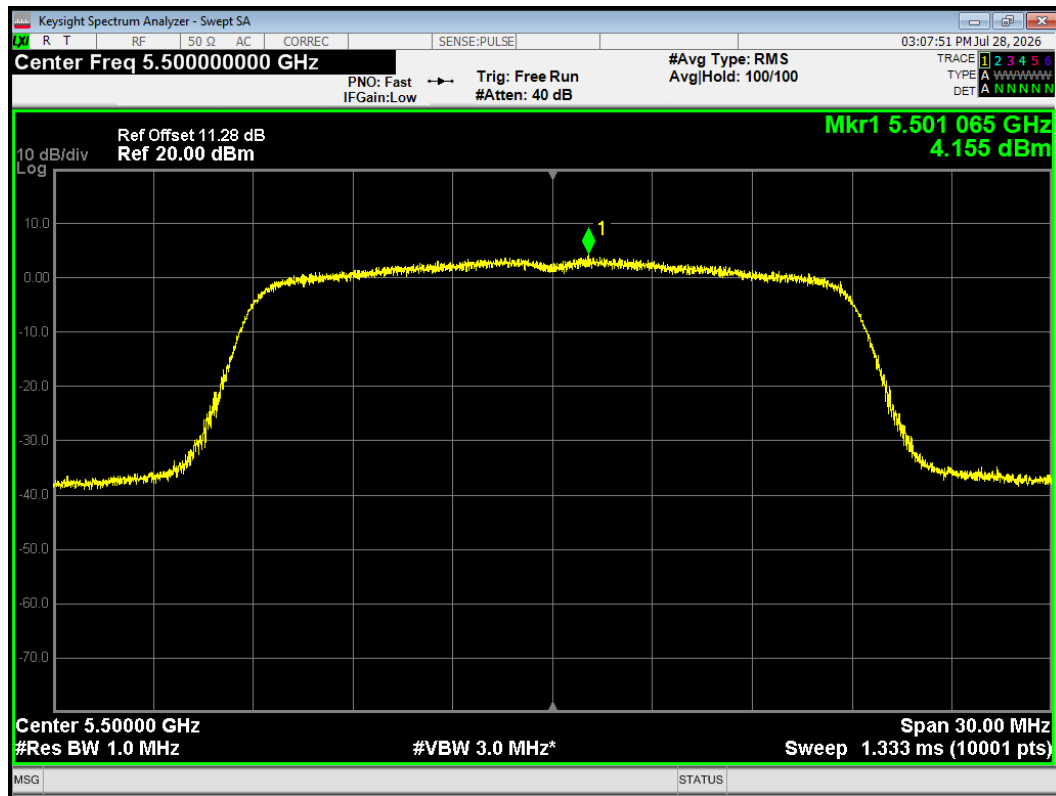


PSD 802.11ac(VHT20) 5600MHz

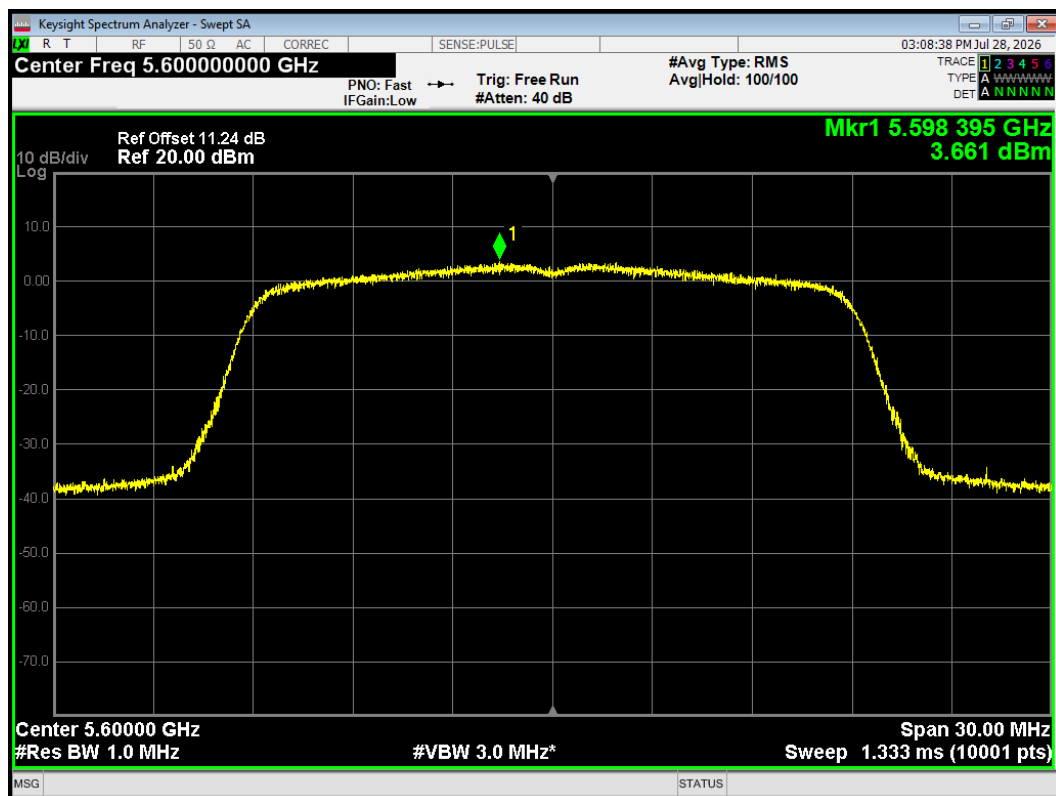


PSD 802.11ac(VHT20) 5700MHz

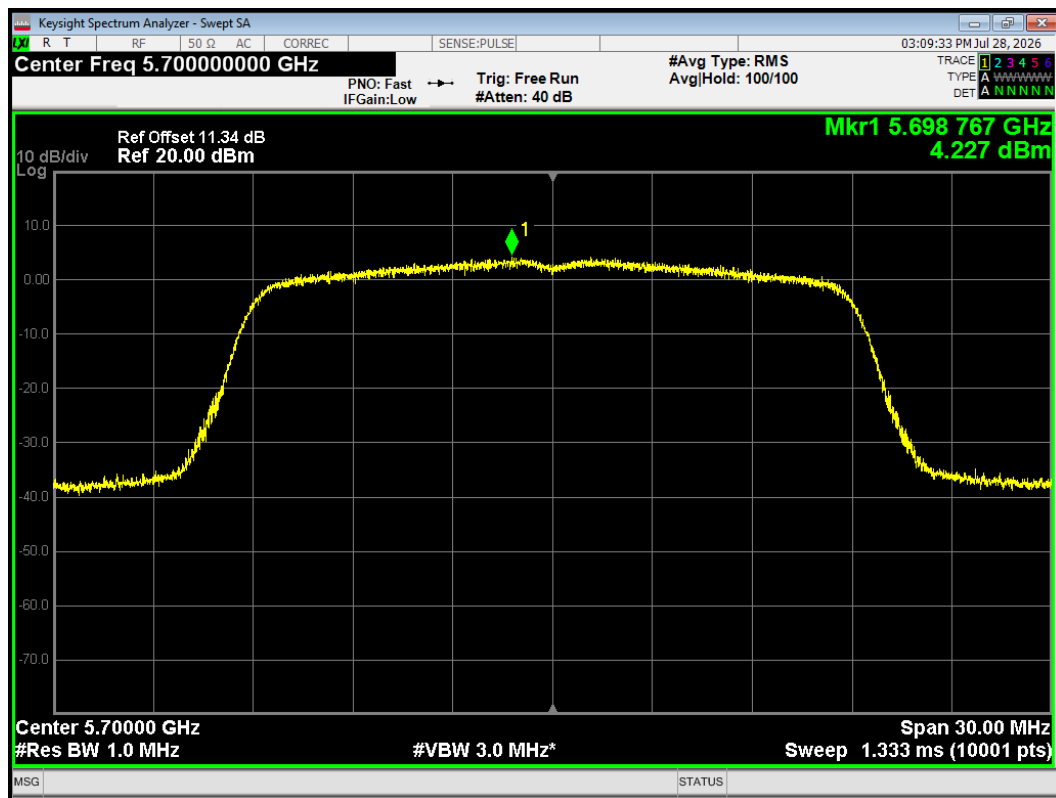


PSD 802.11ac(VHT20) 5720MHz

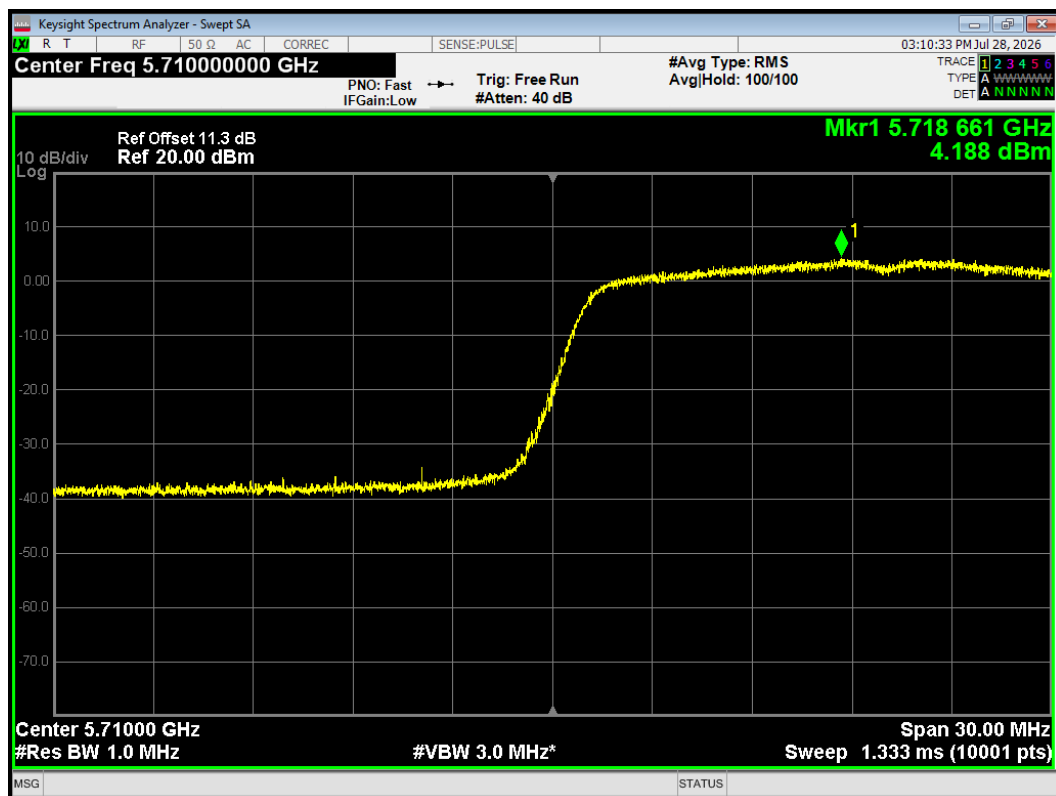


PSD 802.11ac(VHT40) 5510MHz

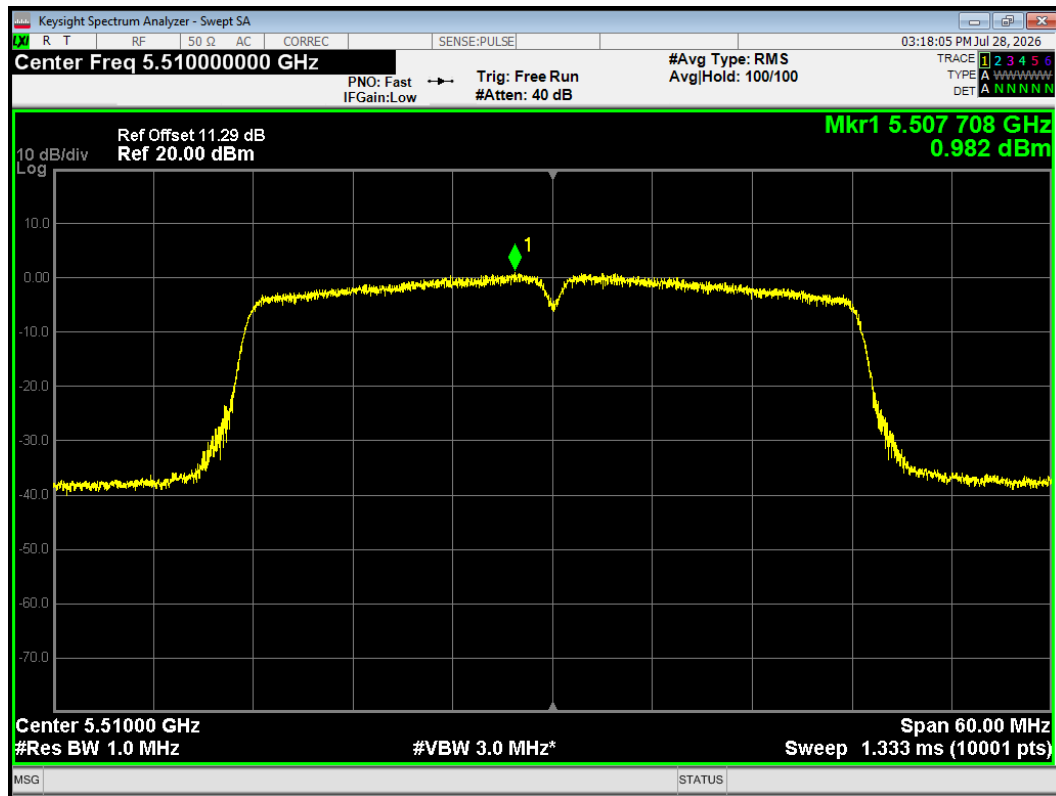


PSD 802.11ac(VHT40) 5590MHz

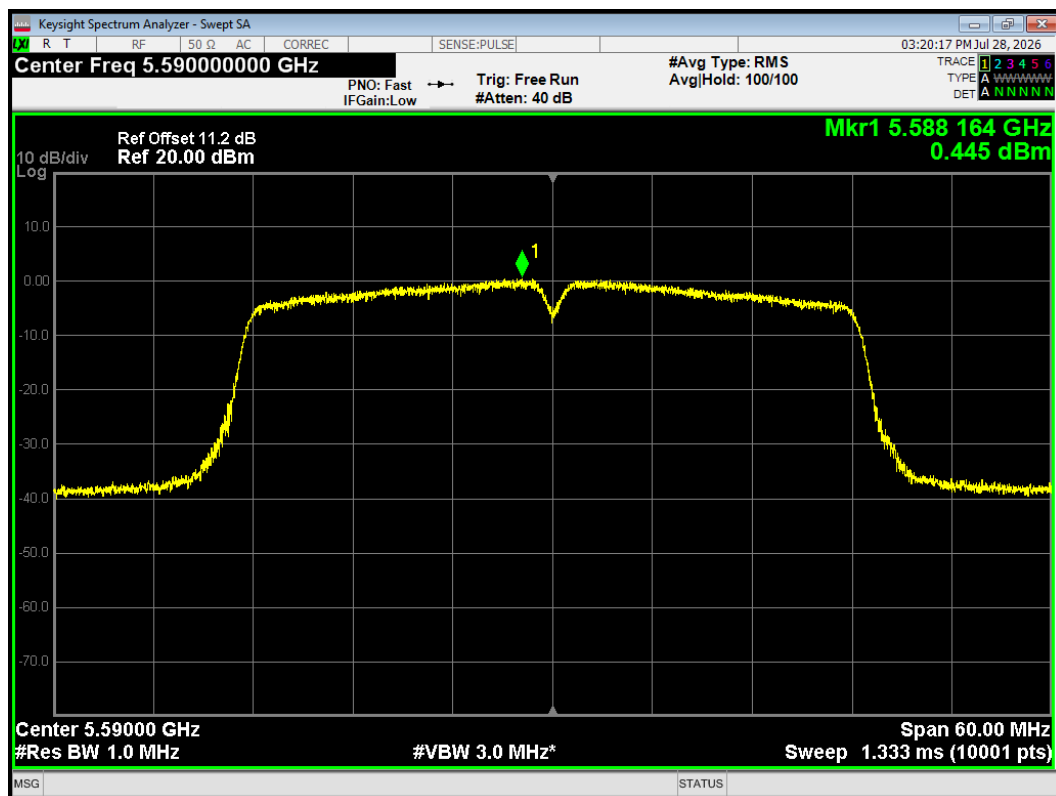


PSD 802.11ac(VHT40) 5670MHz

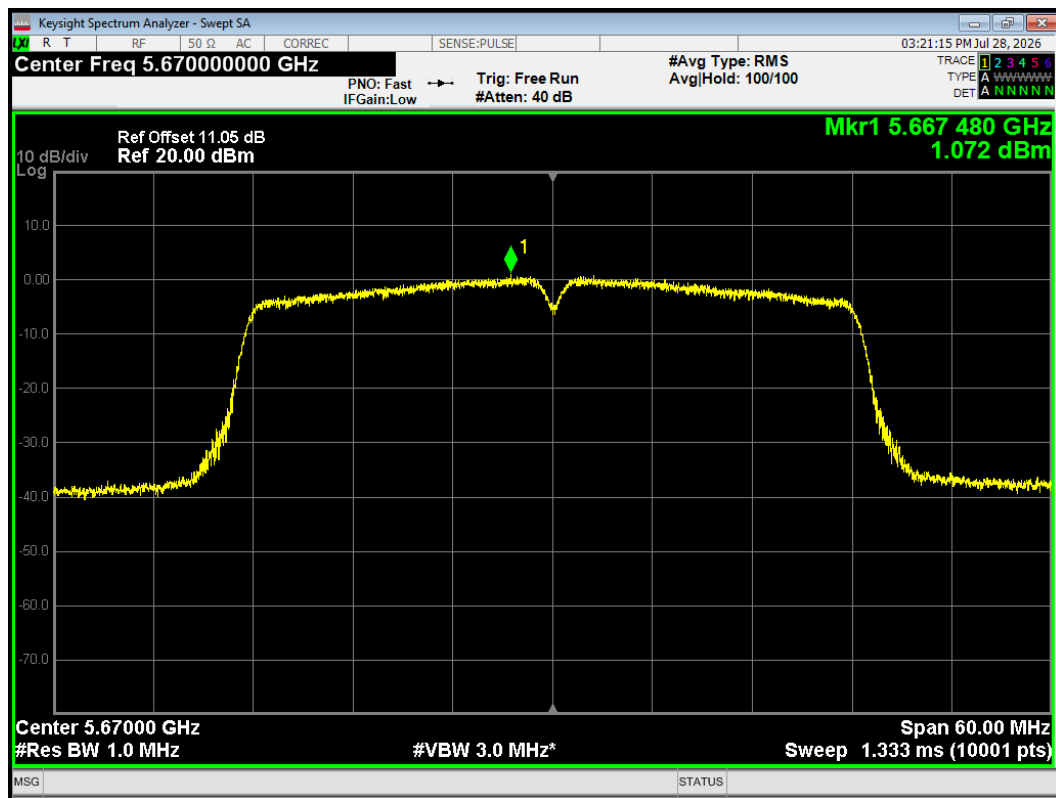


PSD 802.11ac(VHT40) 5710MHz

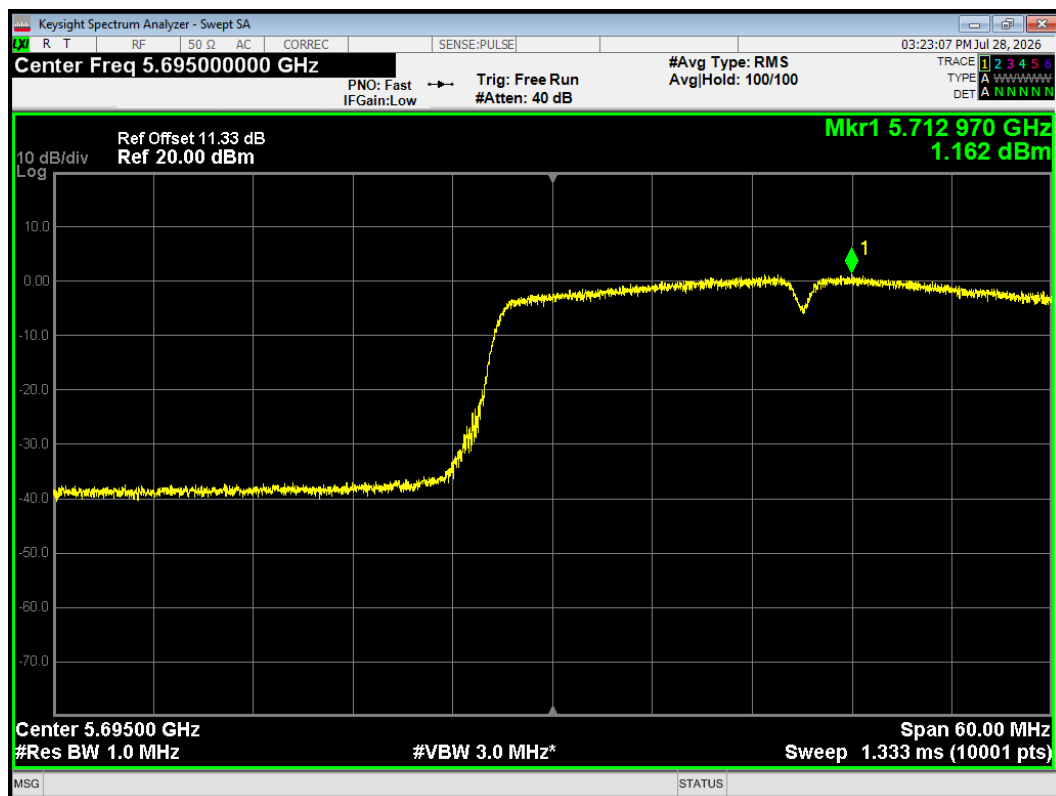


PSD 802.11ac(VHT80) 5610MHz

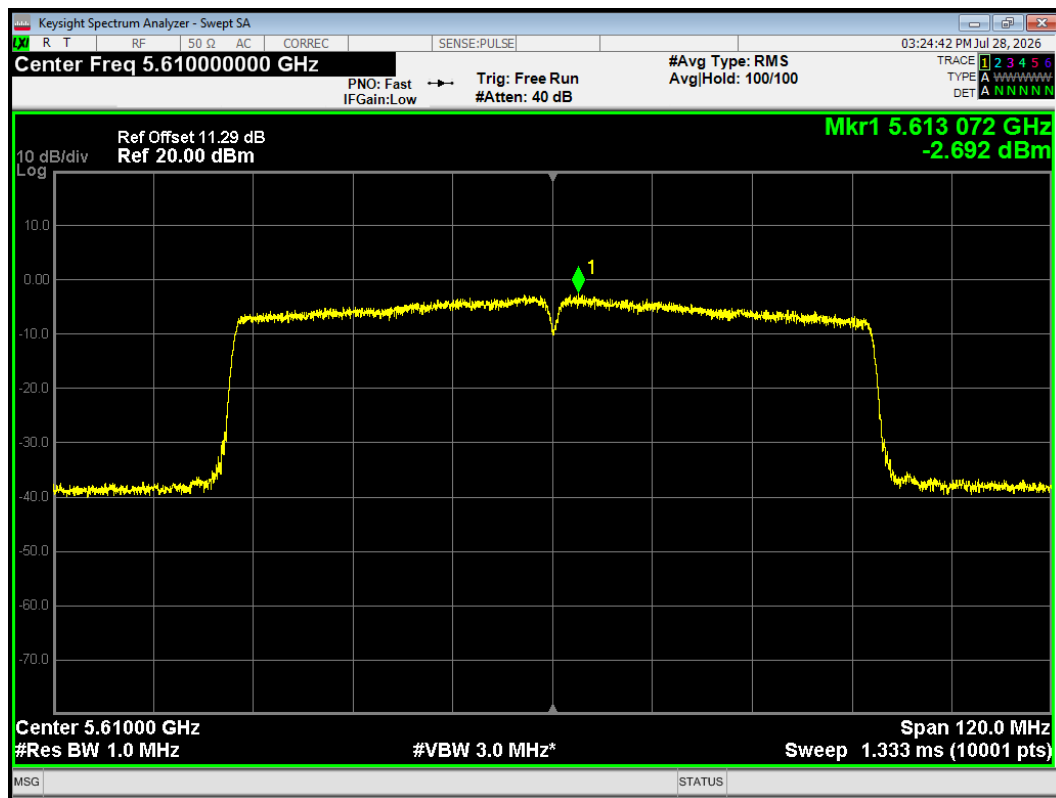


PSD 802.11ac(VHT80) 5690MHz

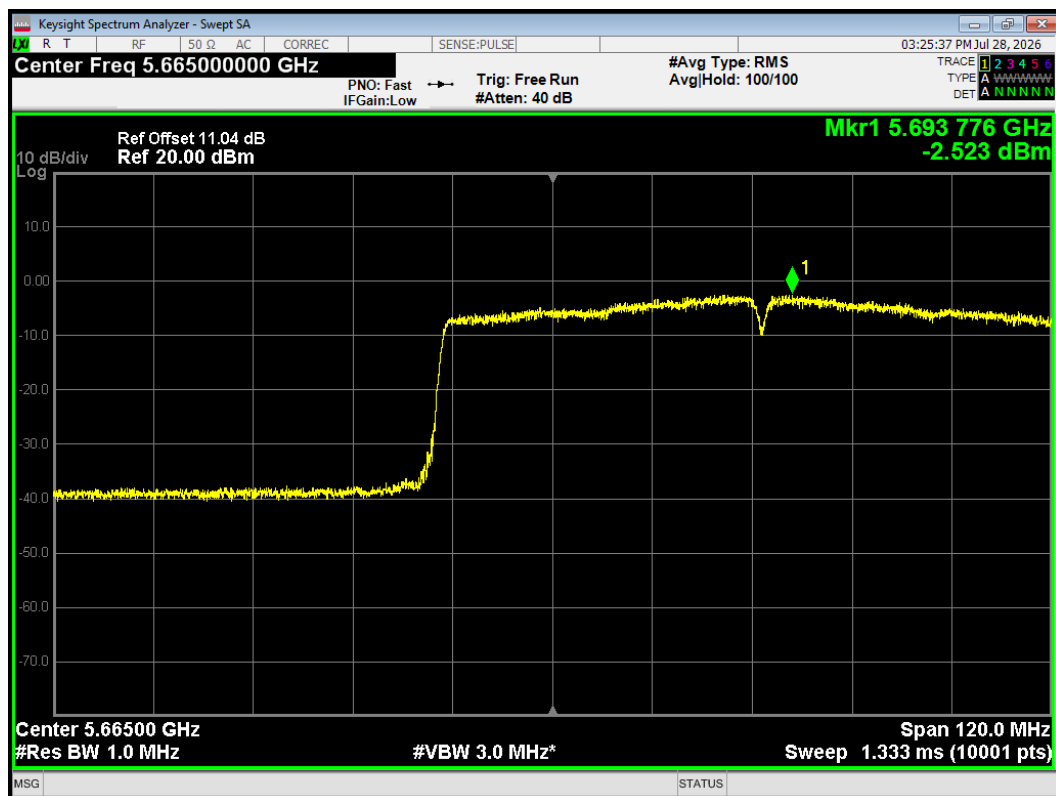


PSD 802.11n(HT20) 5500MHz

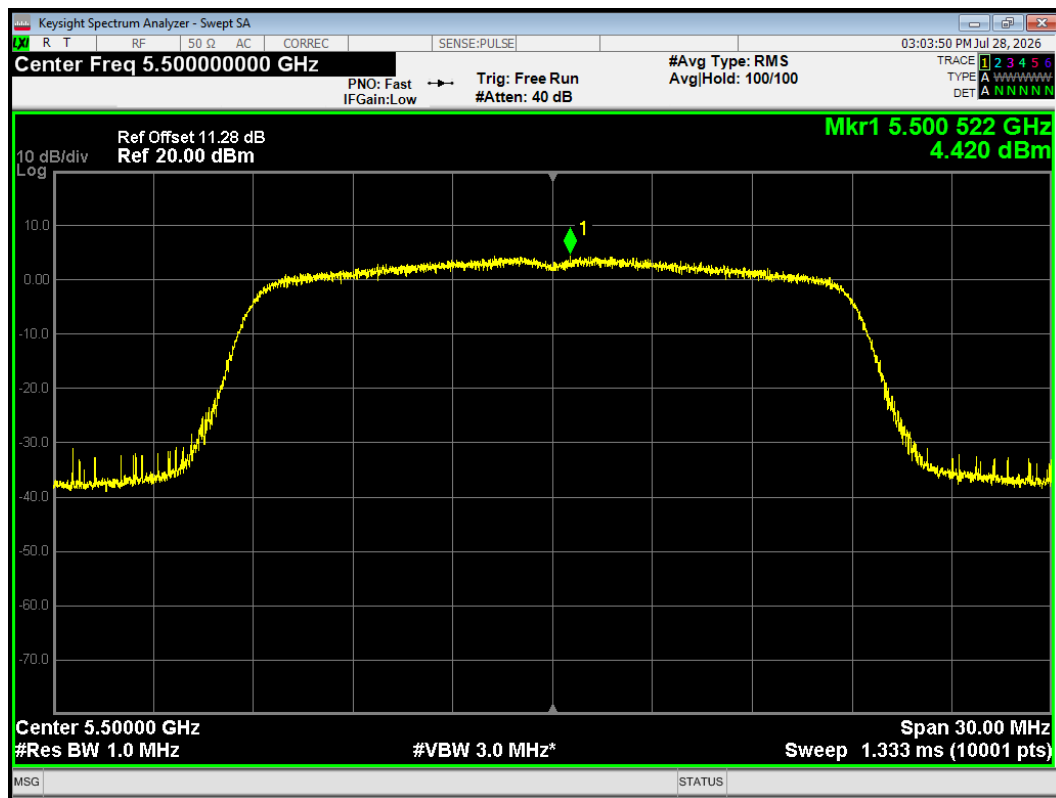


PSD 802.11n(HT20) 5600MHz

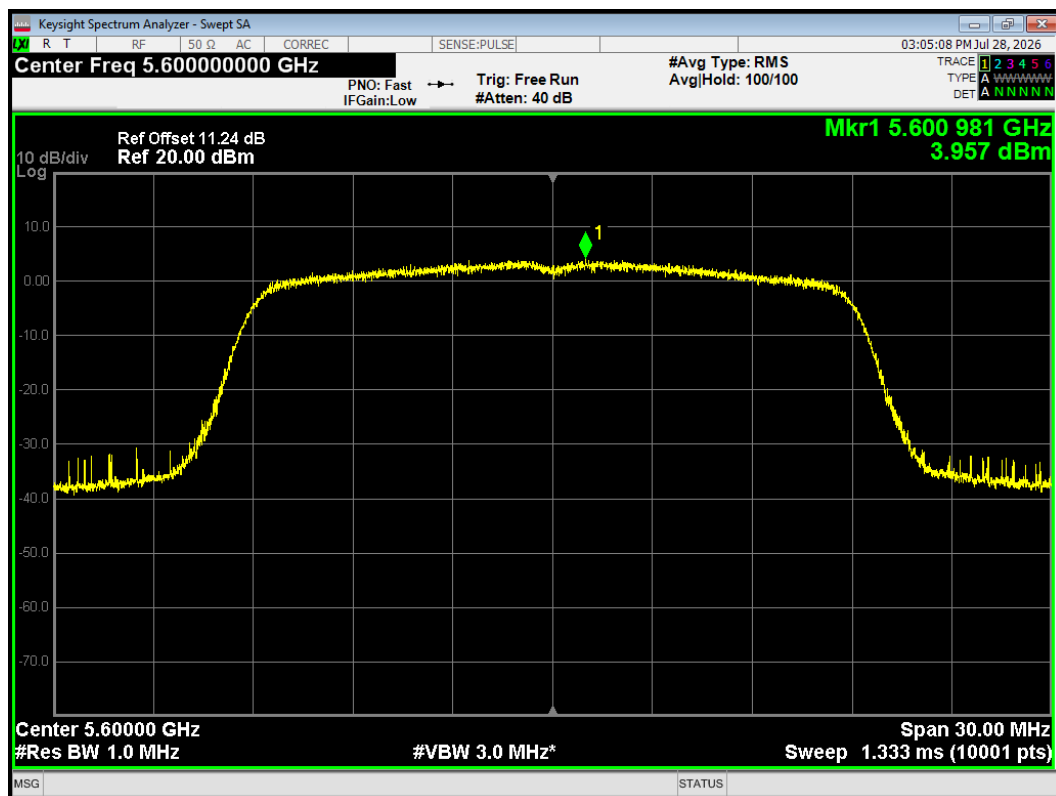


PSD 802.11n(HT20) 5700MHz

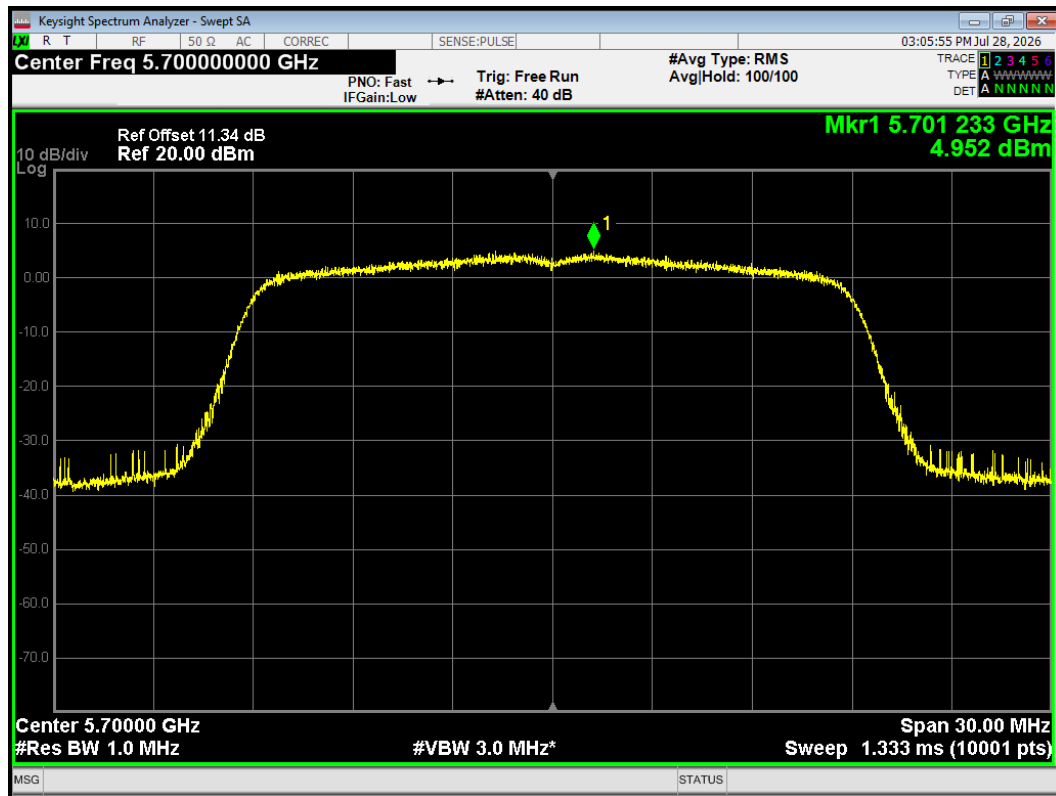


PSD 802.11n(HT20) 5720MHz

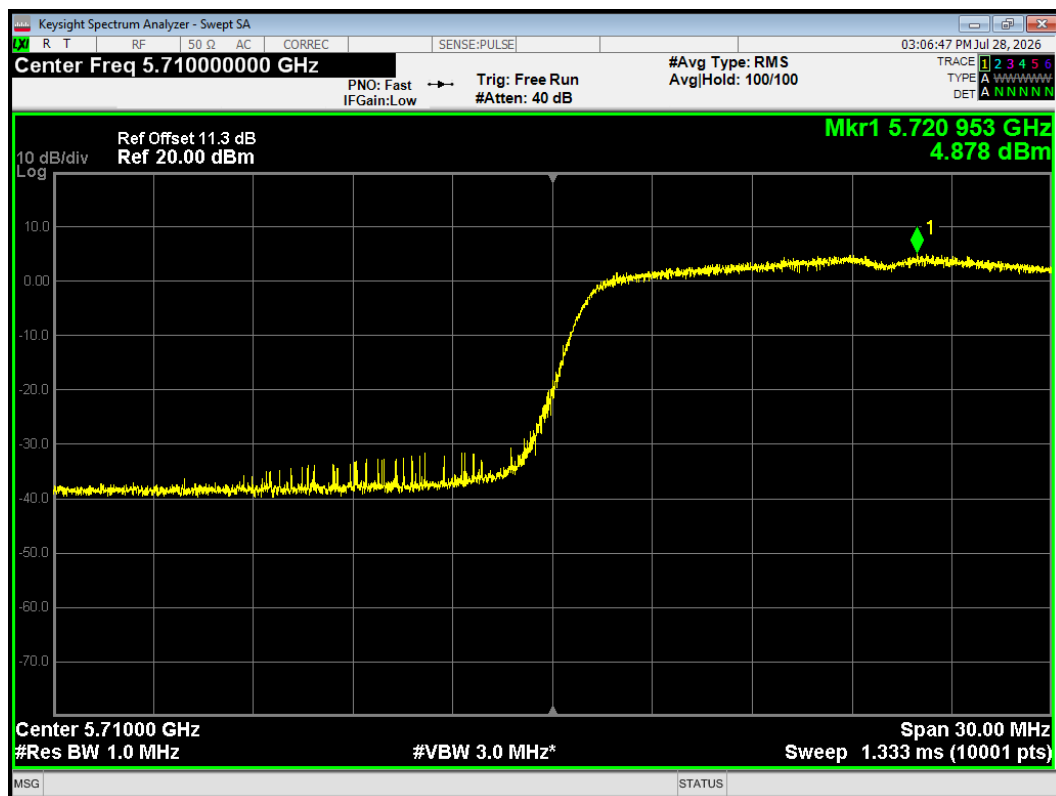


PSD 802.11n(HT40) 5510MHz

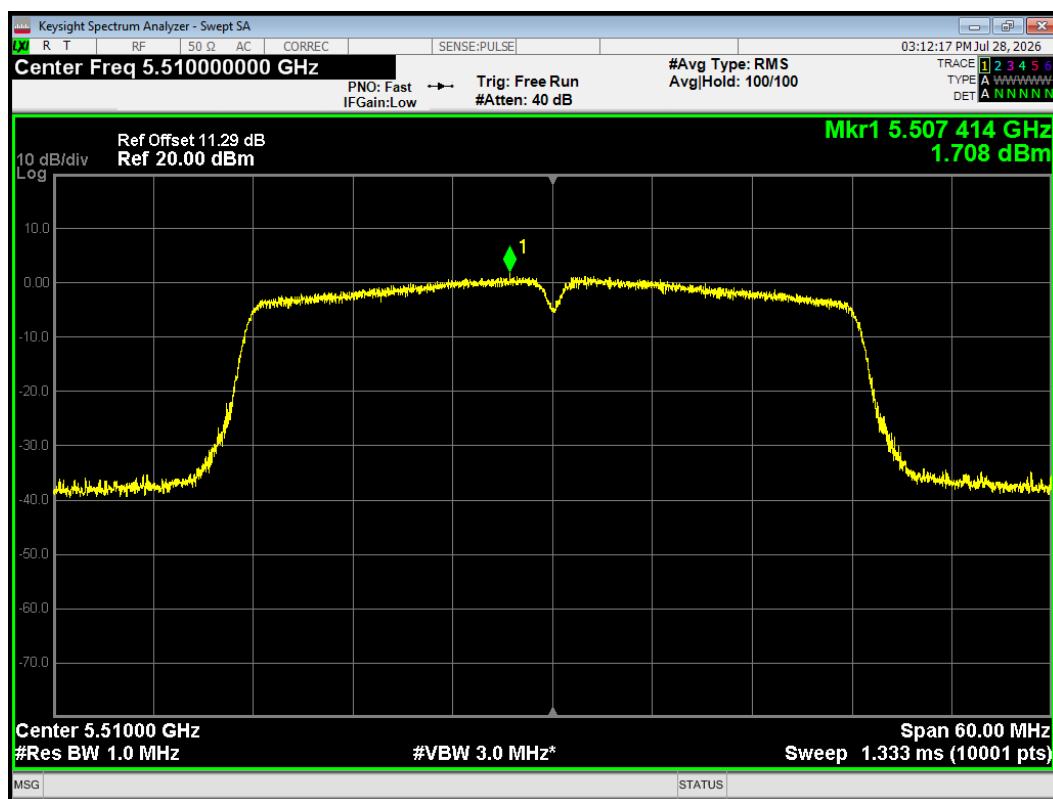


PSD 802.11n(HT40) 5590MHz

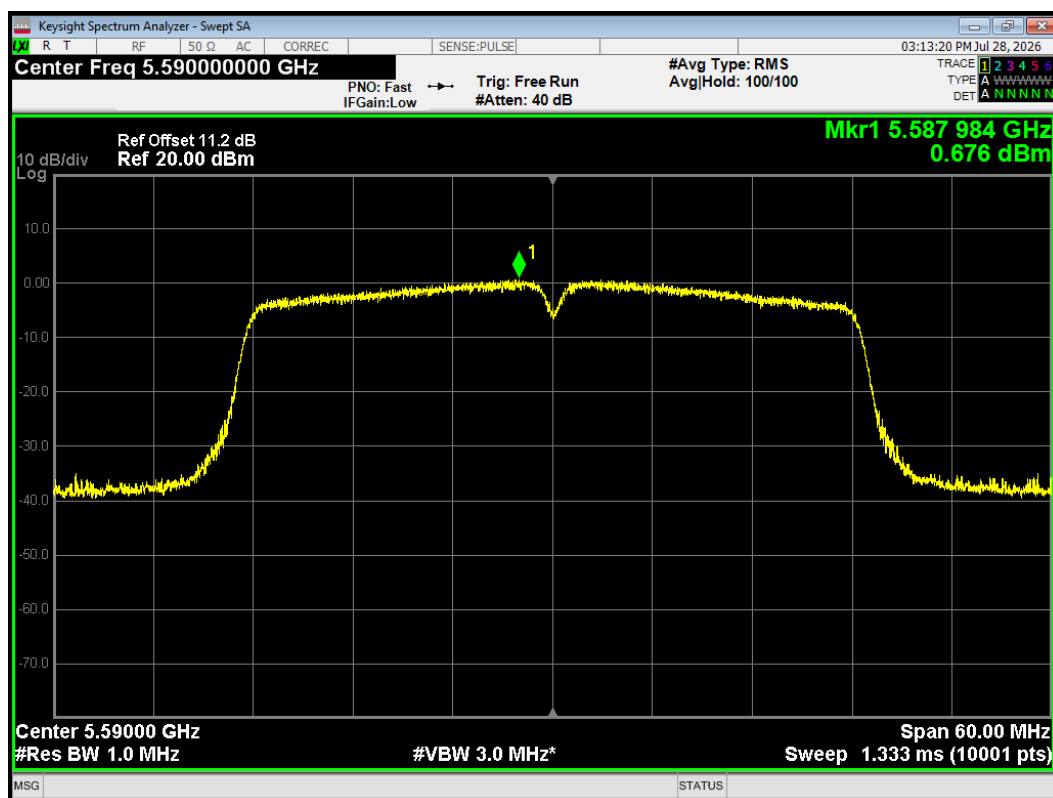


PSD 802.11n(HT40) 5670MHz

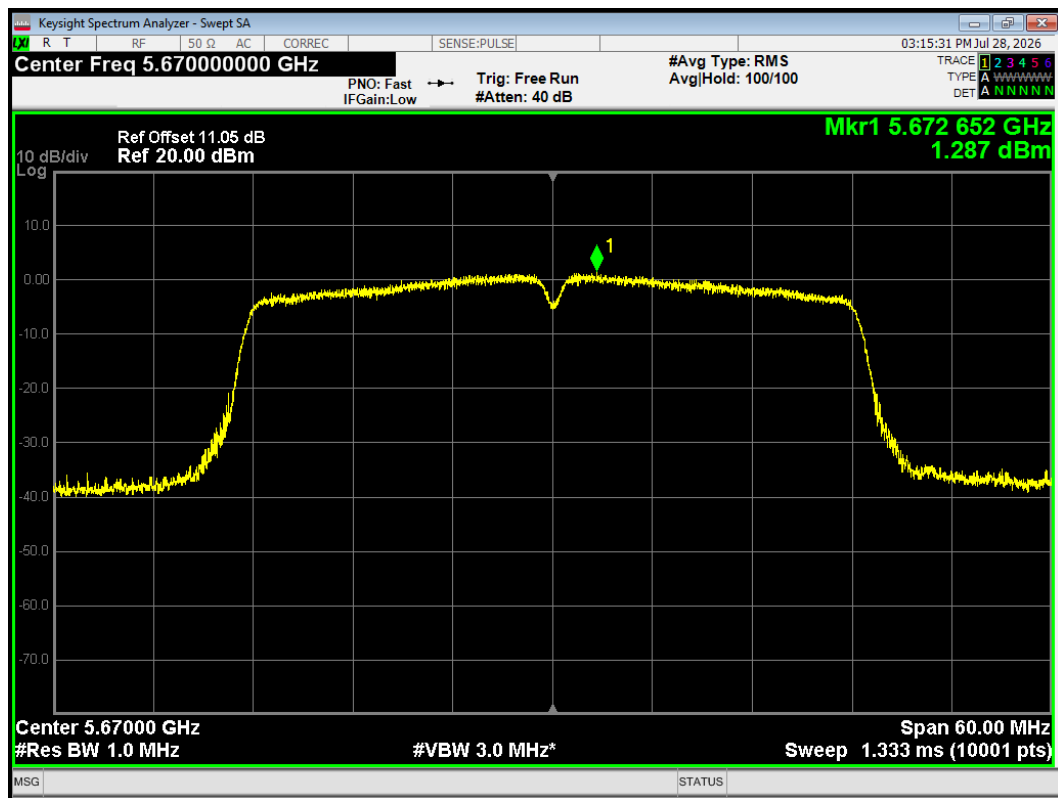


PSD 802.11n(HT40) 5710MHz

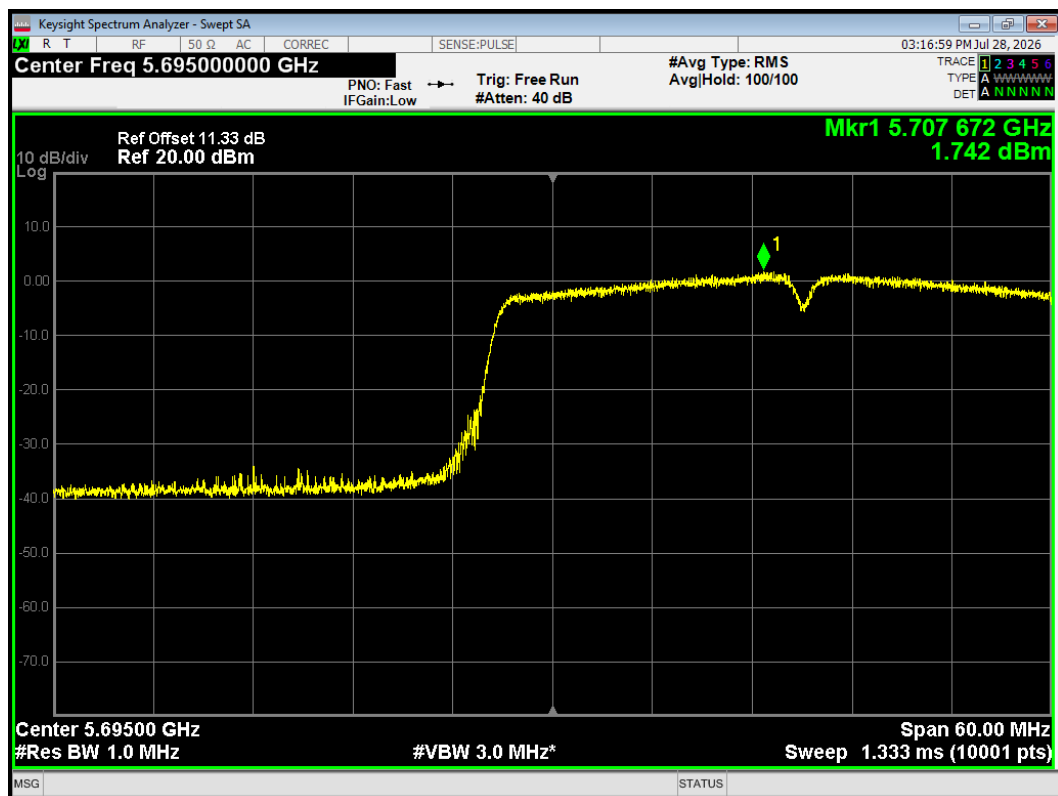


PSD 802.11a 5720MHz

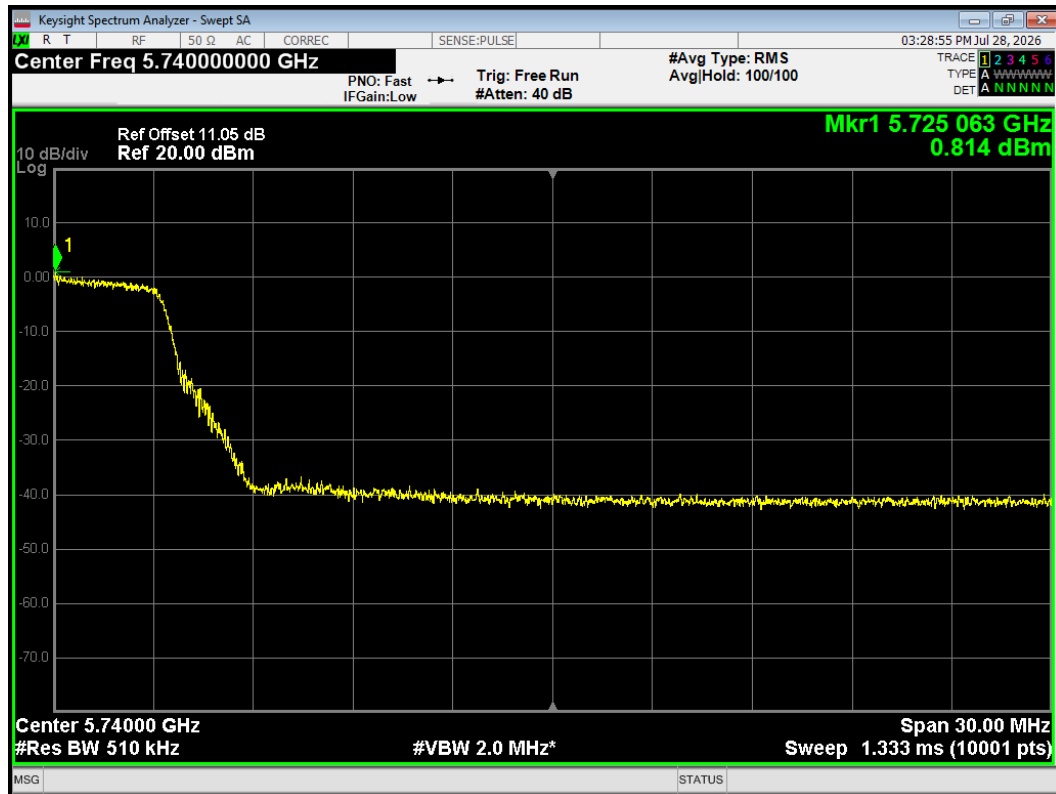


PSD 802.11a 5745MHz

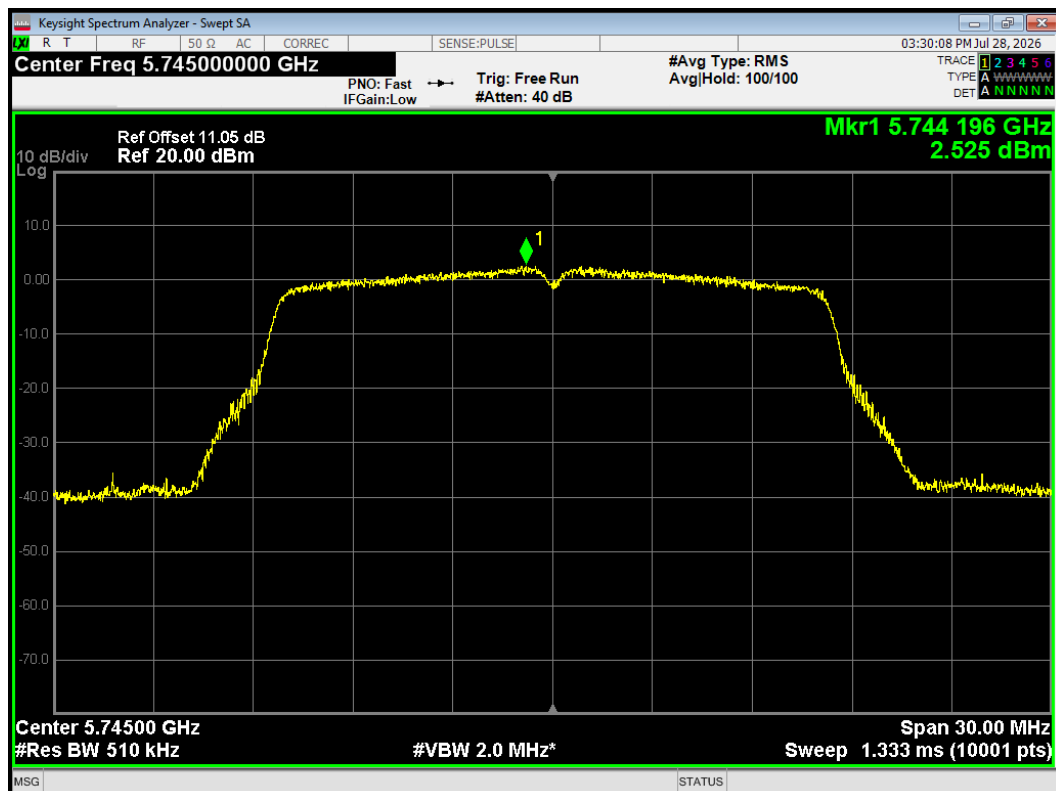


PSD 802.11a 5785MHz

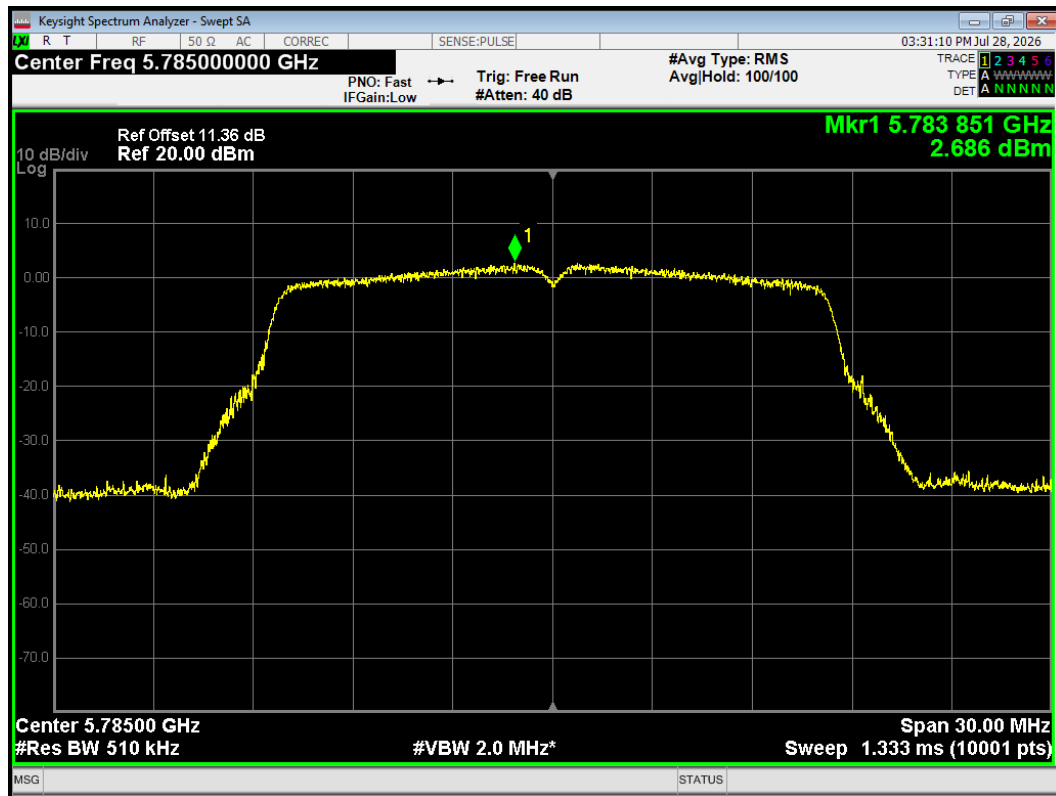


PSD 802.11a 5825MHz

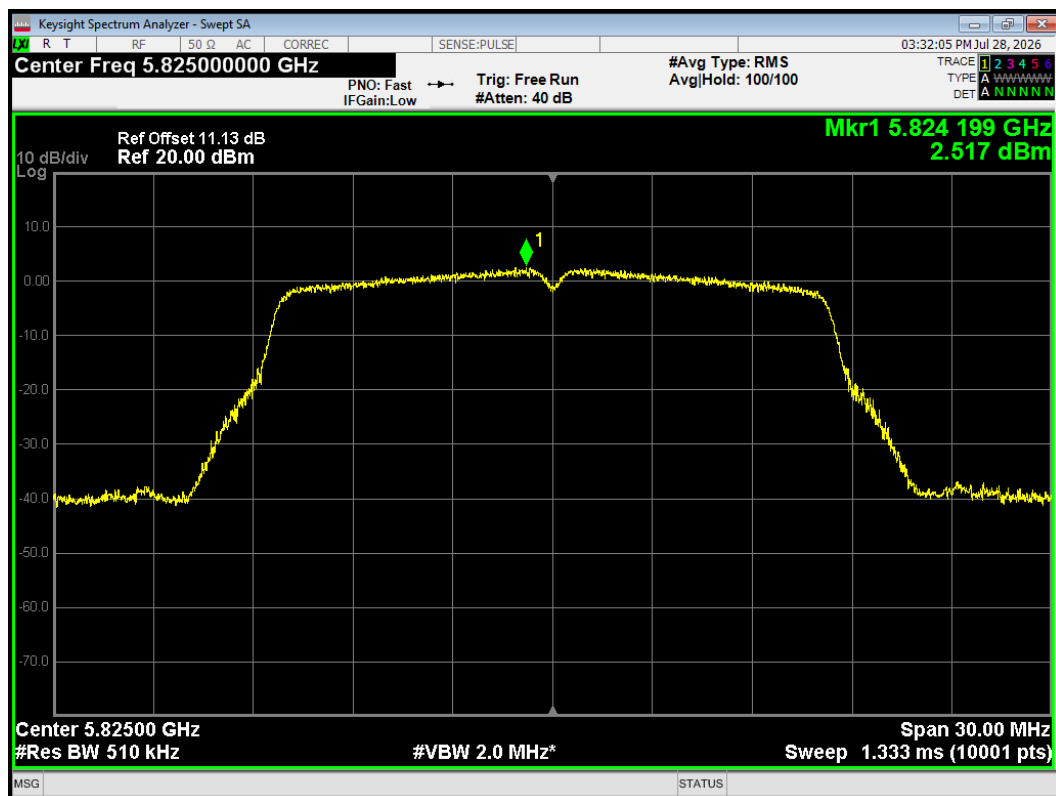


PSD 802.11ac(VHT20) 5720MHz

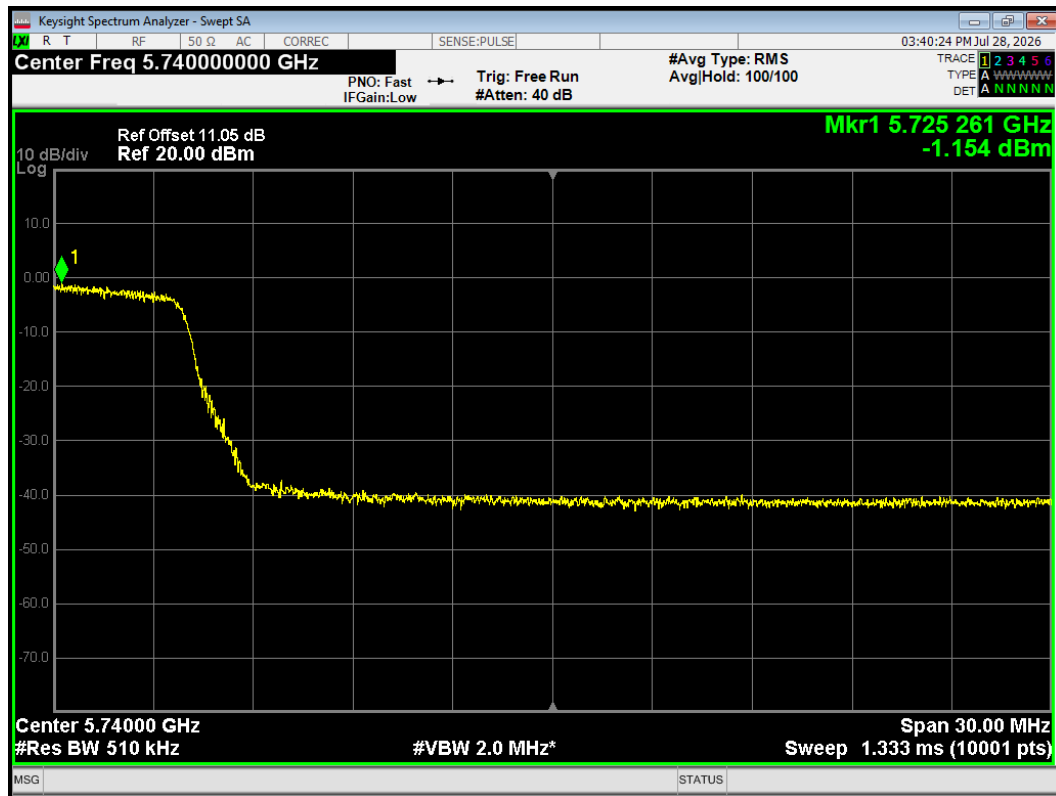


PSD 802.11ac(VHT20) 5745MHz

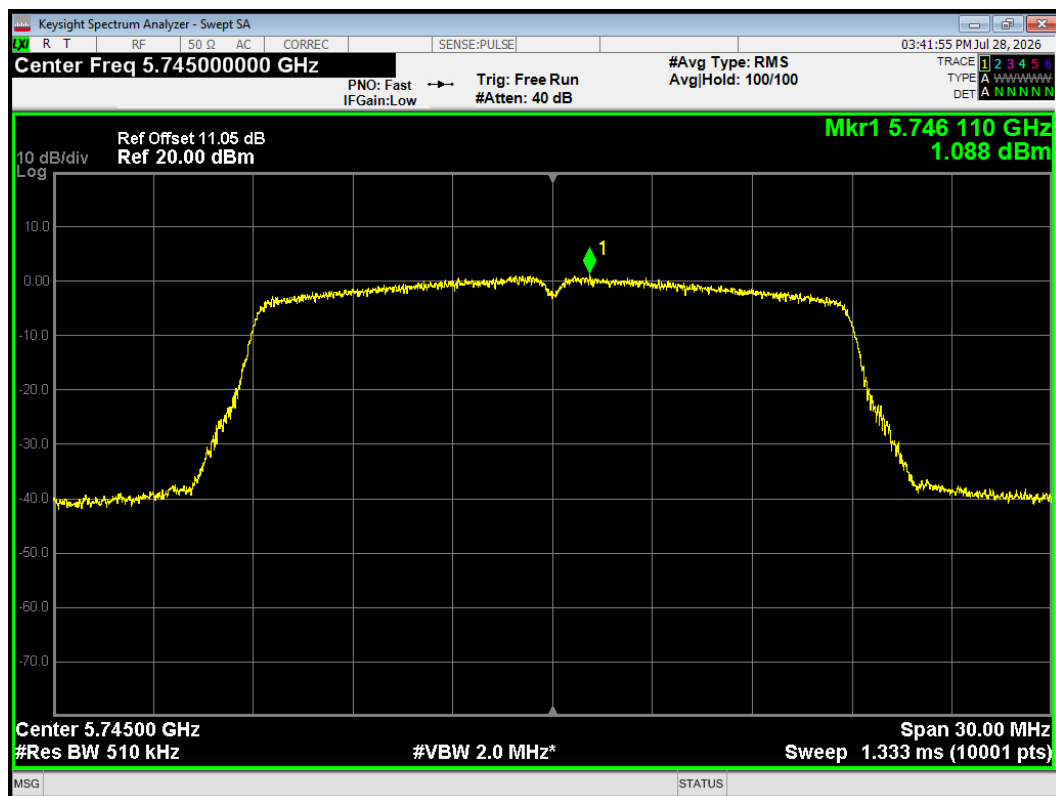


PSD 802.11ac(VHT20) 5785MHz

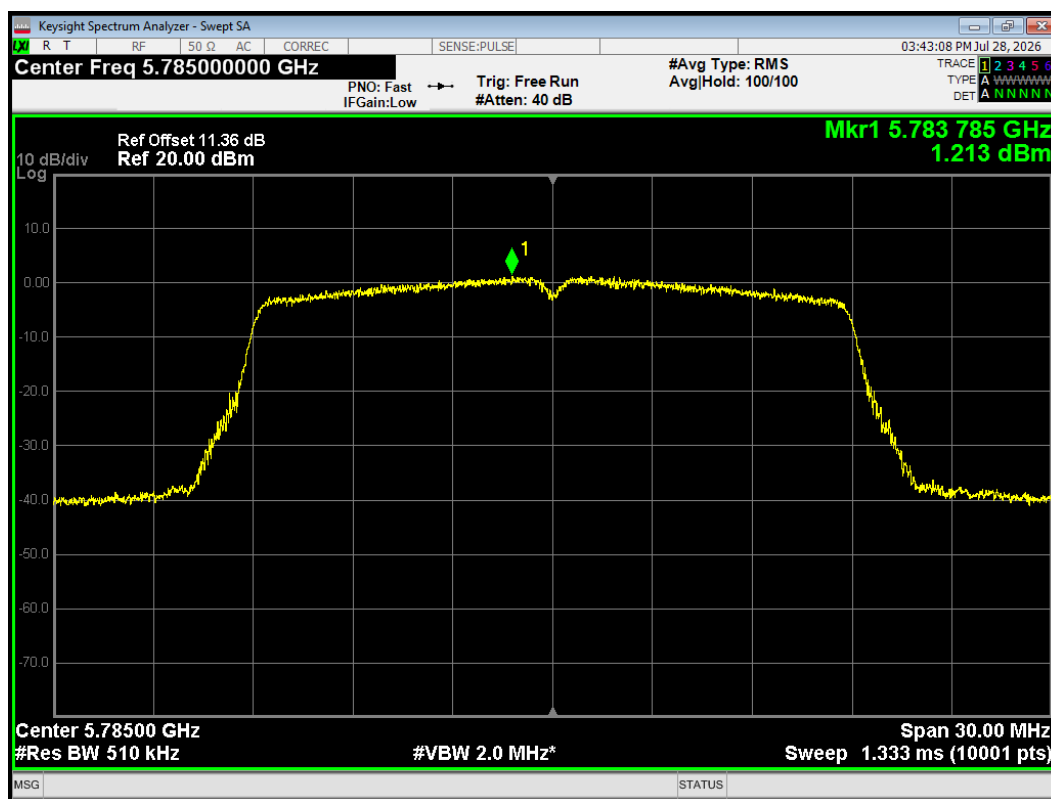


PSD 802.11ac(VHT20) 5825MHz

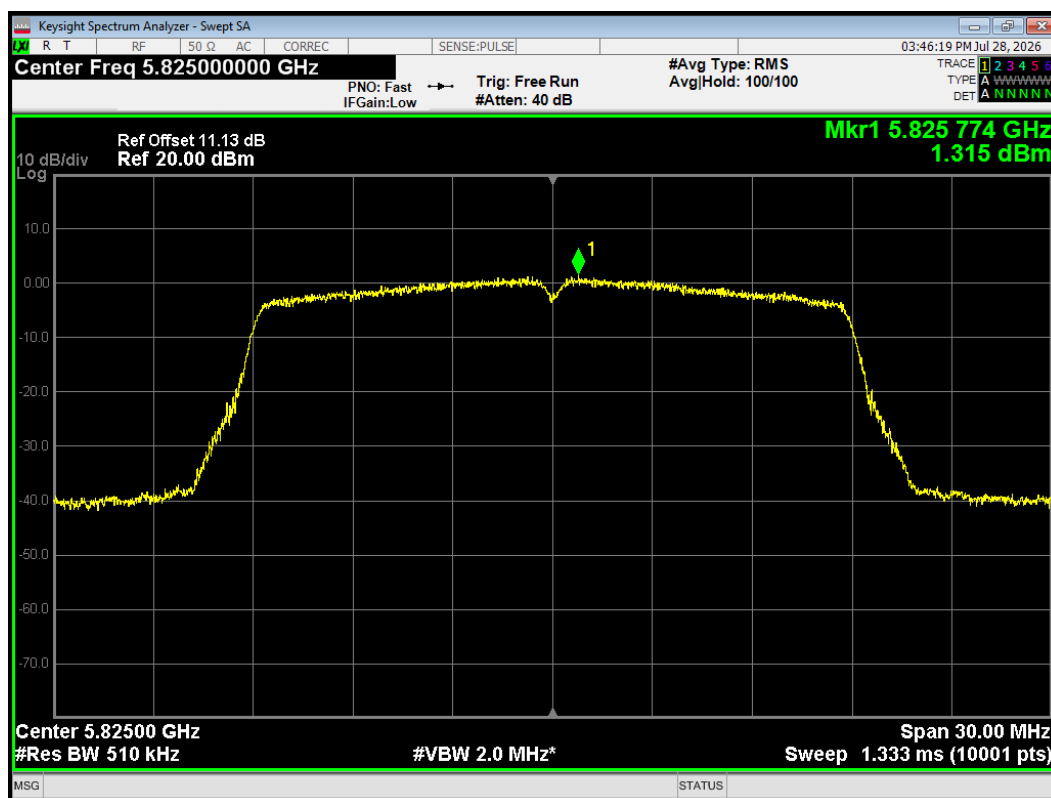


PSD 802.11ac(VHT40) 5710MHz

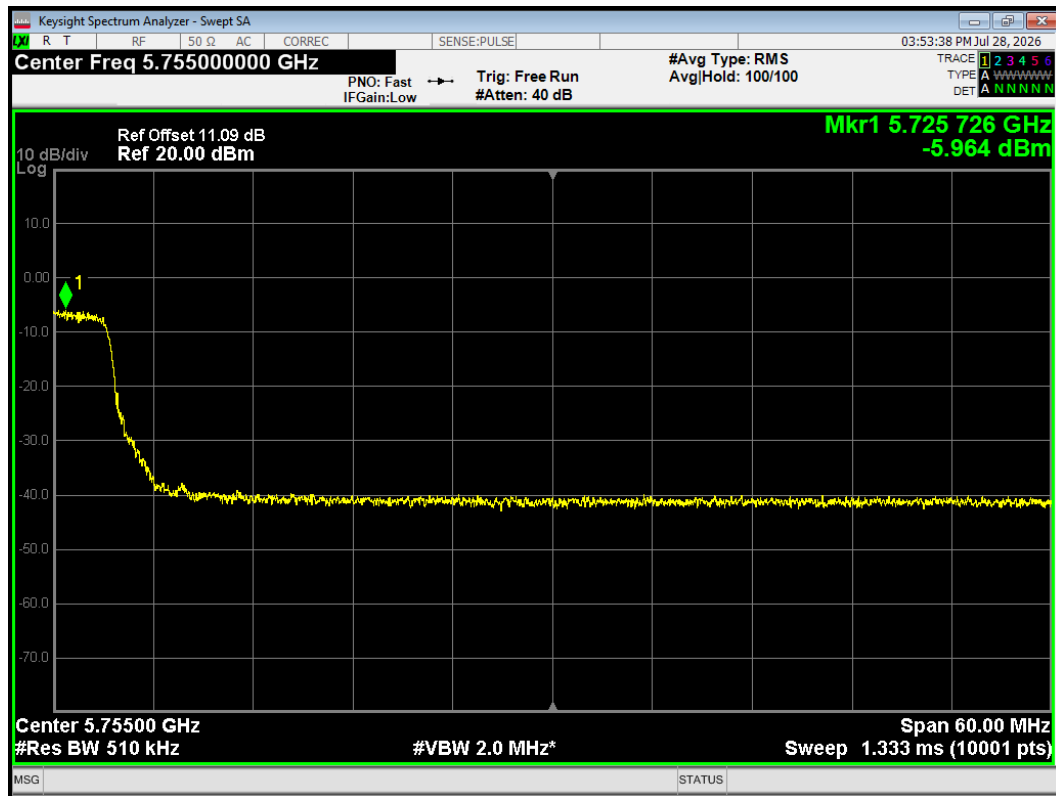


PSD 802.11ac(VHT40) 5755MHz

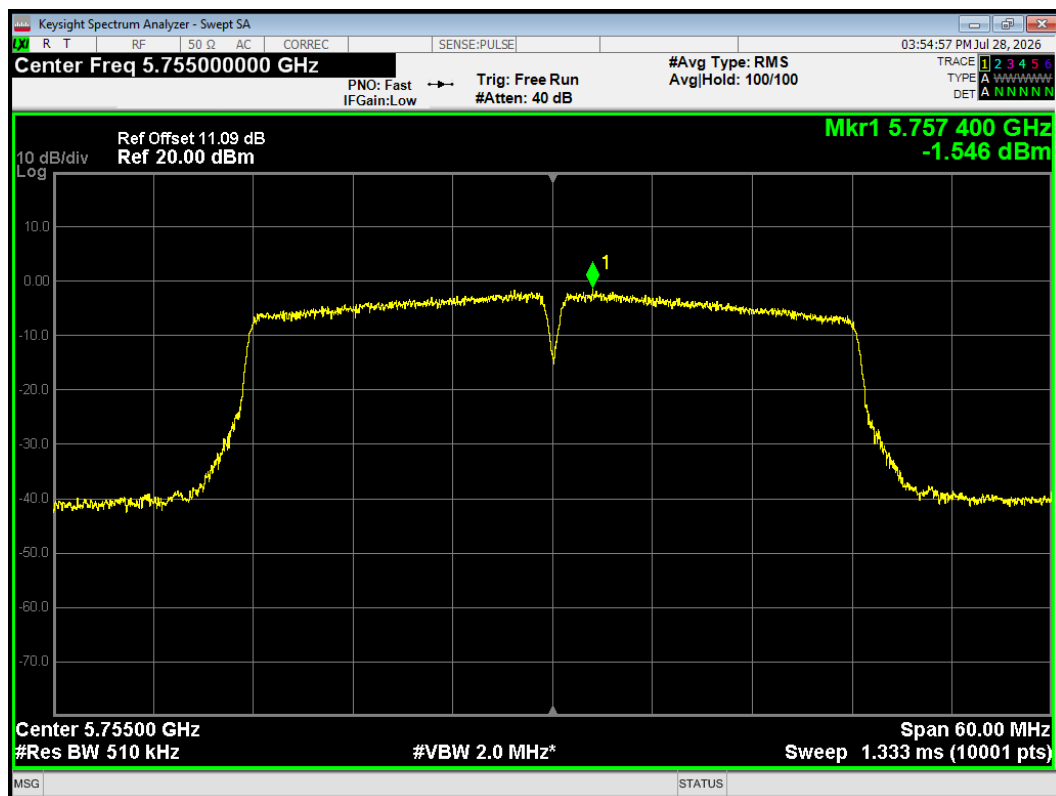


PSD 802.11ac(VHT40) 5795MHz

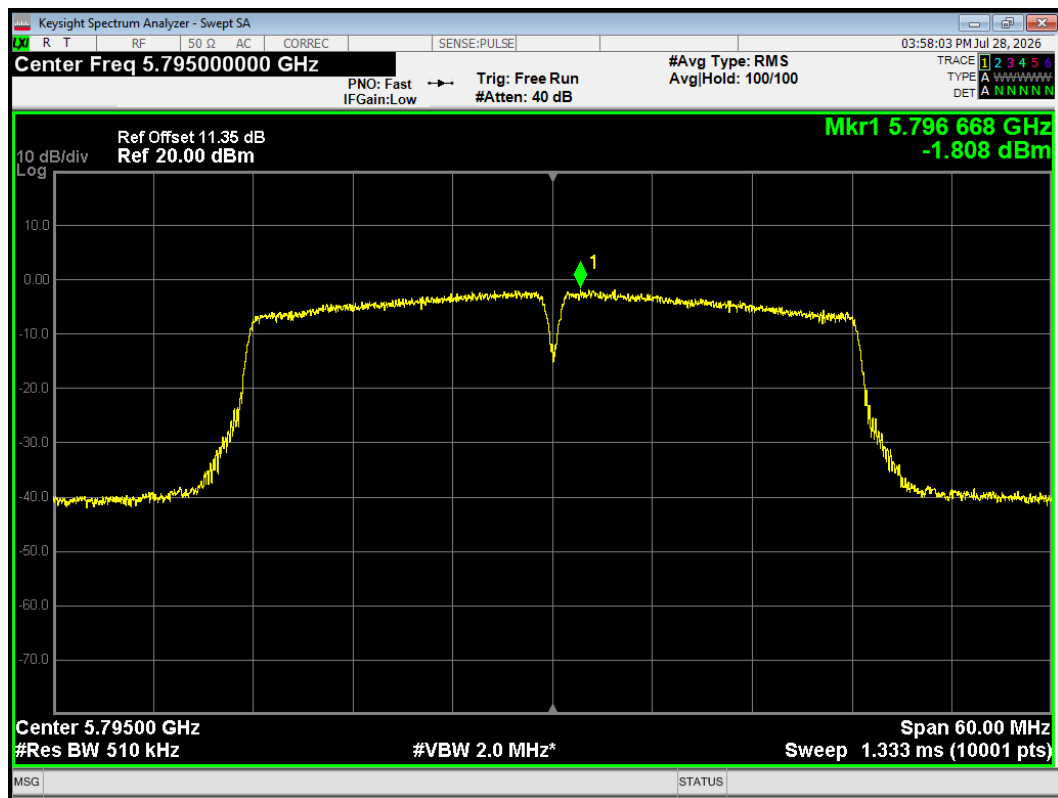


PSD 802.11ac(VHT80) 5690MHz

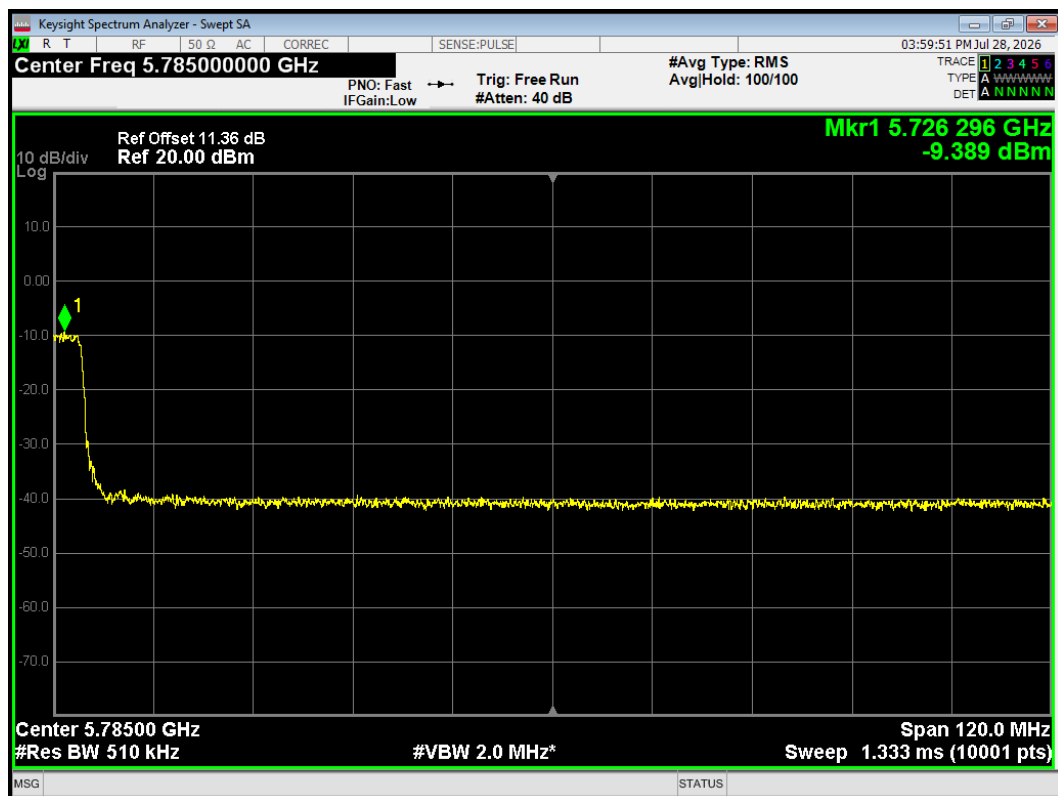


PSD 802.11ac(VHT80) 5775MHz

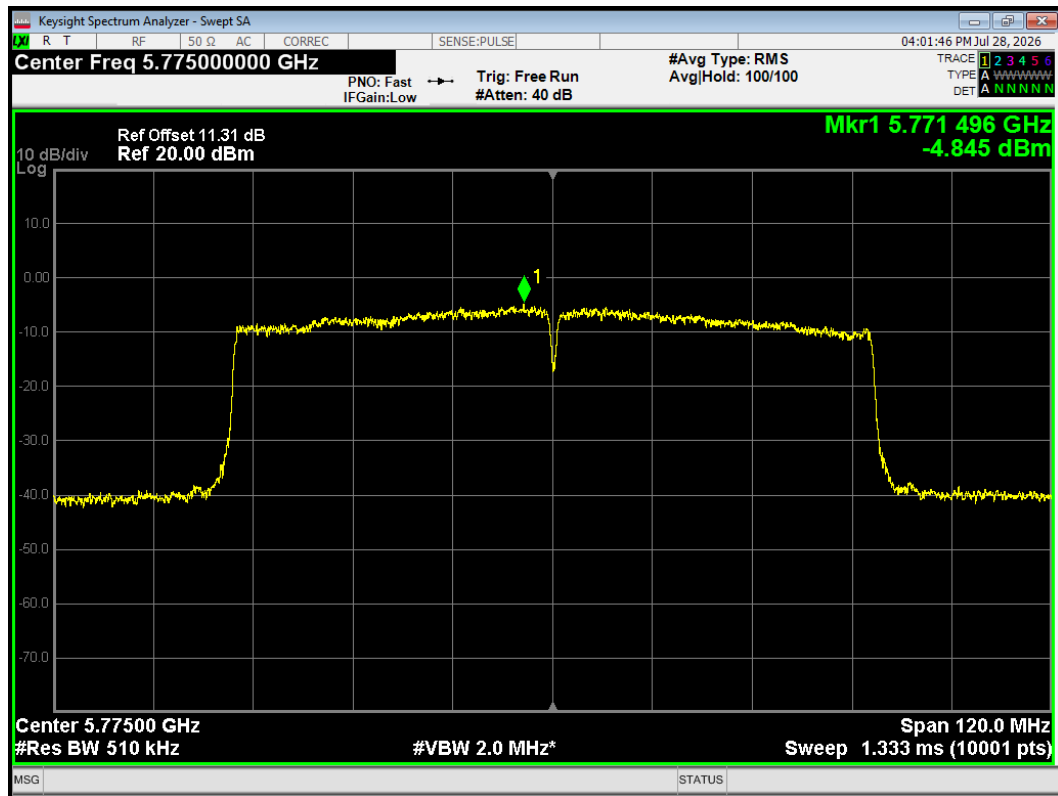


PSD 802.11n(HT20) 5720MHz

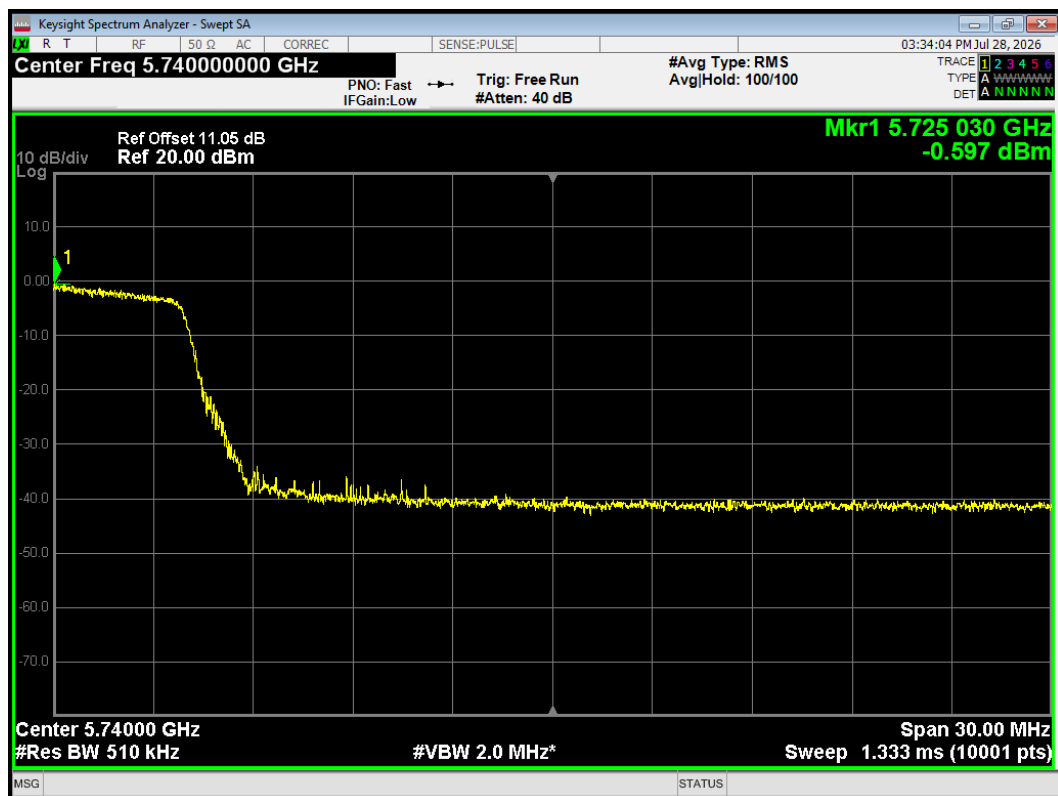


PSD 802.11n(HT20) 5745MHz

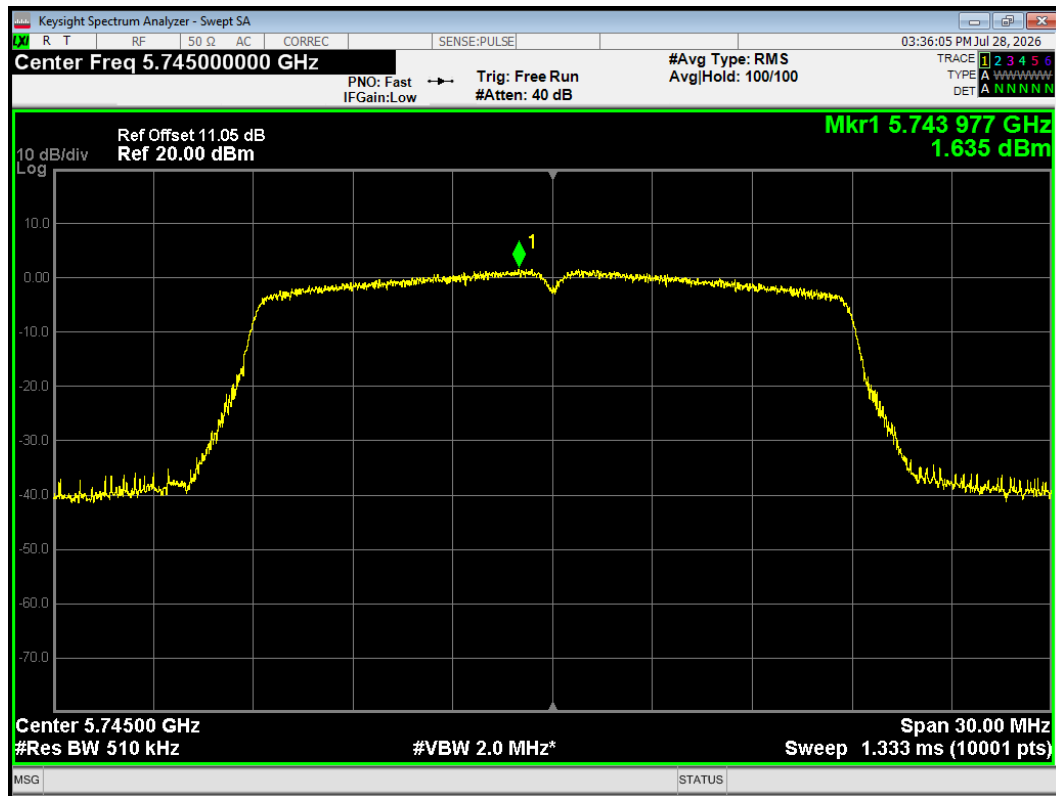


PSD 802.11n(HT20) 5785MHz

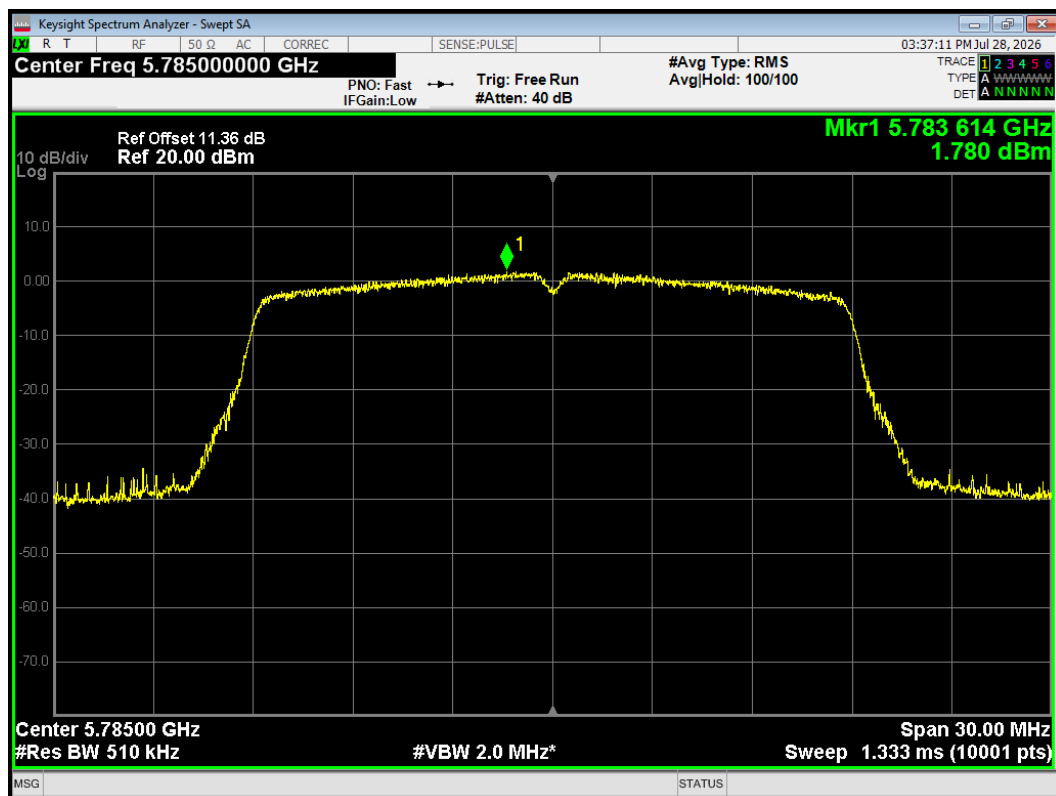


PSD 802.11n(HT20) 5825MHz

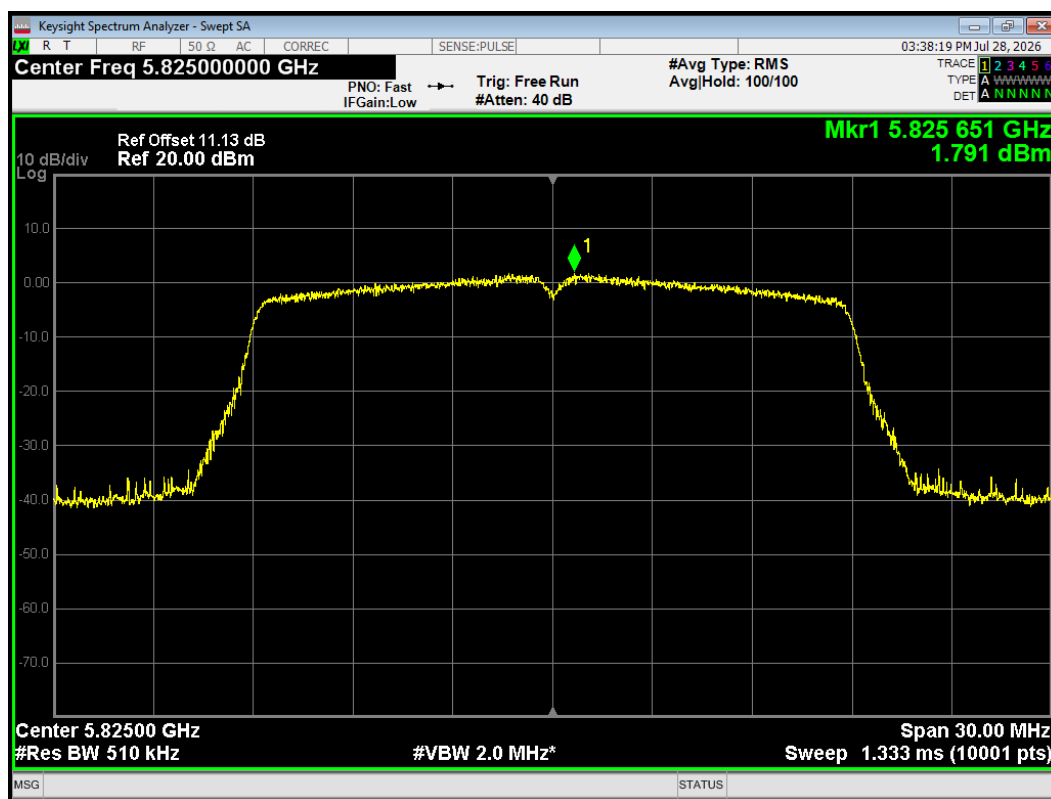


PSD 802.11n(HT40) 5710MHz

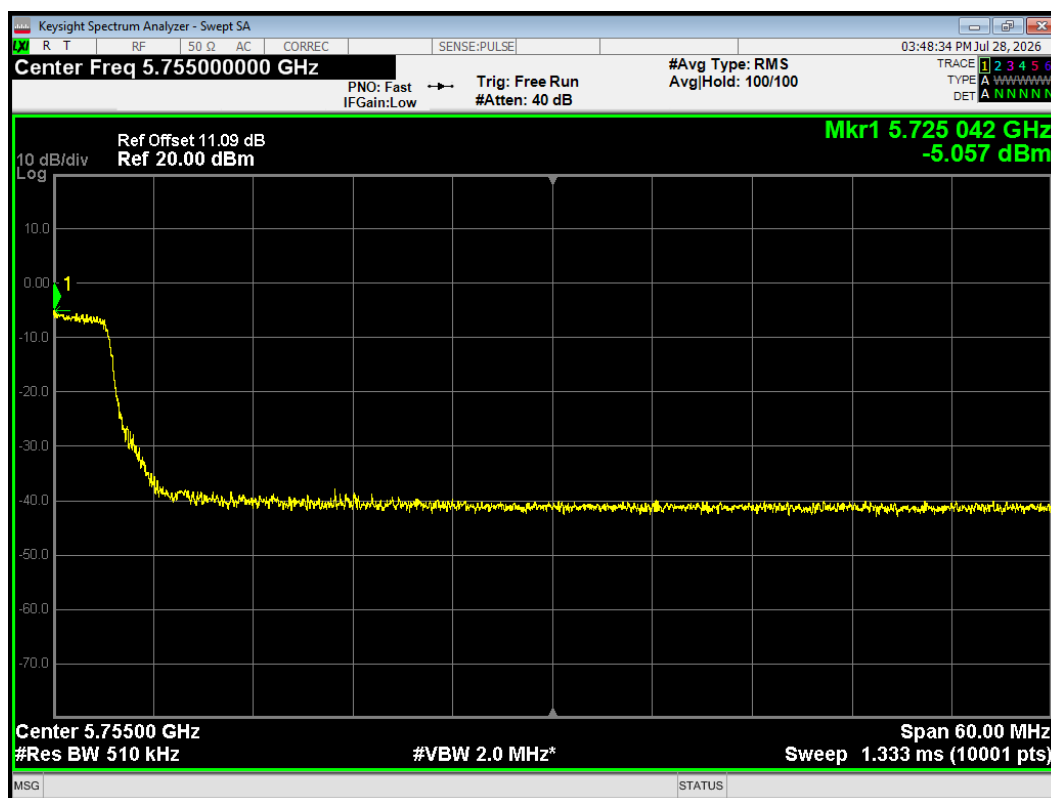

PSD 802.11n(HT40) 5755MHz

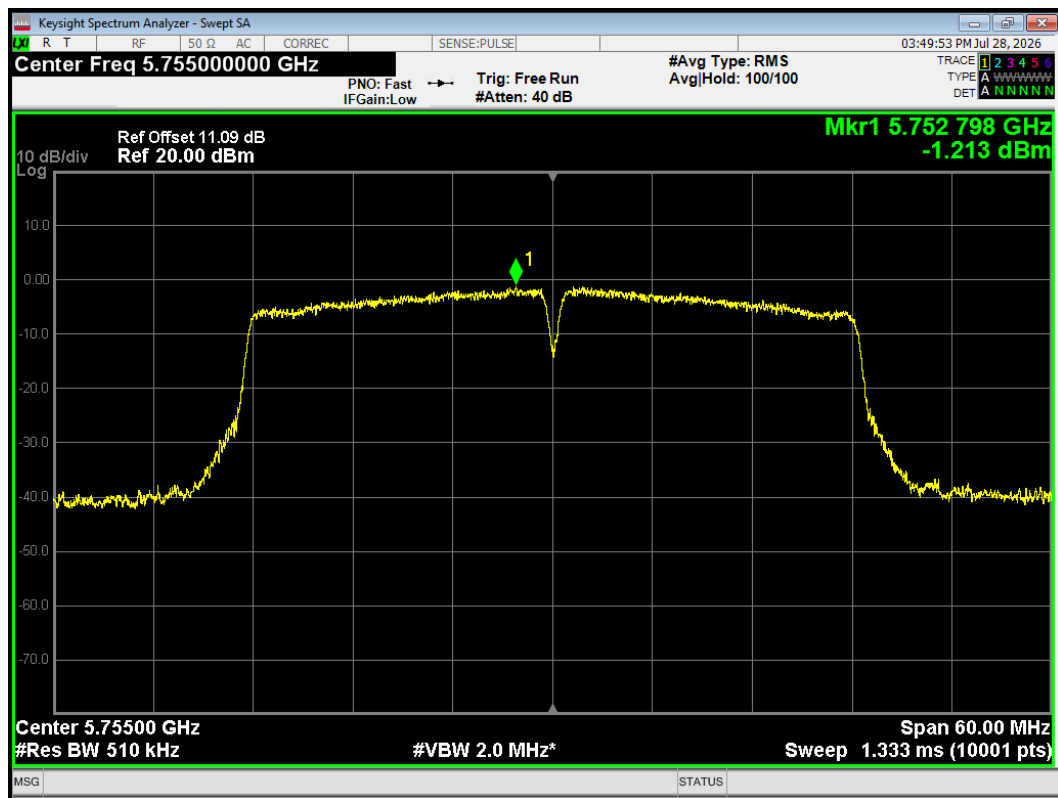

PSD 802.11n(HT40) 5795MHz

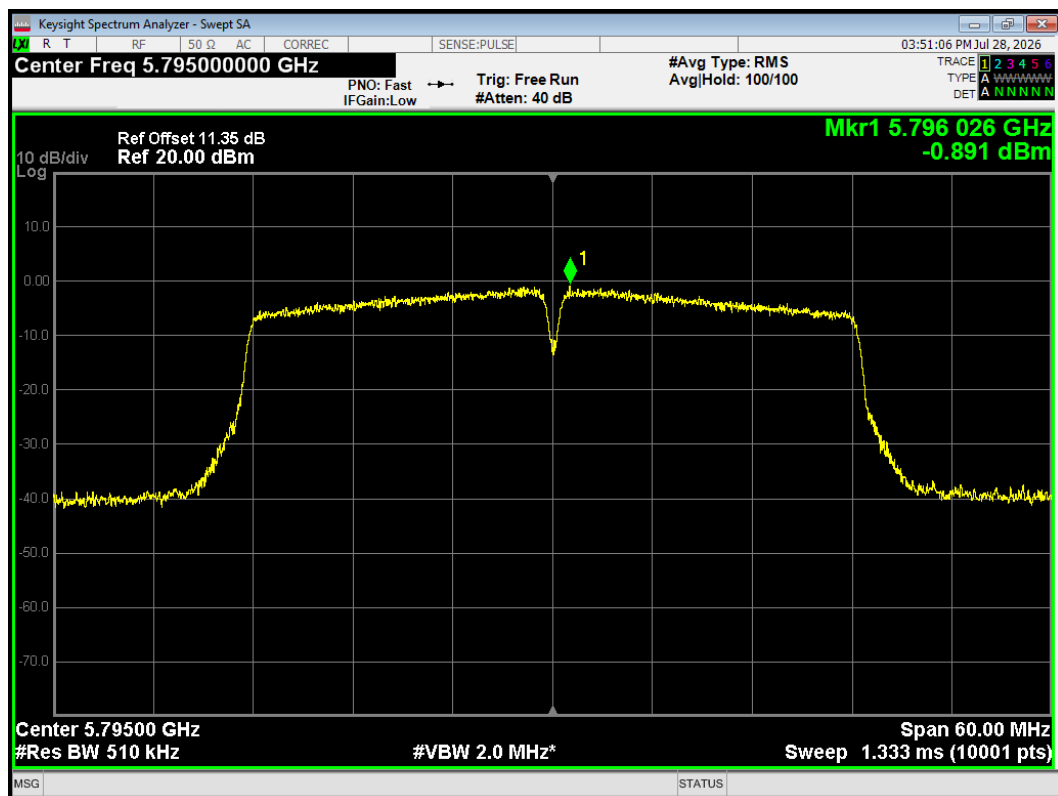

6.5. Unwanted Emission

The detailed test data see EFTA26070269-IE-02-R5-SRD Test Result.

6.6. Conducted Emission

The detailed test data see EFTA26070269-IE-02-R5-SRD Test Result.

7. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Power sensor	R&S	NRP18S	101954	2026-04-21	2027-04-20
Spectrum Analyzer	KEYSIGHT	N9020A	MY51330870	2026-04-21	2027-04-20
DC Power Supply	UNI-T	UTP1306S+	2205D0517426	2025-11-24	2026-11-23
Climate Chamber	ESPEC	SU-242	93000506	2025-11-24	2026-11-23
Attenuator	HASCO	HA18A-10	0003	/	/
Software	MW	MTS8310	2.0.0.0	/	/
EMI Test Receiver	R&S	ESCI3	100948	2026-04-20	2027-04-19
Signal Analyzer	R&S	FSV40	101186	2026-04-21	2027-04-20
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2026-04-12	2029-04-11
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	371	2025-10-26	2028-10-25
Horn Antenna	SCHWARZBECK	BBHA 9120D	430	2024-07-18	2027-07-17
Amplifier	R&S	SCU18F	101022	2026-04-20	2027-04-19
Horn Antenna	R&S	BBHA 9170	101301	2023-09-16	2026-09-15
Amplifier	MicroWave	SCU40F1	100649	2025-12-01	2026-11-30
Software	R&S	EMC32	9.26.01	/	/
RF Cable	Wuhan Champion Electronics	LA810-NMSM-7.5M	24067755	2026-04-21	2027-04-20
RF Cable	Wuhan Champion Electronics	LA810-NMNM-2M	24065754	2026-04-21	2027-04-20
Artificial main network	R&S	ENV216	102191	2025-11-24	2026-11-23
EMI Test Receiver	R&S	ESR	101667	2026-04-20	2027-04-19
Software	R&S	ELEKTRA	5.02.1	/	/

8. The EUT Appearance

Refer to *EUT Appearance*.

9. Test Setup Photos

Refer to *Part15E Test Setup*.

***** END OF REPORT *****