



RADIO TEST REPORT

FCC ID : 2AHBN-AP34
Equipment : 802.11ax 6E Wireless Access Point
Brand Name : Juniper
Model Name : AP34
Applicant : Juniper Networks, Inc.
1133 Innovation Way Sunnyvale, California 94089 USA
Manufacturer : Juniper Networks, Inc.
1133 Innovation Way Sunnyvale, California 94089 USA
Standard : 47 CFR FCC Part 15.407

The product was received on Sep. 03, 2026, and testing was started from Sep. 09, 2026 and completed on Sep. 17, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Rex Liao

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	12
1.3 Testing Location Information	12
1.4 Measurement Uncertainty	12
2 Test Configuration of EUT	13
2.1 Test Channel Mode	13
2.2 The Worst Case Measurement Configuration	16
2.3 EUT Operation during Test	17
2.4 Accessories	17
2.5 Support Equipment.....	17
2.6 Test Setup Diagram	18
3 Transmitter Test Result	20
3.1 Maximum Output Power	20
3.2 Unwanted Emissions.....	23
4 Test Equipment and Calibration Data	27
Appendix A. Test Results of Maximum Output Power	
Appendix B. Test Results of Unwanted Emissions	
Appendix C. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_1 Ver1.4

Page Number : 3 of 28
Issued Date : Oct. 12, 2026
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.407(a)	Maximum Output Power	PASS	-
3.2	15.407(b)	Unwanted Emissions	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.

Reviewed by: Sam Chen**Report Producer: Sophia Shiung**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20)	5180-5240	36-48 [4]
5250-5350		5260-5320	52-64 [4]
5470-5725		5500-5720	100-144 [12]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax (HEW40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5470-5725		5510-5710	102-142 [6]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax (HEW80)	5210	42 [1]
5250-5350		5290	58 [1]
5470-5725		5530-5690	106-138 [3]
5725-5850		5775	155 [1]

For Radio 1

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20	20	2TX
	802.11 n HT20-BF, 802.11 ac VHT20-BF, 802.11 ax HEW20-BF	20	2TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40	40	2TX
	802.11 n HT40-BF, 802.11 ac VHT40-BF, 802.11 ax HEW40-BF	40	2TX
	802.11 ac VHT80, 802.11 ax HEW80	80	2TX
	802.11 ac VHT80-BF, 802.11 ax HEW80-BF	80	2TX



Band	Mode	BWch (MHz)	Nant
5.25-5.35GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20	20	2TX
	802.11 n HT20-BF, 802.11 ac VHT20-BF, 802.11 ax HEW20-BF	20	2TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40	40	2TX
	802.11 n HT40-BF, 802.11 ac VHT40-BF, 802.11 ax HEW40-BF	40	2TX
	802.11 ac VHT80, 802.11 ax HEW80	80	2TX
	802.11 ac VHT80-BF, 802.11 ax HEW80-BF	80	2TX
5.47-5.725GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20	20	2TX
	802.11 n HT20-BF, 802.11 ac VHT20-BF, 802.11 ax HEW20-BF	20	2TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40	40	2TX
	802.11 n HT40-BF, 802.11 ac VHT40-BF, 802.11 ax HEW40-BF	40	2TX
	802.11 ac VHT80, 802.11 ax HEW80	80	2TX
	802.11 ac VHT80-BF, 802.11 ax HEW80-BF	80	2TX



Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20	20	2TX
	802.11 n HT20-BF, 802.11 ac VHT20-BF, 802.11 ax HEW20-BF	20	2TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40	40	2TX
	802.11 n HT40-BF, 802.11 ac VHT40-BF, 802.11 ax HEW40-BF	40	2TX
	802.11 ac VHT80, 802.11 ax HEW80	80	2TX
	802.11 ac VHT80-BF, 802.11 ax HEW80-BF	80	2TX

**For Scanning Radio 4**

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20	20	1TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40	40	1TX
	802.11 ac VHT80, 802.11 ax HEW80	80	1TX
5.25-5.35GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20	20	1TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40	40	1TX
	802.11 ac VHT80, 802.11 ax HEW80	80	1TX
5.47-5.725GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20	20	1TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40	40	1TX
	802.11 ac VHT80, 802.11 ax HEW80	80	1TX
5.725-5.85GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20	20	1TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40	40	1TX
	802.11 ac VHT80, 802.11 ax HEW80	80	1TX

Note:

- ♦ 11a, HT20, HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, modulation.
- ♦ HEW20, HEW40, HEW80 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ BWch is the nominal channel bandwidth.



1.1.2 Antenna Information

Ant.	Port							Brand Name	Model Name	Ant. Type	Connector	Gain (dBi)
	WLAN 5GHz (Radio 1)	WLAN 2.4GHz (Radio 2)	WLAN 6GHz (Radio 3)	WLAN 2.4GHz (Radio 4)	WLAN 5GHz (Radio 4)	WLAN 6GHz (Radio 4)	BT (Radio 5)					
1	2	1	-	-	-	-	-	Juniper	AP34	PIFA	I-PEX	Note 2
2	1	2	-	-	-	-	-	Juniper	AP34	PIFA	I-PEX	
3	-	-	2	-	-	-	-	Juniper	AP34	PIFA	I-PEX	
4	-	-	1	-	-	-	-	Juniper	AP34	PIFA	I-PEX	
5	-	-	-	1	1	1	-	Juniper	AP34	PIFA	I-PEX	
6	-	-	-	-	-	-	1	Juniper	AP34	PIFA	N/A	

Note 1: The above information was declared by manufacturer.

Note 2:

Ant.	Gain (dBi)																		
	WLAN5GHz (Radio 1)				WLAN 2.4GHz (Radio 2)	WLAN 6GHz (Radio 3)				WLAN2.4GHz (Radio 4)	WLAN 5GHz (Radio 4)				WLAN 6GHz (Radio 4)				BT (Radio 5)
	UNII 1	UNII 2A	UNII 2C	UNII 3		UNII 5	UNII 6	UNII 7	UNII 8		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8	
1	2.4	2.13	2.25	2.02	2.63	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2	2.38	2.22	2.33	2.07	2.11	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3	-	-	-	-	-	5.85	5.08	5.08	4.70	-	-	-	-	-	-	-	-	-	-
4	-	-	-	-	-	5.85	5.08	5.08	4.70	-	-	-	-	-	-	-	-	-	-
5	-	-	-	-	-	-	-	-	-	5.0	5.8	5.8	5.5	5.6	5.6	5.5	5.5	5.6	-
6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.6

Note 3:

Item	Directional Gain (dBi)									
	WLAN 2.4GHz (Radio 2)		WLAN5GHz (Radio 1)							
			UNII 1		UNII 2A		UNII 2C		UNII 3	
2T1S	5.38		4.53		3.58		3.34		3.3	
2T2S	2.63		2.4		2.2		2.33		2.07	

Note 4: WLAN 2.4GHz (Radio 2) and 5GHz (Radio 1): Maximum Directional Gain following KDB662911 D03.

Note 5: The antenna gain of Radio 3, Radio 4 and Radio 5 were declared by manufacturer.

Note 6: **For Radio 2**

For 2.4GHz:

For IEEE 802.11b/g/n/VHT/ax mode (2TX/2RX):

Port 1, Port 2 can be used as transmitting/receiving antenna.

Port 1, Port 2 could transmit/receive simultaneously.

For Radio 1

For 5GHz UNII 1~3:

For IEEE 802.11a/n/ac/ax mode (2TX/2RX):

Port 1, Port 2 can be used as transmitting/receiving antenna.

Port 1, Port 2 could transmit/receive simultaneously.

For Radio 3

For 6E UNII 5~8:

For IEEE 802.11ax mode (2TX/2RX):

Port 1, Port 2 can be used as transmitting/receiving antenna.

Port 1, Port 2 could transmit/receive simultaneously.

For scanning Radio 4

For 2.4GHz, IEEE 802.11b/g/n/VHT/ax mode (1TX/1RX):

For 5GHz UNII 1~3, IEEE 802.11a/n/ac/ax mode (1TX/1RX):

For 6E UNII 5~8, IEEE 802.11ax mode (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

For Radio 5

Bluetooth (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.



1.1.3 Mode Test Duty Cycle

For Radio 1

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss 1,(6D)	0.953	0.21	2.065m	500
802.11ax HEW20_Nss 1,(M0)	0.981	0.08	1.488m	10Hz (DC>=0.98)
802.11ax HEW40_Nss 1,(M0)	0.966	0.15	780.625u	2k
802.11ax HEW80_Nss 1,(M0)	0.938	0.28	413.75u	3k
802.11ax HEW20-BF_Nss 1,(M0)	0.981	0.08	1.488m	10Hz (DC>=0.98)
802.11ax HEW40-BF_Nss 1,(M0)	0.966	0.15	780.625u	2k
802.11ax HEW80-BF_Nss 1,(M0)	0.938	0.28	413.75u	3k

For Scanning Radio 4

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss 1,(6D)	0.993	0.03	10.463m	10Hz (DC>=0.98)
802.11ax HEW20_Nss 1,(M0)	0.989	0.05	13.65m	10Hz (DC>=0.98)
802.11ax HEW40_Nss 1,(M0)	0.976	0.11	3.188m	1k
802.11ax HEW80_Nss 1,(M0)	0.963	0.16	2.125m	1k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From PoE			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for n/VHT/ax in 2.4GHz of Radio 2, n/ac/ax in 5GHz UNII 1~UNII 3 of Radio 1 and ax in 6GHz UNII 5~UNII 8 of Radio 3.			
Weather Band	☒	With 5600~5650MHz	☐	Without 5600~5650MHz
Function	☐	Outdoor P2M	☒	Indoor P2M
	☐	Fixed P2P	☐	Client
	☒	Point-to-multipoint	☐	Point-to-point
TPC Function	☒	With TPC	☐	Without TPC
Channel Puncturing Function	☐	Supported		
	☒	Unsupported		
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	Mtool_3.2.1.5			

Note: The above information was declared by manufacturer.

1.1.5 Table for Radio function

Radio 1	Radio 2	Radio 3	Radio 4 (Scanning)	Radio 5
(WLAN 5GHz UNII 1~3)	(WLAN 2.4GHz)	(WLAN 6GHz)	(WLAN 2.4GHz)	(Bluetooth)
			(WLAN 5GHz)	
			(WLAN 6GHz)	

Note: The above information was declared by manufacturer.

1.1.6 Table for Component Source Information

Item	Main Source	Second Source
RF 5GHz FEM (Location: U23, U29, U44)	Brand Name: Qorvo Model Name: QPF4550TR13	Brand Name: Skyworks Model Name: SKY85778-11

Note: The above information was declared by manufacturer.

1.1.7 Table for EUT Combination

EUT	DFS Firmware Number	RF 5GHz FEM (Location: U23, U29, U44)
1	0.13.81	Main source
2	0.12.27458	Second source

Note: The above information was declared by manufacturer.

1.1.8 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR231832AC.

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Adding EUT 2 (Please refer to section 1.1.6 & 1.1.7 for detailed information.)	1. Maximum Output Power for Scanning Radio 4 2. Unwanted Emissions
2. Updating the reference standard to "ANSI C63.10-2020" from "ANSI C63.10-2013".	After evaluation, it does not need to re-test.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D03 v01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISCED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH03-CB	Gino Huang	22.3~23.3 / 61~66	Sep. 14, 2026~ Sep. 16, 2026
Radiated < 1GHz	03CH01-CB	Eason Chan	24.2~24.5 / 68~69	Sep. 17, 2026
Radiated > 1GHz (Mode 1)	03CH06-CB	Jay Lo	23.7~23.8 / 59~68	Sep. 09, 2026~ Sep. 13, 2026
Radiated > 1GHz (Mode 2)	03CH06-CB	Jay Lo	23.9~24.5 / 68~70	

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Radiated Emission (9kHz ~ 30MHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.9 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.5 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.3 dB	Confidence levels of 95%
Conducted Emission	3.8 dB	Confidence levels of 95%
Output Power Measurement	1.5 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

For Radio 1

Mode
802.11a_Nss1,(6Mbps)_2TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11ax HEW20_Nss1,(MCS0)_2TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11ax HEW40_Nss1,(MCS0)_2TX
5190MHz
5230MHz
5270MHz
5310MHz
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
5755MHz
5795MHz
802.11ax HEW80_Nss1,(MCS0)_2TX



Mode
5210MHz
5290MHz
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
5775MHz
802.11ax HEW20-BF_Nss1,(MCS0)_2TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11ax HEW40-BF_Nss1,(MCS0)_2TX
5190MHz
5230MHz
5270MHz
5310MHz
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
5755MHz
5795MHz
802.11ax HEW80-BF_Nss1,(MCS0)_2TX
5210MHz
5290MHz
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
5775MHz

For Scanning Radio 4

Mode
802.11a_Nss1,(6Mbps)_1TX
5180MHz
5200MHz
5240MHz



Mode
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11ax HEW20_Nss1,(MCS0)_1TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11ax HEW40_Nss1,(MCS0)_1TX
5190MHz
5230MHz
5270MHz
5310MHz
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
5755MHz
5795MHz
802.11ax HEW80_Nss1,(MCS0)_1TX
5210MHz
5290MHz
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
5775MHz

Note:

- ♦ Evaluated HEW20/HEW40/HEW80 mode only, due to similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80 mode are the same or lower than HEW20/HEW40/HEW80.
- ♦ The EUT supports non-beamforming and beamforming modes. After evaluating, the non-beamforming mode has been evaluated to be the worst case, so it was selected to test.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Maximum Output Power
Test Condition	Conducted measurement at transmit chains
Operating Mode	1 EUT 2_R4

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link According to the original test report, "EUT in Z axis_R1: 5GHz + R2: 2.4GHz + R3: 6GHz + R4: 2.4GHz + R5: BT" has been evaluated to be the worst case, so the measurement will follow this same test configuration.
1	EUT 2 in Z axis_R1: 5GHz + R2: 2.4GHz + R3: 6GHz + R4: 2.4GHz + R5: BT
Operating Mode > 1GHz	CTX The EUT was performed at X axis, Y axis and Z axis position, and the worst cases was found at Y axis for R1, and X axis for R4. So the measurement will follow these same test configurations.
1	EUT 2 in Y axis_R1
2	EUT 2 in X axis_R4

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	R1: 5GHz + R2: 2.4GHz + R3: 6GHz + R4: 2.4GHz + R5: BT
2	R1: 5GHz + R2: 2.4GHz + R3: 6GHz + R4: 5GHz + R5: BT
3	R1: 5GHz + R2: 2.4GHz + R3: 6GHz + R4: 6GHz + R5: BT
Refer to Sporton Test Report No.: FA231832-11 for Co-location RF Exposure Evaluation.	

Note 1: "R" = "Radio"



Note 2: The PoE is for measurement only and would not be marketed. Its information is listed below:

Power	Brand	Model
PoE 1	PHIHONG	POE60U-1BT-5
PoE 2	PHIHONG	POE60U-1BT-X

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link:

During the test, the EUT operation to normal function.

2.4 Accessories

Bracket*1

2.5 Support Equipment

For Radiated < 1GHz:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	LAN Notebook	DELL	E4300	N/A
B	WiFi (R0) Notebook	DELL	E4300	N/A
C	WiFi (R1) Notebook	DELL	E4300	N/A
D	WiFi (R2) Notebook	DELL	E4300	N/A
E	WiFi (R3) Notebook	DELL	E4300	N/A
F	Flash disk3.0	Silicon Power	B06	N/A
G	PoE 1	PHIHONG	POE60U-1BT-5	N/A


For Radiated > 1GHz:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE 2	PHIHONG	POE60U-1BT-X	N/A
B	Notebook	DELL	E4300	N/A

For RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	PoE 2	PHIHONG	POE60U-1BT-X	N/A

2.6 Test Setup Diagram

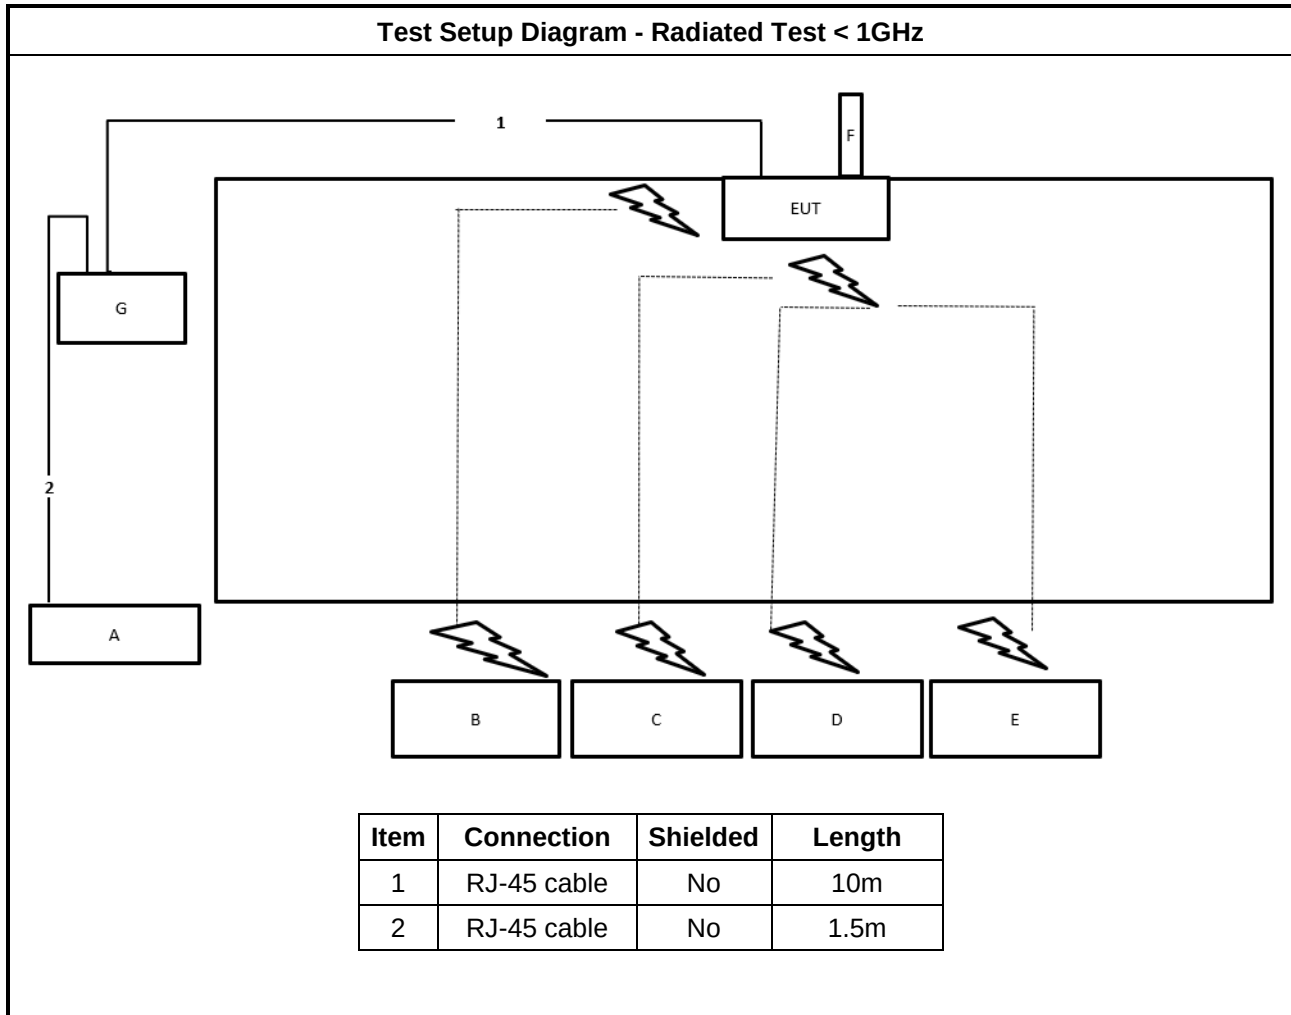

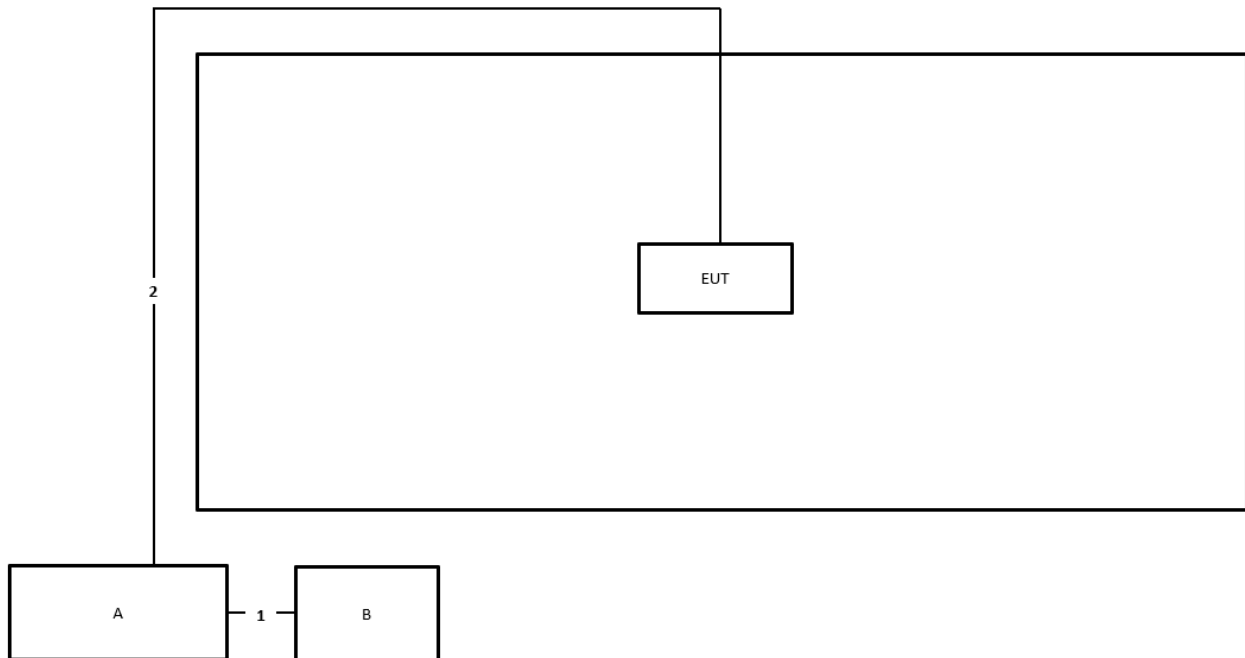Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	1.5m
2	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 Maximum Output Power

3.1.1 Limit

Maximum Output Power Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
	Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm]
	Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
	Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$.
	Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band:	
	For other devices: The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
	Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐ For the 5.25-5.35 GHz band:	
	For other devices: The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10 B$, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
	Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
	Devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.



☐	For the 5.47-5.725 GHz band:
	- The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10 B$, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. - Equipment with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.
☐	For the 5.725-5.85 GHz band:
	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
Maximum Output Power	
	Average over on/off periods with duty factor
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒	For conducted measurement.
	- If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. - If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☐	For radiated measurement.
	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.1.4 Test Setup

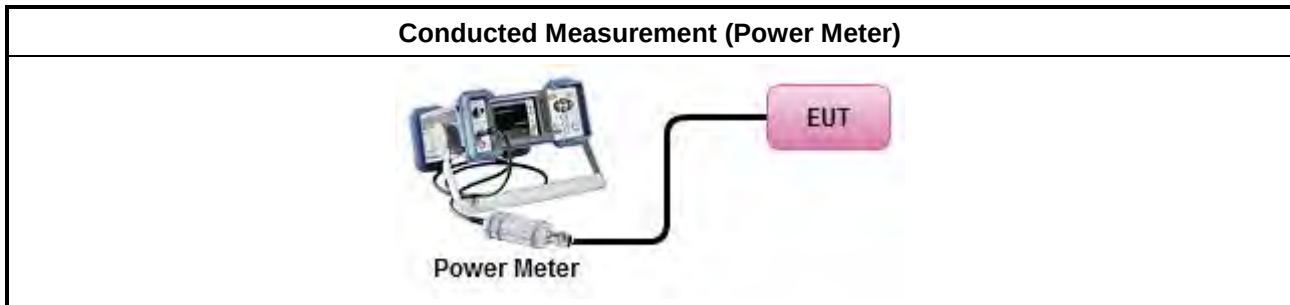

3.1.5 Test Result of Maximum Output Power

Refer as Appendix A



3.2 Unwanted Emissions

3.2.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.



Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
☒ 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	

3.2.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.


3.2.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).
	☒ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.

For radiated measurement.
Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.2.4 Test Setup

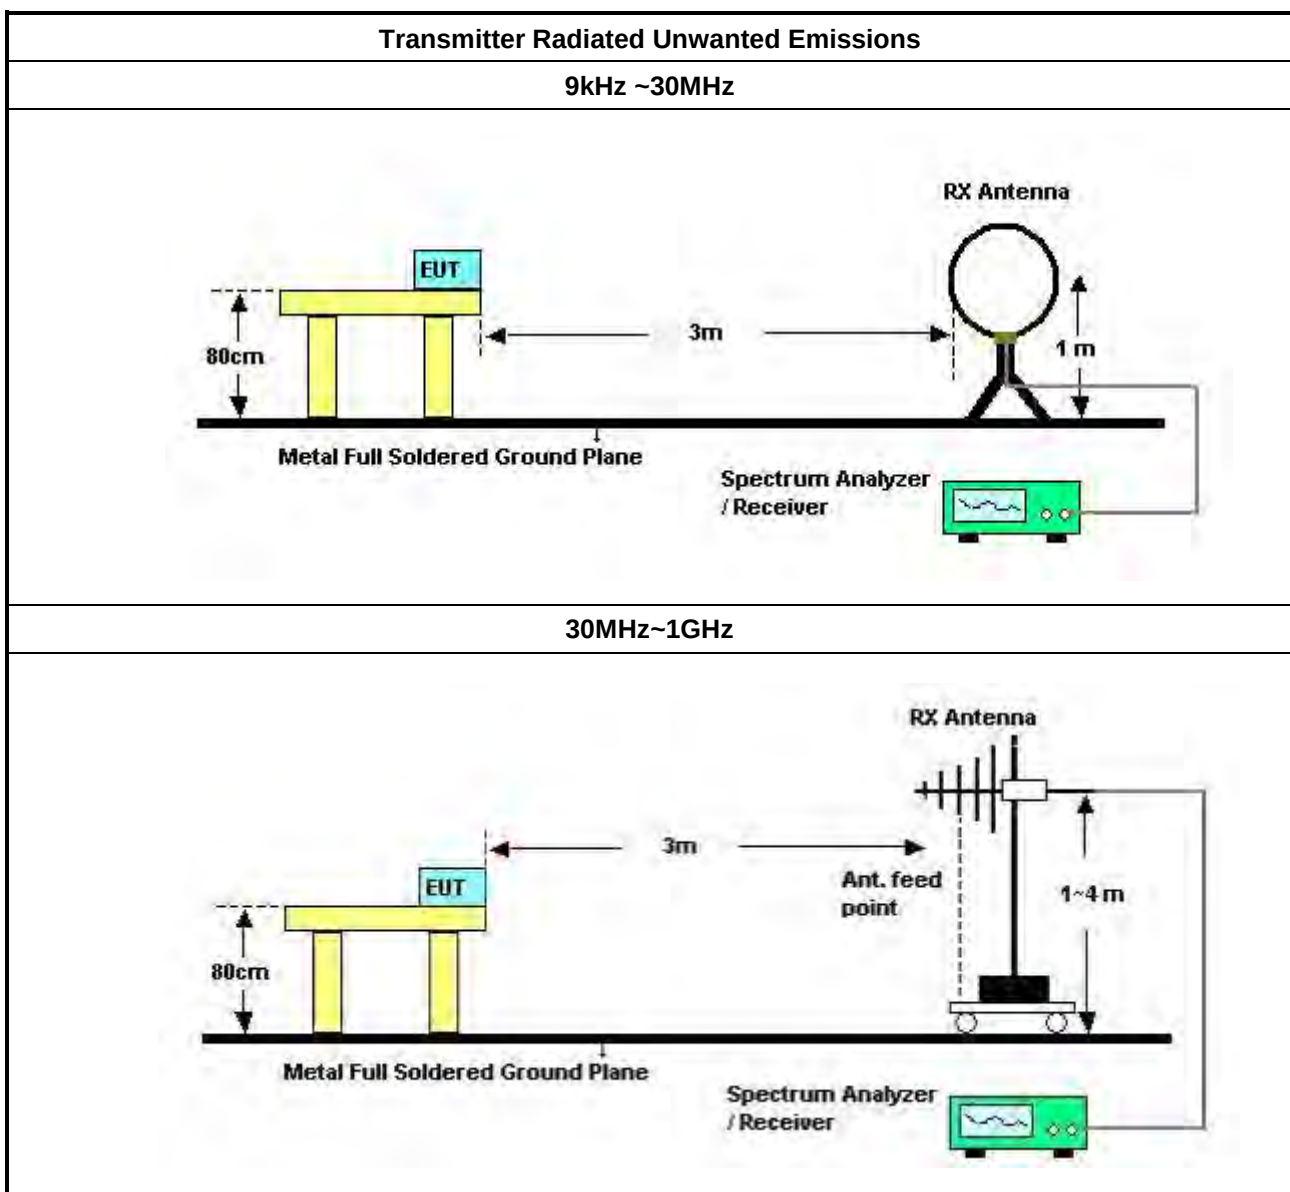

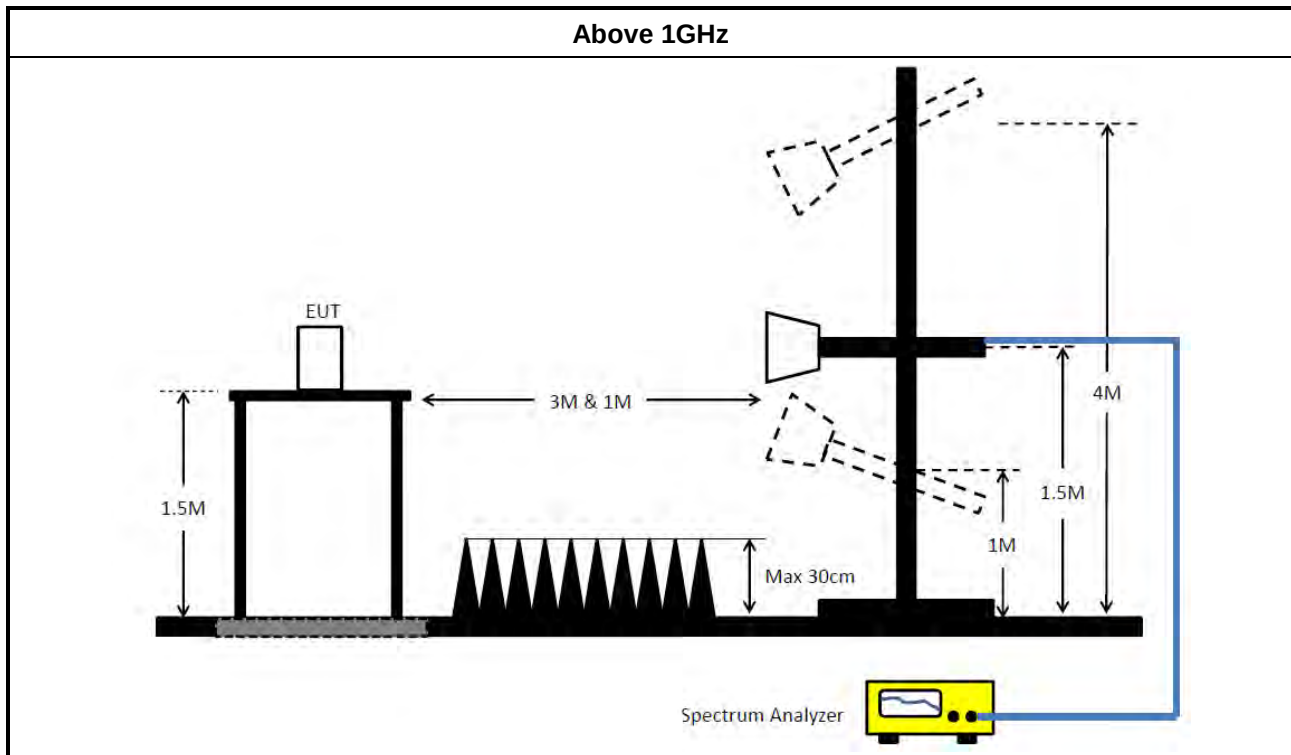

3.2.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.2.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.2.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix B



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH01-CB	30 MHz ~ 1 GHz	Jan. 15, 2026	Jan. 14, 2027	Radiation (03CH01-CB)
RF Cable-low	Woken	RG402	Low Cable-31+32	30 MHz ~ 1 GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH01-CB)
Pre-Amplifier	SGH	SGH0301	20230109-2	10M~1GHz	Jun. 20, 2026	Jun. 19, 2027	Radiation (03CH01-CB)
Bilog Antenna with 6 dB attenuator	TESEQ & EMCI	CBL6112D N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Feb. 13, 2026	Feb. 12, 2027	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 20, 2025	Oct. 19, 2026	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 29, 2025	Oct. 28, 2026	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV3044	101437	10kHz ~ 44GHz	Dec. 12, 2025	Dec. 11, 2026	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.10	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Feb. 11, 2026	Feb. 10, 2027	Radiation (03CH06-CB)
Pre-Amplifier	EMCI	EMC12630SE	980383	1GHz ~ 18GHz	Jul. 29, 2026	Jul. 28, 2027	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Sep. 03, 2026	Sep. 02, 2027	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Signal analyzer	R&S	FSV3044	101667	9kHz~44GHz	Aug. 11, 2026	Aug. 10, 2027	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
RF Cable	Woken	RG402	High Cable-11	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-12	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-13	30MHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)

**RADIO TEST REPORT****Report No. : FR231832-11AC**

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-15	1 GHz ~18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1728002	300MHz~40GHz	Aug. 04, 2026	Aug. 03, 2027	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1531344	300MHz~40GHz	Aug. 04, 2026	Aug. 03, 2027	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1~18GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH03-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.59	0.07228
802.11ax HEW20_Nss1,(MCS0)_1TX	17.28	0.05346
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.28	0.06730
802.11ax HEW20_Nss1,(MCS0)_1TX	17.56	0.05702
802.11ax HEW40_Nss1,(MCS0)_1TX	20.61	0.11508
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	17.49	0.05610
802.11ax HEW20_Nss1,(MCS0)_1TX	17.19	0.05236
5.725-5.85GHz	-	-
802.11ax HEW80_Nss1,(MCS0)_1TX	19.76	0.09462



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	5.80	18.59	18.59	30.00
5320MHz	Pass	5.80	18.28	18.28	23.98
5500MHz	Pass	5.50	17.49	17.49	23.98
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	5.80	17.28	17.28	30.00
5320MHz	Pass	5.80	17.56	17.56	23.98
5500MHz	Pass	5.50	17.19	17.19	23.98
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
5270MHz	Pass	5.80	20.61	20.61	23.98
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-
5775MHz	Pass	5.60	19.76	19.76	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.




Radiated Emissions below 1GHz

Appendix B.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	QP	67.83M	36.27	40.00	-3.73	Vertical

Mode 1

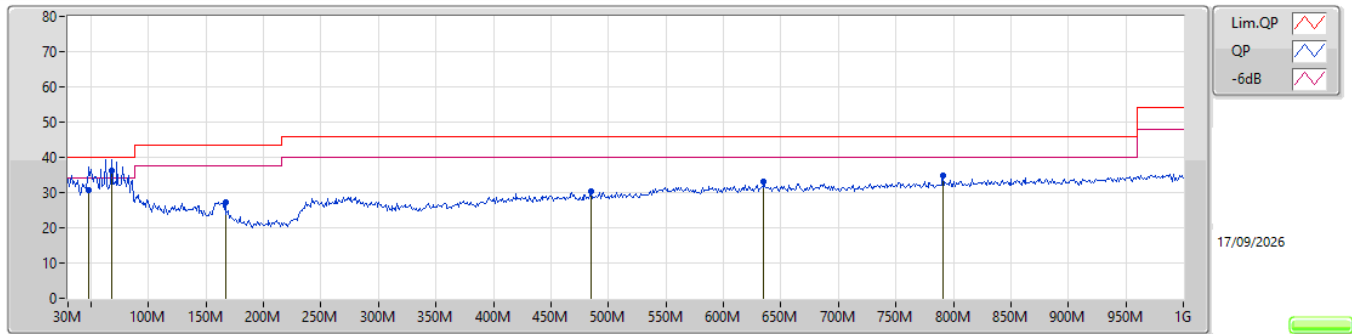

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
QP	48.43M	30.58	40.00	-9.42	-28.56	3	Vertical	216	1.50	-	59.14	14.88	1.24	44.68		
QP	67.83M	36.27	40.00	-3.73	-31.15	3	Vertical	270	1.00	"Worst"	67.42	12.13	1.45	44.73		
PK	166.77M	27.30	43.50	-16.20	-26.91	3	Vertical	14	2.00	-	54.21	15.51	2.29	44.71		
PK	484.93M	30.34	46.00	-15.66	-17.77	3	Vertical	212	1.50	-	48.11	22.77	3.80	44.34		
PK	635.28M	33.02	46.00	-12.98	-14.74	3	Vertical	62	1.25	-	47.76	25.09	4.27	44.10		
PK	791.45M	34.81	46.00	-11.19	-13.52	3	Vertical	276	1.25	-	48.33	25.62	4.79	43.93		

Mode 1

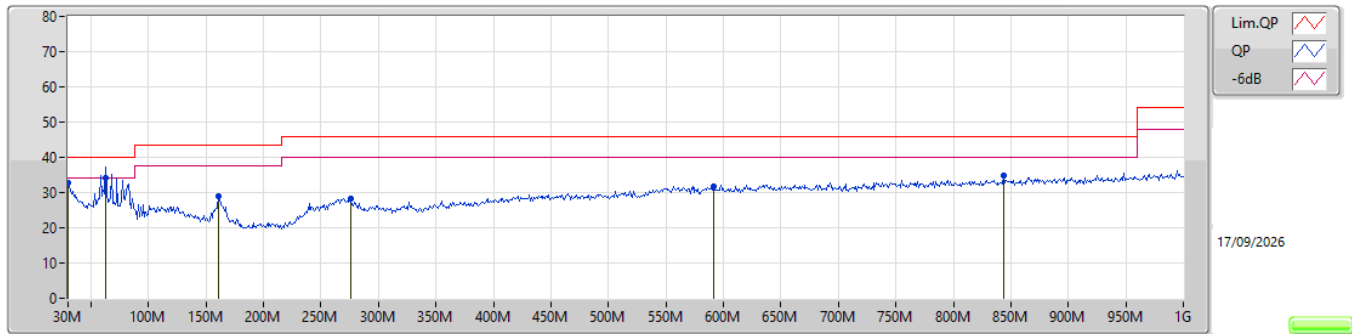

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)		
PK	30M	32.88	40.00	-7.12	-20.04	3	Horizontal	290	2.00	-	52.92	23.46	0.96	44.46		
QP	62.98M	34.19	40.00	-5.81	-31.10	3	Horizontal	6	1.00	"Worst"	65.29	12.27	1.40	44.77		
PK	160.95M	29.01	43.50	-14.49	-26.90	3	Horizontal	86	3.00	-	55.91	15.58	2.24	44.72		
PK	275.41M	28.20	46.00	-17.80	-23.10	3	Horizontal	7	3.00	-	51.30	18.56	2.91	44.57		
PK	591.63M	31.79	46.00	-14.21	-15.44	3	Horizontal	0	3.00	-	47.23	24.62	4.16	44.22		
PK	843.83M	34.79	46.00	-11.21	-13.16	3	Horizontal	335	1.00	-	47.95	25.84	4.92	43.92		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	PK	5.655G	71.88	71.90	-0.02	3	Vertical	56	1.00	93

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

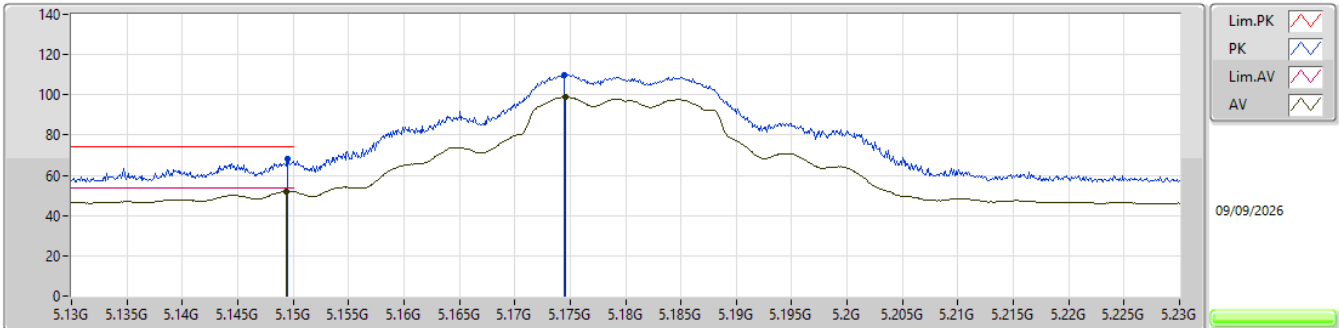


EUT_Y_2TX
SET 95
80\95\102\99\98\86\92\95
7.94\1.85\23.69\23.67\23.51\7.00\3.99\1.94

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1495G	67.92	74.00	-6.08	61.48	3	Vertical	50	2.93	95	32.90	7.47	33.93			
AV	5.1494G	52.06	54.00	-1.94	45.62	3	Vertical	50	2.93	95	32.90	7.47	33.93			
PK	5.1745G	109.81	Inf	-Inf	103.37	3	Vertical	50	2.93	95	32.90	7.47	33.93			
AV	5.1746G	99.05	Inf	-Inf	92.61	3	Vertical	50	2.93	95	32.90	7.47	33.93			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

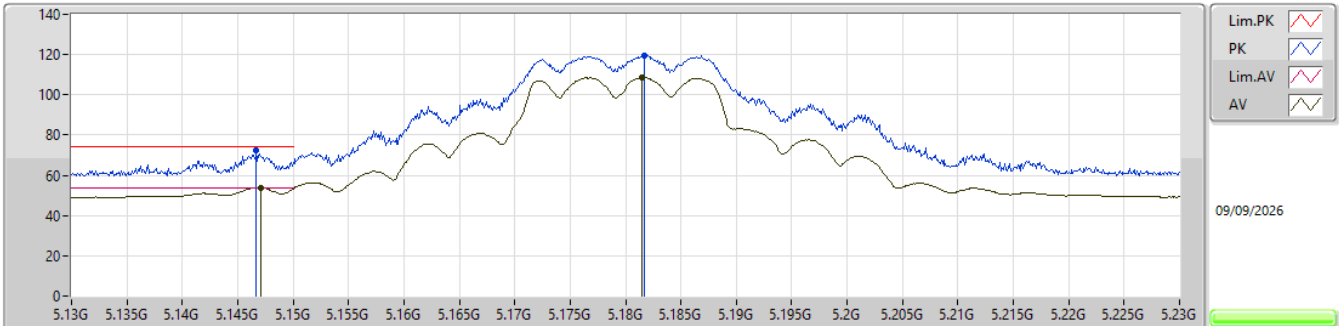


EUT_V_2TX
SET 90
95\85\90
-4.90\3.73\0.21

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1467G	72.12	74.00	-1.88	65.69	3	Horizontal	68	2.04	90	32.89	7.47	33.93			
AV	5.1471G	53.79	54.00	-0.21	47.36	3	Horizontal	68	2.04	90	32.89	7.47	33.93			
PK	5.1817G	119.53	Inf	-Inf	113.09	3	Horizontal	68	2.04	90	32.90	7.47	33.93			
AV	5.1815G	108.55	Inf	-Inf	102.11	3	Horizontal	68	2.04	90	32.90	7.47	33.93			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

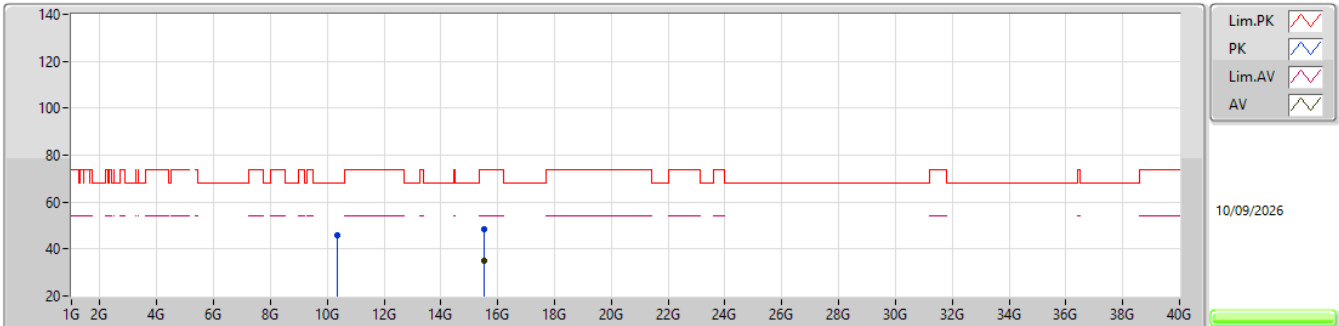


EUT Y_2TX
SET 90

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.37092G	45.88	68.20	-22.32	63.24	3	Vertical	298	1.15	90	38.90	10.59	66.85			
PK	15.54292G	48.50	74.00	-25.50	60.81	3	Vertical	166	1.89	90	38.70	12.92	63.93			
AV	15.53832G	35.19	54.00	-18.81	47.50	3	Vertical	166	1.89	90	38.70	12.92	63.93			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

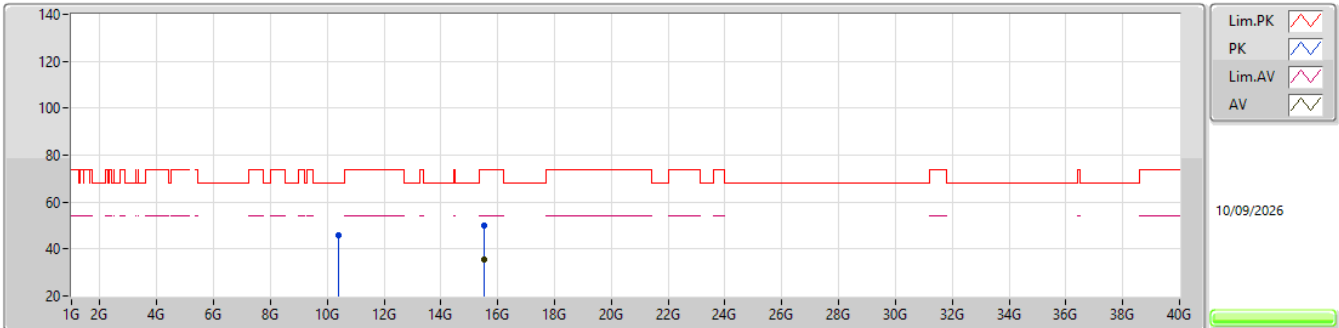


EUT_Y_2TX
SET 90

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.37648G	45.99	68.20	-22.21	63.35	3	Horizontal	1	2.95	90	38.90	10.59	66.85				
PK	15.53396G	50.06	74.00	-23.94	62.38	3	Horizontal	56	2.53	90	38.70	12.91	63.93				
AV	15.5382G	35.72	54.00	-18.28	48.03	3	Horizontal	56	2.53	90	38.70	12.92	63.93				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

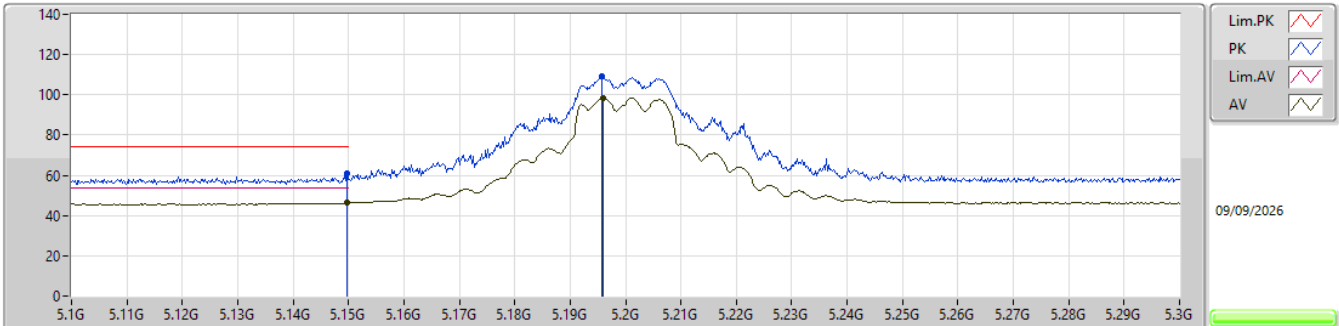


EUT_Y_2TX
SET 94
80\96\78\87\91\93\94\106\100\97\94
8.43\10.04\8.42\8.32\8.01\8.02\7.79\9.98\9.89\9.81\7.76

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1498G	60.69	74.00	-13.31	54.25	3	Vertical	314	1.06	94	32.90	7.47	33.93				
AV	5.1498G	46.24	54.00	-7.76	39.80	3	Vertical	314	1.06	94	32.90	7.47	33.93				
PK	5.1958G	109.06	Inf	-Inf	102.62	3	Vertical	314	1.06	94	32.90	7.47	33.93				
AV	5.196G	98.22	Inf	-Inf	91.78	3	Vertical	314	1.06	94	32.90	7.47	33.93				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

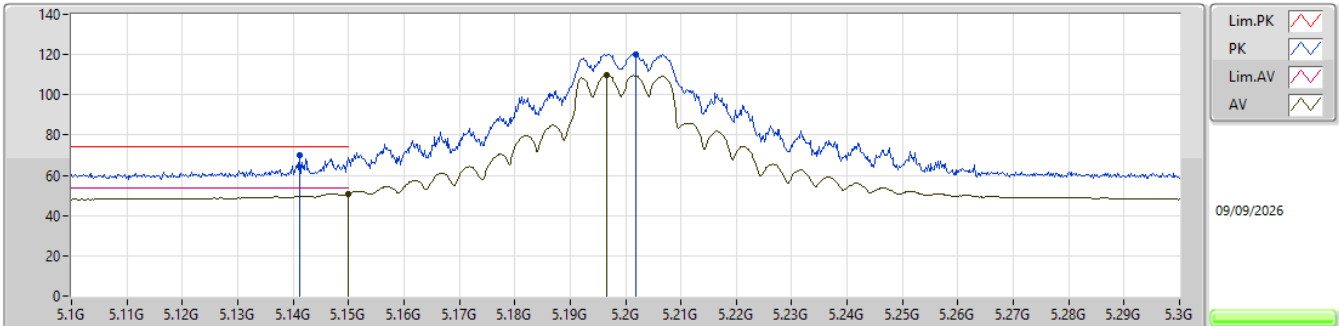


EUT Y_2TX
SET 94
94
3.26

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1412G	69.79	74.00	-4.21	63.37	3	Horizontal	67	1.91	94	32.88	7.47	33.93				
AV	5.15G	50.74	54.00	-3.26	44.30	3	Horizontal	67	1.91	94	32.90	7.47	33.93				
PK	5.2018G	120.13	Inf	-Inf	113.68	3	Horizontal	67	1.91	94	32.91	7.47	33.93				
AV	5.1966G	109.71	Inf	-Inf	103.27	3	Horizontal	67	1.91	94	32.90	7.47	33.93				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

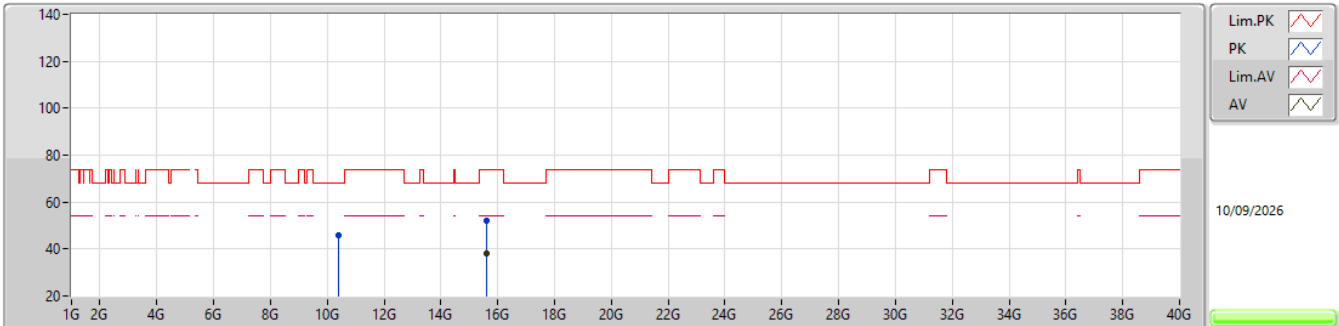


EUT Y_2TX
SET 94

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39496G	46.06	68.20	-22.14	63.38	3	Vertical	131	1.80	94	38.90	10.60	66.82			
PK	15.60412G	52.26	74.00	-21.74	64.78	3	Vertical	169	1.94	94	38.48	12.94	63.94			
AV	15.59856G	38.10	54.00	-15.90	50.59	3	Vertical	169	1.94	94	38.51	12.94	63.94			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX


5200MHz_TX

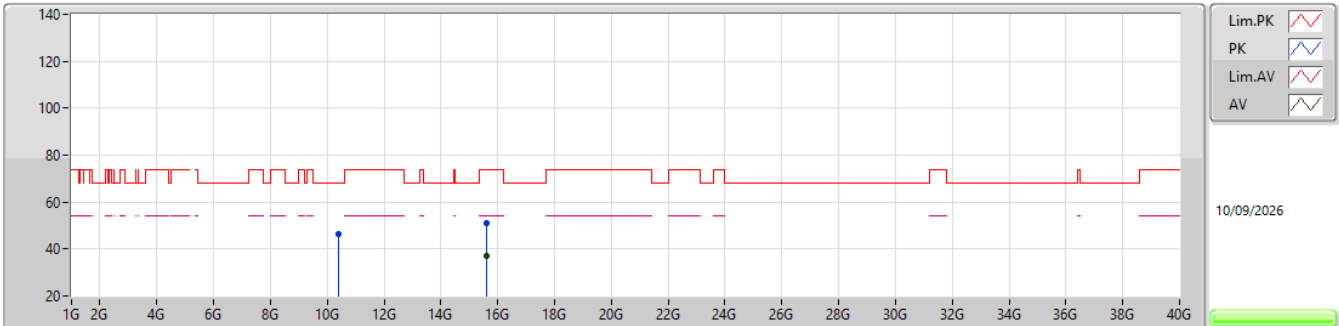EUT Y_2TX
SET 94

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.3994G	46.56	68.20	-21.64	63.86	3	Horizontal	312	1.80	94	38.90	10.61	66.81			
PK	15.60172G	51.14	74.00	-22.86	63.65	3	Horizontal	12	1.80	94	38.49	12.94	63.94			
AV	15.59716G	37.12	54.00	-16.88	49.61	3	Horizontal	12	1.80	94	38.51	12.94	63.94			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

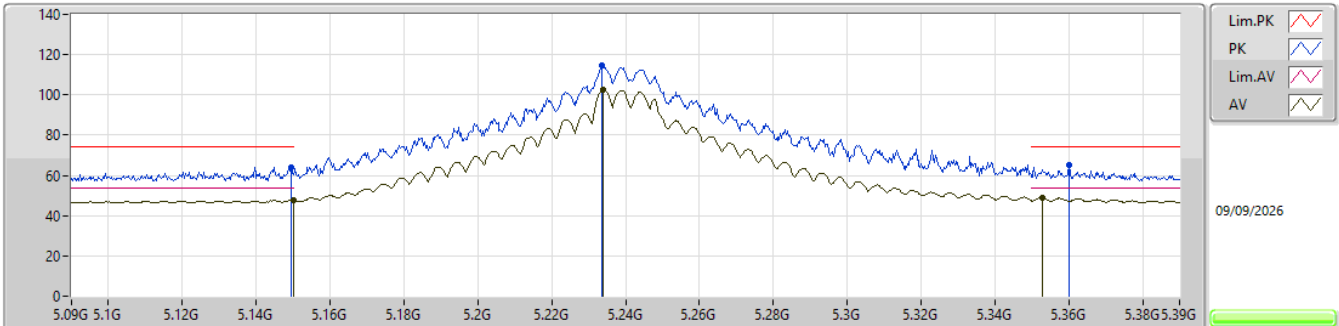


EUT_Y_2TX
SET 108
80\95\108
7.76\7.63\4.96

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.1494G	64.21	74.00	-9.79	57.77	3	Vertical	310	2.86	108	32.90	7.47	33.93					
AV	5.15G	47.85	54.00	-6.15	41.41	3	Vertical	310	2.86	108	32.90	7.47	33.93					
PK	5.2337G	114.38	Inf	-Inf	107.79	3	Vertical	310	2.86	108	33.03	7.49	33.93					
AV	5.234G	102.67	Inf	-Inf	96.07	3	Vertical	310	2.86	108	33.04	7.49	33.93					
PK	5.36G	65.28	74.00	-8.72	58.33	3	Vertical	310	2.86	108	33.32	7.55	33.92					
AV	5.3528G	49.04	54.00	-4.96	42.10	3	Vertical	310	2.86	108	33.31	7.55	33.92					

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5240MHz_TX

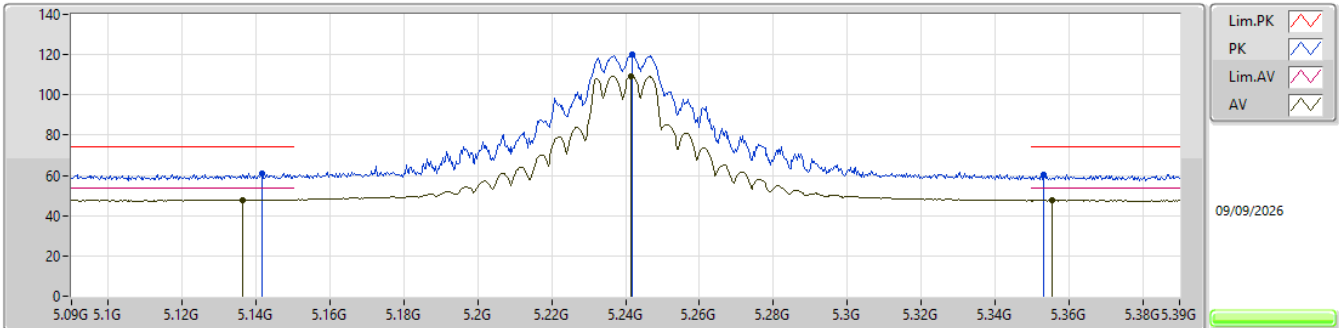


EUT_Y_2TX
SET 94
108\99\82\90\94\96\95\94
-4.45\ -4.41\6.97\6.35\5.99\ -4.53\ -4.61\6.06

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1416G	61.11	74.00	-12.89	54.69	3	Horizontal	66	1.79	94	32.88	7.47	33.93				
AV	5.1362G	47.94	54.00	-6.06	41.53	3	Horizontal	66	1.79	94	32.87	7.47	33.93				
PK	5.2418G	119.92	Inf	-Inf	113.29	3	Horizontal	66	1.79	94	33.07	7.49	33.93				
AV	5.2415G	109.38	Inf	-Inf	102.75	3	Horizontal	66	1.79	94	33.07	7.49	33.93				
PK	5.3531G	60.52	74.00	-13.48	53.58	3	Horizontal	66	1.79	94	33.31	7.55	33.92				
AV	5.3555G	47.64	54.00	-6.36	40.70	3	Horizontal	66	1.79	94	33.31	7.55	33.92				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX


5240MHz_TX

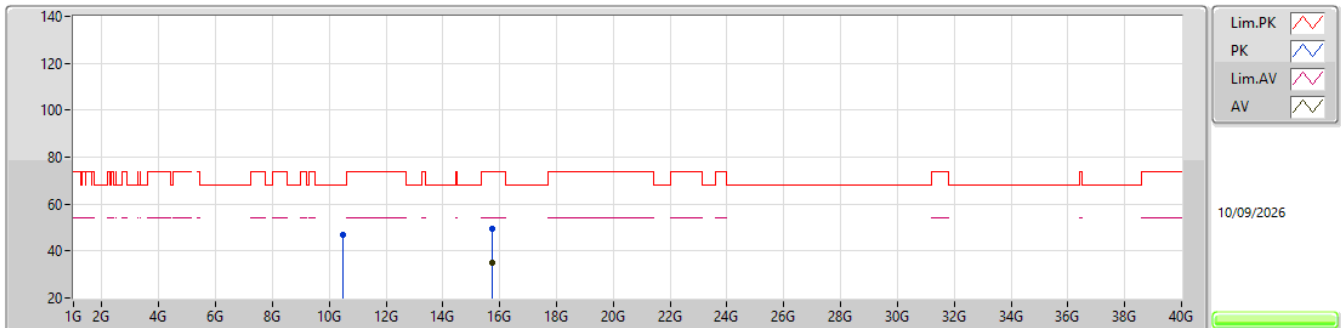EUT Y_2TX
SET 94

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.48996G	46.85	68.20	-21.35	63.80	3	Vertical	0	1.86	94	39.06	10.67	66.68				
PK	15.72176G	49.44	74.00	-24.56	62.07	3	Vertical	47	1.78	94	38.34	12.98	63.95				
AV	15.7218G	35.15	54.00	-18.85	47.78	3	Vertical	47	1.78	94	38.34	12.98	63.95				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX


5240MHz_TX

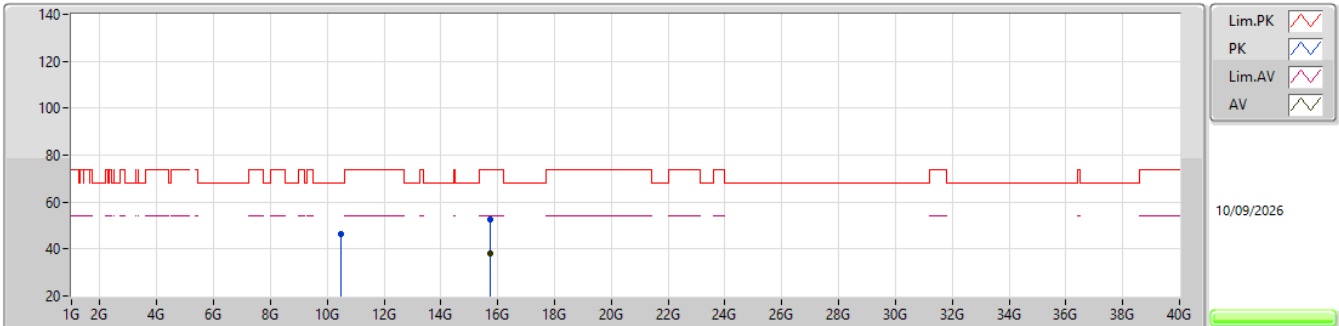EUT Y_2TX
SET 94

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47128G	46.55	68.20	-21.65	63.60	3	Horizontal	202	2.27	94	38.99	10.66	66.70			
PK	15.71708G	52.72	74.00	-21.28	65.36	3	Horizontal	294	1.80	94	38.33	12.98	63.95			
AV	15.72224G	37.90	54.00	-16.10	50.53	3	Horizontal	294	1.80	94	38.34	12.98	63.95			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

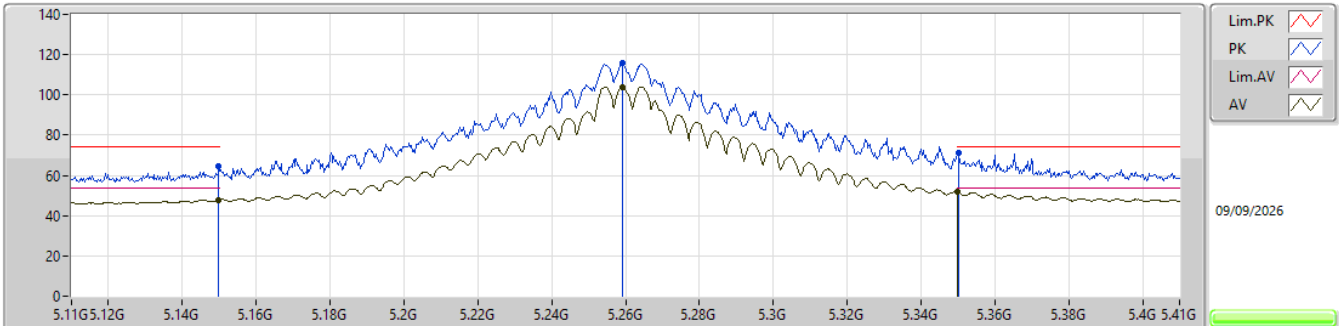


EUT Y_2TX
SET 108
80\95\108
7.58\6.02\2.27

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.1499G	64.28	74.00	-9.72	57.84	3	Vertical	335	2.96	108	32.90	7.47	33.93					
AV	5.1499G	47.86	54.00	-6.14	41.42	3	Vertical	335	2.96	108	32.90	7.47	33.93					
PK	5.2591G	115.61	Inf	-Inf	108.91	3	Vertical	335	2.96	108	33.12	7.50	33.92					
AV	5.2591G	104.01	Inf	-Inf	97.31	3	Vertical	335	2.96	108	33.12	7.50	33.92					
PK	5.3503G	70.99	74.00	-3.01	64.06	3	Vertical	335	2.96	108	33.30	7.55	33.92					
AV	5.35G	51.73	54.00	-2.27	44.81	3	Vertical	335	2.96	108	33.30	7.54	33.92					

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

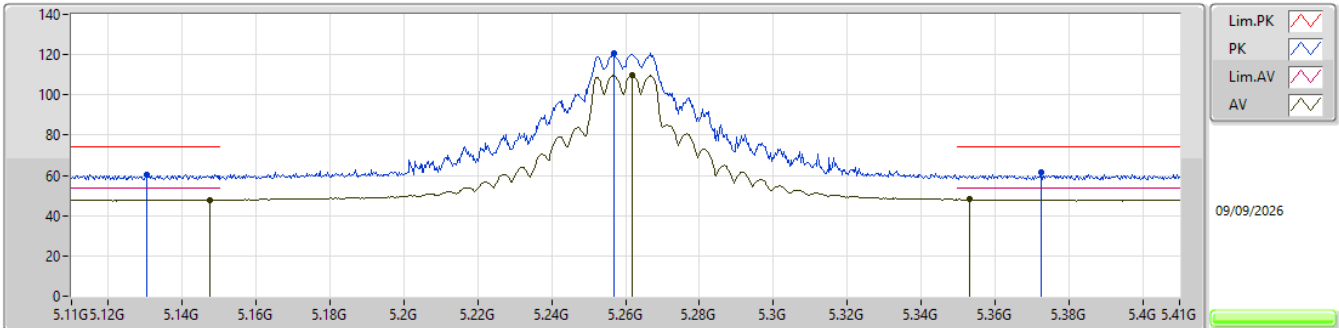


EUT_V_2TX
SET 93
108\100\96\94\93
-3.71\ -3.97\ -1.31\ -1.18\ 5.91

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1304G	60.32	74.00	-13.68	53.92	3	Horizontal	70	2.03	93	32.86	7.47	33.93			
AV	5.1475G	47.84	54.00	-6.16	41.41	3	Horizontal	70	2.03	93	32.89	7.47	33.93			
PK	5.257G	120.67	Inf	-Inf	113.98	3	Horizontal	70	2.03	93	33.11	7.50	33.92			
AV	5.2618G	109.88	Inf	-Inf	103.18	3	Horizontal	70	2.03	93	33.12	7.50	33.92			
PK	5.3725G	61.69	74.00	-12.31	54.71	3	Horizontal	70	2.03	93	33.34	7.56	33.92			
AV	5.353G	48.09	54.00	-5.91	41.15	3	Horizontal	70	2.03	93	33.31	7.55	33.92			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX


5260MHz_TX

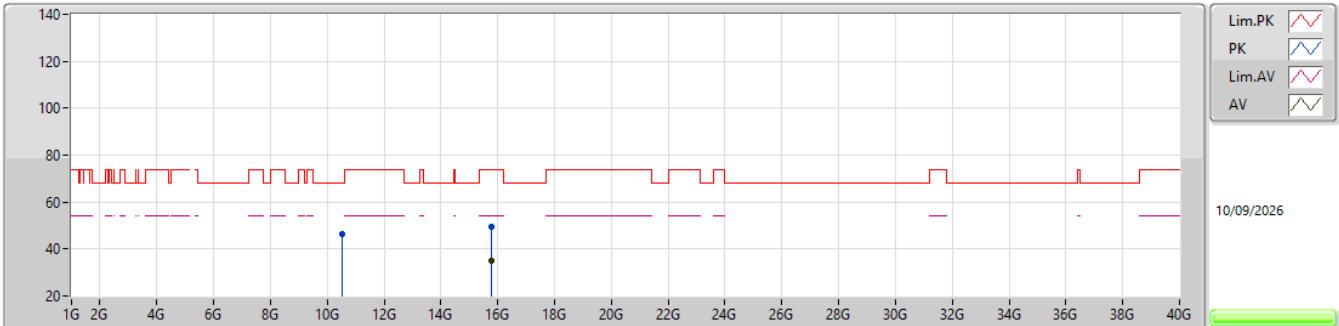EUT_Y_2TX
SET 93

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.52268G	46.44	68.20	-21.76	63.24	3	Vertical	213	1.80	93	39.15	10.69	66.64			
PK	15.77696G	49.70	74.00	-24.30	62.25	3	Vertical	48	1.80	93	38.40	13.00	63.95			
AV	15.77716G	35.02	54.00	-18.98	47.57	3	Vertical	48	1.80	93	38.40	13.00	63.95			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX


5260MHz_TX

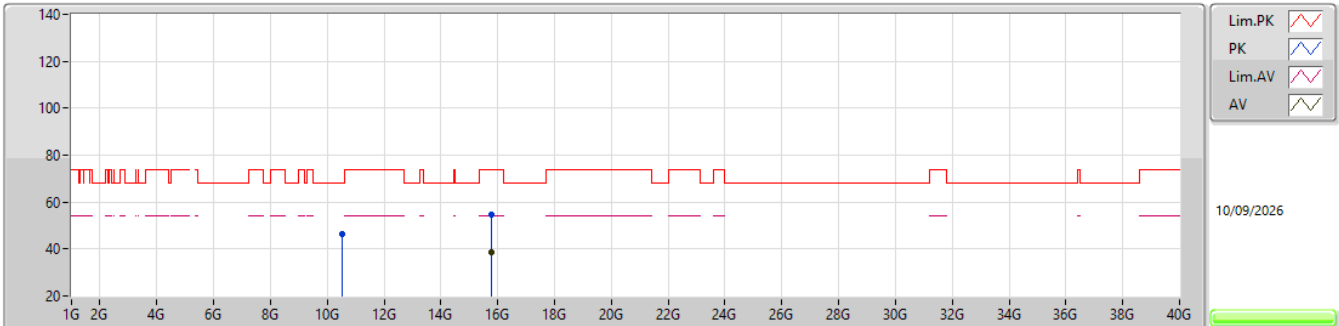EUT_Y_2TX
SET 93

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51752G	46.47	68.20	-21.73	63.28	3	Horizontal	268.1	1.80	93	39.14	10.69	66.64			
PK	15.78184G	54.81	74.00	-19.19	67.36	3	Horizontal	292	1.80	93	38.40	13.00	63.95			
AV	15.77716G	38.65	54.00	-15.35	51.20	3	Horizontal	292	1.80	93	38.40	13.00	63.95			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

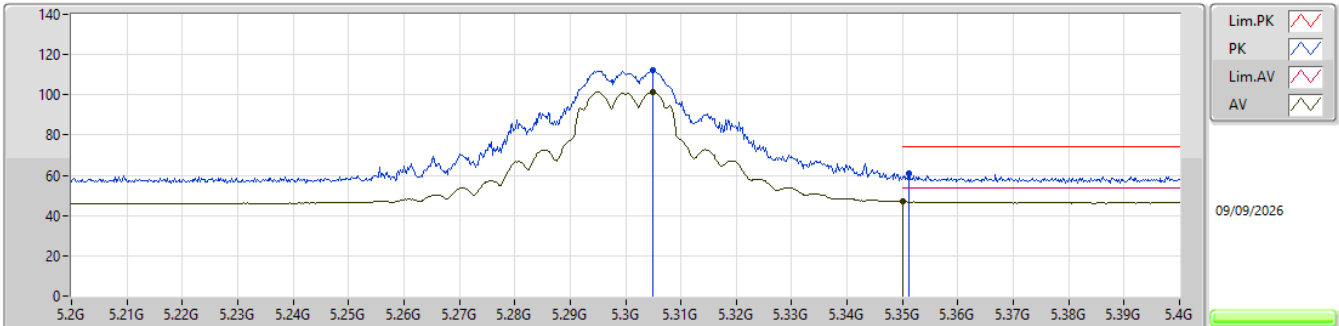

EUT_Y_2TX

SET 92


80\95\78\86\90\92\93\105\99\96\93\92

7.62\ -9.23\7.70\7.55\7.28\7.11\6.95\ -10.75\ -10.76\ -9.22\ -9.09\7.14

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.305G	112.04	Inf	-Inf	105.23	3	Vertical	56	2.92	92	33.21	7.52	33.92				
AV	5.305G	101.49	Inf	-Inf	94.68	3	Vertical	56	2.92	92	33.21	7.52	33.92				
PK	5.3512G	60.71	74.00	-13.29	53.78	3	Vertical	56	2.92	92	33.30	7.55	33.92				
AV	5.35G	46.86	54.00	-7.14	39.94	3	Vertical	56	2.92	92	33.30	7.54	33.92				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

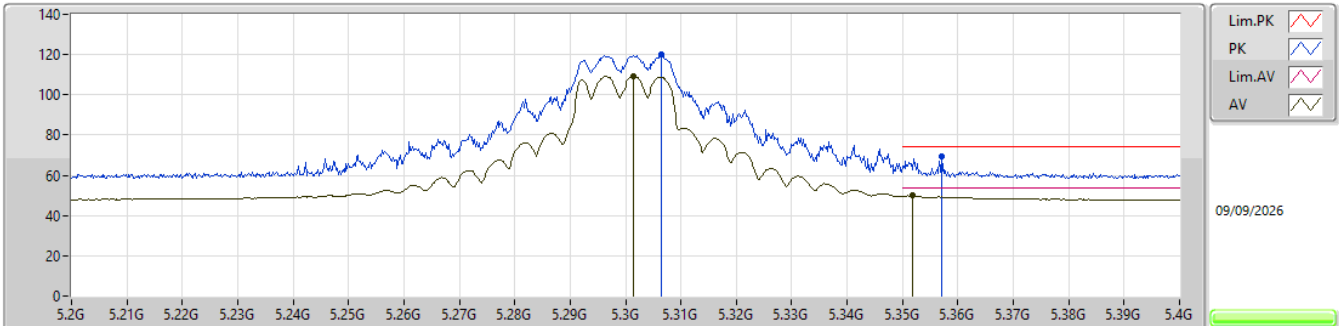


EUT_Y_2TX
SET 92
92
4.18

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3064G	119.87	Inf	-Inf	113.06	3	Horizontal	66	2.01	92	33.21	7.52	33.92				
AV	5.3014G	109.15	Inf	-Inf	102.35	3	Horizontal	66	2.01	92	33.20	7.52	33.92				
PK	5.357G	69.20	74.00	-4.80	62.26	3	Horizontal	66	2.01	92	33.31	7.55	33.92				
AV	5.3518G	49.82	54.00	-4.18	42.89	3	Horizontal	66	2.01	92	33.30	7.55	33.92				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX


5300MHz_TX

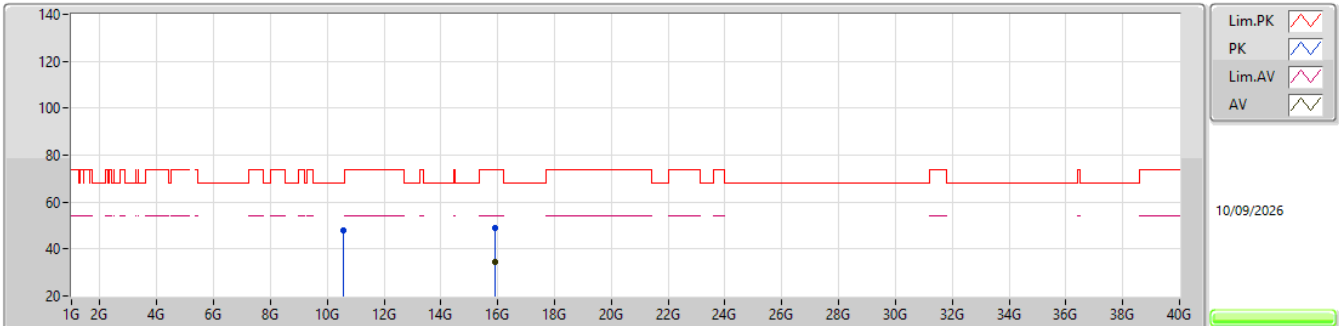EUT Y_2TX
SET 92

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.58736G	48.03	68.20	-20.17	64.67	3	Vertical	360.6	1.80	92	39.20	10.74	66.58			
PK	15.90244G	48.83	74.00	-25.17	60.96	3	Vertical	346	1.88	92	38.79	13.04	63.96			
AV	15.90228G	34.74	54.00	-19.26	46.87	3	Vertical	346	1.88	92	38.79	13.04	63.96			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

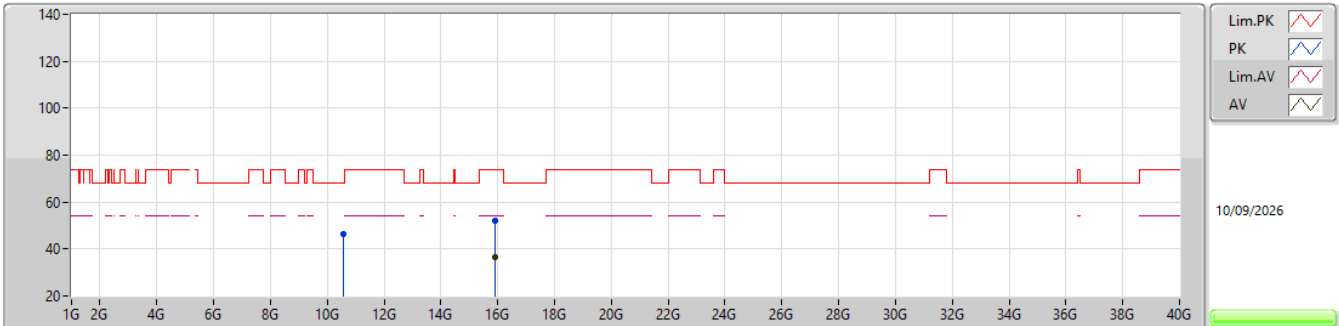


EUT Y_2TX
SET 92

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.58644G	46.22	68.20	-21.98	62.87	3	Horizontal	325	1.11	92	39.20	10.73	66.58			
PK	15.89324G	51.91	74.00	-22.09	64.08	3	Horizontal	46	2.10	92	38.76	13.03	63.96			
AV	15.89836G	36.49	54.00	-17.51	48.62	3	Horizontal	46	2.10	92	38.79	13.04	63.96			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

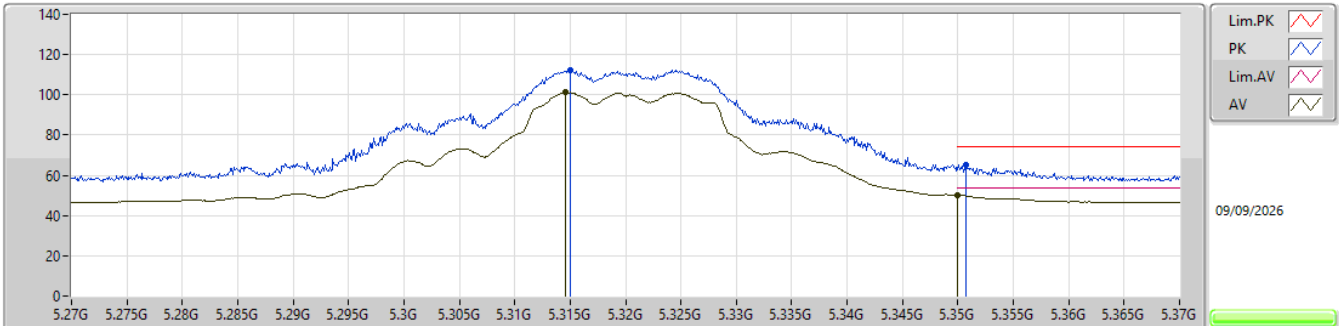


EUT_V_2TX
SET 93
80\95\78\86\90\92\93\105\99\96\93
7.62\~21.84\7.66\7.10\5.48\4.81\3.69\~22.88\~22.76\~21.73\3.88

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.315G	112.14	Inf	-Inf	105.30	3	Vertical	57	2.92	93	33.23	7.53	33.92					
AV	5.3146G	101.20	Inf	-Inf	94.36	3	Vertical	57	2.92	93	33.23	7.53	33.92					
PK	5.3507G	65.37	74.00	-8.63	58.44	3	Vertical	57	2.92	93	33.30	7.55	33.92					
AV	5.35G	50.12	54.00	-3.88	43.20	3	Vertical	57	2.92	93	33.30	7.54	33.92					

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

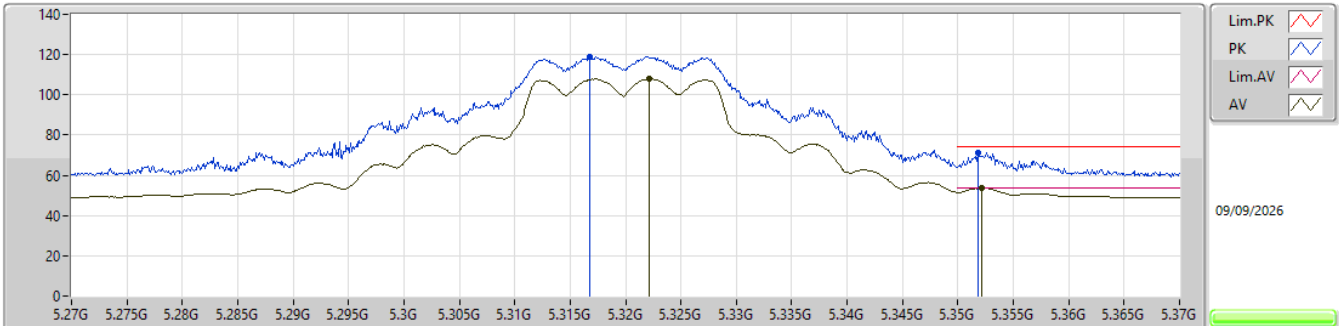


EUT_Y_2TX
SET 92
93\90\91\92
-1.30\1.48\0.77\0.28

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3168G	119.10	Inf	-Inf	112.26	3	Horizontal	74	1.92	92	33.23	7.53	33.92				
AV	5.3221G	107.99	Inf	-Inf	101.14	3	Horizontal	74	1.92	92	33.24	7.53	33.92				
PK	5.3518G	71.28	74.00	-2.72	64.35	3	Horizontal	74	1.92	92	33.30	7.55	33.92				
AV	5.3522G	53.72	54.00	-0.28	46.79	3	Horizontal	74	1.92	92	33.30	7.55	33.92				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

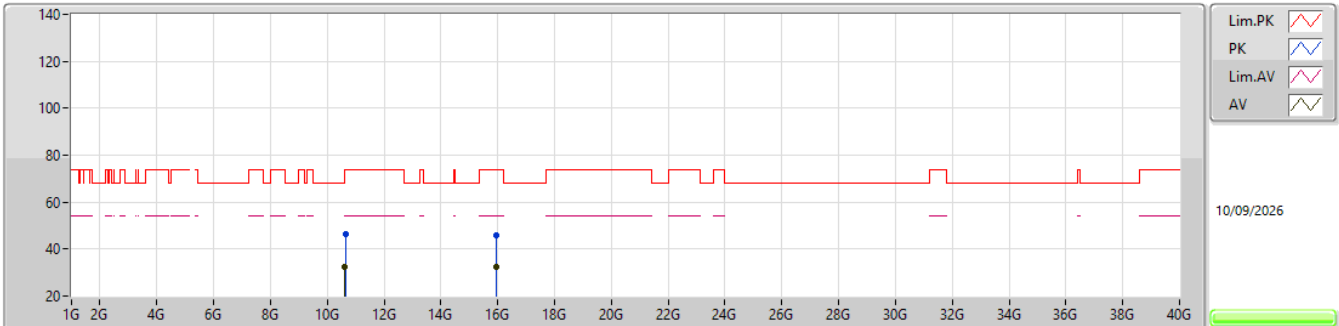


EUT_Y_2TX
SET 92

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.64368G	46.55	74.00	-27.45	63.01	3	Vertical	2	1.91	92	39.29	10.77	66.52				
AV	10.62088G	32.37	54.00	-21.63	48.91	3	Vertical	2	1.91	92	39.24	10.76	66.54				
PK	15.95664G	45.98	74.00	-28.02	58.33	3	Vertical	347	2.50	92	38.56	13.06	63.97				
AV	15.9676G	32.46	54.00	-21.54	44.88	3	Vertical	347	2.50	92	38.49	13.06	63.97				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX


5320MHz_TX

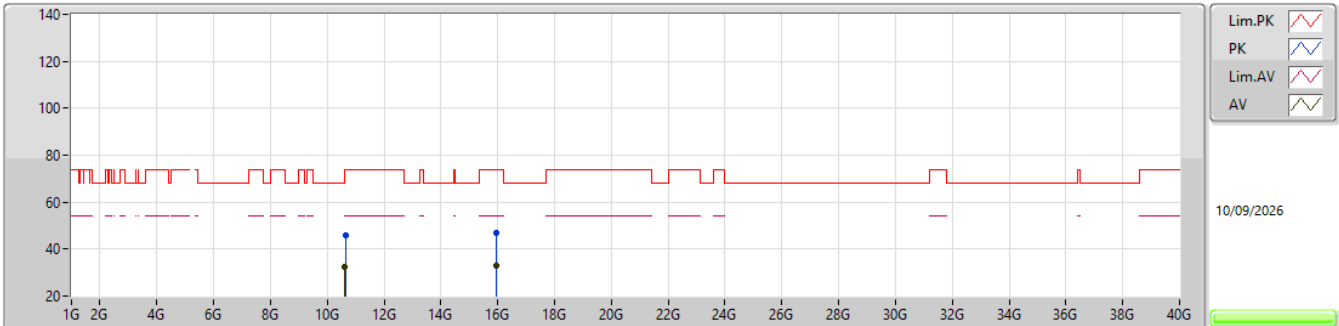EUT_Y_2TX
SET 92

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.65868G	45.99	74.00	-28.01	62.42	3	Horizontal	113	2.55	92	39.30	10.78	66.51			
AV	10.62168G	32.26	54.00	-21.74	48.80	3	Horizontal	113	2.55	92	39.24	10.76	66.54			
PK	15.9586G	46.93	74.00	-27.07	59.29	3	Horizontal	304	1.80	92	38.55	13.06	63.97			
AV	15.95784G	32.79	54.00	-21.21	45.15	3	Horizontal	304	1.80	92	38.55	13.06	63.97			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5500MHz_TX

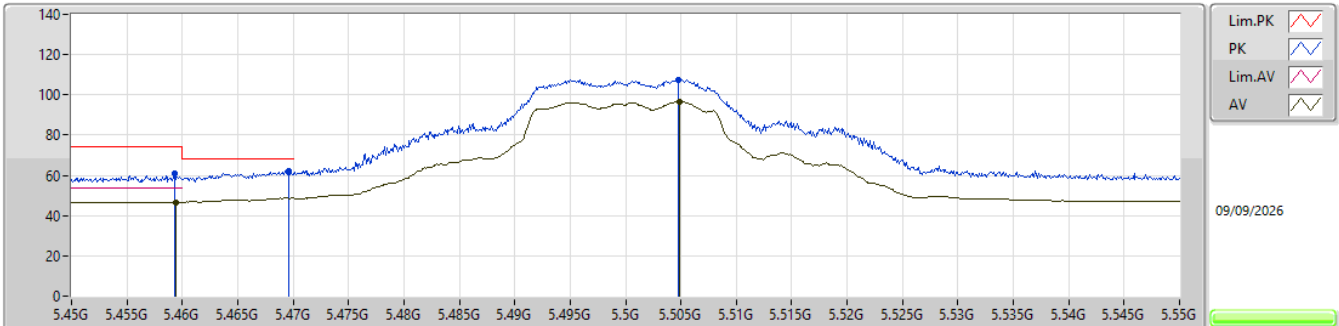


EUT_V_2TX
SET 93
80\95\78\86\90\92\93\105\99\96\93
7.64\ -19.47\7.54\7.56\5.65\5.82\5.05\ -19.89\ -19.82\ -18.68\5.95

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.4593G	60.97	74.00	-13.03	53.62	3	Vertical	130	2.89	93	33.66	7.60	33.91				
AV	5.4594G	46.76	54.00	-7.24	39.41	3	Vertical	130	2.89	93	33.66	7.60	33.91				
PK	5.4696G	62.25	68.20	-5.95	54.84	3	Vertical	130	2.89	93	33.72	7.60	33.91				
PK	5.5048G	107.68	Inf	-Inf	100.06	3	Vertical	130	2.89	93	33.91	7.62	33.91				
AV	5.5049G	96.59	Inf	-Inf	88.97	3	Vertical	130	2.89	93	33.91	7.62	33.91				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5500MHz_TX

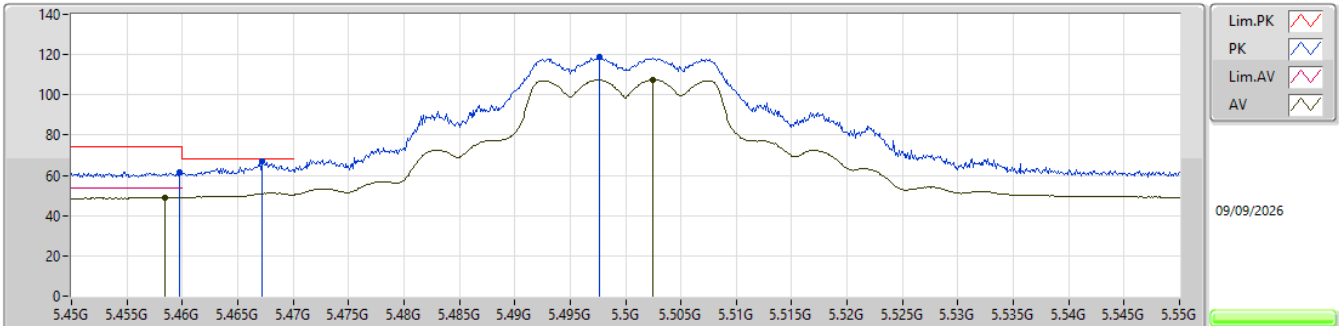


EUT_V_2TX
SET 86
93\81\92\87\85\86
-5.64\4.53\5.16\1.36\2.51\1.46

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4597G	61.42	74.00	-12.58	54.07	3	Horizontal	73	1.99	86	33.66	7.60	33.91			
AV	5.4584G	49.02	54.00	-4.98	41.68	3	Horizontal	73	1.99	86	33.65	7.60	33.91			
PK	5.4672G	66.74	68.20	-1.46	59.35	3	Horizontal	73	1.99	86	33.70	7.60	33.91			
PK	5.4976G	118.66	Inf	-Inf	111.07	3	Horizontal	73	1.99	86	33.89	7.61	33.91			
AV	5.5025G	107.44	Inf	-Inf	99.82	3	Horizontal	73	1.99	86	33.91	7.62	33.91			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5500MHz_TX

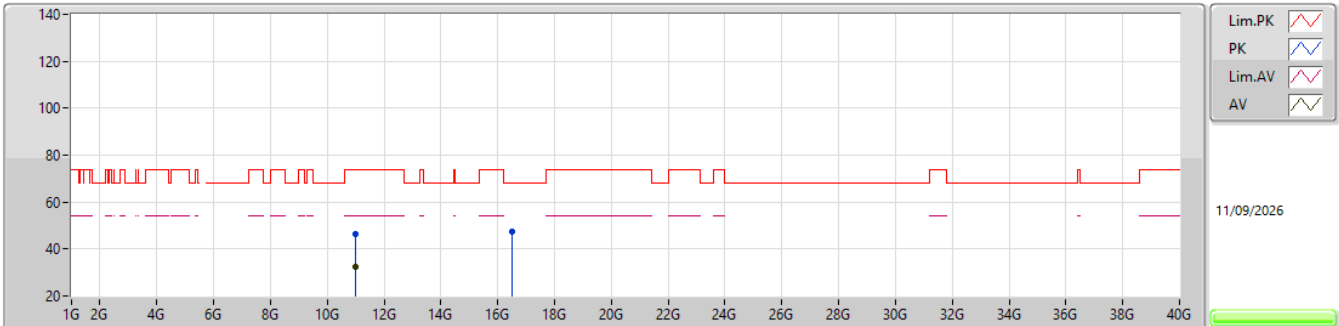


EUT Y_2TX
SET 86

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99864G	46.27	74.00	-27.73	62.23	3	Vertical	214	2.37	86	39.20	11.02	66.18			
AV	10.98644G	32.20	54.00	-21.80	48.15	3	Vertical	214	2.37	86	39.23	11.01	66.19			
PK	16.49128G	47.59	68.20	-20.61	58.08	3	Vertical	360	1.95	86	39.65	13.35	63.49			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5500MHz_TX

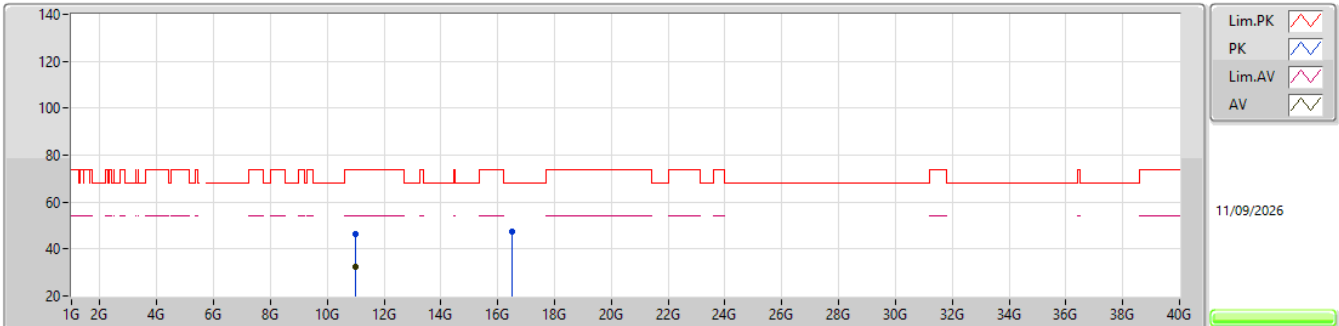EUT Y_2TX
SET 86

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99632G	46.15	74.00	-27.85	62.10	3	Horizontal	85	1.07	86	39.21	11.02	66.18			
AV	10.98868G	32.38	54.00	-21.62	48.34	3	Horizontal	85	1.07	86	39.22	11.01	66.19			
PK	16.49548G	47.49	68.20	-20.71	57.94	3	Horizontal	0	1.67	86	39.67	13.36	63.48			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

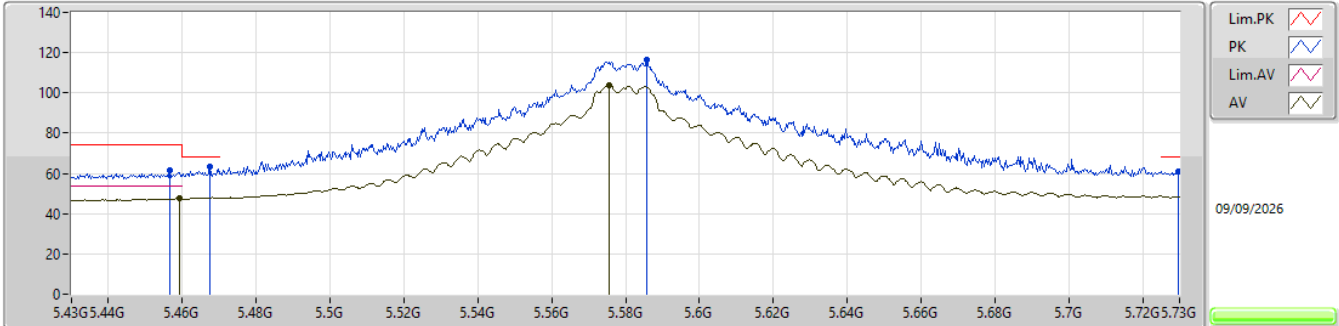


EUT_V_2TX
SET 108
80\95\108
7.73\5.32\5.09

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4567G	61.66	74.00	-12.34	54.33	3	Vertical	51	1.08	108	33.64	7.60	33.91			
AV	5.4591G	47.41	54.00	-6.59	40.07	3	Vertical	51	1.08	108	33.65	7.60	33.91			
PK	5.4675G	63.11	68.20	-5.09	55.72	3	Vertical	51	1.08	108	33.70	7.60	33.91			
PK	5.5857G	116.74	Inf	-Inf	108.97	3	Vertical	51	1.08	108	34.00	7.65	33.88			
AV	5.5755G	103.56	Inf	-Inf	95.79	3	Vertical	51	1.08	108	34.00	7.65	33.88			
PK	5.7297G	61.09	68.20	-7.11	52.99	3	Vertical	51	1.08	108	34.20	7.72	33.82			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

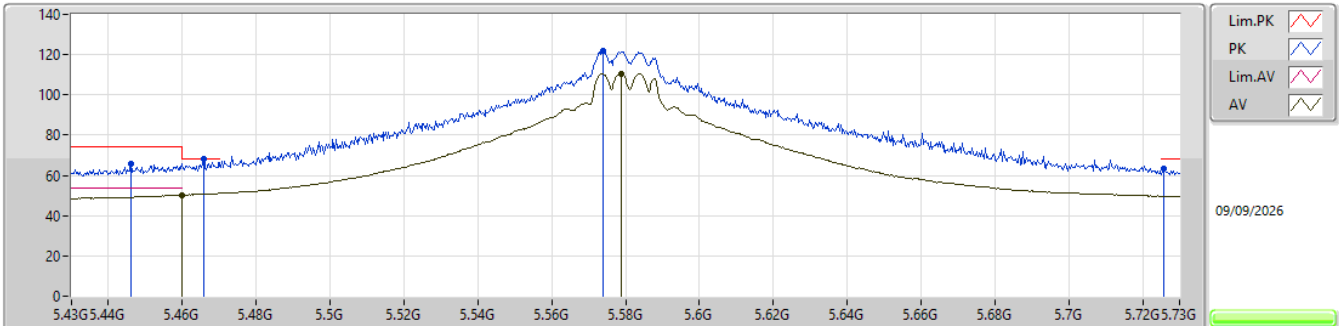


EUT_V_2TX
SET 96
108\96
-5.82\0.30

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4462G	65.97	74.00	-8.03	58.71	3	Horizontal	49	1.86	96	33.58	7.59	33.91			
PK	5.4657G	67.90	68.20	-0.30	60.52	3	Horizontal	49	1.86	96	33.69	7.60	33.91			
AV	5.46G	50.29	54.00	-3.71	42.94	3	Horizontal	49	1.86	96	33.66	7.60	33.91			
PK	5.574G	121.89	Inf	-Inf	114.12	3	Horizontal	49	1.86	96	34.00	7.65	33.88			
AV	5.5788G	110.64	Inf	-Inf	102.87	3	Horizontal	49	1.86	96	34.00	7.65	33.88			
PK	5.7258G	63.21	68.20	-4.99	55.11	3	Horizontal	49	1.86	96	34.20	7.72	33.82			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

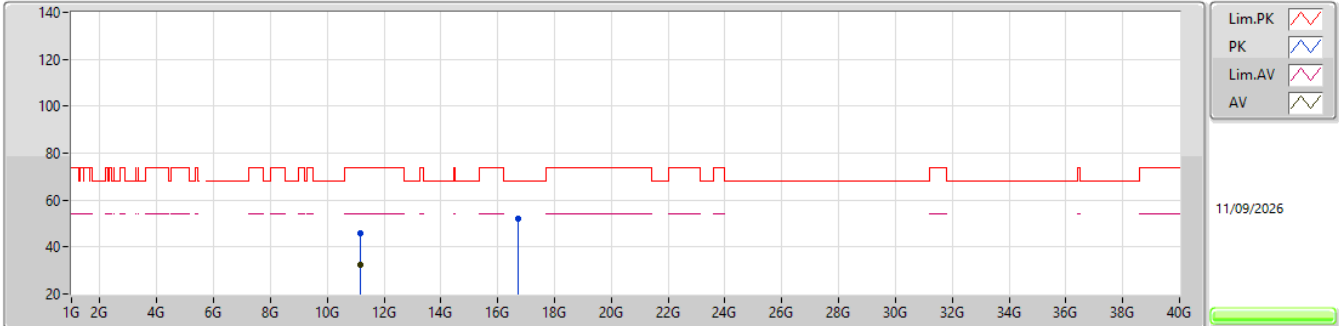


EUT Y_2TX
SET 96

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.16632G	45.70	74.00	-28.30	61.90	3	Vertical	0	2.75	96	38.90	11.13	66.23				
AV	11.1798G	32.27	54.00	-21.73	48.47	3	Vertical	0	2.75	96	38.90	11.14	66.24				
PK	16.73536G	51.92	68.20	-16.28	61.93	3	Vertical	345	2.13	96	40.04	13.50	63.55				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

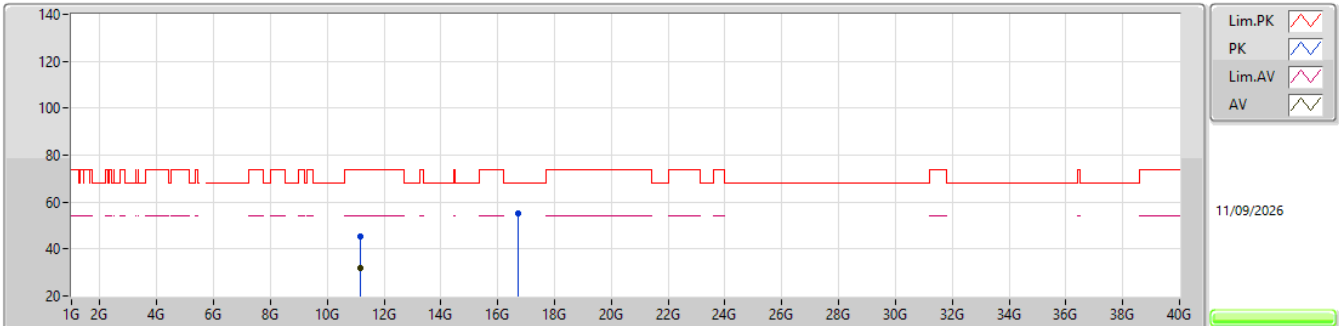


EUT V_2TX
SET 96

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.1734G	45.47	74.00	-28.53	61.67	3	Horizontal	350	1.80	96	38.90	11.14	66.24				
AV	11.17984G	31.96	54.00	-22.04	48.16	3	Horizontal	350	1.80	96	38.90	11.14	66.24				
PK	16.7356G	55.24	68.20	-12.96	65.25	3	Horizontal	48	1.80	96	40.04	13.50	63.55				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

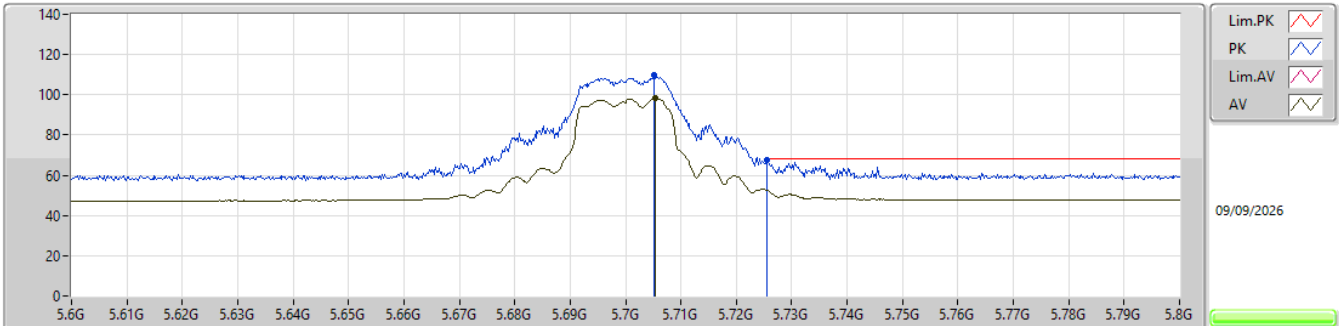


EUT_Y_2TX
SET 85
80\85
2.75\0.42

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7052G	109.65	Inf	-Inf	101.57	3	Vertical	49	1.02	85	34.20	7.71	33.83			
AV	5.7054G	98.30	Inf	-Inf	90.22	3	Vertical	49	1.02	85	34.20	7.71	33.83			
PK	5.7256G	67.78	68.20	-0.42	59.68	3	Vertical	49	1.02	85	34.20	7.72	33.82			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

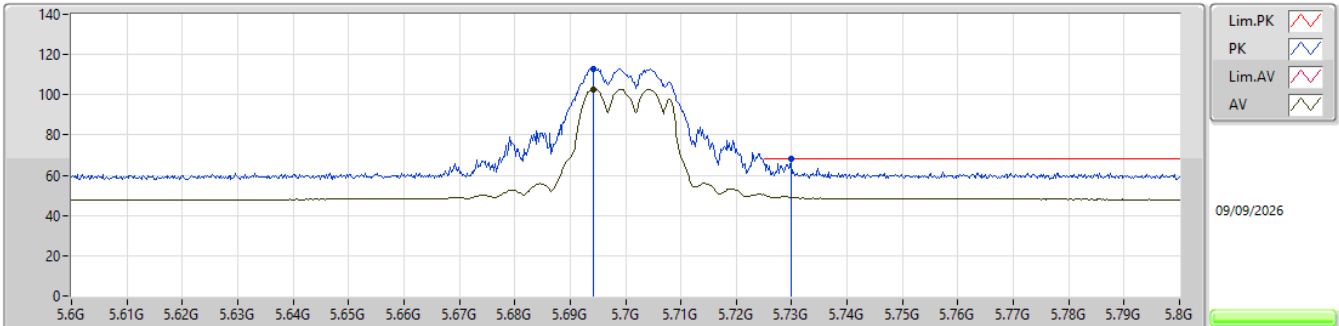


EUT Y_2TX
SET 72
85\73\79\76\75\74\73\72
-5.91\1.08\3.24\1.70\1.67\0.63\0.34\0.11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6942G	113.14	Inf	-Inf	105.09	3	Horizontal	51	1.97	72	34.19	7.70	33.84				
AV	5.6942G	102.85	Inf	-Inf	94.80	3	Horizontal	51	1.97	72	34.19	7.70	33.84				
PK	5.7298G	68.09	68.20	-0.11	59.99	3	Horizontal	51	1.97	72	34.20	7.72	33.82				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5700MHz_TX

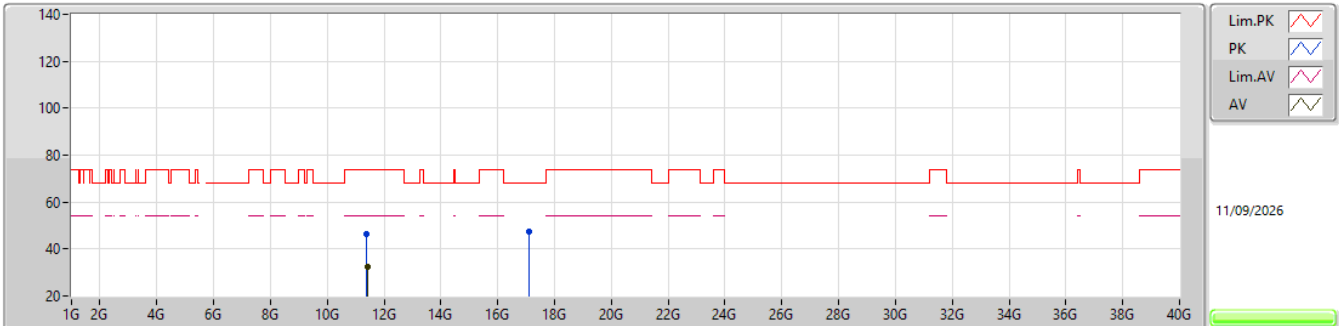EUT_Y_2TX
SET 72

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.38104G	46.48	74.00	-27.52	62.36	3	Vertical	360	1.80	72	39.14	11.28	66.30			
AV	11.41984G	32.51	54.00	-21.49	48.41	3	Vertical	360	1.80	72	39.10	11.31	66.31			
PK	17.08756G	47.37	68.20	-20.83	56.28	3	Vertical	83	2.43	72	41.15	13.70	63.76			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX


5700MHz_TX

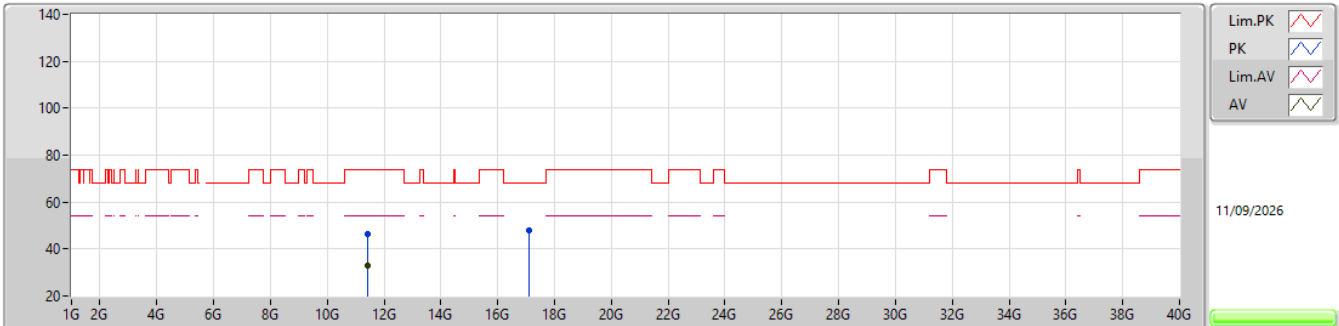EUT_Y_2TX
SET 72

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40944G	46.52	74.00	-27.48	62.43	3	Horizontal	294	1.11	72	39.10	11.30	66.31			
AV	11.41832G	32.85	54.00	-21.15	48.75	3	Horizontal	294	1.11	72	39.10	11.31	66.31			
PK	17.08904G	47.92	68.20	-20.28	56.82	3	Horizontal	360.1	2.94	72	41.16	13.70	63.76			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

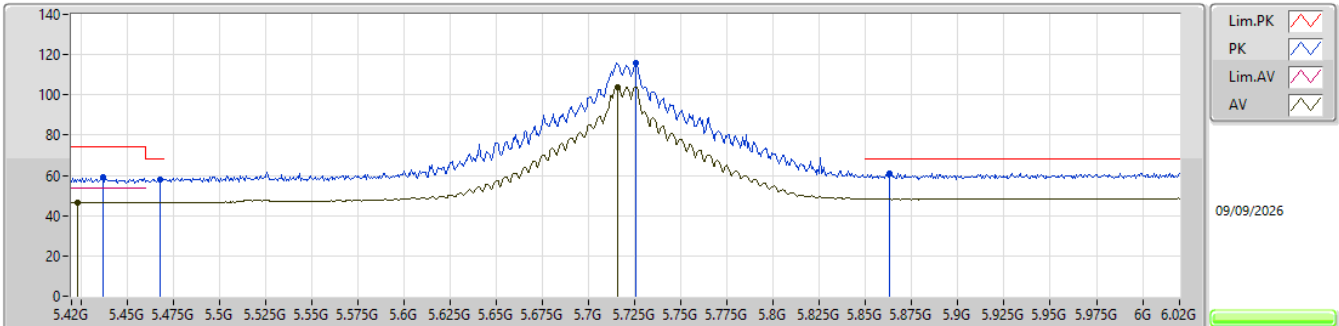


EUT Y_2TX
SET 108
80\92\108
6.48\6.55\7.21

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4368G	58.86	74.00	-15.14	51.63	3	Vertical	53	1.05	108	33.55	7.59	33.91			
AV	5.4236G	46.38	54.00	-7.62	39.22	3	Vertical	53	1.05	108	33.49	7.58	33.91			
PK	5.468G	57.97	68.20	-10.23	50.57	3	Vertical	53	1.05	108	33.71	7.60	33.91			
PK	5.7254G	115.68	Inf	-Inf	107.58	3	Vertical	53	1.05	108	34.20	7.72	33.82			
AV	5.7158G	104.03	Inf	-Inf	95.95	3	Vertical	53	1.05	108	34.20	7.71	33.83			
PK	5.8628G	60.99	68.20	-7.21	52.27	3	Vertical	53	1.05	108	34.70	7.79	33.77			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

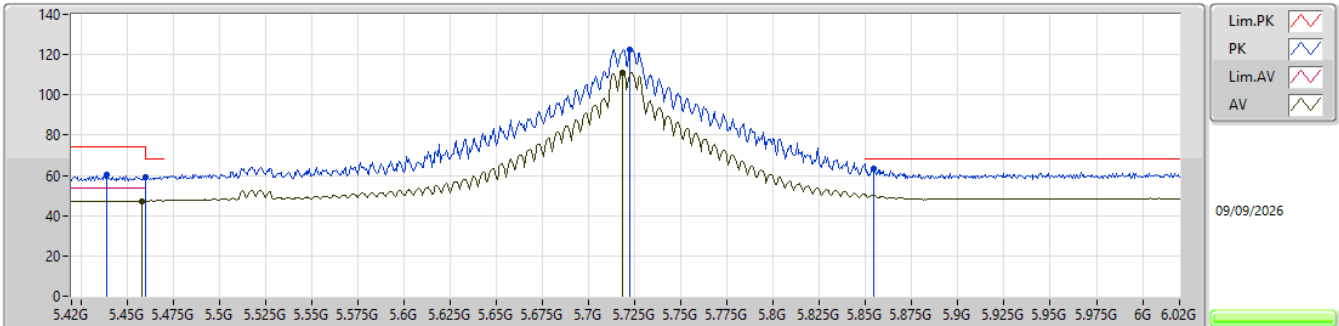


EUT Y_2TX
SET 108
108
4.99

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.4392G	60.56	74.00	-13.44	53.32	3	Horizontal	74	1.94	108	33.56	7.59	33.91					
PK	5.4602G	59.43	68.20	-8.77	52.08	3	Horizontal	74	1.94	108	33.66	7.60	33.91					
AV	5.4578G	47.22	54.00	-6.78	39.88	3	Horizontal	74	1.94	108	33.65	7.60	33.91					
PK	5.7224G	122.56	Inf	-Inf	114.47	3	Horizontal	74	1.94	108	34.20	7.72	33.83					
AV	5.7182G	111.02	Inf	-Inf	102.94	3	Horizontal	74	1.94	108	34.20	7.71	33.83					
PK	5.8544G	63.21	68.20	-4.99	54.56	3	Horizontal	74	1.94	108	34.64	7.79	33.78					

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

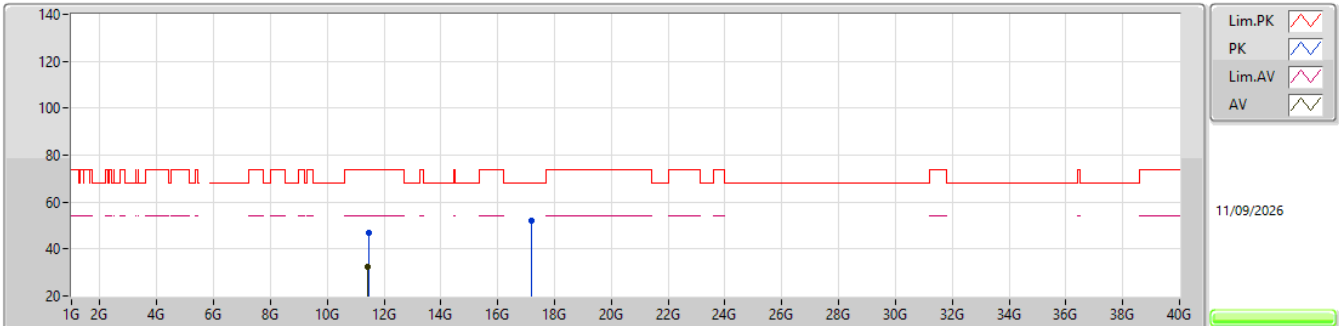


EUT Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.45476G	47.04	74.00	-26.96	62.94	3	Vertical	6	1.80	108	39.10	11.33	66.33			
AV	11.42736G	32.53	54.00	-21.47	48.44	3	Vertical	6	1.80	108	39.10	11.31	66.32			
PK	17.17696G	51.93	68.20	-16.27	60.72	3	Vertical	174	2.17	108	41.35	13.75	63.89			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

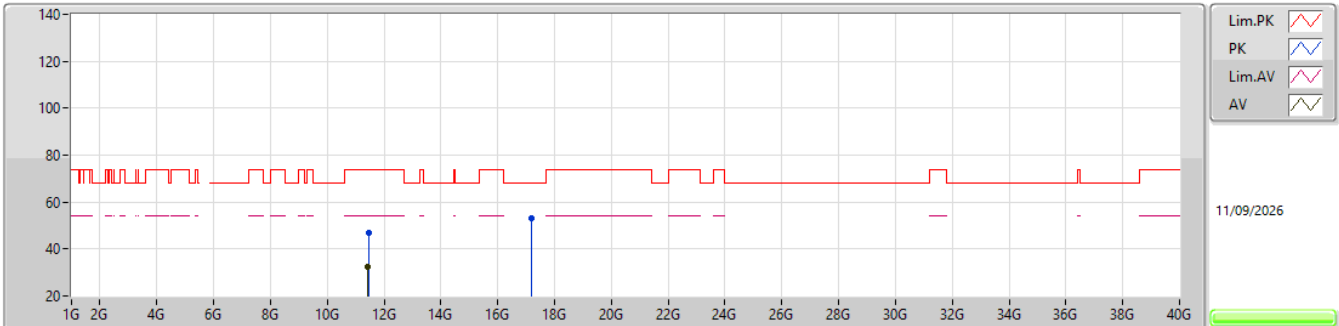


EUT Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.44624G	46.82	74.00	-27.18	62.71	3	Horizontal	5	1.82	108	39.10	11.33	66.32			
AV	11.43924G	32.51	54.00	-21.49	48.41	3	Horizontal	5	1.82	108	39.10	11.32	66.32			
PK	17.1716G	53.35	68.20	-14.85	62.14	3	Horizontal	353	1.80	108	41.34	13.75	63.88			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5745MHz_TX

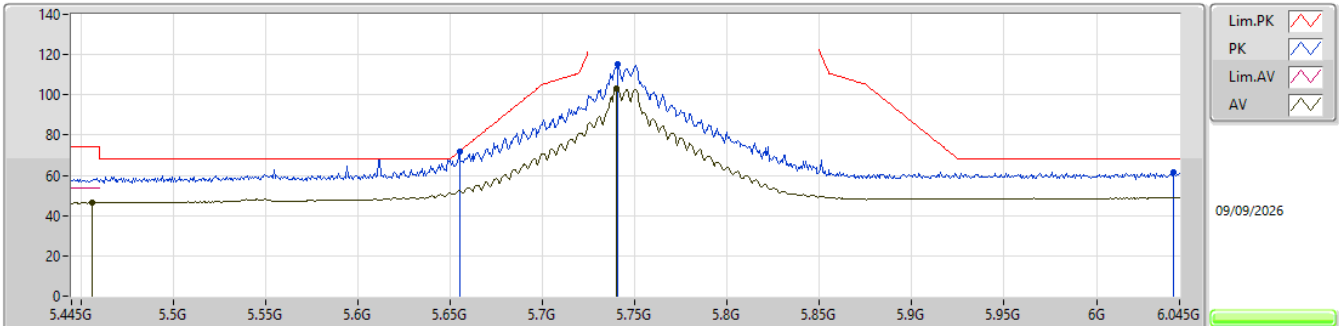


EUT_Y_2TX
SET 93
80\93
6.72\0.02

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
AV	5.4564G	46.31	54.00	-7.69	38.98	3	Vertical	56	1.00	93	33.64	7.60	33.91					
PK	5.655G	71.88	71.90	-0.02	63.94	3	Vertical	56	1.00	93	34.11	7.68	33.85					
PK	5.7408G	115.06	Inf	-Inf	106.96	3	Vertical	56	1.00	93	34.20	7.72	33.82					
AV	5.7402G	103.29	Inf	-Inf	95.19	3	Vertical	56	1.00	93	34.20	7.72	33.82					
PK	6.0414G	61.42	68.20	-6.78	51.78	3	Vertical	56	1.00	93	35.47	7.90	33.73					

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5745MHz_TX

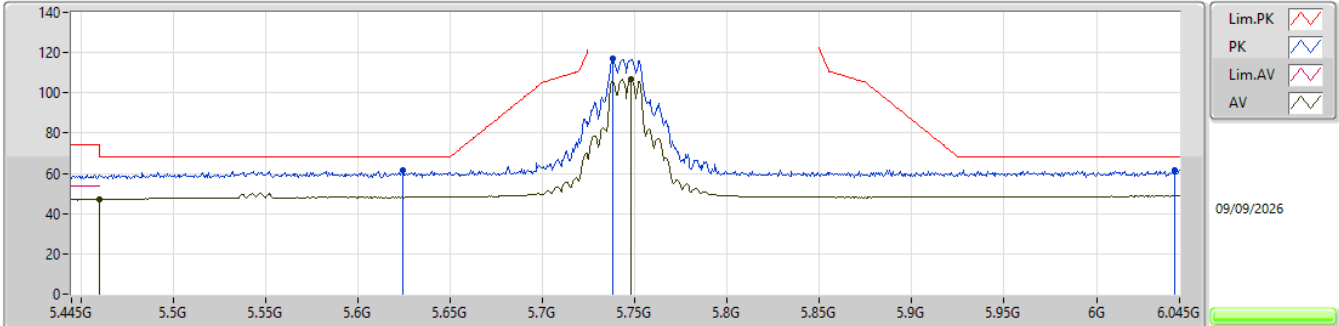


EUT_Y_2TX
SET 87
93\77\92\85\88\89\88\87
-7.66\6.27\12.67\6.16\6.46\2.12\4.63\6.75

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
AV	5.46G	47.10	54.00	-6.90	39.75	3	Horizontal	74	1.80	87	33.66	7.60	33.91				
PK	5.6244G	61.40	68.20	-6.80	53.54	3	Horizontal	74	1.80	87	34.05	7.67	33.86				
PK	5.7378G	117.11	Inf	-Inf	109.01	3	Horizontal	74	1.80	87	34.20	7.72	33.82				
AV	5.748G	106.65	Inf	-Inf	98.54	3	Horizontal	74	1.80	87	34.20	7.73	33.82				
PK	6.0426G	61.45	68.20	-6.75	51.81	3	Horizontal	74	1.80	87	35.47	7.90	33.73				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX


5745MHz_TX

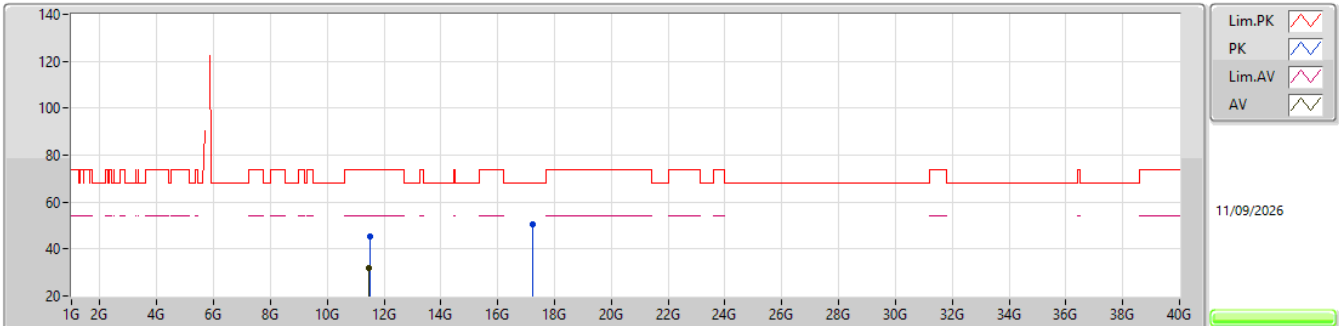EUT Y_2TX
SET 87

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.48805G	45.26	74.00	-28.74	61.14	3	Vertical	316	1.93	87	39.10	11.36	66.34			
AV	11.47506G	31.75	54.00	-22.25	47.63	3	Vertical	316	1.93	87	39.10	11.35	66.33			
PK	17.2224G	50.77	68.20	-17.43	59.42	3	Vertical	18	1.29	87	41.53	13.78	63.96			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX


5745MHz_TX

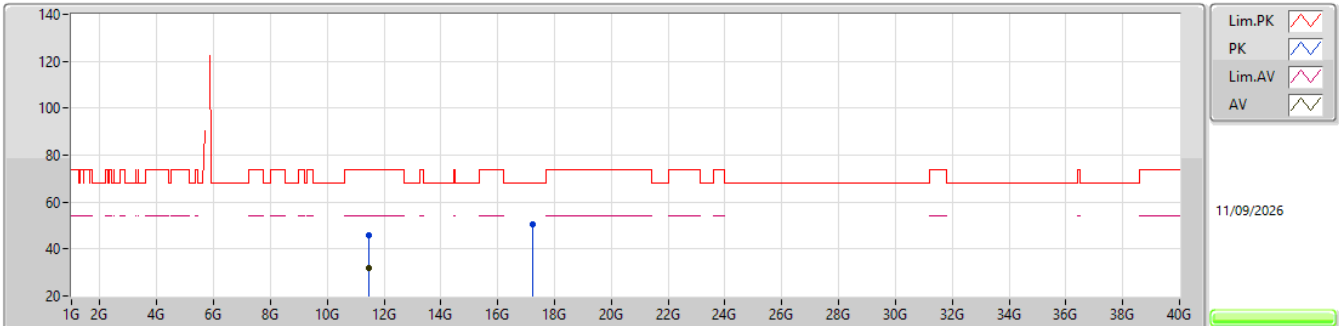EUT Y_2TX
SET 87

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4768G	45.99	74.00	-28.01	61.87	3	Horizontal	224	2.86	87	39.10	11.35	66.33			
AV	11.47542G	31.75	54.00	-22.25	47.63	3	Horizontal	224	2.86	87	39.10	11.35	66.33			
PK	17.24252G	50.35	68.20	-17.85	58.89	3	Horizontal	359.1	1.80	87	41.66	13.79	63.99			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5785MHz_TX

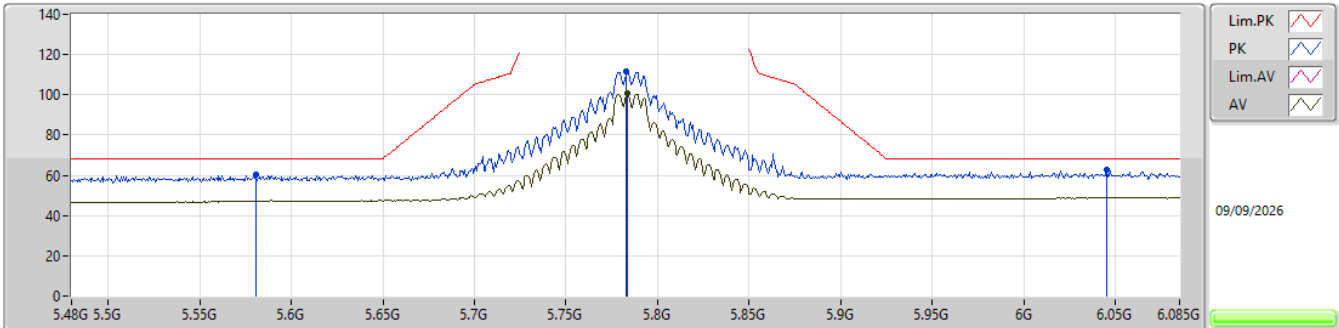


EUT Y_2TX
SET 108
80\91\108
5.70\6.40\5.61

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.58043G	60.60	68.20	-7.60	52.83	3	Vertical	321	2.21	108	34.00	7.65	33.88				
PK	5.78311G	111.91	Inf	-Inf	103.70	3	Vertical	321	2.21	108	34.27	7.74	33.80				
AV	5.78371G	100.57	Inf	-Inf	92.36	3	Vertical	321	2.21	108	34.27	7.74	33.80				
PK	6.04507G	62.59	68.20	-5.61	52.94	3	Vertical	321	2.21	108	35.48	7.90	33.73				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5785MHz_TX

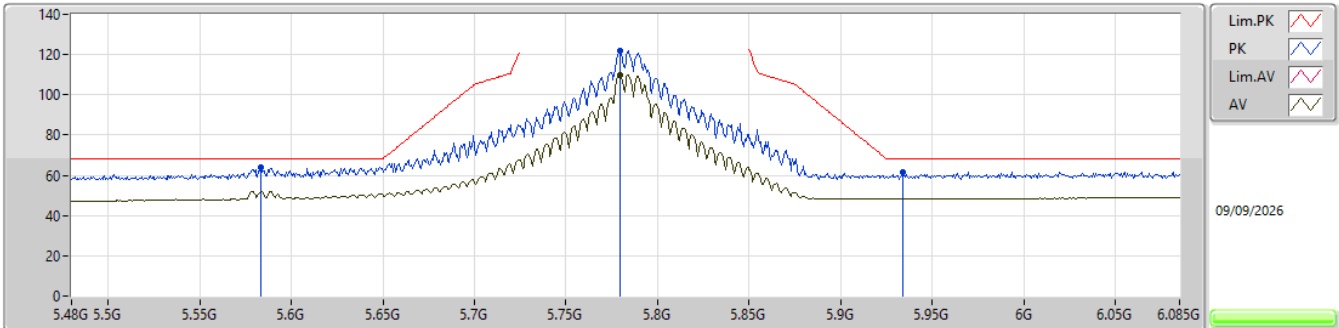


EUT Y_2TX
SET 108
108
4.12

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.58346G	64.08	68.20	-4.12	56.31	3	Horizontal	53	1.81	108	34.00	7.65	33.88					
PK	5.77948G	121.74	Inf	-Inf	113.54	3	Horizontal	53	1.81	108	34.26	7.74	33.80					
AV	5.77948G	109.82	Inf	-Inf	101.62	3	Horizontal	53	1.81	108	34.26	7.74	33.80					
PK	5.93375G	61.83	68.20	-6.37	52.60	3	Horizontal	53	1.81	108	35.14	7.84	33.75					

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX


5785MHz_TX

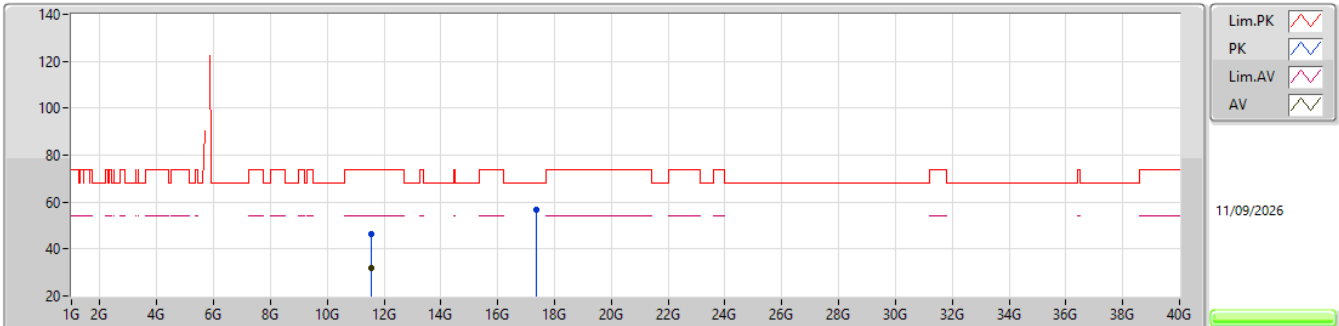EUT Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.56931G	46.20	74.00	-27.80	62.07	3	Vertical	125	2.07	108	39.10	11.41	66.38			
AV	11.55923G	32.01	54.00	-21.99	47.87	3	Vertical	125	2.07	108	39.10	11.41	66.37			
PK	17.3552G	56.53	68.20	-11.67	64.91	3	Vertical	146	1.86	108	41.92	13.86	64.16			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX


5785MHz_TX

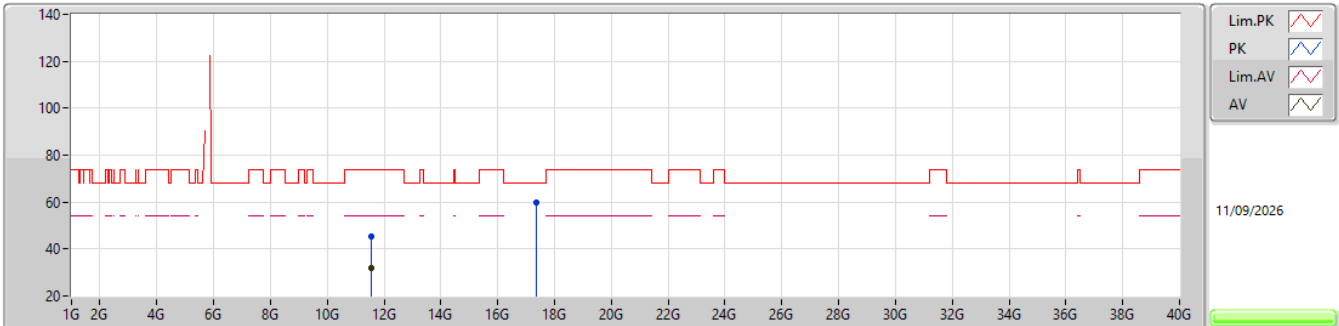EUT Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.56337G	45.39	74.00	-28.61	61.25	3	Horizontal	183	1.81	108	39.10	11.41	66.37			
AV	11.55674G	32.05	54.00	-21.95	47.92	3	Horizontal	183	1.81	108	39.10	11.40	66.37			
PK	17.35024G	59.82	68.20	-8.38	68.22	3	Horizontal	301	1.79	108	41.90	13.85	64.15			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

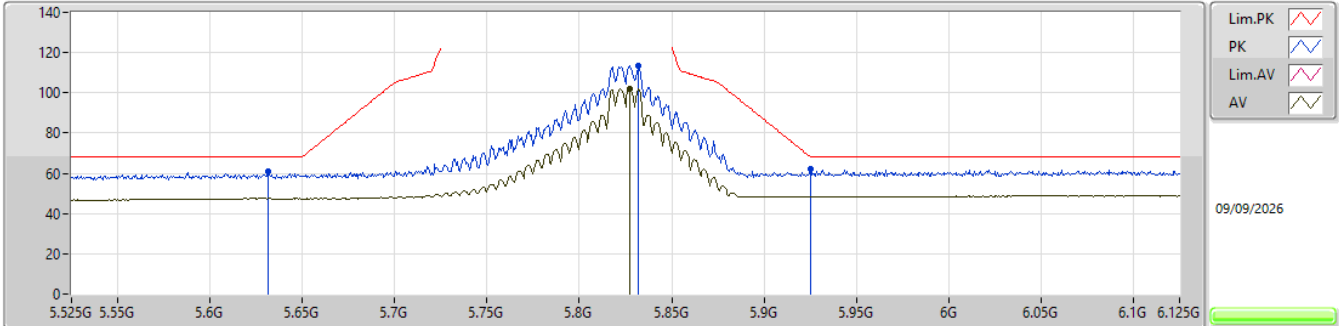


EUT_Y_2TX
SET 108
80\92\108
6.35\6.49\6.31

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6312G	60.70	68.20	-7.50	52.83	3	Vertical	336	2.85	108	34.06	7.67	33.86				
PK	5.8322G	113.50	Inf	-Inf	105.02	3	Vertical	336	2.85	108	34.49	7.77	33.78				
AV	5.8274G	102.03	Inf	-Inf	93.59	3	Vertical	336	2.85	108	34.46	7.77	33.79				
PK	5.925G	61.89	68.20	-6.31	52.71	3	Vertical	336	2.85	108	35.10	7.83	33.75				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

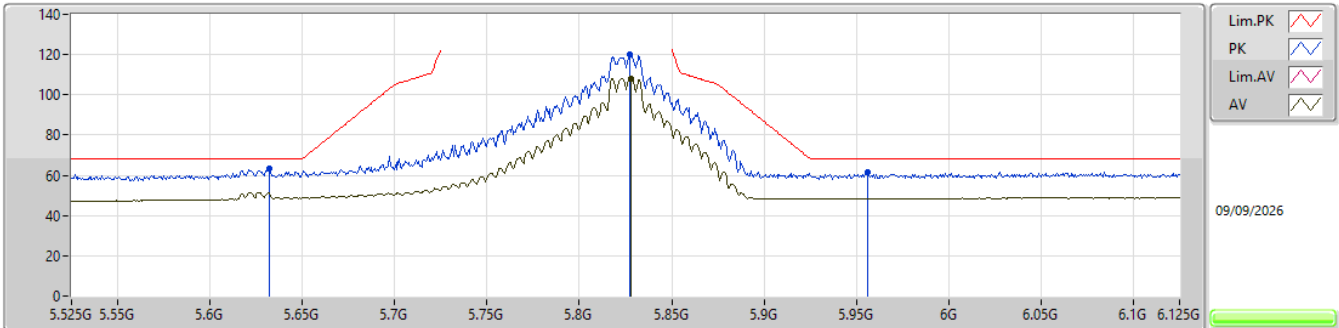


EUT Y_2TX
SET 108
108
4.84

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.6318G	63.36	68.20	-4.84	55.49	3	Horizontal	75	2.63	108	34.06	7.67	33.86					
PK	5.8274G	119.93	Inf	-Inf	111.49	3	Horizontal	75	2.63	108	34.46	7.77	33.79					
AV	5.828G	108.21	Inf	-Inf	99.76	3	Horizontal	75	2.63	108	34.47	7.77	33.79					
PK	5.9558G	61.69	68.20	-6.51	52.37	3	Horizontal	75	2.63	108	35.21	7.85	33.74					

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX


5825MHz_TX

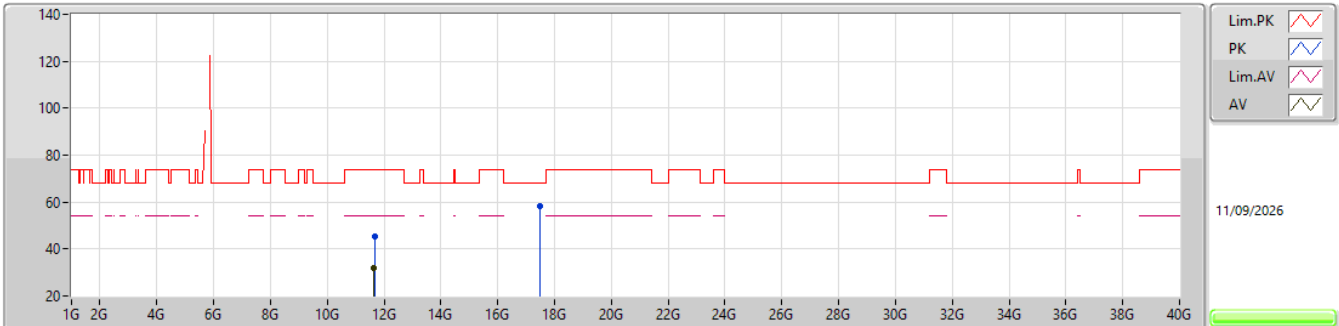EUT Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.66191G	45.50	74.00	-28.50	61.45	3	Vertical	191	2.39	108	39.00	11.48	66.43			
AV	11.65591G	31.72	54.00	-22.28	47.67	3	Vertical	191	2.39	108	39.00	11.47	66.42			
PK	17.47092G	58.15	68.20	-10.05	66.50	3	Vertical	350	1.72	108	42.06	13.92	64.33			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

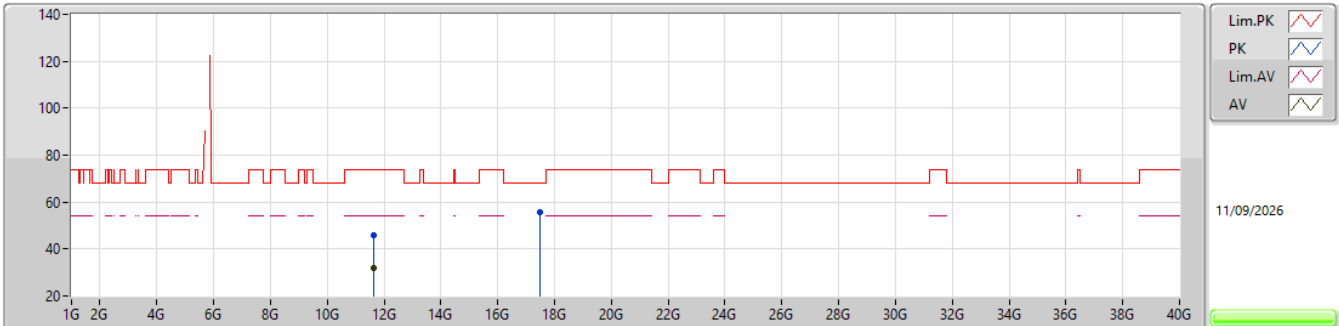


EUT Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.64745G	45.67	74.00	-28.33	61.61	3	Horizontal	20	1.91	108	39.01	11.47	66.42				
AV	11.65654G	31.72	54.00	-22.28	47.67	3	Horizontal	20	1.91	108	39.00	11.47	66.42				
PK	17.4738G	55.70	68.20	-12.50	64.06	3	Horizontal	346	1.80	108	42.05	13.92	64.33				

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5180MHz_TX

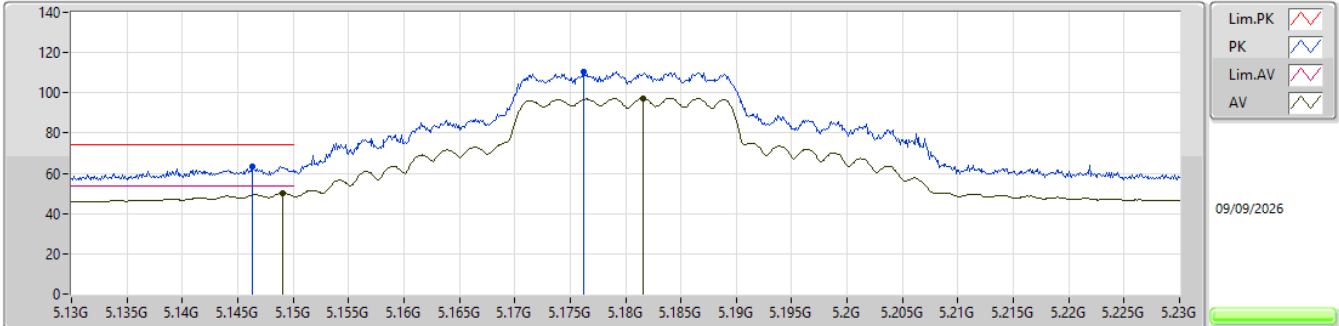


EUT_Y_2TX
SET 94
80\96\78\87\91\93\94\106\100\97\94
8.16\~22.89\8.21\7.06\5.20\4.13\3.61\~22.92\~22.93\~22.78\3.80

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1463G	63.37	74.00	-10.63	56.94	3	Vertical	45	1.05	94	32.89	7.47	33.93				
AV	5.1491G	50.20	54.00	-3.80	43.76	3	Vertical	45	1.05	94	32.90	7.47	33.93				
PK	5.1762G	110.55	Inf	-Inf	104.11	3	Vertical	45	1.05	94	32.90	7.47	33.93				
AV	5.1816G	97.44	Inf	-Inf	91.00	3	Vertical	45	1.05	94	32.90	7.47	33.93				

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5180MHz_TX

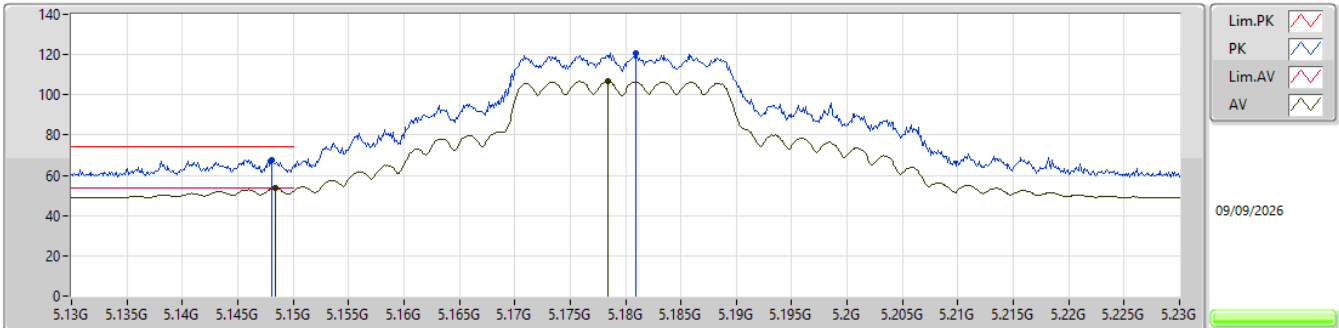


EUT_V_2TX
SET 88
94\83\88
-5.41\3.63\0.46

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1481G	67.56	74.00	-6.44	61.12	3	Horizontal	71	2.07	88	32.90	7.47	33.93				
AV	5.1484G	53.54	54.00	-0.46	47.10	3	Horizontal	71	2.07	88	32.90	7.47	33.93				
PK	5.1809G	120.50	Inf	-Inf	114.06	3	Horizontal	71	2.07	88	32.90	7.47	33.93				
AV	5.1784G	106.68	Inf	-Inf	100.24	3	Horizontal	71	2.07	88	32.90	7.47	33.93				

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5180MHz_TX

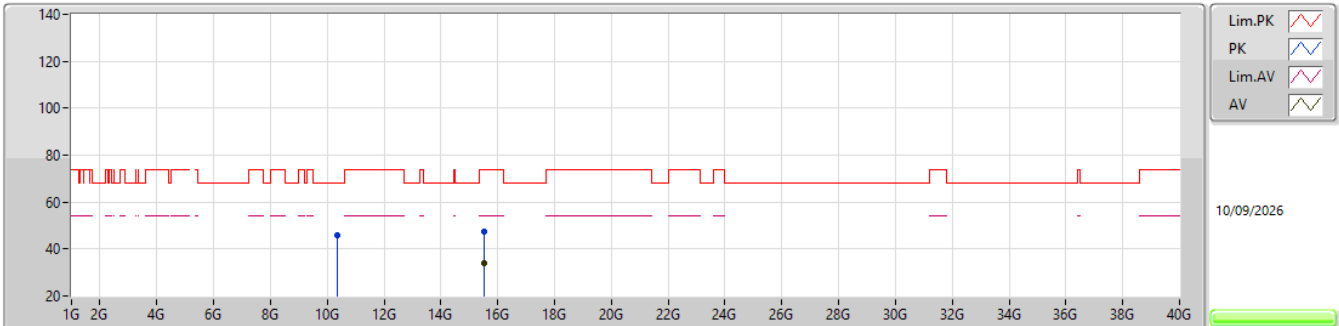EUT Y_2TX
SET 88

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.3548G	45.64	68.20	-22.56	63.05	3	Vertical	3	2.65	88	38.90	10.57	66.88			
PK	15.5328G	47.65	74.00	-26.35	59.97	3	Vertical	173	1.16	88	38.70	12.91	63.93			
AV	15.541G	34.16	54.00	-19.84	46.47	3	Vertical	173	1.16	88	38.70	12.92	63.93			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5180MHz_TX

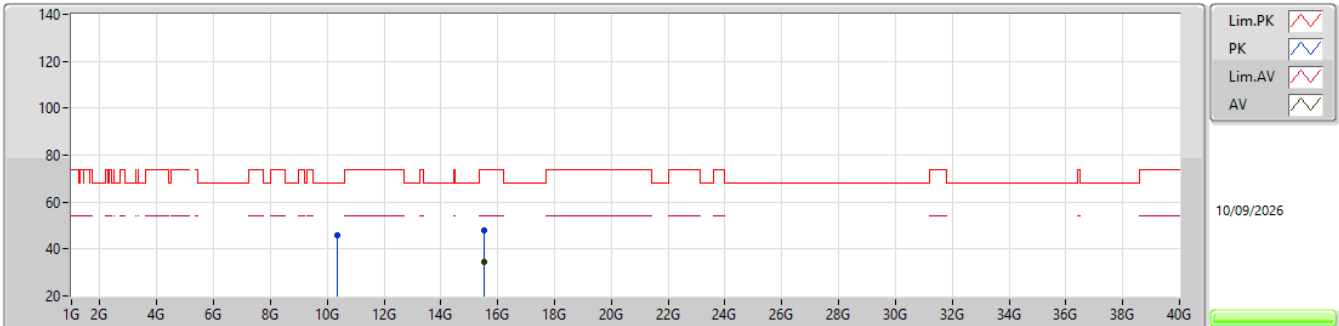EUT Y_2TX
SET 88

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35756G	45.65	68.20	-22.55	63.04	3	Horizontal	258	1.80	88	38.90	10.58	66.87			
PK	15.52872G	48.13	74.00	-25.87	60.45	3	Horizontal	11	1.80	88	38.70	12.91	63.93			
AV	15.54108G	34.28	54.00	-19.72	46.59	3	Horizontal	11	1.80	88	38.70	12.92	63.93			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5200MHz_TX

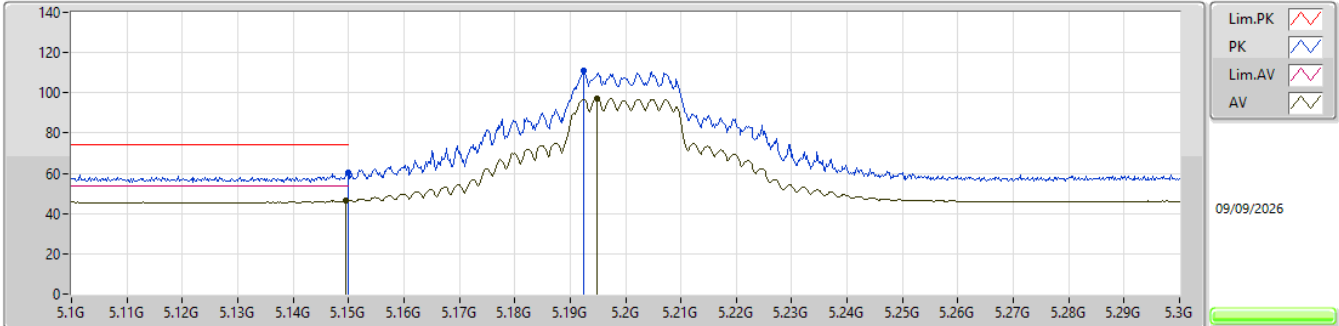


EUT Y_2TX
SET 94
80\96\78\87\91\93\94\106\100\97\94
8.43\11.73\8.43\8.25\7.93\7.53\7.29\11.75\11.70\11.59\7.35

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.15G	60.18	74.00	-13.82	53.74	3	Vertical	313	2.89	94	32.90	7.47	33.93				
AV	5.1496G	46.65	54.00	-7.35	40.21	3	Vertical	313	2.89	94	32.90	7.47	33.93				
PK	5.1924G	111.28	Inf	-Inf	104.84	3	Vertical	313	2.89	94	32.90	7.47	33.93				
AV	5.1948G	96.96	Inf	-Inf	90.52	3	Vertical	313	2.89	94	32.90	7.47	33.93				

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5200MHz_TX

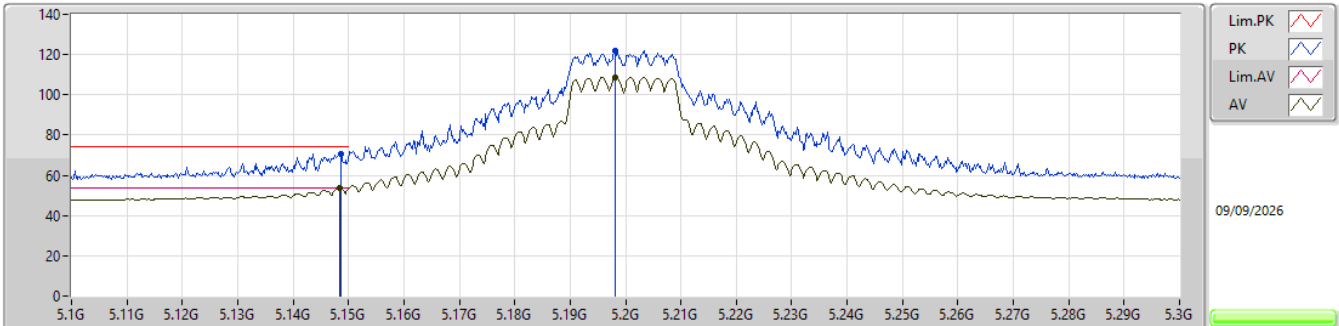


EUT_Y_2TX
SET 94
94
0.52

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1486G	70.79	74.00	-3.21	64.35	3	Horizontal	67	1.84	94	32.90	7.47	33.93			
AV	5.1484G	53.48	54.00	-0.52	47.04	3	Horizontal	67	1.84	94	32.90	7.47	33.93			
PK	5.1982G	122.03	Inf	-Inf	115.59	3	Horizontal	67	1.84	94	32.90	7.47	33.93			
AV	5.1982G	108.74	Inf	-Inf	102.30	3	Horizontal	67	1.84	94	32.90	7.47	33.93			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5200MHz_TX

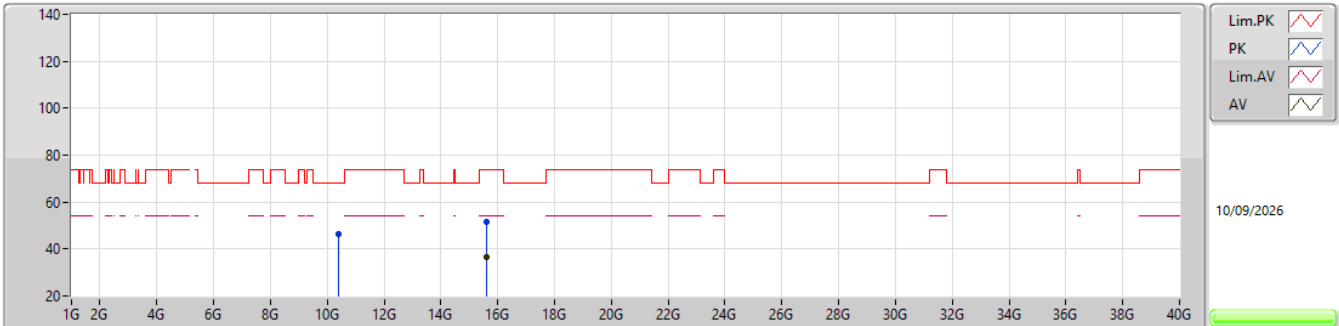


EUT Y_2TX
SET 94

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.38276G	46.57	68.20	-21.63	63.92	3	Vertical	127	1.80	94	38.90	10.59	66.84			
PK	15.61164G	51.39	74.00	-22.61	63.96	3	Vertical	169	1.86	94	38.43	12.94	63.94			
AV	15.59896G	36.75	54.00	-17.25	49.25	3	Vertical	169	1.86	94	38.50	12.94	63.94			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5200MHz_TX

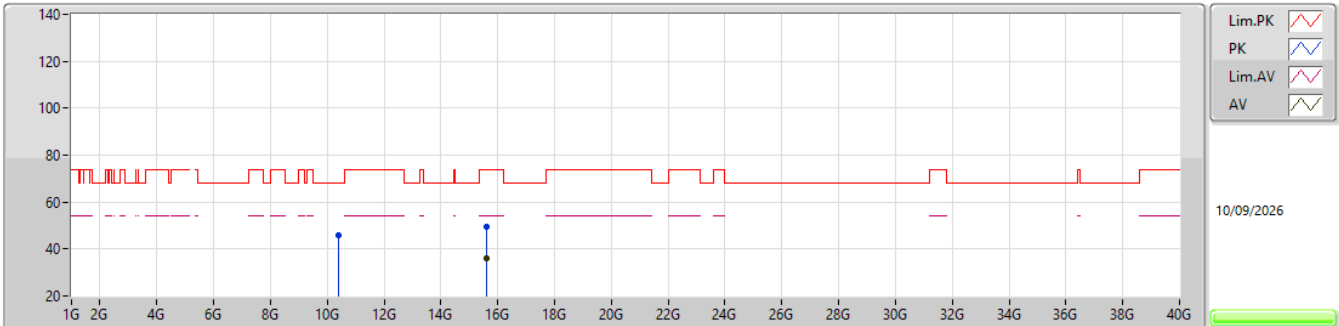EUT Y_2TX
SET 94

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.38224G	45.87	68.20	-22.33	63.22	3	Horizontal	226	1.80	94	38.90	10.59	66.84			
PK	15.60088G	49.56	74.00	-24.44	62.07	3	Horizontal	326	1.80	94	38.49	12.94	63.94			
AV	15.59868G	35.88	54.00	-18.12	48.37	3	Horizontal	326	1.80	94	38.51	12.94	63.94			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5240MHz_TX

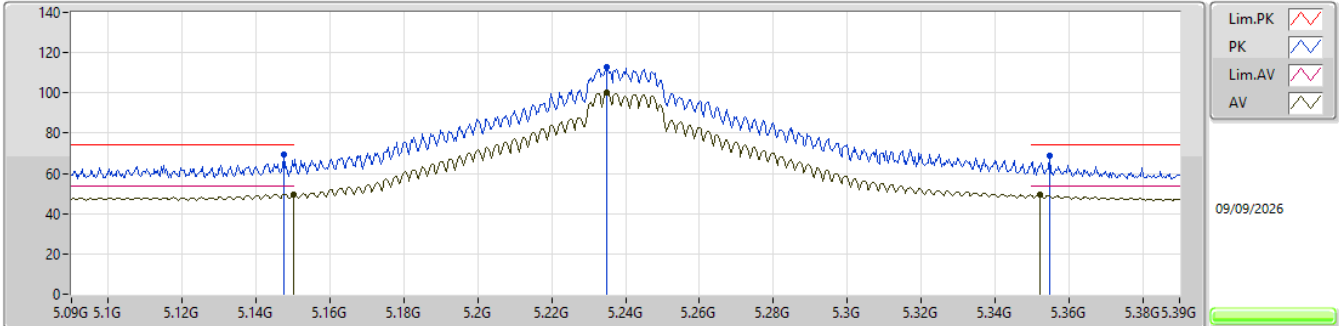


EUT_Y_2TX
SET 108
80\95\108
7.80\7.68\4.29

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.1476G	69.56	74.00	-4.44	63.12	3	Vertical	315	3.00	108	32.90	7.47	33.93					
AV	5.15G	49.71	54.00	-4.29	43.27	3	Vertical	315	3.00	108	32.90	7.47	33.93					
PK	5.2349G	113.11	Inf	-Inf	106.51	3	Vertical	315	3.00	108	33.04	7.49	33.93					
AV	5.2349G	100.08	Inf	-Inf	93.48	3	Vertical	315	3.00	108	33.04	7.49	33.93					
PK	5.3549G	68.70	74.00	-5.30	61.76	3	Vertical	315	3.00	108	33.31	7.55	33.92					
AV	5.3522G	49.30	54.00	-4.70	42.37	3	Vertical	315	3.00	108	33.30	7.55	33.92					

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5240MHz_TX

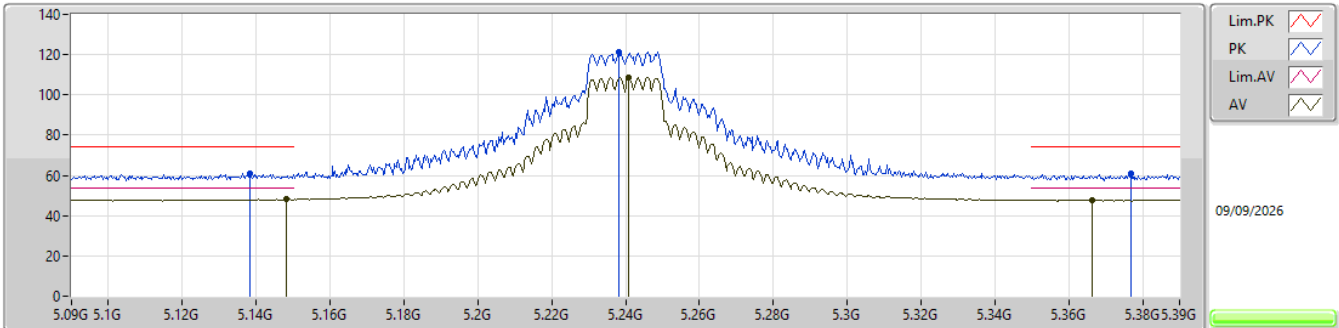


EUT Y_2TX
SET 94
108\90\107\99\95\93\94
-8.92\6.21\ -9.29\ -9.15\ -9.15\5.96\5.81

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1383G	60.71	74.00	-13.29	54.29	3	Horizontal	70	1.94	94	32.88	7.47	33.93
AV	5.1482G	48.19	54.00	-5.81	41.75	3	Horizontal	70	1.94	94	32.90	7.47	33.93
PK	5.2382G	121.13	Inf	-Inf	114.52	3	Horizontal	70	1.94	94	33.05	7.49	33.93
AV	5.2409G	108.48	Inf	-Inf	101.86	3	Horizontal	70	1.94	94	33.06	7.49	33.93
PK	5.3768G	60.74	74.00	-13.26	53.75	3	Horizontal	70	1.94	94	33.35	7.56	33.92
AV	5.3663G	47.67	54.00	-6.33	40.71	3	Horizontal	70	1.94	94	33.33	7.55	33.92

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5240MHz_TX

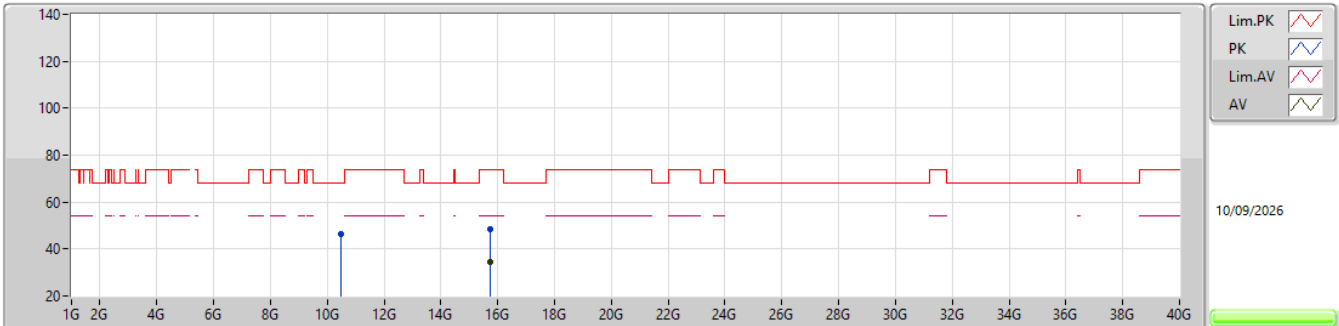


EUT Y_2TX
SET 94

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.49112G	46.49	68.20	-21.71	63.43	3	Vertical	41	1.64	94	39.06	10.67	66.67				
PK	15.7282G	48.54	74.00	-25.46	61.15	3	Vertical	49	1.80	94	38.36	12.98	63.95				
AV	15.7206G	34.63	54.00	-19.37	47.26	3	Vertical	49	1.80	94	38.34	12.98	63.95				

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5240MHz_TX

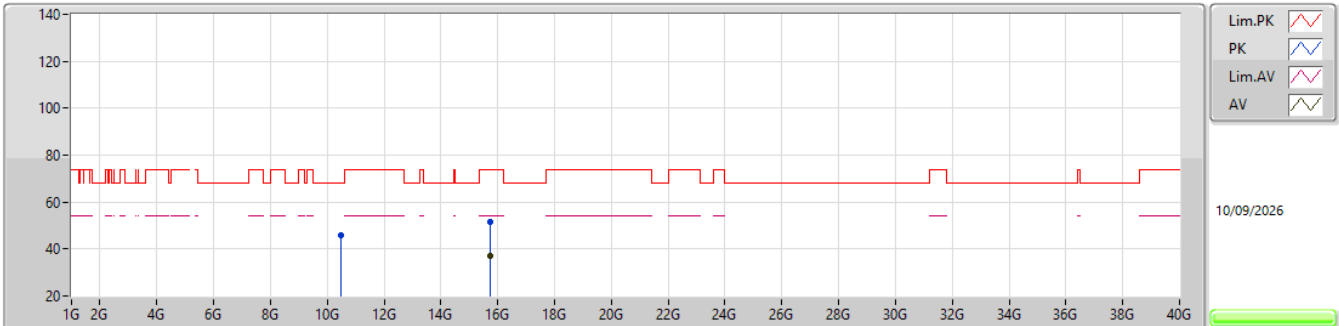EUT Y_2TX
SET 94

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47488G	45.83	68.20	-22.37	62.87	3	Horizontal	262	1.80	94	39.00	10.66	66.70			
PK	15.72368G	51.77	74.00	-22.23	64.39	3	Horizontal	293	1.80	94	38.35	12.98	63.95			
AV	15.71616G	36.95	54.00	-17.05	49.60	3	Horizontal	293	1.80	94	38.33	12.97	63.95			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5260MHz_TX

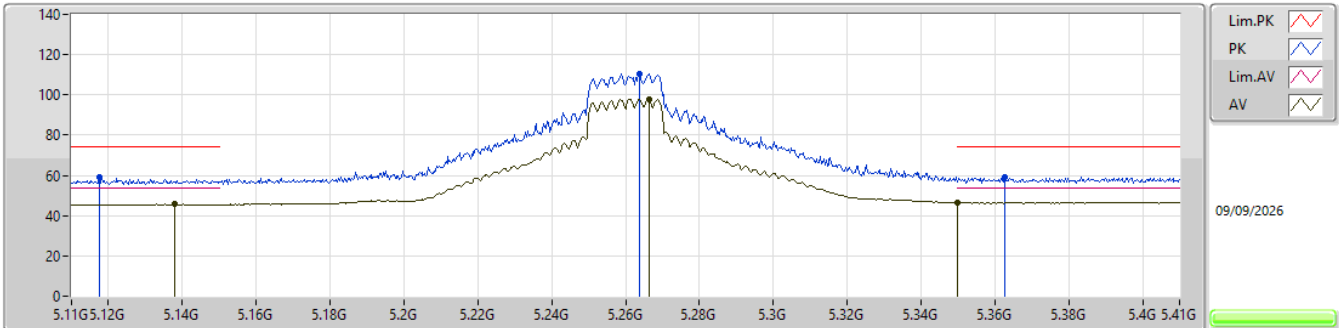


EUT_Y_2TX
SET 97
80\95\108\102\99\98\97
7.69\7.66\0.84\0.78\0.79\0.86\7.49

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1175G	58.93	74.00	-15.07	52.56	3	Vertical	321	1.03	97	32.83	7.47	33.93			
AV	5.1379G	45.61	54.00	-8.39	39.19	3	Vertical	321	1.03	97	32.88	7.47	33.93			
PK	5.2639G	110.50	Inf	-Inf	103.79	3	Vertical	321	1.03	97	33.13	7.50	33.92			
AV	5.2663G	97.96	Inf	-Inf	91.25	3	Vertical	321	1.03	97	33.13	7.50	33.92			
PK	5.3626G	59.13	74.00	-14.87	52.17	3	Vertical	321	1.03	97	33.33	7.55	33.92			
AV	5.35G	46.51	54.00	-7.49	39.59	3	Vertical	321	1.03	97	33.30	7.54	33.92			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5260MHz_TX

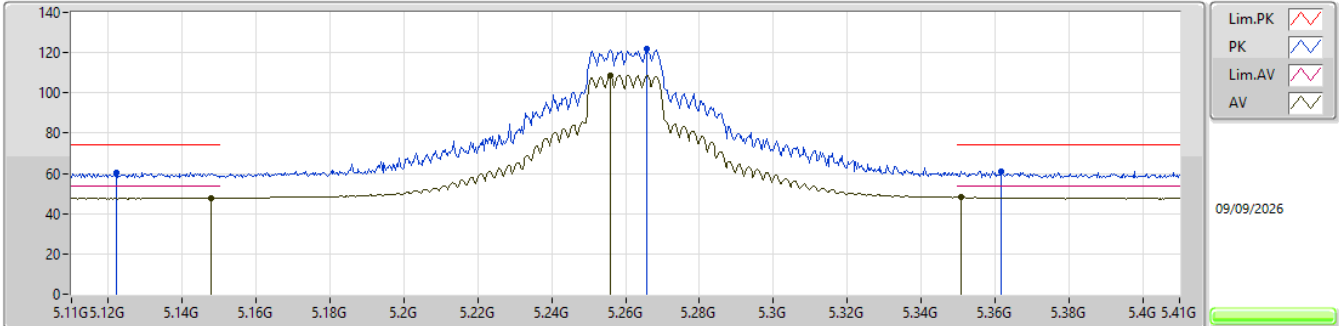


EUT_V_2TX
SET 93
97\88\96\92\94\95\94\93
-4.23\6.26\4.25\5.99\5.88\4.24\4.70\5.98

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.1223G	60.47	74.00	-13.53	54.09	3	Horizontal	68	2.02	93	32.84	7.47	33.93					
AV	5.1478G	47.67	54.00	-6.33	41.23	3	Horizontal	68	2.02	93	32.90	7.47	33.93					
PK	5.2657G	121.78	Inf	-Inf	115.07	3	Horizontal	68	2.02	93	33.13	7.50	33.92					
AV	5.2558G	108.57	Inf	-Inf	101.88	3	Horizontal	68	2.02	93	33.11	7.50	33.92					
PK	5.3617G	61.19	74.00	-12.81	54.24	3	Horizontal	68	2.02	93	33.32	7.55	33.92					
AV	5.3509G	48.02	54.00	-5.98	41.09	3	Horizontal	68	2.02	93	33.30	7.55	33.92					

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX


5260MHz_TX

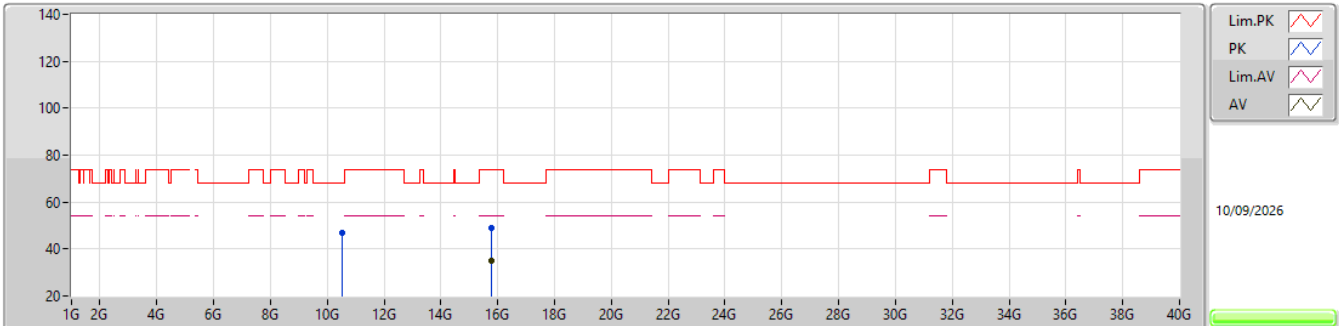EUT Y_2TX
SET 93

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.53636G	46.84	68.20	-21.36	63.60	3	Vertical	1	1.80	93	39.17	10.70	66.63			
PK	15.78332G	49.22	74.00	-24.78	61.77	3	Vertical	47	1.80	93	38.40	13.00	63.95			
AV	15.77832G	34.98	54.00	-19.02	47.53	3	Vertical	47	1.80	93	38.40	13.00	63.95			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5260MHz_TX

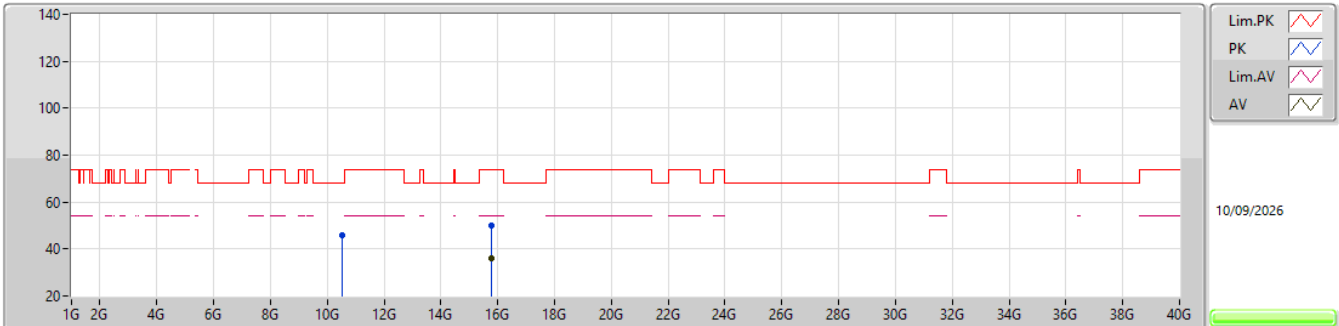EUT Y_2TX
SET 93

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50736G	45.82	68.20	-22.38	62.68	3	Horizontal	90	1.80	93	39.11	10.68	66.65			
PK	15.77344G	50.05	74.00	-23.95	62.61	3	Horizontal	290	1.80	93	38.40	12.99	63.95			
AV	15.78108G	36.01	54.00	-17.99	48.56	3	Horizontal	290	1.80	93	38.40	13.00	63.95			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5300MHz_TX

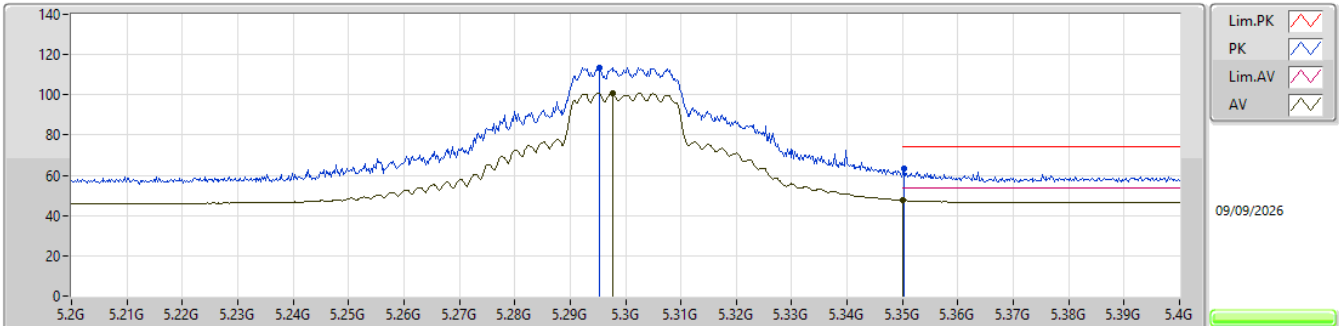

EUT_Y_2TX

SET 94


80\94\108\101\98\97\85\91\94

7.49\6.40\11.85\11.92\11.98\11.68\7.44\7.16\6.49

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.2952G	113.41	Inf	-Inf	106.62	3	Vertical	61	2.94	94	33.19	7.52	33.92			
AV	5.2976G	100.96	Inf	-Inf	94.16	3	Vertical	61	2.94	94	33.20	7.52	33.92			
PK	5.3502G	63.38	74.00	-10.62	56.45	3	Vertical	61	2.94	94	33.30	7.55	33.92			
AV	5.35G	47.51	54.00	-6.49	40.59	3	Vertical	61	2.94	94	33.30	7.54	33.92			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5300MHz_TX

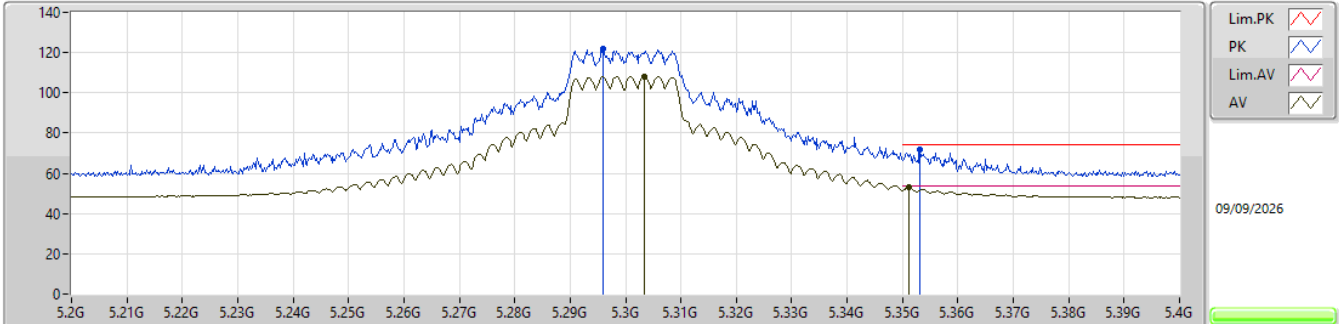


EUT Y_2TX
SET 94
94
1.09

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.296G	121.90	Inf	-Inf	115.11	3	Horizontal	72	2.03	94	33.19	7.52	33.92				
AV	5.3034G	108.12	Inf	-Inf	101.31	3	Horizontal	72	2.03	94	33.21	7.52	33.92				
PK	5.3532G	71.84	74.00	-2.16	64.90	3	Horizontal	72	2.03	94	33.31	7.55	33.92				
AV	5.3512G	52.91	54.00	-1.09	45.98	3	Horizontal	72	2.03	94	33.30	7.55	33.92				

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5300MHz_TX

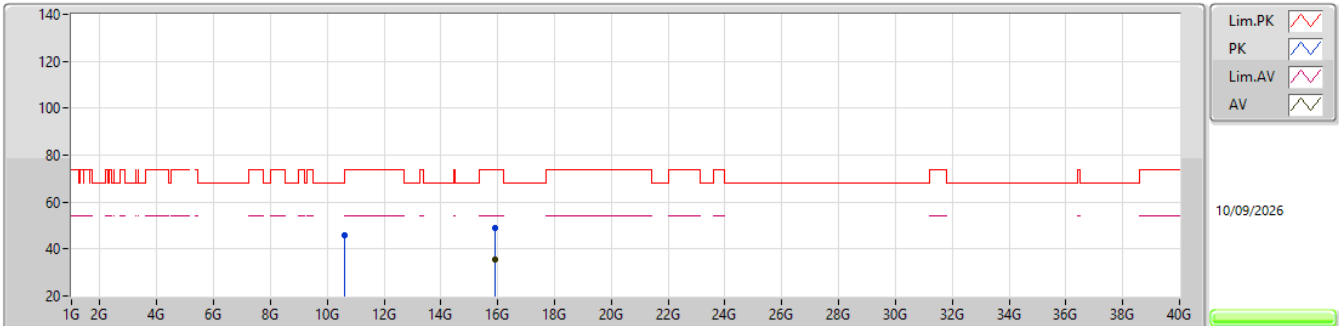EUT Y_2TX
SET 94

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60144G	46.08	74.00	-27.92	62.70	3	Vertical	333	1.80	94	39.20	10.74	66.56			
PK	15.90124G	49.10	74.00	-24.90	61.22	3	Vertical	345	1.92	94	38.80	13.04	63.96			
AV	15.9012G	35.26	54.00	-18.74	47.38	3	Vertical	345	1.92	94	38.80	13.04	63.96			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5300MHz_TX

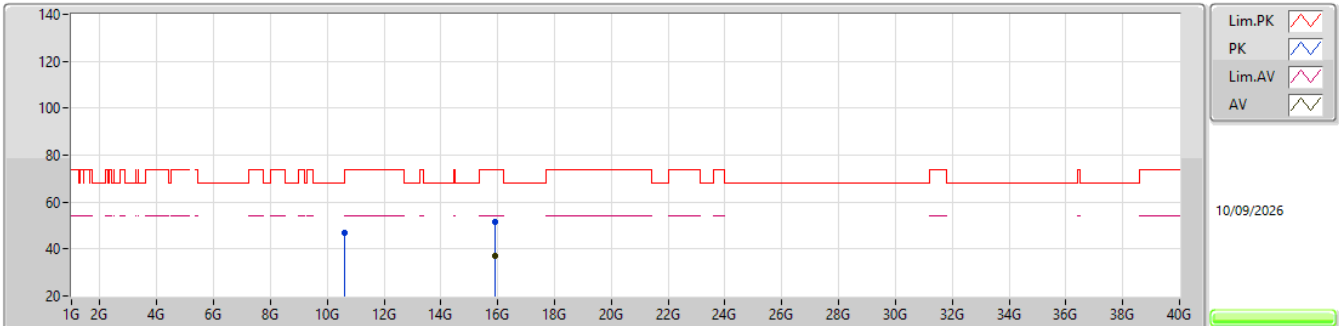


EUT Y_2TX
SET 94

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59512G	46.82	68.20	-21.38	63.45	3	Horizontal	305	1.05	94	39.20	10.74	66.57			
PK	15.8916G	51.73	74.00	-22.27	63.91	3	Horizontal	48	1.77	94	38.75	13.03	63.96			
AV	15.90148G	37.21	54.00	-16.79	49.34	3	Horizontal	48	1.77	94	38.79	13.04	63.96			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5320MHz_TX

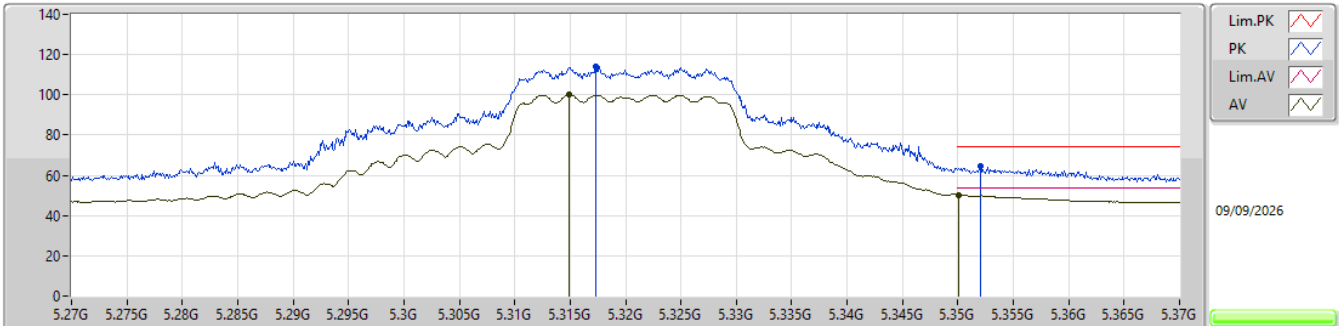


EUT_V_2TX
SET 93
80\95\78\86\90\92\93\105\99\96\93
7.59\ -23.70\7.64\6.99\5.06\3.95\3.37\ -24.48\ -24.28\ -23.65\3.70

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3173G	114.19	Inf	-Inf	107.35	3	Vertical	60	2.92	93	33.23	7.53	33.92				
AV	5.3149G	99.94	Inf	-Inf	93.10	3	Vertical	60	2.92	93	33.23	7.53	33.92				
PK	5.352G	64.79	74.00	-9.21	57.86	3	Vertical	60	2.92	93	33.30	7.55	33.92				
AV	5.3501G	50.30	54.00	-3.70	43.37	3	Vertical	60	2.92	93	33.30	7.55	33.92				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5320MHz_TX

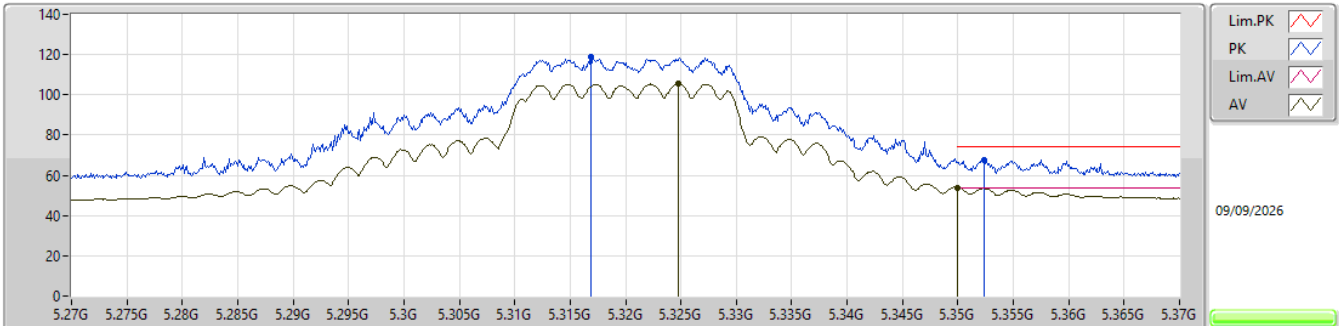


EUT_V_2TX
SET 90
93\86\89\90
-3.11\3.74\0.87\0.06

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3169G	118.60	Inf	-Inf	111.76	3	Horizontal	54	1.80	90	33.23	7.53	33.92				
AV	5.3248G	105.54	Inf	-Inf	98.68	3	Horizontal	54	1.80	90	33.25	7.53	33.92				
PK	5.3524G	67.83	74.00	-6.17	60.90	3	Horizontal	54	1.80	90	33.30	7.55	33.92				
AV	5.35G	53.94	54.00	-0.06	47.02	3	Horizontal	54	1.80	90	33.30	7.54	33.92				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX


5320MHz_TX

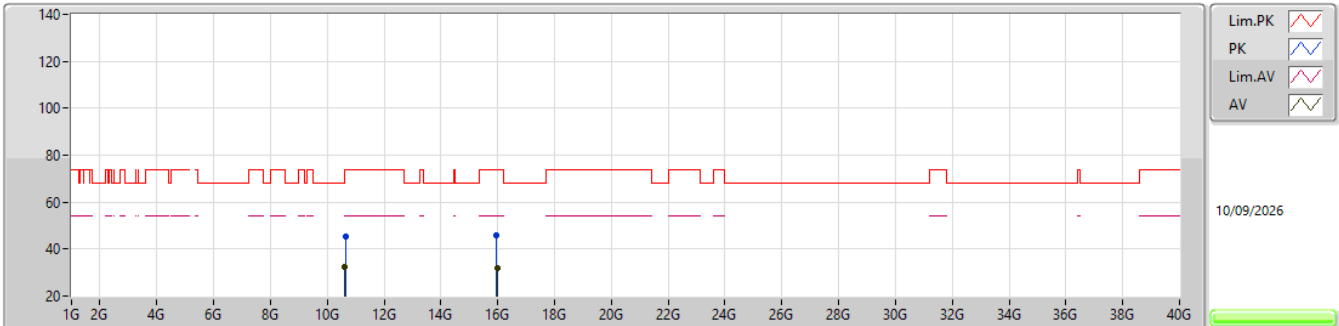EUT Y_2TX
SET 90

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.65544G	45.58	74.00	-28.42	62.01	3	Vertical	296.1	1.80	90	39.30	10.78	66.51				
AV	10.62256G	32.24	54.00	-21.76	48.77	3	Vertical	296.1	1.80	90	39.25	10.76	66.54				
PK	15.96724G	45.68	74.00	-28.32	58.09	3	Vertical	137	2.80	90	38.50	13.06	63.97				
AV	15.97736G	31.79	54.00	-22.21	44.26	3	Vertical	137	2.80	90	38.44	13.06	63.97				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX


5320MHz_TX

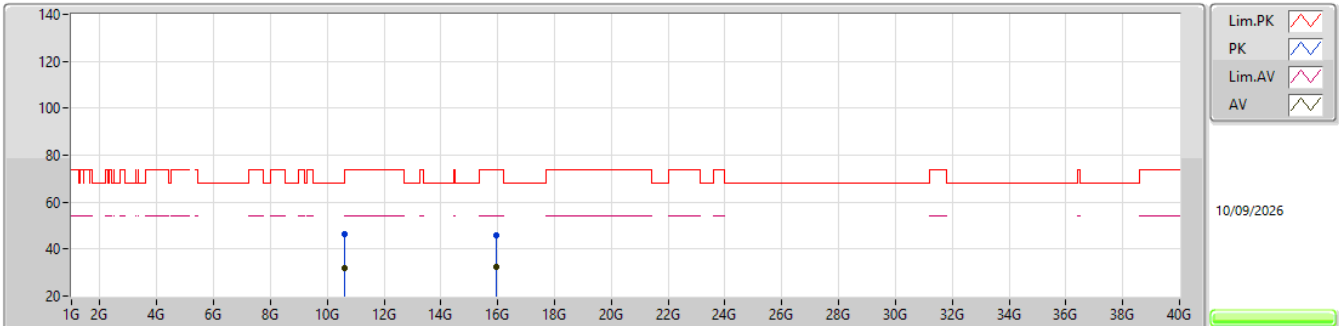EUT_Y_2TX
SET 90

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.62708G	46.13	74.00	-27.87	62.66	3	Horizontal	209.1	1.80	90	39.25	10.76	66.54			
AV	10.62084G	31.89	54.00	-22.11	48.43	3	Horizontal	209.1	1.80	90	39.24	10.76	66.54			
PK	15.95852G	45.81	74.00	-28.19	58.17	3	Horizontal	48	1.71	90	38.55	13.06	63.97			
AV	15.96656G	32.46	54.00	-21.54	44.87	3	Horizontal	48	1.71	90	38.50	13.06	63.97			

5.47-5.725GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5500MHz_TX

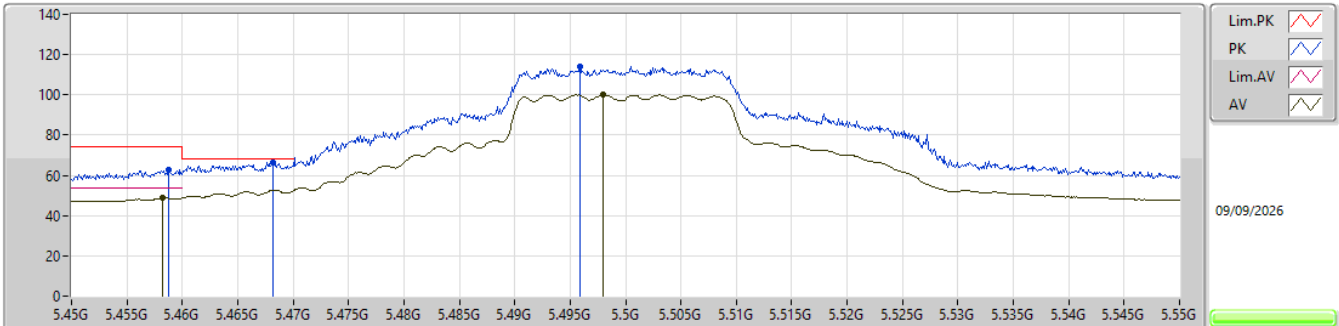


EUT_Y_2TX
SET 94
80\94\101\98\97\85\91\94
7.35\1.57\24.57\25.00\25.32\7.13\4.38\2.02

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4588G	62.98	74.00	-11.02	55.64	3	Vertical	63	2.88	94	33.65	7.60	33.91			
AV	5.4582G	48.69	54.00	-5.31	41.35	3	Vertical	63	2.88	94	33.65	7.60	33.91			
PK	5.4682G	66.18	68.20	-2.02	58.78	3	Vertical	63	2.88	94	33.71	7.60	33.91			
PK	5.4959G	113.86	Inf	-Inf	106.28	3	Vertical	63	2.88	94	33.88	7.61	33.91			
AV	5.498G	100.06	Inf	-Inf	92.47	3	Vertical	63	2.88	94	33.89	7.61	33.91			

5.47-5.725GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5500MHz_TX

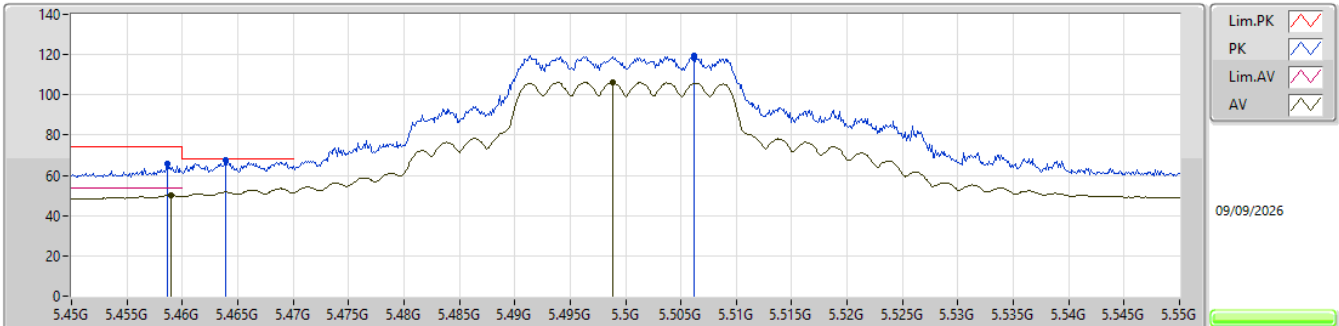


EUT_V_2TX
SET 87
94\81\93\87
-6.48\4.78\ -6.06\0.47

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4586G	65.93	74.00	-8.07	58.59	3	Horizontal	74	1.80	87	33.65	7.60	33.91			
AV	5.459G	50.09	54.00	-3.91	42.75	3	Horizontal	74	1.80	87	33.65	7.60	33.91			
PK	5.4639G	67.73	68.20	-0.47	60.36	3	Horizontal	74	1.80	87	33.68	7.60	33.91			
PK	5.5062G	119.27	Inf	-Inf	111.65	3	Horizontal	74	1.80	87	33.91	7.62	33.91			
AV	5.4988G	106.13	Inf	-Inf	98.54	3	Horizontal	74	1.80	87	33.89	7.61	33.91			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5500MHz_TX

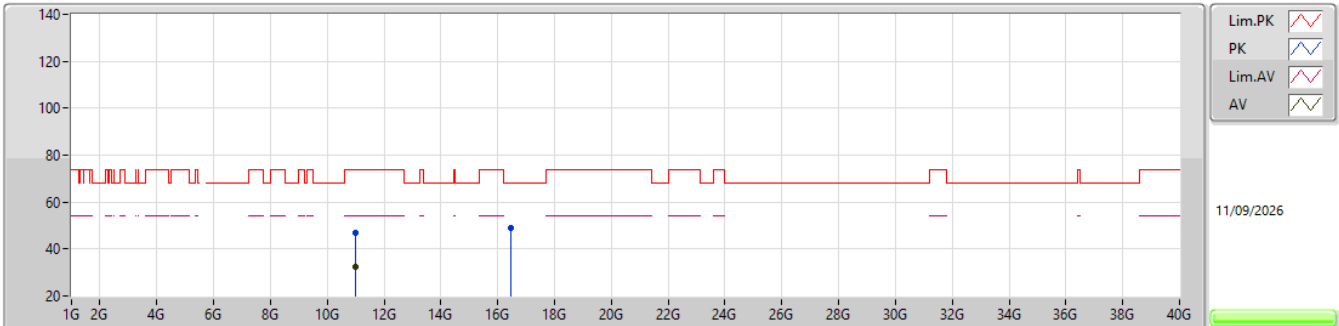EUT Y_2TX
SET 87

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.98648G	46.89	74.00	-27.11	62.84	3	Vertical	263	1.80	87	39.23	11.01	66.19			
AV	10.98732G	32.24	54.00	-21.76	48.19	3	Vertical	263	1.80	87	39.23	11.01	66.19			
PK	16.48112G	48.78	68.20	-19.42	59.34	3	Vertical	202	2.35	87	39.59	13.35	63.50			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5500MHz_TX

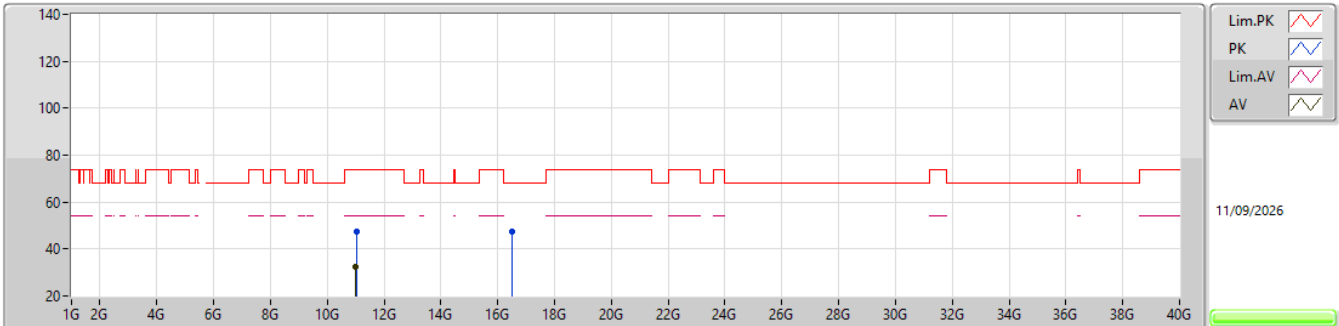EUT Y_2TX
SET 87

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.0178G	47.25	74.00	-26.75	63.21	3	Horizontal	0	1.80	87	39.20	11.03	66.19				
AV	10.98176G	32.49	54.00	-21.51	48.44	3	Horizontal	0	1.80	87	39.24	11.01	66.20				
PK	16.51536G	47.51	68.20	-20.69	57.92	3	Horizontal	34	1.80	87	39.70	13.37	63.48				

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TX

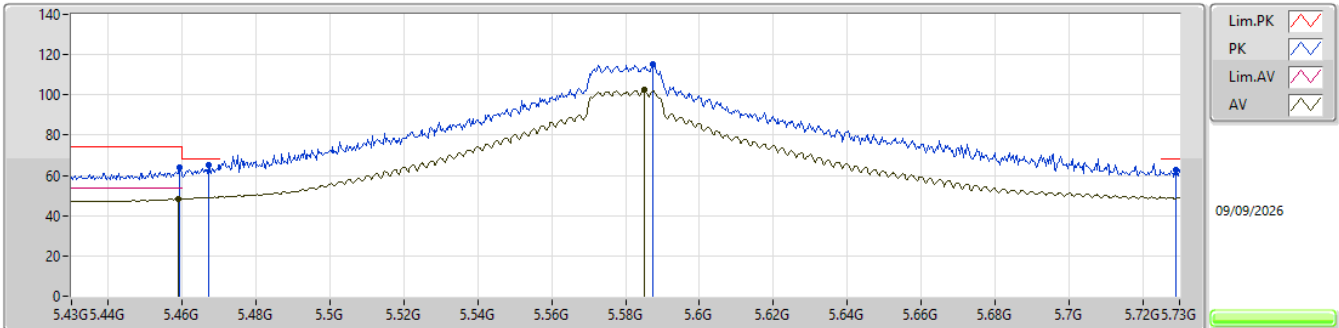


EUT Y_2TX
SET 103
80\95\102\105\104\103
7.70\1.14\2.70\1.19\1.86\2.97

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4591G	63.75	74.00	-10.25	56.41	3	Vertical	52	1.01	103	33.65	7.60	33.91			
AV	5.4588G	48.29	54.00	-5.71	40.95	3	Vertical	52	1.01	103	33.65	7.60	33.91			
PK	5.4672G	65.23	68.20	-2.97	57.84	3	Vertical	52	1.01	103	33.70	7.60	33.91			
PK	5.5875G	115.43	Inf	-Inf	107.66	3	Vertical	52	1.01	103	34.00	7.65	33.88			
AV	5.5851G	102.32	Inf	-Inf	94.55	3	Vertical	52	1.01	103	34.00	7.65	33.88			
PK	5.7291G	62.83	68.20	-5.37	54.73	3	Vertical	52	1.01	103	34.20	7.72	33.82			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TX

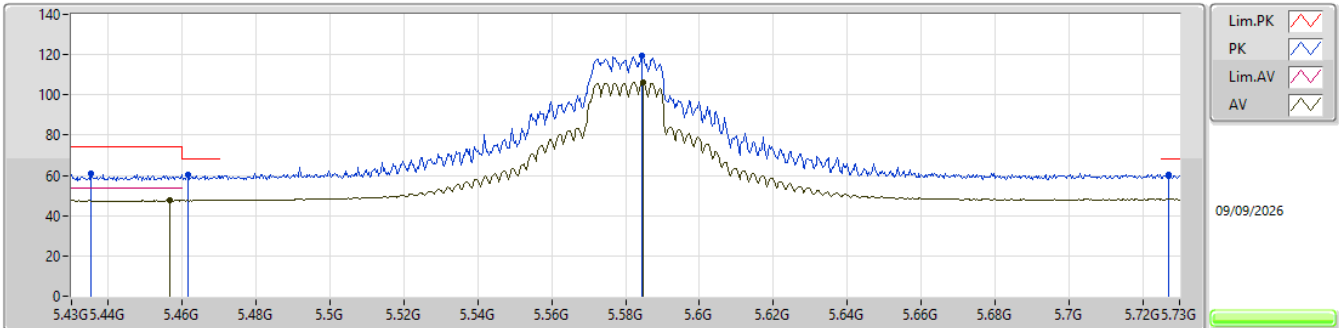


EUT_V_2TX
SET 93
103\86\102\94\90\92\93
-8.28\6.85\7.02\1.09\6.68\6.53\6.48

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4351G	60.84	74.00	-13.16	53.62	3	Horizontal	54	1.80	93	33.54	7.59	33.91			
PK	5.4615G	60.29	68.20	-7.91	52.93	3	Horizontal	54	1.80	93	33.67	7.60	33.91			
AV	5.4567G	47.52	54.00	-6.48	40.19	3	Horizontal	54	1.80	93	33.64	7.60	33.91			
PK	5.5845G	119.68	Inf	-Inf	111.91	3	Horizontal	54	1.80	93	34.00	7.65	33.88			
AV	5.5848G	106.09	Inf	-Inf	98.32	3	Horizontal	54	1.80	93	34.00	7.65	33.88			
PK	5.727G	60.41	68.20	-7.79	52.31	3	Horizontal	54	1.80	93	34.20	7.72	33.82			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5580MHz_TX

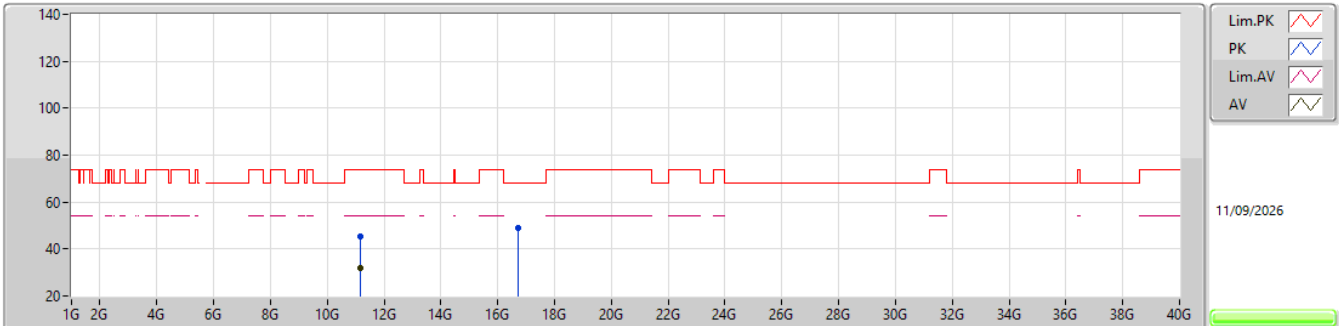EUT Y_2TX
SET 93

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15512G	45.32	74.00	-28.68	61.52	3	Vertical	175	1.80	93	38.90	11.13	66.23			
AV	11.17944G	31.96	54.00	-22.04	48.16	3	Vertical	175	1.80	93	38.90	11.14	66.24			
PK	16.73568G	48.96	68.20	-19.24	58.97	3	Vertical	346	2.20	93	40.04	13.50	63.55			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5580MHz_TX

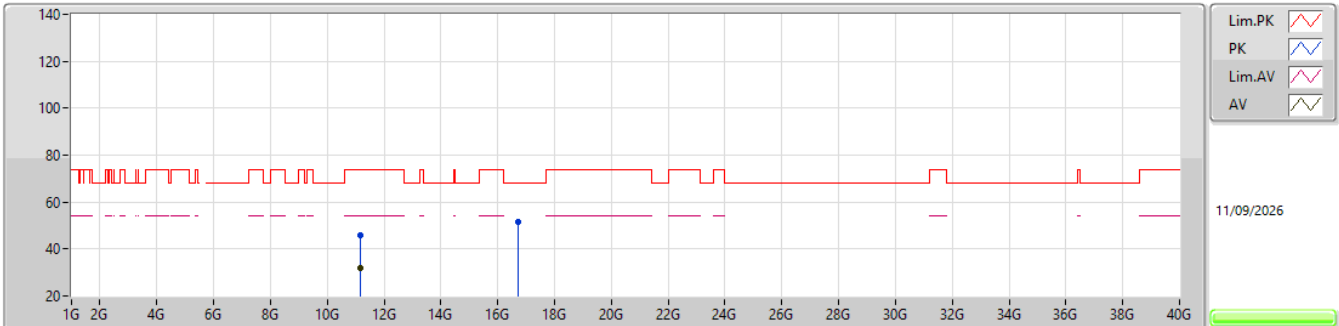EUT Y_2TX
SET 93

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.17936G	45.62	74.00	-28.38	61.82	3	Horizontal	3	1.80	93	38.90	11.14	66.24			
AV	11.179G	31.94	54.00	-22.06	48.14	3	Horizontal	3	1.80	93	38.90	11.14	66.24			
PK	16.73236G	51.53	68.20	-16.67	61.56	3	Horizontal	50	1.79	93	40.03	13.49	63.55			

5.47-5.725GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5700MHz_TX

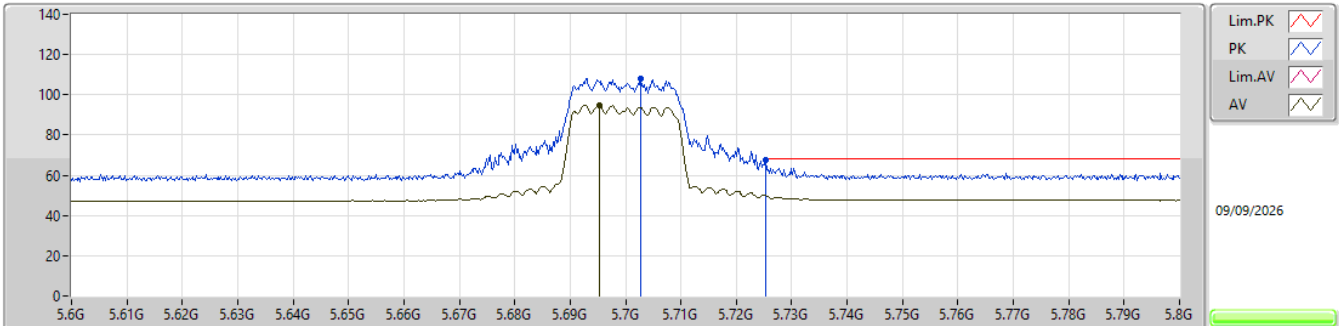


EUT_Y_2TX
SET 75
80\71\75
-4.42\3.38\0.32

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7028G	107.77	Inf	-Inf	99.69	3	Vertical	53	1.07	75	34.20	7.71	33.83			
AV	5.6952G	94.87	Inf	-Inf	86.82	3	Vertical	53	1.07	75	34.19	7.70	33.84			
PK	5.7254G	67.88	68.20	-0.32	59.78	3	Vertical	53	1.07	75	34.20	7.72	33.82			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TX

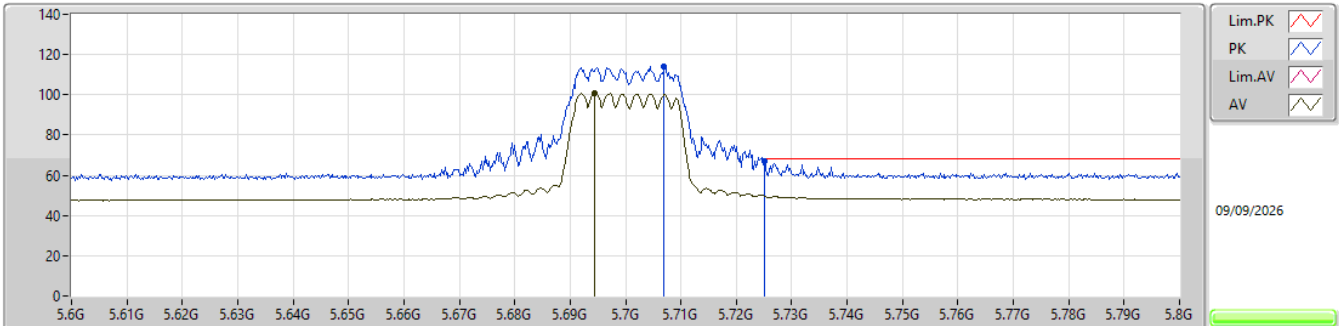


EUT_Y_2TX
SET 68
75\61\74\68\71\70\69\68
-6.93\6.77\4.45\0.53\1.87\1.63\0.13\0.96

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.707G	114.28	Inf	-Inf	106.20	3	Horizontal	50	2.02	68	34.20	7.71	33.83				
AV	5.6944G	100.56	Inf	-Inf	92.51	3	Horizontal	50	2.02	68	34.19	7.70	33.84				
PK	5.725G	67.24	68.20	-0.96	59.14	3	Horizontal	50	2.02	68	34.20	7.72	33.82				

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5700MHz_TX

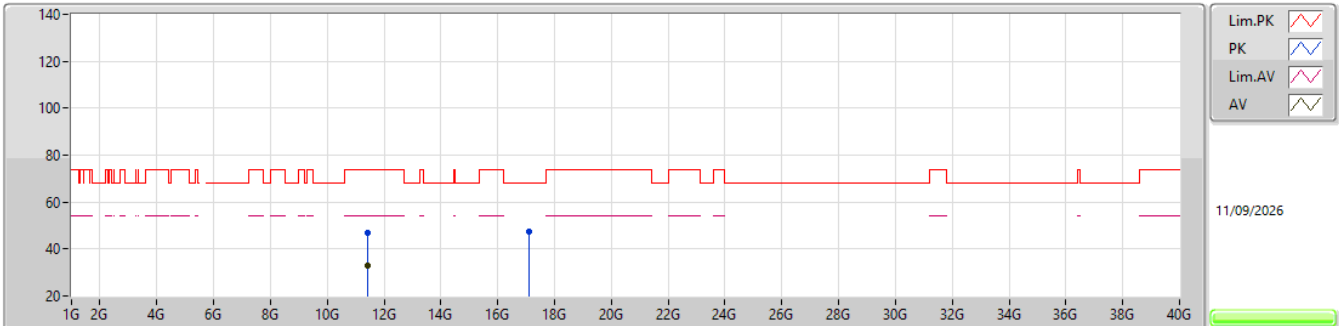EUT Y_2TX
SET 68

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40736G	46.73	74.00	-27.27	62.64	3	Vertical	327	1.53	68	39.10	11.30	66.31			
AV	11.40524G	32.78	54.00	-21.22	48.69	3	Vertical	327	1.53	68	39.10	11.30	66.31			
PK	17.09524G	47.29	68.20	-20.91	56.17	3	Vertical	0	1.80	68	41.18	13.71	63.77			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5700MHz_TX

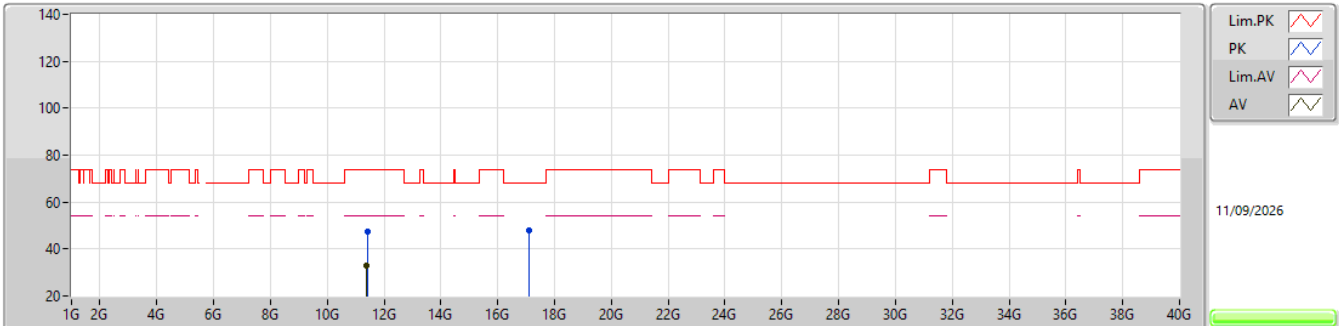EUT Y_2TX
SET 68

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40756G	47.64	74.00	-26.36	63.55	3	Horizontal	0	1.80	68	39.10	11.30	66.31			
AV	11.40008G	32.89	54.00	-21.11	48.80	3	Horizontal	0	1.80	68	39.10	11.30	66.31			
PK	17.09516G	47.83	68.20	-20.37	56.71	3	Horizontal	352	1.80	68	41.18	13.71	63.77			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

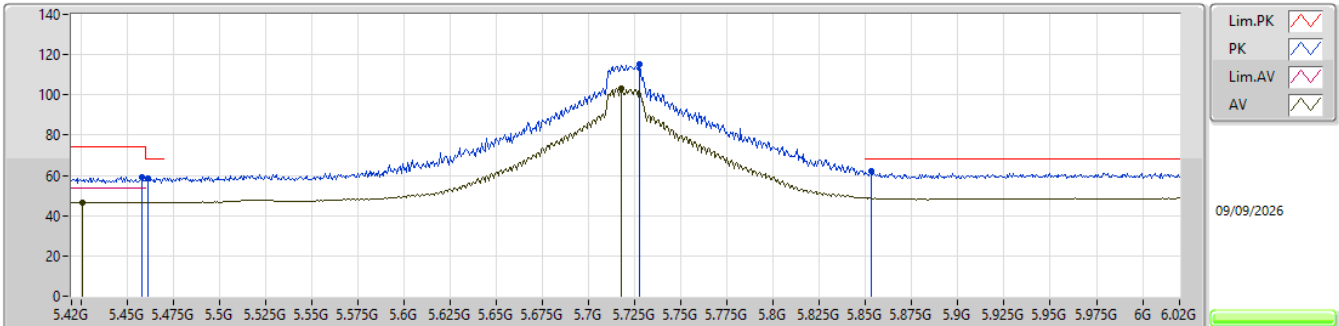


EUT_V_2TX
SET 108
80\93\108
6.79\6.58\6.30

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4584G	59.24	74.00	-14.76	51.90	3	Vertical	51	1.05	108	33.65	7.60	33.91			
AV	5.426G	46.41	54.00	-7.59	39.24	3	Vertical	51	1.05	108	33.50	7.58	33.91			
PK	5.4614G	58.42	68.20	-9.78	51.06	3	Vertical	51	1.05	108	33.67	7.60	33.91			
PK	5.7278G	115.14	Inf	-Inf	107.04	3	Vertical	51	1.05	108	34.20	7.72	33.82			
AV	5.7176G	103.23	Inf	-Inf	95.15	3	Vertical	51	1.05	108	34.20	7.71	33.83			
PK	5.8532G	61.90	68.20	-6.30	53.27	3	Vertical	51	1.05	108	34.63	7.78	33.78			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

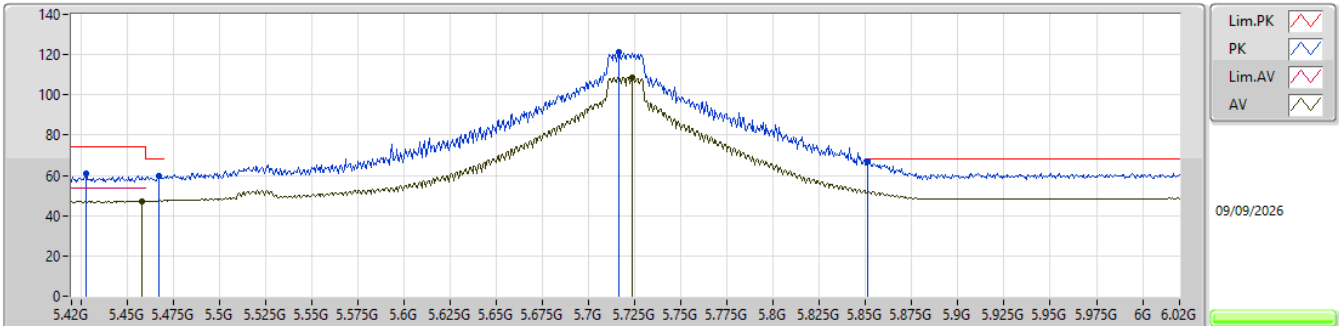


EUT_V_2TX
SET 101
108\106\105\104\103\102\101
-0.67\ -0.61\ -0.78\ -0.76\ -0.28\ -0.23\ 1.13

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4278G	60.84	74.00	-13.16	53.66	3	Horizontal	75	2.74	101	33.51	7.58	33.91			
PK	5.4674G	59.67	68.20	-8.53	52.28	3	Horizontal	75	2.74	101	33.70	7.60	33.91			
AV	5.4584G	47.14	54.00	-6.86	39.80	3	Horizontal	75	2.74	101	33.65	7.60	33.91			
PK	5.7164G	121.16	Inf	-Inf	113.08	3	Horizontal	75	2.74	101	34.20	7.71	33.83			
AV	5.7236G	108.75	Inf	-Inf	100.66	3	Horizontal	75	2.74	101	34.20	7.72	33.83			
PK	5.8508G	67.07	68.20	-1.13	58.46	3	Horizontal	75	2.74	101	34.61	7.78	33.78			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5720MHz Straddle 5.47-5.725GHz_TX

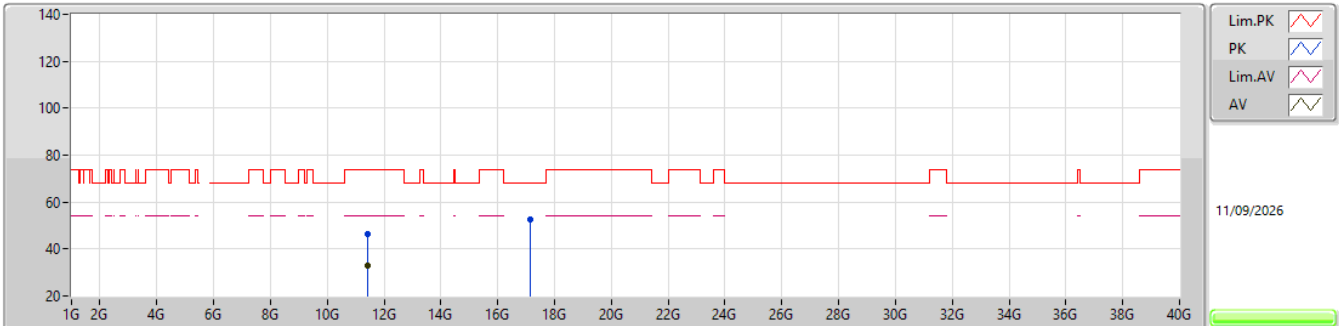EUT Y_2TX
SET 101

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.42184G	46.19	74.00	-27.81	62.09	3	Vertical	30	1.80	101	39.10	11.31	66.31				
AV	11.44332G	32.88	54.00	-21.12	48.77	3	Vertical	30	1.80	101	39.10	11.33	66.32				
PK	17.16048G	52.81	68.20	-15.39	61.62	3	Vertical	8	1.88	101	41.32	13.74	63.87				

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

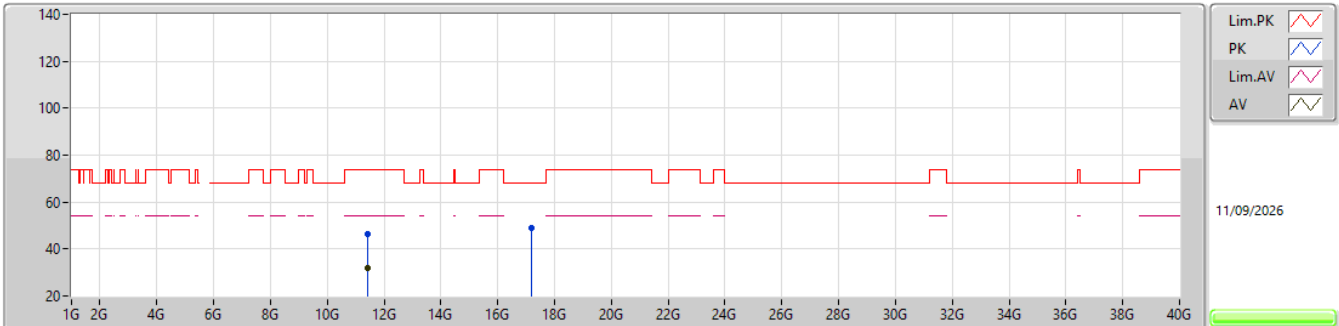


EUT Y_2TX
SET 101

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.43871G	46.30	74.00	-27.70	62.20	3	Horizontal	255	1.99	101	39.10	11.32	66.32				
AV	11.44186G	31.99	54.00	-22.01	47.89	3	Horizontal	255	1.99	101	39.10	11.32	66.32				
PK	17.16843G	49.07	68.20	-19.13	57.86	3	Horizontal	198	1.35	101	41.34	13.75	63.88				

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TX

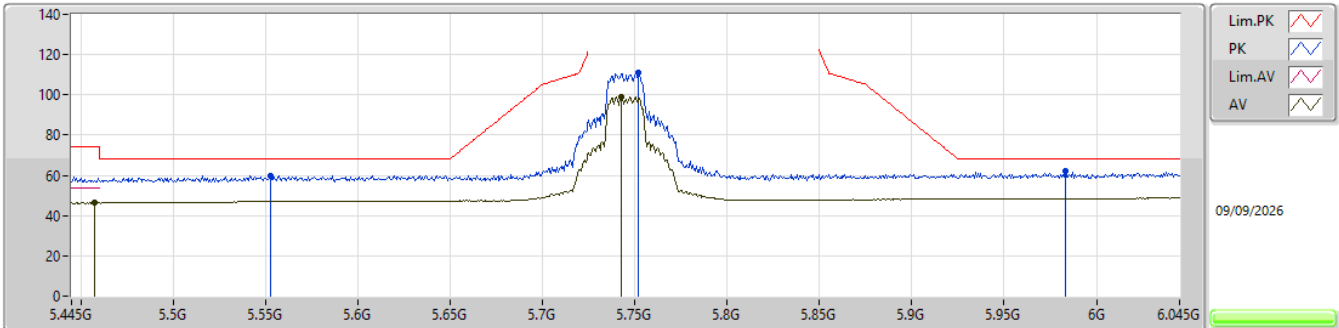


EUT_Y_2TX
SET 87
80\92\78\85\88\89\88\87
6.41\5.22\6.05\5.65\6.87\3.72\3.50\6.32

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.553G	59.95	68.20	-8.25	52.20	3	Vertical	53	1.02	87	34.00	7.64	33.89				
AV	5.4576G	46.28	54.00	-7.72	38.94	3	Vertical	53	1.02	87	33.65	7.60	33.91				
PK	5.7522G	111.02	Inf	-Inf	102.90	3	Vertical	53	1.02	87	34.20	7.73	33.81				
AV	5.7426G	98.93	Inf	-Inf	90.83	3	Vertical	53	1.02	87	34.20	7.72	33.82				
PK	5.9832G	61.88	68.20	-6.32	52.47	3	Vertical	53	1.02	87	35.27	7.87	33.73				

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5745MHz_TX

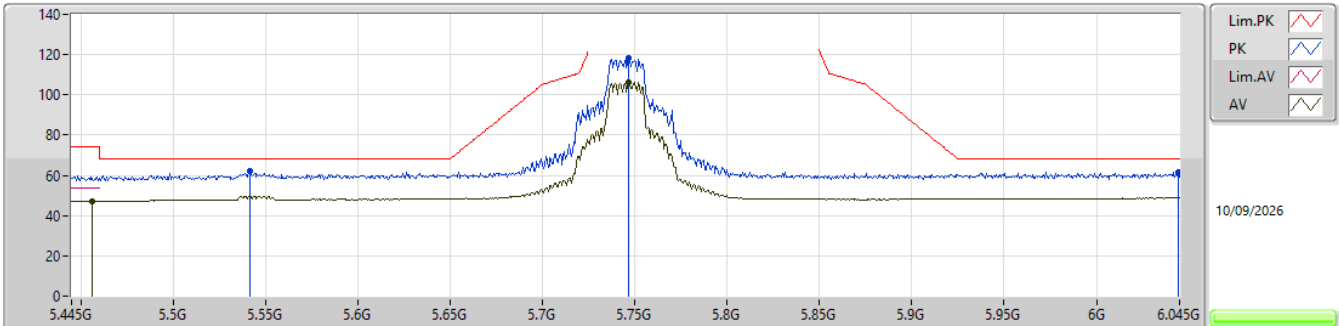


EUT_V_2TX
SET 87
87
6.04

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.5416G	62.16	68.20	-6.04	54.44	3	Horizontal	53	2.04	87	33.98	7.63	33.89			
AV	5.4564G	47.15	54.00	-6.85	39.82	3	Horizontal	53	2.04	87	33.64	7.60	33.91			
PK	5.7468G	118.46	Inf	-Inf	110.35	3	Horizontal	53	2.04	87	34.20	7.73	33.82			
AV	5.7468G	106.01	Inf	-Inf	97.90	3	Horizontal	53	2.04	87	34.20	7.73	33.82			
PK	6.0444G	61.68	68.20	-6.52	52.03	3	Horizontal	53	2.04	87	35.48	7.90	33.73			

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX


5745MHz_TX

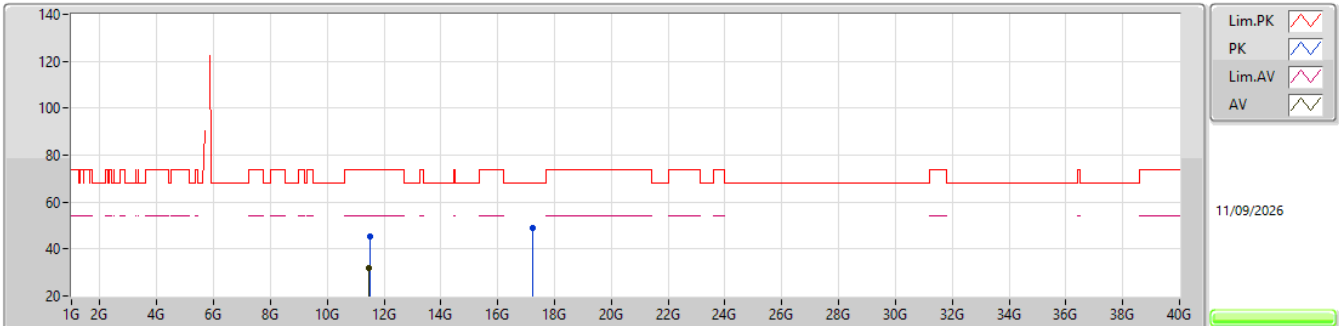EUT Y_2TX
SET 87

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.50104G	45.22	74.00	-28.78	61.09	3	Vertical	276	1.22	87	39.10	11.37	66.34			
AV	11.47791G	31.72	54.00	-22.28	47.60	3	Vertical	276	1.22	87	39.10	11.35	66.33			
PK	17.23252G	49.14	68.20	-19.06	57.73	3	Vertical	14	1.80	87	41.60	13.78	63.97			

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5745MHz_TX

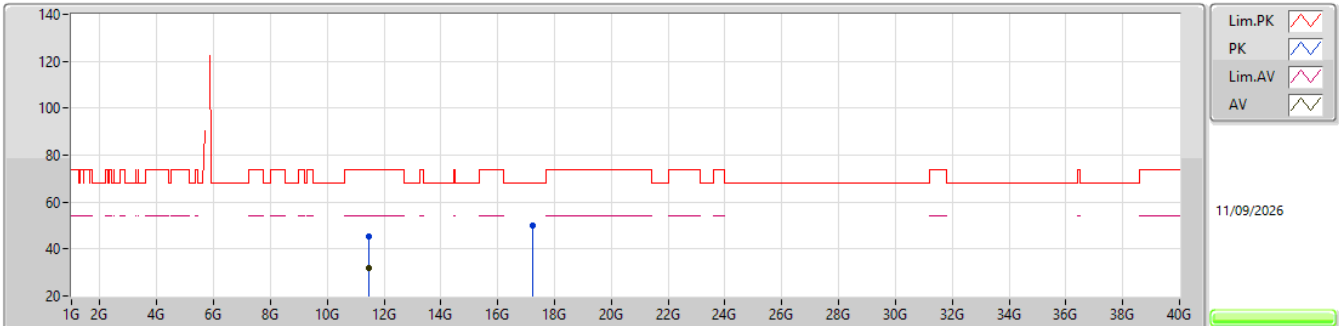


EUT Y_2TX
SET 87

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.47632G	45.53	74.00	-28.47	61.41	3	Horizontal	110	2.99	87	39.10	11.35	66.33			
AV	11.475G	31.76	54.00	-22.24	47.64	3	Horizontal	110	2.99	87	39.10	11.35	66.33			
PK	17.2418G	50.25	68.20	-17.95	58.80	3	Horizontal	222	1.80	87	41.65	13.79	63.99			

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5785MHz_TX

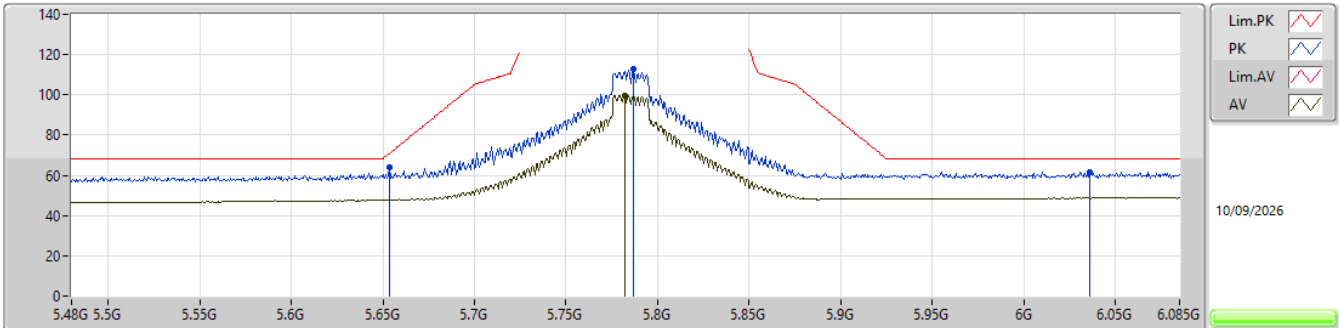


EUT Y_2TX
SET 108
80\92\108
6.35\6.71\6.41

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.65364G	63.69	70.89	-7.20	55.75	3	Vertical	320	2.20	108	34.11	7.68	33.85				
PK	5.78674G	112.91	Inf	-Inf	104.70	3	Vertical	320	2.20	108	34.27	7.74	33.80				
AV	5.7819G	99.68	Inf	-Inf	91.48	3	Vertical	320	2.20	108	34.26	7.74	33.80				
PK	6.036G	61.79	68.20	-6.41	52.18	3	Vertical	320	2.20	108	35.44	7.90	33.73				

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5785MHz_TX

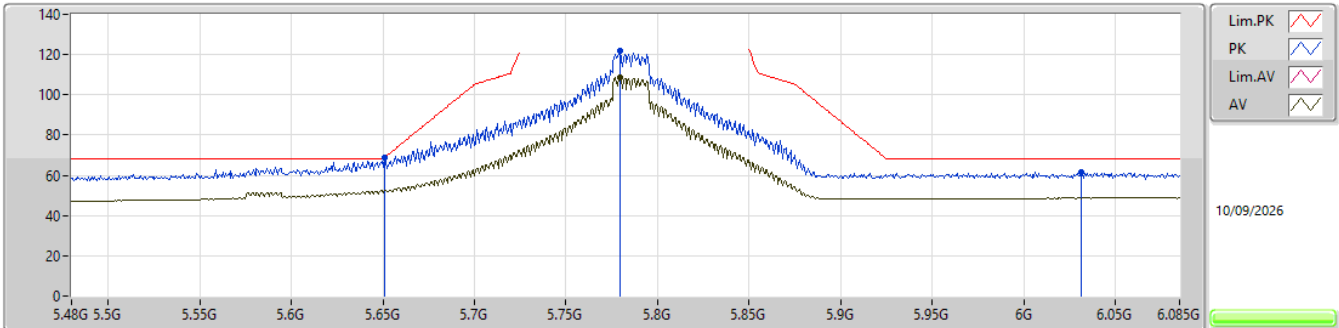


EUT Y_2TX
SET 104
108\107\106\105\104
-0.23\ -1.14\ -1.25\ -2.47\ 0.08

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.65122G	69.02	69.10	-0.08	61.09	3	Horizontal	50	1.89	104	34.10	7.68	33.85				
PK	5.77948G	121.73	Inf	-Inf	113.53	3	Horizontal	50	1.89	104	34.26	7.74	33.80				
AV	5.77948G	108.49	Inf	-Inf	100.29	3	Horizontal	50	1.89	104	34.26	7.74	33.80				
PK	6.03116G	61.44	68.20	-6.76	51.86	3	Horizontal	50	1.89	104	35.42	7.89	33.73				

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5785MHz_TX

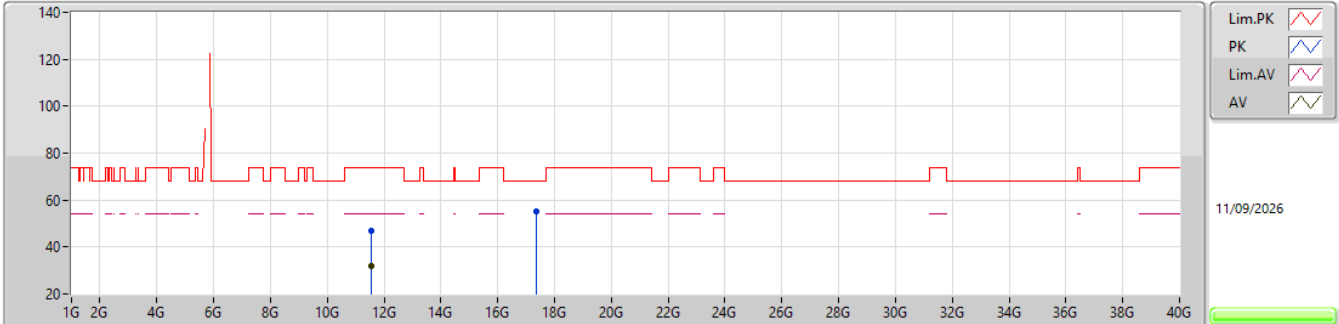


EUT Y_2TX
SET 104

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.56067G	46.70	74.00	-27.30	62.56	3	Vertical	328	2.44	104	39.10	11.41	66.37				
AV	11.55806G	31.99	54.00	-22.01	47.85	3	Vertical	328	2.44	104	39.10	11.41	66.37				
PK	17.35472G	55.35	68.20	-12.85	63.72	3	Vertical	144	1.86	104	41.92	13.86	64.15				

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX


5785MHz_TX

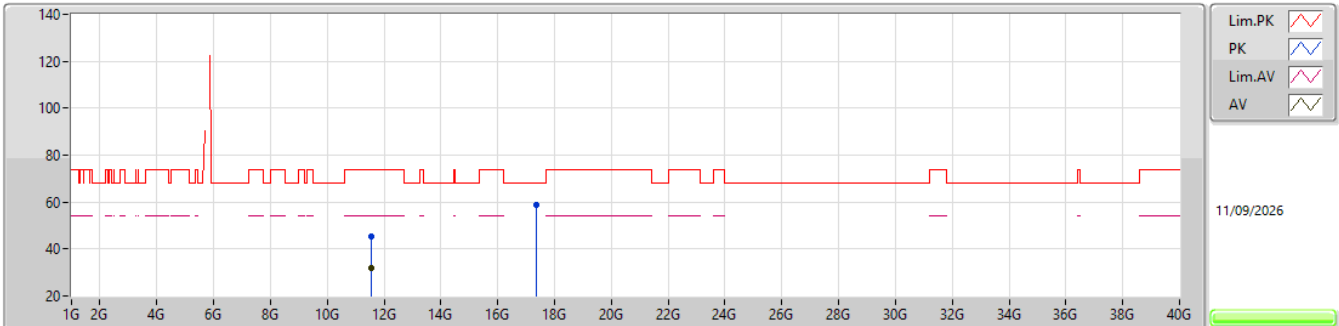EUT Y_2TX
SET 104

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.55722G	45.44	74.00	-28.56	61.31	3	Horizontal	117	1.16	104	39.10	11.40	66.37				
AV	11.55806G	32.00	54.00	-22.00	47.86	3	Horizontal	117	1.16	104	39.10	11.41	66.37				
PK	17.34768G	58.95	68.20	-9.25	67.34	3	Horizontal	304	1.78	104	41.90	13.85	64.14				

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5825MHz_TX

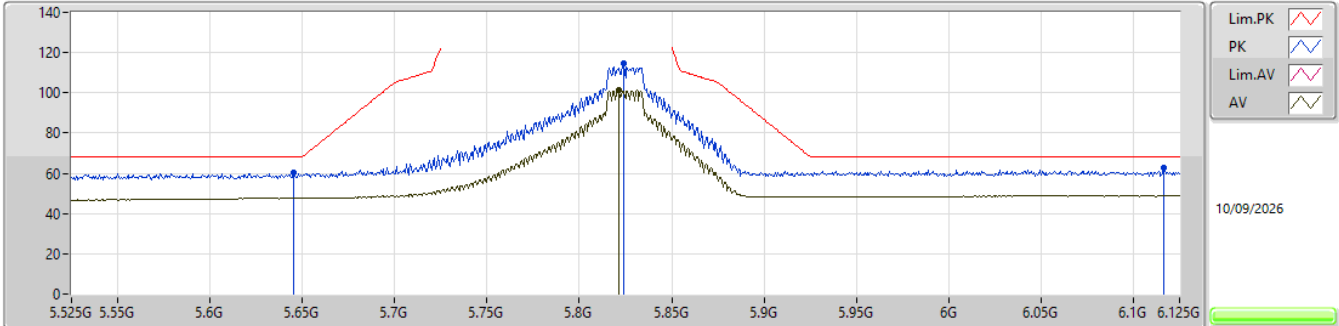


EUT Y_2TX
SET 108
80\91\108
5.95\6.37\5.65

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.645G	60.22	68.20	-7.98	52.30	3	Vertical	334	2.85	108	34.09	7.68	33.85				
PK	5.8238G	114.39	Inf	-Inf	105.97	3	Vertical	334	2.85	108	34.44	7.77	33.79				
AV	5.8214G	101.17	Inf	-Inf	92.77	3	Vertical	334	2.85	108	34.43	7.76	33.79				
PK	6.1166G	62.55	68.20	-5.65	52.97	3	Vertical	334	2.85	108	35.40	7.93	33.75				

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5825MHz_TX

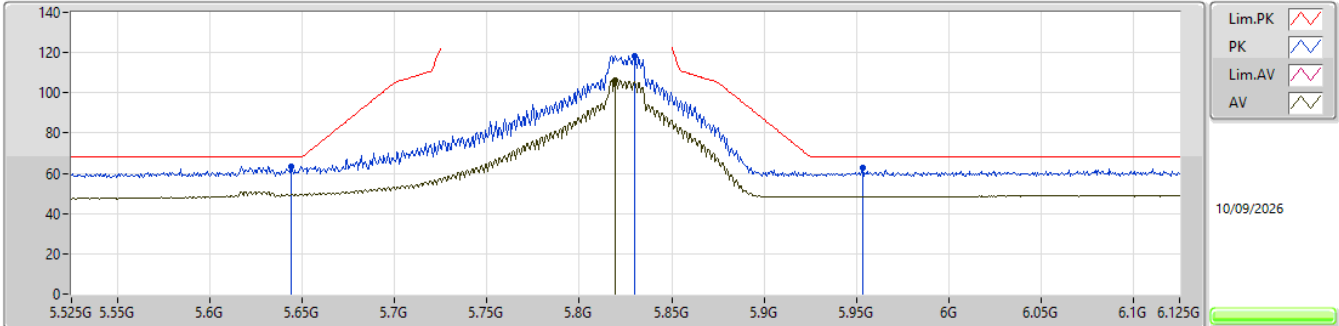


EUT Y_2TX
SET 108
108
4.83

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.6438G	63.37	68.20	-4.83	55.46	3	Horizontal	53	1.77	108	34.09	7.68	33.86				
PK	5.8298G	118.29	Inf	-Inf	109.82	3	Horizontal	53	1.77	108	34.48	7.77	33.78				
AV	5.8196G	106.22	Inf	-Inf	97.83	3	Horizontal	53	1.77	108	34.42	7.76	33.79				
PK	5.9534G	63.05	68.20	-5.15	53.73	3	Horizontal	53	1.77	108	35.21	7.85	33.74				

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5825MHz_TX

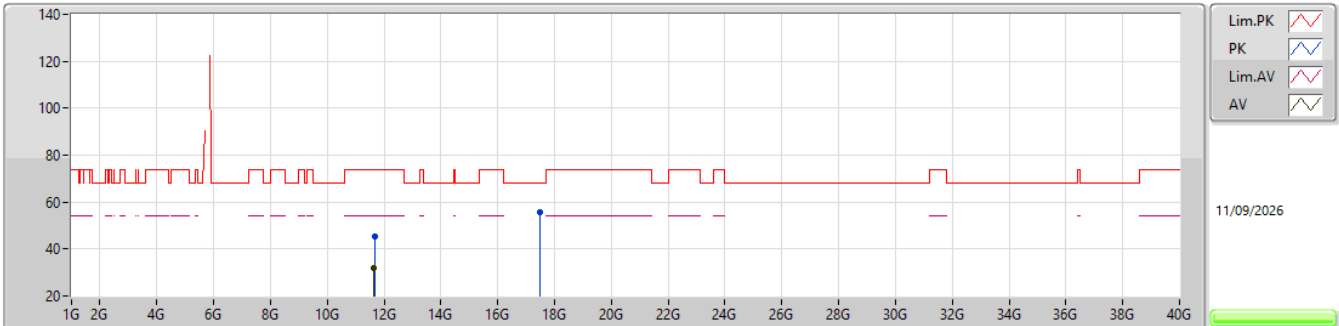


EUT Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.66098G	45.41	74.00	-28.59	61.36	3	Vertical	172	2.65	108	39.00	11.48	66.43			
AV	11.64745G	31.72	54.00	-22.28	47.66	3	Vertical	172	2.65	108	39.01	11.47	66.42			
PK	17.47792G	55.89	68.20	-12.31	64.26	3	Vertical	4	1.80	108	42.04	13.93	64.34			

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5825MHz_TX

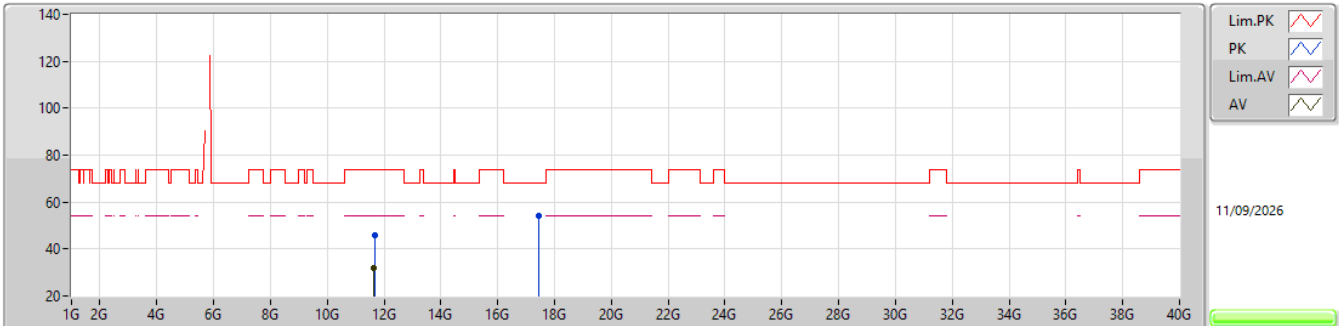


EUT Y_2TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.65882G	45.67	74.00	-28.33	61.63	3	Horizontal	47	2.04	108	39.00	11.47	66.43				
AV	11.64502G	31.73	54.00	-22.27	47.67	3	Horizontal	47	2.04	108	39.01	11.47	66.42				
PK	17.46368G	54.16	68.20	-14.04	62.49	3	Horizontal	354	1.80	108	42.07	13.92	64.32				

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5190MHz_TX

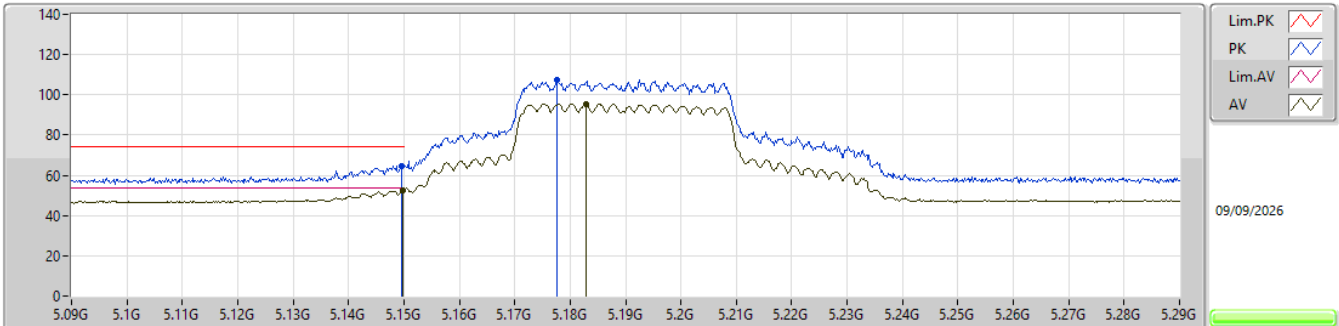


EUT_Y_2TX
SET 84
80\90\78\84\87\86\85\84
5.00\ -7.01\6.23\0.89\ -2.84\ -2.36\ -0.79\1.38

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1496G	64.61	74.00	-9.39	58.17	3	Vertical	60	2.90	84	32.90	7.47	33.93				
AV	5.1498G	52.62	54.00	-1.38	46.18	3	Vertical	60	2.90	84	32.90	7.47	33.93				
PK	5.1776G	107.46	Inf	-Inf	101.02	3	Vertical	60	2.90	84	32.90	7.47	33.93				
AV	5.1828G	95.60	Inf	-Inf	89.16	3	Vertical	60	2.90	84	32.90	7.47	33.93				

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5190MHz_TX

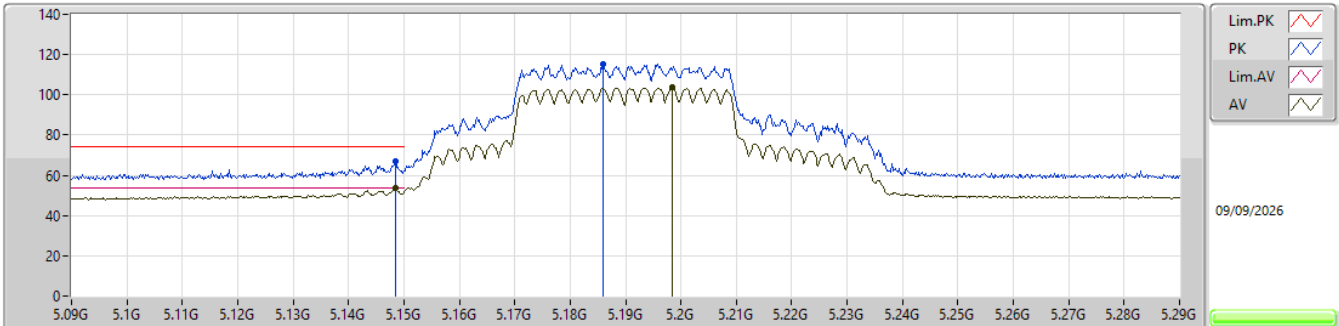


EUT_Y_2TX
SET 78
84\69\83\76\79\78
-7.19\4.20\ -5.63\2.01\ -0.45\0.51

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1484G	67.14	74.00	-6.86	60.70	3	Horizontal	70	1.91	78	32.90	7.47	33.93			
AV	5.1484G	53.49	54.00	-0.51	47.05	3	Horizontal	70	1.91	78	32.90	7.47	33.93			
PK	5.186G	115.24	Inf	-Inf	108.80	3	Horizontal	70	1.91	78	32.90	7.47	33.93			
AV	5.1984G	103.60	Inf	-Inf	97.16	3	Horizontal	70	1.91	78	32.90	7.47	33.93			

5.15-5.25GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5190MHz_TX

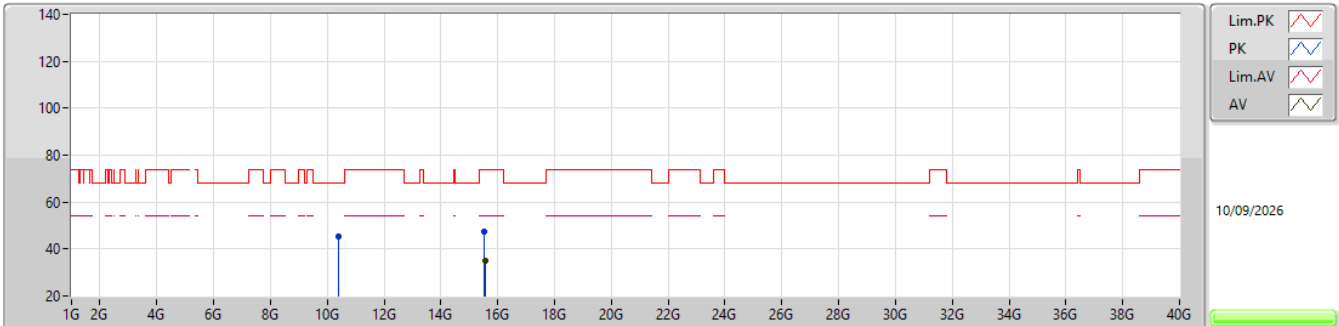EUT Y_2TX
SET 78

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.38032G	45.51	68.20	-22.69	62.86	3	Vertical	360	1.80	78	38.90	10.59	66.84			
PK	15.54208G	47.60	74.00	-26.40	59.91	3	Vertical	185	1.80	78	38.70	12.92	63.93			
AV	15.54984G	34.96	54.00	-19.04	47.27	3	Vertical	185	1.80	78	38.70	12.92	63.93			

5.15-5.25GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5190MHz_TX

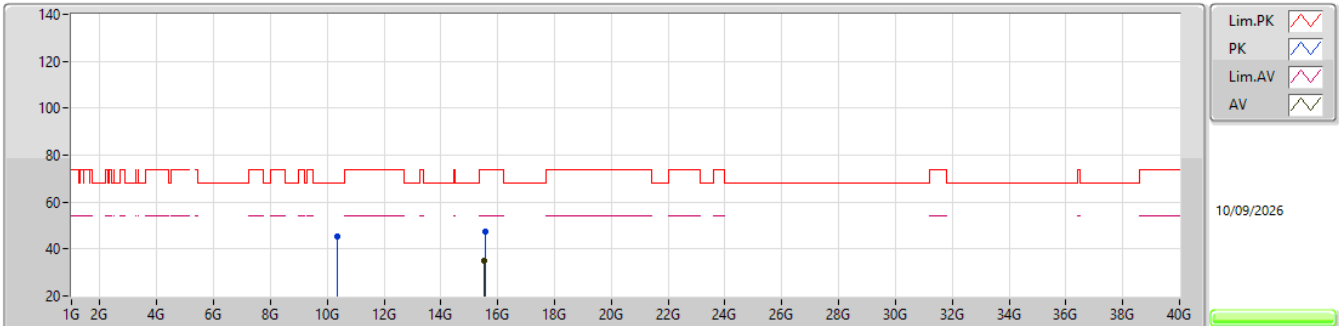EUT Y_2TX
SET 78

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36376G	45.48	68.20	-22.72	62.86	3	Horizontal	256	1.80	78	38.90	10.58	66.86			
PK	15.54592G	47.25	74.00	-26.75	59.56	3	Horizontal	64	1.08	78	38.70	12.92	63.93			
AV	15.536G	34.99	54.00	-19.01	47.31	3	Horizontal	64	1.08	78	38.70	12.91	63.93			

5.15-5.25GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5230MHz_TX

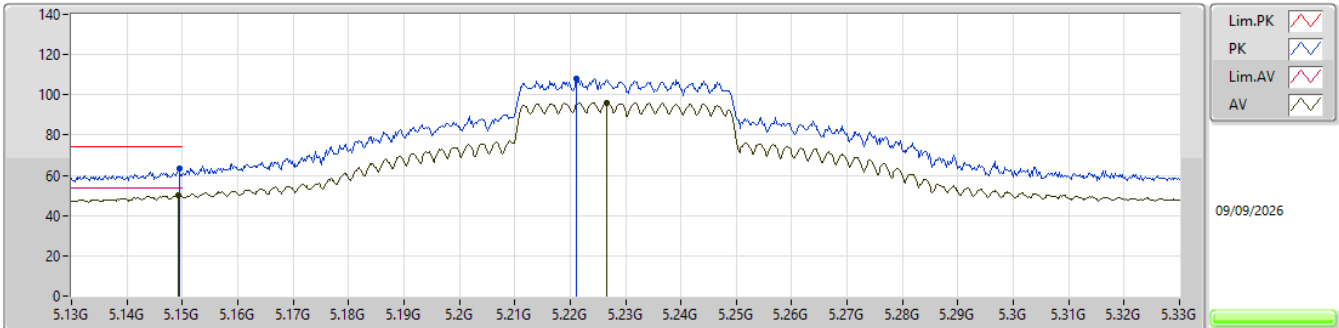


EUT_Y_2TX
SET 97
80\94\108\101\98\97
7.30\4.77\13.82\13.96\13.80\3.71

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1494G	63.37	74.00	-10.63	56.93	3	Vertical	45	2.22	97	32.90	7.47	33.93				
AV	5.1492G	50.29	54.00	-3.71	43.85	3	Vertical	45	2.22	97	32.90	7.47	33.93				
PK	5.2212G	107.81	Inf	-Inf	101.28	3	Vertical	45	2.22	97	32.98	7.48	33.93				
AV	5.2266G	96.18	Inf	-Inf	89.62	3	Vertical	45	2.22	97	33.01	7.48	33.93				

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5230MHz_TX

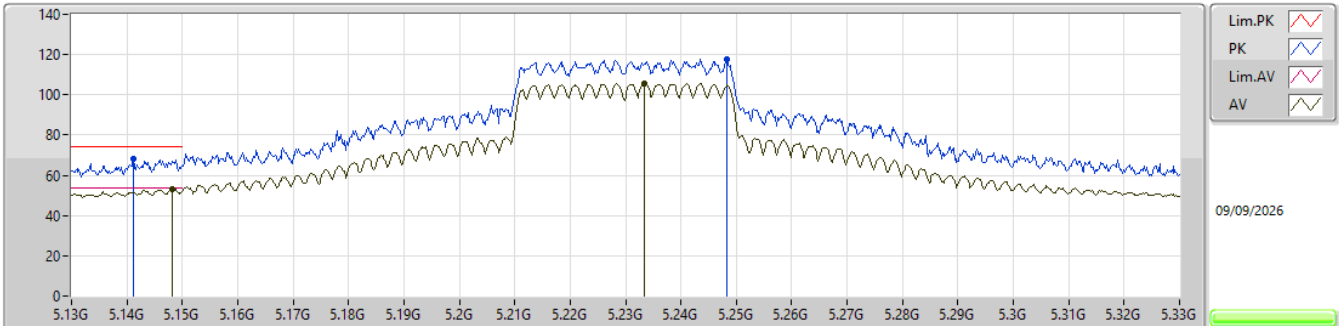


EUT_V_2TX
SET 86
97\81\89\85\87\86
-7.57\3.90\ -1.78\0.94\ -0.43\0.71

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1412G	67.92	74.00	-6.08	61.50	3	Horizontal	70	1.91	86	32.88	7.47	33.93			
AV	5.1482G	53.29	54.00	-0.71	46.85	3	Horizontal	70	1.91	86	32.90	7.47	33.93			
PK	5.2484G	117.91	Inf	-Inf	111.26	3	Horizontal	70	1.91	86	33.09	7.49	33.93			
AV	5.2334G	105.52	Inf	-Inf	98.93	3	Horizontal	70	1.91	86	33.03	7.49	33.93			

5.15-5.25GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5230MHz_TX

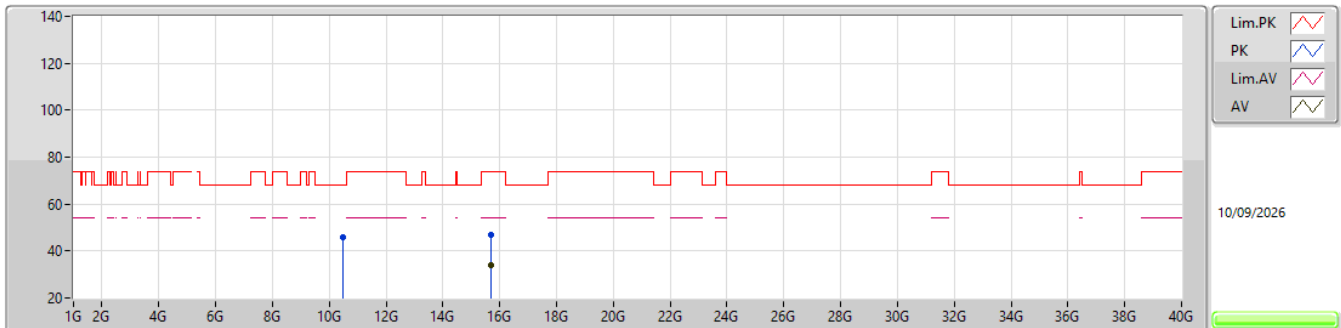


EUT Y_2TX
SET 86

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.49128G	46.02	68.20	-22.18	62.95	3	Vertical	1	1.95	86	39.07	10.67	66.67			
PK	15.67744G	46.77	74.00	-27.23	59.50	3	Vertical	344.1	1.80	86	38.25	12.96	63.94			
AV	15.67784G	34.05	54.00	-19.95	46.77	3	Vertical	344.1	1.80	86	38.26	12.96	63.94			

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX


5230MHz_TX

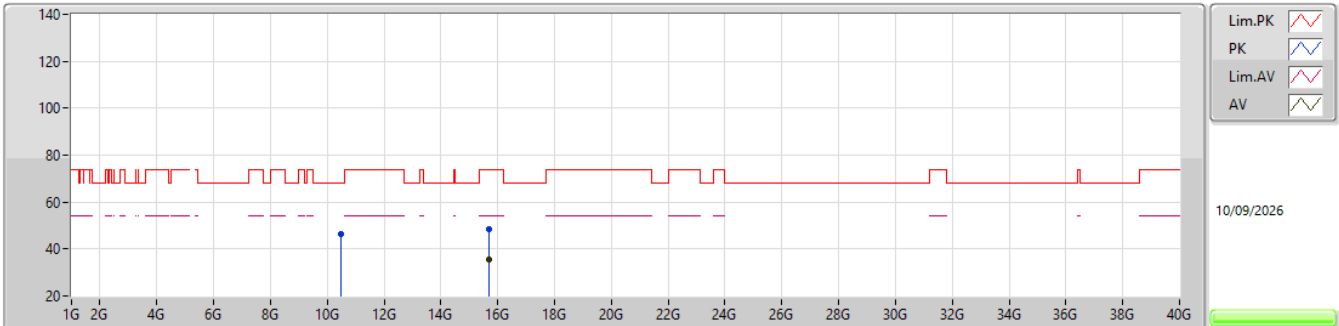EUT Y_2TX
SET 86

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.49136G	46.30	68.20	-21.90	63.23	3	Horizontal	63	1.80	86	39.07	10.67	66.67			
PK	15.6984G	48.25	74.00	-25.75	60.93	3	Horizontal	296	1.78	86	38.30	12.97	63.95			
AV	15.68608G	35.33	54.00	-18.67	48.04	3	Horizontal	296	1.78	86	38.27	12.96	63.94			

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5270MHz_TX

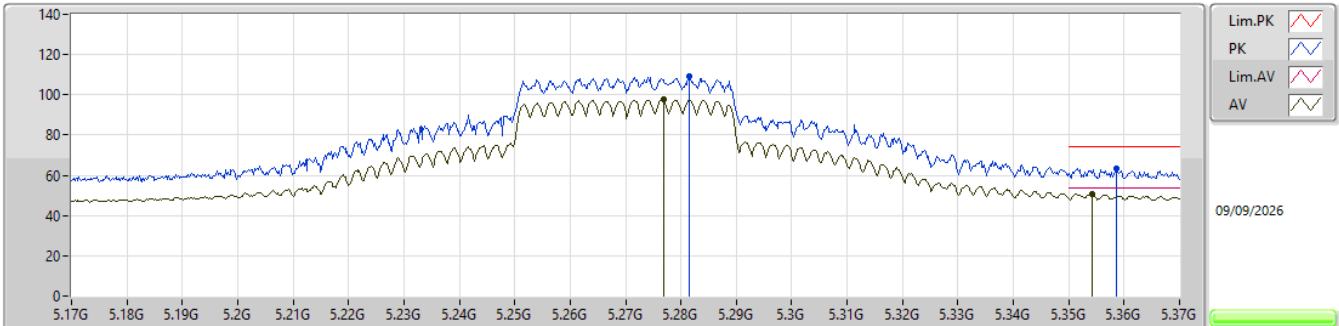


EUT_Y_2TX
SET 95
80\92\108\100\96\94\95
6.41\4.20\17.47\16.75\10.32\3.69\3.45

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2814G	109.37	Inf	-Inf	102.62	3	Vertical	306	2.96	95	33.16	7.51	33.92				
AV	5.2768G	97.57	Inf	-Inf	90.83	3	Vertical	306	2.96	95	33.15	7.51	33.92				
PK	5.3586G	63.30	74.00	-10.70	56.35	3	Vertical	306	2.96	95	33.32	7.55	33.92				
AV	5.3542G	50.55	54.00	-3.45	43.61	3	Vertical	306	2.96	95	33.31	7.55	33.92				

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5270MHz_TX

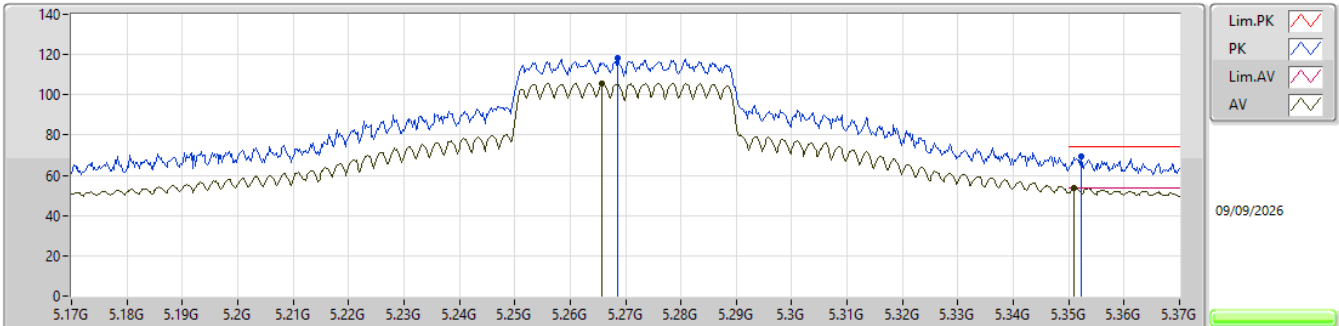


EUT_Y_2TX
SET 88
95\84\89\87\88
-5.22\2.63\0.43\0.80\0.11

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.2686G	117.99	Inf	-Inf	111.27	3	Horizontal	70	1.87	88	33.14	7.50	33.92			
AV	5.2658G	105.82	Inf	-Inf	99.11	3	Horizontal	70	1.87	88	33.13	7.50	33.92			
PK	5.3522G	69.44	74.00	-4.56	62.51	3	Horizontal	70	1.87	88	33.30	7.55	33.92			
AV	5.351G	53.89	54.00	-0.11	46.96	3	Horizontal	70	1.87	88	33.30	7.55	33.92			

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX


5270MHz_TX

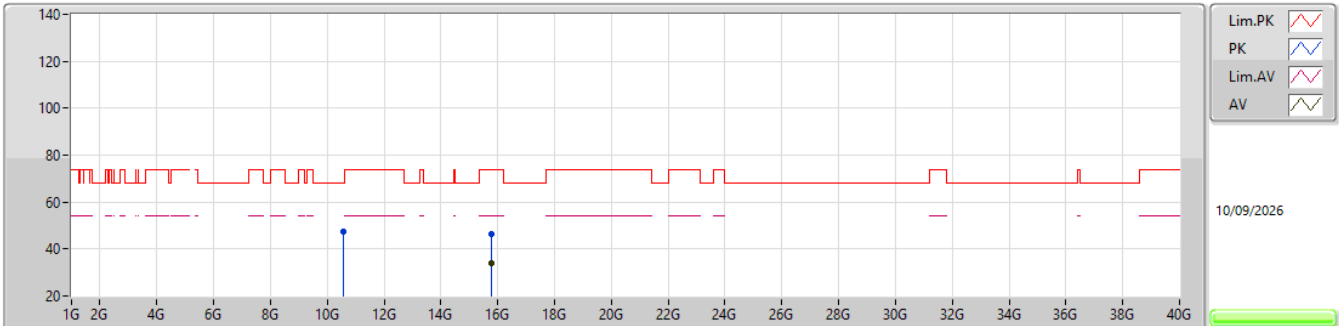EUT Y_2TX
SET 88

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.57248G	47.28	68.20	-20.92	63.94	3	Vertical	320	1.22	88	39.20	10.73	66.59			
PK	15.79392G	46.30	74.00	-27.70	58.85	3	Vertical	10	2.15	88	38.40	13.00	63.95			
AV	15.79192G	34.00	54.00	-20.00	46.55	3	Vertical	10	2.15	88	38.40	13.00	63.95			

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX


5270MHz_TX

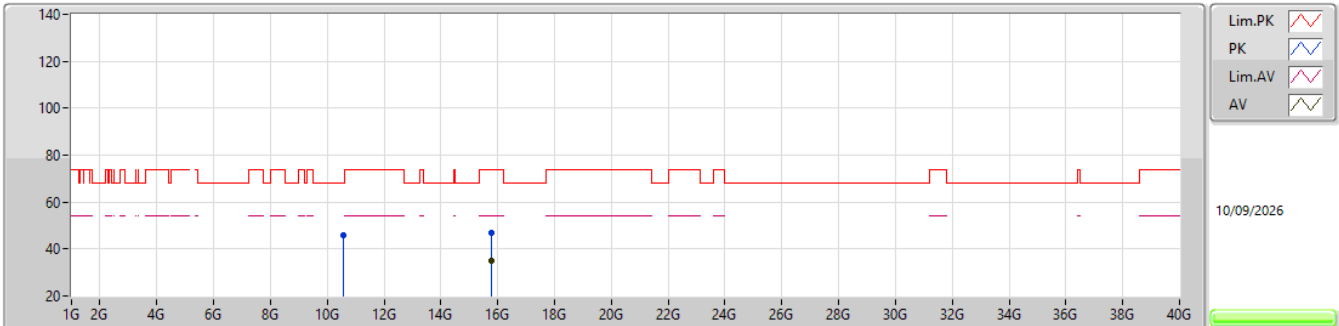EUT Y_2TX
SET 88

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.56256G	45.91	68.20	-22.29	62.59	3	Horizontal	153.1	1.80	88	39.20	10.72	66.60			
PK	15.79376G	46.91	74.00	-27.09	59.46	3	Horizontal	0	1.80	88	38.40	13.00	63.95			
AV	15.79272G	34.80	54.00	-19.20	47.35	3	Horizontal	0	1.80	88	38.40	13.00	63.95			

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5310MHz_TX

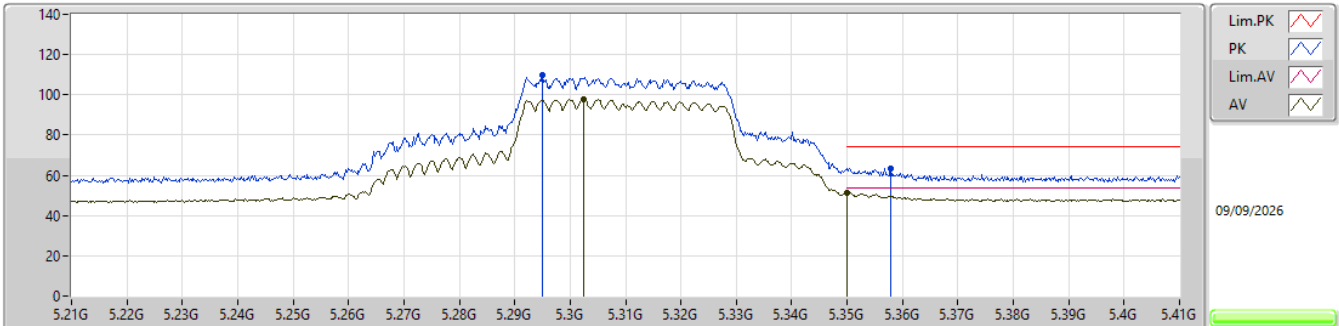


EUT_Y_2TX
SET 87
80\92\78\85\88\87
6.20\5.63\6.23\4.29\0.46\2.81

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.295G	109.57	Inf	-Inf	102.78	3	Vertical	58	2.94	87	33.19	7.52	33.92				
AV	5.3024G	97.65	Inf	-Inf	90.85	3	Vertical	58	2.94	87	33.20	7.52	33.92				
PK	5.3578G	63.64	74.00	-10.36	56.69	3	Vertical	58	2.94	87	33.32	7.55	33.92				
AV	5.35G	51.19	54.00	-2.81	44.27	3	Vertical	58	2.94	87	33.30	7.54	33.92				

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5310MHz_TX

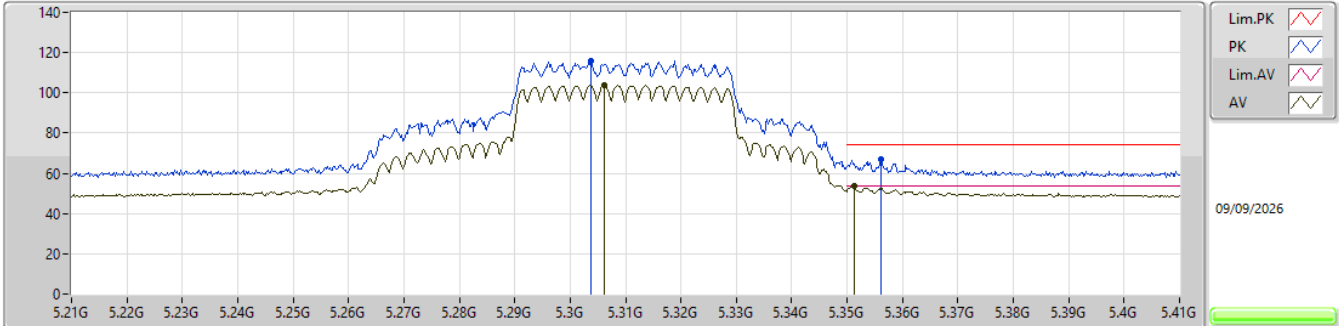


EUT_V_2TX
SET 83
87\74\86\80\83\84\83
-6.31\5.12\4.72\3.03\0.78\1.17\0.47

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3038G	115.93	Inf	-Inf	109.12	3	Horizontal	300	2.00	83	33.21	7.52	33.92			
AV	5.3062G	103.79	Inf	-Inf	96.98	3	Horizontal	300	2.00	83	33.21	7.52	33.92			
PK	5.3562G	67.12	74.00	-6.88	60.18	3	Horizontal	300	2.00	83	33.31	7.55	33.92			
AV	5.3512G	53.53	54.00	-0.47	46.60	3	Horizontal	300	2.00	83	33.30	7.55	33.92			

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX


5310MHz_TX

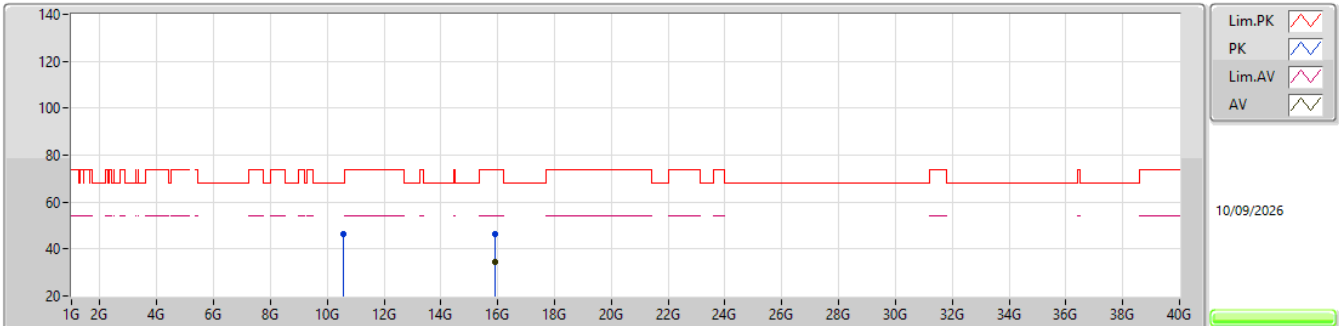EUT Y_2TX
SET 83

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.58136G	46.24	68.20	-21.96	62.89	3	Vertical	299	1.80	83	39.20	10.73	66.58			
PK	15.9036G	46.49	74.00	-27.51	58.62	3	Vertical	292	2.27	83	38.79	13.04	63.96			
AV	15.89176G	34.27	54.00	-19.73	46.45	3	Vertical	292	2.27	83	38.75	13.03	63.96			

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5310MHz_TX

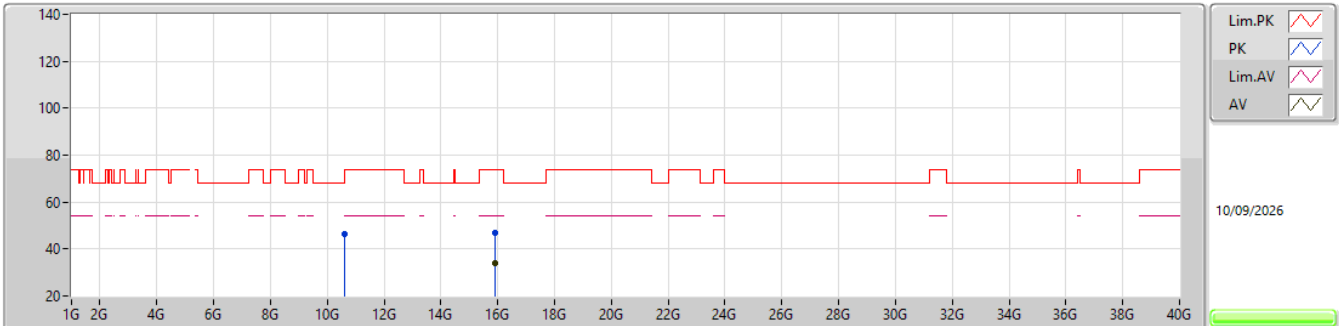


EUT_Y_2TX
SET 83

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59904G	46.26	68.20	-21.94	62.88	3	Horizontal	360.6	2.87	83	39.20	10.74	66.56			
PK	15.9028G	46.82	74.00	-27.18	58.95	3	Horizontal	-0	1.80	83	38.79	13.04	63.96			
AV	15.89G	34.19	54.00	-19.81	46.38	3	Horizontal	-0	1.80	83	38.74	13.03	63.96			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TX

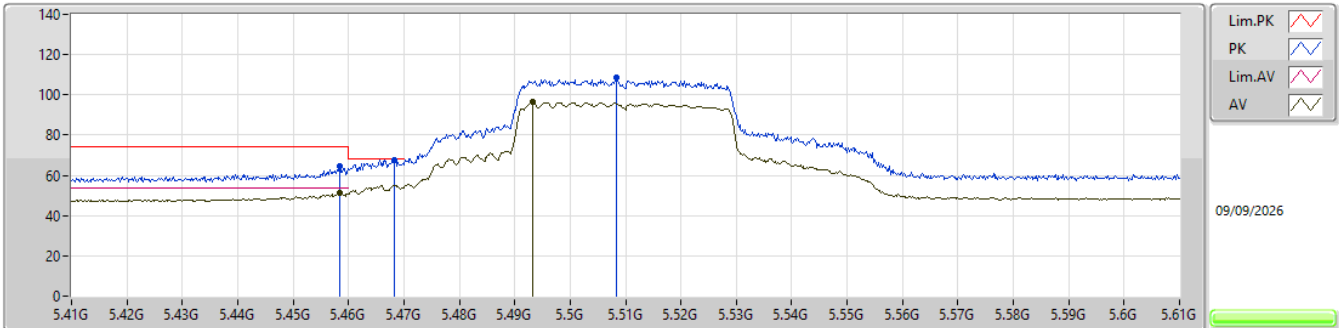


EUT_Y_2TX
SET 87
80\91\78\84\87\88\87
5.62\ -6.36\5.88\3.86\0.78\ -2.99\0.73

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.4584G	64.44	74.00	-9.56	57.10	3	Vertical	66	2.89	87	33.65	7.60	33.91				
AV	5.4584G	51.01	54.00	-2.99	43.67	3	Vertical	66	2.89	87	33.65	7.60	33.91				
PK	5.4682G	67.47	68.20	-0.73	60.07	3	Vertical	66	2.89	87	33.71	7.60	33.91				
PK	5.5084G	108.34	Inf	-Inf	100.71	3	Vertical	66	2.89	87	33.92	7.62	33.91				
AV	5.4932G	96.31	Inf	-Inf	88.75	3	Vertical	66	2.89	87	33.86	7.61	33.91				

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TX

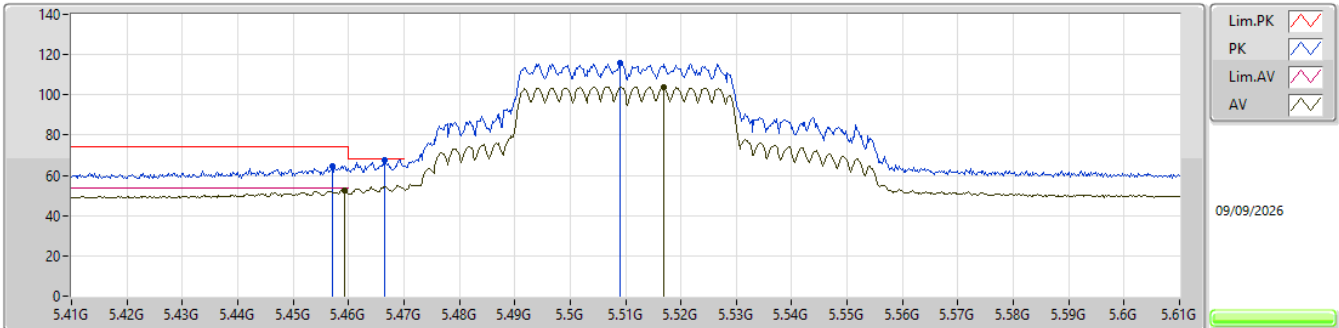


EUT_V_2TX
SET 82
87\70\86\78\82
-8.22\5.07\7.03\3.68\0.49

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.457G	64.73	74.00	-9.27	57.40	3	Horizontal	50	1.85	82	33.64	7.60	33.91			
AV	5.4592G	52.51	54.00	-1.49	45.16	3	Horizontal	50	1.85	82	33.66	7.60	33.91			
PK	5.4666G	67.71	68.20	-0.49	60.32	3	Horizontal	50	1.85	82	33.70	7.60	33.91			
PK	5.509G	115.64	Inf	-Inf	108.01	3	Horizontal	50	1.85	82	33.92	7.62	33.91			
AV	5.5168G	104.06	Inf	-Inf	96.41	3	Horizontal	50	1.85	82	33.93	7.62	33.90			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5510MHz_TX

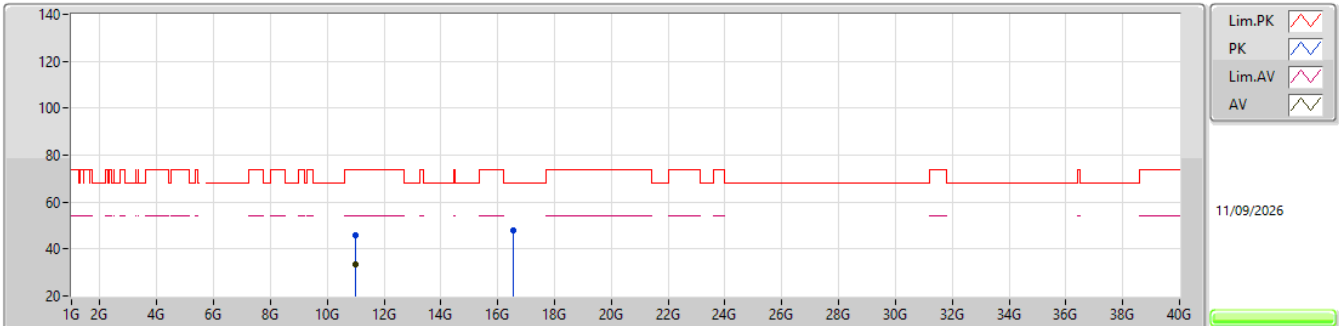EUT_Y_2TX
SET 82

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.98072G	45.88	74.00	-28.12	61.83	3	Vertical	293.1	1.80	82	39.24	11.01	66.20			
AV	10.98688G	33.63	54.00	-20.37	49.58	3	Vertical	293.1	1.80	82	39.23	11.01	66.19			
PK	16.5532G	47.72	68.20	-20.48	58.13	3	Vertical	360	1.80	82	39.70	13.39	63.50			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5510MHz_TX

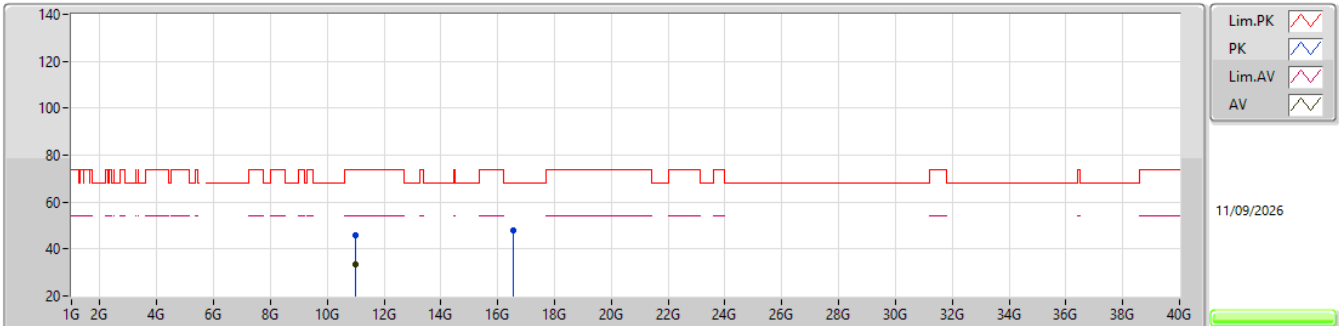EUT Y_2TX
SET 82

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.98368G	45.80	74.00	-28.20	61.76	3	Horizontal	184	1.80	82	39.23	11.01	66.20			
AV	10.98416G	33.44	54.00	-20.56	49.40	3	Horizontal	184	1.80	82	39.23	11.01	66.20			
PK	16.54176G	47.94	68.20	-20.26	58.35	3	Horizontal	354	1.80	82	39.70	13.38	63.49			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TX

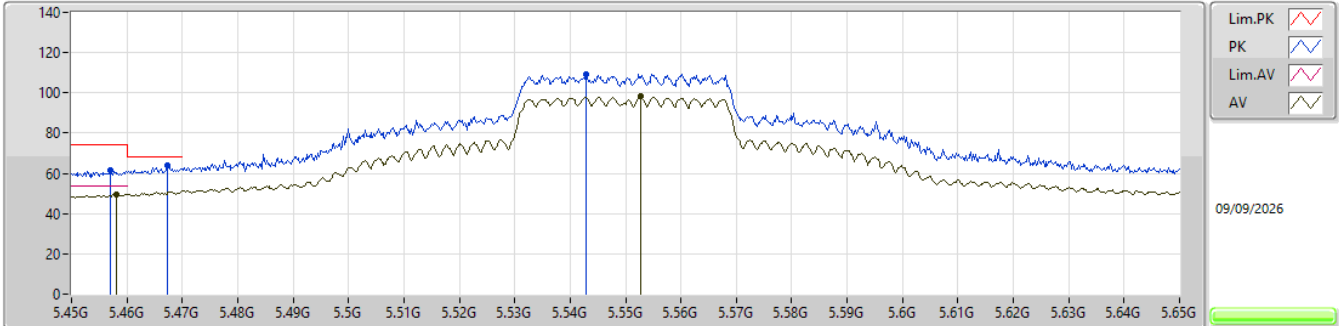


EUT_Y_2TX
SET 97
80\92\108\100\96\98\99\98\97
6.20\5.57\~14.72\~16.07\4.62\4.12\~14.51\~14.87\3.94

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.457G	61.31	74.00	-12.69	53.98	3	Vertical	56	1.01	97	33.64	7.60	33.91				
AV	5.458G	49.48	54.00	-4.52	42.14	3	Vertical	56	1.01	97	33.65	7.60	33.91				
PK	5.4672G	64.26	68.20	-3.94	56.87	3	Vertical	56	1.01	97	33.70	7.60	33.91				
PK	5.5428G	109.48	Inf	-Inf	101.75	3	Vertical	56	1.01	97	33.99	7.63	33.89				
AV	5.5528G	98.16	Inf	-Inf	90.41	3	Vertical	56	1.01	97	34.00	7.64	33.89				

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TX

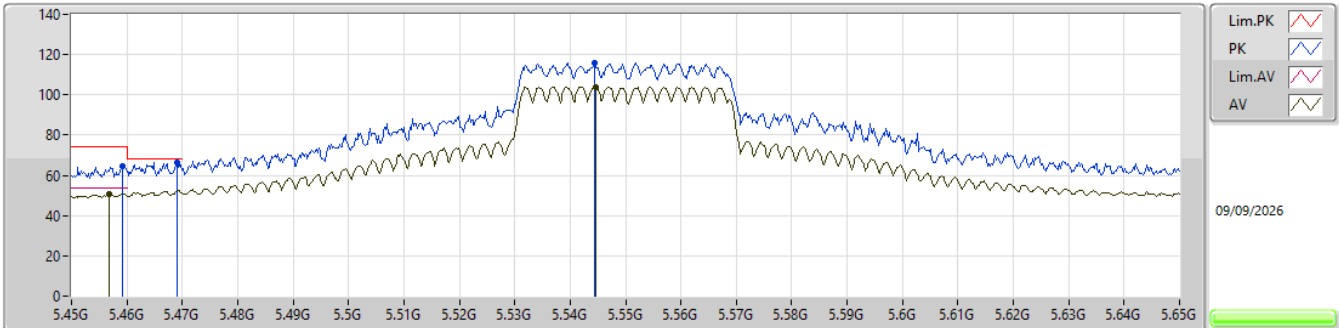


EUT_V_2TX
SET 86
97\88\92\90\89\88\87\86
-4.49\1.33\2.55\1.38\1.05\0.32\0.39\1.59

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4592G	64.55	74.00	-9.45	57.20	3	Horizontal	53	2.02	86	33.66	7.60	33.91			
AV	5.4568G	50.81	54.00	-3.19	43.48	3	Horizontal	53	2.02	86	33.64	7.60	33.91			
PK	5.469G	66.61	68.20	-1.59	59.21	3	Horizontal	53	2.02	86	33.71	7.60	33.91			
PK	5.5444G	115.93	Inf	-Inf	108.20	3	Horizontal	53	2.02	86	33.99	7.63	33.89			
AV	5.5446G	104.01	Inf	-Inf	96.27	3	Horizontal	53	2.02	86	33.99	7.64	33.89			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5550MHz_TX

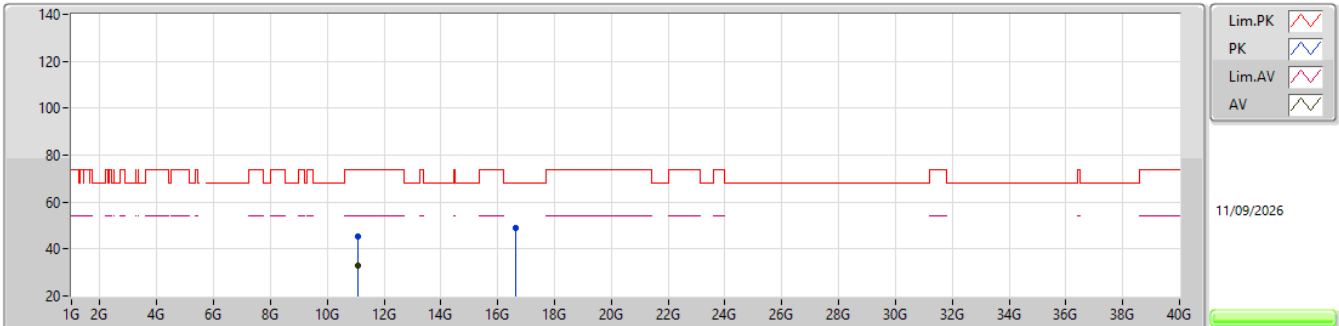EUT Y_2TX
SET 86

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.09538G	45.33	74.00	-28.67	61.34	3	Vertical	298	2.54	86	39.11	11.09	66.21				
AV	11.10153G	32.98	54.00	-21.02	49.01	3	Vertical	298	2.54	86	39.09	11.09	66.21				
PK	16.64456G	48.74	68.20	-19.46	59.03	3	Vertical	356	1.21	86	39.79	13.44	63.52				

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5550MHz_TX

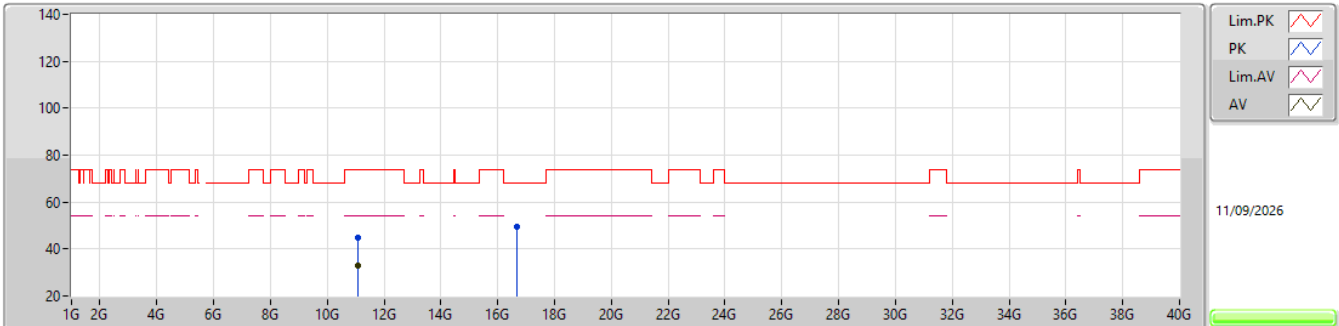EUT Y_2TX
SET 86

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.08809G	45.05	74.00	-28.95	61.06	3	Horizontal	147	1.02	86	39.12	11.08	66.21			
AV	11.09568G	32.90	54.00	-21.10	48.91	3	Horizontal	147	1.02	86	39.11	11.09	66.21			
PK	16.6572G	49.36	68.20	-18.84	59.63	3	Horizontal	226	1.80	86	39.81	13.45	63.53			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TX

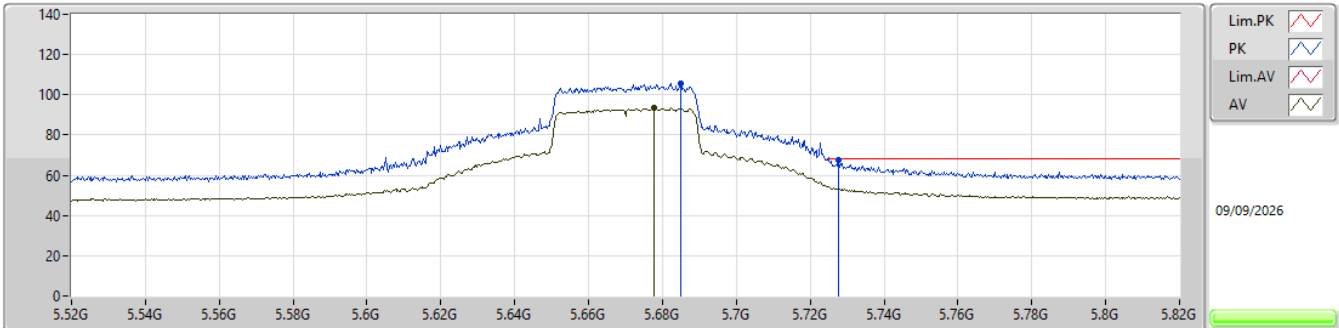

EUT_Y_2TX

SET 93


80\93\87\90\91\103\97\94\95\94\93

6.58\ -0.11\4.84\1.94\3.34\ -18.82\ -18.79\1.14\ -0.99\ -0.55\0.61

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.685G	105.90	Inf	-Inf	97.87	3	Vertical	136	1.09	93	34.17	7.70	33.84				
AV	5.6778G	93.51	Inf	-Inf	85.49	3	Vertical	136	1.09	93	34.16	7.70	33.84				
PK	5.7276G	67.59	68.20	-0.61	59.49	3	Vertical	136	1.09	93	34.20	7.72	33.82				

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TX

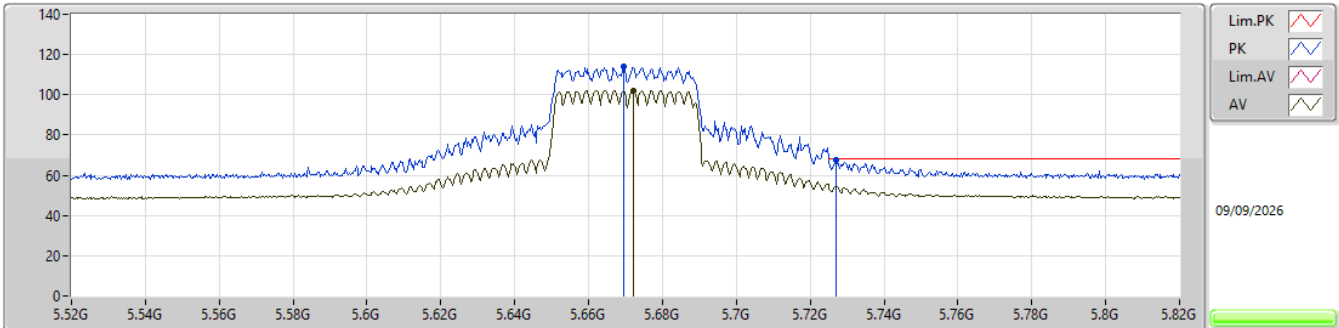


EUT Y_2TX
SET 79
93\74\83\79
-9.02\2.66\ -1.73\0.39

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6694G	114.19	Inf	-Inf	106.21	3	Horizontal	52	1.86	79	34.14	7.69	33.85			
AV	5.6721G	102.20	Inf	-Inf	94.21	3	Horizontal	52	1.86	79	34.14	7.69	33.84			
PK	5.727G	67.81	68.20	-0.39	59.71	3	Horizontal	52	1.86	79	34.20	7.72	33.82			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5670MHz_TX

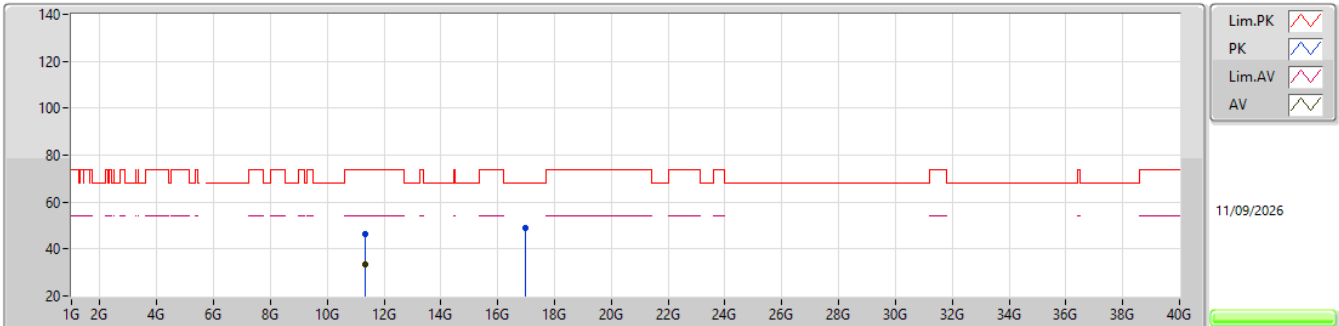EUT Y_2TX
SET 79

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.34498G	46.39	74.00	-27.61	62.23	3	Vertical	261	2.77	79	39.19	11.26	66.29			
AV	11.32872G	33.48	54.00	-20.52	49.36	3	Vertical	261	2.77	79	39.16	11.25	66.29			
PK	16.9768G	48.87	68.20	-19.33	58.10	3	Vertical	287	2.80	79	40.75	13.64	63.62			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5670MHz_TX

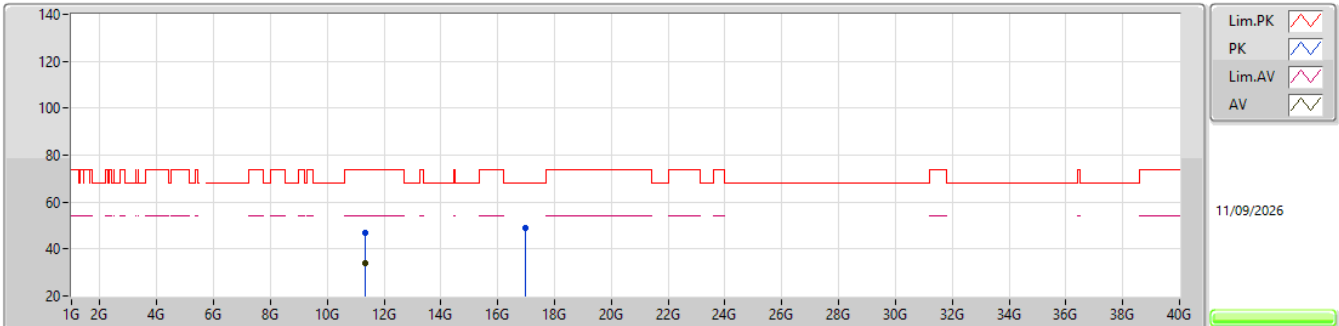EUT Y_2TX
SET 79

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.35125G	46.70	74.00	-27.30	62.53	3	Horizontal	62	1.48	79	39.20	11.26	66.29				
AV	11.34531G	33.83	54.00	-20.17	49.67	3	Horizontal	62	1.48	79	39.19	11.26	66.29				
PK	16.99048G	49.01	68.20	-19.19	58.22	3	Horizontal	300	1.80	79	40.78	13.64	63.63				

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

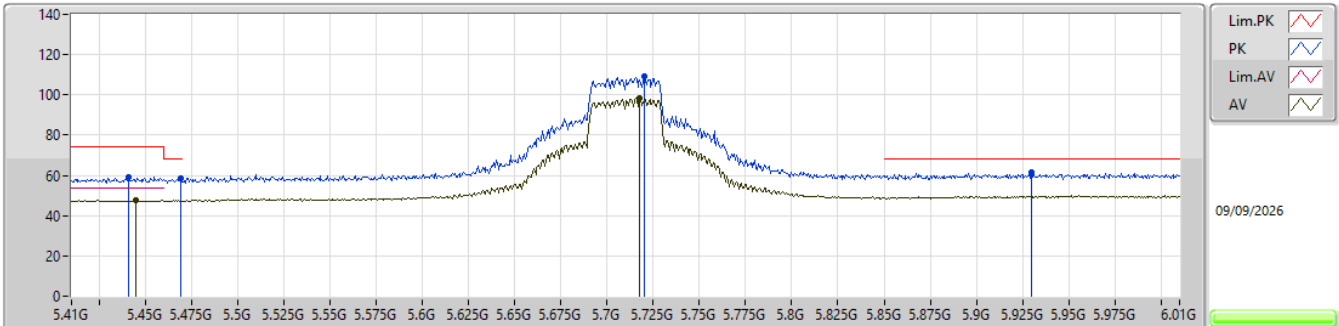


EUT_V_2TX
SET 95
80\92\108\100\96\94\95
6.07\5.66\ -1.63\ -0.71\ -0.96\6.24\6.04

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4406G	58.95	74.00	-15.05	51.71	3	Vertical	57	1.04	95	33.56	7.59	33.91			
AV	5.4448G	47.96	54.00	-6.04	40.70	3	Vertical	57	1.04	95	33.58	7.59	33.91			
PK	5.4694G	58.45	68.20	-9.75	51.04	3	Vertical	57	1.04	95	33.72	7.60	33.91			
PK	5.7202G	109.25	Inf	-Inf	101.17	3	Vertical	57	1.04	95	34.20	7.71	33.83			
AV	5.7178G	98.16	Inf	-Inf	90.08	3	Vertical	57	1.04	95	34.20	7.71	33.83			
PK	5.9296G	61.49	68.20	-6.71	52.29	3	Vertical	57	1.04	95	35.12	7.83	33.75			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

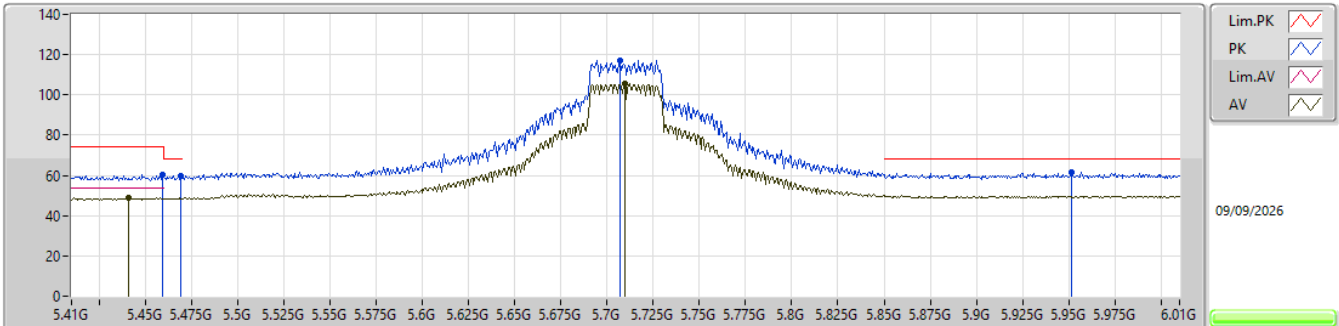


EUT_V_2TX
SET 95
95
5.00

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4592G	60.16	74.00	-13.84	52.81	3	Horizontal	50	1.99	95	33.66	7.60	33.91			
AV	5.4412G	49.00	54.00	-5.00	41.76	3	Horizontal	50	1.99	95	33.56	7.59	33.91			
PK	5.4694G	59.77	68.20	-8.43	52.36	3	Horizontal	50	1.99	95	33.72	7.60	33.91			
PK	5.707G	117.23	Inf	-Inf	109.15	3	Horizontal	50	1.99	95	34.20	7.71	33.83			
AV	5.7094G	105.55	Inf	-Inf	97.47	3	Horizontal	50	1.99	95	34.20	7.71	33.83			
PK	5.9512G	61.68	68.20	-6.52	52.37	3	Horizontal	50	1.99	95	35.20	7.85	33.74			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5710MHz Straddle 5.47-5.725GHz_TX

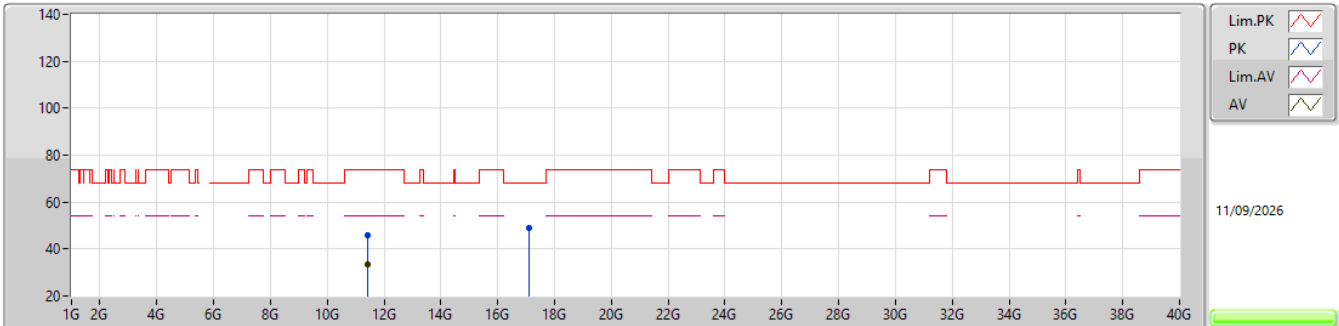EUT Y_2TX
SET 95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.42279G	45.94	74.00	-28.06	61.85	3	Vertical	328	2.09	95	39.10	11.31	66.32			
AV	11.42198G	33.58	54.00	-20.42	49.49	3	Vertical	328	2.09	95	39.10	11.31	66.32			
PK	17.12352G	49.17	68.20	-19.03	58.01	3	Vertical	52	1.80	95	41.25	13.72	63.81			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5710MHz Straddle 5.47-5.725GHz_TX

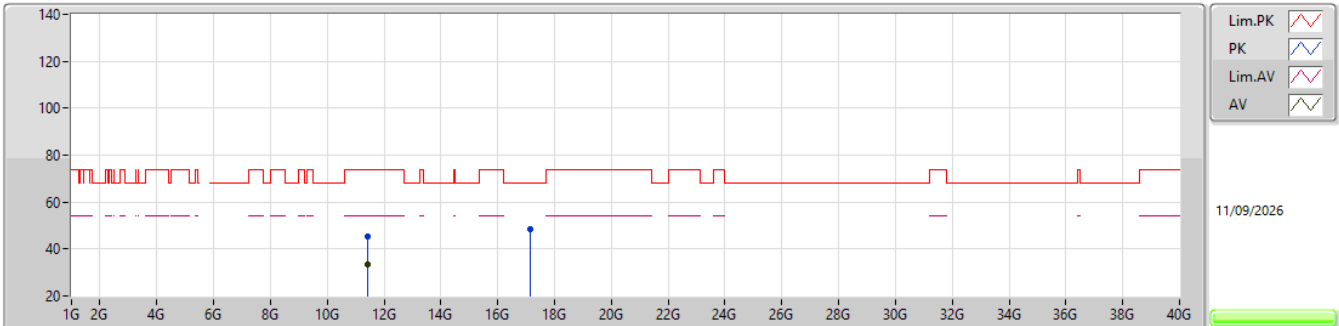EUT Y_2TX
SET 95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43167G	45.39	74.00	-28.61	61.29	3	Horizontal	88	2.24	95	39.10	11.32	66.32			
AV	11.41823G	33.58	54.00	-20.42	49.48	3	Horizontal	88	2.24	95	39.10	11.31	66.31			
PK	17.15464G	48.63	68.20	-19.57	57.44	3	Horizontal	1	1.79	95	41.31	13.74	63.86			

5.725-5.85GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5755MHz_TX

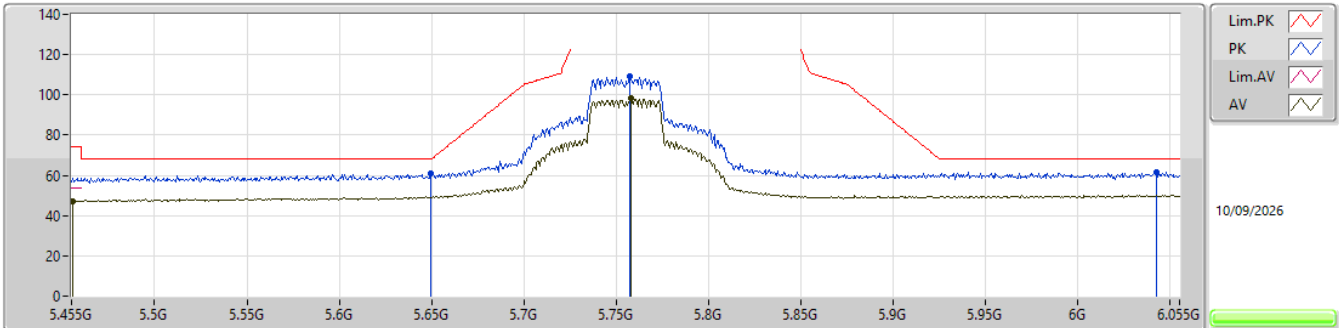


EUT_Y_2TX
SET 91
80\92\108\100\96\94\93\92\91
6.28\6.52\12.34\12.34\12.40\9.86\10.65\11.61\6.35

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
AV	5.4556G	47.32	54.00	-6.68	40.00	3	Vertical	55	1.05	91	33.63	7.60	33.91			
PK	5.6494G	60.73	68.20	-7.47	52.80	3	Vertical	55	1.05	91	34.10	7.68	33.85			
PK	5.7574G	109.04	Inf	-Inf	100.91	3	Vertical	55	1.05	91	34.21	7.73	33.81			
AV	5.758G	98.18	Inf	-Inf	90.04	3	Vertical	55	1.05	91	34.22	7.73	33.81			
PK	6.0424G	61.85	68.20	-6.35	52.21	3	Vertical	55	1.05	91	35.47	7.90	33.73			

5.725-5.85GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5755MHz_TX

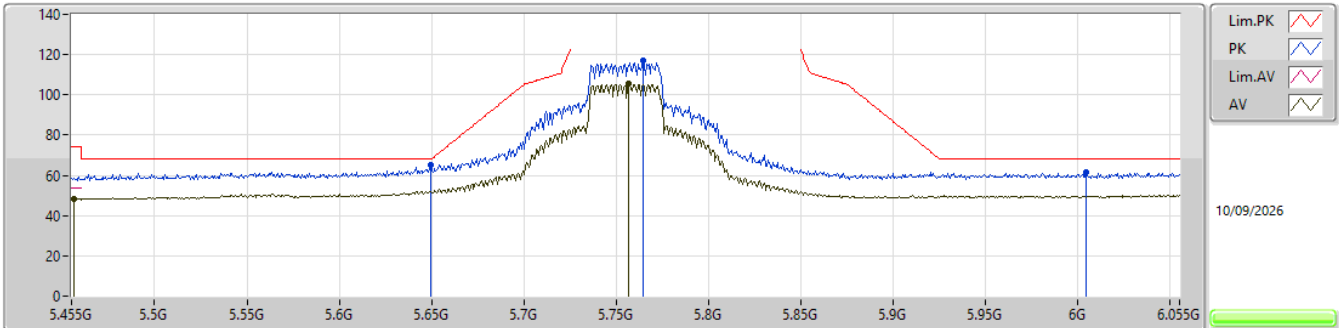


EUT_Y_2TX
SET 91
91
3.12

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
AV	5.4562G	48.48	54.00	-5.52	41.15	3	Horizontal	52	2.01	91	33.64	7.60	33.91				
PK	5.6494G	65.08	68.20	-3.12	57.15	3	Horizontal	52	2.01	91	34.10	7.68	33.85				
PK	5.7646G	117.21	Inf	-Inf	109.06	3	Horizontal	52	2.01	91	34.23	7.73	33.81				
AV	5.7568G	105.40	Inf	-Inf	97.27	3	Horizontal	52	2.01	91	34.21	7.73	33.81				
PK	6.0046G	61.29	68.20	-6.91	51.81	3	Horizontal	52	2.01	91	35.32	7.88	33.72				

5.725-5.85GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX


5755MHz_TX

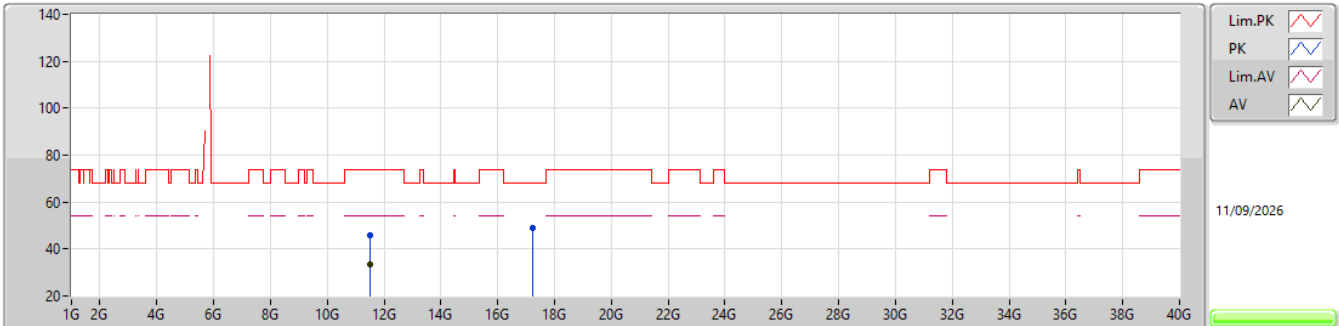EUT_Y_2TX
SET 91

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.50706G	45.92	74.00	-28.08	61.79	3	Vertical	338	2.69	91	39.10	11.37	66.34			
AV	11.5112G	33.21	54.00	-20.79	49.09	3	Vertical	338	2.69	91	39.10	11.37	66.35			
PK	17.2326G	49.18	68.20	-19.02	57.77	3	Vertical	310	1.18	91	41.60	13.78	63.97			

5.725-5.85GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX


5755MHz_TX

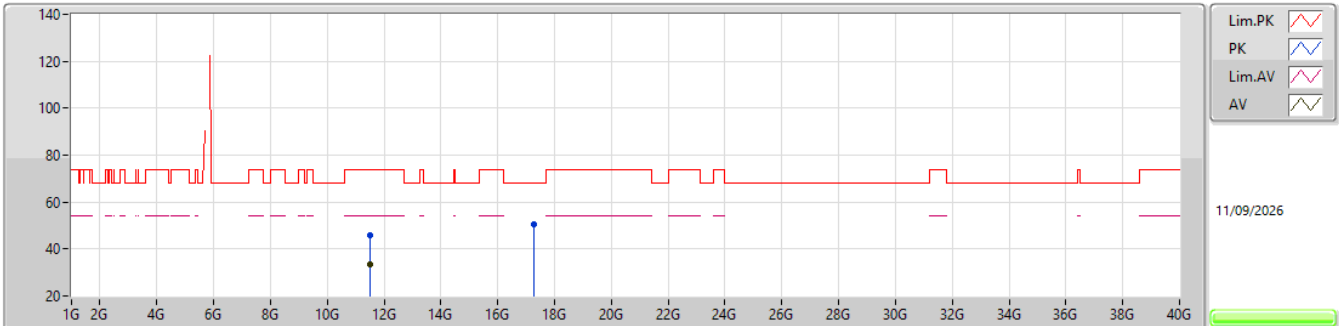EUT Y_2TX
SET 91

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.50595G	46.00	74.00	-28.00	61.87	3	Horizontal	347	1.13	91	39.10	11.37	66.34			
AV	11.52479G	33.33	54.00	-20.67	49.20	3	Horizontal	347	1.13	91	39.10	11.38	66.35			
PK	17.28092G	50.73	68.20	-17.47	59.15	3	Horizontal	359	1.72	91	41.82	13.81	64.05			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TX

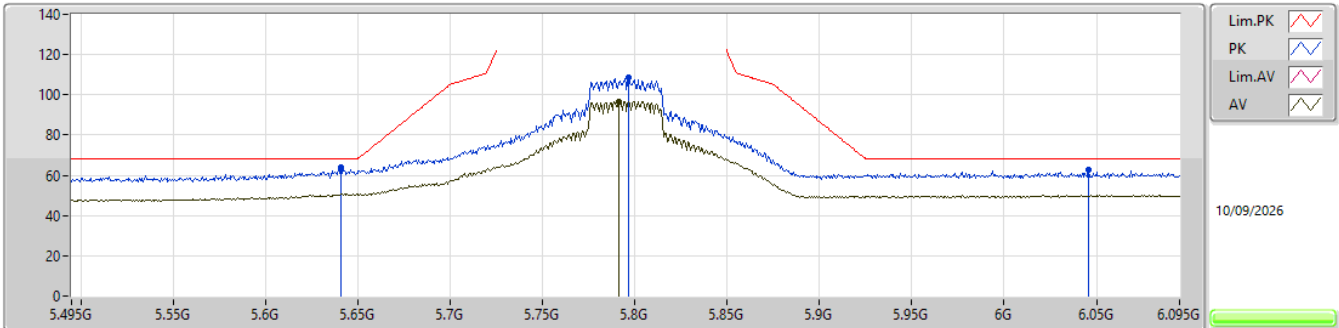


EUT_V_2TX
SET 95
80\92\108\100\96\94\95
6.25\6.75\~2.45\~2.55\~2.61\4.87\4.19

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6408G	64.01	68.20	-4.19	56.11	3	Vertical	321	2.18	95	34.08	7.68	33.86			
PK	5.7968G	108.43	Inf	-Inf	100.19	3	Vertical	321	2.18	95	34.29	7.75	33.80			
AV	5.7914G	96.81	Inf	-Inf	88.58	3	Vertical	321	2.18	95	34.28	7.75	33.80			
PK	6.0458G	62.46	68.20	-5.74	52.81	3	Vertical	321	2.18	95	35.48	7.90	33.73			

5.725-5.85GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5795MHz_TX

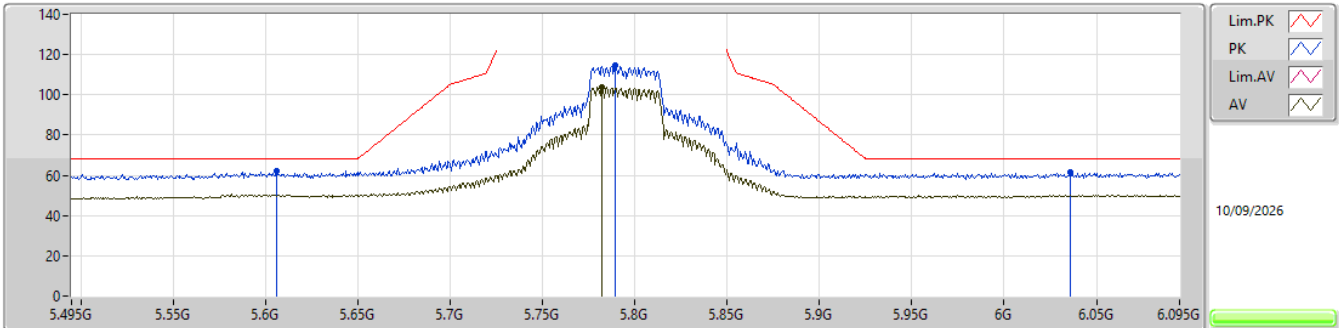


EUT_Y_2TX
SET 91
95\78\94\86\90\92\93\92\91
-8.01\5.22\ -8.64\5.84\5.13\6.19\ -9.30\ -7.79\6.09

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.606G	62.11	68.20	-6.09	54.31	3	Horizontal	54	1.80	91	34.01	7.66	33.87				
PK	5.7896G	114.78	Inf	-Inf	106.55	3	Horizontal	54	1.80	91	34.28	7.75	33.80				
AV	5.7824G	104.03	Inf	-Inf	95.83	3	Horizontal	54	1.80	91	34.26	7.74	33.80				
PK	6.0356G	61.27	68.20	-6.93	51.66	3	Horizontal	54	1.80	91	35.44	7.90	33.73				

5.725-5.85GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX


5795MHz_TX

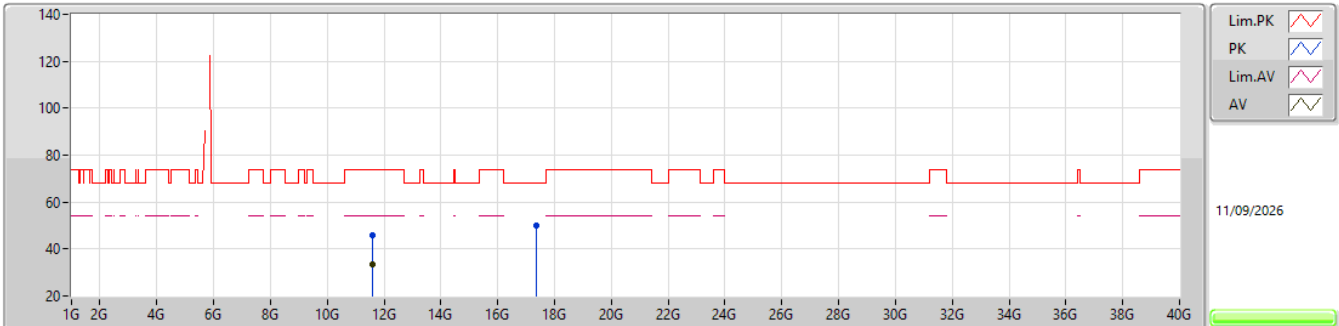EUT Y_2TX
SET 91

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.60032G	46.12	74.00	-27.88	61.98	3	Vertical	230	2.26	91	39.10	11.43	66.39			
AV	11.60146G	33.30	54.00	-20.70	49.15	3	Vertical	230	2.26	91	39.10	11.44	66.39			
PK	17.3806G	50.25	68.20	-17.95	58.55	3	Vertical	343	2.34	91	42.02	13.87	64.19			

5.725-5.85GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX


5795MHz_TX

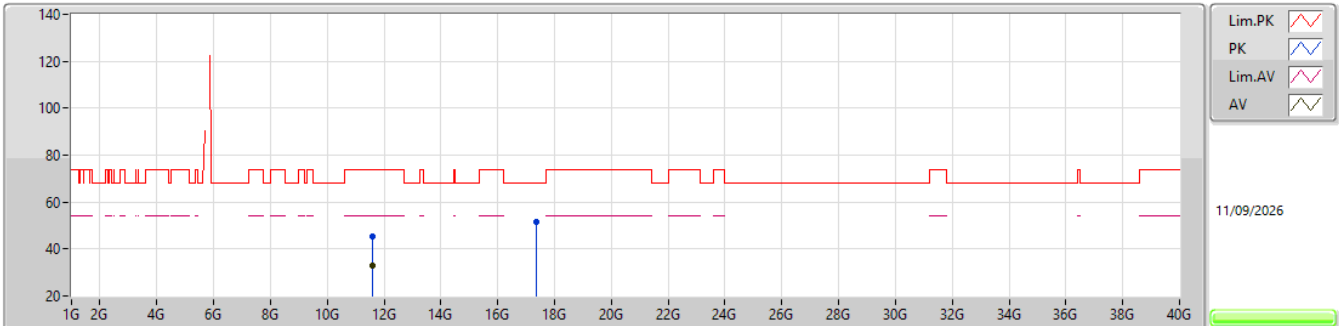EUT_Y_2TX
SET 91

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57512G	45.49	74.00	-28.51	61.35	3	Horizontal	205	2.42	91	39.10	11.42	66.38			
AV	11.59411G	33.13	54.00	-20.87	48.99	3	Horizontal	205	2.42	91	39.10	11.43	66.39			
PK	17.37124G	51.48	68.20	-16.72	59.81	3	Horizontal	360	1.80	91	41.98	13.87	64.18			

5.15-5.25GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

5210MHz_TX

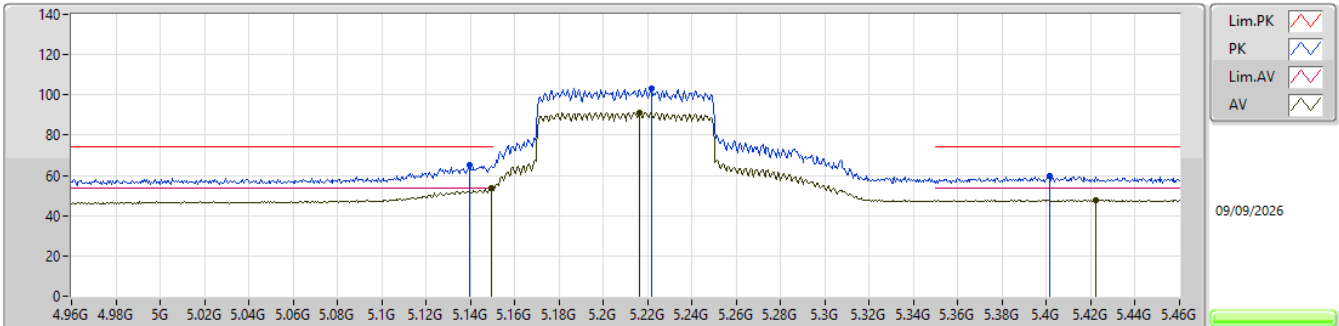


EUT_V_2TX
SET 85
80\89\78\83\85
4.76\5.62\6.05\2.43\0.45

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1395G	65.47	74.00	-8.53	59.05	3	Vertical	45	1.05	85	32.88	7.47	33.93			
AV	5.1495G	53.55	54.00	-0.45	47.11	3	Vertical	45	1.05	85	32.90	7.47	33.93			
PK	5.222G	103.19	Inf	-Inf	96.65	3	Vertical	45	1.05	85	32.99	7.48	33.93			
AV	5.2165G	91.33	Inf	-Inf	84.81	3	Vertical	45	1.05	85	32.97	7.48	33.93			
PK	5.4015G	59.47	74.00	-14.53	52.41	3	Vertical	45	1.05	85	33.41	7.57	33.92			
AV	5.422G	47.90	54.00	-6.10	40.74	3	Vertical	45	1.05	85	33.49	7.58	33.91			

5.15-5.25GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

5210MHz_TX

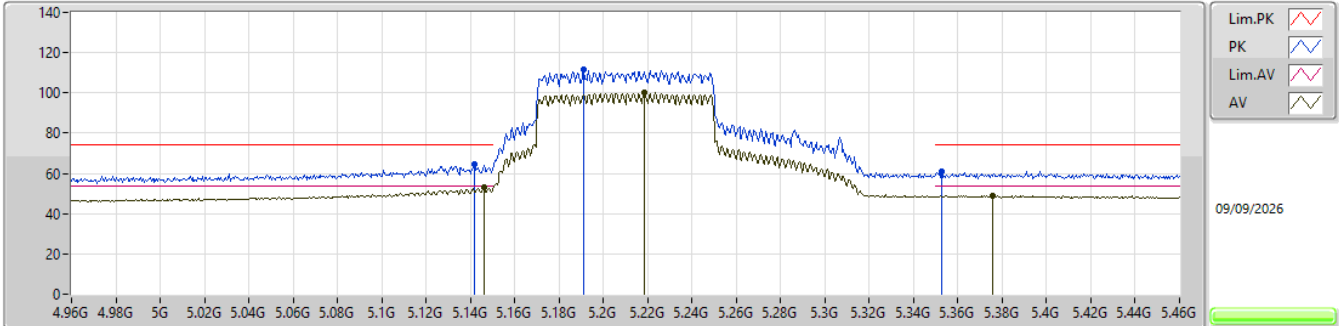


EUT_Y_2TX
SET 78
85\67\83\75\79\77\78
-8.53\4.16\5.57\2.61\0.13\1.49\1.10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.142G	64.72	74.00	-9.28	58.30	3	Horizontal	293	1.80	78	32.88	7.47	33.93			
AV	5.146G	52.90	54.00	-1.10	46.47	3	Horizontal	293	1.80	78	32.89	7.47	33.93			
PK	5.191G	111.47	Inf	-Inf	105.03	3	Horizontal	293	1.80	78	32.90	7.47	33.93			
AV	5.2185G	100.05	Inf	-Inf	93.53	3	Horizontal	293	1.80	78	32.97	7.48	33.93			
PK	5.3525G	60.74	74.00	-13.26	53.81	3	Horizontal	293	1.80	78	33.30	7.55	33.92			
AV	5.3755G	48.82	54.00	-5.18	41.83	3	Horizontal	293	1.80	78	33.35	7.56	33.92			

5.15-5.25GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

5210MHz_TX

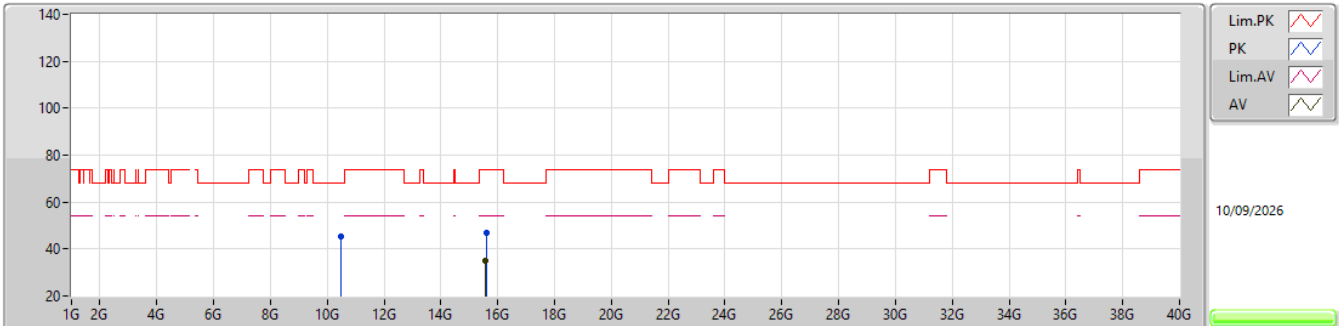


EUT Y_2TX
SET 78

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.46752G	45.60	68.20	-22.60	62.69	3	Vertical	230	1.80	78	38.97	10.65	66.71				
PK	15.61096G	47.15	74.00	-26.85	59.72	3	Vertical	16	1.69	78	38.43	12.94	63.94				
AV	15.5564G	35.23	54.00	-18.77	47.57	3	Vertical	16	1.69	78	38.67	12.92	63.93				

5.15-5.25GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5210MHz_TX

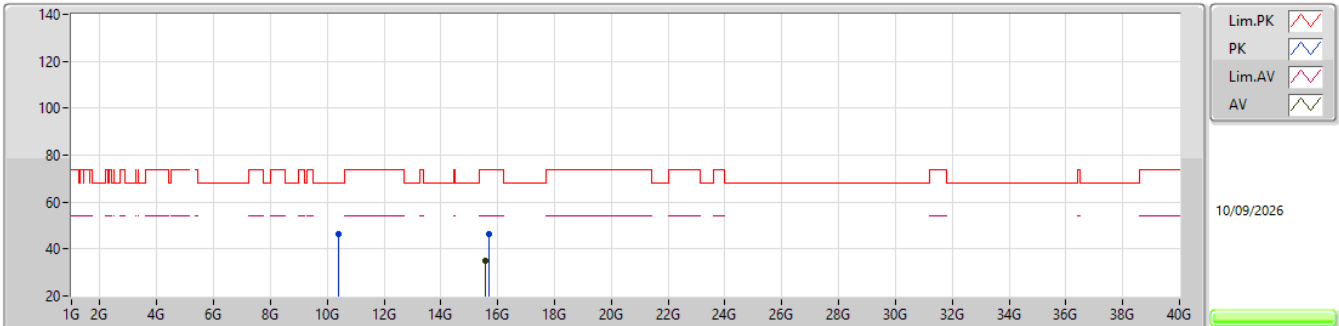EUT Y_2TX
SET 78

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.38752G	46.13	68.20	-22.07	63.46	3	Horizontal	333	1.19	78	38.90	10.60	66.83			
PK	15.69944G	46.39	74.00	-27.61	59.07	3	Horizontal	213	1.60	78	38.30	12.97	63.95			
AV	15.55576G	34.90	54.00	-19.10	47.23	3	Horizontal	213	1.60	78	38.68	12.92	63.93			

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

5290MHz_TX

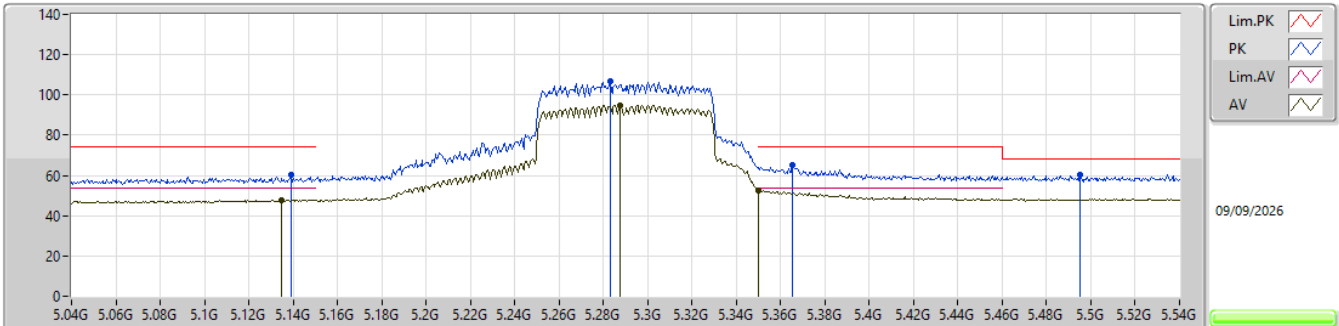


EUT_V_2TX
SET 87
80\91\78\84\87\88\87
5.53\5.54\5.92\4.59\0.95\0.89\1.23

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.139G	60.08	74.00	-13.92	53.66	3	Vertical	63	2.93	87	32.88	7.47	33.93			
AV	5.135G	47.74	54.00	-6.26	41.33	3	Vertical	63	2.93	87	32.87	7.47	33.93			
PK	5.283G	106.59	Inf	-Inf	99.83	3	Vertical	63	2.93	87	33.17	7.51	33.92			
AV	5.2875G	95.02	Inf	-Inf	88.25	3	Vertical	63	2.93	87	33.18	7.51	33.92			
PK	5.3655G	65.45	74.00	-8.55	58.49	3	Vertical	63	2.93	87	33.33	7.55	33.92			
AV	5.35G	52.77	54.00	-1.23	45.85	3	Vertical	63	2.93	87	33.30	7.54	33.92			
PK	5.495G	60.55	68.20	-7.65	52.98	3	Vertical	63	2.93	87	33.87	7.61	33.91			

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

5290MHz_TX

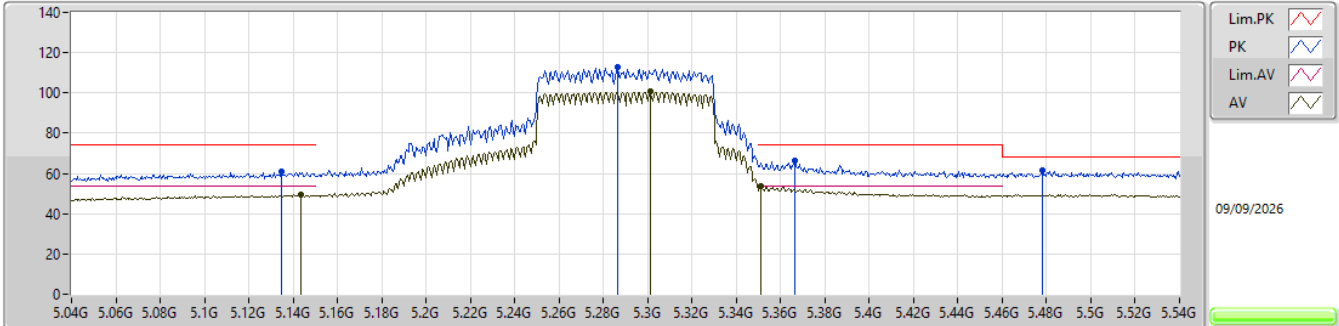


EUT_V_2TX
SET 83
87\73\86\80\83
-6.80\5.16\5.69\3.59\0.24

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1345G	60.74	74.00	-13.26	54.33	3	Horizontal	300	1.80	83	32.87	7.47	33.93				
AV	5.1435G	49.34	54.00	-4.66	42.91	3	Horizontal	300	1.80	83	32.89	7.47	33.93				
PK	5.2865G	113.07	Inf	-Inf	106.31	3	Horizontal	300	1.80	83	33.17	7.51	33.92				
AV	5.301G	100.57	Inf	-Inf	93.77	3	Horizontal	300	1.80	83	33.20	7.52	33.92				
PK	5.3665G	66.44	74.00	-7.56	59.48	3	Horizontal	300	1.80	83	33.33	7.55	33.92				
AV	5.351G	53.76	54.00	-0.24	46.83	3	Horizontal	300	1.80	83	33.30	7.55	33.92				
PK	5.478G	61.46	68.20	-6.74	53.99	3	Horizontal	300	1.80	83	33.77	7.61	33.91				

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX


5290MHz_TX

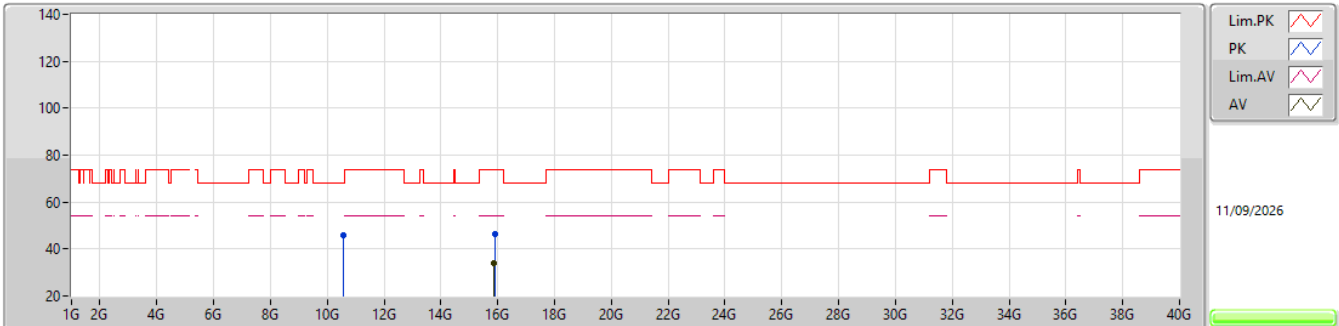EUT_Y_2TX
SET83

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.58G	46.12	68.20	-22.08	62.77	3	Vertical	151	2.06	83	39.20	10.73	66.58			
PK	15.89448G	46.58	74.00	-27.42	58.74	3	Vertical	344	2.42	83	38.77	13.03	63.96			
AV	15.86536G	33.83	54.00	-20.17	46.18	3	Vertical	344	2.42	83	38.59	13.02	63.96			

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX


5290MHz_TX

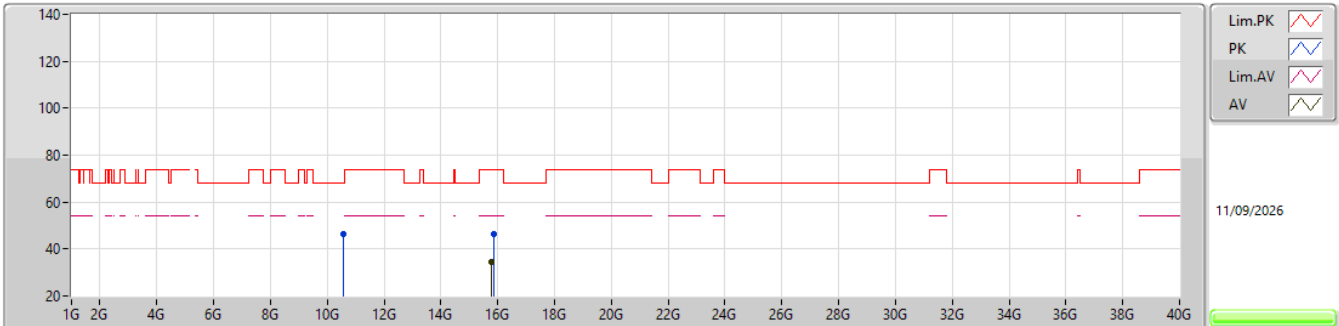EUT Y_2TX
SET 83

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.56224G	46.46	68.20	-21.74	63.14	3	Horizontal	208	1.80	83	39.20	10.72	66.60			
PK	15.85624G	46.60	74.00	-27.40	59.00	3	Horizontal	360	2.95	83	38.54	13.02	63.96			
AV	15.80088G	34.28	54.00	-19.72	46.83	3	Horizontal	360	2.95	83	38.40	13.00	63.95			

5.47-5.725GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

5530MHz_TX

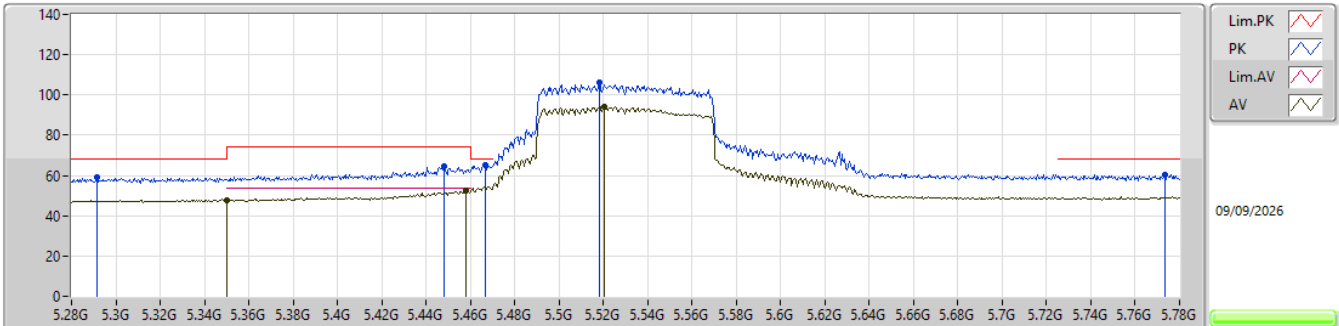


EUT_V_2TX
SET 88
80\91\86\88\89\88
5.61\3.67\3.01\1.62\0.79\1.34

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2915G	58.99	68.20	-9.21	52.21	3	Vertical	66	3.00	88	33.18	7.52	33.92				
AV	5.35G	47.48	54.00	-6.52	40.56	3	Vertical	66	3.00	88	33.30	7.54	33.92				
PK	5.448G	64.29	74.00	-9.71	57.02	3	Vertical	66	3.00	88	33.59	7.59	33.91				
PK	5.4665G	65.37	68.20	-2.83	57.98	3	Vertical	66	3.00	88	33.70	7.60	33.91				
AV	5.458G	52.66	54.00	-1.34	45.32	3	Vertical	66	3.00	88	33.65	7.60	33.91				
PK	5.518G	106.20	Inf	-Inf	98.54	3	Vertical	66	3.00	88	33.94	7.62	33.90				
AV	5.5205G	94.16	Inf	-Inf	86.50	3	Vertical	66	3.00	88	33.94	7.62	33.90				
PK	5.7735G	60.53	68.20	-7.67	52.35	3	Vertical	66	3.00	88	34.25	7.74	33.81				

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TX

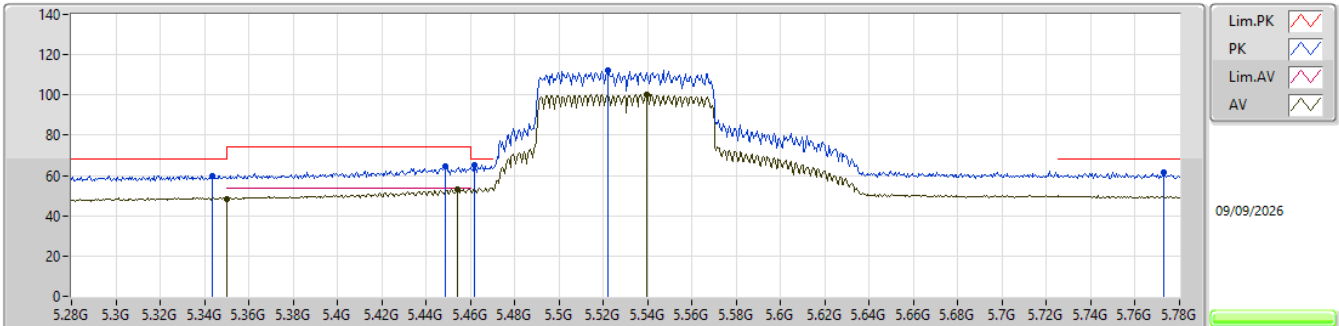


EUT_V_2TX
SET 82
88\72\80\84\82\83\82
-7.64\3.39\1.86\1.34\1.05\0.63\0.87

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3435G	59.85	68.20	-8.35	52.94	3	Horizontal	52	1.79	82	33.29	7.54	33.92
AV	5.35G	48.33	54.00	-5.67	41.41	3	Horizontal	52	1.79	82	33.30	7.54	33.92
PK	5.4485G	64.29	74.00	-9.71	57.02	3	Horizontal	52	1.79	82	33.59	7.59	33.91
AV	5.454G	53.13	54.00	-0.87	45.83	3	Horizontal	52	1.79	82	33.62	7.59	33.91
PK	5.462G	65.41	68.20	-2.79	58.05	3	Horizontal	52	1.79	82	33.67	7.60	33.91
PK	5.522G	111.99	Inf	-Inf	104.33	3	Horizontal	52	1.79	82	33.94	7.62	33.90
AV	5.5395G	100.34	Inf	-Inf	92.62	3	Horizontal	52	1.79	82	33.98	7.63	33.89
PK	5.773G	61.41	68.20	-6.79	53.23	3	Horizontal	52	1.79	82	34.25	7.74	33.81

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5530MHz_TX

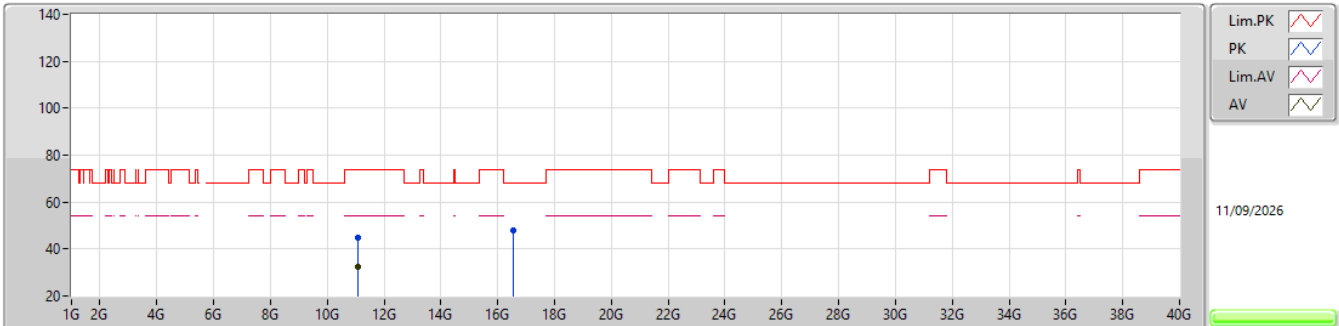EUT Y_2TX
SET 82

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.07044G	44.74	74.00	-29.26	60.71	3	Vertical	149	1.09	82	39.16	11.07	66.20			
AV	11.06597G	32.57	54.00	-21.43	48.53	3	Vertical	149	1.09	82	39.17	11.07	66.20			
PK	16.55832G	47.81	68.20	-20.39	58.22	3	Vertical	1	1.63	82	39.70	13.39	63.50			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TX

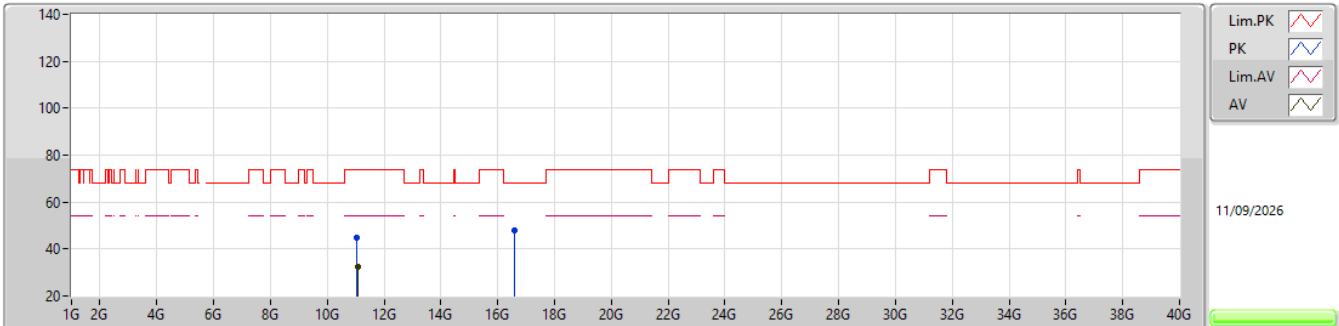


EUT_Y_2TX
SET 82

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.05226G	45.00	74.00	-29.00	60.94	3	Horizontal	27	2.06	82	39.20	11.06	66.20			
AV	11.0744G	32.66	54.00	-21.34	48.64	3	Horizontal	27	2.06	82	39.15	11.07	66.20			
PK	16.57064G	48.16	68.20	-20.04	58.56	3	Horizontal	353	2.01	82	39.70	13.40	63.50			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TX

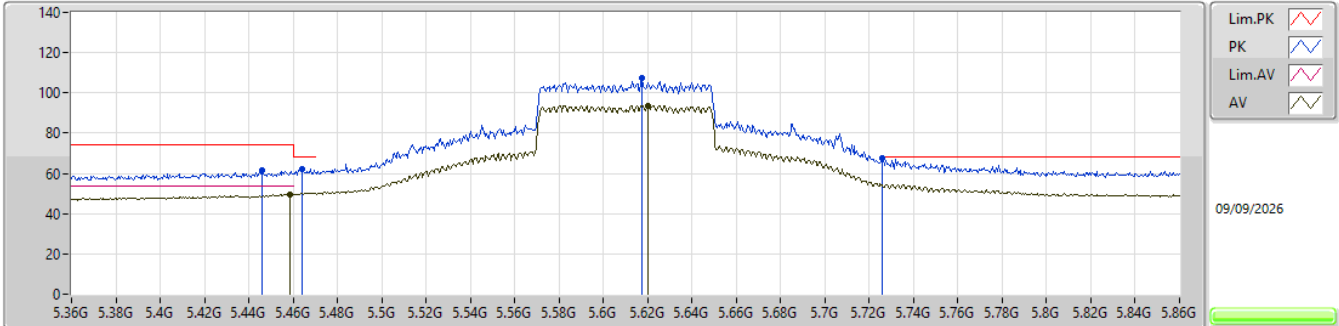


EUT_V_2TX
SET 89
80\88\92\90\89
4.03\1.87\2.78\1.04\0.61

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.446G	61.34	74.00	-12.66	54.08	3	Vertical	55	1.00	89	33.58	7.59	33.91
PK	5.464G	62.34	68.20	-5.86	54.97	3	Vertical	55	1.00	89	33.68	7.60	33.91
AV	5.4585G	49.60	54.00	-4.40	42.26	3	Vertical	55	1.00	89	33.65	7.60	33.91
PK	5.6175G	107.22	Inf	-Inf	99.39	3	Vertical	55	1.00	89	34.03	7.67	33.87
AV	5.62G	93.83	Inf	-Inf	85.98	3	Vertical	55	1.00	89	34.04	7.67	33.86
PK	5.726G	67.59	68.20	-0.61	59.49	3	Vertical	55	1.00	89	34.20	7.72	33.82

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TX

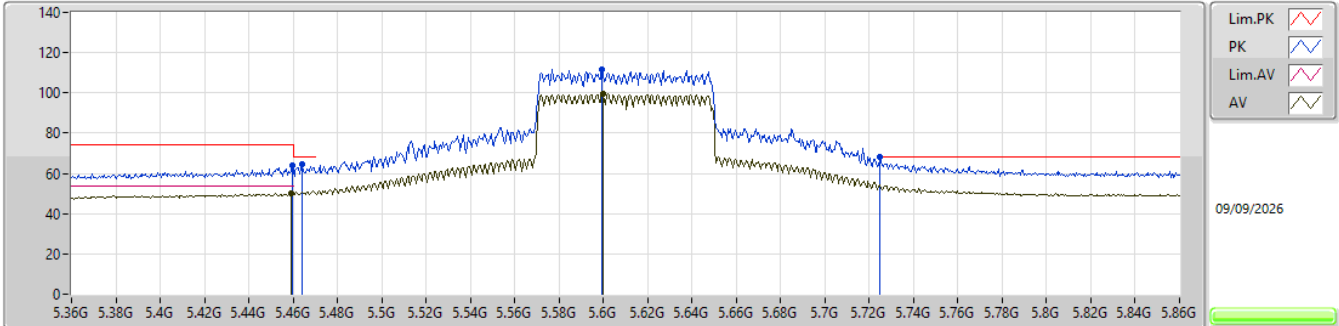


EUT_Y_2TX
SET 78
89\78
-5.33\0.02

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4595G	63.70	74.00	-10.30	56.35	3	Horizontal	54	1.95	78	33.66	7.60	33.91
AV	5.459G	50.19	54.00	-3.81	42.85	3	Horizontal	54	1.95	78	33.65	7.60	33.91
PK	5.464G	64.42	68.20	-3.78	57.05	3	Horizontal	54	1.95	78	33.68	7.60	33.91
PK	5.5995G	111.56	Inf	-Inf	103.77	3	Horizontal	54	1.95	78	34.00	7.66	33.87
AV	5.6G	99.42	Inf	-Inf	91.63	3	Horizontal	54	1.95	78	34.00	7.66	33.87
PK	5.725G	68.18	68.20	-0.02	60.08	3	Horizontal	54	1.95	78	34.20	7.72	33.82

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5610MHz_TX

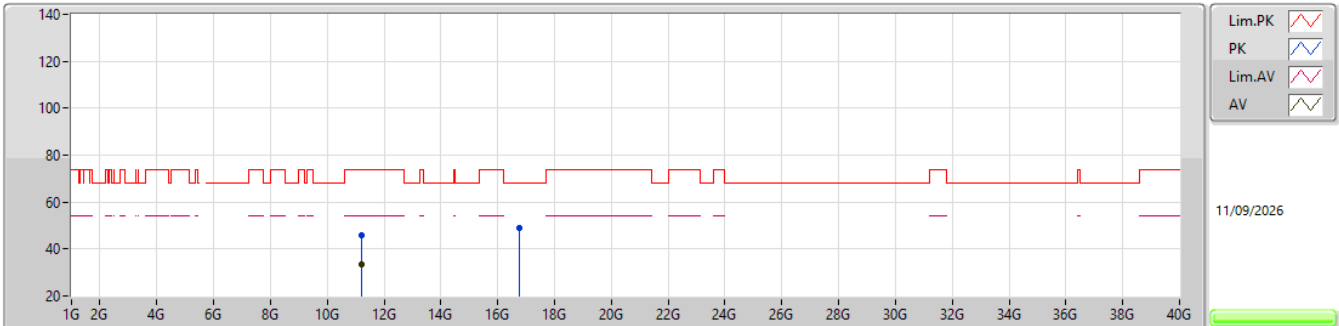EUT Y_2TX
SET 78

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.21448G	45.61	74.00	-28.39	61.76	3	Vertical	194	1.43	78	38.93	11.17	66.25				
AV	11.21223G	33.19	54.00	-20.81	49.35	3	Vertical	194	1.43	78	38.92	11.17	66.25				
PK	16.7572G	48.93	68.20	-19.27	58.85	3	Vertical	305	1.93	78	40.13	13.51	63.56				

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5610MHz_TX

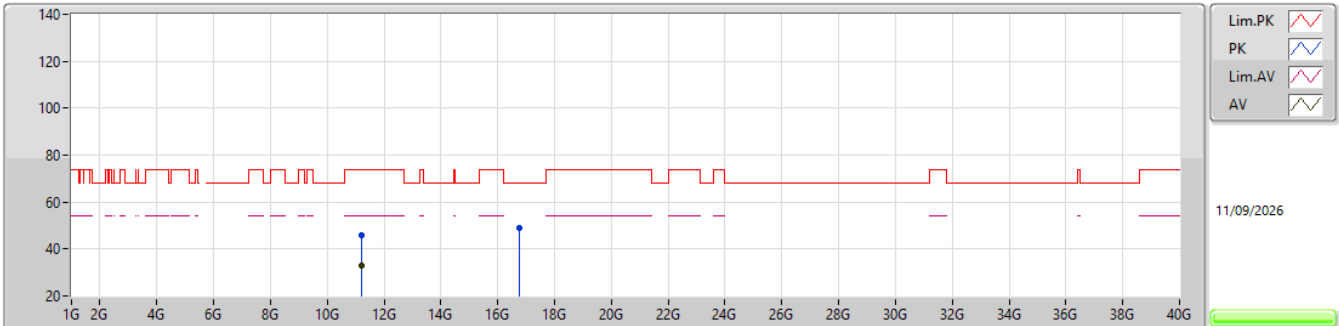EUT Y_2TX
SET 78

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.20815G	46.05	74.00	-27.95	62.22	3	Horizontal	195	2.46	78	38.92	11.16	66.25			
AV	11.21202G	33.03	54.00	-20.97	49.19	3	Horizontal	195	2.46	78	38.92	11.17	66.25			
PK	16.7668G	48.79	68.20	-19.41	58.67	3	Horizontal	354	2.26	78	40.17	13.51	63.56			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

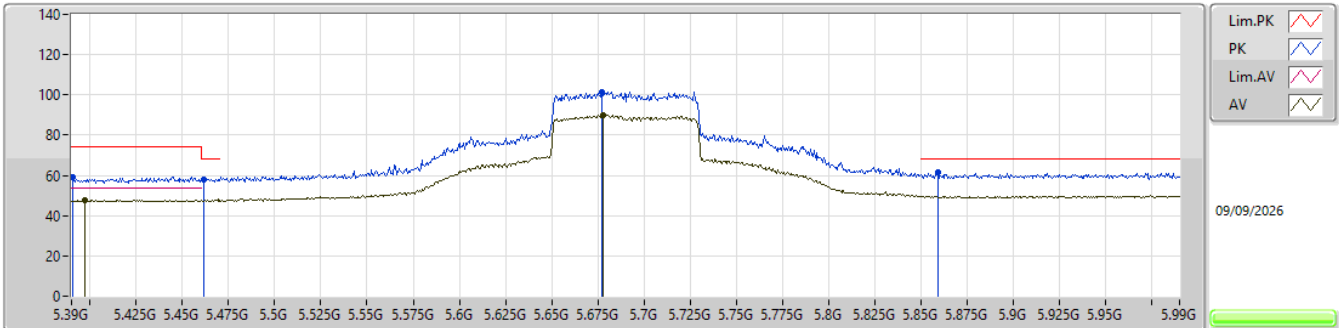


EUT_V_2TX
SET 93
80\92\108\100\96\94\93
6.37\6.20\5.63\5.85\6.33\5.98\6.34

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3906G	59.11	74.00	-14.89	52.08	3	Vertical	140	1.09	93	33.38	7.57	33.92
AV	5.3972G	47.66	54.00	-6.34	40.62	3	Vertical	140	1.09	93	33.39	7.57	33.92
PK	5.4614G	58.16	68.20	-10.04	50.80	3	Vertical	140	1.09	93	33.67	7.60	33.91
PK	5.6774G	101.54	Inf	-Inf	93.54	3	Vertical	140	1.09	93	34.15	7.69	33.84
AV	5.678G	90.16	Inf	-Inf	82.14	3	Vertical	140	1.09	93	34.16	7.70	33.84
PK	5.8592G	61.29	68.20	-6.91	52.60	3	Vertical	140	1.09	93	34.67	7.79	33.77

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

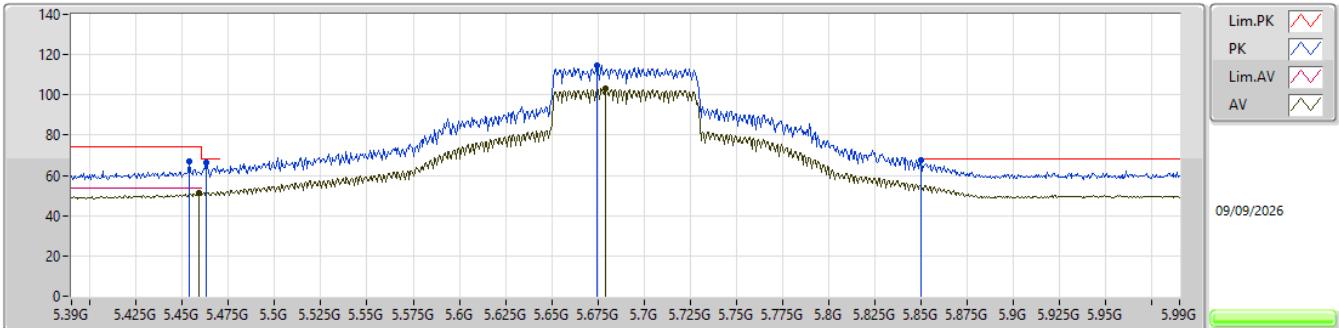


EUT_V_2TX
SET 93
93
0.86

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.4536G	67.00	74.00	-7.00	59.70	3	Horizontal	53	1.95	93	33.62	7.59	33.91				
PK	5.4632G	66.10	68.20	-2.10	58.73	3	Horizontal	53	1.95	93	33.68	7.60	33.91				
AV	5.459G	51.25	54.00	-2.75	43.91	3	Horizontal	53	1.95	93	33.65	7.60	33.91				
PK	5.6744G	114.77	Inf	-Inf	106.77	3	Horizontal	53	1.95	93	34.15	7.69	33.84				
AV	5.6792G	103.15	Inf	-Inf	95.13	3	Horizontal	53	1.95	93	34.16	7.70	33.84				
PK	5.85G	67.34	68.20	-0.86	58.74	3	Horizontal	53	1.95	93	34.60	7.78	33.78				

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5690MHz Straddle 5.47-5.725GHz_TX

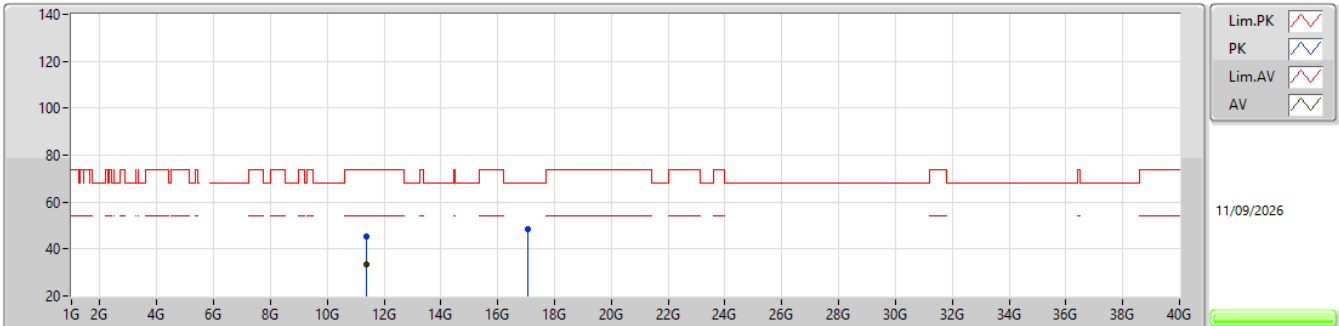EUT Y_2TX
SET 93

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.37841G	45.31	74.00	-28.69	61.19	3	Vertical	131	1.34	93	39.14	11.28	66.30			
AV	11.38678G	33.67	54.00	-20.33	49.55	3	Vertical	131	1.34	93	39.13	11.29	66.30			
PK	17.04952G	48.68	68.20	-19.52	57.70	3	Vertical	195	1.46	93	41.00	13.68	63.70			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5690MHz Straddle 5.47-5.725GHz_TX

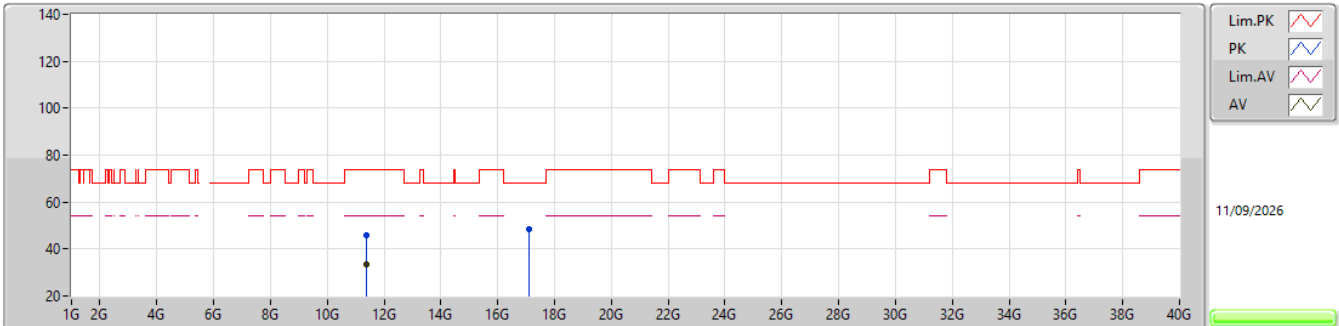EUT_Y_2TX
SET 93

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.37016G	45.91	74.00	-28.09	61.77	3	Horizontal	230	1.91	93	39.16	11.28	66.30			
AV	11.38474G	33.68	54.00	-20.32	49.56	3	Horizontal	230	1.91	93	39.13	11.29	66.30			
PK	17.09624G	48.32	68.20	-19.88	57.20	3	Horizontal	22	1.80	93	41.18	13.71	63.77			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TX

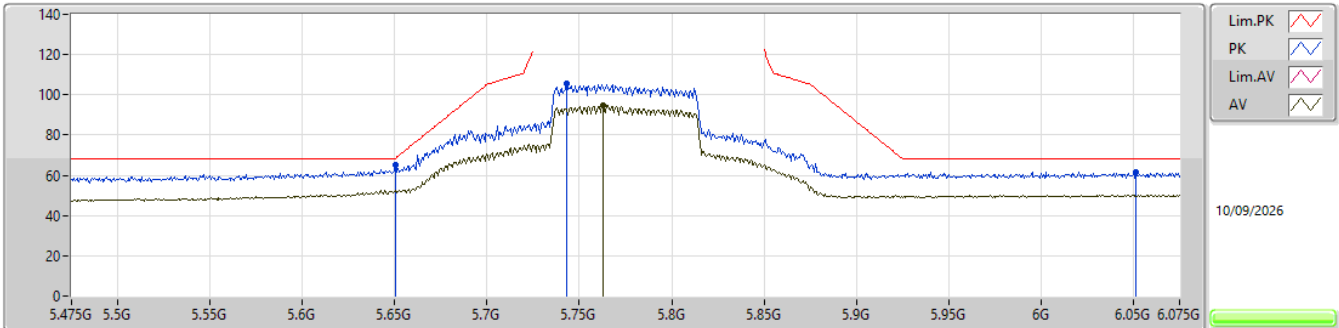


EUT_Y_2TX
SET 92
80\92\98\95\94\82\88\91\92
6.26\2.90\17.73\18.74\17.52\6.21\5.96\4.31\3.22

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6502G	65.13	68.35	-3.22	57.20	3	Vertical	55	1.06	92	34.10	7.68	33.85			
PK	5.7432G	105.70	Inf	-Inf	97.60	3	Vertical	55	1.06	92	34.20	7.72	33.82			
AV	5.763G	94.88	Inf	-Inf	86.73	3	Vertical	55	1.06	92	34.23	7.73	33.81			
PK	6.0516G	61.79	68.20	-6.41	52.13	3	Vertical	55	1.06	92	35.50	7.90	33.74			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TX

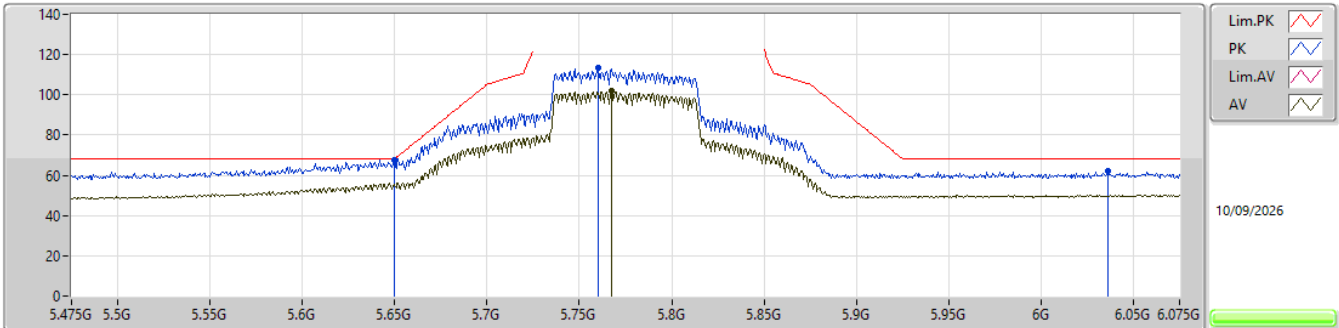


EUT_Y_2TX
SET 89
92\87\89\90\89
-2.16\1.81\1.22\0.01\0.80

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6496G	67.40	68.20	-0.80	59.47	3	Horizontal	54	2.01	89	34.10	7.68	33.85			
PK	5.76G	113.24	Inf	-Inf	105.10	3	Horizontal	54	2.01	89	34.22	7.73	33.81			
AV	5.7672G	101.88	Inf	-Inf	93.72	3	Horizontal	54	2.01	89	34.23	7.74	33.81			
PK	6.036G	62.25	68.20	-5.95	52.64	3	Horizontal	54	2.01	89	35.44	7.90	33.73			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5775MHz_TX

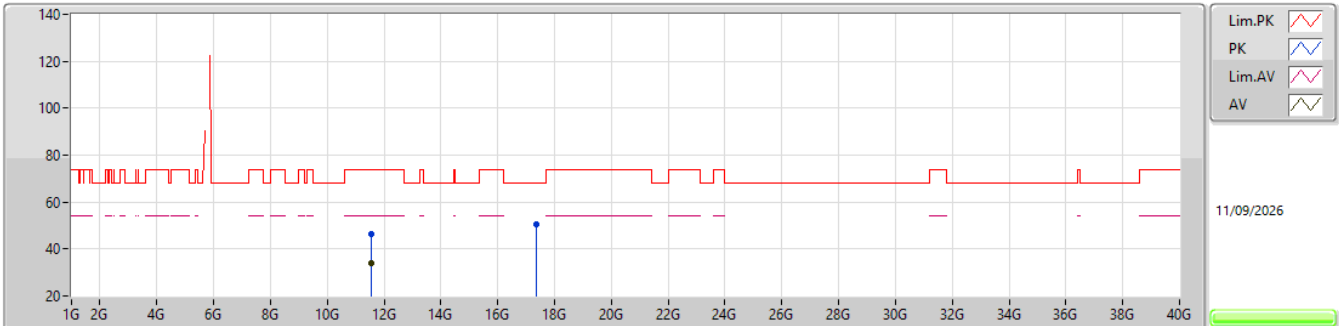EUT Y_2TX
SET 89

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.54904G	46.19	74.00	-27.81	62.06	3	Vertical	279	1.62	89	39.10	11.40	66.37			
AV	11.54916G	33.75	54.00	-20.25	49.62	3	Vertical	279	1.62	89	39.10	11.40	66.37			
PK	17.34324G	50.38	68.20	-17.82	58.77	3	Vertical	179	1.80	89	41.90	13.85	64.14			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TX

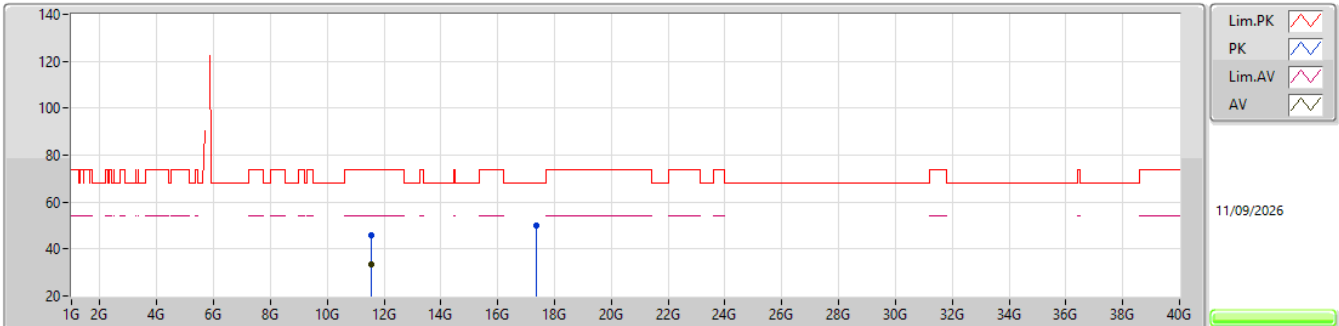EUT Y_2TX
SET 89

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.54193G	46.08	74.00	-27.92	61.95	3	Horizontal	289	1.72	89	39.10	11.39	66.36				
AV	11.53632G	33.48	54.00	-20.52	49.35	3	Horizontal	289	1.72	89	39.10	11.39	66.36				
PK	17.34756G	50.14	68.20	-18.06	58.53	3	Horizontal	285.1	1.80	89	41.90	13.85	64.14				




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1.(6Mbps)_1TX	Pass	AV	5.1491G	53.96	54.00	-0.04	3	Vertical	352	1.69	98

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

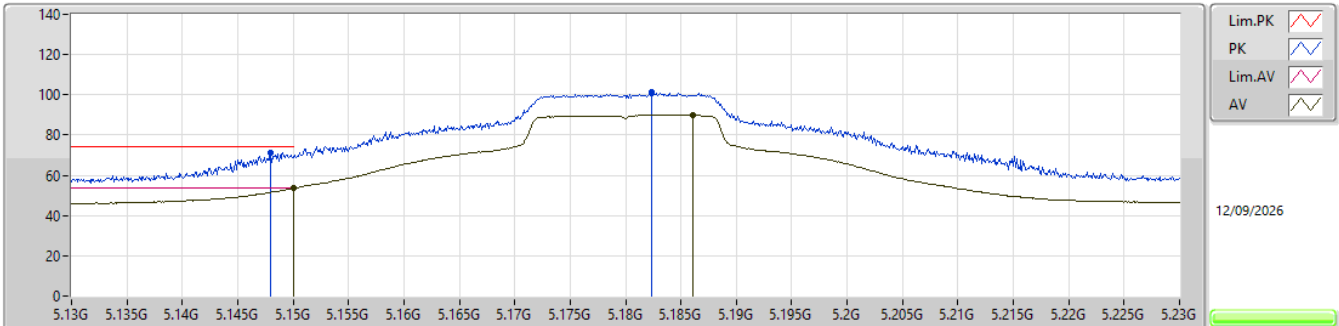


EUT_X_1TX
SET 76
80\75\77\76
-2.36\1.21\0.53\0.45

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.148G	71.14	74.00	-2.86	64.70	3	Vertical	346	1.53	76	32.90	7.47	33.93				
AV	5.15G	53.55	54.00	-0.45	47.11	3	Vertical	346	1.53	76	32.90	7.47	33.93				
PK	5.1824G	101.34	Inf	-Inf	94.90	3	Vertical	346	1.53	76	32.90	7.47	33.93				
AV	5.1861G	89.86	Inf	-Inf	83.42	3	Vertical	346	1.53	76	32.90	7.47	33.93				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

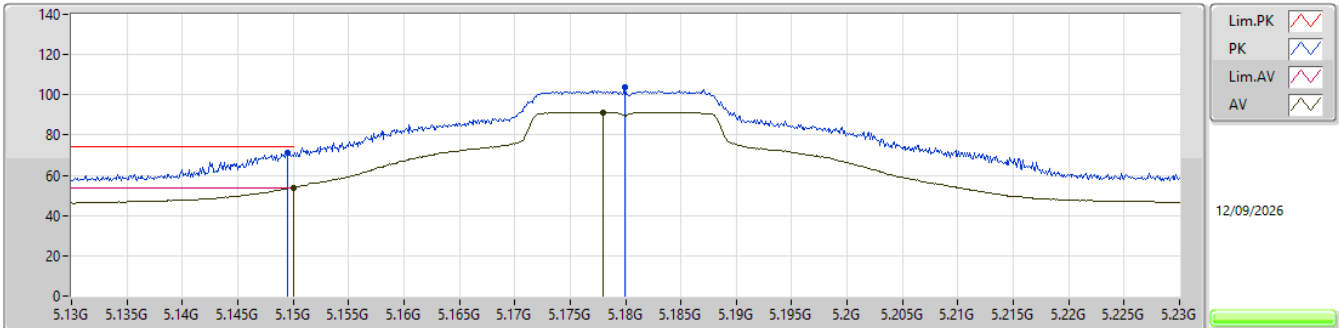


EUT_X_1TX
SET 75
76\74\75
-0.70\0.55\0.05

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1495G	71.48	74.00	-2.52	65.04	3	Horizontal	70	2.38	75	32.90	7.47	33.93			
AV	5.15G	53.95	54.00	-0.05	47.51	3	Horizontal	70	2.38	75	32.90	7.47	33.93			
PK	5.1799G	103.71	Inf	-Inf	97.27	3	Horizontal	70	2.38	75	32.90	7.47	33.93			
AV	5.178G	91.23	Inf	-Inf	84.79	3	Horizontal	70	2.38	75	32.90	7.47	33.93			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX


5180MHz_TX

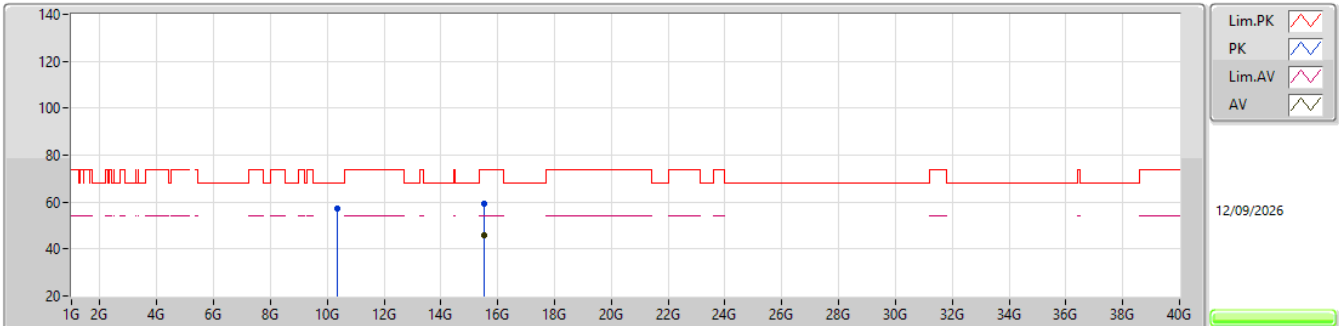EUT X_1TX
SET 75

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.35376G	57.07	68.20	-11.13	41.71	3	Vertical	24	1.58	75	38.90	10.57	34.11				
PK	15.5438G	59.53	74.00	-14.47	42.47	3	Vertical	0	1.80	75	38.70	12.92	34.56				
AV	15.5446G	46.03	54.00	-7.97	28.97	3	Vertical	0	1.80	75	38.70	12.92	34.56				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5180MHz_TX

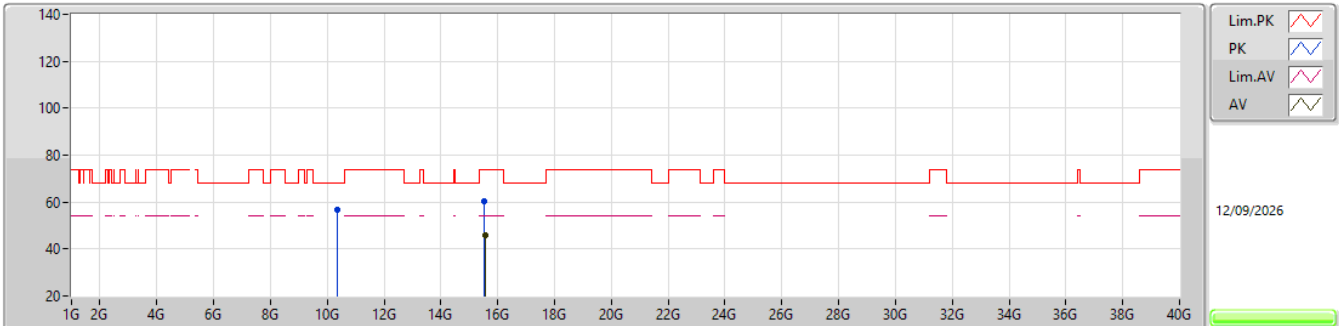


EUT_X_1TX
SET 75

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.353G	56.93	68.20	-11.27	41.57	3	Horizontal	73	1.71	75	38.90	10.57	34.11			
PK	15.53516G	60.47	74.00	-13.53	43.43	3	Horizontal	230.1	1.80	75	38.70	12.91	34.57			
AV	15.54648G	46.01	54.00	-7.99	28.95	3	Horizontal	230.1	1.80	75	38.70	12.92	34.56			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

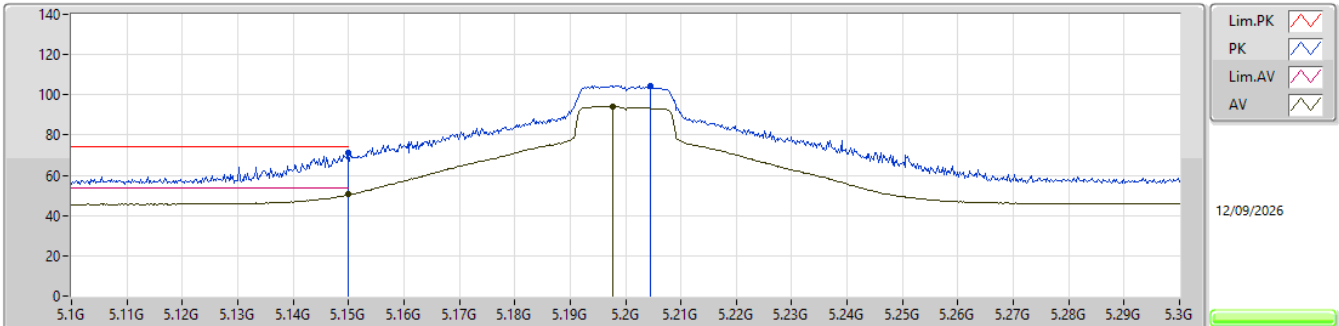


EUT_X_1TX
SET 95
80\95\102\99\98\86\92\95
7.53\2.96\9.02\8.82\8.82\6.94\5.02\2.89

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.15G	71.11	74.00	-2.89	64.67	3	Vertical	345	1.73	95	32.90	7.47	33.93				
AV	5.15G	50.42	54.00	-3.58	43.98	3	Vertical	345	1.73	95	32.90	7.47	33.93				
PK	5.2046G	104.63	Inf	-Inf	98.17	3	Vertical	345	1.73	95	32.92	7.47	33.93				
AV	5.1978G	94.14	Inf	-Inf	87.70	3	Vertical	345	1.73	95	32.90	7.47	33.93				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

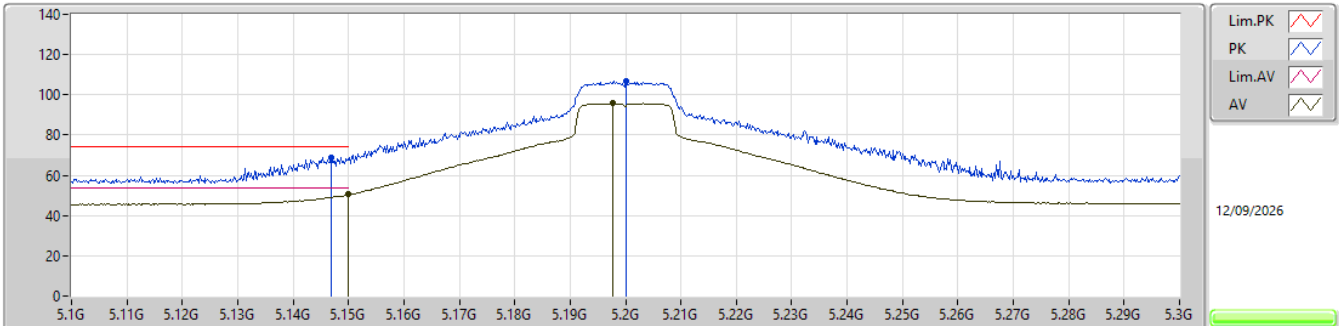


EUT_X_1TX
SET 95
95
3.58

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.1468G	69.06	74.00	-4.94	62.63	3	Horizontal	70	1.63	95	32.89	7.47	33.93					
AV	5.15G	50.42	54.00	-3.58	43.98	3	Horizontal	70	1.63	95	32.90	7.47	33.93					
PK	5.2G	106.95	Inf	-Inf	100.51	3	Horizontal	70	1.63	95	32.90	7.47	33.93					
AV	5.1978G	95.73	Inf	-Inf	89.29	3	Horizontal	70	1.63	95	32.90	7.47	33.93					

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

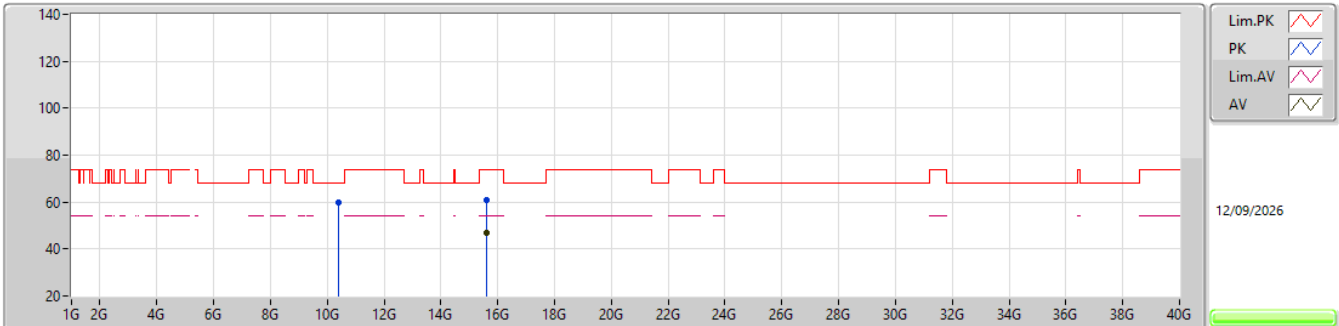


EUT_X_1TX
SET 95

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.398G	60.03	68.20	-8.17	44.65	3	Vertical	20	1.05	95	38.90	10.60	34.12			
PK	15.5904G	60.68	74.00	-13.32	43.73	3	Vertical	183	1.80	95	38.54	12.93	34.52			
AV	15.5984G	46.86	54.00	-7.14	29.92	3	Vertical	183	1.80	95	38.51	12.94	34.51			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5200MHz_TX

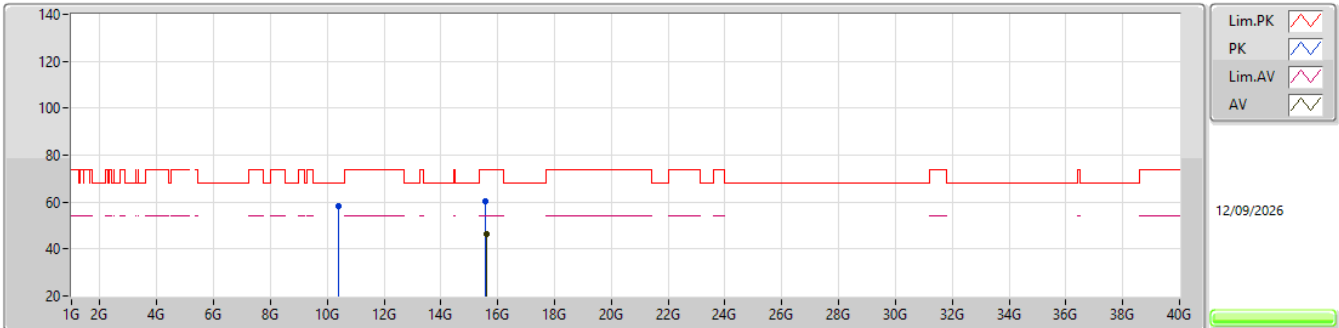


EUT_X_1TX
SET 95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.4G	58.10	68.20	-10.10	42.71	3	Horizontal	92	1.33	95	38.90	10.61	34.12				
PK	15.58212G	60.10	74.00	-13.90	43.12	3	Horizontal	59	1.80	95	38.57	12.93	34.52				
AV	15.60076G	46.57	54.00	-7.43	29.64	3	Horizontal	59	1.80	95	38.50	12.94	34.51				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

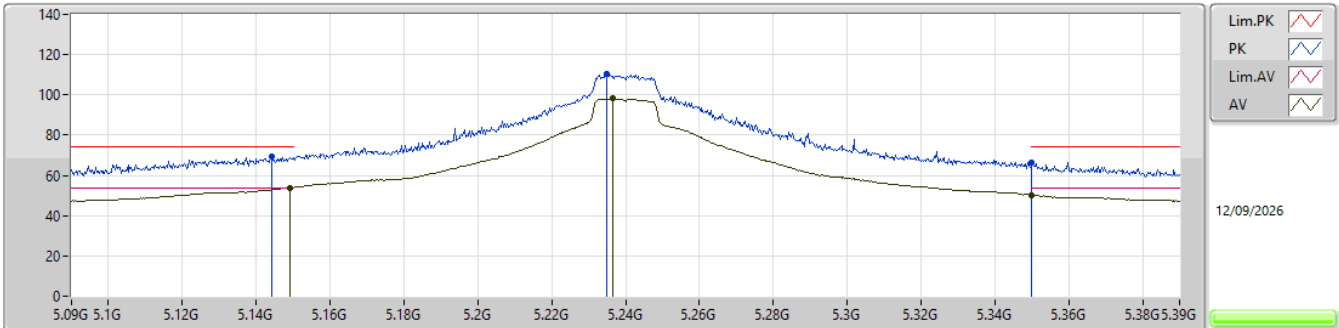


EUT_X_1TX
SET 98
80\95\108\102\99\98
7.91\7.91\0.07\0.12\0.16\0.04

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1443G	69.26	74.00	-4.74	62.83	3	Vertical	352	1.69	98	32.89	7.47	33.93			
AV	5.1491G	53.96	54.00	-0.04	47.52	3	Vertical	352	1.69	98	32.90	7.47	33.93			
PK	5.2349G	110.45	Inf	-Inf	103.85	3	Vertical	352	1.69	98	33.04	7.49	33.93			
AV	5.2364G	98.10	Inf	-Inf	91.49	3	Vertical	352	1.69	98	33.05	7.49	33.93			
PK	5.35G	66.32	74.00	-7.68	59.40	3	Vertical	352	1.69	98	33.30	7.54	33.92			
AV	5.35G	50.23	54.00	-3.77	43.31	3	Vertical	352	1.69	98	33.30	7.54	33.92			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

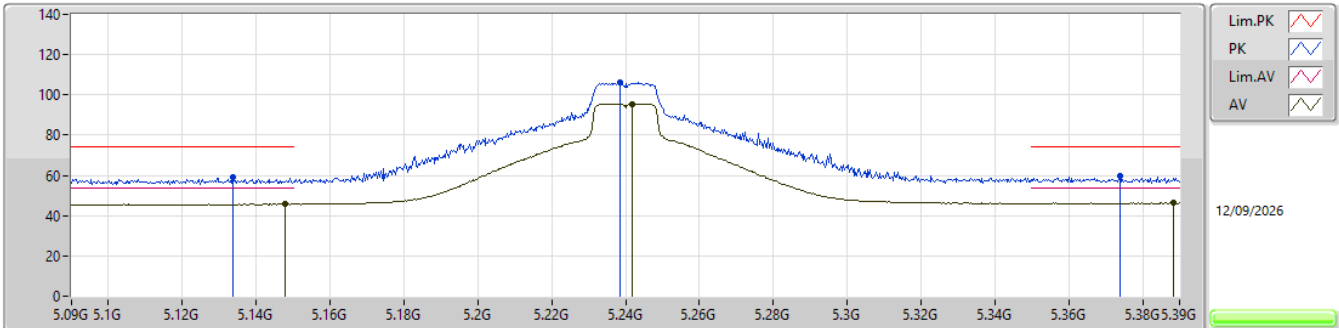


EUT_X_1TX
SET 95
98\94\97\96\95
-1.90\7.70\ -1.98\ -1.95\7.74

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1338G	59.16	74.00	-14.84	52.75	3	Horizontal	69	2.26	95	32.87	7.47	33.93			
AV	5.1479G	45.79	54.00	-8.21	39.35	3	Horizontal	69	2.26	95	32.90	7.47	33.93			
PK	5.2385G	105.99	Inf	-Inf	99.38	3	Horizontal	69	2.26	95	33.05	7.49	33.93			
AV	5.2418G	95.61	Inf	-Inf	88.98	3	Horizontal	69	2.26	95	33.07	7.49	33.93			
PK	5.3738G	59.85	74.00	-14.15	52.86	3	Horizontal	69	2.26	95	33.35	7.56	33.92			
AV	5.3885G	46.26	54.00	-7.74	39.24	3	Horizontal	69	2.26	95	33.38	7.56	33.92			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX

5240MHz_TX

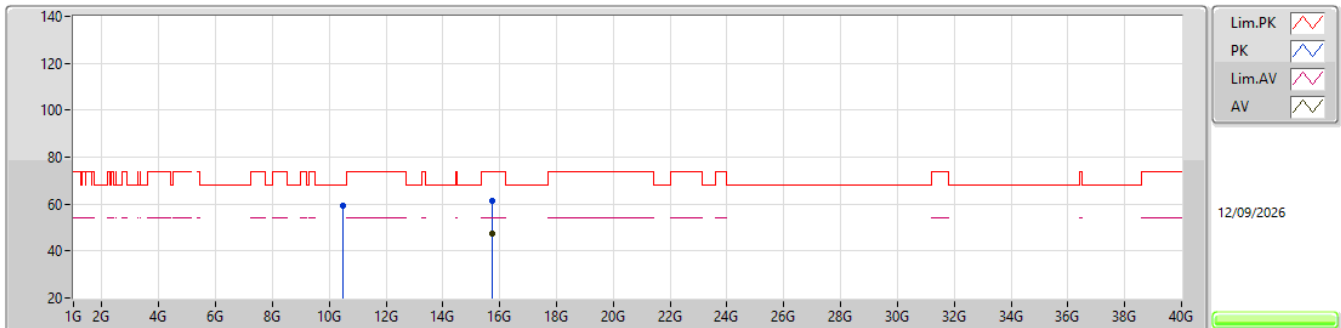


EUT X_1TX
SET 95

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.48196G	59.13	68.20	-9.07	43.57	3	Vertical	24	1.21	95	39.03	10.66	34.13			
PK	15.71828G	61.51	74.00	-12.49	44.58	3	Vertical	175	2.20	95	38.34	12.98	34.39			
AV	15.72408G	47.47	54.00	-6.53	30.53	3	Vertical	175	2.20	95	38.35	12.98	34.39			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_1TX


5240MHz_TX

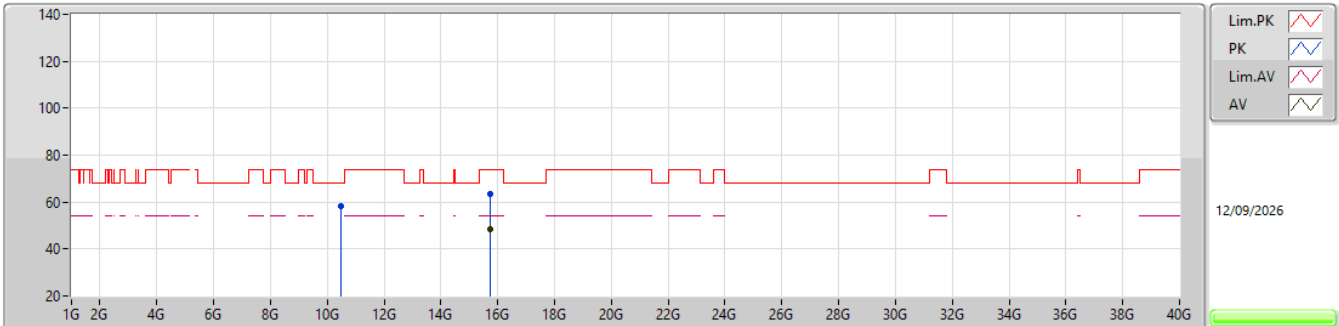EUT_X_1TX
SET 95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47356G	58.27	68.20	-9.93	42.75	3	Horizontal	85	1.80	95	38.99	10.66	34.13			
PK	15.72092G	63.67	74.00	-10.33	46.74	3	Horizontal	267	1.96	95	38.34	12.98	34.39			
AV	15.72016G	48.56	54.00	-5.44	31.63	3	Horizontal	267	1.96	95	38.34	12.98	34.39			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

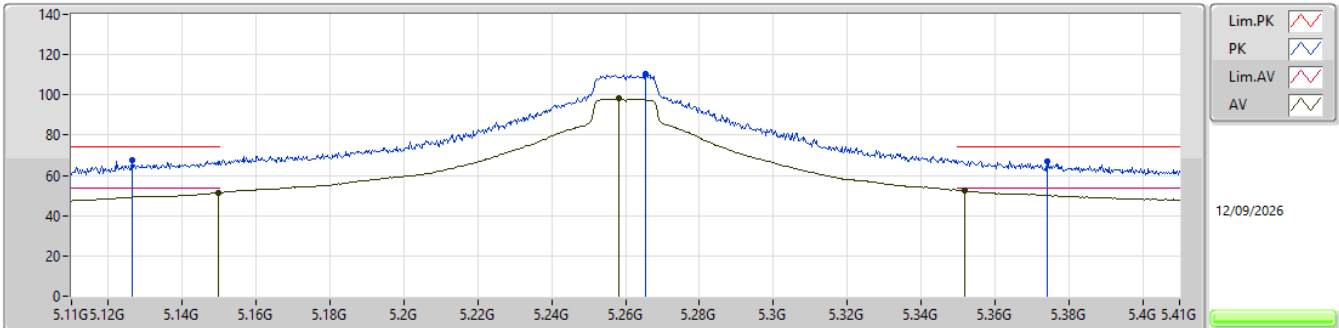


EUT_X_1TX
SET 95
80\95
7.84\1.39

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1265G	67.74	74.00	-6.26	61.35	3	Vertical	345	1.49	108	32.85	7.47	33.93			
AV	5.1499G	51.41	54.00	-2.59	44.97	3	Vertical	345	1.49	108	32.90	7.47	33.93			
PK	5.2654G	110.32	Inf	-Inf	103.61	3	Vertical	345	1.49	108	33.13	7.50	33.92			
AV	5.2582G	98.11	Inf	-Inf	91.41	3	Vertical	345	1.49	108	33.12	7.50	33.92			
PK	5.3743G	67.16	74.00	-6.84	60.17	3	Vertical	345	1.49	108	33.35	7.56	33.92			
AV	5.3518G	52.61	54.00	-1.39	45.68	3	Vertical	345	1.49	108	33.30	7.55	33.92			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

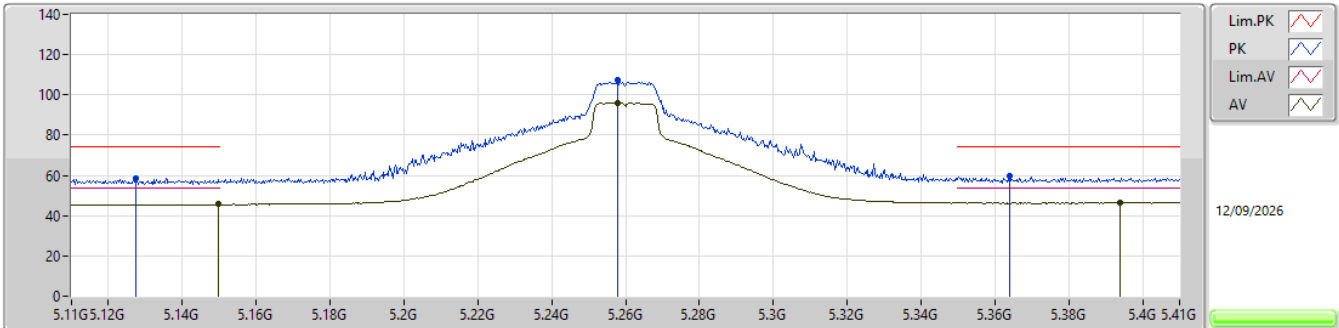


EUT_X_1TX
SET 95
108\102\99\98\97\96\95
-2.53\ -2.72\ -2.52\ -2.49\ -2.55\ -2.47\ 7.56

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1274G	58.48	74.00	-15.52	52.09	3	Horizontal	68	2.25	95	32.85	7.47	33.93			
AV	5.1496G	45.64	54.00	-8.36	39.20	3	Horizontal	68	2.25	95	32.90	7.47	33.93			
PK	5.2579G	107.48	Inf	-Inf	100.78	3	Horizontal	68	2.25	95	33.12	7.50	33.92			
AV	5.2579G	95.99	Inf	-Inf	89.29	3	Horizontal	68	2.25	95	33.12	7.50	33.92			
PK	5.3641G	59.44	74.00	-14.56	52.48	3	Horizontal	68	2.25	95	33.33	7.55	33.92			
AV	5.3938G	46.44	54.00	-7.56	39.40	3	Horizontal	68	2.25	95	33.39	7.57	33.92			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

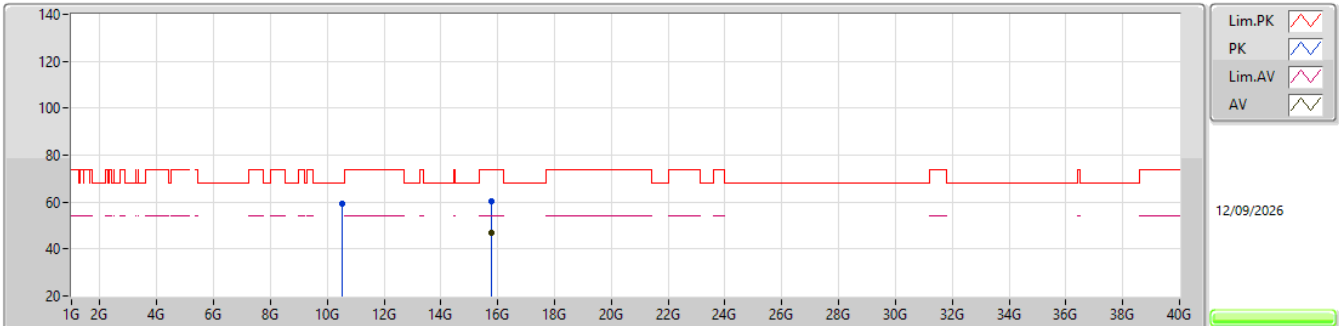


EUT_X_1TX
SET 95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51892G	59.38	68.20	-8.82	43.68	3	Vertical	24	1.19	95	39.14	10.69	34.13			
PK	15.77212G	60.54	74.00	-13.46	43.49	3	Vertical	176	1.80	95	38.40	12.99	34.34			
AV	15.7754G	46.81	54.00	-7.19	29.76	3	Vertical	176	1.80	95	38.40	12.99	34.34			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

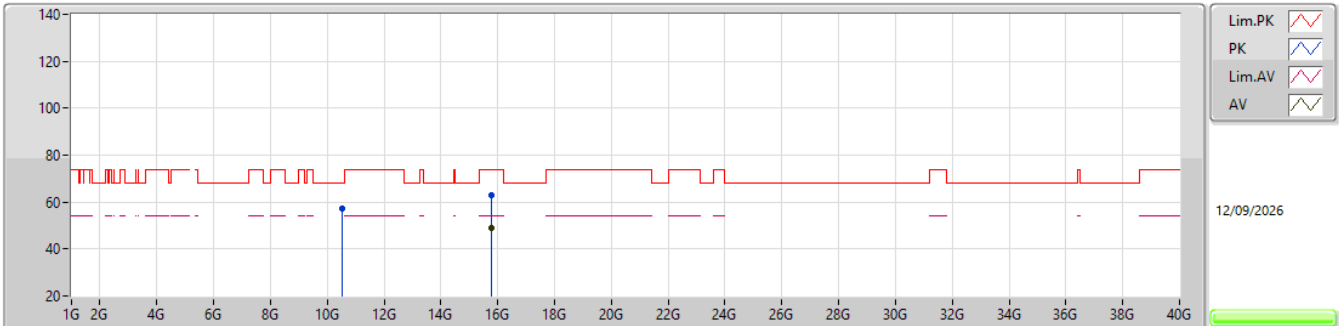


EUT_X_1TX
SET 95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51892G	57.42	68.20	-10.78	41.72	3	Horizontal	90	1.39	95	39.14	10.69	34.13			
PK	15.78176G	63.17	74.00	-10.83	46.11	3	Horizontal	262	2.82	95	38.40	13.00	34.34			
AV	15.77772G	48.74	54.00	-5.26	31.68	3	Horizontal	262	2.82	95	38.40	13.00	34.34			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5300MHz_TX

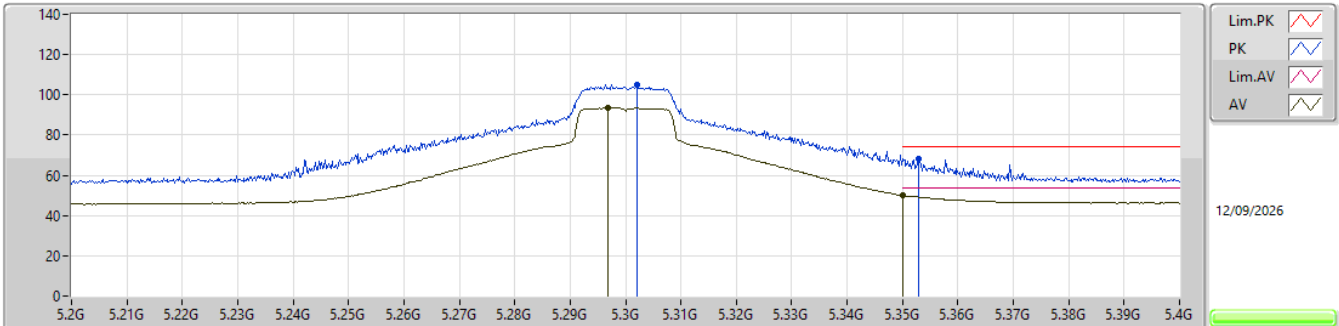


EUT_X_1TX
SET 94
80\94\101\98\97\85\91\94
7.16\3.80\8.42\8.32\8.32\6.66\4.93\3.99

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.302G	105.25	Inf	-Inf	98.45	3	Vertical	72	1.76	94	33.20	7.52	33.92				
AV	5.2968G	93.48	Inf	-Inf	86.69	3	Vertical	72	1.76	94	33.19	7.52	33.92				
PK	5.3528G	68.35	74.00	-5.65	61.41	3	Vertical	72	1.76	94	33.31	7.55	33.92				
AV	5.35G	50.01	54.00	-3.99	43.09	3	Vertical	72	1.76	94	33.30	7.54	33.92				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5300MHz_TX

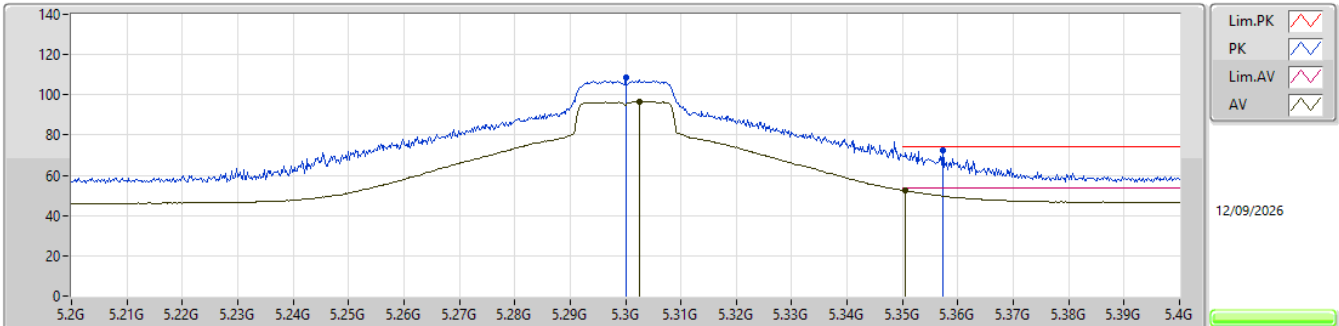


EUT_X_1TX
SET 94
94
1.53

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3G	108.86	Inf	-Inf	102.06	3	Horizontal	72	2.30	94	33.20	7.52	33.92				
AV	5.3026G	96.50	Inf	-Inf	89.69	3	Horizontal	72	2.30	94	33.21	7.52	33.92				
PK	5.3572G	72.13	74.00	-1.87	65.19	3	Horizontal	72	2.30	94	33.31	7.55	33.92				
AV	5.3504G	52.47	54.00	-1.53	45.54	3	Horizontal	72	2.30	94	33.30	7.55	33.92				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX


5300MHz_TX

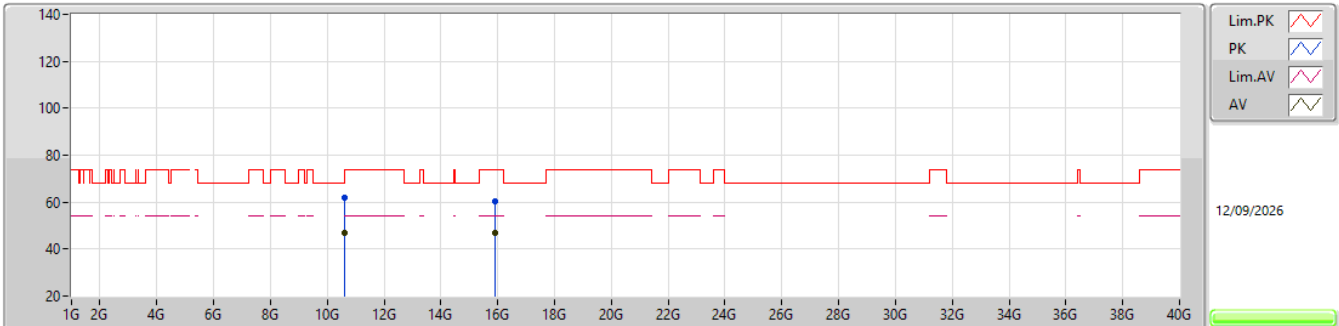EUT_X_1TX
SET 94

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.59896G	61.73	68.20	-6.47	45.95	3	Vertical	22	1.09	94	39.20	10.74	34.16				
AV	10.6008G	46.89	54.00	-7.11	31.11	3	Vertical	22	1.09	94	39.20	10.74	34.16				
PK	15.89804G	60.46	74.00	-13.54	42.86	3	Vertical	188	1.77	94	38.79	13.04	34.23				
AV	15.8972G	46.99	54.00	-7.01	29.40	3	Vertical	188	1.77	94	38.78	13.04	34.23				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX


5300MHz_TX

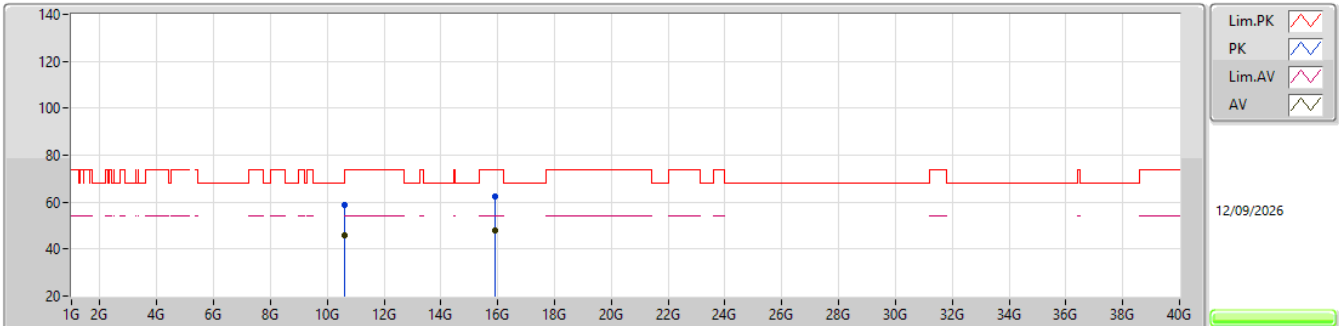EUT_X_1TX
SET 94

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60196G	58.99	74.00	-15.01	43.20	3	Horizontal	86	1.76	94	39.20	10.75	34.16			
AV	10.6012G	45.67	54.00	-8.33	29.89	3	Horizontal	86	1.76	94	39.20	10.74	34.16			
PK	15.89764G	62.28	74.00	-11.72	44.68	3	Horizontal	262	2.06	94	38.79	13.04	34.23			
AV	15.9G	47.86	54.00	-6.14	30.24	3	Horizontal	262	2.06	94	38.80	13.04	34.22			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5320MHz_TX

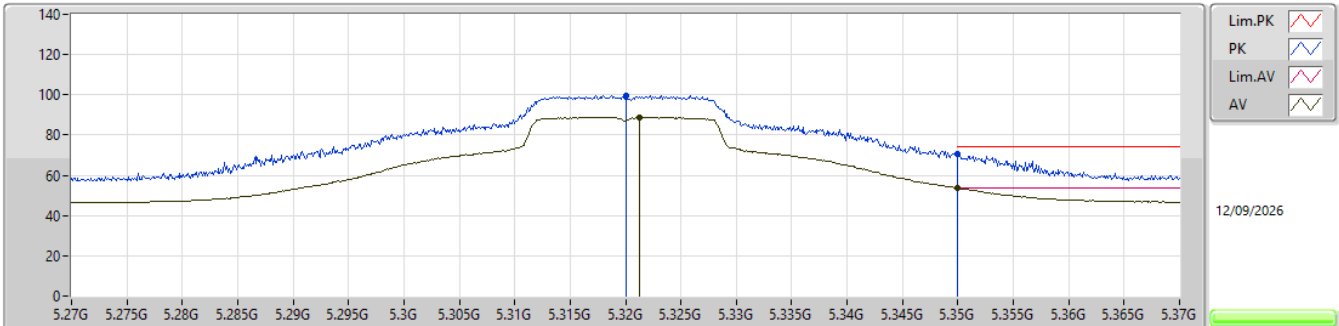


EUT_X_1TX
SET 77
80\77
-1.38\0.42

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.32G	99.85	Inf	-Inf	93.00	3	Vertical	73	1.73	77	33.24	7.53	33.92			
AV	5.3213G	88.80	Inf	-Inf	81.95	3	Vertical	73	1.73	77	33.24	7.53	33.92			
PK	5.35G	70.55	74.00	-3.45	63.63	3	Vertical	73	1.73	77	33.30	7.54	33.92			
AV	5.35G	53.58	54.00	-0.42	46.66	3	Vertical	73	1.73	77	33.30	7.54	33.92			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5320MHz_TX

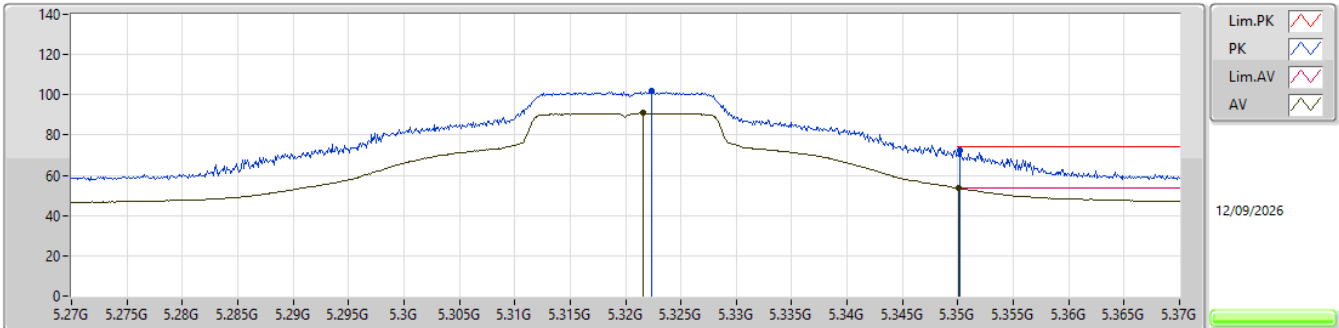


EUT_X_1TX
SET 73
77\72\74\73
-2.43\0.91\0.36\0.45

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3224G	101.86	Inf	-Inf	95.01	3	Horizontal	73	2.30	73	33.24	7.53	33.92			
AV	5.3216G	90.83	Inf	-Inf	83.98	3	Horizontal	73	2.30	73	33.24	7.53	33.92			
PK	5.3502G	72.51	74.00	-1.49	65.58	3	Horizontal	73	2.30	73	33.30	7.55	33.92			
AV	5.3501G	53.55	54.00	-0.45	46.62	3	Horizontal	73	2.30	73	33.30	7.55	33.92			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX


5320MHz_TX

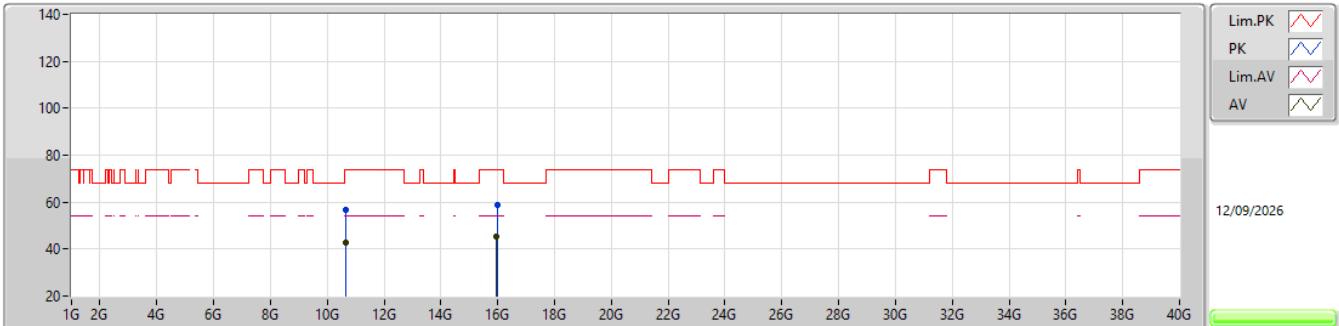EUT X_1TX
SET 73

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.63944G	56.90	74.00	-17.10	41.02	3	Vertical	0	1.79	73	39.28	10.77	34.17				
AV	10.64G	42.93	54.00	-11.07	27.05	3	Vertical	0	1.79	73	39.28	10.77	34.17				
PK	15.97688G	58.98	74.00	-15.02	41.63	3	Vertical	183.1	1.80	73	38.44	13.06	34.15				
AV	15.94072G	45.38	54.00	-8.62	27.88	3	Vertical	183.1	1.80	73	38.64	13.05	34.19				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX


5320MHz_TX

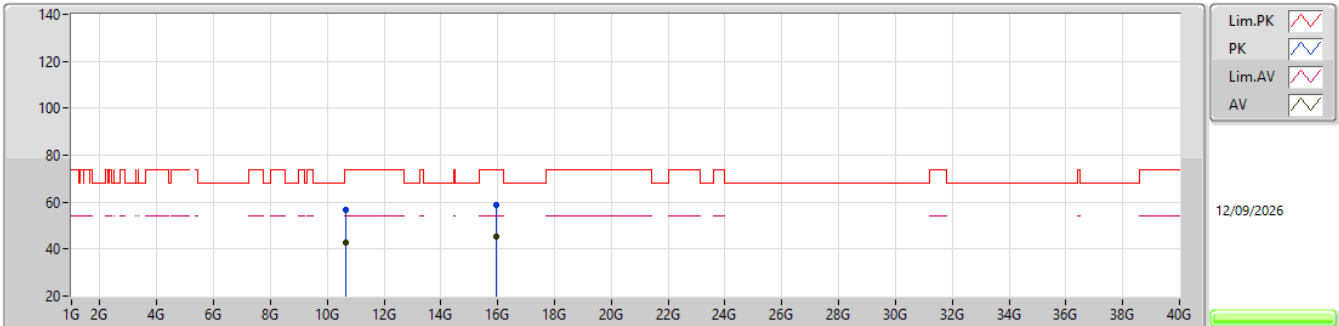EUT X_1TX
SET 73

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63488G	56.58	74.00	-17.42	40.71	3	Horizontal	76	1.80	73	39.27	10.77	34.17			
AV	10.63684G	42.92	54.00	-11.08	27.05	3	Horizontal	76	1.80	73	39.27	10.77	34.17			
PK	15.94116G	58.77	74.00	-15.23	41.27	3	Horizontal	4	1.85	73	38.64	13.05	34.19			
AV	15.9472G	45.46	54.00	-8.54	27.98	3	Horizontal	4	1.85	73	38.61	13.05	34.18			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5500MHz_TX

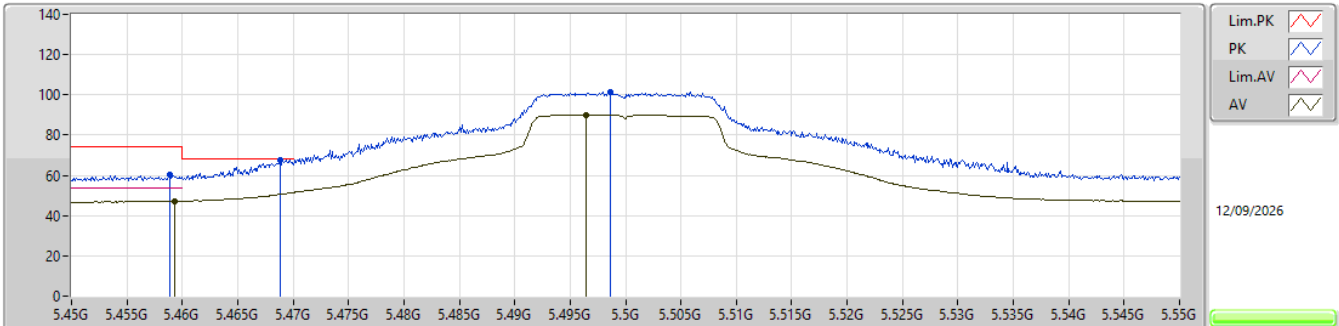


EUT_X_1TX
SET 78
80\76\78
-1.53\1.62\0.48

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4589G	60.26	74.00	-13.74	52.92	3	Vertical	15	1.80	78	33.65	7.60	33.91			
AV	5.4593G	47.27	54.00	-6.73	39.92	3	Vertical	15	1.80	78	33.66	7.60	33.91			
PK	5.4688G	67.72	68.20	-0.48	60.32	3	Vertical	15	1.80	78	33.71	7.60	33.91			
PK	5.4986G	101.46	Inf	-Inf	93.87	3	Vertical	15	1.80	78	33.89	7.61	33.91			
AV	5.4964G	90.11	Inf	-Inf	82.53	3	Vertical	15	1.80	78	33.88	7.61	33.91			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5500MHz_TX

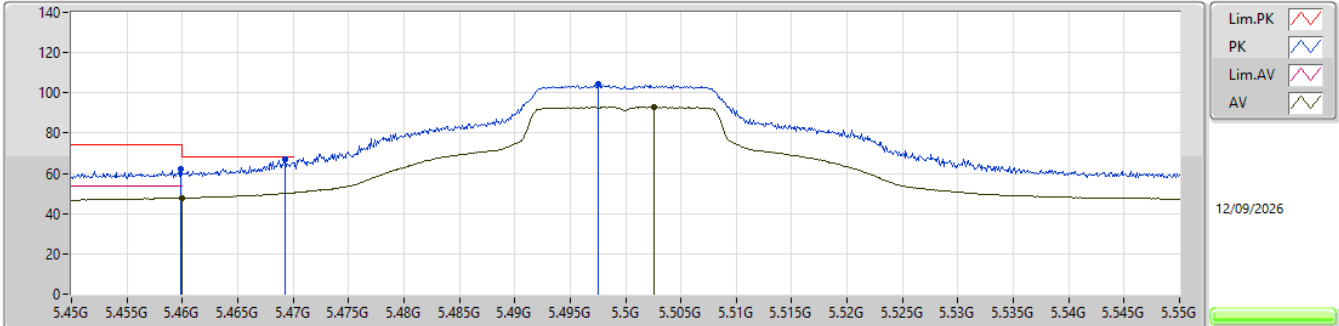


EUT_X_1TX
SET 71
78\70\74\72\71
-3.80\1.97\0.74\0.21\1.27

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4599G	61.89	74.00	-12.11	54.54	3	Horizontal	76	1.80	71	33.66	7.60	33.91			
AV	5.46G	47.89	54.00	-6.11	40.54	3	Horizontal	76	1.80	71	33.66	7.60	33.91			
PK	5.4693G	66.93	68.20	-1.27	59.52	3	Horizontal	76	1.80	71	33.72	7.60	33.91			
PK	5.4975G	104.28	Inf	-Inf	96.70	3	Horizontal	76	1.80	71	33.88	7.61	33.91			
AV	5.5026G	92.87	Inf	-Inf	85.25	3	Horizontal	76	1.80	71	33.91	7.62	33.91			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5500MHz_TX

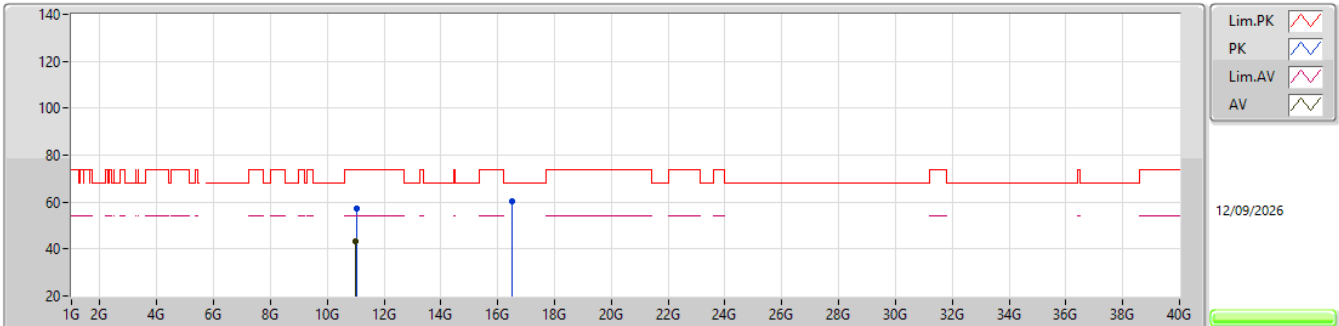EUT X_1TX
SET 71

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.01972G	57.12	74.00	-16.88	41.17	3	Vertical	29	1.92	71	39.20	11.03	34.28			
AV	10.98016G	43.19	54.00	-10.81	27.19	3	Vertical	29	1.92	71	39.24	11.01	34.25			
PK	16.49528G	60.56	68.20	-7.64	42.39	3	Vertical	340	1.80	71	39.67	13.36	34.86			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5500MHz_TX

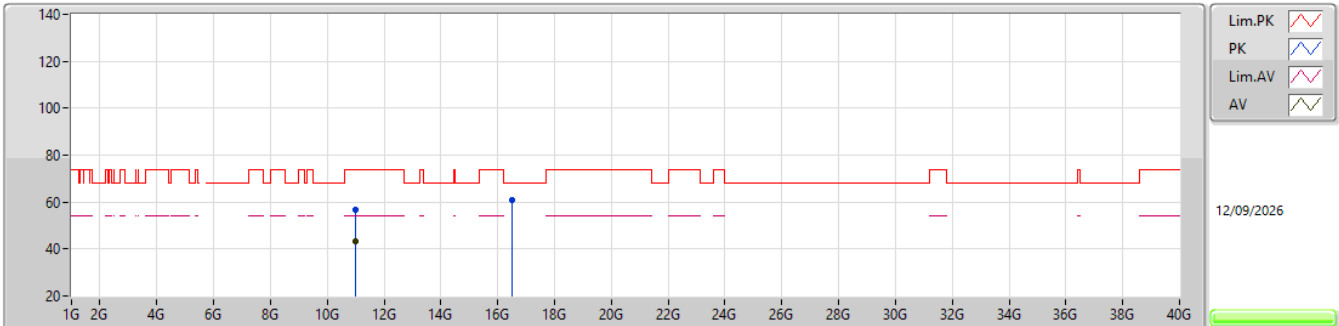


EUT_X_1TX
SET 71

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.99416G	56.74	74.00	-17.26	40.77	3	Horizontal	186	1.21	71	39.21	11.02	34.26				
AV	10.98124G	43.14	54.00	-10.86	27.15	3	Horizontal	186	1.21	71	39.24	11.01	34.26				
PK	16.48776G	60.99	68.20	-7.21	42.86	3	Horizontal	4	1.80	71	39.63	13.35	34.85				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5580MHz_TX

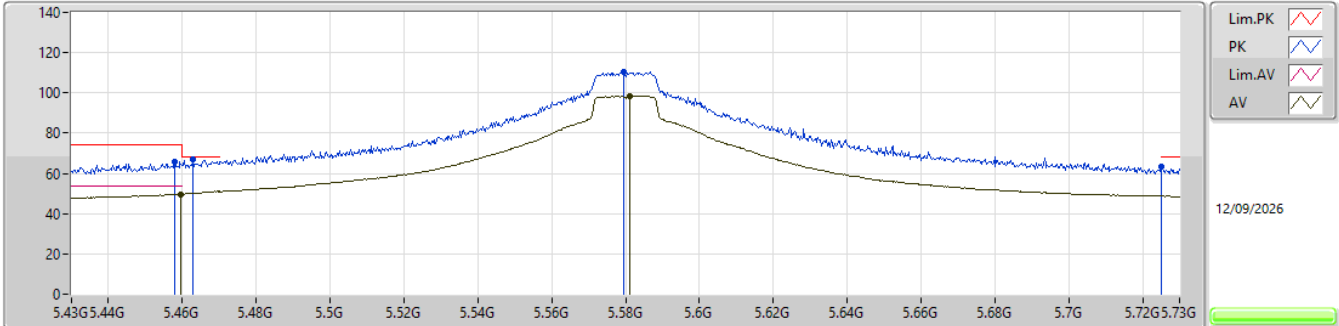


EUT_X_1TX
SET 98
80\95\98
7.64\7.57\1.46

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4579G	65.83	74.00	-8.17	58.49	3	Vertical	80	1.68	108	33.65	7.60	33.91			
AV	5.4597G	49.73	54.00	-4.27	42.38	3	Vertical	80	1.68	108	33.66	7.60	33.91			
PK	5.463G	66.74	68.20	-1.46	59.37	3	Vertical	80	1.68	108	33.68	7.60	33.91			
PK	5.5794G	110.35	Inf	-Inf	102.58	3	Vertical	80	1.68	108	34.00	7.65	33.88			
AV	5.5812G	98.56	Inf	-Inf	90.79	3	Vertical	80	1.68	108	34.00	7.65	33.88			
PK	5.7252G	63.16	68.20	-5.04	55.06	3	Vertical	80	1.68	108	34.20	7.72	33.82			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5580MHz_TX

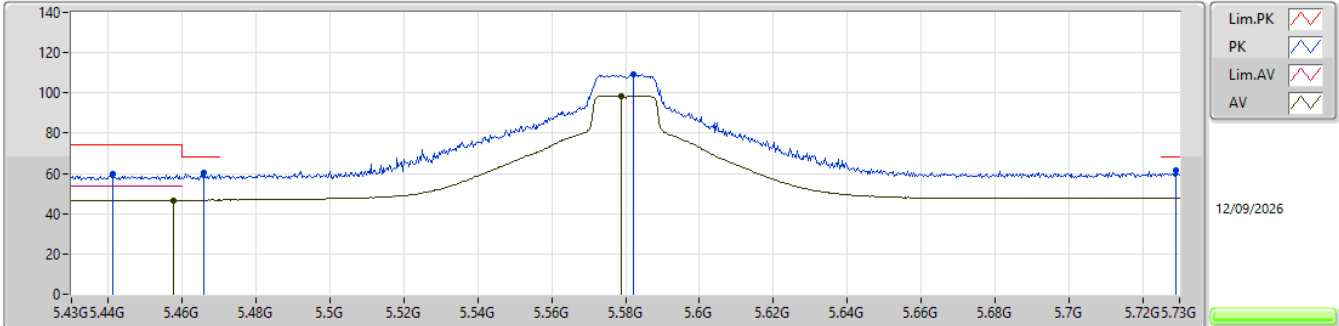


EUT_X_1TX
SET 98
108\104\102\101\100\99\98
-1.95\ -2.31\ -2.89\ -1.79\ -2.32\ -2.71\ 6.89

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4411G	59.73	74.00	-14.27	52.49	3	Horizontal	74	1.80	98	33.56	7.59	33.91			
PK	5.4657G	60.43	68.20	-7.77	53.05	3	Horizontal	74	1.80	98	33.69	7.60	33.91			
AV	5.4576G	46.71	54.00	-7.29	39.37	3	Horizontal	74	1.80	98	33.65	7.60	33.91			
PK	5.5821G	109.18	Inf	-Inf	101.41	3	Horizontal	74	1.80	98	34.00	7.65	33.88			
AV	5.5788G	98.60	Inf	-Inf	90.83	3	Horizontal	74	1.80	98	34.00	7.65	33.88			
PK	5.7291G	61.31	68.20	-6.89	53.21	3	Horizontal	74	1.80	98	34.20	7.72	33.82			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5580MHz_TX

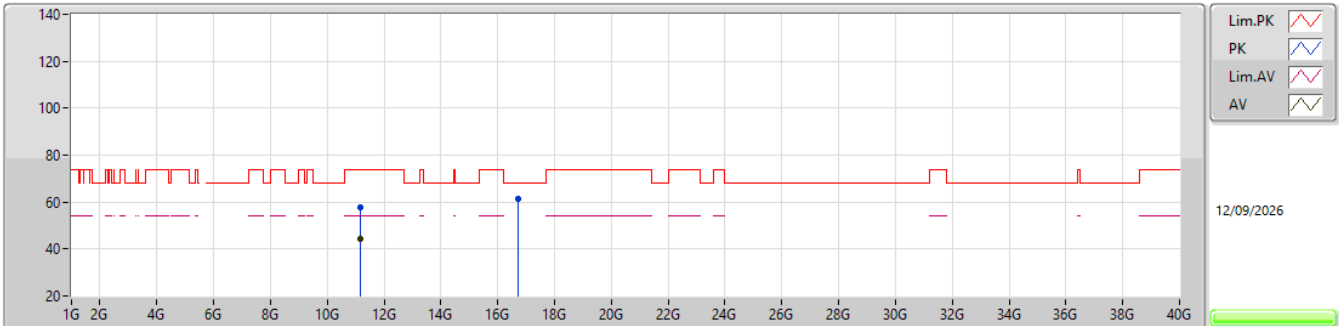


EUT_X_1TX
SET 98

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.15448G	57.71	74.00	-16.29	42.12	3	Vertical	29	1.80	98	38.90	11.13	34.44				
AV	11.16012G	44.31	54.00	-9.69	28.72	3	Vertical	29	1.80	98	38.90	11.13	34.44				
PK	16.73688G	61.59	68.20	-6.61	42.87	3	Vertical	263	1.80	98	40.05	13.50	34.83				

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5580MHz_TX

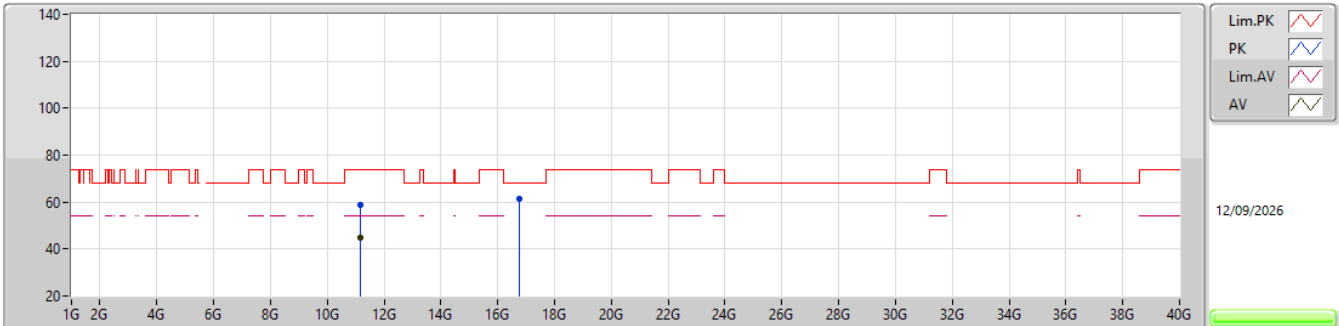EUT X_1TX
SET 98

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15552G	58.76	74.00	-15.24	43.17	3	Horizontal	74	2.20	98	38.90	11.13	34.44			
AV	11.159G	44.59	54.00	-9.41	29.00	3	Horizontal	74	2.20	98	38.90	11.13	34.44			
PK	16.74368G	61.18	68.20	-7.02	42.44	3	Horizontal	78	1.80	98	40.07	13.50	34.83			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5700MHz_TX

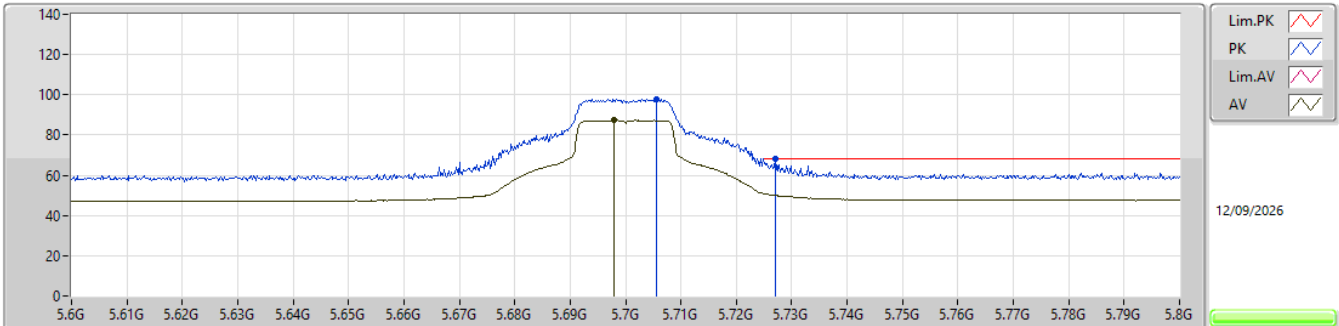


EUT_X_1TX
SET 62
80\64\56\60\62\63\62
-7.87\ -1.46\3.29\0.83\0.66\ -2.72\0.12

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.7056G	98.03	Inf	-Inf	89.95	3	Vertical	82	1.64	62	34.20	7.71	33.83			
AV	5.698G	87.25	Inf	-Inf	79.18	3	Vertical	82	1.64	62	34.20	7.70	33.83			
PK	5.727G	68.08	68.20	-0.12	59.98	3	Vertical	82	1.64	62	34.20	7.72	33.82			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5700MHz_TX

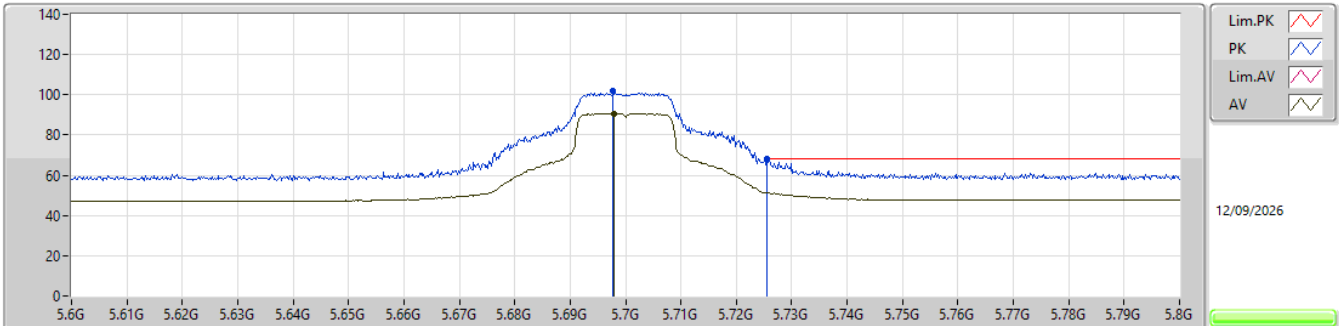


EUT_X_1TX
SET 57
62\56\59\58\57
-2.67\2.24\ -0.39\ -2.11\0.18

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6978G	101.83	Inf	-Inf	93.76	3	Horizontal	76	1.89	57	34.20	7.70	33.83			
AV	5.698G	90.62	Inf	-Inf	82.55	3	Horizontal	76	1.89	57	34.20	7.70	33.83			
PK	5.7256G	68.02	68.20	-0.18	59.92	3	Horizontal	76	1.89	57	34.20	7.72	33.82			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5700MHz_TX

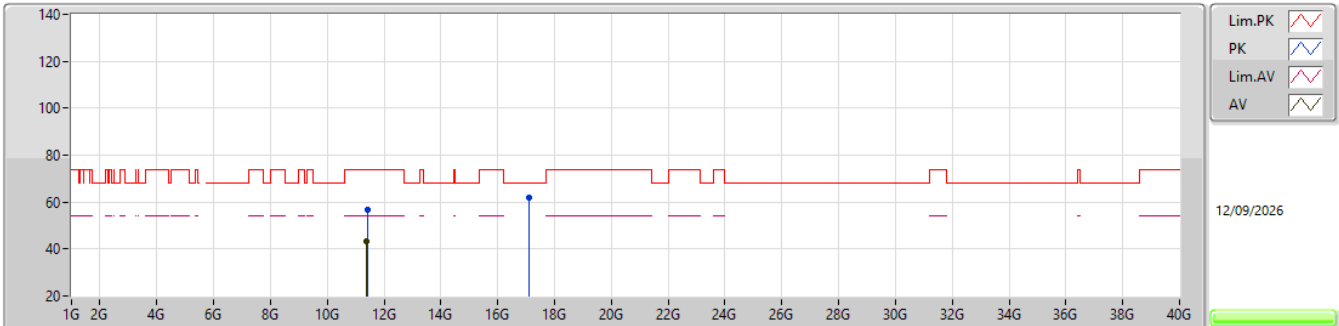EUT X_1TX
SET 57

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40192G	56.72	74.00	-17.28	41.04	3	Vertical	4	1.80	57	39.10	11.30	34.72			
AV	11.38112G	43.34	54.00	-10.66	27.61	3	Vertical	4	1.80	57	39.14	11.28	34.69			
PK	17.09236G	61.96	68.20	-6.24	41.77	3	Vertical	181.1	1.80	57	41.17	13.70	34.68			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5700MHz_TX

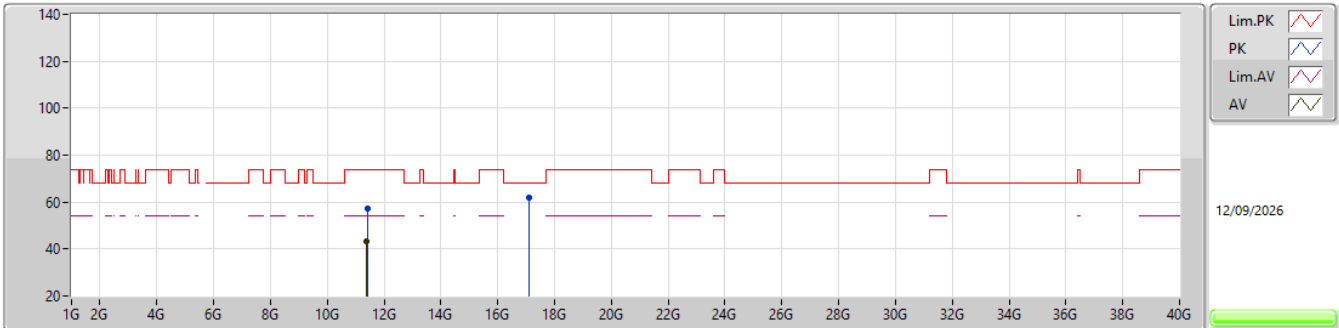EUT_X_1TX
SET 57

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40596G	57.09	74.00	-16.91	41.41	3	Horizontal	152	1.80	57	39.10	11.30	34.72			
AV	11.38096G	43.39	54.00	-10.61	27.66	3	Horizontal	152	1.80	57	39.14	11.28	34.69			
PK	17.11256G	62.11	68.20	-6.09	41.82	3	Horizontal	211	1.80	57	41.23	13.72	34.66			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

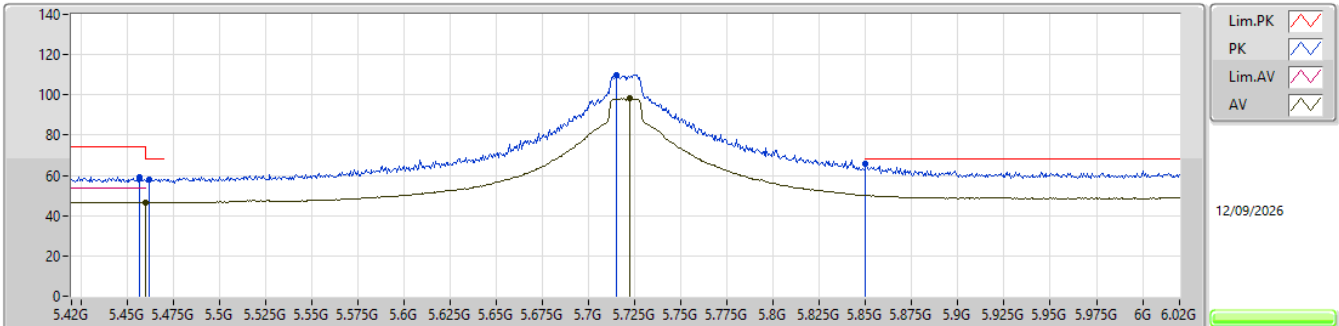


EUT_X_1TX
SET 108
80\92\108
6.36\6.96\2.16

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.4566G	59.11	74.00	-14.89	51.78	3	Vertical	86	1.61	108	33.64	7.60	33.91					
PK	5.462G	58.18	68.20	-10.02	50.82	3	Vertical	86	1.61	108	33.67	7.60	33.91					
AV	5.46G	46.46	54.00	-7.54	39.11	3	Vertical	86	1.61	108	33.66	7.60	33.91					
PK	5.7152G	110.11	Inf	-Inf	102.03	3	Vertical	86	1.61	108	34.20	7.71	33.83					
AV	5.7224G	98.17	Inf	-Inf	90.08	3	Vertical	86	1.61	108	34.20	7.72	33.83					
PK	5.85G	66.04	68.20	-2.16	57.44	3	Vertical	86	1.61	108	34.60	7.78	33.78					

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TX

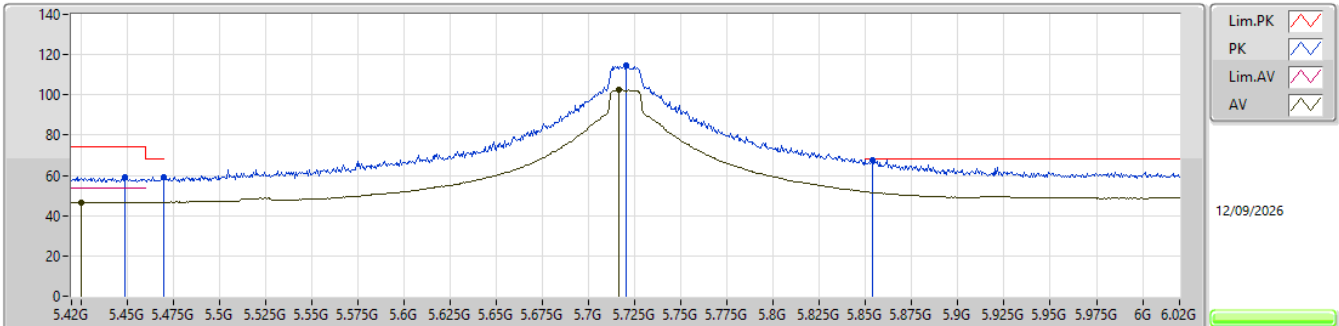


EUT_X_1TX
SET 106
108\106
-0.89\0.41

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.4488G	59.24	74.00	-14.76	51.96	3	Horizontal	77	1.80	106	33.60	7.59	33.91					
AV	5.4254G	46.60	54.00	-7.40	39.43	3	Horizontal	77	1.80	106	33.50	7.58	33.91					
PK	5.4698G	58.98	68.20	-9.22	51.57	3	Horizontal	77	1.80	106	33.72	7.60	33.91					
PK	5.7206G	114.73	Inf	-Inf	106.65	3	Horizontal	77	1.80	106	34.20	7.71	33.83					
AV	5.7164G	102.38	Inf	-Inf	94.30	3	Horizontal	77	1.80	106	34.20	7.71	33.83					
PK	5.8538G	67.79	68.20	-0.41	59.16	3	Horizontal	77	1.80	106	34.63	7.78	33.78					

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5720MHz Straddle 5.47-5.725GHz_TX

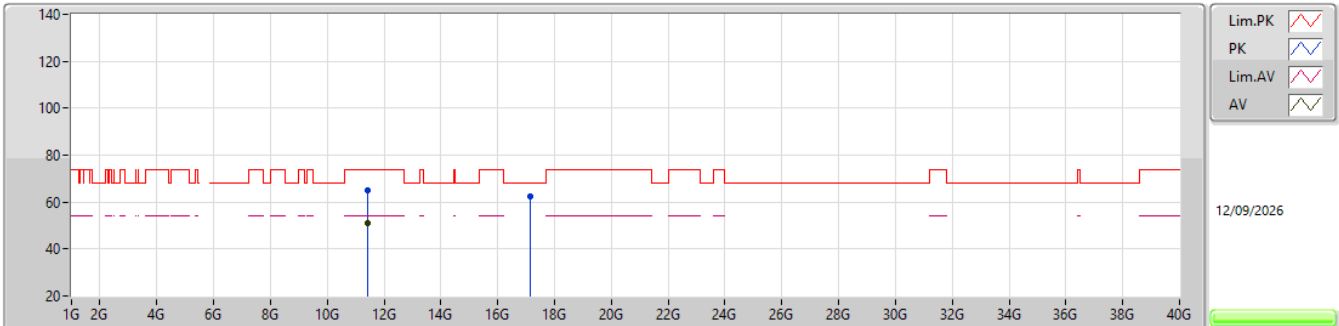EUT X_1TX
SET 106

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.44192G	65.18	74.00	-8.82	49.52	3	Vertical	36	1.79	106	39.10	11.32	34.76			
AV	11.43928G	51.02	54.00	-2.98	35.36	3	Vertical	36	1.79	106	39.10	11.32	34.76			
PK	17.16264G	62.47	68.20	-5.73	42.01	3	Vertical	69	1.80	106	41.33	13.74	34.61			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX


5720MHz Straddle 5.47-5.725GHz_TX

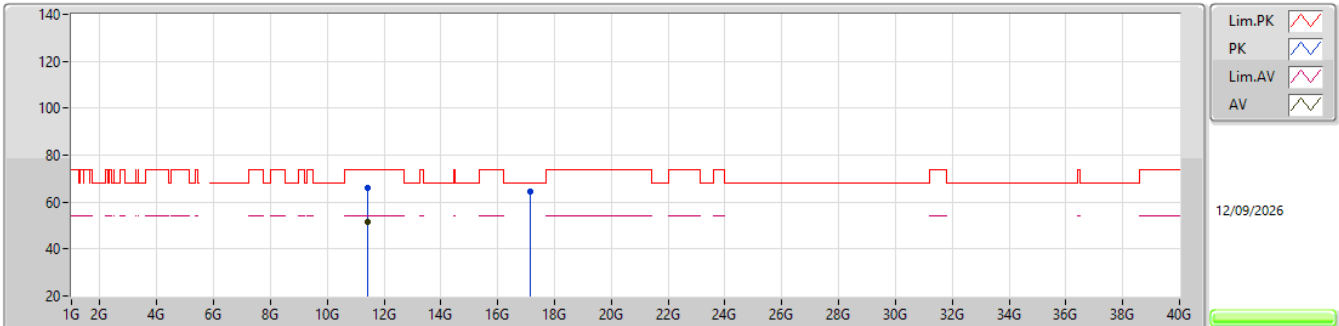EUT X_1TX
SET 106

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43628G	66.18	74.00	-7.82	50.52	3	Horizontal	90	1.80	106	39.10	11.32	34.76			
AV	11.44008G	51.65	54.00	-2.35	35.99	3	Horizontal	90	1.80	106	39.10	11.32	34.76			
PK	17.1608G	64.50	68.20	-3.70	44.05	3	Horizontal	65	1.83	106	41.32	13.74	34.61			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5745MHz_TX

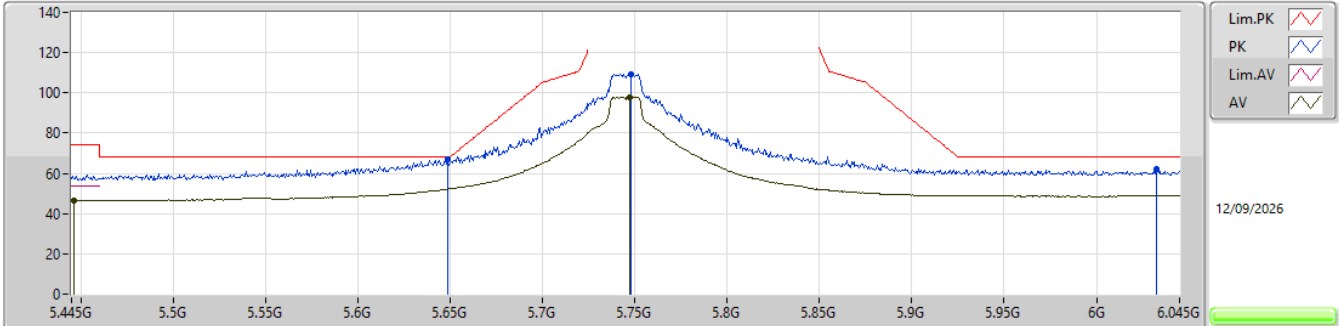


EUT_X_1TX
SET 95
80\93\95
6.50\6.44\0.98

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
AV	5.4462G	46.41	54.00	-7.59	39.15	3	Vertical	89	1.63	106	33.58	7.59	33.91				
PK	5.6484G	67.22	68.20	-0.98	59.29	3	Vertical	89	1.63	106	34.10	7.68	33.85				
PK	5.748G	109.41	Inf	-Inf	101.30	3	Vertical	89	1.63	106	34.20	7.73	33.82				
AV	5.7474G	97.84	Inf	-Inf	89.73	3	Vertical	89	1.63	106	34.20	7.73	33.82				
PK	6.0324G	61.91	68.20	-6.29	52.32	3	Vertical	89	1.63	106	35.43	7.89	33.73				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5745MHz_TX

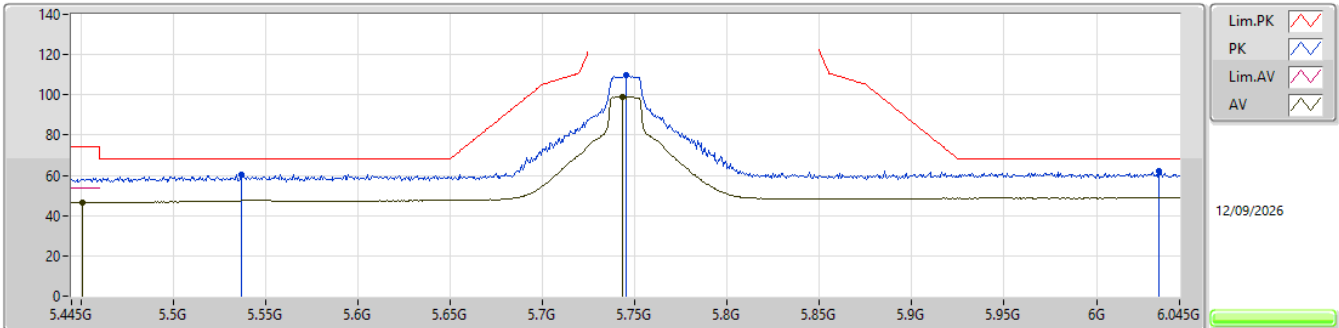


EUT_X_1TX
SET 95
106\101\99\98\97\96\95
-2.04\ -2.22\ -3.15\ -1.86\ -2.71\ -2.03\ 6.05

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.5368G	60.40	68.20	-7.80	52.70	3	Horizontal	79	1.85	95	33.97	7.63	33.90				
AV	5.451G	46.46	54.00	-7.54	39.17	3	Horizontal	79	1.85	95	33.61	7.59	33.91				
PK	5.7456G	109.65	Inf	-Inf	101.54	3	Horizontal	79	1.85	95	34.20	7.73	33.82				
AV	5.7432G	99.00	Inf	-Inf	90.90	3	Horizontal	79	1.85	95	34.20	7.72	33.82				
PK	6.0336G	62.15	68.20	-6.05	52.55	3	Horizontal	79	1.85	95	35.43	7.90	33.73				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX


5745MHz_TX

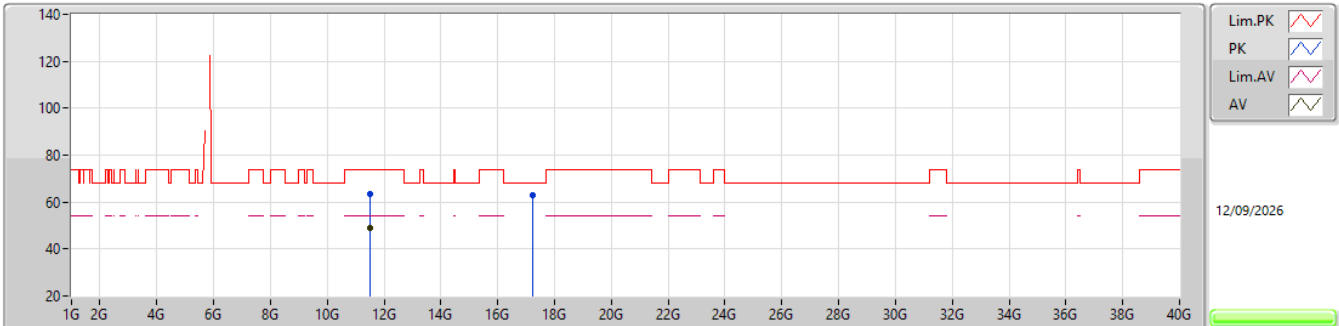EUT X_1TX
SET 95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.49168G	63.22	74.00	-10.78	47.58	3	Vertical	30	1.27	95	39.10	11.36	34.82			
AV	11.49016G	48.85	54.00	-5.15	33.21	3	Vertical	30	1.27	95	39.10	11.36	34.82			
PK	17.2282G	62.84	68.20	-5.36	42.03	3	Vertical	0	1.80	95	41.57	13.78	34.54			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5745MHz_TX

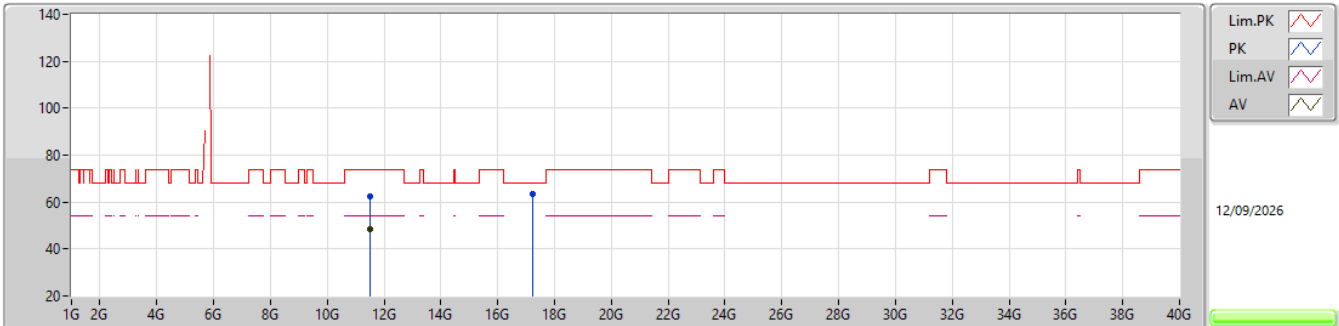


EUT_X_1TX
SET 95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.49092G	62.41	74.00	-11.59	46.77	3	Horizontal	92	1.80	95	39.10	11.36	34.82			
AV	11.49048G	48.28	54.00	-5.72	32.64	3	Horizontal	92	1.80	95	39.10	11.36	34.82			
PK	17.22976G	63.49	68.20	-4.71	42.67	3	Horizontal	43	1.26	95	41.58	13.78	34.54			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5785MHz_TX

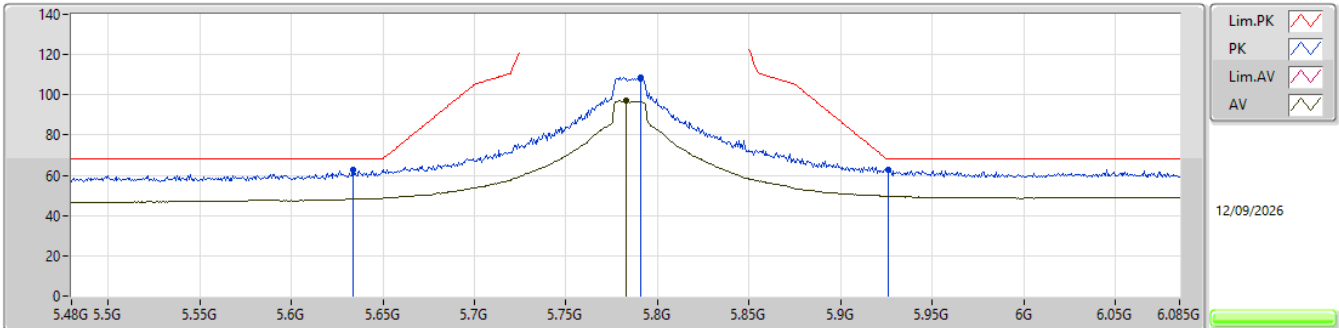


EUT_X_1TX
SET 108
80\91\108
5.90\6.46\5.37

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.63367G	62.79	68.20	-5.41	54.90	3	Vertical	86	1.54	108	34.07	7.68	33.86				
PK	5.79097G	108.68	Inf	-Inf	100.45	3	Vertical	86	1.54	108	34.28	7.75	33.80				
AV	5.7825G	97.13	Inf	-Inf	88.93	3	Vertical	86	1.54	108	34.26	7.74	33.80				
PK	5.92589G	62.83	68.20	-5.37	53.65	3	Vertical	86	1.54	108	35.10	7.83	33.75				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5785MHz_TX

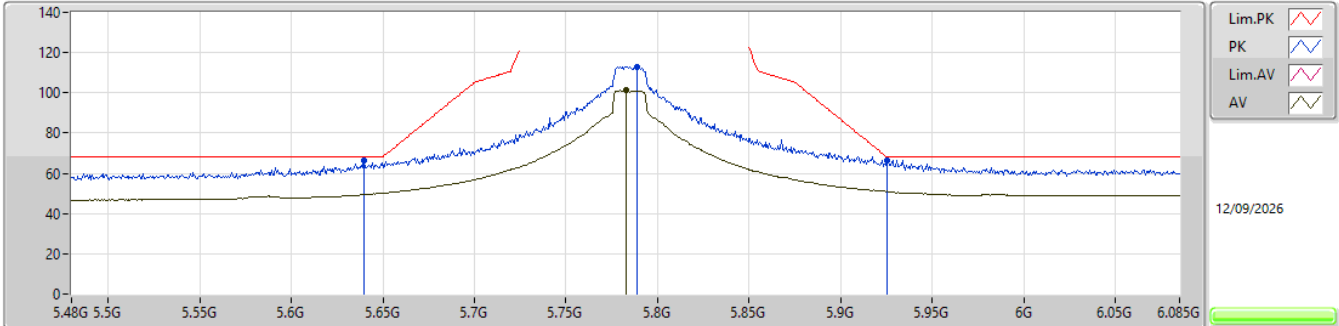


EUT_X_1TX
SET 108
108
1.55

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.63972G	66.65	68.20	-1.55	58.75	3	Horizontal	80	1.80	108	34.08	7.68	33.86			
PK	5.78855G	112.93	Inf	-Inf	104.71	3	Horizontal	80	1.80	108	34.28	7.74	33.80			
AV	5.7825G	101.21	Inf	-Inf	93.01	3	Horizontal	80	1.80	108	34.26	7.74	33.80			
PK	5.925G	66.57	68.20	-1.63	57.39	3	Horizontal	80	1.80	108	35.10	7.83	33.75			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX


5785MHz_TX

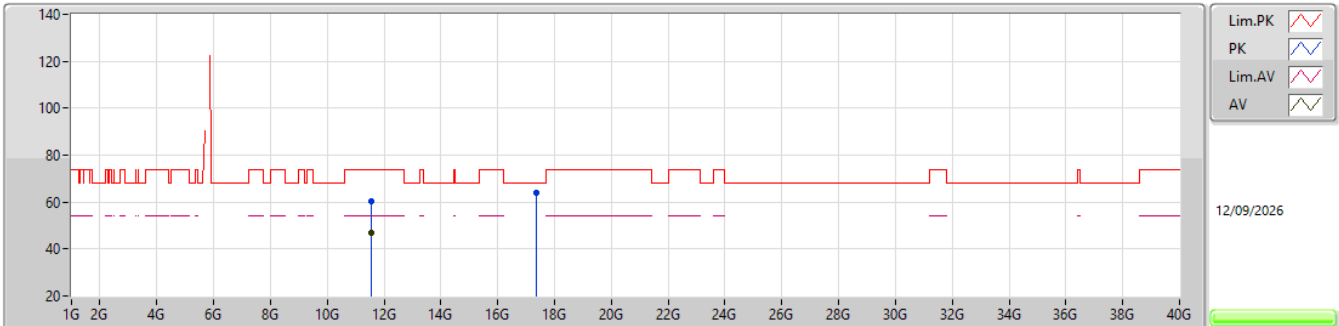EUT X_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.56636G	60.43	74.00	-13.57	44.75	3	Vertical	37	1.89	108	39.10	11.41	34.83			
AV	11.56924G	47.04	54.00	-6.96	31.36	3	Vertical	37	1.89	108	39.10	11.41	34.83			
PK	17.37276G	64.11	68.20	-4.09	42.64	3	Vertical	360.1	1.80	108	41.99	13.87	34.39			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5785MHz_TX

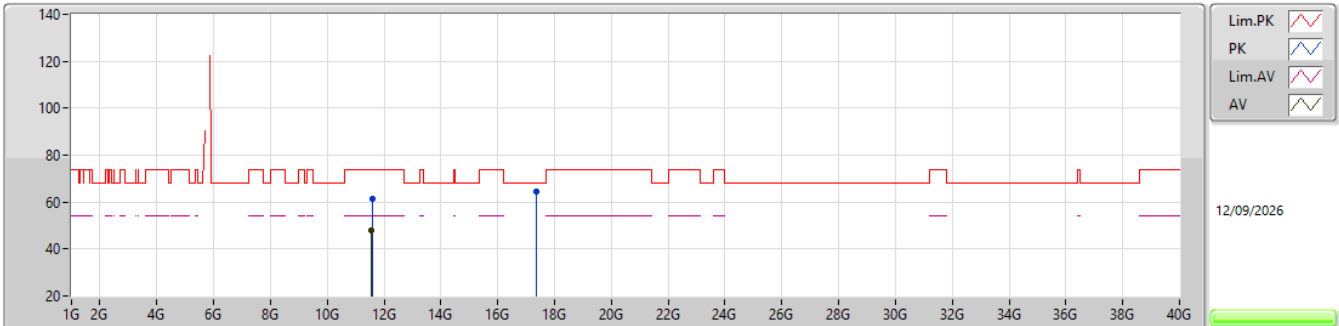


EUT X_1TX
SET 108

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.57484G	61.43	74.00	-12.57	45.74	3	Horizontal	91	1.79	108	39.10	11.42	34.83				
AV	11.57024G	47.77	54.00	-6.23	32.09	3	Horizontal	91	1.79	108	39.10	11.41	34.83				
PK	17.35572G	64.41	68.20	-3.79	43.04	3	Horizontal	294.1	1.80	108	41.92	13.86	34.41				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5825MHz_TX

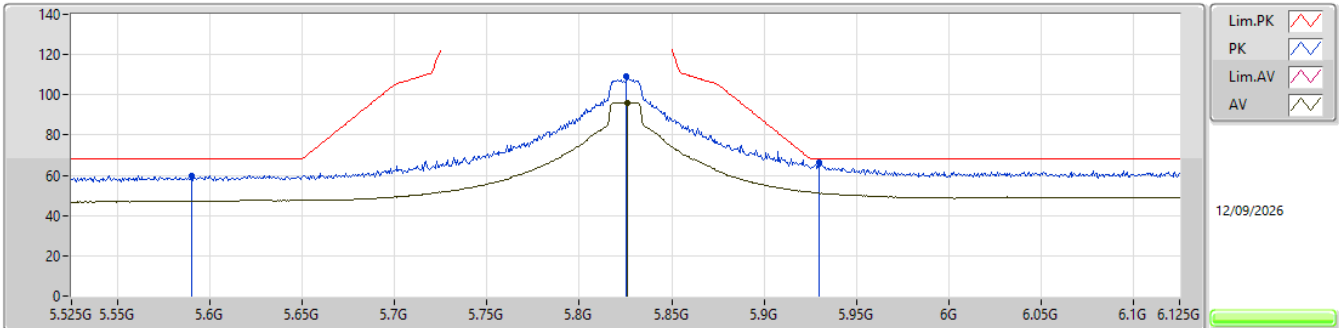


EUT_X_1TX
SET 95
80\92\95
6.11\6.65\1.89

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.5898G	60.02	68.20	-8.18	52.24	3	Vertical	90	1.61	108	34.00	7.66	33.88				
PK	5.8256G	108.96	Inf	-Inf	100.53	3	Vertical	90	1.61	108	34.45	7.77	33.79				
AV	5.8262G	96.25	Inf	-Inf	87.81	3	Vertical	90	1.61	108	34.46	7.77	33.79				
PK	5.93G	66.31	68.20	-1.89	57.11	3	Vertical	90	1.61	108	35.12	7.83	33.75				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5825MHz_TX

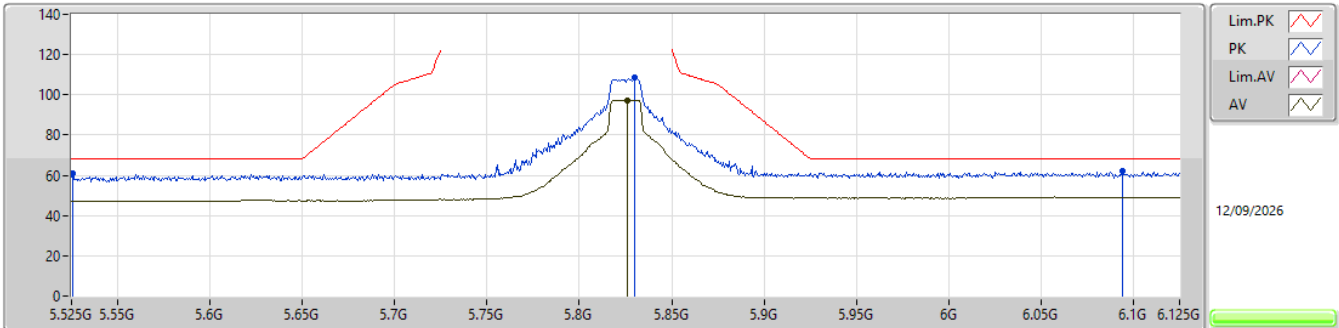


EUT_X_1TX
SET 95
108\103\101\100\99\87\93\96\97\96\95
-2.17\ -0.50\ -1.30\ -2.38\ -3.34\ 6.10\ 5.60\ 5.09\ -0.86\ -0.87\ 6.06

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.5256G	61.12	68.20	-7.08	53.44	3	Horizontal	79	2.11	95	33.95	7.63	33.90				
PK	5.8298G	108.42	Inf	-Inf	99.95	3	Horizontal	79	2.11	95	34.48	7.77	33.78				
AV	5.8262G	97.36	Inf	-Inf	88.92	3	Horizontal	79	2.11	95	34.46	7.77	33.79				
PK	6.0944G	62.14	68.20	-6.06	52.56	3	Horizontal	79	2.11	95	35.41	7.92	33.75				

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX


5825MHz_TX

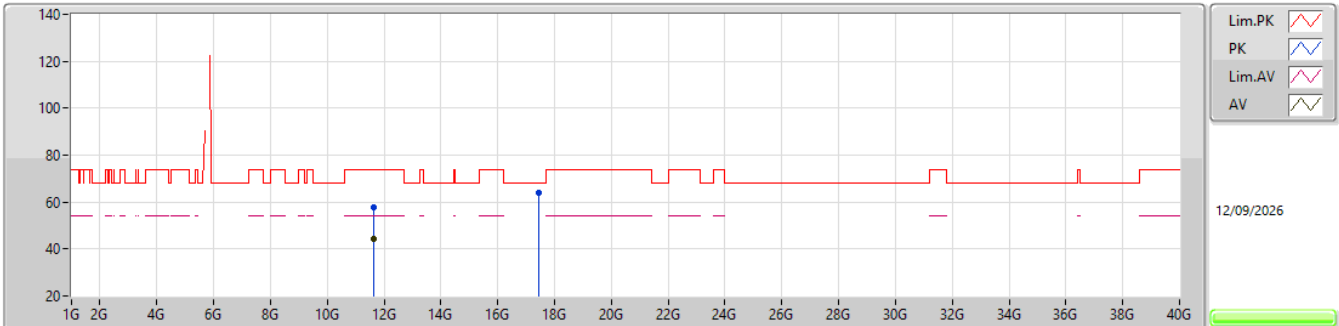EUT X_1TX
SET 95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.64804G	57.86	74.00	-16.14	42.22	3	Vertical	36	1.80	95	39.00	11.47	34.83			
AV	11.65044G	44.19	54.00	-9.81	28.55	3	Vertical	36	1.80	95	39.00	11.47	34.83			
PK	17.4638G	64.15	68.20	-4.05	42.46	3	Vertical	49	1.47	95	42.07	13.92	34.30			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5825MHz_TX

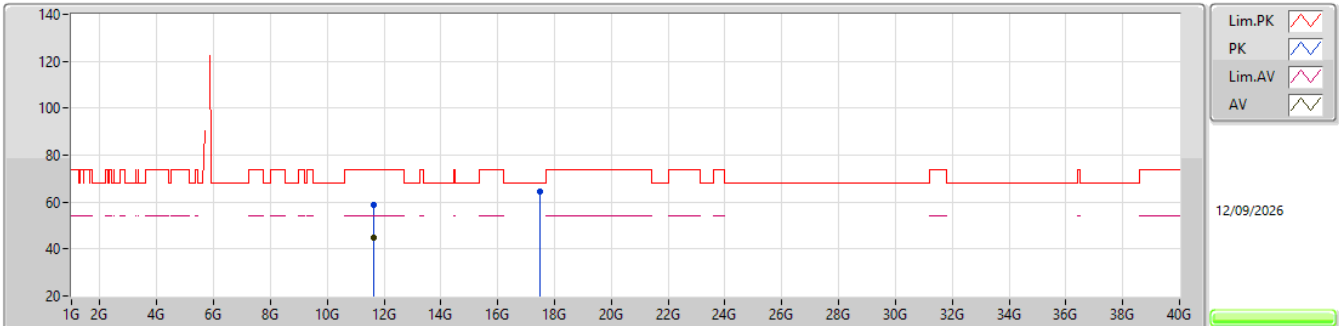


EUT_X_1TX
SET 95

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	11.64948G	58.67	74.00	-15.33	43.03	3	Horizontal	76	2.46	95	39.00	11.47	34.83				
AV	11.65036G	44.87	54.00	-9.13	29.23	3	Horizontal	76	2.46	95	39.00	11.47	34.83				
PK	17.478G	64.53	68.20	-3.67	42.84	3	Horizontal	285	1.80	95	42.04	13.93	34.28				

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5180MHz_TX

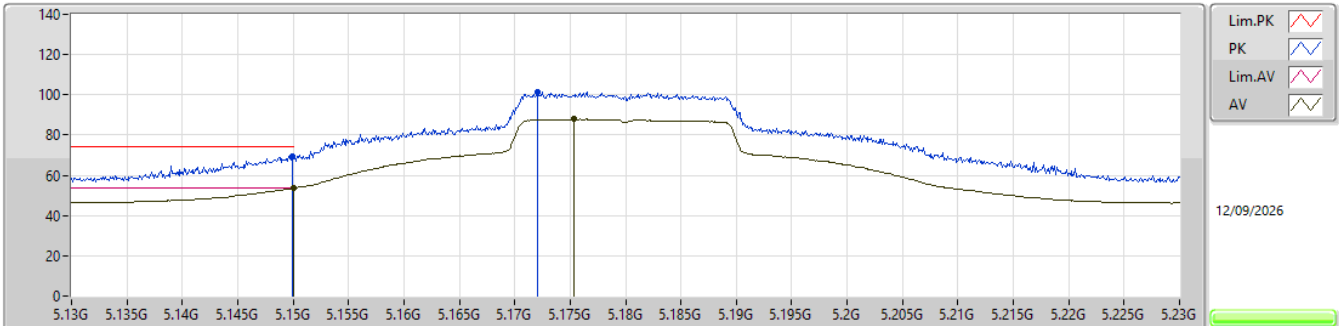


EUT_X_1TX
SET 72
80\69\74\72
-5.17\2.27\ -1.12\0.38

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1499G	69.29	74.00	-4.71	62.85	3	Vertical	347	1.95	72	32.90	7.47	33.93			
AV	5.15G	53.62	54.00	-0.38	47.18	3	Vertical	347	1.95	72	32.90	7.47	33.93			
PK	5.1721G	101.58	Inf	-Inf	95.14	3	Vertical	347	1.95	72	32.90	7.47	33.93			
AV	5.1753G	87.85	Inf	-Inf	81.41	3	Vertical	347	1.95	72	32.90	7.47	33.93			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5180MHz_TX

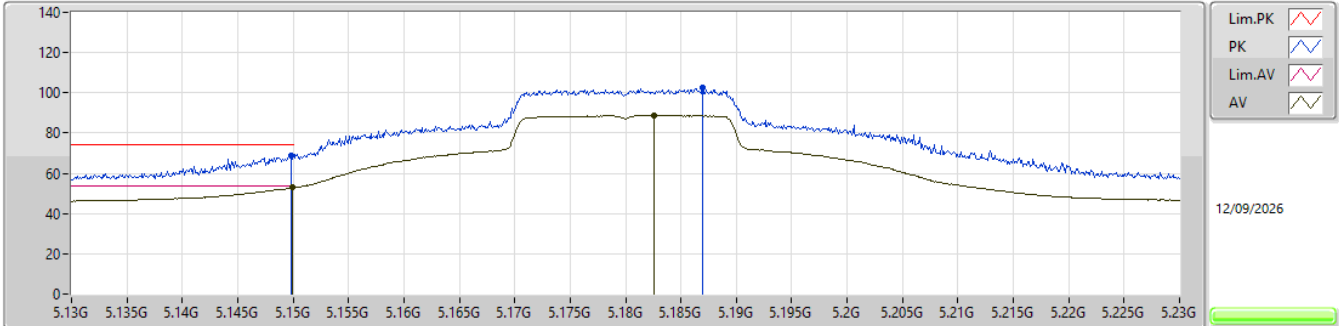


EUT_X_1TX
SET 70
72\70\71\70
-0.68\0.99\0.05\1.06

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1498G	68.72	74.00	-5.28	62.28	3	Horizontal	73	1.86	70	32.90	7.47	33.93				
AV	5.1499G	52.94	54.00	-1.06	46.50	3	Horizontal	73	1.86	70	32.90	7.47	33.93				
PK	5.187G	102.67	Inf	-Inf	96.23	3	Horizontal	73	1.86	70	32.90	7.47	33.93				
AV	5.1826G	88.60	Inf	-Inf	82.16	3	Horizontal	73	1.86	70	32.90	7.47	33.93				

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5180MHz_TX

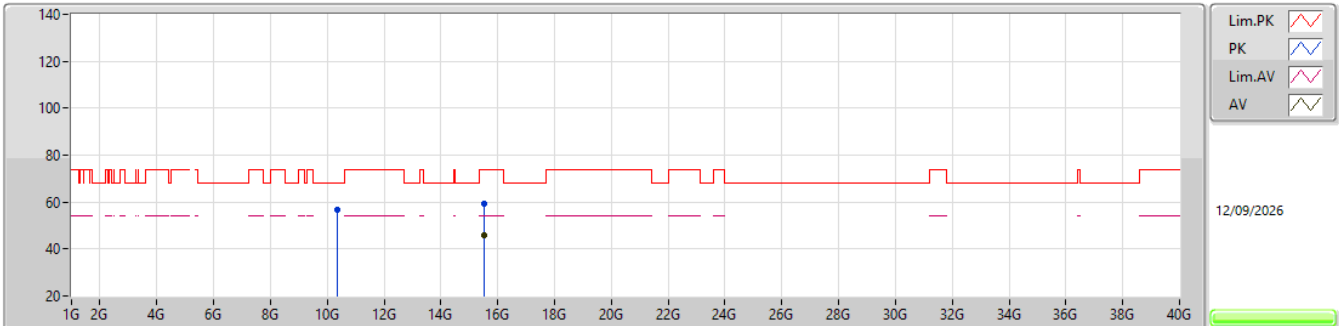EUT X_1TX
SET 70

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.3522G	56.76	68.20	-11.44	41.40	3	Vertical	28	1.08	70	38.90	10.57	34.11				
PK	15.52764G	59.30	74.00	-14.70	42.26	3	Vertical	360	1.80	70	38.70	12.91	34.57				
AV	15.54272G	45.68	54.00	-8.32	28.62	3	Vertical	360	1.80	70	38.70	12.92	34.56				

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TX

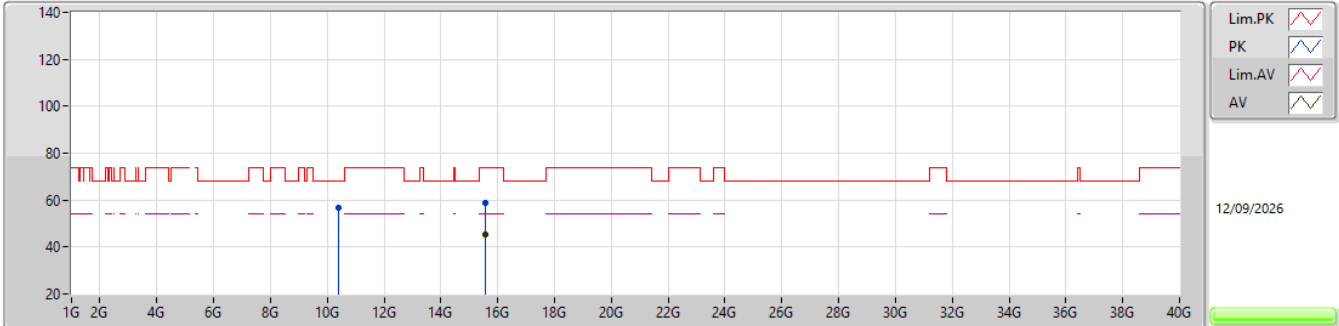


EUT X_1TX
SET 70

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.37828G	56.85	68.20	-11.35	41.47	3	Horizontal	69	2.49	70	38.90	10.59	34.11				
PK	15.54772G	58.90	74.00	-15.10	41.84	3	Horizontal	154	1.80	70	38.70	12.92	34.56				
AV	15.54956G	45.53	54.00	-8.47	28.46	3	Horizontal	154	1.80	70	38.70	12.92	34.55				

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

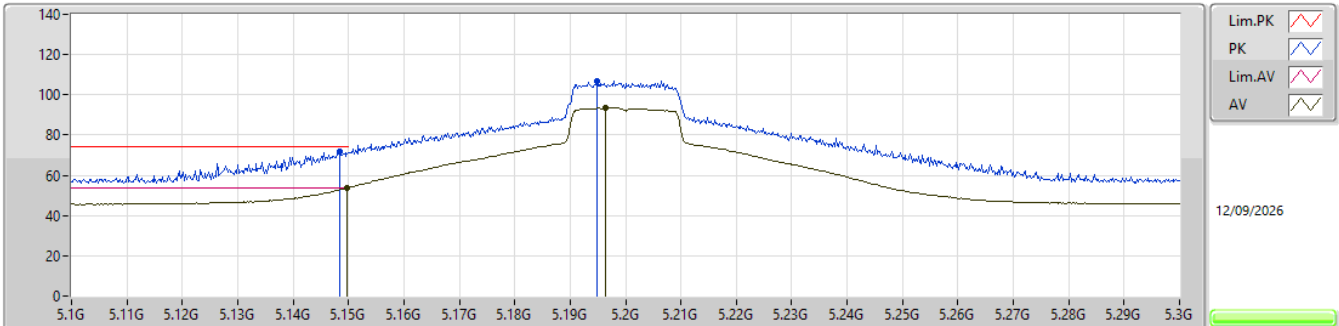


EUT_X_1TX
SET 94
80\92\98\95\94
6.31\1.25\11.03\0.71\0.20

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1484G	71.56	74.00	-2.44	65.12	3	Vertical	347	1.70	94	32.90	7.47	33.93			
AV	5.1498G	53.80	54.00	-0.20	47.36	3	Vertical	347	1.70	94	32.90	7.47	33.93			
PK	5.1948G	106.83	Inf	-Inf	100.39	3	Vertical	347	1.70	94	32.90	7.47	33.93			
AV	5.1964G	93.42	Inf	-Inf	86.98	3	Vertical	347	1.70	94	32.90	7.47	33.93			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

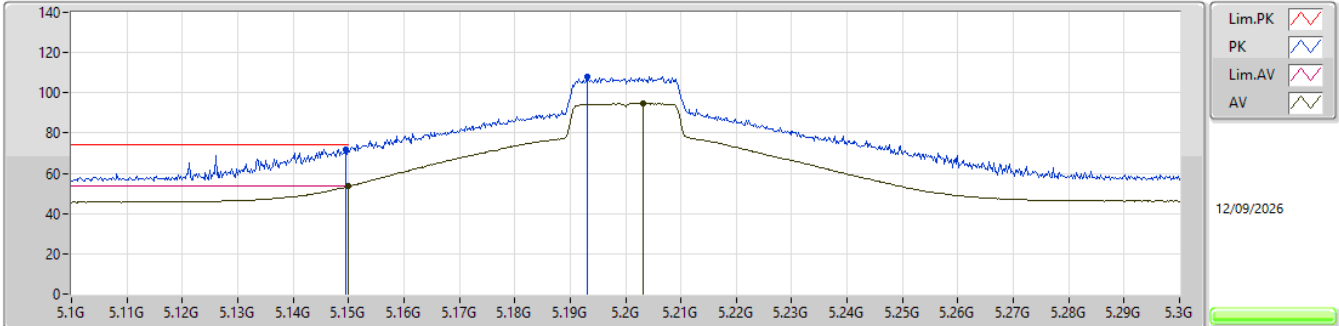


EUT_X_1TX
SET 92
94\92
-0.69\0.39

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1496G	71.99	74.00	-2.01	65.55	3	Horizontal	76	2.27	92	32.90	7.47	33.93			
AV	5.15G	53.61	54.00	-0.39	47.17	3	Horizontal	76	2.27	92	32.90	7.47	33.93			
PK	5.193G	108.06	Inf	-Inf	101.62	3	Horizontal	76	2.27	92	32.90	7.47	33.93			
AV	5.2032G	94.72	Inf	-Inf	88.27	3	Horizontal	76	2.27	92	32.91	7.47	33.93			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

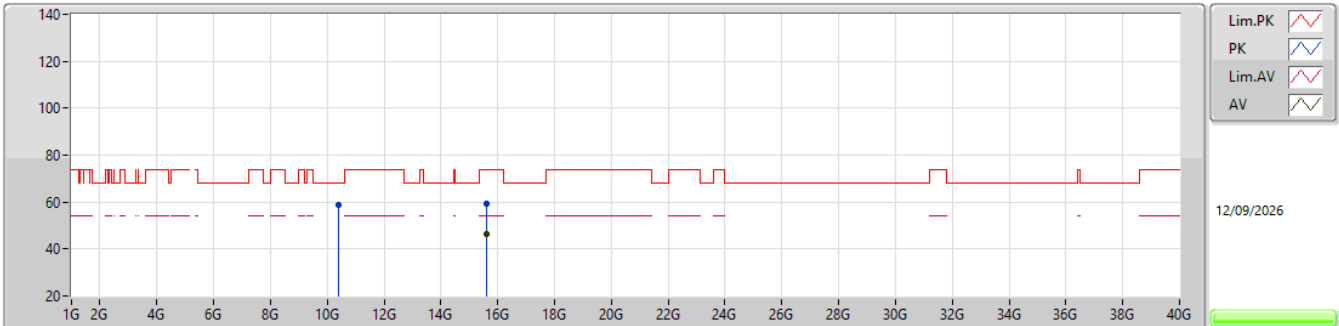


EUT X_1TX
SET 92

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.39524G	59.03	68.20	-9.17	43.65	3	Vertical	23	1.08	92	38.90	10.60	34.12				
PK	15.596G	59.46	74.00	-14.54	42.52	3	Vertical	185	1.78	92	38.52	12.93	34.51				
AV	15.59832G	46.29	54.00	-7.71	29.35	3	Vertical	185	1.78	92	38.51	12.94	34.51				

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TX

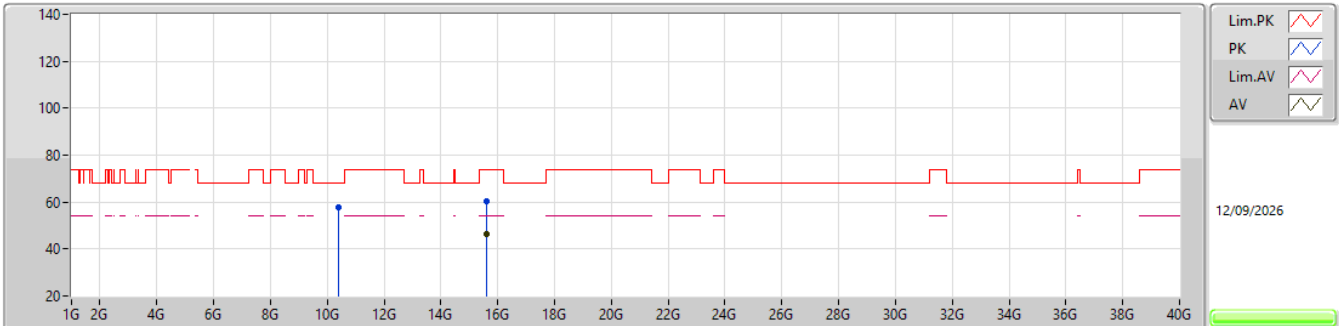


EUT X_1TX
SET 92

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40292G	57.56	68.20	-10.64	42.17	3	Horizontal	88	1.39	92	38.90	10.61	34.12			
PK	15.60308G	60.36	74.00	-13.64	43.44	3	Horizontal	77	2.67	92	38.48	12.94	34.50			
AV	15.60436G	46.15	54.00	-7.85	29.24	3	Horizontal	77	2.67	92	38.47	12.94	34.50			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TX

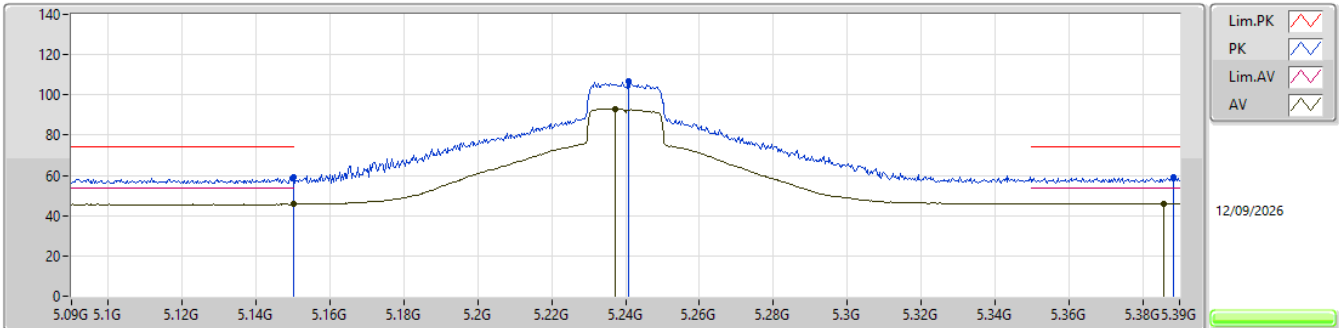


EUT_X_1TX
SET 95
80\95\108\102\99\98\97\96\95
7.91\7.77\1.77\1.73\1.75\1.75\1.67\1.64\7.84

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.15G	58.88	74.00	-15.12	52.44	3	Vertical	348	1.71	95	32.90	7.47	33.93			
AV	5.15G	45.74	54.00	-8.26	39.30	3	Vertical	348	1.71	95	32.90	7.47	33.93			
PK	5.2409G	106.59	Inf	-Inf	99.97	3	Vertical	348	1.71	95	33.06	7.49	33.93			
AV	5.2373G	93.16	Inf	-Inf	86.55	3	Vertical	348	1.71	95	33.05	7.49	33.93			
PK	5.3882G	58.89	74.00	-15.11	51.87	3	Vertical	348	1.71	95	33.38	7.56	33.92			
AV	5.3858G	46.16	54.00	-7.84	39.15	3	Vertical	348	1.71	95	33.37	7.56	33.92			

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5240MHz_TX

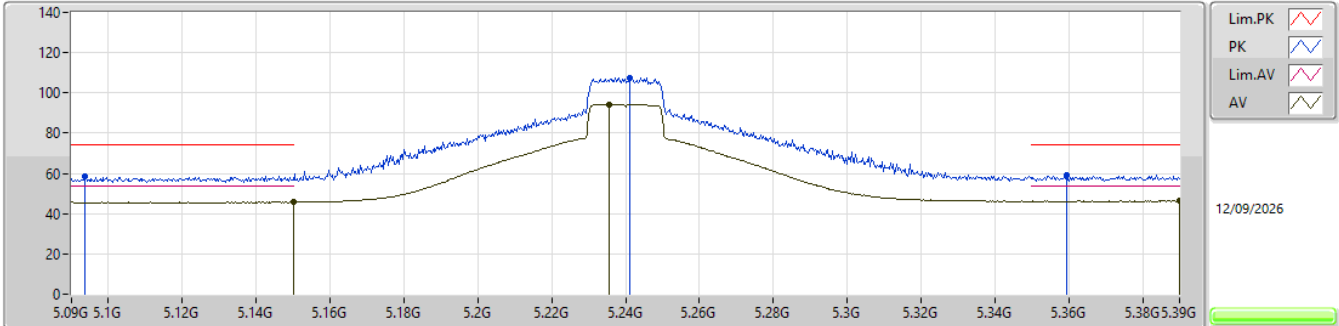


EUT_X_1TX
SET 95
95
7.70

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.0936G	58.72	74.00	-15.28	52.36	3	Horizontal	68	1.80	95	32.83	7.46	33.93			
AV	5.15G	45.72	54.00	-8.28	39.28	3	Horizontal	68	1.80	95	32.90	7.47	33.93			
PK	5.2412G	107.65	Inf	-Inf	101.03	3	Horizontal	68	1.80	95	33.06	7.49	33.93			
AV	5.2355G	94.33	Inf	-Inf	87.73	3	Horizontal	68	1.80	95	33.04	7.49	33.93			
PK	5.3594G	58.96	74.00	-15.04	52.01	3	Horizontal	68	1.80	95	33.32	7.55	33.92			
AV	5.39G	46.30	54.00	-7.70	39.27	3	Horizontal	68	1.80	95	33.38	7.57	33.92			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5240MHz_TX

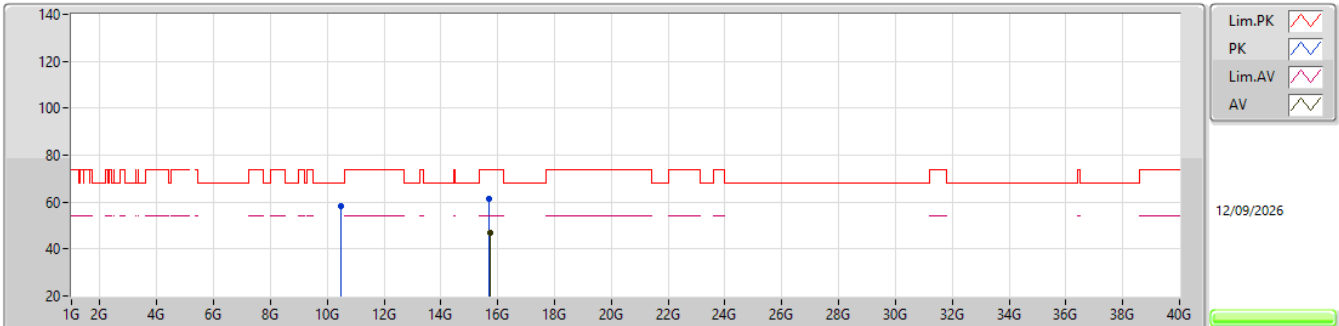EUT_X_1TX
SET 95

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.475G	58.38	68.20	-9.82	42.85	3	Vertical	21	1.08	95	39.00	10.66	34.13			
PK	15.7016G	61.30	74.00	-12.70	44.44	3	Vertical	181	2.69	95	38.30	12.97	34.41			
AV	15.71896G	46.90	54.00	-7.10	29.97	3	Vertical	181	2.69	95	38.34	12.98	34.39			

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5240MHz_TX

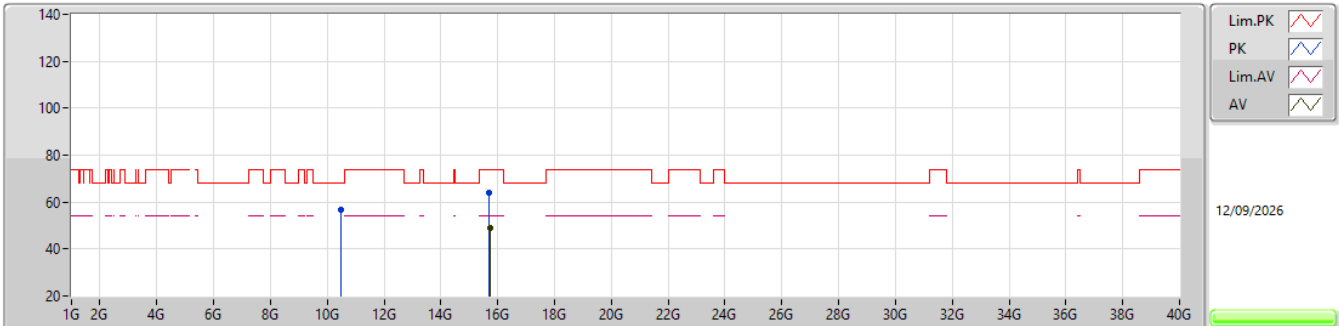EUT X_1TX
SET 95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47764G	56.92	68.20	-11.28	41.38	3	Horizontal	82	1.79	95	39.01	10.66	34.13			
PK	15.70936G	63.79	74.00	-10.21	46.90	3	Horizontal	263	2.78	95	38.32	12.97	34.40			
AV	15.72096G	49.09	54.00	-4.91	32.16	3	Horizontal	263	2.78	95	38.34	12.98	34.39			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5260MHz_TX

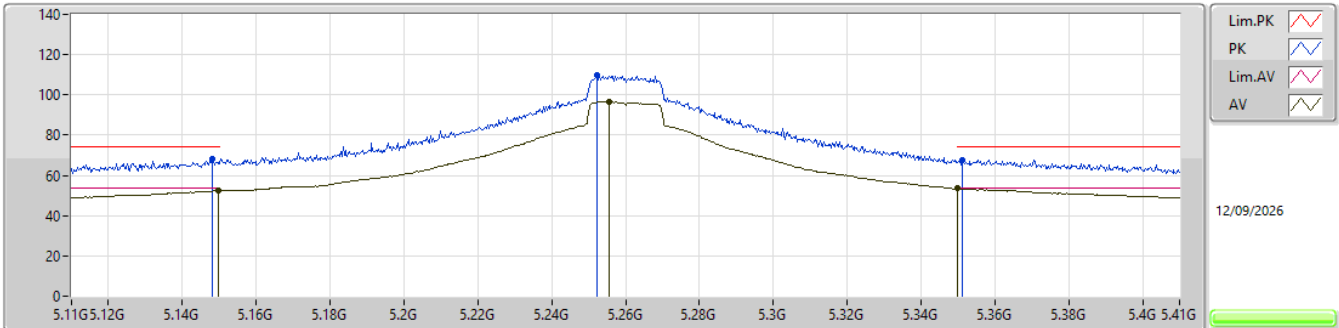


EUT_X_1TX
SET 95
80\95
7.66\0.55

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1481G	68.40	74.00	-5.60	61.96	3	Vertical	9	2.13	108	32.90	7.47	33.93
AV	5.1499G	52.40	54.00	-1.60	45.96	3	Vertical	9	2.13	108	32.90	7.47	33.93
PK	5.2522G	109.62	Inf	-Inf	102.94	3	Vertical	9	2.13	108	33.10	7.50	33.92
AV	5.2555G	96.56	Inf	-Inf	89.87	3	Vertical	9	2.13	108	33.11	7.50	33.92
PK	5.3512G	67.82	74.00	-6.18	60.89	3	Vertical	9	2.13	108	33.30	7.55	33.92
AV	5.35G	53.45	54.00	-0.55	46.53	3	Vertical	9	2.13	108	33.30	7.54	33.92

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5260MHz_TX

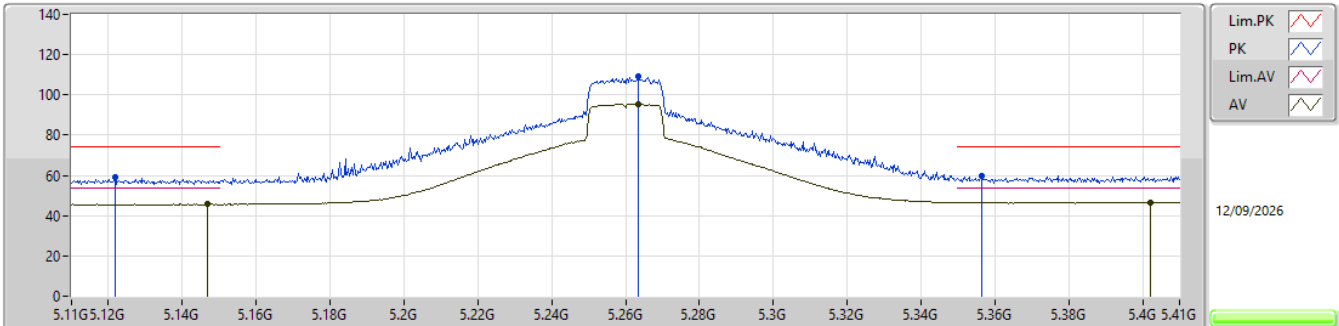

EUT_X_1TX

SET 95


108\101\98\97\85\91\94\95\107\95

-3.17\ -3.09\ -3.39\ -3.29\ 7.55\ 7.51\ 7.49\ 7.43\ -3.28\ 7.38

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1217G	59.04	74.00	-14.96	52.66	3	Horizontal	72	2.11	95	32.84	7.47	33.93			
AV	5.1469G	45.70	54.00	-8.30	39.27	3	Horizontal	72	2.11	95	32.89	7.47	33.93			
PK	5.2636G	109.28	Inf	-Inf	102.57	3	Horizontal	72	2.11	95	33.13	7.50	33.92			
AV	5.2633G	95.31	Inf	-Inf	88.60	3	Horizontal	72	2.11	95	33.13	7.50	33.92			
PK	5.3563G	59.72	74.00	-14.28	52.78	3	Horizontal	72	2.11	95	33.31	7.55	33.92			
AV	5.4022G	46.62	54.00	-7.38	39.56	3	Horizontal	72	2.11	95	33.41	7.57	33.92			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5260MHz_TX

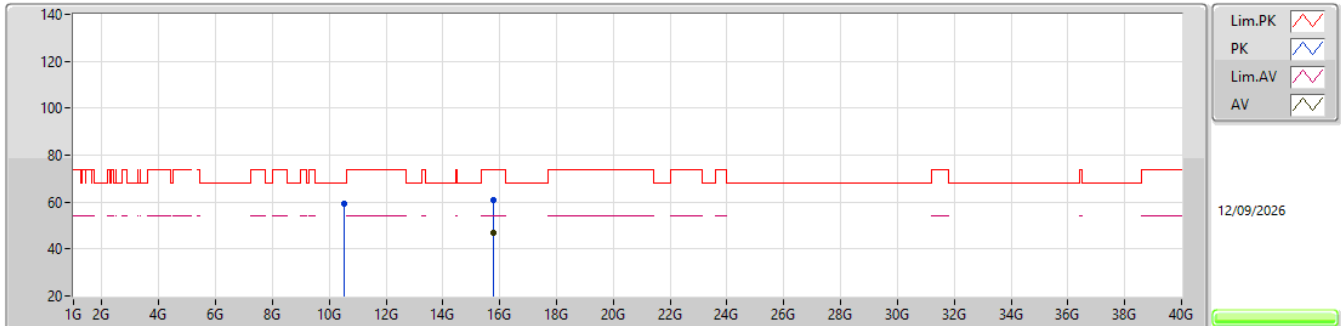EUT X_1TX
SET 95

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.52388G	59.06	68.20	-9.14	43.36	3	Vertical	23	1.16	95	39.15	10.69	34.14			
PK	15.78512G	60.79	74.00	-13.21	43.72	3	Vertical	175	1.80	95	38.40	13.00	34.33			
AV	15.77768G	47.09	54.00	-6.91	30.03	3	Vertical	175	1.80	95	38.40	13.00	34.34			

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5260MHz_TX

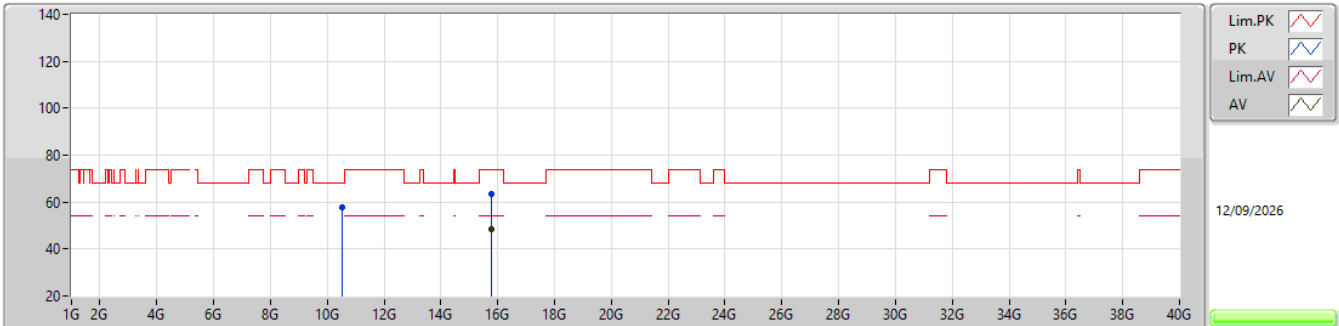EUT X_1TX
SET 95

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5236G	57.64	68.20	-10.56	41.94	3	Horizontal	84	1.80	95	39.15	10.69	34.14			
PK	15.77348G	63.48	74.00	-10.52	46.43	3	Horizontal	262	2.79	95	38.40	12.99	34.34			
AV	15.77736G	48.59	54.00	-5.41	31.53	3	Horizontal	262	2.79	95	38.40	13.00	34.34			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5300MHz_TX

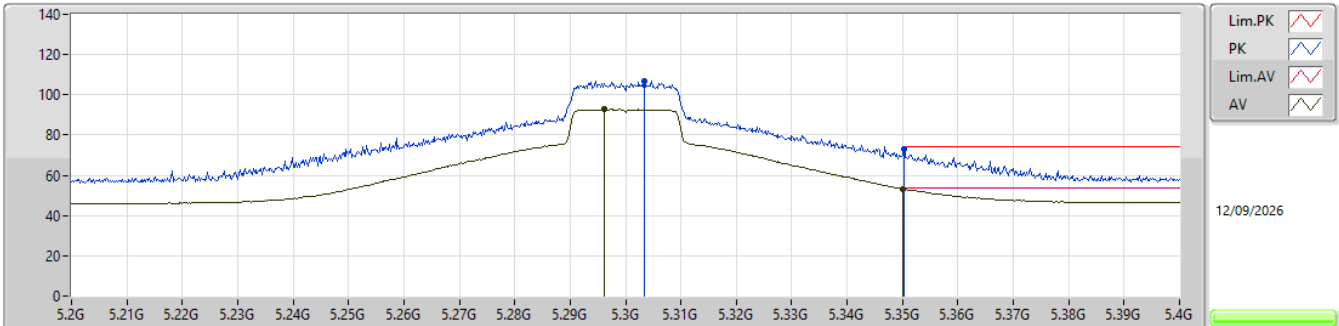


EUT_X_1TX
SET 94
80\92\98\95\94
6.18\1.61\11.05\0.04\0.75

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3034G	106.75	Inf	-Inf	99.94	3	Vertical	72	1.75	94	33.21	7.52	33.92				
AV	5.2962G	92.74	Inf	-Inf	85.95	3	Vertical	72	1.75	94	33.19	7.52	33.92				
PK	5.3502G	72.99	74.00	-1.01	66.06	3	Vertical	72	1.75	94	33.30	7.55	33.92				
AV	5.35G	53.25	54.00	-0.75	46.33	3	Vertical	72	1.75	94	33.30	7.54	33.92				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5300MHz_TX

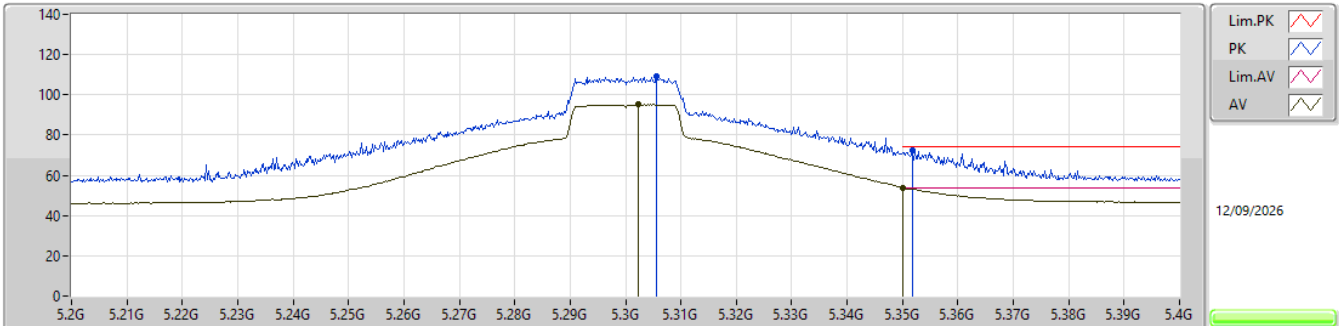


EUT_X_1TX
SET 90
94\90
-1.92\0.04

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3056G	109.12	Inf	-Inf	102.31	3	Horizontal	70	2.20	90	33.21	7.52	33.92			
AV	5.3022G	95.19	Inf	-Inf	88.39	3	Horizontal	70	2.20	90	33.20	7.52	33.92			
PK	5.3518G	72.66	74.00	-1.34	65.73	3	Horizontal	70	2.20	90	33.30	7.55	33.92			
AV	5.35G	53.96	54.00	-0.04	47.04	3	Horizontal	70	2.20	90	33.30	7.54	33.92			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX


5300MHz_TX

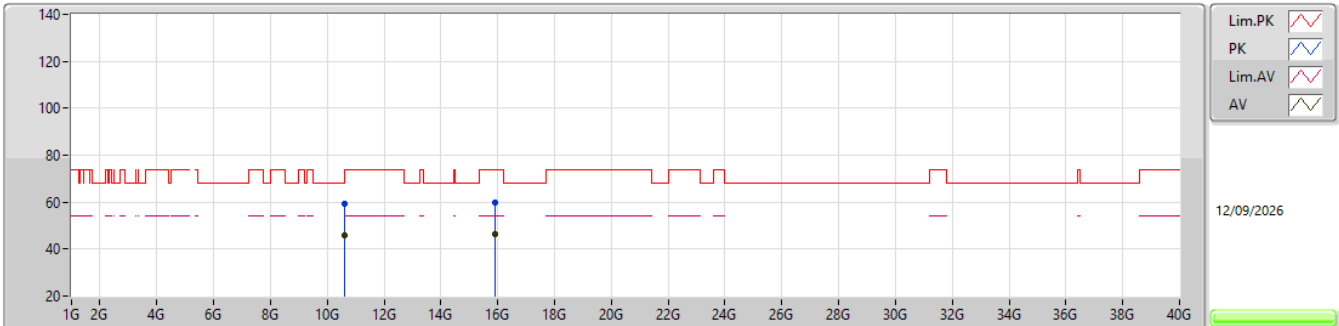EUT X_1TX
SET 90

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.599G	59.19	68.20	-9.01	43.41	3	Vertical	24	1.64	90	39.20	10.74	34.16			
AV	10.60116G	46.07	54.00	-7.93	30.29	3	Vertical	24	1.64	90	39.20	10.74	34.16			
PK	15.91036G	59.98	74.00	-14.02	42.39	3	Vertical	186	1.77	90	38.76	13.04	34.21			
AV	15.90144G	46.51	54.00	-7.49	28.90	3	Vertical	186	1.77	90	38.79	13.04	34.22			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX


5300MHz_TX

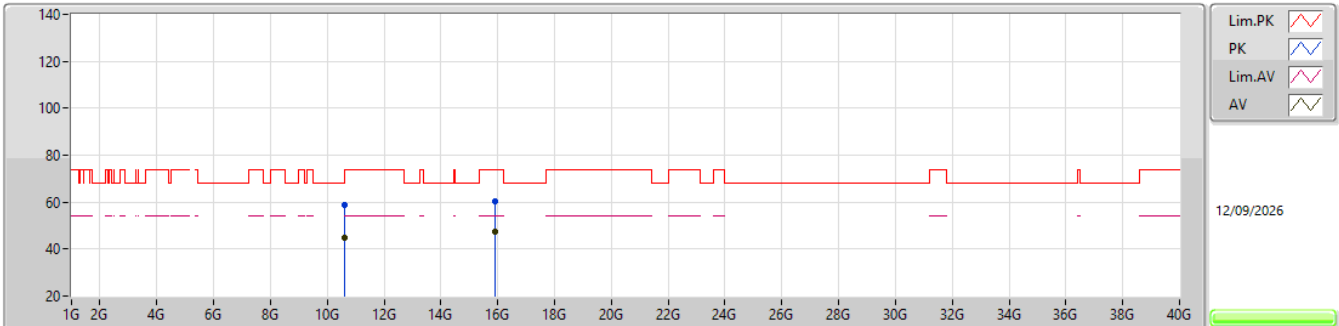EUT_X_1TX
SET 90

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.60176G	58.61	74.00	-15.39	42.82	3	Horizontal	87	1.74	90	39.20	10.75	34.16				
AV	10.60108G	44.98	54.00	-9.02	29.20	3	Horizontal	87	1.74	90	39.20	10.74	34.16				
PK	15.90744G	60.40	74.00	-13.60	42.81	3	Horizontal	268	2.07	90	38.77	13.04	34.22				
AV	15.89976G	47.22	54.00	-6.78	29.60	3	Horizontal	268	2.07	90	38.80	13.04	34.22				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5320MHz_TX

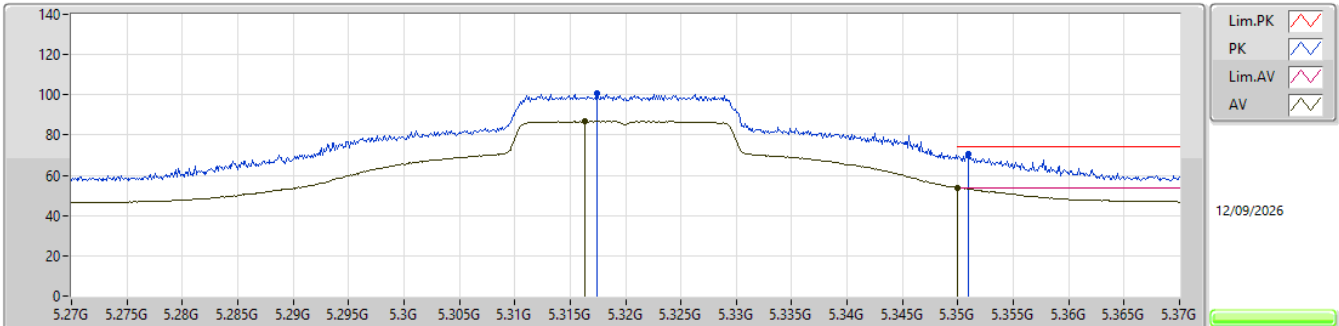


EUT_X_1TX
SET 73
80\70\75\73
-4.84\2.21\ -1.54\0.07

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3174G	101.07	Inf	-Inf	94.23	3	Vertical	72	1.72	73	33.23	7.53	33.92				
AV	5.3163G	86.78	Inf	-Inf	79.94	3	Vertical	72	1.72	73	33.23	7.53	33.92				
PK	5.3509G	70.59	74.00	-3.41	63.66	3	Vertical	72	1.72	73	33.30	7.55	33.92				
AV	5.35G	53.93	54.00	-0.07	47.01	3	Vertical	72	1.72	73	33.30	7.54	33.92				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

5320MHz_TX

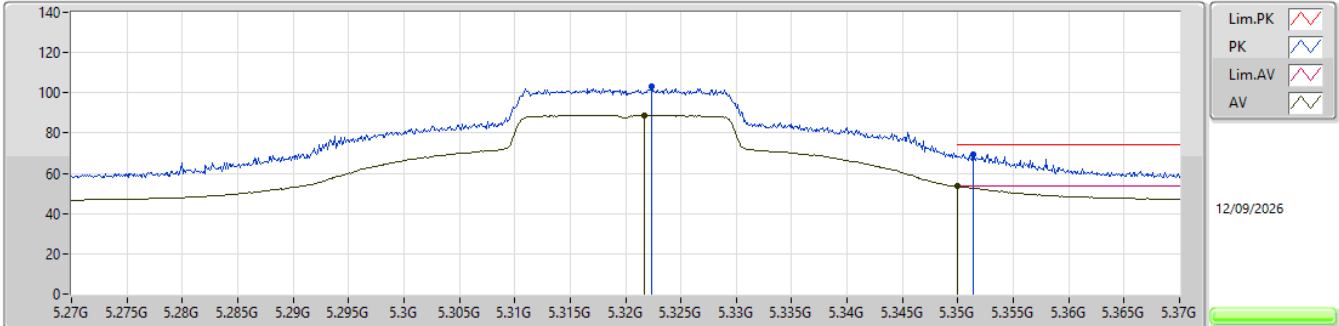


EUT_X_1TX
SET 69
73\68\70\69
-2.47\1.34\0.08\0.54

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3224G	103.17	Inf	-Inf	96.32	3	Horizontal	68	2.32	69	33.24	7.53	33.92			
AV	5.3217G	88.83	Inf	-Inf	81.98	3	Horizontal	68	2.32	69	33.24	7.53	33.92			
PK	5.3514G	69.54	74.00	-4.46	62.61	3	Horizontal	68	2.32	69	33.30	7.55	33.92			
AV	5.35G	53.46	54.00	-0.54	46.54	3	Horizontal	68	2.32	69	33.30	7.54	33.92			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX


5320MHz_TX

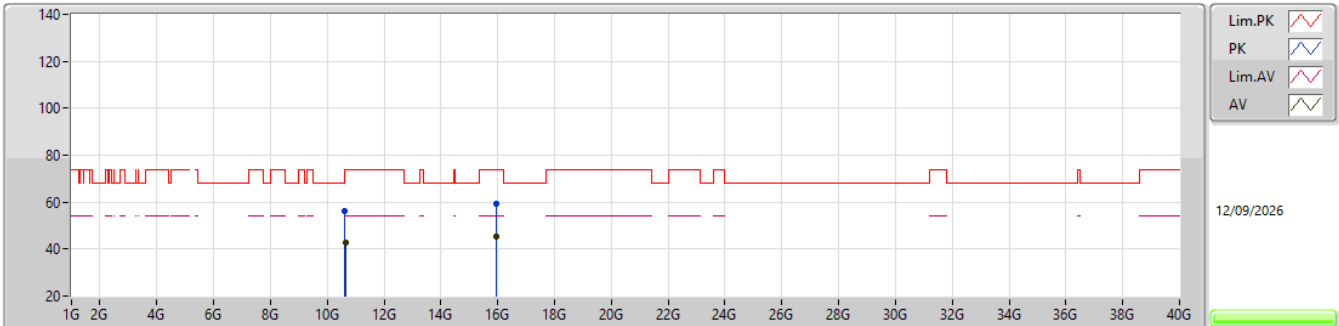EUT X_1TX
SET 69

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.62108G	56.29	74.00	-17.71	40.45	3	Vertical	30	1.86	69	39.24	10.76	34.16				
AV	10.63692G	43.01	54.00	-10.99	27.14	3	Vertical	30	1.86	69	39.27	10.77	34.17				
PK	15.96936G	59.09	74.00	-14.91	41.71	3	Vertical	322	1.68	69	38.48	13.06	34.16				
AV	15.94G	45.22	54.00	-8.78	27.72	3	Vertical	322	1.68	69	38.64	13.05	34.19				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX


5320MHz_TX

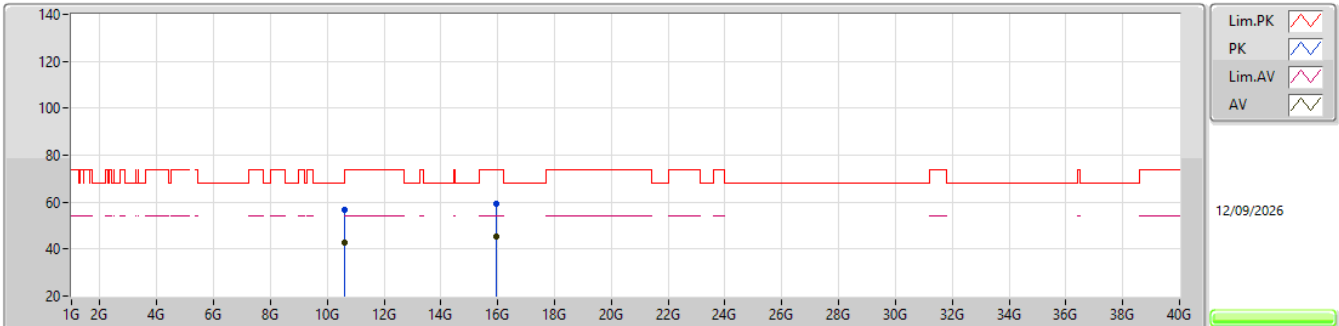EUT X_1TX
SET 69

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.62992G	56.65	74.00	-17.35	40.79	3	Horizontal	313	1.80	69	39.26	10.76	34.16			
AV	10.62088G	42.82	54.00	-11.18	26.98	3	Horizontal	313	1.80	69	39.24	10.76	34.16			
PK	15.96412G	59.16	74.00	-14.84	41.74	3	Horizontal	359	1.39	69	38.52	13.06	34.16			
AV	15.94864G	45.57	54.00	-8.43	28.09	3	Horizontal	359	1.39	69	38.61	13.05	34.18			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TX

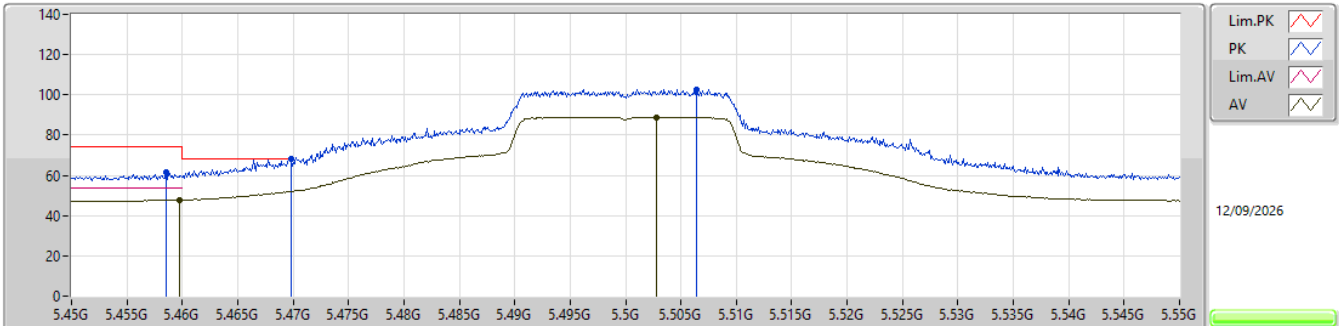


EUT_X_1TX
SET 74
80\72\76\74
-3.77\2.55\ -1.90\0.08

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.4585G	61.45	74.00	-12.55	54.11	3	Vertical	79	1.74	74	33.65	7.60	33.91					
AV	5.4597G	47.84	54.00	-6.16	40.49	3	Vertical	79	1.74	74	33.66	7.60	33.91					
PK	5.4698G	68.12	68.20	-0.08	60.71	3	Vertical	79	1.74	74	33.72	7.60	33.91					
PK	5.5064G	102.75	Inf	-Inf	95.13	3	Vertical	79	1.74	74	33.91	7.62	33.91					
AV	5.5028G	88.99	Inf	-Inf	81.37	3	Vertical	79	1.74	74	33.91	7.62	33.91					

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TX

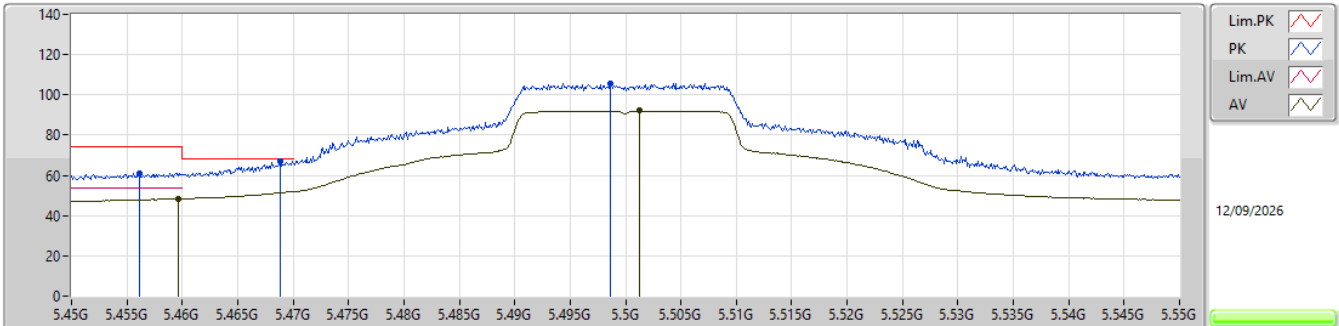


EUT_X_1TX
SET 70
74\65\73\69\71\70
-4.26\6.14\2.59\1.78\0.14\1.16

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4561G	61.15	74.00	-12.85	53.82	3	Horizontal	79	1.80	70	33.64	7.60	33.91			
AV	5.4596G	48.40	54.00	-5.60	41.05	3	Horizontal	79	1.80	70	33.66	7.60	33.91			
PK	5.4688G	67.04	68.20	-1.16	59.64	3	Horizontal	79	1.80	70	33.71	7.60	33.91			
PK	5.4986G	105.80	Inf	-Inf	98.21	3	Horizontal	79	1.80	70	33.89	7.61	33.91			
AV	5.5013G	92.03	Inf	-Inf	84.42	3	Horizontal	79	1.80	70	33.90	7.62	33.91			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5500MHz_TX

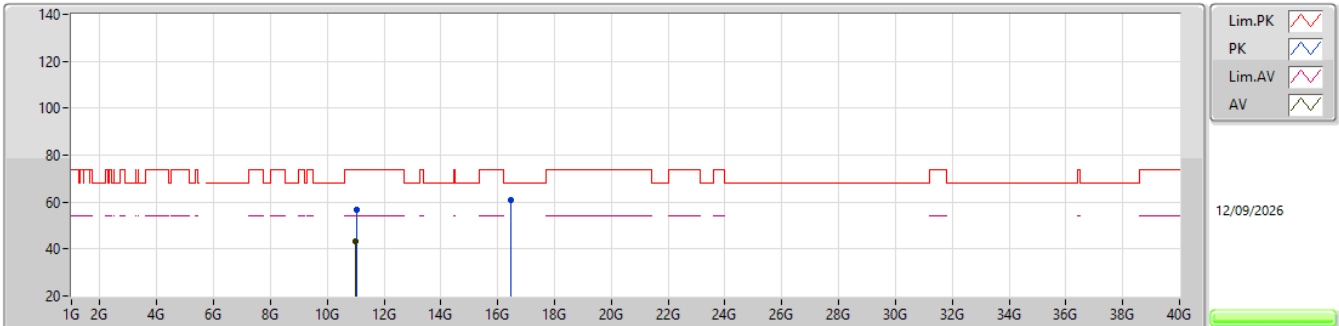EUT X_1TX
SET 70

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.01788G	56.88	74.00	-17.12	40.93	3	Vertical	351	2.31	70	39.20	11.03	34.28			
AV	10.99024G	43.05	54.00	-10.95	27.08	3	Vertical	351	2.31	70	39.22	11.01	34.26			
PK	16.48344G	60.66	68.20	-7.54	42.56	3	Vertical	218	1.80	70	39.60	13.35	34.85			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5500MHz_TX

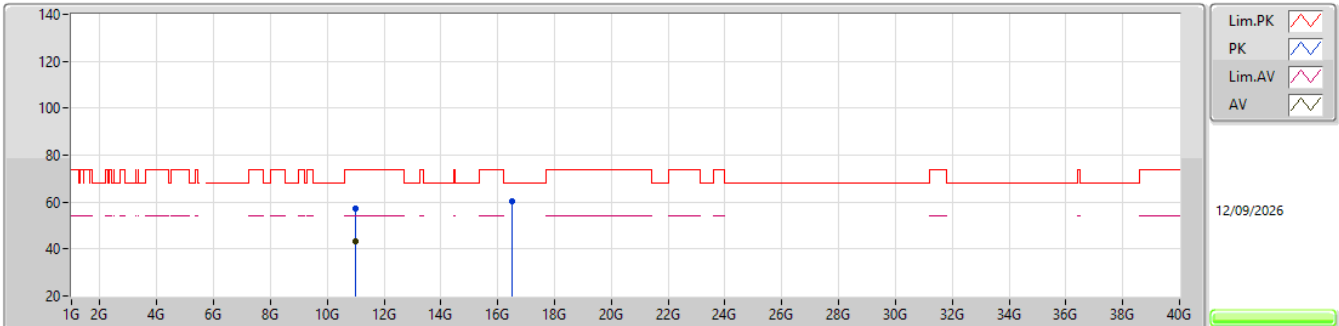EUT X_1TX
SET 70

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.98176G	57.03	74.00	-16.97	41.04	3	Horizontal	201	1.95	70	39.24	11.01	34.26				
AV	10.98776G	43.03	54.00	-10.97	27.06	3	Horizontal	201	1.95	70	39.22	11.01	34.26				
PK	16.5196G	60.34	68.20	-7.86	42.14	3	Horizontal	276	1.80	70	39.70	13.37	34.87				

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TX

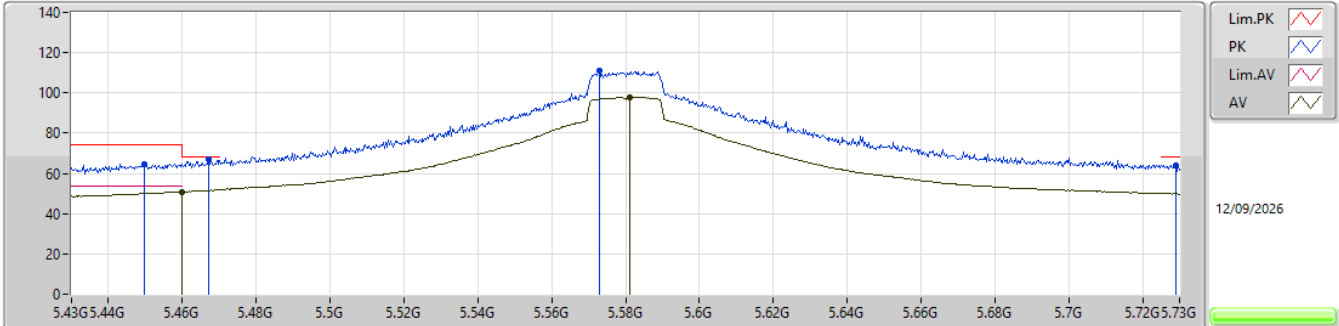


EUT_X_1TX
SET 98
80\94\98
7.47\7.46\1.25

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4498G	64.74	74.00	-9.26	57.46	3	Vertical	87	1.61	108	33.60	7.59	33.91
PK	5.4672G	66.95	68.20	-1.25	59.56	3	Vertical	87	1.61	108	33.70	7.60	33.91
AV	5.46G	50.84	54.00	-3.16	43.49	3	Vertical	87	1.61	108	33.66	7.60	33.91
PK	5.5728G	110.91	Inf	-Inf	103.14	3	Vertical	87	1.61	108	34.00	7.65	33.88
AV	5.5812G	97.73	Inf	-Inf	89.96	3	Vertical	87	1.61	108	34.00	7.65	33.88
PK	5.7291G	64.26	68.20	-3.94	56.16	3	Vertical	87	1.61	108	34.20	7.72	33.82

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TX

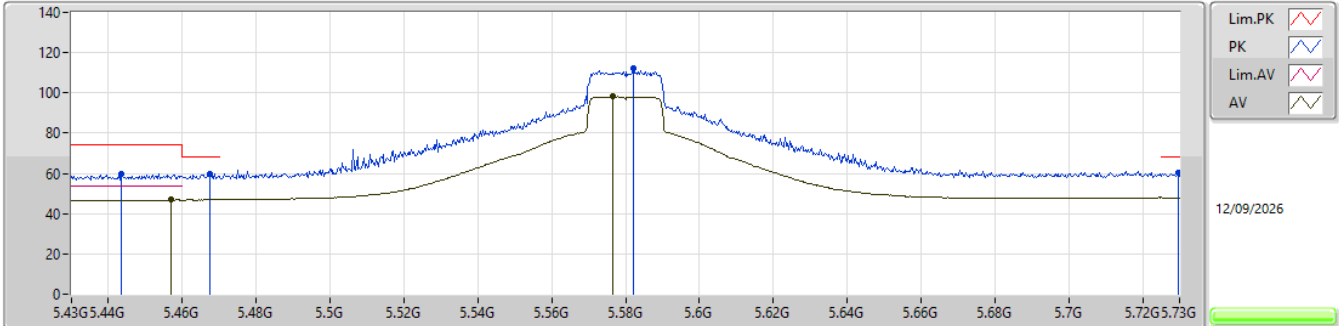


EUT_X_1TX
SET 98
108\100\80\90\95\97\98\107\103\101\98
-3.63\ -5.00\7.39\7.39\7.23\7.21\7.16\ -2.77\ -3.06\ -2.31\7.17

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4435G	59.98	74.00	-14.02	52.73	3	Horizontal	77	1.75	98	33.57	7.59	33.91
PK	5.4675G	59.71	68.20	-8.49	52.32	3	Horizontal	77	1.75	98	33.70	7.60	33.91
AV	5.457G	46.83	54.00	-7.17	39.50	3	Horizontal	77	1.75	98	33.64	7.60	33.91
PK	5.5821G	112.15	Inf	-Inf	104.38	3	Horizontal	77	1.75	98	34.00	7.65	33.88
AV	5.5764G	98.09	Inf	-Inf	90.32	3	Horizontal	77	1.75	98	34.00	7.65	33.88
PK	5.7297G	60.27	68.20	-7.93	52.17	3	Horizontal	77	1.75	98	34.20	7.72	33.82

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX


5580MHz_TX

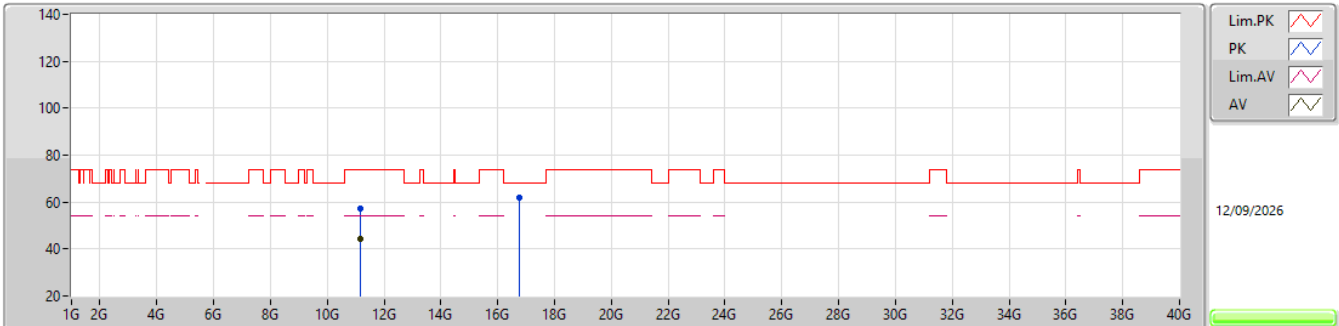EUT X_1TX
SET 98

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16196G	57.50	74.00	-16.50	41.91	3	Vertical	25	1.33	98	38.90	11.13	34.44			
AV	11.16088G	44.14	54.00	-9.86	28.55	3	Vertical	25	1.33	98	38.90	11.13	34.44			
PK	16.75496G	62.07	68.20	-6.13	43.26	3	Vertical	355	1.46	98	40.12	13.51	34.82			

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TX

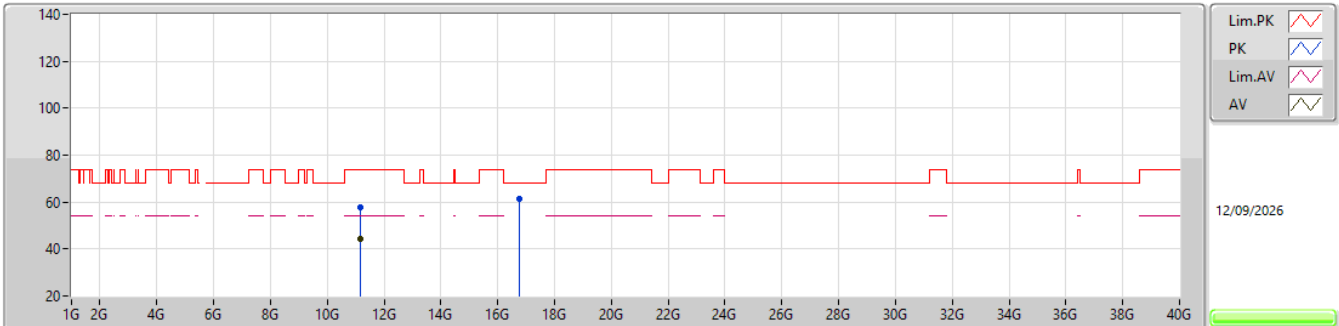EUT X_1TX
SET 98

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16392G	57.93	74.00	-16.07	42.35	3	Horizontal	76	2.12	98	38.90	11.13	34.45			
AV	11.16068G	44.16	54.00	-9.84	28.57	3	Horizontal	76	2.12	98	38.90	11.13	34.44			
PK	16.75564G	61.48	68.20	-6.72	42.67	3	Horizontal	77	1.79	98	40.12	13.51	34.82			