


Radiated Spurious Emission below 1GHz:

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel of DH5 for GFSK was recorded in the report.

Test Graph


Horizontal:

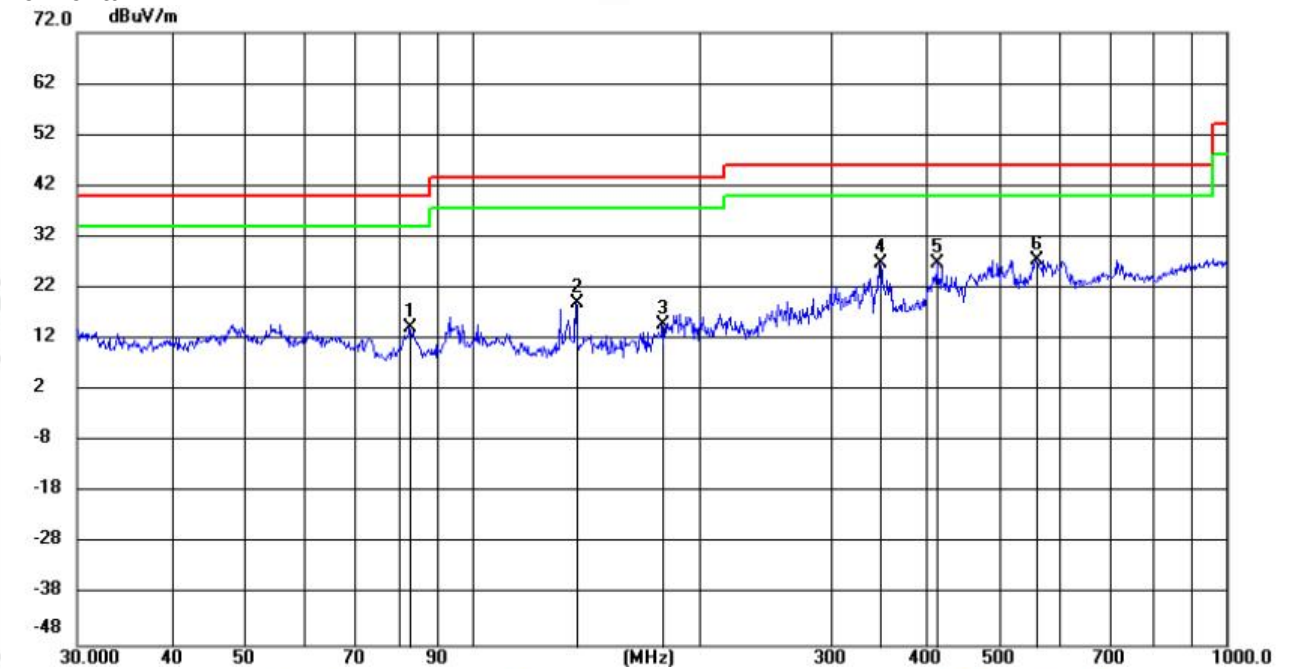

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		82.8077	4.10	10.24	14.34	40.00	-25.66	200	90	
2		137.4924	8.48	10.47	18.95	43.50	-24.55	100	220	
3		179.2920	3.90	10.98	14.88	43.50	-28.62	200	133	
4		346.9916	9.02	17.87	26.89	46.00	-19.11	100	137	
5		414.0683	7.35	19.63	26.98	46.00	-19.02	200	6	
6	*	559.7106	5.37	22.12	27.49	46.00	-18.51	100	27	

Remark:

1. $\text{Margin} = \text{Measurement}(\text{Level}) - \text{Limit}$.
2. $\text{Measurement}(\text{Level}) = \text{Reading Level} + \text{Correct Factor}$.
3. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit, an exclamation mark (!) indicates over -6dB margin Limit.

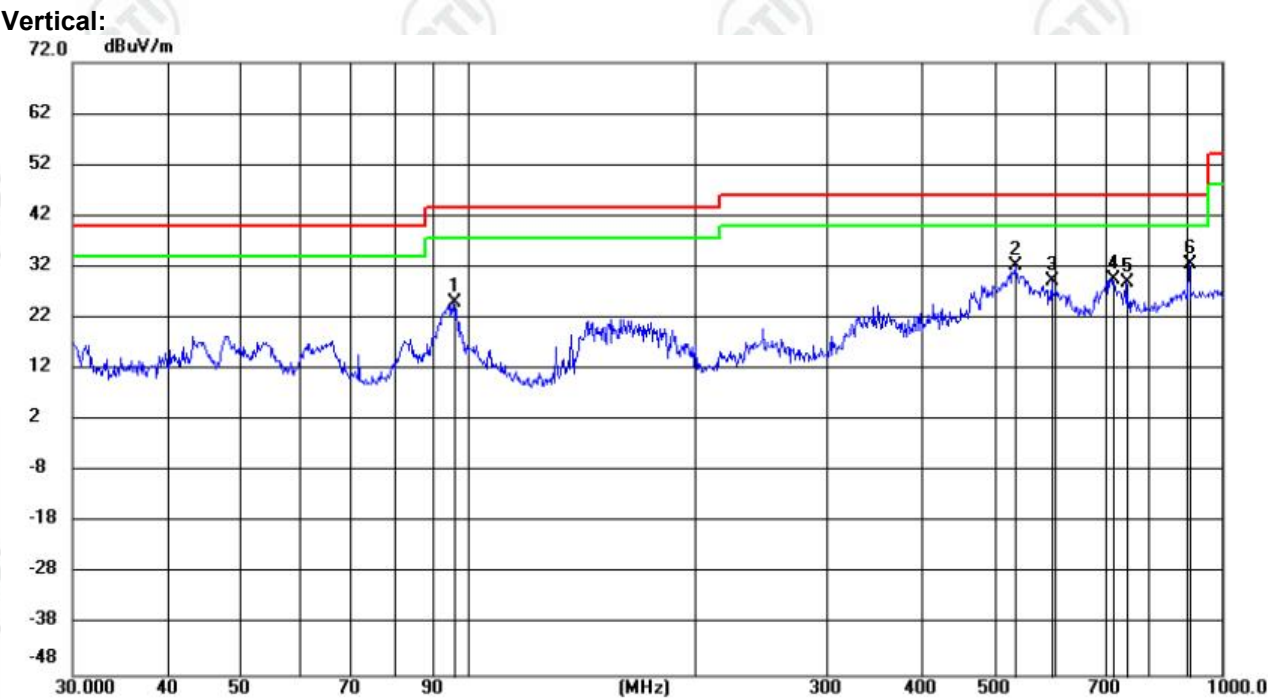

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		95.8630	12.43	12.71	25.14	43.50	-18.36	100	91	
2		533.8321	10.82	21.38	32.20	46.00	-13.80	100	23	
3		596.1772	6.40	22.87	29.27	46.00	-16.73	100	125	
4		716.8076	5.52	24.17	29.69	46.00	-16.31	100	177	
5		748.6630	4.50	24.34	28.84	46.00	-17.16	100	160	
6	*	904.8945	5.45	27.00	32.45	46.00	-13.55	100	23	


Remark:

1. $\text{Margin} = \text{Measurement}(\text{Level}) - \text{Limit}$.
2. $\text{Measurement}(\text{Level}) = \text{Reading Level} + \text{Correct Factor}$.
3. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit, an exclamation mark (!) indicates over -6dB margin Limit.

Radiated Spurious Emission above 1GHz:

Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Test_Engineer	\	Test_Date	2026/9/24


Test Graph

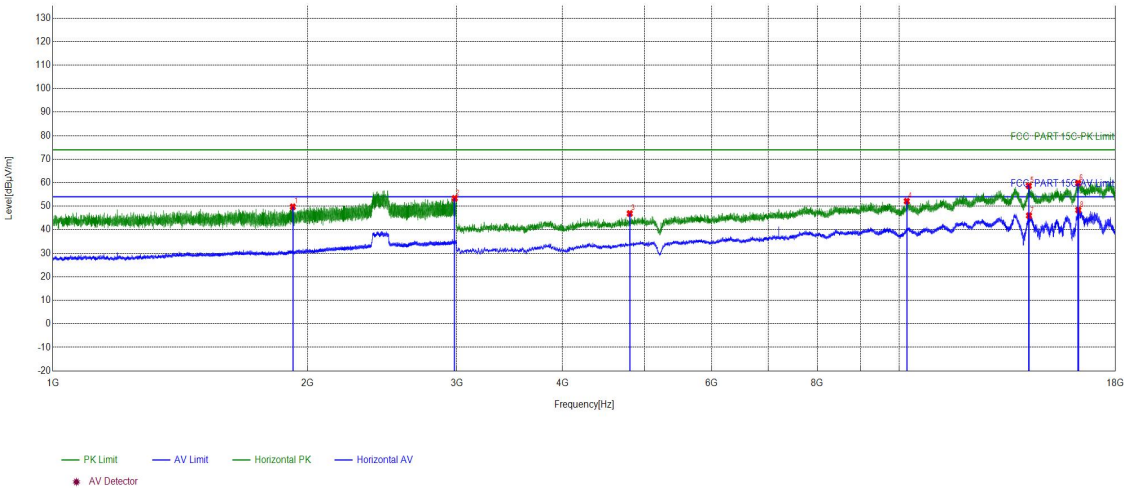

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1920.728	14.73	35.03	49.76	74.00	24.24	PASS	Horizontal	PK
2	2983.7322	17.88	35.47	53.35	74.00	20.65	PASS	Horizontal	PK
3	4803.1202	-8.60	55.51	46.91	74.00	27.09	PASS	Horizontal	PK
4	10204.4803	1.56	50.60	52.16	74.00	21.84	PASS	Horizontal	PK
5	14222.7482	8.60	50.09	58.69	74.00	15.31	PASS	Horizontal	PK
6	16266.8845	10.61	49.25	59.86	74.00	14.14	PASS	Horizontal	PK
7	14231.7488	8.71	37.30	46.01	54.00	7.99	PASS	Horizontal	AV
8	16273.8849	10.69	37.70	48.39	54.00	5.61	PASS	Horizontal	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Test_Engineer	\	Test_Date	2026/9/24


Test Graph

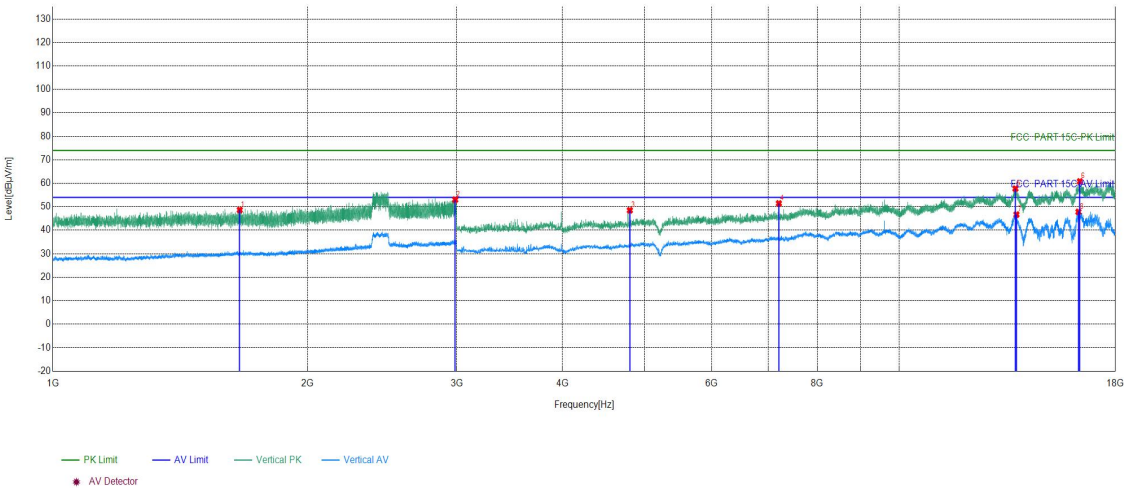

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1662.4442	13.81	34.84	48.65	74.00	25.35	PASS	Vertical	PK
2	2987.9992	17.90	35.11	53.01	74.00	20.99	PASS	Vertical	PK
3	4804.1203	-8.60	57.11	48.51	74.00	25.49	PASS	Vertical	PK
4	7206.2804	-3.35	54.78	51.43	74.00	22.57	PASS	Vertical	PK
5	13714.7143	7.24	50.50	57.74	74.00	16.26	PASS	Vertical	PK
6	16341.8895	11.48	49.32	60.80	74.00	13.20	PASS	Vertical	PK
7	13752.7168	7.19	39.50	46.69	54.00	7.31	PASS	Vertical	AV
8	16278.8853	10.74	37.11	47.85	54.00	6.15	PASS	Vertical	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Test_Engineer	\	Test_Date	2026/9/24


Test Graph

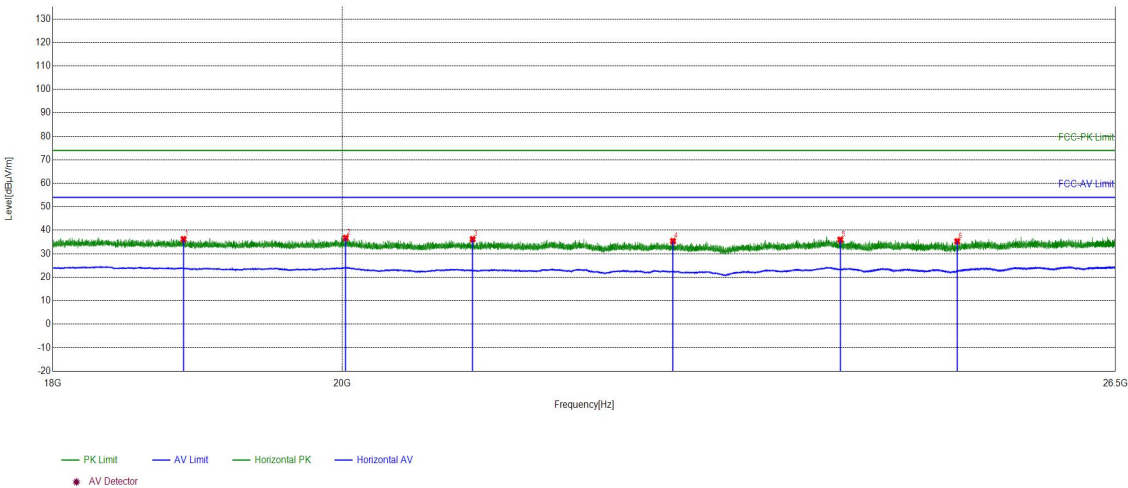

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18876.8951	-26.28	62.49	36.21	74.00	37.79	PASS	Horizontal	PK
2	20024.441	-24.73	61.44	36.71	74.00	37.29	PASS	Horizontal	PK
3	20971.3789	-25.95	62.12	36.17	74.00	37.83	PASS	Horizontal	PK
4	22558.2223	-25.03	60.40	35.37	74.00	38.63	PASS	Horizontal	PK
5	23974.719	-21.99	57.94	35.95	74.00	38.05	PASS	Horizontal	PK
6	25017.2007	-22.05	57.35	35.30	74.00	38.70	PASS	Horizontal	PK

Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Test_Engineer	\	Test_Date	2026/9/24


Test Graph

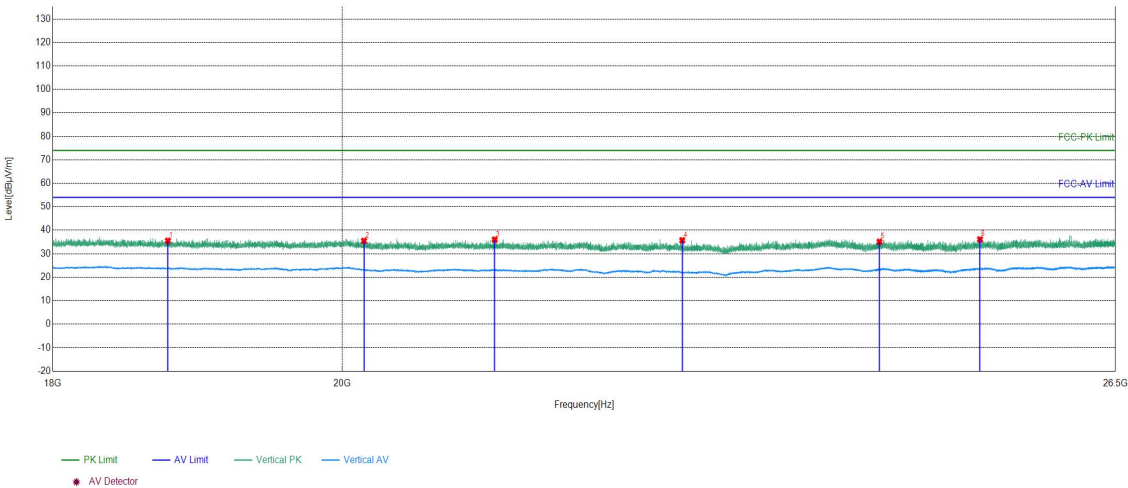

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18769.4508	-26.35	61.86	35.51	74.00	38.49	PASS	Vertical	PK
2	20158.4063	-25.32	60.79	35.47	74.00	38.53	PASS	Vertical	PK
3	21140.7056	-25.82	61.83	36.01	74.00	37.99	PASS	Vertical	PK
4	22634.3854	-25.01	60.72	35.71	74.00	38.29	PASS	Vertical	PK
5	24319.4928	-22.06	57.16	35.10	74.00	38.90	PASS	Vertical	PK
6	25225.629	-21.09	57.19	36.10	74.00	37.90	PASS	Vertical	PK

Test_Mode	GFSK Transmitting	Test_Frequency	2445MHz
Test_Engineer	\	Test_Date	2026/9/24


Test Graph

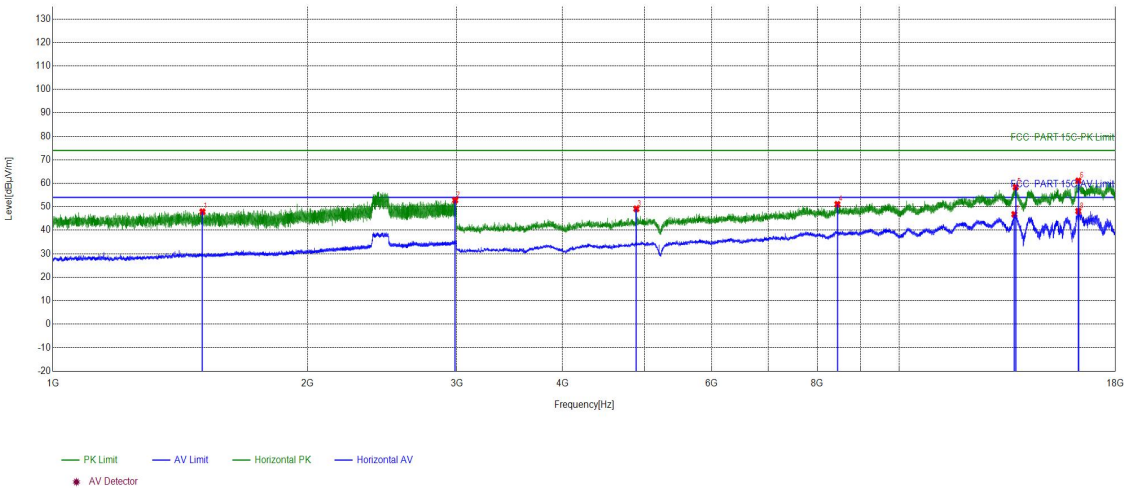

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1502.3002	13.34	34.57	47.91	74.00	26.09	PASS	Horizontal	PK
2	2987.1991	17.90	34.90	52.80	74.00	21.20	PASS	Horizontal	PK
3	4890.126	-8.33	57.46	49.13	74.00	24.87	PASS	Horizontal	PK
4	8450.3634	-0.52	51.60	51.08	74.00	22.92	PASS	Horizontal	PK
5	13723.7149	7.21	51.15	58.36	74.00	15.64	PASS	Horizontal	PK
6	16276.8851	10.72	50.34	61.06	74.00	12.94	PASS	Horizontal	PK
7	13674.7116	7.36	39.42	46.78	54.00	7.22	PASS	Horizontal	AV
8	16273.8849	10.69	37.44	48.13	54.00	5.87	PASS	Horizontal	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2445MHz
Test_Engineer	\	Test_Date	2026/9/24


Test Graph

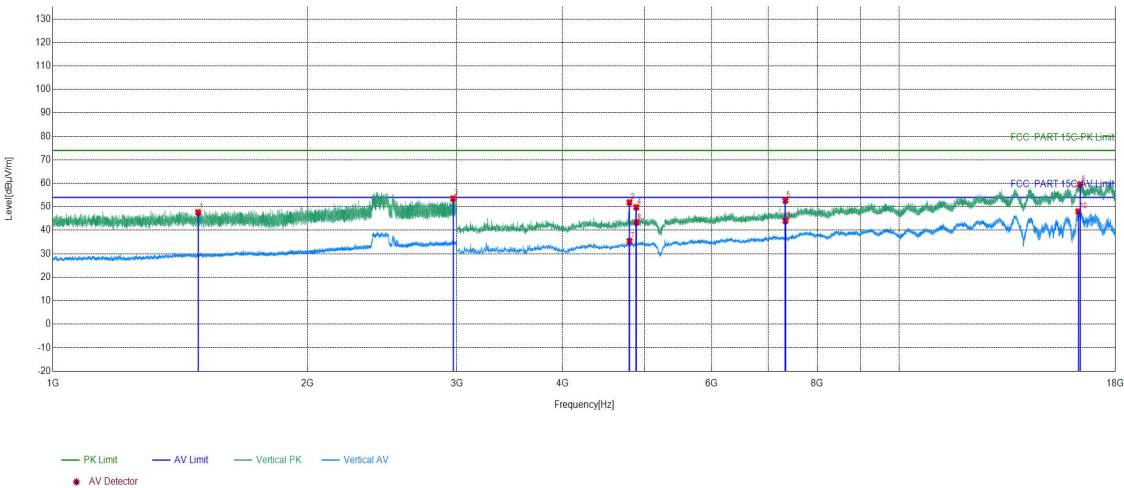

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1484.5656	13.19	34.43	47.62	74.00	26.38	PASS	Vertical	PK
2	2970.9314	17.93	35.58	53.51	74.00	20.49	PASS	Vertical	PK
3	4799.1199	-8.61	60.50	51.89	74.00	22.11	PASS	Vertical	PK
4	4890.126	-8.33	58.13	49.80	74.00	24.20	PASS	Vertical	PK
5	7335.289	-2.86	55.53	52.67	74.00	21.33	PASS	Vertical	PK
6	16352.8902	11.49	48.06	59.55	74.00	14.45	PASS	Vertical	PK
7	4800.12	-8.61	43.97	35.36	54.00	18.64	PASS	Vertical	AV
8	4891.1261	-8.32	51.64	43.32	54.00	10.68	PASS	Vertical	AV
9	7336.2891	-2.86	46.88	44.02	54.00	9.98	PASS	Vertical	AV
10	16272.8849	10.68	37.32	48.00	54.00	6.00	PASS	Vertical	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2445MHz
Test_Engineer	\	Test_Date	2026/9/24


Test Graph

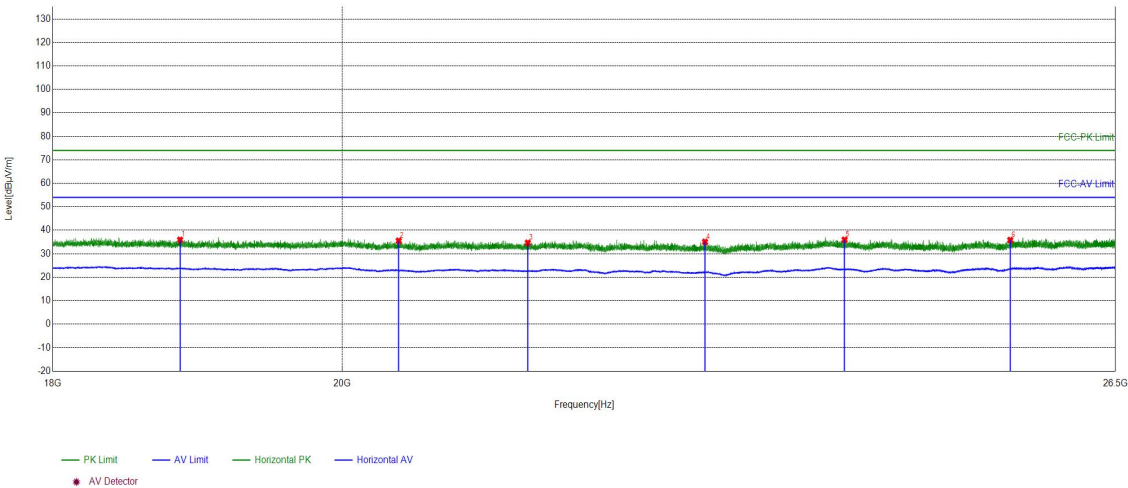

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	18853.0941	-26.28	62.21	35.93	74.00	38.07	PASS	Horizontal	PK
2	20414.7766	-25.52	61.02	35.50	74.00	38.50	PASS	Horizontal	PK
3	21397.4159	-25.88	60.53	34.65	74.00	39.35	PASS	Horizontal	PK
4	22822.7529	-25.13	60.17	35.04	74.00	38.96	PASS	Horizontal	PK
5	24012.4605	-21.98	57.92	35.94	74.00	38.06	PASS	Horizontal	PK
6	25504.7802	-21.06	56.87	35.81	74.00	38.19	PASS	Horizontal	PK

Test_Mode	GFSK Transmitting	Test_Frequency	2445MHz
Test_Engineer	\	Test_Date	2026/9/24


Test Graph

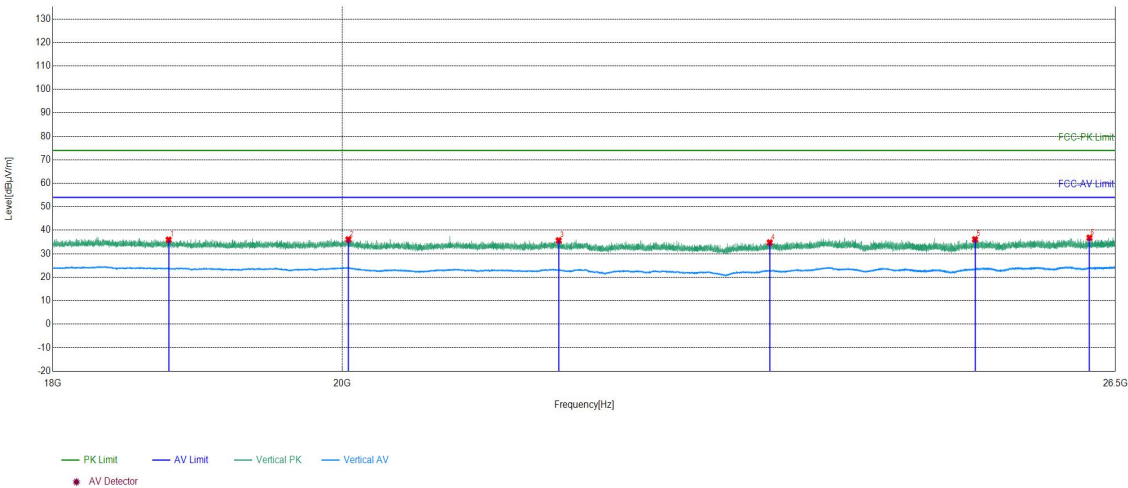

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	18774.891	-26.34	62.29	35.95	74.00	38.05	PASS	Vertical	PK
2	20044.1618	-24.82	60.89	36.07	74.00	37.93	PASS	Vertical	PK
3	21638.8256	-25.70	61.34	35.64	74.00	38.36	PASS	Vertical	PK
4	23366.7747	-23.67	58.44	34.77	74.00	39.23	PASS	Vertical	PK
5	25180.0672	-21.15	57.26	36.11	74.00	37.89	PASS	Vertical	PK
6	26251.11	-21.31	58.10	36.79	74.00	37.21	PASS	Vertical	PK

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Test_Engineer	\	Test_Date	2026/9/24


Test Graph

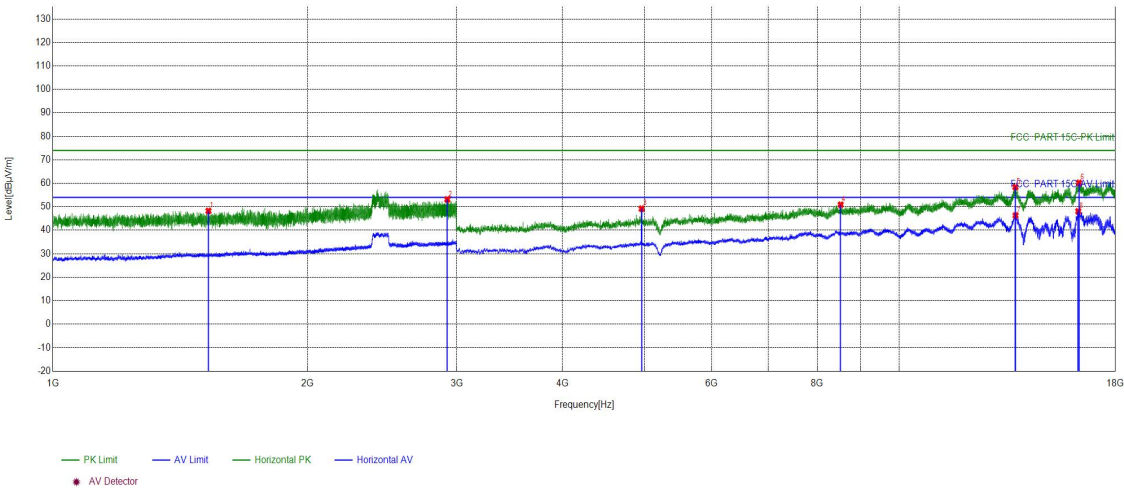

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1526.8351	13.41	34.84	48.25	74.00	25.75	PASS	Horizontal	PK
2	2924.2616	17.64	35.46	53.10	74.00	20.90	PASS	Horizontal	PK
3	4960.1307	-8.05	57.24	49.19	74.00	24.81	PASS	Horizontal	PK
4	8525.3684	-0.54	51.43	50.89	74.00	23.11	PASS	Horizontal	PK
5	13713.7142	7.24	51.12	58.36	74.00	15.64	PASS	Horizontal	PK
6	16304.887	11.03	49.17	60.20	74.00	13.80	PASS	Horizontal	PK
7	13719.7146	7.22	39.08	46.30	54.00	7.70	PASS	Horizontal	AV
8	16271.8848	10.67	37.38	48.05	54.00	5.95	PASS	Horizontal	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Test_Engineer	\	Test_Date	2026/9/24


Test Graph

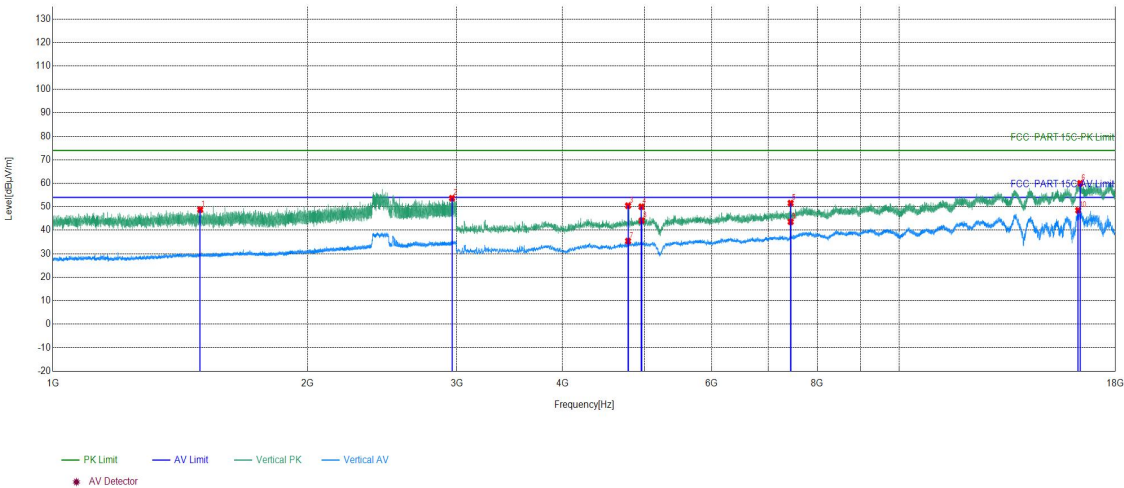

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1493.0995	13.34	35.45	48.79	74.00	25.21	PASS	Vertical	PK
2	2961.5974	17.78	35.87	53.65	74.00	20.35	PASS	Vertical	PK
3	4781.1187	-8.62	59.09	50.47	74.00	23.53	PASS	Vertical	PK
4	4959.1306	-8.04	58.07	50.03	74.00	23.97	PASS	Vertical	PK
5	7440.296	-2.50	54.05	51.55	74.00	22.45	PASS	Vertical	PK
6	16358.8906	11.30	48.73	60.03	74.00	13.97	PASS	Vertical	PK
7	4781.1187	-8.62	44.02	35.40	54.00	18.60	PASS	Vertical	AV
8	4961.1307	-8.05	52.18	44.13	54.00	9.87	PASS	Vertical	AV
9	7441.2961	-2.48	46.10	43.62	54.00	10.38	PASS	Vertical	AV
10	16269.8847	10.64	37.85	48.49	54.00	5.51	PASS	Vertical	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Test_Engineer	\	Test_Date	2026/9/24


Test Graph

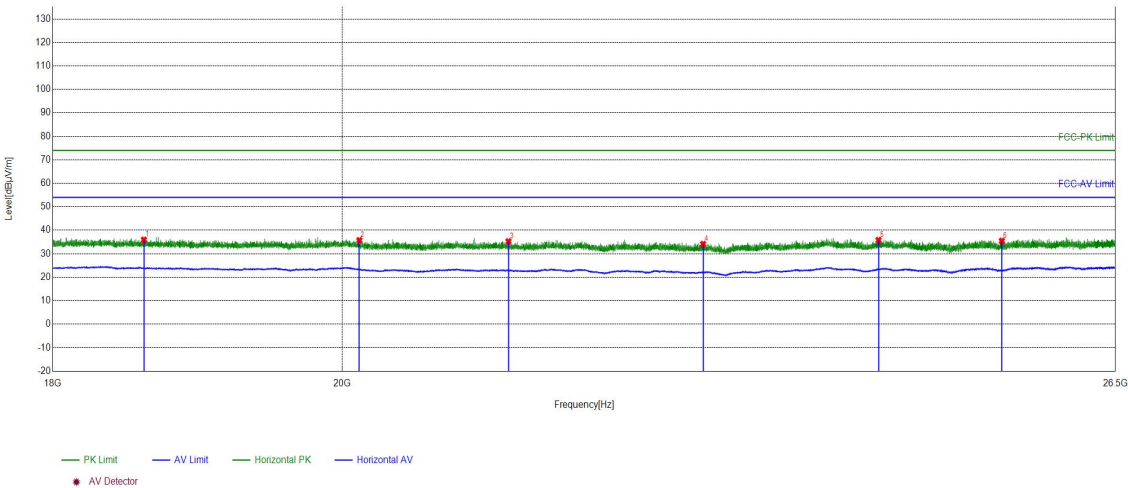

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18606.2442	-26.68	62.59	35.91	74.00	38.09	PASS	Horizontal	PK
2	20124.405	-25.17	60.88	35.71	74.00	38.29	PASS	Horizontal	PK
3	21247.1299	-25.78	61.01	35.23	74.00	38.77	PASS	Horizontal	PK
4	22807.1123	-25.08	59.20	34.12	74.00	39.88	PASS	Horizontal	PK
5	24310.9924	-22.11	57.90	35.79	74.00	38.21	PASS	Horizontal	PK
6	25427.2571	-21.34	56.81	35.47	74.00	38.53	PASS	Horizontal	PK

Test_Mode	GFSK Transmitting	Test_Frequency	2480MHz
Test_Engineer	\	Test_Date	2026/9/24

Test Graph

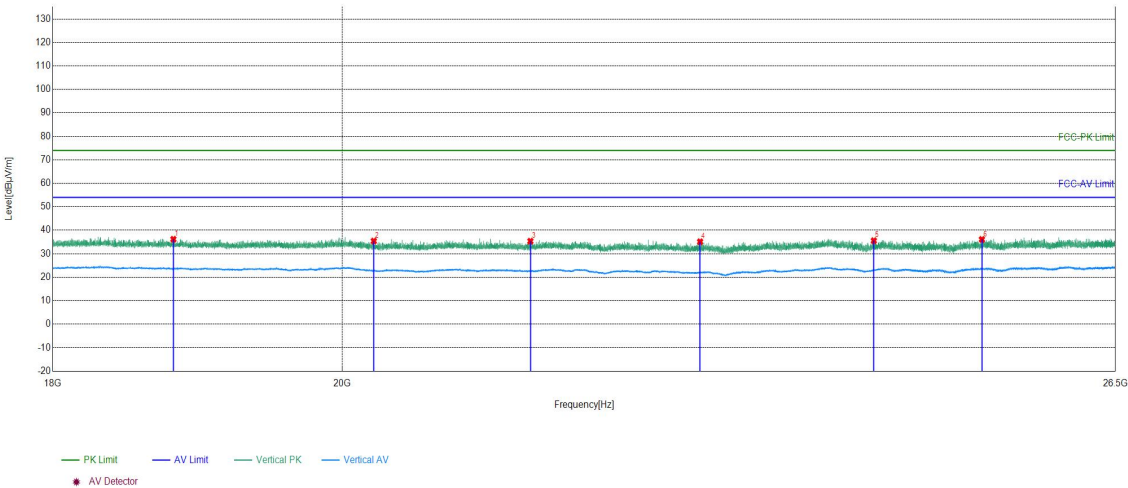

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	18807.1923	-26.29	62.47	36.18	74.00	37.82	PASS	Vertical	PK
2	20230.4892	-25.51	60.91	35.40	74.00	38.60	PASS	Vertical	PK
3	21417.1367	-25.87	61.22	35.35	74.00	38.65	PASS	Vertical	PK
4	22781.9513	-25.04	60.15	35.11	74.00	38.89	PASS	Vertical	PK
5	24269.5108	-22.30	57.87	35.57	74.00	38.43	PASS	Vertical	PK
6	25242.9697	-21.12	57.21	36.09	74.00	37.91	PASS	Vertical	PK


Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.The report records the lowest Peak value. If the Peak value is greater than 54dBµV/m, then the Average value at that time is recorded.

Restricted bands:

Test_Mode	GFSK Transmitting	Test_Frequency	2402MHz
Test_Engineer	\	Test_Date	2026/9/24

Test Graph

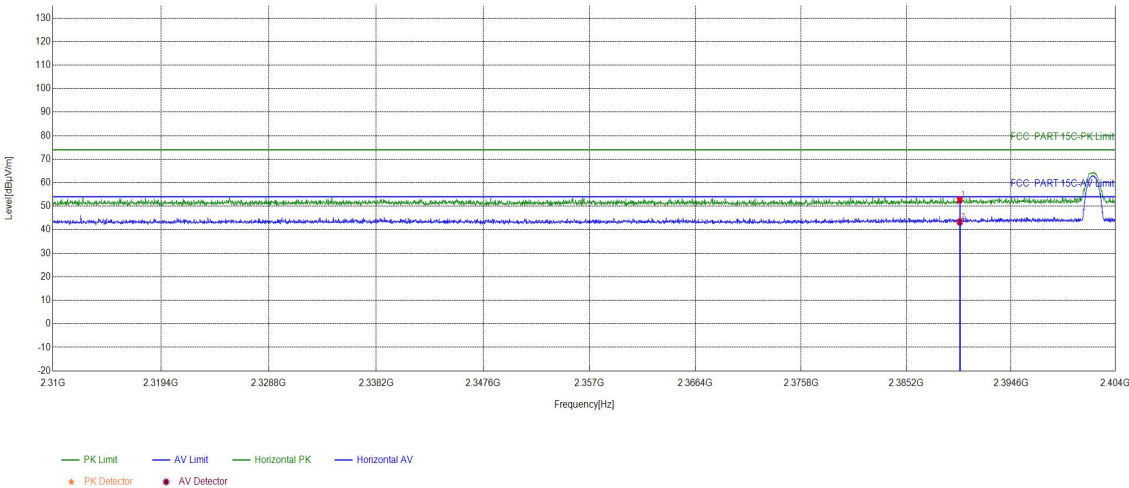

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.70	52.66	74.00	21.34	PASS	Horizontal	PK
2	2390	15.96	27.33	43.29	54.00	10.71	PASS	Horizontal	AV