




Maximum location: X=-12.00, Y=15.00

SAR Peak: 1.43 W/kg

SAR 10g (W/Kg)	0.456007
SAR 1g (W/Kg)	0.846127

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.4234	0.9022	0.4952	0.2717	0.1548

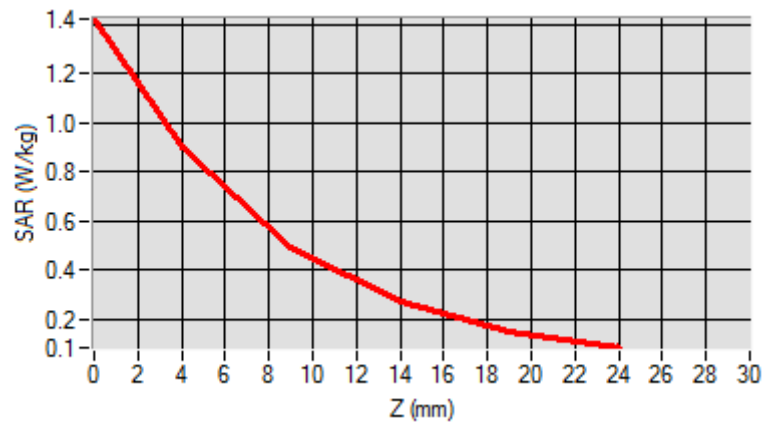

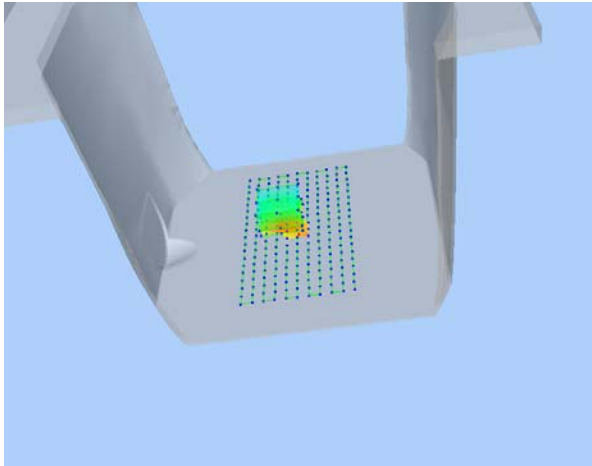3D screen shot	Hot spot position
	

MEASUREMENT 151

Type: Phone measurement (Complete)

Date of measurement: 09/16/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	836.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	2.341234
Ambient Temperature	21.1
Liquid Temperature	21.3

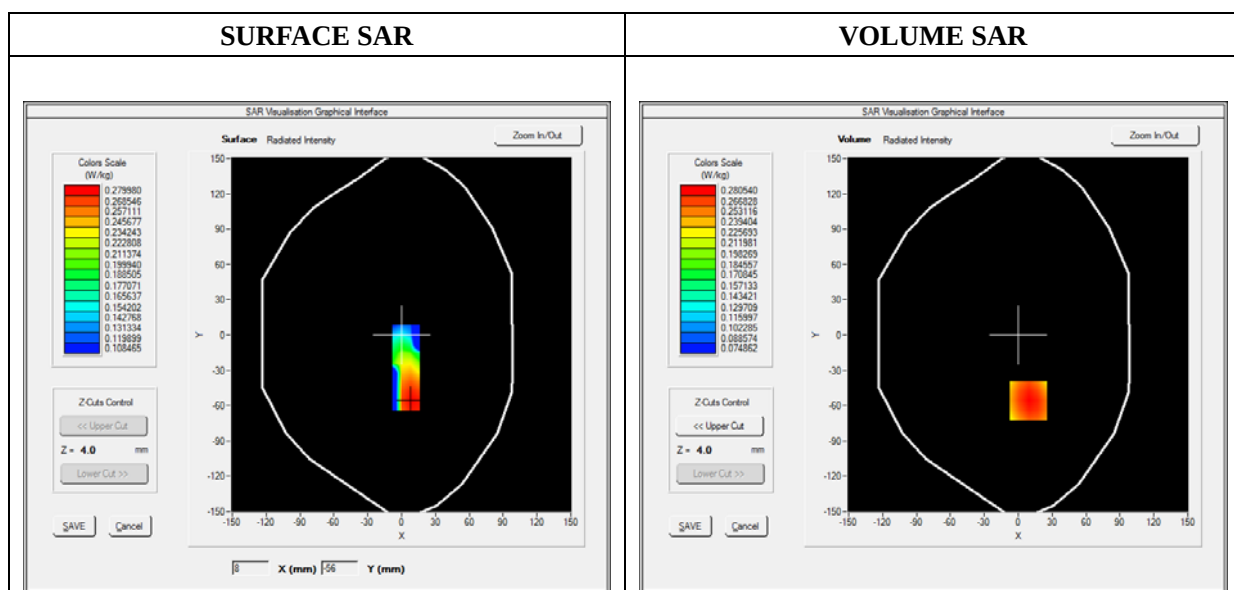



Maximum location: X=9.00, Y=-56.00

SAR Peak: 0.34 W/kg

SAR 10g (W/Kg)	0.204224
SAR 1g (W/Kg)	0.271458

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3443	0.2805	0.2177	0.1706	0.1351

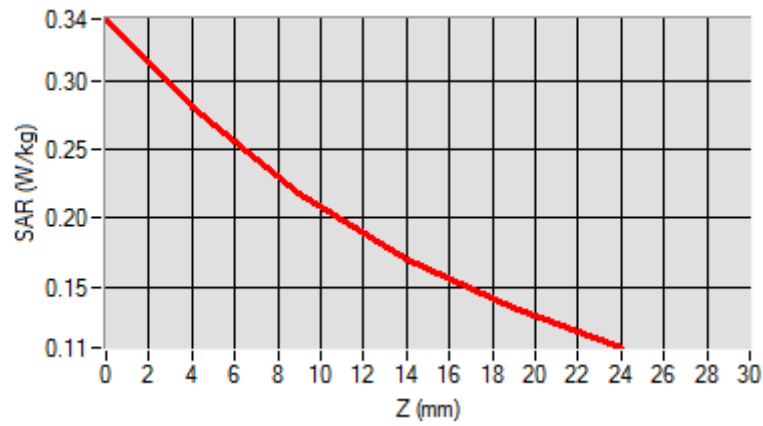

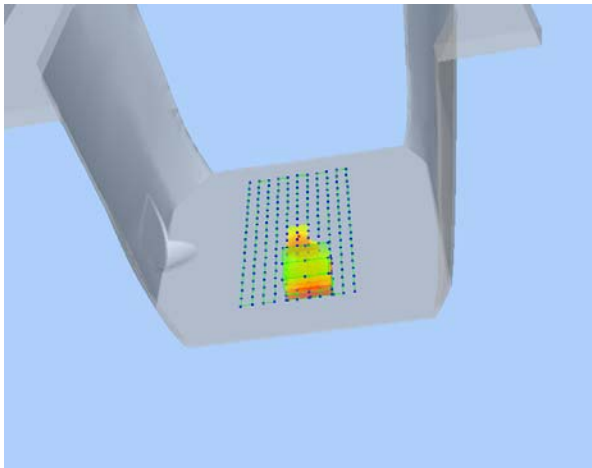3D screen shot	Hot spot position
	

MEASUREMENT 267

Type: Phone measurement (Complete)

Date of measurement: 09/17/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.06; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA1700_RMC
Channels	LowHigh
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1752.600000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	2.341221
Ambient Temperature	21.1
Liquid Temperature	21.3

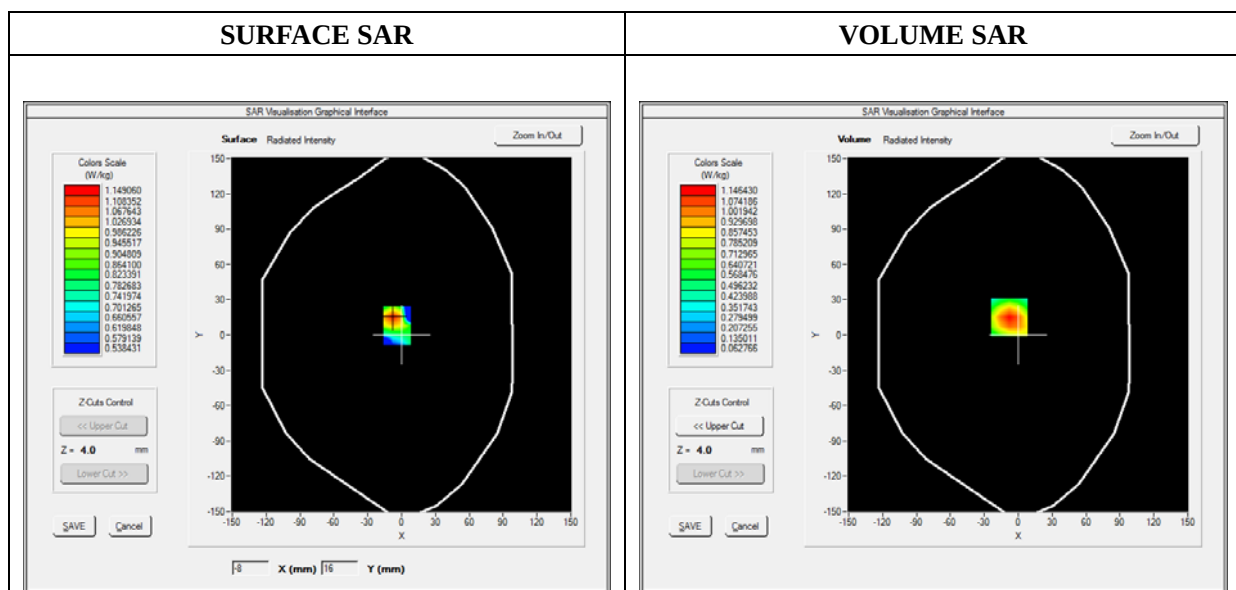

Maximum location: X=-8.00, Y=15.00

SAR Peak: 1.77 W/kg

SAR 10g (W/Kg)	0.596965
SAR 1g (W/Kg)	1.077925

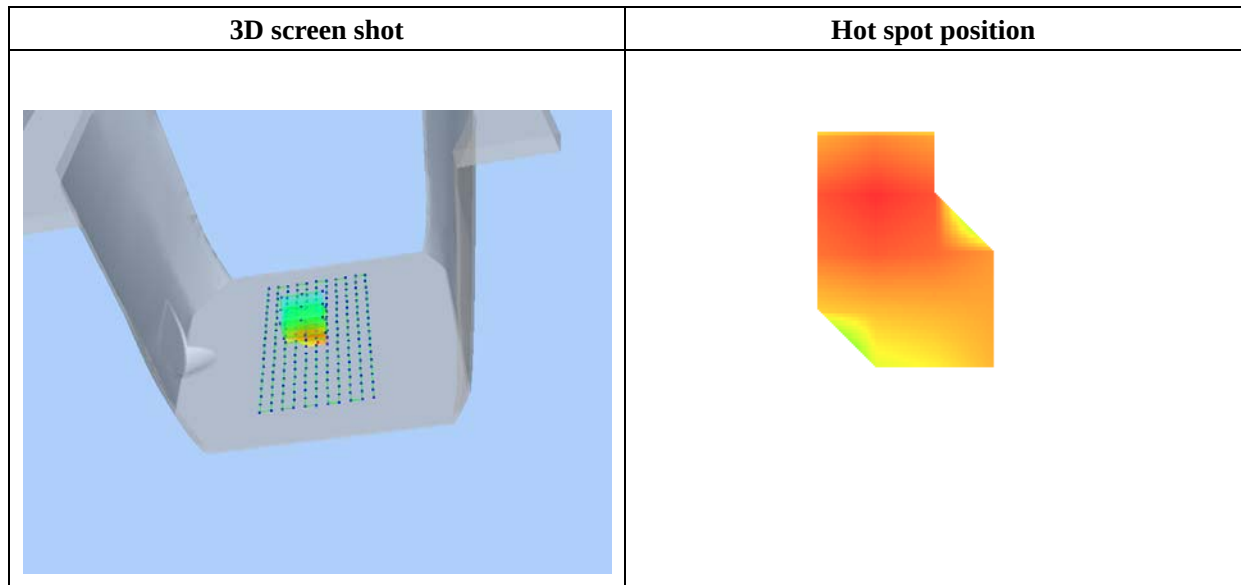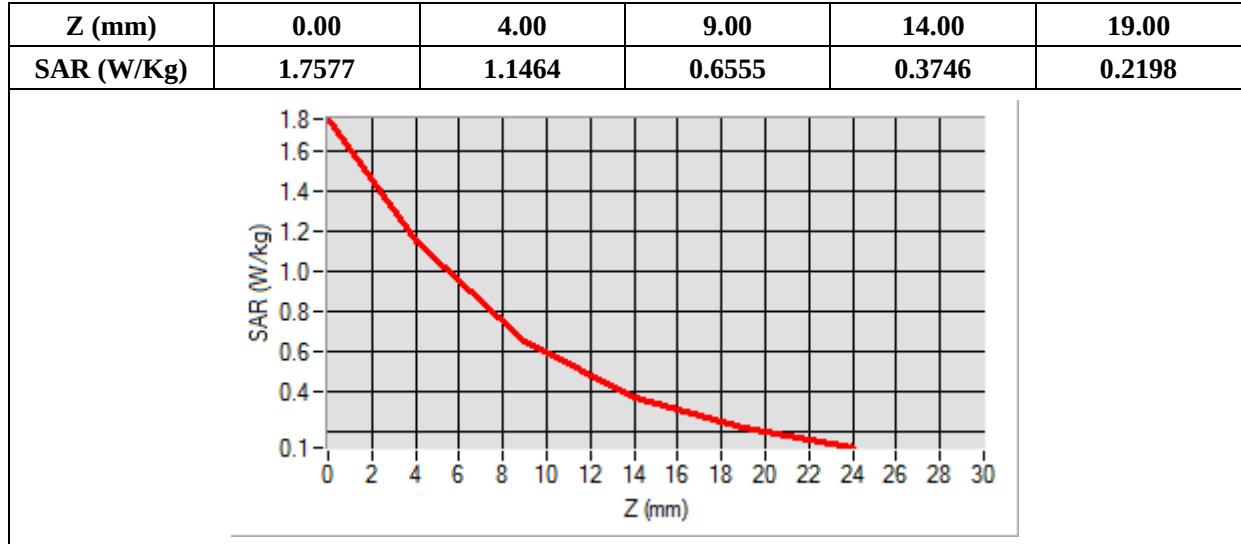

MEASUREMENT 281

Type: Phone measurement (Complete)

Date of measurement: 09/17/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 2_RMC
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.327810
Ambient Temperature	21.1
Liquid Temperature	21.3

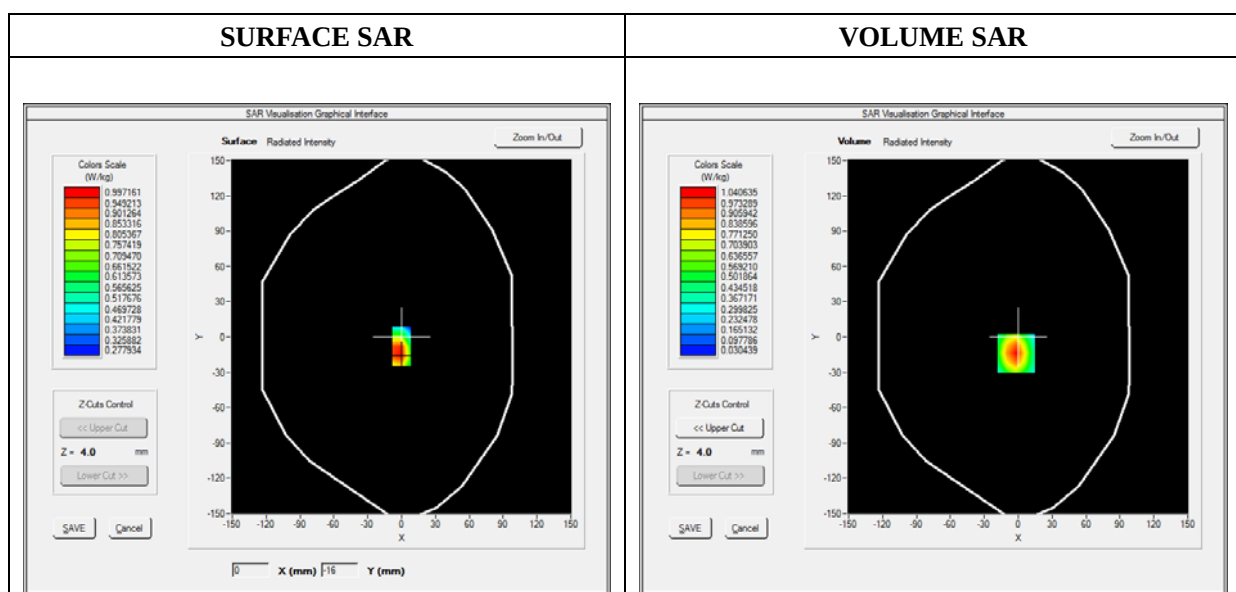

Maximum location: X=-2.00, Y=-14.00

SAR Peak: 1.68 W/kg

SAR 10g (W/Kg)	0.499230
SAR 1g (W/Kg)	0.970006

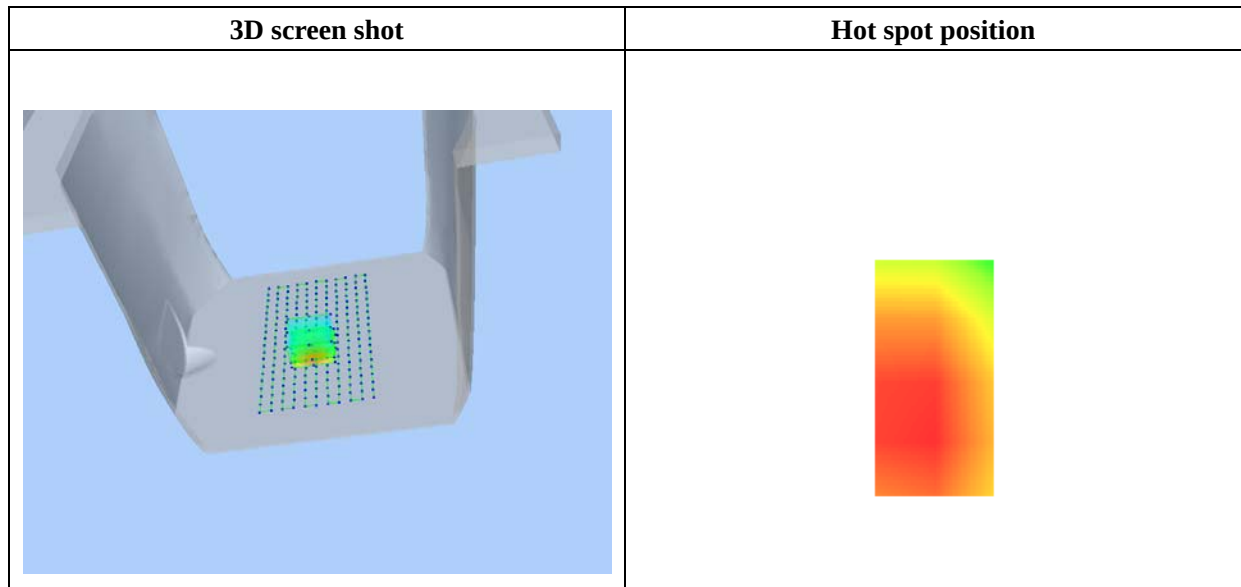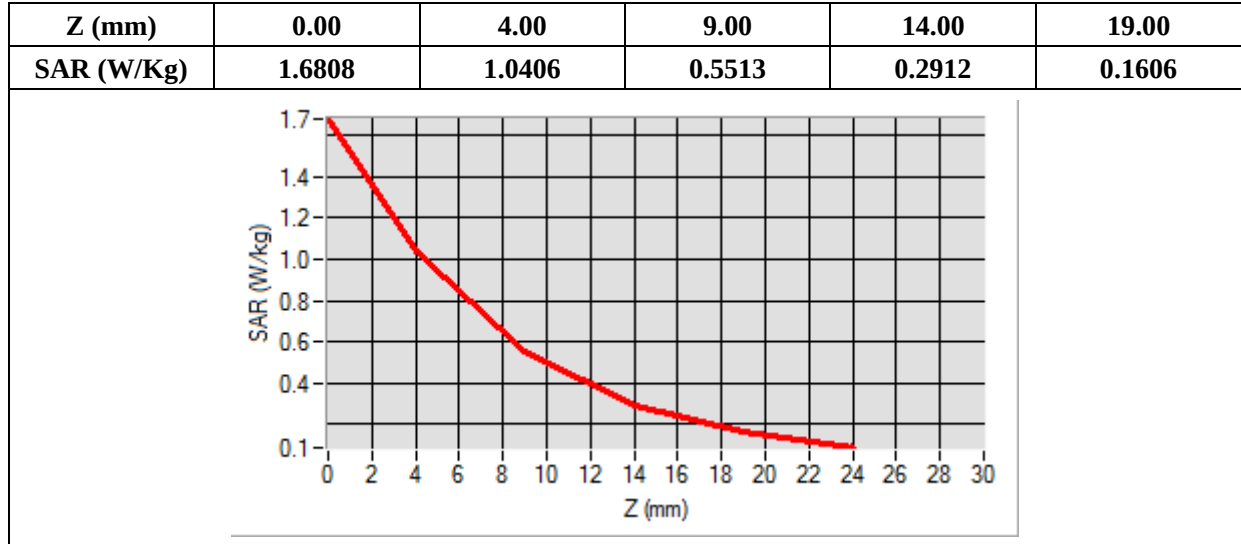

MEASUREMENT 293

Type: Phone measurement (Complete)

Date of measurement: 09/17/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.06; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 4_RMC
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1720.000000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.858383
Ambient Temperature	21.1
Liquid Temperature	21.2

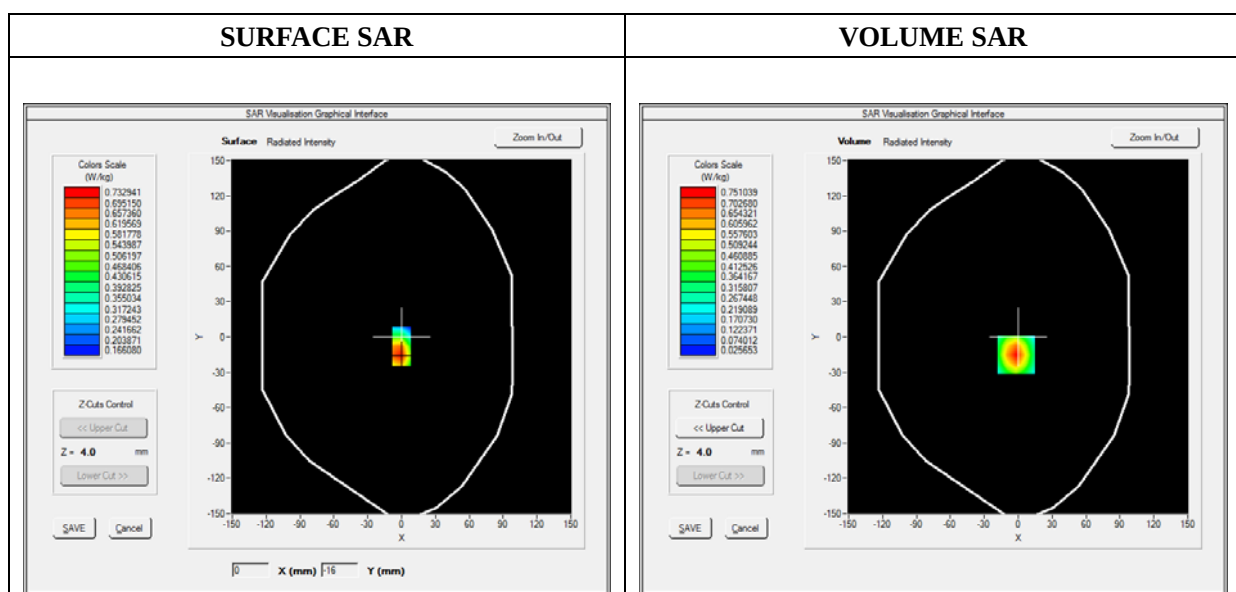



Maximum location: X=-2.00, Y=-15.00

SAR Peak: 1.19 W/kg

SAR 10g (W/Kg)	0.363448
SAR 1g (W/Kg)	0.697865

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1909	0.7510	0.4097	0.2242	0.1282

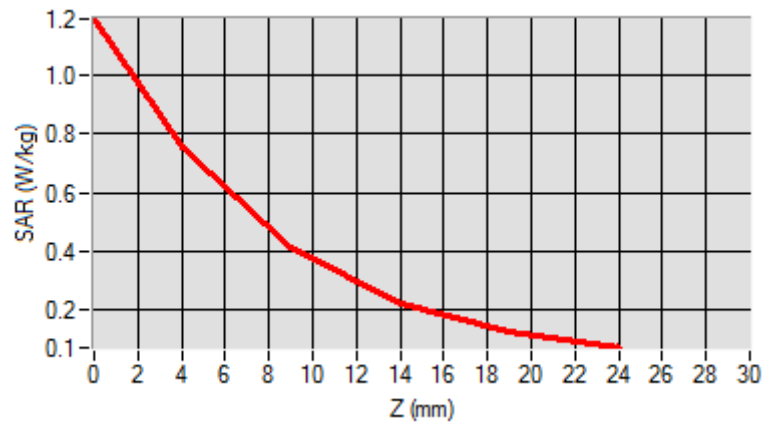

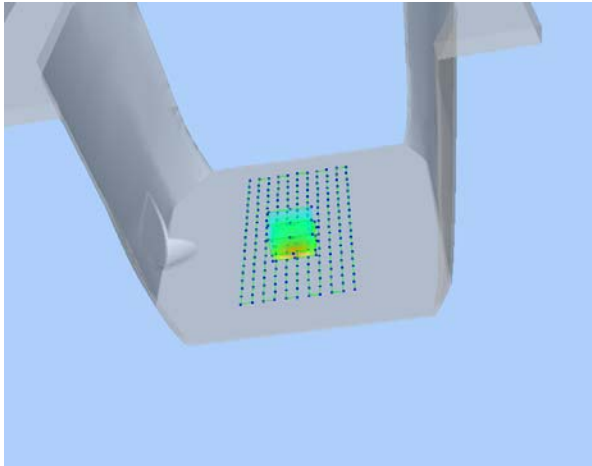3D screen shot	Hot spot position
	

MEASUREMENT 299

Type: Phone measurement (Complete)

Date of measurement: 09/16/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 5_RMC
Channels	QPSK, 10MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	829.000000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	1.037332
Ambient Temperature	21.1
Liquid Temperature	21.2

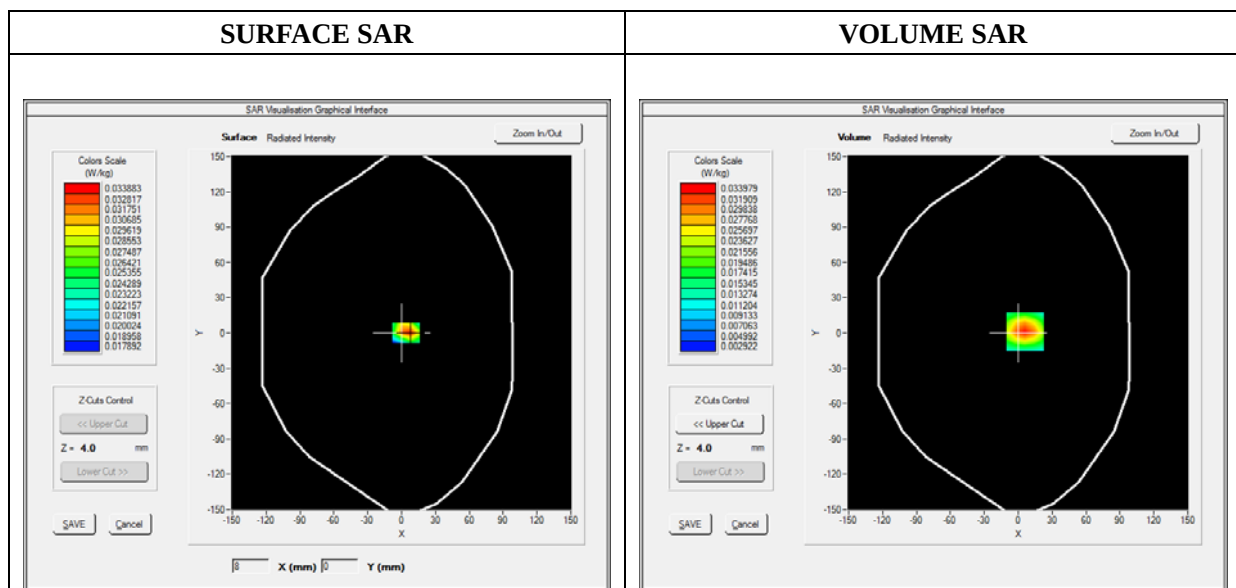

Maximum location: X=6.00, Y=1.00

SAR Peak: 0.05 W/kg

SAR 10g (W/Kg)	0.018509
SAR 1g (W/Kg)	0.031856

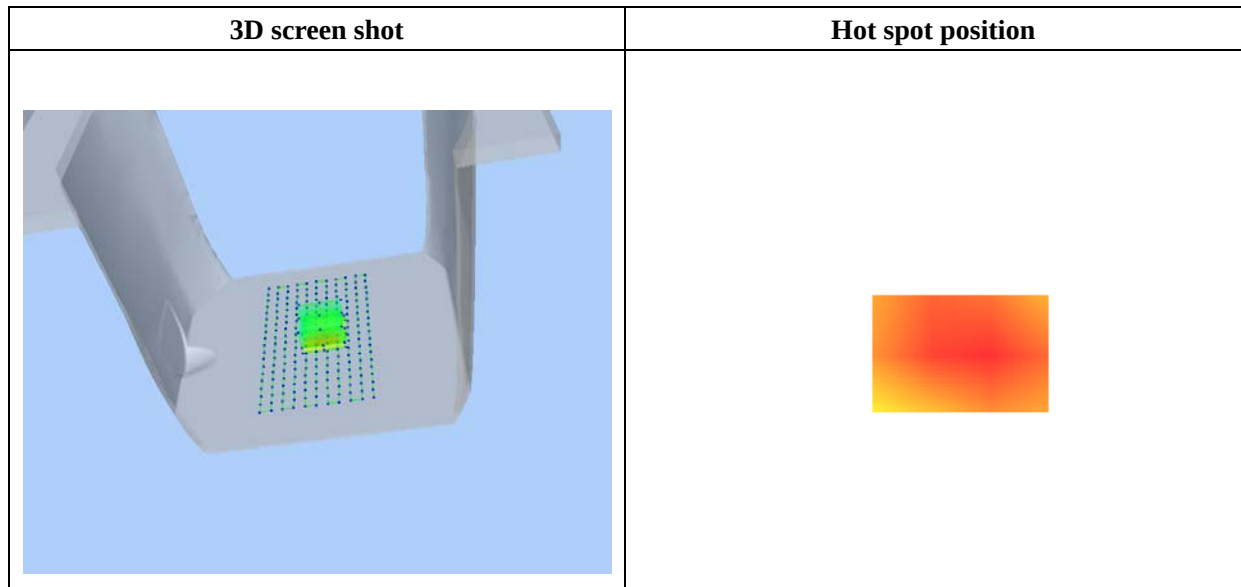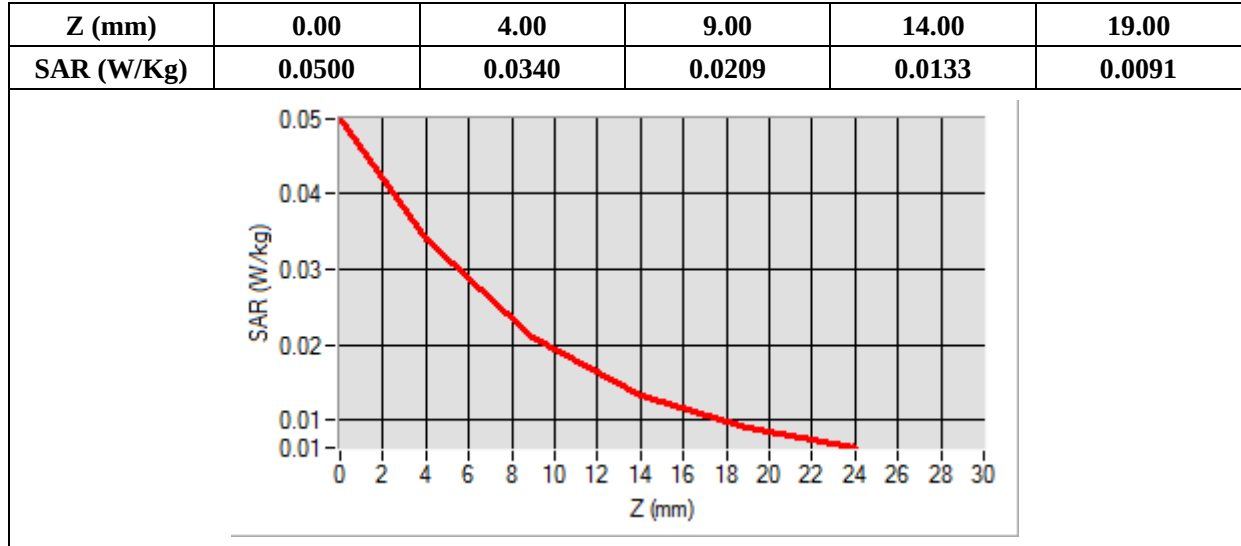

MEASUREMENT 311

Type: Phone measurement (Complete)

Date of measurement: 09/18/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.58; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 7_RMC
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative Permittivity (real part)	52.241202
Conductivity (S/m)	2.120943
Power Variation (%)	3.672346
Ambient Temperature	21.1
Liquid Temperature	21.2

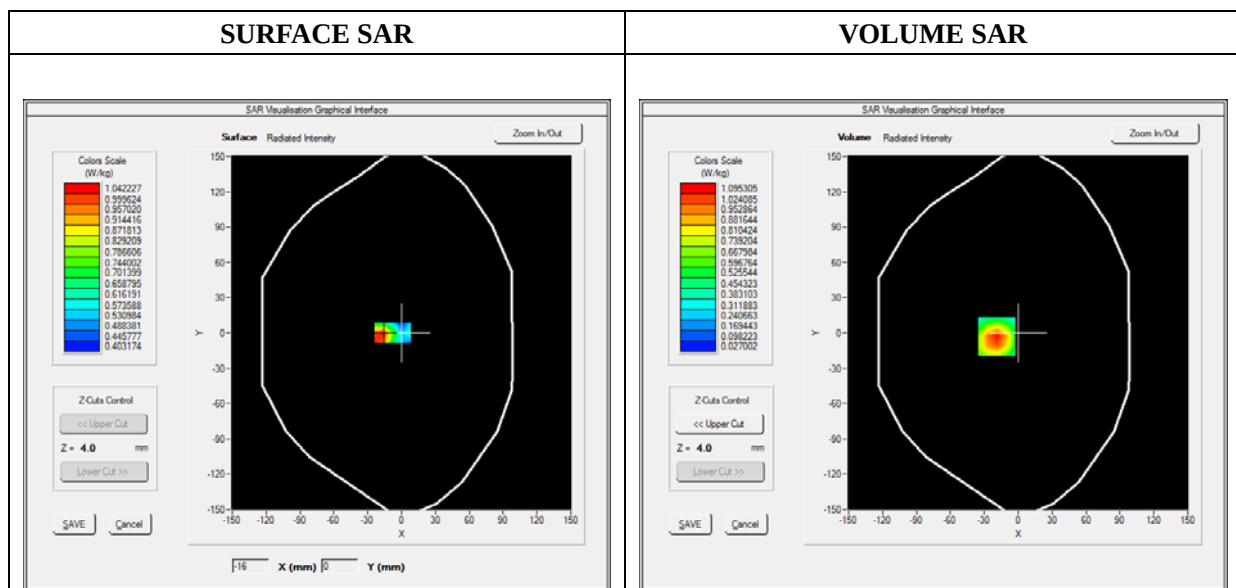




Maximum location: X=-19.00, Y=-3.00

SAR Peak: 1.81 W/kg

SAR 10g (W/Kg)	0.528666
SAR 1g (W/Kg)	1.031768

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.7786	1.0953	0.5739	0.2973	0.1588

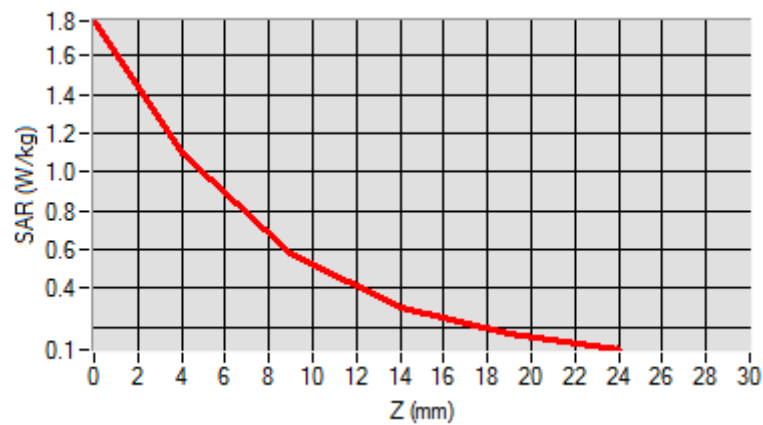

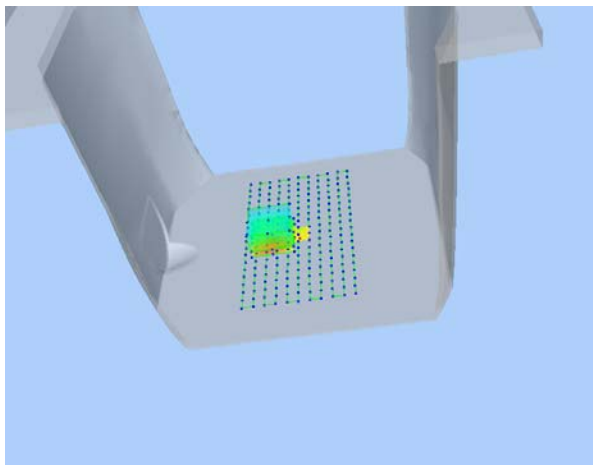3D screen shot	Hot spot position
	

MEASUREMENT 322

Type: Phone measurement (Complete)

Date of measurement: 09/16/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.28; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 12_RMC
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative Permittivity (real part)	54.964739
Conductivity (S/m)	0.931048
Power Variation (%)	3.672346
Ambient Temperature	21.1
Liquid Temperature	21.2

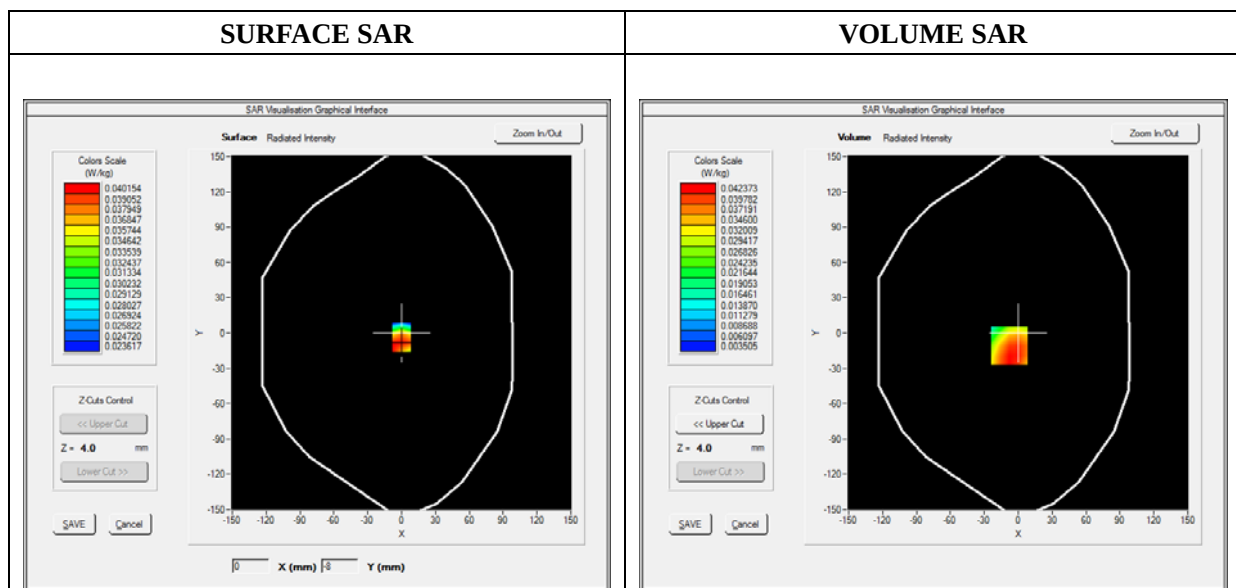



Maximum location: X=-8.00, Y=-11.00

SAR Peak: 0.06 W/kg

SAR 10g (W/Kg)	0.027034
SAR 1g (W/Kg)	0.041262

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1837	0.0424	0.0173	0.0235	0.0073

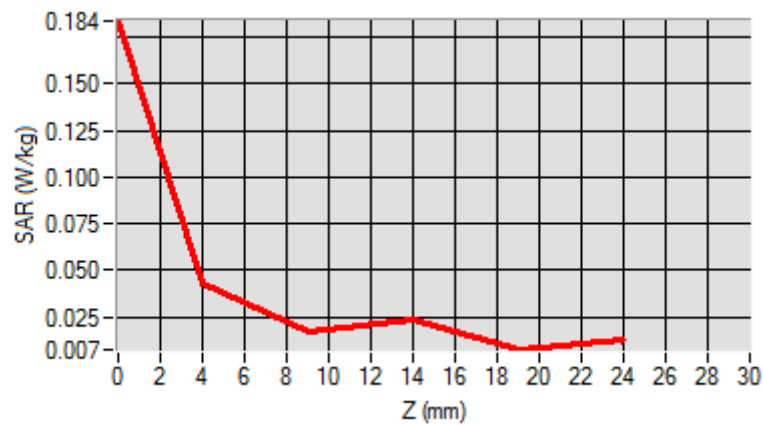

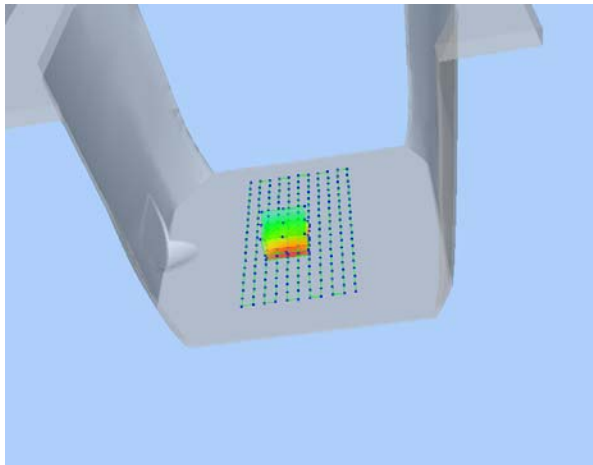3D screen shot	Hot spot position
	

MEASUREMENT 332

Type: Phone measurement (Complete)

Date of measurement: 09/16/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.28; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 13_RMC
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	782.000000
Relative Permittivity (real part)	54.964739
Conductivity (S/m)	0.931048
Power Variation (%)	3.017812
Ambient Temperature	21.1
Liquid Temperature	21.2

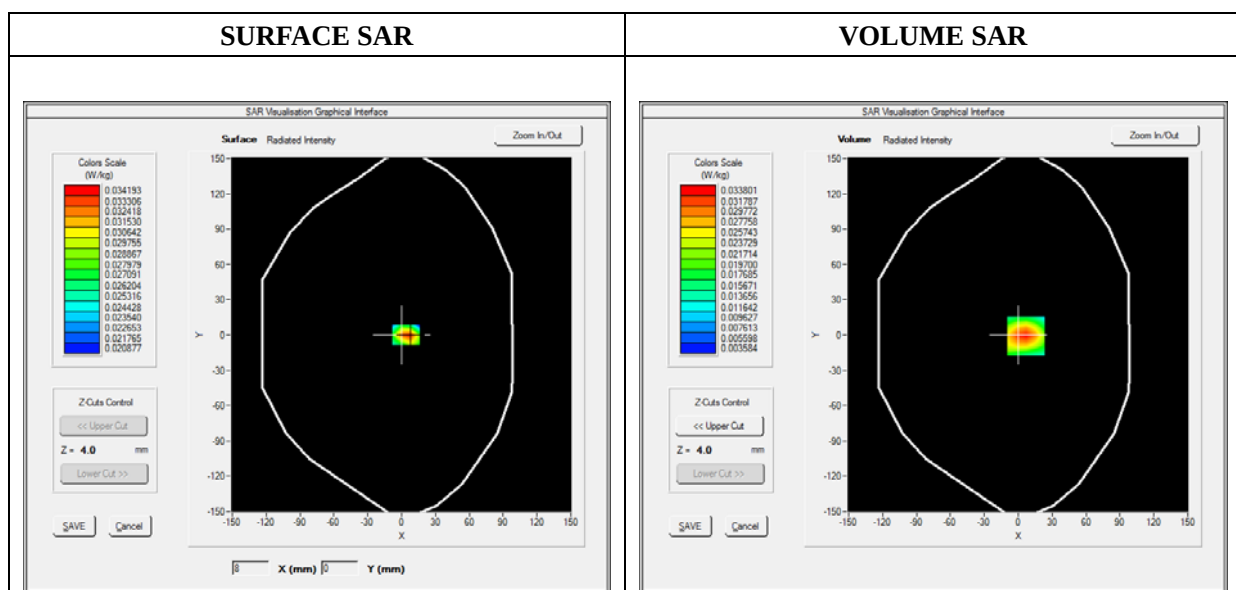

Maximum location: X=7.00, Y=-1.00

SAR Peak: 0.05 W/kg

SAR 10g (W/Kg)	0.018618
SAR 1g (W/Kg)	0.031764

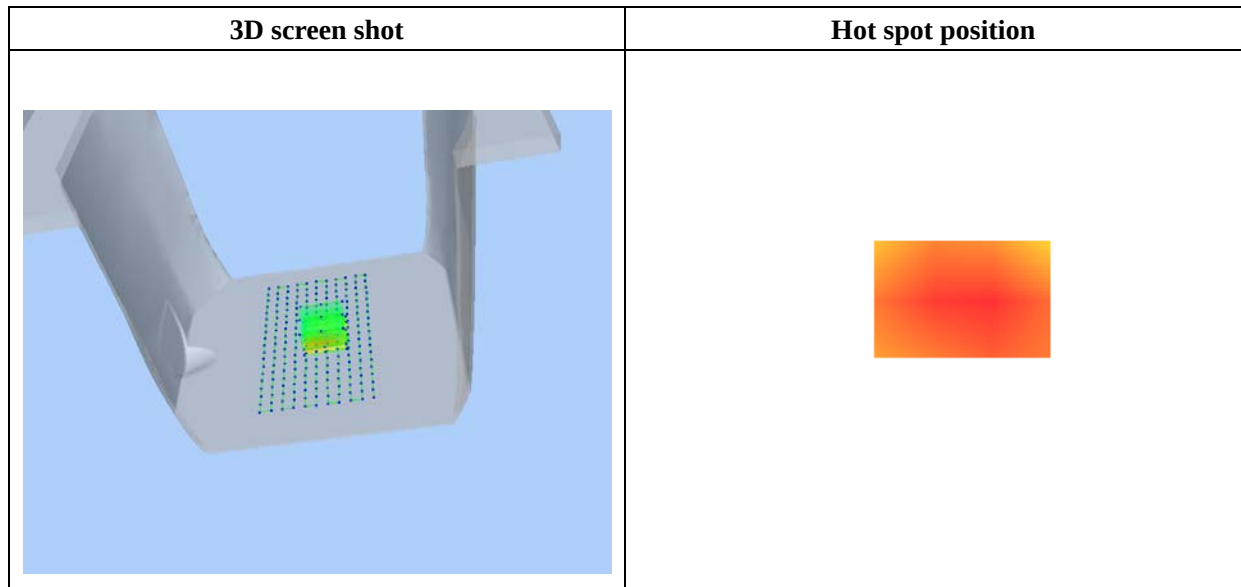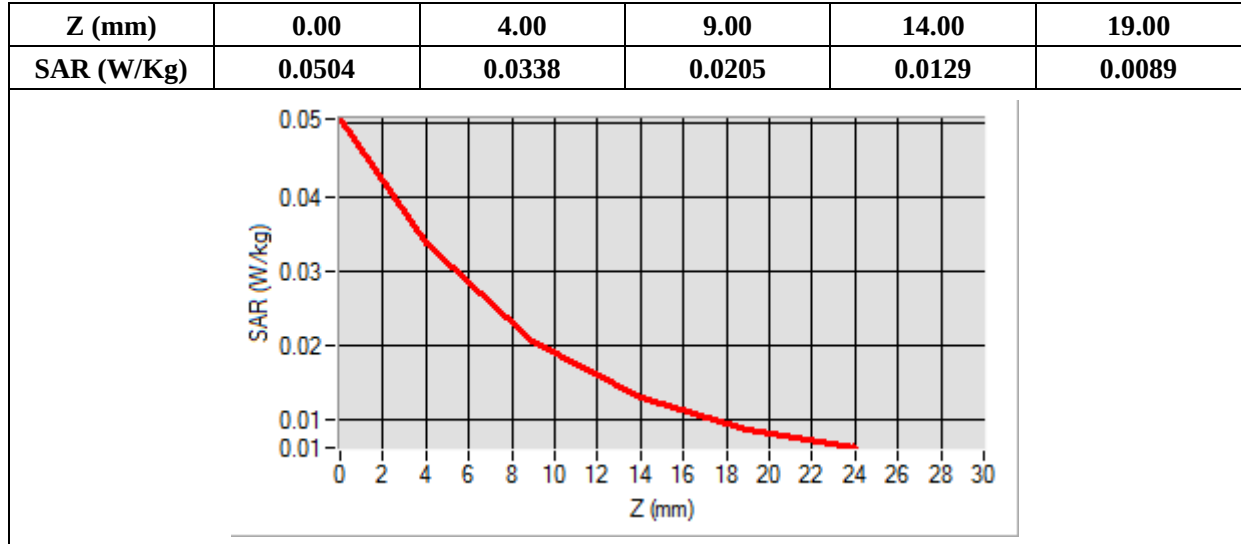

MEASUREMENT 342

Type: Phone measurement (Complete)

Date of measurement: 09/16/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.28; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 17_RMC
Channels	QPSK, 5MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	713.500000
Relative Permittivity (real part)	54.964739
Conductivity (S/m)	0.931048
Power Variation (%)	3.108329
Ambient Temperature	21.1
Liquid Temperature	21.2

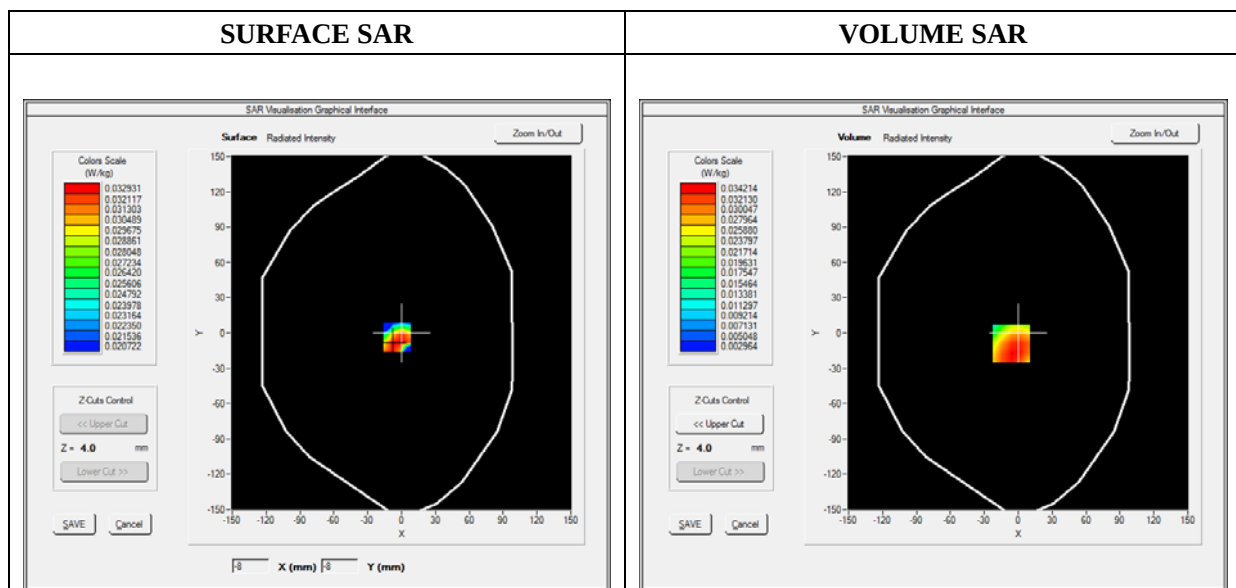

Maximum location: X=-6.00, Y=-9.00

SAR Peak: 0.05 W/kg

SAR 10g (W/Kg)	0.022687
SAR 1g (W/Kg)	0.035270

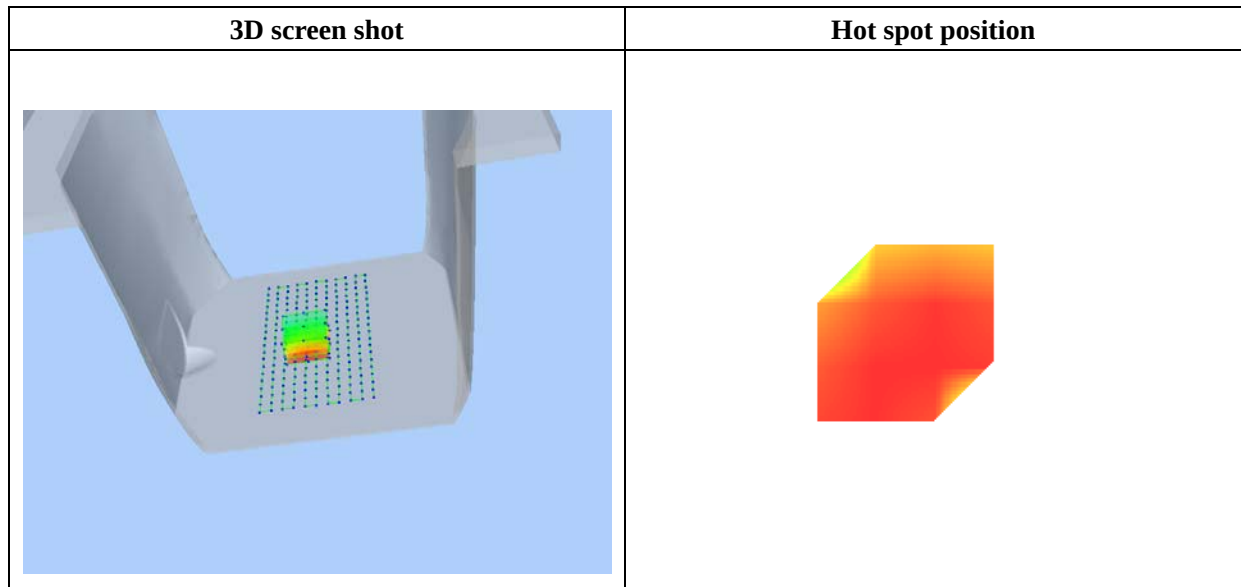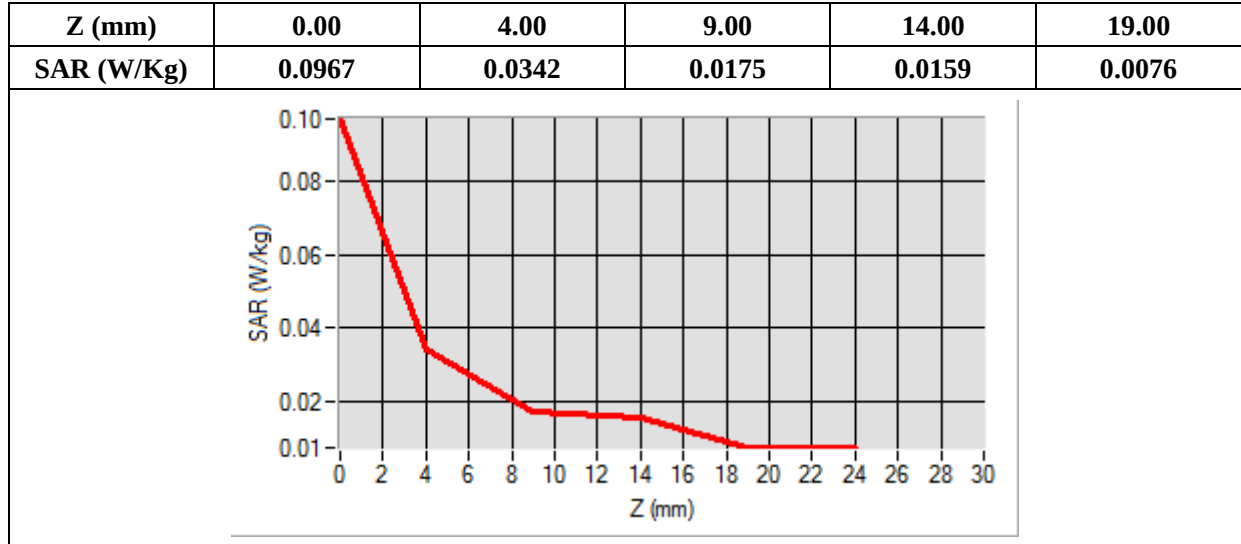

MEASUREMENT 358

Type: Phone measurement (Complete)

Date of measurement: 09/17/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 25_RMC
Channels	QPSK, 20MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1910.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.305272
Ambient Temperature	21.1
Liquid Temperature	21.3

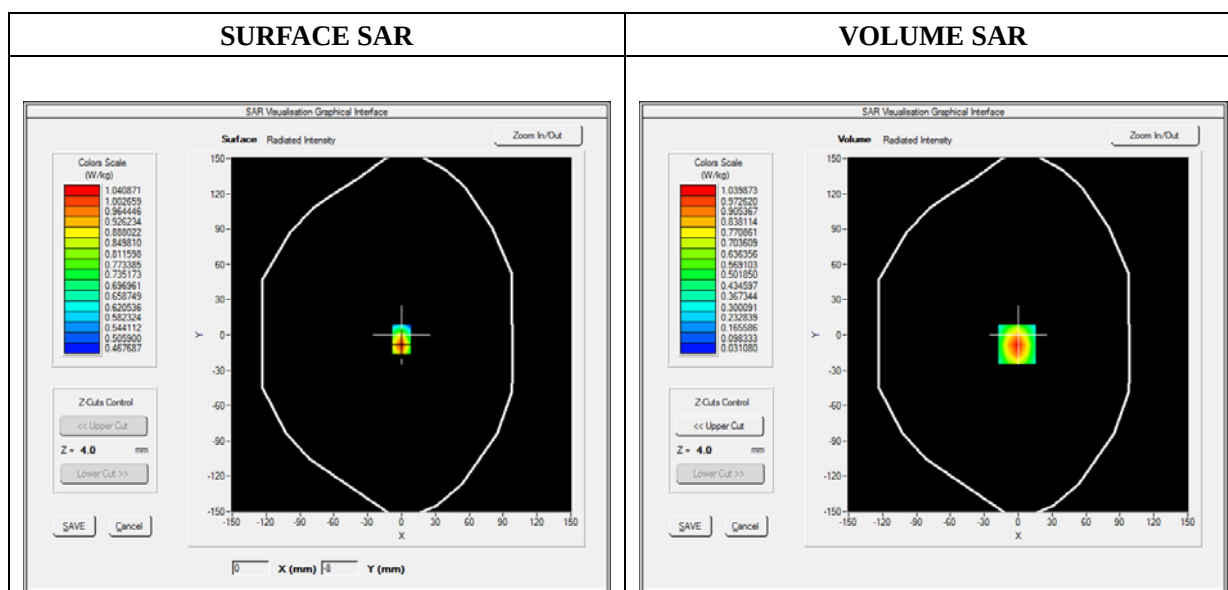

Maximum location: X=-1.00, Y=-8.00

SAR Peak: 1.67 W/kg

SAR 10g (W/Kg)	0.498301
SAR 1g (W/Kg)	0.965953

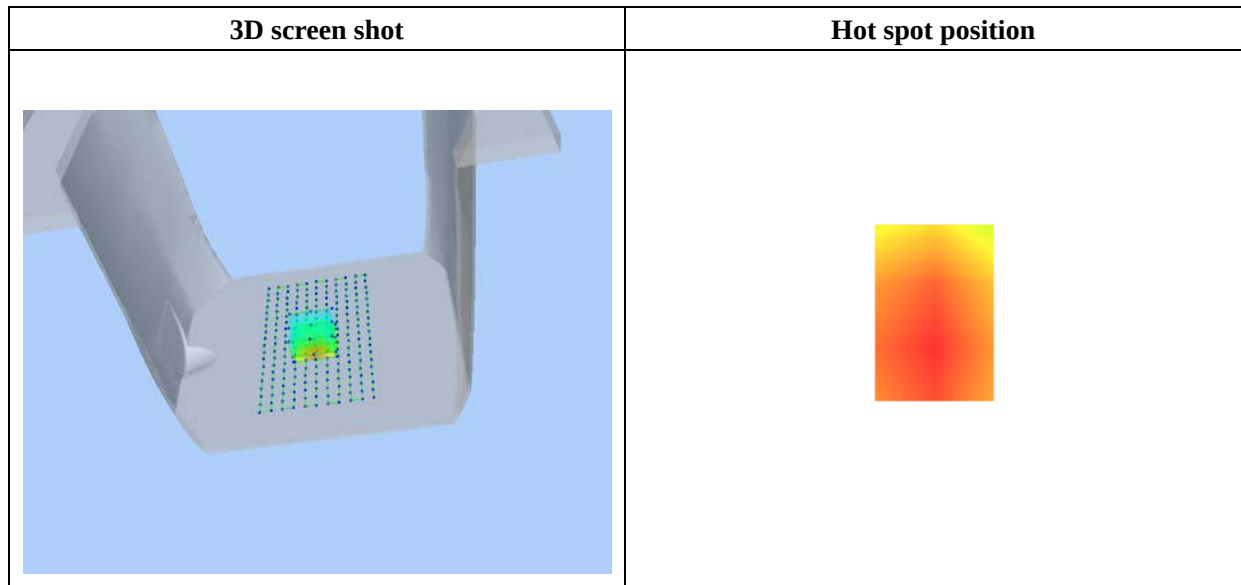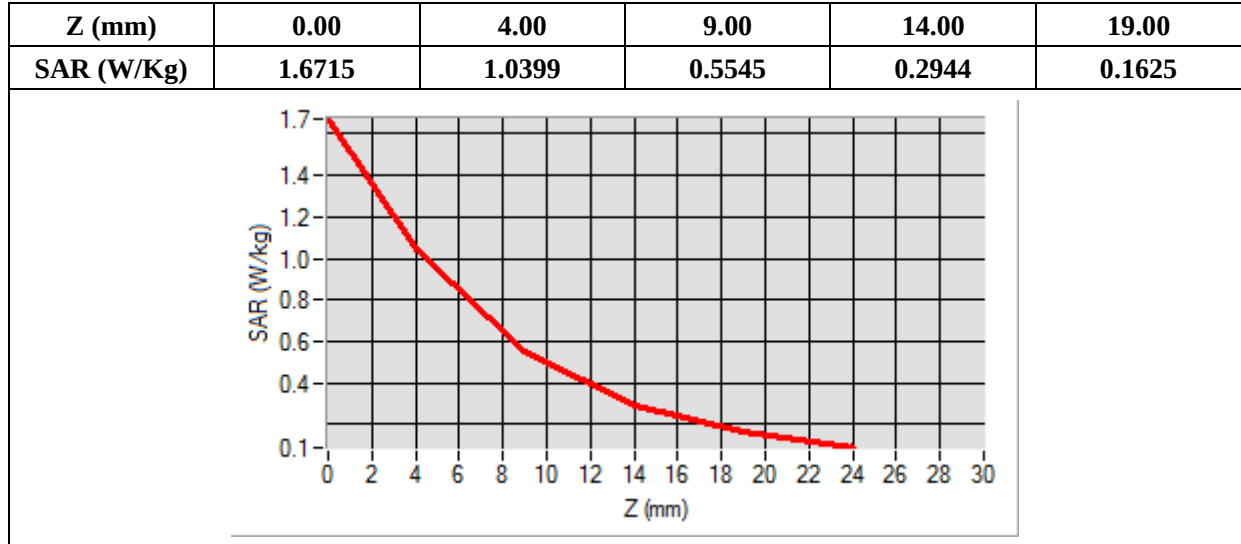

MEASUREMENT 365

Type: Phone measurement (Complete)

Date of measurement: 09/16/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 26_RMC
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	831.000000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	1.210493
Ambient Temperature	21.1
Liquid Temperature	21.2

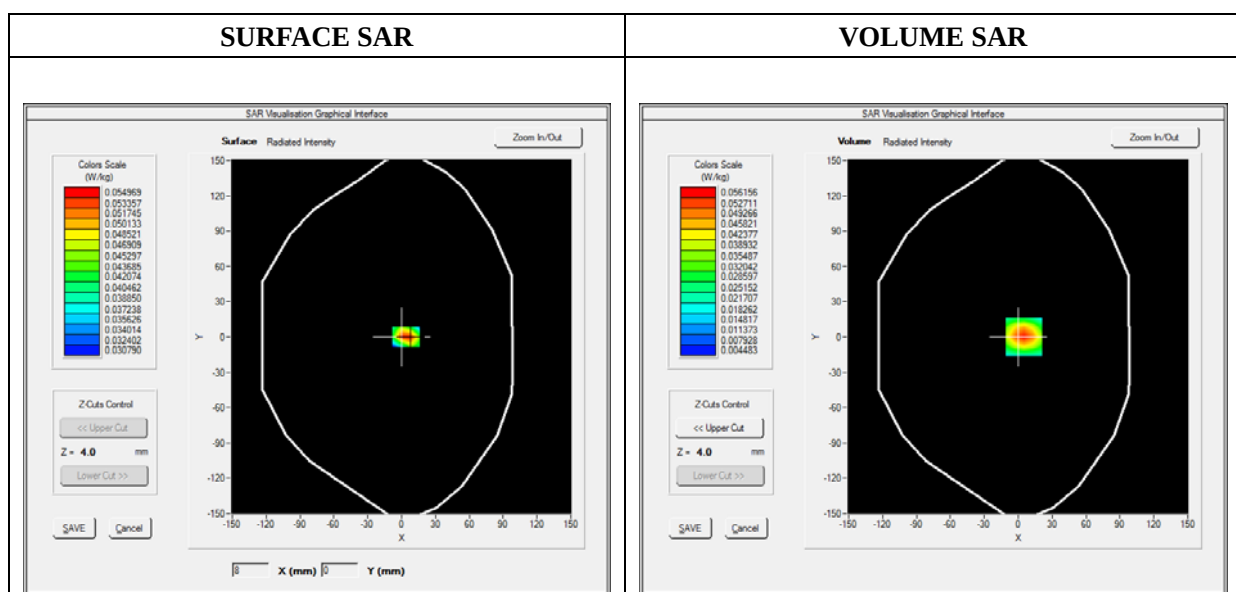



Maximum location: X=5.00, Y=0.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.030360
SAR 1g (W/Kg)	0.052330

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0826	0.0562	0.0346	0.0221	0.0150

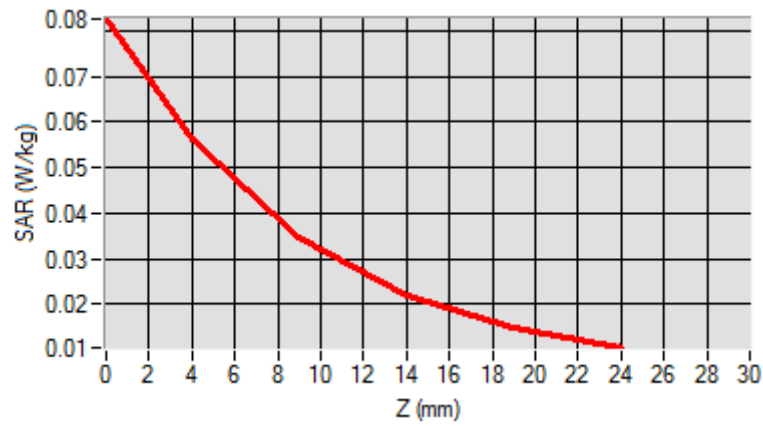

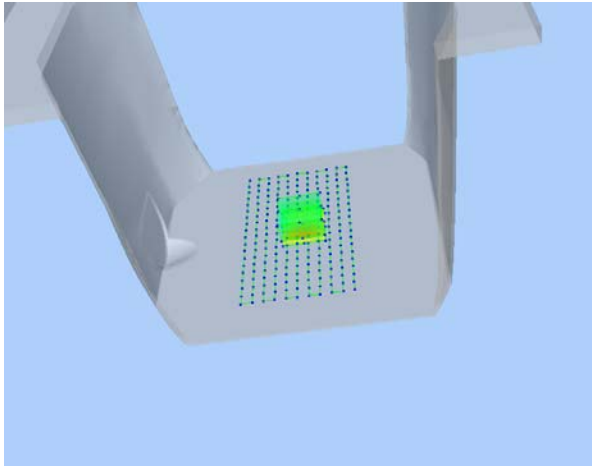3D screen shot	Hot spot position
	

MEASUREMENT 375

Type: Phone measurement (Complete)

Date of measurement: 09/18/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.58; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 30_RMC
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2310.000000
Relative Permittivity (real part)	52.010212
Conductivity (S/m)	1.910255
Power Variation (%)	3.672346
Ambient Temperature	21.1
Liquid Temperature	21.2

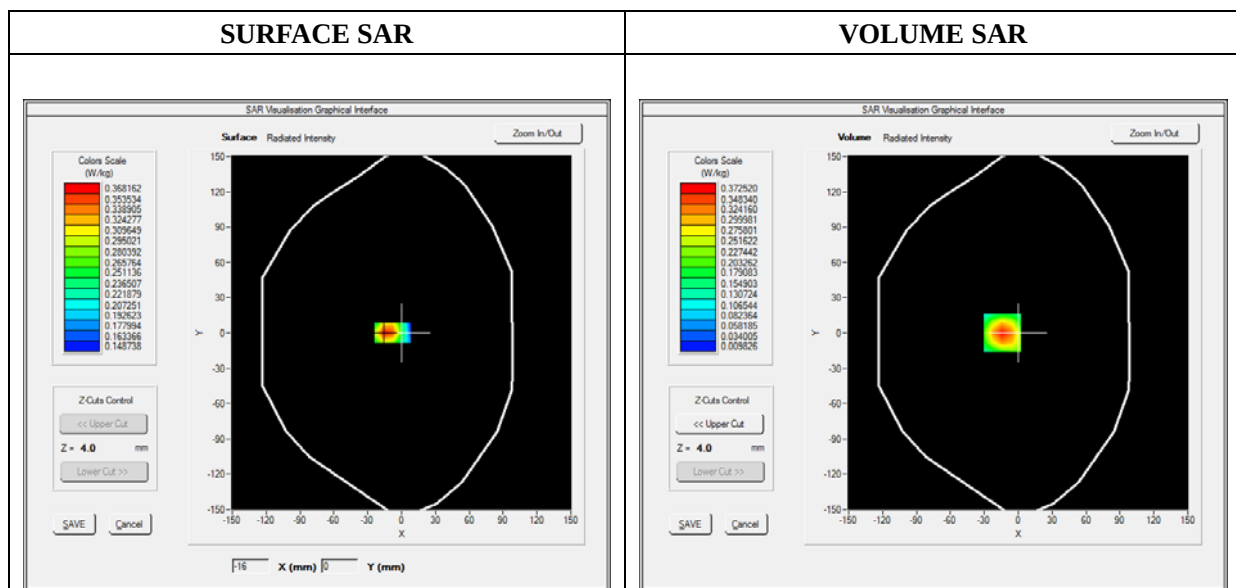



Maximum location: X=-14.00, Y=0.00

SAR Peak: 0.64 W/kg

SAR 10g (W/Kg)	0.171659
SAR 1g (W/Kg)	0.348383

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6439	0.3725	0.1771	0.0823	0.0402

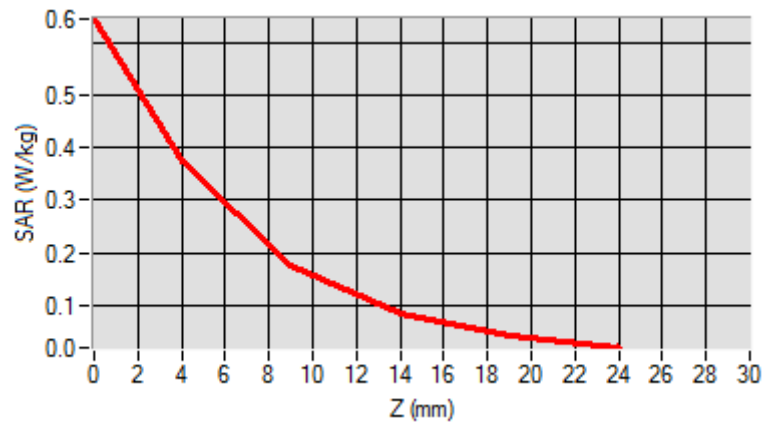

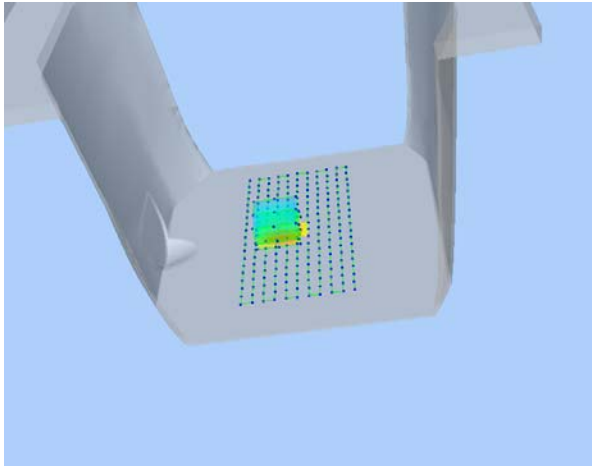3D screen shot	Hot spot position
	

MEASUREMENT 385

Type: Phone measurement (Complete)

Date of measurement: 09/18/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 40_RMC
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2310.000000
Relative Permittivity (real part)	52.010212
Conductivity (S/m)	1.910255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

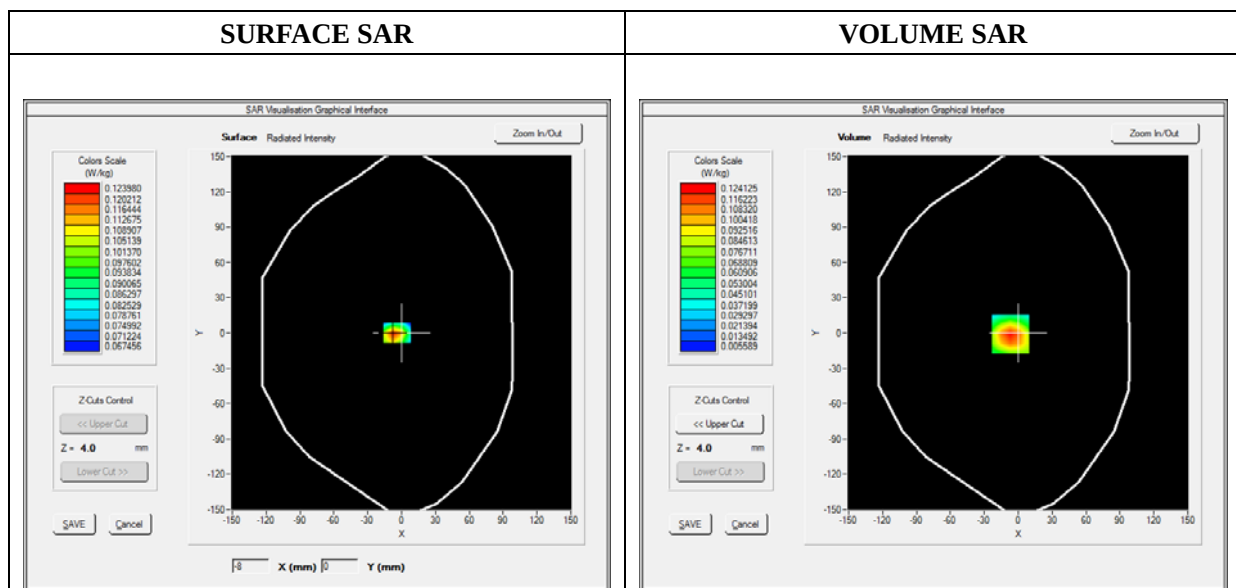

Maximum location: X=-7.00, Y=-1.00

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.058976
SAR 1g (W/Kg)	0.117250

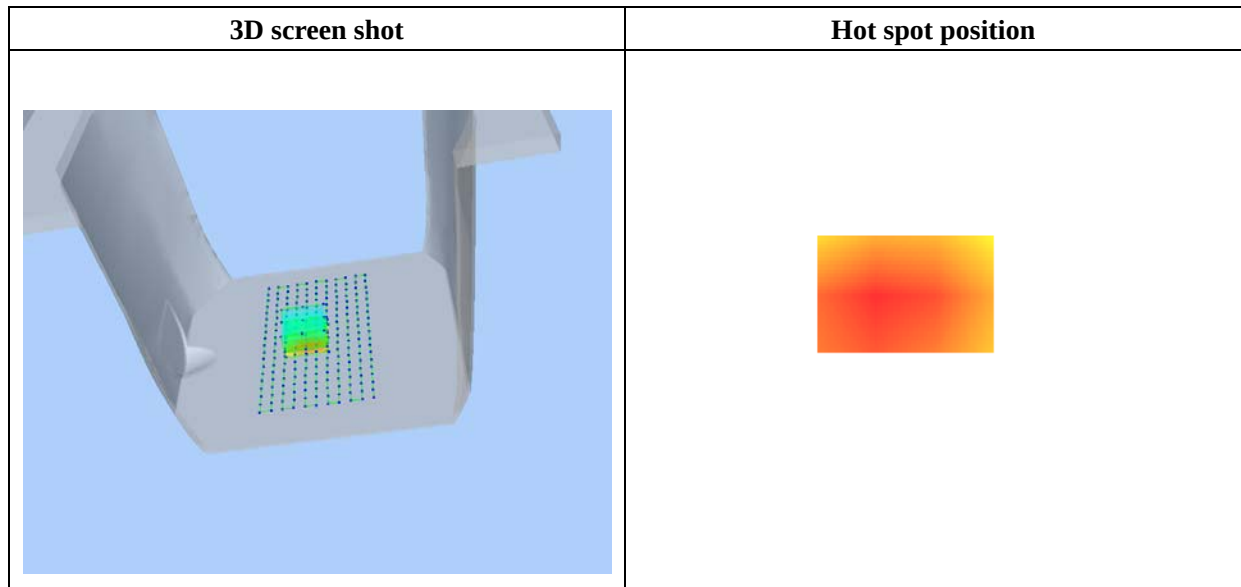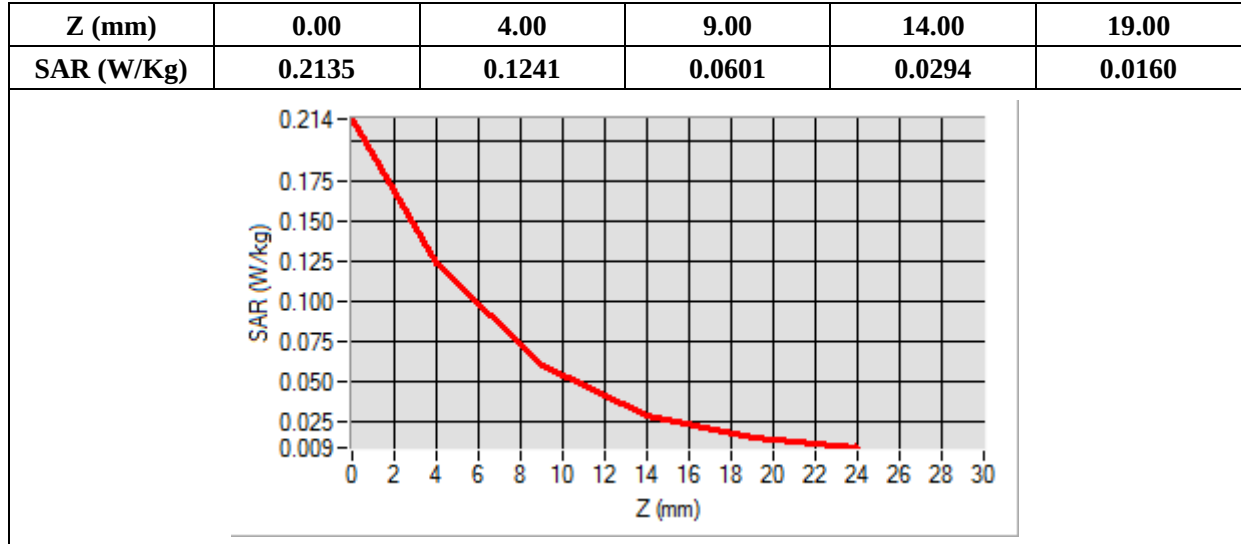

MEASUREMENT 395

Type: Phone measurement (Complete)

Date of measurement: 09/18/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 40_RMC
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2355.000000
Relative Permittivity (real part)	52.010212
Conductivity (S/m)	1.910255
Power Variation (%)	2.098922
Ambient Temperature	21.1
Liquid Temperature	21.2

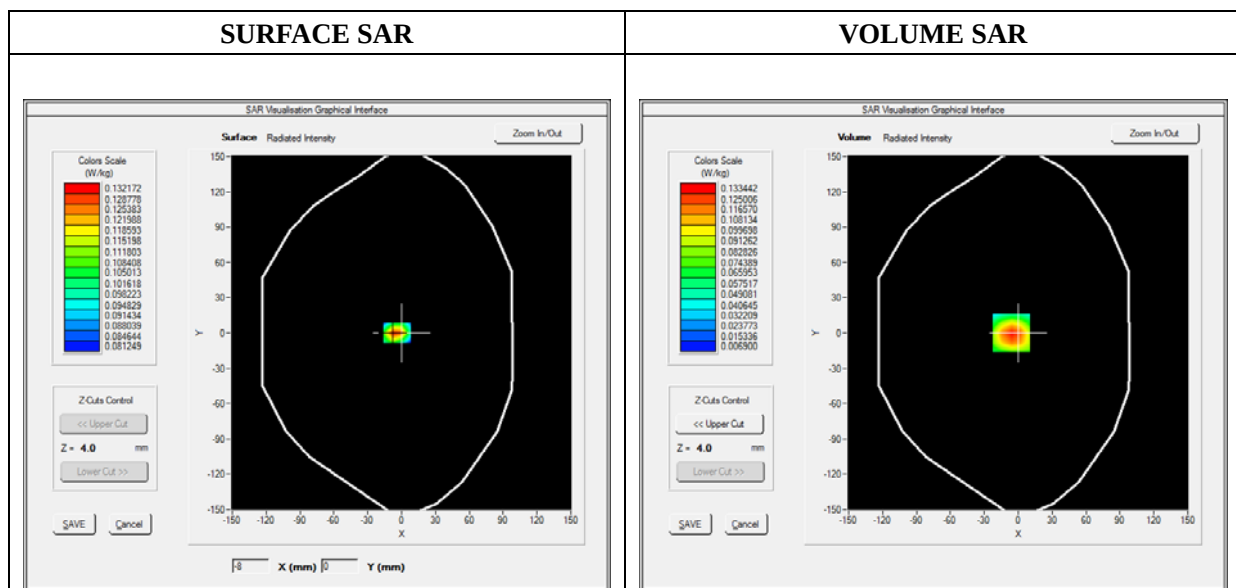

Maximum location: X=-6.00, Y=0.00

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.066693
SAR 1g (W/Kg)	0.125358

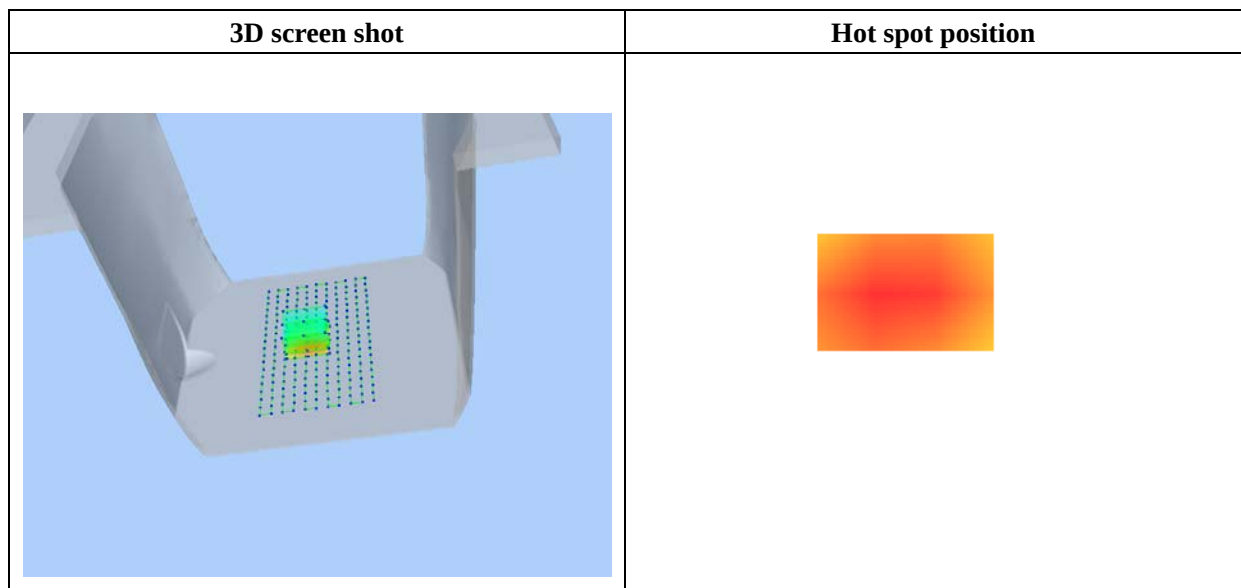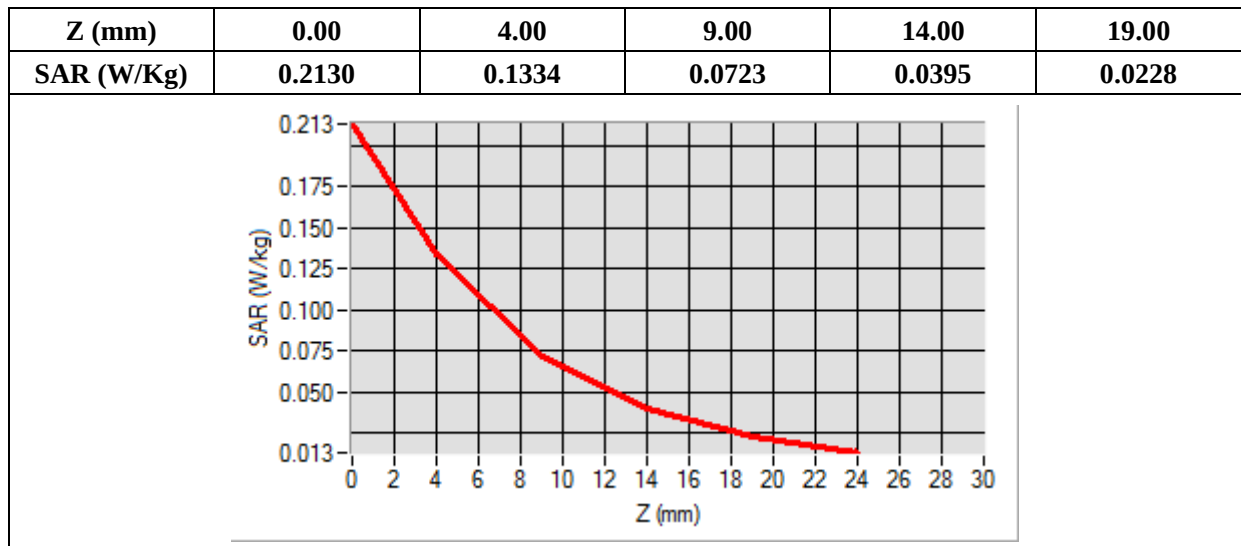

MEASUREMENT 411

Type: Phone measurement (Complete)

Date of measurement: 09/18/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.58; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 66_RMC
Channels	QPSK, 5MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1777.500000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.672346
Ambient Temperature	21.1
Liquid Temperature	21.2

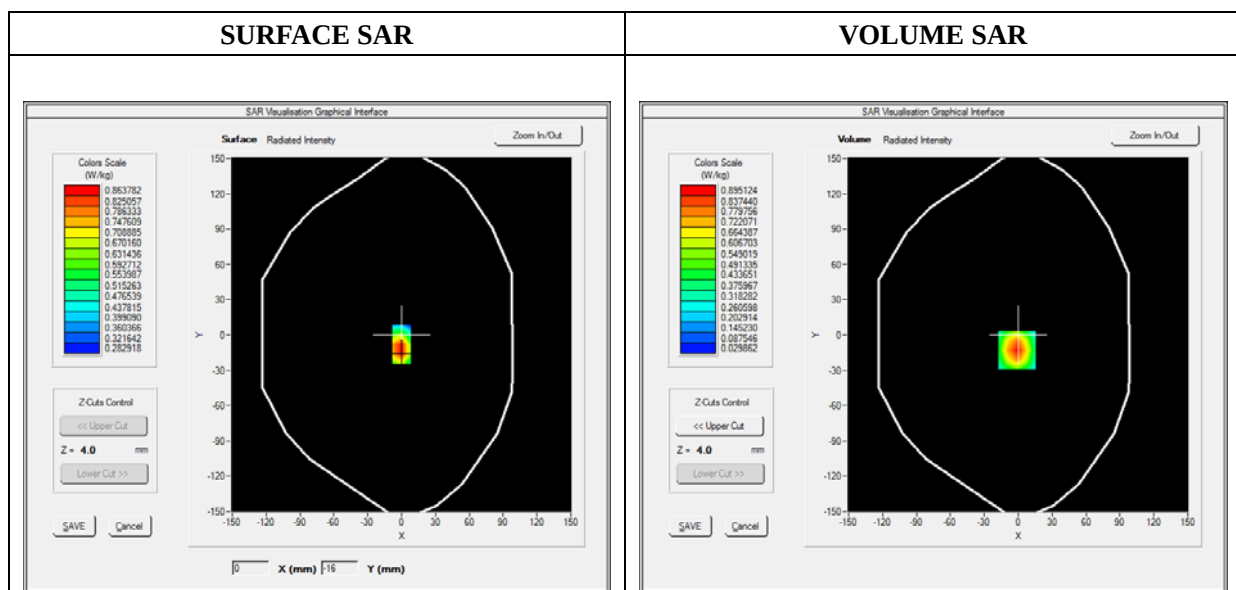

Maximum location: X=-1.00, Y=-13.00

SAR Peak: 1.43 W/kg

SAR 10g (W/Kg)	0.431814
SAR 1g (W/Kg)	0.830941

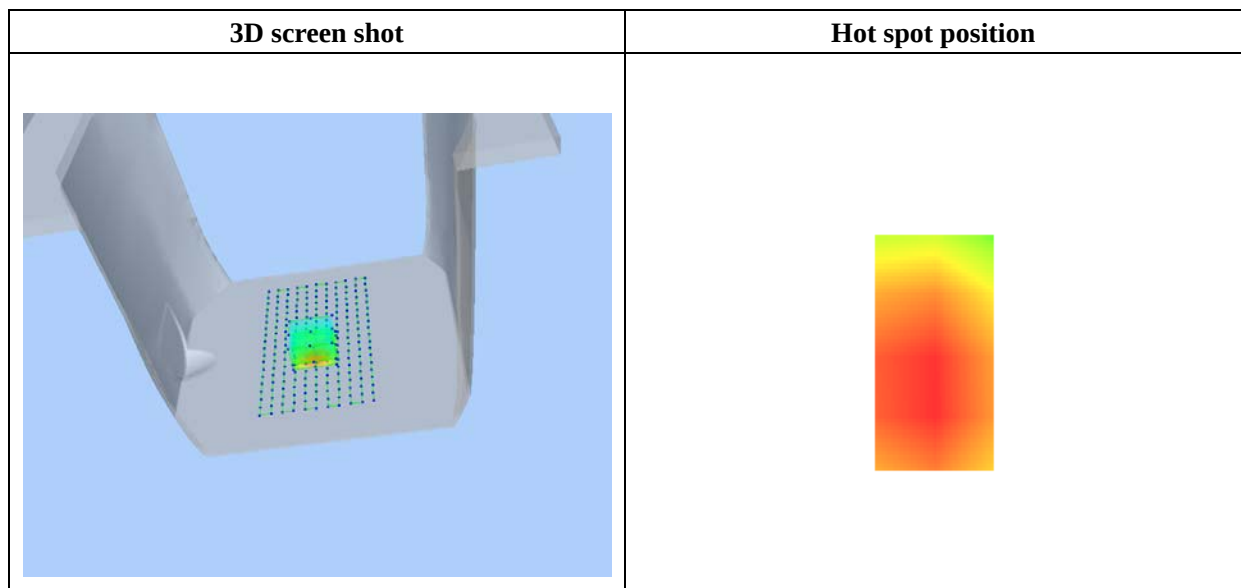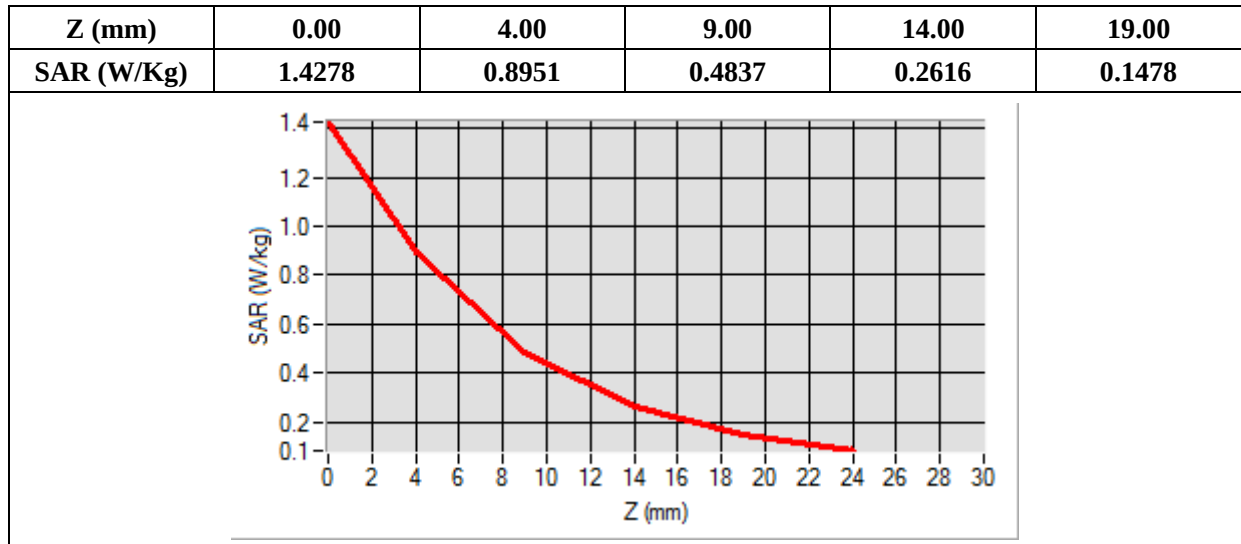

MEASUREMENT 418

Type: Phone measurement (Complete)

Date of measurement: 09/18/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi_802.11b
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2462.000000
Relative Permittivity (real part)	52.010212
Conductivity (S/m)	1.910255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

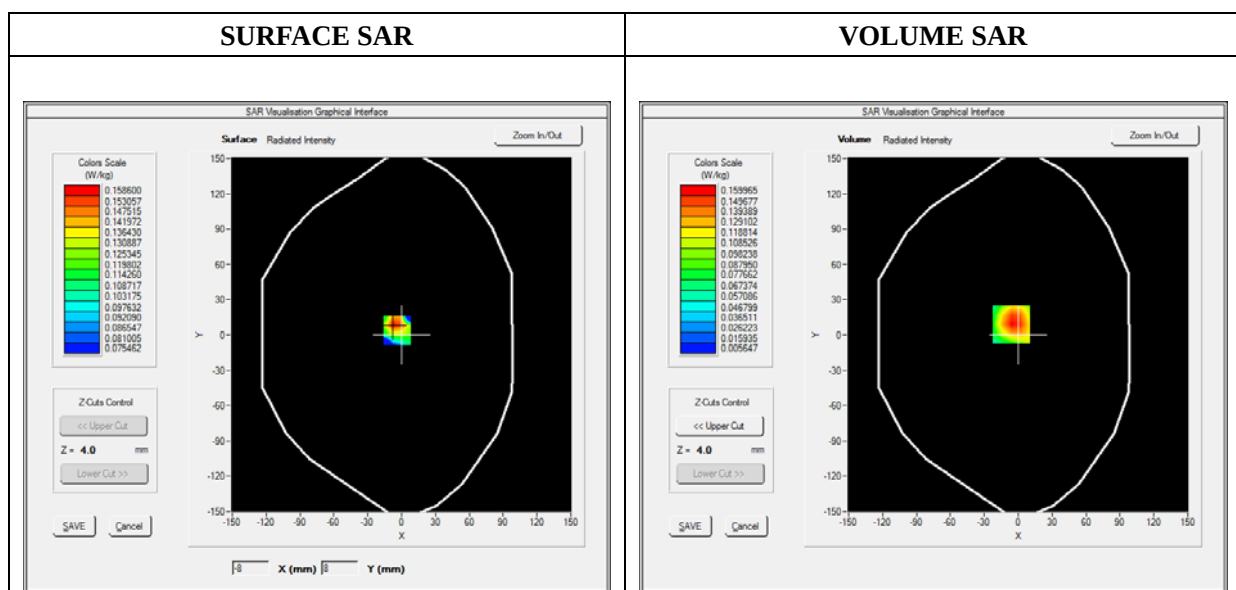

Maximum location: X=-6.00, Y=9.00

SAR Peak: 0.28 W/kg

SAR 10g (W/Kg)	0.078047
SAR 1g (W/Kg)	0.153160

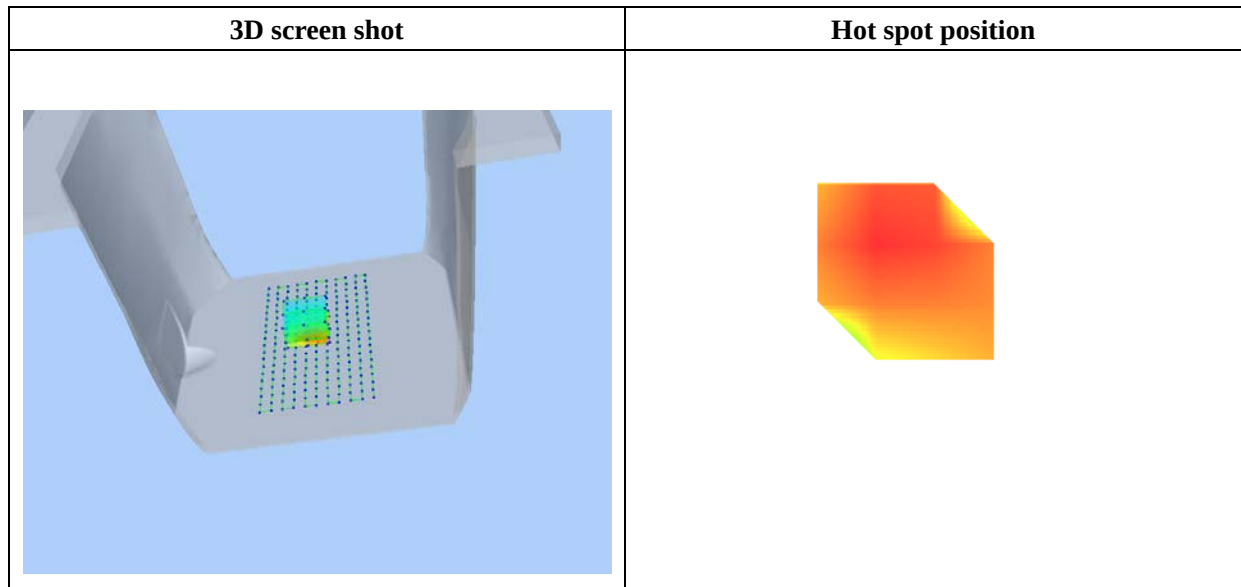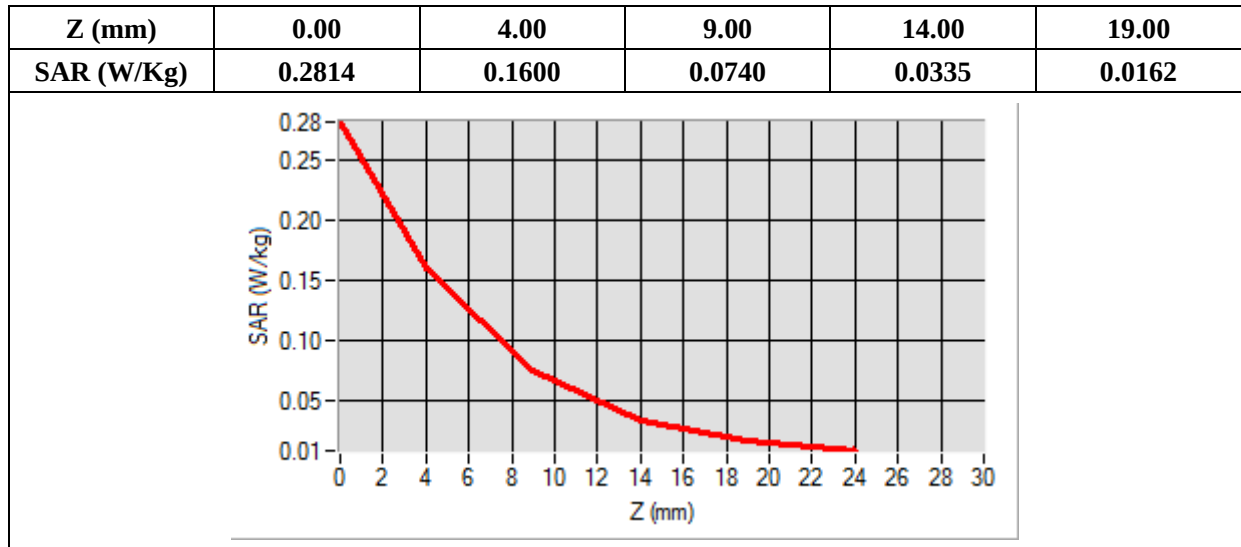

MEASUREMENT 424

Type: Phone measurement (Complete)

Date of measurement: 09/19/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: 2.39; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right
Band	WiFi(5.2G)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5240.000000
Relative Permittivity (real part)	48.501241
Conductivity (S/m)	5.160213
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2

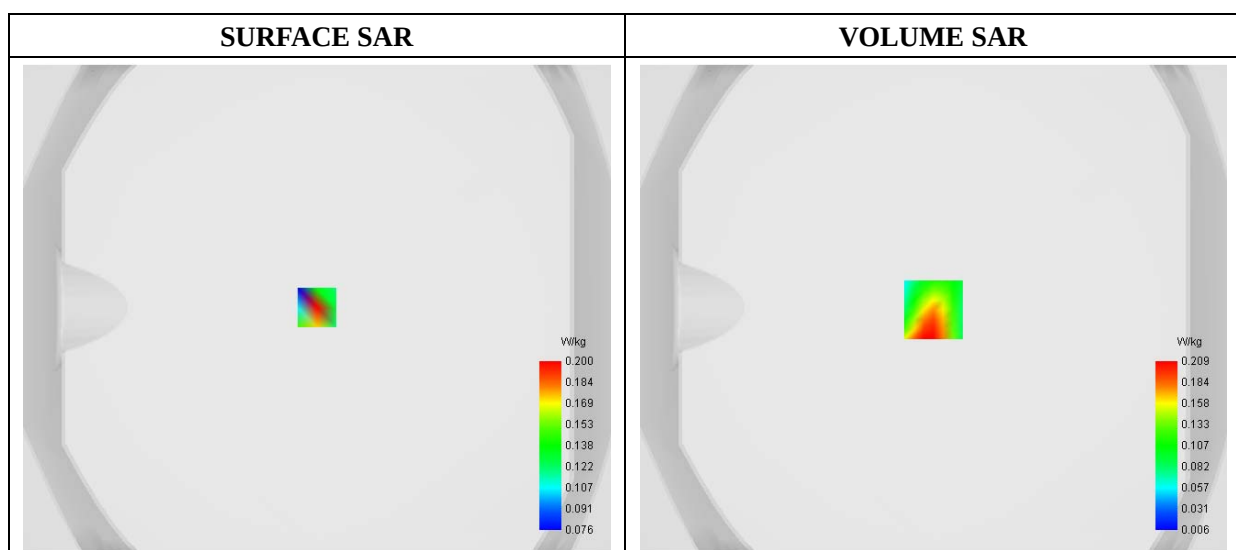

Maximum location: X=0.00, Y=-1.00

SAR 10g (W/Kg)	0.057726
SAR 1g (W/Kg)	0.131378

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.4575	0.2091	0.0596	0.0385	0.0176	0.0076	0.0117	0.0072	0.0115

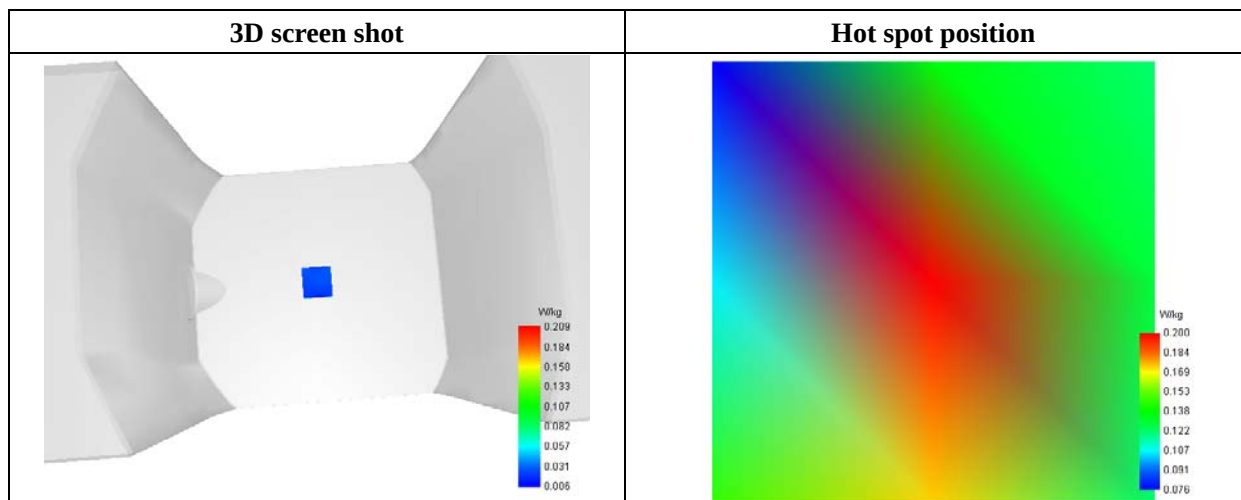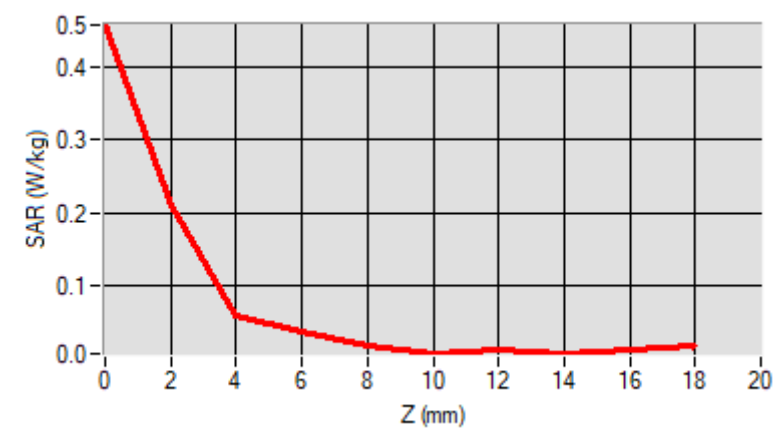

MEASUREMENT 426

Type: Phone measurement (Complete)

Date of measurement: 09/17/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: 2.28; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.3G)_802.11n_40
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5270.000000
Relative Permittivity (real part)	48.502911
Conductivity (S/m)	5.261483
Power Variation (%)	0.848378
Ambient Temperature	21.1
Liquid Temperature	21.2

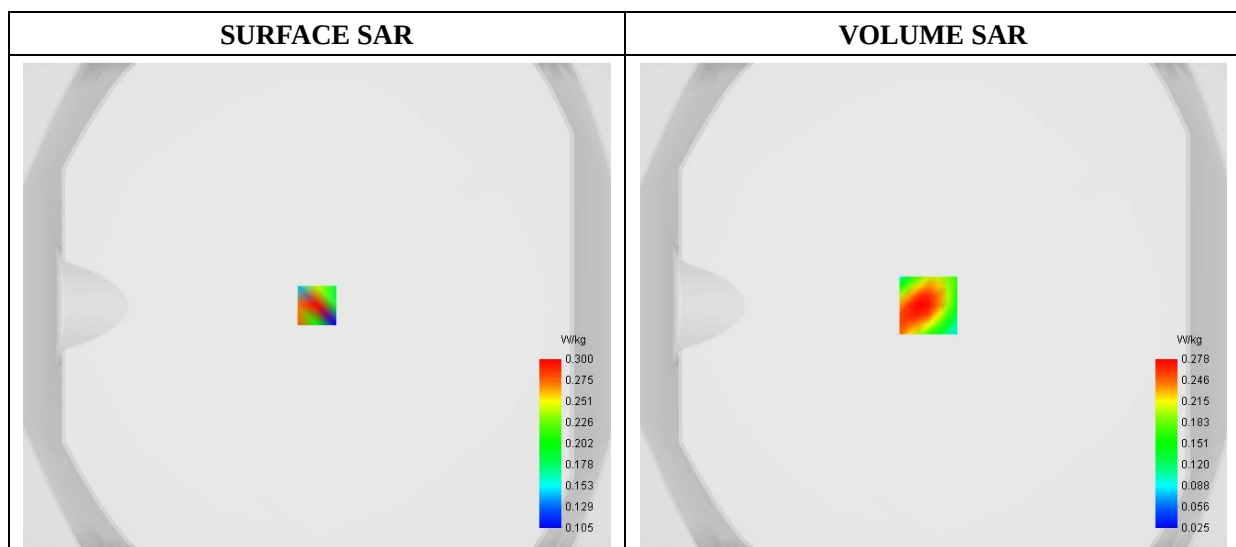

Maximum location: X=-2.00, Y=0.00

SAR 10g (W/Kg)	0.100295
SAR 1g (W/Kg)	0.189003

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.4691	0.2779	0.1515	0.1051	0.0673	0.0525	0.0461	0.0442	0.0489

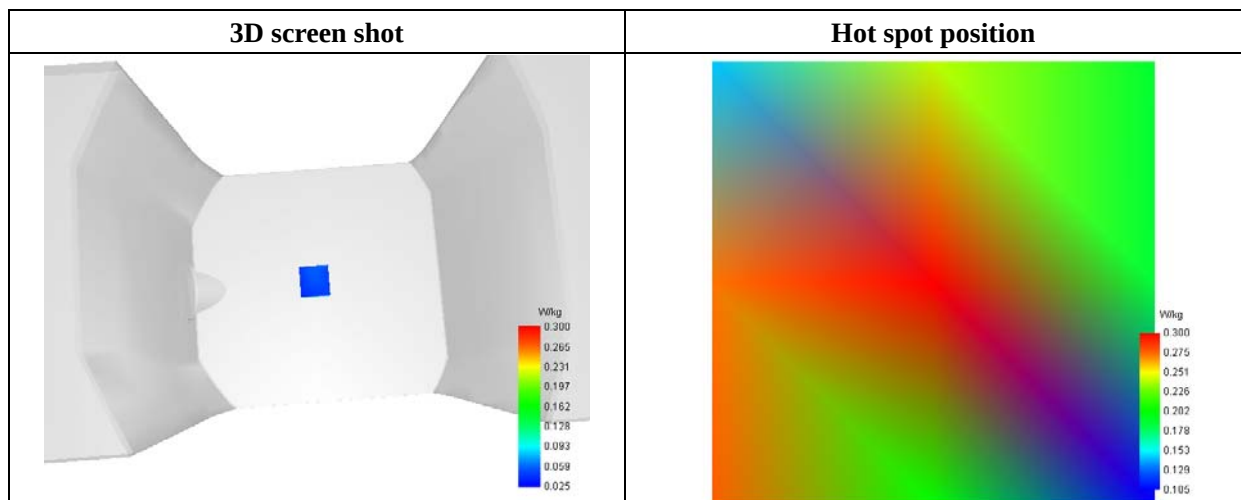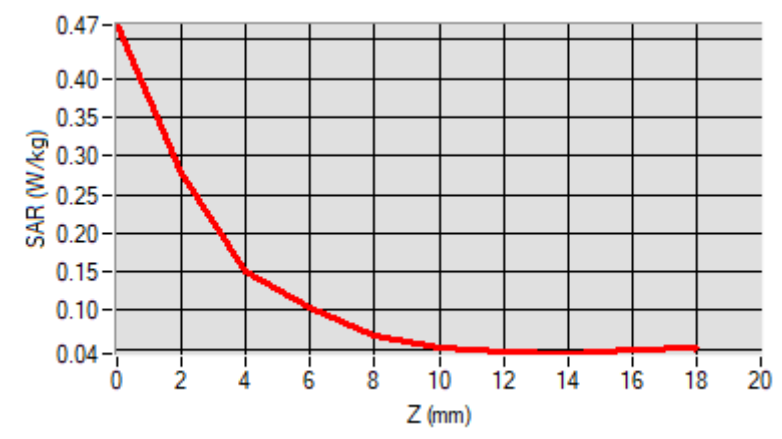

MEASUREMENT 430

Type: Phone measurement (Complete)

Date of measurement: 09/17/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: 2.28; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.6G)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5500.000000
Relative Permittivity (real part)	48.302143
Conductivity (S/m)	5.521688
Power Variation (%)	1.083921
Ambient Temperature	21.1
Liquid Temperature	21.2

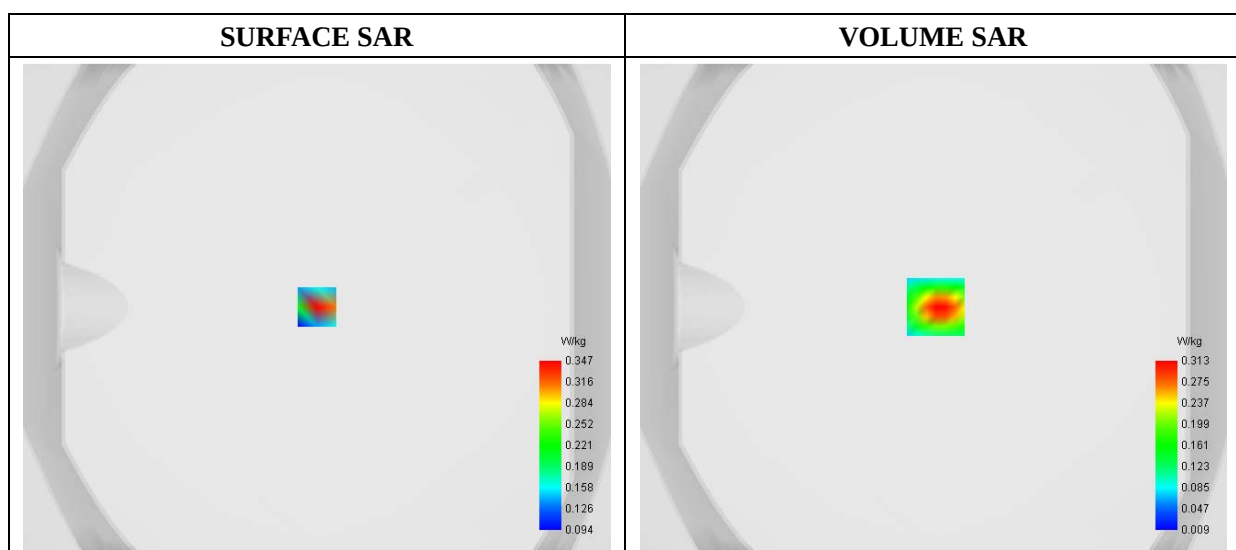

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	0.085125
SAR 1g (W/Kg)	0.197068

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.5678	0.3134	0.1591	0.0782	0.0418	0.0277	0.0248	0.0292	0.0396

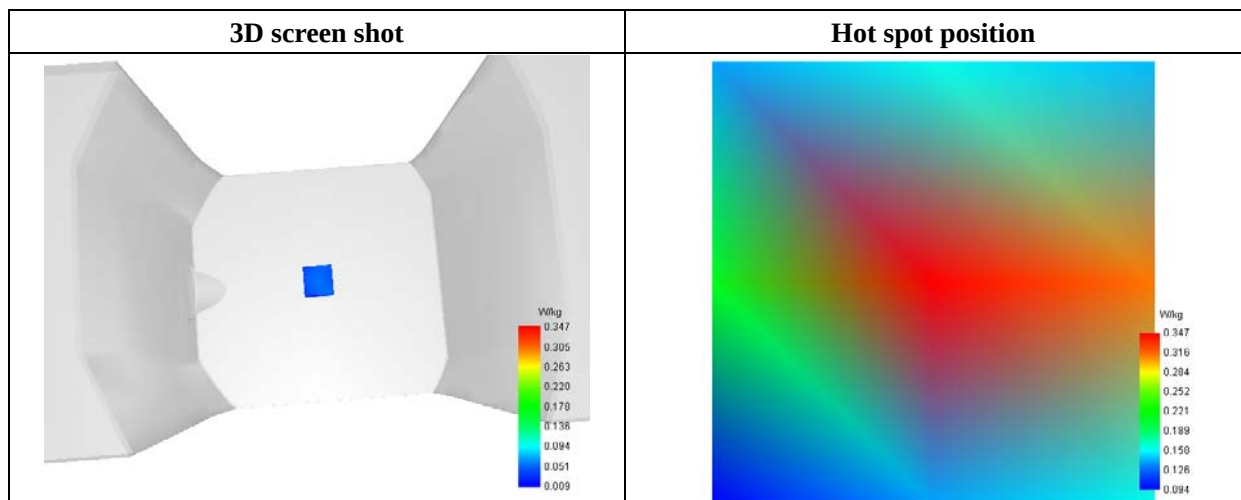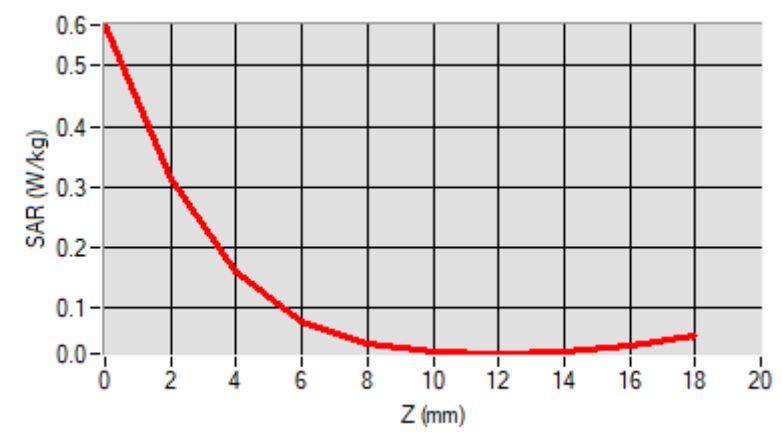

MEASUREMENT 436

Type: Phone measurement (Complete)

Date of measurement: 09/17/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: 2.28; Calibrated: 2019/07/08

A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Left
Band	WiFi(5.8G)_802.11n_40
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5825.000000
Relative Permittivity (real part)	48.101939
Conductivity (S/m)	5.761487
Power Variation (%)	1.155771
Ambient Temperature	21.1
Liquid Temperature	21.2

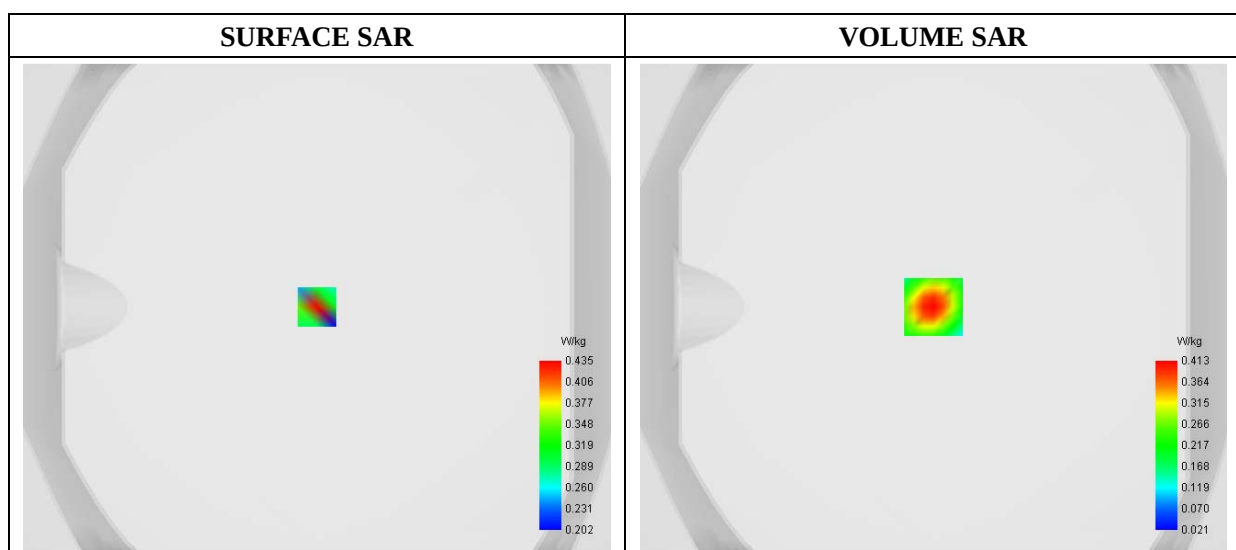

Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	0.114742
SAR 1g (W/Kg)	0.253810

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.7276	0.4127	0.2186	0.1126	0.0619	0.0400	0.0329	0.0344	0.0418

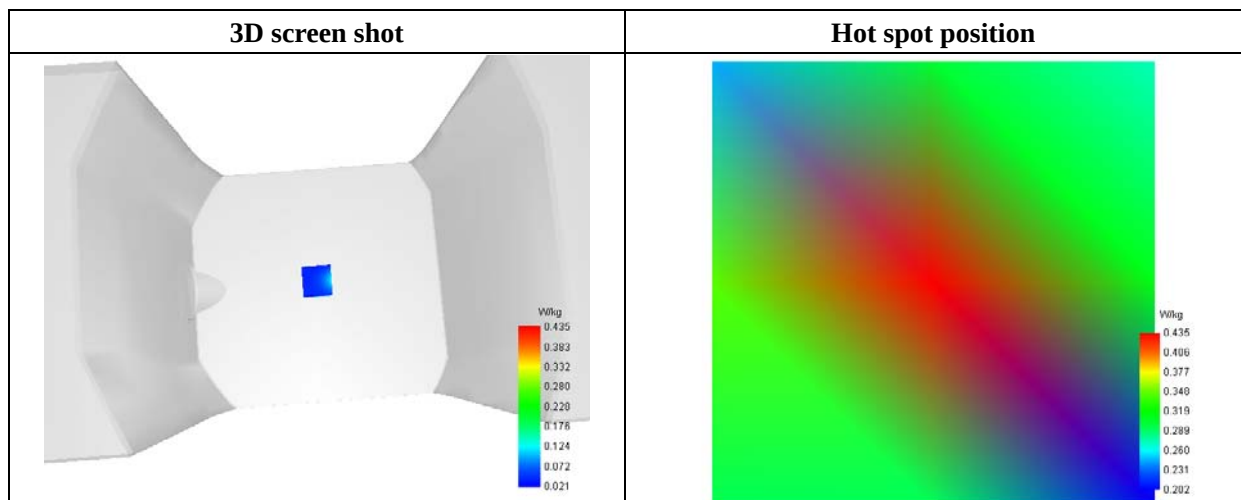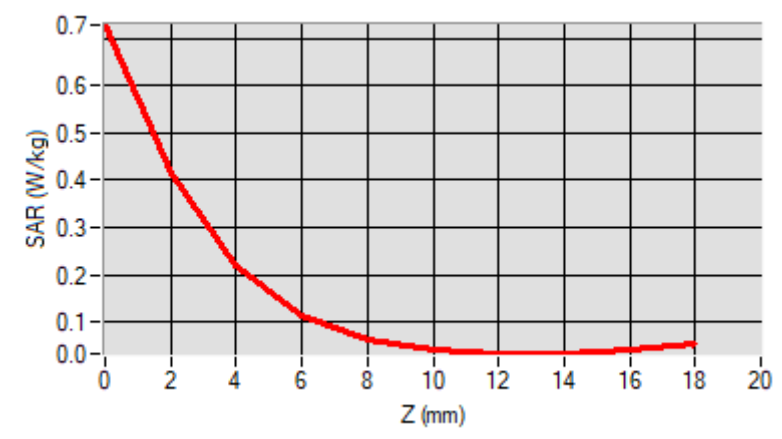

MEASUREMENT 438

Type: Phone measurement (Complete)

Date of measurement: 09/16/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	GPRS850_4TX
Channels	Low
Signal	Duty Cycle: 1:2

B. SAR Measurement Results



Frequency (MHz)	824.200000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.502922
Ambient Temperature	21.1
Liquid Temperature	21.3

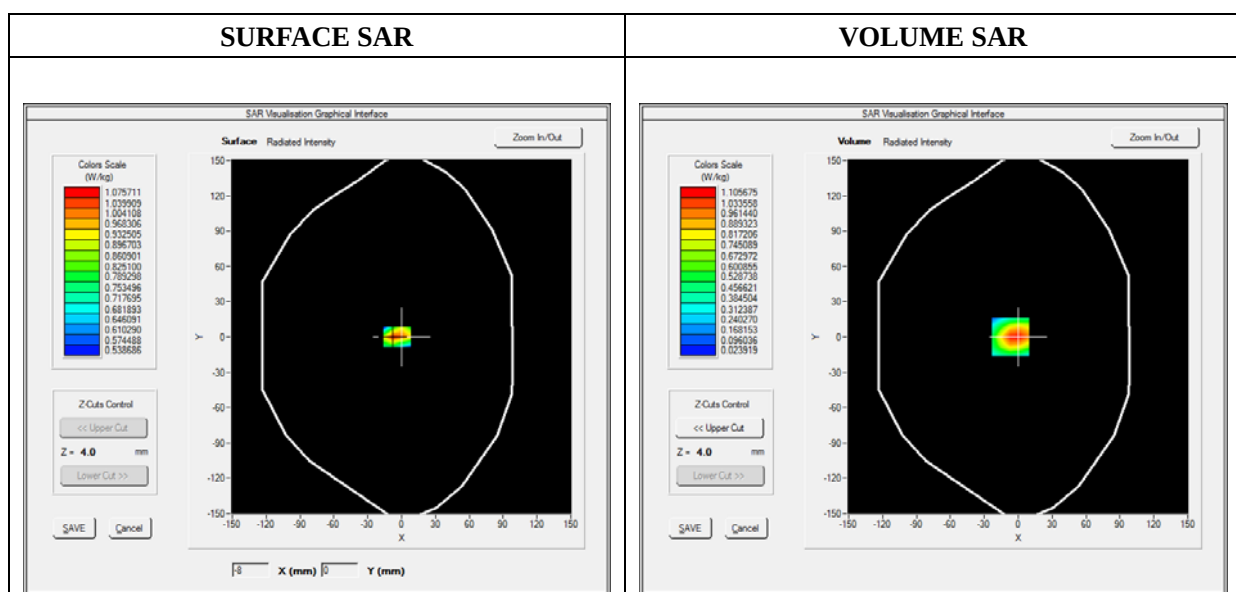

Maximum location: X=-7.00, Y=0.00

SAR Peak: 1.98 W/kg

SAR 10g (W/Kg)	0.526743
SAR 1g (W/Kg)	1.050974

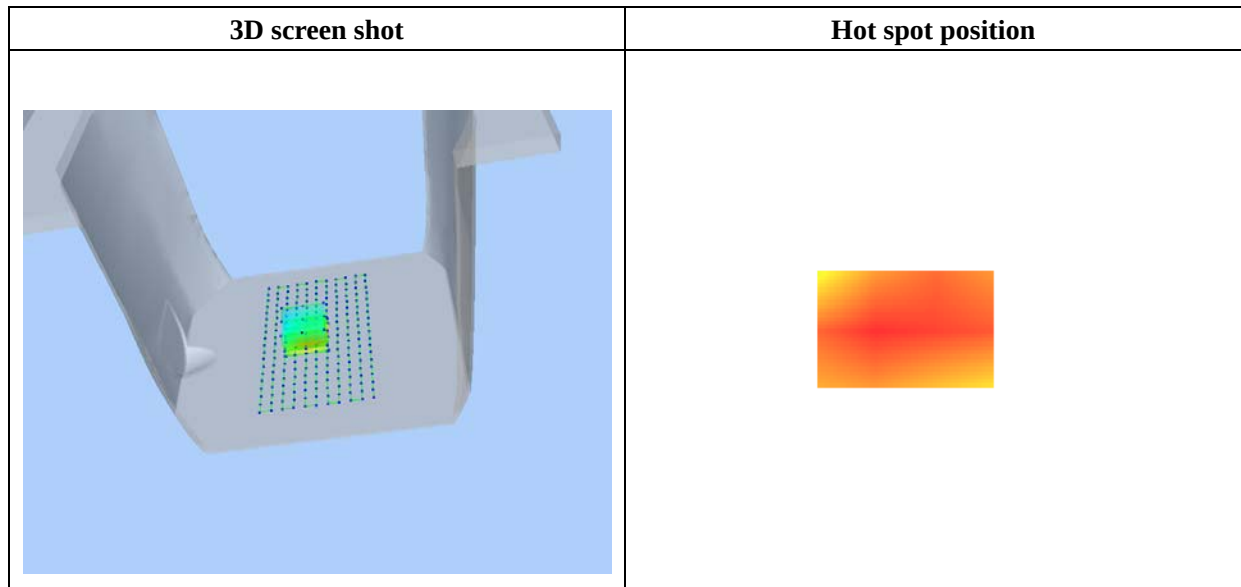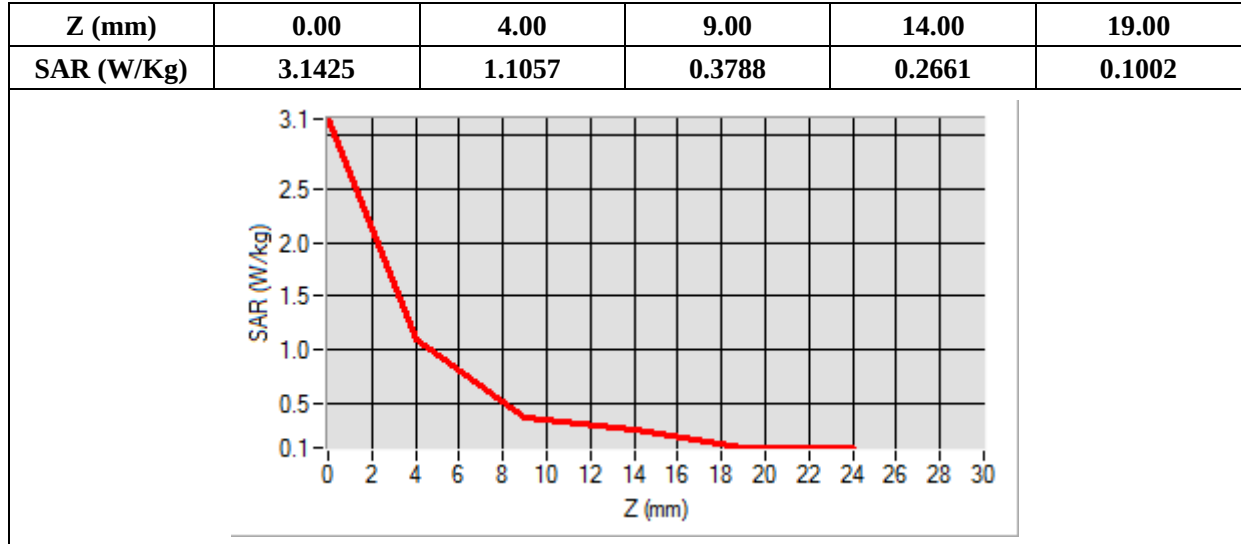

MEASUREMENT 441

Type: Phone measurement (Complete)

Date of measurement: 09/17/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	GPRS1900_2TX
Channels	Middle
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.503921
Ambient Temperature	21.1
Liquid Temperature	21.3

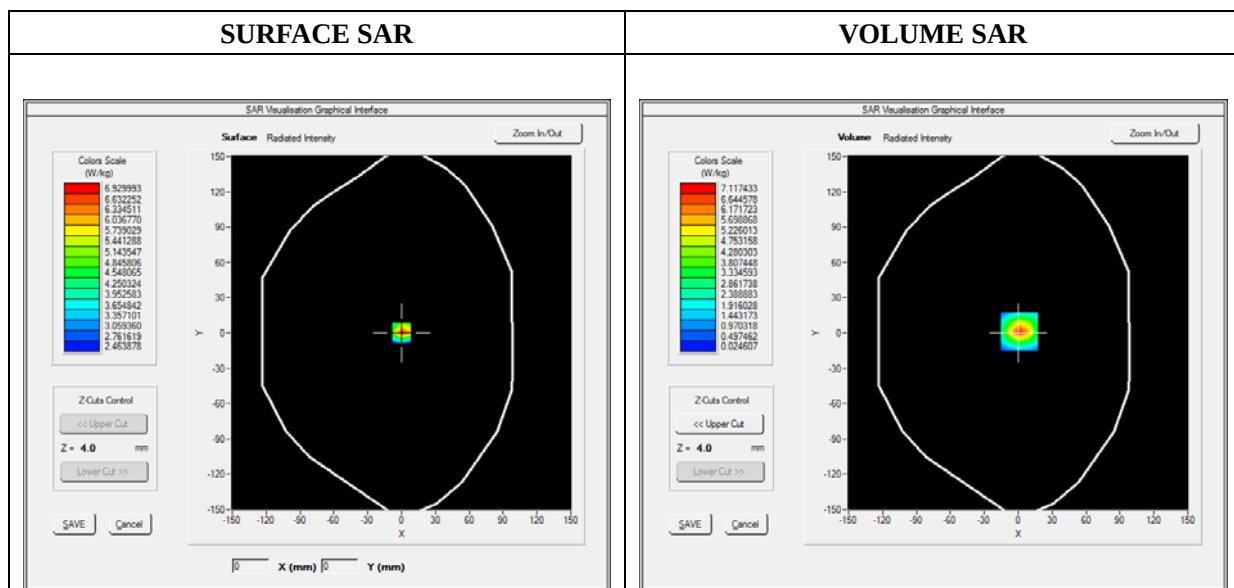




Maximum location: X=1.00, Y=1.00

SAR Peak: 12.63 W/kg

SAR 10g (W/Kg)	2.780280
SAR 1g (W/Kg)	6.428819

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	12.6346	7.1174	3.2392	1.4319	0.6734

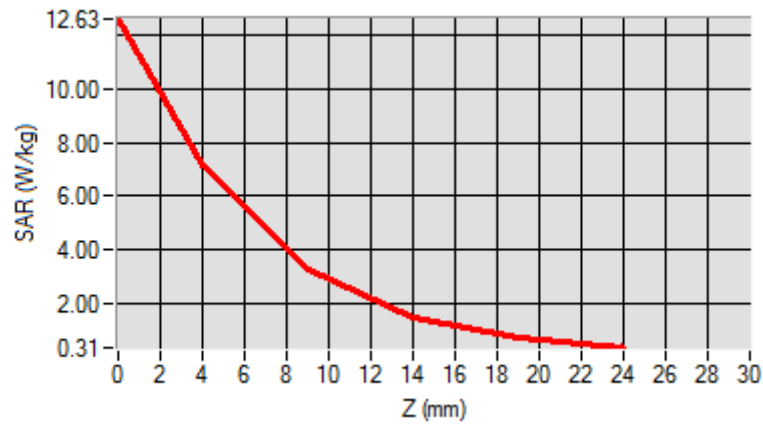

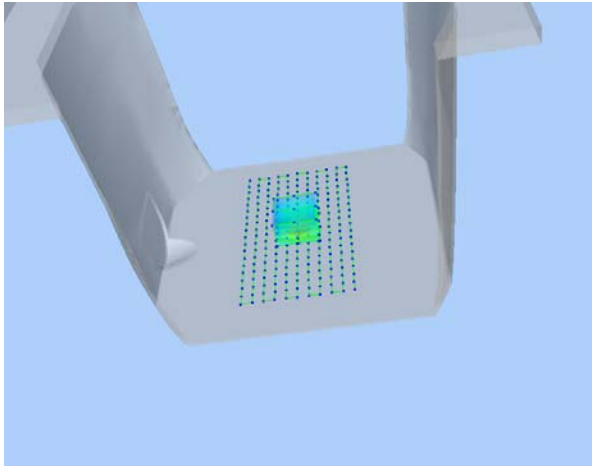3D screen shot	Hot spot position
	

MEASUREMENT 442

Type: Phone measurement (Complete)

Date of measurement: 09/16/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	GPRS850_4TX
Channels	Low
Signal	Duty Cycle: 1:2

B. SAR Measurement Results



Frequency (MHz)	824.200000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.502922
Ambient Temperature	21.1
Liquid Temperature	21.3

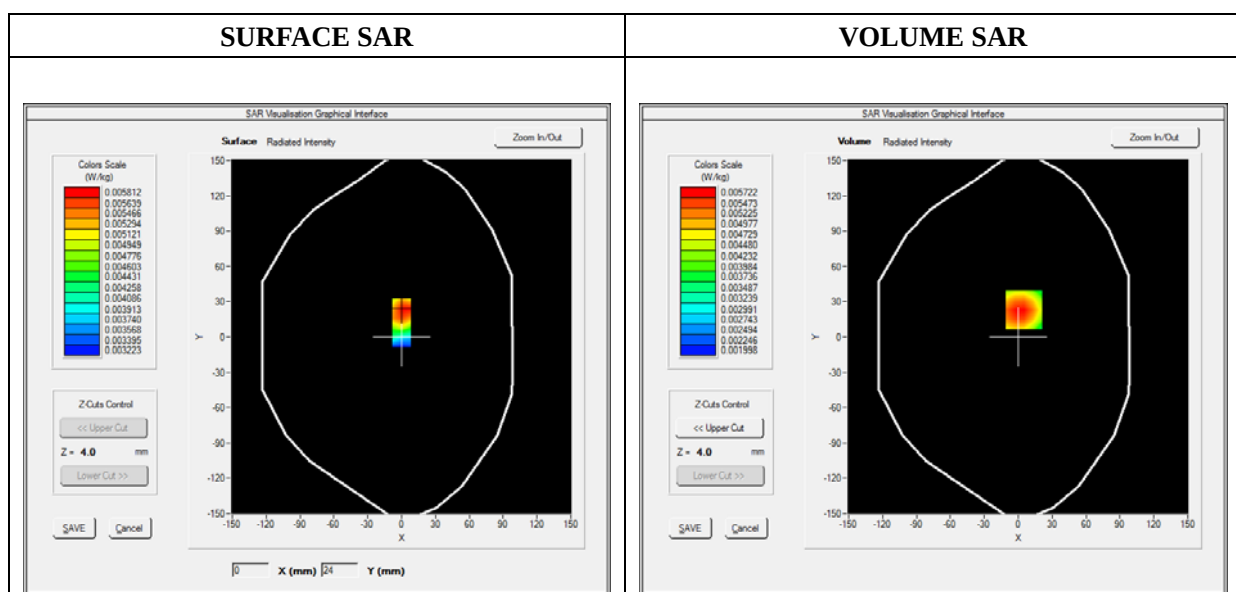

Maximum location: X=5.00, Y=23.00

SAR Peak: 0.01 W/kg

SAR 10g (W/Kg)	0.004138
SAR 1g (W/Kg)	0.005555

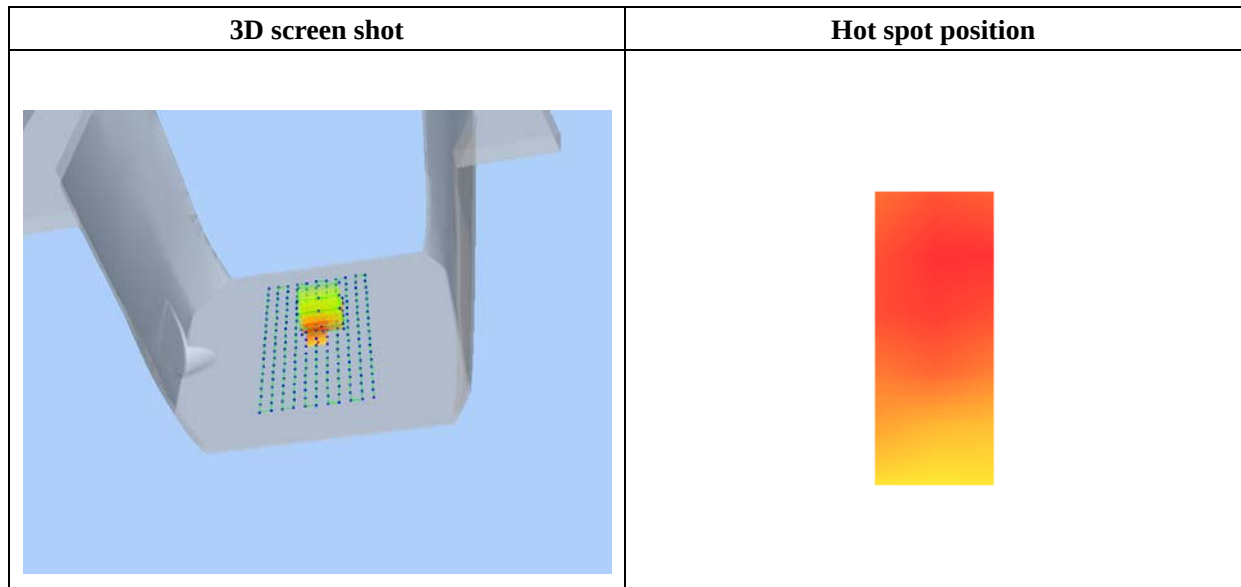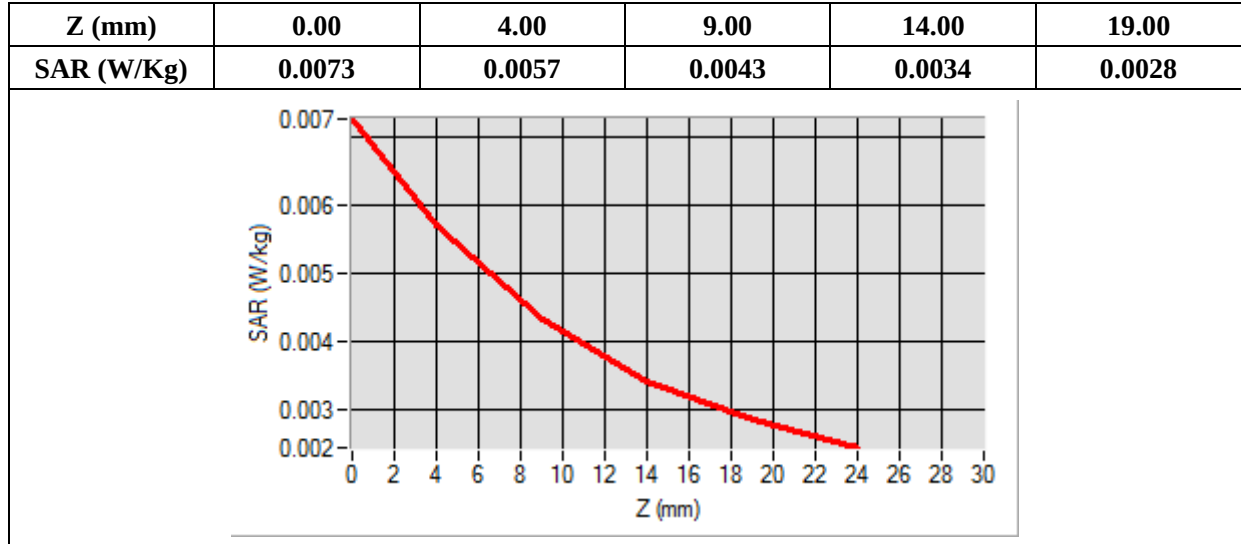

MEASUREMENT 443

Type: Phone measurement (Complete)

Date of measurement: 09/17/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 05/22/2019

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	GPRS1900_2TX
Channels	High
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1909.800000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.503921
Ambient Temperature	21.1
Liquid Temperature	21.3

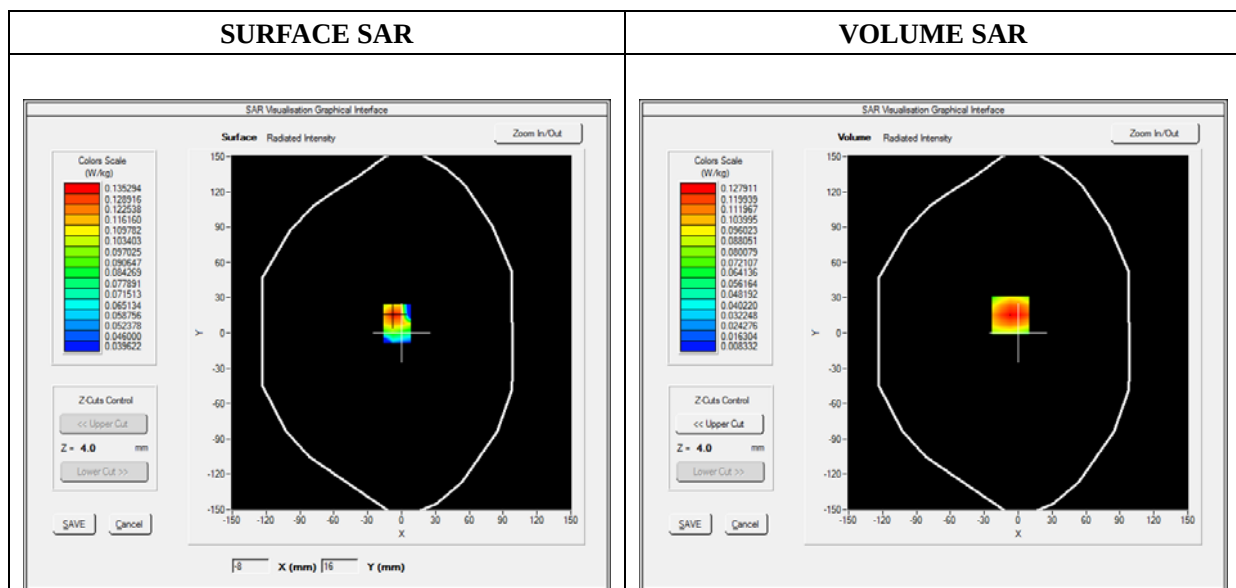




Maximum location: X=-7.00, Y=15.00

SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.070111
SAR 1g (W/Kg)	0.121831

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1964	0.1279	0.0730	0.0416	0.0244

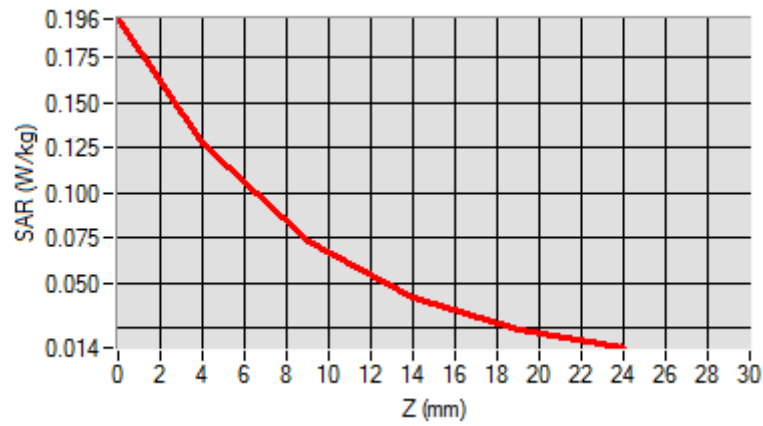

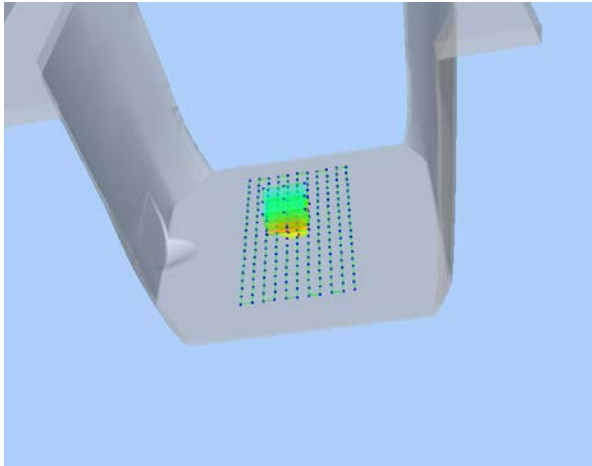3D screen shot	Hot spot position
	

Annex C. EUT Photos

EUT View Front



EUT View Back



Antenna View


Annex D. Test Setup Photos


Head Exposure Conditions

Cheek



Tilt

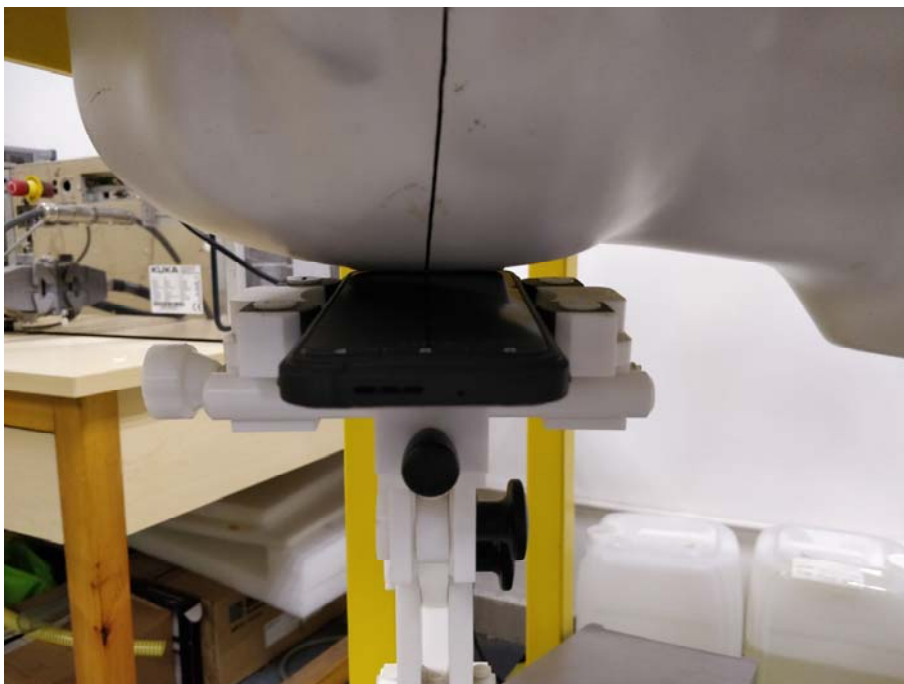

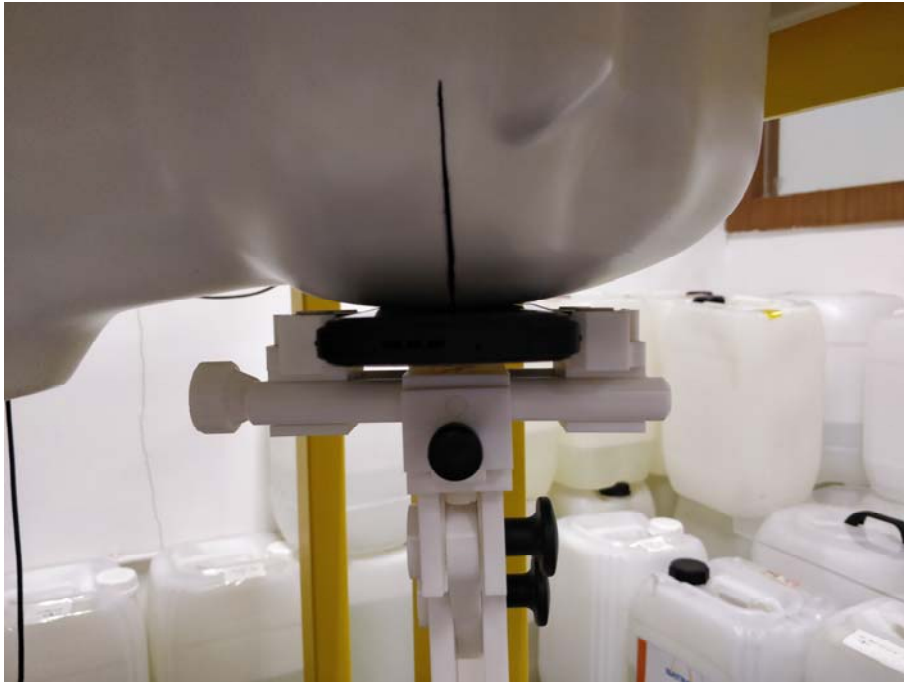Cheek**Tilt**


Body-worn & Hotspot mode Exposure Conditions



Body Front



Body Back

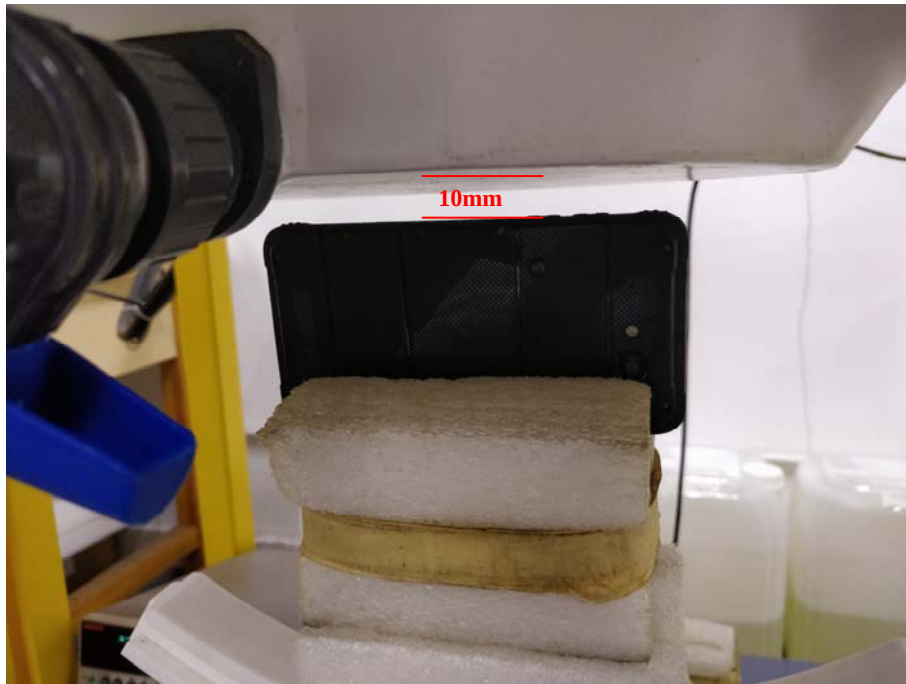


Body Right**Body Left**

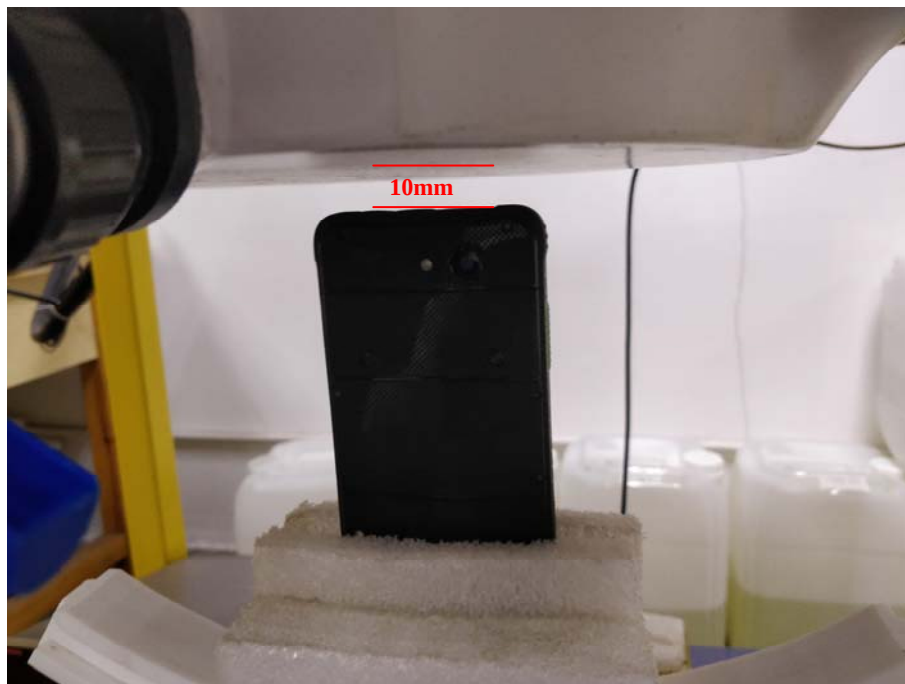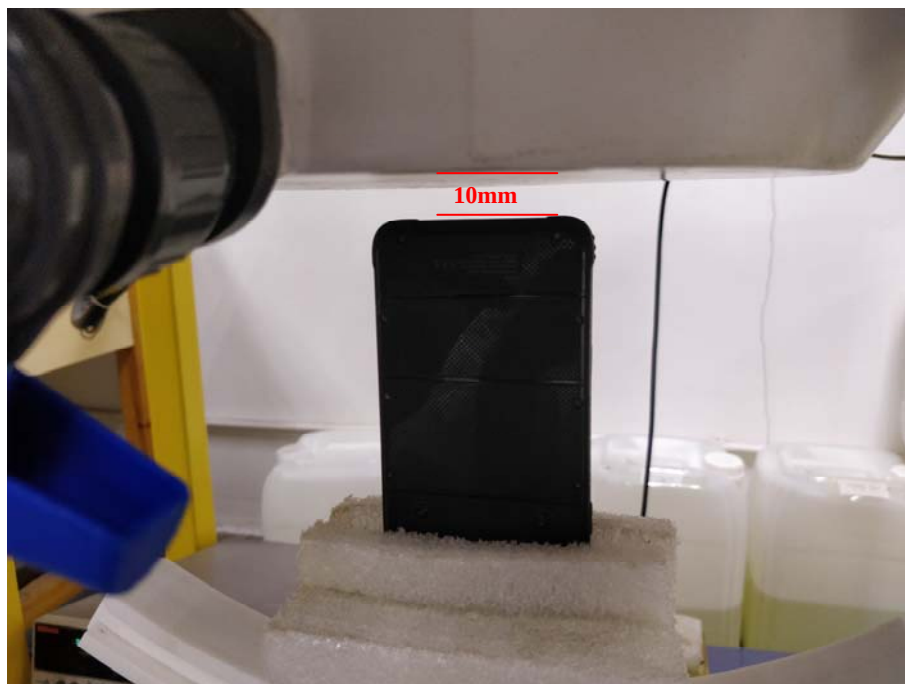Body Top**Body Bottom**

Front-of the face mode Exposure Conditions

Front

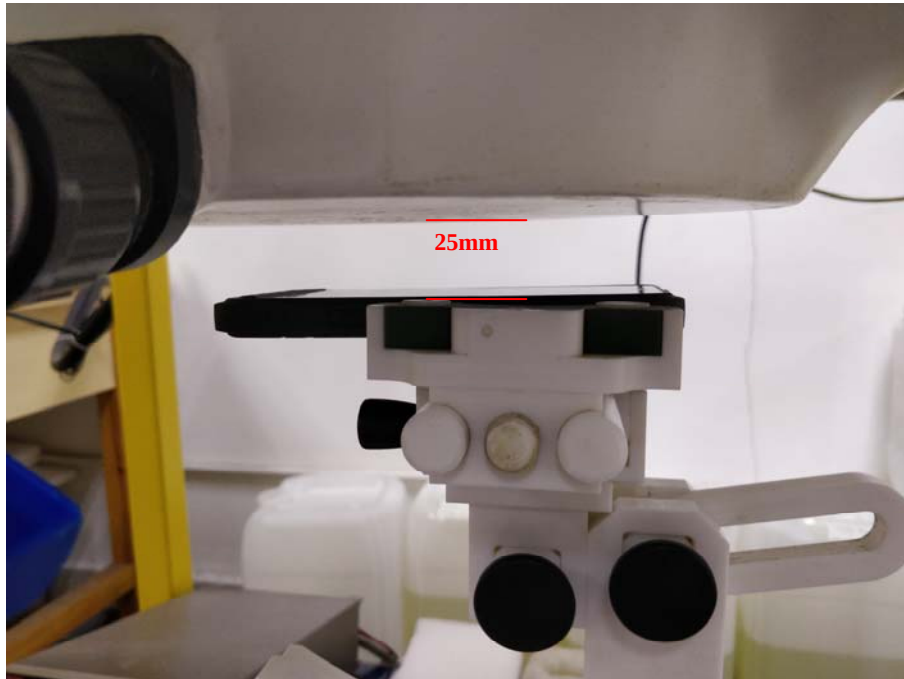

Extremity SAR mode Exposure Conditions

Back



Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******