

Appendix G

Test Results of Wi-Fi 802.11a/n/ac of Radiated Emission and Conducted Emission Testing

APPENDIX G.....	1
APPENDIX G.1: RADIATED SPURIOUS EMISSIONS	2
<i>Wi-Fi 802.11 a mode, 6 Mbps</i>	<i>2</i>
<i>Wi-Fi 802.11 n(HT20) mode, MCS0 Mbps</i>	<i>26</i>
<i>Wi-Fi 802.11 n(HT40) mode, MCS0 Mbps</i>	<i>50</i>
<i>Wi-Fi 802.11 ac(HT20) mode, MCS0 Mbps</i>	<i>66</i>
<i>Wi-Fi 802.11 ac(HT40) mode, MCS0 Mbps</i>	<i>90</i>
<i>Wi-Fi 802.11 ac(HT80) mode, MCS0 Mbps</i>	<i>106</i>
APPENDIX G.2: RADIATED EMISSIONS NEAR THE BAND EDGE.....	114
<i>Wi-Fi 802.11 a mode, 6 Mbps</i>	<i>114</i>
<i>Wi-Fi 802.11 n(HT20) mode, MCS0 Mbps</i>	<i>122</i>
<i>Wi-Fi 802.11 n(HT40) mode, MCS0 Mbps</i>	<i>130</i>
<i>Wi-Fi 802.11 ac(HT20) mode, MCS0 Mbps</i>	<i>138</i>
<i>Wi-Fi 802.11 ac(HT40) mode, MCS0 Mbps</i>	<i>146</i>
<i>Wi-Fi 802.11 ac(HT80) mode, MCS0 Mbps</i>	<i>154</i>
APPENDIX G.3: CONDUCTED EMISSION.....	162

NOTE

During the pretest the EUT was rotated through three orthogonal axes to determine the attitude that maximizes the emissions. After that the EUT was manually handled to find the orientation that has the maximum emission, which is the orientation shown in the test set-up photos.

Appendix G.1: Radiated Spurious Emissions

Wi-Fi 802.11 a mode, 6 Mbps

30MHz - 1GHz

U-NII-1



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #2839
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5180MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11a

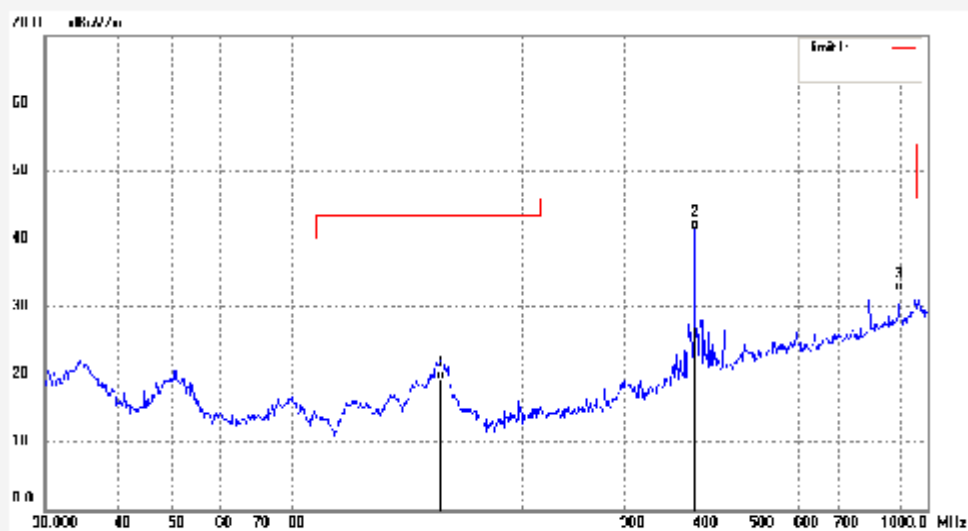

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	144.3348	35.44	-16.23	19.21	43.50	-24.29	QP			
2	396.2414	49.35	-7.97	41.38	46.00	-4.62	QP			
3	893.8567	32.03	0.26	32.29	46.00	-13.71	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #2840
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5180MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11a

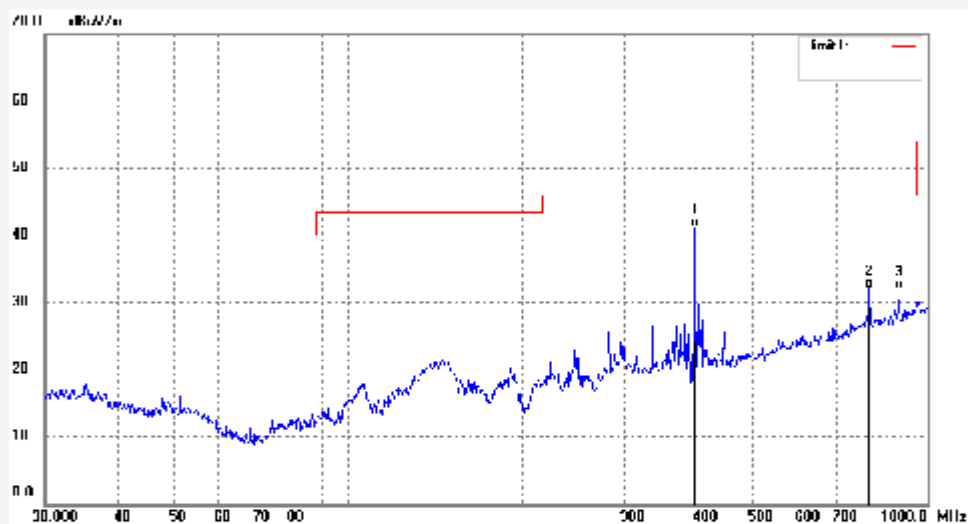

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	49.27	-7.97	41.30	46.00	-4.70	QP			
2	793.3958	33.26	-1.12	32.14	46.00	-13.86	QP			
3	893.8567	31.64	0.26	31.90	46.00	-14.10	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #2841
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5220MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11a

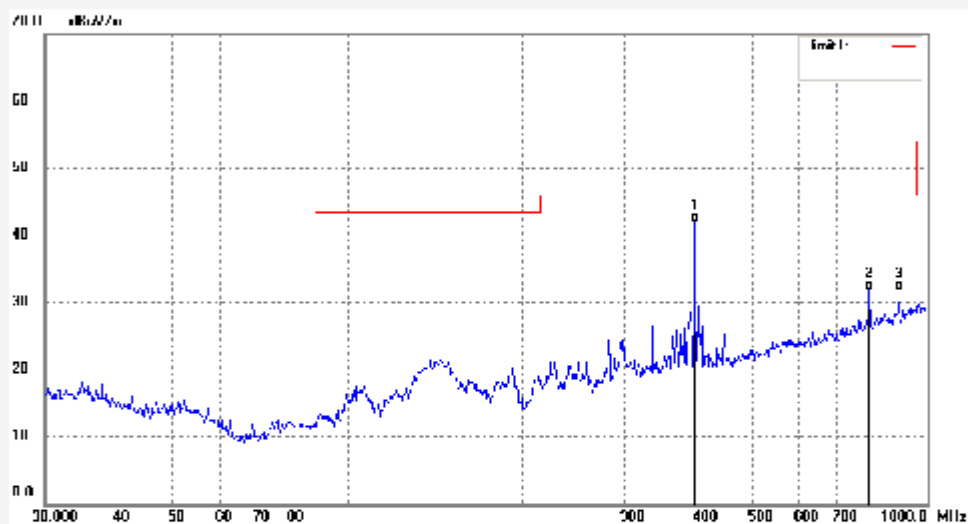

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	49.85	-7.97	41.88	46.00	-4.12	QP			
2	793.3958	32.88	-1.12	31.76	46.00	-14.24	QP			
3	893.8567	31.46	0.26	31.72	46.00	-14.28	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2842
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5220MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11a

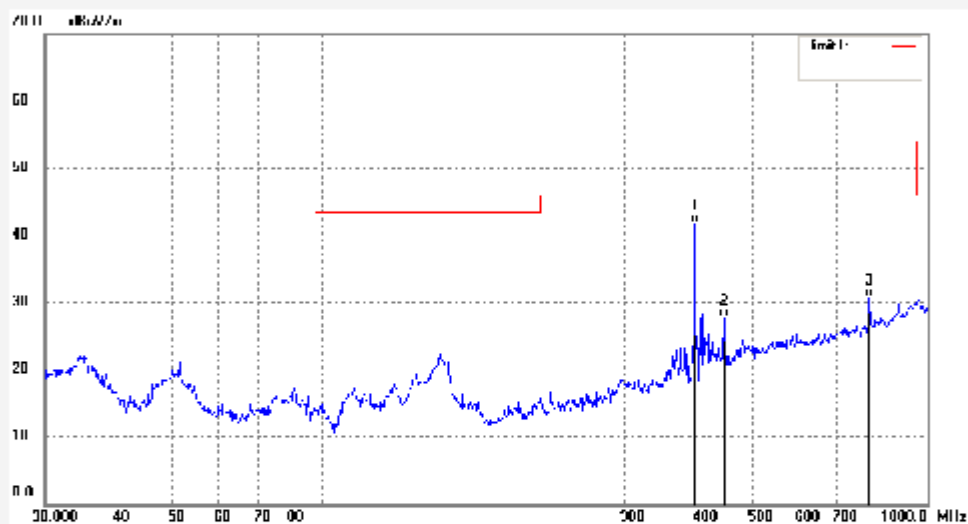

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	398.2414	49.79	-7.97	41.82	46.00	-4.18	QP			
2	446.4141	34.58	-6.84	27.74	46.00	-18.26	QP			
3	793.3958	31.75	-1.12	30.63	46.00	-15.37	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #2843
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5240MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11a

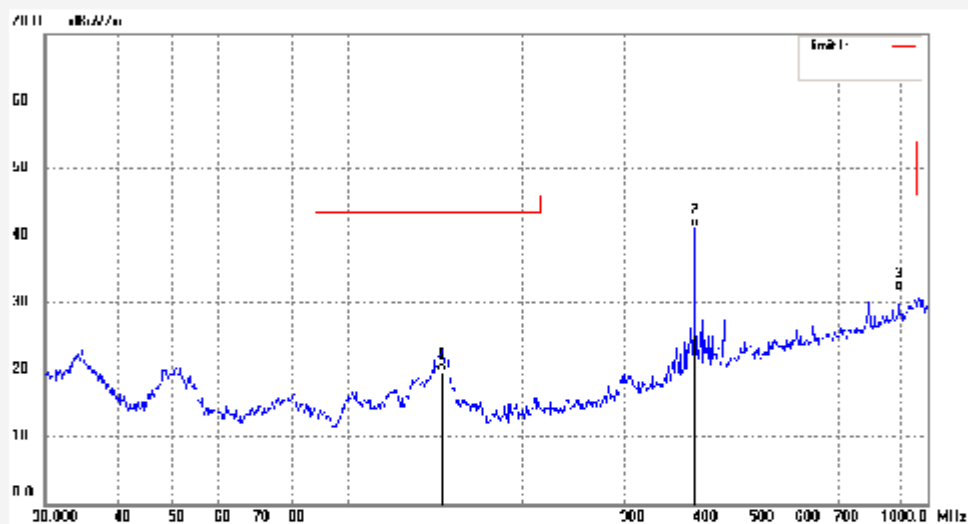

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	145.3505	35.98	-16.23	19.75	43.50	-23.75	QP			
2	396.2414	49.13	-7.97	41.16	46.00	-4.84	QP			
3	893.8567	31.48	0.26	31.74	46.00	-14.26	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #2844
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5240MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11a

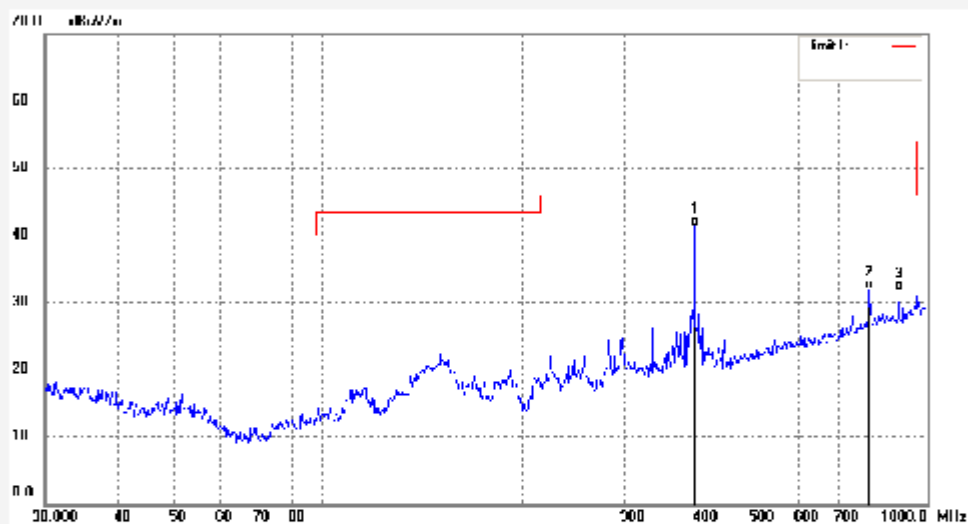

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	49.29	-7.97	41.32	46.00	-4.68	QP			
2	793.3958	33.03	-1.12	31.91	46.00	-14.09	QP			
3	893.8567	31.53	0.26	31.79	46.00	-14.21	QP			

U-NII-3



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #2850
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5825MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11a

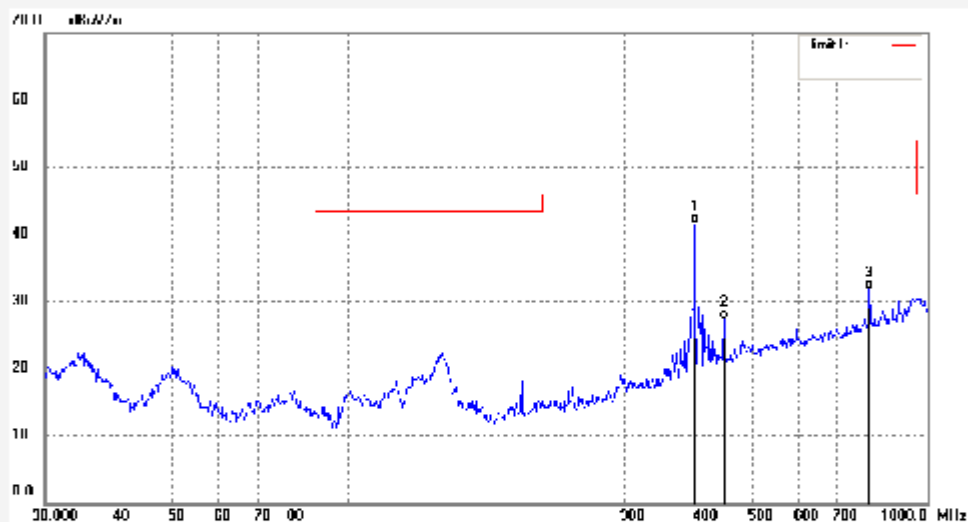

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	49.58	-7.97	41.61	46.00	-4.39	QP			
2	446.4141	34.27	-6.84	27.43	46.00	-18.57	QP			
3	793.3958	32.92	-1.12	31.80	46.00	-14.20	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #2845
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5745MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11a

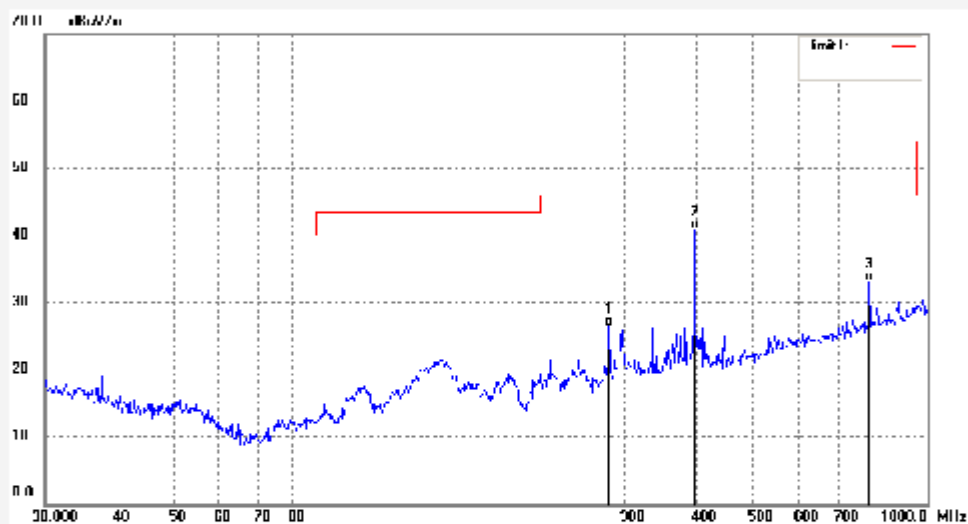

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	281.9945	37.22	-10.79	26.43	46.00	-19.57	QP			
2	396.2414	48.86	-7.97	40.89	46.00	-5.11	QP			
3	793.3958	34.37	-1.12	33.25	46.00	-12.75	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #2846
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5745MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11a

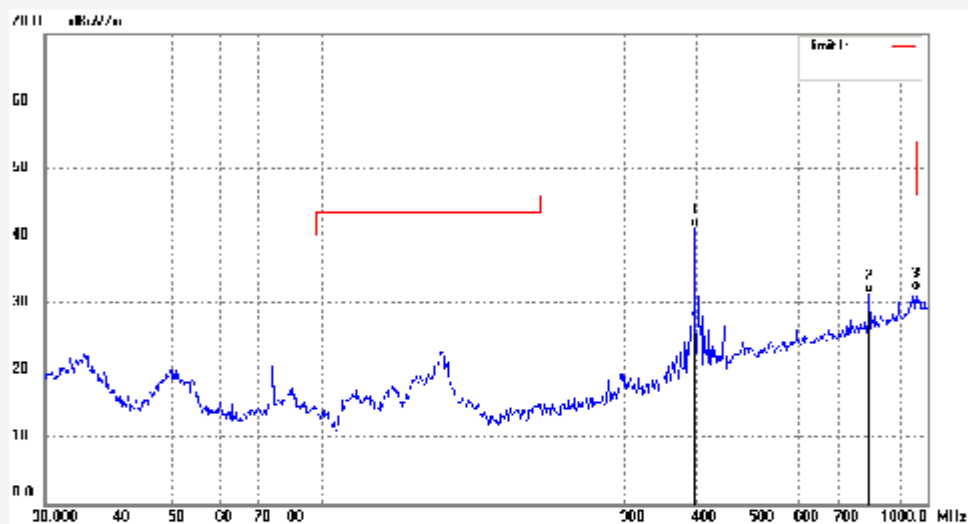

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	390.2414	49.18	-7.97	41.19	46.00	-4.81	QP			
2	793.3958	32.50	-1.12	31.38	46.00	-14.62	QP			
3	955.4380	30.52	1.29	31.81	46.00	-14.19	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #2847

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: TX 5785MHz

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/08/28/

Time:

Engineer Signature: PEI

Distance: 3m

Note: 802.11a

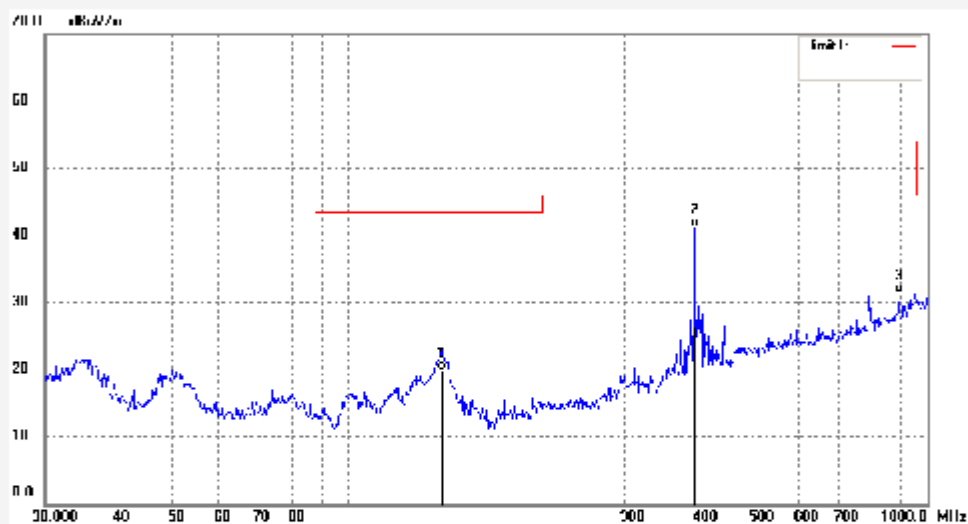

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	145.3505	36.18	-16.23	19.95	43.50	-23.55	QP			
2	396.2414	49.19	-7.97	41.22	46.00	-4.78	QP			
3	893.8567	31.11	0.26	31.37	46.00	-14.63	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #2848
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5785MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11a

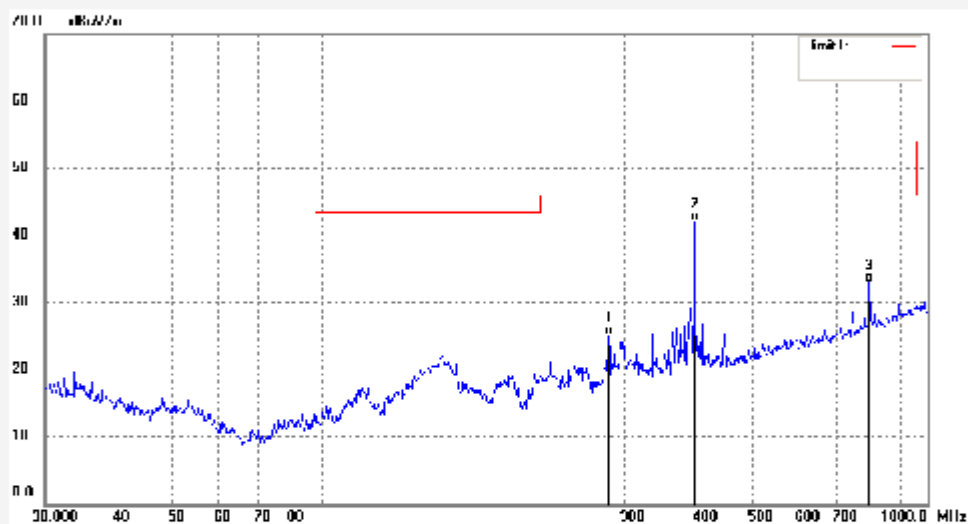

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	281.9945	35.83	-10.79	25.04	46.00	-20.96	QP			
2	396.2414	50.10	-7.97	42.13	46.00	-3.87	QP			
3	793.3958	34.07	-1.12	32.95	46.00	-13.05	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #2849
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5825MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11a

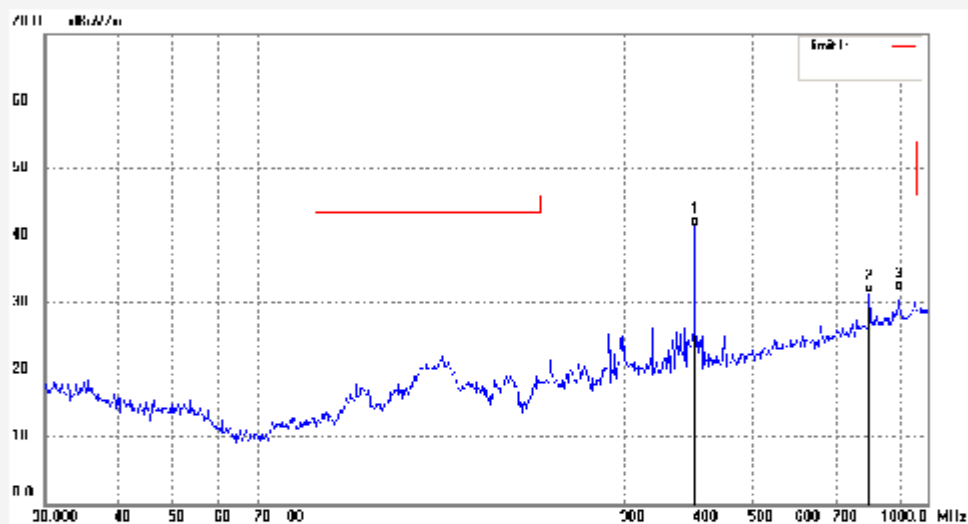

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	398.2414	49.42	-7.97	41.45	46.00	-4.55	QP			
2	793.3958	32.57	-1.12	31.45	46.00	-14.55	QP			
3	893.8567	31.42	0.26	31.68	46.00	-14.32	QP			

1GHz - 18GHz
U-NII-1




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2657	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 18/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5220MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11a	

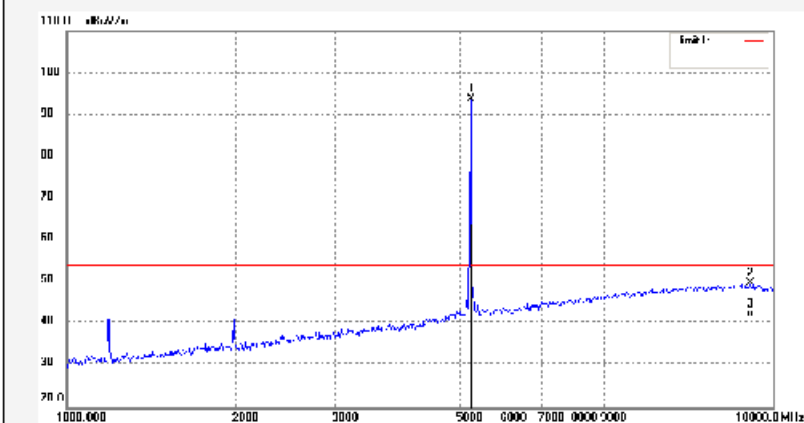

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5220.000	92.87	0.75	93.62	/	/	peak			
2	16409.819	9.65	40.25	49.90	74.00	-24.10	peak			
3	16409.819	1.34	40.25	41.59	54.00	-12.41	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2658	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5220MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11a

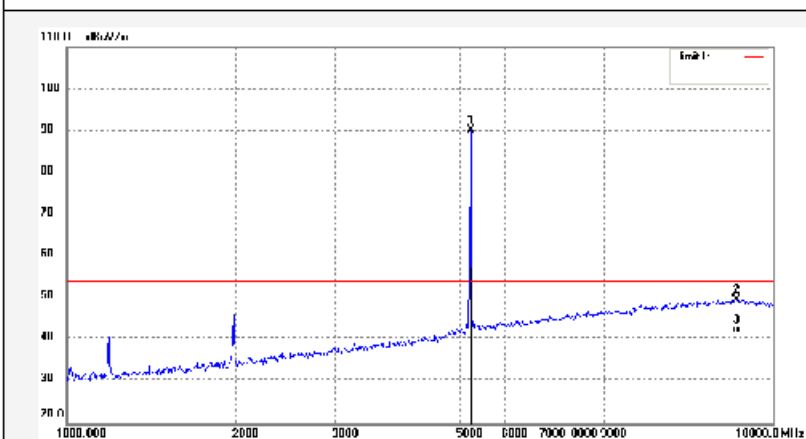

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5220.000	89.44	0.75	90.19	/	/	peak			
2	15532.938	9.60	40.09	49.69	74.00	-24.31	peak			
3	15532.938	1.42	40.09	41.51	54.00	-12.49	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2659	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5240MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11a

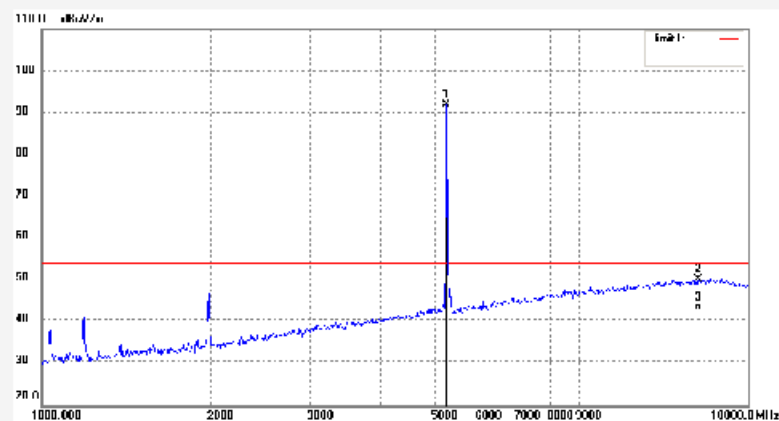

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5240.000	91.06	0.82	91.88	/	/	peak			
2	14702.914	8.31	41.99	50.30	74.00	-23.70	peak			
3	14702.914	0.55	41.99	42.54	54.00	-11.46	AVG			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2660	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5240MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11a

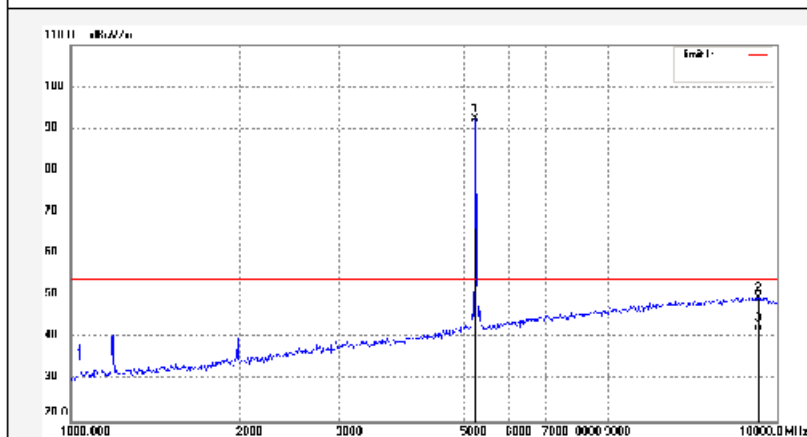

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5240.000	91.58	0.82	92.40	/	/	peak			
2	16896.884	8.76	40.85	49.61	74.00	-24.39	peak			
3	16896.884	0.70	40.85	41.55	54.00	-12.45	AVG			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2653	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5180MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11a

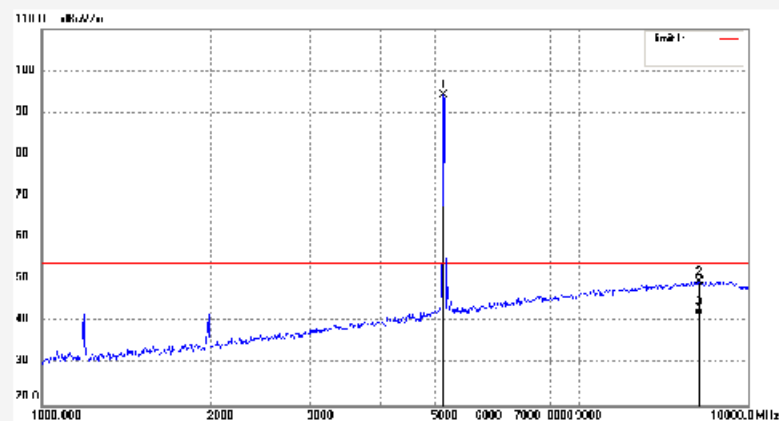

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5180.000	93.50	0.61	94.11	/	/	peak			
2	14745.473	7.82	41.86	49.68	74.00	-24.32	peak			
3	14745.473	-0.32	41.86	41.54	54.00	-12.46	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2654	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5180MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11a

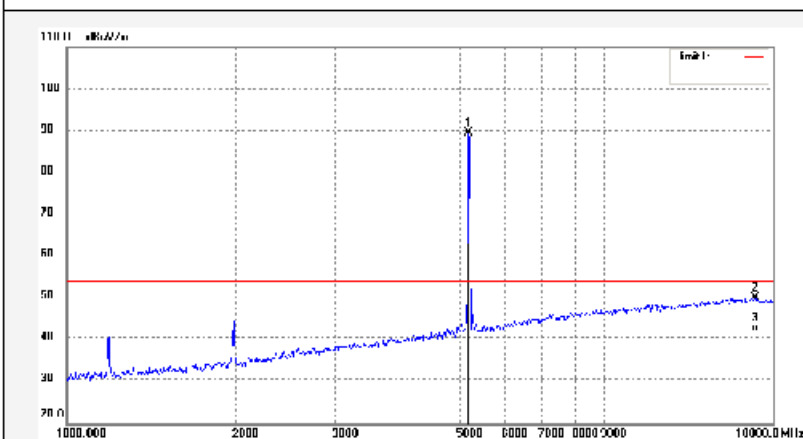

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5180.000	88.79	0.61	89.40	/	/	peak			
2	16745.214	8.97	40.99	49.96	74.00	-24.04	peak			
3	16745.214	0.88	40.99	41.87	54.00	-12.13	AVG			

U-NII-3



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: PHY #2673
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5785MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 18/08/27/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11a

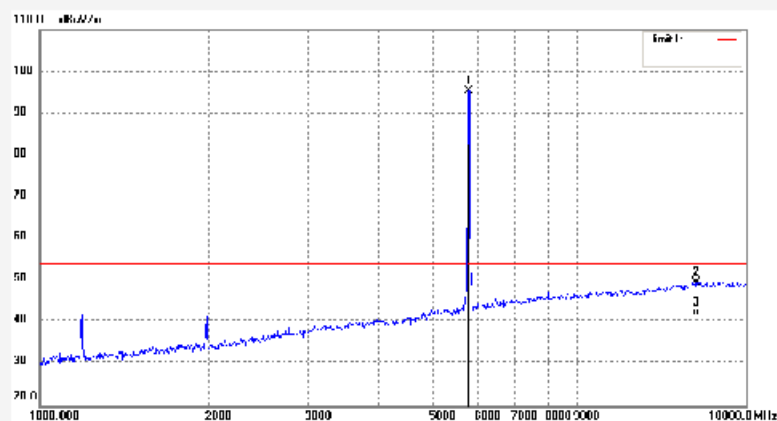

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5785.000	93.51	1.86	95.37	/	/	peak			
2	14702.914	7.52	41.99	49.51	74.00	-24.49	peak			
3	14702.914	-0.52	41.99	41.47	54.00	-12.53	AVG			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2674	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5785MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11a

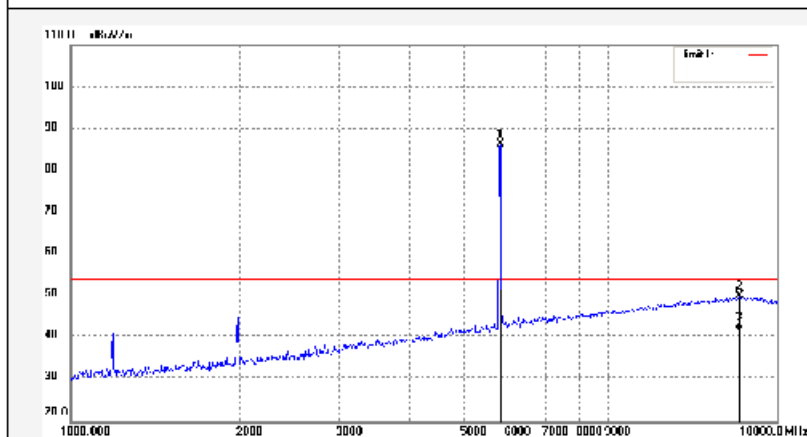

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5785.000	84.41	1.86	86.27	/	/	peak			
2	15443.405	9.73	40.21	49.94	74.00	-24.06	peak			
3	15443.405	1.53	40.21	41.74	54.00	-12.26	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2675	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5825MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11a

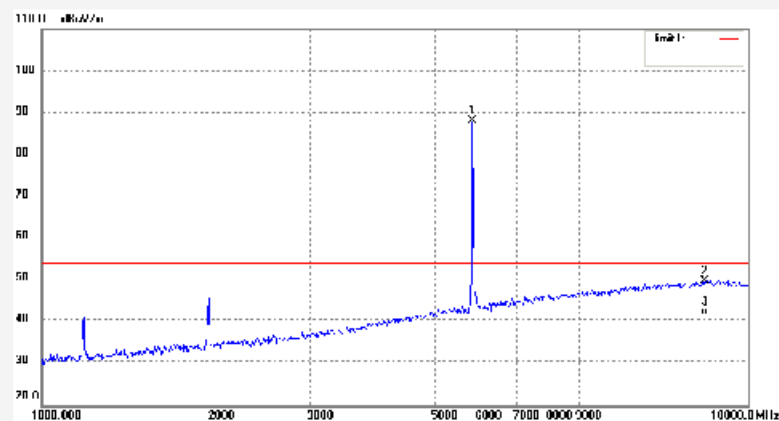

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5825.000	86.18	1.97	88.15	/	/	peak			
2	15090.405	8.88	40.92	49.80	74.00	-24.20	peak			
3	15090.405	0.54	40.92	41.46	54.00	-12.54	AVG			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2676	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5825MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11a

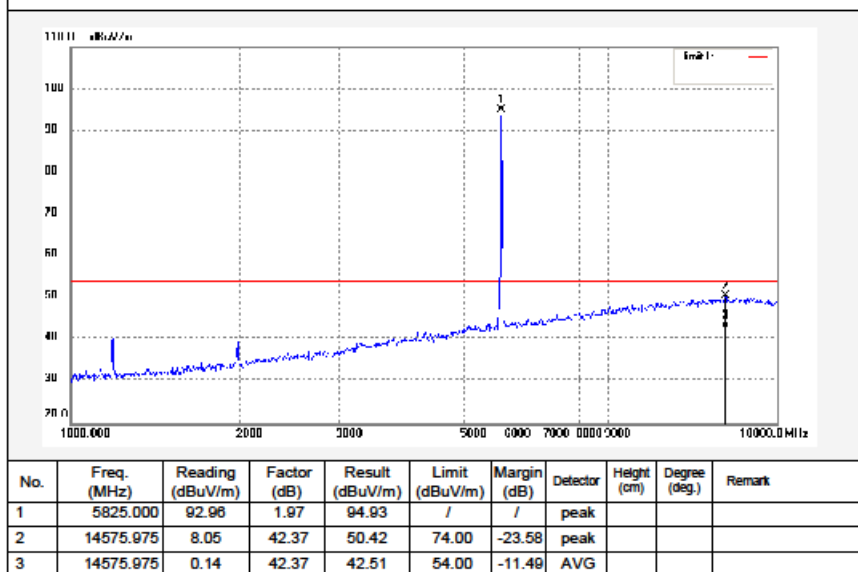




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2669	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5745MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11a

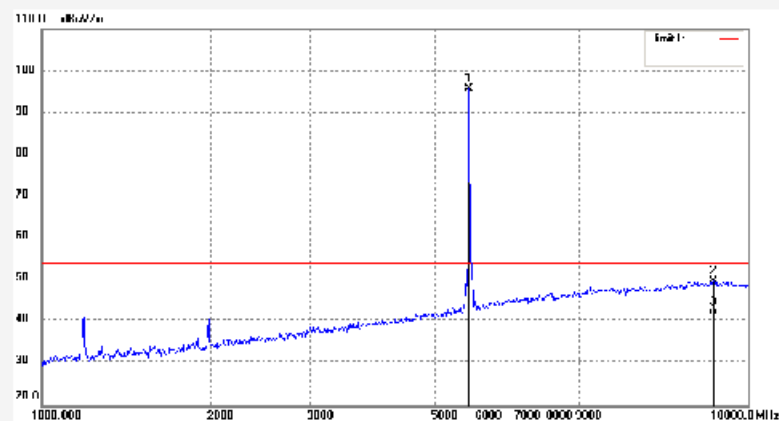

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5745.000	94.28	1.50	95.78	/	/	peak			
2	15622.990	9.69	40.08	49.77	74.00	-24.23	peak			
3	15622.990	1.51	40.08	41.59	54.00	-12.41	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2670	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5745MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11a

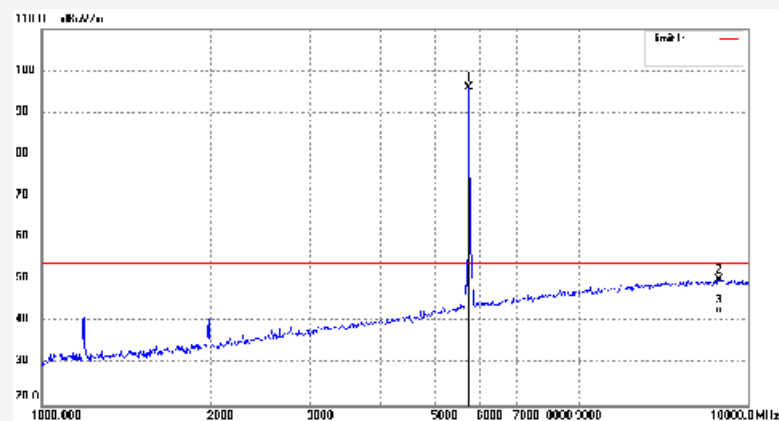

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5745.000	94.55	1.50	96.05	/	/	peak			
2	15988.449	9.97	40.00	49.97	74.00	-24.03	peak			
3	15988.449	1.84	40.00	41.84	54.00	-12.16	AVG			

**Wi-Fi 802.11 n(HT20) mode, MCS0 Mbps
30MHz - 1GHz
U-NII-1**




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2853	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5220MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11n HT20	

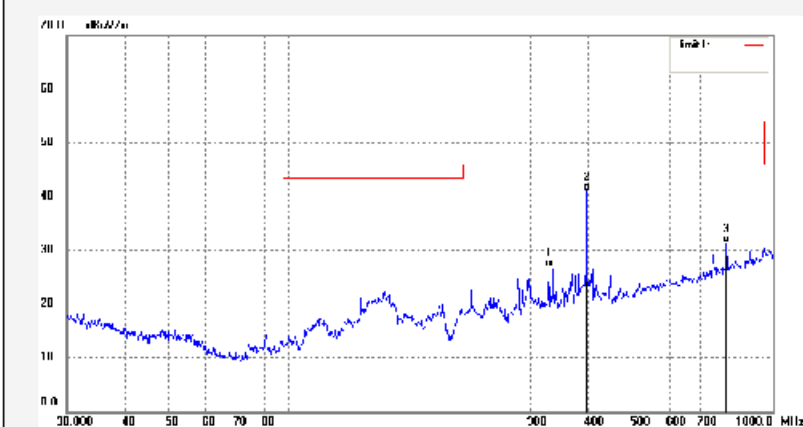

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	329.0389	36.18	-9.38	26.80	46.00	-19.20	QP			
2	396.2414	48.95	-7.97	40.98	46.00	-5.02	QP			
3	793.3958	32.55	-1.12	31.43	46.00	-14.57	QP			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2854	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5220MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT20

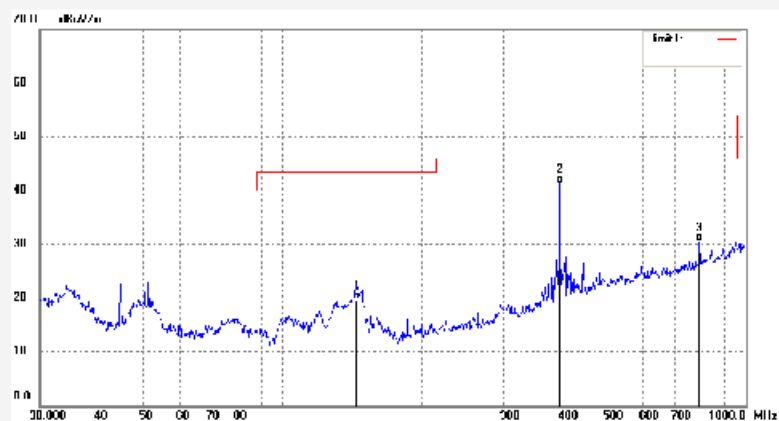

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	144.8418	35.94	-16.23	19.71	43.50	-23.79	QP			
2	396.2414	49.40	-7.97	41.43	46.00	-4.57	QP			
3	793.3958	31.66	-1.12	30.54	46.00	-15.46	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2855
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5240MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11n HT20

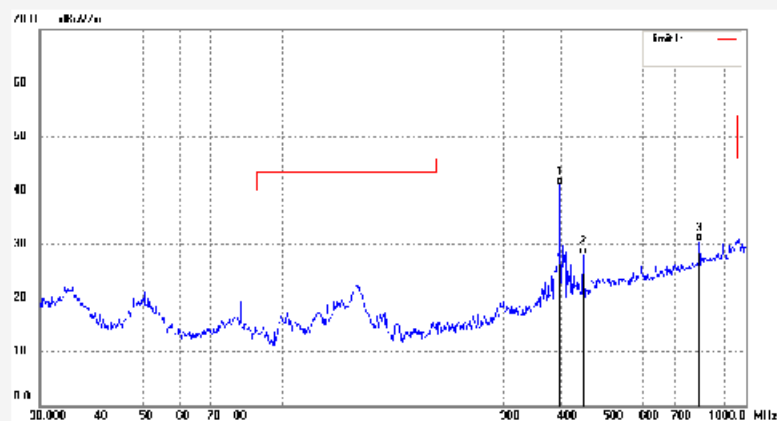


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	49.09	-7.97	41.12	46.00	-4.88	QP			
2	446.4141	34.91	-8.84	28.07	46.00	-17.93	QP			
3	793.3958	31.62	-1.12	30.50	46.00	-15.50	QP			



ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2856	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5240MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11n HT20	

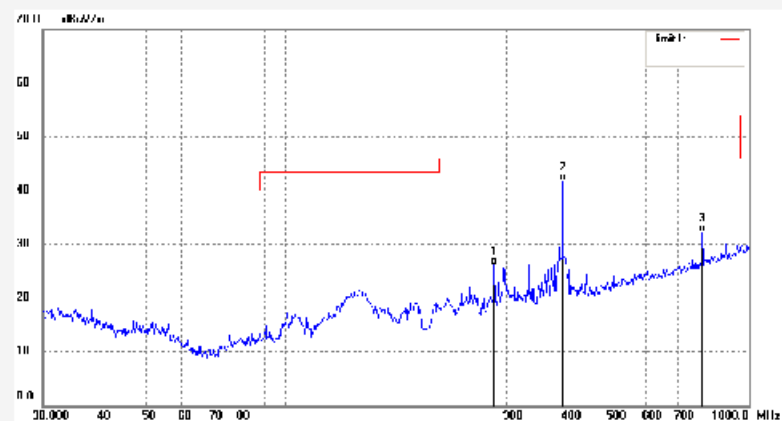

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	281.9945	36.93	-10.79	26.14	46.00	-19.86	QP			
2	396.2414	49.67	-7.97	41.70	46.00	-4.30	QP			
3	793.3958	33.47	-1.12	32.35	46.00	-13.65	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2851
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5180MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11n HT20

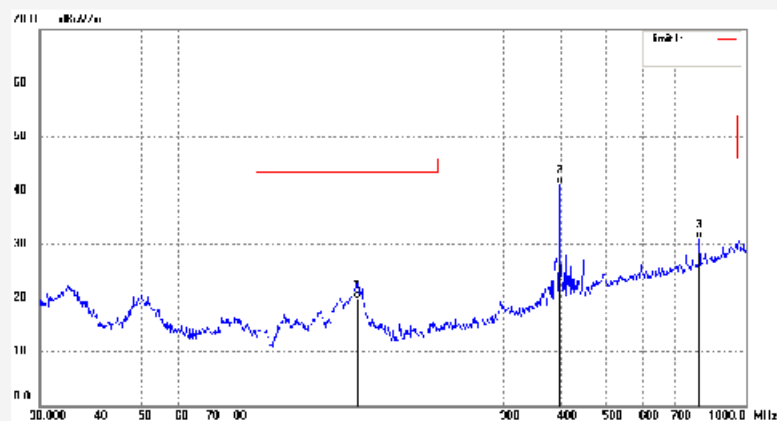

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	145.3505	36.09	-16.23	19.86	43.50	-23.64	QP			
2	396.2414	49.11	-7.97	41.14	46.00	-4.86	QP			
3	793.3958	32.21	-1.12	31.09	46.00	-14.91	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2852	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5180MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11n HT20	

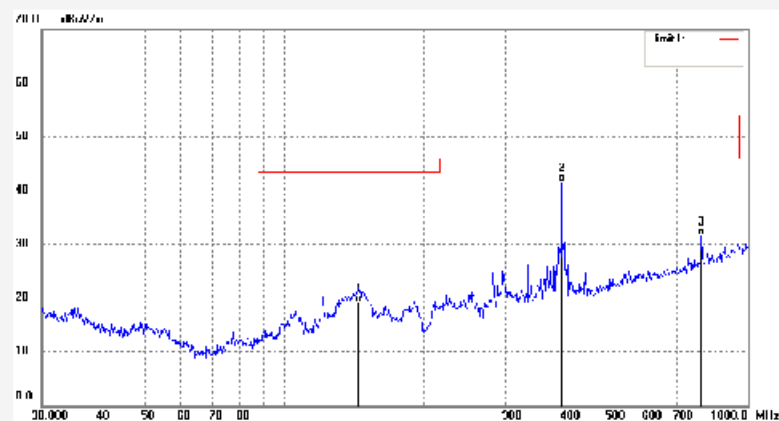

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	144.8418	35.37	-18.23	19.14	43.50	-24.36	QP			
2	396.2414	49.57	-7.97	41.60	46.00	-4.40	QP			
3	793.3958	32.89	-1.12	31.57	46.00	-14.43	QP			

U-NII-3




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2859	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5785MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11n HT20	

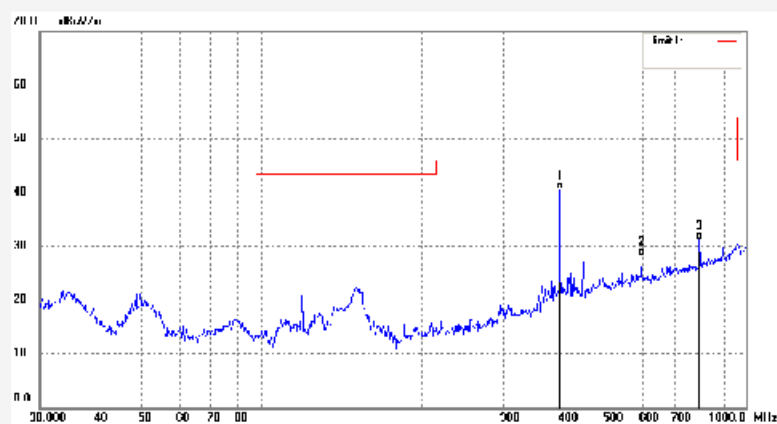

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	48.48	-7.97	40.51	46.00	-5.49	QP			
2	595.1327	32.37	-4.02	28.35	46.00	-17.65	QP			
3	793.3958	32.32	-1.12	31.20	46.00	-14.80	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2860	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5785MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11n HT20	

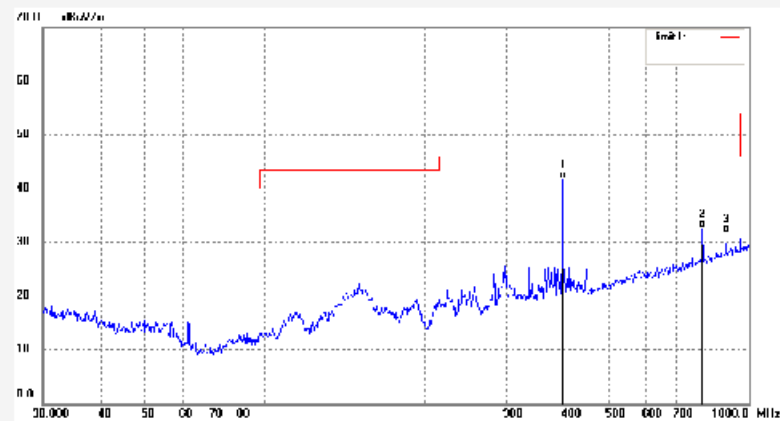

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	49.70	-7.97	41.73	46.00	-4.27	QP			
2	793.3958	33.80	-1.12	32.68	46.00	-13.32	QP			
3	893.8587	31.52	0.26	31.78	46.00	-14.22	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2861	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5825MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT20

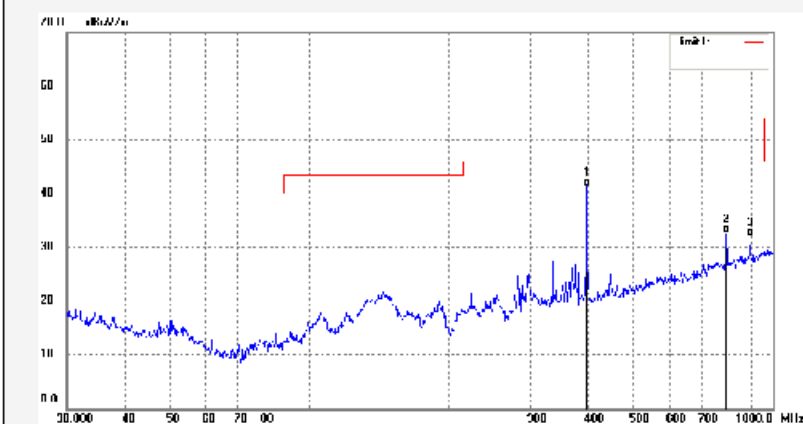

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	49.30	-7.97	41.33	46.00	-4.67	QP			
2	793.3958	33.74	-1.12	32.62	46.00	-13.38	QP			
3	893.8587	31.77	0.26	32.03	46.00	-13.97	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2862
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5825MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11n HT20

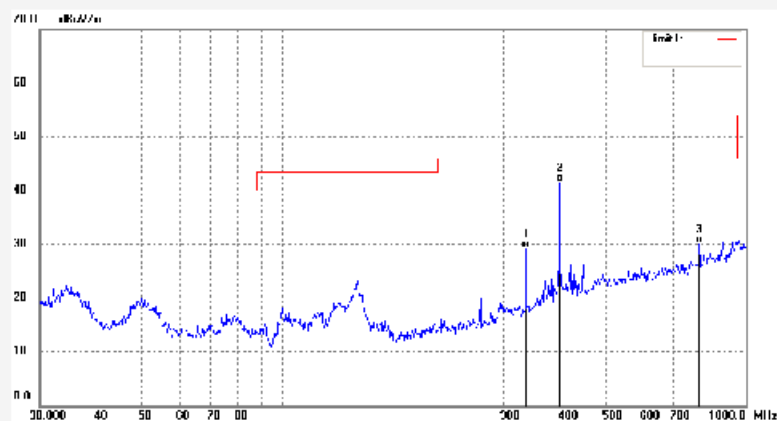

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	336.0351	38.49	-9.23	29.26	46.00	-16.74	QP			
2	396.2414	49.45	-7.97	41.48	46.00	-4.52	QP			
3	793.3958	31.30	-1.12	30.18	46.00	-15.82	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2857
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5745MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11n HT20

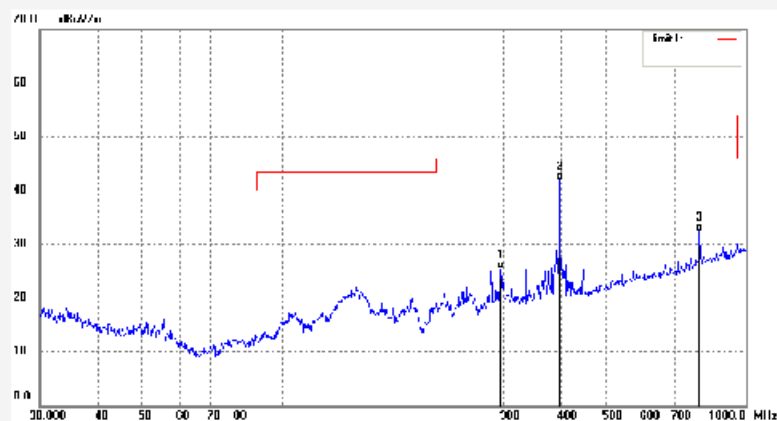

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	296.1836	35.85	-10.36	25.49	46.00	-20.51	QP			
2	396.2414	49.94	-7.97	41.97	46.00	-4.03	QP			
3	793.3958	33.56	-1.12	32.44	46.00	-13.56	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2858
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5745MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11n HT20

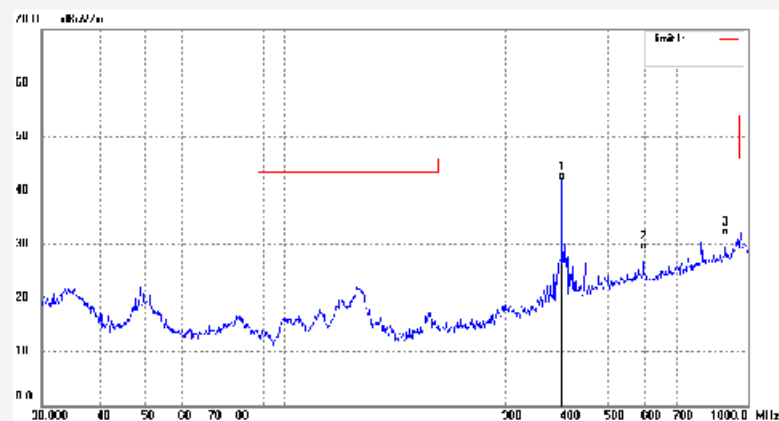

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	49.86	-7.97	41.89	46.00	-4.11	QP			
2	595.1327	33.00	-4.02	28.98	46.00	-17.02	QP			
3	893.8567	31.37	0.26	31.63	46.00	-14.37	QP			

1GHz - 18GHz
U-NII-1




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2689	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5220MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11n HT20	

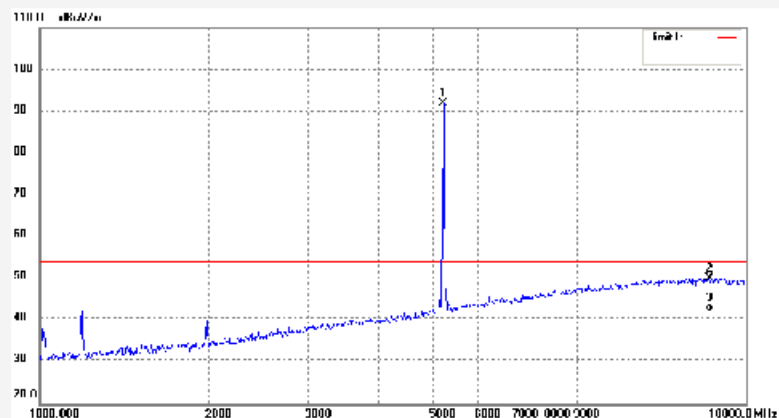

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5220.000	91.13	0.75	91.88	/	/	peak			
2	15488.107	10.02	40.12	50.14	74.00	-23.86	peak			
3	15488.107	2.00	40.12	42.12	54.00	-11.88	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2690	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5220MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT20

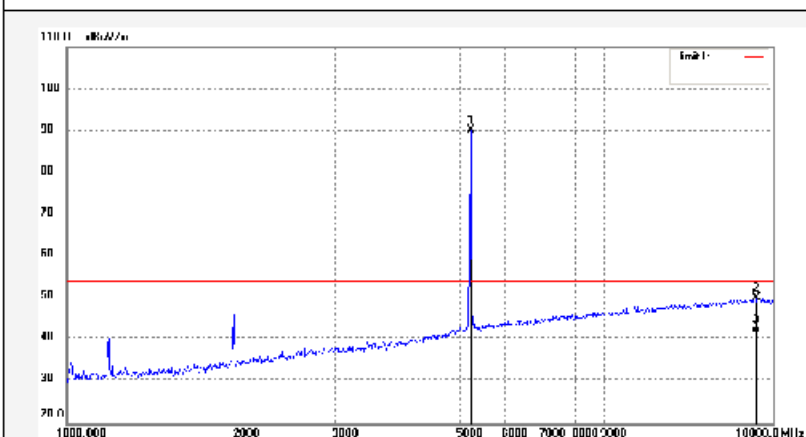

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5220.000	89.41	0.75	90.16	/	/	peak			
2	16842.294	8.71	41.26	49.97	74.00	-24.03	peak			
3	16842.294	0.32	41.26	41.58	54.00	-12.42	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2601	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5240MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT20

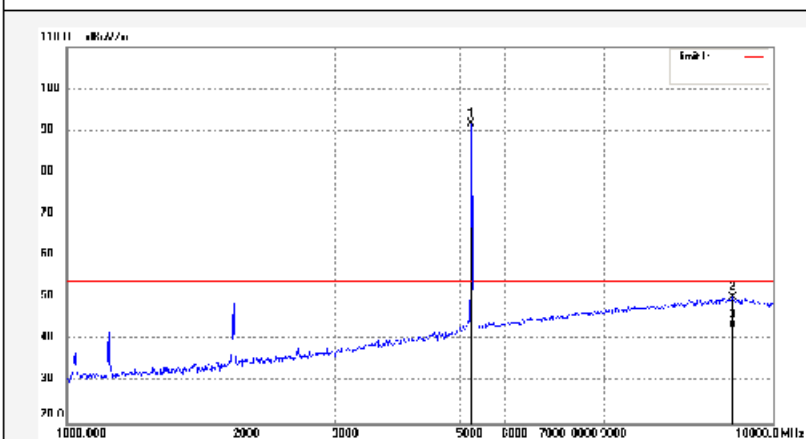

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5240.000	90.74	0.82	91.56	/	/	peak			
2	15285.885	9.69	40.57	50.26	74.00	-23.74	peak			
3	15265.885	2.29	40.57	42.86	54.00	-11.14	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2692	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5240MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11n HT20	

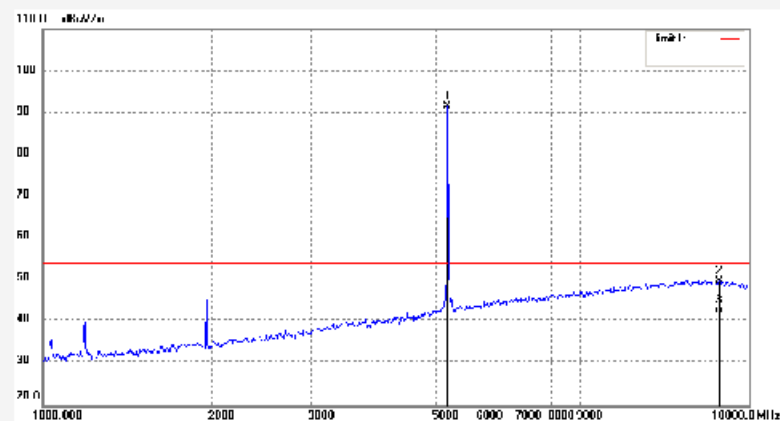

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5240.000	90.60	0.82	91.42	/	/	peak			
2	15942.303	9.89	40.01	49.90	74.00	-24.10	peak			
3	15942.303	1.88	40.01	41.89	54.00	-12.11	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2685	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5180MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT20

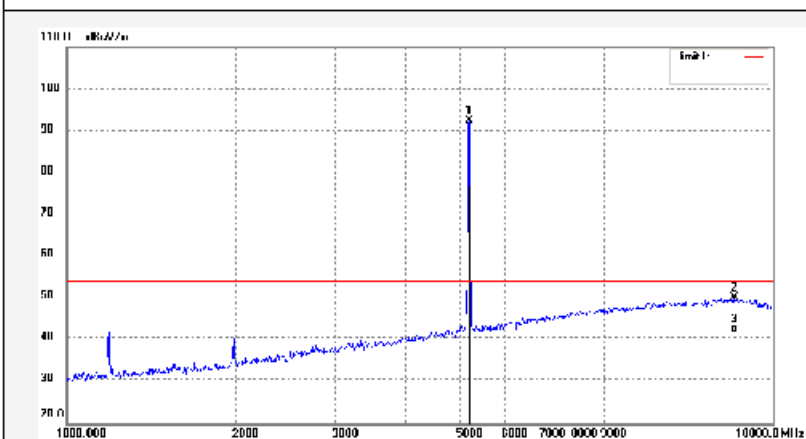

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5180.000	91.71	0.61	92.32	/	/	peak			
2	15398.832	9.64	40.30	49.94	74.00	-24.06	peak			
3	15399.832	1.34	40.30	41.64	54.00	-12.36	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2686	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5180MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT20

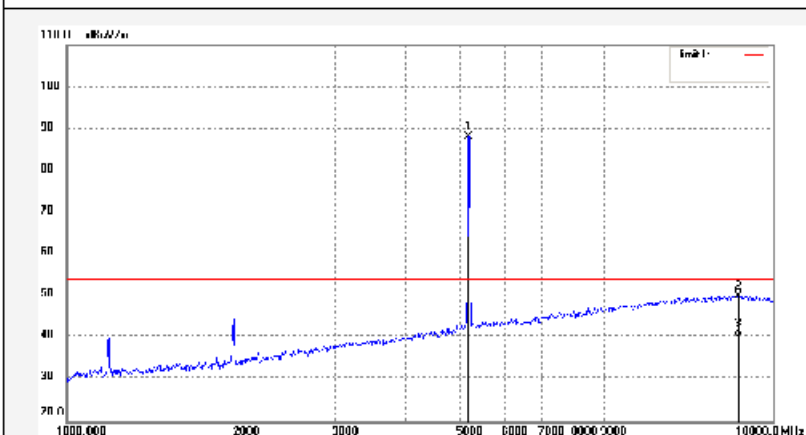

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5180.000	87.49	0.61	88.10	/	/	peak			
2	15622.990	10.04	40.08	50.12	74.00	-23.88	peak			
3	15622.990	0.15	40.08	40.23	54.00	-13.77	AVG			

U-NII-3



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2705
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5785MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 18/08/27/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11n HT20

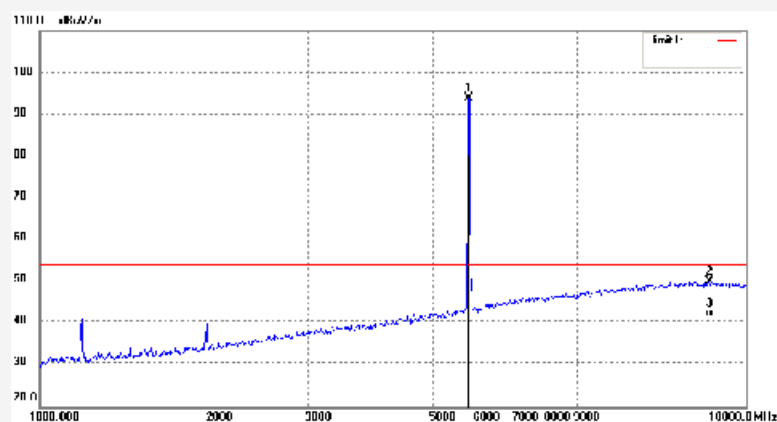


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5785.000	92.12	1.86	93.98	/	/	peak			
2	15488.107	9.84	40.12	49.96	74.00	-24.04	peak			
3	15488.107	1.36	40.12	41.48	54.00	-12.52	AVG			



ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2706	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5785MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11n HT20	

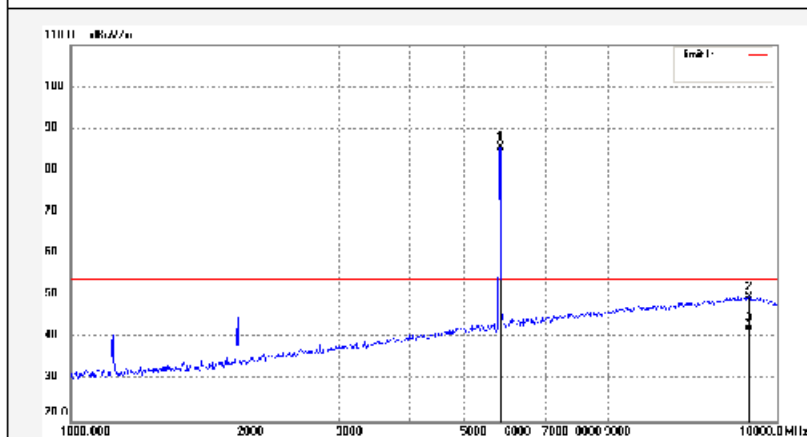

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5785.000	83.82	1.86	85.68	/	/	peak			
2	16034.728	9.72	40.02	49.74	74.00	-24.26	peak			
3	16034.728	1.55	40.02	41.57	54.00	-12.43	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2707	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5825MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT20

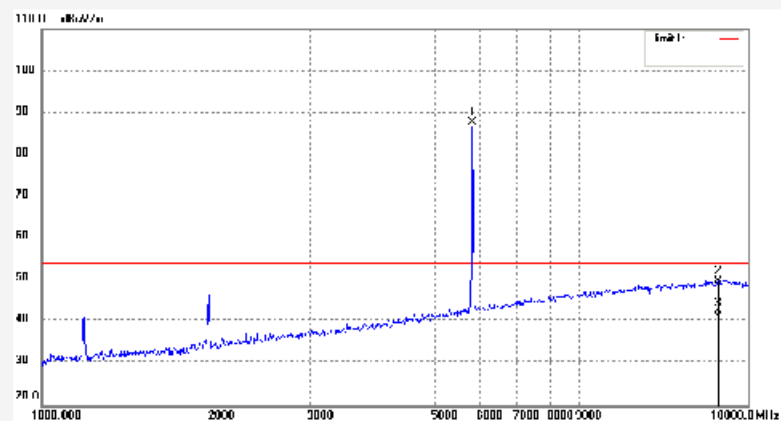

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5825.000	85.72	1.97	87.69	/	/	peak			
2	15942.303	9.90	40.01	49.91	74.00	-24.09	peak			
3	15942.303	1.35	40.01	41.36	54.00	-12.64	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2708	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5825MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT20

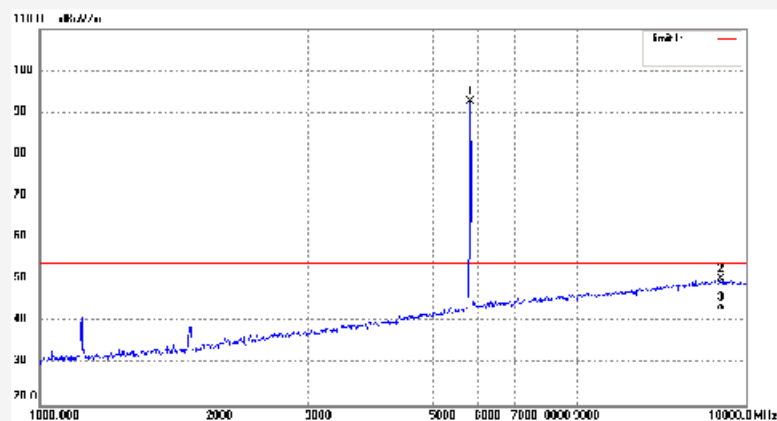

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5825.000	90.54	1.97	92.51	/	/	peak			
2	16221.189	10.13	40.13	50.26	74.00	-23.74	peak			
3	16221.189	2.50	40.13	42.63	54.00	-11.37	AVG			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2701	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5745MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT20

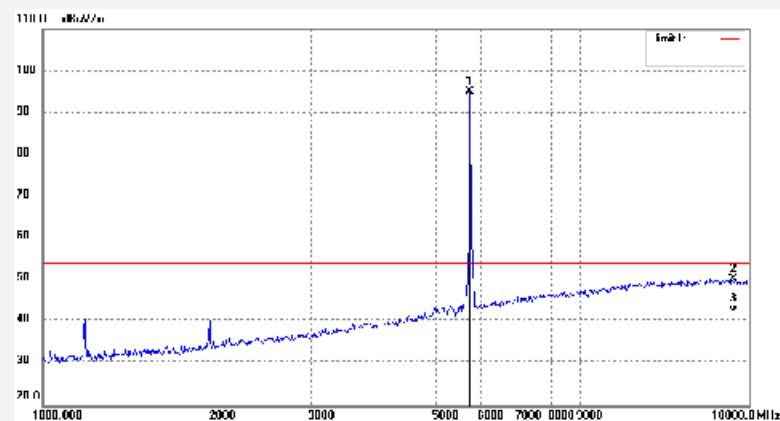

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5745.000	93.55	1.50	95.05	/	/	peak			
2	16891.045	8.79	41.39	50.18	74.00	-23.82	peak			
3	16891.045	1.08	41.39	42.47	54.00	-11.53	AVG			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2702	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5745MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT20

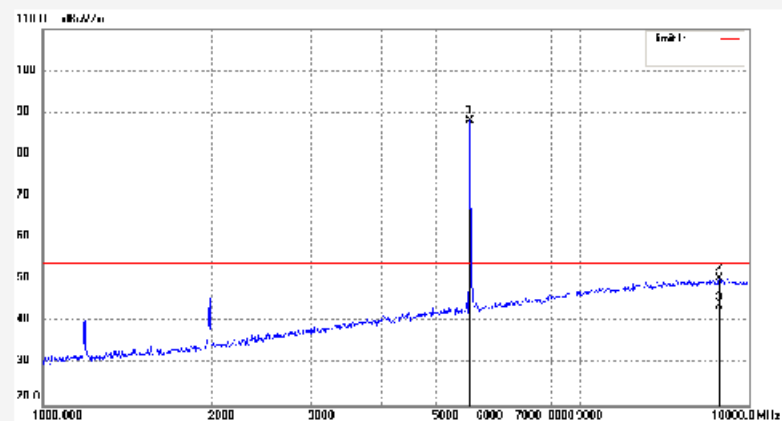

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5745.000	86.50	1.50	88.00	/	/	peak			
2	15942.303	10.39	40.01	50.40	74.00	-23.60	peak			
3	15942.303	2.56	40.01	42.57	54.00	-11.43	AVG			

**Wi-Fi 802.11 n(HT40) mode, MCS0 Mbps
30MHz - 1GHz
U-NII-3**



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: PHY #2809	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5795MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT40

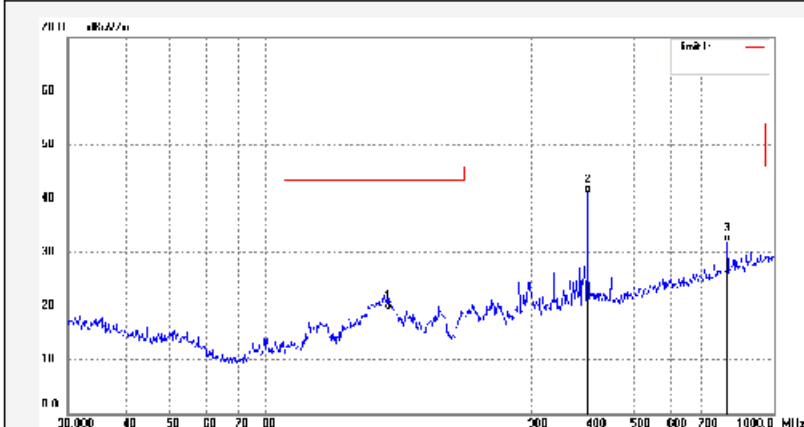

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	147.4036	35.46	-16.20	19.26	43.50	-24.24	QP			
2	396.2414	48.98	-7.97	41.01	46.00	-4.99	QP			
3	793.3958	33.06	-1.12	31.94	46.00	-14.06	QP			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2870
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5795MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11n HT40

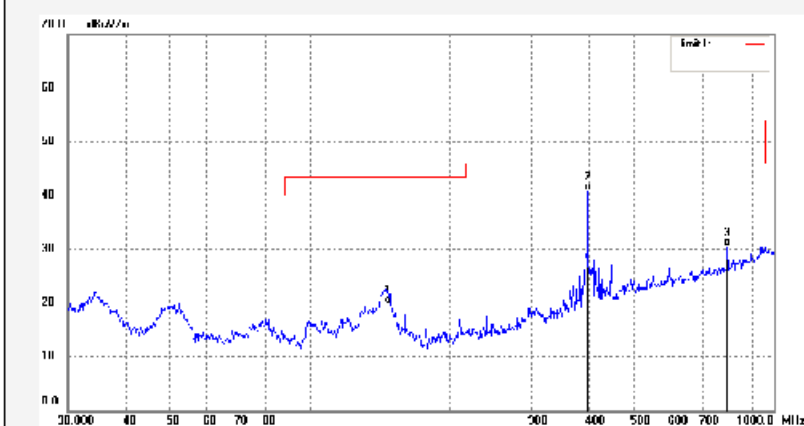

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	147.4036	36.04	-16.20	19.84	43.50	-23.66	QP			
2	396.2414	48.89	-7.97	40.92	46.00	-5.08	QP			
3	793.3958	31.67	-1.12	30.55	46.00	-15.45	QP			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2867
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5755MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11n HT40

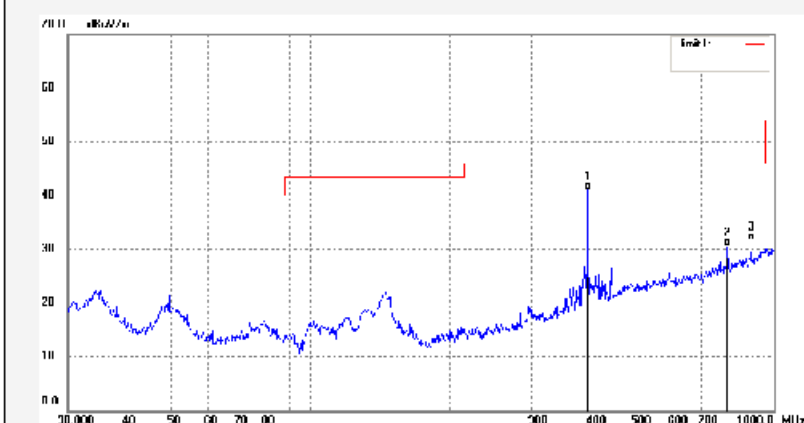

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	48.98	-7.97	41.01	46.00	-4.99	QP			
2	793.3958	31.65	-1.12	30.53	46.00	-15.47	QP			
3	893.8567	31.34	0.26	31.60	46.00	-14.40	QP			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2868
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5755MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11n HT40

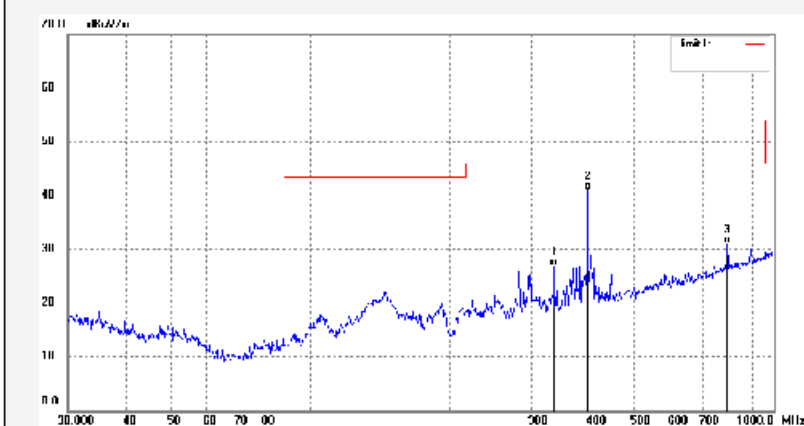

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	336.0351	36.12	-9.23	26.89	46.00	-19.11	QP			
2	398.2414	49.07	-7.97	41.10	46.00	-4.90	QP			
3	793.3958	32.22	-1.12	31.10	46.00	-14.90	QP			

U-NII-1




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2865	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5230MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11n HT40	

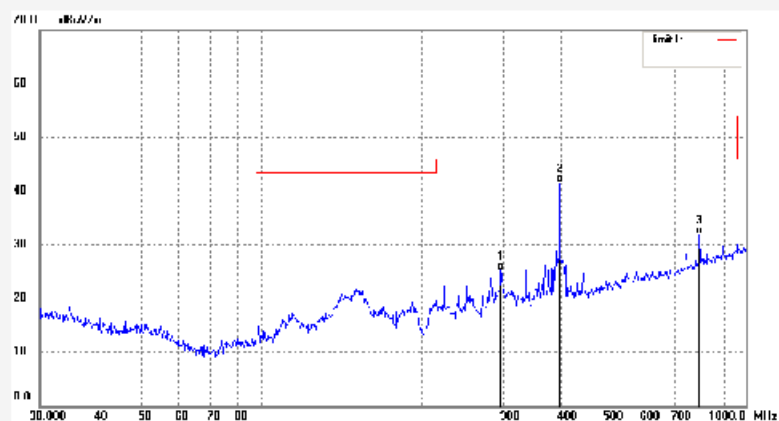

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	296.1836	35.62	-10.36	25.26	46.00	-20.74	QP			
2	396.2414	49.59	-7.97	41.62	46.00	-4.38	QP			
3	793.3958	33.14	-1.12	32.02	46.00	-13.98	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2866	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5230MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11n HT40	

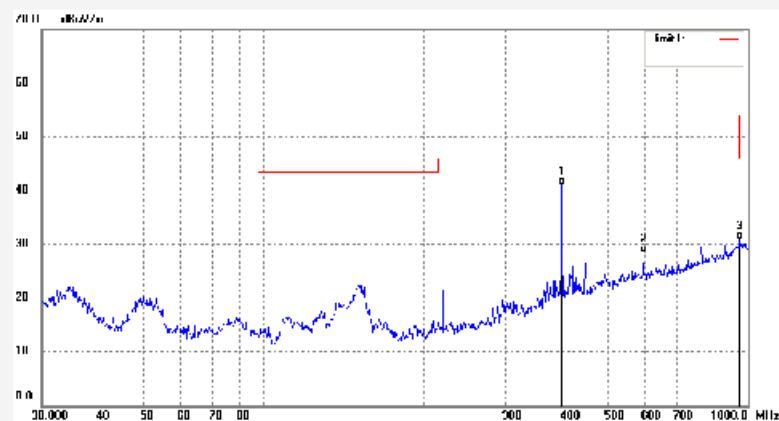

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	49.00	-7.97	41.03	46.00	-4.97	QP			
2	595.1327	32.45	-4.02	28.43	46.00	-17.57	QP			
3	962.1622	29.55	1.37	30.92	54.00	-23.08	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2863	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5190MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11n HT40	

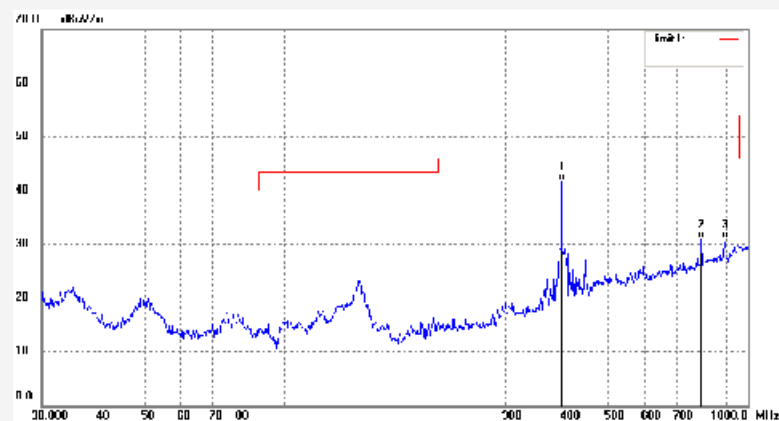


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	49.67	-7.97	41.70	46.00	-4.30	QP			
2	793.3958	32.24	-1.12	31.12	46.00	-14.88	QP			
3	893.8587	30.75	0.26	31.01	46.00	-14.99	QP			



ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2864	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5190MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11n HT40	

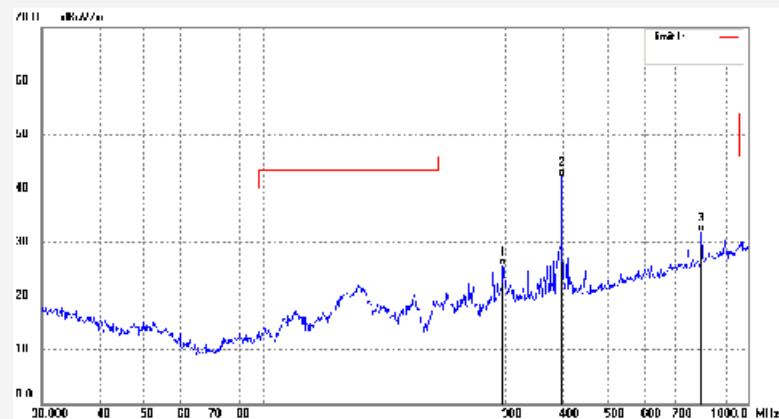

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	296.1836	35.99	-10.36	25.63	46.00	-20.37	QP			
2	396.2414	50.17	-7.97	42.20	46.00	-3.80	QP			
3	793.3958	33.12	-1.12	32.00	46.00	-14.00	QP			

1GHz - 18GHz
U-NII-1



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: PHY #2718
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5190MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 18/08/27/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11n HT40

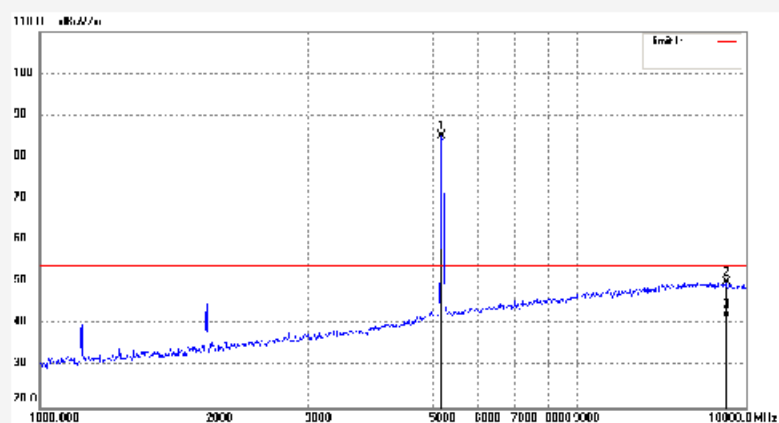

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5190.000	84.46	0.65	85.11	/	/	peak			
2	16800.642	9.38	40.58	49.96	74.00	-24.04	peak			
3	16800.642	0.87	40.58	41.45	54.00	-12.55	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2721	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5230MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT40

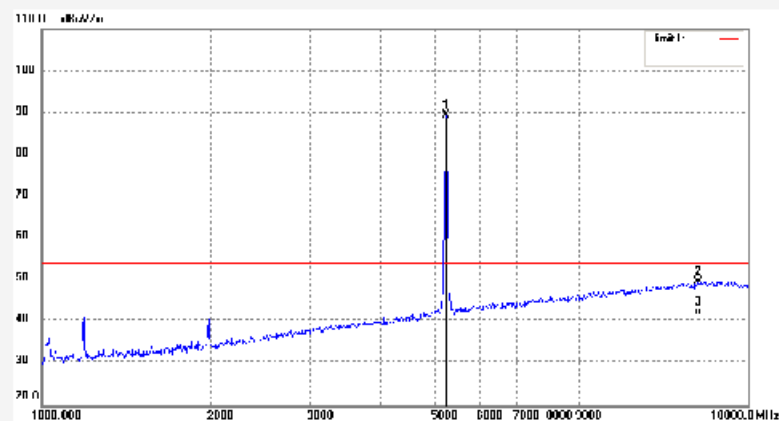

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5230.000	88.59	0.78	89.37	74.00	-24.31	peak			
2	14702.914	7.70	41.99	49.69	54.00	-12.54	peak			
3	14702.914	-0.53	41.99	41.46	54.00	-12.54	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2722	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5230MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT40

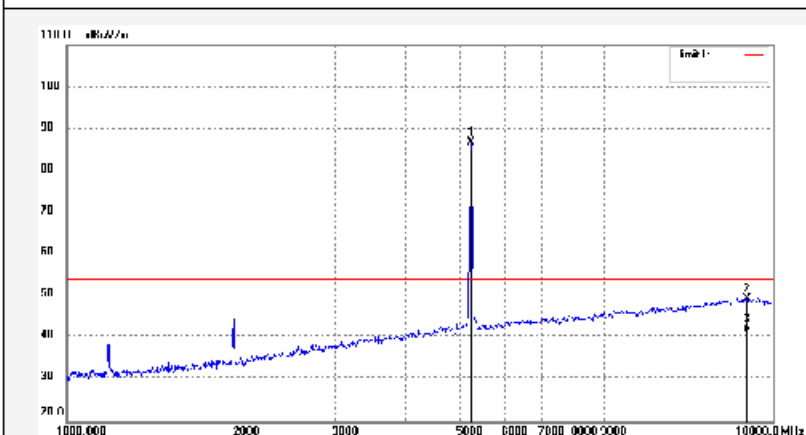

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5230.000	86.03	0.78	86.81	/	/	peak			
2	16174.372	9.33	40.10	49.43	74.00	-24.57	peak			
3	16174.372	1.10	40.10	41.20	54.00	-12.80	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2717	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5190MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT40

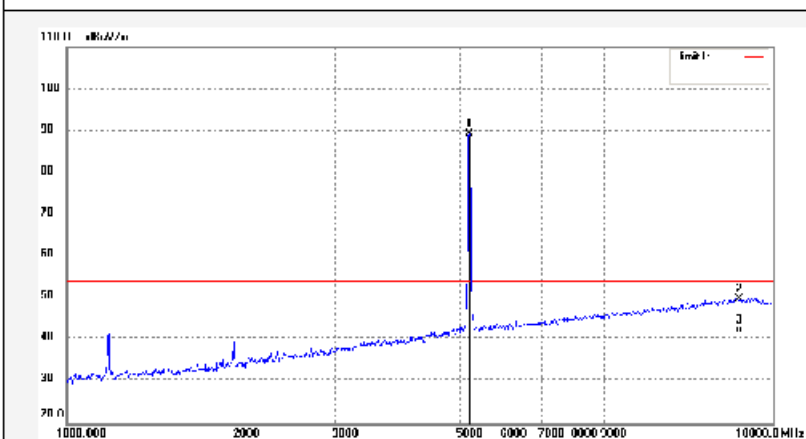

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5190.000	88.59	0.65	89.24	/	/	peak			
2	15713.564	9.74	40.06	49.80	74.00	-24.20	peak			
3	15713.564	1.37	40.06	41.43	54.00	-12.57	AVG			

U-NII-3




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: PHY #2730	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 18/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5755MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11n HT40	

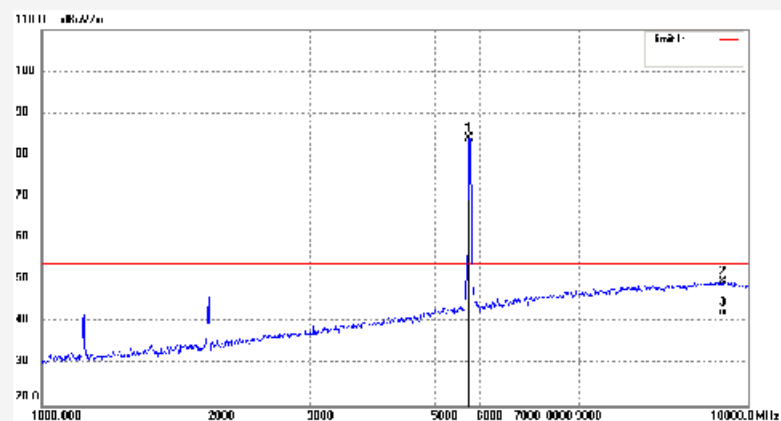

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5755.000	82.49	1.60	84.09	/	/	peak			
2	16221.189	9.58	40.13	49.71	74.00	-24.29	peak			
3	16221.189	1.37	40.13	41.50	54.00	-12.50	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2733	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5795MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT40

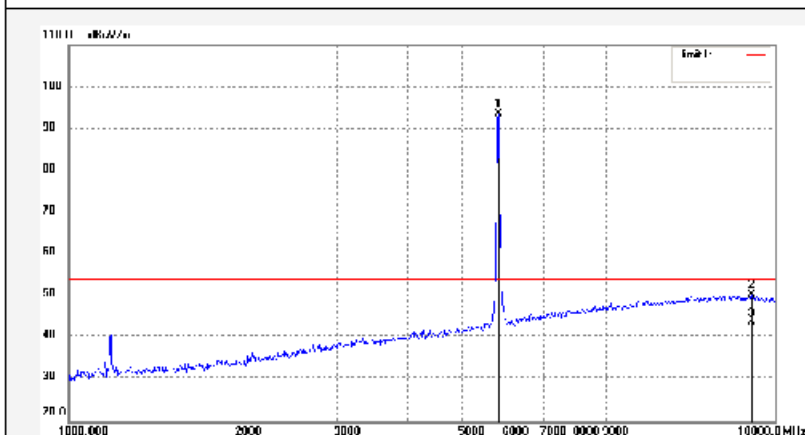

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5795.000	91.53	1.93	93.46	/	/	peak			
2	16362.457	10.01	40.22	50.23	74.00	-23.77	peak			
3	16362.457	2.36	40.22	42.58	54.00	-11.42	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2734	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5795MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT40

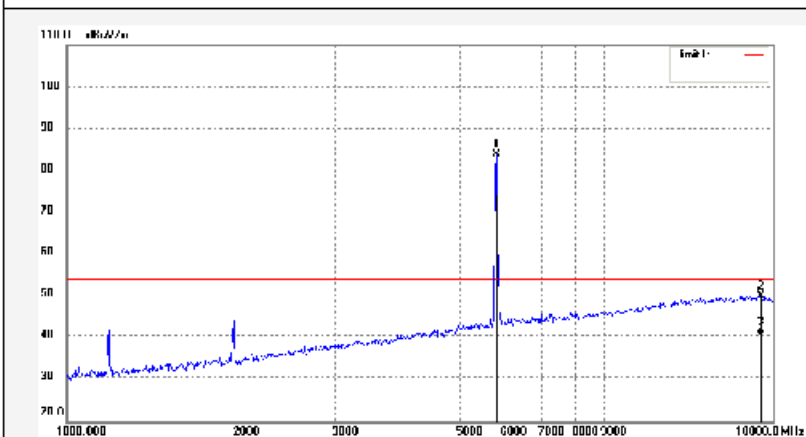

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5795.000	81.92	1.93	83.85	/	/	peak			
2	17136.924	7.86	42.25	50.11	74.00	-23.89	peak			
3	17136.924	-1.69	42.25	40.56	54.00	-13.44	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2729	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5755MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11n HT40

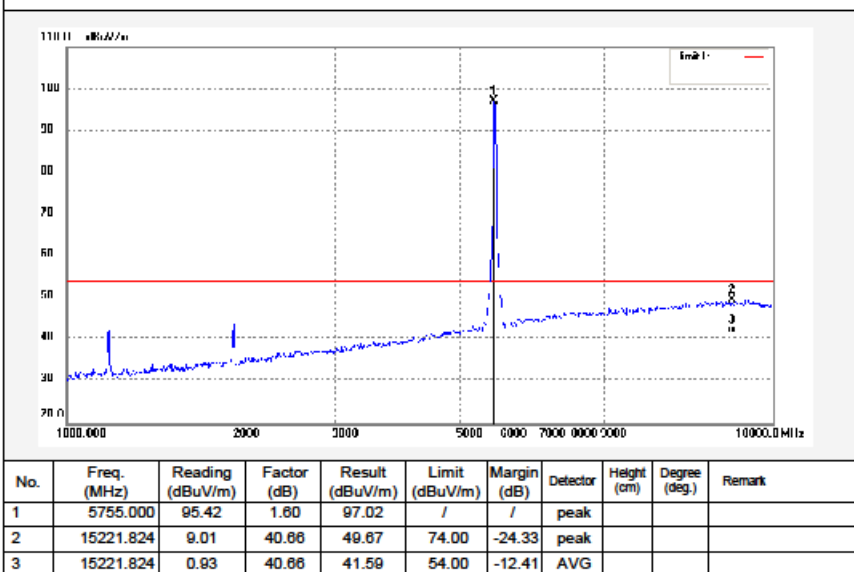

**Wi-Fi 802.11 ac(HT20) mode, MCS0 Mbps
30MHz - 1GHz
U-NII-1**




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2876	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5240MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11ac VHT20	

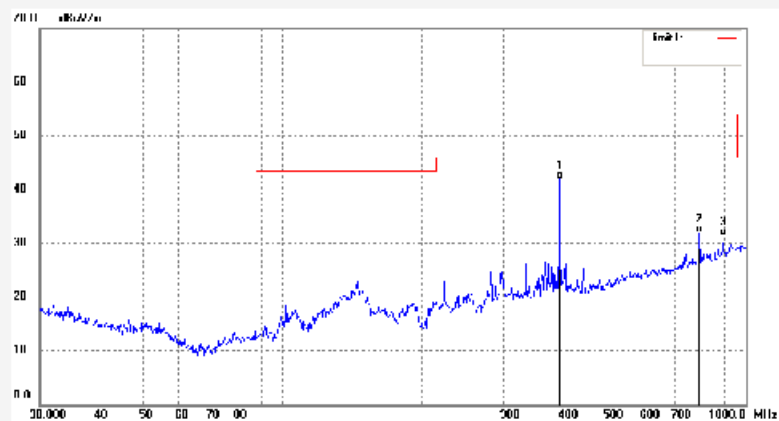

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	49.88	-7.97	41.91	46.00	-4.09	QP			
2	793.3958	33.00	-1.12	31.88	46.00	-14.12	QP			
3	893.8567	31.13	0.26	31.39	46.00	-14.61	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2871
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5180MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11ac VHT20

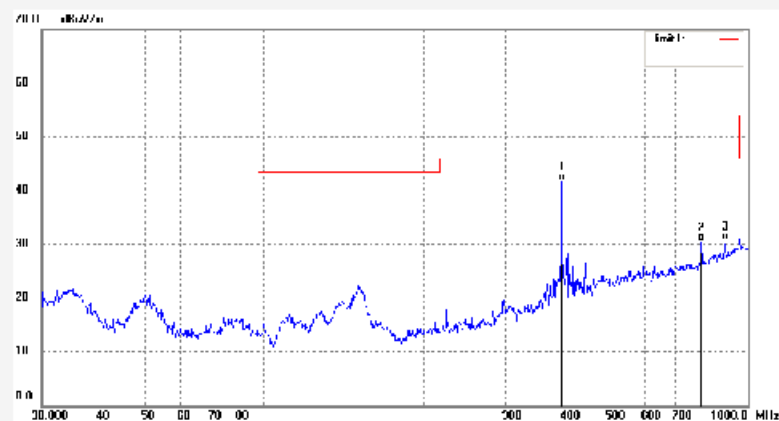

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	49.76	-7.97	41.79	46.00	-4.21	QP			
2	793.3958	31.68	-1.12	30.56	46.00	-15.44	QP			
3	893.8567	30.45	0.26	30.71	46.00	-15.29	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2872	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5180MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11ac VHT20	

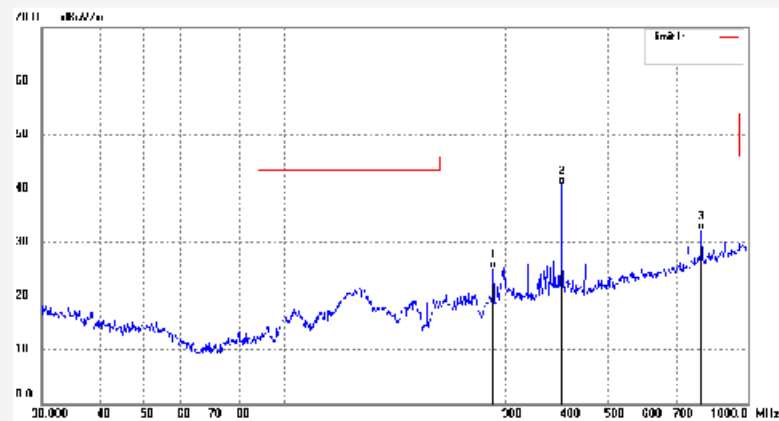

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	281.9945	35.87	-10.79	25.08	46.00	-20.92	QP			
2	396.2414	48.58	-7.97	40.61	46.00	-5.39	QP			
3	793.3958	33.48	-1.12	32.36	46.00	-13.64	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2873
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5220MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11ac VHT20

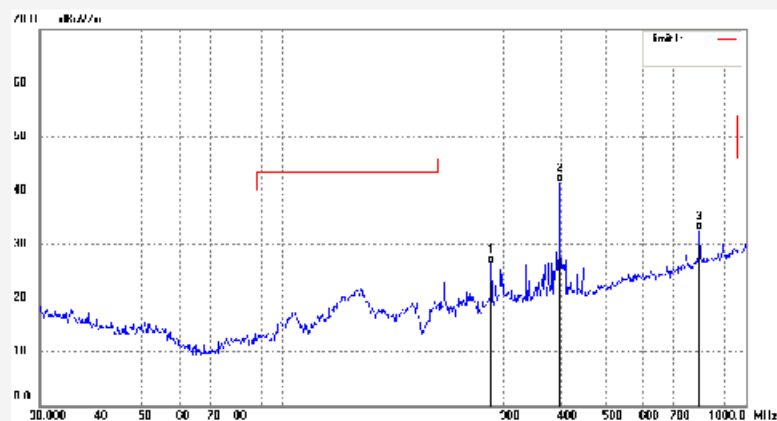

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	281.9945	37.24	-10.79	26.45	46.00	-19.55	QP			
2	396.2414	49.47	-7.97	41.50	46.00	-4.50	QP			
3	793.3958	33.81	-1.12	32.69	46.00	-13.31	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2874
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5220MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11ac VHT20

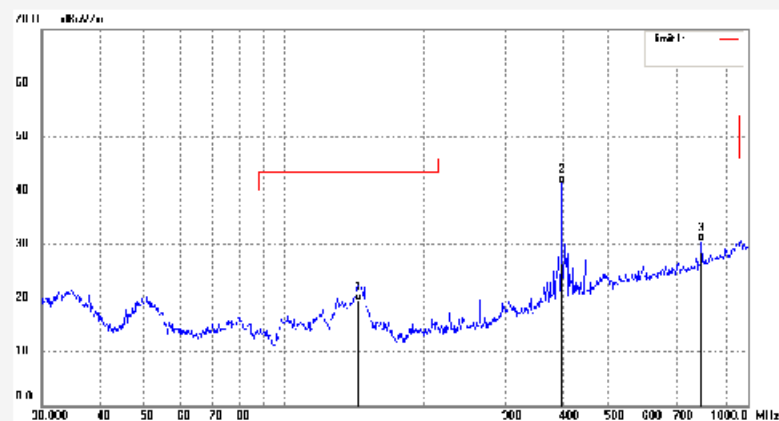

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	144.8418	35.77	-16.23	19.54	43.50	-23.96	QP			
2	396.2414	49.39	-7.97	41.42	46.00	-4.58	QP			
3	793.3958	31.69	-1.12	30.57	46.00	-15.43	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2875
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5240MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11ac VHT20

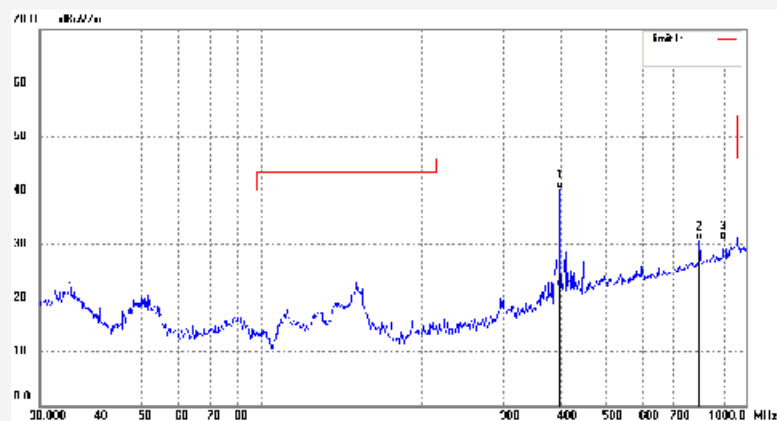

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	48.34	-7.97	40.37	46.00	-5.63	QP			
2	793.3958	31.79	-1.12	30.67	46.00	-15.33	QP			
3	893.8587	30.71	0.26	30.97	46.00	-15.03	QP			

U-NII-3



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2879
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5785MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11ac VHT20

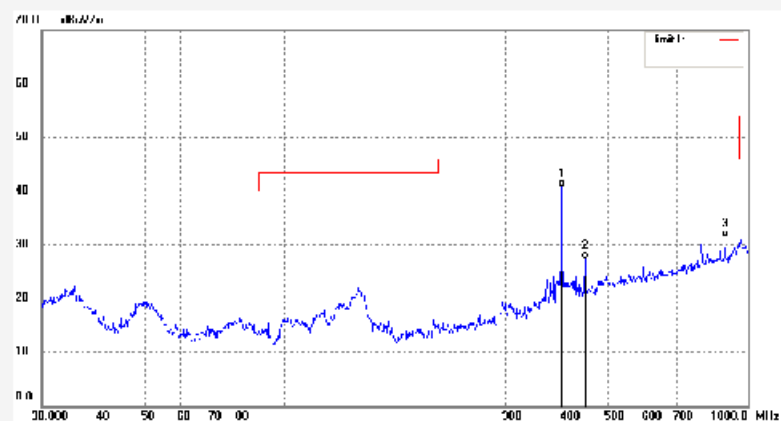

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	48.70	-7.97	40.73	46.00	-5.27	QP			
2	446.4141	34.31	-6.84	27.47	46.00	-18.53	QP			
3	893.8567	31.14	0.26	31.40	46.00	-14.60	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2880	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5785MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11ac VHT20	

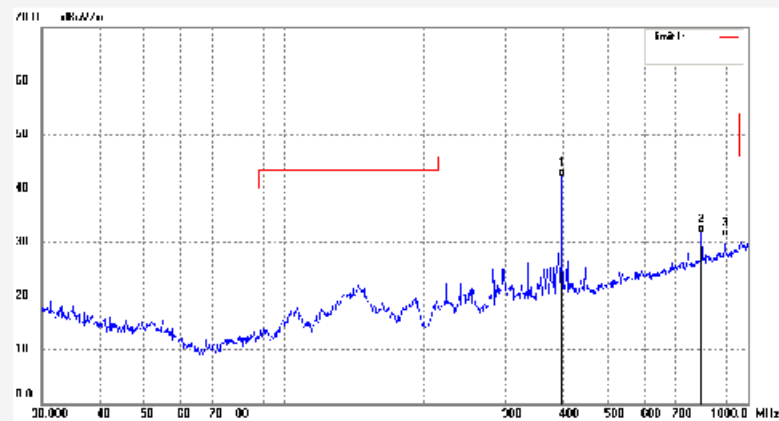

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	50.29	-7.97	42.32	46.00	-3.68	QP			
2	793.3958	32.94	-1.12	31.82	46.00	-14.18	QP			
3	893.8587	30.79	0.26	31.05	46.00	-14.95	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2881
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5825MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11ac VHT20

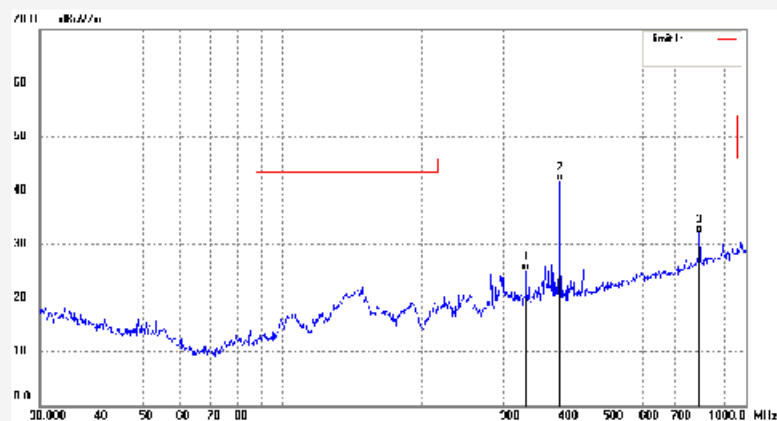

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	336.0351	34.41	-9.23	25.18	46.00	-20.82	QP			
2	396.2414	49.65	-7.97	41.68	46.00	-4.32	QP			
3	793.3958	33.21	-1.12	32.09	46.00	-13.91	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2882	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5825MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11ac VHT20

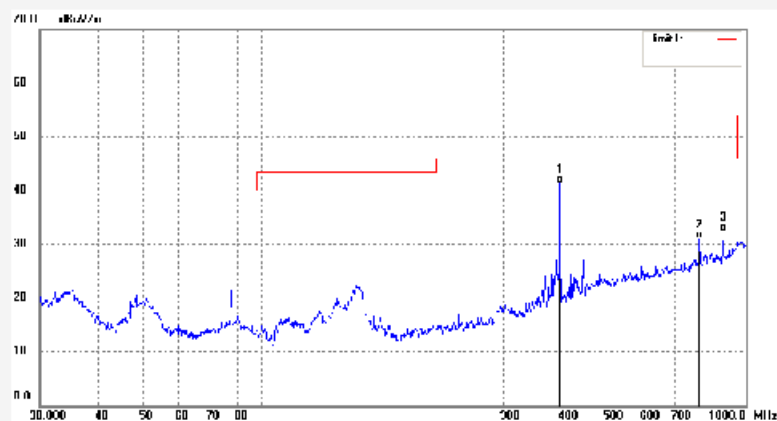

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	49.33	-7.97	41.36	46.00	-4.64	QP			
2	793.3958	32.14	-1.12	31.02	46.00	-14.98	QP			
3	893.8587	32.19	0.26	32.45	46.00	-13.55	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2877	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5745MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11ac VHT20

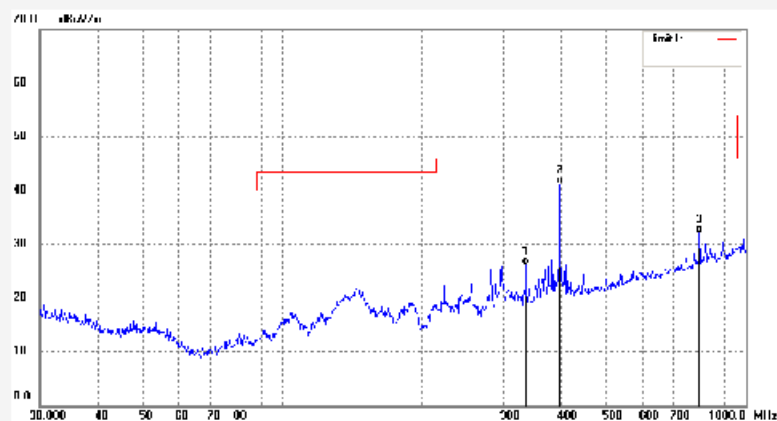

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	336.0351	35.39	-9.23	26.16	46.00	-19.84	QP			
2	396.2414	49.21	-7.97	41.24	46.00	-4.76	QP			
3	793.3958	33.24	-1.12	32.12	46.00	-13.88	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2878
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5745MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/28/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11ac VHT20

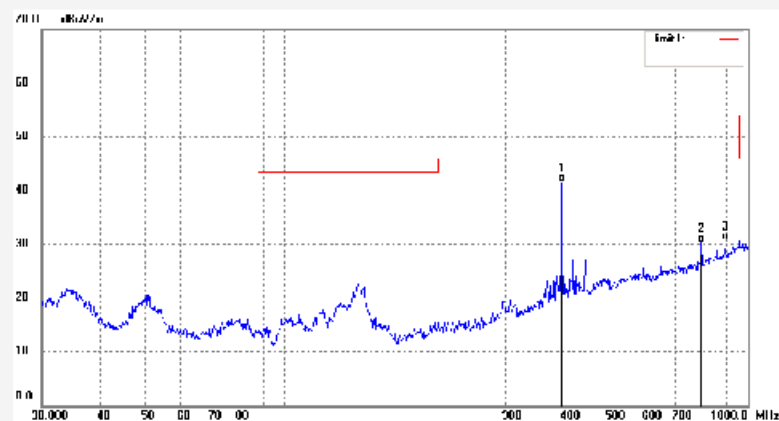

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	396.2414	49.47	-7.97	41.50	46.00	-4.50	QP			
2	793.3958	31.40	-1.12	30.28	46.00	-15.72	QP			
3	893.8587	30.43	0.26	30.69	46.00	-15.31	QP			

1GHz - 18GHz
U-NII-1



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: PHY #2742
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: TX 5180MHz
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 16/08/27/
Time:
Engineer Signature: PEI
Distance: 3m

Note: 802.11ac VHT20

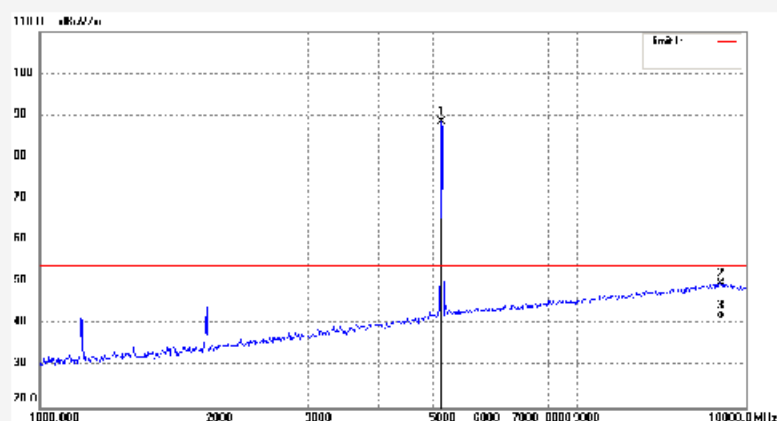

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5180.000	87.92	0.61	88.53	/	/	peak			
2	16221.189	9.70	40.13	49.83	74.00	-24.17	peak			
3	16221.189	1.19	40.13	41.32	54.00	-12.68	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2745	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5220MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11ac VHT20	

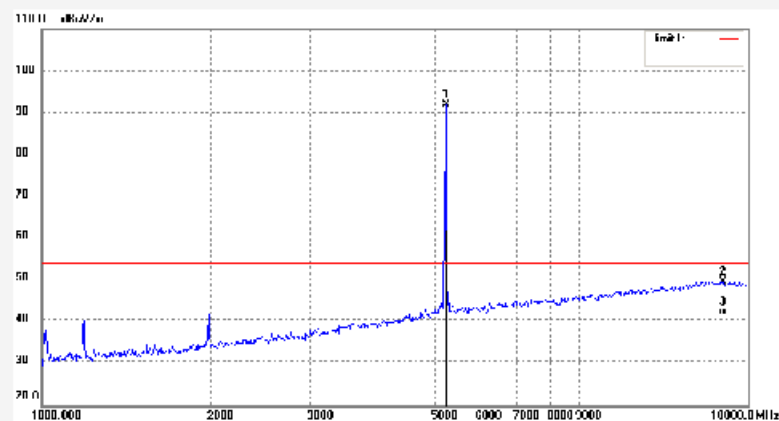


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5220.000	91.24	0.75	91.99	/	/	peak			
2	16268.142	9.47	40.16	49.63	74.00	-24.37	peak			
3	16268.142	1.42	40.16	41.58	54.00	-12.42	AVG			



ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2746	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5220MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	
Note: 802.11ac VHT20	

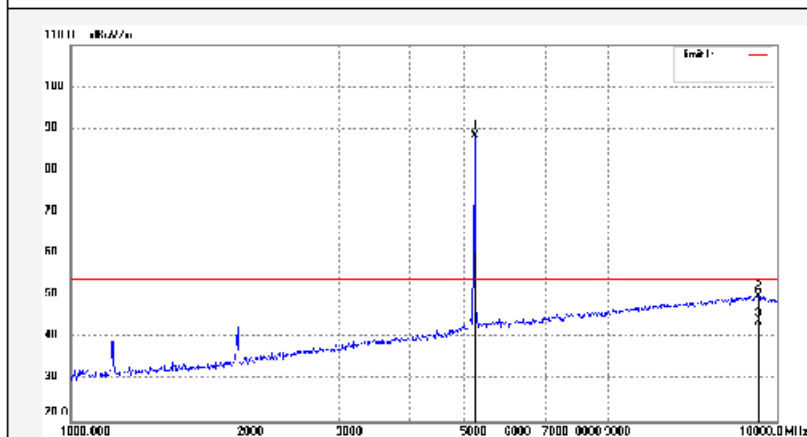

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5220.000	87.64	0.75	88.39	/	/	peak			
2	16896.884	9.16	40.85	50.01	74.00	-23.99	peak			
3	16896.884	1.80	40.85	42.65	54.00	-11.35	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: PHY #2747	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 16/08/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: TX 5240MHz	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note: 802.11ac VHT20

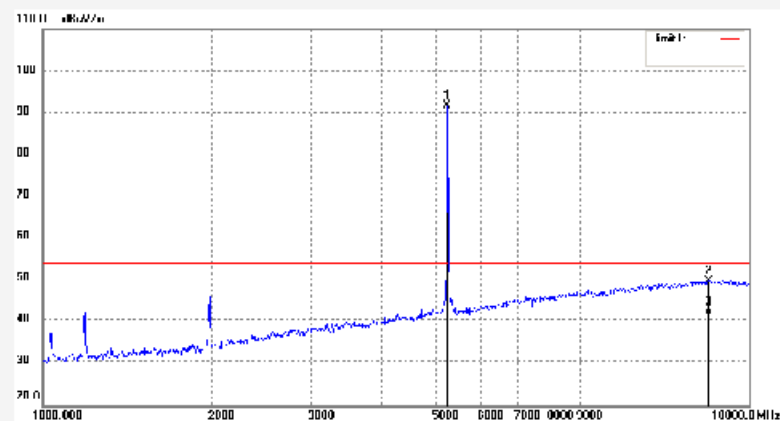

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5240.000	90.76	0.82	91.58	/	/	peak			
2	15285.885	9.34	40.57	49.91	74.00	-24.09	peak			
3	15285.885	1.02	40.57	41.59	54.00	-12.41	AVG			