
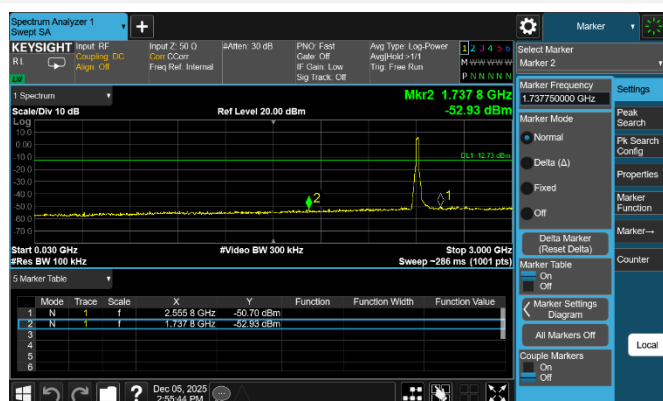



802.11n-20 MHz LOW CHANNEL CARRIER LEVEL

802.11n-20 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11n-20 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz


802.11n-20 MHz MIDDLE CHANNEL CARRIER LEVEL

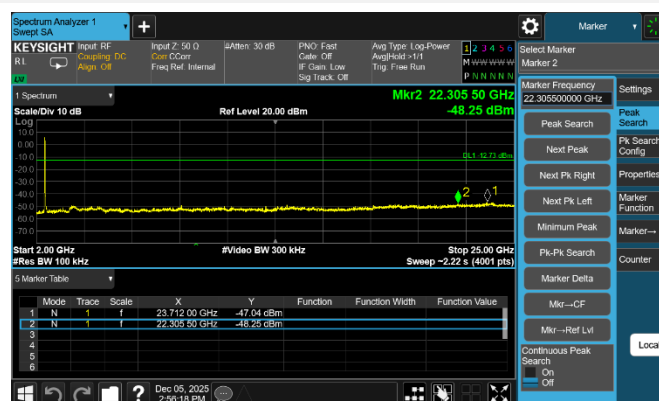

802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

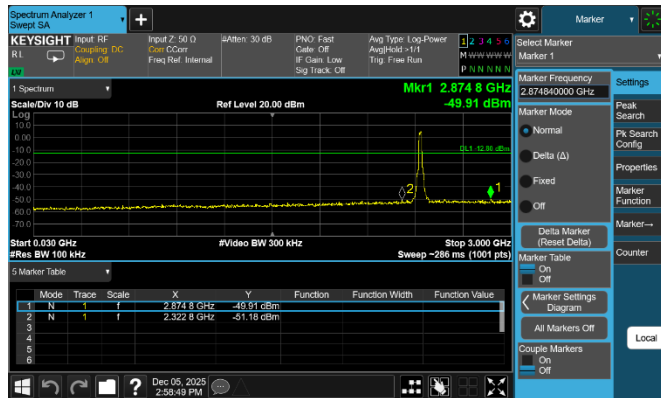


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

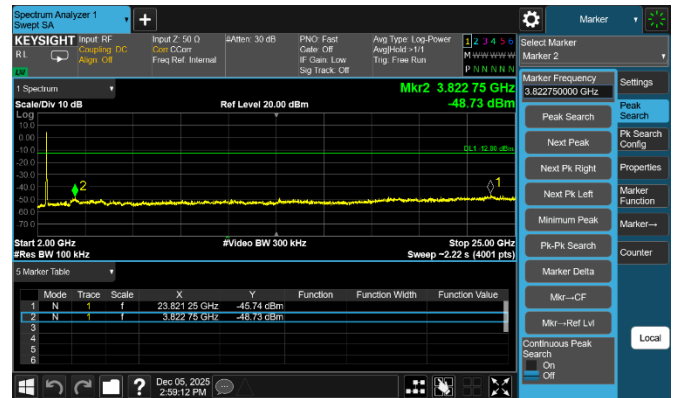

802.11n-20 MHz HIGH CHANNEL CARRIER LEVEL



802.11n-20 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

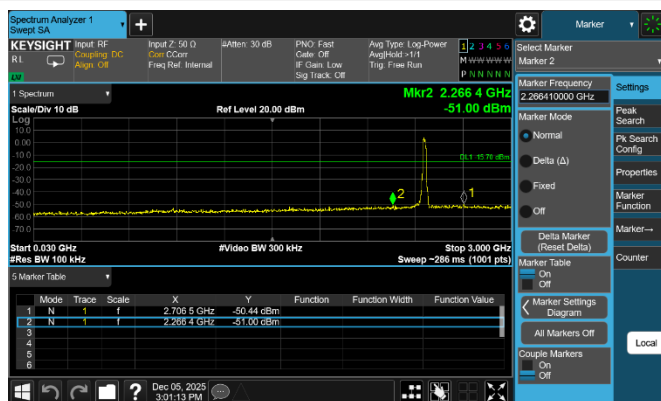

802.11n-20 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz



A.4 Band Edge (Authorized-band band-edge)

Note 1: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

Test Data

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-44.88	8.76	-11.24	Pass
High	-51.29	8.33	-11.67	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-23.97	4.65	-15.35	Pass
High	-44.25	4.66	-15.34	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-18.47	7.27	-12.73	Pass
High	-44.90	4.30	-15.70	Pass

Test Plots

802.11b LOW CHANNEL, CARRIER LEVEL




802.11b LOW CHANNEL, BAND EDGE




802.11b HIGH CHANNEL, CARRIER LEVEL



802.11b HIGH CHANNEL, BAND EDGE

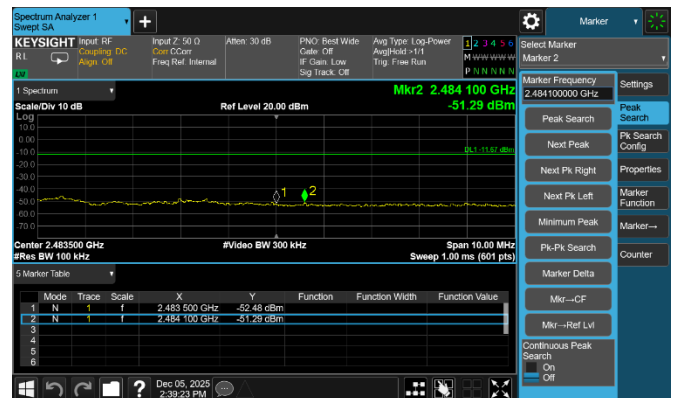

802.11g LOW CHANNEL, CARRIER LEVEL

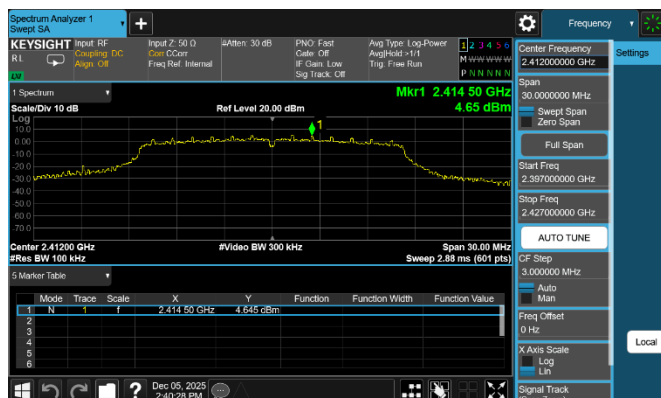


802.11g LOW CHANNEL, BAND EDGE



802.11g HIGH CHANNEL, CARRIER LEVEL



802.11g HIGH CHANNEL, BAND EDGE

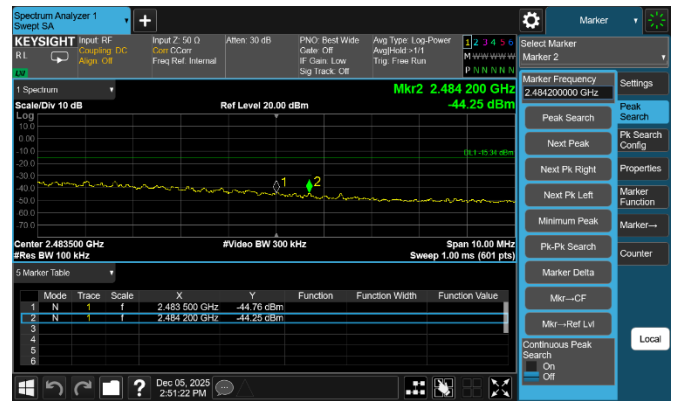

802.11n-20 MHz LOW CHANNEL, CARRIER LEVEL




802.11n-20 MHz LOW CHANNEL, BAND EDGE



802.11n-20 MHz HIGH CHANNEL, CARRIER LEVEL



802.11n-20 MHz HIGH CHANNEL, BAND EDGE

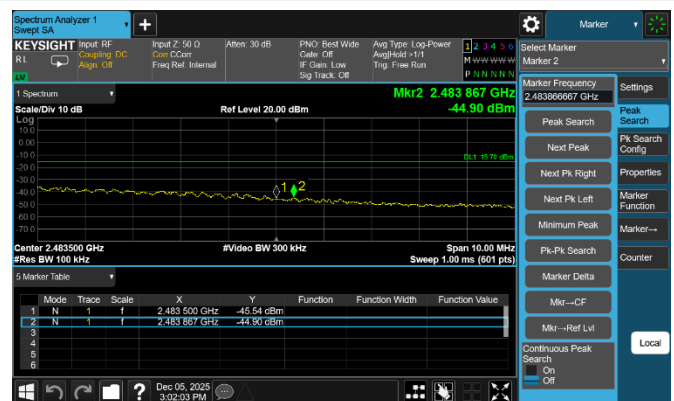

A.5 Conducted Emission


Note 1: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note 2: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note 3: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots


PHASE L

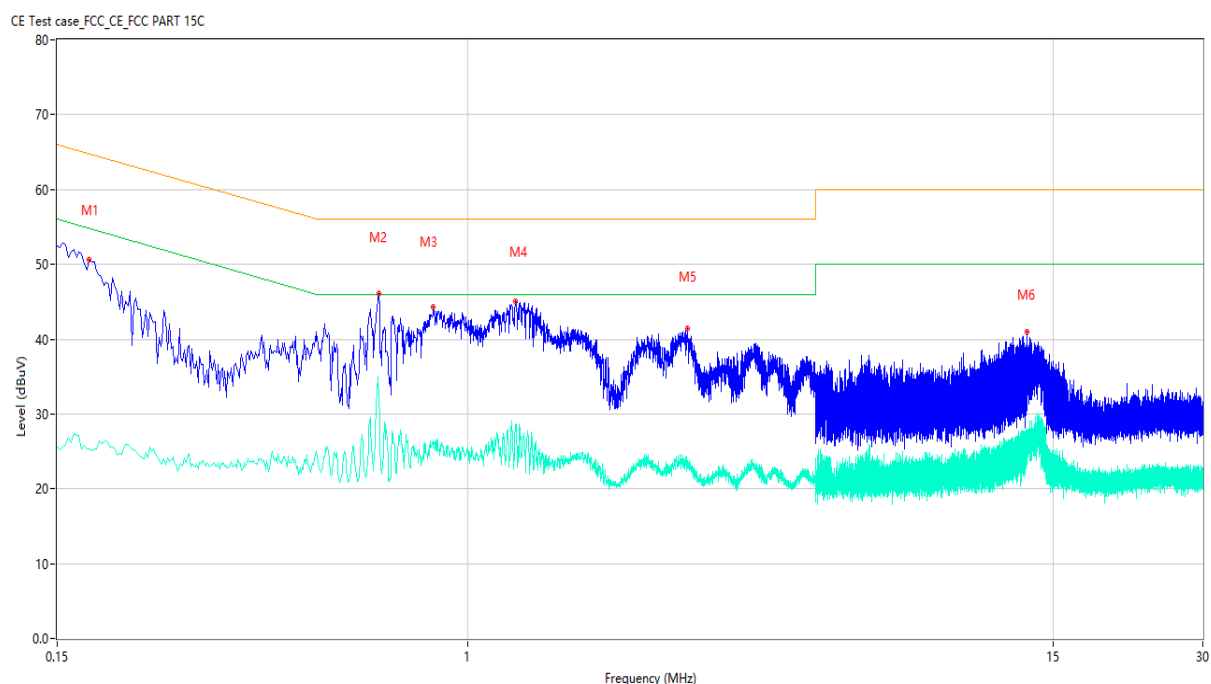

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin(dB)	Detector	Line	Verdict
1	0.174	50.64	10.08	64.77	14.13	Peak	L	Pass
1**	0.174	25.38	10.08	54.77	29.39	AV	L	Pass
2	0.664	46.11	10.22	56.00	9.89	Peak	L	Pass
2**	0.664	32.54	10.22	46.00	13.46	AV	L	Pass
3	0.854	44.28	10.20	56.00	11.72	Peak	L	Pass
3**	0.854	26.40	10.20	46.00	19.60	AV	L	Pass
4	1.250	45.06	10.23	56.00	10.94	Peak	L	Pass
4**	1.250	28.35	10.23	46.00	17.65	AV	L	Pass
5	2.766	41.46	10.38	56.00	14.54	Peak	L	Pass
5**	2.766	23.48	10.38	46.00	22.52	AV	L	Pass
6	13.314	40.99	11.10	60.00	19.01	Peak	L	Pass
6**	13.314	27.63	11.10	50.00	22.37	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

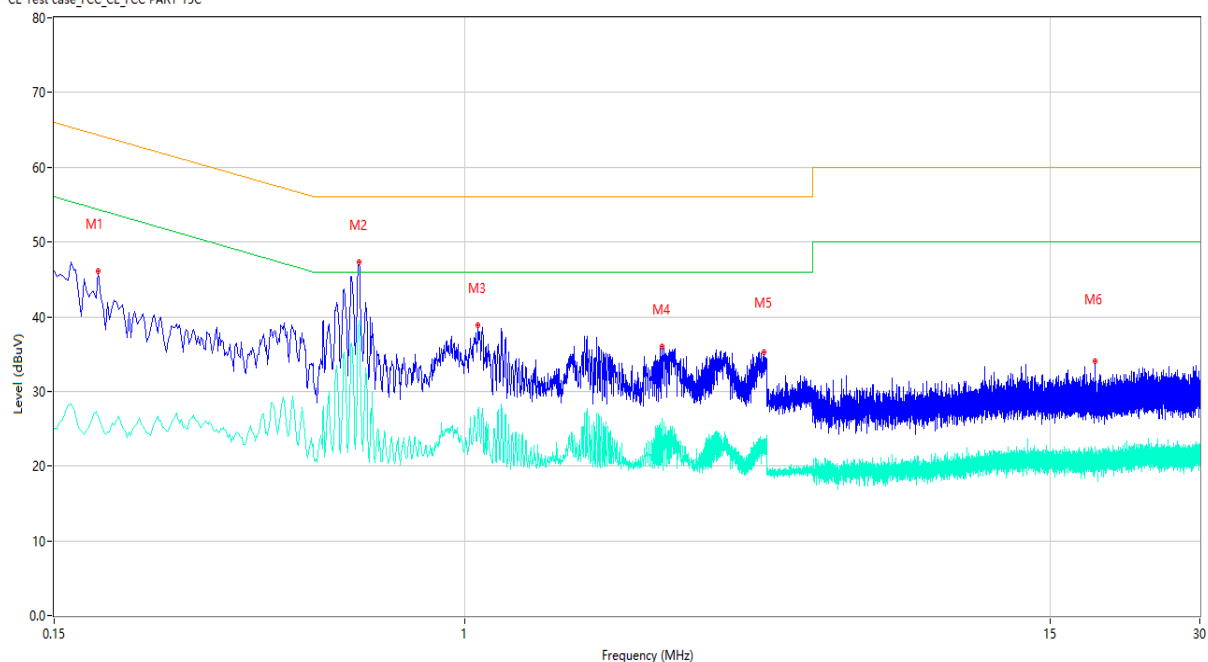

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin(dB)	Detector	Line	Verdict
1	0.184	46.03	10.15	64.30	18.27	Peak	N	Pass
1**	0.184	26.58	10.15	54.30	27.72	AV	N	Pass
2	0.614	47.32	10.20	56.00	8.68	Peak	N	Pass
2**	0.614	39.47	10.20	46.00	6.53	AV	N	Pass
3	1.064	38.80	10.24	56.00	17.20	Peak	N	Pass
3**	1.064	26.57	10.24	46.00	19.43	AV	N	Pass
4	2.498	35.99	10.28	56.00	20.01	Peak	N	Pass
4**	2.498	26.25	10.28	46.00	19.75	AV	N	Pass
5	3.992	35.24	10.38	56.00	20.76	Peak	N	Pass
5**	3.992	22.46	10.38	46.00	23.54	AV	N	Pass
6	18.478	34.02	11.31	60.00	25.98	Peak	N	Pass
6**	18.478	21.13	11.31	50.00	28.87	AV	N	Pass

A.6 Radiated Emission

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Test Data and Plots

30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

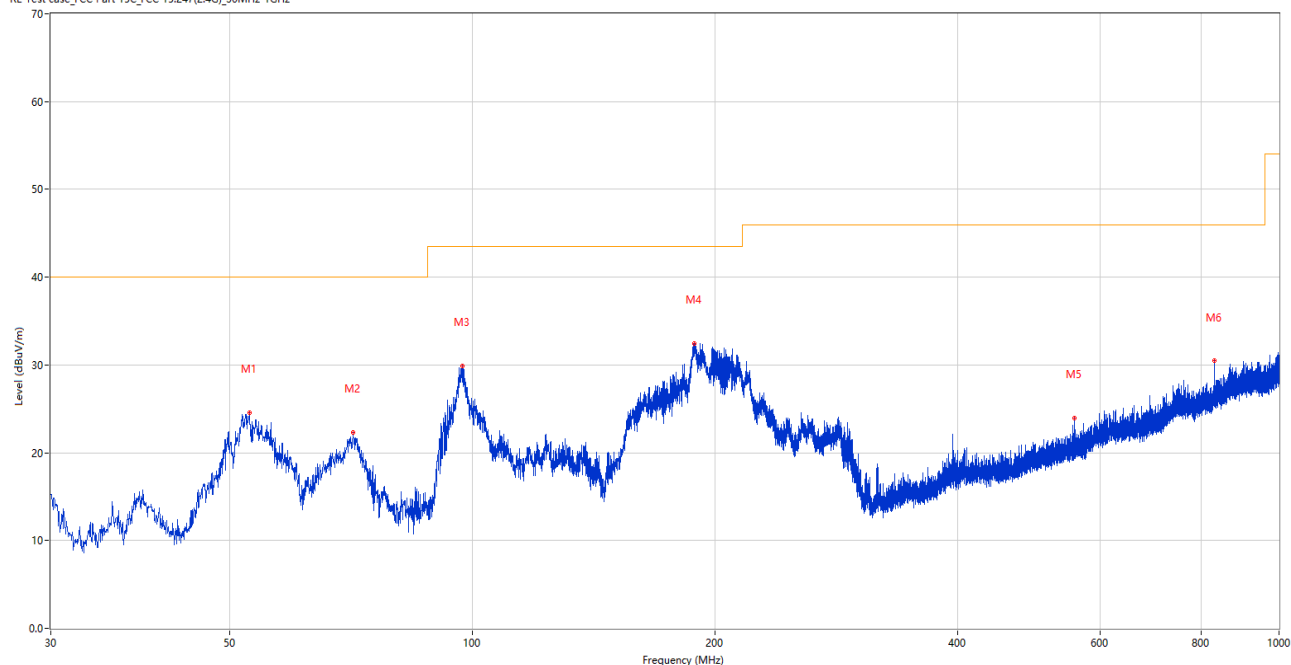

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	52.941	24.53	-24.79	40.0	15.47	Peak	157.00	200	Horizontal	Pass
2	71.031	22.30	-29.32	40.0	17.70	Peak	157.00	200	Horizontal	Pass
3	97.221	29.88	-26.33	43.5	13.62	Peak	169.00	200	Horizontal	Pass
4	188.498	32.49	-26.61	43.5	11.01	Peak	58.00	100	Horizontal	Pass
5	557.244	23.96	-16.82	46.0	22.04	Peak	302.00	100	Horizontal	Pass
6	830.929	30.46	-10.97	46.0	15.54	Peak	235.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

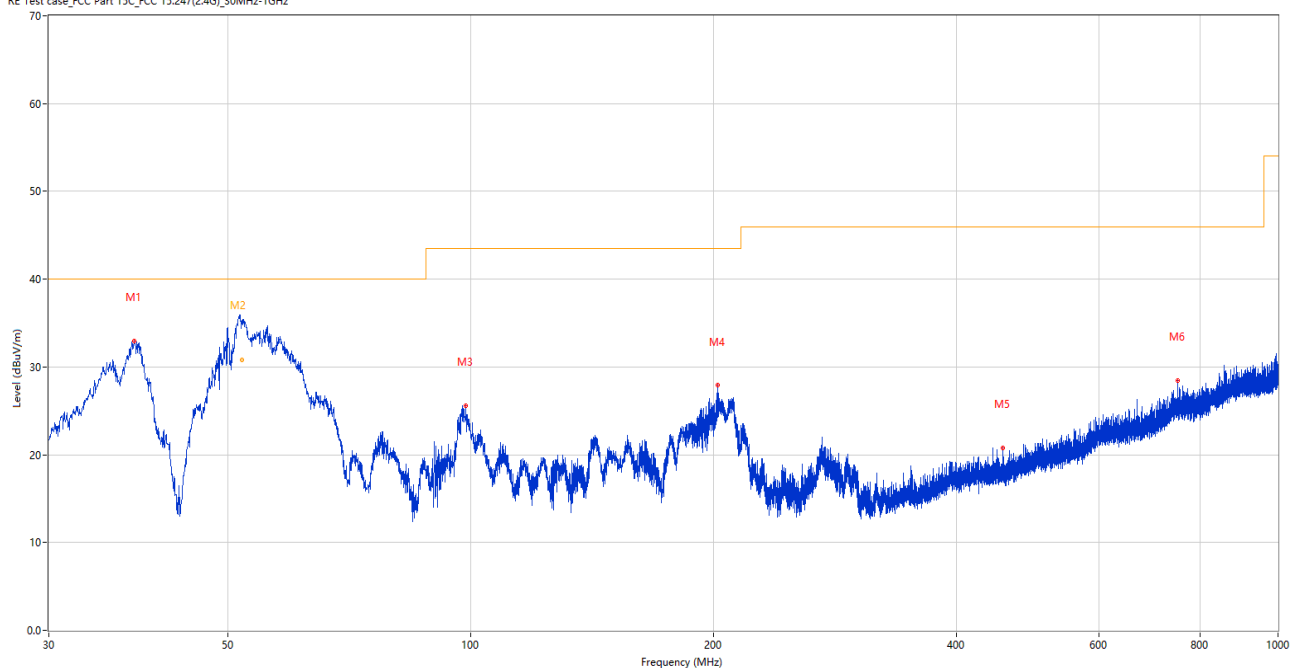


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	38.294	32.96	-26.50	40.0	7.04	Peak	360.00	100	Vertical	Pass
2	51.990	34.75	-24.68	40.0	5.25	Peak	241.00	153	Vertical	N/A
2*	51.990	30.76	-24.68	40.0	9.24	QP	241.00	153	Vertical	Pass
3	98.482	25.55	-26.22	43.5	17.95	Peak	11.00	100	Vertical	Pass
4	202.078	27.90	-26.09	43.5	15.60	Peak	203.00	200	Vertical	Pass
5	455.636	20.78	-19.36	46.0	25.22	Peak	360.00	100	Vertical	Pass
6	751.583	28.44	-12.00	46.0	17.56	Peak	360.00	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

1 GHz to 18 GHz, ANT H 802.11b Middle Channel


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

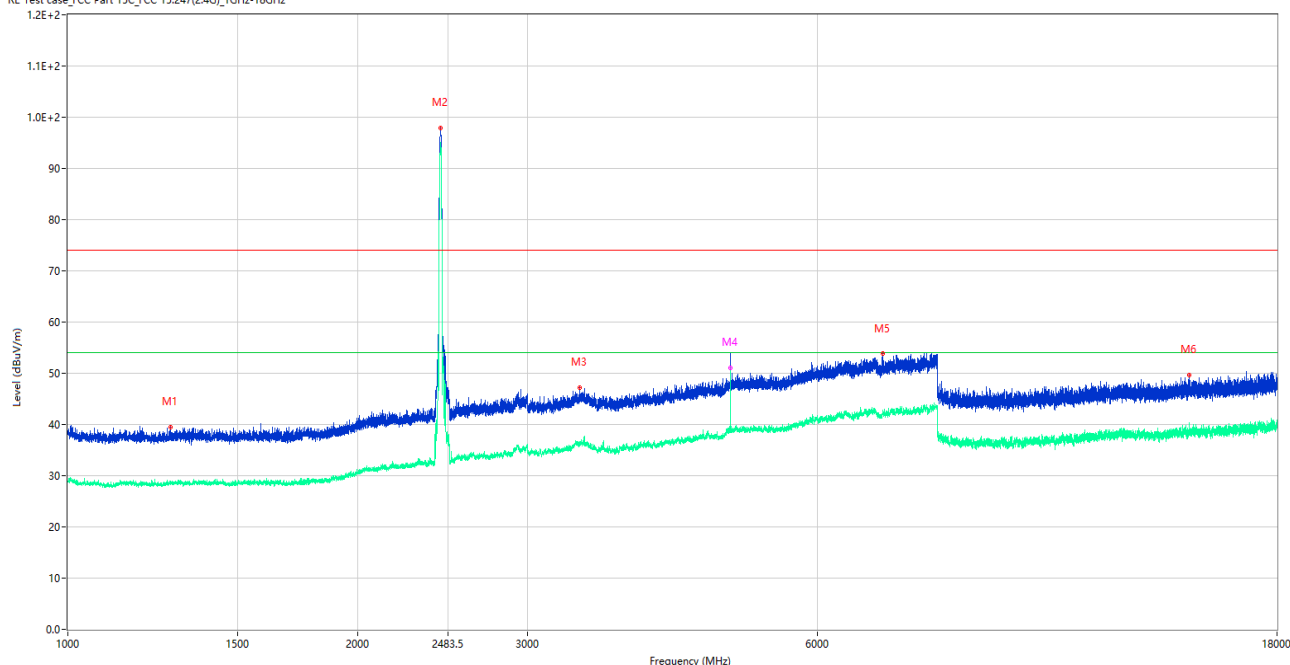

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1278.000	39.48	-15.88	74.0	34.52	Peak	359.00	150	Horizontal	Pass
1**	1278.000	28.56	-15.88	54.0	25.44	AV	359.00	150	Horizontal	Pass
2	2438.250	97.90	-12.38	74.0	-23.90	Peak	152.00	150	Horizontal	N/A
2**	2438.250	95.03	-12.38	54.0	-41.03	AV	152.00	150	Horizontal	N/A
3	3397.000	47.21	-5.81	74.0	26.79	Peak	150.00	150	Horizontal	Pass
3**	3397.000	36.16	-5.81	54.0	17.84	AV	150.00	150	Horizontal	Pass
4	4874.500	52.90	-2.25	74.0	21.10	Peak	23.00	150	Horizontal	Pass
4**	4874.500	50.94	-2.25	54.0	3.06	AV	23.00	150	Horizontal	Pass
5	7015.000	53.84	0.60	74.0	20.16	Peak	261.00	150	Horizontal	Pass
5**	7015.000	41.94	0.60	54.0	12.06	AV	261.00	150	Horizontal	Pass
6	14586.500	49.65	-2.40	74.0	24.35	Peak	181.00	150	Horizontal	Pass
6**	14586.500	39.15	-2.40	54.0	14.85	AV	181.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

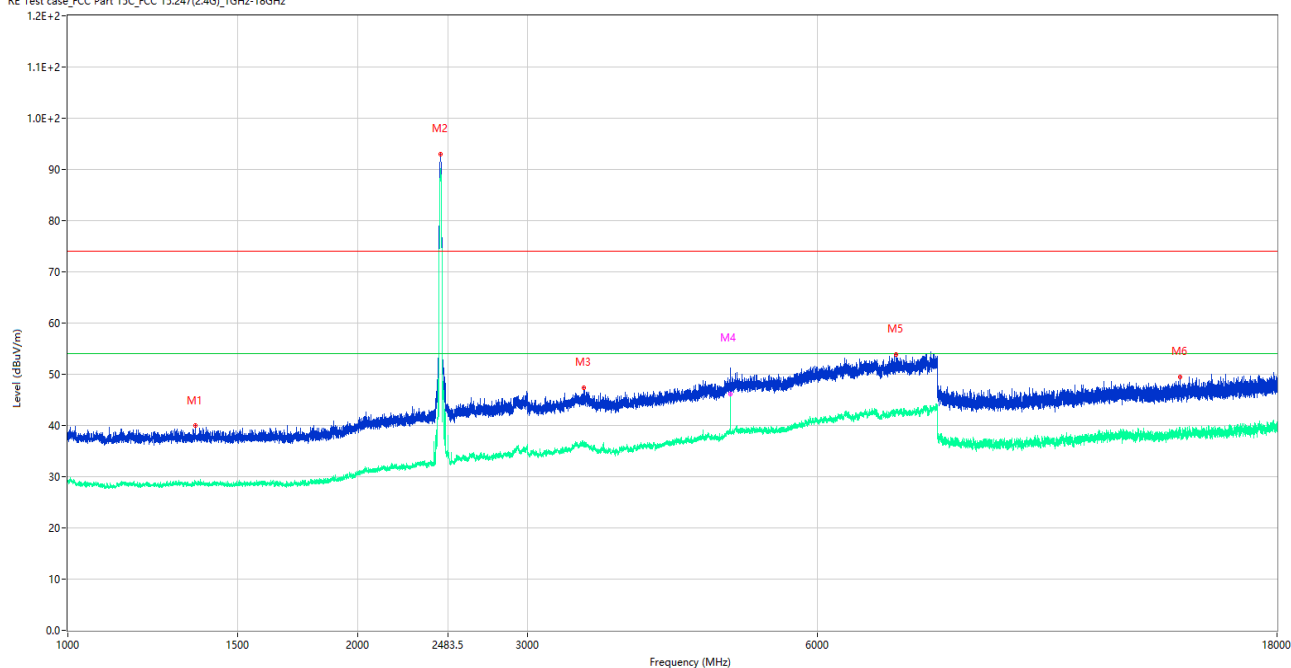

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1357.500	39.98	-15.83	74.0	34.02	Peak	43.00	150	Vertical	Pass
1**	1357.500	28.81	-15.83	54.0	25.19	AV	43.00	150	Vertical	Pass
2	2438.250	92.99	-12.38	74.0	-18.99	Peak	245.00	150	Vertical	N/A
2**	2438.250	90.13	-12.38	54.0	-36.13	AV	245.00	150	Vertical	N/A
3	3434.000	47.42	-5.17	74.0	26.58	Peak	277.00	150	Vertical	Pass
3**	3434.000	36.05	-5.17	54.0	17.95	AV	277.00	150	Vertical	Pass
4	4874.500	49.81	-2.25	74.0	24.19	Peak	158.00	150	Vertical	Pass
4**	4874.500	46.06	-2.25	54.0	7.94	AV	158.00	150	Vertical	Pass
5	7246.500	53.89	0.90	74.0	20.11	Peak	337.00	150	Vertical	Pass
5**	7246.500	42.70	0.90	54.0	11.30	AV	337.00	150	Vertical	Pass
6	14278.500	49.48	-2.47	74.0	24.52	Peak	178.00	150	Vertical	Pass
6**	14278.500	38.85	-2.47	54.0	15.15	AV	178.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

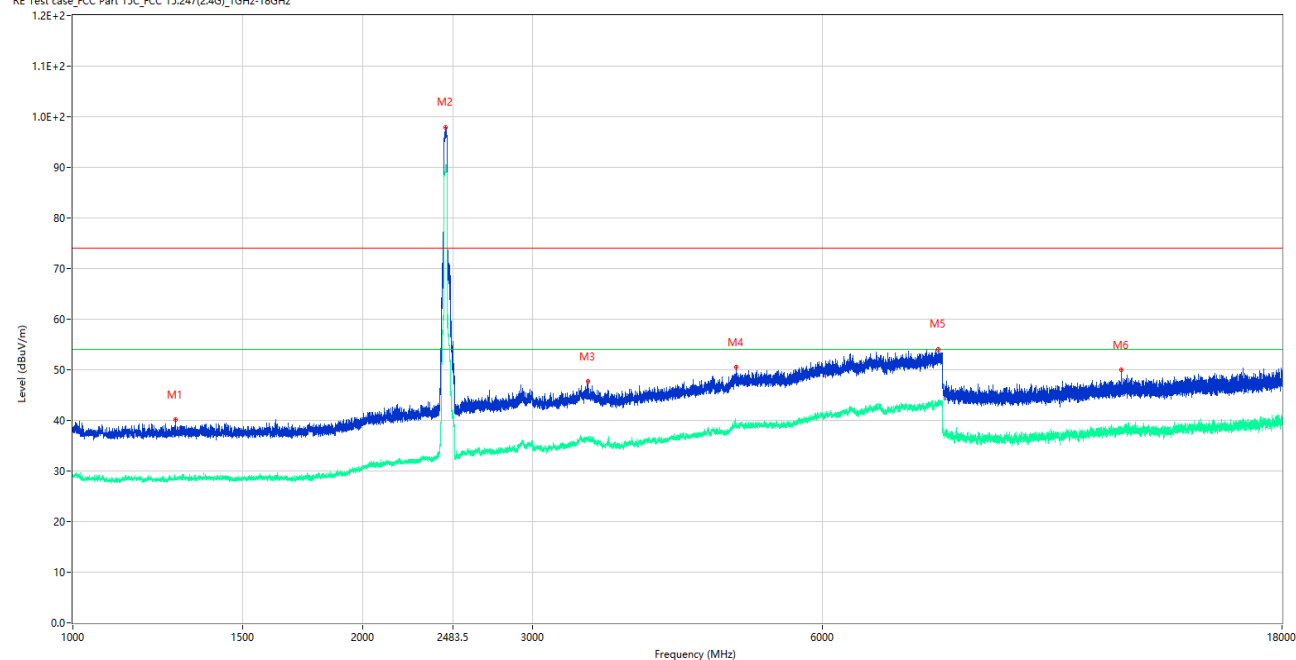

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1279.000	40.14	-15.88	74.0	33.86	Peak	69.00	150	Horizontal	Pass
1**	1279.000	28.46	-15.88	54.0	25.54	AV	69.00	150	Horizontal	Pass
2	2439.250	97.93	-12.37	74.0	-23.93	Peak	154.00	150	Horizontal	N/A
2**	2439.250	90.57	-12.37	54.0	-36.57	AV	154.00	150	Horizontal	N/A
3	3427.500	47.68	-4.93	74.0	26.32	Peak	210.00	150	Horizontal	Pass
3**	3427.500	36.66	-4.93	54.0	17.34	AV	210.00	150	Horizontal	Pass
4	4884.500	50.45	-2.30	74.0	23.55	Peak	50.00	150	Horizontal	Pass
4**	4884.500	38.60	-2.30	54.0	15.40	AV	50.00	150	Horizontal	Pass
5	7914.000	54.09	1.79	74.0	19.91	Peak	0.00	150	Horizontal	Pass
5**	7914.000	43.23	1.79	54.0	10.77	AV	0.00	150	Horizontal	Pass
6	12259.500	49.94	-2.66	74.0	24.06	Peak	178.00	150	Horizontal	Pass
6**	12259.500	38.28	-2.66	54.0	15.72	AV	178.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

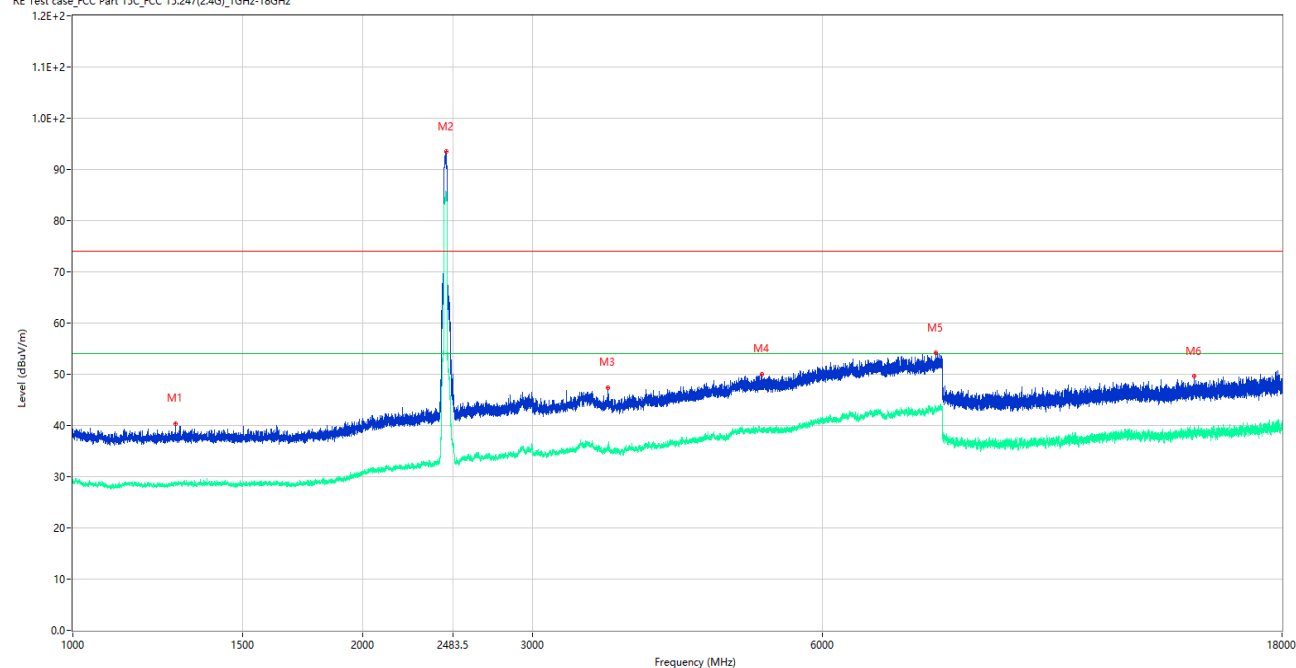

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1278.750	40.39	-15.88	74.0	33.61	Peak	33.00	150	Vertical	Pass
1**	1278.750	29.03	-15.88	54.0	24.97	AV	33.00	150	Vertical	Pass
2	2440.000	93.45	-12.37	74.0	-19.45	Peak	87.00	150	Vertical	N/A
2**	2440.000	85.04	-12.37	54.0	-31.04	AV	87.00	150	Vertical	N/A
3	3596.000	47.40	-5.13	74.0	26.60	Peak	360.00	150	Vertical	Pass
3**	3596.000	36.36	-5.13	54.0	17.64	AV	360.00	150	Vertical	Pass
4	5192.000	50.01	-2.30	74.0	23.99	Peak	34.00	150	Vertical	Pass
4**	5192.000	39.12	-2.30	54.0	14.88	AV	34.00	150	Vertical	Pass
5	7868.500	54.23	1.79	74.0	19.77	Peak	132.00	150	Vertical	Pass
5**	7868.500	43.09	1.79	54.0	10.91	AV	132.00	150	Vertical	Pass
6	14595.500	49.64	-2.22	74.0	24.36	Peak	270.00	150	Vertical	Pass
6**	14595.500	39.51	-2.22	54.0	14.49	AV	270.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

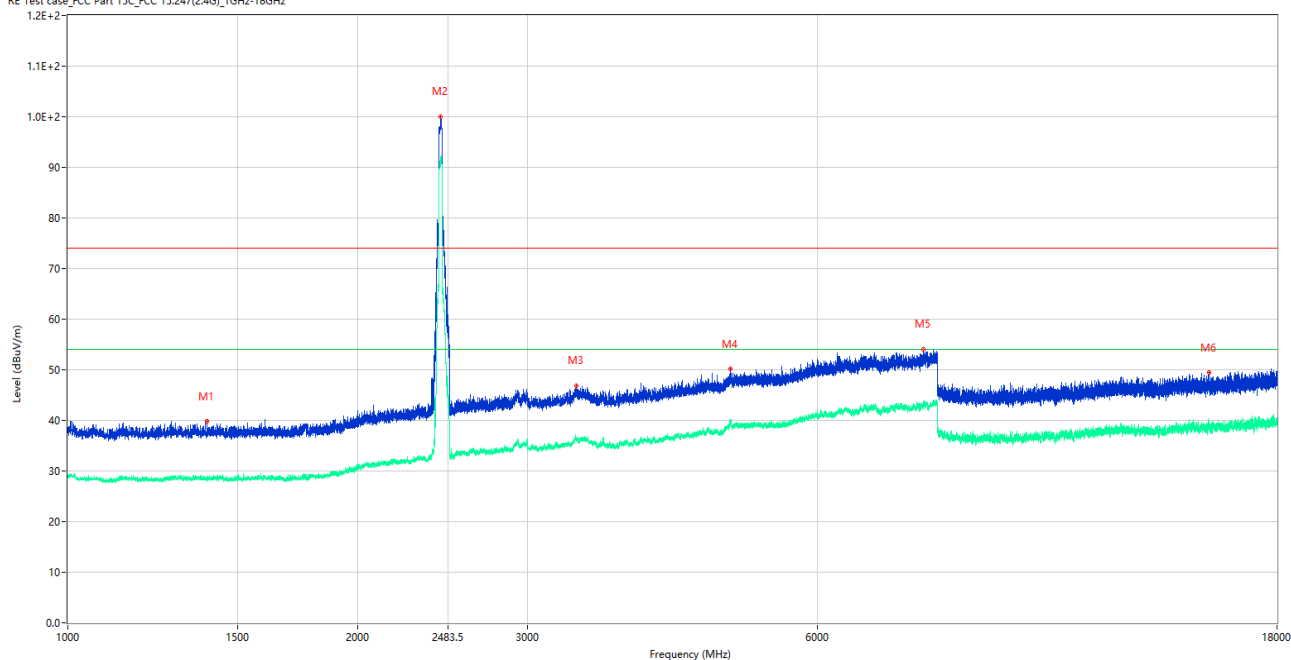

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1395.750	39.81	-16.02	74.0	34.19	Peak	37.00	150	Horizontal	Pass
1**	1395.750	28.62	-16.02	54.0	25.38	AV	37.00	150	Horizontal	Pass
2	2439.250	100.04	-12.37	74.0	-26.04	Peak	152.00	150	Horizontal	N/A
2**	2439.250	91.95	-12.37	54.0	-37.95	AV	152.00	150	Horizontal	N/A
3	3371.000	46.87	-4.85	74.0	27.13	Peak	172.00	150	Horizontal	Pass
3**	3371.000	36.32	-4.85	54.0	17.68	AV	172.00	150	Horizontal	Pass
4	4874.000	50.12	-2.23	74.0	23.88	Peak	29.00	150	Horizontal	Pass
4**	4874.000	39.24	-2.23	54.0	14.76	AV	29.00	150	Horizontal	Pass
5	7734.500	54.05	1.16	74.0	19.95	Peak	181.00	150	Horizontal	Pass
5**	7734.500	43.54	1.16	54.0	10.46	AV	181.00	150	Horizontal	Pass
6	15311.000	49.42	-1.89	74.0	24.58	Peak	157.00	150	Horizontal	Pass
6**	15311.000	39.36	-1.89	54.0	14.64	AV	157.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

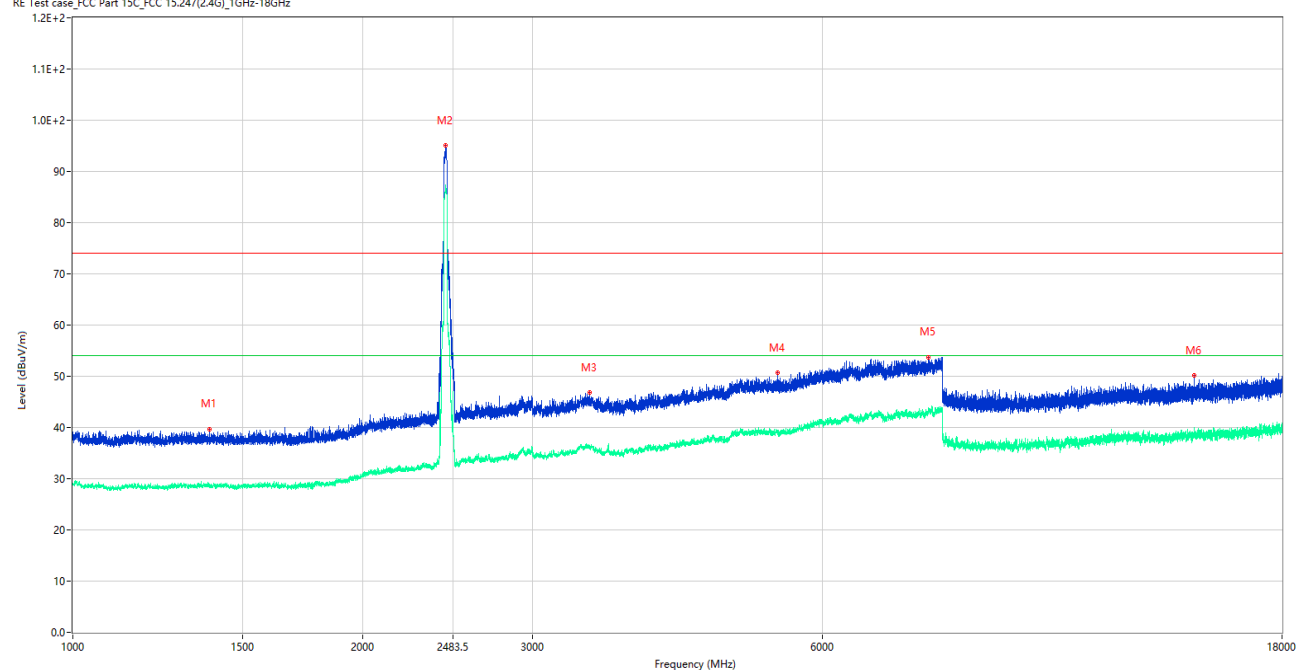

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1386.750	39.69	-15.99	74.0	34.31	Peak	48.00	150	Vertical	Pass
1**	1386.750	28.31	-15.99	54.0	25.69	AV	48.00	150	Vertical	Pass
2	2438.500	95.02	-12.37	74.0	-21.02	Peak	250.00	150	Vertical	N/A
2**	2438.500	86.98	-12.37	54.0	-32.98	AV	250.00	150	Vertical	N/A
3	3440.500	46.84	-5.28	74.0	27.16	Peak	279.00	150	Vertical	Pass
3**	3440.500	35.84	-5.28	54.0	18.16	AV	279.00	150	Vertical	Pass
4	5391.500	50.76	-2.16	74.0	23.24	Peak	90.00	150	Vertical	Pass
4**	5391.500	39.02	-2.16	54.0	14.98	AV	90.00	150	Vertical	Pass
5	7729.000	53.67	0.86	74.0	20.33	Peak	161.00	150	Vertical	Pass
5**	7729.000	43.14	0.86	54.0	10.86	AV	161.00	150	Vertical	Pass
6	14586.500	50.15	-2.40	74.0	23.85	Peak	120.00	150	Vertical	Pass
6**	14586.500	39.10	-2.40	54.0	14.90	AV	120.00	150	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note 1: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note 2: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note 3: According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Test Data and Plots

802.11b LOW CHANNEL



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.16	-4.87	74.0	22.84	Peak	0.13	150	Vertical	Pass
1**	2390.000	40.52	-4.87	54.0	13.48	AV	0.13	150	Vertical	Pass
2	2377.800	52.74	-4.24	74.0	21.26	Peak	355.00	150	Vertical	Pass
2**	2377.800	40.74	-4.24	54.0	13.26	AV	355.00	150	Vertical	Pass

802.11b HIGH CHANNEL

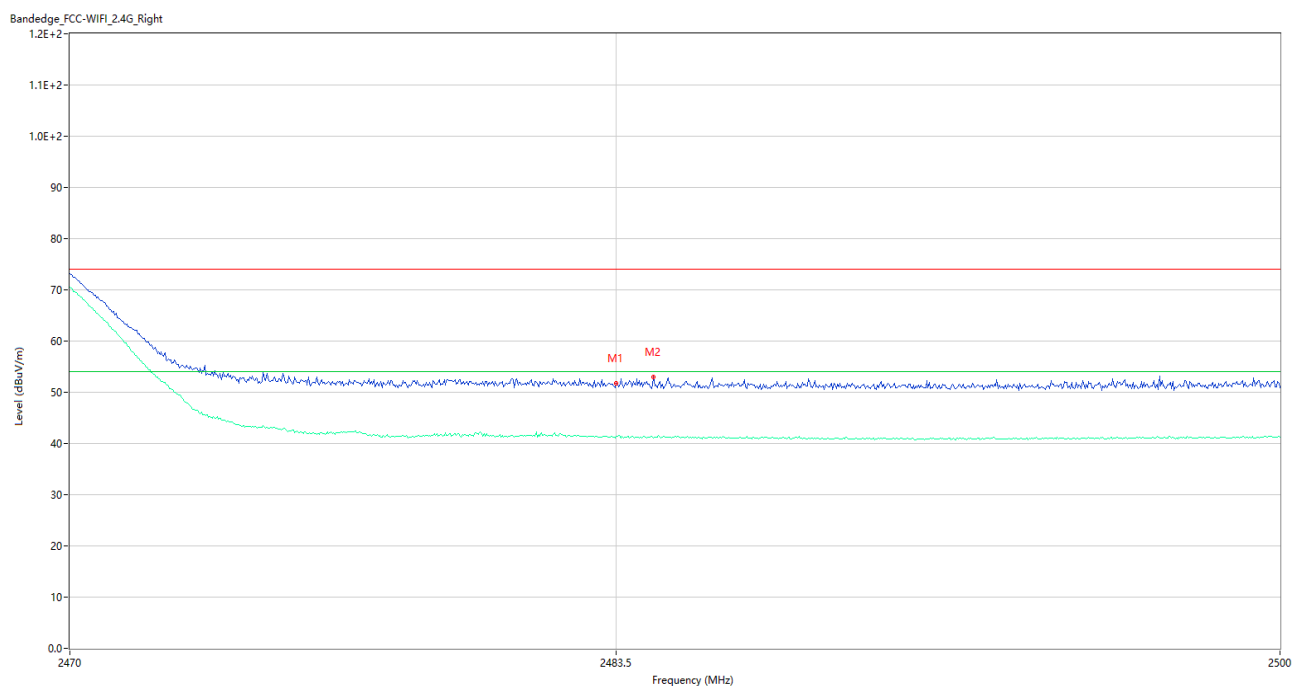


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.83	-3.78	74.0	22.17	Peak	219.00	150	Horizontal	Pass
1**	2483.500	41.34	-3.78	54.0	12.66	AV	219.00	150	Horizontal	Pass
2	2484.430	52.99	-3.78	74.0	21.01	Peak	164.00	150	Horizontal	Pass
2**	2484.430	41.13	-3.78	54.0	12.87	AV	164.00	150	Horizontal	Pass

802.11g LOW CHANNEL




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.72	-4.87	74.0	23.28	Peak	359.88	150	Vertical	Pass
1**	2390.000	40.52	-4.87	54.0	13.48	AV	359.88	150	Vertical	Pass
2	2376.900	52.61	-4.21	74.0	21.39	Peak	360.00	150	Vertical	Pass
2**	2376.900	40.74	-4.21	54.0	13.26	AV	360.00	150	Vertical	Pass

802.11g HIGH CHANNEL

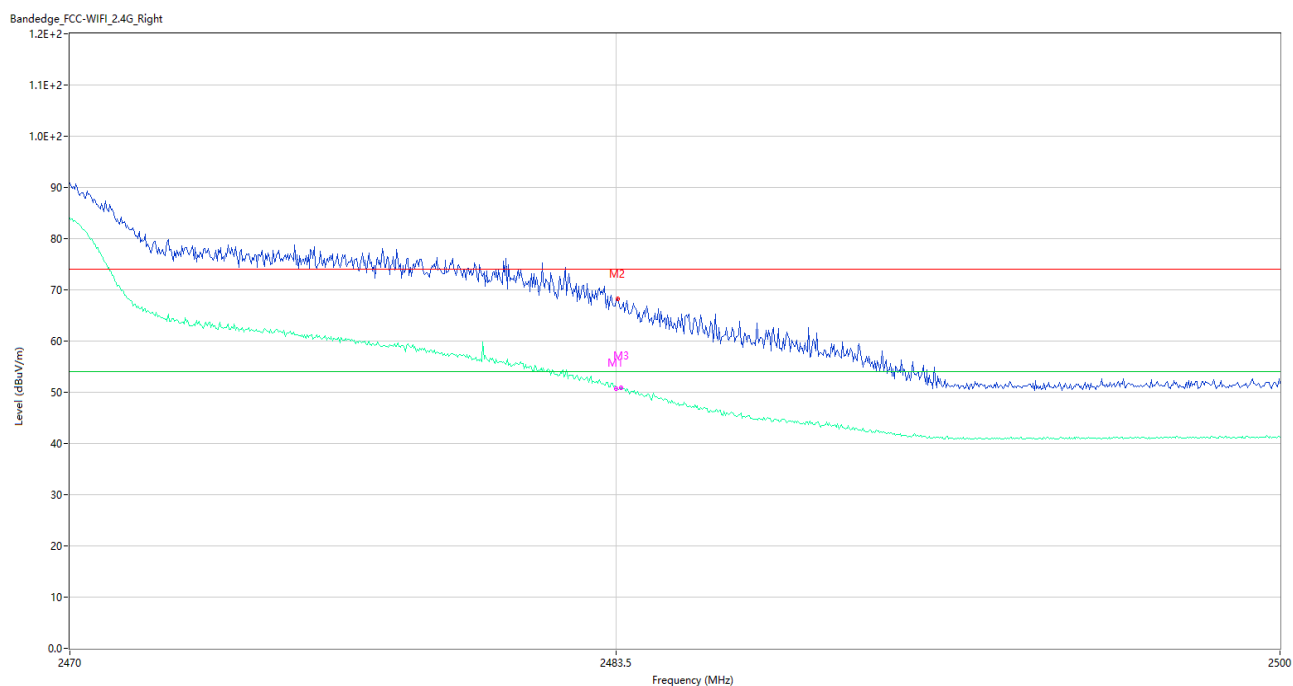


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	67.83	-3.78	74.0	6.17	Peak	198.00	150	Horizontal	Pass
1**	2483.500	50.74	-3.78	54.0	3.26	AV	198.00	150	Horizontal	Pass
2	2483.530	68.16	-3.78	74.0	5.84	Peak	245.00	150	Horizontal	Pass
2**	2483.530	50.72	-3.78	54.0	3.28	AV	245.00	150	Horizontal	Pass
3	2483.620	66.27	-3.78	74.0	7.73	Peak	152.00	150	Horizontal	Pass
3**	2483.620	50.82	-3.78	54.0	3.18	AV	152.00	150	Horizontal	Pass

802.11n20 LOW CHANNEL

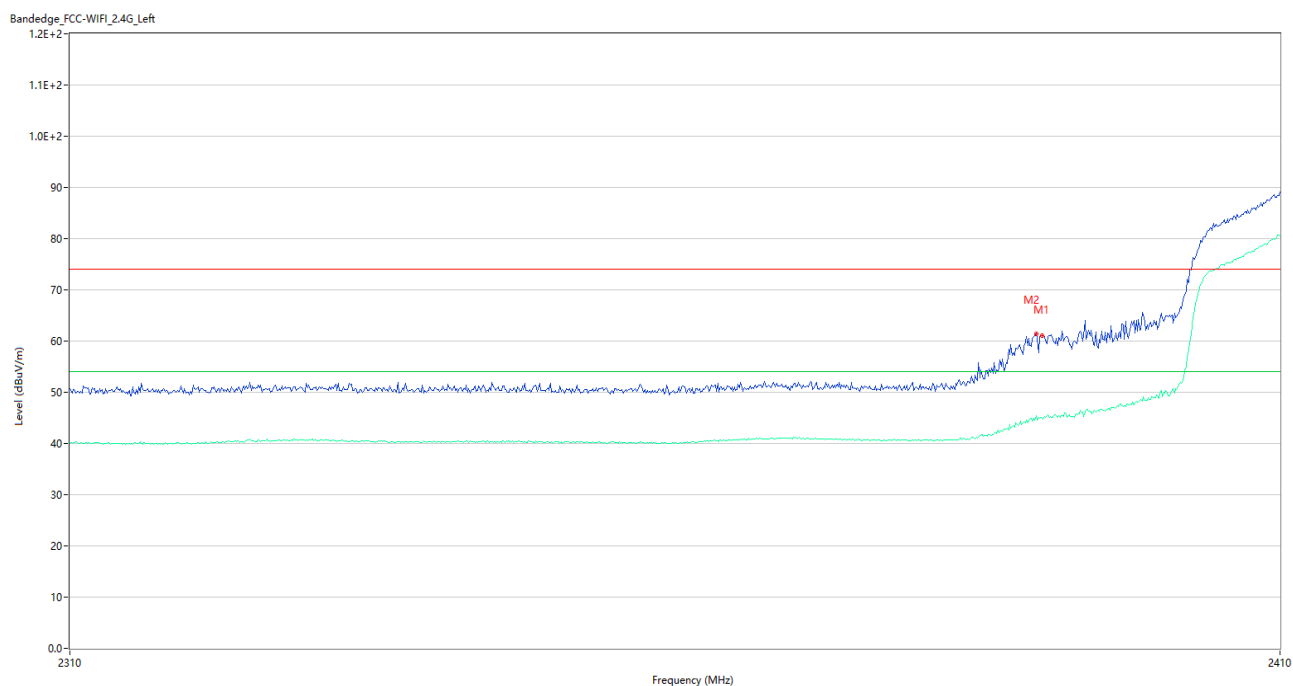

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	61.09	-4.87	74.0	12.91	Peak	167.98	150	Horizontal	Pass
1**	2390.000	44.93	-4.87	54.0	9.07	AV	167.98	150	Horizontal	Pass
2	2389.500	61.42	-4.85	74.0	12.58	Peak	170.00	150	Horizontal	Pass
2**	2389.500	45.51	-4.85	54.0	8.49	AV	170.00	150	Horizontal	Pass

802.11n20 HIGH CHANNEL

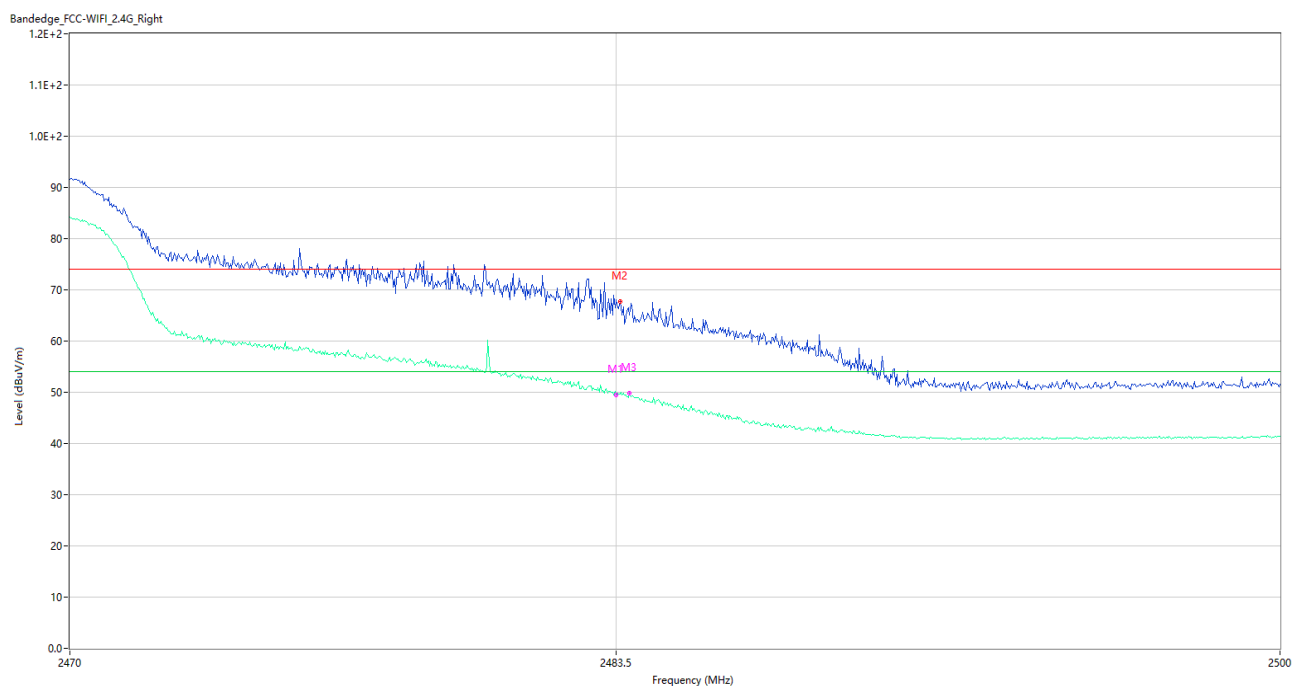

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	68.11	-3.78	74.0	5.89	Peak	236.00	150	Horizontal	Pass
1**	2483.500	49.50	-3.78	54.0	4.50	AV	236.00	150	Horizontal	Pass
2	2483.590	67.64	-3.78	74.0	6.36	Peak	188.00	150	Horizontal	Pass
2**	2483.590	49.58	-3.78	54.0	4.42	AV	188.00	150	Horizontal	Pass
3	2483.830	65.09	-3.78	74.0	8.91	Peak	236.00	150	Horizontal	Pass
3**	2483.830	49.83	-3.78	54.0	4.17	AV	236.00	150	Horizontal	Pass

A.8 Power Spectral Density (PSD)

Test Data

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-5.46	8
Middle	-5.35	8
High	-5.87	8

802.11g Mode:


Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-9.41	8
Middle	-9.61	8
High	-9.10	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-7.79	8
Middle	-7.45	8
High	-10.90	8

Test Plots

802.11b LOW CHANNEL

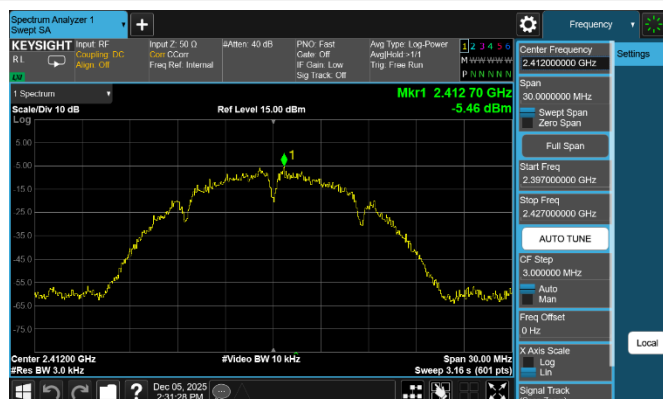


802.11b MIDDLE CHANNEL




802.11b HIGH CHANNEL




802.11g LOW CHANNEL

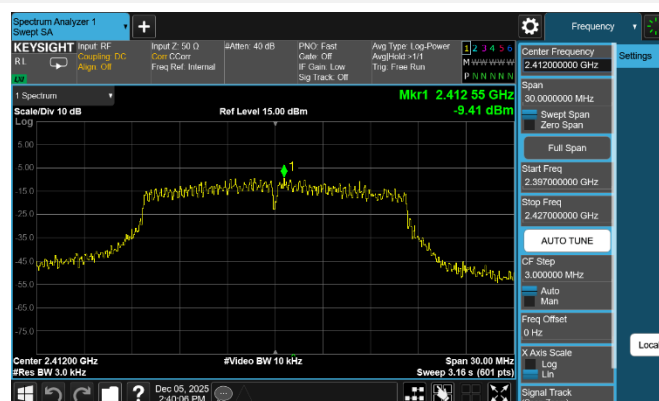


802.11g MIDDLE CHANNEL

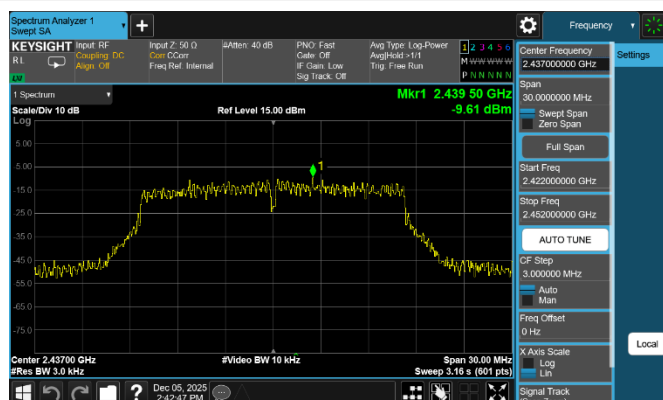


802.11g HIGH CHANNEL

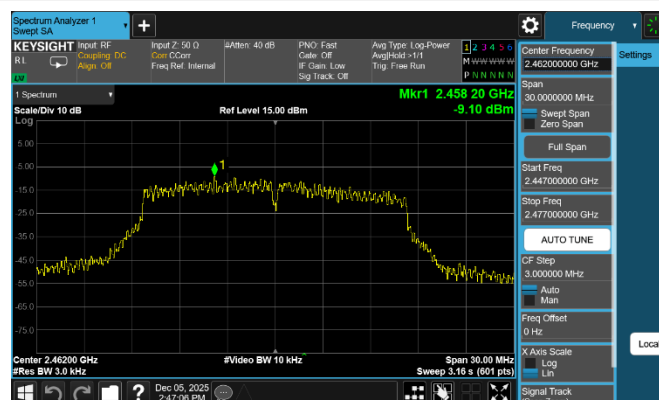


802.11n-20 MHz LOW CHANNEL

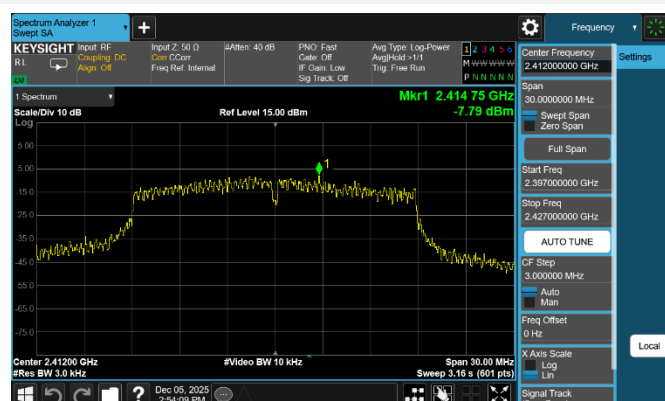

802.11 n-20 MHz MIDDLE CHANNEL

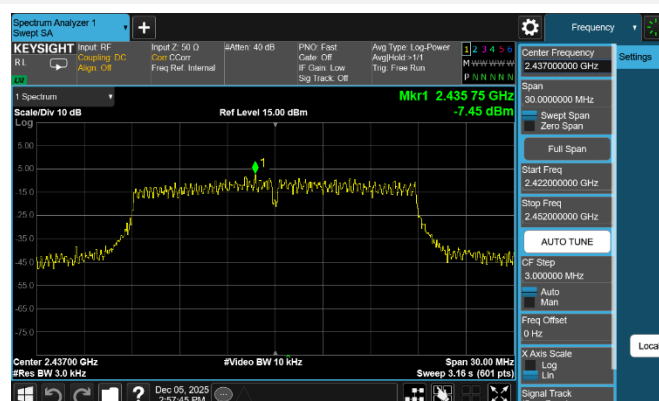

802.11n-20 MHz HIGH CHANNEL

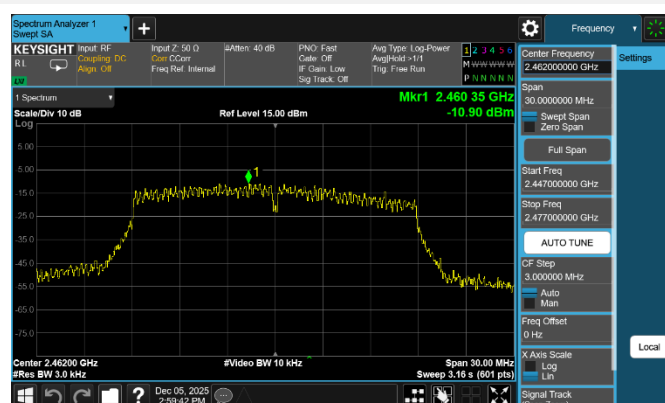

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SH25B1334-AR-1.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SH25B1334-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SH25B1334-AI.PDF”.

Statement

1. The Testing Center guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. For the report with Accreditation Symbol, the items marked with "☆" are not within the accredited scope.
3. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the test report stamp.
4. The test data and results are only valid for the tested samples provided by the customer.
5. This report shall not be partially reproduced without the written permission of the Testing Center.
6. Any objection shall be raised to the Testing Center within 30 days after receiving the report.

--END OF REPORT--