

Main Antenna: Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_10.33.19

EUT Name:	Mobile Phone	Temp.(°C):	20.1
Model Number:	X6895B	Humidity (%RH):	45
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH1 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器:A04 数据线:A08 ANT12



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.59	-4.87	74.0	23.41	Peak	353.76	150	Vertical	Pass
1**	2390.000	40.47	-4.87	54.0	13.53	AV	353.76	150	Vertical	Pass
2	2368.700	52.74	-4.15	74.0	21.26	Peak	333.00	150	Vertical	Pass
2**	2368.700	40.64	-4.15	54.0	13.36	AV	333.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_10.30.09

EUT Name:	Mobile Phone	Temp.(°C):	20.1
Model Number:	X6895B	Humidity (%RH):	45
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH1 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器:A04 数据线:A08 ANT12



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.89	-4.87	74.0	23.11	Peak	258.98	150	Horizontal	Pass
1**	2390.000	41.09	-4.87	54.0	12.91	AV	258.98	150	Horizontal	Pass
2	2385.200	51.88	-4.60	74.0	22.12	Peak	26.00	150	Horizontal	Pass
2**	2385.200	42.13	-4.60	54.0	11.87	AV	26.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_10.37.06

EUT Name:	Mobile Phone	Temp.(°C):	20.1
Model Number:	X6895B	Humidity (%RH):	45
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH11 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器:A04 数据线:A08 ANT12




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.47	-3.78	74.0	22.53	Peak	0.00	150	Vertical	Pass
1**	2483.500	41.11	-3.78	54.0	12.89	AV	0.00	150	Vertical	Pass
2	2484.070	52.28	-3.78	74.0	21.72	Peak	314.00	150	Vertical	Pass
2**	2484.070	40.99	-3.78	54.0	13.01	AV	314.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_10.39.29

EUT Name:	Mobile Phone	Temp.(°C):	20.1
Model Number:	X6895B	Humidity (%RH):	45
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH11 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器:A04 数据线:A08 ANT12

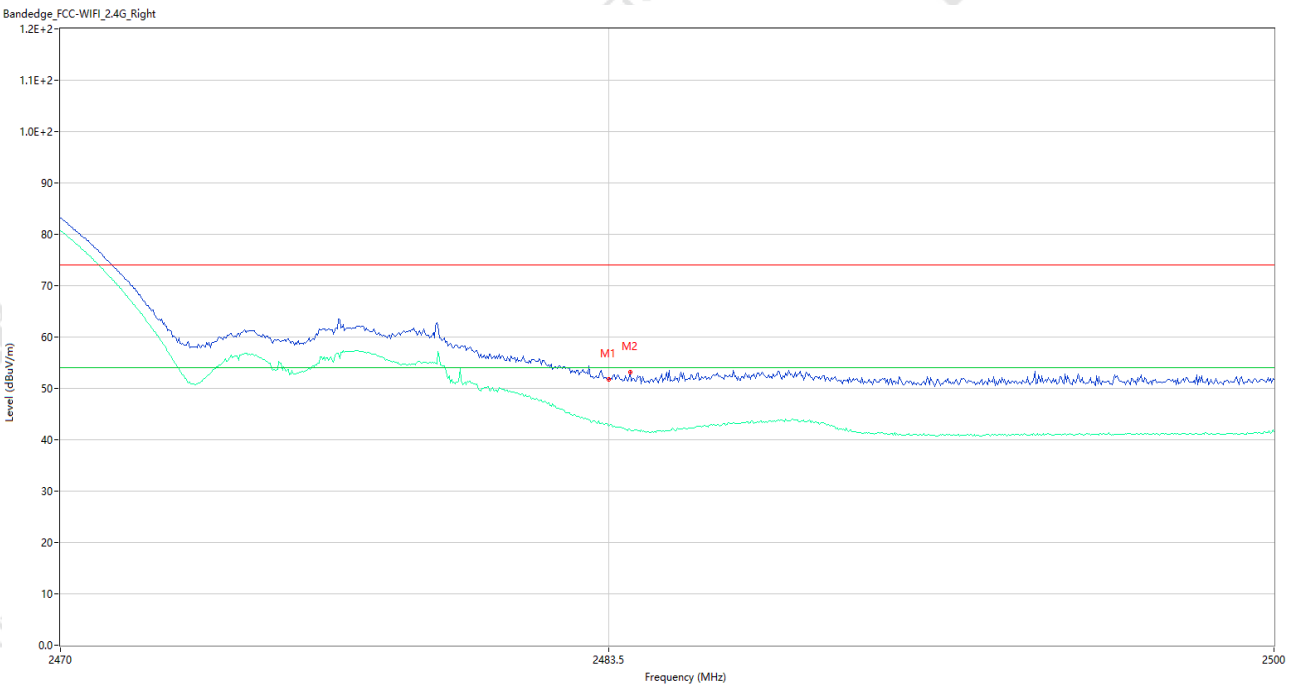


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.74	-3.78	74.0	22.26	Peak	206.00	150	Horizontal	Pass
1**	2483.500	42.62	-3.78	54.0	11.38	AV	206.00	150	Horizontal	Pass
2	2484.040	53.12	-3.78	74.0	20.88	Peak	360.00	150	Horizontal	Pass
2**	2484.040	41.90	-3.78	54.0	12.10	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_21.57.22

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH1 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT12

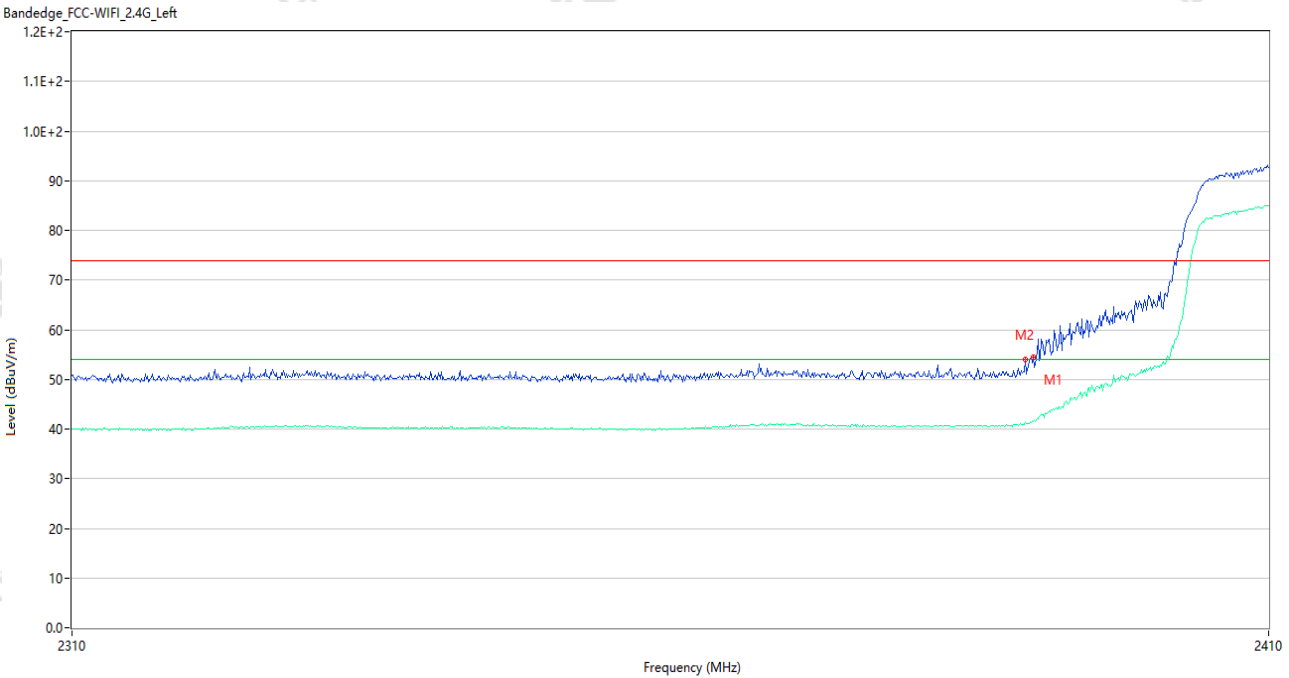


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	54.45	-4.87	74.0	19.55	Peak	167.92	150	Vertical	Pass
1**	2390.000	41.69	-4.87	54.0	12.31	AV	167.92	150	Vertical	Pass
2	2389.300	53.99	-4.84	74.0	20.01	Peak	164.00	150	Vertical	Pass
2**	2389.300	41.24	-4.84	54.0	12.76	AV	164.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_21.55.22

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH1 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT12

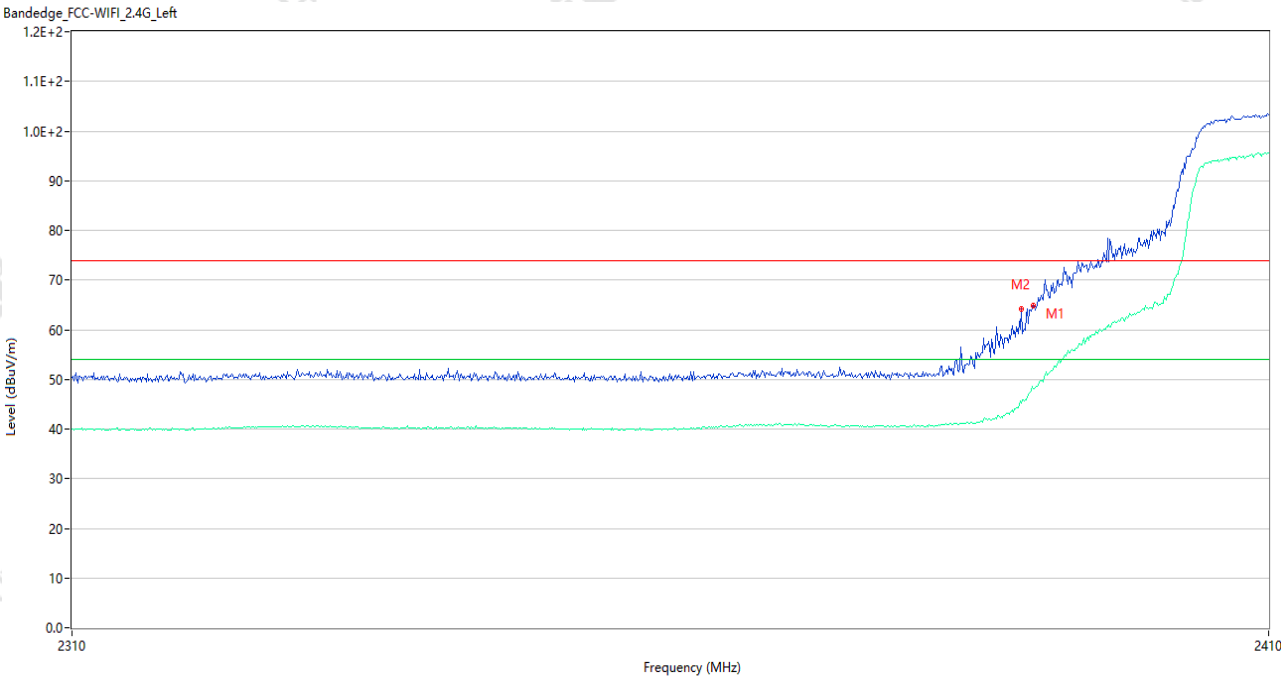


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	64.84	-4.87	74.0	9.16	Peak	307.69	150	Horizontal	Pass
1**	2390.000	48.09	-4.87	54.0	5.91	AV	307.69	150	Horizontal	Pass
2	2389.000	64.16	-4.82	74.0	9.84	Peak	313.00	150	Horizontal	Pass
2**	2389.000	45.10	-4.82	54.0	8.90	AV	313.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_22.29.11

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH11 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT12

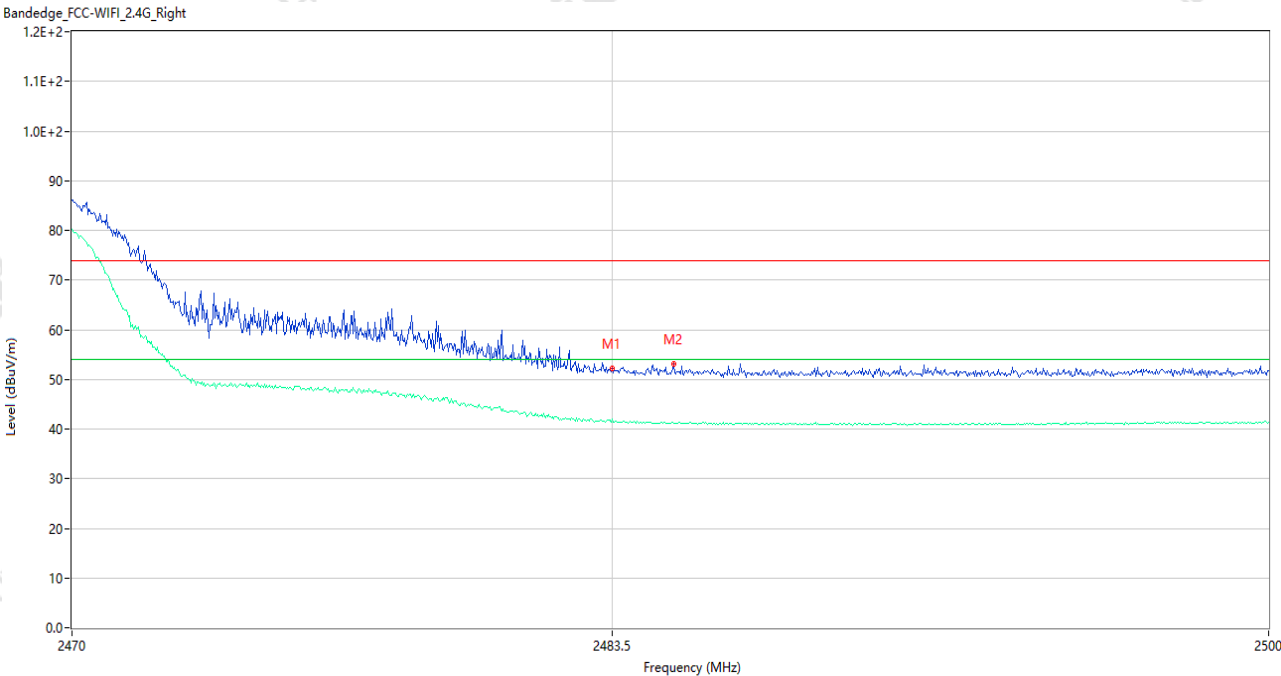


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.28	-3.78	74.0	21.72	Peak	190.00	150	Vertical	Pass
1**	2483.500	42.03	-3.78	54.0	11.97	AV	190.00	150	Vertical	Pass
2	2485.030	53.05	-3.78	74.0	20.95	Peak	346.00	150	Vertical	Pass
2**	2485.030	41.18	-3.78	54.0	12.82	AV	346.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_22.27.38

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH11 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT12

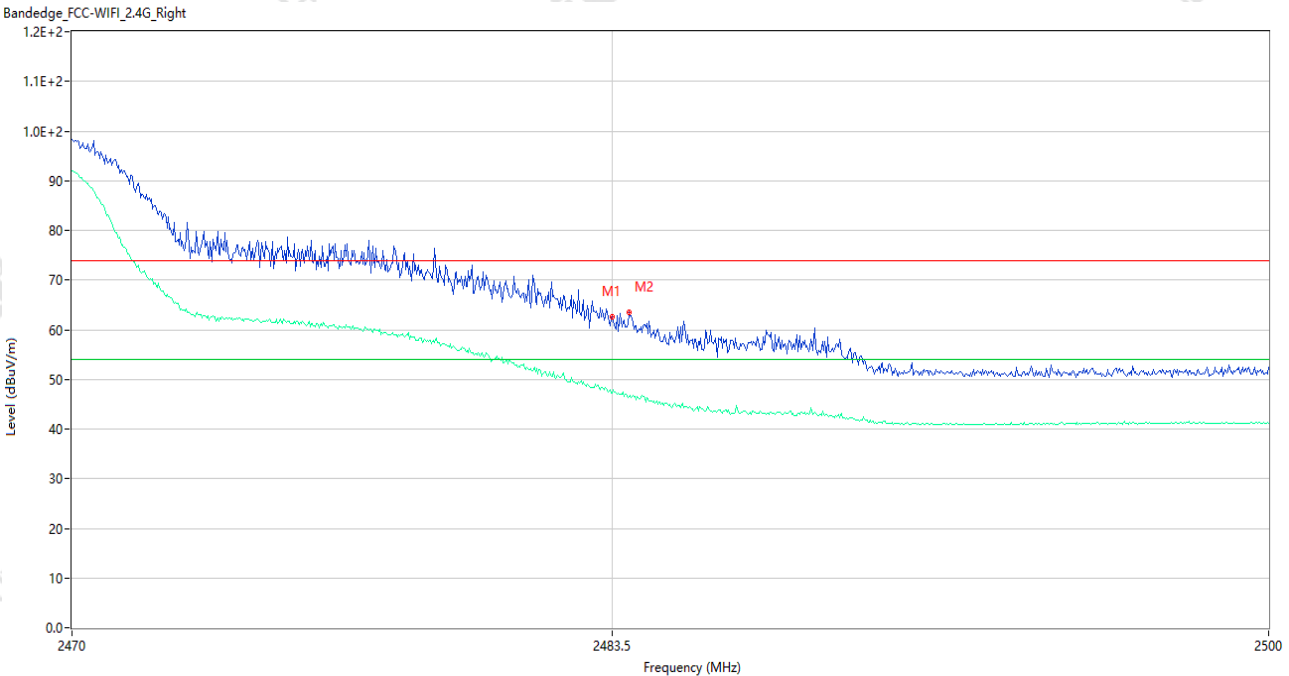


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	62.50	-3.78	74.0	11.50	Peak	294.00	150	Horizontal	Pass
1**	2483.500	47.26	-3.78	54.0	6.74	AV	294.00	150	Horizontal	Pass
2	2483.920	63.57	-3.78	74.0	10.43	Peak	327.00	150	Horizontal	Pass
2**	2483.920	46.56	-3.78	54.0	7.44	AV	327.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_22.14.00

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH1 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT12

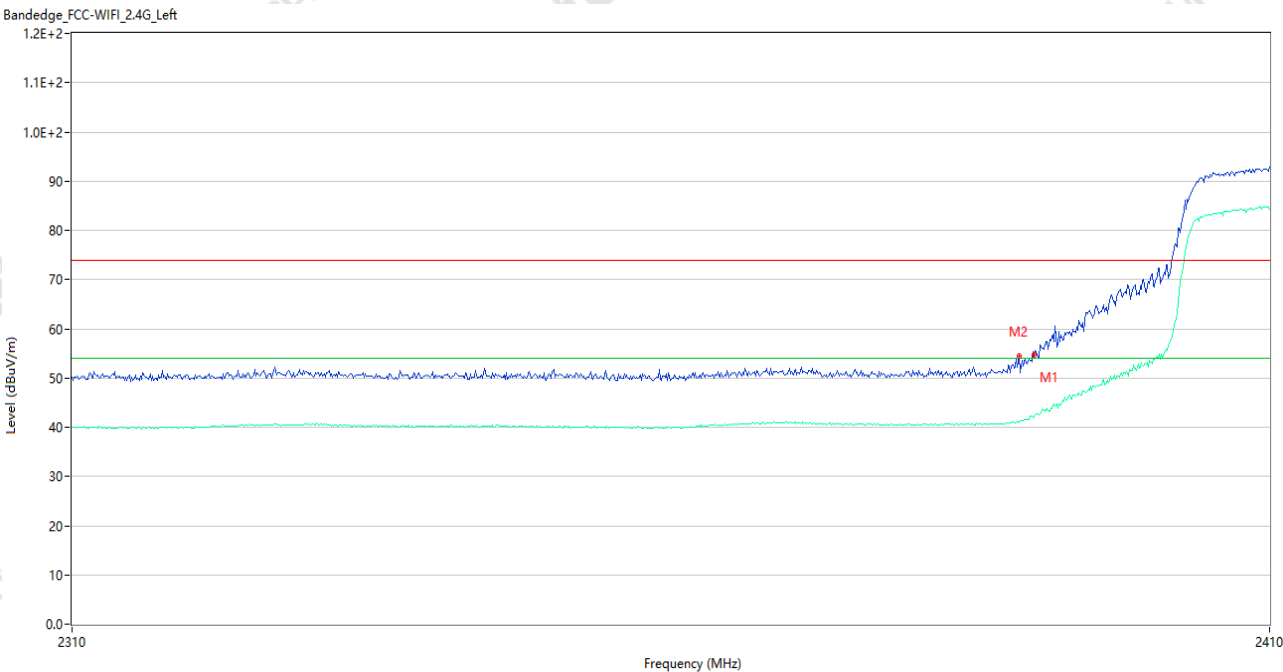

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	54.79	-4.87	74.0	19.21	Peak	179.18	150	Vertical	Pass
1**	2390.000	42.02	-4.87	54.0	11.98	AV	179.18	150	Vertical	Pass
2	2388.700	54.51	-4.80	74.0	19.49	Peak	157.00	150	Vertical	Pass
2**	2388.700	41.00	-4.80	54.0	13.00	AV	157.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_22.12.11

EUT Name: Mobile Phone

Temp.(°C): 23.1

Model Number: X6895B

Humidity (%RH): 51

Sample Number: CC26010326-001-S09

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C


Work Mode: 2.4GWIFI 11n20 CH1 P=16

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A04+数据线: A08
ANT12

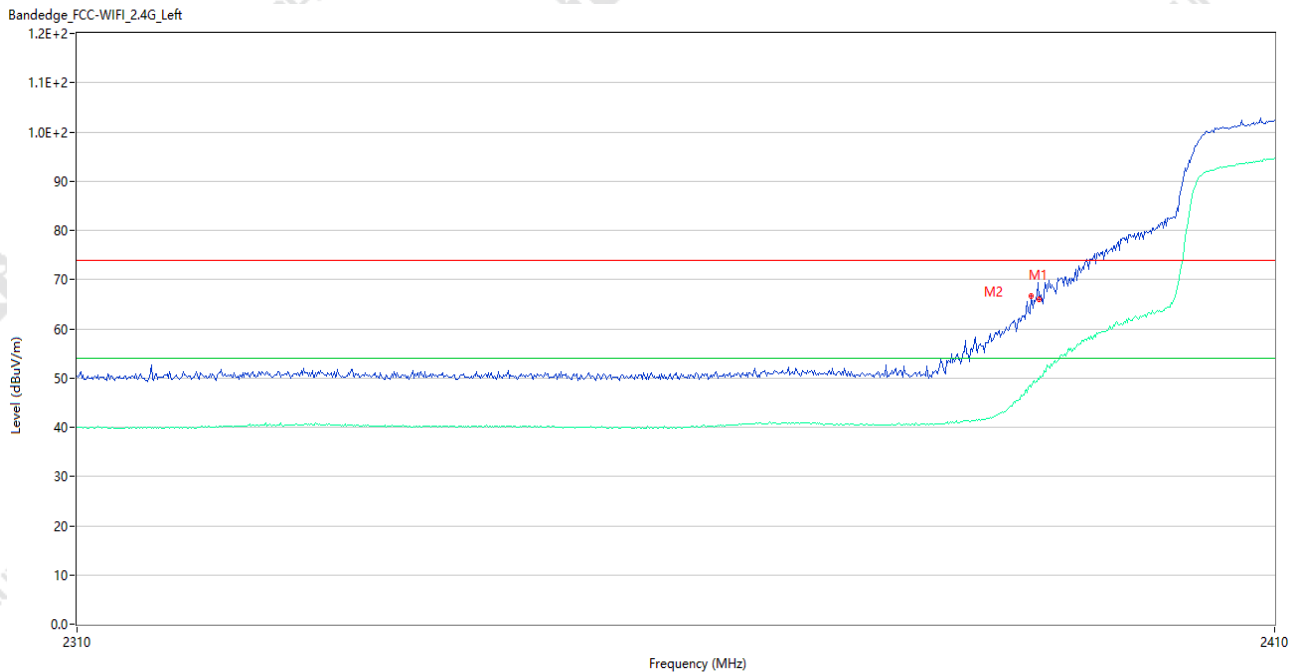


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	65.98	-4.87	74.0	8.02	Peak	245.00	150	Horizontal	Pass
1**	2390.000	49.65	-4.87	54.0	4.35	AV	245.00	150	Horizontal	Pass
2	2389.300	66.57	-4.84	74.0	7.43	Peak	44.00	150	Horizontal	Pass
2**	2389.300	48.02	-4.84	54.0	5.98	AV	44.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_22.45.28

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH11 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT12

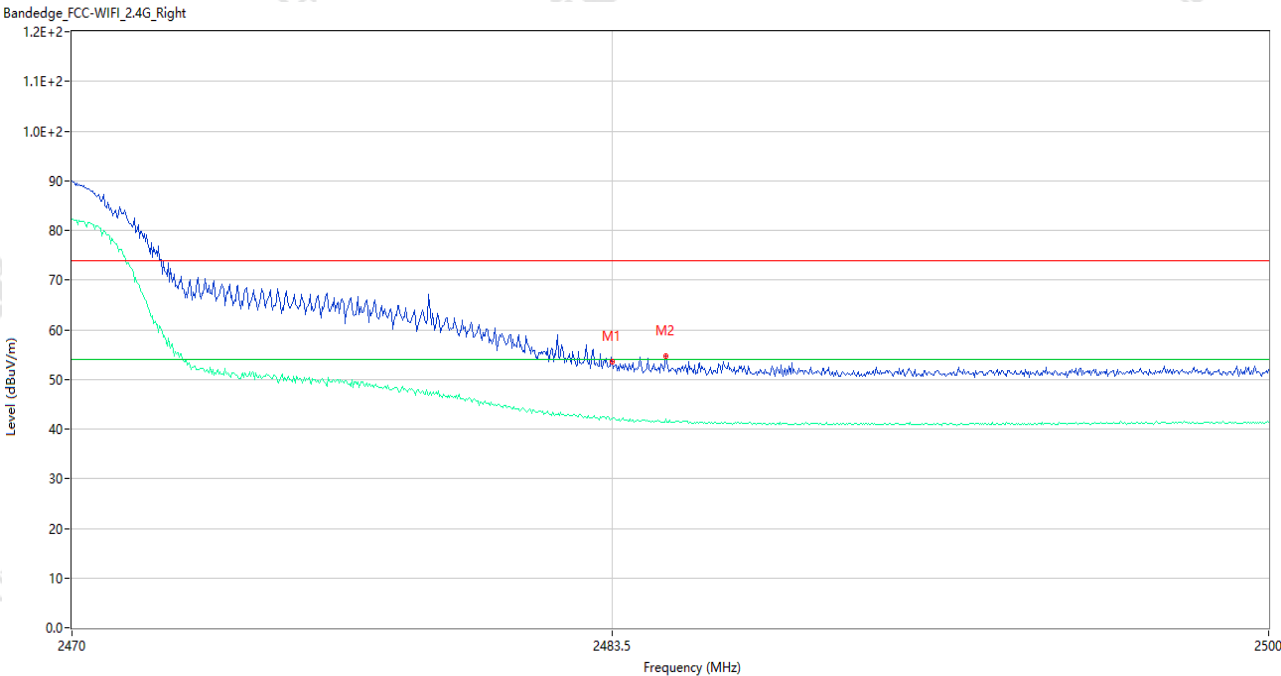


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.47	-3.78	74.0	20.53	Peak	93.00	150	Vertical	Pass
1**	2483.500	41.97	-3.78	54.0	12.03	AV	93.00	150	Vertical	Pass
2	2484.850	54.62	-3.78	74.0	19.38	Peak	145.00	150	Vertical	Pass
2**	2484.850	42.03	-3.78	54.0	11.97	AV	145.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_22.41.25

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH11 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT12

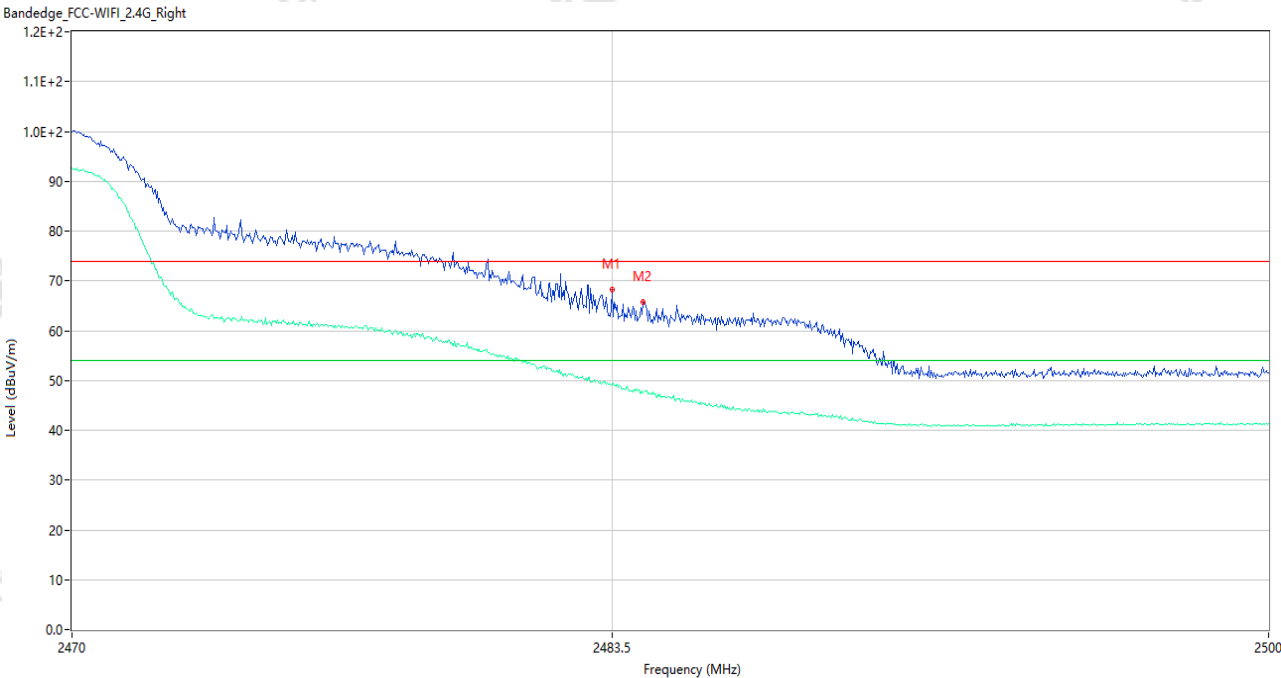

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	68.15	-3.78	74.0	5.85	Peak	39.00	150	Horizontal	Pass
1**	2483.500	49.37	-3.78	54.0	4.63	AV	39.00	150	Horizontal	Pass
2	2484.280	65.82	-3.78	74.0	8.18	Peak	333.00	150	Horizontal	Pass
2**	2484.280	47.39	-3.78	54.0	6.61	AV	333.00	150	Horizontal	Pass

Aux. Antenna: Test Result

Project Number: P-CC26010282
Test Time: 2026-02-04_23.16.56

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH1 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT13



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.66	-4.87	74.0	23.34	Peak	253.70	150	Vertical	Pass
1**	2390.000	40.59	-4.87	54.0	13.41	AV	253.70	150	Vertical	Pass
2	2375.400	52.42	-4.17	74.0	21.58	Peak	127.00	150	Vertical	Pass
2**	2375.400	40.63	-4.17	54.0	13.37	AV	127.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_23.18.24

EUT Name: Mobile Phone

Temp.(°C): 23.1

Model Number: X6895B

Humidity (%RH): 51

Sample Number: CC26010326-001-S09

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C


Work Mode: 2.4GWIFI 11b CH1 P=18

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A04+数据线: A08
ANT13

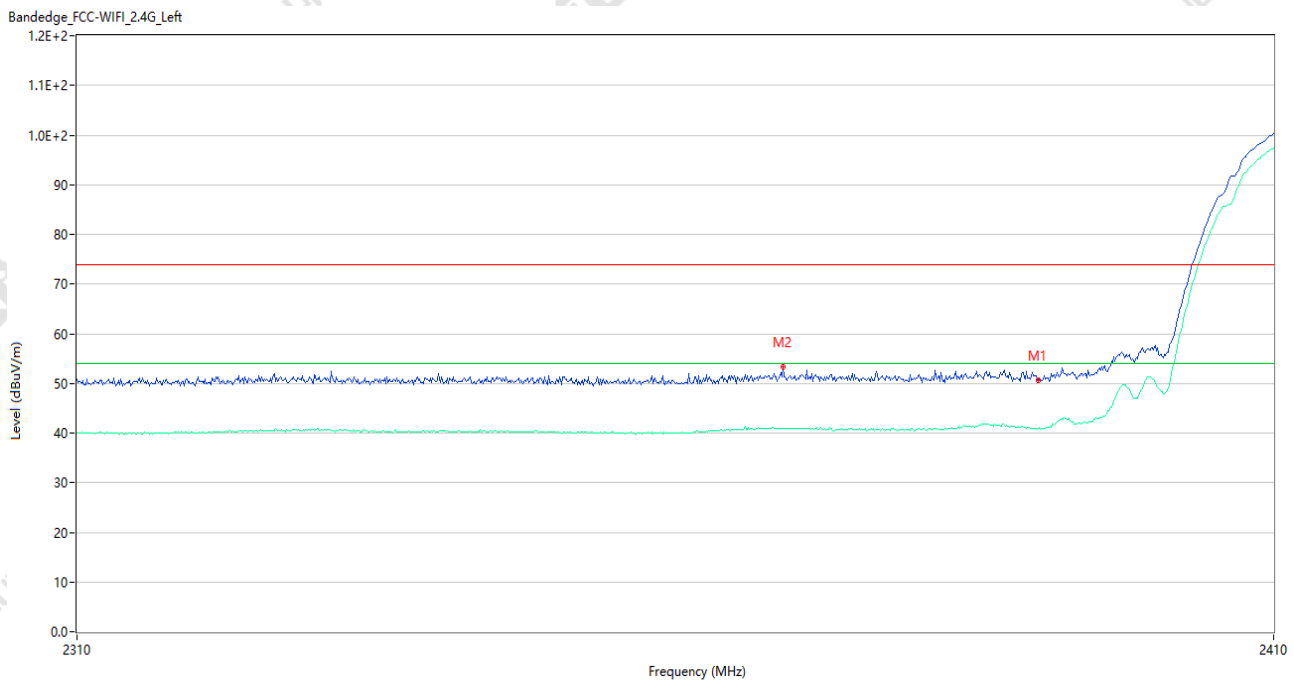


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.56	-4.87	74.0	23.44	Peak	0.09	150	Horizontal	Pass
1**	2390.000	40.80	-4.87	54.0	13.20	AV	0.09	150	Horizontal	Pass
2	2368.500	53.43	-4.17	74.0	20.57	Peak	155.00	150	Horizontal	Pass
2**	2368.500	40.86	-4.17	54.0	13.14	AV	155.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_23.13.30

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH11 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT13

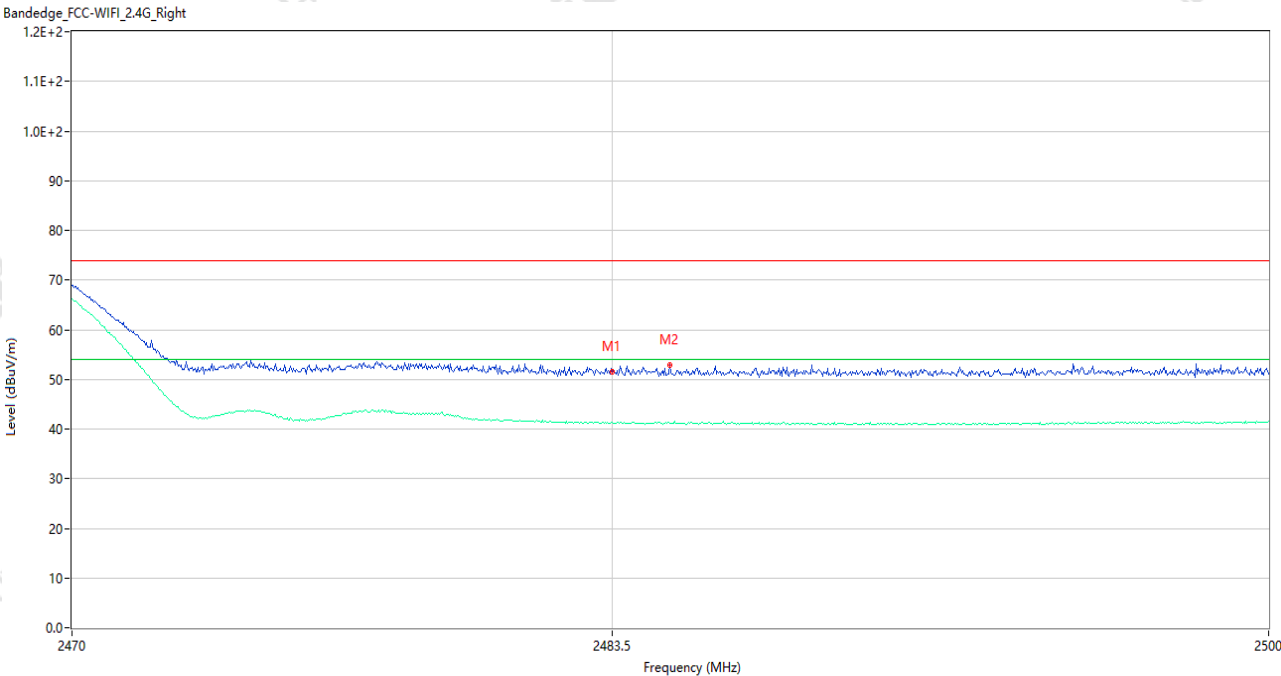


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.57	-3.78	74.0	22.43	Peak	227.00	150	Vertical	Pass
1**	2483.500	41.37	-3.78	54.0	12.63	AV	227.00	150	Vertical	Pass
2	2484.940	52.91	-3.78	74.0	21.09	Peak	267.00	150	Vertical	Pass
2**	2484.940	41.06	-3.78	54.0	12.94	AV	267.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_23.11.59

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH11 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT13

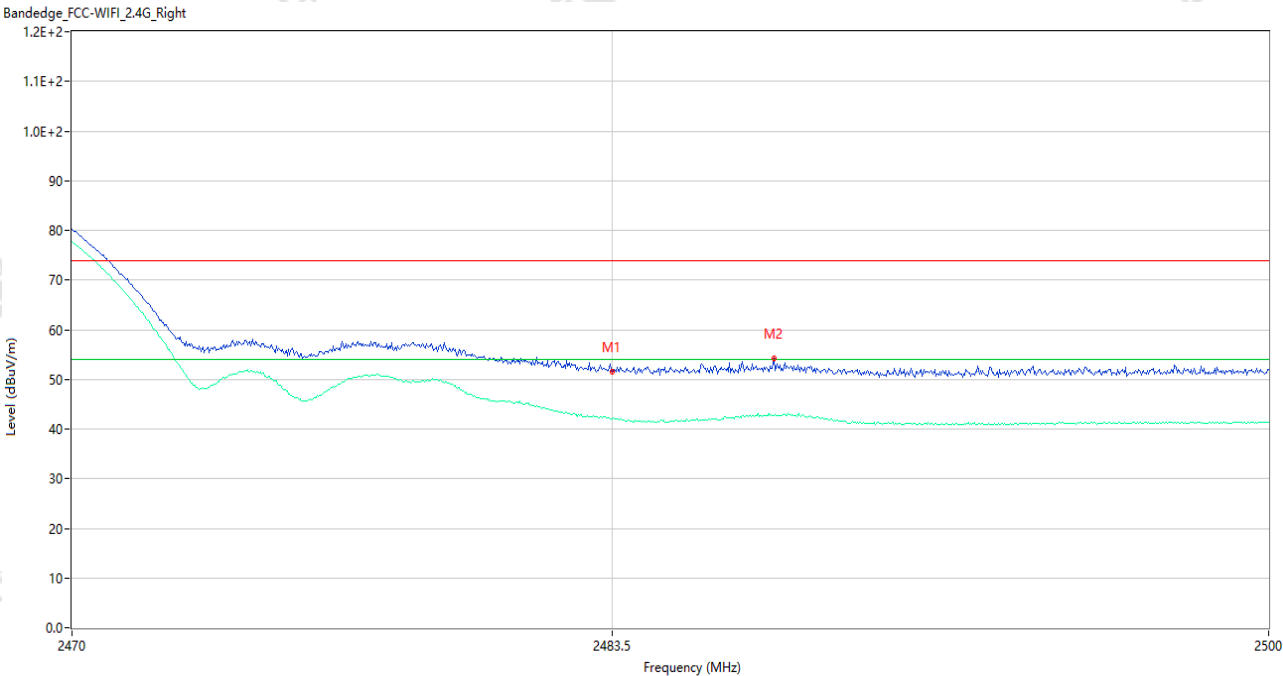

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.51	-3.78	74.0	22.49	Peak	176.00	150	Horizontal	Pass
1**	2483.500	42.02	-3.78	54.0	11.98	AV	176.00	150	Horizontal	Pass
2	2487.550	54.15	-3.81	74.0	19.85	Peak	15.00	150	Horizontal	Pass
2**	2487.550	42.61	-3.81	54.0	11.39	AV	15.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_23.21.58

EUT Name: Mobile Phone

Temp.(°C): 23.1

Model Number: X6895B

Humidity (%RH): 51

Sample Number: CC26010326-001-S09

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11g CH1 P=16

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A04+数据线: A08
ANT13




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	57.02	-4.87	74.0	16.98	Peak	0.00	150	Vertical	Pass
1**	2390.000	42.43	-4.87	54.0	11.57	AV	0.00	150	Vertical	Pass
2	2389.500	56.62	-4.85	74.0	17.38	Peak	0.00	150	Vertical	Pass
2**	2389.500	41.80	-4.85	54.0	12.20	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_23.20.23

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH1 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT13

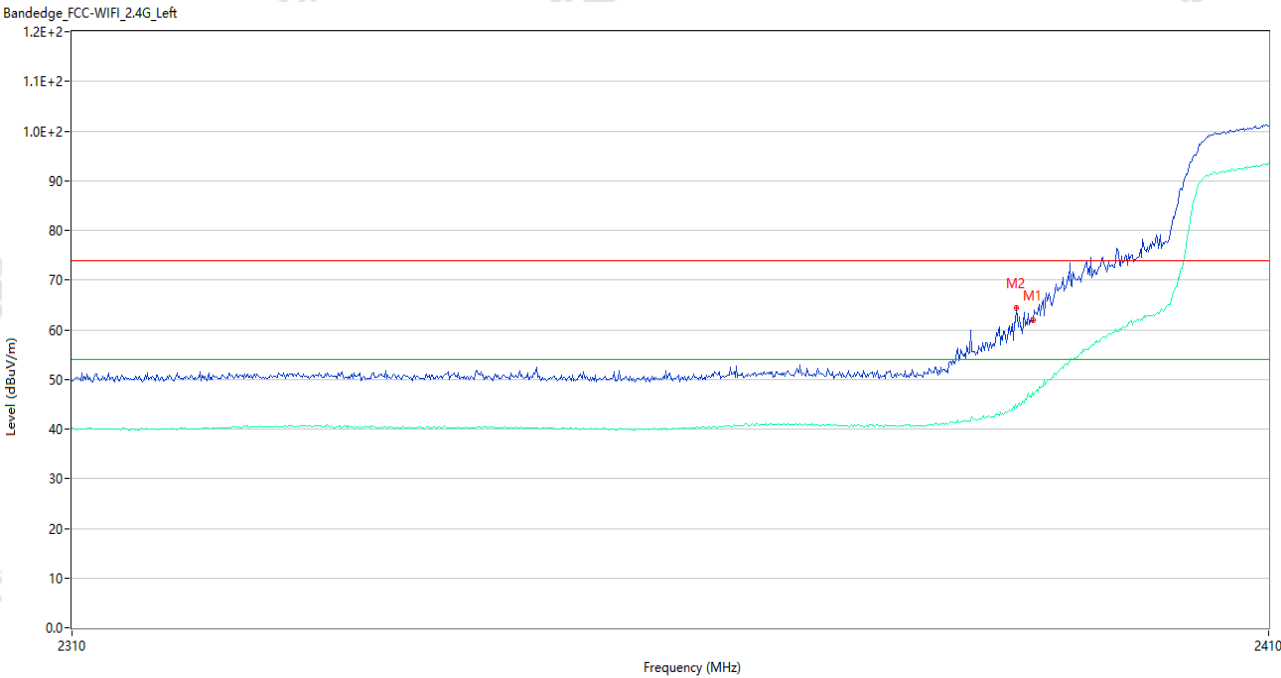


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	61.94	-4.87	74.0	12.06	Peak	51.17	150	Horizontal	Pass
1**	2390.000	46.77	-4.87	54.0	7.23	AV	51.17	150	Horizontal	Pass
2	2388.600	64.46	-4.80	74.0	9.54	Peak	196.00	150	Horizontal	Pass
2**	2388.600	44.39	-4.80	54.0	9.61	AV	196.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_23.05.40

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH11 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT13

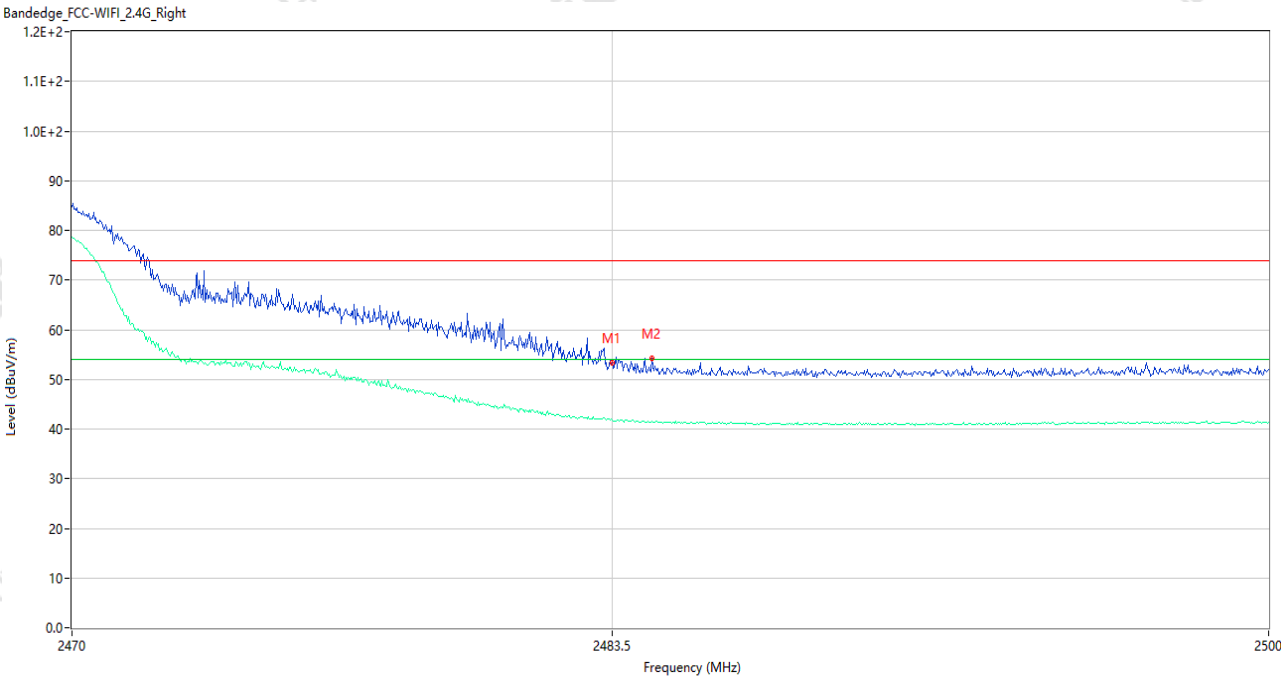


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.28	-3.78	74.0	20.72	Peak	66.00	150	Vertical	Pass
1**	2483.500	41.90	-3.78	54.0	12.10	AV	66.00	150	Vertical	Pass
2	2484.490	54.32	-3.78	74.0	19.68	Peak	282.00	150	Vertical	Pass
2**	2484.490	41.47	-3.78	54.0	12.53	AV	282.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_23.07.34

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH11 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT13

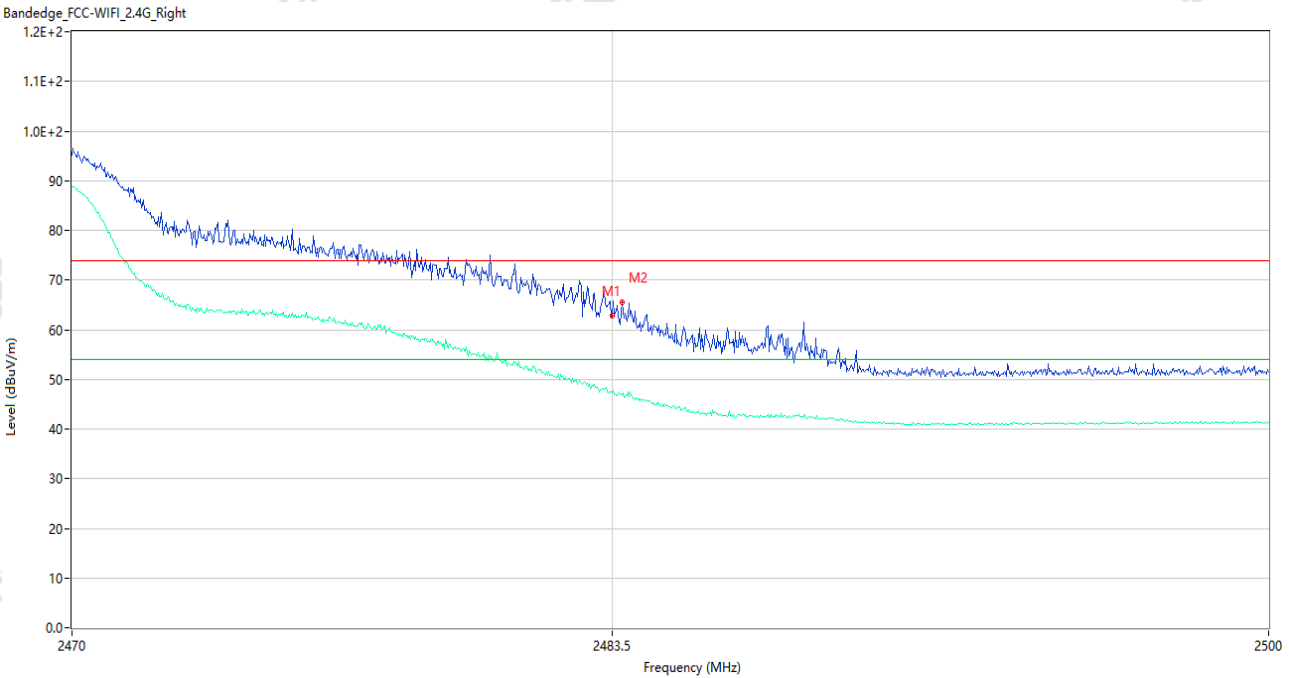


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	62.89	-3.78	74.0	11.11	Peak	15.00	150	Horizontal	Pass
1**	2483.500	47.36	-3.78	54.0	6.64	AV	15.00	150	Horizontal	Pass
2	2483.740	65.63	-3.78	74.0	8.37	Peak	41.00	150	Horizontal	Pass
2**	2483.740	47.09	-3.78	54.0	6.91	AV	41.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_23.23.48

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH1 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT13

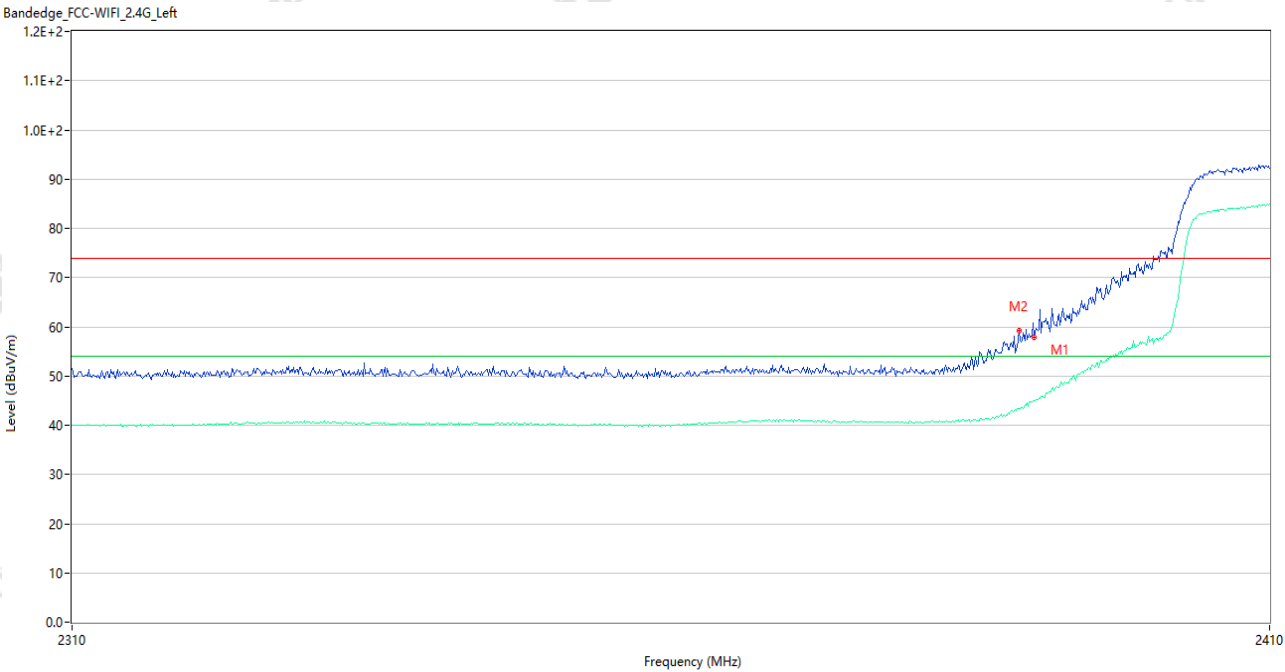

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	57.82	-4.87	74.0	16.18	Peak	257.01	150	Vertical	Pass
1**	2390.000	44.87	-4.87	54.0	9.13	AV	257.01	150	Vertical	Pass
2	2388.700	59.12	-4.80	74.0	14.88	Peak	346.00	150	Vertical	Pass
2**	2388.700	43.40	-4.80	54.0	10.60	AV	346.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_23.25.24

EUT Name: Mobile Phone

Temp.(°C): 23.1

Model Number: X6895B

Humidity (%RH): 51

Sample Number: CC26010326-001-S09

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C


Work Mode: 2.4GWIFI 11n20 CH1 P=17

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A04+数据线: A08
ANT13

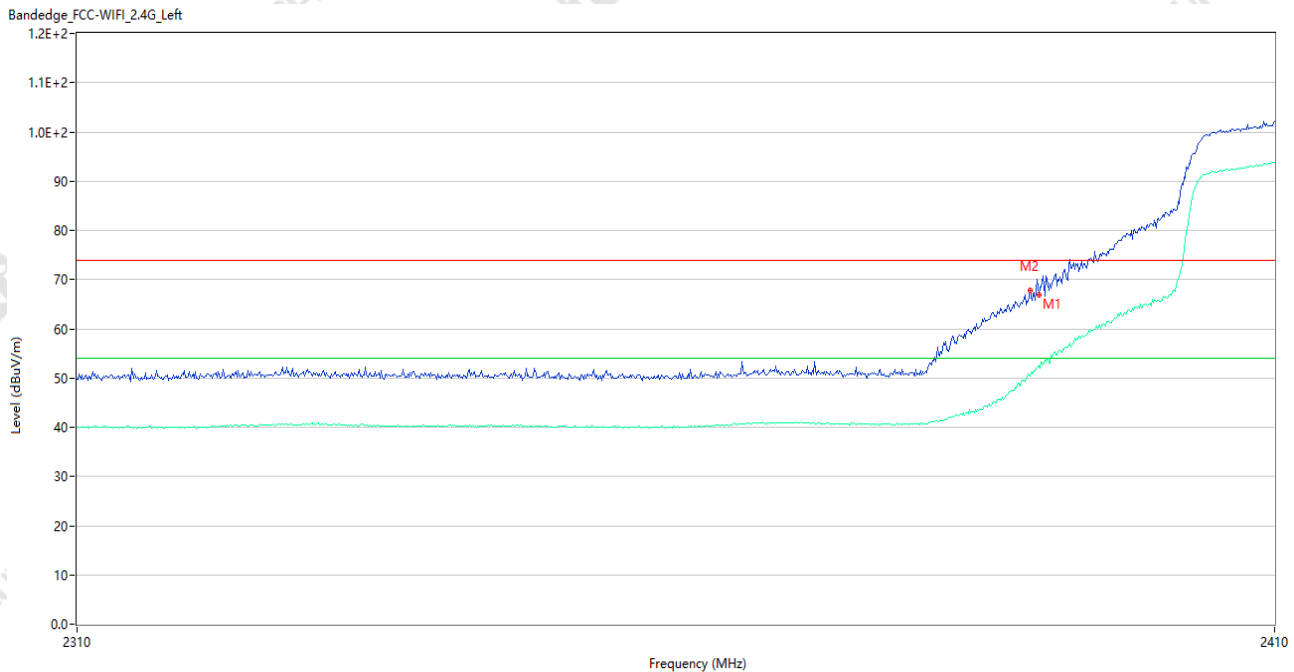

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	66.81	-4.87	74.0	7.19	Peak	0.22	150	Horizontal	Pass
1**	2390.000	52.36	-4.87	54.0	1.64	AV	0.22	150	Horizontal	Pass
2	2389.200	67.69	-4.83	74.0	6.31	Peak	35.00	150	Horizontal	Pass
2**	2389.200	50.37	-4.83	54.0	3.63	AV	35.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010282

Test Time: 2026-02-04_22:58:34

EUT Name: Mobile Phone

Temp.(°C): 23.1

Model Number: X6895B

Humidity (%RH): 51

Sample Number: CC26010326-001-S09

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C


Work Mode: 2.4GWIFI 11n20 CH11 P=17

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A04+数据线: A08
ANT13

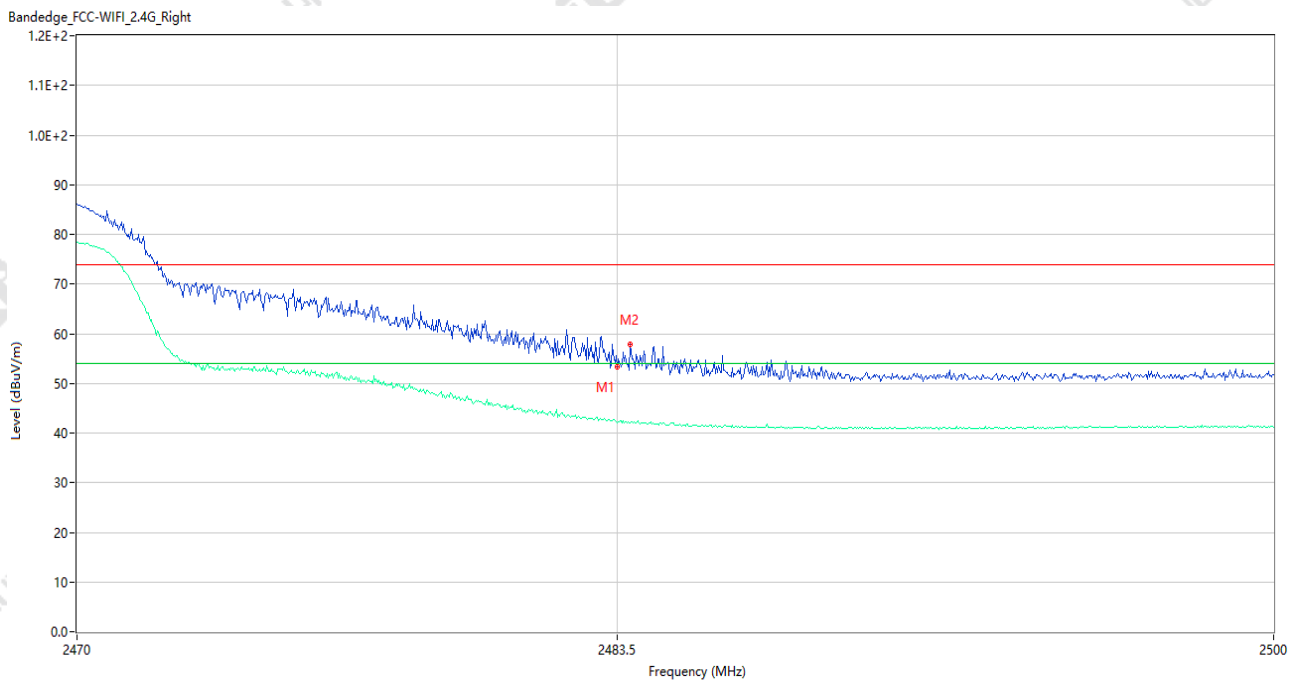


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.26	-3.78	74.0	20.74	Peak	198.00	150	Vertical	Pass
1**	2483.500	42.11	-3.78	54.0	11.89	AV	198.00	150	Vertical	Pass
2	2483.830	57.81	-3.78	74.0	16.19	Peak	70.00	150	Vertical	Pass
2**	2483.830	42.01	-3.78	54.0	11.99	AV	70.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010282
Test Time: 2026-02-04_22.56.45

EUT Name:	Mobile Phone	Temp.(°C):	23.1
Model Number:	X6895B	Humidity (%RH):	51
Sample Number:	CC26010326-001-S09	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH11 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A04+数据线: A08 ANT13

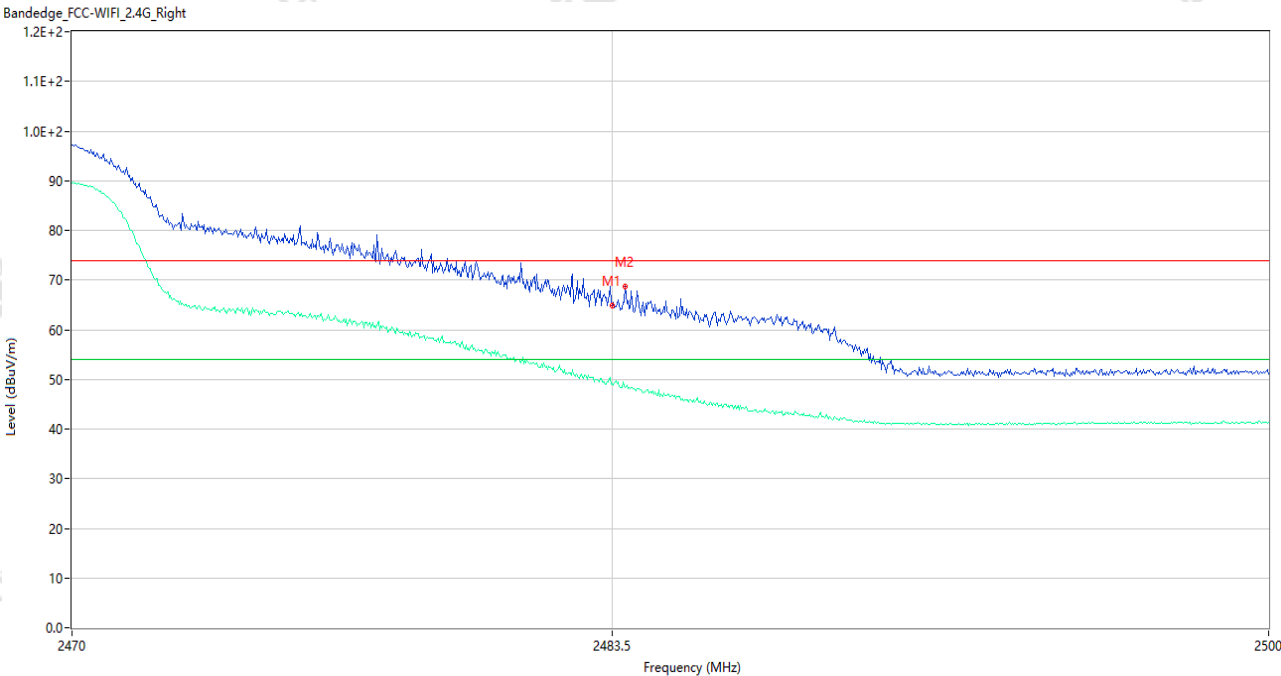

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	64.80	-3.78	74.0	9.20	Peak	221.00	150	Horizontal	Pass
1**	2483.500	49.07	-3.78	54.0	4.93	AV	221.00	150	Horizontal	Pass
2	2483.830	68.77	-3.78	74.0	5.23	Peak	66.00	150	Horizontal	Pass
2**	2483.830	48.35	-3.78	54.0	5.65	AV	66.00	150	Horizontal	Pass