
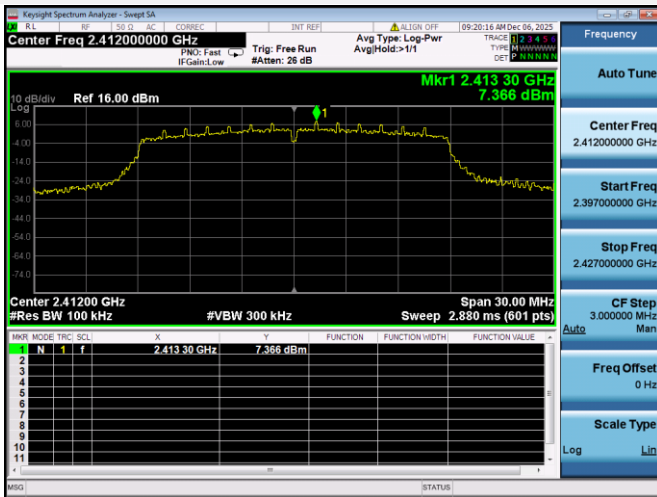
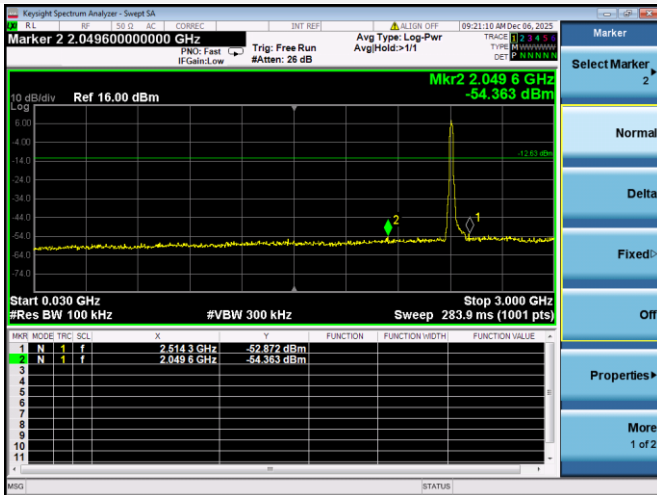
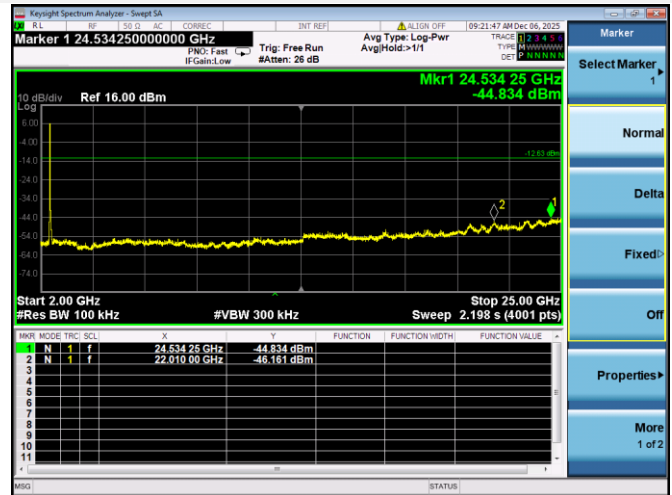



802.11n-20 MHz LOW CHANNEL CARRIER LEVEL

802.11n-20 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11n-20 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz


802.11n-20 MHz MIDDLE CHANNEL CARRIER LEVEL

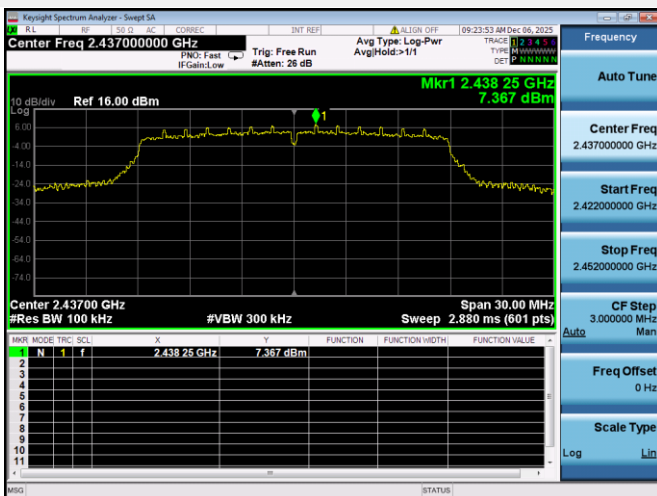


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

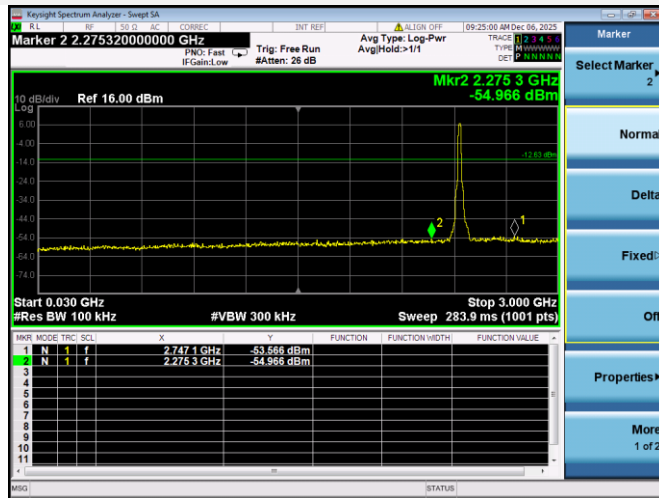


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

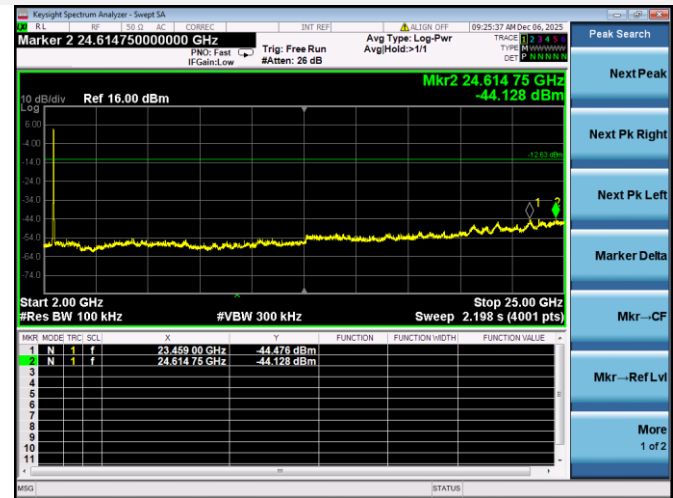


802.11n-20 MHz HIGH CHANNEL CARRIER LEVEL

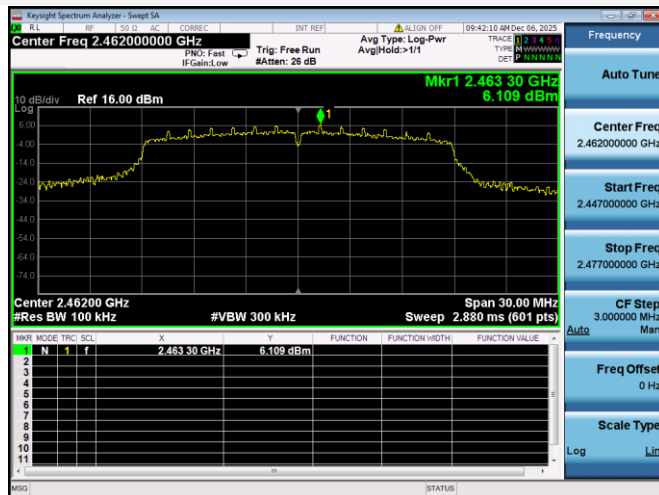

802.11n-20 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

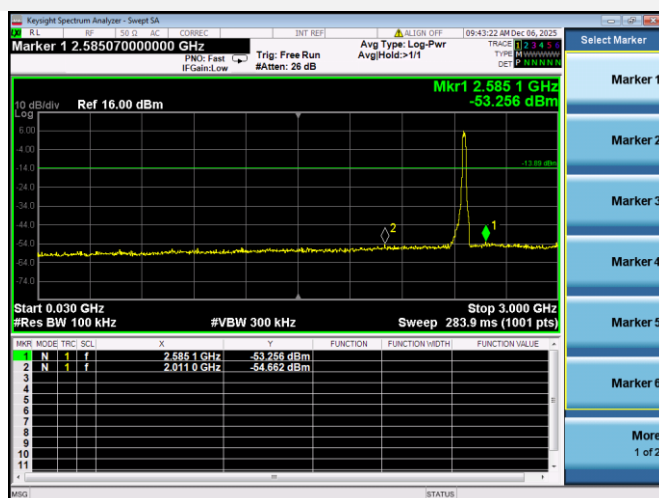

802.11n-20 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

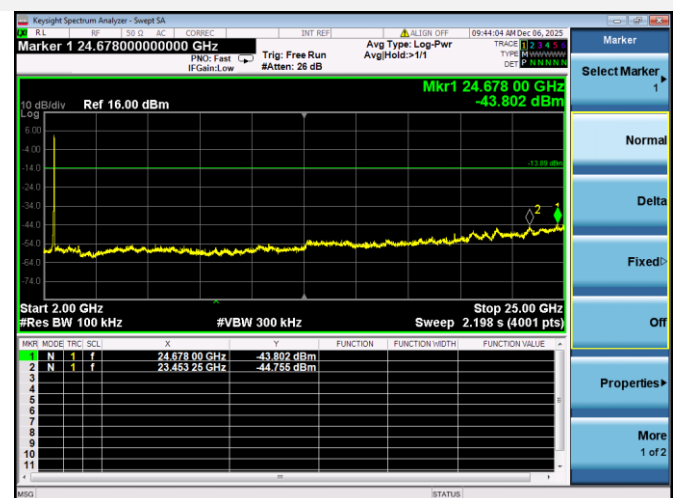

A.4 Band Edge (Authorized-band band-edge)

Note 1: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

Test Data

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-43.54	8.46	-11.54	Pass
High	-53.01	8.62	-11.38	Pass

802.11g Mode:


Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-22.11	6.61	-13.39	Pass
High	-38.74	5.96	-14.04	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-23.87	7.37	-12.63	Pass
High	-37.97	6.11	-13.89	Pass

Test Plots


802.11b LOW CHANNEL, CARRIER LEVEL

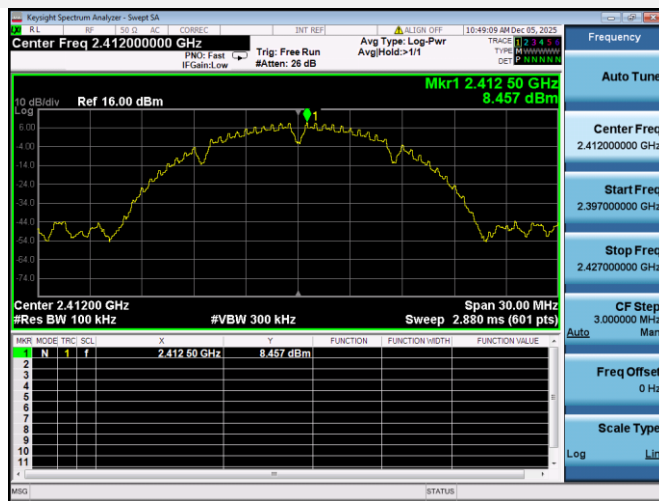


802.11b LOW CHANNEL, BAND EDGE




802.11b HIGH CHANNEL, CARRIER LEVEL

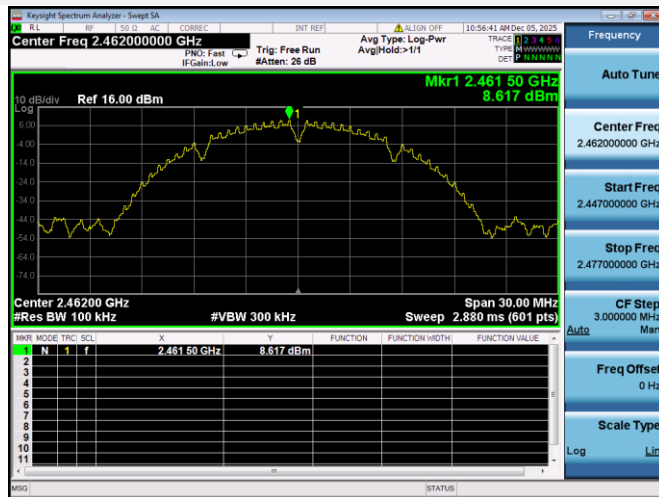


802.11b HIGH CHANNEL, BAND EDGE

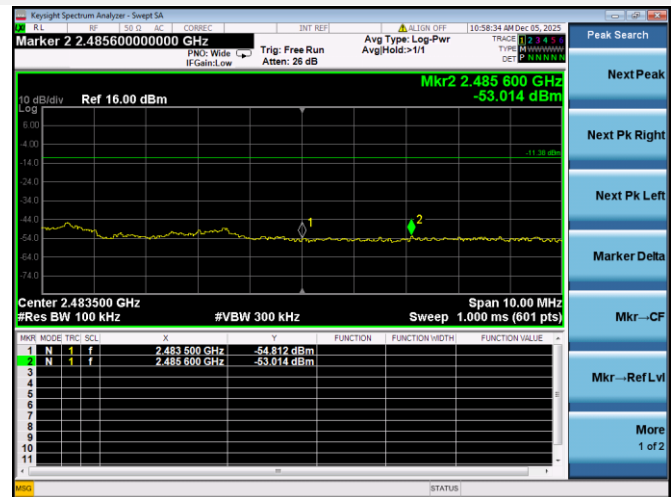


802.11g LOW CHANNEL, CARRIER LEVEL

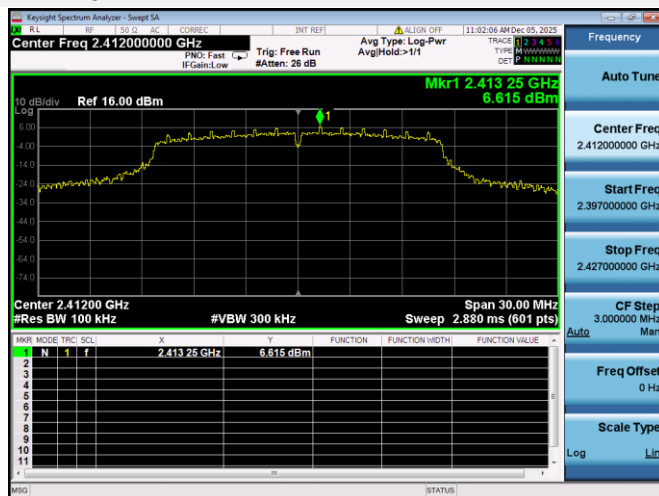


802.11g LOW CHANNEL, BAND EDGE

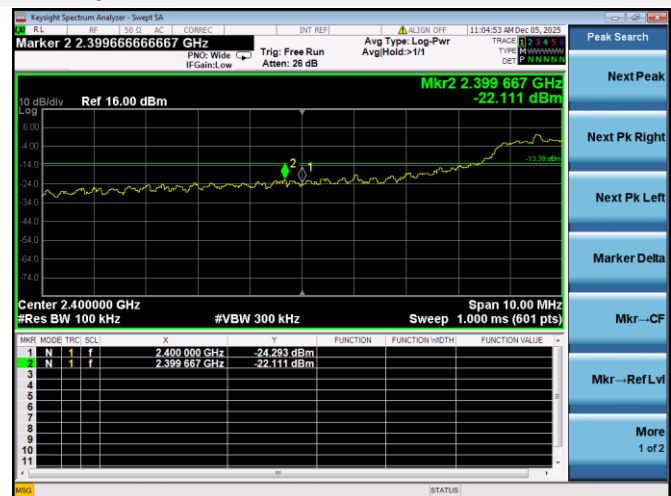


802.11g HIGH CHANNEL, CARRIER LEVEL

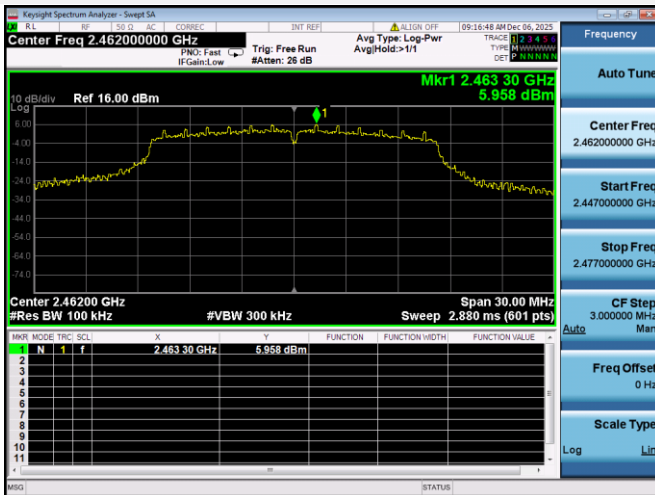

802.11g HIGH CHANNEL, BAND EDGE

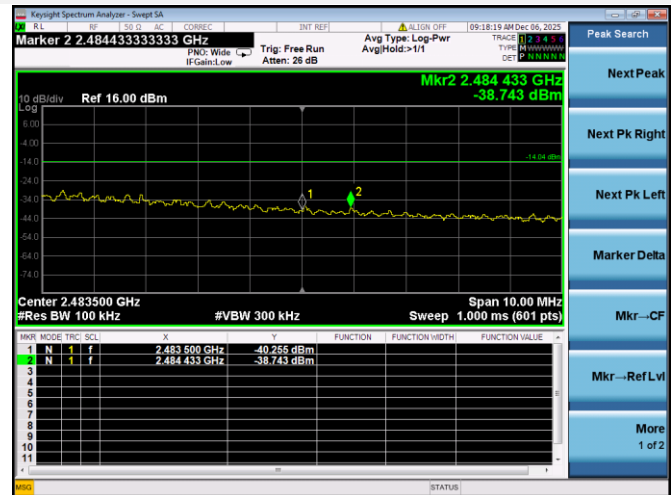


802.11n-20 MHz LOW CHANNEL, CARRIER LEVEL

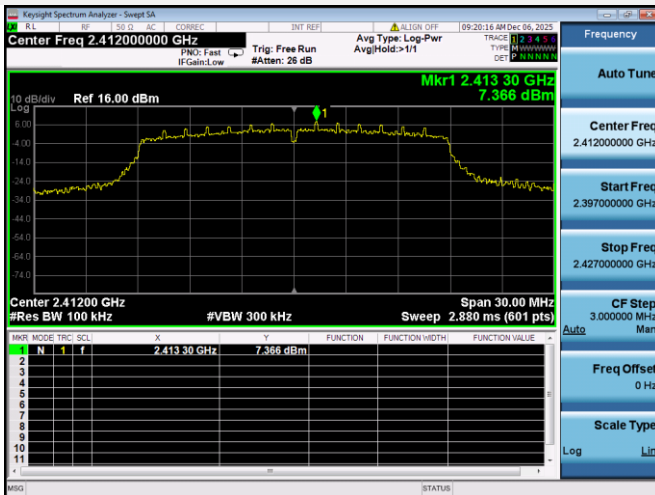


802.11n-20 MHz LOW CHANNEL, BAND EDGE



802.11n-20 MHz HIGH CHANNEL, CARRIER LEVEL

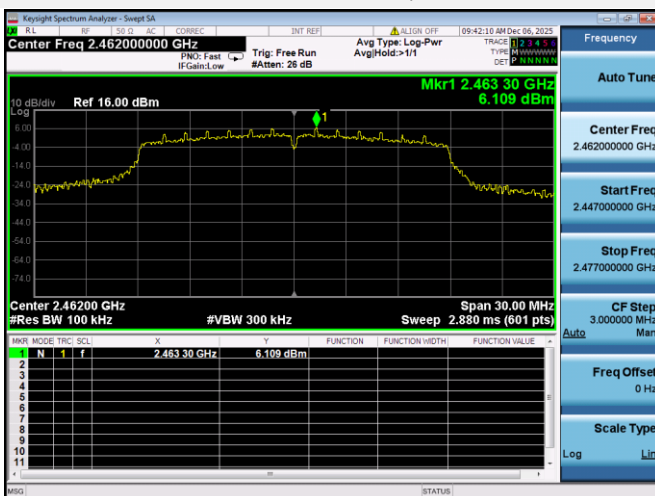

802.11n-20 MHz HIGH CHANNEL, BAND EDGE

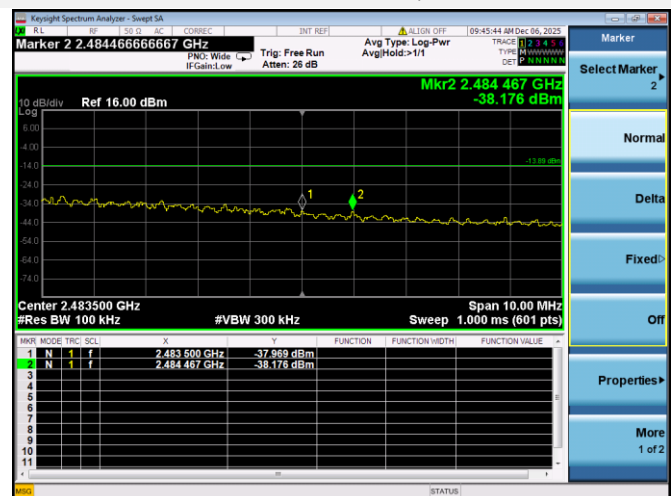

A.5 Conducted Emission


Note 1: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note 2: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note 3: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots


PHASE L

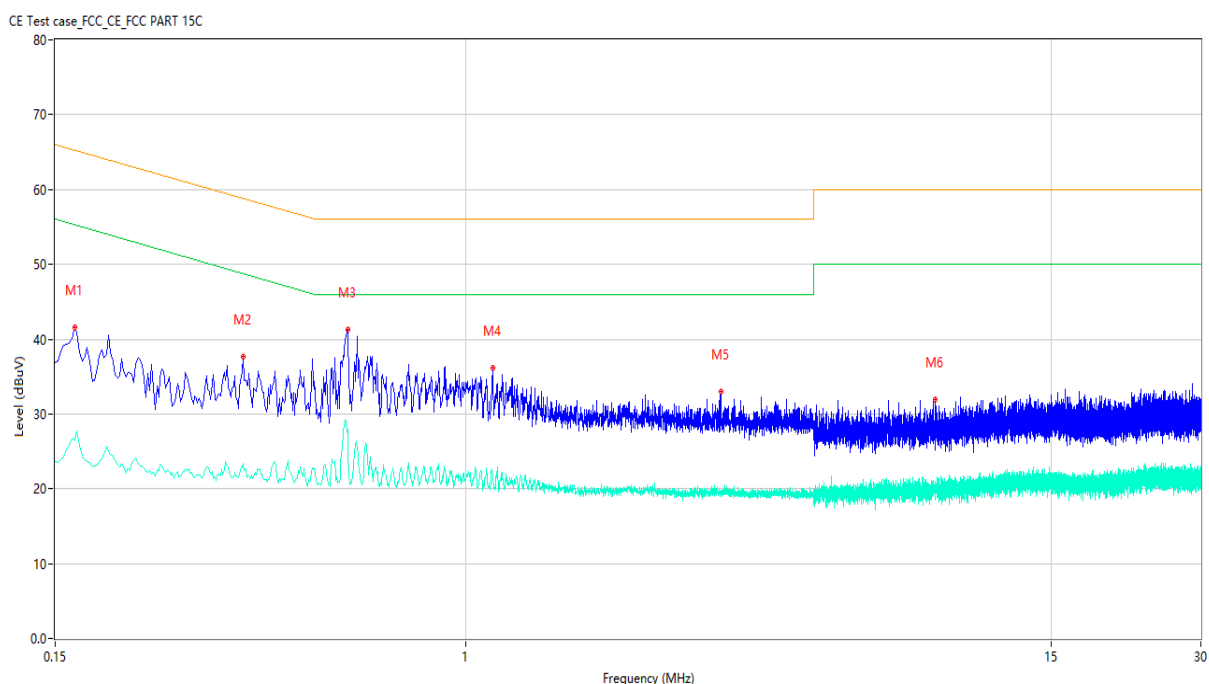

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin(dB)	Detector	Line	Verdict
1	0.164	41.55	10.07	65.26	23.71	Peak	L	Pass
1**	0.164	26.59	10.07	55.26	28.67	AV	L	Pass
2	0.358	37.66	10.13	58.77	21.11	Peak	L	Pass
2**	0.358	23.29	10.13	48.77	25.48	AV	L	Pass
3	0.580	41.27	10.18	56.00	14.73	Peak	L	Pass
3**	0.580	27.93	10.18	46.00	18.07	AV	L	Pass
4	1.134	36.19	10.21	56.00	19.81	Peak	L	Pass
4**	1.134	21.50	10.21	46.00	24.50	AV	L	Pass
5	3.266	32.95	10.39	56.00	23.05	Peak	L	Pass
5**	3.266	19.43	10.39	46.00	26.57	AV	L	Pass
6	8.778	31.92	10.85	60.00	28.08	Peak	L	Pass
6**	8.778	19.94	10.85	50.00	30.06	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

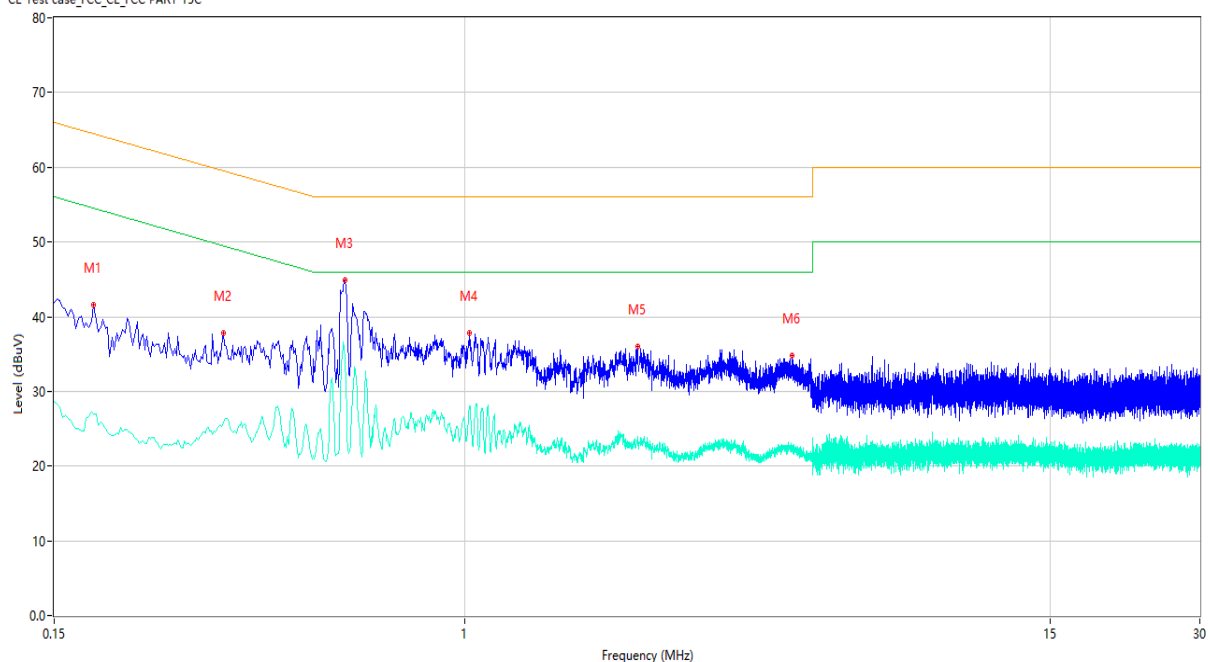

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin(dB)	Detector	Line	Verdict
1	0.180	41.55	10.15	64.49	22.94	Peak	N	Pass
1**	0.180	27.03	10.15	54.49	27.46	AV	N	Pass
2	0.328	37.75	10.16	59.50	21.75	Peak	N	Pass
2**	0.328	25.81	10.16	49.50	23.69	AV	N	Pass
3	0.576	44.92	10.19	56.00	11.08	Peak	N	Pass
3**	0.576	34.30	10.19	46.00	11.70	AV	N	Pass
4	1.022	37.83	10.24	56.00	18.17	Peak	N	Pass
4**	1.022	27.90	10.24	46.00	18.10	AV	N	Pass
5	2.226	36.02	10.26	56.00	19.98	Peak	N	Pass
5**	2.226	23.29	10.26	46.00	22.71	AV	N	Pass
6	4.552	34.83	10.41	56.00	21.17	Peak	N	Pass
6**	4.552	22.31	10.41	46.00	23.69	AV	N	Pass

A.6 Radiated Emission

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Test Data and Plots

30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

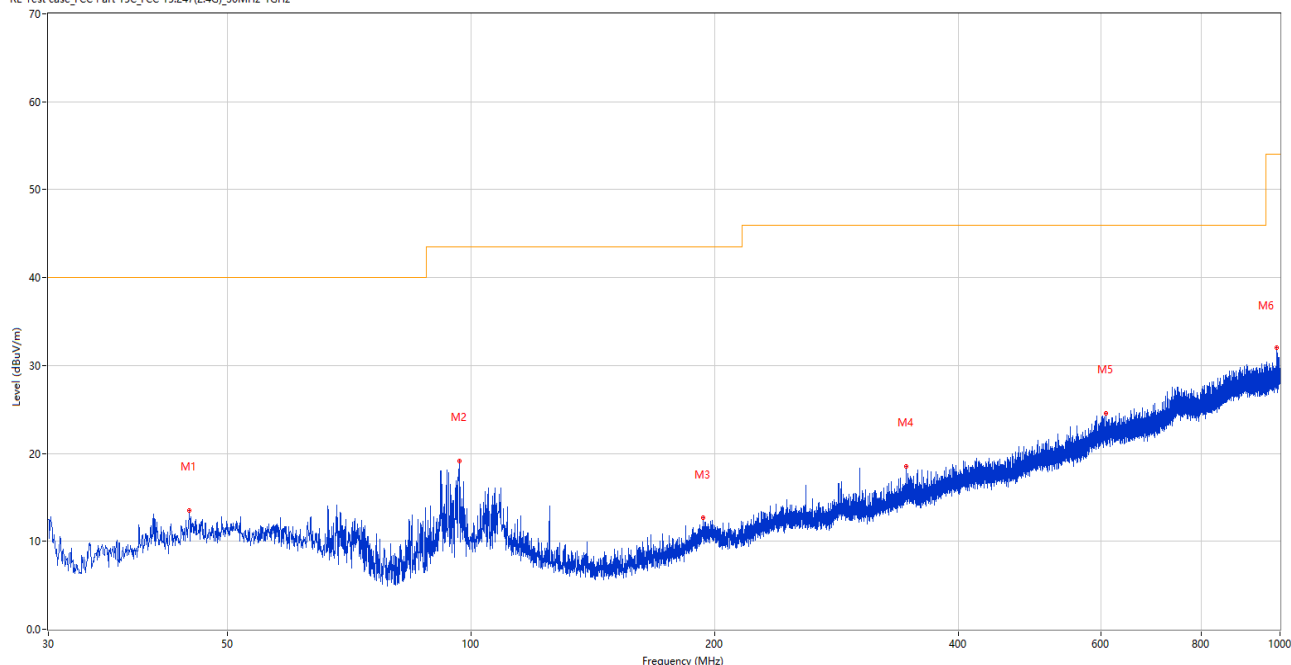

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	44.841	13.47	-24.76	40.0	26.53	Peak	172.00	100	Horizontal	Pass
2	96.590	19.18	-26.43	43.5	24.32	Peak	262.00	200	Horizontal	Pass
3	193.542	12.64	-25.74	43.5	30.86	Peak	135.00	100	Horizontal	Pass
4	344.765	18.57	-21.52	46.0	27.43	Peak	252.00	100	Horizontal	Pass
5	609.381	24.55	-14.72	46.0	21.45	Peak	0.00	200	Horizontal	Pass
6	989.912	32.02	-8.35	54.0	21.98	Peak	306.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

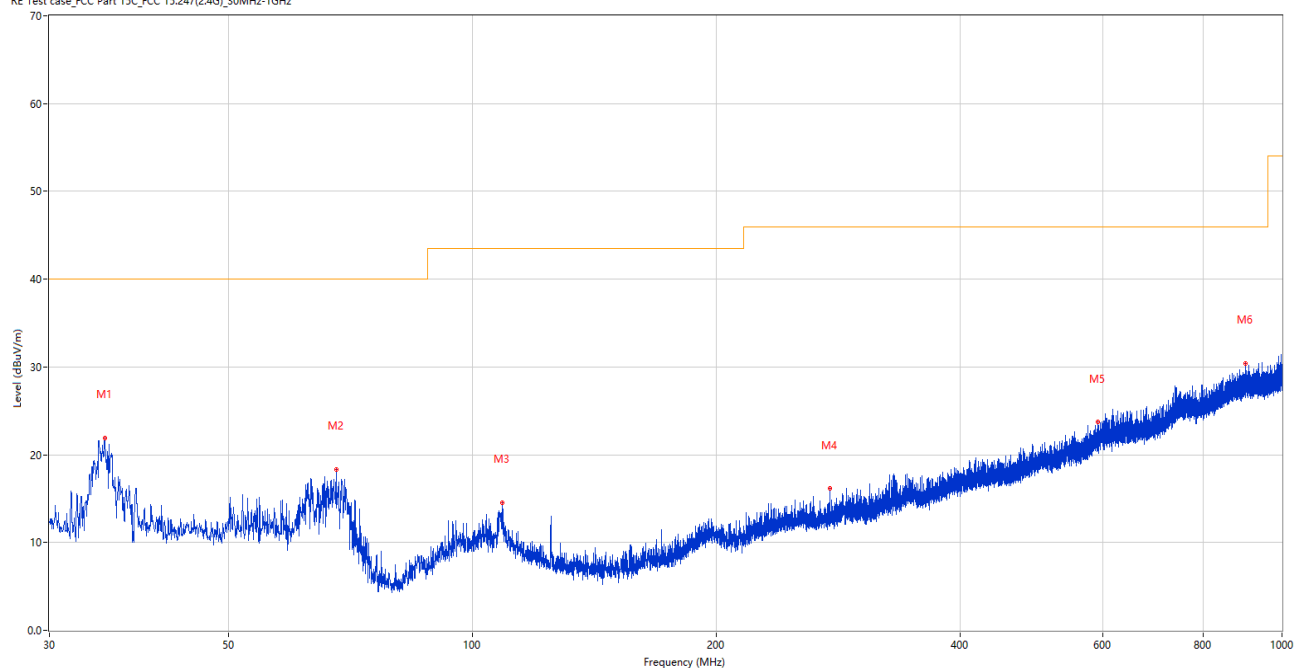


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	35.141	21.94	-27.69	40.0	18.06	Peak	348.00	100	Vertical	Pass
2	67.830	18.34	-28.26	40.0	21.66	Peak	166.00	100	Vertical	Pass
3	108.812	14.53	-26.52	43.5	28.97	Peak	80.00	100	Vertical	Pass
4	276.477	16.13	-23.94	46.0	29.87	Peak	215.00	100	Vertical	Pass
5	592.260	23.70	-15.28	46.0	22.30	Peak	215.00	100	Vertical	Pass
6	901.642	30.36	-9.21	46.0	15.64	Peak	68.00	100	Vertical	Pass
1	35.141	21.94	-27.69	40.0	18.06	Peak	348.00	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.


1 GHz to 18 GHz, ANT H 802.11b Middle Channel

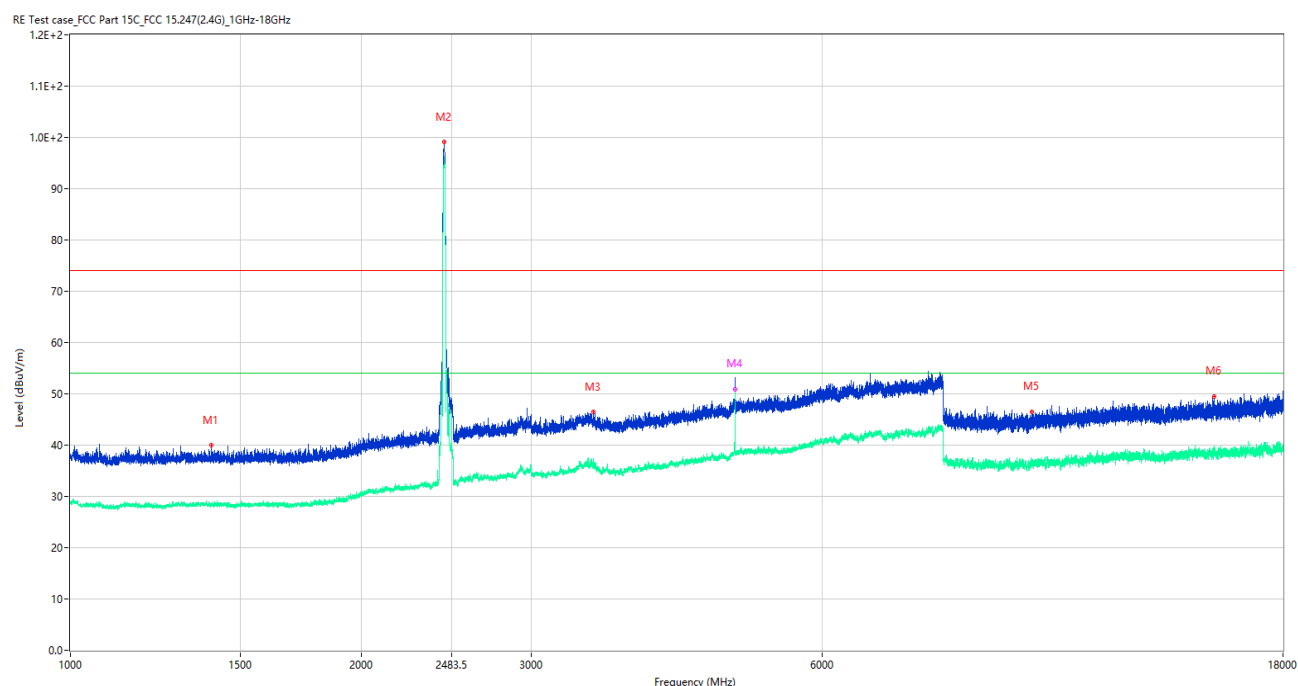

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1399.250	39.95	-15.99	74.0	34.05	Peak	62.00	150	Horizontal	Pass
1**	1399.250	28.17	-15.99	54.0	25.83	AV	62.00	150	Horizontal	Pass
2	2438.250	99.11	-12.38	74.0	-25.11	Peak	164.00	150	Horizontal	N/A
2**	2438.250	96.24	-12.38	54.0	-42.24	AV	164.00	150	Horizontal	N/A
3	3477.500	46.46	-6.22	74.0	27.54	Peak	198.00	150	Horizontal	Pass
3**	3477.500	36.70	-6.22	54.0	17.30	AV	198.00	150	Horizontal	Pass
4	4874.500	52.84	-2.25	74.0	21.16	Peak	59.00	150	Horizontal	Pass
4**	4874.500	50.95	-2.25	54.0	3.05	AV	59.00	150	Horizontal	Pass
5	9892.000	46.41	-4.29	74.0	27.59	Peak	89.00	150	Horizontal	Pass
5**	9892.000	36.38	-4.29	54.0	17.62	AV	89.00	150	Horizontal	Pass
6	15263.500	49.51	-1.04	74.0	24.49	Peak	118.00	150	Horizontal	Pass
6**	15263.500	39.23	-1.04	54.0	14.77	AV	118.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

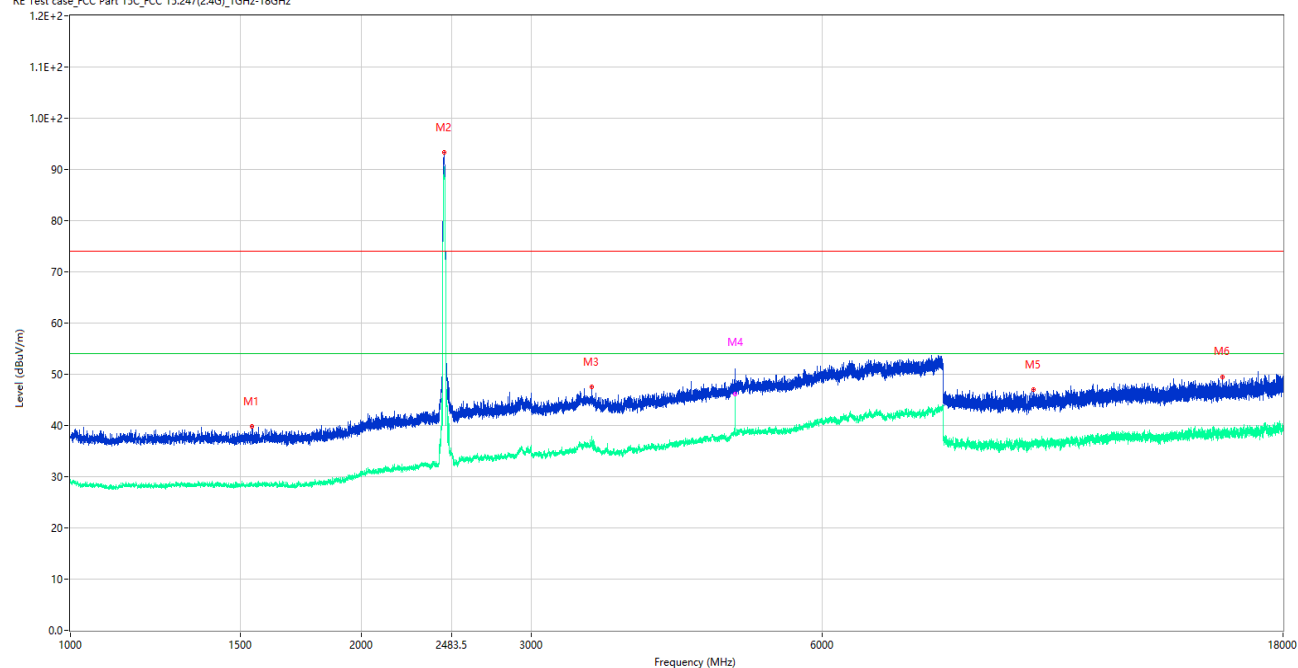

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1542.250	39.75	-16.07	74.0	34.25	Peak	62.00	150	Vertical	Pass
1**	1542.250	28.67	-16.07	54.0	25.33	AV	62.00	150	Vertical	Pass
2	2438.250	93.33	-12.38	74.0	-19.33	Peak	124.00	150	Vertical	N/A
2**	2438.250	90.46	-12.38	54.0	-36.46	AV	124.00	150	Vertical	N/A
3	3464.500	47.52	-5.08	74.0	26.48	Peak	331.00	150	Vertical	Pass
3**	3464.500	37.01	-5.08	54.0	16.99	AV	331.00	150	Vertical	Pass
4	4874.500	49.69	-2.25	74.0	24.31	Peak	200.00	150	Vertical	Pass
4**	4874.500	46.08	-2.25	54.0	7.92	AV	200.00	150	Vertical	Pass
5	9932.000	46.99	-4.03	74.0	27.01	Peak	11.00	150	Vertical	Pass
5**	9932.000	36.39	-4.03	54.0	17.61	AV	11.00	150	Vertical	Pass
6	15593.000	49.42	-2.57	74.0	24.58	Peak	243.00	150	Vertical	Pass
6**	15593.000	38.00	-2.57	54.0	16.00	AV	243.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

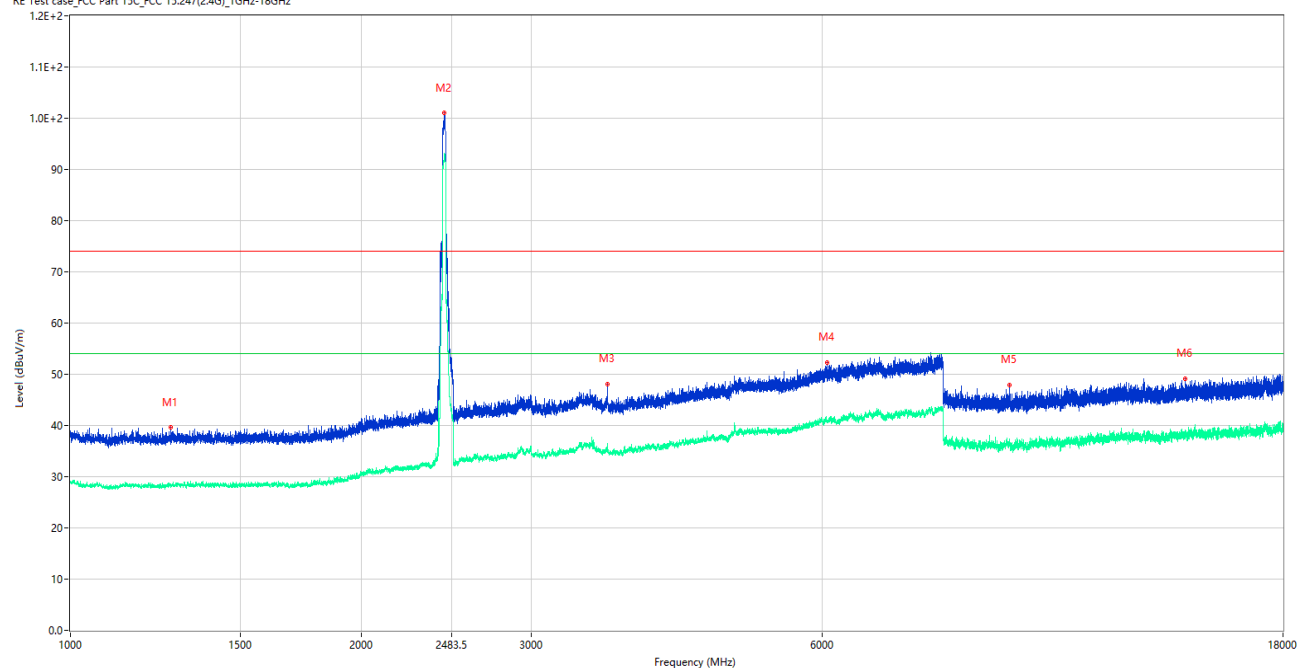

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1270.250	39.58	-15.90	74.0	34.42	Peak	36.00	150	Horizontal	Pass
1**	1270.250	28.27	-15.90	54.0	25.73	AV	36.00	150	Horizontal	Pass
2	2438.500	101.04	-12.37	74.0	-27.04	Peak	169.00	150	Horizontal	N/A
2**	2438.500	92.99	-12.37	54.0	-38.99	AV	169.00	150	Horizontal	N/A
3	3598.000	48.16	-5.09	74.0	25.84	Peak	266.00	150	Horizontal	Pass
3**	3598.000	36.53	-5.09	54.0	17.47	AV	266.00	150	Horizontal	Pass
4	6068.500	52.35	-0.39	74.0	21.65	Peak	69.00	150	Horizontal	Pass
4**	6068.500	40.56	-0.39	54.0	13.44	AV	69.00	150	Horizontal	Pass
5	9373.000	47.94	-4.90	74.0	26.06	Peak	206.00	150	Horizontal	Pass
5**	9373.000	36.35	-4.90	54.0	17.65	AV	206.00	150	Horizontal	Pass
6	14246.500	49.13	-2.31	74.0	24.87	Peak	90.00	150	Horizontal	Pass
6**	14246.500	37.40	-2.31	54.0	16.60	AV	90.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

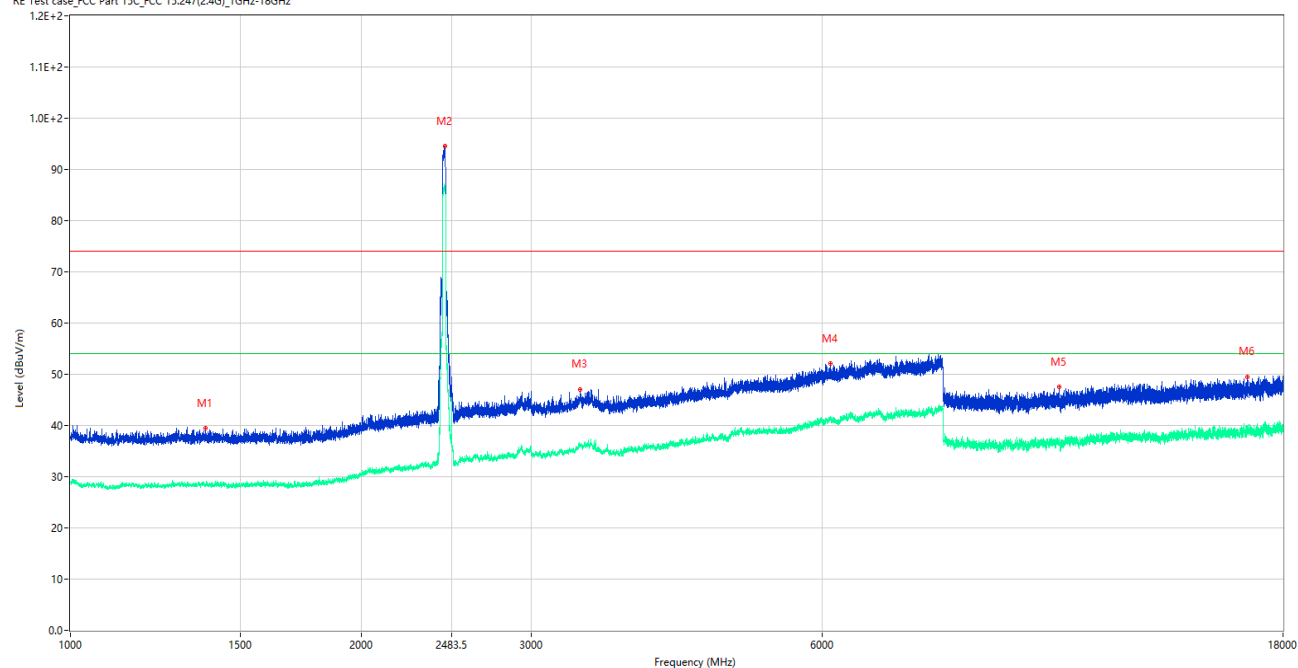

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1380.500	39.49	-15.98	74.0	34.51	Peak	221.00	150	Vertical	Pass
1**	1380.500	28.31	-15.98	54.0	25.69	AV	221.00	150	Vertical	Pass
2	2441.250	94.50	-12.40	74.0	-20.50	Peak	114.00	150	Vertical	N/A
2**	2441.250	86.29	-12.40	54.0	-32.29	AV	114.00	150	Vertical	N/A
3	3369.500	47.09	-4.87	74.0	26.91	Peak	111.00	150	Vertical	Pass
3**	3369.500	36.00	-4.87	54.0	18.00	AV	111.00	150	Vertical	Pass
4	6120.500	52.07	-0.10	74.0	21.93	Peak	51.00	150	Vertical	Pass
4**	6120.500	41.34	-0.10	54.0	12.66	AV	51.00	150	Vertical	Pass
5	10564.500	47.54	-3.21	74.0	26.46	Peak	298.00	150	Vertical	Pass
5**	10564.500	37.01	-3.21	54.0	16.99	AV	298.00	150	Vertical	Pass
6	16550.000	49.52	-1.07	74.0	24.48	Peak	125.00	150	Vertical	Pass
6**	16550.000	39.28	-1.07	54.0	14.72	AV	125.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

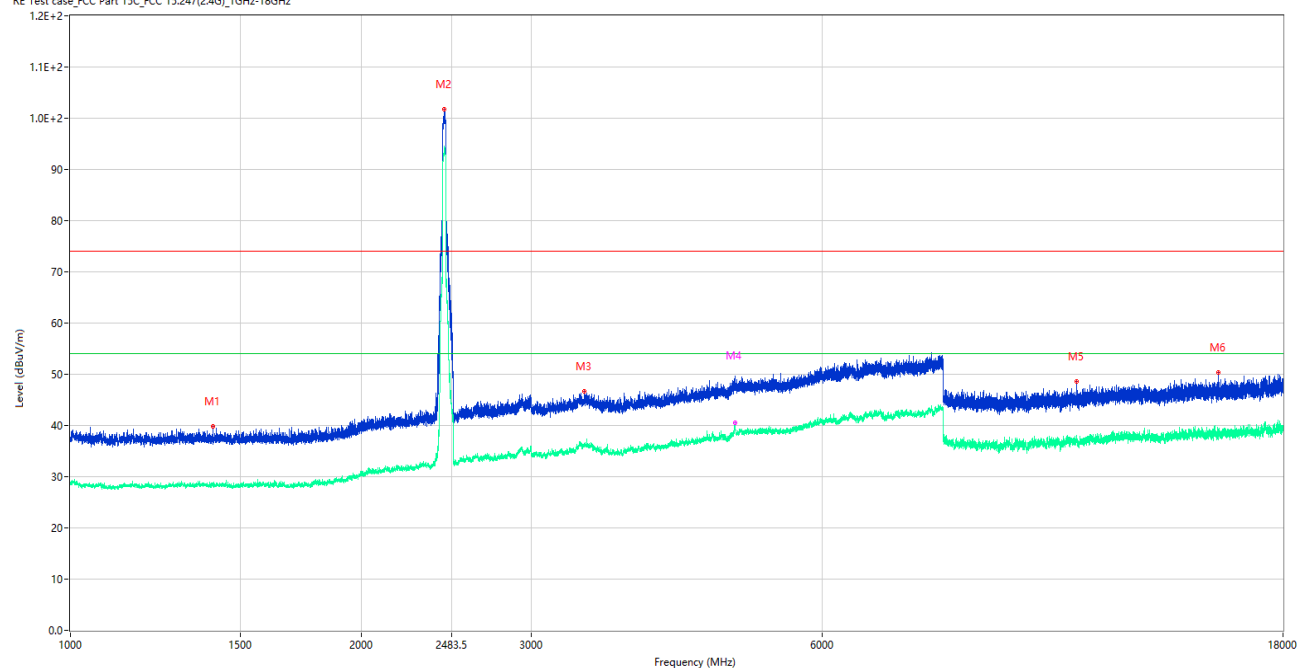

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1405.250	39.81	-16.01	74.0	34.19	Peak	8.00	150	Horizontal	Pass
1**	1405.250	28.15	-16.01	54.0	25.85	AV	8.00	150	Horizontal	Pass
2	2438.000	101.73	-12.38	74.0	-27.73	Peak	164.00	150	Horizontal	N/A
2**	2438.000	94.29	-12.38	54.0	-40.29	AV	164.00	150	Horizontal	N/A
3	3402.500	46.62	-5.56	74.0	27.38	Peak	343.00	150	Horizontal	Pass
3**	3402.500	36.39	-5.56	54.0	17.61	AV	343.00	150	Horizontal	Pass
4	4873.000	48.16	-2.22	74.0	25.84	Peak	28.00	150	Horizontal	Pass
4**	4873.000	40.47	-2.22	54.0	13.53	AV	28.00	150	Horizontal	Pass
5	10998.000	48.55	-2.78	74.0	25.45	Peak	264.00	150	Horizontal	Pass
5**	10998.000	37.45	-2.78	54.0	16.55	AV	264.00	150	Horizontal	Pass
6	15434.000	50.39	-1.61	74.0	23.61	Peak	9.00	150	Horizontal	Pass
6**	15434.000	38.45	-1.61	54.0	15.55	AV	9.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

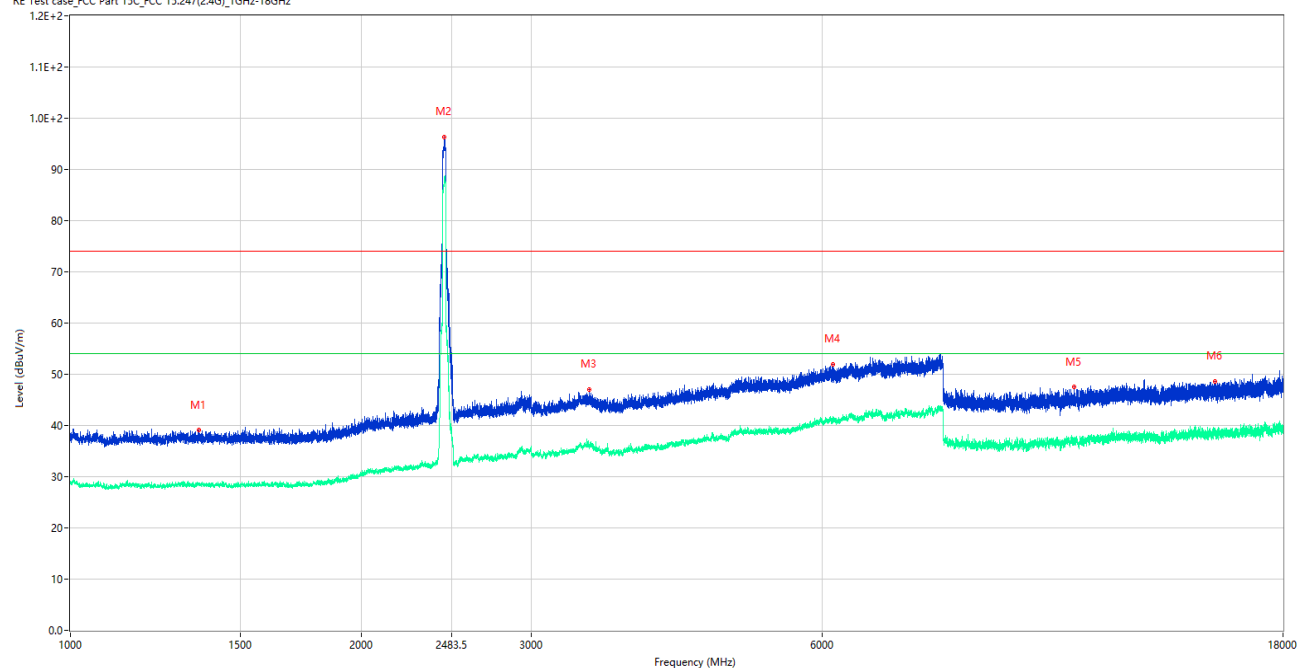

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1357.250	39.13	-15.83	74.0	34.87	Peak	303.00	150	Vertical	Pass
1**	1357.250	28.44	-15.83	54.0	25.56	AV	303.00	150	Vertical	Pass
2	2440.000	96.40	-12.37	74.0	-22.40	Peak	105.00	150	Vertical	N/A
2**	2440.000	88.33	-12.37	54.0	-34.33	AV	105.00	150	Vertical	N/A
3	3446.000	47.08	-5.18	74.0	26.92	Peak	18.00	150	Vertical	Pass
3**	3446.000	35.94	-5.18	54.0	18.06	AV	18.00	150	Vertical	Pass
4	6155.500	51.94	-0.17	74.0	22.06	Peak	157.00	150	Vertical	Pass
4**	6155.500	41.02	-0.17	54.0	12.98	AV	157.00	150	Vertical	Pass
5	10945.500	47.49	-3.28	74.0	26.51	Peak	10.00	150	Vertical	Pass
5**	10945.500	36.49	-3.28	54.0	17.51	AV	10.00	150	Vertical	Pass
6	15310.000	48.59	-1.88	74.0	25.41	Peak	38.00	150	Vertical	Pass
6**	15310.000	39.07	-1.88	54.0	14.93	AV	38.00	150	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note 1: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note 2: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note 3: According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Test Data and Plots

802.11b LOW CHANNEL




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.77	-4.87	74.0	24.23	Peak	85.09	150	Horizontal	Pass
1**	2390.000	40.32	-4.87	54.0	13.68	AV	85.09	150	Horizontal	Pass
2	2383.100	51.91	-4.48	74.0	22.09	Peak	129.00	150	Horizontal	Pass
2**	2383.100	40.42	-4.48	54.0	13.58	AV	129.00	150	Horizontal	Pass

802.11b HIGH CHANNEL

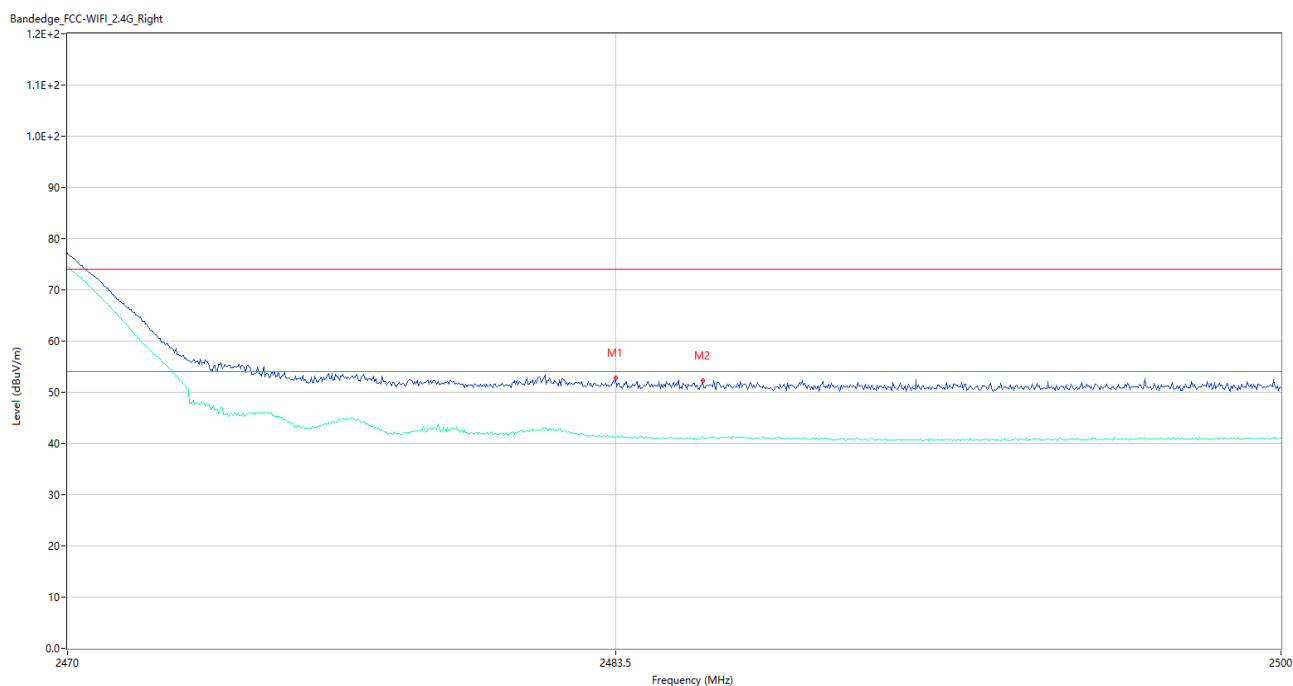


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.88	-3.78	74.0	21.12	Peak	259.00	150	Horizontal	Pass
1**	2483.500	41.21	-3.78	54.0	12.79	AV	259.00	150	Horizontal	Pass
2	2485.660	52.34	-3.78	74.0	21.66	Peak	135.00	150	Horizontal	Pass
2**	2485.660	41.33	-3.78	54.0	12.67	AV	135.00	150	Horizontal	Pass

802.11g LOW CHANNEL

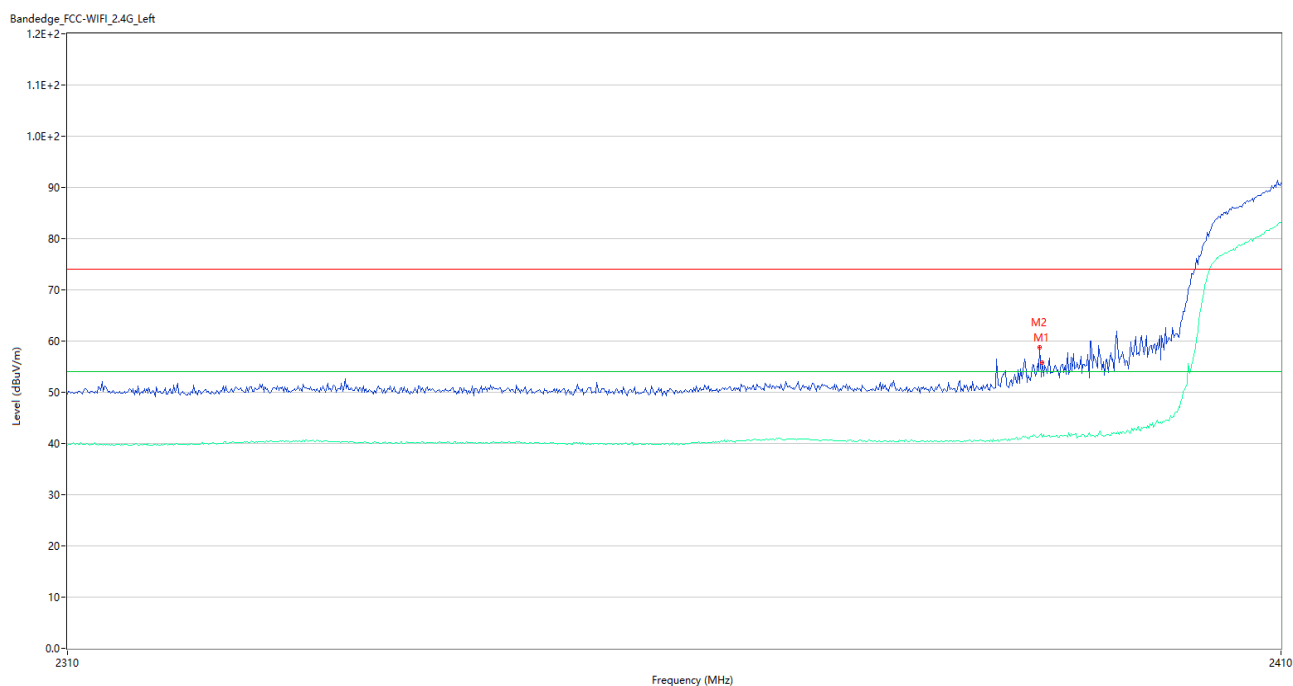


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	55.78	-4.87	74.0	18.22	Peak	166.05	150	Horizontal	Pass
1**	2390.000	41.29	-4.87	54.0	12.71	AV	166.05	150	Horizontal	Pass
2	2389.800	58.69	-4.86	74.0	15.31	Peak	164.00	150	Horizontal	Pass
2**	2389.800	41.63	-4.86	54.0	12.37	AV	164.00	150	Horizontal	Pass

802.11g HIGH CHANNEL

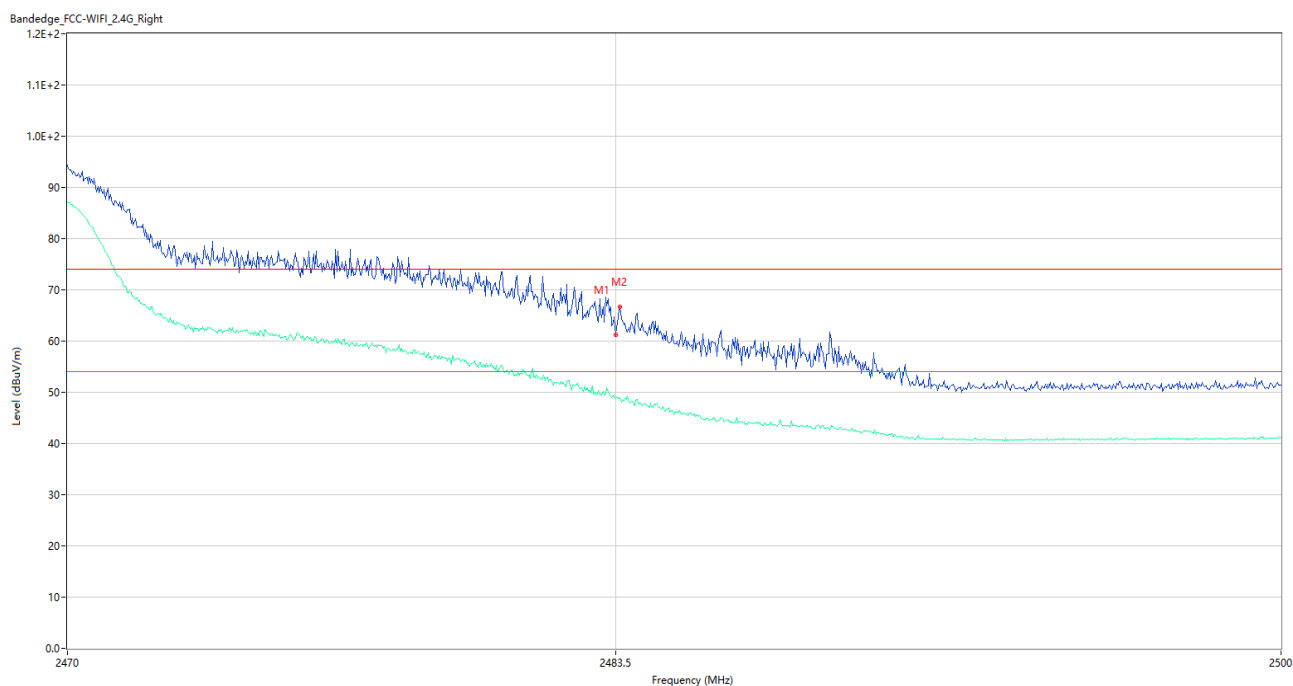


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	61.17	-3.78	74.0	12.83	Peak	181.00	150	Horizontal	Pass
1**	2483.500	48.76	-3.78	54.0	5.24	AV	181.00	150	Horizontal	Pass
2	2483.620	66.63	-3.78	74.0	7.37	Peak	159.00	150	Horizontal	Pass
2**	2483.620	49.00	-3.78	54.0	5.00	AV	159.00	150	Horizontal	Pass

802.11n20 LOW CHANNEL

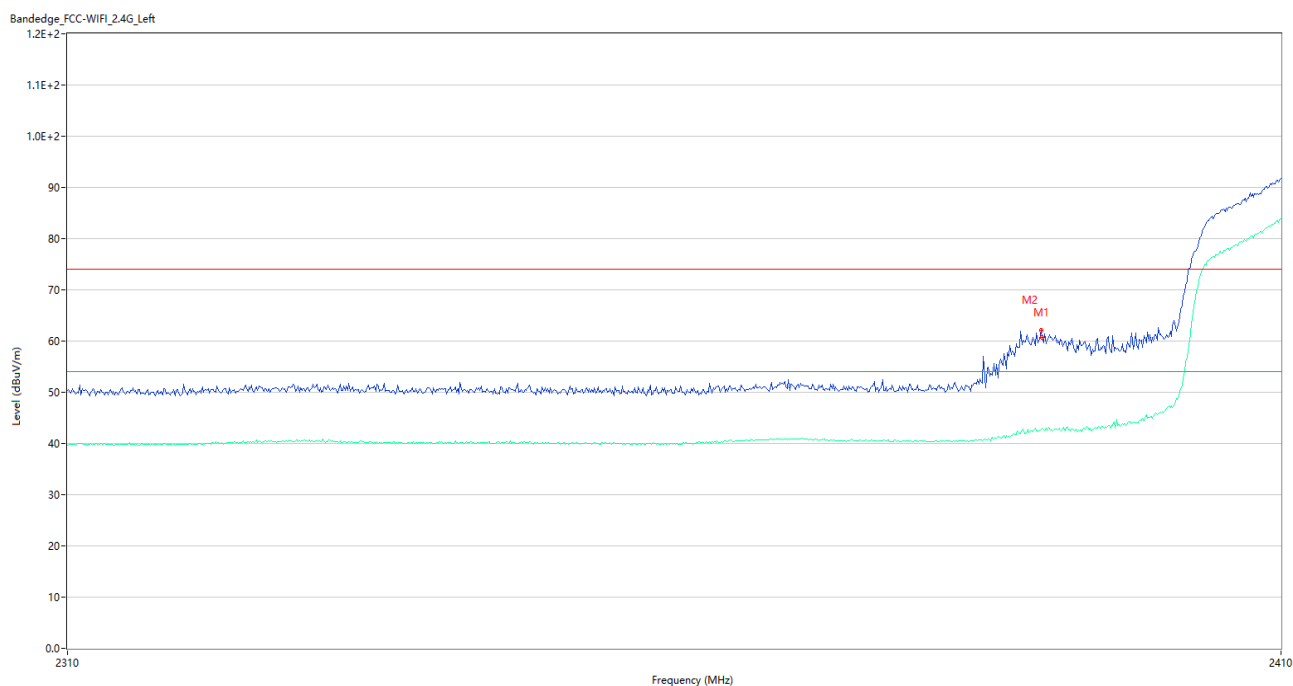

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	60.62	-4.87	74.0	13.38	Peak	200.95	150	Horizontal	Pass
1**	2390.000	42.98	-4.87	54.0	11.02	AV	200.95	150	Horizontal	Pass
2	2389.900	62.03	-4.87	74.0	11.97	Peak	162.00	150	Horizontal	Pass
2**	2389.900	42.76	-4.87	54.0	11.24	AV	162.00	150	Horizontal	Pass

802.11n20 HIGH CHANNEL

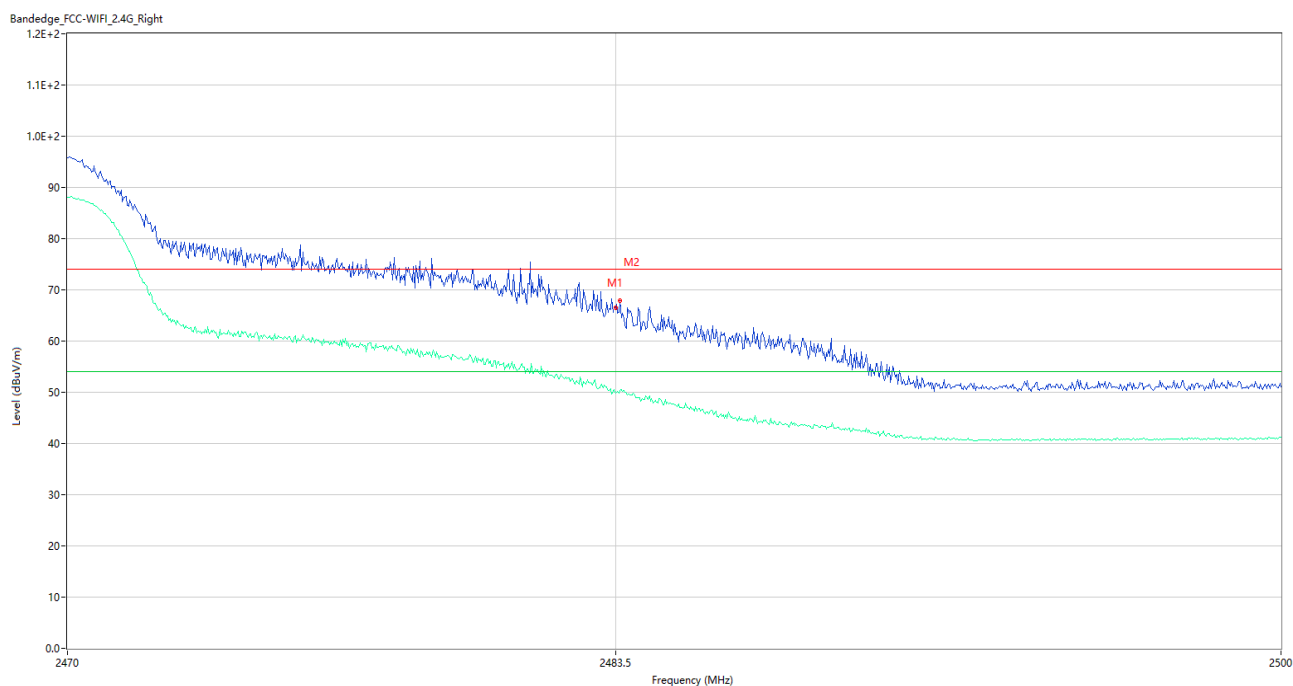

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin(dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	66.48	-3.78	74.0	7.52	Peak	154.00	150	Horizontal	Pass
1**	2483.500	49.81	-3.78	54.0	4.19	AV	154.00	150	Horizontal	Pass
2	2483.620	67.86	-3.78	74.0	6.14	Peak	166.00	150	Horizontal	Pass
2**	2483.620	50.34	-3.78	54.0	3.66	AV	166.00	150	Horizontal	Pass

A.8 Power Spectral Density (PSD)

Test Data

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-6.86	8
Middle	-5.76	8
High	-6.28	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-8.63	8
Middle	-8.93	8
High	-9.37	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-9.43	8
Middle	-9.31	8
High	-9.80	8

Test Plots

802.11b LOW CHANNEL




802.11b MIDDLE CHANNEL




802.11b HIGH CHANNEL




802.11g LOW CHANNEL

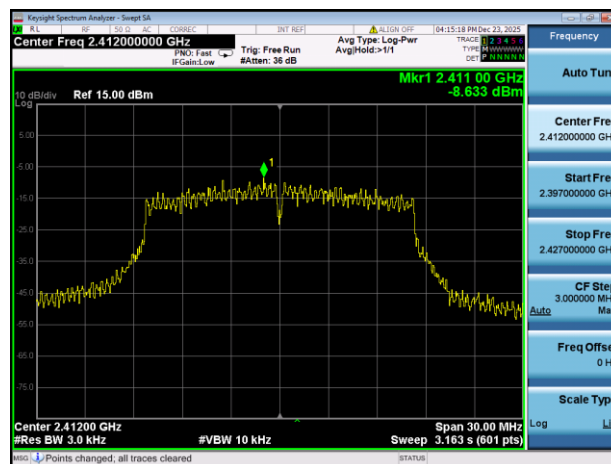


802.11g MIDDLE CHANNEL

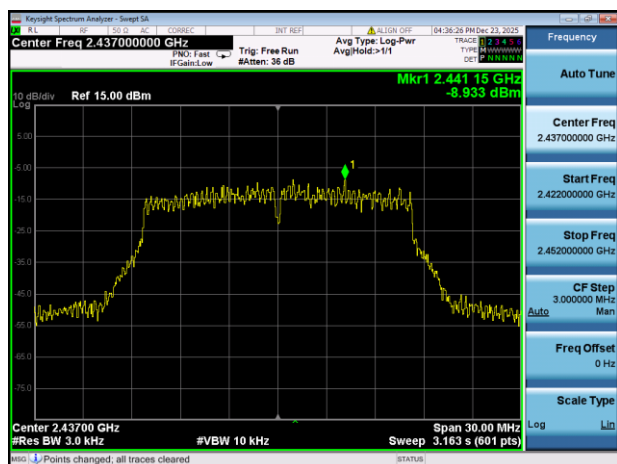


802.11g HIGH CHANNEL

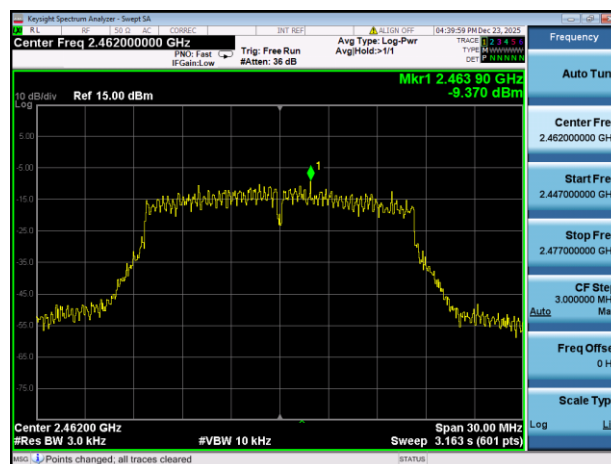


802.11n-20 MHz LOW CHANNEL

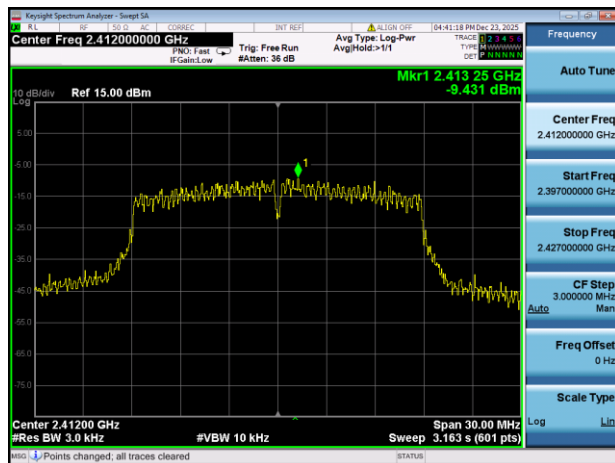

802.11 n-20 MHz MIDDLE CHANNEL

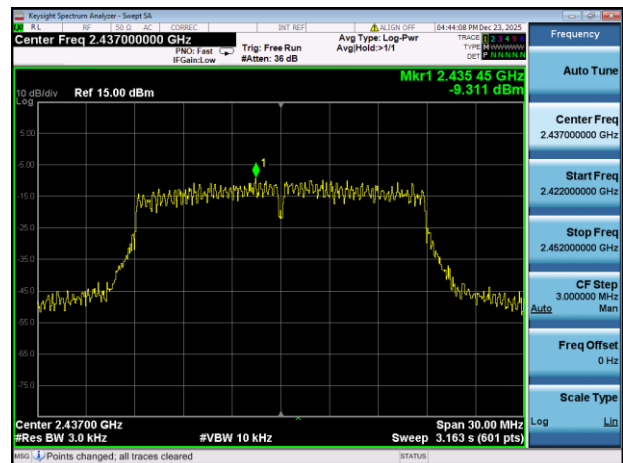

802.11n-20 MHz HIGH CHANNEL

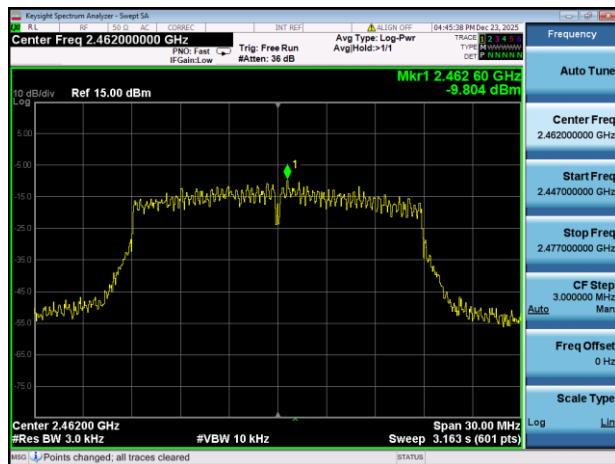

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SH25B1335-AR-1.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SH25B1335-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SH25B1335-AI.PDF”.

Statement

1. The Testing Center guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. For the report with Accreditation Symbol, the items marked with "☆" are not within the accredited scope.
3. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the test report stamp.
4. The test data and results are only valid for the tested samples provided by the customer.
5. This report shall not be partially reproduced without the written permission of the Testing Center.
6. Any objection shall be raised to the Testing Center within 30 days after receiving the report.

--END OF REPORT--