






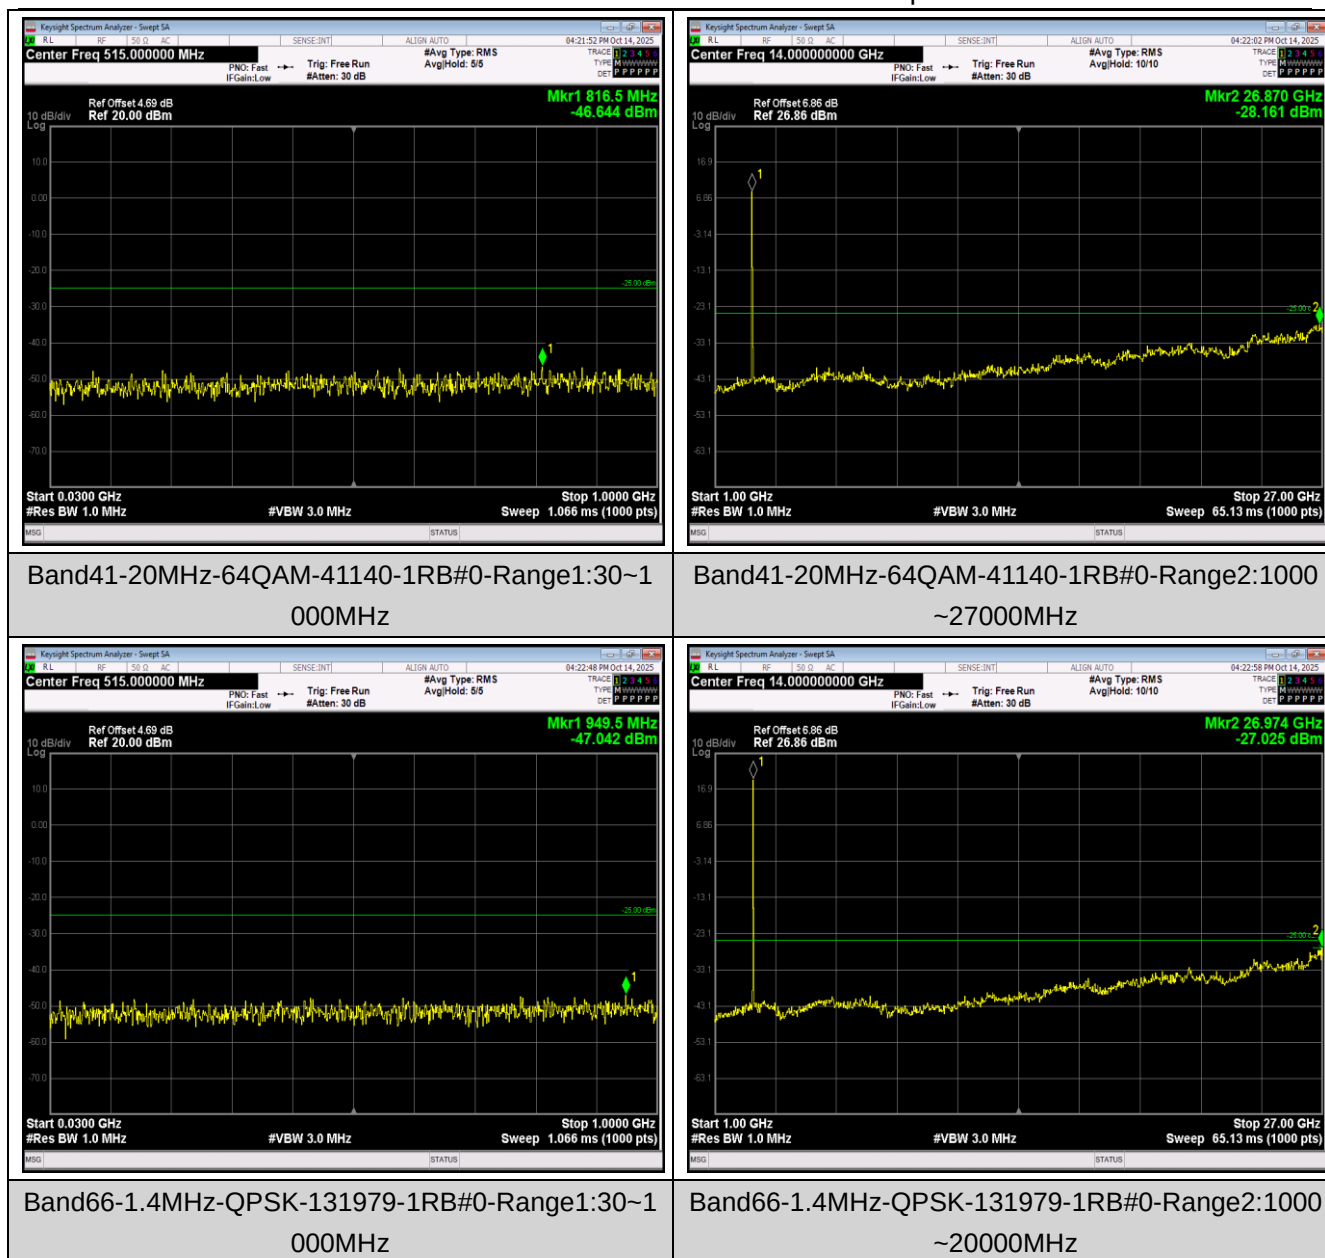


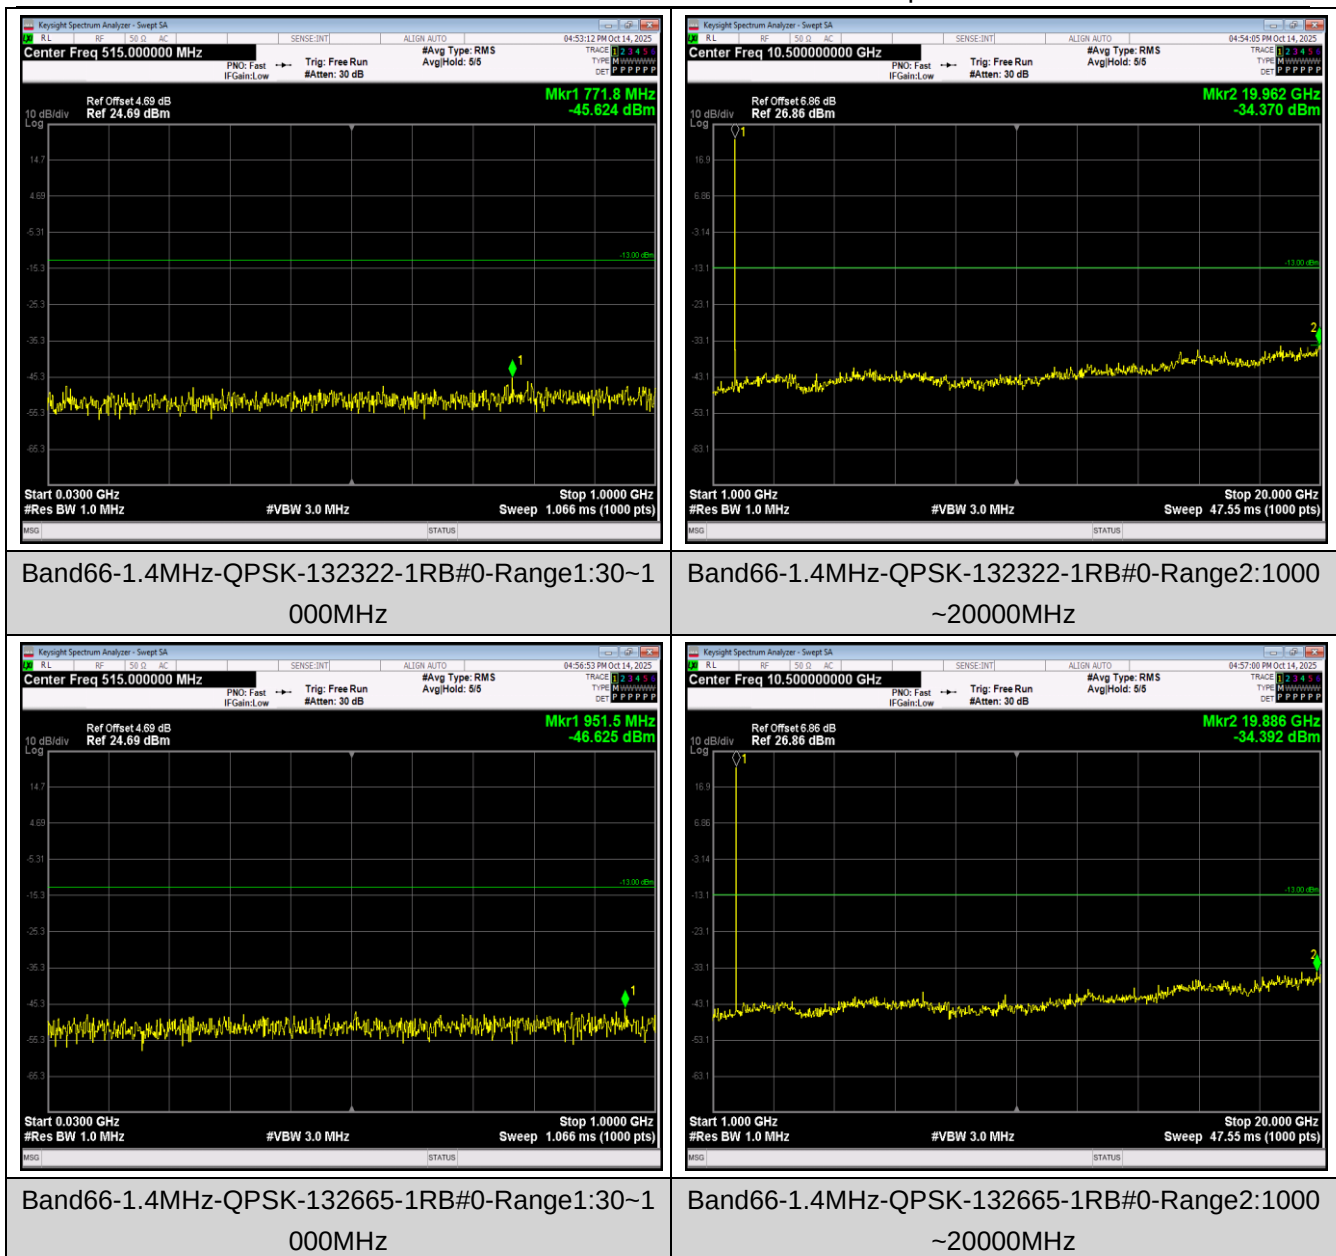


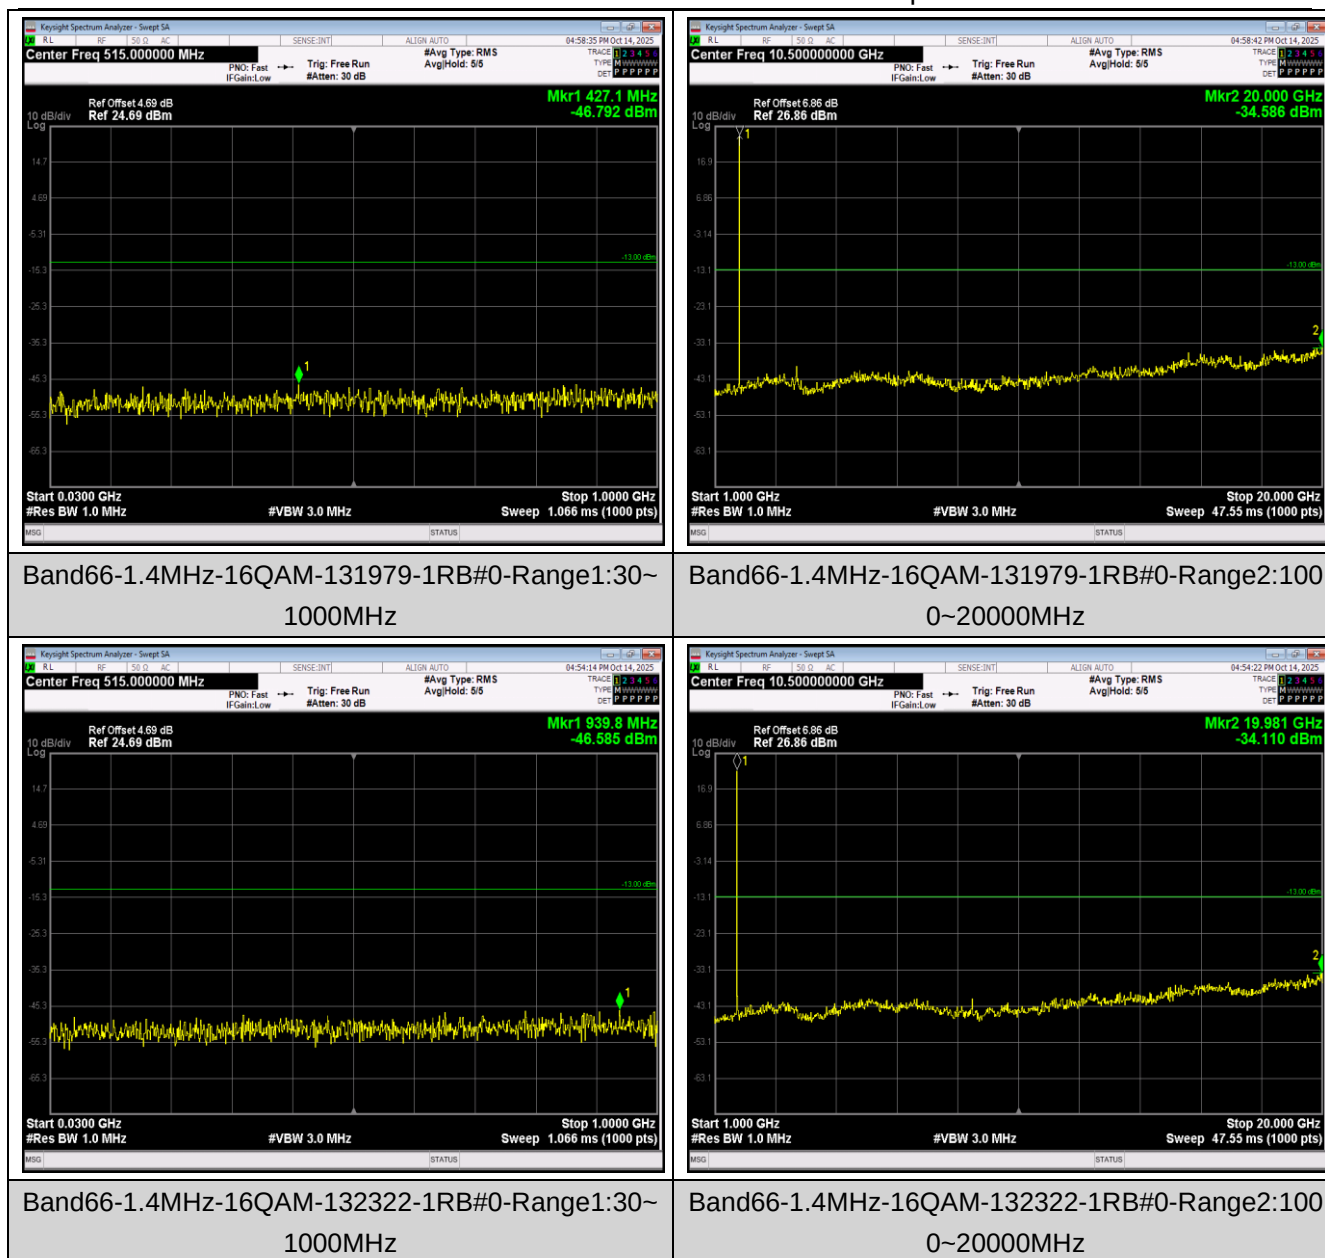


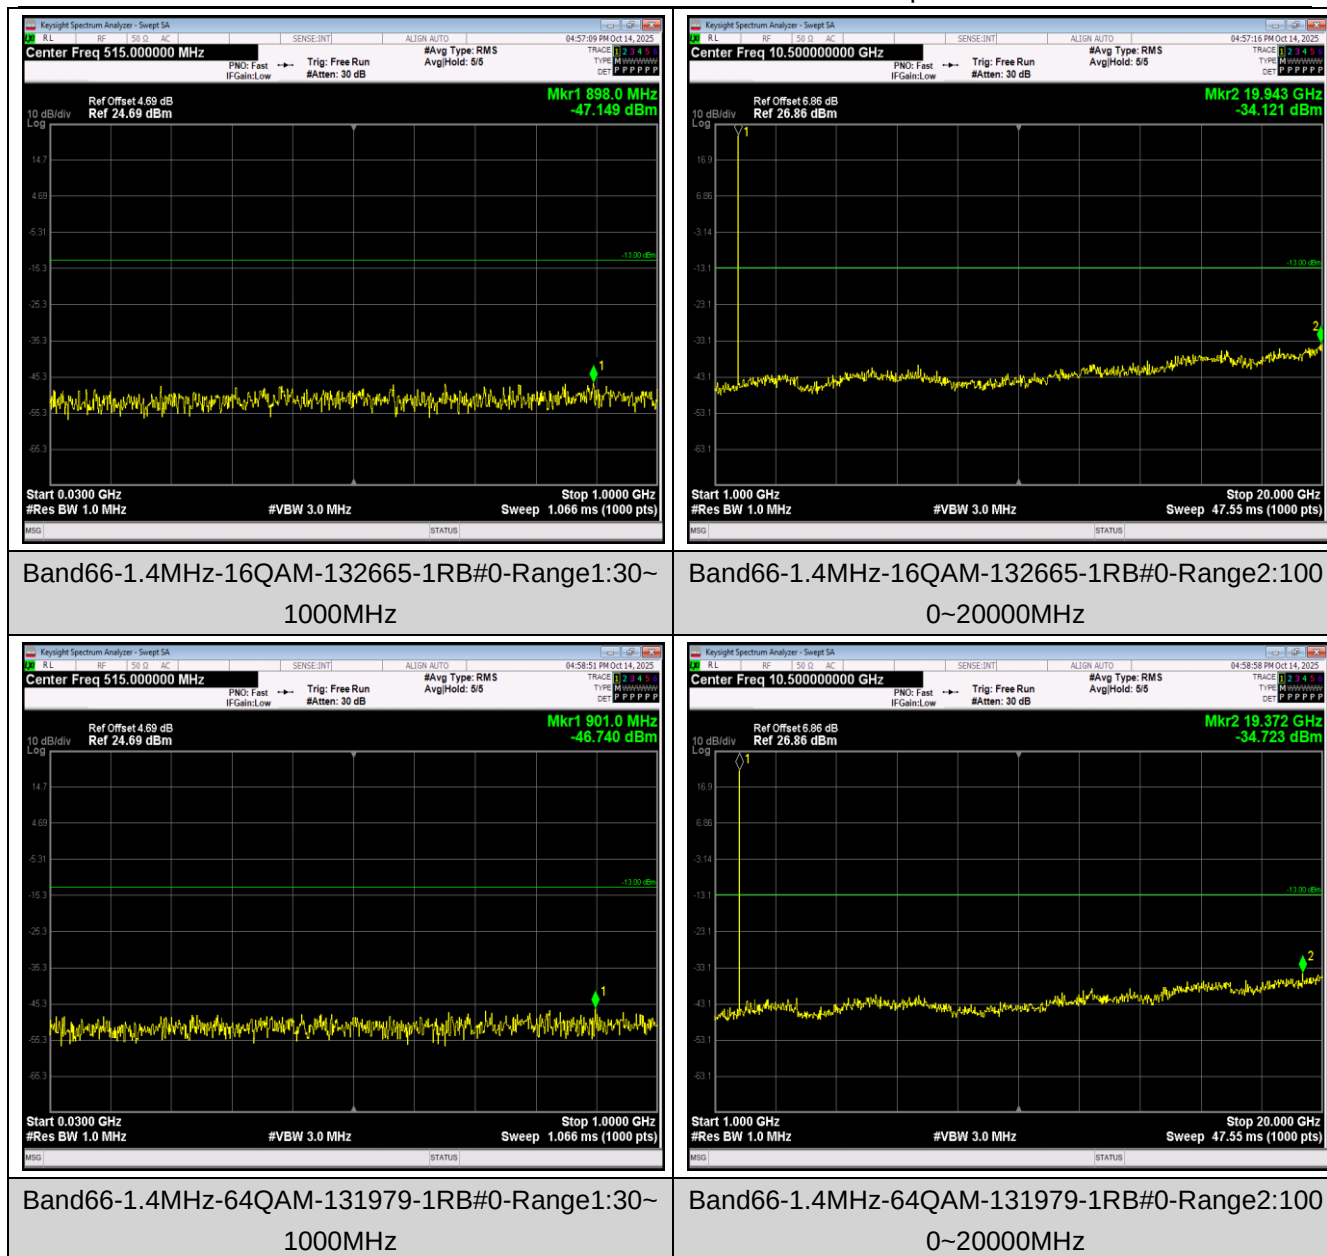


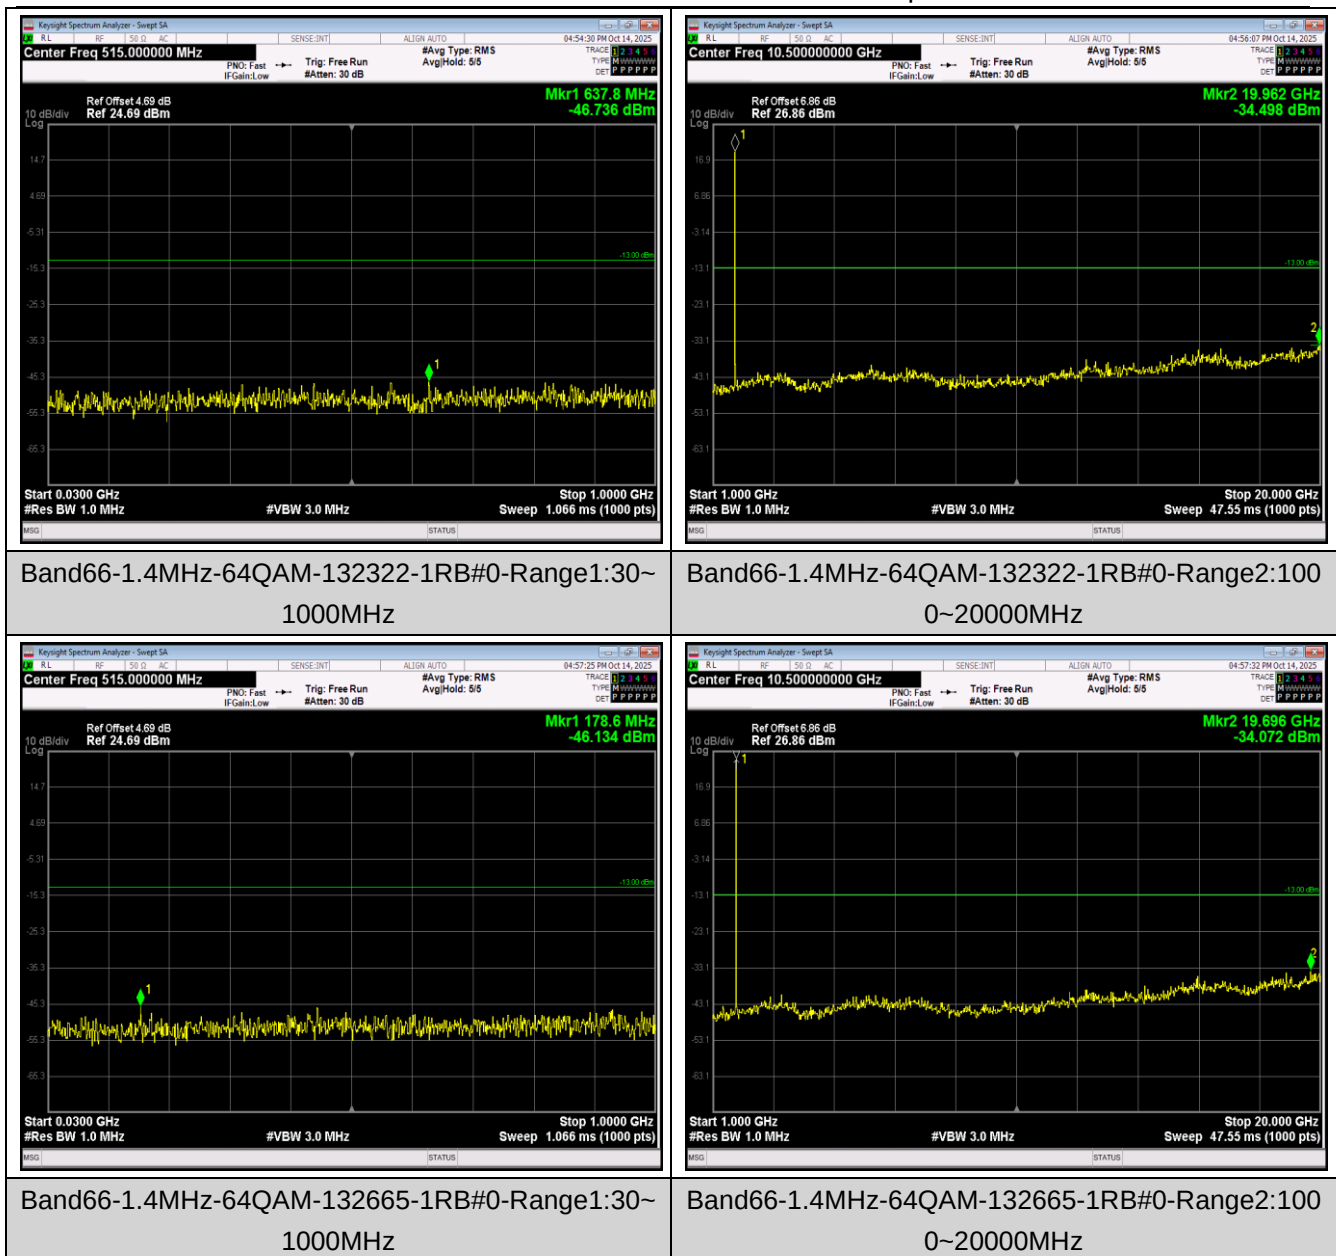


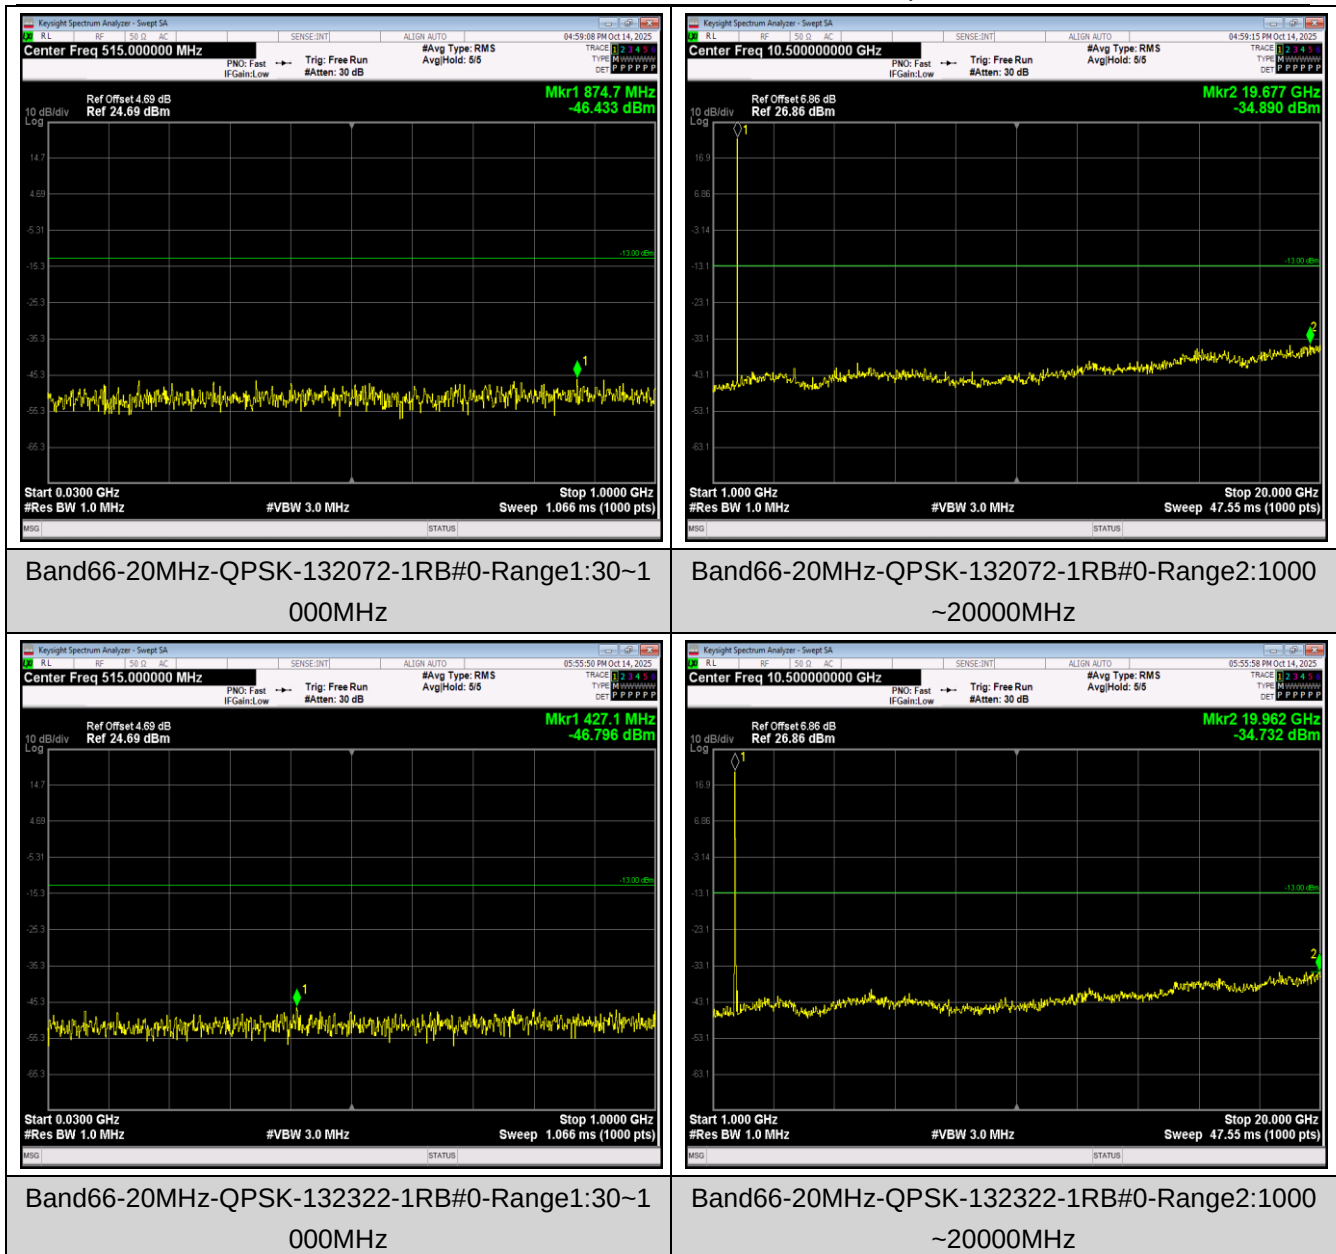

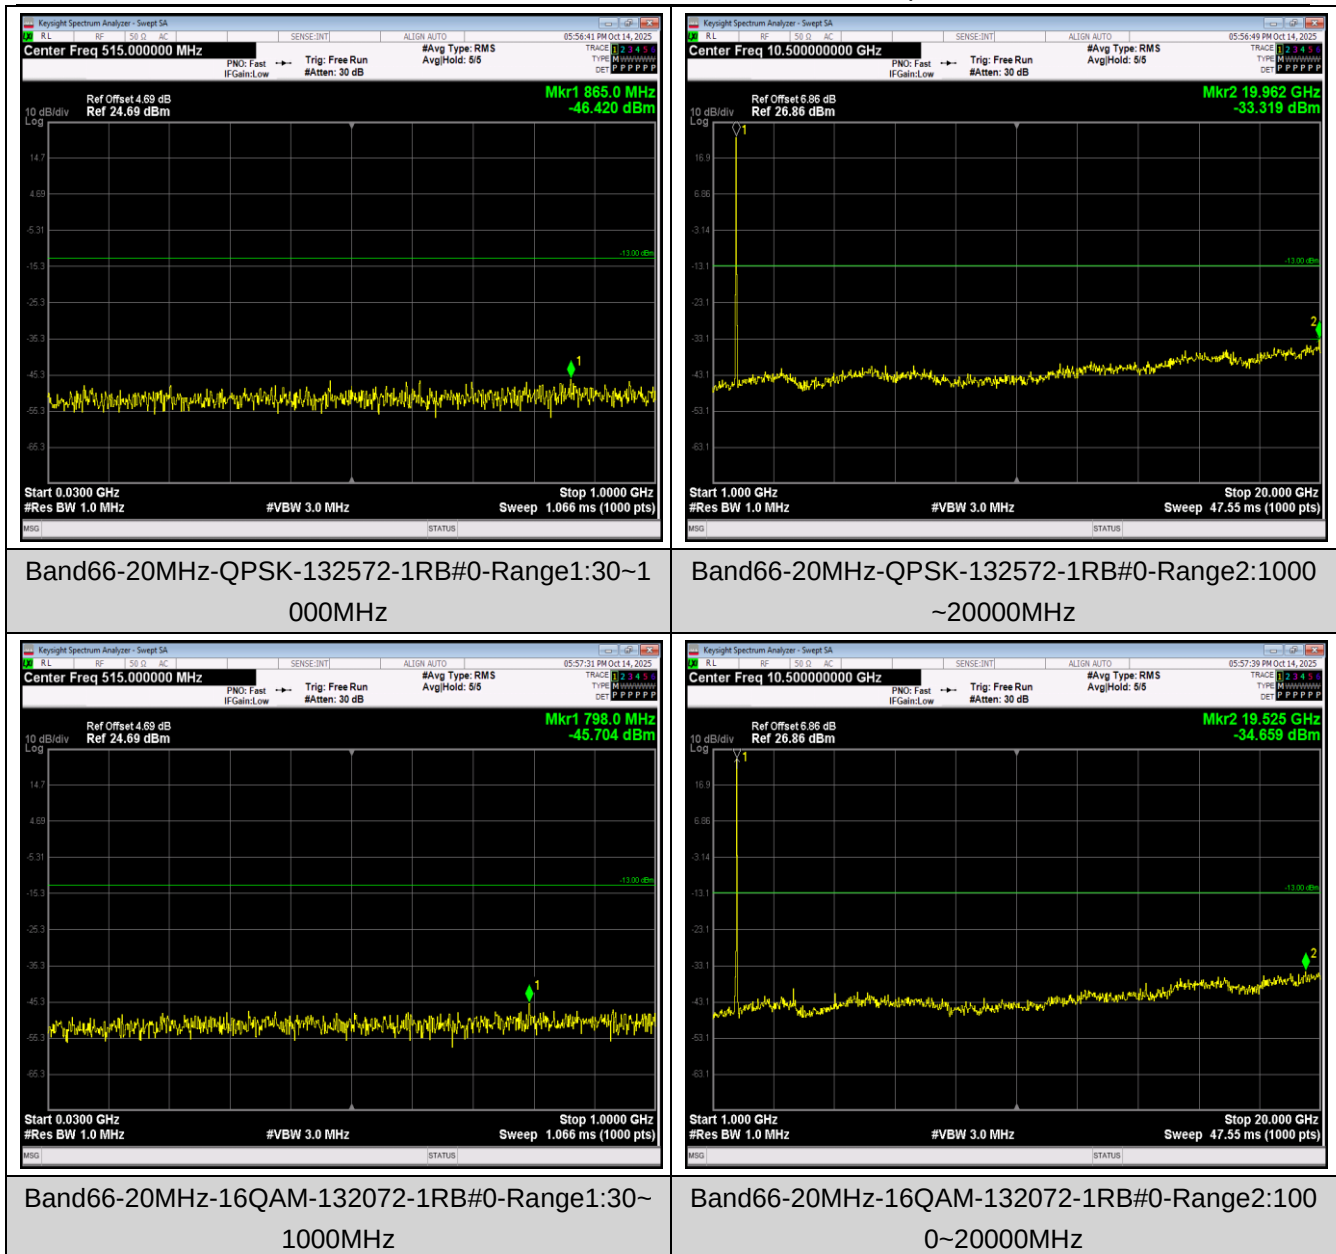


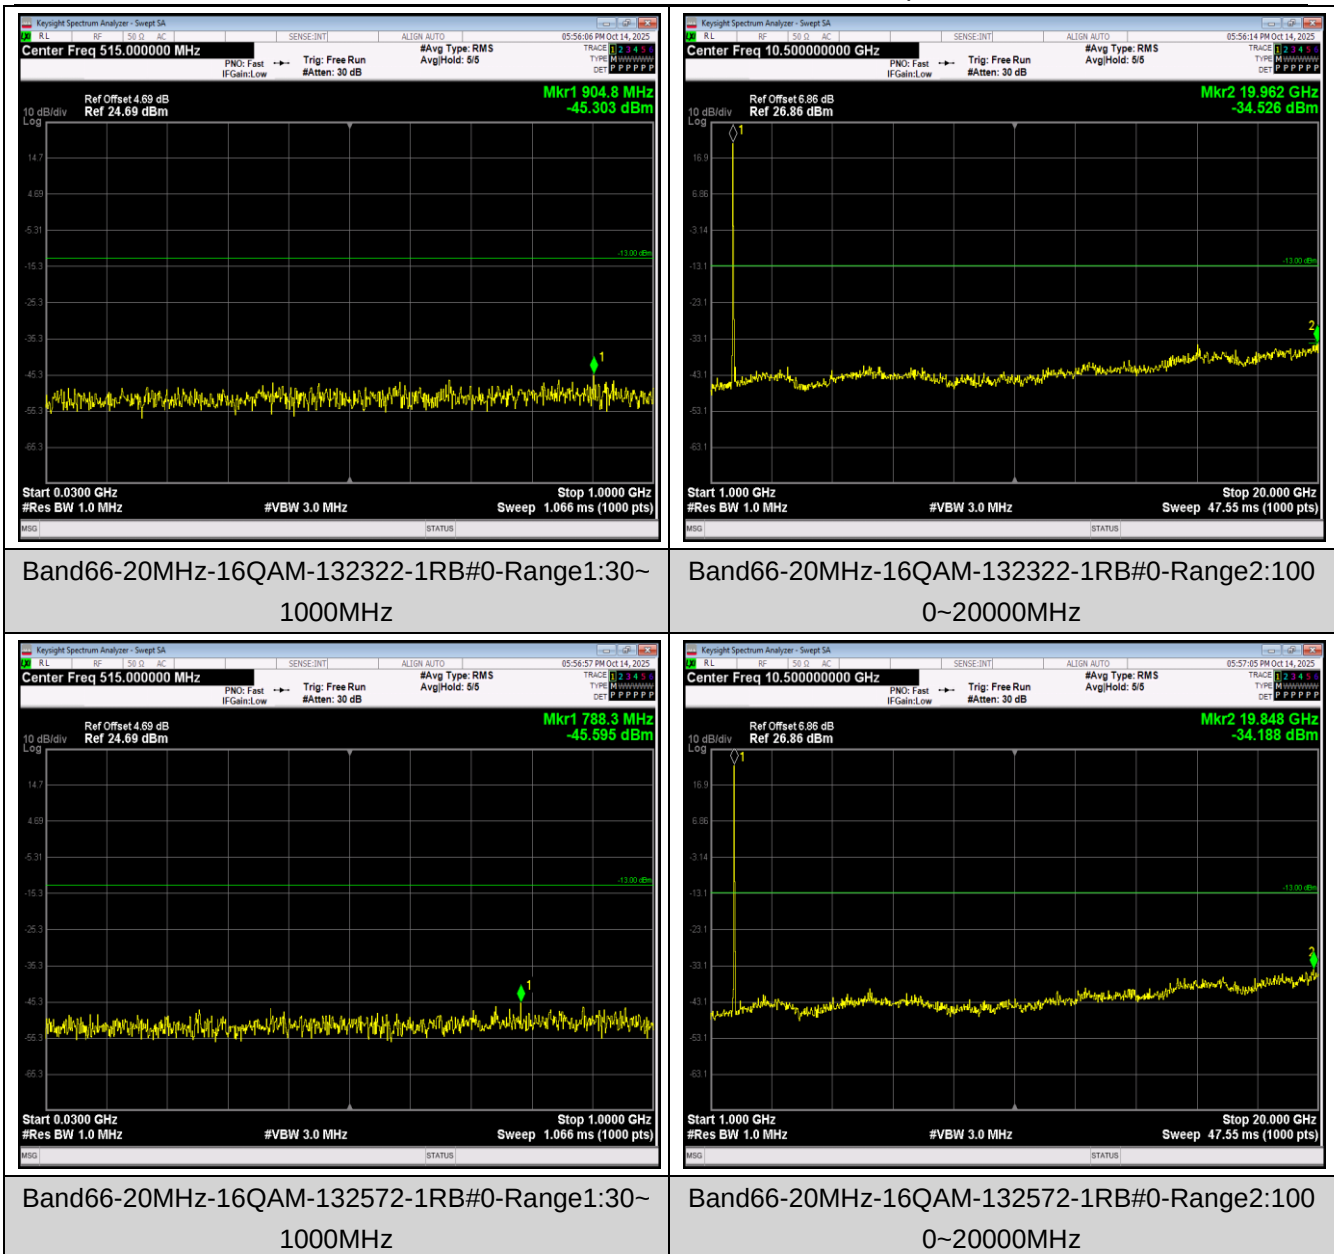


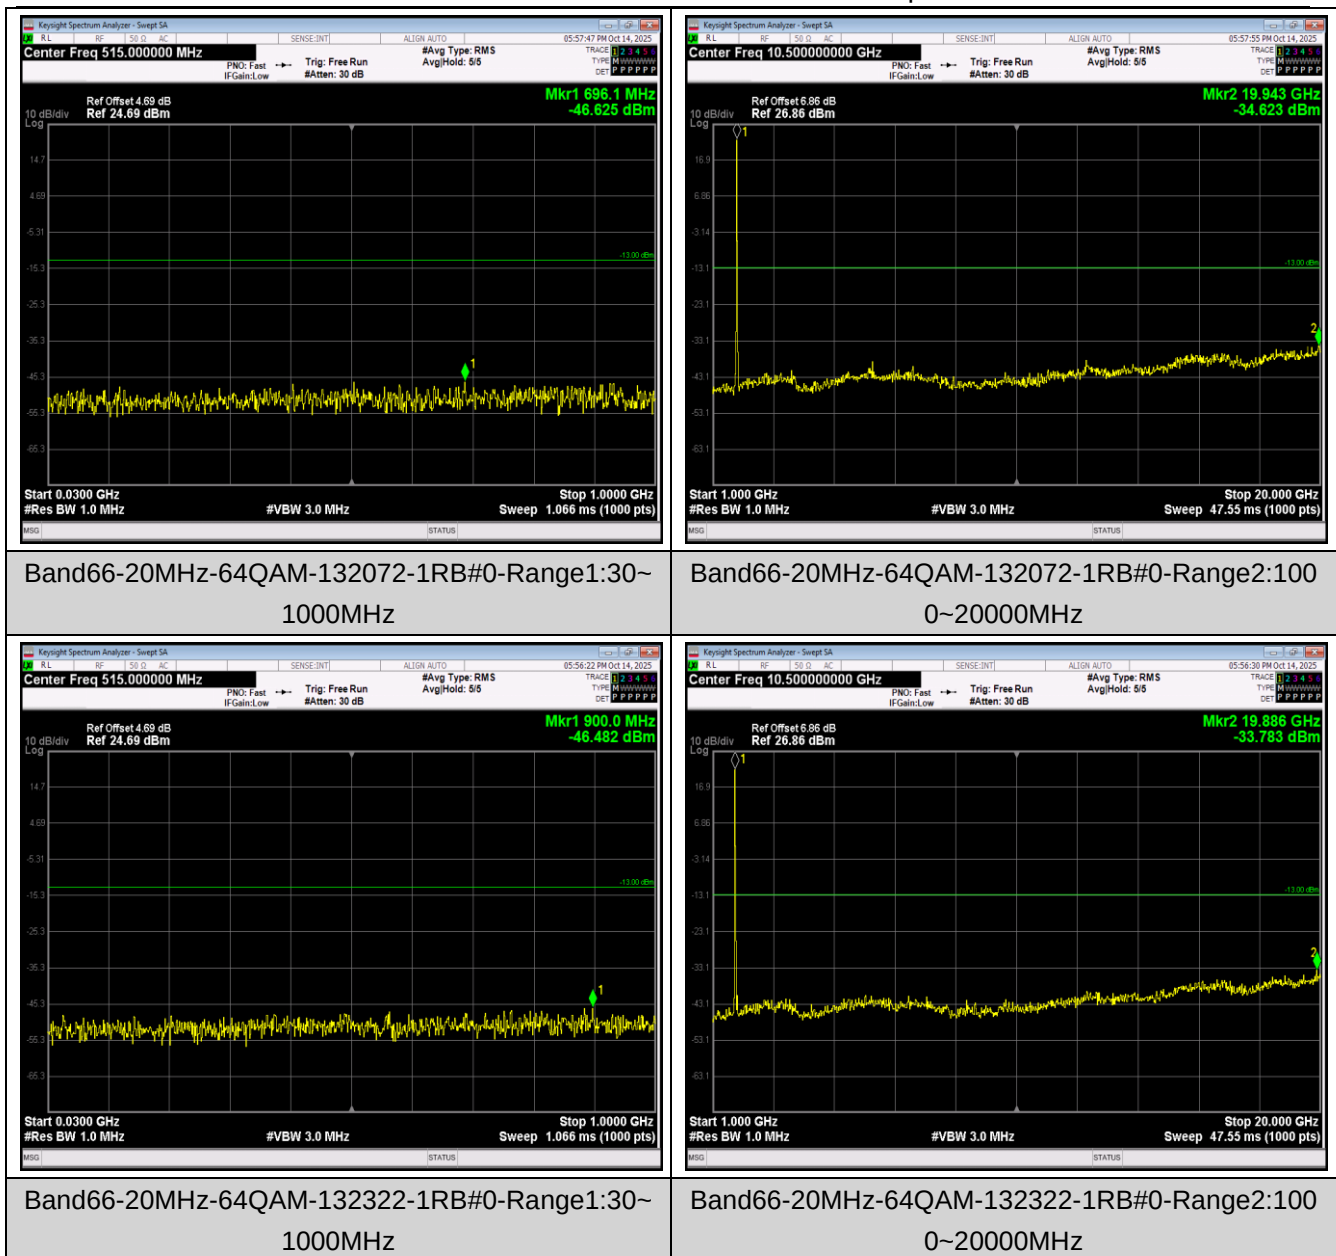


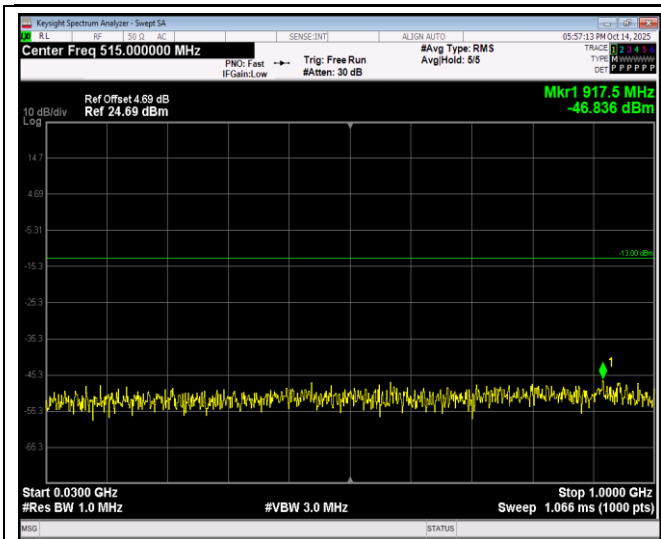

Band66-20MHz-64QAM-132572-1RB#0-Range1:30~1000MHz

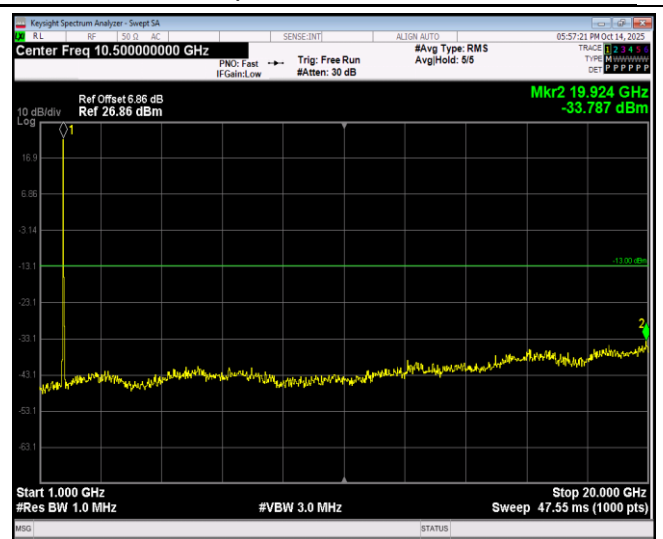

Band66-20MHz-64QAM-132572-1RB#0-Range2:1000~20000MHz

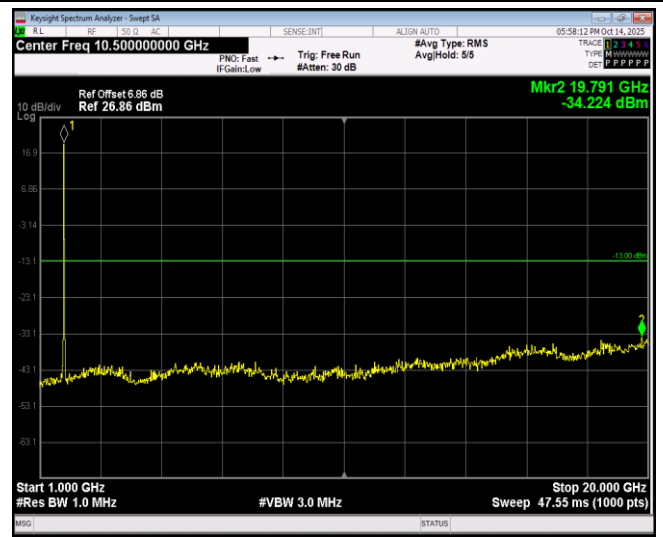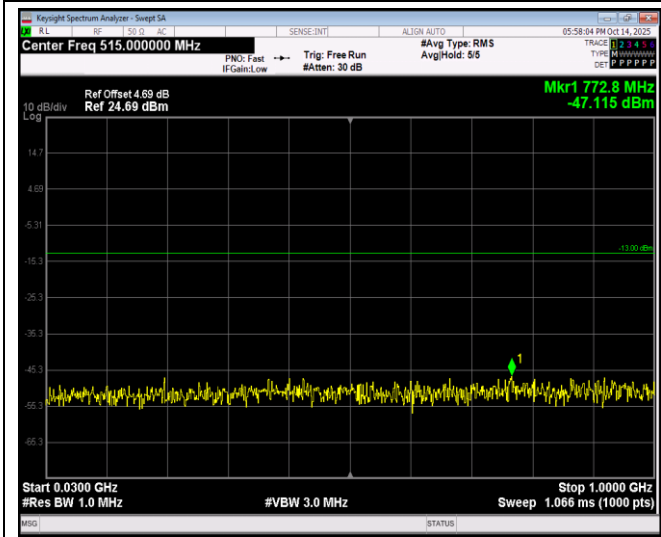

Appendix F: Frequency Stability

Test Result

LTE Band 2 part:

Reference Frequency: LTE Band 2 (10MHz) Middle channel=18900 Frequency=1880.0MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.91	-30	-26.24	-0.013957	Within authorized band for Band 2	Pass
	-20	19.14	0.010181		
	-10	14.99	0.007973		
	0	13.28	0.007064		
	10	-60.97	-0.032431		
	20	-30.86	-0.016415		
	30	-47.41	-0.025218		
	40	13.19	0.007016		
	50	32.50	0.017287		
16QAM					
3.91	-30	40.08	0.021319	Within authorized band for Band 2	Pass
	-20	-20.60	-0.010957		
	-10	14.45	0.007686		
	0	23.13	0.012303		
	10	13.86	0.007372		
	20	-32.94	-0.017521		
	30	28.37	0.015090		
	40	22.16	0.011787		
	50	25.91	0.013782		
64QAM					
3.91	-30	-32.74	-0.017415	Within authorized band for Band 2	Pass
	-20	-16.06	-0.008543		
	-10	-10.20	-0.005426		
	0	-16.55	-0.008803		
	10	26.25	0.013963		
	20	24.91	0.013250		
	30	-25.92	-0.013787		
	40	21.37	0.011367		
	50	22.65	0.012048		



Report No.: AITSZ-251127006FW8

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.60	22.54	0.011989	Within authorized band for Band 2	Pass
	3.91	58.15	0.030931		
	4.50	-60.31	-0.032080		
16QAM					
25	3.60	28.07	0.014931	Within authorized band for Band 2	Pass
	3.91	47.84	0.025447		
	4.50	36.94	0.019649		
64QAM					
25	3.60	-20.41	-0.010856	Within authorized band for Band 2	Pass
	3.91	43.82	0.023309		
	4.50	-18.63	-0.009910		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 4 part:

Reference Frequency: LTE Band 4(10MHz) Middle channel=20175 Frequency=1732.5MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.91	-30	-22.97	-0.013258	Within authorized band for Band 4	Pass
	-20	-14.89	-0.008595		
	-10	-14.56	-0.008404		
	0	-29.44	-0.016993		
	10	-23.19	-0.013385		
	20	-34.58	-0.019960		
	30	-38.38	-0.022153		
	40	-18.25	-0.010534		
	50	-12.63	-0.007290		
16QAM					
3.91	-30	22.95	0.013247	Within authorized band for Band 4	Pass
	-20	27.82	0.016058		
	-10	27.35	0.015786		
	0	-11.57	-0.006678		
	10	-15.49	-0.008941		
	20	30.28	0.017478		
	30	-22.23	-0.012831		
	40	-11.00	-0.006349		
	50	33.09	0.019100		
64QAM					
3.91	-30	-36.98	-0.021345	Within authorized band for Band 4	Pass
	-20	-44.72	-0.025812		
	-10	-25.82	-0.014903		
	0	28.40	0.016392		
	10	-9.68	-0.005587		
	20	-10.46	-0.006038		
	30	37.28	0.021518		
	40	39.78	0.022961		
	50	47.02	0.027140		



Report No.: AITSZ-251127006FW8

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.60	26.56	0.015330	Within authorized band for Band 4	Pass
	3.91	43.16	0.024912		
	4.50	-34.66	-0.020006		
16QAM					
25	3.60	11.54	0.006661	Within authorized band for Band 4	Pass
	3.91	-23.17	-0.013374		
	4.50	13.55	0.007821		
64QAM					
25	3.60	-45.53	-0.026280	Within authorized band for Band 4	Pass
	3.91	-27.81	-0.016052		
	4.50	-28.38	-0.016381		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					



LTE Band 5 part:

Reference Frequency: LTE Band 5(10MHz) Middle channel=20525 Frequency=836.5MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.91	-30	-10.11	-0.012086	±2.5	Pass
	-20	-9.03	-0.010795		
	-10	-14.66	-0.017525		
	0	-17.92	-0.021423		
	10	-30.11	-0.035995		
	20	-32.59	-0.038960		
	30	-29.85	-0.035684		
	40	-27.38	-0.032732		
	50	-31.91	-0.038147		
16QAM					
3.91	-30	-6.58	-0.007866	±2.5	Pass
	-20	-5.99	-0.007161		
	-10	26.49	0.031668		
	0	27.74	0.033162		
	10	22.40	0.026778		
	20	28.12	0.033616		
	30	30.20	0.036103		
	40	33.50	0.040048		
	50	-28.90	-0.034549		
64QAM					
3.91	-30	33.50	0.040048	±2.5	Pass
	-20	35.23	0.042116		
	-10	37.18	0.044447		
	0	35.45	0.042379		
	10	31.16	0.037250		
	20	23.30	0.027854		
	30	35.55	0.042499		
	40	23.88	0.028548		
	50	18.64	0.022283		



Report No.: AITSZ-251127006FW8

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.60	-45.53	-0.026280	±2.5	Pass
	3.91	-27.81	-0.016052		
	4.50	-28.38	-0.016381		
16QAM					
25	3.60	-35.78	-0.042773	±2.5	Pass
	3.91	-28.44	-0.033999		
	4.50	-10.86	-0.012983		
64QAM					
25	3.60	5.29	0.006324	±2.5	Pass
	3.91	-35.99	-0.043025		
	4.50	10.01	0.011967		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 7 part:

Reference Frequency: LTE Band 7(10MHz) Middle channel=21100 Frequency=2535.0MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.91	-30	-63.82	-0.025176	Within authorized band for Band 7	Pass
	-20	-42.54	-0.016781		
	-10	36.85	0.014536		
	0	29.88	0.011787		
	10	-13.22	-0.005215		
	20	-59.80	-0.023590		
	30	29.61	0.011680		
	40	-27.25	-0.010750		
	50	-44.49	-0.017550		
16QAM					
3.91	-30	46.05	0.018166	Within authorized band for Band 7	Pass
	-20	21.36	0.008426		
	-10	-23.56	-0.009294		
	0	12.33	0.004864		
	10	24.91	0.009826		
	20	-18.07	-0.007128		
	30	-19.91	-0.007854		
	40	52.69	0.020785		
	50	21.23	0.008375		
64QAM					
3.91	-30	-30.44	-0.012008	Within authorized band for Band 7	Pass
	-20	22.62	0.008923		
	-10	58.61	0.023120		
	0	35.39	0.013961		
	10	-20.63	-0.008138		
	20	-15.44	-0.006091		
	30	37.67	0.014860		
	40	-67.96	-0.026809		
	50	-40.25	-0.015878		



Report No.: AITSZ-251127006FW8

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.60	-29.53	-0.011649	Within authorized band for Band 7	Pass
	3.91	45.56	0.017972		
	4.50	23.93	0.009440		
16QAM					
25	3.60	15.81	0.006237	Within authorized band for Band 7	Pass
	3.91	17.02	0.006714		
	4.50	-24.73	-0.009755		
64QAM					
25	3.60	-16.79	-0.006623	Within authorized band for Band 7	Pass
	3.91	50.18	0.019795		
	4.50	-41.61	-0.016414		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					



LTE Band 12 part:

Reference Frequency: LTE Band 12(10MHz) Middle channel=23095 Frequency=707.5MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.91	-30	31.97	0.045187	Within authorized band for Band 12	Pass
	-20	7.65	0.010813		
	-10	9.26	0.013088		
	0	5.54	0.007830		
	10	-18.77	-0.026530		
	20	-24.33	-0.034389		
	30	-32.86	-0.046445		
	40	-42.47	-0.060028		
	50	10.23	0.014459		
16QAM					
3.91	-30	32.76	0.046304	Within authorized band for Band 12	Pass
	-20	11.40	0.016113		
	-10	17.29	0.024438		
	0	28.04	0.039633		
	10	35.95	0.050813		
	20	32.66	0.046163		
	30	35.31	0.049908		
	40	45.32	0.064057		
	50	7.55	0.010671		
64QAM					
3.91	-30	13.78	0.019477	Within authorized band for Band 12	Pass
	-20	12.15	0.017173		
	-10	26.87	0.037979		
	0	39.53	0.055873		
	10	25.16	0.035562		
	20	20.40	0.028834		
	30	22.39	0.031647		
	40	19.81	0.028000		
	50	20.28	0.028664		



Report No.: AITSZ-251127006FW8

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.60	40.37	0.057060	Within authorized band for Band 12	Pass
	3.91	28.80	0.040707		
	4.50	29.87	0.042219		
16QAM					
25	3.60	16.41	0.023194	Within authorized band for Band 12	Pass
	3.91	15.64	0.022106		
	4.50	24.81	0.035067		
64QAM					
25	3.60	15.55	0.021979	Within authorized band for Band 12	Pass
	3.91	6.17	0.008721		
	4.50	19.60	0.027703		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 17 part:

Reference Frequency: LTE Band 17(10MHz) Middle channel=23790 Frequency=710.0MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.91	-30	23.45	0.033028	Within authorized band for Band 17	Pass
	-20	17.72	0.024958		
	-10	18.20	0.025634		
	0	-5.52	-0.007775		
	10	-8.96	-0.012620		
	20	-18.93	-0.026662		
	30	-26.18	-0.036873		
	40	-30.18	-0.042507		
	50	-27.11	-0.038183		
16QAM					
3.91	-30	5.68	0.008000	Within authorized band for Band 17	Pass
	-20	19.76	0.027831		
	-10	16.98	0.023915		
	0	30.57	0.043056		
	10	28.44	0.040056		
	20	30.23	0.042577		
	30	37.88	0.053352		
	40	46.75	0.065845		
	50	21.17	0.029817		
64QAM					
3.91	-30	24.42	0.034394	Within authorized band for Band 17	Pass
	-20	39.17	0.055169		
	-10	43.97	0.061930		
	0	38.92	0.054817		
	10	38.25	0.053873		
	20	36.45	0.051338		
	30	36.56	0.051493		
	40	45.29	0.063789		
	50	-3.63	-0.005113		



Report No.: AITSZ-251127006FW8

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.60	40.17	0.056577	Within authorized band for Band 17	Pass
	3.91	30.48	0.042930		
	4.50	42.36	0.059662		
16QAM					
25	3.60	-20.07	-0.028268	Within authorized band for Band 17	Pass
	3.91	-19.18	-0.027014		
	4.50	-20.13	-0.028352		
64QAM					
25	3.60	-14.88	-0.020958	Within authorized band for Band 17	Pass
	3.91	-11.20	-0.015775		
	4.50	19.08	0.026873		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 26 part:

Reference Frequency: LTE Band 26 (10MHz) Middle channel=26740 Frequency819.0=MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.91	-30	-10.41	-0.012711	Within authorized band for Band 26	Pass
	-20	-24.76	-0.030232		
	-10	-30.31	-0.037009		
	0	-29.45	-0.035958		
	10	-25.21	-0.030781		
	20	-25.12	-0.030672		
	30	-15.54	-0.018974		
	40	-21.24	-0.025934		
	50	-34.25	-0.041819		
16QAM					
3.91	-30	6.98	0.008523	Within authorized band for Band26	Pass
	-20	18.74	0.022882		
	-10	11.66	0.014237		
	0	27.42	0.033480		
	10	31.37	0.038303		
	20	32.49	0.039670		
	30	45.18	0.055165		
	40	-30.21	-0.036886		
	50	-31.60	-0.038584		
64QAM					
3.91	-30	8.88	0.010842	Within authorized band for Band26	Pass
	-20	22.95	0.028022		
	-10	25.69	0.031368		
	0	37.24	0.045470		
	10	44.76	0.054652		
	20	8.10	0.009890		
	30	19.27	0.023529		
	40	27.21	0.033223		
	50	24.05	0.029365		



Report No.: AITSZ-251127006FW8

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.60	24.76	0.029600	Within authorized band for Band26	Pass
	3.91	38.11	0.045559		
	4.50	-22.47	-0.026862		
16QAM	16QAM				
25	3.60	-32.67	-0.039890	Within authorized band for Band26	Pass
	3.91	-33.17	-0.040501		
	4.50	-22.59	-0.027582		
64QAM	64QAM				
25	3.60	32.23	0.039353	Within authorized band for Band26	Pass
	3.91	-9.86	-0.012039		
	4.50	46.28	0.056508		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 26 part:

Reference Frequency: LTE Band 26(10MHz) Middle channel=26915 Frequency=863.5MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.91	-30	-51.67	-0.061769	Within authorized band for Band26	Pass
	-20	-16.65	-0.019904		
	-10	-21.89	-0.026169		
	0	-51.46	-0.061518		
	10	-6.68	-0.007986		
	20	-18.54	-0.022164		
	30	-29.54	-0.035314		
	40	-34.36	-0.041076		
	50	-29.55	-0.035326		
16QAM					
3.91	-30	-21.83	-0.026097	Within authorized band for Band26	Pass
	-20	-20.10	-0.024029		
	-10	-15.92	-0.019032		
	0	10.77	0.012875		
	10	8.23	0.009839		
	20	9.93	0.011871		
	30	5.88	0.007029		
	40	-7.25	-0.008667		
	50	-20.93	-0.025021		
64QAM					
3.91	-30	-8.55	-0.010221	Within authorized band for Band26	Pass
	-20	-11.67	-0.013951		
	-10	-9.47	-0.011321		
	0	12.75	0.015242		
	10	23.57	0.028177		
	20	13.52	0.016163		
	30	26.66	0.031871		
	40	27.67	0.033078		
	50	22.62	0.027041		



Report No.: AITSZ-251127006FW8

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.60	3.23	0.003944	Within authorized band for Band 26	Pass
	3.91	11.42	0.013944		
	4.50	-6.39	-0.007802		
16QAM	16QAM				
25	3.60	-42.57	-0.050891	Within authorized band for Band26	Pass
	3.91	-36.15	-0.043216		
	4.50	-28.37	-0.033915		
64QAM	64QAM				
25	3.60	-14.83	-0.017729	Within authorized band for Band26	Pass
	3.91	-13.46	-0.016091		
	4.50	-21.20	-0.025344		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 38 part:

Reference Frequency: LTE Band 38(10MHz) Middle channel=38000 Frequency=2595.0MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.91	-30	-43.37	-0.016713	Within authorized band for Band 38	Pass
	-20	-25.23	-0.009723		
	-10	-39.22	-0.015114		
	0	-42.94	-0.016547		
	10	-31.66	-0.012200		
	20	-62.11	-0.023934		
	30	-35.05	-0.013507		
	40	-71.77	-0.027657		
	50	33.02	0.012724		
16QAM					
3.91	-30	50.31	0.019387	Within authorized band for Band 38	Pass
	-20	-27.47	-0.010586		
	-10	10.11	0.003896		
	0	51.26	0.019753		
	10	12.96	0.004994		
	20	-19.60	-0.007553		
	30	-37.87	-0.014593		
	40	18.91	0.007287		
	50	56.43	0.021746		
64QAM					
3.91	-30	62.21	0.023973	Within authorized band for Band 38	Pass
	-20	39.85	0.015356		
	-10	41.96	0.016170		
	0	39.65	0.015279		
	10	29.31	0.011295		
	20	27.61	0.010640		
	30	16.01	0.006170		
	40	29.90	0.011522		
	50	36.48	0.014058		



Report No.: AITSZ-251127006FW8

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.60	49.91	0.019233	Within authorized band for Band 38	Pass
	3.91	66.50	0.025626		
	4.50	-13.85	-0.005337		
16QAM					
25	3.60	36.18	0.013942	Within authorized band for Band 38	Pass
	3.91	51.36	0.019792		
	4.50	15.72	0.006058		
64QAM					
25	3.60	51.96	0.020023	Within authorized band for Band 38	Pass
	3.91	23.79	0.009168		
	4.50	42.43	0.016351		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

LTE Band 41 part:

Reference Frequency: LTE Band 41 (10MHz) Middle channel=40640 Frequency=2595.0MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.91	-30	-29.44	-0.011345	Within authorized band for Band 41	Pass
	-20	-30.54	-0.011769		
	-10	16.69	0.006432		
	0	22.80	0.008786		
	10	-19.07	-0.007349		
	20	-19.25	-0.007418		
	30	-56.68	-0.021842		
	40	9.16	0.003530		
	50	-20.70	-0.007977		
16QAM					
3.91	-30	31.97	0.012320	Within authorized band for Band 41	Pass
	-20	20.18	0.007776		
	-10	40.73	0.015696		
	0	39.91	0.015380		
	10	-15.64	-0.006027		
	20	-54.87	-0.021145		
	30	23.37	0.009006		
	40	24.09	0.009283		
	50	26.65	0.010270		
64QAM					
3.91	-30	59.75	0.023025	Within authorized band for Band 41	Pass
	-20	12.70	0.004894		
	-10	-58.75	-0.022640		
	0	52.21	0.020119		
	10	21.16	0.008154		
	20	50.50	0.019461		
	30	35.98	0.013865		
	40	50.50	0.019461		
	50	-9.58	-0.003692		



Report No.: AITSZ-251127006FW8

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.60	40.58	0.015638	Within authorized band for Band 41	Pass
	3.91	29.67	0.011434		
	4.50	8.97	0.003457		
16QAM					
25	3.60	-31.99	-0.012328	Within authorized band for Band41	Pass
	3.91	-34.72	-0.013380		
	4.50	29.31	0.011295		
64QAM					
25	3.60	23.06	0.008886	Within authorized band for Band41	Pass
	3.91	43.82	0.016886		
	4.50	46.56	0.017942		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					


LTE Band 66 part:

Reference Frequency: LTE Band 66 (10MHz) Middle channel=132322 Frequency=1745.0MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
3.91	-30	32.74	0.018762	Within authorized band for Band 66	Pass
	-20	-16.41	-0.009404		
	-10	-18.32	-0.010499		
	0	-33.77	-0.019352		
	10	-18.53	-0.010619		
	20	-18.91	-0.010837		
	30	-11.03	-0.006321		
	40	34.89	0.019994		
	50	-21.26	-0.012183		
16QAM					
3.91	-30	38.60	0.022120	Within authorized band for Band 66	Pass
	-20	56.06	0.032126		
	-10	16.58	0.009501		
	0	29.55	0.016934		
	10	-10.24	-0.005868		
	20	39.37	0.022562		
	30	77.65	0.044499		
	40	25.41	0.014562		
	50	-17.82	-0.010212		
64QAM					
3.91	-30	-45.92	-0.026315	Within authorized band for Band 66	Pass
	-20	-27.18	-0.015576		
	-10	11.23	0.006436		
	0	-20.36	-0.011668		
	10	26.51	0.015192		
	20	28.18	0.016149		
	30	-25.49	-0.014607		
	40	13.33	0.007639		
	50	17.04	0.009765		



Report No.: AITSZ-251127006FW8

Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
QPSK					
25	3.60	39.42	0.022590	Within authorized band for Band 66	Pass
	3.91	22.19	0.012716		
	4.50	-37.45	-0.021461		
16QAM					
25	3.60	29.63	0.016980	Within authorized band for Band 66	Pass
	3.91	-11.69	-0.006699		
	4.50	27.94	0.016011		
64QAM					
25	3.60	-15.49	-0.008877	Within authorized band for Band 66	Pass
	3.91	-20.48	-0.011736		
	4.50	-30.18	-0.017295		
Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.					

Appendix G: Modulation Characteristics

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result	Verdict
Band2	20MHz	QPSK	18900	100RB#0	PASS	PASS
Band2	20MHz	16QAM	18900	100RB#0	PASS	PASS
Band2	20MHz	64QAM	18900	100RB#0	PASS	PASS
Band4	20MHz	QPSK	20175	100RB#0	PASS	PASS
Band4	20MHz	16QAM	20175	100RB#0	PASS	PASS
Band4	20MHz	64QAM	20175	100RB#0	PASS	PASS
Band5	10MHz	QPSK	20525	50RB#0	PASS	PASS
Band5	10MHz	16QAM	20525	50RB#0	PASS	PASS
Band5	10MHz	64QAM	20525	50RB#0	PASS	PASS
Band7	20MHz	QPSK	21100	100RB#0	PASS	PASS
Band7	20MHz	16QAM	21100	100RB#0	PASS	PASS
Band7	20MHz	64QAM	21100	100RB#0	PASS	PASS
Band12	10MHz	QPSK	23095	50RB#0	PASS	PASS
Band12	10MHz	16QAM	23095	50RB#0	PASS	PASS
Band12	10MHz	64QAM	23095	50RB#0	PASS	PASS
Band17	10MHz	QPSK	23790	50RB#0	PASS	PASS
Band17	10MHz	16QAM	23790	50RB#0	PASS	PASS
Band17	10MHz	64QAM	23790	50RB#0	PASS	PASS
Band26	10MHz	QPSK	26740	50RB#0	PASS	PASS
Band26	10MHz	16QAM	26740	50RB#0	PASS	PASS
Band26	10MHz	64QAM	26740	50RB#0	PASS	PASS
Band26	15MHz	QPSK	26915	75RB#0	PASS	PASS
Band26	15MHz	16QAM	26915	75RB#0	PASS	PASS
Band26	15MHz	64QAM	26915	75RB#0	PASS	PASS
Band38	20MHz	QPSK	38000	100RB#0	PASS	PASS
Band38	20MHz	16QAM	38000	100RB#0	PASS	PASS
Band38	20MHz	64QAM	38000	100RB#0	PASS	PASS
Band41	20MHz	QPSK	40640	100RB#0	PASS	PASS
Band41	20MHz	16QAM	40640	100RB#0	PASS	PASS
Band41	20MHz	64QAM	40640	100RB#0	PASS	PASS
Band66	20MHz	QPSK	132322	100RB#0	PASS	PASS
Band66	20MHz	16QAM	132322	100RB#0	PASS	PASS
Band66	20MHz	64QAM	132322	100RB#0	PASS	PASS

Remark: All bandwidth and all modulation had been tested, but only the worst case data displayed in this report.

Test Graphs

