


Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_15.35.01

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11a CH36
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

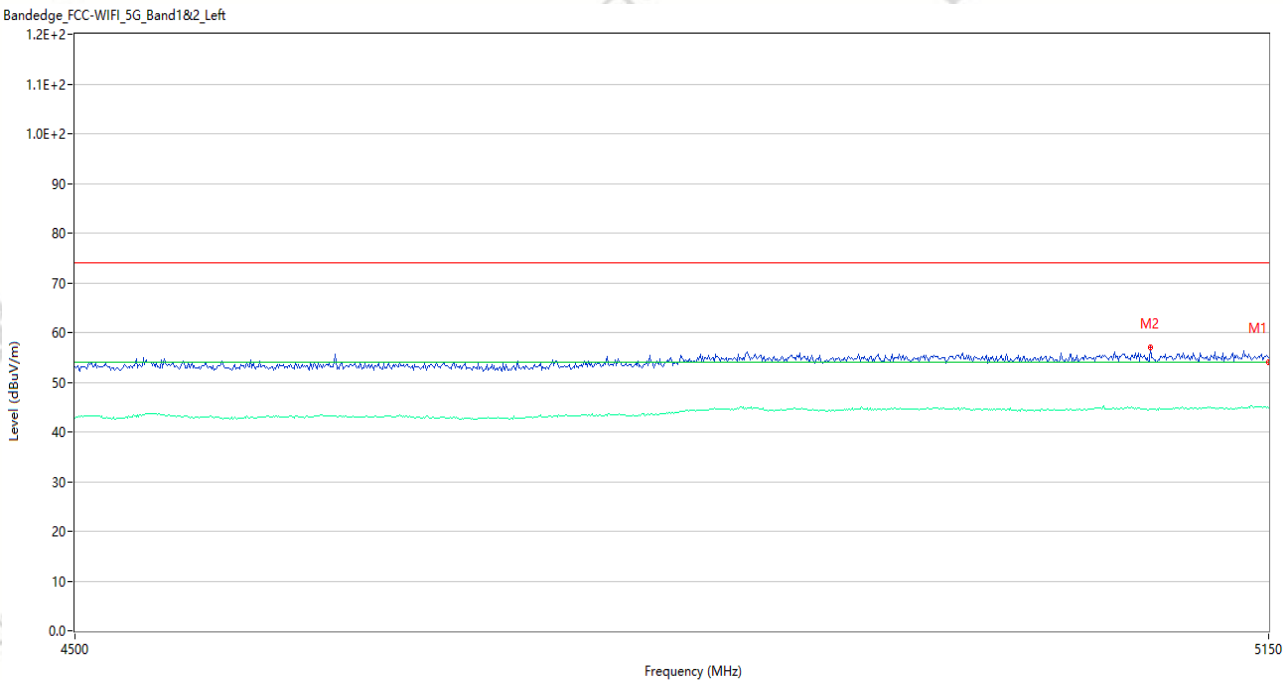


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	54.96	3.82	74.0	19.04	Peak	79.00	150	Vertical	Pass
1**	5150.000	44.90	3.82	54.0	9.10	AV	79.00	150	Vertical	Pass
2	5081.750	56.93	3.46	74.0	17.07	Peak	286.00	150	Vertical	Pass
2**	5081.750	44.61	3.46	54.0	9.39	AV	286.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_15.32.06

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11a CH36
Tesst Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

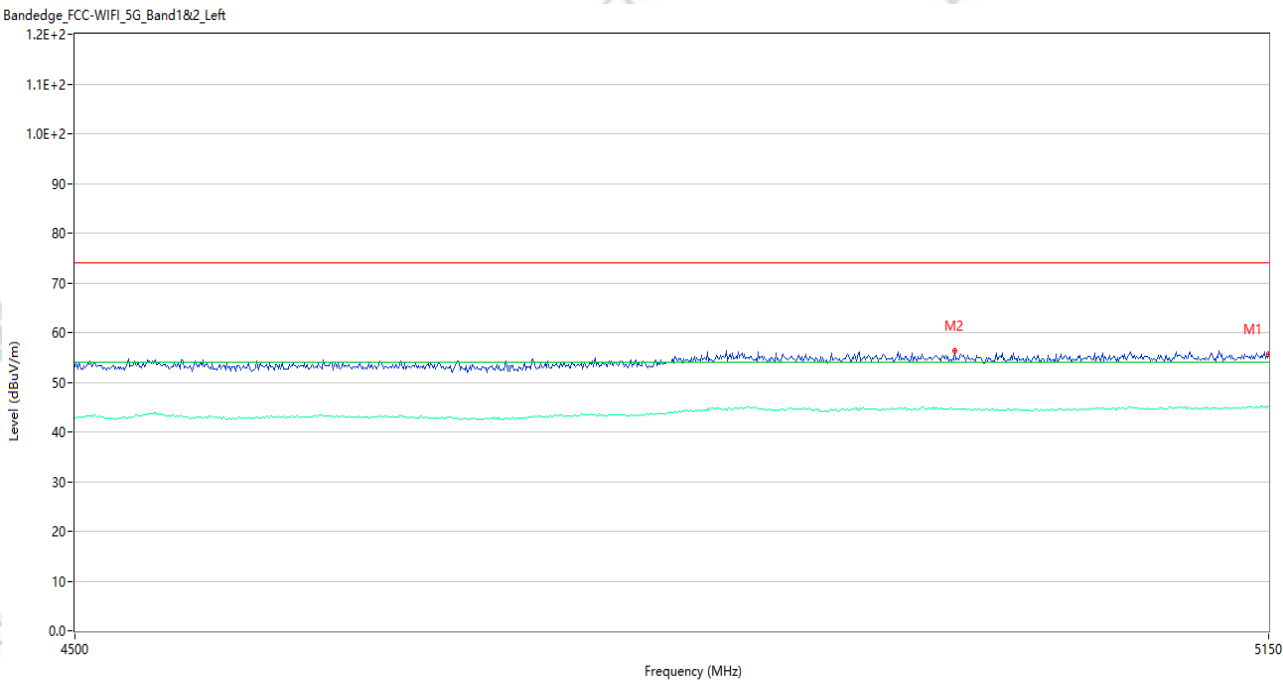

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	55.65	3.82	74.0	18.35	Peak	125.00	150	Horizontal	Pass
1**	5150.000	45.00	3.82	54.0	9.00	AV	125.00	150	Horizontal	Pass
2	4970.600	56.39	3.84	74.0	17.61	Peak	283.00	150	Horizontal	Pass
2**	4970.600	44.45	3.84	54.0	9.55	AV	283.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_15.40.35

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11a CH42
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	54.76	4.04	74.0	19.24	Peak	358.00	150	Vertical	Pass
1**	5350.000	44.89	4.04	54.0	9.11	AV	358.00	150	Vertical	Pass
2	5350.880	56.47	4.06	74.0	17.53	Peak	118.00	150	Vertical	Pass
2**	5350.880	44.88	4.06	54.0	9.12	AV	118.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_15.42.34

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11a CH42
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

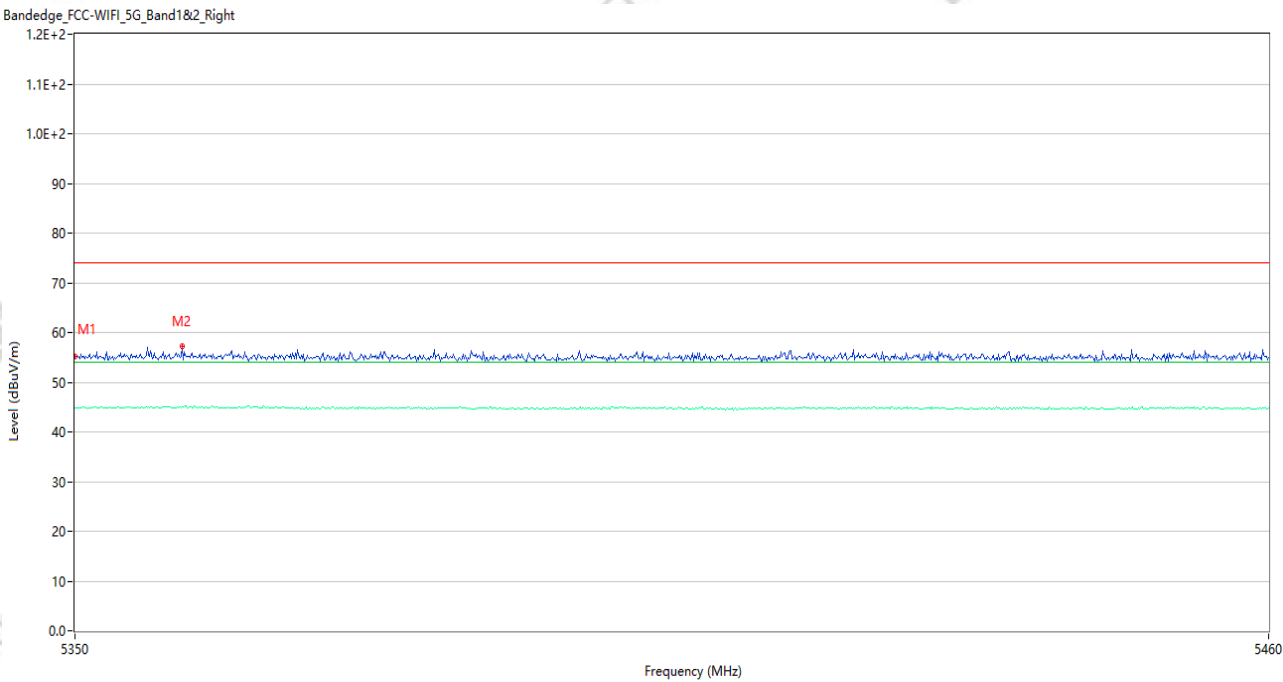


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	55.20	4.04	74.0	18.80	Peak	352.00	150	Horizontal	Pass
1**	5350.000	44.83	4.04	54.0	9.17	AV	352.00	150	Horizontal	Pass
2	5359.790	57.19	4.24	74.0	16.81	Peak	298.00	150	Horizontal	Pass
2**	5359.790	45.14	4.24	54.0	8.86	AV	298.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_15.49.46

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11n20 CH36
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

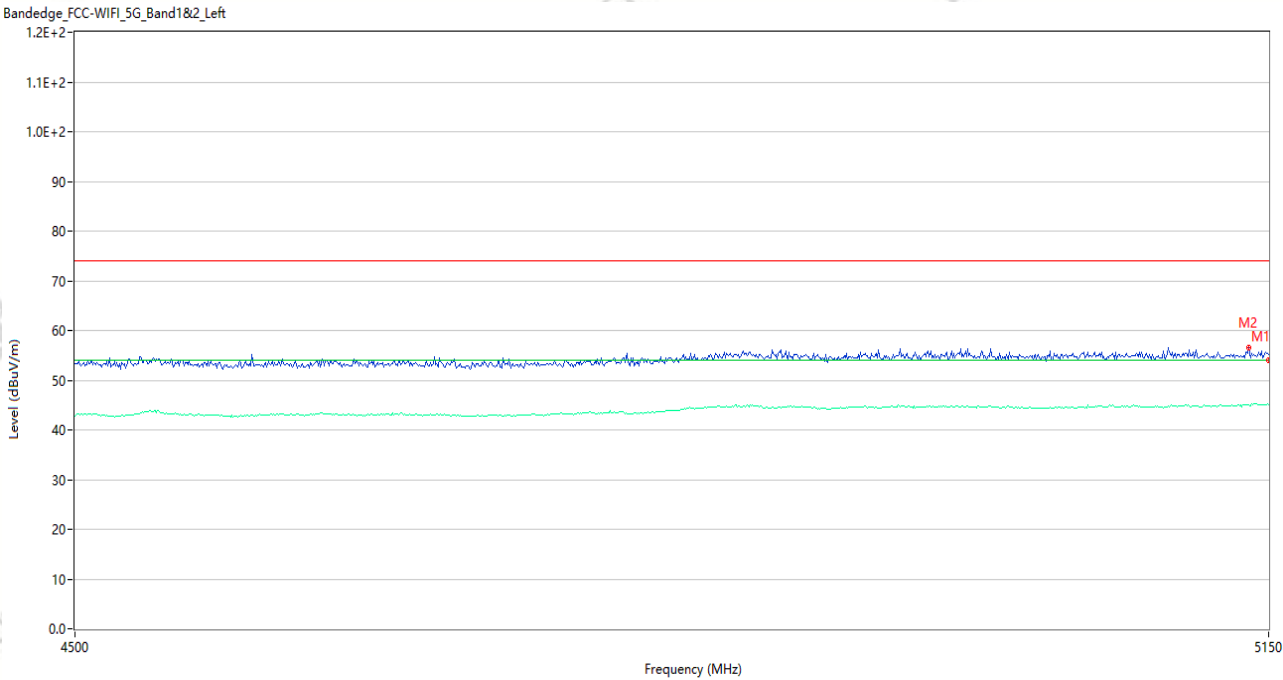


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	55.10	3.82	74.0	18.90	Peak	73.99	150	Vertical	Pass
1**	5150.000	45.05	3.82	54.0	8.95	AV	73.99	150	Vertical	Pass
2	5138.300	56.66	4.04	74.0	17.34	Peak	329.00	150	Vertical	Pass
2**	5138.300	45.09	4.04	54.0	8.91	AV	329.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_15.47.40

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11n20 CH36
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

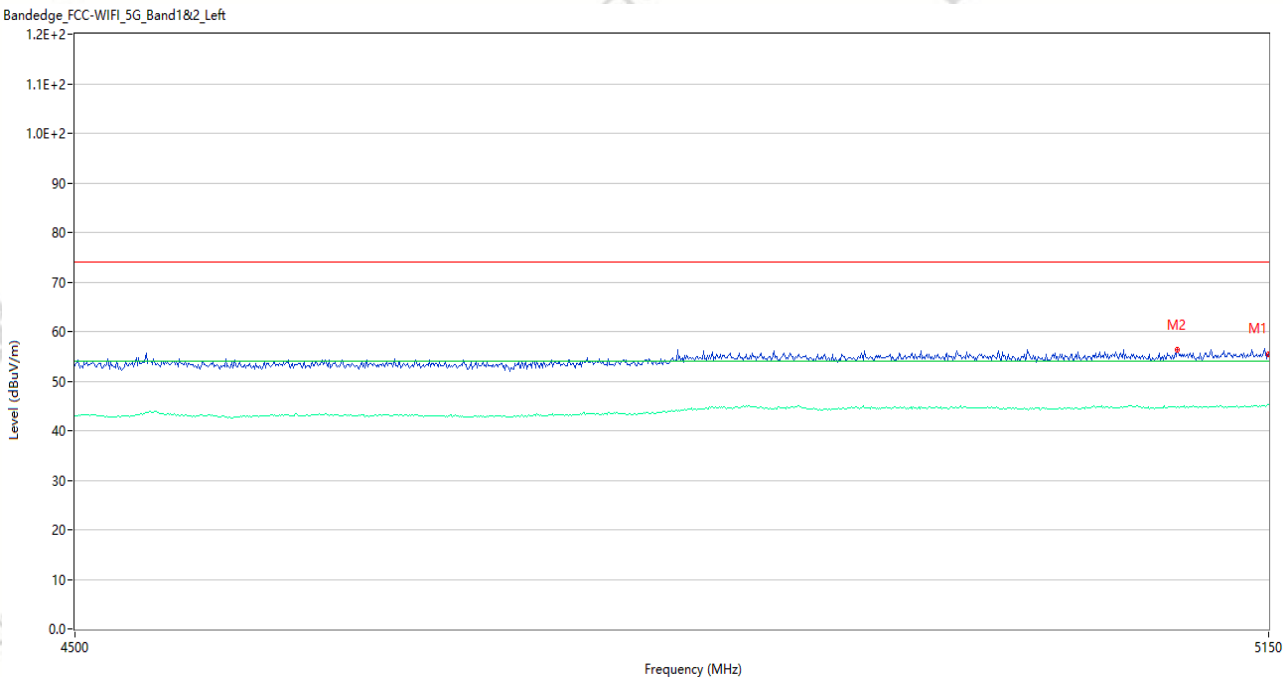


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	55.41	3.82	74.0	18.59	Peak	73.99	150	Horizontal	Pass
1**	5150.000	45.22	3.82	54.0	8.78	AV	73.99	150	Horizontal	Pass
2	5097.350	56.28	3.82	74.0	17.72	Peak	254.00	150	Horizontal	Pass
2**	5097.350	44.85	3.82	54.0	9.15	AV	254.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_15.54.03

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11n20 CH48
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

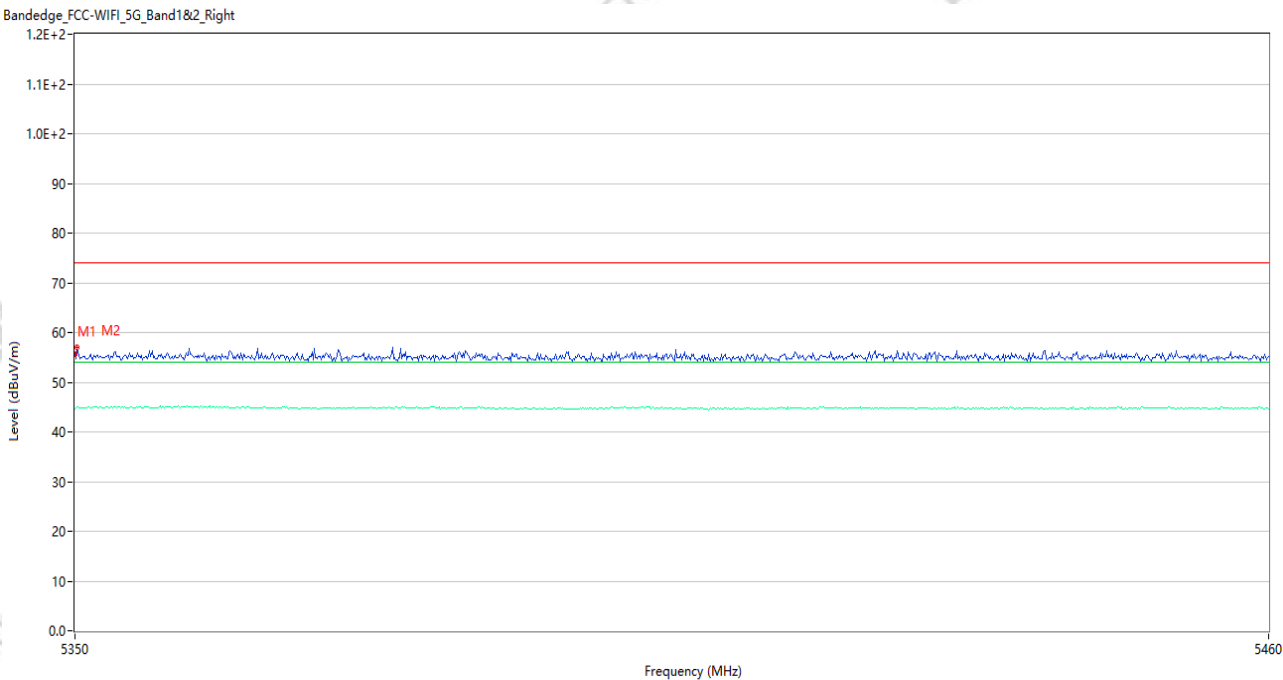


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	55.52	4.04	74.0	18.48	Peak	324.00	150	Vertical	Pass
1**	5350.000	44.70	4.04	54.0	9.30	AV	324.00	150	Vertical	Pass
2	5350.220	57.05	4.04	74.0	16.95	Peak	102.00	150	Vertical	Pass
2**	5350.220	44.97	4.04	54.0	9.03	AV	102.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_15.55.40

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11n20 CH48
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

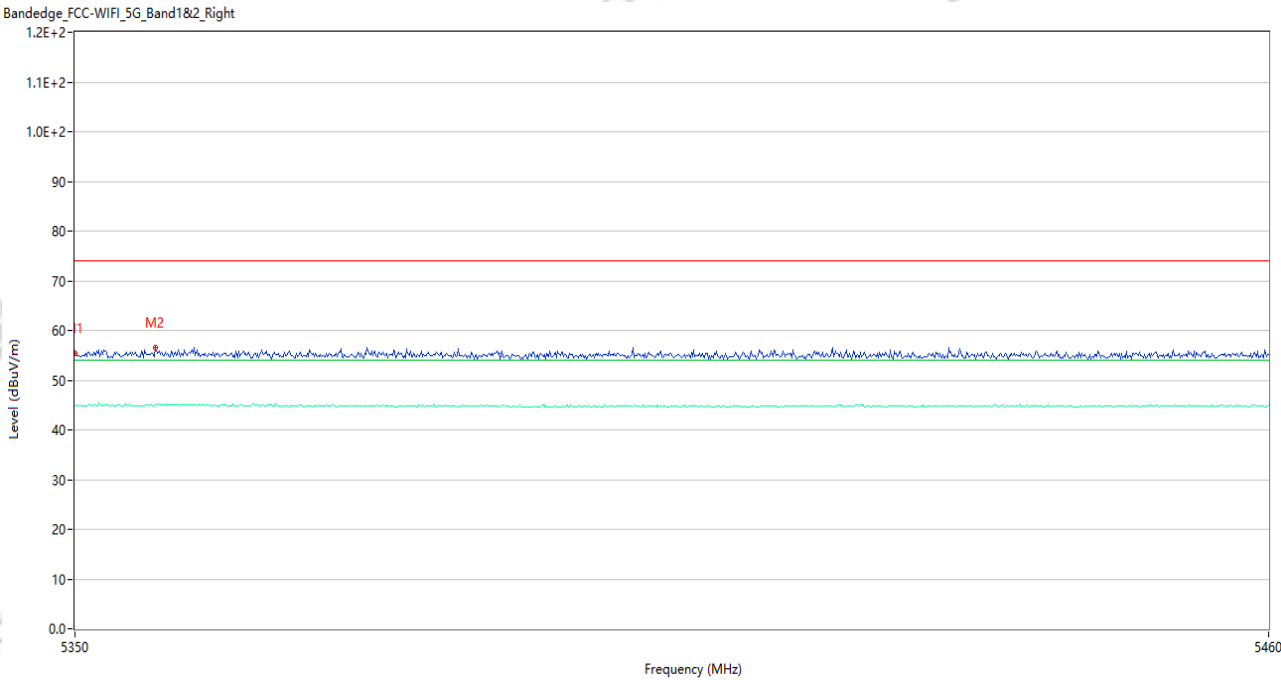


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	55.36	4.04	74.0	18.64	Peak	114.00	150	Horizontal	Pass
1**	5350.000	44.90	4.04	54.0	9.10	AV	114.00	150	Horizontal	Pass
2	5357.370	56.63	4.20	74.0	17.37	Peak	345.00	150	Horizontal	Pass
2**	5357.370	45.07	4.20	54.0	8.93	AV	345.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_14.38.13

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5GWIFI 11n40 CH38
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

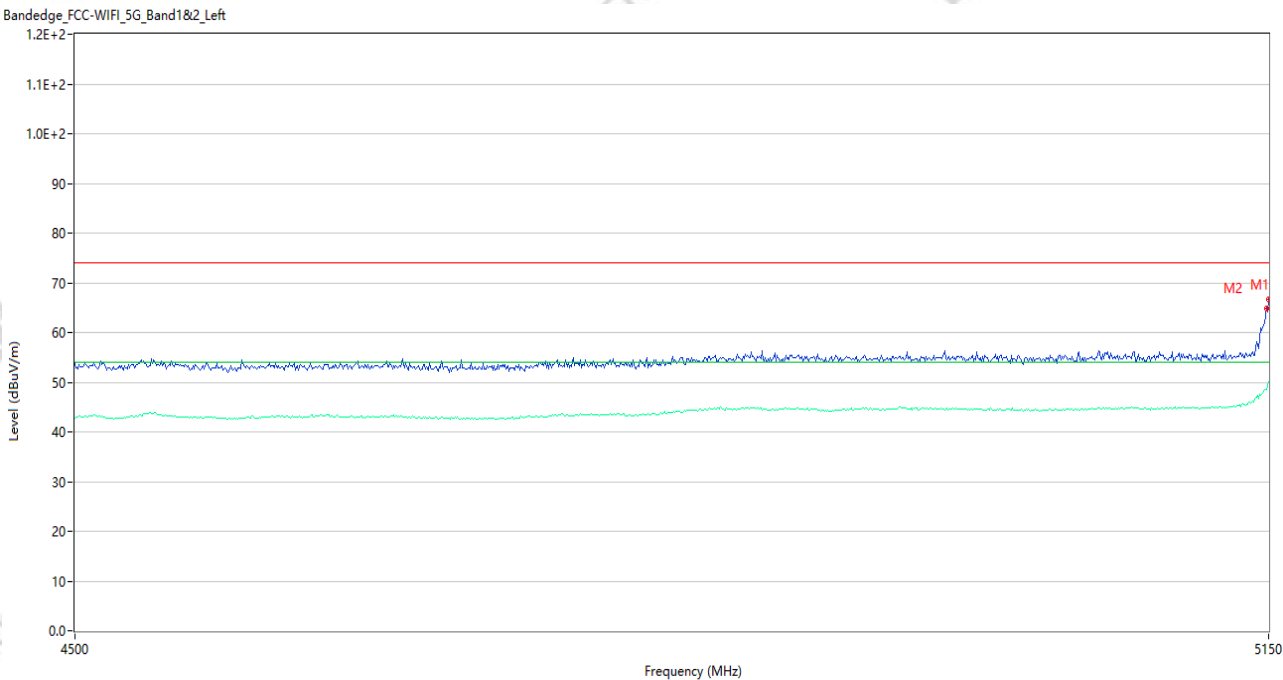


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	66.56	3.82	74.0	7.44	Peak	191.00	150	Vertical	Pass
1**	5150.000	50.00	3.82	54.0	4.00	AV	191.00	150	Vertical	Pass
2	5148.700	64.94	3.85	74.0	9.06	Peak	194.00	150	Vertical	Pass
2**	5148.700	48.46	3.85	54.0	5.54	AV	194.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_14.39.45

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5GWIFI 11n40 CH38
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

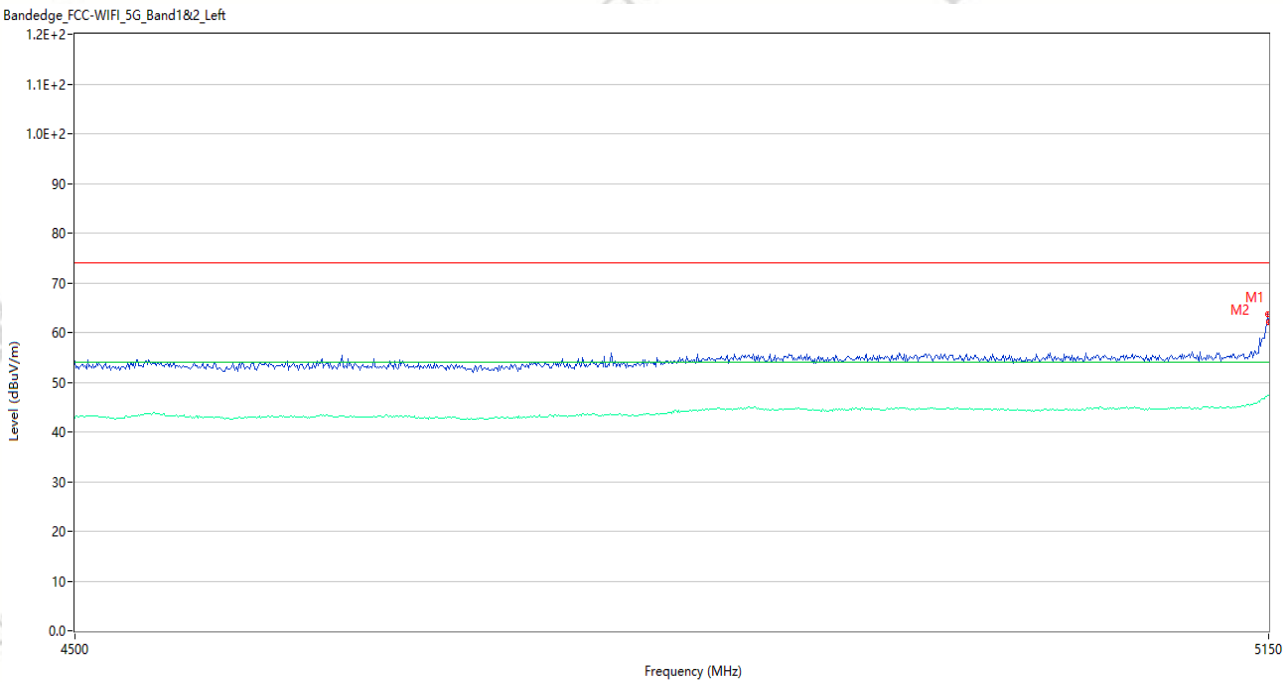


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	62.16	3.82	74.0	11.84	Peak	0.00	150	Horizontal	Pass
1**	5150.000	47.43	3.82	54.0	6.57	AV	0.00	150	Horizontal	Pass
2	5149.350	63.69	3.84	74.0	10.31	Peak	0.00	150	Horizontal	Pass
2**	5149.350	47.30	3.84	54.0	6.70	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_16.01.26

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11n40 CH46
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

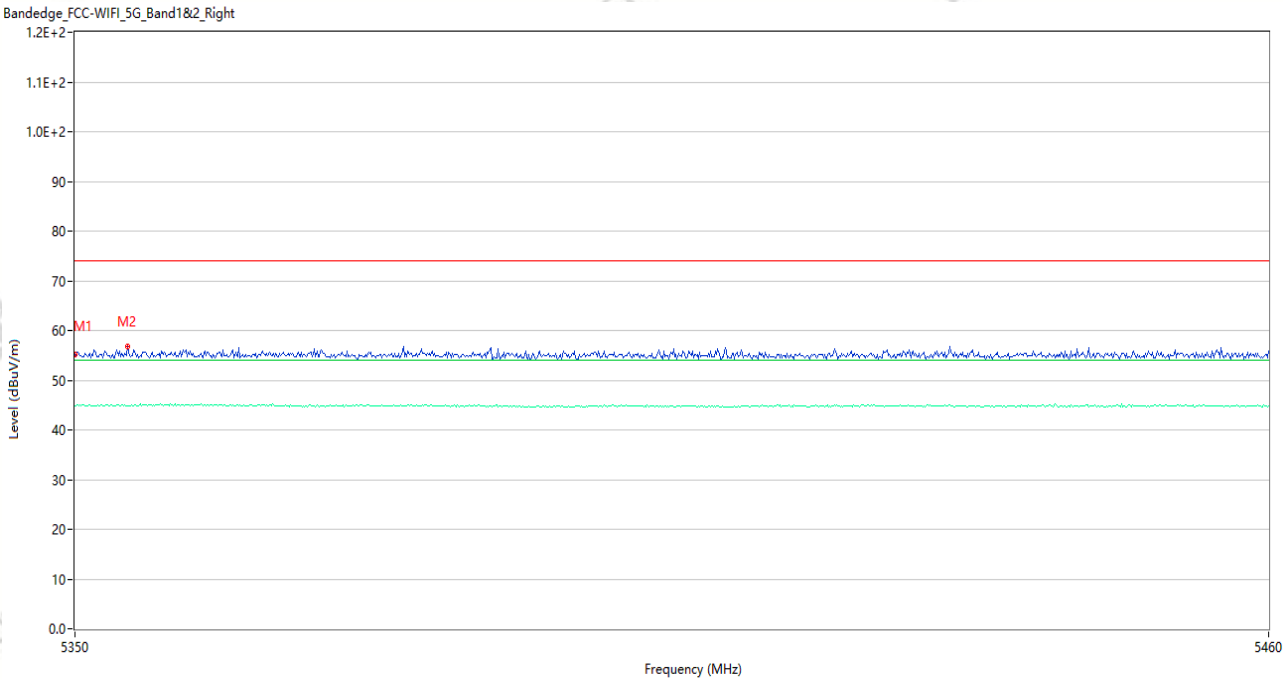


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	55.08	4.04	74.0	18.92	Peak	328.00	150	Vertical	Pass
1**	5350.000	44.82	4.04	54.0	9.18	AV	328.00	150	Vertical	Pass
2	5354.840	56.67	4.14	74.0	17.33	Peak	245.00	150	Vertical	Pass
2**	5354.840	44.86	4.14	54.0	9.14	AV	245.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_15.59.31

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11n40 CH46
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

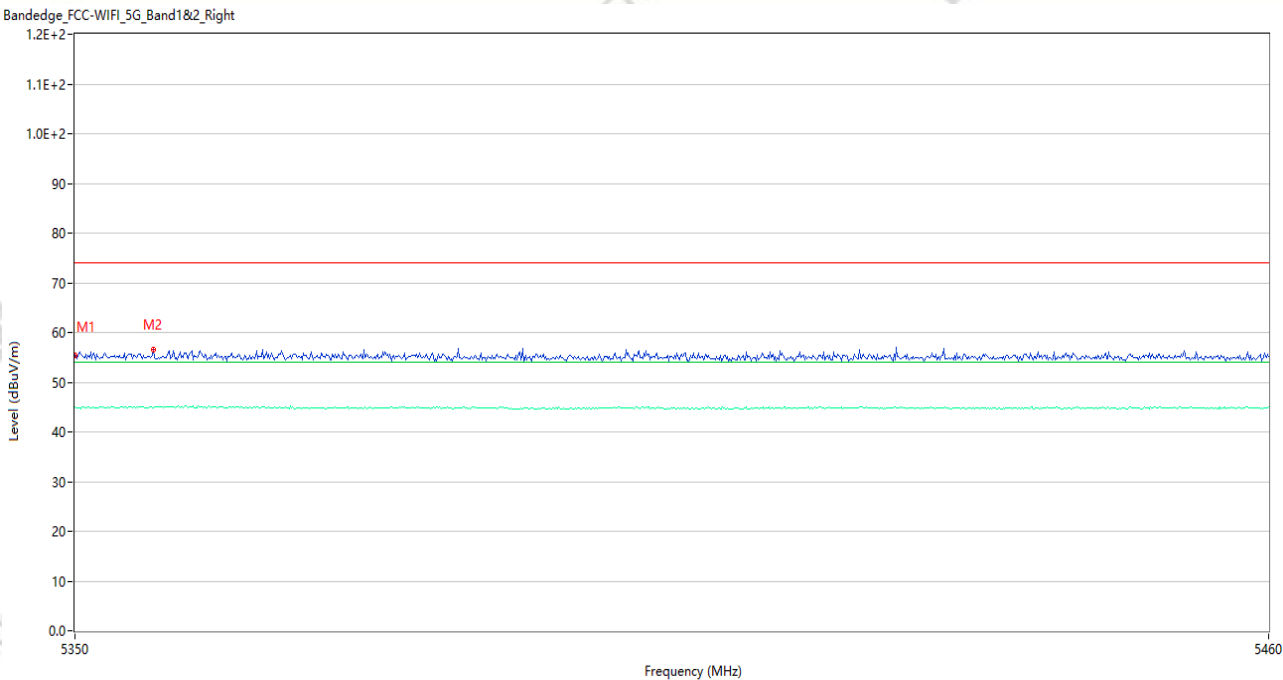


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	55.35	4.04	74.0	18.65	Peak	0.00	150	Horizontal	Pass
1**	5350.000	45.04	4.04	54.0	8.96	AV	0.00	150	Horizontal	Pass
2	5357.150	56.45	4.19	74.0	17.55	Peak	3.00	150	Horizontal	Pass
2**	5357.150	44.84	4.19	54.0	9.16	AV	3.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_14.59.34

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11ac80 CH42
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

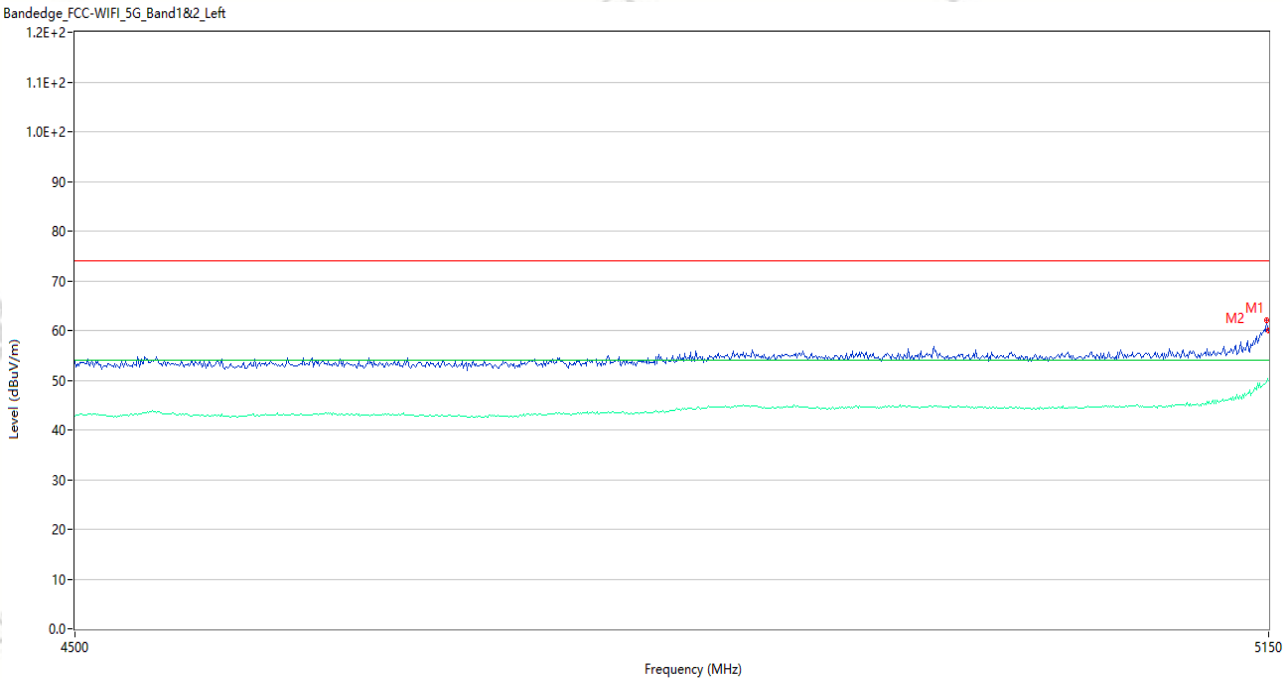


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	60.05	3.82	74.0	13.95	Peak	192.02	150	Vertical	Pass
1**	5150.000	49.93	3.82	54.0	4.07	AV	192.02	150	Vertical	Pass
2	5148.700	62.01	3.85	74.0	11.99	Peak	196.00	150	Vertical	Pass
2**	5148.700	49.66	3.85	54.0	4.34	AV	196.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_15.01.35

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2GWIFI 11ac80 CH42
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

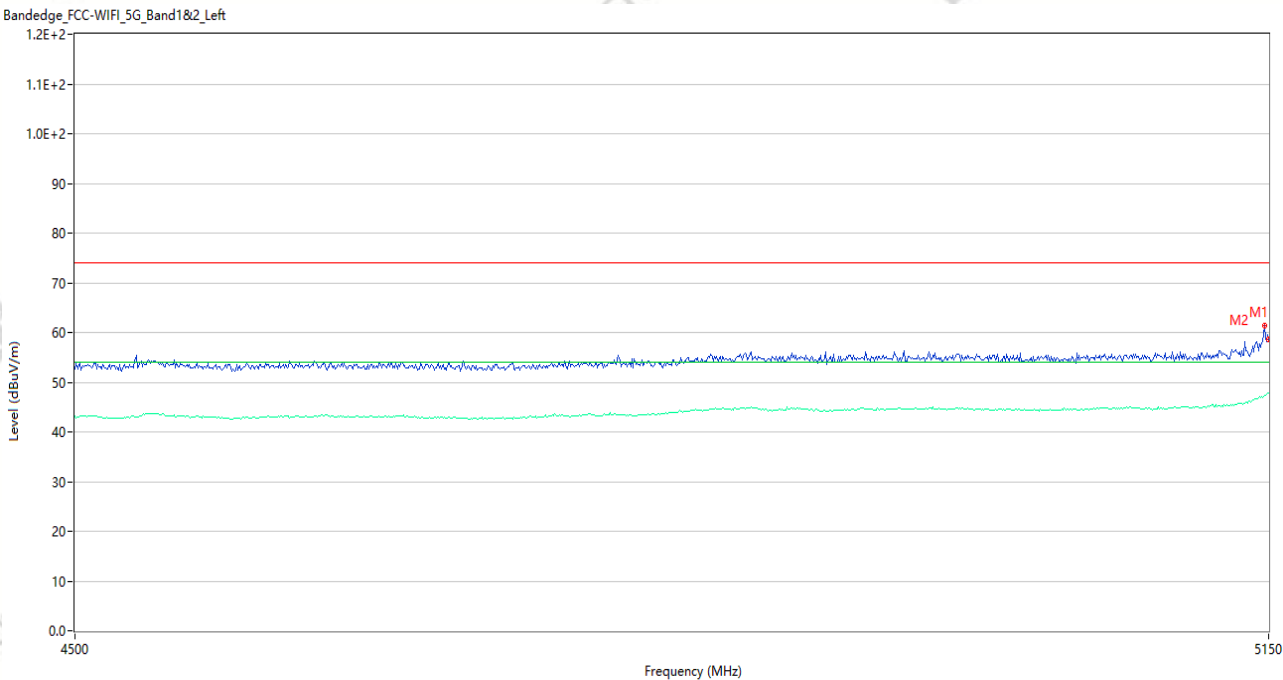


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	58.66	3.82	74.0	15.34	Peak	30.99	150	Horizontal	Pass
1**	5150.000	47.74	3.82	54.0	6.26	AV	30.99	150	Horizontal	Pass
2	5147.400	61.41	3.89	74.0	12.59	Peak	359.00	150	Horizontal	Pass
2**	5147.400	47.36	3.89	54.0	6.64	AV	359.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_16.06.24

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11a CH52
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

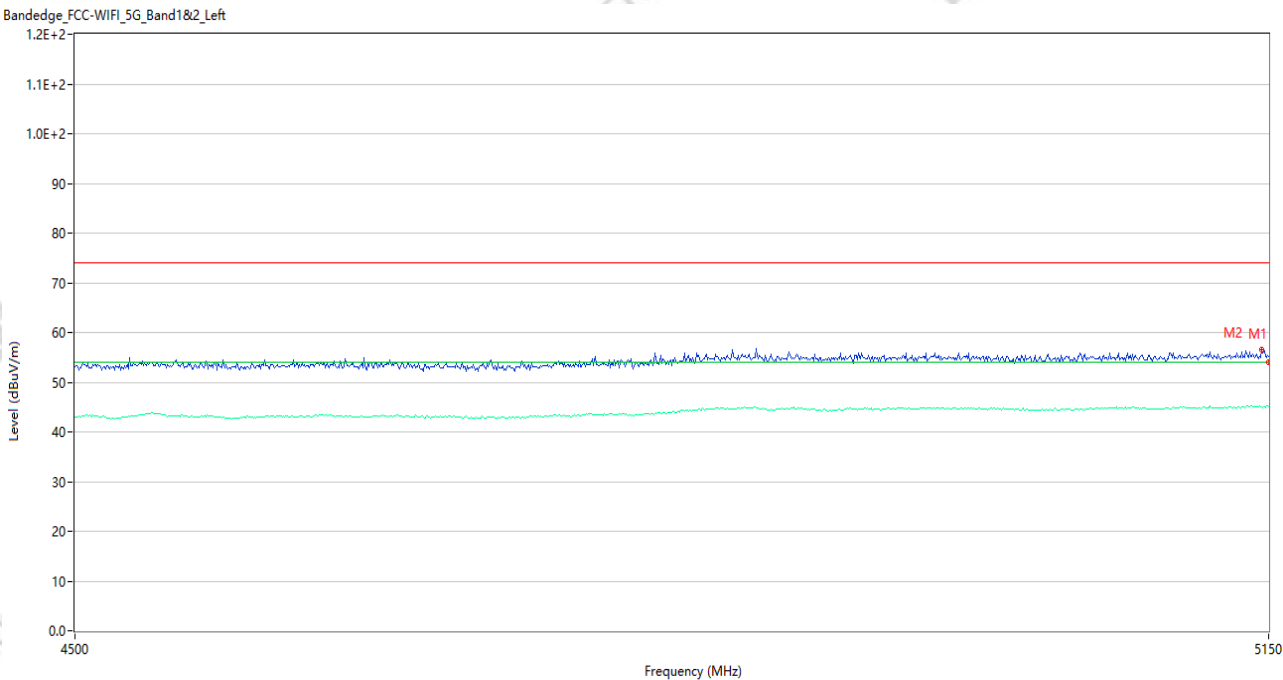


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	55.24	3.82	74.0	18.76	Peak	92.98	150	Vertical	Pass
1**	5150.000	45.03	3.82	54.0	8.97	AV	92.98	150	Vertical	Pass
2	5146.100	56.64	3.93	74.0	17.36	Peak	0.00	150	Vertical	Pass
2**	5146.100	45.07	3.93	54.0	8.93	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_16.08.05

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11a CH52
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

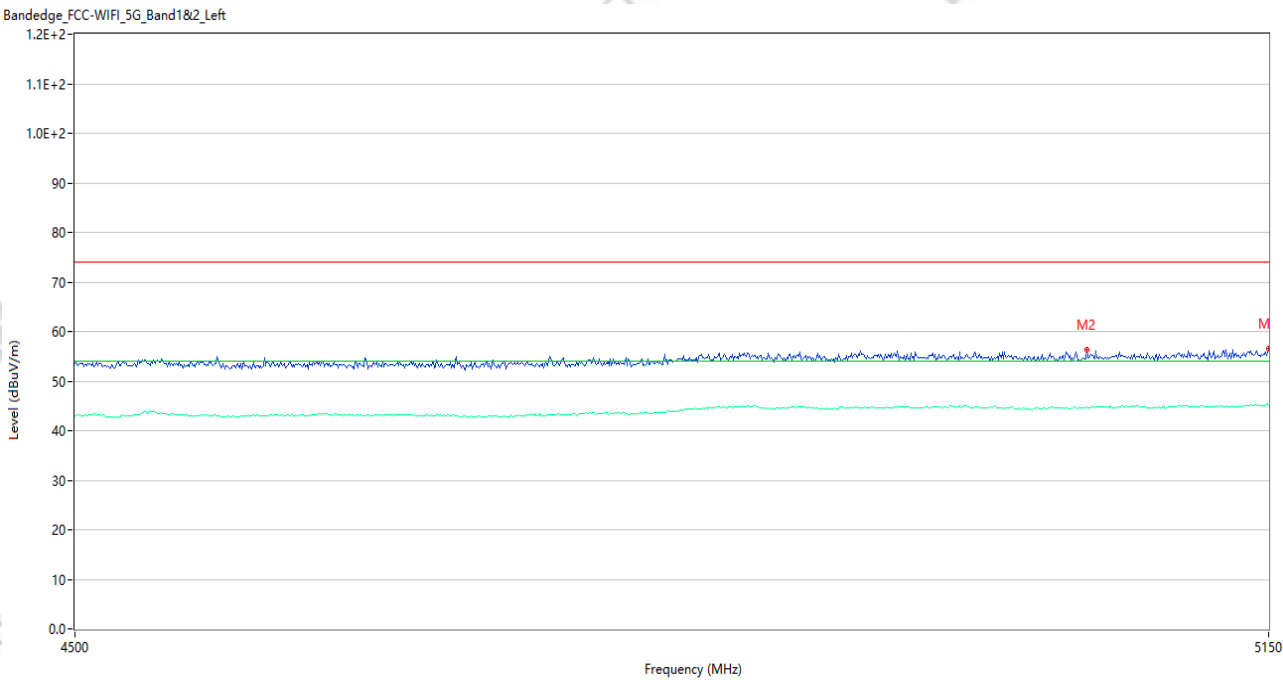


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	56.54	3.82	74.0	17.46	Peak	94.98	150	Horizontal	Pass
1**	5150.000	45.06	3.82	54.0	8.94	AV	94.98	150	Horizontal	Pass
2	5045.350	56.36	3.69	74.0	17.64	Peak	18.00	150	Horizontal	Pass
2**	5045.350	44.82	3.69	54.0	9.18	AV	18.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_17.02.05

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11a CH64
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

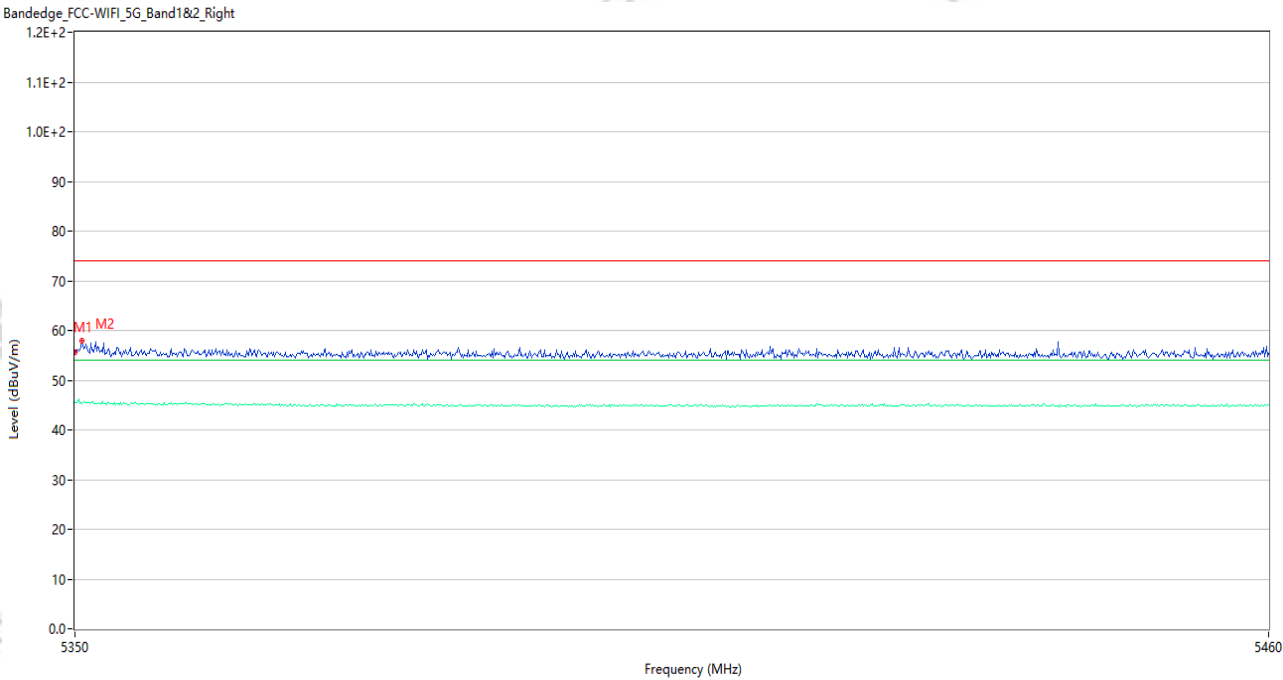


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	55.72	4.04	74.0	18.28	Peak	187.00	150	Vertical	Pass
1**	5350.000	45.43	4.04	54.0	8.57	AV	187.00	150	Vertical	Pass
2	5350.660	58.04	4.05	74.0	15.96	Peak	19.00	150	Vertical	Pass
2**	5350.660	45.33	4.05	54.0	8.67	AV	19.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_17.03.52

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11a CH64
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

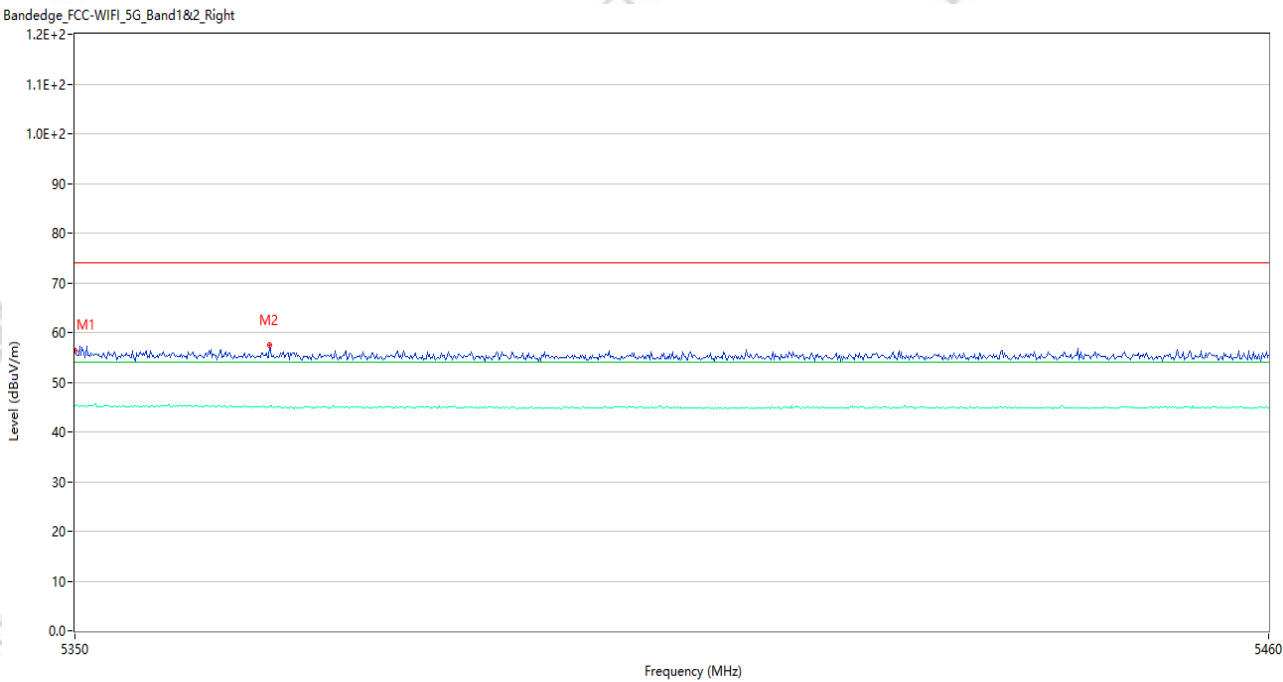


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	56.38	4.04	74.0	17.62	Peak	44.00	150	Horizontal	Pass
1**	5350.000	45.35	4.04	54.0	8.65	AV	44.00	150	Horizontal	Pass
2	5367.820	57.50	4.03	74.0	16.50	Peak	348.00	150	Horizontal	Pass
2**	5367.820	45.17	4.03	54.0	8.83	AV	348.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_17.10.52

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11n20 CH52
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

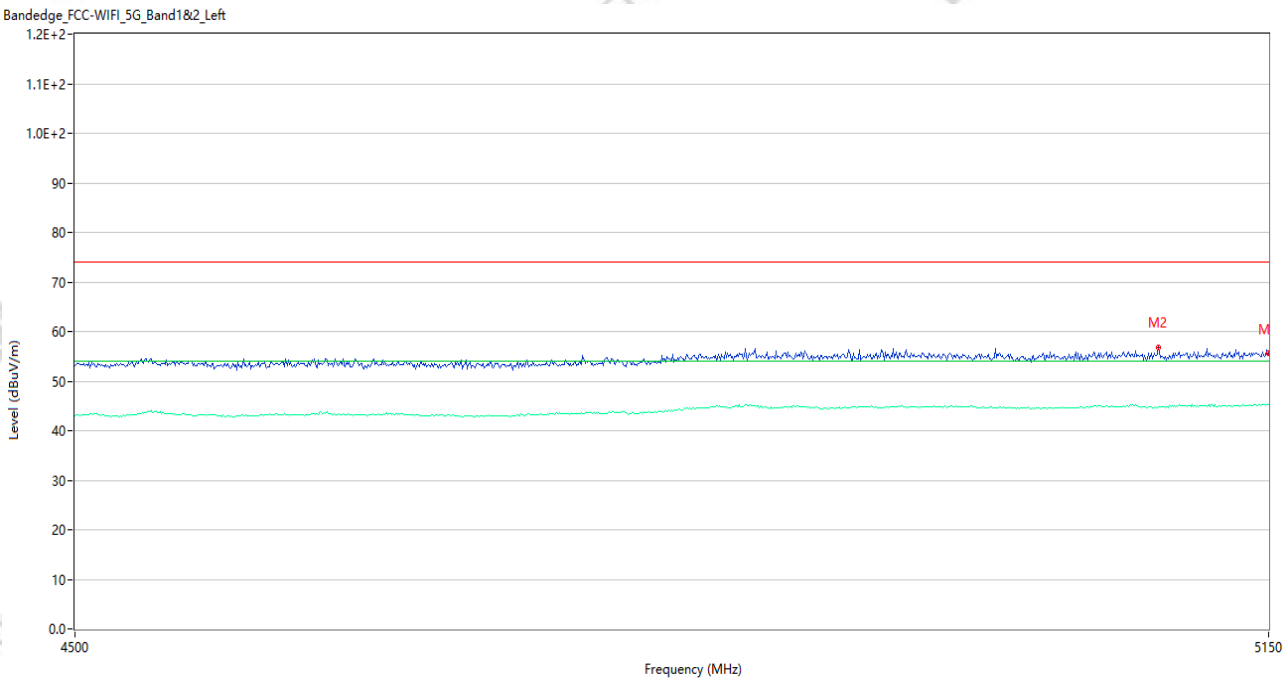


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	55.53	3.82	74.0	18.47	Peak	311.01	150	Vertical	Pass
1**	5150.000	45.39	3.82	54.0	8.61	AV	311.01	150	Vertical	Pass
2	5086.300	56.83	3.44	74.0	17.17	Peak	93.00	150	Vertical	Pass
2**	5086.300	44.90	3.44	54.0	9.10	AV	93.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_17.09.10

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11n20 CH52
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

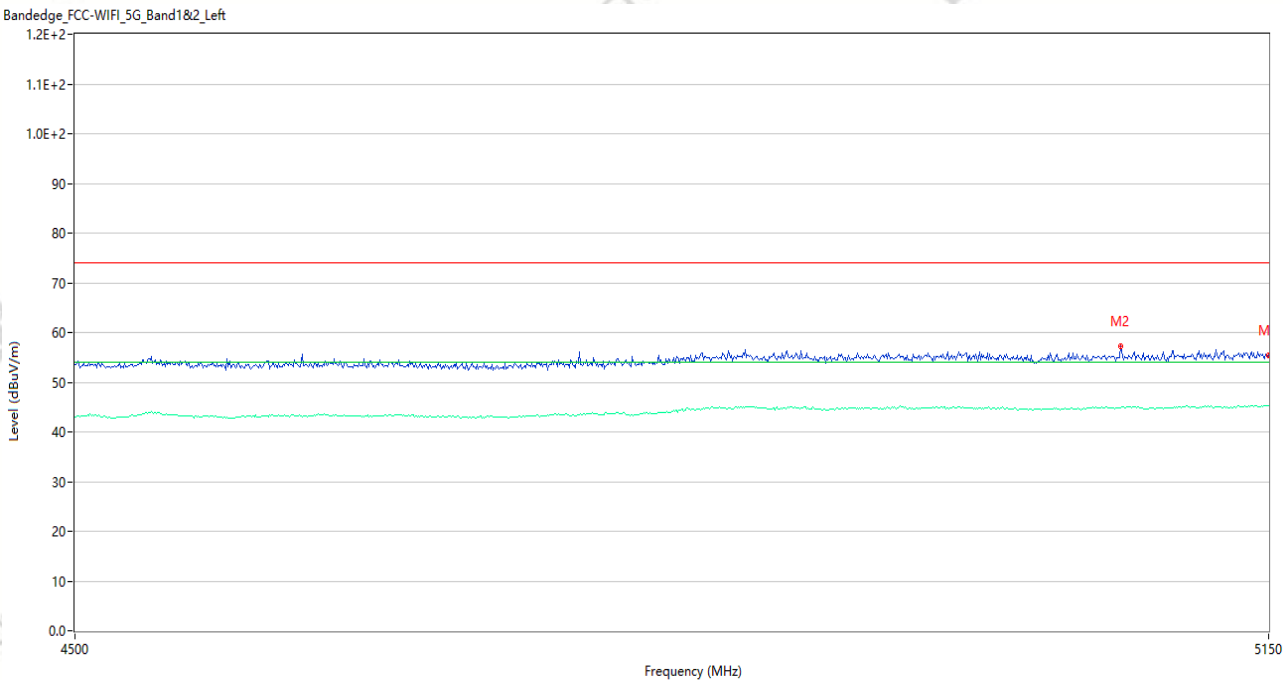

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	55.52	3.82	74.0	18.48	Peak	0.05	150	Horizontal	Pass
1**	5150.000	45.33	3.82	54.0	8.67	AV	0.05	150	Horizontal	Pass
2	5064.850	57.20	3.73	74.0	16.80	Peak	57.00	150	Horizontal	Pass
2**	5064.850	44.82	3.73	54.0	9.18	AV	57.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_17.26.15

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11n20 CH64
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	57.94	4.04	74.0	16.06	Peak	283.00	150	Vertical	Pass
1**	5350.000	45.85	4.04	54.0	8.15	AV	283.00	150	Vertical	Pass
2	5352.530	59.09	4.09	74.0	14.91	Peak	188.00	150	Vertical	Pass
2**	5352.530	45.50	4.09	54.0	8.50	AV	188.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_17.25.00

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11n20 CH64
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

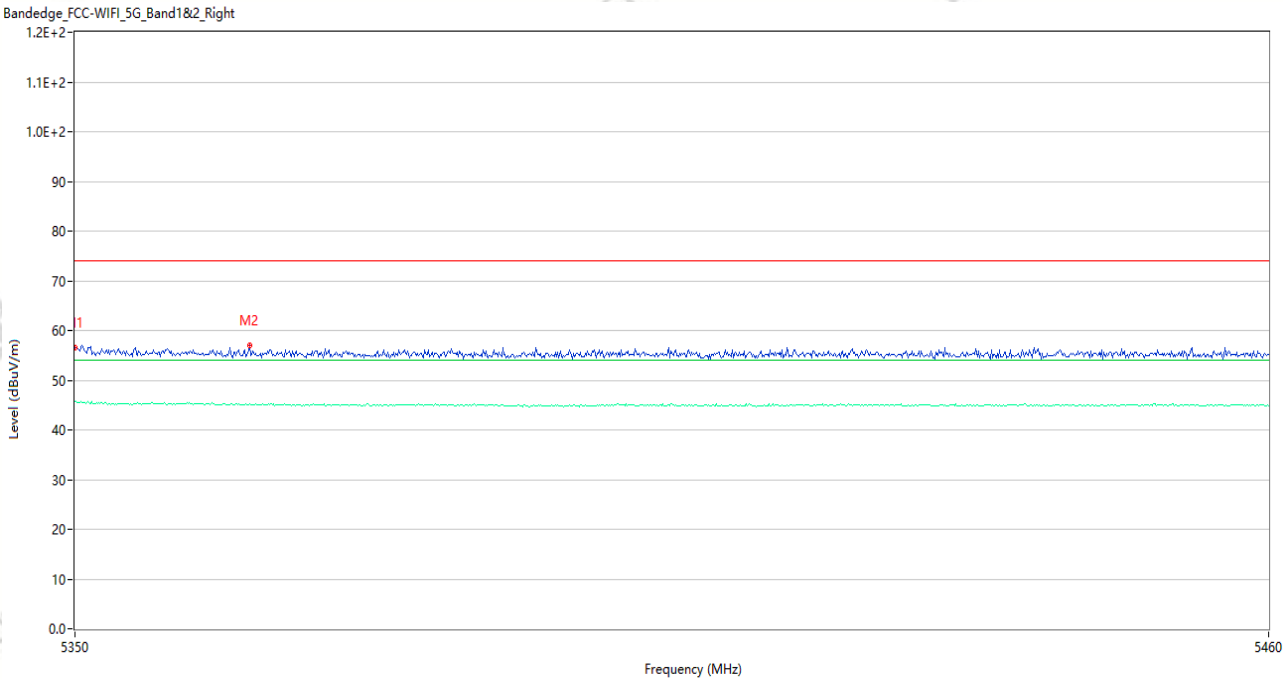


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	56.62	4.04	74.0	17.38	Peak	5.00	150	Horizontal	Pass
1**	5350.000	45.69	4.04	54.0	8.31	AV	5.00	150	Horizontal	Pass
2	5365.950	57.12	4.08	74.0	16.88	Peak	348.00	150	Horizontal	Pass
2**	5365.950	45.19	4.08	54.0	8.81	AV	348.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_17.30.45

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11n40 CH54
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

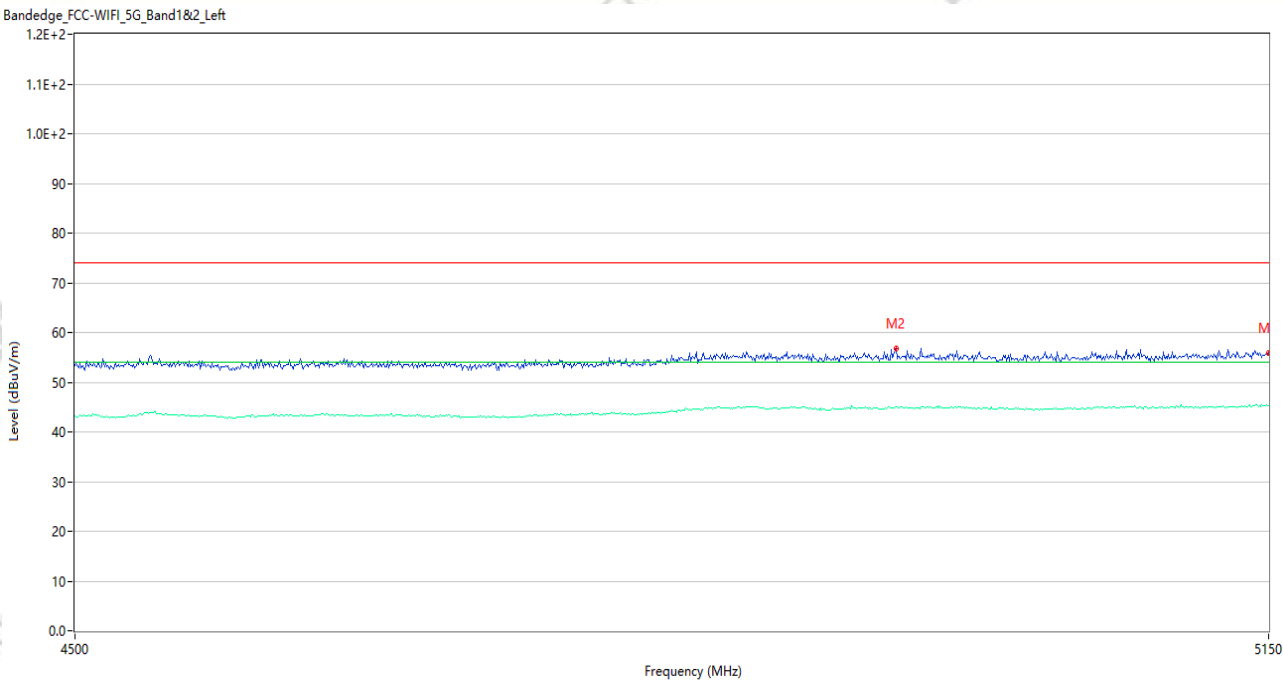


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	55.83	3.82	74.0	18.17	Peak	343.98	150	Vertical	Pass
1**	5150.000	45.32	3.82	54.0	8.68	AV	343.98	150	Vertical	Pass
2	4937.450	56.72	3.87	74.0	17.28	Peak	352.00	150	Vertical	Pass
2**	4937.450	44.95	3.87	54.0	9.05	AV	352.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_17.32.54

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11n40 CH54
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

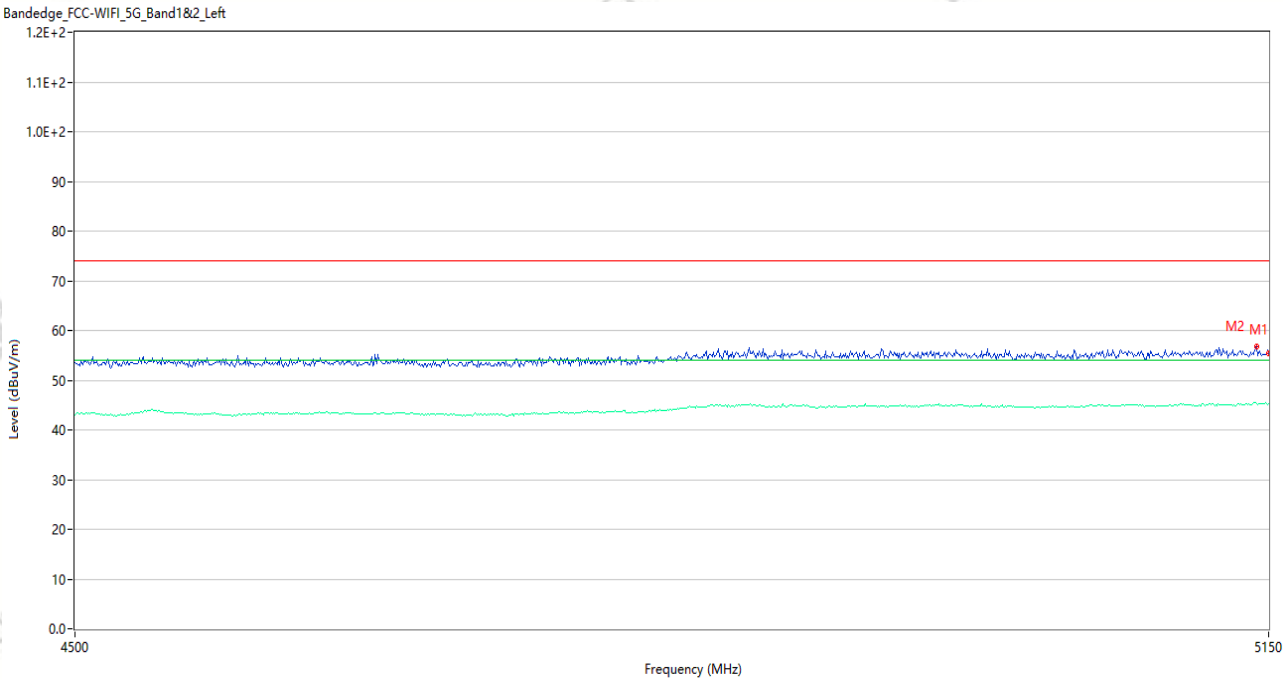


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	55.38	3.82	74.0	18.62	Peak	27.07	150	Horizontal	Pass
1**	5150.000	45.24	3.82	54.0	8.76	AV	27.07	150	Horizontal	Pass
2	5142.850	56.75	4.02	74.0	17.25	Peak	92.00	150	Horizontal	Pass
2**	5142.850	45.19	4.02	54.0	8.81	AV	92.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_17.47.29

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11n40 CH62
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

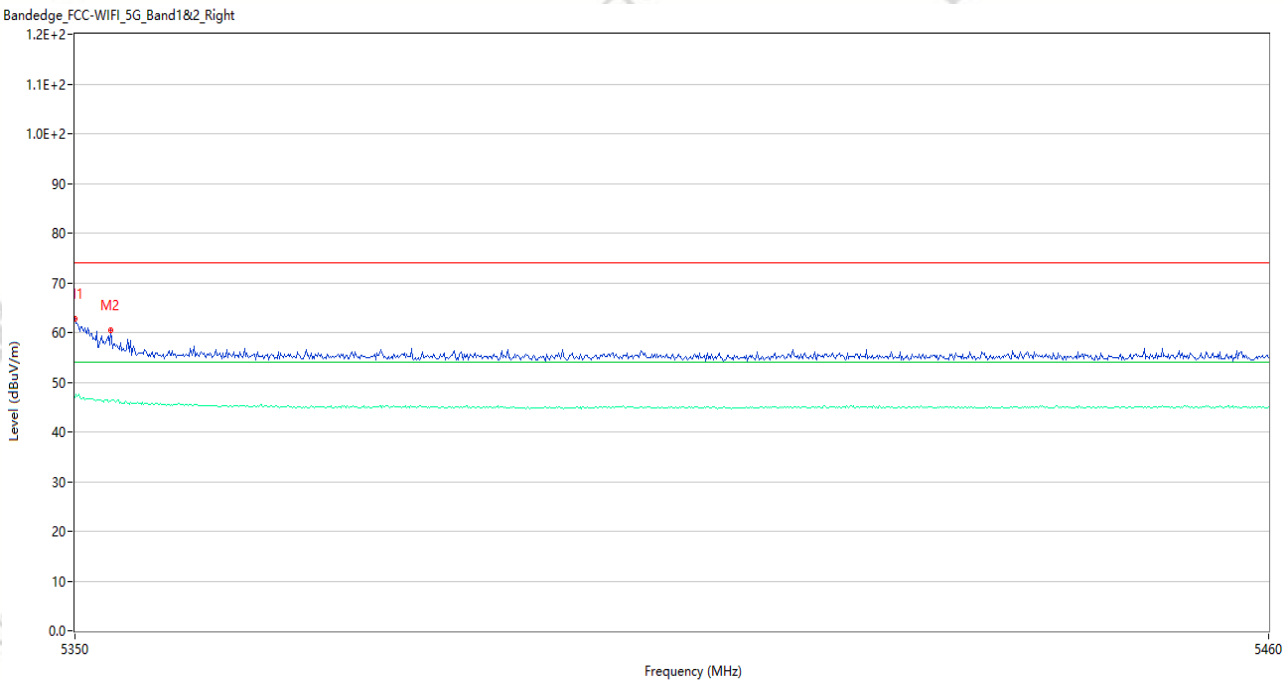


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	62.70	4.04	74.0	11.30	Peak	29.00	150	Vertical	Pass
1**	5350.000	46.79	4.04	54.0	7.21	AV	29.00	150	Vertical	Pass
2	5353.300	60.54	4.10	74.0	13.46	Peak	29.00	150	Vertical	Pass
2**	5353.300	46.25	4.10	54.0	7.75	AV	29.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_17.52.22

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11n40 CH62
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

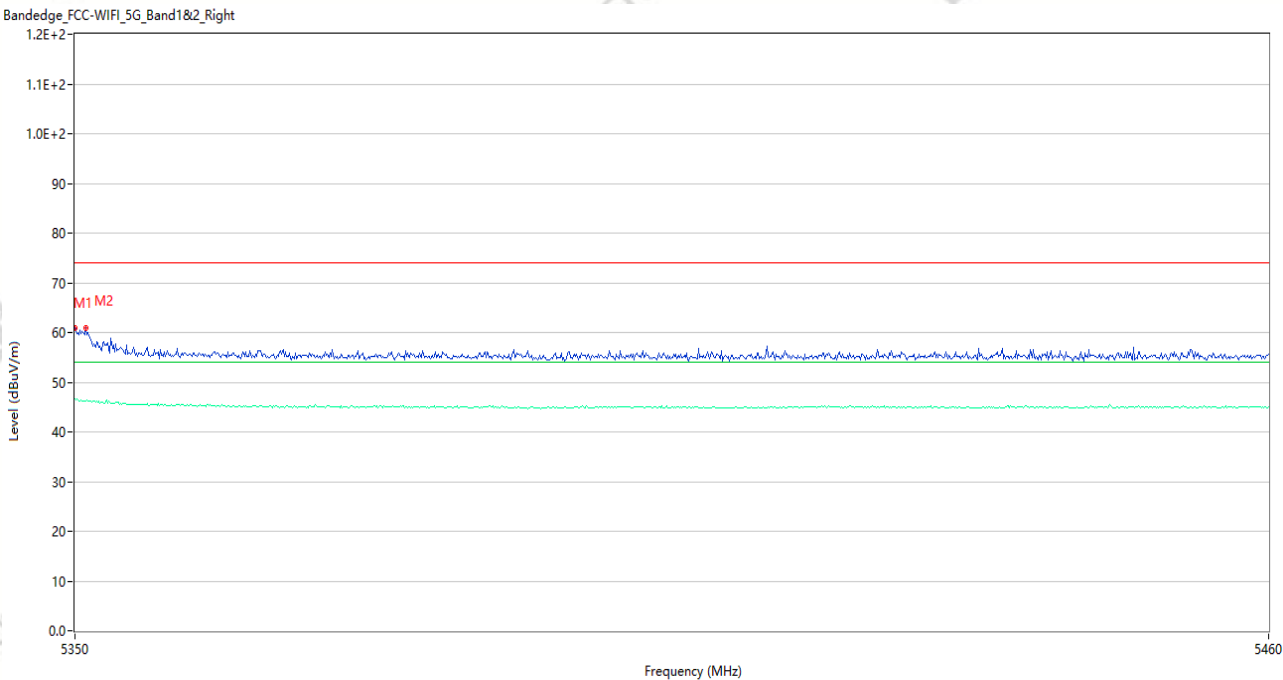


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	61.02	4.04	74.0	12.98	Peak	360.00	150	Horizontal	Pass
1**	5350.000	46.62	4.04	54.0	7.38	AV	360.00	150	Horizontal	Pass
2	5350.990	60.91	4.06	74.0	13.09	Peak	360.00	150	Horizontal	Pass
2**	5350.990	46.11	4.06	54.0	7.89	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_17.57.54

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11ac80 CH58
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

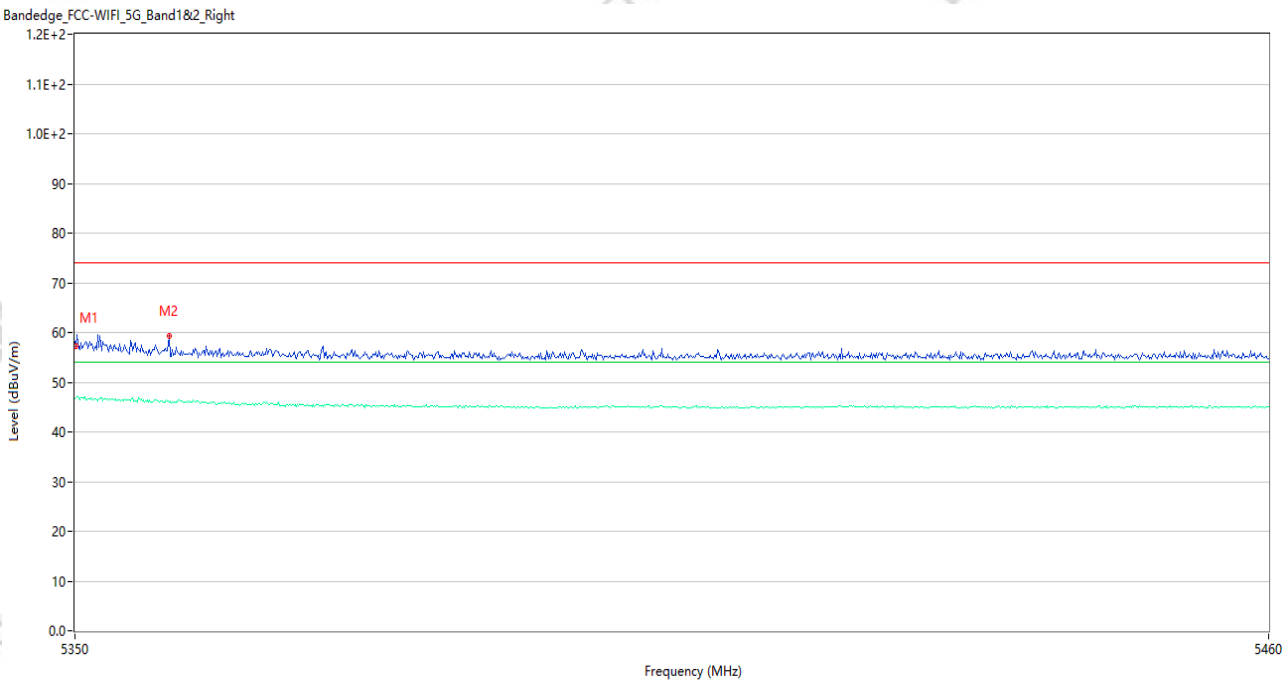


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.110	57.22	4.04	74.0	16.78	Peak	181.00	150	Vertical	Pass
1**	5350.110	46.91	4.04	54.0	7.09	AV	181.00	150	Vertical	Pass
2	5358.580	59.29	4.22	74.0	14.71	Peak	28.00	150	Vertical	Pass
2**	5358.580	45.93	4.22	54.0	8.07	AV	28.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_17.56.26

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3GWIFI 11ac80 CH58
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

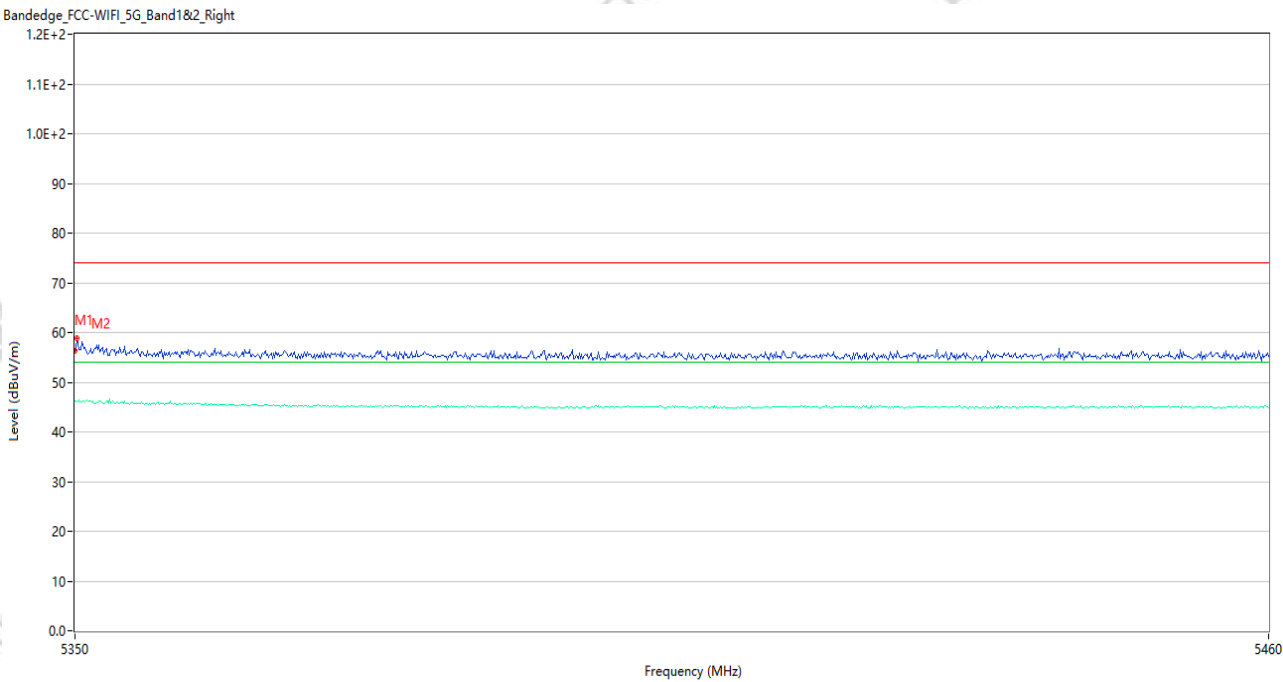

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	56.26	4.04	74.0	17.74	Peak	0.00	150	Horizontal	Pass
1**	5350.000	46.17	4.04	54.0	7.83	AV	0.00	150	Horizontal	Pass
2	5350.220	58.84	4.04	74.0	15.16	Peak	2.00	150	Horizontal	Pass
2**	5350.220	46.07	4.04	54.0	7.93	AV	2.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_19.17.22

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11a CH100
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	55.02	3.78	68.2	13.18	Peak	158.88	150	Vertical	Pass
1**	5460.000	44.90	3.78	54.0	9.10	AV	158.88	150	Vertical	Pass
2	5461.480	56.27	3.83	68.2	11.93	Peak	160.00	150	Vertical	Pass
2**	5461.480	44.87	3.83	--	-44.87	AV	160.00	150	Vertical	N/A

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_19.10.27

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11a CH100
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

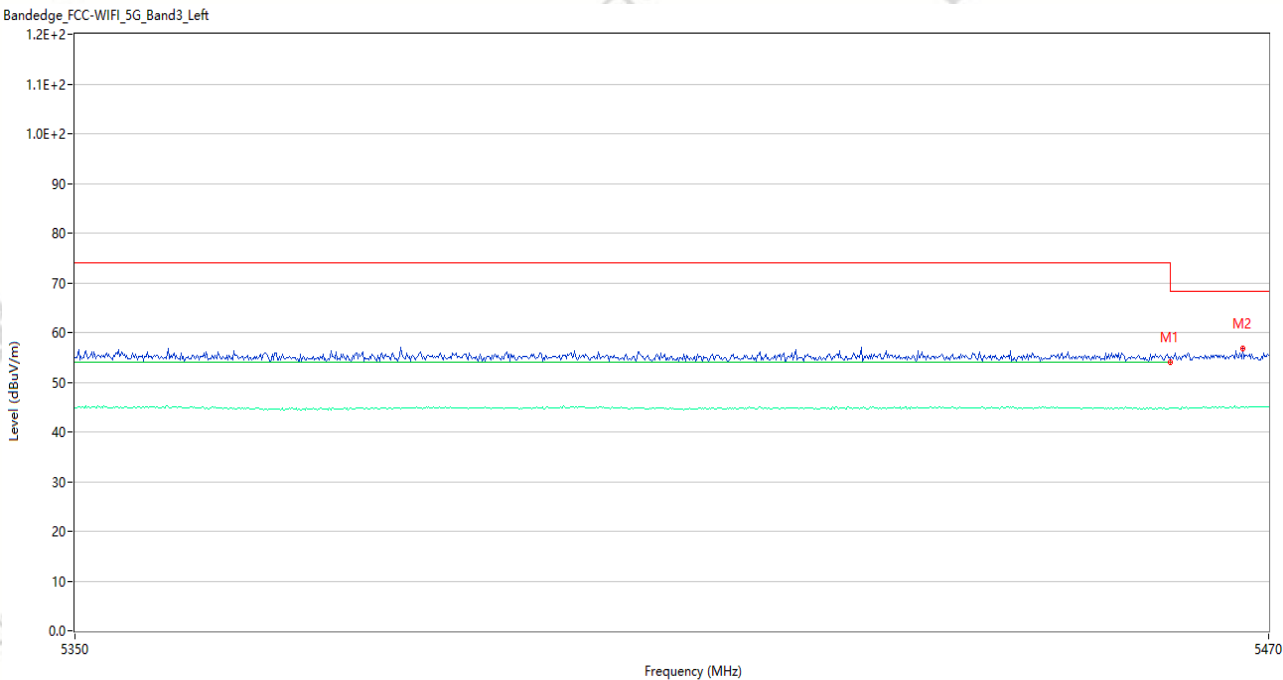


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	54.81	3.78	68.2	13.39	Peak	176.18	150	Horizontal	Pass
1**	5460.000	44.77	3.78	54.0	9.23	AV	176.18	150	Horizontal	Pass
2	5467.360	56.86	4.02	68.2	11.34	Peak	126.00	150	Horizontal	Pass
2**	5467.360	45.00	4.02	--	-45.00	AV	126.00	150	Horizontal	N/A

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_19.45.22

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11a CH140
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

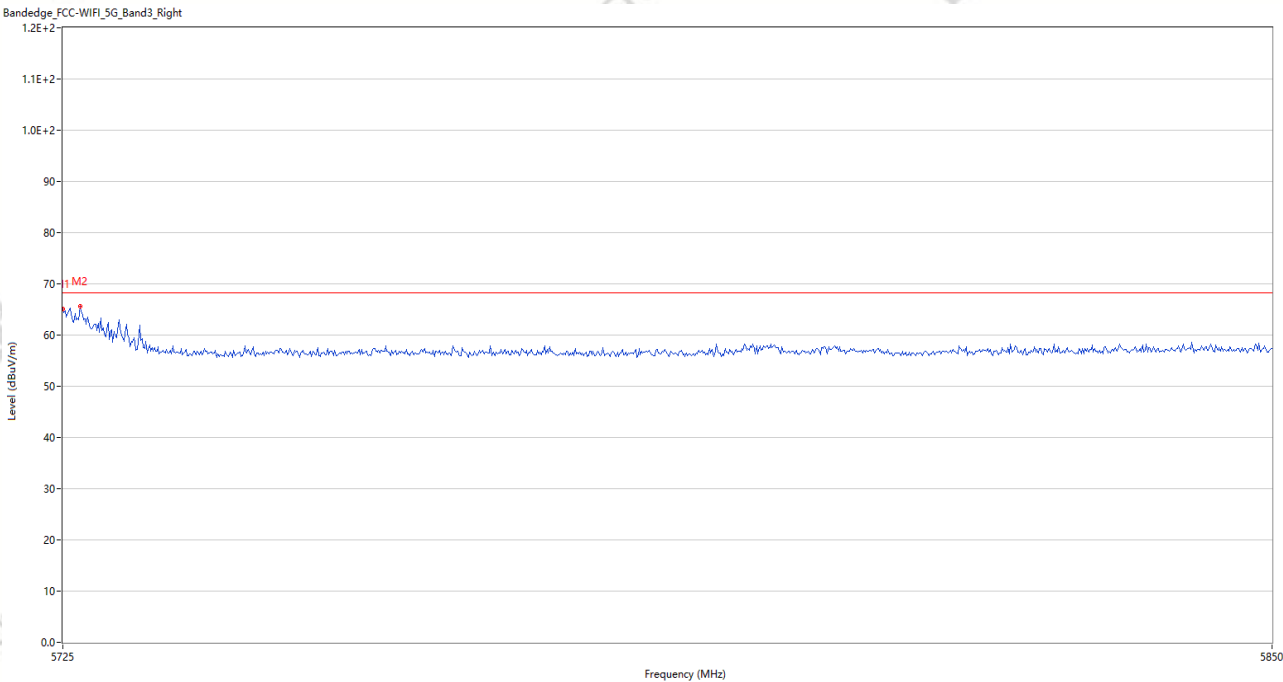


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	65.11	4.31	68.2	3.09	Peak	190.00	150	Vertical	Pass
2	5726.750	65.64	4.25	68.2	2.56	Peak	35.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_19.42.11

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11a CH140
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

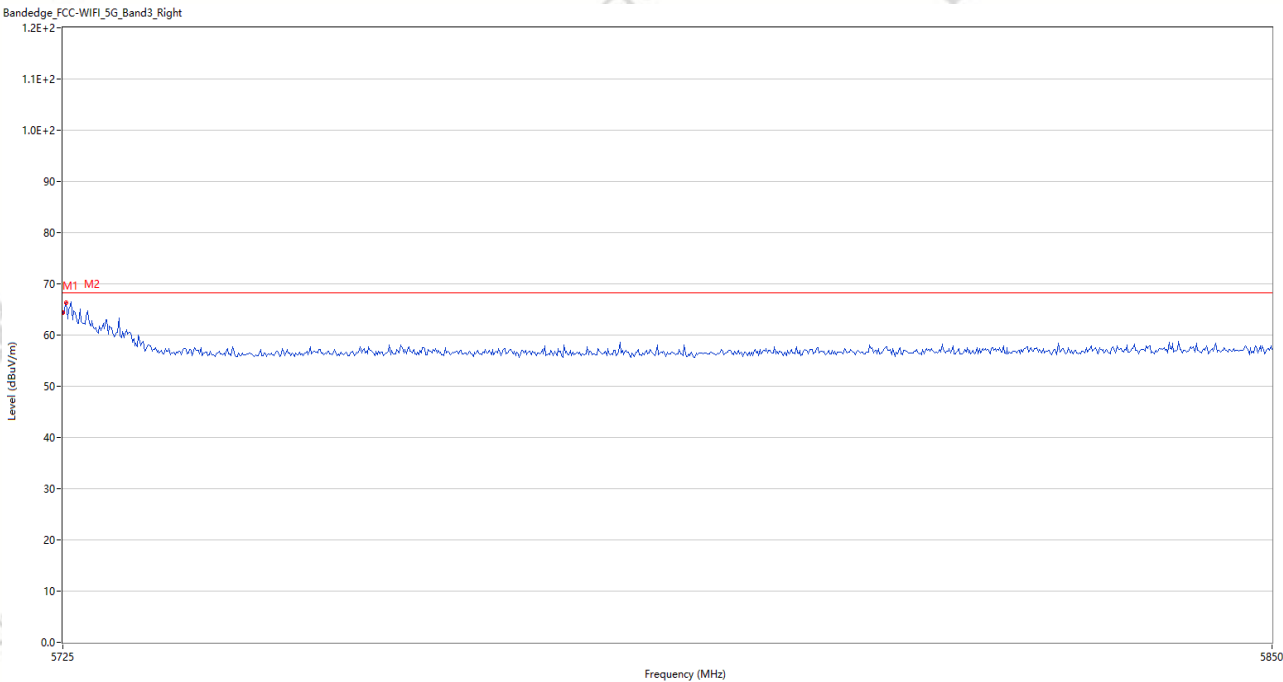


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	64.41	4.31	68.2	3.79	Peak	304.00	150	Horizontal	Pass
2	5725.375	66.37	4.30	68.2	1.83	Peak	314.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_20.03.57

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11n20 CH116
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

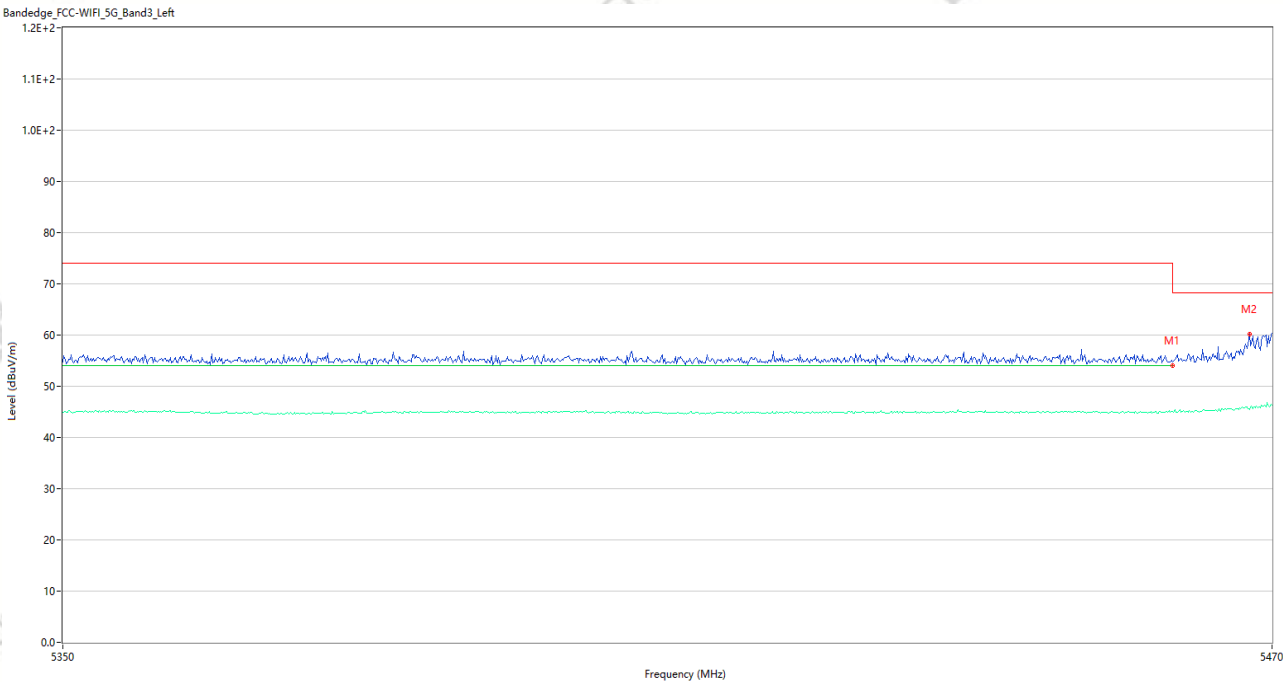


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	54.90	3.78	68.2	13.30	Peak	139.53	150	Vertical	Pass
1**	5460.000	45.04	3.78	54.0	8.96	AV	139.53	150	Vertical	Pass
2	5467.720	60.10	4.03	68.2	8.10	Peak	40.00	150	Vertical	Pass
2**	5467.720	45.50	4.03	--	-45.50	AV	40.00	150	Vertical	N/A

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_20.07.47

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11n20 CH116
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

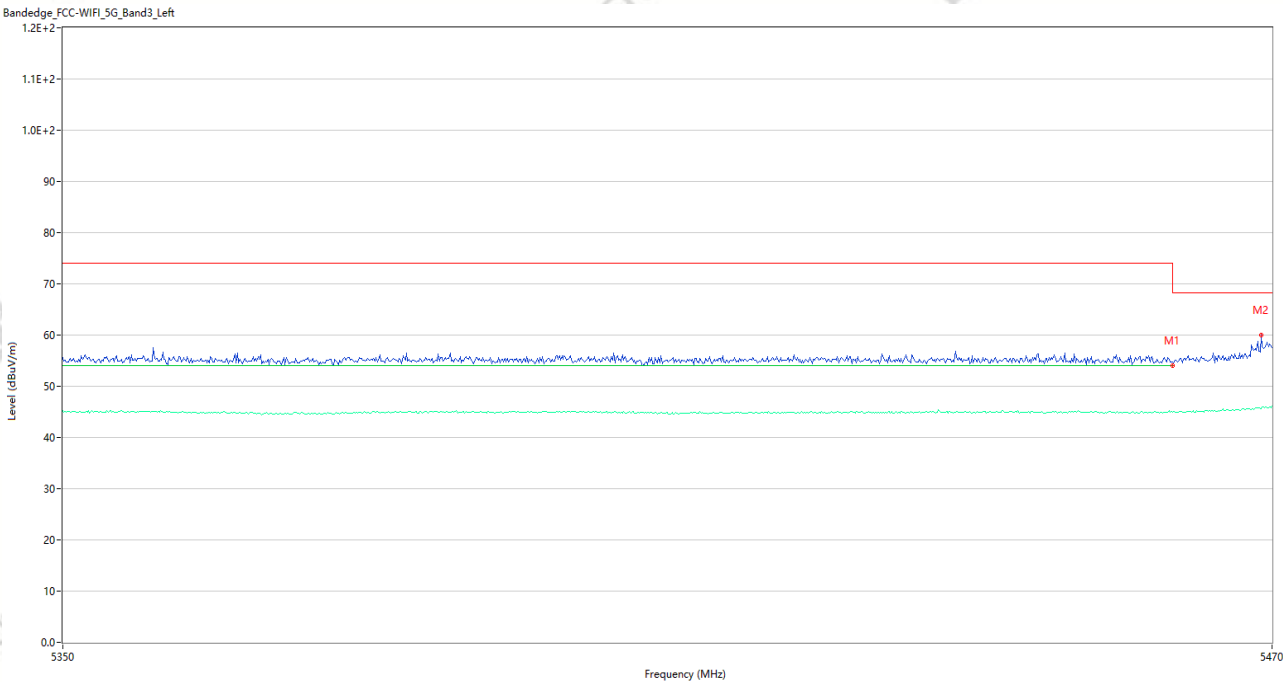


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	54.72	3.78	68.2	13.48	Peak	173.17	150	Horizontal	Pass
1**	5460.000	44.90	3.78	54.0	9.10	AV	173.17	150	Horizontal	Pass
2	5468.920	59.96	4.07	68.2	8.24	Peak	360.00	150	Horizontal	Pass
2**	5468.920	45.58	4.07	--	-45.58	AV	360.00	150	Horizontal	N/A

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_19.49.16

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11n20 CH140
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

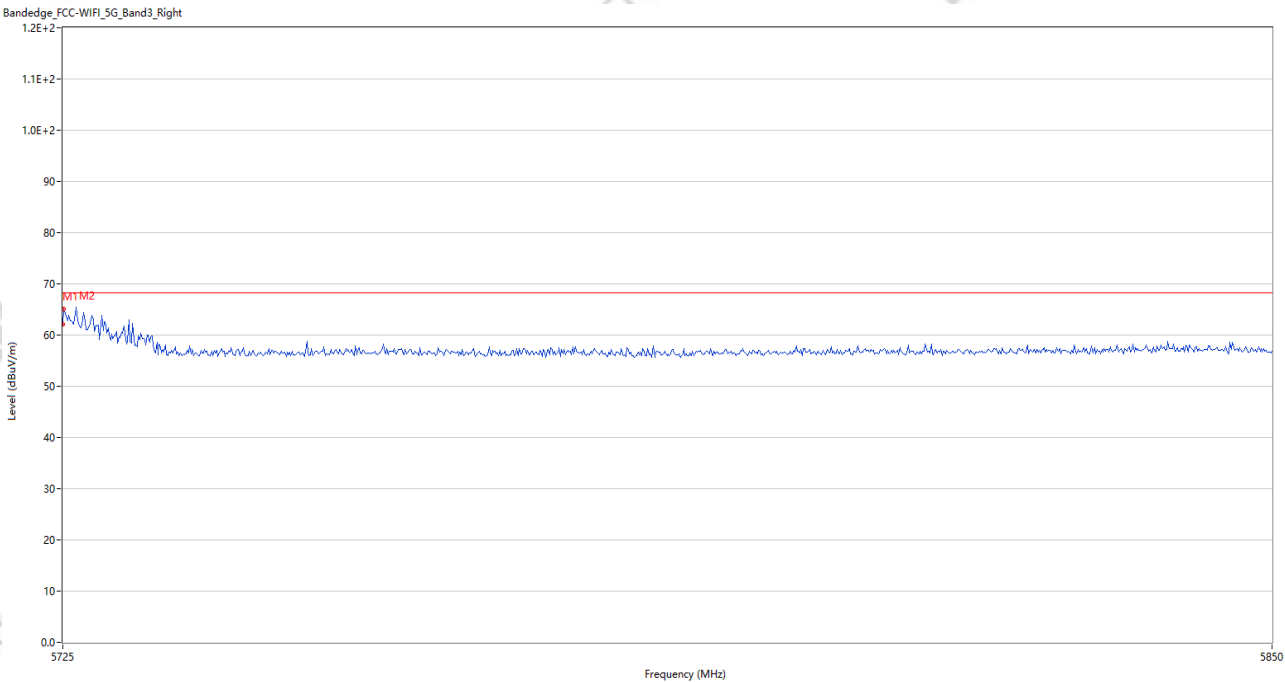


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	62.13	4.31	68.2	6.07	Peak	97.00	150	Vertical	Pass
2	5725.125	65.14	4.31	68.2	3.06	Peak	353.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_19.50.49

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11n20 CH140
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

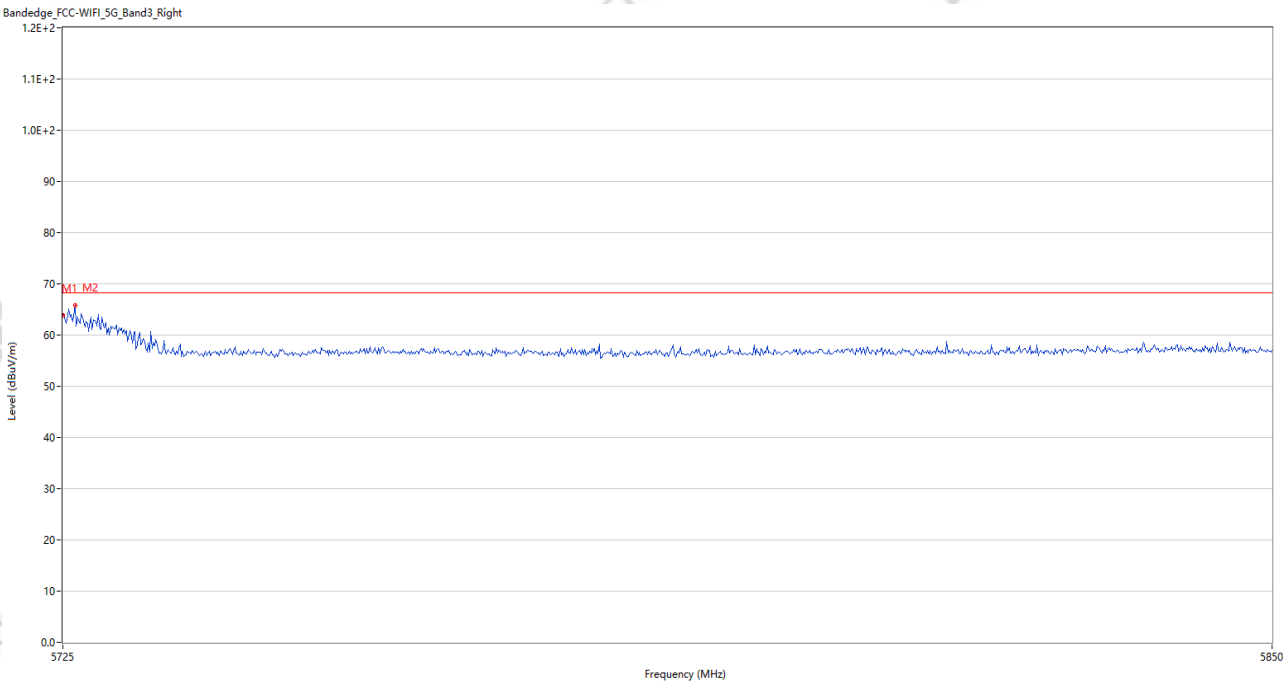


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	63.85	4.31	68.2	4.35	Peak	312.00	150	Horizontal	Pass
2	5726.250	65.76	4.26	68.2	2.44	Peak	306.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_19.50.16

EUT Name:	Tablet	Temp.(°C):	22.3
Model Number:	P10005L	Humidity (%RH):	51
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11n40 CH102
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

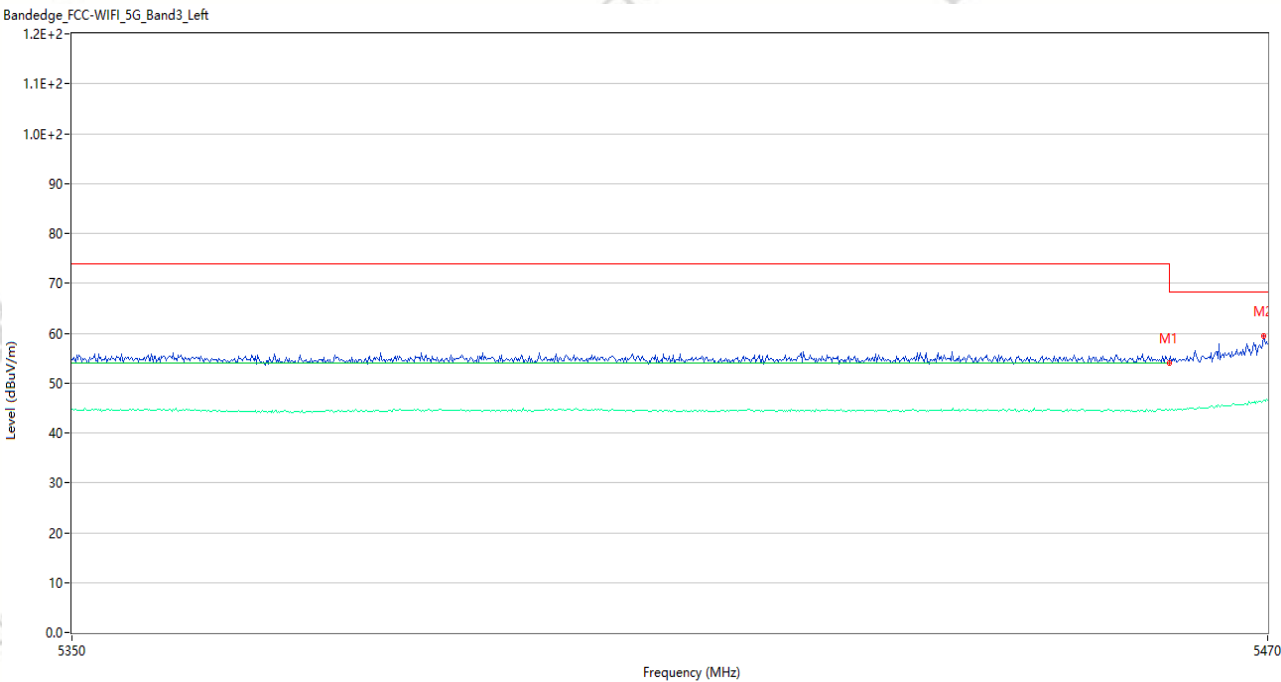


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	54.67	3.78	68.2	13.53	Peak	229.44	150	Vertical	Pass
1**	5460.000	44.56	3.78	54.0	9.44	AV	229.44	150	Vertical	Pass
2	5469.640	59.41	4.08	68.2	8.79	Peak	13.00	150	Vertical	Pass
2**	5469.640	46.57	4.08	--	-46.57	AV	13.00	150	Vertical	N/A

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_19.50.32

EUT Name:	Tablet	Temp.(°C):	22.3
Model Number:	P10005L	Humidity (%RH):	51
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11n40 CH102
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

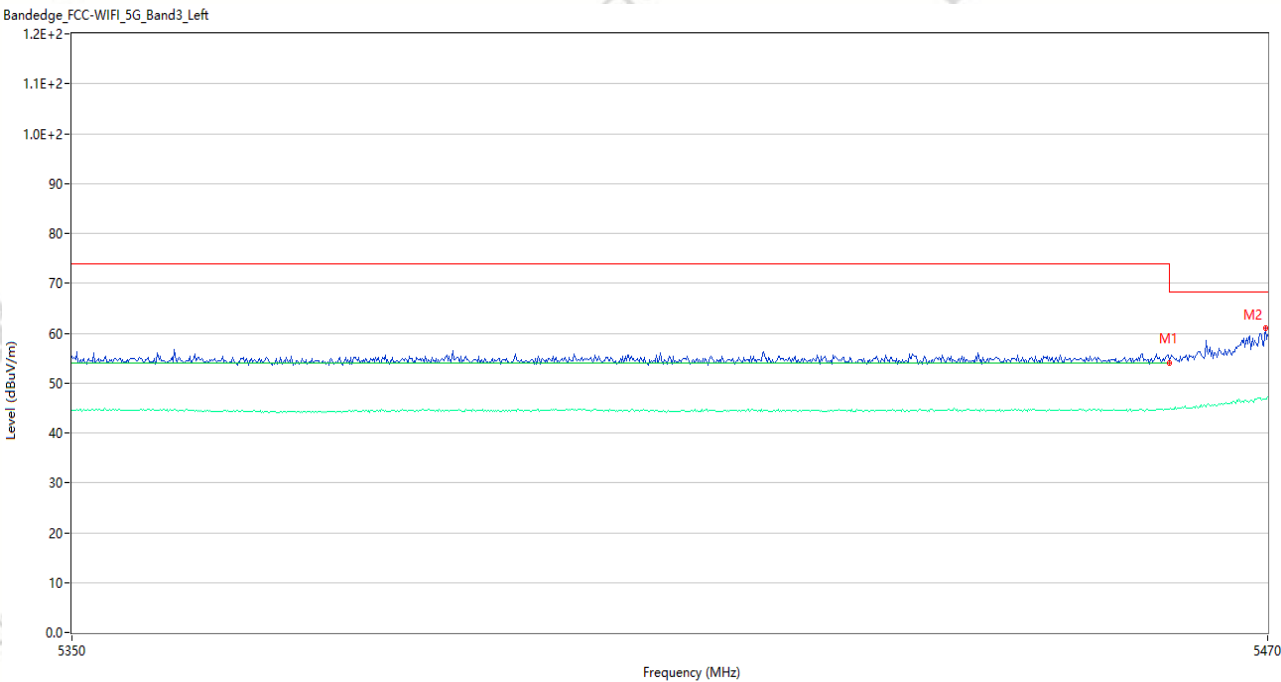


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	54.88	3.78	68.2	13.32	Peak	297.06	150	Horizontal	Pass
1**	5460.000	44.78	3.78	54.0	9.22	AV	297.06	150	Horizontal	Pass
2	5469.760	60.91	4.09	68.2	7.29	Peak	360.00	150	Horizontal	Pass
2**	5469.760	46.84	4.09	--	-46.84	AV	360.00	150	Horizontal	N/A

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_20.14.44

EUT Name:	Tablet	Temp.(°C):	22.3
Model Number:	P10005L	Humidity (%RH):	51
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11n40 CH134
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

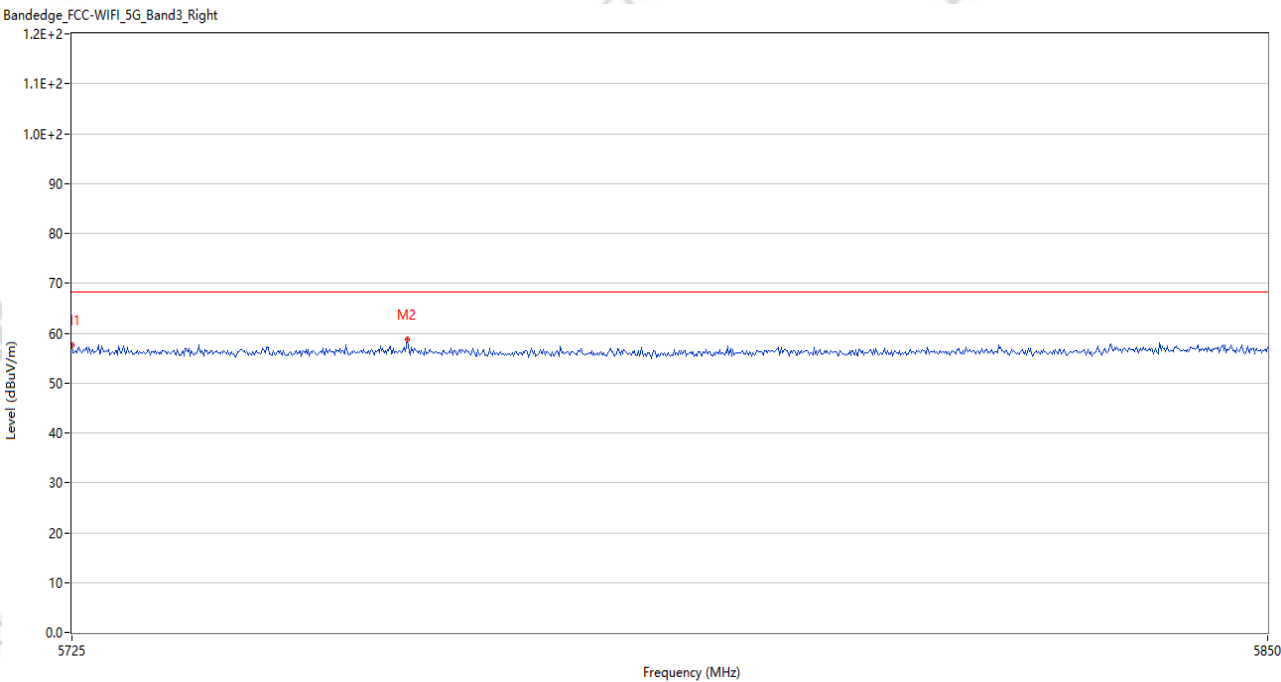


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	57.65	4.31	68.2	10.55	Peak	159.00	150	Vertical	Pass
2	5759.750	58.77	4.63	68.2	9.43	Peak	13.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_20.16.08

EUT Name:	Tablet	Temp.(°C):	22.3
Model Number:	P10005L	Humidity (%RH):	51
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11n40 CH134
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

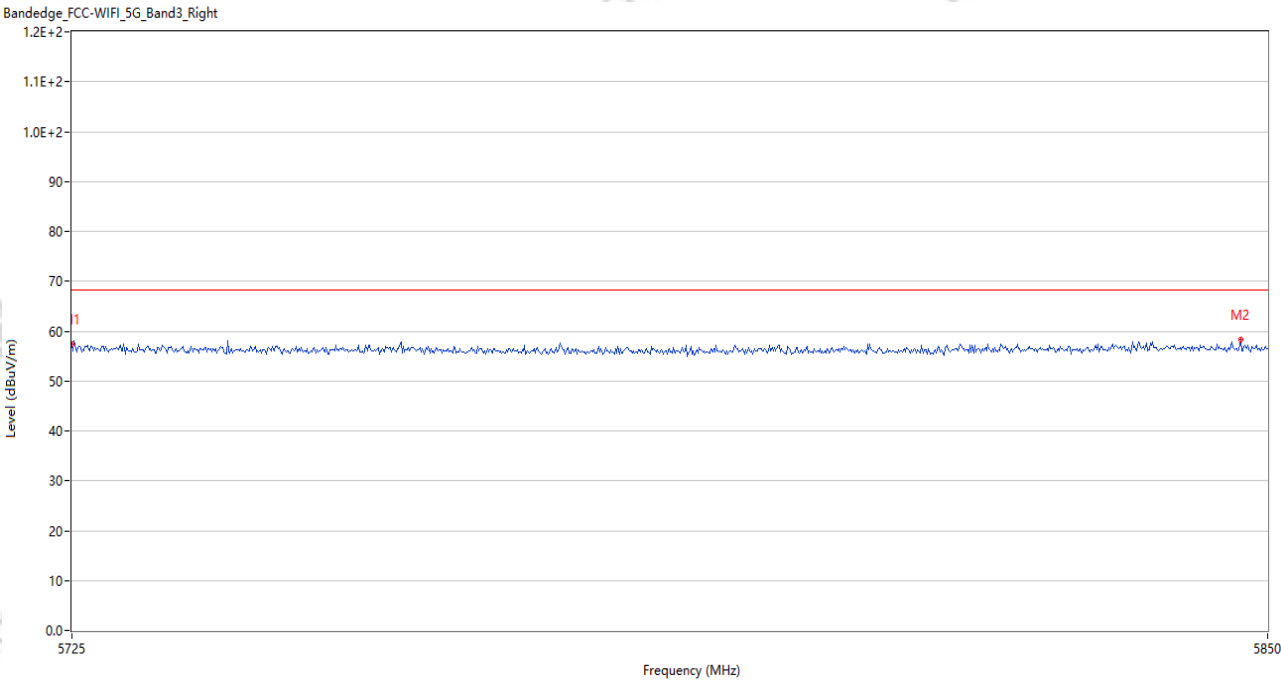


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	57.29	4.31	68.2	10.91	Peak	117.00	150	Horizontal	Pass
2	5847.125	58.25	5.27	68.2	9.95	Peak	303.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_20.21.38

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11ac80 CH106
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

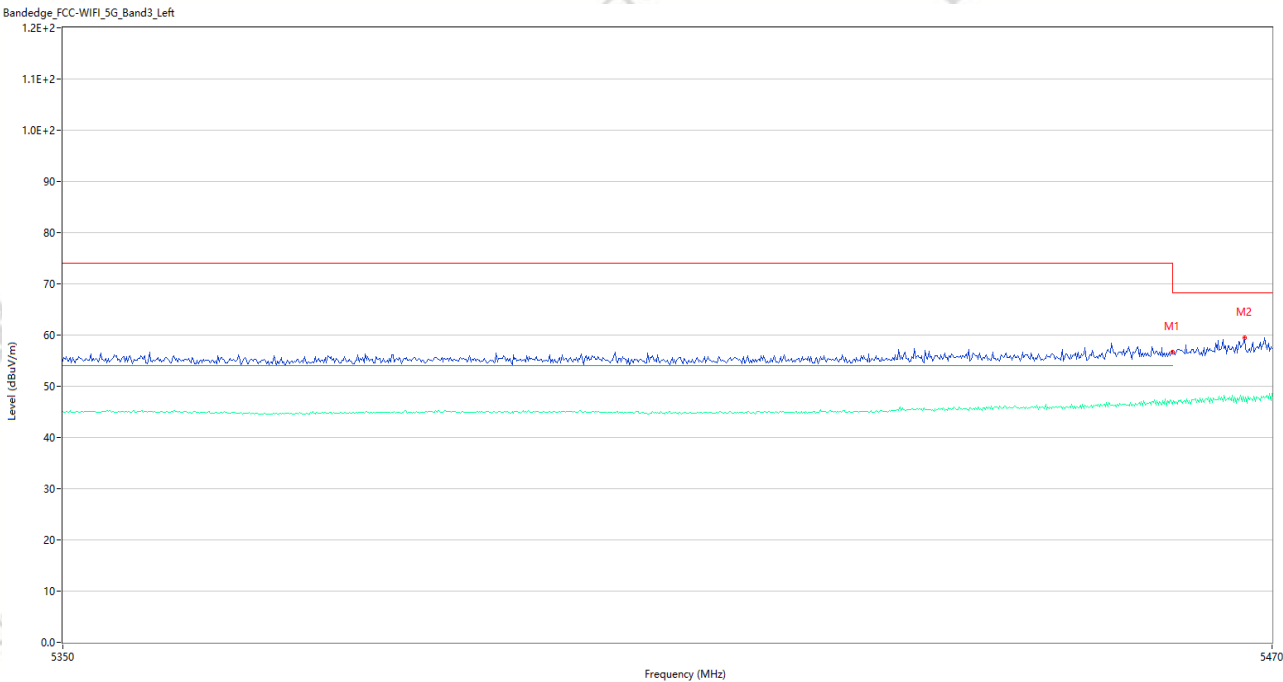


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	56.73	3.78	68.2	11.47	Peak	86.12	150	Vertical	Pass
1**	5460.000	46.63	3.78	54.0	7.37	AV	86.12	150	Vertical	Pass
2	5467.240	59.56	4.02	68.2	8.64	Peak	28.00	150	Vertical	Pass
2**	5467.240	47.05	4.02	--	-47.05	AV	28.00	150	Vertical	N/A

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_20.22.56

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11ac80 CH106
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

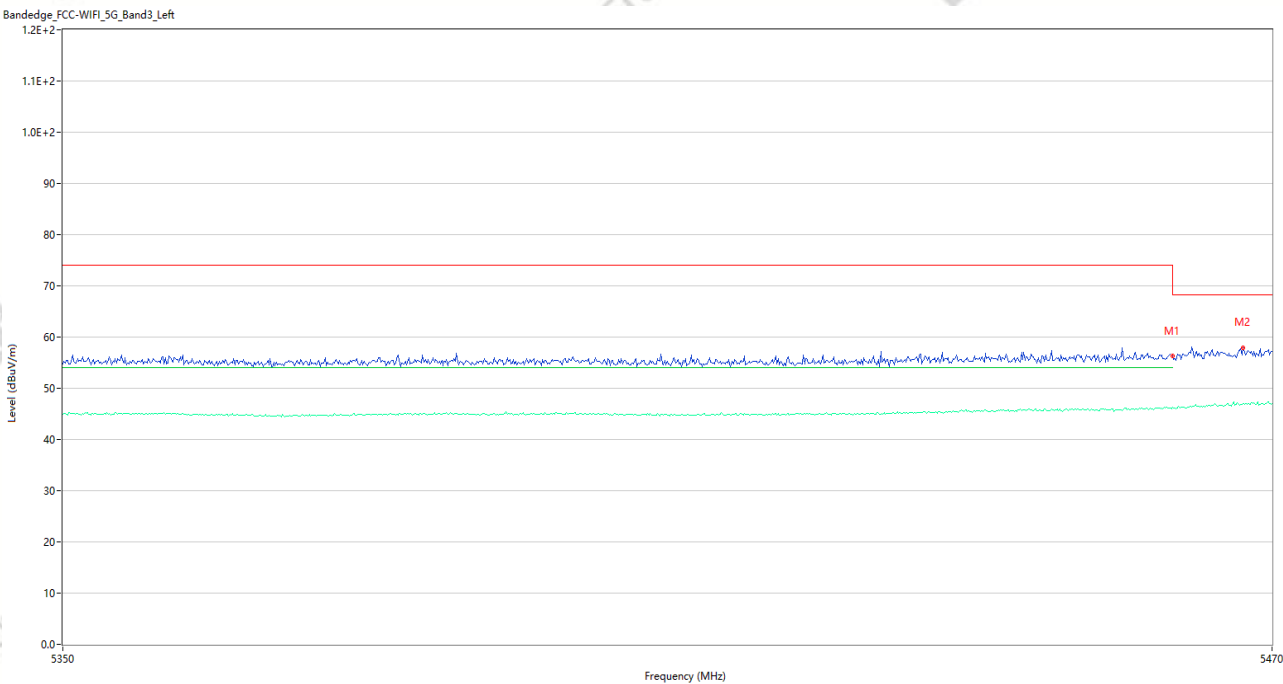


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	56.29	3.78	68.2	11.91	Peak	0.00	150	Horizontal	Pass
1**	5460.000	46.16	3.78	54.0	7.84	AV	0.00	150	Horizontal	Pass
2	5467.120	57.88	4.01	68.2	10.32	Peak	0.00	150	Horizontal	Pass
2**	5467.120	47.04	4.01	--	-47.04	AV	0.00	150	Horizontal	N/A

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_20.28.38

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11ac80 CH122
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

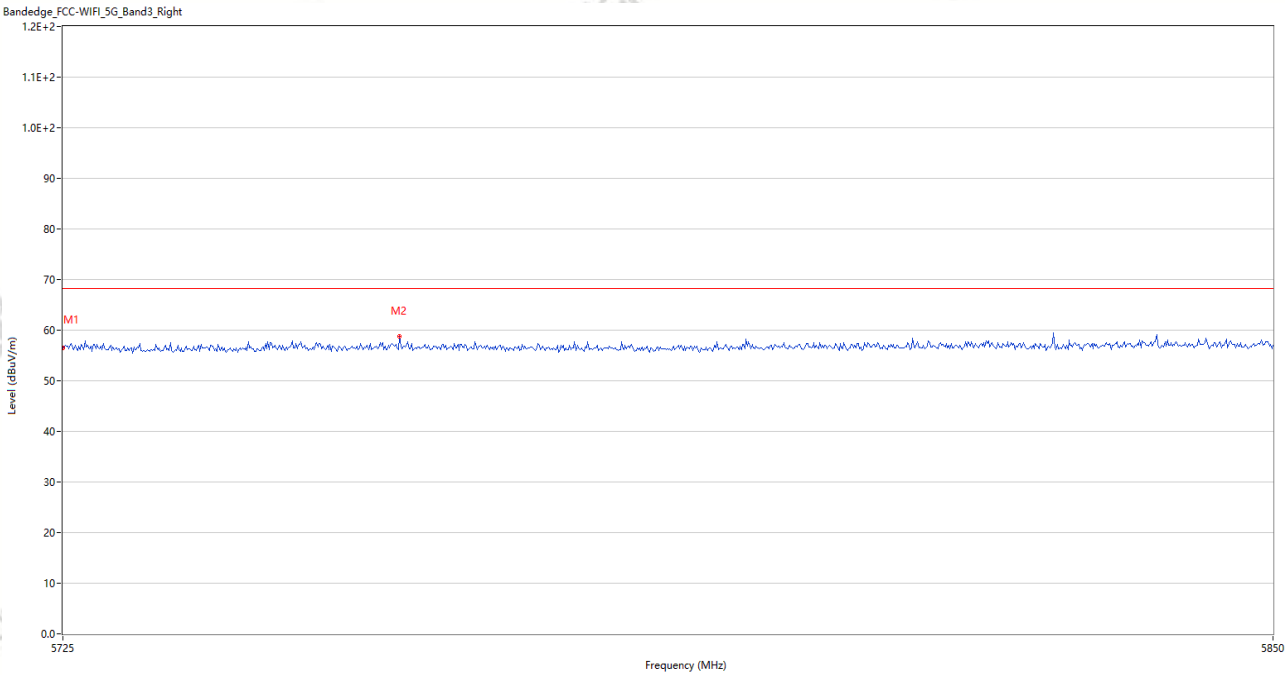


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	56.53	4.31	68.2	11.67	Peak	339.00	150	Vertical	Pass
2	5759.500	58.83	4.62	68.2	9.37	Peak	353.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_20.27.09

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6GWIFI 11ac80 CH122
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

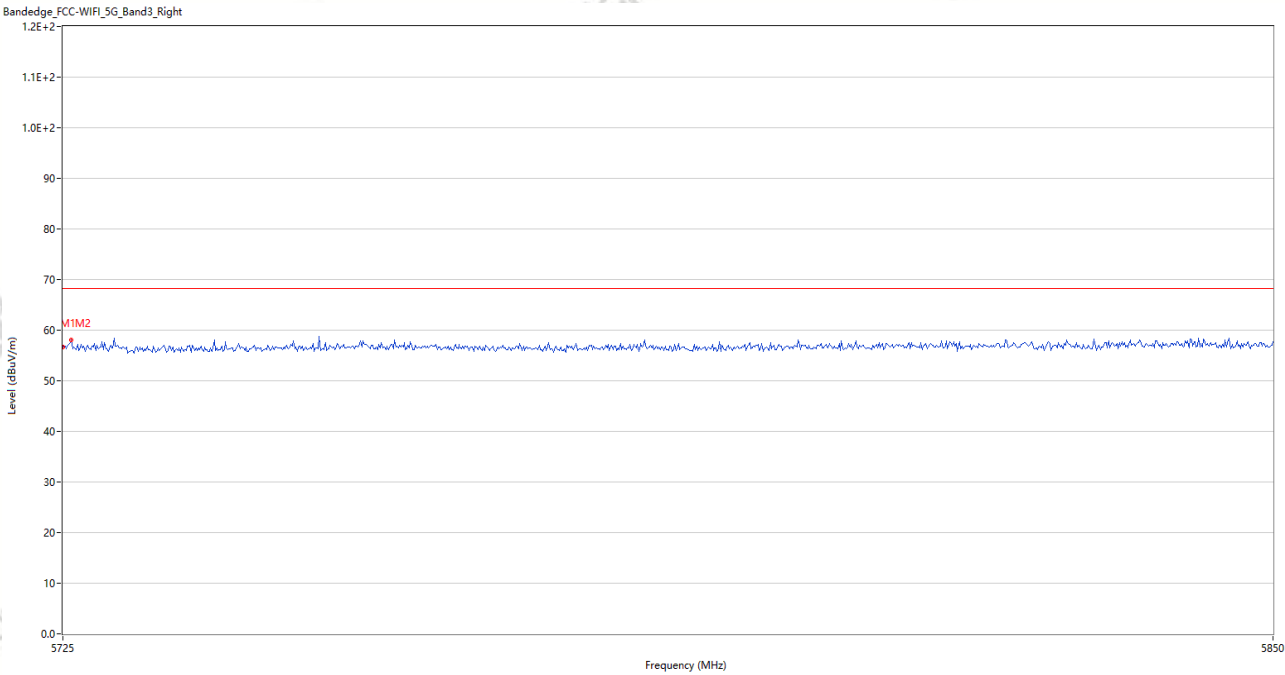


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	56.74	4.31	68.2	11.46	Peak	309.00	150	Horizontal	Pass
2	5725.875	58.08	4.28	68.2	10.12	Peak	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_20.48.05

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11a CH149
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

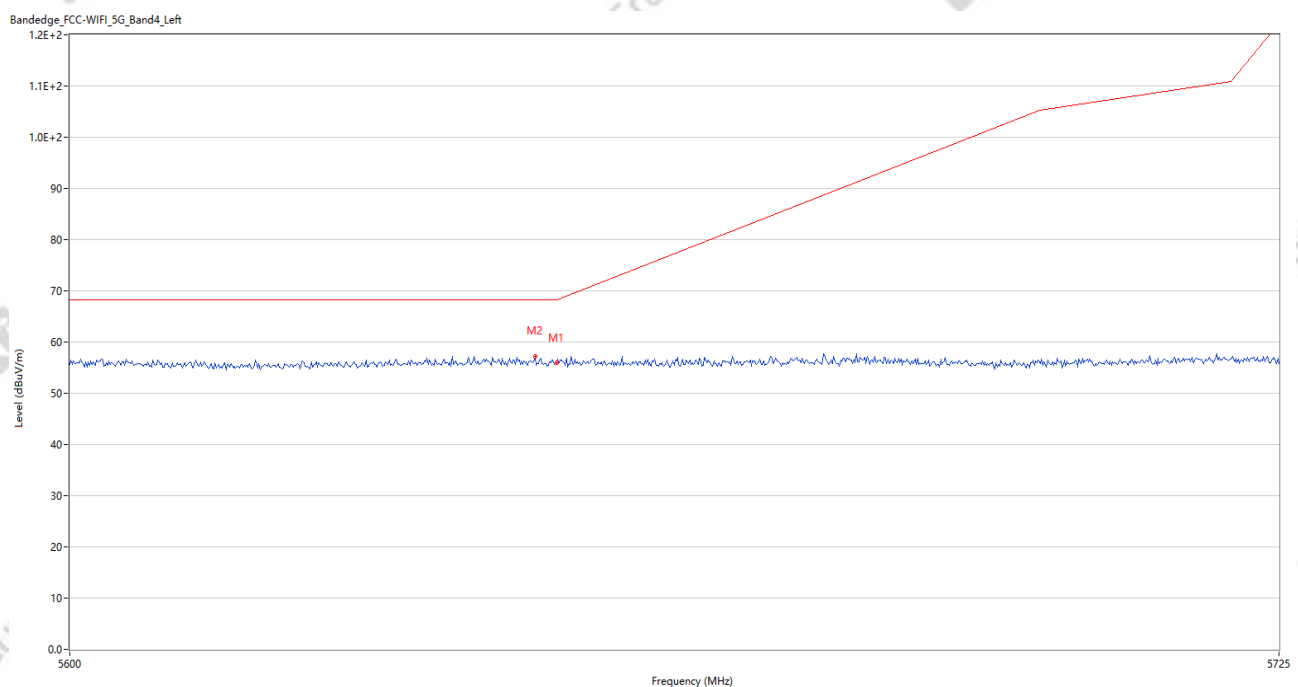

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	55.95	3.81	68.2	12.25	Peak	167.94	150	Vertical	Pass
2	5647.750	57.12	3.80	68.2	11.08	Peak	56.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_20.45.48

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: 5.8GWIFI 11a CH149

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A04+数据线: A07

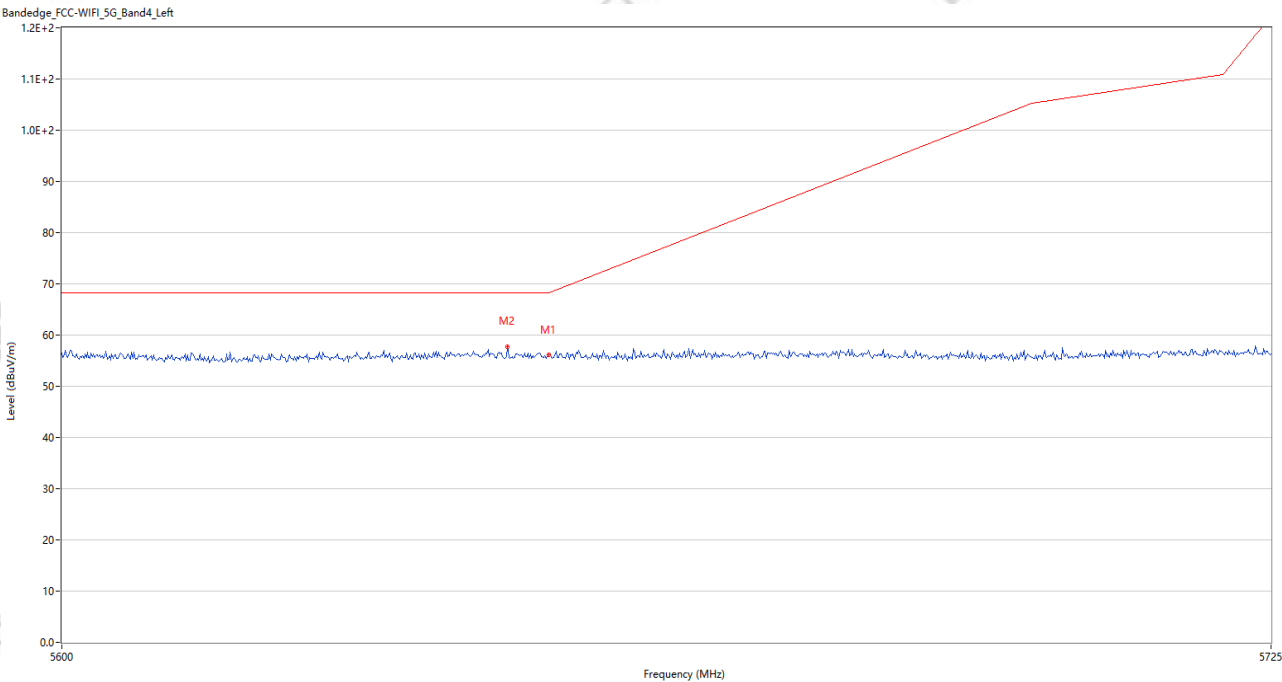


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	56.09	3.81	68.2	12.11	Peak	0.35	150	Horizontal	Pass
2	5645.750	57.72	3.78	68.2	10.48	Peak	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_21.07.39

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11a CH165
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

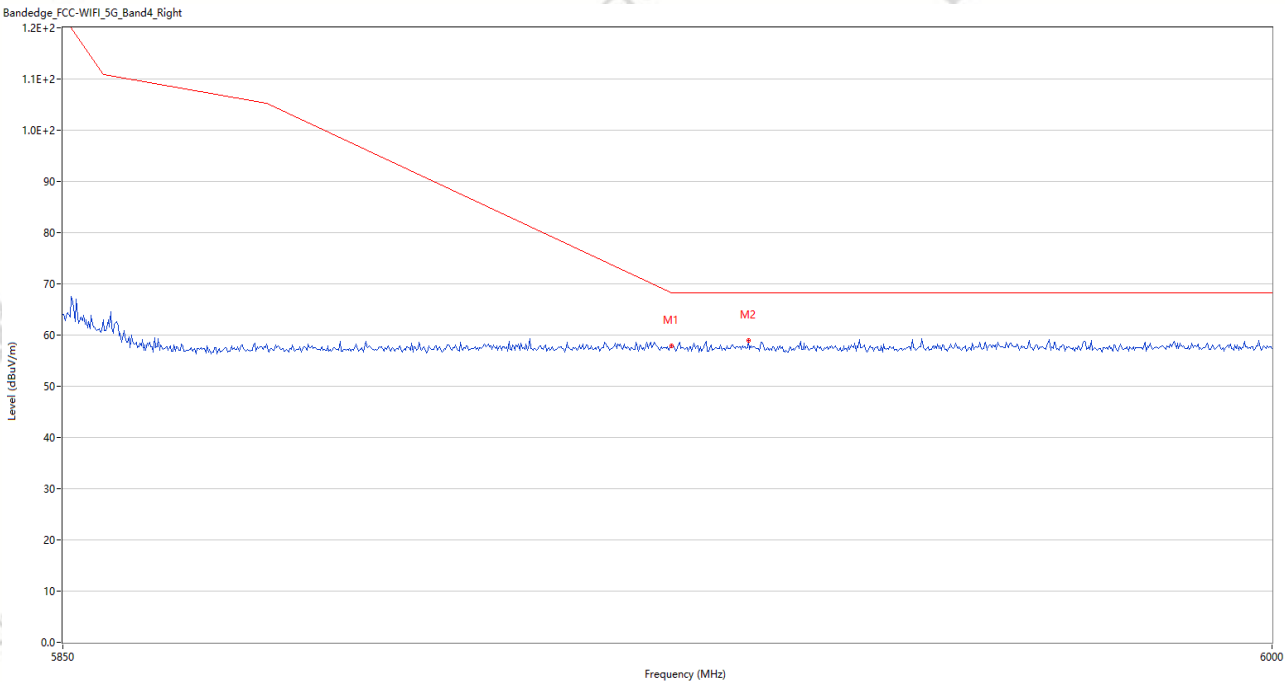


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	57.90	6.44	68.2	10.30	Peak	160.26	150	Vertical	Pass
2	5934.600	59.02	6.19	68.2	9.18	Peak	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_21.06.06

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11a CH165
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

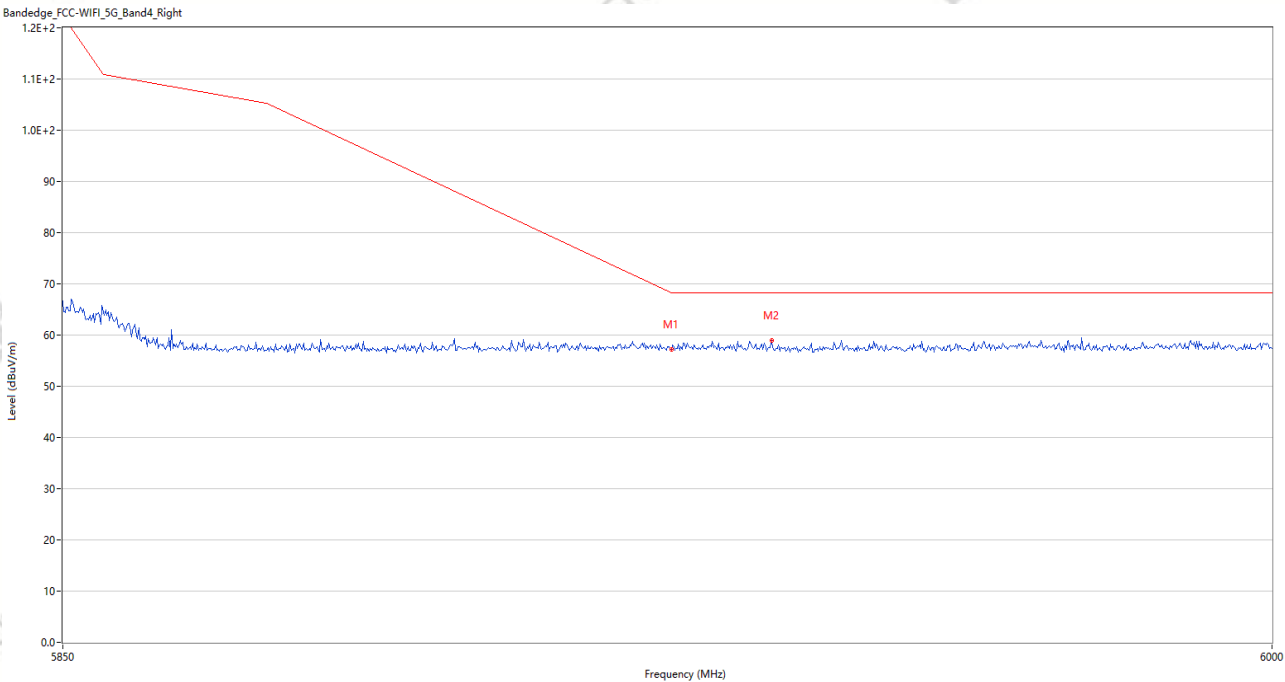


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	57.17	6.44	68.2	11.03	Peak	353.55	150	Horizontal	Pass
2	5937.450	58.94	6.10	68.2	9.26	Peak	154.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_21.11.18

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11n20 CH149
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

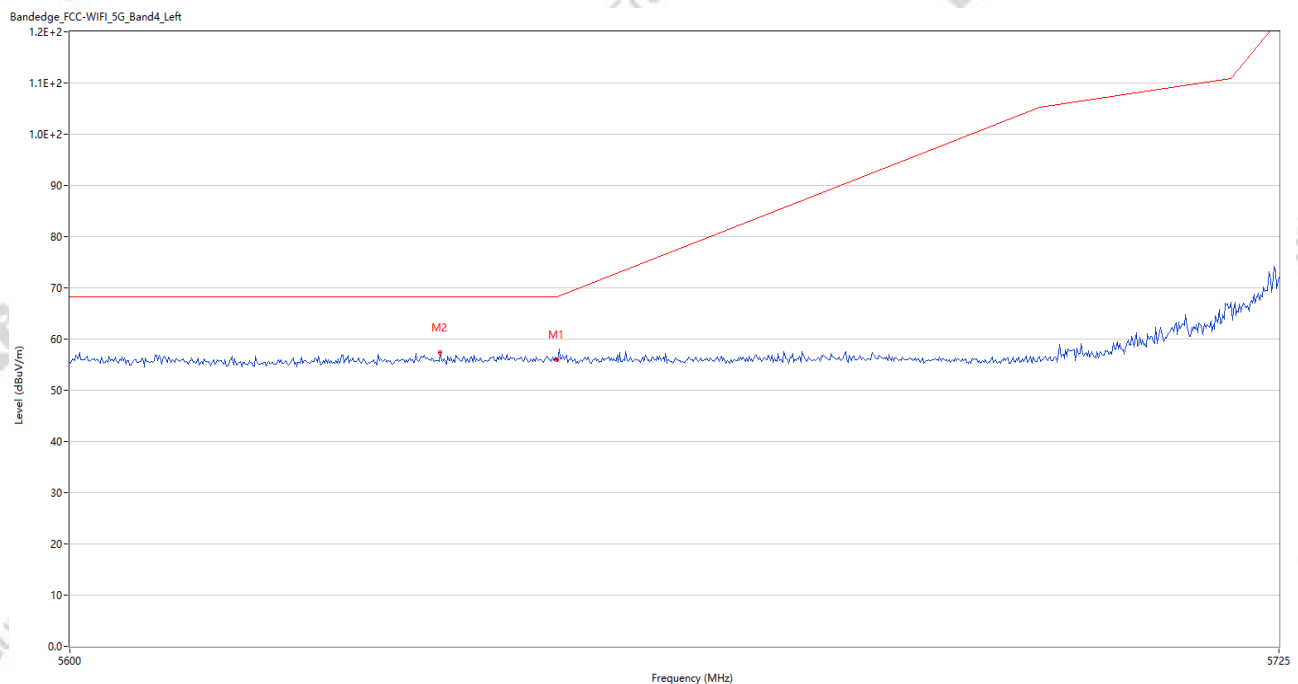


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	55.91	3.81	68.2	12.29	Peak	241.97	150	Vertical	Pass
2	5638.000	57.36	3.73	68.2	10.84	Peak	271.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_21.12.41

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11n20 CH149
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

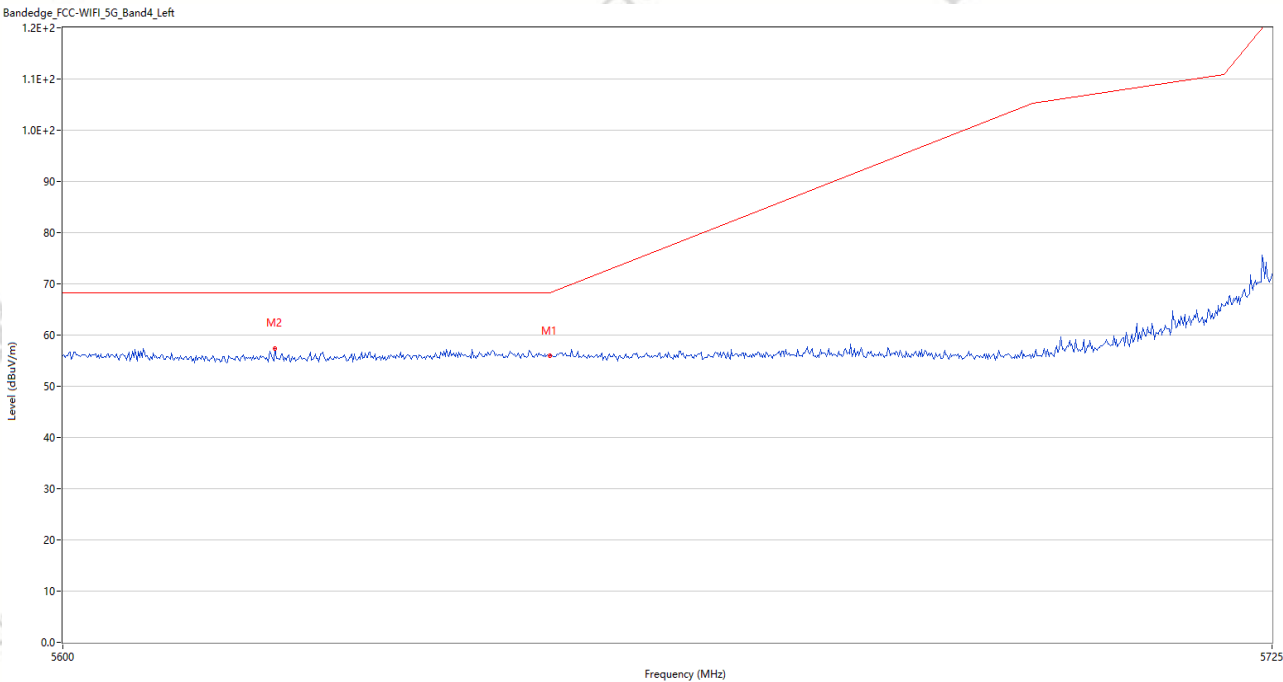


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	55.91	3.81	68.2	12.29	Peak	89.26	150	Horizontal	Pass
2	5621.750	57.28	3.61	68.2	10.92	Peak	27.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_21.28.27

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11n20 CH165
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

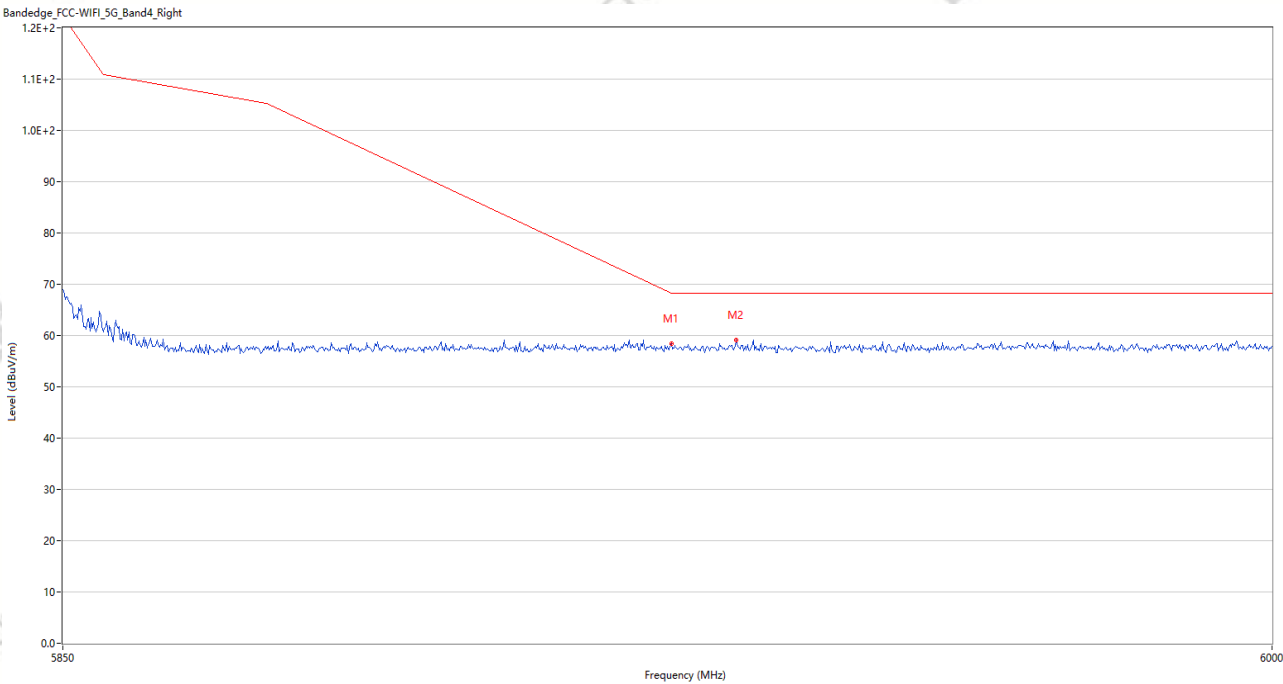


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	58.42	6.44	68.2	9.78	Peak	197.16	150	Vertical	Pass
2	5933.100	59.06	6.24	68.2	9.14	Peak	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_21.29.53

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11n20 CH165
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

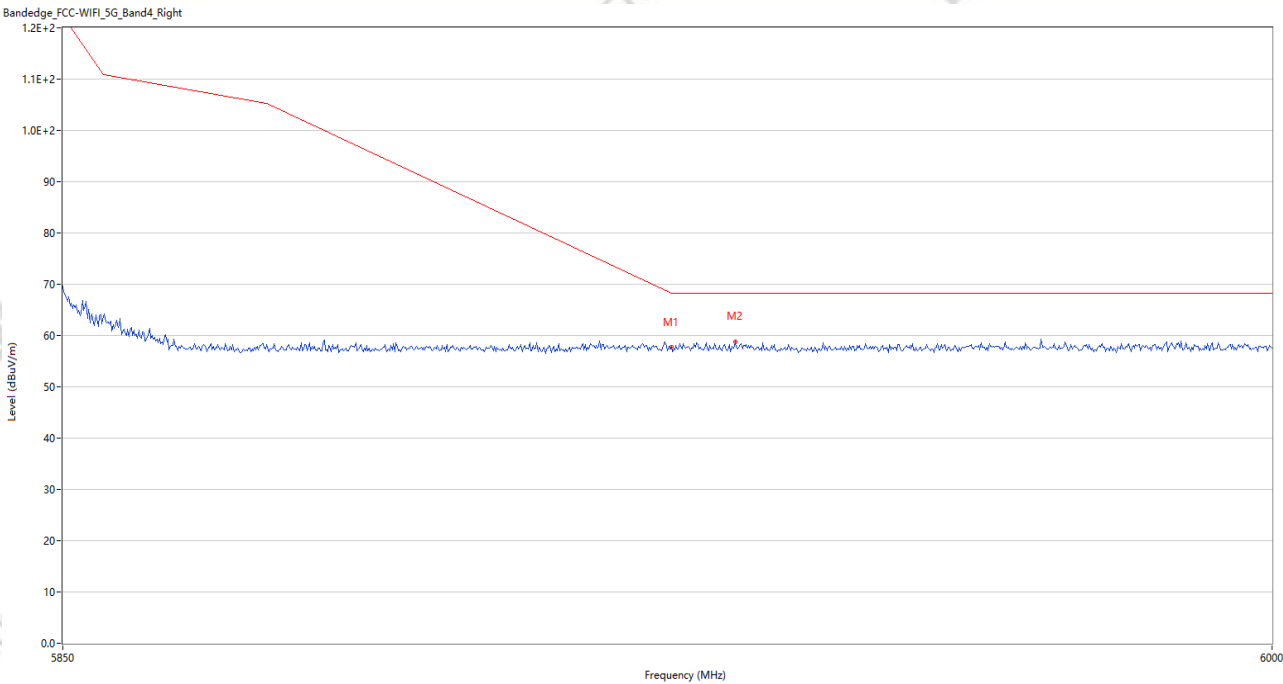


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	57.63	6.44	68.2	10.57	Peak	359.69	150	Horizontal	Pass
2	5932.950	58.85	6.25	68.2	9.35	Peak	197.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_21.37.27

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11n40 CH151
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

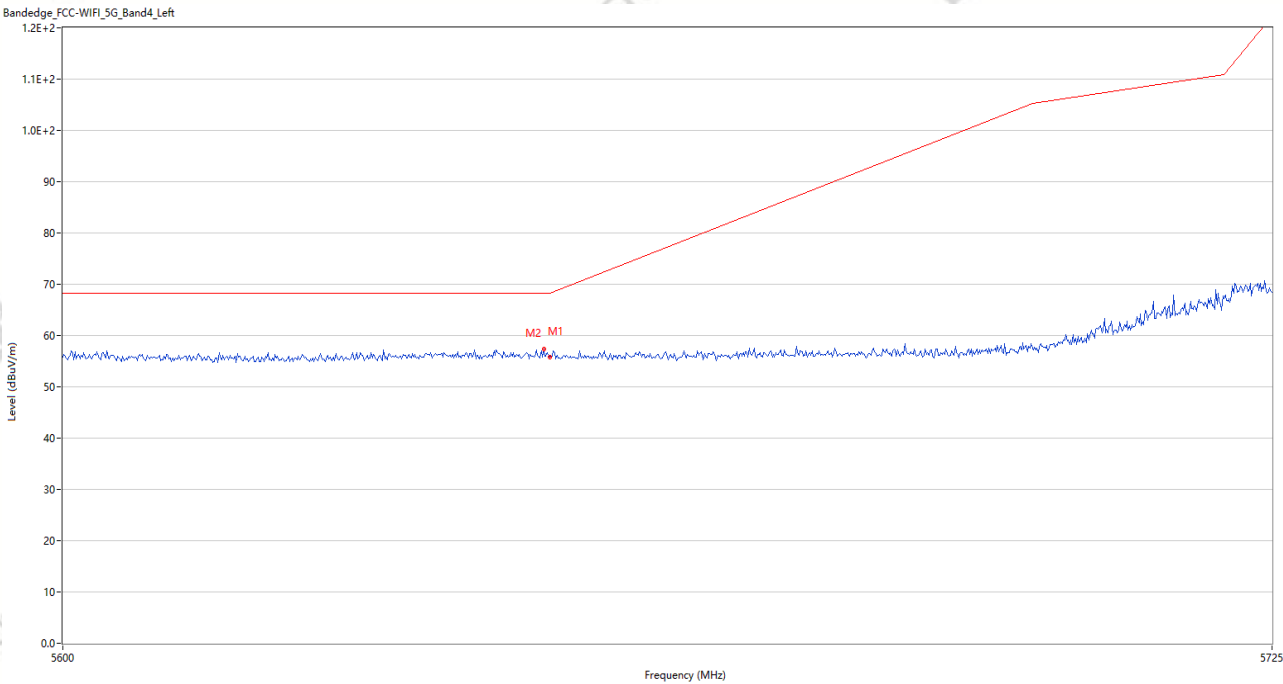


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	55.82	3.81	68.2	12.38	Peak	65.05	150	Vertical	Pass
2	5649.375	57.36	3.81	68.2	10.84	Peak	16.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_21.38.52

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11n40 CH151
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

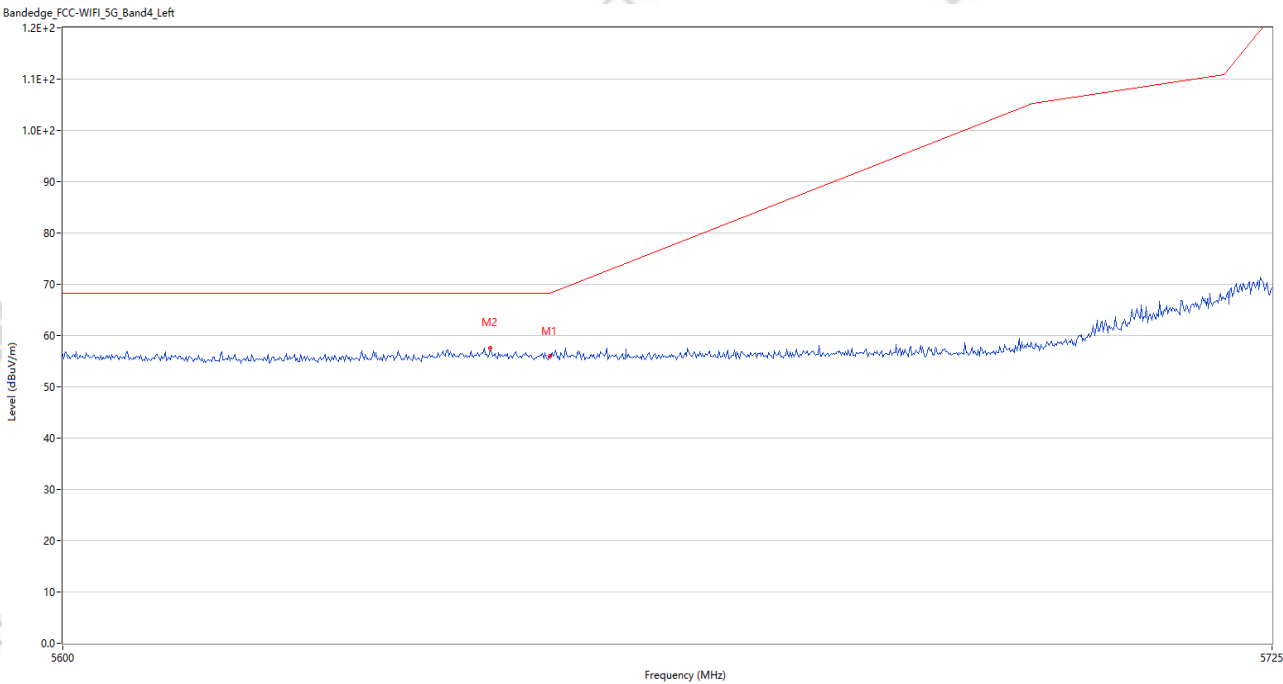


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	55.94	3.81	68.2	12.26	Peak	165.84	150	Horizontal	Pass
2	5643.875	57.59	3.76	68.2	10.61	Peak	228.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_21.34.31

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11n40 CH159
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

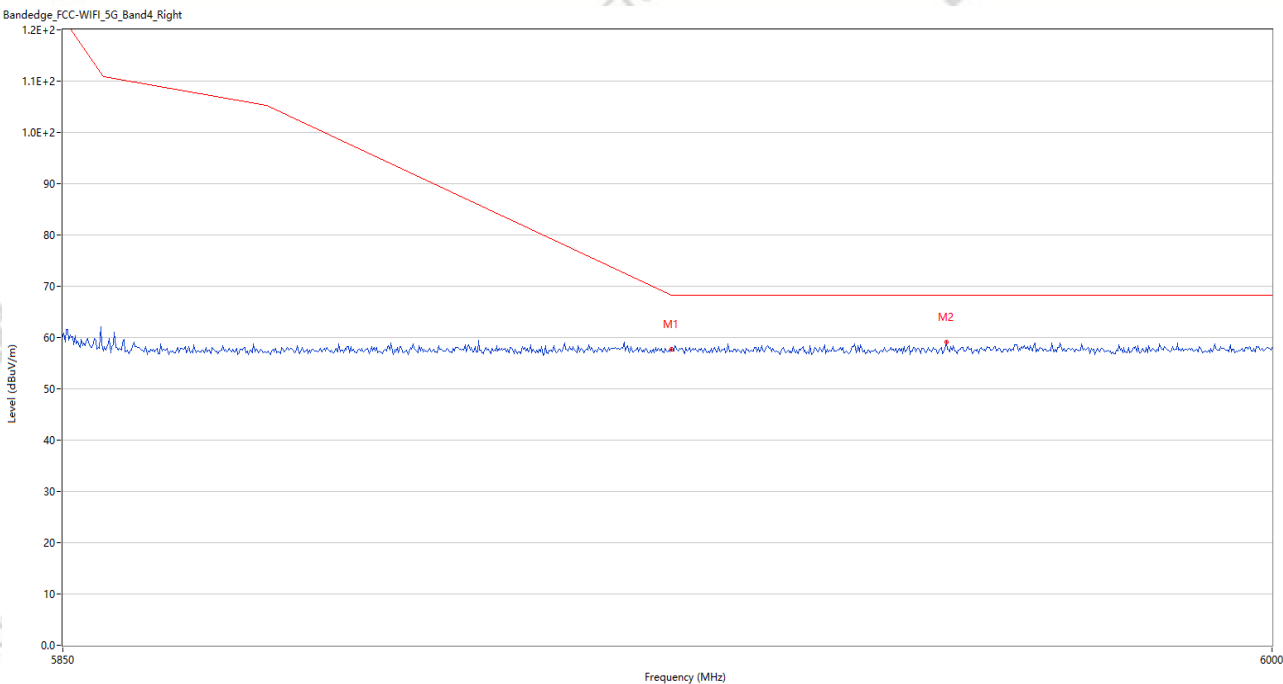


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	57.69	6.44	68.2	10.51	Peak	359.73	150	Vertical	Pass
2	5959.200	59.08	6.10	68.2	9.12	Peak	74.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_21.33.10

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11n40 CH159
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

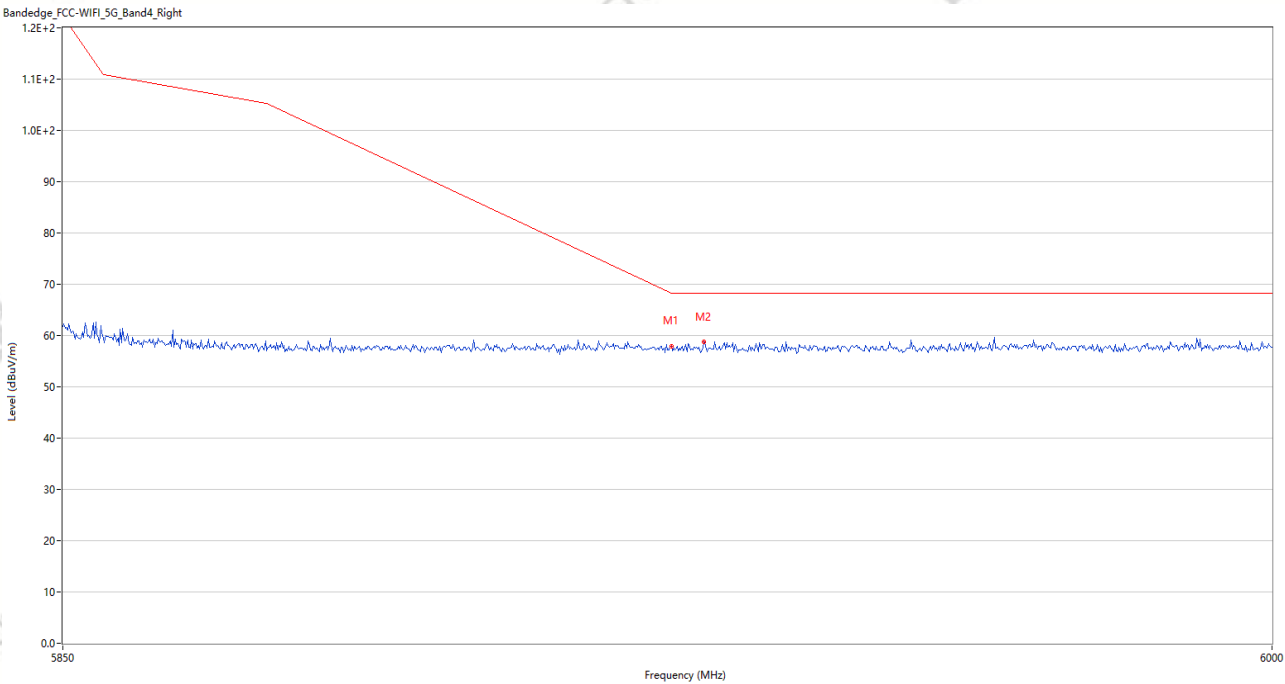


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	57.90	6.44	68.2	10.30	Peak	36.95	150	Horizontal	Pass
2	5929.050	58.70	6.34	68.2	9.50	Peak	2.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_21.54.28

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11ac80 CH155
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

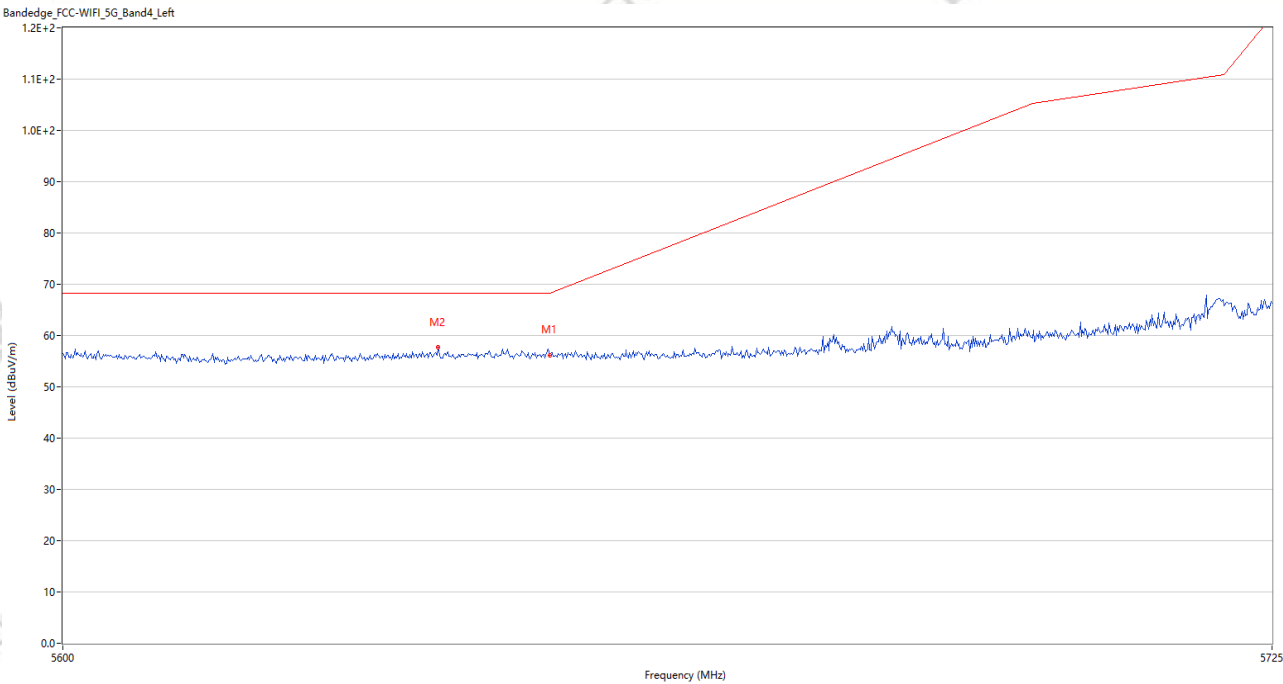


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	56.14	3.81	68.2	12.06	Peak	157.05	150	Vertical	Pass
2	5638.500	57.66	3.73	68.2	10.54	Peak	341.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_21.55.56

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8GWIFI 11ac80 CH155
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	适配器: A04+数据线: A07

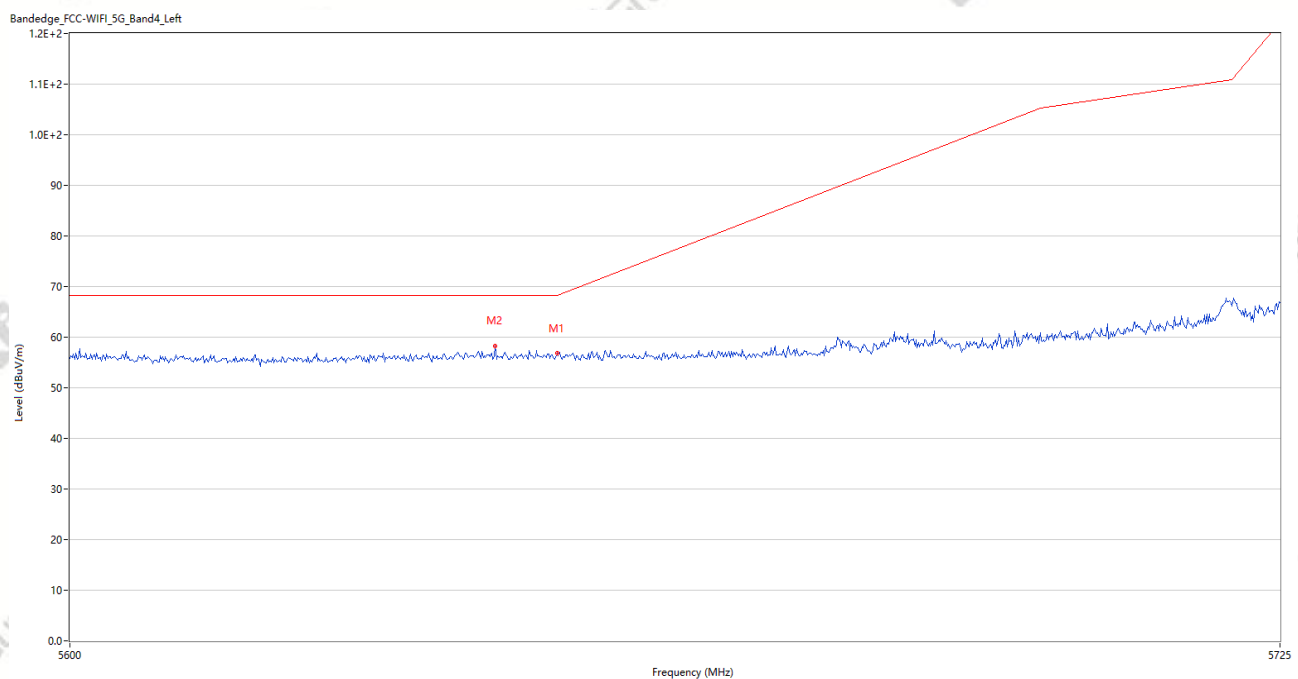

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	56.83	3.81	68.2	11.37	Peak	359.94	150	Horizontal	Pass
2	5643.625	58.20	3.76	68.2	10.00	Peak	66.00	150	Horizontal	Pass