



## FCC TEST REPORT

**Application No.:** ZR/2020/90037  
**Applicant:** HMD Global Oy  
**Address of Applicant:** Bertel Jungin aukio 9, 02600 Espoo, Finland  
**Manufacturer:** HMD Global Oy  
**Address of Manufacturer:** Bertel Jungin aukio 9, 02600 Espoo, Finland  
**EUT Description:** Mobile Phone  
**Model No.:** TA-1340  
**Trade Mark:** NOKIA  
**FCC ID:** 2AJOTTA-1340  
**Standards:** 47 CFR FCC Part 2, Subpart J  
 47 CFR Part 15, Subpart C  
**Test Method:** KDB558074 D01 15.247 Meas Guidance v05r02  
 ANSI C63.10 (2013)  
**Date of Receipt:** 2020/9/22(for original report ZR/2020/9003703)  
**Date of Test:** 2020/9/22 to 2020/9/29(for original report ZR/2020/9003703)  
**Date of Issue:** 2020/9/30(for original report ZR/2020/9003703)  
 2020/11/9(for new report ZR/2020/9003715)

|                     |               |
|---------------------|---------------|
| <b>Test Result:</b> | <b>PASS *</b> |
|---------------------|---------------|

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Remark: TA-1333 support Double SIM, while TA-1340 can support Double SIM and Single SIM.

Authorized Signature:

Derek Yang

Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



## 1 Version

| Revision Record |         |           |          |          |
|-----------------|---------|-----------|----------|----------|
| Version         | Chapter | Date      | Modifier | Remark   |
| 01              |         | 2020/11/9 |          | Original |
|                 |         |           |          |          |
|                 |         |           |          |          |

|                          |  |                                                                                                                        |  |  |
|--------------------------|--|------------------------------------------------------------------------------------------------------------------------|--|--|
| Authorized for issue by: |  |                                                                                                                        |  |  |
| Tested By                |  | <br><hr/> (Mike Hu) /Project Engineer |  |  |
|                          |  |                                                                                                                        |  |  |
| Checked By               |  | <br><hr/> (David Chen) /Reviewer     |  |  |
|                          |  |                                                                                                                        |  |  |





## 2 Test Summary

| Test Item                                                         | Test Requirement | Test method      | Test Result | Result |
|-------------------------------------------------------------------|------------------|------------------|-------------|--------|
| AC Power Line Conducted Emission                                  | 15.207           | ANSI C63.10 2013 | Clause 4.2  | PASS   |
| Conducted Output Power                                            | 15.247 (b)(3)    | ANSI C63.10 2013 | Clause 4.3  | PASS   |
| DTS (6 dB) Bandwidth & 99% Occupied Bandwidth                     | 15.247 (a)(2)    | ANSI C63.10 2013 | Clause 4.4  | PASS   |
| Power Spectral Density                                            | 15.247 (e)       | ANSI C63.10 2013 | Clause 4.5  | PASS   |
| Band-edge for RF Conducted Emissions                              | 15.247(d)        | ANSI C63.10 2013 | Clause 4.6  | PASS   |
| RF Conducted Spurious Emissions                                   | 15.247(d)        | ANSI C63.10 2013 | Clause 4.7  | PASS   |
| Radiated Spurious Emissions                                       | 15.205/15.209    | ANSI C63.10 2013 | Clause 4.8  | PASS   |
| Restricted bands around fundamental frequency (Radiated Emission) | 15.205/15.209    | ANSI C63.10 2013 | Clause 4.9  | PASS   |

### Remark:

This test report (Report No.: ZR/2020/9003715) is base on the original test report (Report No.: ZR/2020/9003703) issued on 2020-09-30.

Review this report and original report, this report just changing the parts according to the declaration letter from client.

According to the declaration from the applicant, the models: TA-1333 and TA-1340 are identical in specifications, only different according to the declaration letter from client.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report all items do not need to retest and all test data in this report are base on the previous report with report number ZR/2020/9003703.



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center (ECC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## Contents

|          |                                                             |           |
|----------|-------------------------------------------------------------|-----------|
| <b>1</b> | <b>VERSION</b>                                              | <b>2</b>  |
| <b>2</b> | <b>TEST SUMMARY</b>                                         | <b>3</b>  |
| <b>3</b> | <b>GENERAL INFORMATION</b>                                  | <b>5</b>  |
| 3.1      | CLIENT INFORMATION                                          | 5         |
| 3.2      | TEST LOCATION                                               | 5         |
| 3.3      | TEST FACILITY                                               | 5         |
| 3.4      | GENERAL DESCRIPTION OF EUT                                  | 6         |
| 3.5      | TEST ENVIRONMENT                                            | 7         |
| 3.6      | DESCRIPTION OF SUPPORT UNITS                                | 7         |
| <b>4</b> | <b>TEST RESULTS AND MEASUREMENT DATA</b>                    | <b>8</b>  |
| 4.1      | ANTENNA REQUIREMENT                                         | 8         |
| 4.2      | AC POWER LINE CONDUCTED EMISSIONS                           | 9         |
| 4.3      | DUTY CYCLE                                                  | 13        |
| 4.3.1    | Test Results                                                | 13        |
| 4.3.1    | Test Plots                                                  | 13        |
| 4.4      | CONDUCTED OUTPUT POWER                                      | 14        |
| 4.4.1    | Test Results                                                | 14        |
| 4.4.2    | Test plots                                                  | 15        |
| 4.5      | DTS (6 dB) BANDWIDTH & 99% OCCUPIED BANDWIDTH               | 17        |
| 4.5.1    | Test Results                                                | 17        |
| 4.5.2    | Test plots                                                  | 18        |
| 4.6      | POWER SPECTRAL DENSITY                                      | 21        |
| 4.6.1    | Test Results                                                | 21        |
| 4.6.2    | Test plots                                                  | 22        |
| 4.7      | BAND-EDGE FOR RF CONDUCTED EMISSIONS                        | 24        |
| 4.7.1    | Test plots                                                  | 25        |
| 4.8      | SPURIOUS RF CONDUCTED EMISSIONS                             | 27        |
| 4.8.1    | Test plots                                                  | 28        |
| 4.9      | RADIATED SPURIOUS EMISSION                                  | 30        |
| 4.9.1    | Radiated emission below 1GHz                                | 33        |
| 4.9.2    | Transmitter emission above 1GHz                             | 35        |
| 4.10     | RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY               | 41        |
| 4.10.1   | Test plots                                                  | 42        |
| <b>5</b> | <b>MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)</b> | <b>46</b> |
| <b>6</b> | <b>EQUIPMENT LIST</b>                                       | <b>47</b> |
| <b>7</b> | <b>PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS</b>             | <b>49</b> |



### 3 General Information

#### 3.1 Client Information

|                          |                                             |
|--------------------------|---------------------------------------------|
| Applicant:               | HMD Global Oy                               |
| Address of Applicant:    | Bertel Jungin aukio 9, 02600 Espoo, Finland |
| Manufacturer:            | HMD Global Oy                               |
| Address of Manufacturer: | Bertel Jungin aukio 9, 02600 Espoo, Finland |

#### 3.2 Test Location

|            |                                                                                             |
|------------|---------------------------------------------------------------------------------------------|
| Company:   | SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch                             |
| Address:   | No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China |
| Post code: | 518057                                                                                      |
| Telephone: | +86 (0) 755 2601 2053                                                                       |
| Fax:       | +86 (0) 755 2671 0594                                                                       |
| E-mail:    | ee.shenzhen@sgs.com                                                                         |

#### 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

### 3.4 General Description of EUT

|                      |                                                                                                                                                     |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| EUT Description:     | Mobile Phone                                                                                                                                        |
| Model No.:           | TA-1340                                                                                                                                             |
| Trade Mark:          | NOKIA                                                                                                                                               |
| Hardware Version:    | MB_V3                                                                                                                                               |
| Software Version:    | 00WW-A01                                                                                                                                            |
| Operation Frequency: | 2400MHz~2483.5MHz<br>fc = 2402 MHz + N * 2 MHz, where:<br>-fc = "Operating Frequency" in MHz,<br>-N = "Channel Number" with the range from 0 to 39. |
| Bluetooth Version:   | Bluetooth V4.2 LE                                                                                                                                   |
| Modulation Type:     | GFSK                                                                                                                                                |
| Number of Channel:   | 40                                                                                                                                                  |
| Sample Type:         | <input checked="" type="checkbox"/> Portable Device, <input type="checkbox"/> Module                                                                |
| Antenna Type:        | <input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated                                                                   |
| Antenna Gain:        | -0.85dBi                                                                                                                                            |
| Power Supply:        | <input type="checkbox"/> AC/DC Adapter; <input checked="" type="checkbox"/> Battery; <input type="checkbox"/> PoE;; <input type="checkbox"/> Other: |

| Operation Frequency of each channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 0                                   | 2402MHz   | 10      | 2422MHz   | 20      | 2442MHz   | 30      | 2462MHz   |
| 1                                   | 2404MHz   | 11      | 2424MHz   | 21      | 2444MHz   | 31      | 2464MHz   |
| 2                                   | 2406MHz   | 12      | 2426MHz   | 22      | 2446MHz   | 32      | 2466MHz   |
| 3                                   | 2408MHz   | 13      | 2428MHz   | 23      | 2448MHz   | 33      | 2468MHz   |
| 4                                   | 2410MHz   | 14      | 2430MHz   | 24      | 2450MHz   | 34      | 2470MHz   |
| 5                                   | 2412MHz   | 15      | 2432MHz   | 25      | 2452MHz   | 35      | 2472MHz   |
| 6                                   | 2414MHz   | 16      | 2434MHz   | 26      | 2454MHz   | 36      | 2474MHz   |
| 7                                   | 2416MHz   | 17      | 2436MHz   | 27      | 2456MHz   | 37      | 2476MHz   |
| 8                                   | 2418MHz   | 18      | 2438MHz   | 28      | 2458MHz   | 38      | 2478MHz   |
| 9                                   | 2420MHz   | 19      | 2440MHz   | 29      | 2460MHz   | 39      | 2480MHz   |

Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel                    | Frequency |
|----------------------------|-----------|
| The lowest channel (CH0)   | 2402MHz   |
| The middle channel (CH19)  | 2440MHz   |
| The highest channel (CH39) | 2480MHz   |



### 3.5 Test Environment

| Operating Environment |            |
|-----------------------|------------|
| Temperature:          | 25.0 °C    |
| Humidity:             | 50 % RH    |
| Atmospheric Pressure: | 101.32 KPa |

### 3.6 Description of Support Units

The EUT has been tested independent unit.




## 4 Test results and Measurement Data

### 4.1 Antenna Requirement

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 47 CFR Part 15C Section 15.203 /247(c) |
| <p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:</p> <p>The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.85dBi.</p> |                                        |



## 4.2 AC Power Line Conducted Emissions
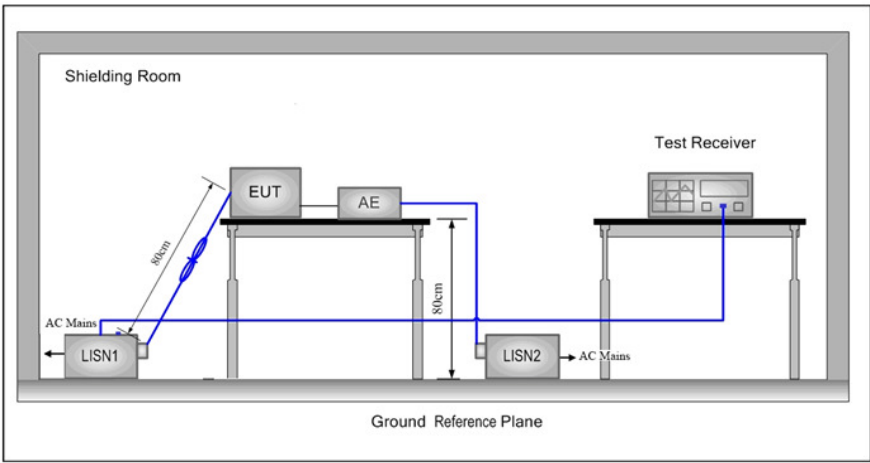
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |           |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
| Test Requirement:                                | 47 CFR Part 15C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |              |           |
| Test Method:                                     | ANSI C63.10: 2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |              |           |
| Test Frequency Range:                            | 150kHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |           |
| Limit:                                           | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Limit (dBuV) |           |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Quasi-peak   | Average   |
|                                                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 66 to 56*    | 56 to 46* |
|                                                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 56           | 46        |
|                                                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 60           | 50        |
| * Decreases with the logarithm of the frequency. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |           |
| Test Procedure:                                  | <p>1) The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</p> |              |           |
| Test Setup:                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |              |           |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center EEC Laboratory

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



|                   |                                                                  |
|-------------------|------------------------------------------------------------------|
| Test Mode:        | Transmitting with GFSK modulation.<br>Charge +Transmitting mode. |
| Instruments Used: | Refer to section 5.10 for details.                               |
| Test Results:     | Pass                                                             |




**Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live line:

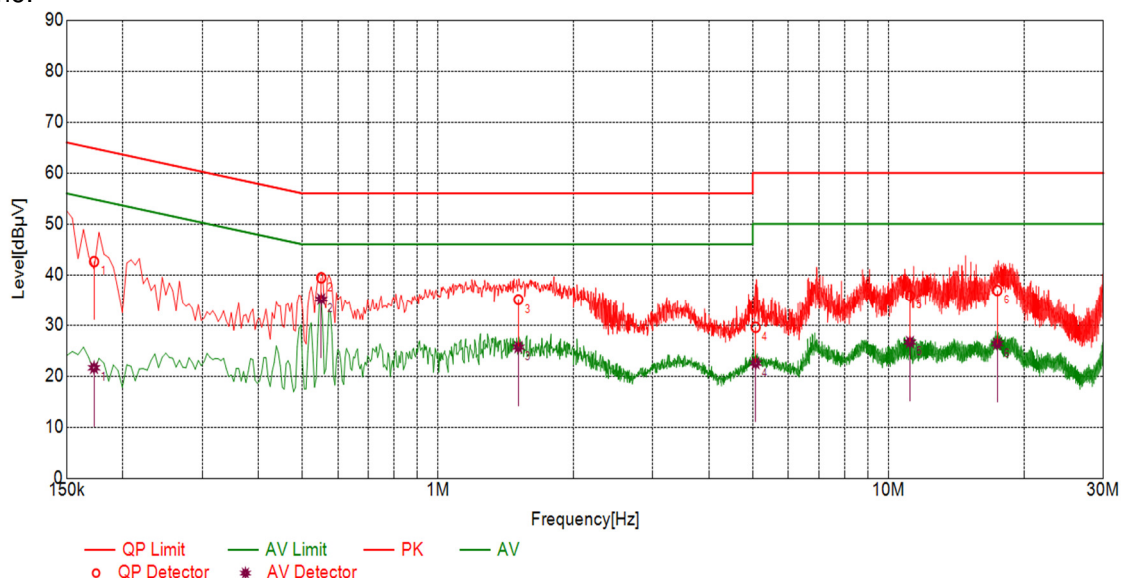**Test Graph**

| Final Data List |             |             |          |          |           |          |          |           |      |
|-----------------|-------------|-------------|----------|----------|-----------|----------|----------|-----------|------|
| NO.             | Freq. [MHz] | Factor [dB] | QP Value | QP Limit | QP Margin | AV Value | AV Limit | AV Margin | Type |
| 1               | 0.1726      | 10.10       | 42.61    | 64.84    | 22.23     | 21.62    | 54.84    | 33.22     | L    |
| 2               | 0.5510      | 10.10       | 39.42    | 56.00    | 16.58     | 35.17    | 46.00    | 10.83     | L    |
| 3               | 1.5092      | 10.10       | 35.06    | 56.00    | 20.94     | 25.66    | 46.00    | 20.34     | L    |
| 4               | 5.0732      | 10.10       | 29.56    | 60.00    | 30.44     | 22.53    | 50.00    | 27.47     | L    |
| 5               | 11.1649     | 10.10       | 35.85    | 60.00    | 24.15     | 26.65    | 50.00    | 23.35     | L    |
| 6               | 17.4449     | 10.11       | 36.92    | 60.00    | 23.08     | 26.35    | 50.00    | 23.65     | L    |



Neutral line:

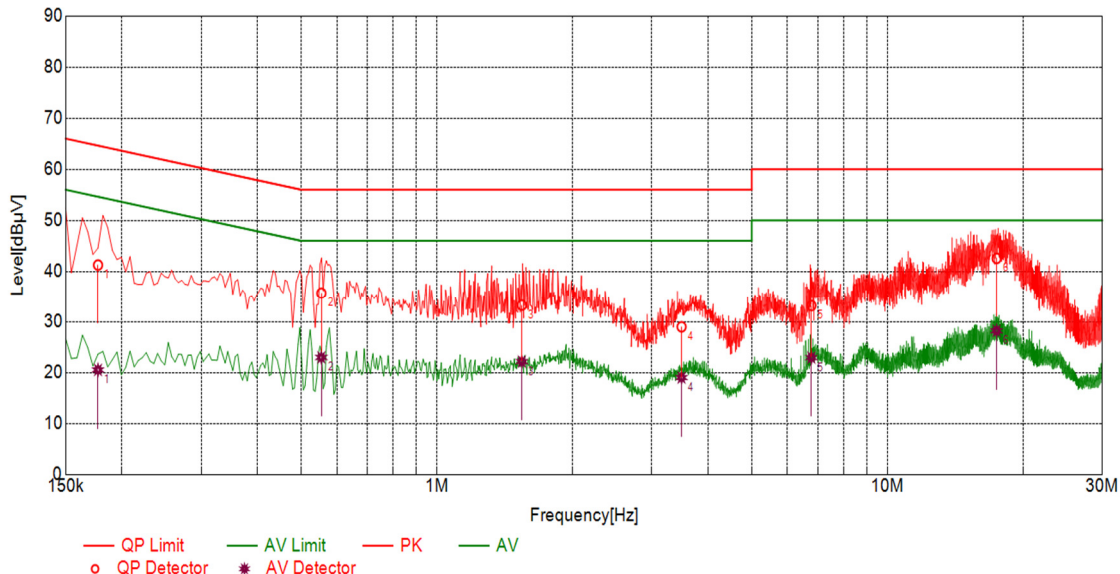

## Test Graph

| Final Data List |             |             |                 |                 |                |                 |                 |                |      |
|-----------------|-------------|-------------|-----------------|-----------------|----------------|-----------------|-----------------|----------------|------|
| NO.             | Freq. [MHz] | Factor [dB] | QP Value [dBμV] | QP Limit [dBμV] | QP Margin [dB] | AV Value [dBμV] | AV Limit [dBμV] | AV Margin [dB] | Type |
| 1               | 0.1770      | 10.10       | 41.26           | 64.63           | 23.37          | 20.51           | 54.63           | 34.12          | N    |
| 2               | 0.5542      | 10.10       | 35.72           | 56.00           | 20.28          | 22.96           | 46.00           | 23.04          | N    |
| 3               | 1.5439      | 10.10       | 33.24           | 56.00           | 22.76          | 22.15           | 46.00           | 23.85          | N    |
| 4               | 3.4921      | 10.10       | 28.98           | 56.00           | 27.02          | 19.01           | 46.00           | 26.99          | N    |
| 5               | 6.7808      | 10.10       | 33.17           | 60.00           | 26.83          | 22.93           | 50.00           | 27.07          | N    |
| 6               | 17.4730     | 10.11       | 42.57           | 60.00           | 17.43          | 28.19           | 50.00           | 21.81          | N    |

Remarks:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.




## 4.3 Duty Cycle

### 4.3.1 Test Results

| Test Mode | TX Freq. [MHz]  | Duty cycle [%] |
|-----------|-----------------|----------------|
| BLE_1M    | CH0, CH19, CH39 | 62.21          |

### 4.3.1 Test Plots


#### 4.3.1.1 BLE\_1M

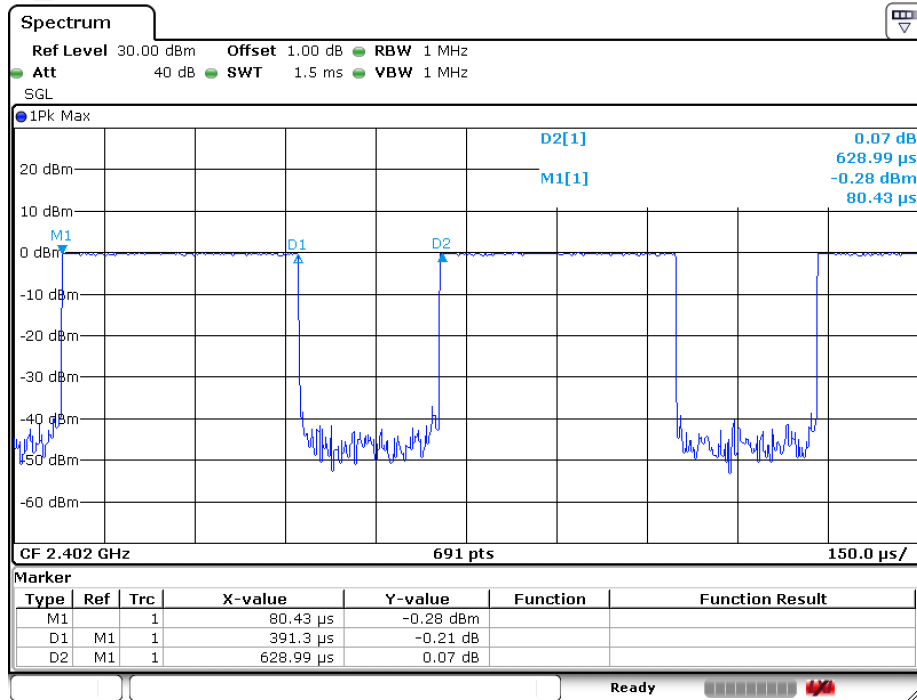

Date: 27.SEP.2020 15:30:35



#### 4.4 Conducted Output Power
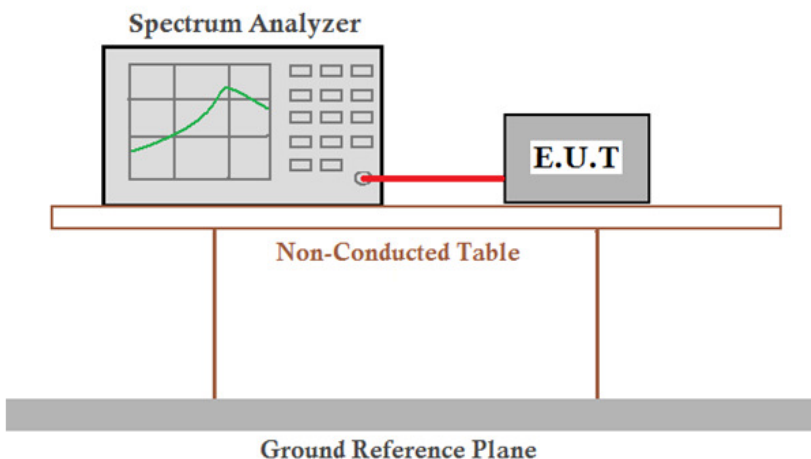
|                   |                                                                                    |
|-------------------|------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (b)(3)                                              |
| Test Method:      | ANSI C63.10 :2013 Section 11.9.1.1                                                 |
| Test Setup:       |  |
| Limit:            | 30dBm                                                                              |
| Test Mode:        | Transmitting with GFSK modulation.                                                 |
| Instruments Used: | Refer to section 5.10 for details.                                                 |
| Test Results:     | Pass                                                                               |

##### 4.4.1 Test Results


###### Measurement Data of Peak Power:

| GFSK_1M mode |                         |             |        |
|--------------|-------------------------|-------------|--------|
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest       | 1.87                    | 30.00       | Pass   |
| Middle       | 1.23                    | 30.00       | Pass   |
| Highest      | 1.52                    | 30.00       | Pass   |




#### 4.4.2 Test plots:

##### 4.4.2.1 GFSK 1M\_Lowest Channel

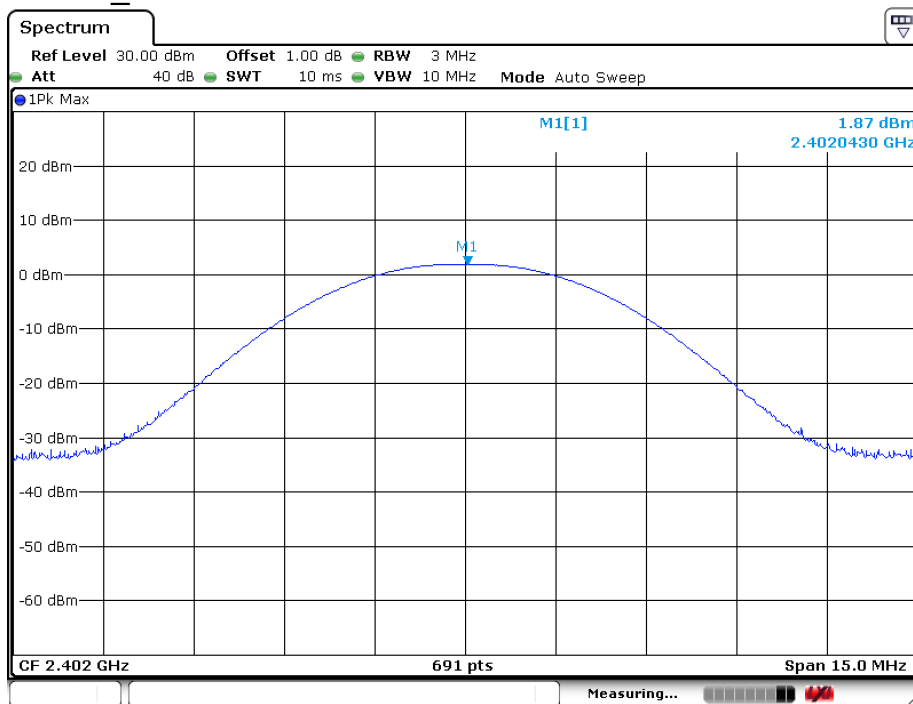

Date: 27.SEP.2020 15:31:32

##### 4.4.2.2 GFSK 1M\_Middle Channel

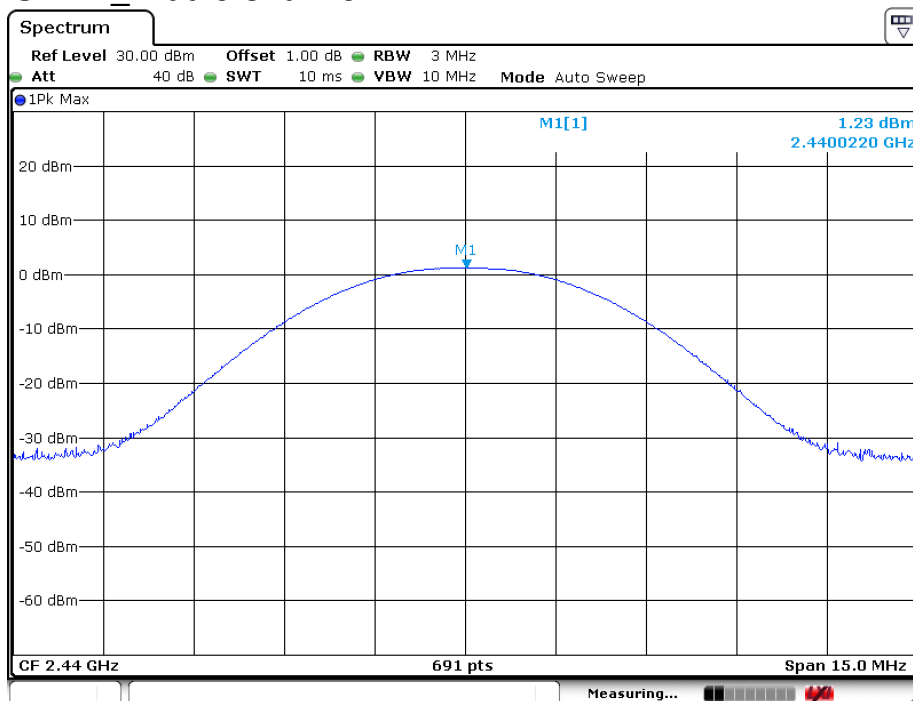

Date: 27.SEP.2020 15:32:03

##### 4.4.2.3 GFSK 1M\_Highest Channel




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center (CCC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 [www.sgs.com.cn](http://www.sgs.com.cn)  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

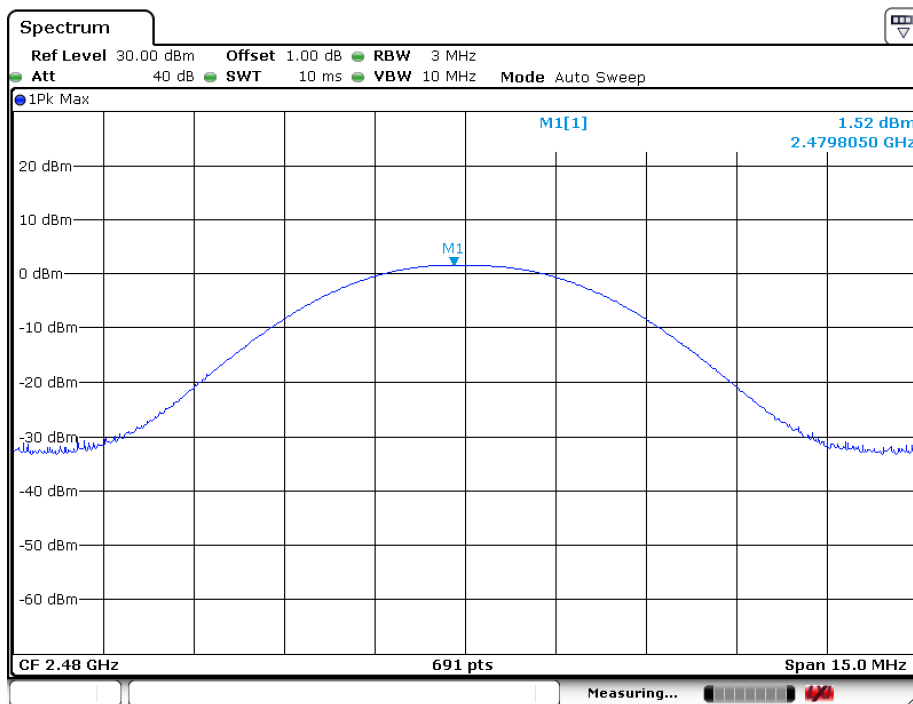

Date: 27.SEP.2020 15:32:47




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Inspection & Testing Services

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 4.5 DTS (6 dB) Bandwidth &amp; 99% Occupied Bandwidth
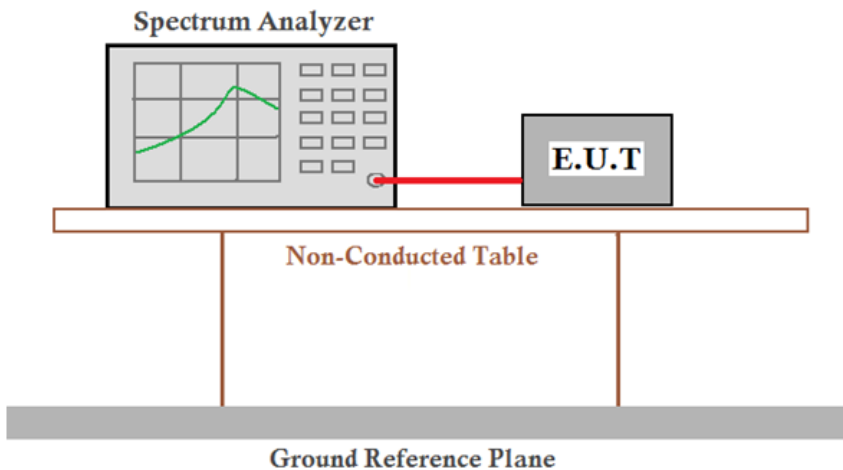
|                   |                                                                                    |
|-------------------|------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (a)(2)                                              |
| Test Method:      | ANSI C63.10: 2013 Section 11.8 Option 2                                            |
| Test Setup:       |  |
| Limit:            | $\geq 500$ kHz                                                                     |
| Test Mode:        | Transmitting with GFSK modulation.                                                 |
| Instruments Used: | Refer to section 5.10 for details.                                                 |
| Test Results:     | Pass                                                                               |


## 4.5.1 Test Results

| Mode    | Test Channel | 99% Occupied Bandwidth (MHz) | 6dB Emission Bandwidth (MHz) | Limit (kHz) | Result |
|---------|--------------|------------------------------|------------------------------|-------------|--------|
| GFSK_1M | Lowest       | 1.03                         | 0.72                         | $\geq 500$  | Pass   |
|         | Middle       | 1.03                         | 0.67                         | $\geq 500$  | Pass   |
|         | Highest      | 1.03                         | 0.67                         | $\geq 500$  | Pass   |




## 4.5.2 Test plots

### 4.5.2.1 GFSK 1M\_Lowest Channel

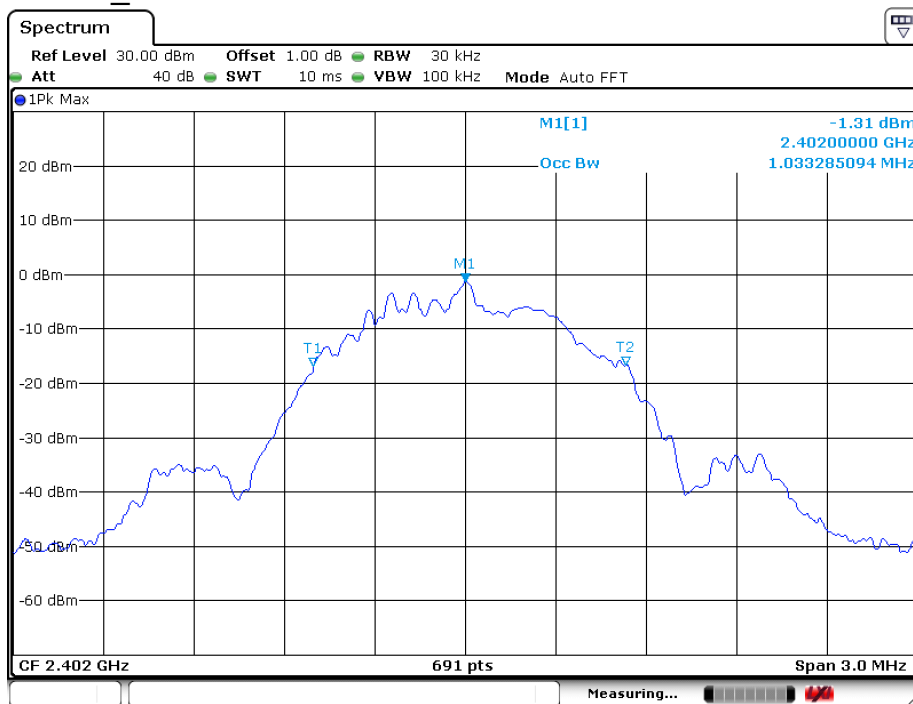

Date: 27.SEP.2020 15:39:43

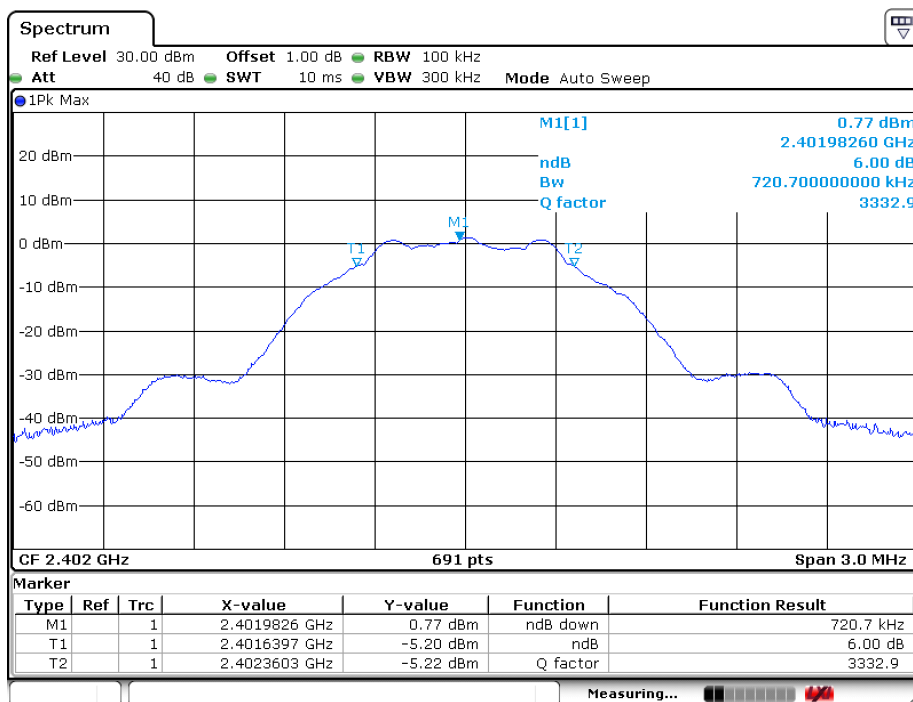

Date: 27.SEP.2020 15:33:53




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 4.5.2.2 GFSK 1M\_Middle Channel




Date: 27.SEP.2020 15:39:28

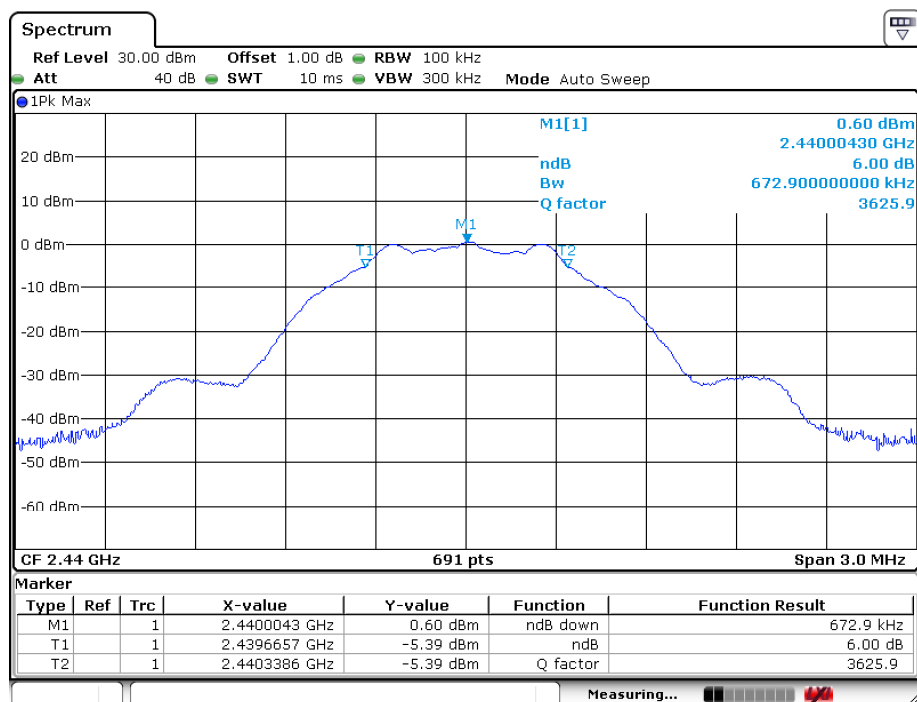


Date: 27.SEP.2020 15:34:17



## 4.5.2.3 GFSK 1M\_Highest Channel

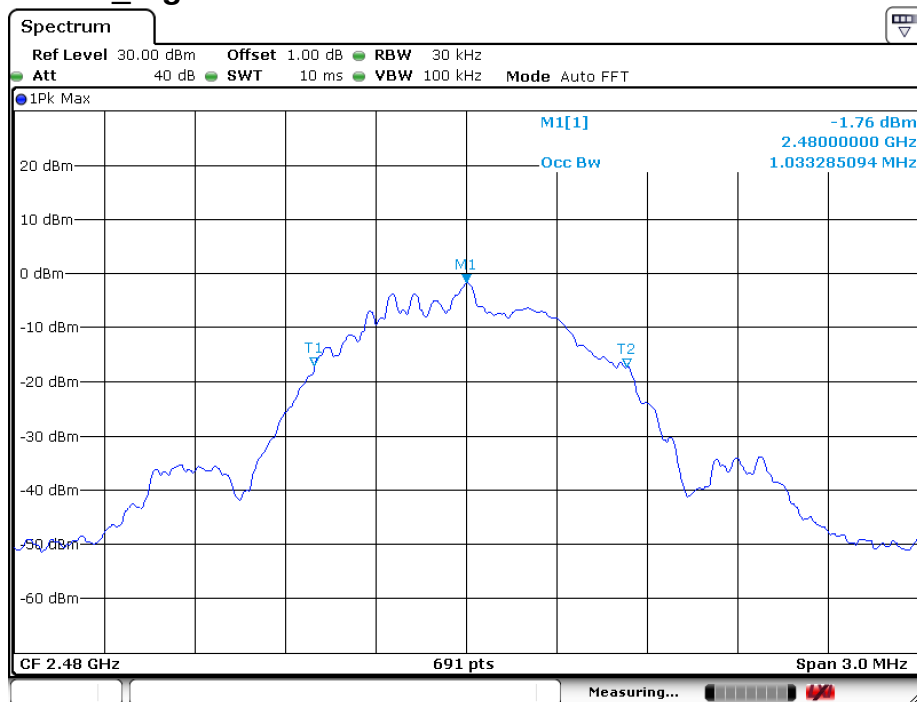


Date: 27.SEP.2020 15:39:01

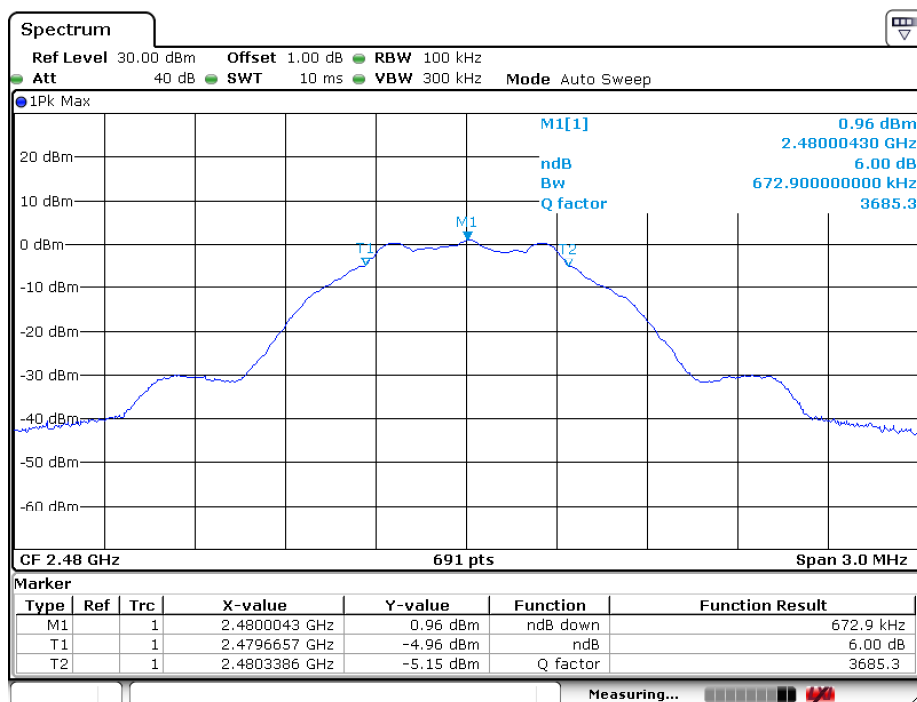

Date: 27.SEP.2020 15:36:45



## 4.6 Power Spectral Density
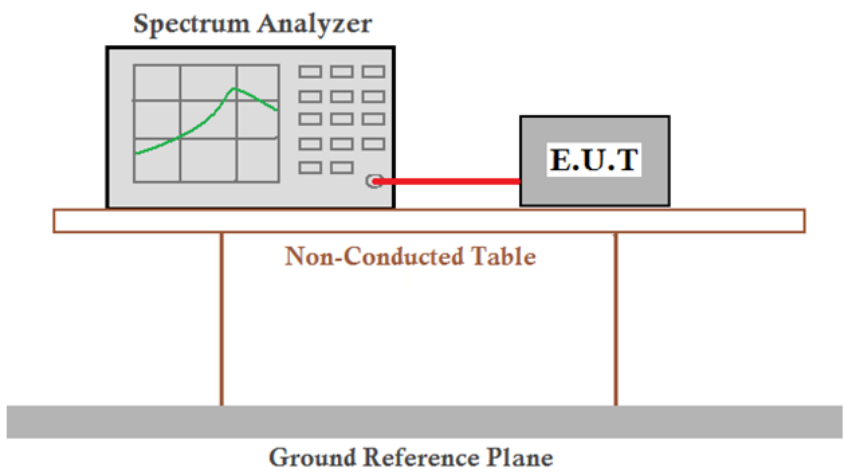
|                   |                                                                                    |
|-------------------|------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (e)                                                 |
| Test Method:      | ANSI C63.10 :2013 Section 11.10.2                                                  |
| Test Setup:       |  |
| Limit:            | $\leq 8.00 \text{ dBm/3kHz}$                                                       |
| Test Mode:        | Transmitting with GFSK modulation.                                                 |
| Instruments Used: | Refer to section 5.10 for details.                                                 |
| Test Results:     | Pass                                                                               |


### 4.6.1 Test Results

| Mode    | Test Channel | Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
|---------|--------------|-----------------------------------|------------------|--------|
| GFSK_1M | Lowest       | -13.24                            | $\leq 8.00$      | Pass   |
|         | Middle       | -13.97                            | $\leq 8.00$      | Pass   |
|         | Highest      | -13.72                            | $\leq 8.00$      | Pass   |




## 4.6.2 Test plots

### 4.6.2.1 GFSK 1M\_Lowest Channel

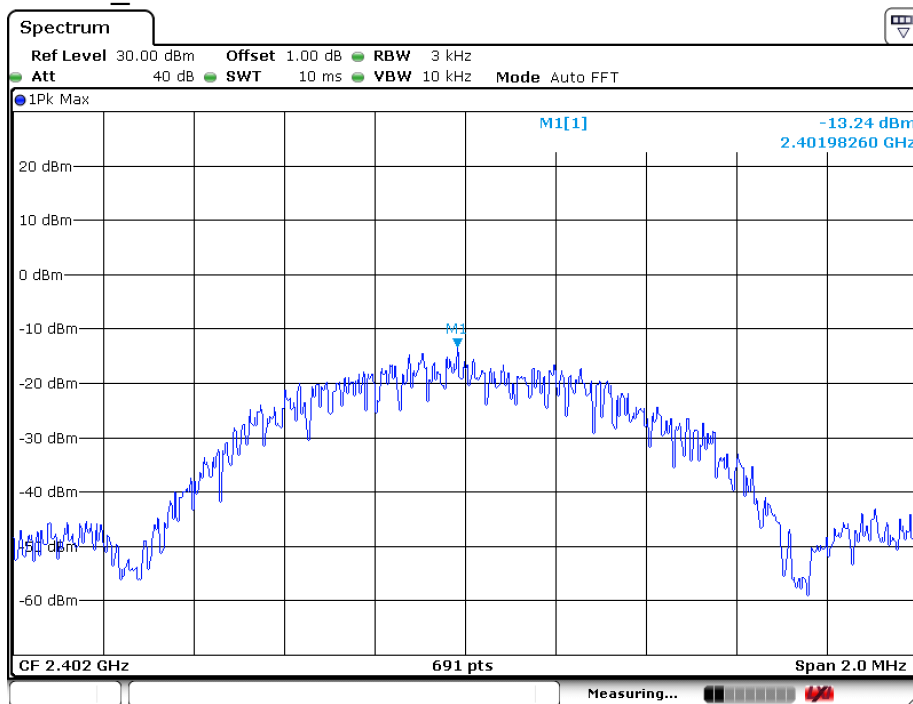

Date: 27.SEP.2020 15:33:36

### 4.6.2.2 GFSK 1M\_Middle Channel

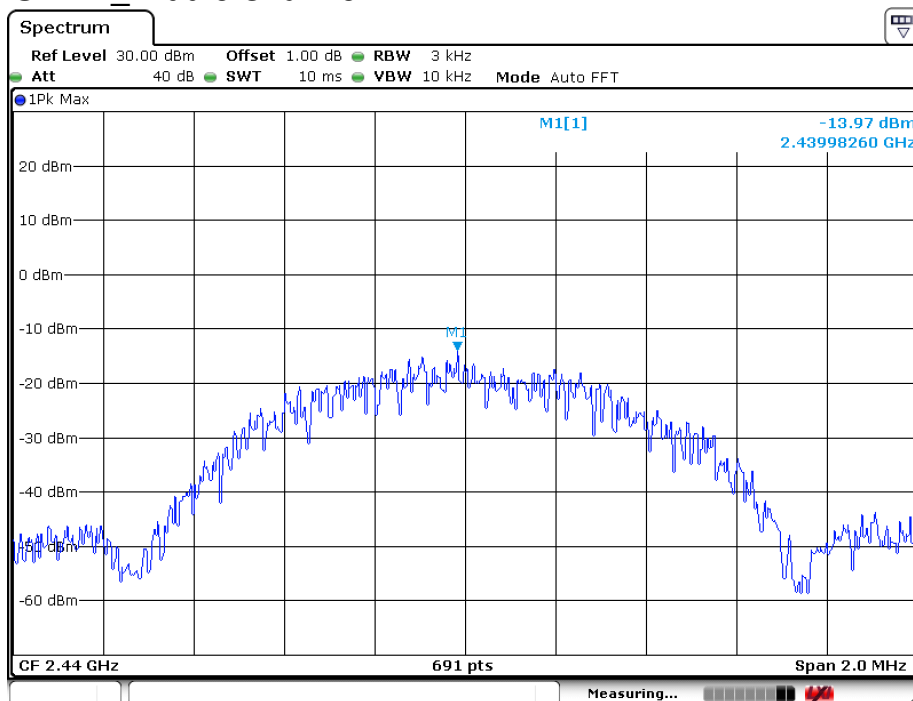


Date: 27.SEP.2020 15:33:17

### 4.6.2.3 GFSK 1M\_Highest Channel



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

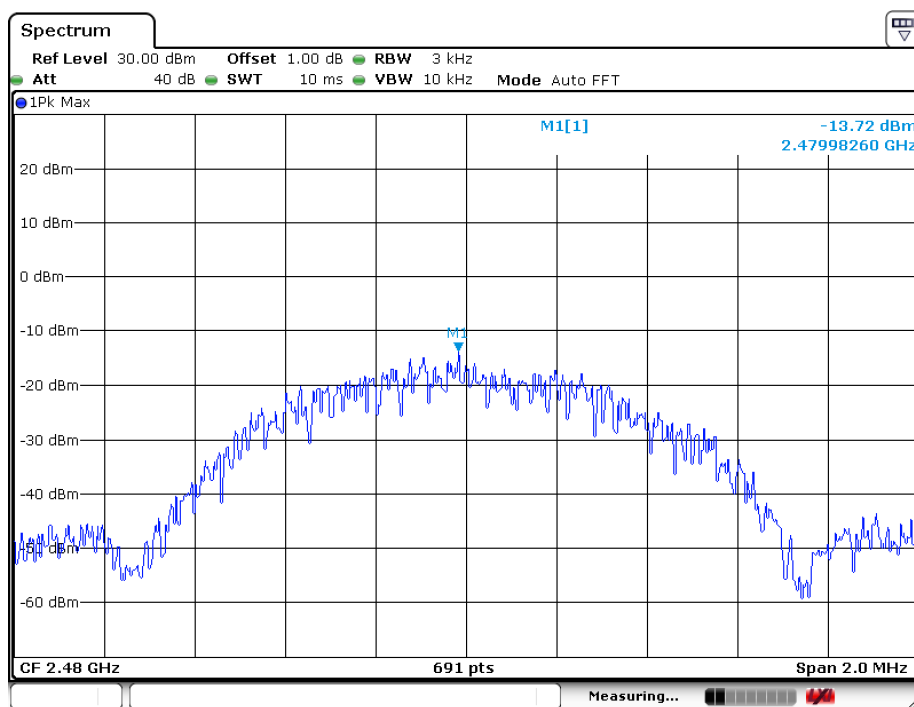


Date: 27.SEP.2020 15:32:58



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## 4.7 Band-edge for RF Conducted Emissions
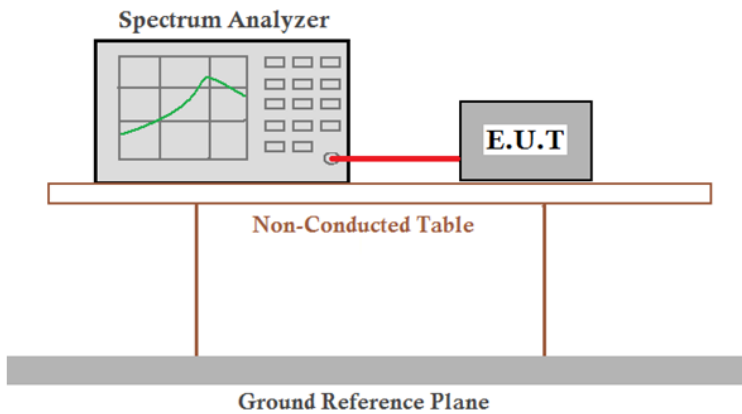
|                   |                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:      | ANSI C63.10: 2013 Section 11.13                                                                                                                                                                                                                                                                                                                                                         |
| Test Setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p>                              |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Mode:        | Transmitting with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                      |
| Instruments Used: | Refer to section 5.10 for details.                                                                                                                                                                                                                                                                                                                                                      |
| Test Results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                    |



#### 4.7.1 Test plots

##### 4.7.1.1 GFSK 1M\_Lowest Channel

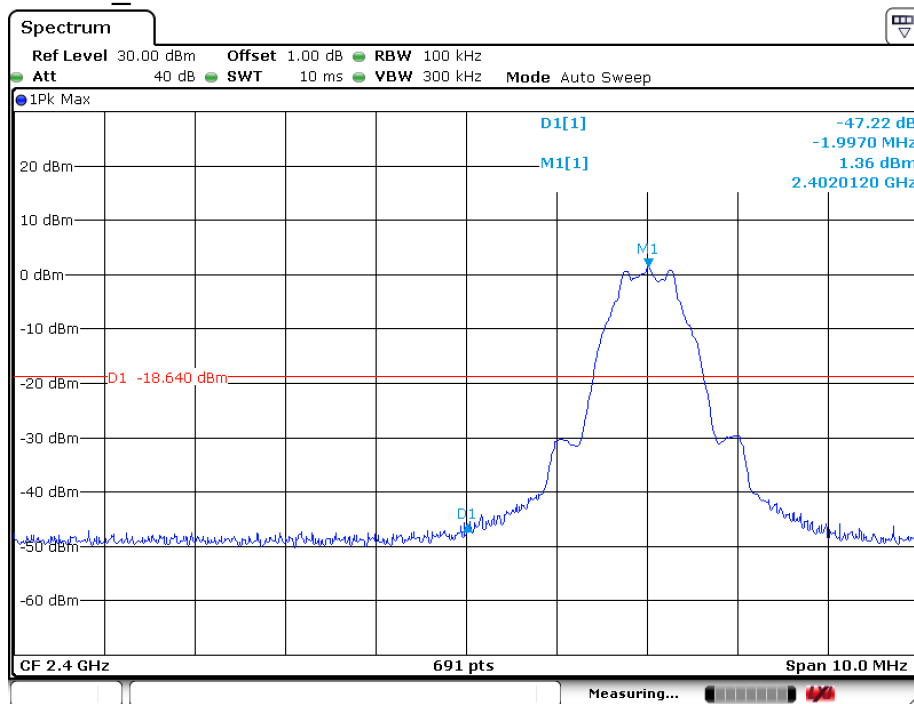

Date: 27.SEP.2020 15:40:15




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn

中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 4.7.1.2 GFSK 1M\_Highest Channel

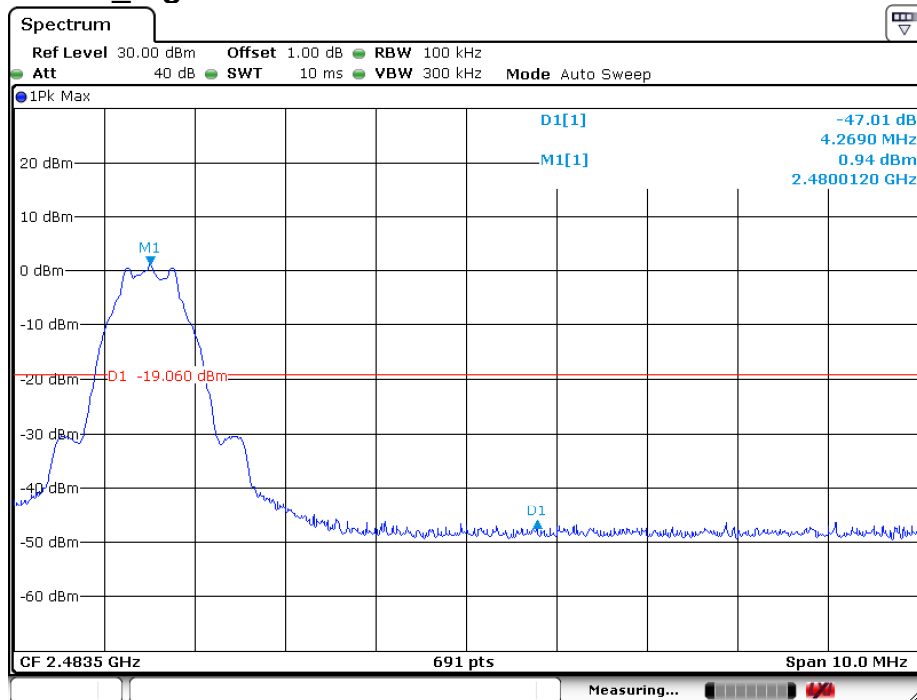


Date: 27.SEP.2020 15:41:02

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center EEC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## 4.8 Spurious RF Conducted Emissions
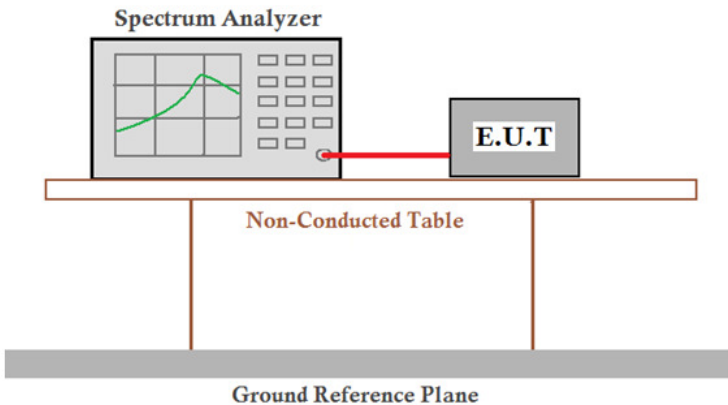
|                   |                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:      | ANSI C63.10: 2013 Section 11.11                                                                                                                                                                                                                                                                                                                                                         |
| Test Setup:       |                                                                                                                                                                                                                                                                                                       |
| Limit:            | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Mode:        | Transmitting with GFSK modulation.                                                                                                                                                                                                                                                                                                                                                      |
| Instruments Used: | Refer to section 5.10 for details.                                                                                                                                                                                                                                                                                                                                                      |
| Test Results:     | Pass                                                                                                                                                                                                                                                                                                                                                                                    |




#### 4.8.1 Test plots:

##### 4.8.1.1 GFSK 1M\_Lowest Channel

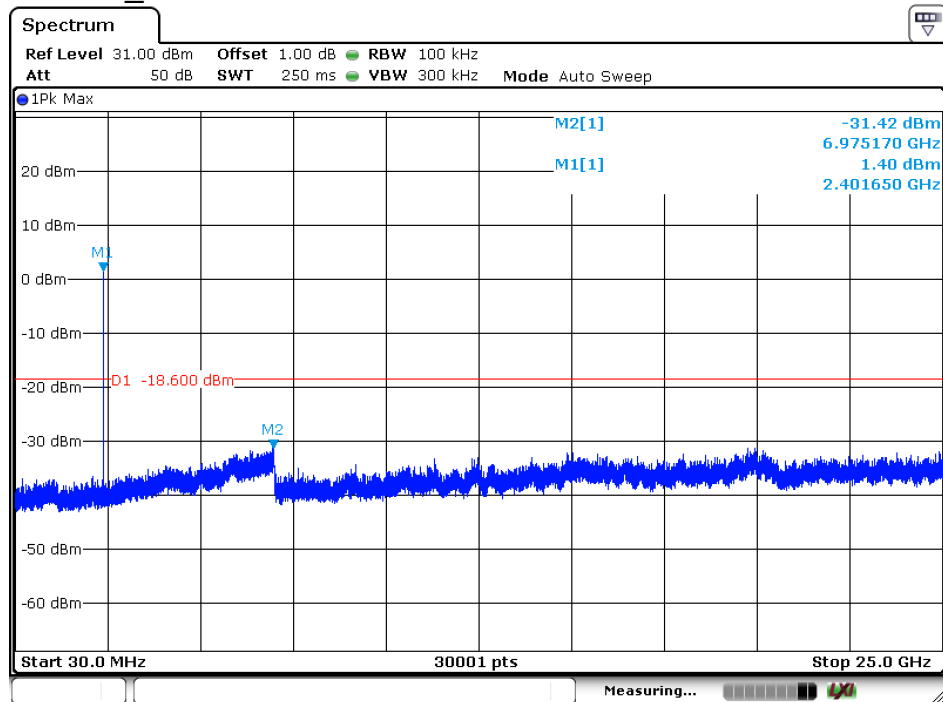

Date: 11.OCT.2020 18:09:15

##### 4.8.1.2 GFSK 1M\_Middle Channel

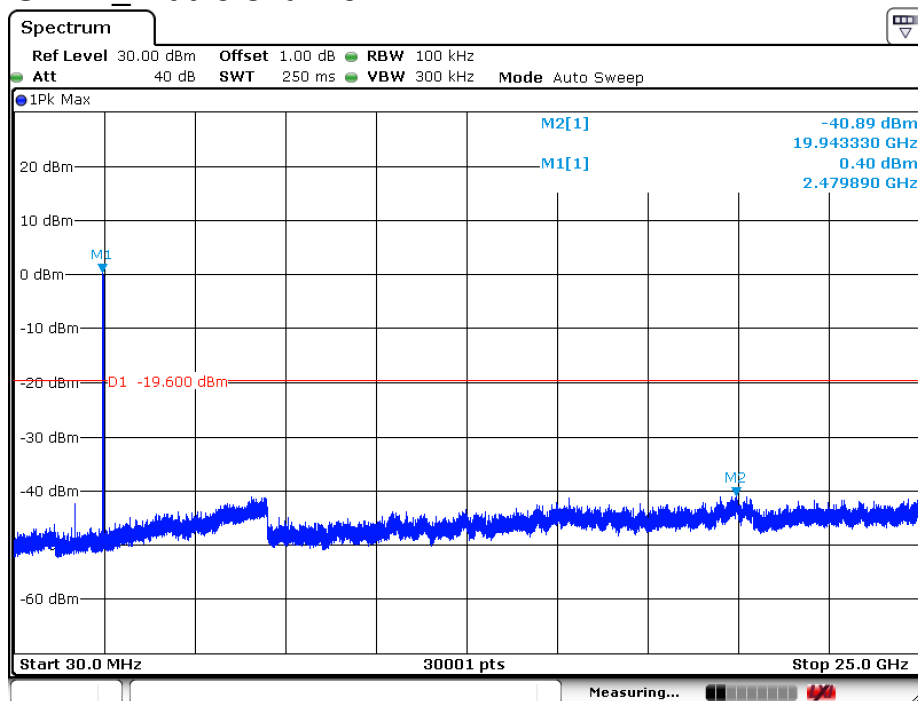

Date: 27.SEP.2020 15:43:15

##### 4.8.1.3 GFSK 1M\_Highest Channel




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

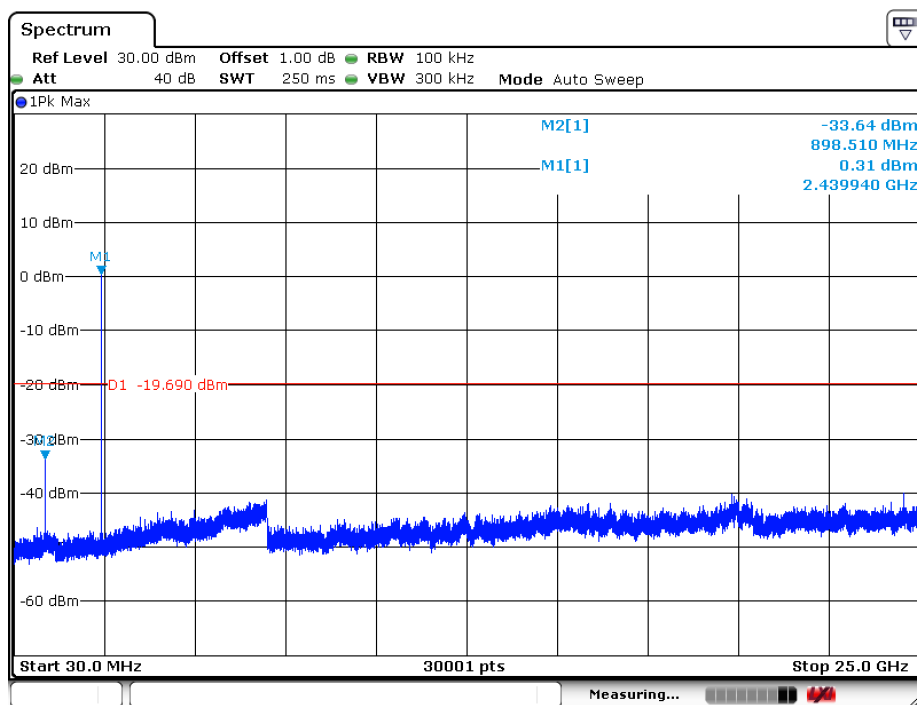

Date: 27.SEP.2020 15:43:56

## Remark:

Scan from 9KHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center EEC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 4.9 Radiated Spurious Emission

|                                                                                                                                                                                                                                                                               |                                                         |                                  |                |            |                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|----------------------------------|----------------|------------|--------------------------|
| Test Requirement:                                                                                                                                                                                                                                                             | 47 CFR Part 15C Section 15.209 and 15.205               |                                  |                |            |                          |
| Test Method:                                                                                                                                                                                                                                                                  | ANSI C63.10 :2013 Section 11.12                         |                                  |                |            |                          |
| Test Site:                                                                                                                                                                                                                                                                    | Measurement Distance: 3m or 10m (Semi-Anechoic Chamber) |                                  |                |            |                          |
| Receiver Setup:                                                                                                                                                                                                                                                               | Frequency                                               | Detector                         | RBW            | VBW        | Remark                   |
|                                                                                                                                                                                                                                                                               | 0.009MHz-0.090MHz                                       | Peak                             | 10kHz          | 30kHz      | Peak                     |
|                                                                                                                                                                                                                                                                               | 0.009MHz-0.090MHz                                       | Average                          | 10kHz          | 30kHz      | Average                  |
|                                                                                                                                                                                                                                                                               | 0.090MHz-0.110MHz                                       | Quasi-peak                       | 10kHz          | 30kHz      | Quasi-peak               |
|                                                                                                                                                                                                                                                                               | 0.110MHz-0.490MHz                                       | Peak                             | 10kHz          | 30kHz      | Peak                     |
|                                                                                                                                                                                                                                                                               | 0.110MHz-0.490MHz                                       | Average                          | 10kHz          | 30kHz      | Average                  |
|                                                                                                                                                                                                                                                                               | 0.490MHz -30MHz                                         | Quasi-peak                       | 10kHz          | 30kHz      | Quasi-peak               |
|                                                                                                                                                                                                                                                                               | 30MHz-1GHz                                              | Quasi-peak                       | 100 kHz        | 300kHz     | Quasi-peak               |
|                                                                                                                                                                                                                                                                               | Above 1GHz                                              | Peak                             | 1MHz           | 3MHz       | Peak                     |
|                                                                                                                                                                                                                                                                               |                                                         | Peak                             | 1MHz           | 10Hz       | Average                  |
| Limit:                                                                                                                                                                                                                                                                        | Frequency                                               | Field strength (microvolt/meter) | Limit (dBuV/m) | Remark     | Measurement distance (m) |
|                                                                                                                                                                                                                                                                               | 0.009MHz-0.490MHz                                       | 2400/F(kHz)                      | -              | -          | 300                      |
|                                                                                                                                                                                                                                                                               | 0.490MHz-1.705MHz                                       | 24000/F(kHz)                     | -              | -          | 30                       |
|                                                                                                                                                                                                                                                                               | 1.705MHz-30MHz                                          | 30                               | -              | -          | 30                       |
|                                                                                                                                                                                                                                                                               | 30MHz-88MHz                                             | 100                              | 40.0           | Quasi-peak | 3                        |
|                                                                                                                                                                                                                                                                               | 88MHz-216MHz                                            | 150                              | 43.5           | Quasi-peak | 3                        |
|                                                                                                                                                                                                                                                                               | 216MHz-960MHz                                           | 200                              | 46.0           | Quasi-peak | 3                        |
|                                                                                                                                                                                                                                                                               | 960MHz-1GHz                                             | 500                              | 54.0           | Quasi-peak | 3                        |
|                                                                                                                                                                                                                                                                               | Above 1GHz                                              | 500                              | 54.0           | Average    | 3                        |
| Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. |                                                         |                                  |                |            |                          |



**Test Setup:**

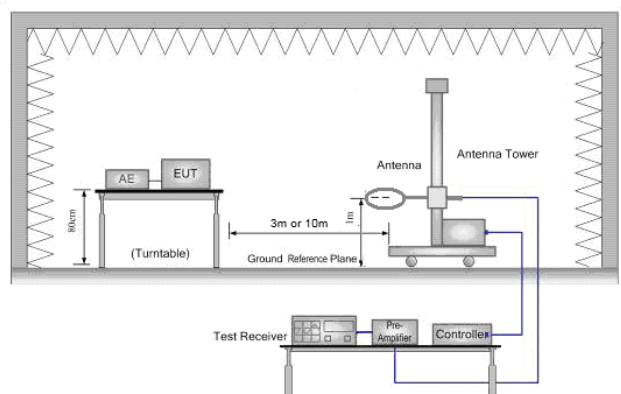


Figure 1. Below 30MHz

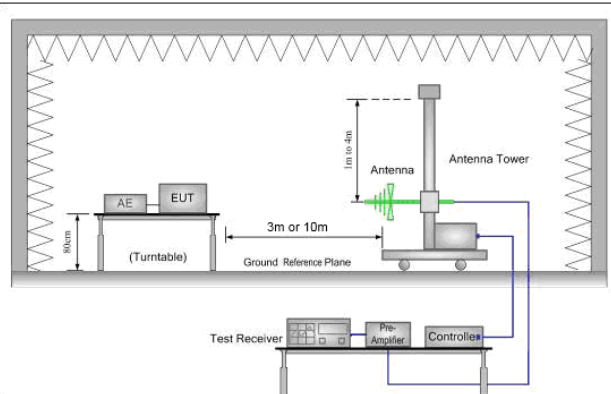


Figure 2. 30MHz to 1GHz

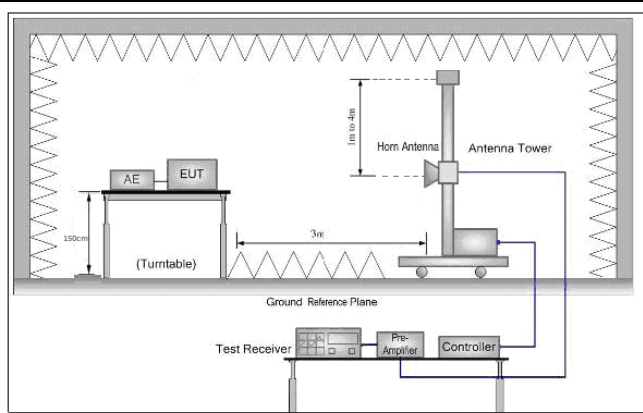


Figure 3. Above 1 GHz

**Test Procedure:**

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Use the following spectrum analyzer settings:
  - Span shall wide enough to fully capture the emission being measured;
  - Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$  GHz ; VBW  $\geq$  RBW; Sweep = auto;
 Detector function = peak; Trace = max hold for peak




|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | <p>(3) For average measurement: use duty cycle correction factor method per 15.35(c).</p> <p>Duty cycle = On time/100 milliseconds</p> <p>On time = <math>N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n</math></p> <p>Where <math>N_1</math> is number of type 1 pulses, <math>L_1</math> is length of type 1 pulses, etc.</p> <p>Average Emission Level = Peak Emission Level + <math>20 * \log(\text{Duty cycle})</math></p> <p>f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>g. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>h. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>i. Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the highest channel (2480MHz)</p> <p>j. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>k. Repeat above procedures until all frequencies measured was complete.</p> |
| Exploratory Test Mode: | <p>Transmitting with GFSK modulation.</p> <p>Charge + Transmitting mode.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Final Test Mode:       | <p>Transmitting with GFSK modulation.</p> <p>Pretest the EUT at Charge + Transmitting mode,</p> <p>For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Instruments Used:      | Refer to section 5.10 for details.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |



#### 4.9.1 Radiated emission below 1GHz

##### 4.9.1.1 Charge + Transmitting, Vertical

#### Test Graph

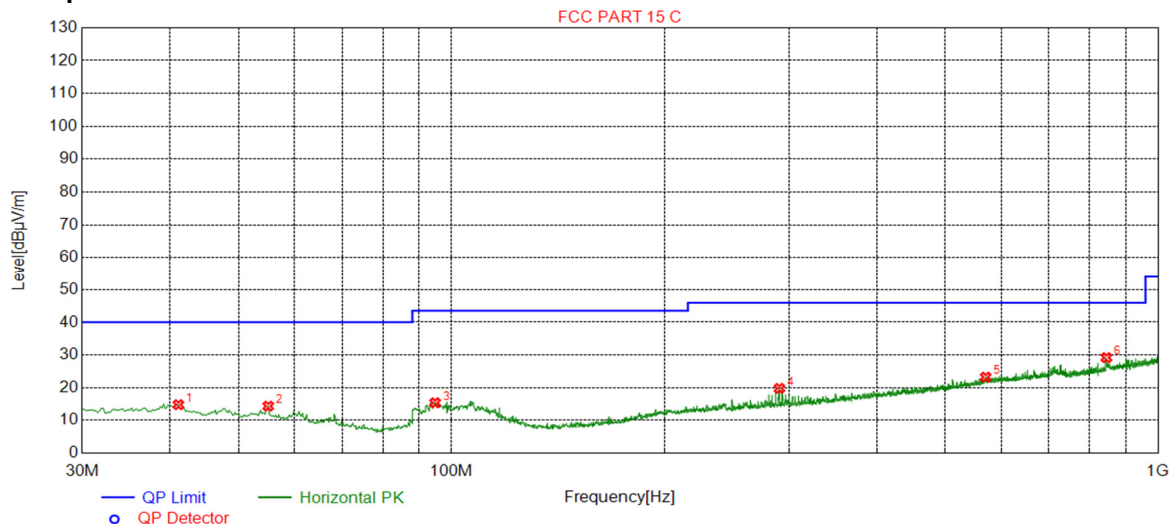

#### Suspected List

| Suspected List |             |                |             |                |             |             |           |            |
|----------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| NO.            | Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
| 1              | 41.0602     | 14.81          | -28.78      | 40.00          | 25.19       | 200         | 237       | Horizontal |
| 2              | 55.0310     | 14.38          | -31.12      | 40.00          | 25.62       | 200         | 277       | Horizontal |
| 3              | 94.8090     | 15.40          | -32.92      | 43.50          | 28.10       | 200         | 335       | Horizontal |
| 4              | 291.176     | 19.80          | -28.60      | 46.00          | 26.20       | 100         | 246       | Horizontal |
| 5              | 570.204     | 23.24          | -21.47      | 46.00          | 22.76       | 100         | 22        | Horizontal |
| 6              | 845.157     | 29.20          | -16.97      | 46.00          | 16.80       | 100         | 278       | Horizontal |


#### Final Data List





## Test Report

### Test Graph

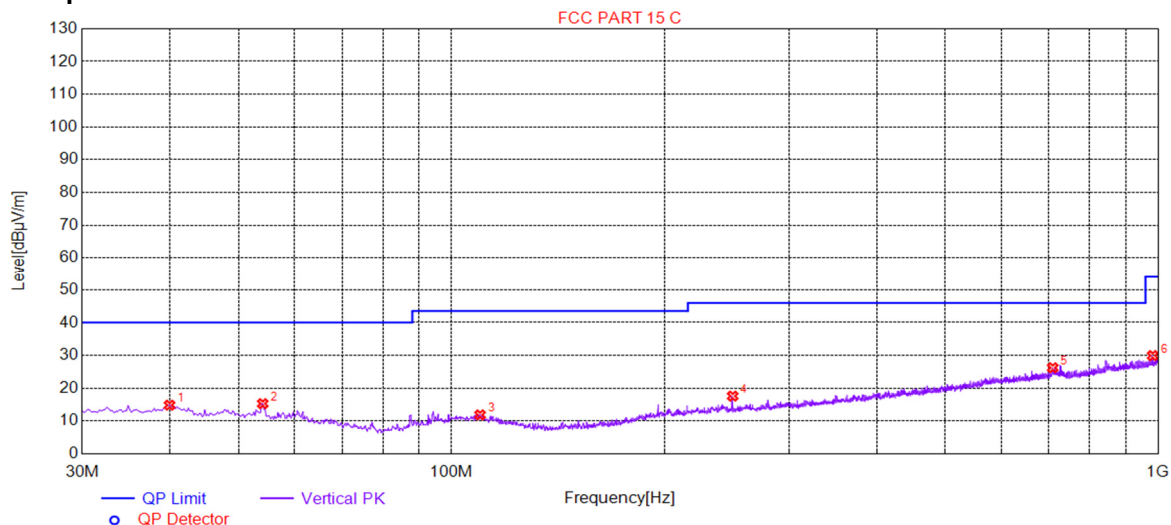

### Suspected List

| Suspected List |             |                |             |                |             |             |           |          |
|----------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| NO.            | Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1              | 39.8960     | 14.85          | -28.37      | 40.00          | 25.15       | 100         | 83        | Vertical |
| 2              | 54.0608     | 15.32          | -30.98      | 40.00          | 24.68       | 100         | 332       | Vertical |
| 3              | 109.750     | 11.90          | -32.00      | 43.50          | 31.60       | 100         | 40        | Vertical |
| 4              | 250.040     | 17.62          | -29.66      | 46.00          | 28.38       | 100         | 14        | Vertical |
| 5              | 709.523     | 26.26          | -19.29      | 46.00          | 19.74       | 100         | 83        | Vertical |
| 6              | 982.730     | 29.96          | -15.03      | 54.00          | 24.04       | 100         | 297       | Vertical |


### Final Data List



## 4.9.2 Transmitter emission above 1GHz

## 4.9.2.1 BLE 1M\_Channel 0

## Test Graph

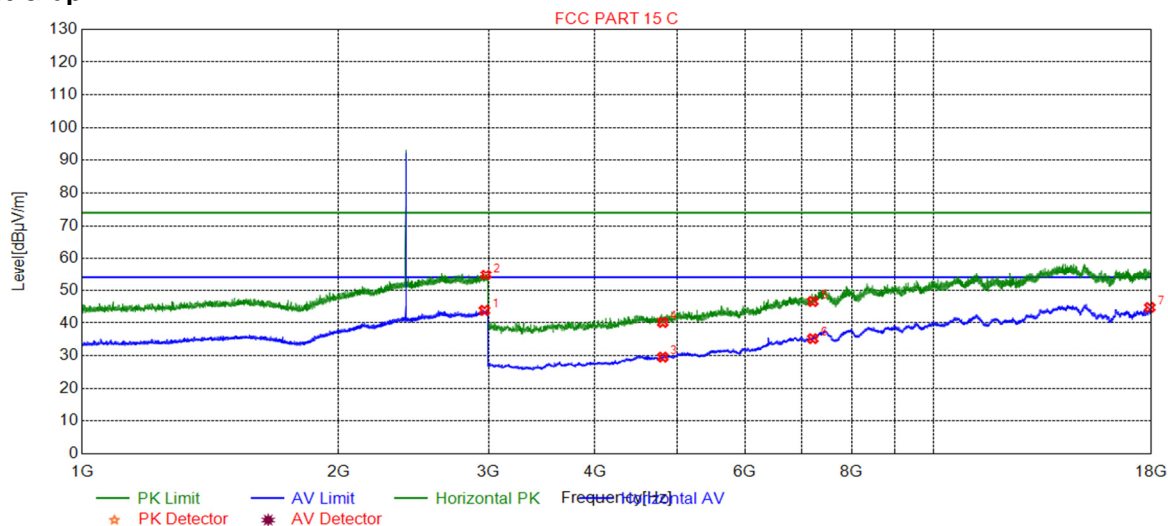

## Suspected List

## Suspected List


| NO. | Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 2966.99     | 43.88          | 9.60        | 54.00          | 10.12       | 150         | 191       | Horizontal |
| 2   | 2978.99     | 54.88          | 9.55        | 74.00          | 19.12       | 150         | 342       | Horizontal |
| 3   | 4804.00     | 29.58          | -18.30      | 54.00          | 24.42       | 150         | 43        | Horizontal |
| 4   | 4804.00     | 40.17          | -18.30      | 74.00          | 33.83       | 150         | 124       | Horizontal |
| 5   | 7206.00     | 46.59          | -9.82       | 74.00          | 27.41       | 150         | 43        | Horizontal |
| 6   | 7206.00     | 35.23          | -9.82       | 54.00          | 18.77       | 150         | 287       | Horizontal |
| 7   | 17918.9     | 44.78          | -1.30       | 54.00          | 9.22        | 150         | 151       | Horizontal |

## Final Data List



### 4.9.2.2 BLE 1M\_Channel 0

#### Test Graph

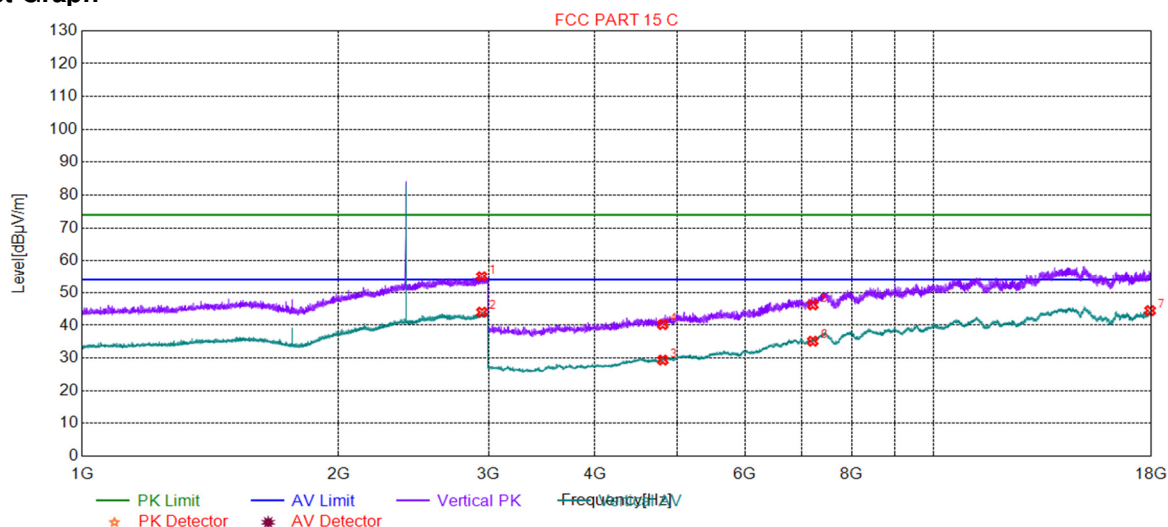

#### Suspected List

| Suspected List |             |                |             |                |             |             |           |          |
|----------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| NO.            | Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1              | 2945.48     | 55.16          | 9.63        | 74.00          | 18.84       | 150         | 292       | Vertical |
| 2              | 2946.98     | 44.04          | 9.65        | 54.00          | 9.96        | 150         | 265       | Vertical |
| 3              | 4804.00     | 29.39          | -18.30      | 54.00          | 24.61       | 150         | 73        | Vertical |
| 4              | 4804.00     | 40.25          | -18.30      | 74.00          | 33.75       | 150         | 360       | Vertical |
| 5              | 7206.00     | 46.27          | -9.82       | 74.00          | 27.73       | 150         | 45        | Vertical |
| 6              | 7206.00     | 35.16          | -9.82       | 54.00          | 18.84       | 150         | 73        | Vertical |
| 7              | 17933.9     | 44.51          | -1.30       | 54.00          | 9.49        | 150         | 154       | Vertical |

#### Final Data List



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center FCC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 4.9.2.3 BLE 1M\_Channel 19

## Test Graph

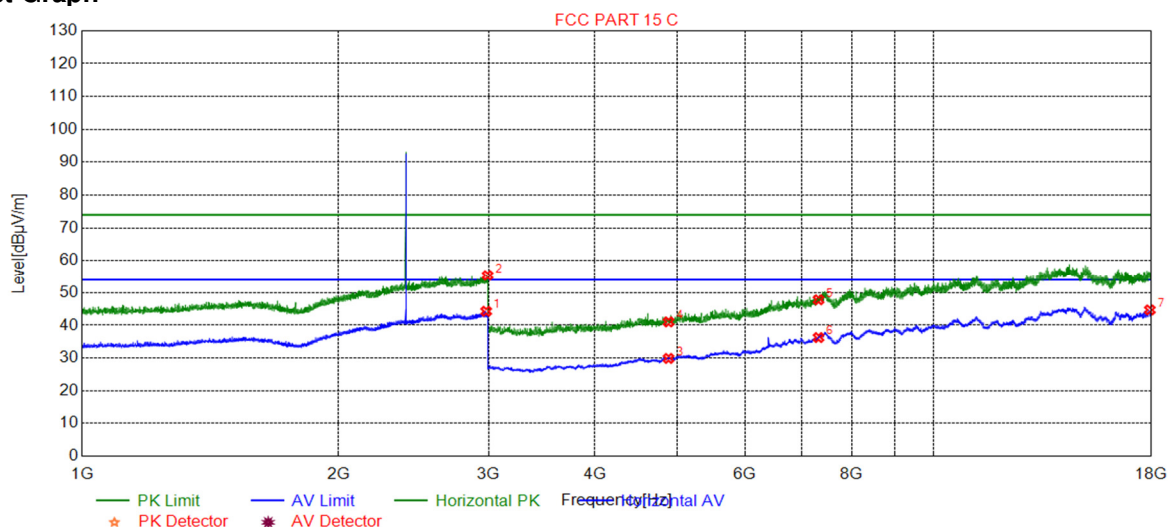

## Suspected List


| Suspected List |             |                |             |                |             |             |           |            |
|----------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| NO.            | Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
| 1              | 2980.99     | 44.31          | 9.54        | 54.00          | 9.69        | 150         | 164       | Horizontal |
| 2              | 2992.49     | 55.44          | 9.48        | 74.00          | 18.56       | 150         | 26        | Horizontal |
| 3              | 4880.00     | 29.89          | -17.96      | 54.00          | 24.11       | 150         | 152       | Horizontal |
| 4              | 4880.00     | 41.06          | -17.96      | 74.00          | 32.94       | 150         | 207       | Horizontal |
| 5              | 7320.00     | 47.83          | -9.54       | 74.00          | 26.17       | 150         | 207       | Horizontal |
| 6              | 7320.00     | 36.27          | -9.54       | 54.00          | 17.73       | 150         | 0         | Horizontal |
| 7              | 17921.9     | 44.73          | -1.30       | 54.00          | 9.27        | 150         | 315       | Horizontal |

## Final Data List



## 4.9.2.4 BLE 1M\_Channel 19

## Test Graph

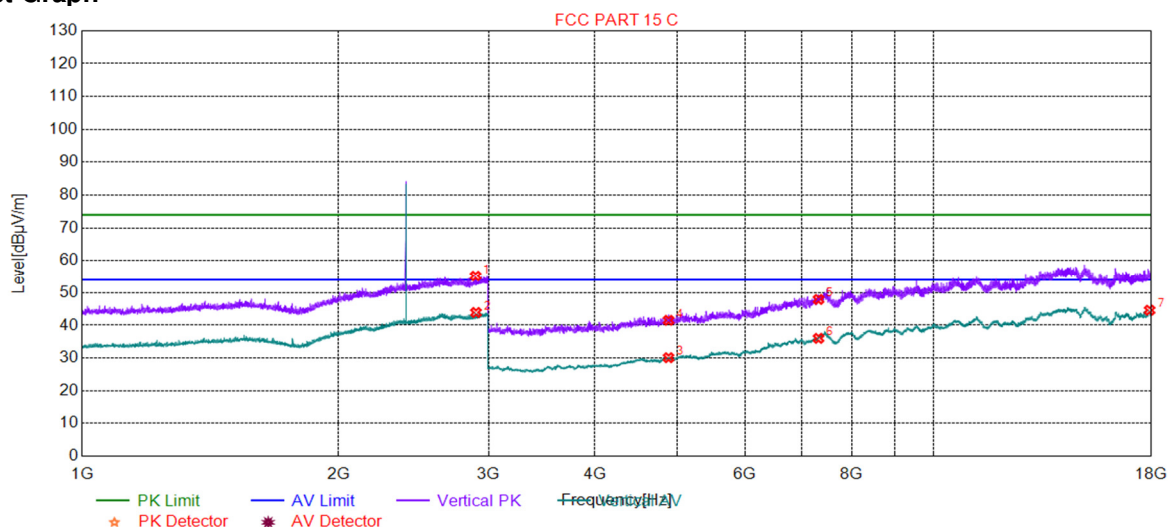

## Suspected List


| Suspected List |             |                |             |                |             |             |           |          |
|----------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| NO.            | Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1              | 2896.47     | 55.26          | 9.15        | 74.00          | 18.74       | 150         | 58        | Vertical |
| 2              | 2899.97     | 43.94          | 9.14        | 54.00          | 10.06       | 150         | 86        | Vertical |
| 3              | 4880.00     | 30.12          | -17.96      | 54.00          | 23.88       | 150         | 127       | Vertical |
| 4              | 4880.00     | 41.55          | -17.96      | 74.00          | 32.45       | 150         | 317       | Vertical |
| 5              | 7320.00     | 47.94          | -9.54       | 74.00          | 26.06       | 150         | 208       | Vertical |
| 6              | 7320.00     | 36.03          | -9.54       | 54.00          | 17.97       | 150         | 45        | Vertical |
| 7              | 17909.9     | 44.65          | -1.31       | 54.00          | 9.35        | 150         | 263       | Vertical |

## Final Data List



## 4.9.2.5 BLE 1M\_Channel 39

## Test Graph

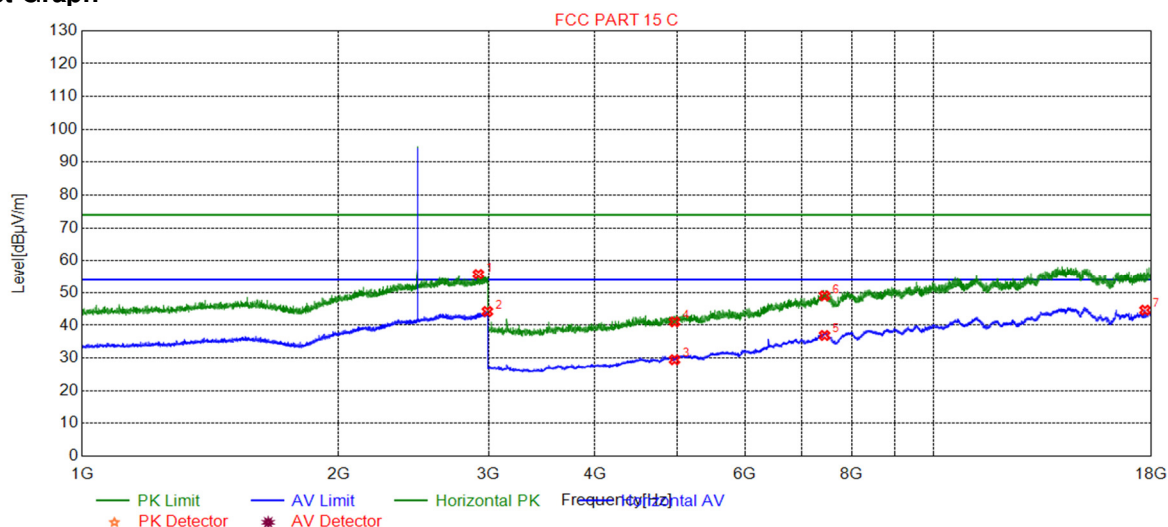

## Suspected List

| Suspected List |             |                |             |                |             |             |           |            |
|----------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| NO.            | Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
| 1              | 2918.47     | 55.82          | 9.34        | 74.00          | 18.18       | 150         | 342       | Horizontal |
| 2              | 2990.49     | 44.25          | 9.49        | 54.00          | 9.75        | 150         | 193       | Horizontal |
| 3              | 4960.00     | 29.48          | -17.47      | 54.00          | 24.52       | 150         | 342       | Horizontal |
| 4              | 4960.00     | 41.09          | -17.47      | 74.00          | 32.91       | 150         | 342       | Horizontal |
| 5              | 7440.00     | 36.91          | -9.02       | 54.00          | 17.09       | 150         | 0         | Horizontal |
| 6              | 7440.00     | 49.03          | -9.02       | 74.00          | 24.97       | 150         | 123       | Horizontal |
| 7              | 17690.9     | 44.65          | -0.64       | 54.00          | 9.35        | 150         | 0         | Horizontal |

## Final Data List



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center FCC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

#### 4.9.2.6 BLE 1M\_Channel 39

##### Test Graph

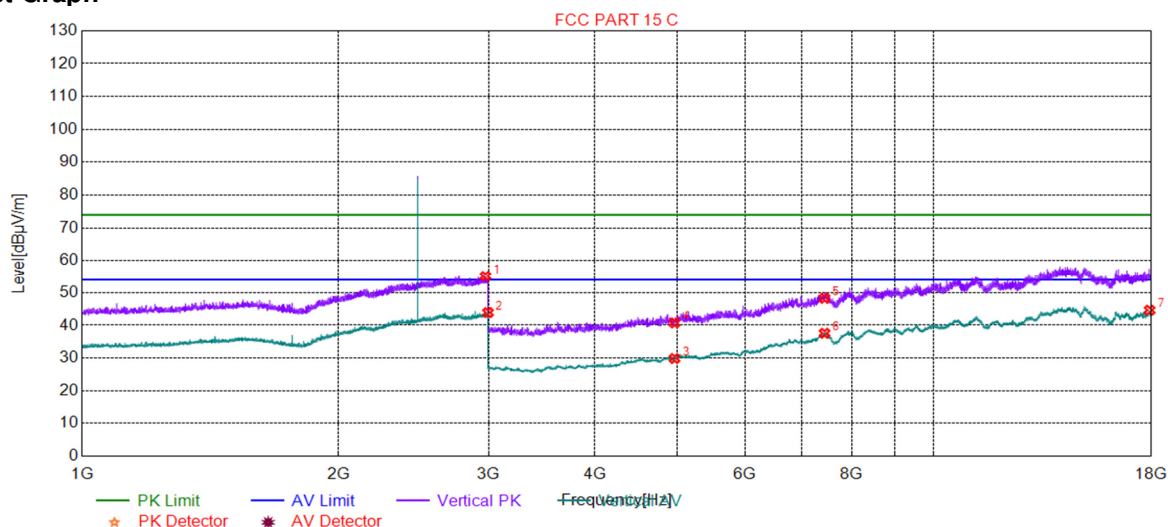

##### Suspected List

| Suspected List |             |                |             |                |             |             |           |          |
|----------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| NO.            | Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1              | 2974.99     | 55.19          | 9.57        | 74.00          | 18.81       | 150         | 209       | Vertical |
| 2              | 2995.49     | 43.91          | 9.47        | 54.00          | 10.09       | 150         | 360       | Vertical |
| 3              | 4960.00     | 29.86          | -17.47      | 54.00          | 24.14       | 150         | 290       | Vertical |
| 4              | 4960.00     | 40.76          | -17.47      | 74.00          | 33.24       | 150         | 127       | Vertical |
| 5              | 7440.00     | 48.28          | -9.02       | 74.00          | 25.72       | 150         | 127       | Vertical |
| 6              | 7440.00     | 37.59          | -9.02       | 54.00          | 16.41       | 150         | 317       | Vertical |
| 7              | 17911.4     | 44.64          | -1.31       | 54.00          | 9.36        | 150         | 18        | Vertical |

##### Final Data List

##### Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz and 18GHz to 25GHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
- 4) All Modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 4.10 Restricted bands around fundamental frequency

|                   |                                                         |                    |                  |
|-------------------|---------------------------------------------------------|--------------------|------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205               |                    |                  |
| Test Method:      | ANSI C63.10: 2013 Section 11.12                         |                    |                  |
| Test Site:        | Measurement Distance: 3m or 10m (Semi-Anechoic Chamber) |                    |                  |
| Limit:            | Frequency                                               | Limit (dBuV/m @3m) | Remark           |
|                   | 30MHz-88MHz                                             | 40.0               | Quasi-peak Value |
|                   | 88MHz-216MHz                                            | 43.5               | Quasi-peak Value |
|                   | 216MHz-960MHz                                           | 46.0               | Quasi-peak Value |
|                   | 960MHz-1GHz                                             | 54.0               | Quasi-peak Value |
|                   | Above 1GHz                                              | 54.0               | Average Value    |
|                   |                                                         | 74.0               | Peak Value       |
| Test Setup:       |                                                         |                    |                  |

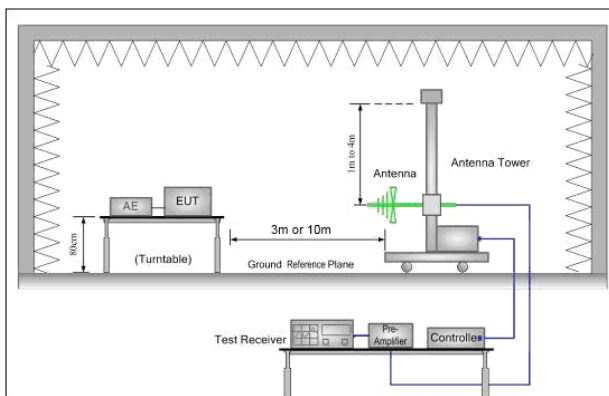


Figure 1. 30MHz to 1GHz

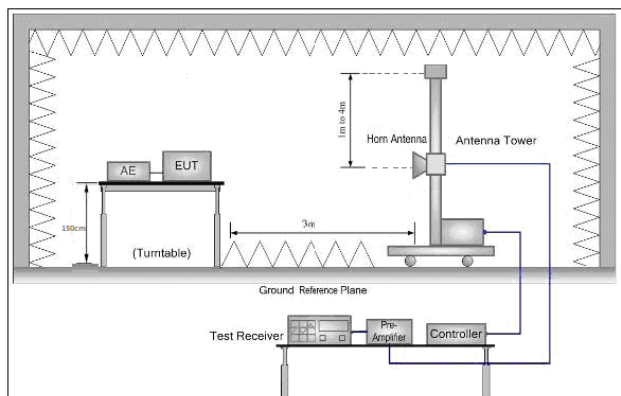


Figure 2. Above 1 GHz

|                 |                                                                                                                                                                                                                                                                    |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Procedure: | a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.                                   |
|                 | b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.                                         |
|                 | c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.                                                                                                                   |
|                 | d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.                                    |
|                 | e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.                            |
|                 | f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.                                                                                                                                                        |
|                 | g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel |
|                 | h. Test the EUT in the lowest channel, the Highest channel                                                                                                                                                                                                         |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

|                        |                                                                                                                                                                                                                                        |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.<br>j. Repeat above procedures until all frequencies measured was complete. |
| Exploratory Test Mode: | Transmitting with GFSK modulation.<br>Charge + Transmitting mode.                                                                                                                                                                      |
| Final Test Mode:       | Transmitting with GFSK modulation.<br>Pretest the EUT at Charge + Transmitting mode.<br>Only the worst case is recorded in the report.                                                                                                 |
| Instruments Used:      | Refer to section 5.10 for details.                                                                                                                                                                                                     |
| Test Results:          | Pass                                                                                                                                                                                                                                   |

#### 4.10.1 Test plots

##### 4.10.1.1 BLE 1M\_Channel 0

#### Test Graph

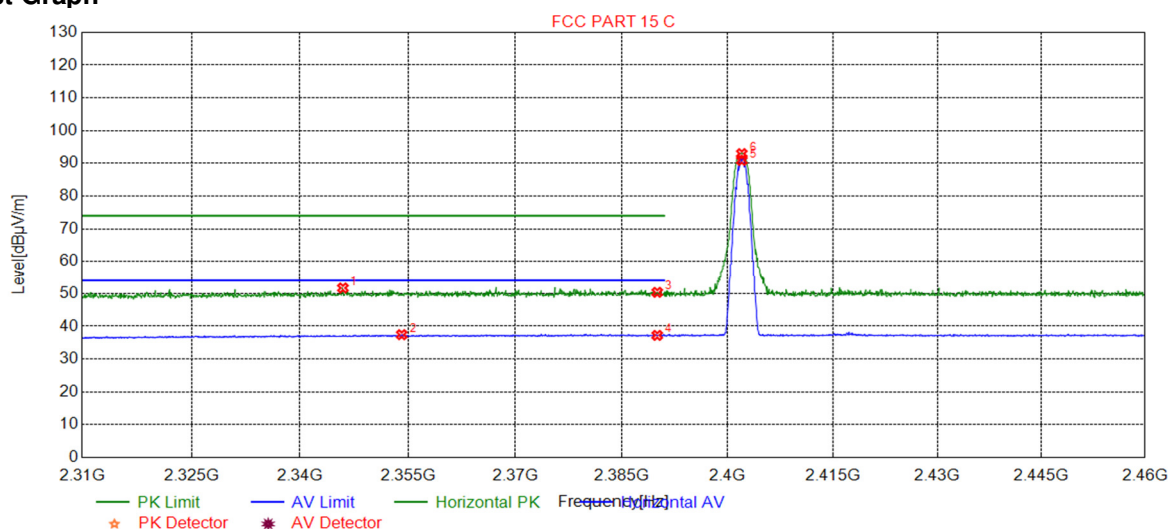

#### Suspected List

| Suspected List |             |                |             |                |             |             |           |            |
|----------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| NO.            | Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
| 1              | 2345.94     | 51.67          | 7.77        | 74.00          | 22.33       | 150         | 242       | Horizontal |
| 2              | 2354.12     | 37.44          | 7.81        | 54.00          | 16.56       | 150         | 143       | Horizontal |
| 3              | 2390.00     | 50.35          | 7.77        | 74.00          | 23.65       | 150         | 215       | Horizontal |
| 4              | 2390.00     | 37.23          | 7.77        | 54.00          | 16.77       | 150         | 11        | Horizontal |
| 5              | 2402.00     | 90.91          | 7.77        | 0.00           | -90.91      | 150         | 242       | Horizontal |
| 6              | 2402.00     | 92.99          | 7.77        | 0.00           | -92.99      | 150         | 198       | Horizontal |

#### Final Data List




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center, FCC Laboratory.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 4.10.1.2 BLE 1M\_Channel 0

## Test Graph

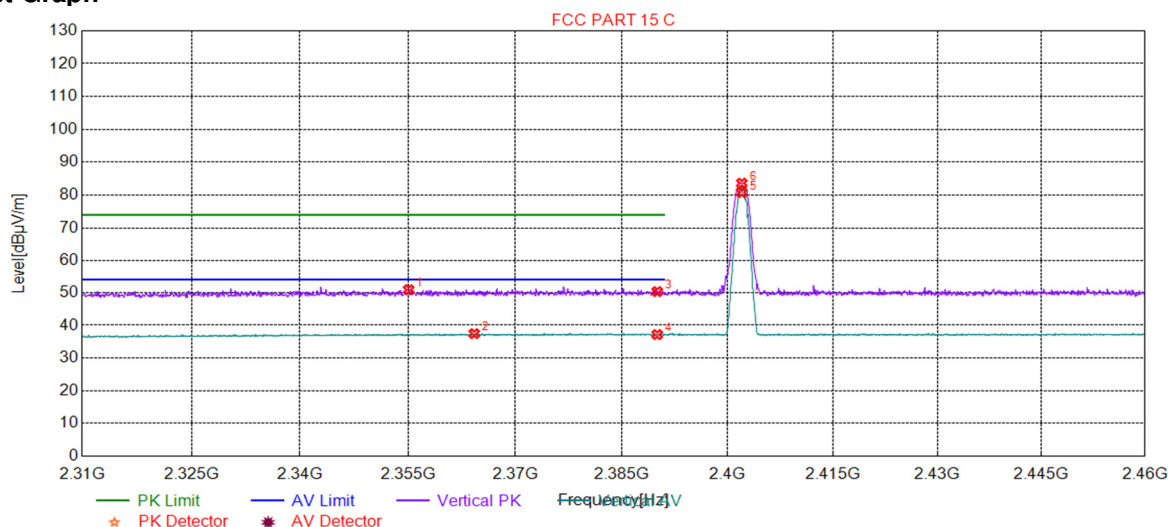

## Suspected List

## Suspected List


| NO. | Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| 1   | 2355.09     | 50.90          | 7.80        | 74.00          | 23.10       | 150         | 249       | Vertical |
| 2   | 2364.25     | 37.46          | 7.80        | 54.00          | 16.54       | 150         | 156       | Vertical |
| 3   | 2390.00     | 50.33          | 7.77        | 74.00          | 23.67       | 150         | 145       | Vertical |
| 4   | 2390.00     | 37.19          | 7.77        | 54.00          | 16.81       | 150         | 62        | Vertical |
| 5   | 2402.00     | 80.80          | 7.77        | 0.00           | -80.80      | 150         | 293       | Vertical |
| 6   | 2402.00     | 83.66          | 7.77        | 0.00           | -83.66      | 150         | 200       | Vertical |

## Final Data List



## 4.10.1.3 BLE 1M\_Channel 39

## Test Graph

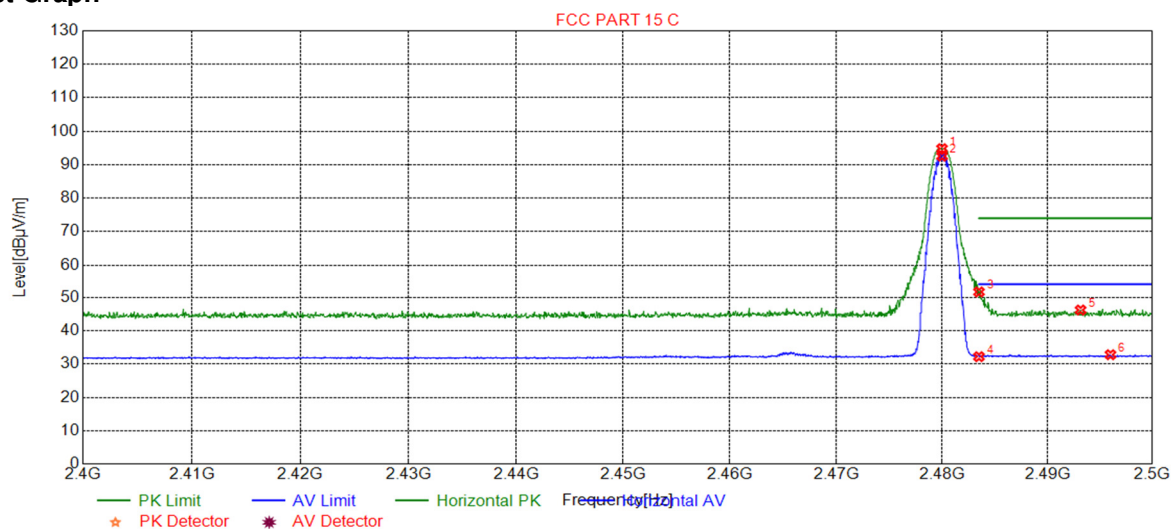

## Suspected List


| Suspected List |             |                |             |                |             |             |           |            |
|----------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| NO.            | Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
| 1              | 2480.00     | 94.79          | 8.01        | 0.00           | -94.79      | 150         | 194       | Horizontal |
| 2              | 2480.00     | 92.57          | 8.01        | 0.00           | -92.57      | 150         | 243       | Horizontal |
| 3              | 2483.50     | 51.69          | 8.01        | 74.00          | 22.31       | 150         | 199       | Horizontal |
| 4              | 2483.50     | 32.25          | 8.01        | 54.00          | 21.75       | 150         | 95        | Horizontal |
| 5              | 2493.14     | 46.25          | 8.02        | 74.00          | 27.75       | 150         | 149       | Horizontal |
| 6              | 2495.99     | 32.84          | 8.03        | 54.00          | 21.16       | 150         | 95        | Horizontal |

## Final Data List



## 4.10.1.4 BLE 1M\_Channel 39

## Test Graph

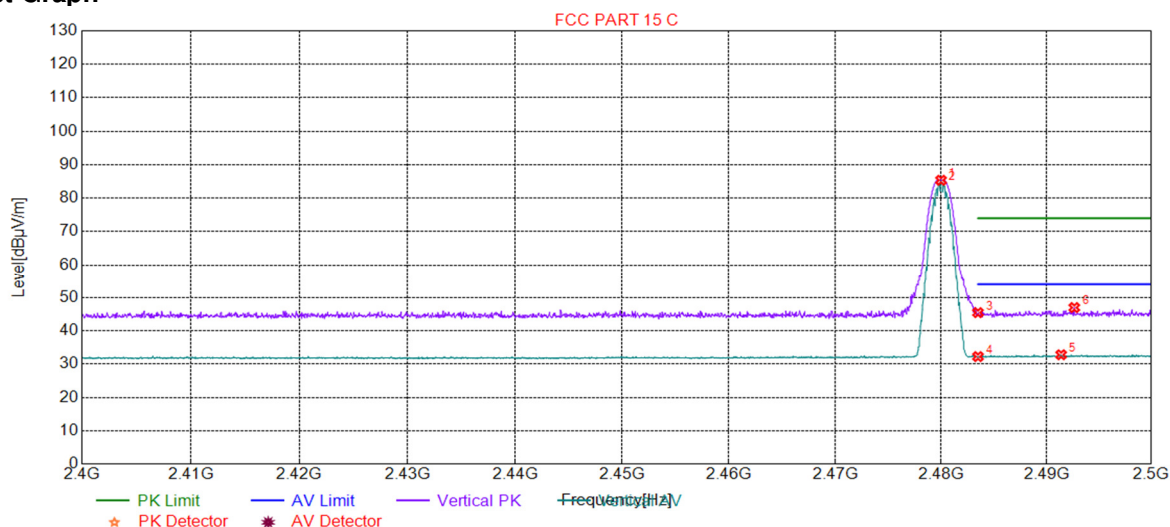

## Suspected List

| Suspected List |             |                |             |                |             |             |           |          |
|----------------|-------------|----------------|-------------|----------------|-------------|-------------|-----------|----------|
| NO.            | Freq. [MHz] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1              | 2480.00     | 85.36          | 8.01        | 0.00           | -85.36      | 150         | 326       | Vertical |
| 2              | 2480.00     | 84.57          | 8.01        | 0.00           | -84.57      | 150         | 299       | Vertical |
| 3              | 2483.50     | 45.47          | 8.01        | 74.00          | 28.53       | 150         | 338       | Vertical |
| 4              | 2483.50     | 32.27          | 8.01        | 54.00          | 21.73       | 150         | 85        | Vertical |
| 5              | 2491.39     | 32.83          | 8.02        | 54.00          | 21.17       | 150         | 85        | Vertical |
| 6              | 2492.64     | 46.99          | 8.02        | 74.00          | 27.01       | 150         | 332       | Vertical |

## Final Data List

## Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

All Modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Centre - FCC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 5 Measurement Uncertainty (95% confidence levels, k=2)

| No. | Item                            | Measurement Uncertainty            |
|-----|---------------------------------|------------------------------------|
| 1   | Total RF power, conducted       | $\pm 0.75\text{dB}$                |
| 2   | RF power density, conducted     | $\pm 2.84\text{dB}$                |
| 3   | Spurious emissions, conducted   | $\pm 0.75\text{dB}$                |
| 4   | Radiated Spurious emission test | $\pm 4.5\text{dB}$ (30MHz-1GHz)    |
|     |                                 | $\pm 4.8\text{dB}$ (1GHz-25GHz)    |
| 5   | Conduct emission test           | $\pm 3.12\text{ dB}$ (9KHz- 30MHz) |
| 6   | Temperature test                | $\pm 1\text{ }^{\circ}\text{C}$    |
| 7   | Humidity test                   | $\pm 3\%$                          |
| 8   | DC and low frequency voltages   | $\pm 0.5\%$                        |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

## 6 Equipment List

| Conducted Emission   |                                    |                 |               |              |              |
|----------------------|------------------------------------|-----------------|---------------|--------------|--------------|
| Test Equipment       | Manufacturer                       | Model No.       | Inventory No. | Cal. date    | Cal.Duedate  |
|                      |                                    |                 |               | (yyyy-mm-dd) | (yyyy-mm-dd) |
| Shielding Room       | ZhongYu Electron                   | GB-88           | SEM001-06     | 2020/5/10    | 2023/5/9     |
| LISN                 | Rohde & Schwarz                    | ENV216          | SEM007-01     | 2020/7/14    | 2021/7/14    |
| LISN                 | ETS-LINDGREN                       | Feb-16          | SEM007-02     | 2020/4/1     | 2021/3/31    |
| Measurement Software | AUDIX                              | e3 V5.4.1221d   | N/A           | N/A          | N/A          |
| Coaxial Cable        | SGS                                | N/A             | SEM024-01     | 2020/6/12    | 2021/6/11    |
| 2 Line ISN           | Fischer Custom Communications Inc. | FCC-TLISN-T2-02 | EMC0122       | 2020/2/11    | 2021/2/10    |
| EMI Test Receiver    | Rohde & Schwarz                    | ESCI            | SEM004-02     | 2020/3/2     | 2021/3/1     |

| RF conducted test   |                          |                  |               |              |              |
|---------------------|--------------------------|------------------|---------------|--------------|--------------|
| Test Equipment      | Manufacturer             | Model No.        | Inventory No. | Cal. date    | Cal.Duedate  |
|                     |                          |                  |               | (yyyy-mm-dd) | (yyyy-mm-dd) |
| DC Power Supply     | Agilent Technologies Inc | 66311B           | W009-09       | 2020/7/15    | 2021/7/15    |
| Signal Analyzer     | Rohde & Schwarz          | FSV              | W025-05       | 2020/1/3     | 2021/1/2     |
| Coaxial Cable       | SGS                      | N/A              | SEM031-01     | 2020/6/12    | 2021/6/11    |
| Attenuator          | Weinschel Associates     | WA41             | SEM021-09     | N/A          | N/A          |
| Signal Generator    | KEYSIGHT                 | N5173B           | SEM006-05     | 2020/7/14    | 2021/7/14    |
| Temperature Chamber | GIANT FORCE              | ICT-150-40-CP-AR | W027-03       | 2019/10/27   | 2020/10/27   |
| Power Meter         | Rohde & Schwarz          | NRVS             | SEM014-02     | 2020/7/14    | 2021/7/14    |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Inspection & Testing Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



| RE in Chamber                      |                          |                   |               |              |               |
|------------------------------------|--------------------------|-------------------|---------------|--------------|---------------|
| Test Equipment                     | Manufacturer             | Model No.         | Inventory No. | Cal. date    | Cal. Due date |
|                                    |                          |                   |               | (yyyy-mm-dd) | (yyyy-mm-dd)  |
| 3m Semi-Anechoic Chamber           | AUDIX                    | N/A               | SEM001-02     | 2018/3/13    | 2021/3/12     |
| Measurement Software               | AUDIX                    | e3V8.2014-6-27    | N/A           | N/A          | N/A           |
| Coaxial Cable                      | SGS                      | N/A               | SEM026-01     | 2020/6/12    | 2021/6/11     |
| EXA Signal Analyzer (10Hz-26.5GHz) | Agilent Technologies Inc | N9010A            | SEM004-09     | 2020/3/12    | 2021/3/11     |
| BiConiLog Antenna (26-3000MHz)     | ETS-Lindgren             | 3142C             | SEM003-01     | 2020/6/27    | 2023/6/26     |
| Horn Antenna (0.8-18GHz)           | Rohde & Schwarz          | HF907             | SEM003-07     | 2018/4/13    | 2021/4/12     |
| Pre-amplifier(0.1-1.3GHz)          | HP                       | 8447D             | SEM005-02     | 2020/7/14    | 2021/7/14     |
| Low Noise Amplifier(100MHz-18GHz)  | Black Diamond Series     | BDLNA-0118-352810 | SEM005-05     | 2020/9/3     | 2021/9/2      |
| Horn Antenna (15-40GHz)            | Schwarzbeck              | BBHA 9170         | SEM003-15     | 2017/10/17   | 2020/10/16    |
| Pre-amplifier(18-26GHz)            | Rohde & Schwarz          | CH14-H052         | SEM005-17     | 2020/3/2     | 2021/3/1      |
| Band filter                        | N/A                      | N/A               | SEM023-01     | N/A          | N/A           |
| RE in Chamber                      |                          |                   |               |              |               |
| Test Equipment                     | Manufacturer             | Model No.         | Inventory No. | Cal. date    | Cal. Due date |
|                                    |                          |                   |               | (yyyy-mm-dd) | (yyyy-mm-dd)  |
| 3m Semi-Anechoic Chamber           | ETS-LINDGREN             | N/A               | SEM001-01     | 2020/8/5     | 2021/8/4      |
| Measurement Software               | AUDIX                    | e3 V8.2014-6-27   | N/A           | N/A          | N/A           |
| Coaxial Cable                      | SGS                      | N/A               | SEM025-01     | 2020/6/12    | 2021/6/11     |
| MXE EMI Receiver (20Hz-8.4GHz)     | Agilent Technologies     | N9038A            | SEM004-05     | 2020/7/14    | 2021/7/14     |
| BiConiLog Antenna (26-3000MHz)     | ETS-LINDGREN             | 3142C             | SEM003-01     | 2020/6/27    | 2023/6/26     |
| Pre-amplifier (0.1-1.3GHz)         | Agilent Technologies     | 8447D             | SEM005-01     | 2020/3/2     | 2021/3/1      |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



| RE in Chamber                      |                 |                 |               |                        |                            |
|------------------------------------|-----------------|-----------------|---------------|------------------------|----------------------------|
| Test Equipment                     | Manufacturer    | Model No.       | Inventory No. | Cal. Date (yyyy-mm-dd) | Cal. Due date (yyyy-mm-dd) |
| 10m Semi-Anechoic Chamber          | SAEMC           | FSAC1018        | SEM001-03     | 2018/3/31              | 2021/3/30                  |
| EMI Test Receiver (9k-7GHz)        | Rohde & Schwarz | ESR             | SEM004-03     | 2020/3/2               | 2021/3/1                   |
| Trilog-Broadband Antenna(25M-2GHz) | Schwarzbeck     | VULB9168        | SEM003-18     | 2020/3/15              | 2022/3/14                  |
| Pre-amplifier (9k-1GHz)            | Sonoma          | 310N            | SEM005-03     | 2020/3/12              | 2021/3/11                  |
| Loop Antenna (9kHz-30MHz)          | ETS-Lindgren    | 6502            | SEM003-08     | 2020/8/22              | 2023/8/21                  |
| Measurement Software               | AUDIX           | e3 V8.2014-6-27 | N/A           | N/A                    | N/A                        |
| Coaxial Cable                      | SGS             | N/A             | SEM029-01     | 2020/6/12              | 2021/6/11                  |

## 7 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of Set-Up for ZR/2020/90037.

The End

