




Z Axis Scan



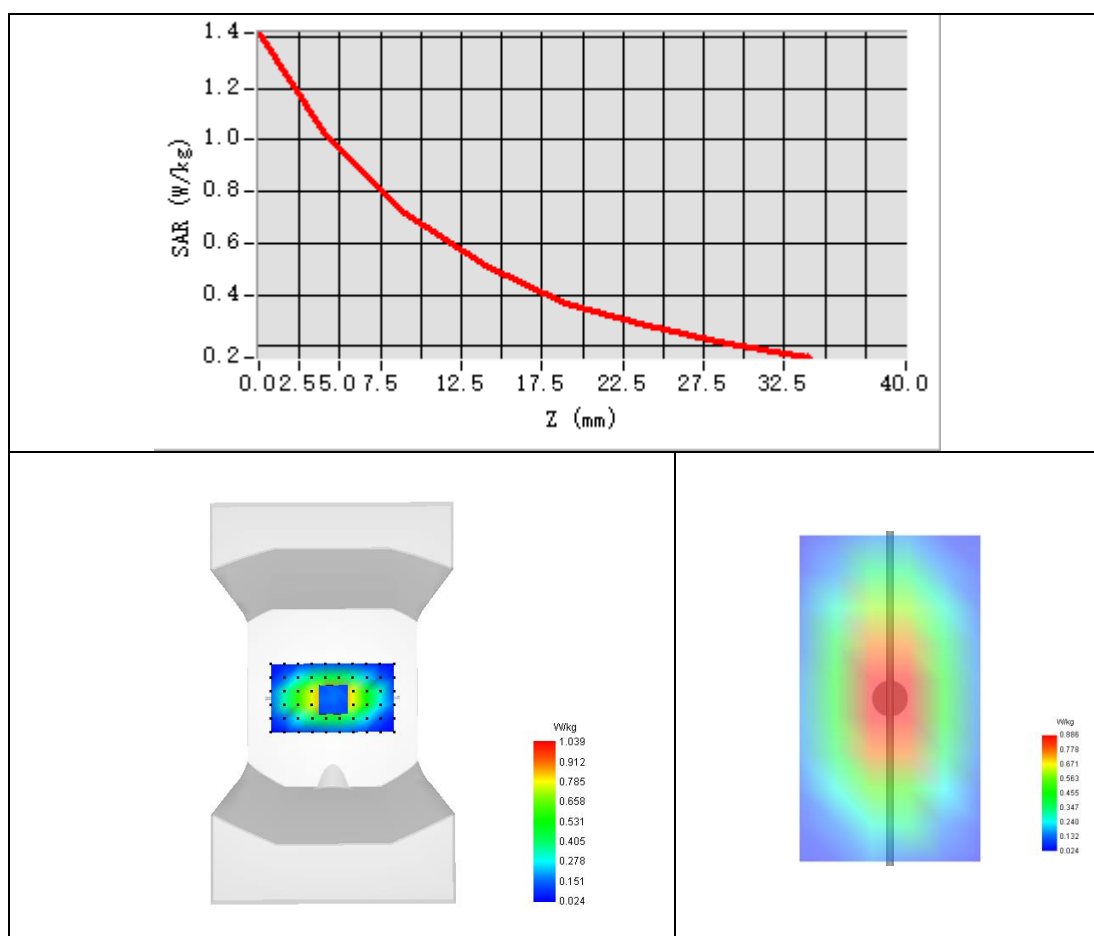

System Performance Check Data (1800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-05-14

Experimental conditions.


Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW
Frequency (MHz)	1800.000
Relative permittivity	40.63
Conductivity (S/m)	1.45
Probe	SN 04/22 EPGO364
ConvF	1.95
Crest factor:	1:1

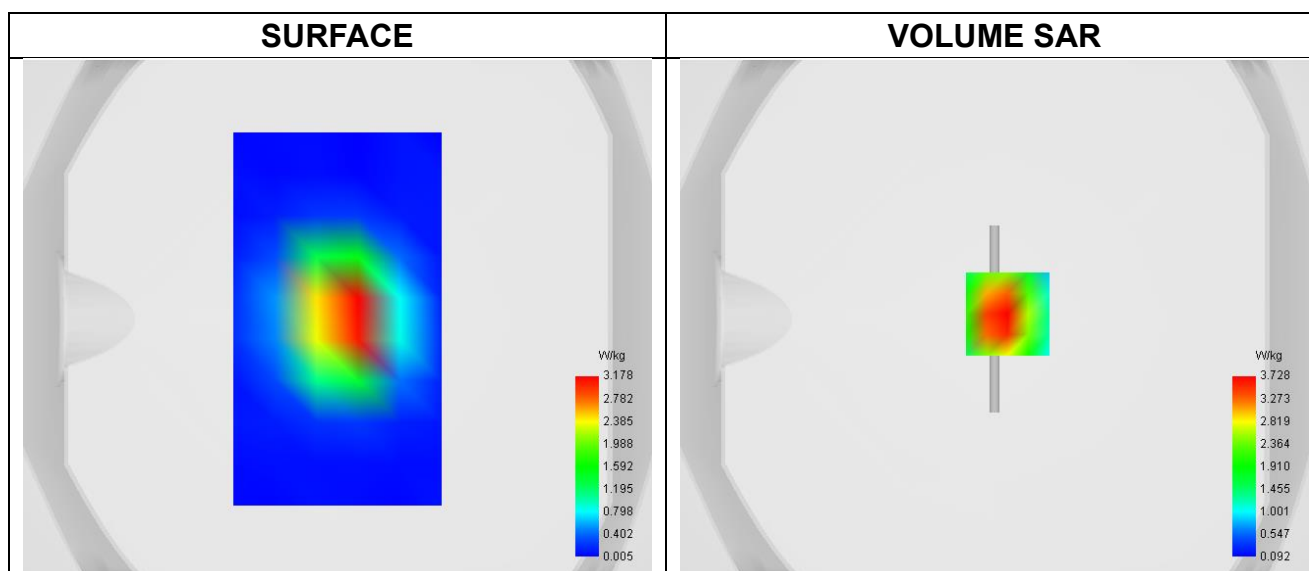

Maximum location: X=5.00, Y=2.00 ; SAR Peak: 5.79 W/kg

SAR 10g (W/Kg)	2.079
SAR 1g (W/Kg)	3.914

Z Axis Scan

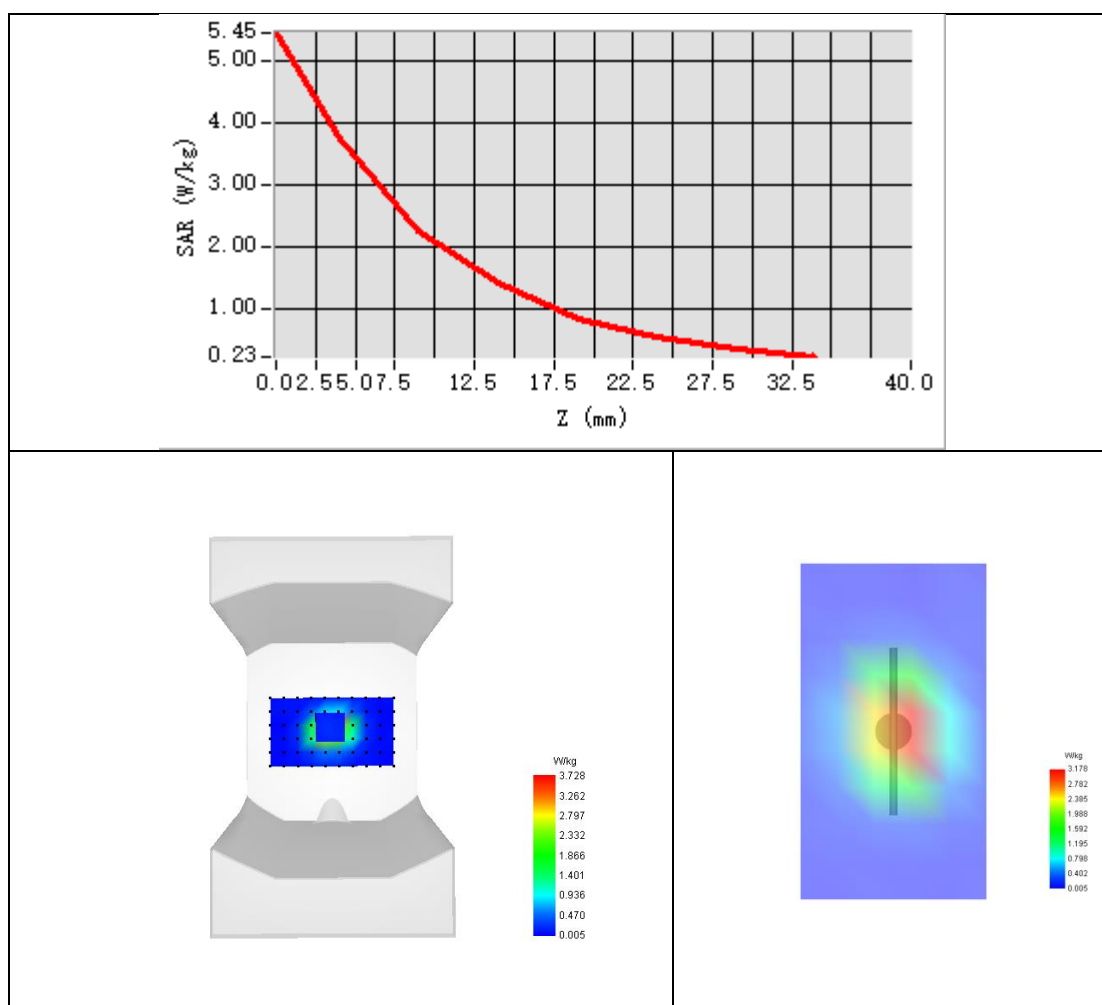



System Performance Check Data (1900MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-05-15

Experimental conditions.


Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW
Frequency (MHz)	1900.000
Relative permittivity	40.64
Conductivity (S/m)	1.39
Probe	SN 04/22 EPG0364
ConvF	2.25
Crest factor:	1:1

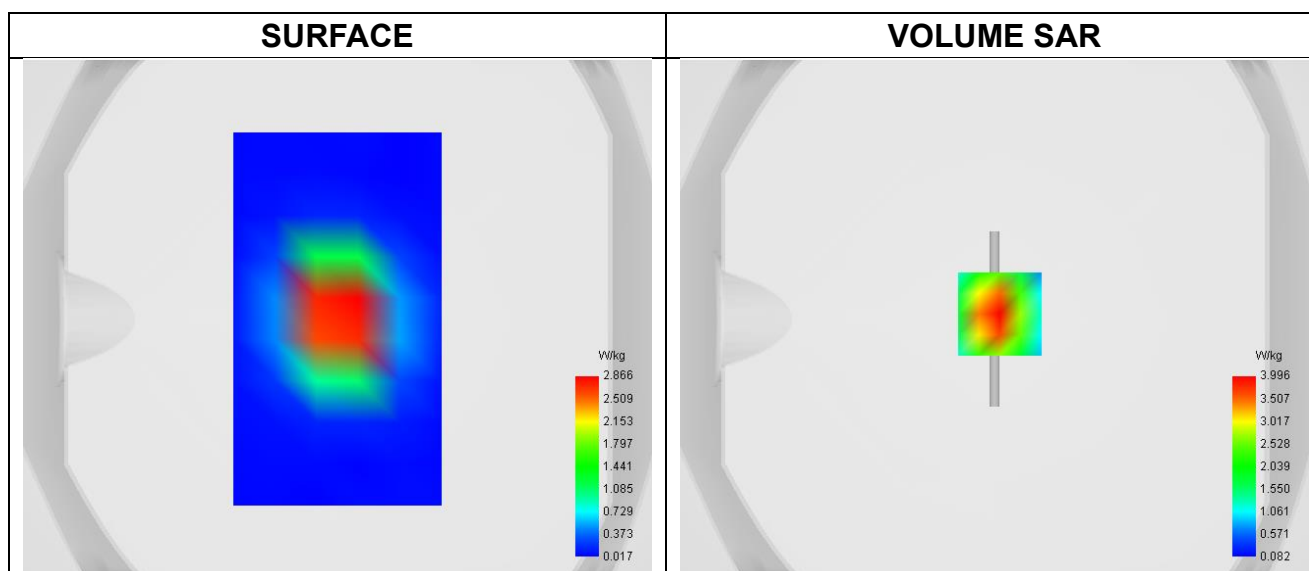

Maximum location: X=2.00, Y=2.00 ; SAR Peak: 6.23 W/kg

SAR 10g (W/Kg)	2.043
SAR 1g (W/Kg)	3.914

Z Axis Scan

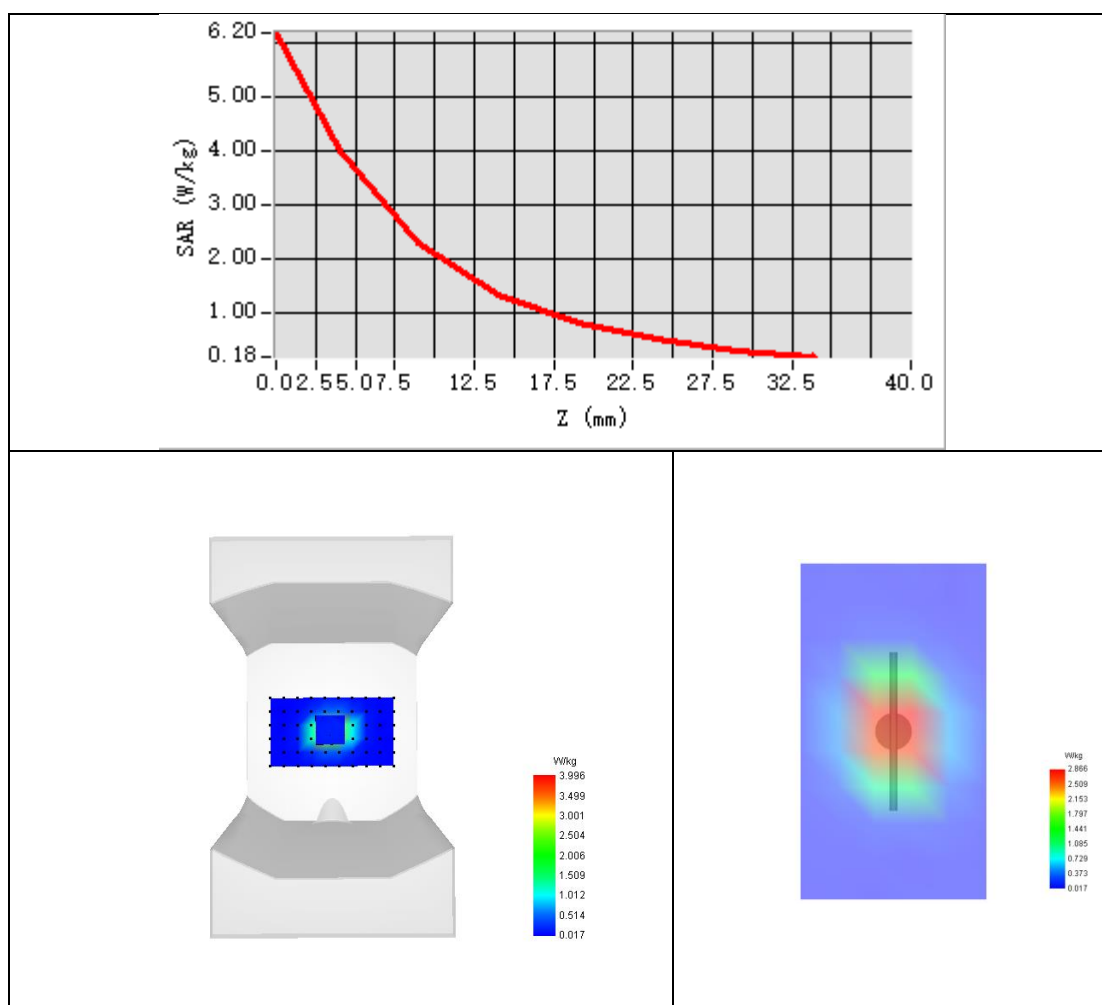



System Performance Check Data (1900MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-05-16

Experimental conditions.


Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW
Frequency (MHz)	1900.000
Relative permittivity	41.04
Conductivity (S/m)	1.43
Probe	SN 04/22 EPG0364
ConvF	2.25
Crest factor:	1:1

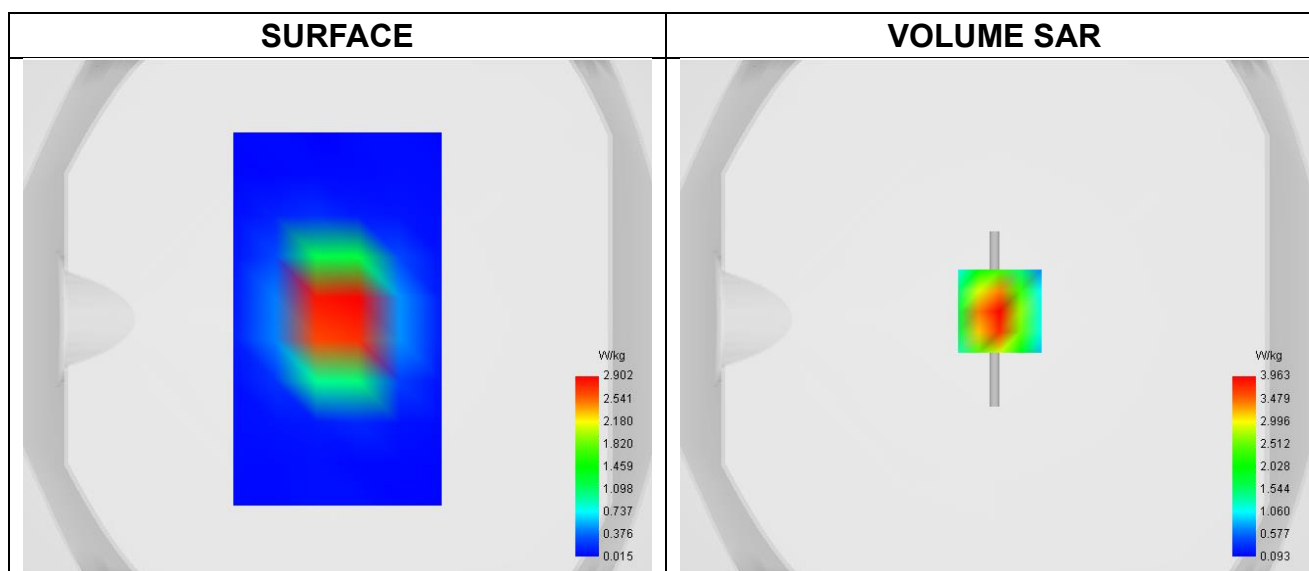

Maximum location: X=5.00, Y=1.00 ; SAR Peak: 6.89 W/kg

SAR 10g (W/Kg)	2.051
SAR 1g (W/Kg)	4.068

Z Axis Scan

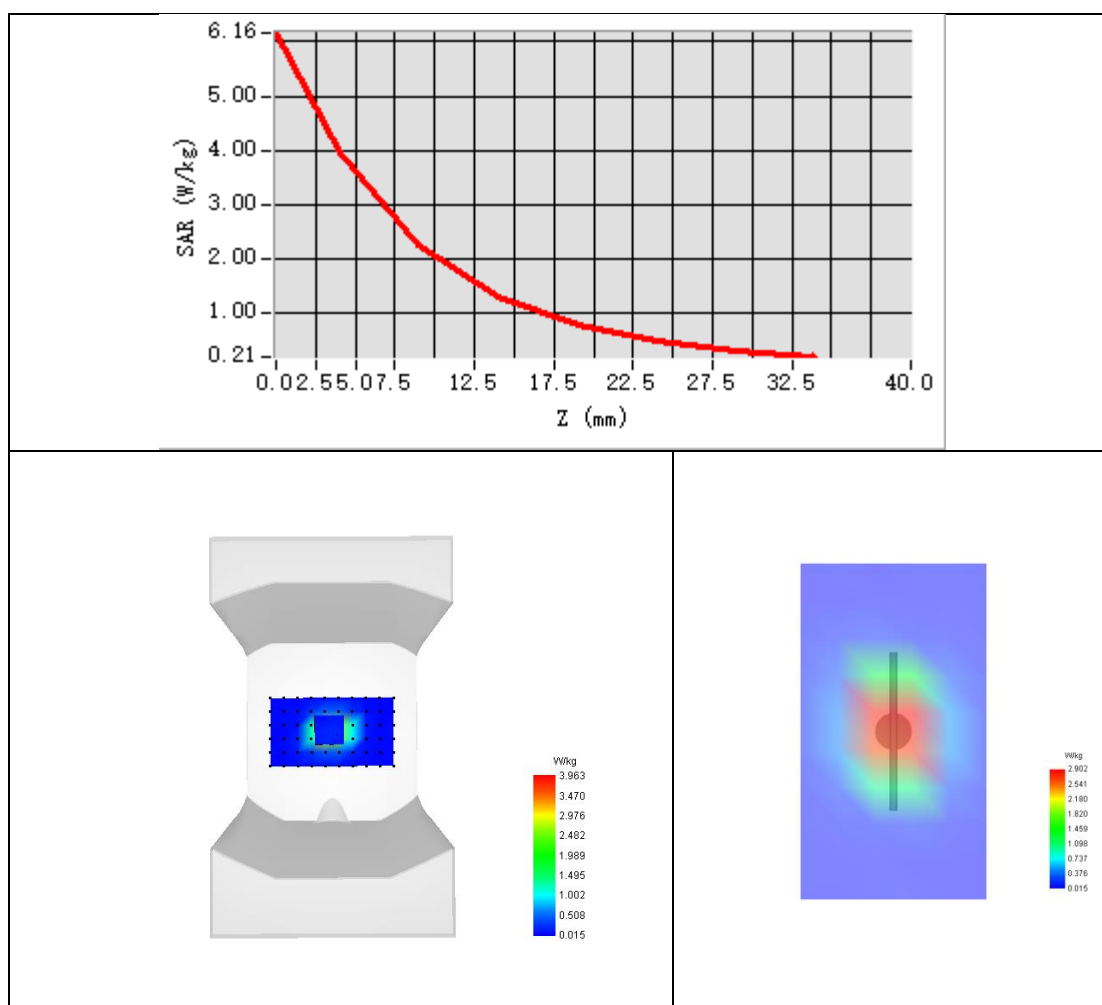



System Performance Check Data (2450MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-06-03

Experimental conditions.


Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW
Frequency (MHz)	2450.000
Relative permittivity	40.44
Conductivity (S/m)	1.83
Probe	SN 04/22 EPGO364
ConvF	2.33
Crest factor:	1:1

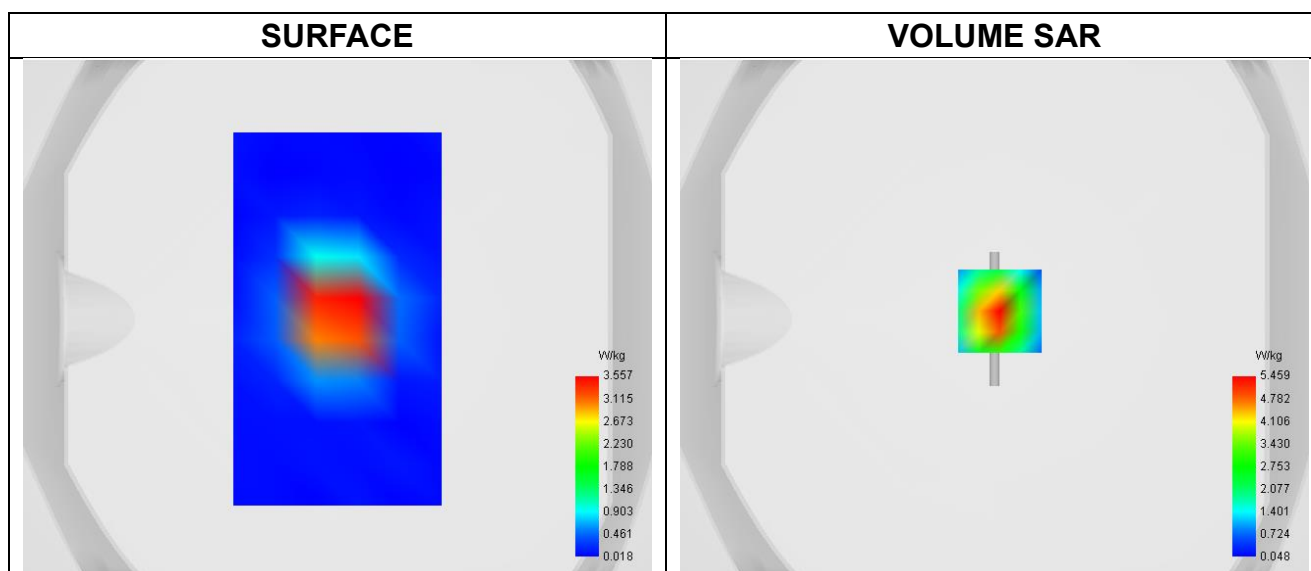

Maximum location: X=2.00, Y=3.00 ; SAR Peak: 9.08 W/kg

SAR 10g (W/Kg)	2.326
SAR 1g (W/Kg)	5.413

Z Axis Scan

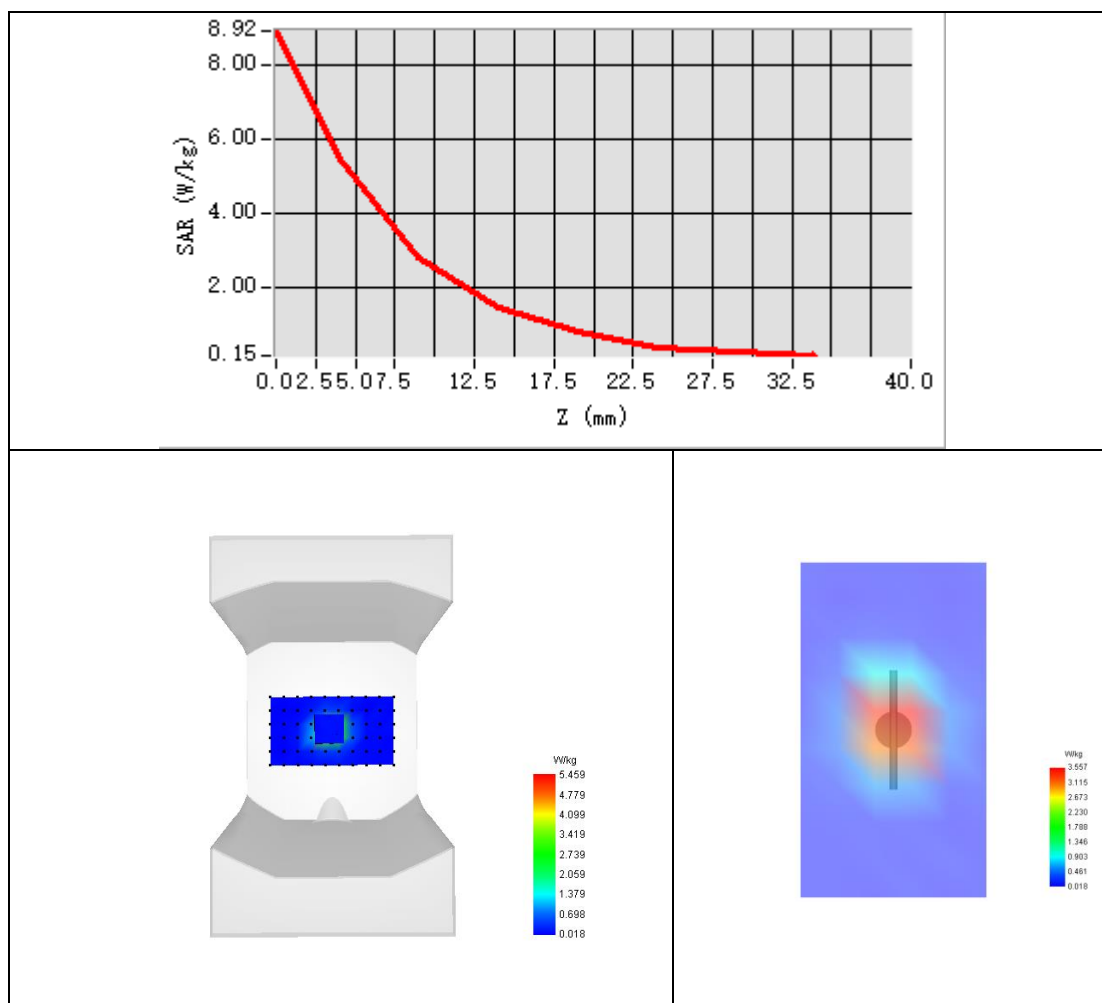



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-06-04

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	39.29
Conductivity (S/m)	1.91
Probe	SN 04/22 EPGO364
ConvF	2.36
Crest factor:	1:1

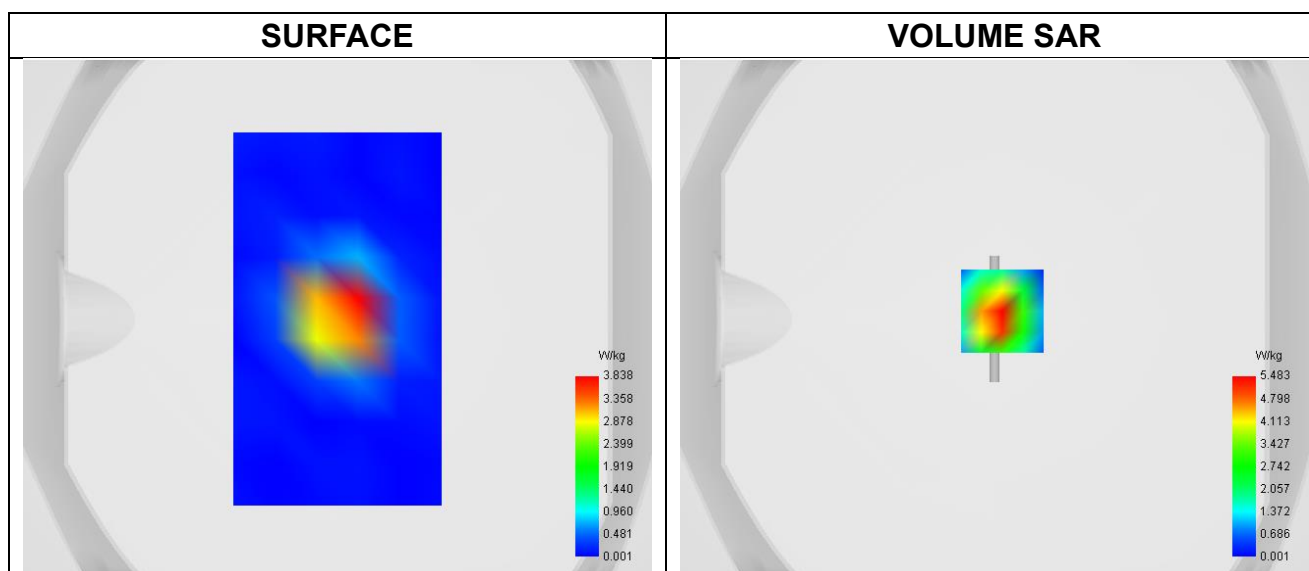


Maximum location: X=2.00, Y=3.00 ; SAR Peak: 9.20 W/kg

SAR 10g (W/Kg)	2.415
SAR 1g (W/Kg)	5.655



Z Axis Scan

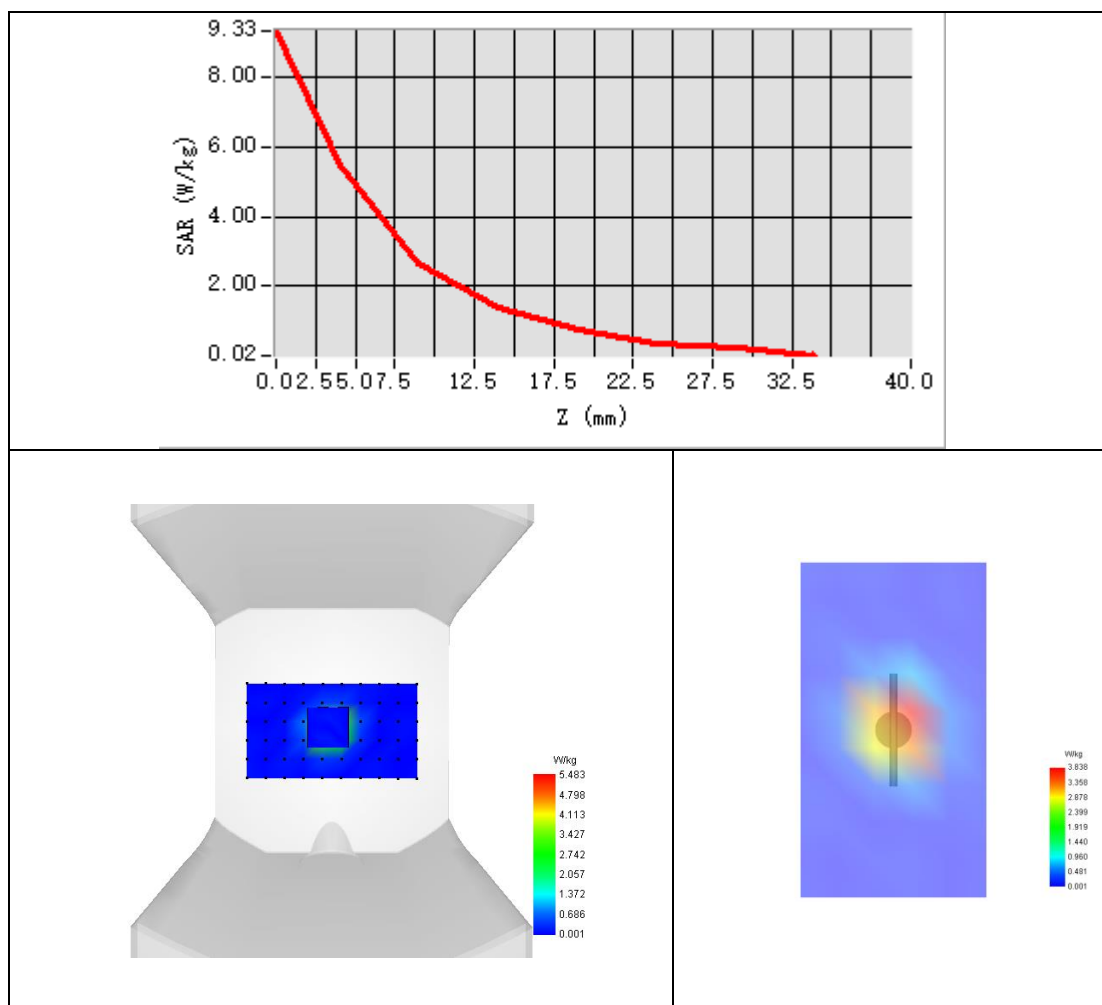



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-06-08

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	39.57
Conductivity (S/m)	2.02
Probe	SN 04/22 EPG0364
ConvF	2.36
Crest factor:	1:1

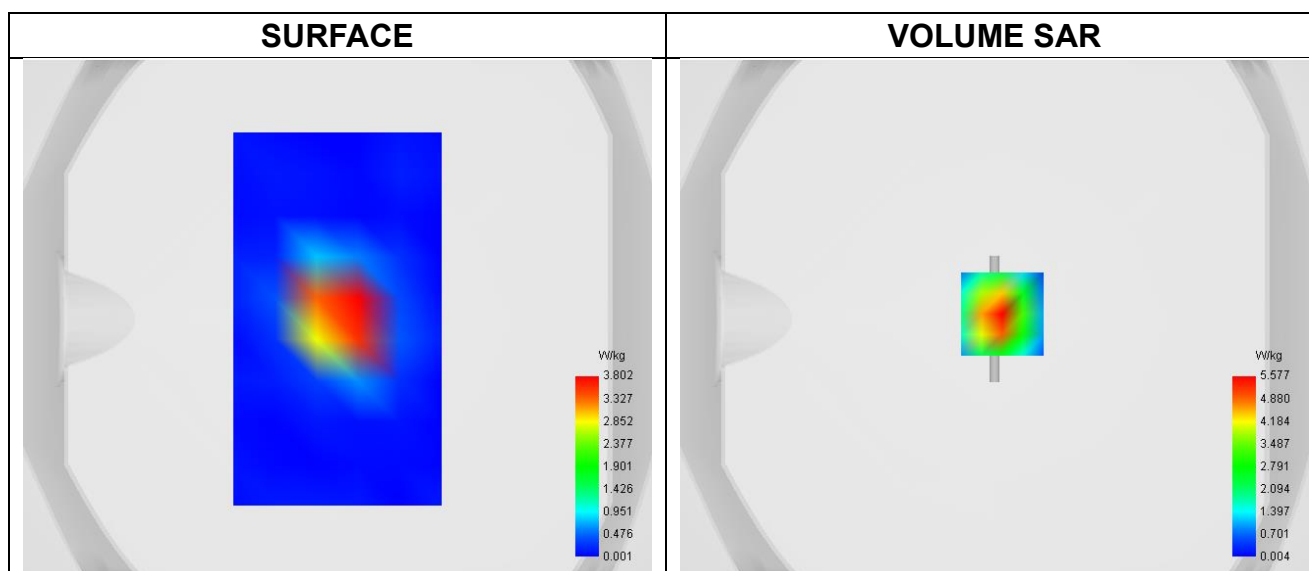


Maximum location: X=3.00, Y=3.00 ; SAR Peak: 9.58 W/kg

SAR 10g (W/Kg)	2.392
SAR 1g (W/Kg)	5.686



Z Axis Scan

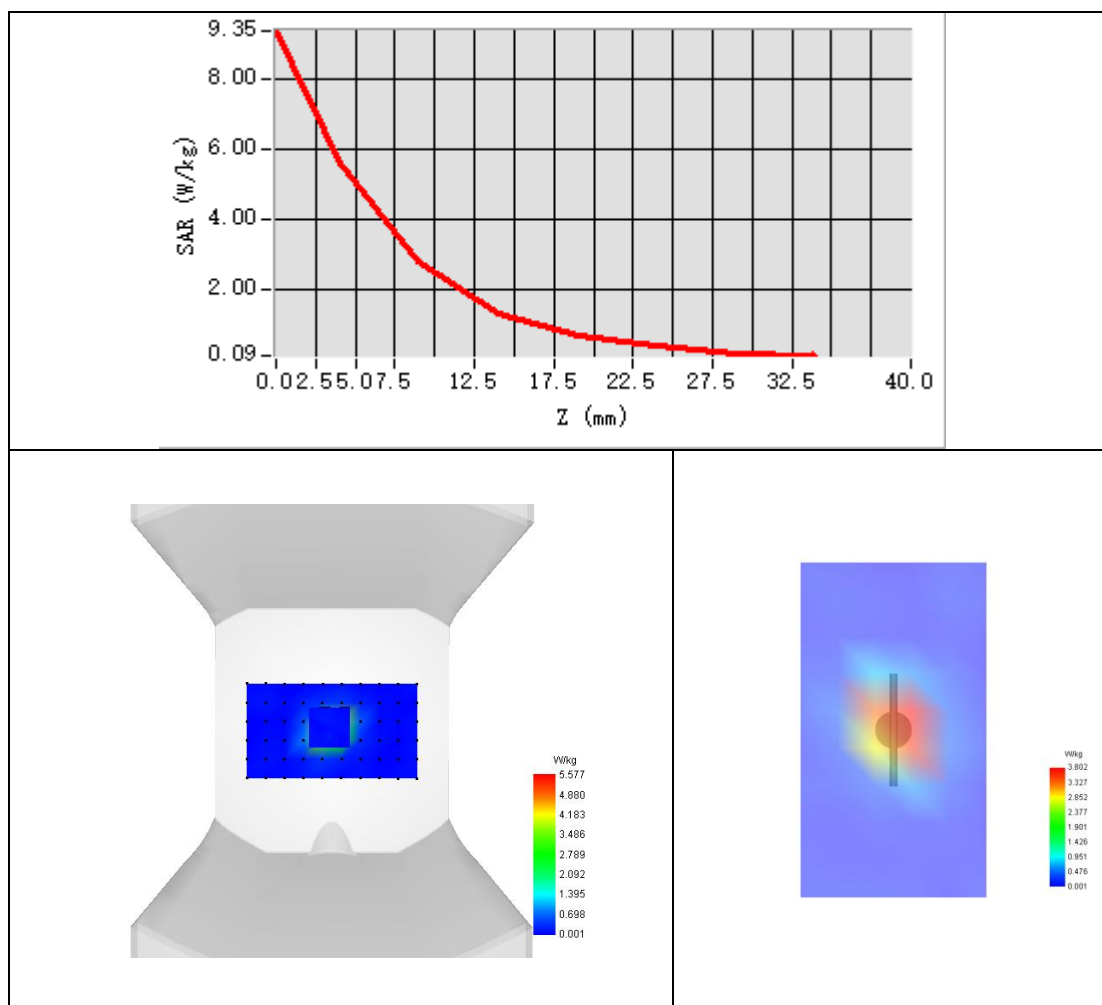



System Performance Check Data (5200MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-05-13

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW
Frequency (MHz)	5200.000
Relative permittivity	36.85
Conductivity (S/m)	4.60
Probe	SN 04/22 EPGO364
ConvF	1.95
Crest factor:	1:1

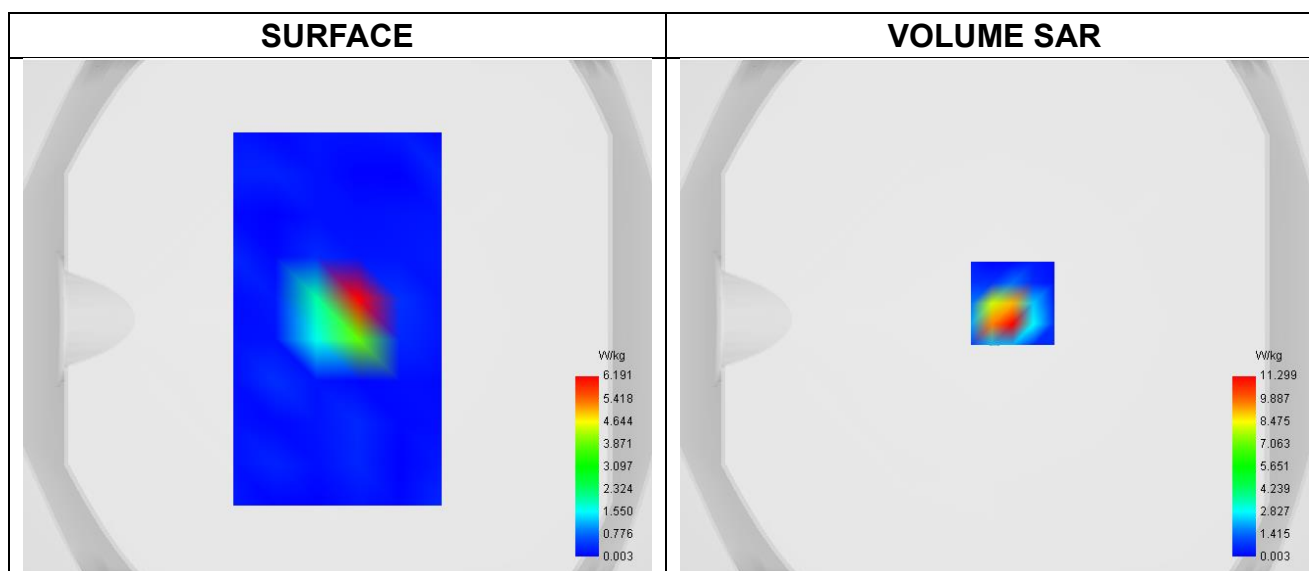


Maximum location: X=7.00, Y=6.00 ; SAR Peak: 21.88 W/kg

SAR 10g (W/Kg)	2.167
SAR 1g (W/Kg)	7.790



Z Axis Scan

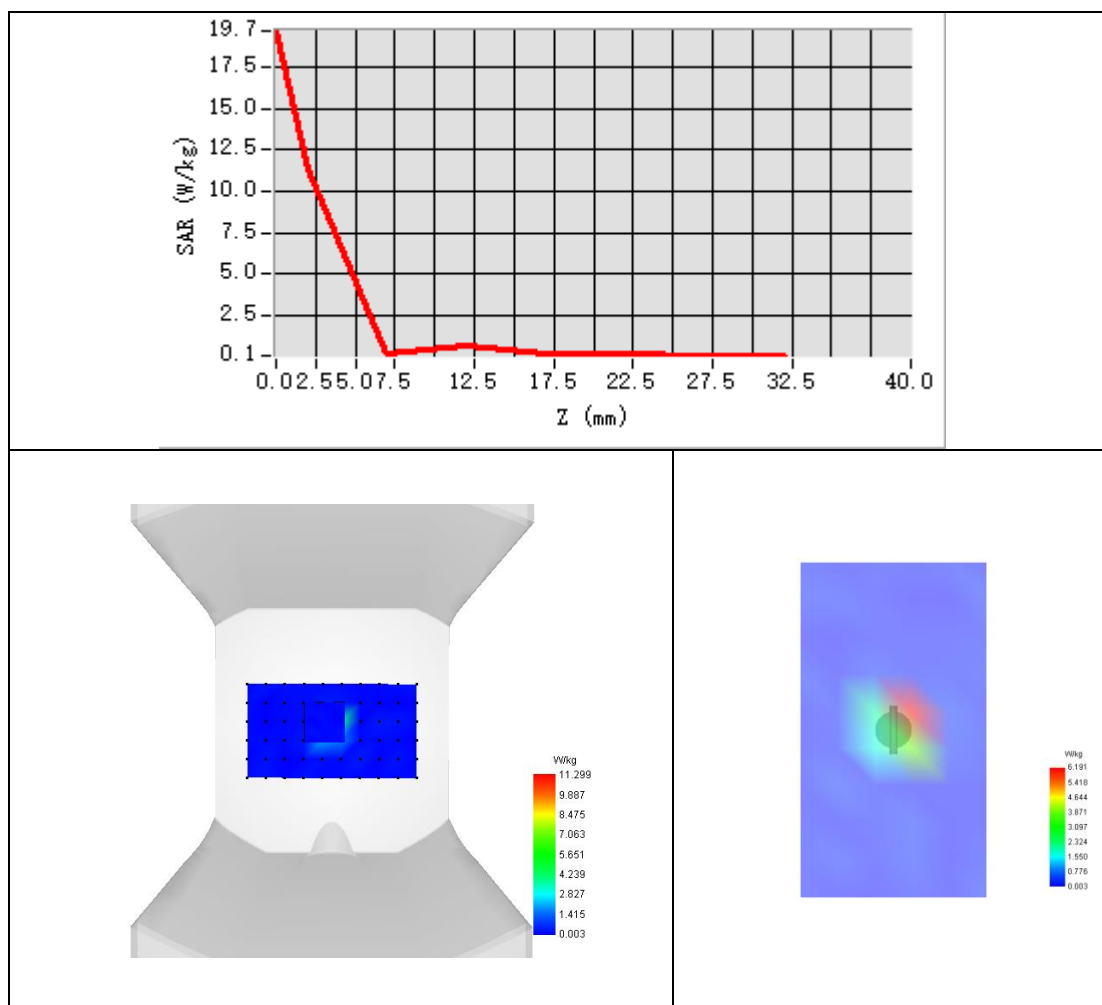



System Performance Check Data (5400MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-05-15

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5400
Channels	Middle
Signal	CW
Frequency (MHz)	5400.000
Relative permittivity	36.89
Conductivity (S/m)	4.80
Probe	SN 04/22 EPG0364
ConvF	1.85
Crest factor:	1:1

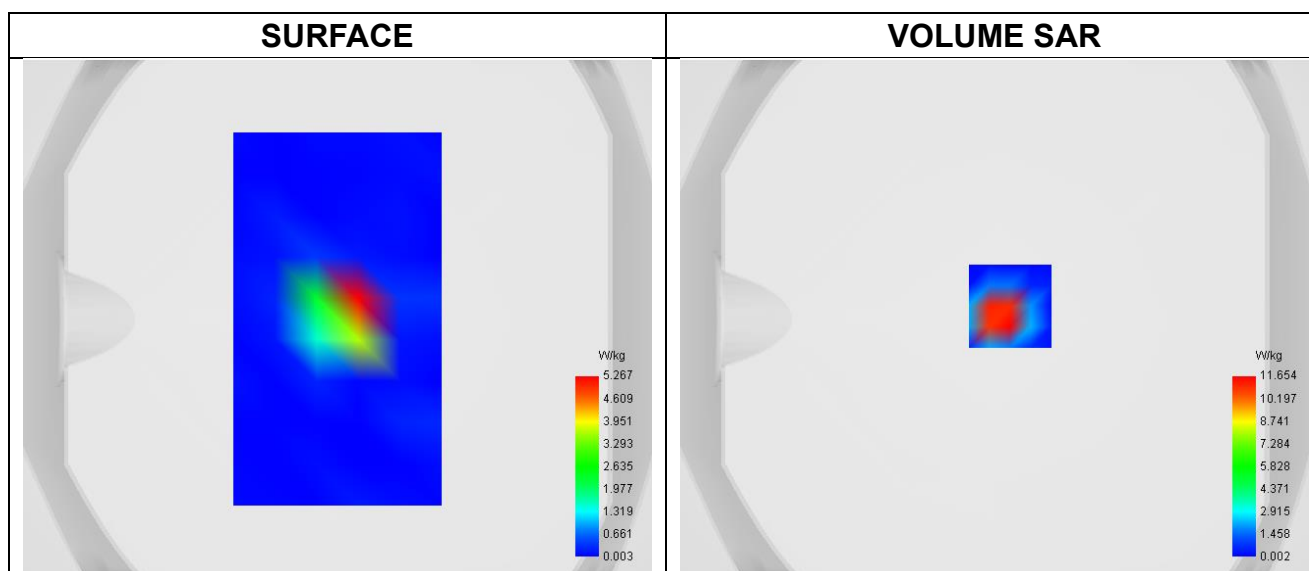


Maximum location: X=6.00, Y=5.00 ; SAR Peak: 25.72 W/kg

SAR 10g (W/Kg)	2.215
SAR 1g (W/Kg)	7.981



Z Axis Scan

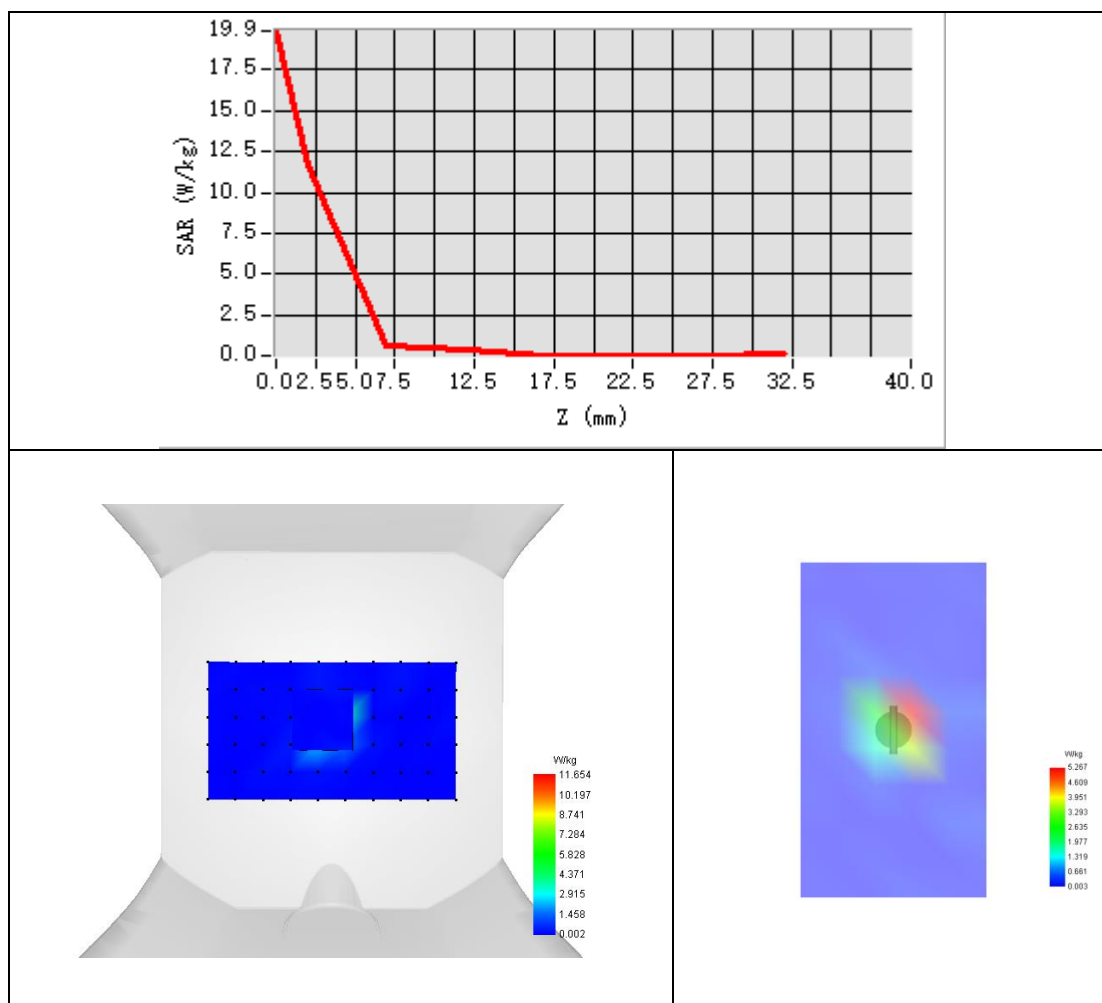



System Performance Check Data (5600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-06-04

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Channels	Middle
Signal	CW
Frequency (MHz)	5600.000
Relative permittivity	35.96
Conductivity (S/m)	5.04
Probe	SN 04/22 EPG0364
ConvF	1.86
Crest factor:	1:1

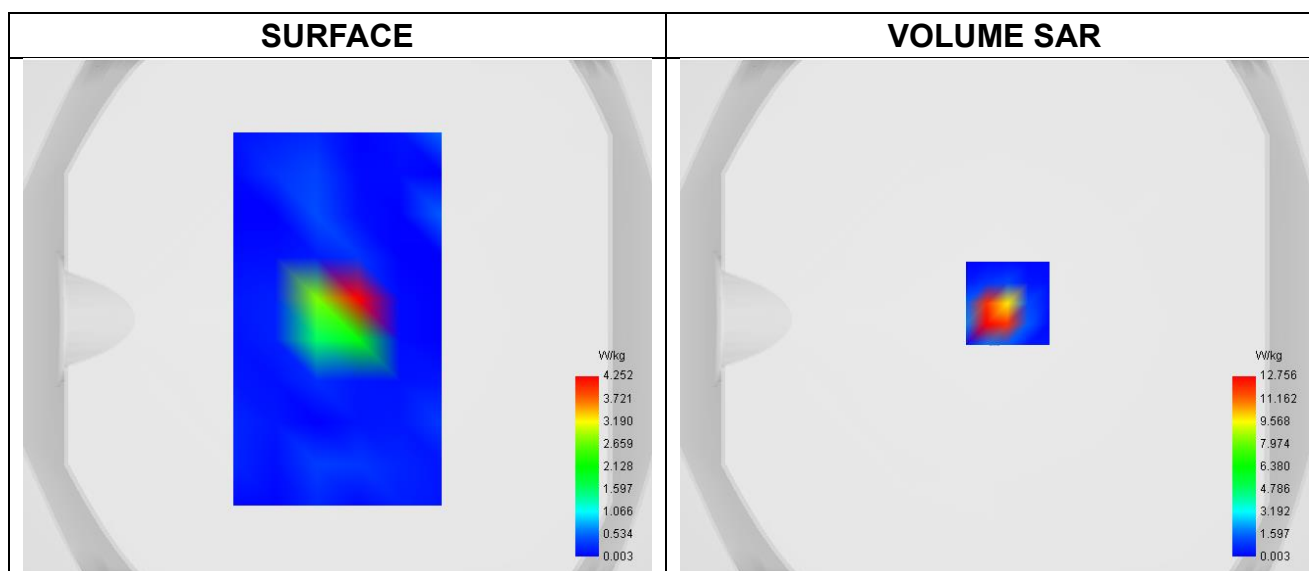


Maximum location: X=5.00, Y=6.00 ; SAR Peak: 27.92 W/kg

SAR 10g (W/Kg)	2.237
SAR 1g (W/Kg)	7.838



Z Axis Scan

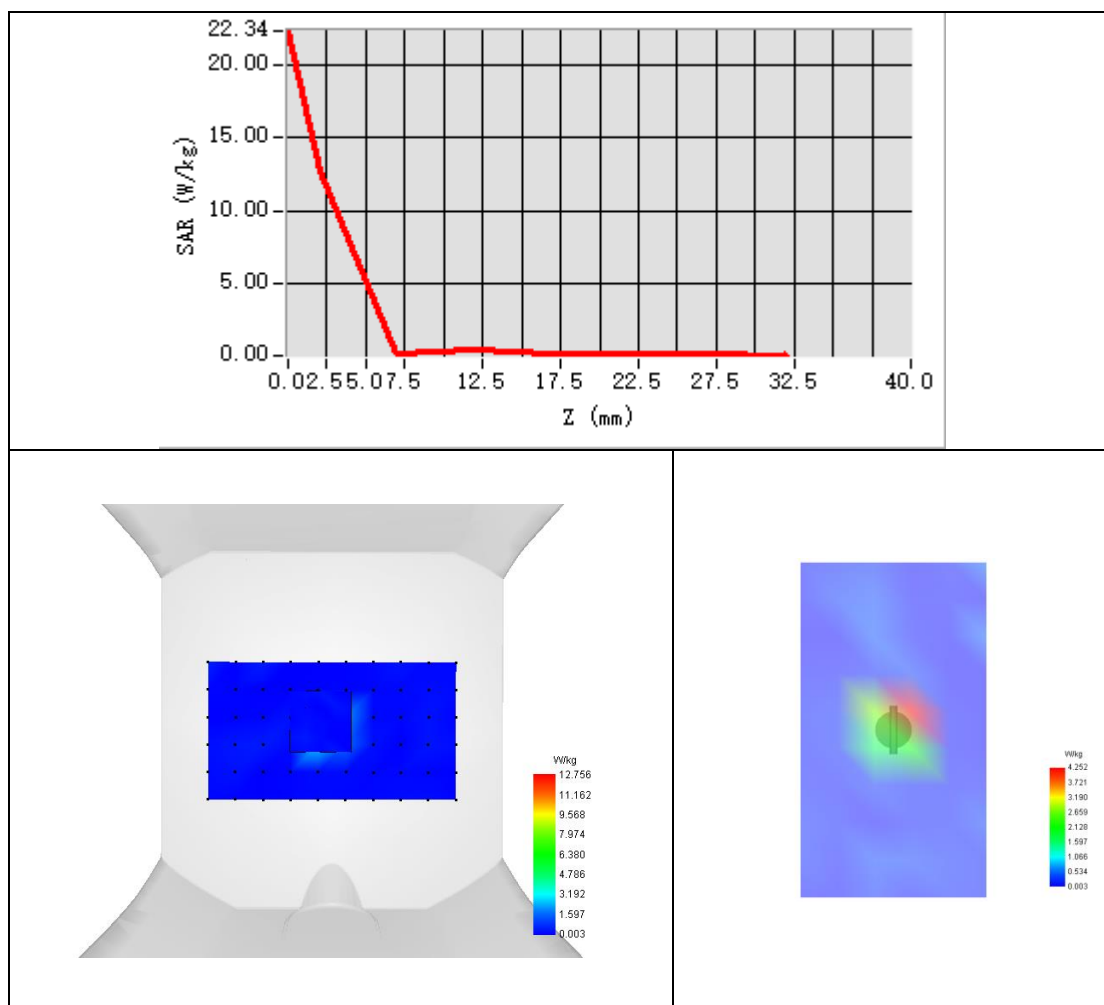



System Performance Check Data (5800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-06-09

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW
Frequency (MHz)	5800.000
Relative permittivity	35.68
Conductivity (S/m)	5.21
Probe	SN 04/22 EPG0364
ConvF	1.73
Crest factor:	1:1

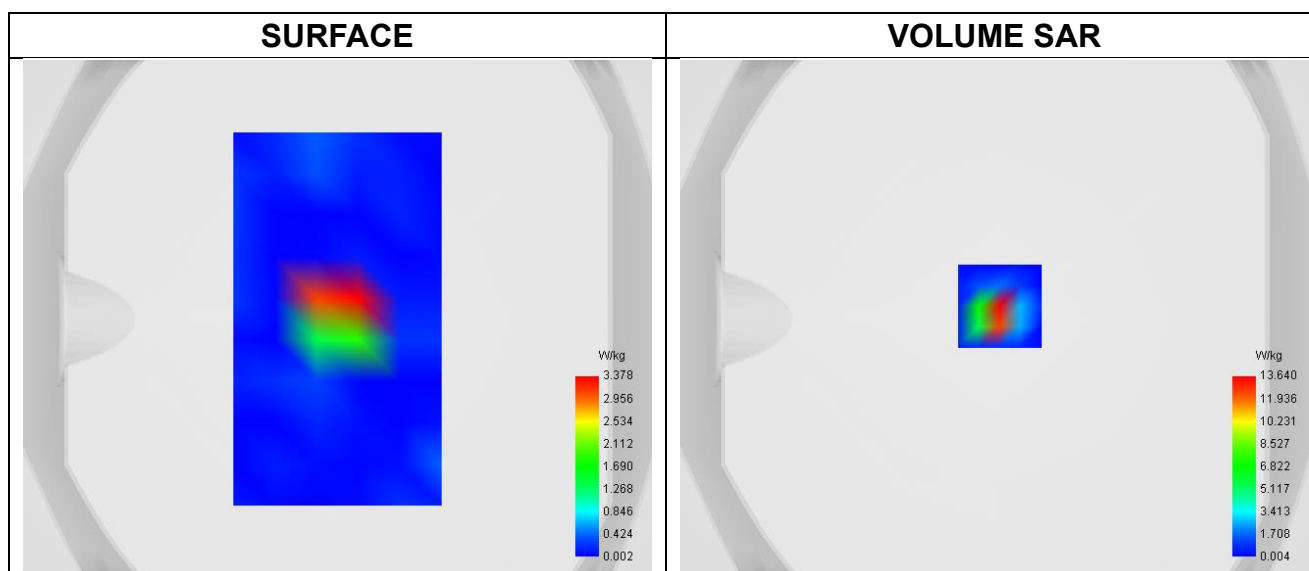


Maximum location: X=2.00, Y=5.00 ; SAR Peak: 27.22 W/kg

SAR 10g (W/Kg)	2.099
SAR 1g (W/Kg)	7.489



Z Axis Scan

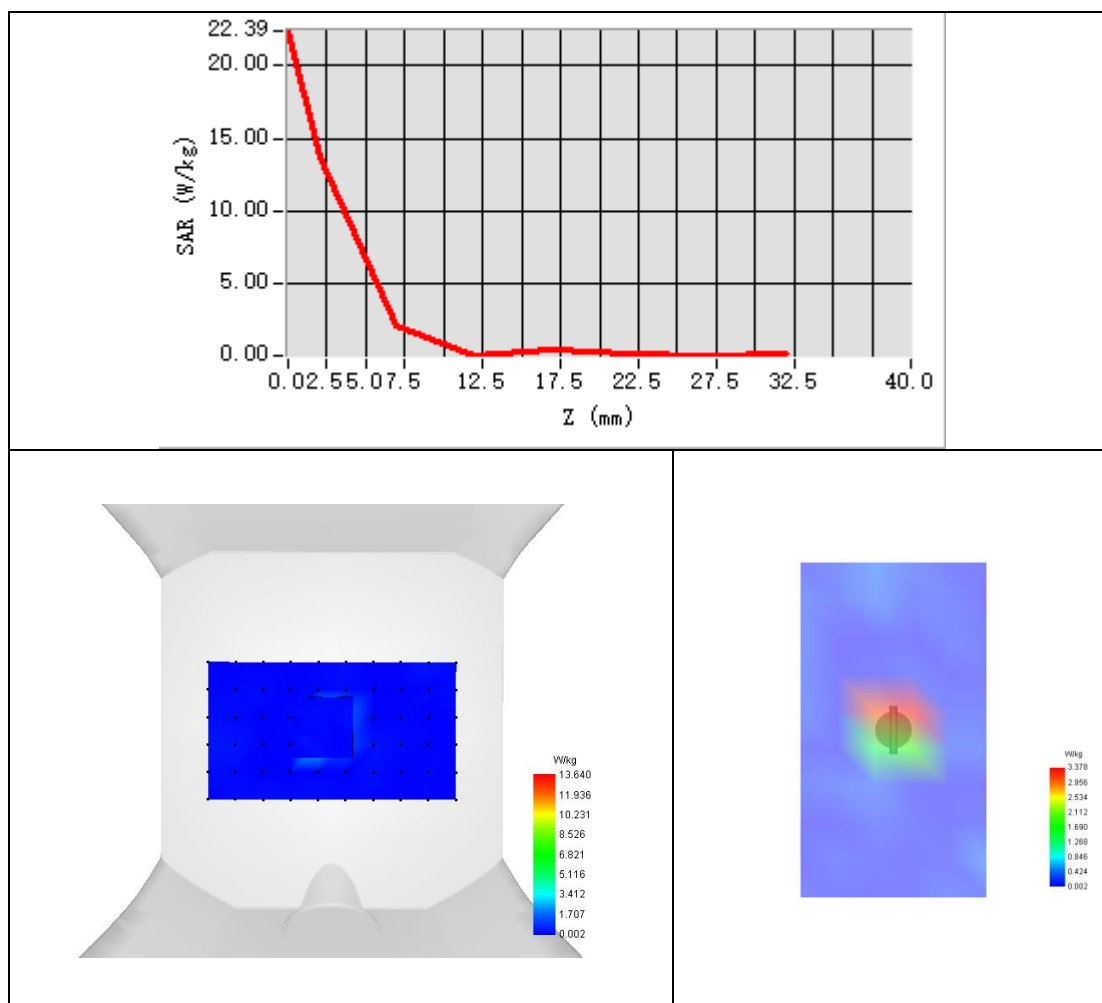




Appendix B. SAR Test Plots

Plot 1:

Test Date	2023-05-13
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	GSM850
Signal	TDMA (GSM)
Frequency	848.8
SAR 10g (W/Kg)	0.274
SAR 1g (W/Kg)	0.412

Maximum location: X=-47.00, Y=-25.00 ; SAR Peak: 0.62 W/kg

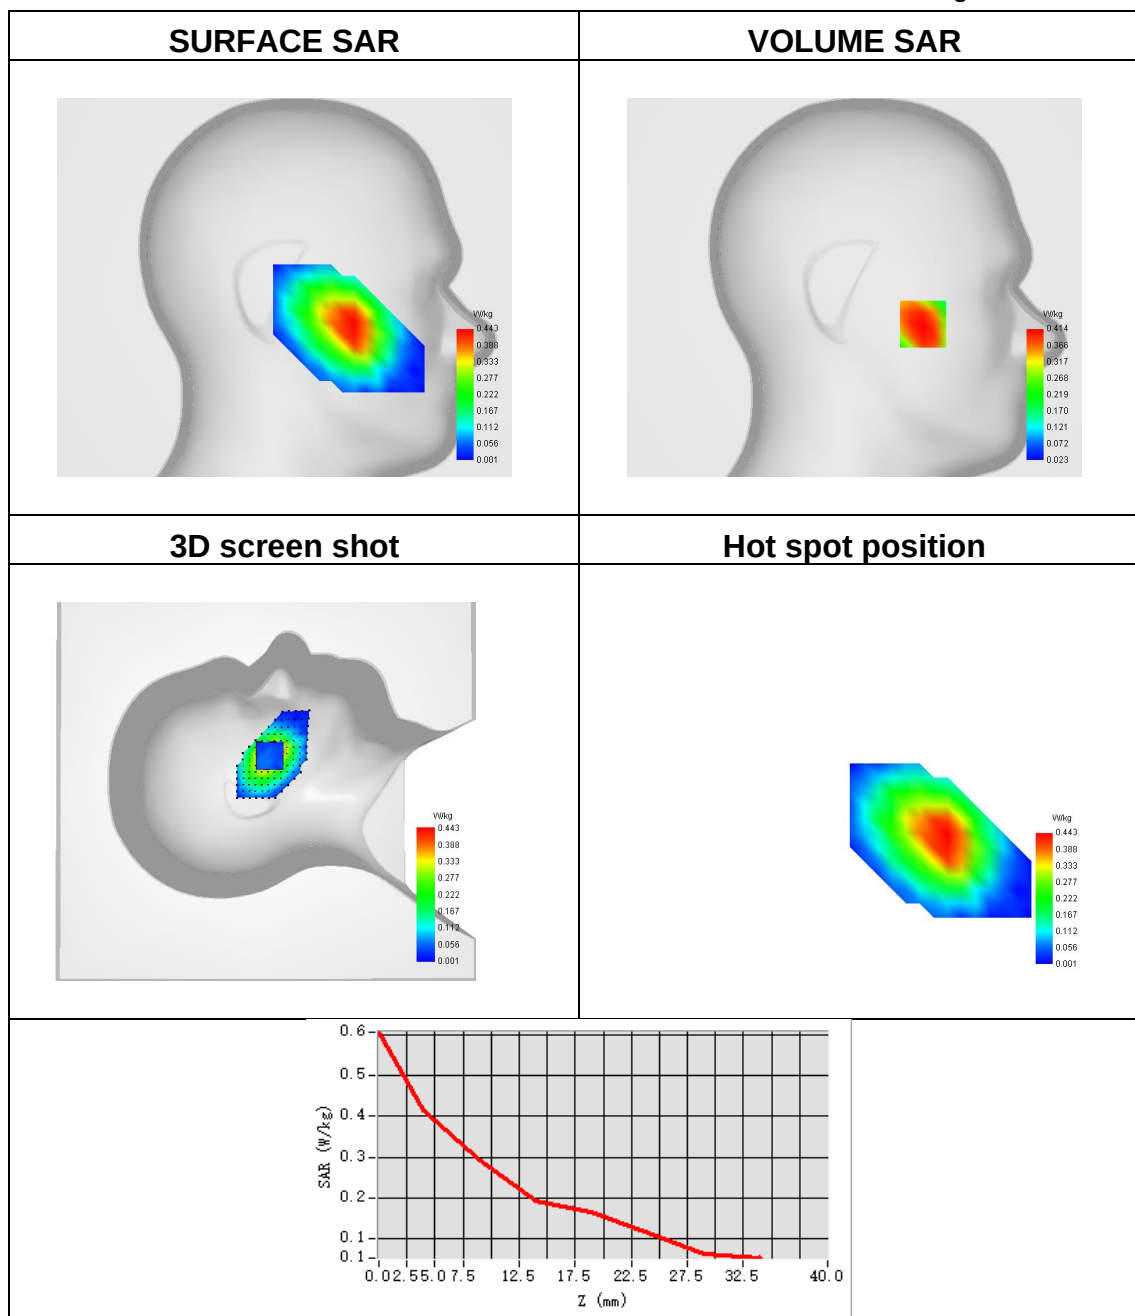




Plot 2:

Test Date	2023-05-13
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS850
Signal	TDMA (GPRS)
Frequency	848.8
SAR 10g (W/Kg)	0.541
SAR 1g (W/Kg)	0.816

Maximum location: X=1.00, Y=10.00 ; SAR Peak: 1.19 W/kg

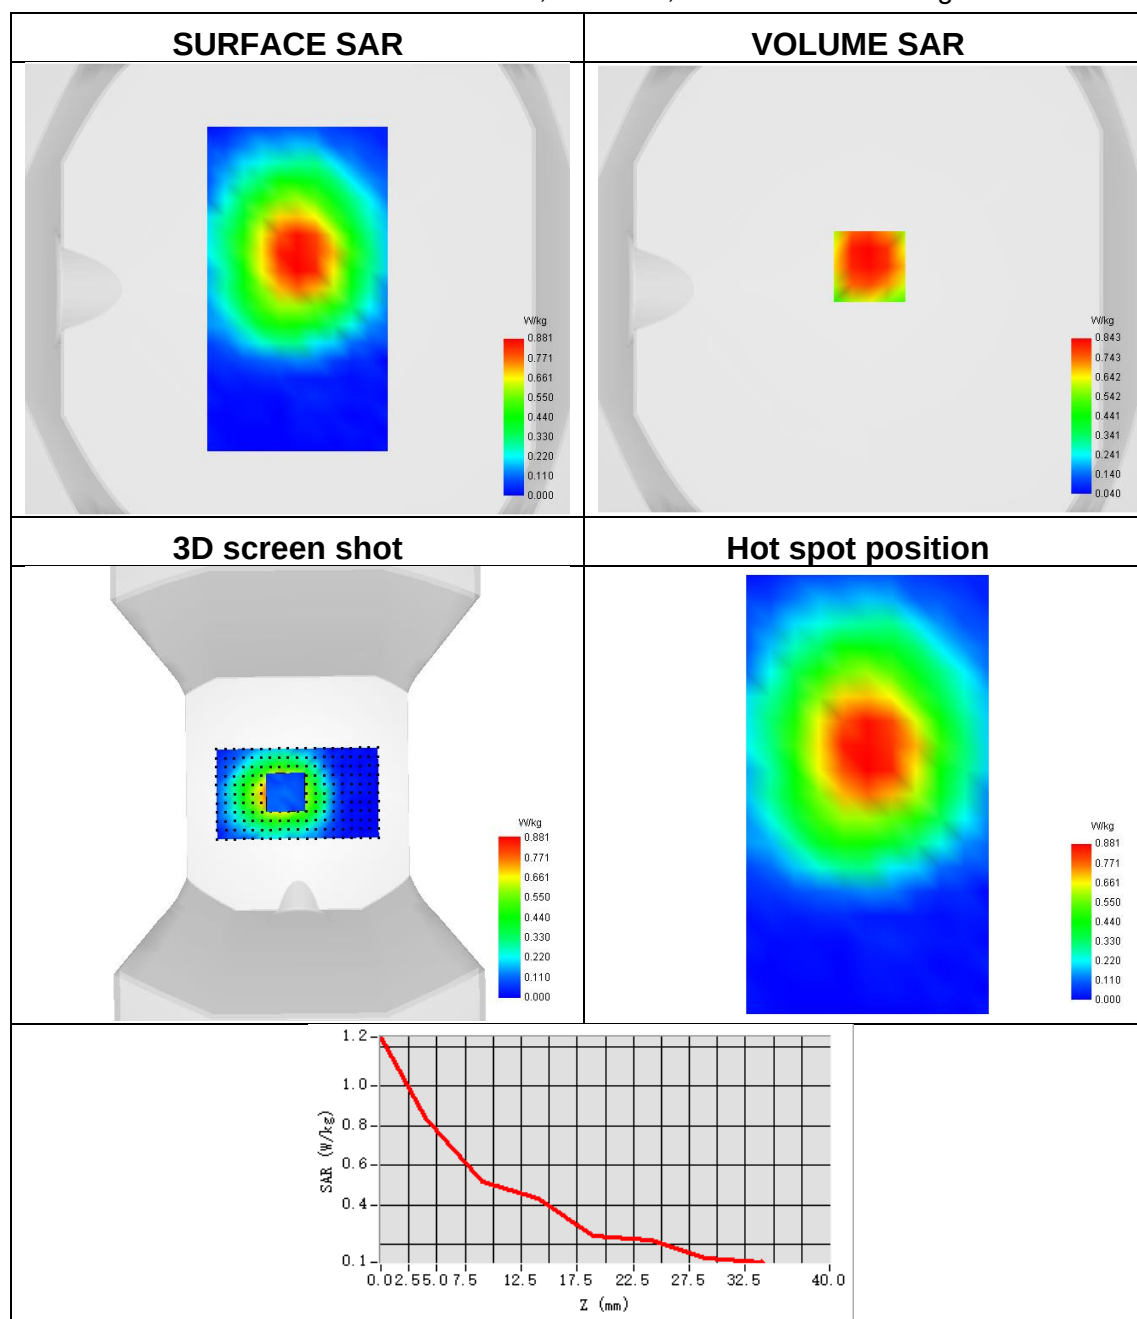




Plot 3:

Test Date	2023-05-15
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Signal	TDMA (GSM)
Frequency	1850.2
SAR 10g (W/Kg)	0.317
SAR 1g (W/Kg)	0.533

Maximum location: X=-42.00, Y=-18.00 ; SAR Peak: 0.83 W/kg

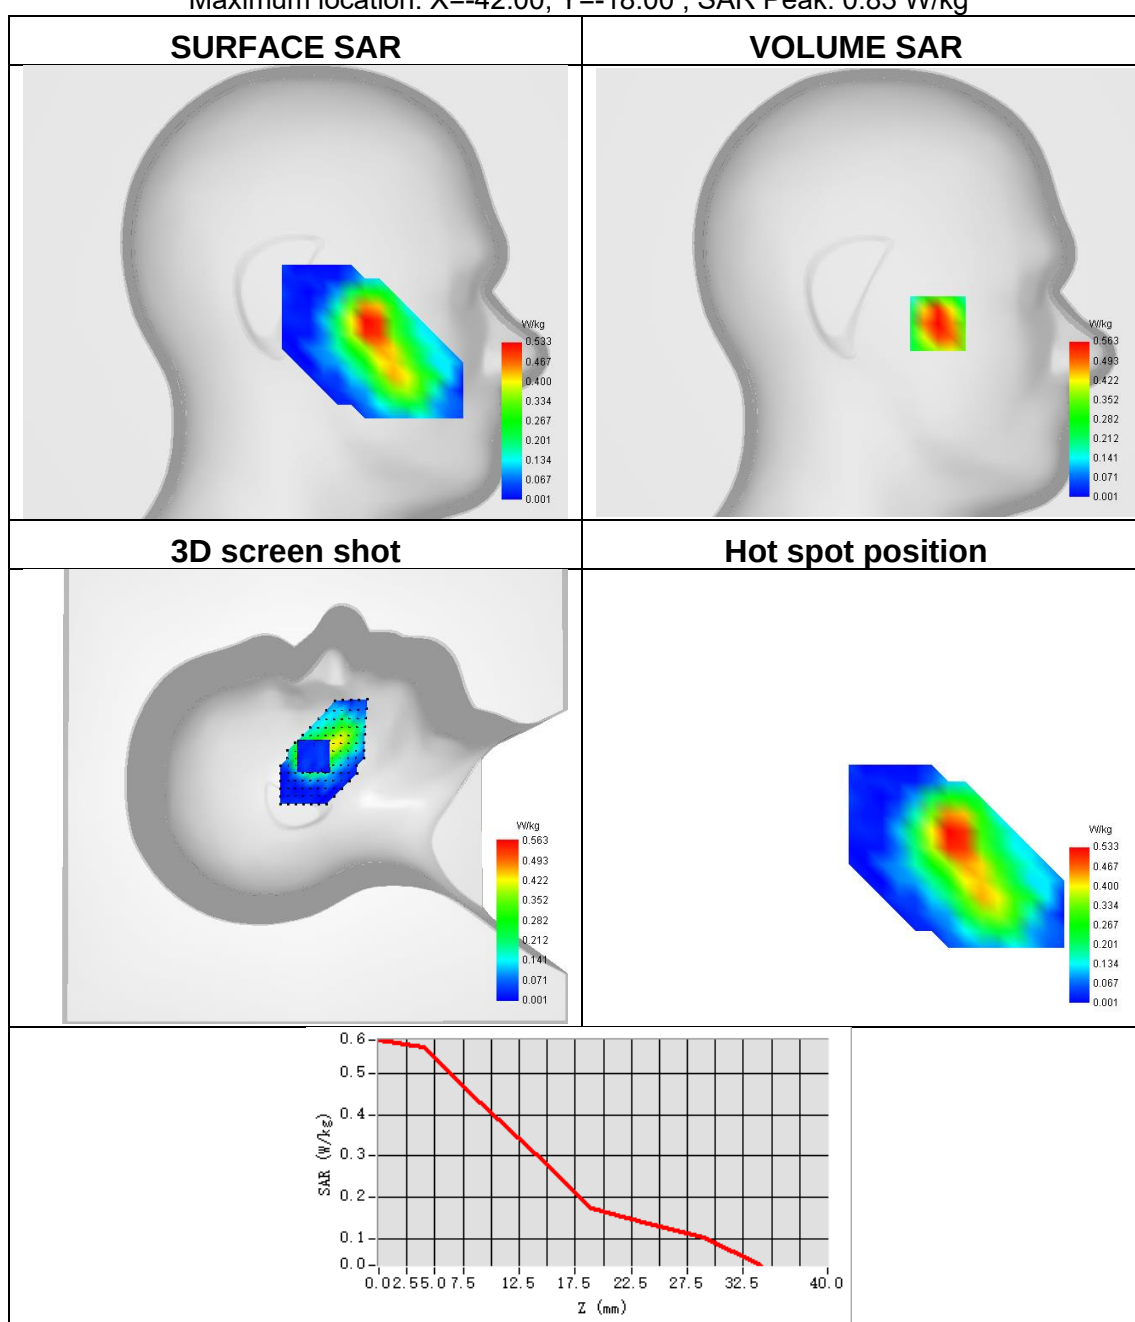




Plot 4:

Test Date	2023-05-15
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1850.2
SAR 10g (W/Kg)	0.342
SAR 1g (W/Kg)	0.646

Maximum location: X=-1.00, Y=-7.00 ; SAR Peak: 1.14 W/kg

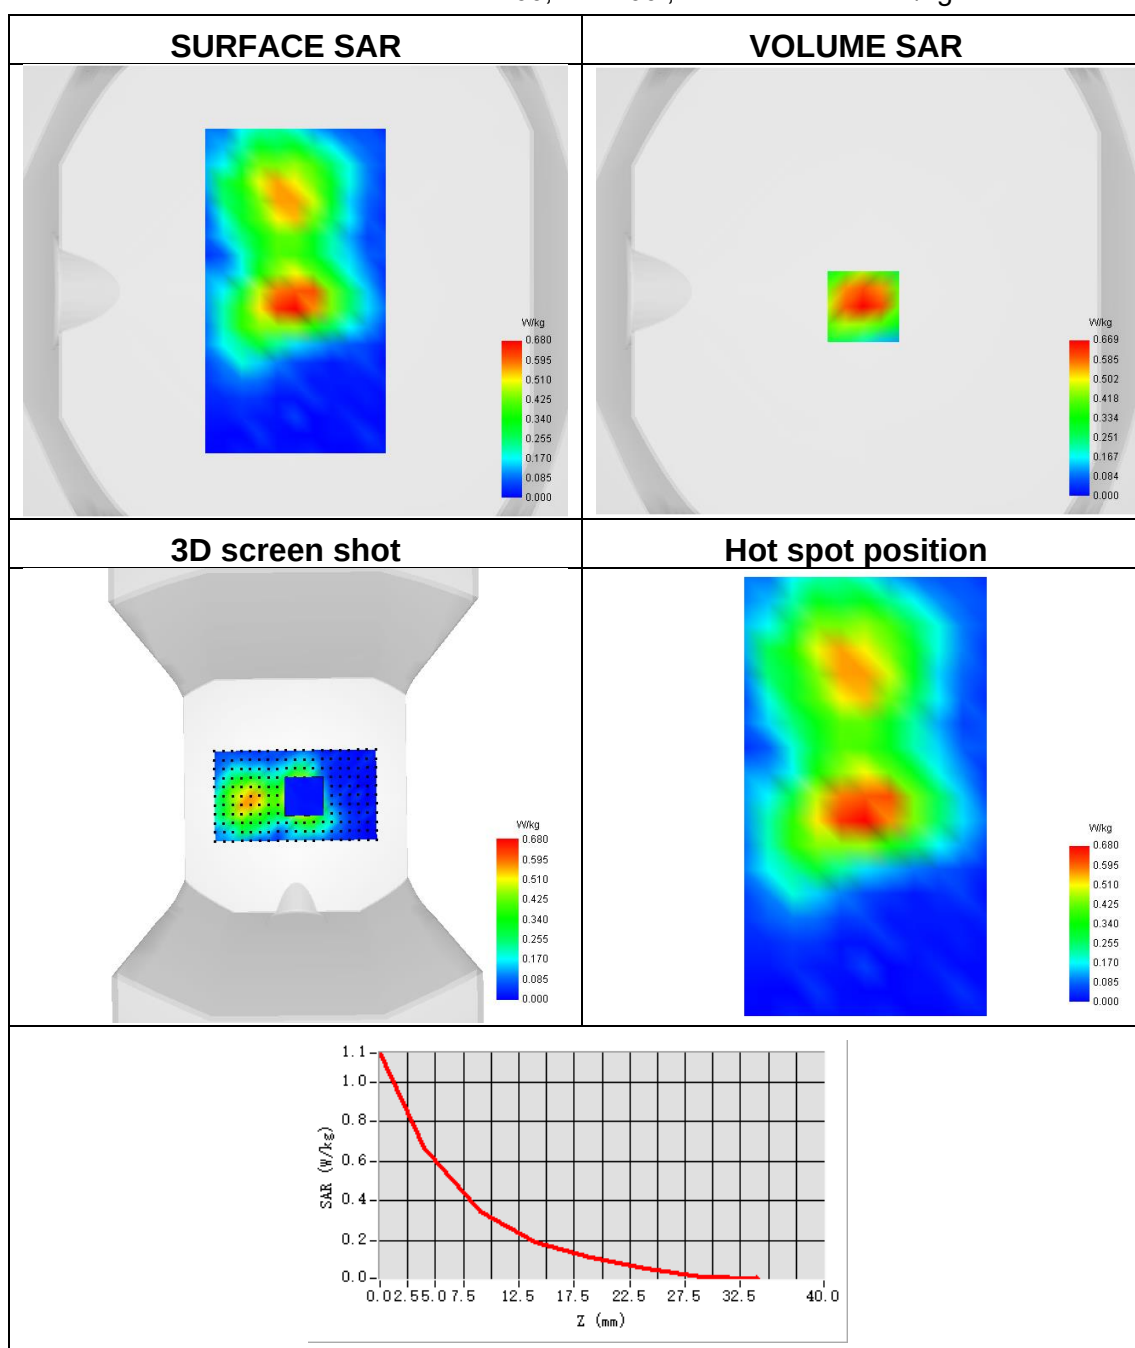




Plot 5:

Test Date	2023-05-16
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1880
SAR 10g (W/Kg)	0.468
SAR 1g (W/Kg)	0.898

Maximum location: X=-54.00, Y=-42.00 ; SAR Peak: 1.44 W/kg

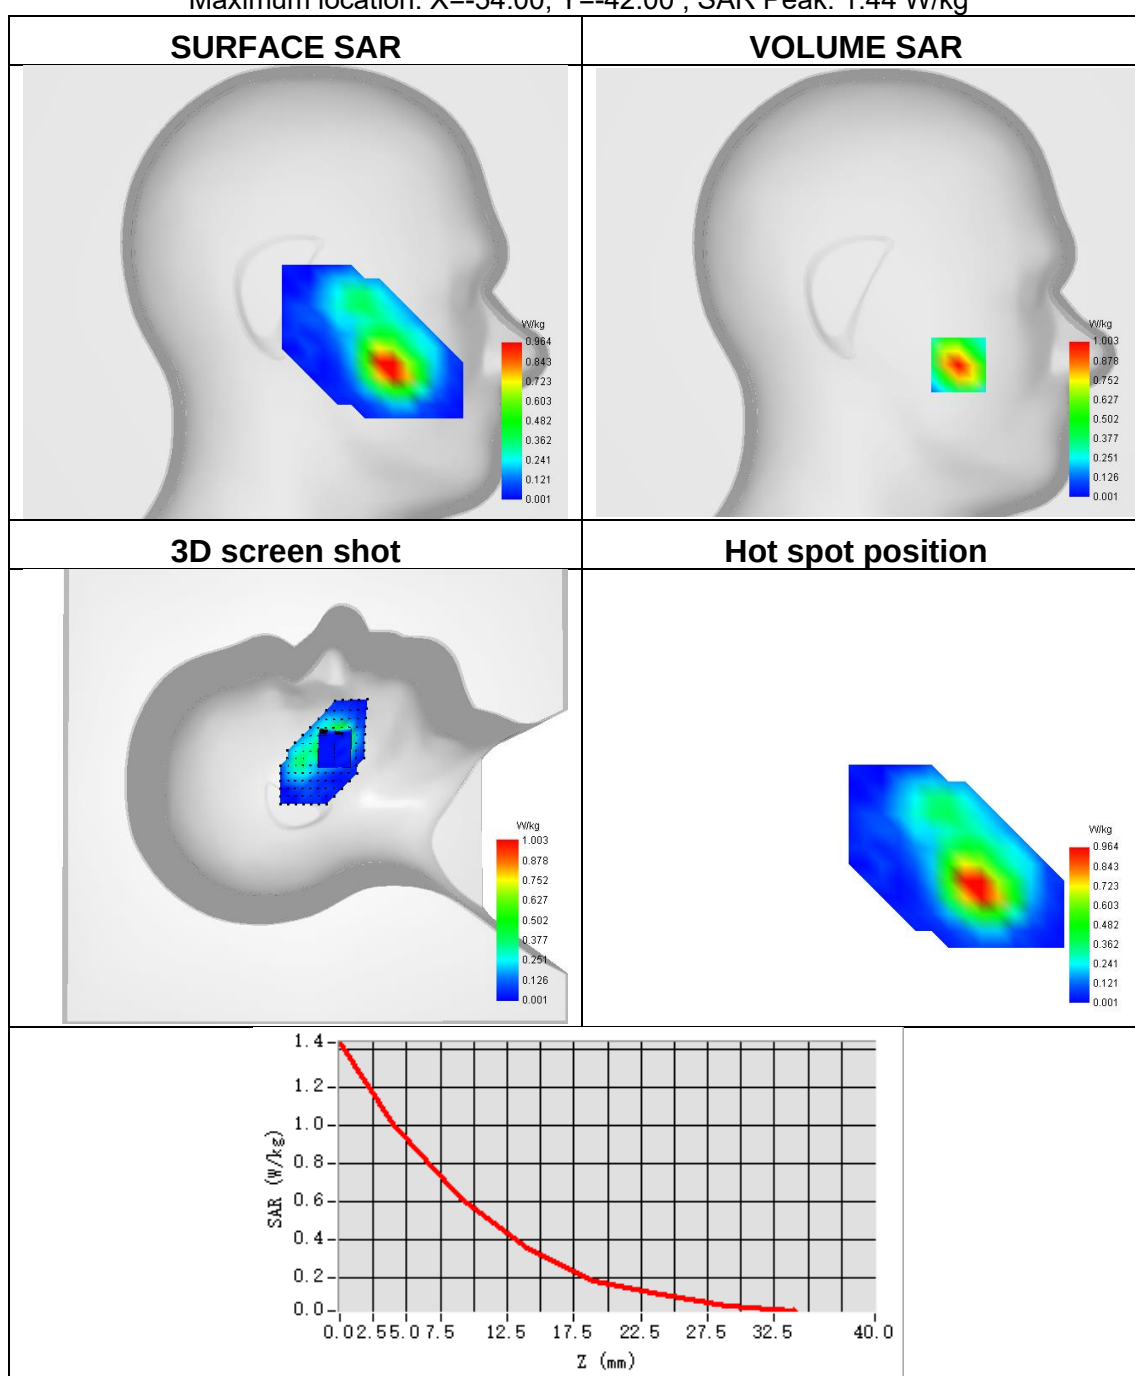




Plot 6:

Test Date	2023-05-16
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1880
SAR 10g (W/Kg)	0.337
SAR 1g (W/Kg)	0.584

Maximum location: X=-1.00, Y=49.00 ; SAR Peak: 0.97 W/kg

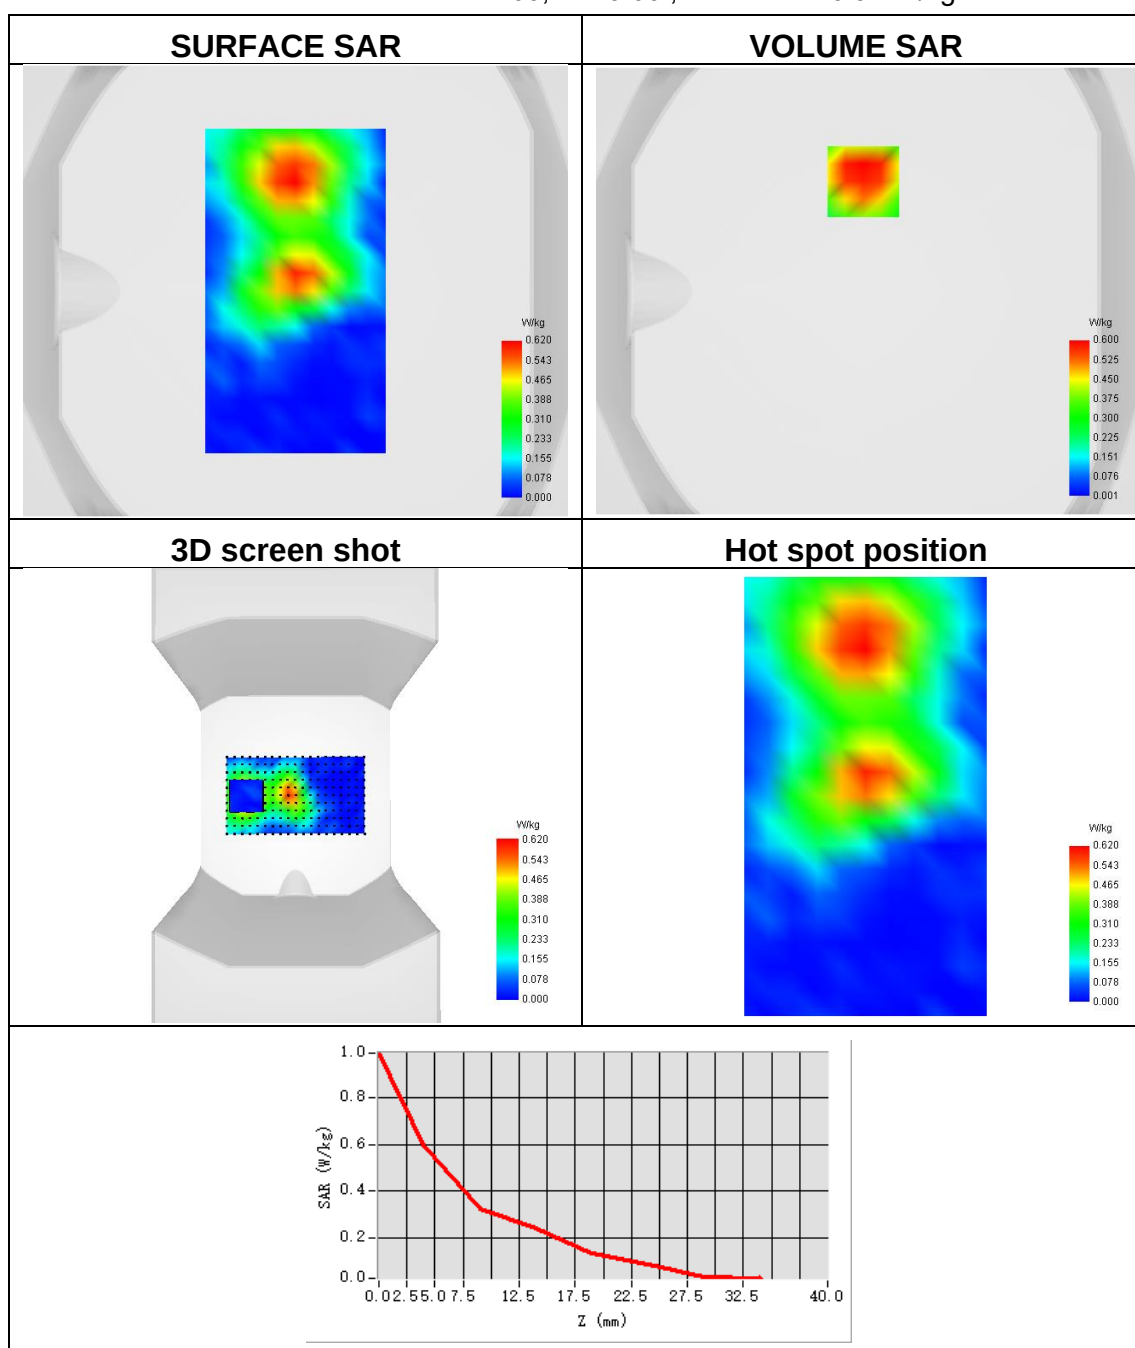




Plot 7:

Test Date	2023-05-14
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1740
SAR 10g (W/Kg)	0.311
SAR 1g (W/Kg)	0.565

Maximum location: X=-63.00, Y=-20.00 ; SAR Peak: 0.89 W/kg

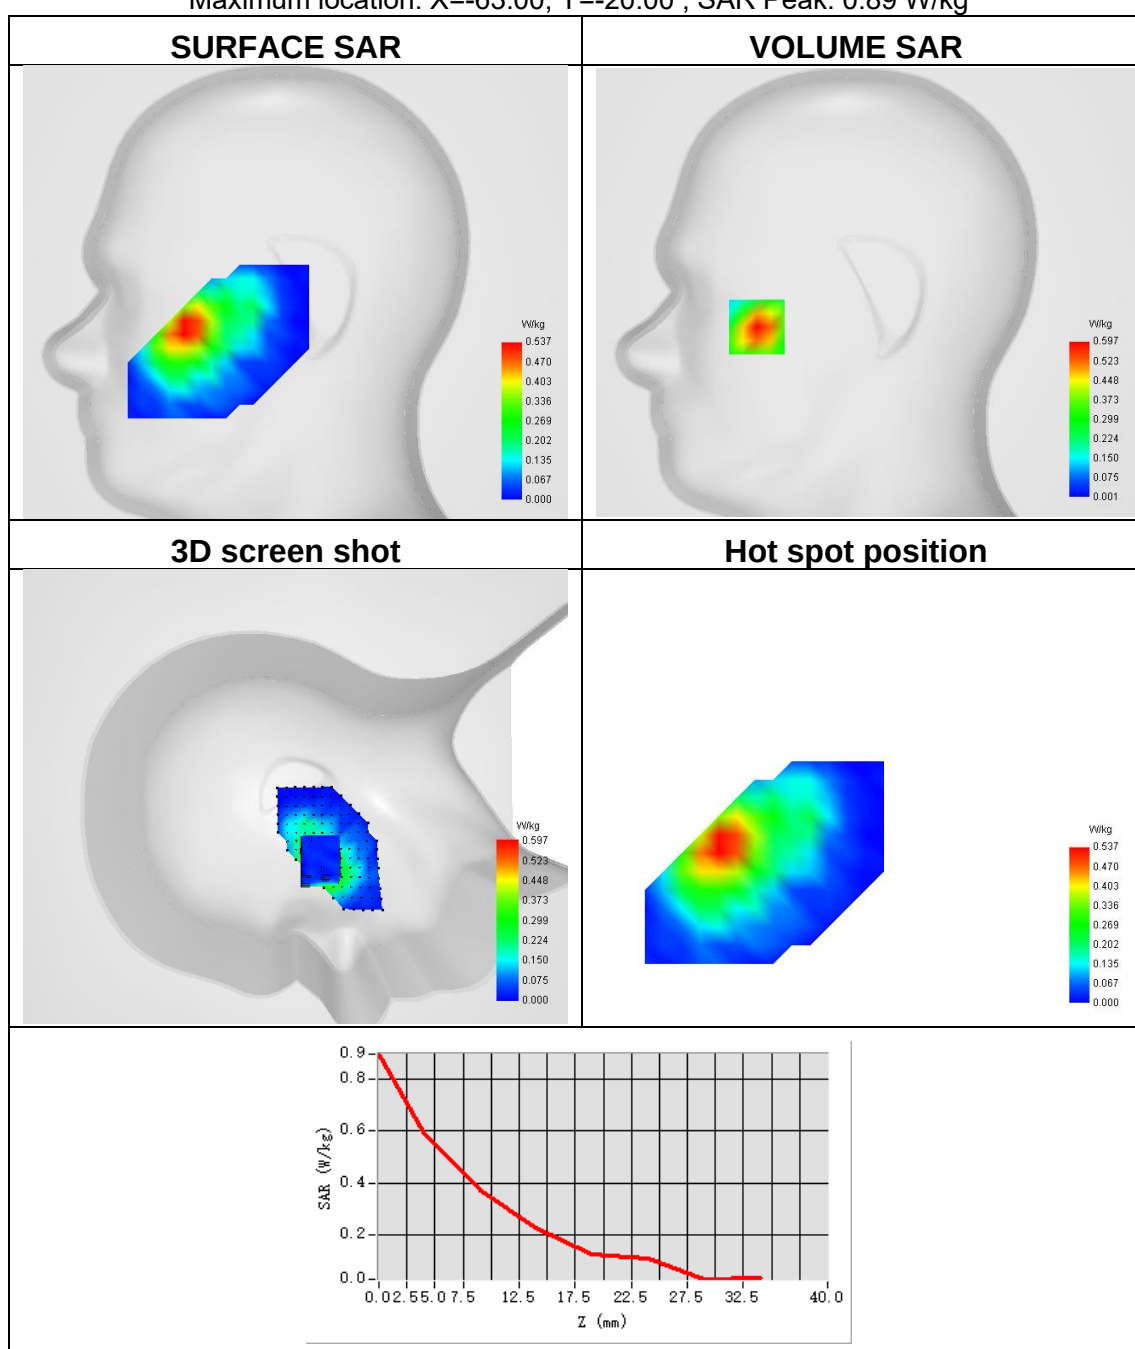




Plot 8:

Test Date	2023-05-14
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1740
SAR 10g (W/Kg)	0.288
SAR 1g (W/Kg)	0.554


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 0.91 W/kg

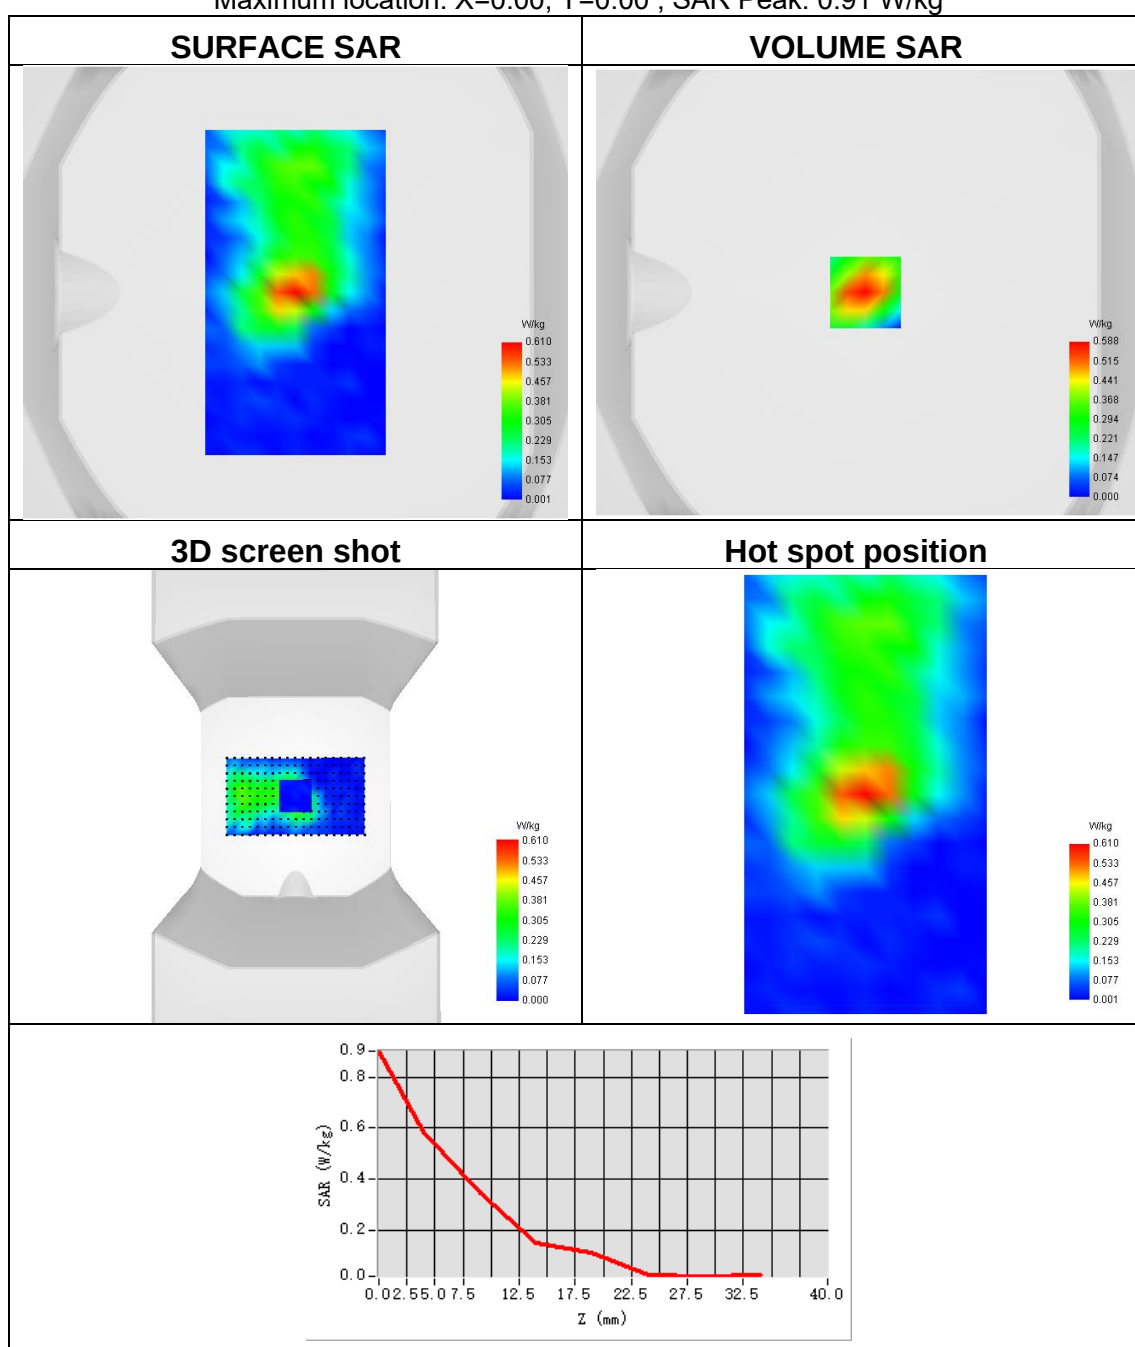

Plot 9:

Test Date	2023-05-12
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Band 5 (850)
Signal	WCDMA
Frequency	826.4
SAR 10g (W/Kg)	0.395
SAR 1g (W/Kg)	0.586

Maximum location: X=-51.00, Y=-28.00 ; SAR Peak: 0.81 W/kg

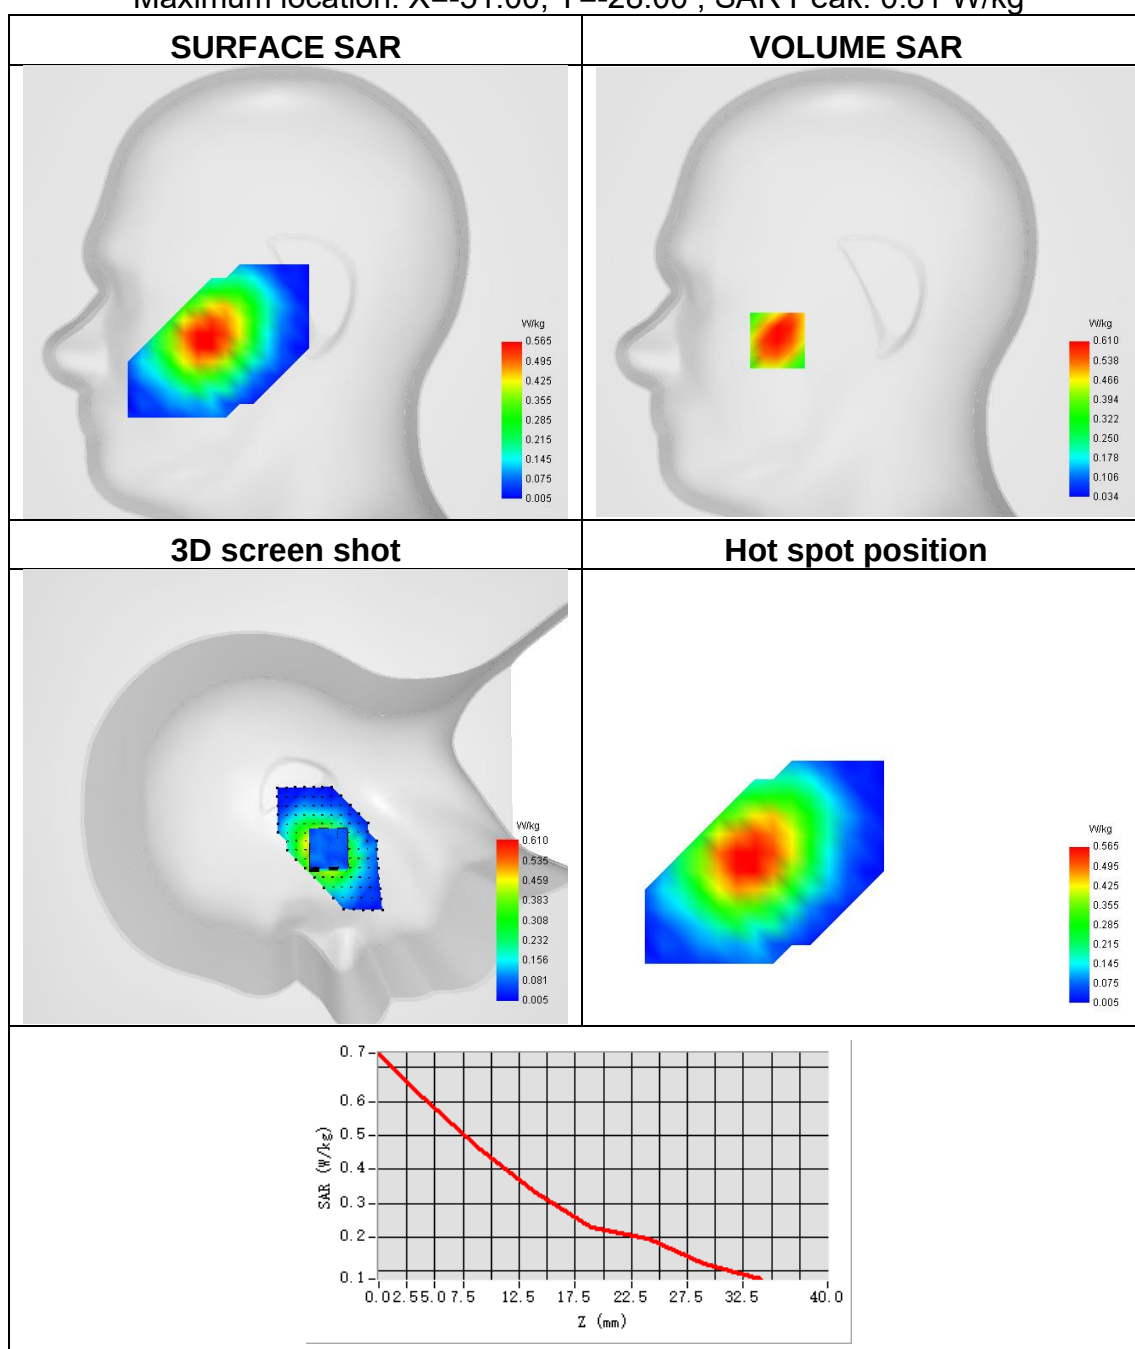




Plot 10:

Test Date	2023-05-12
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	826.4
SAR 10g (W/Kg)	0.387
SAR 1g (W/Kg)	0.600

Maximum location: X=2.00, Y=23.00 ; SAR Peak: 0.88 W/kg

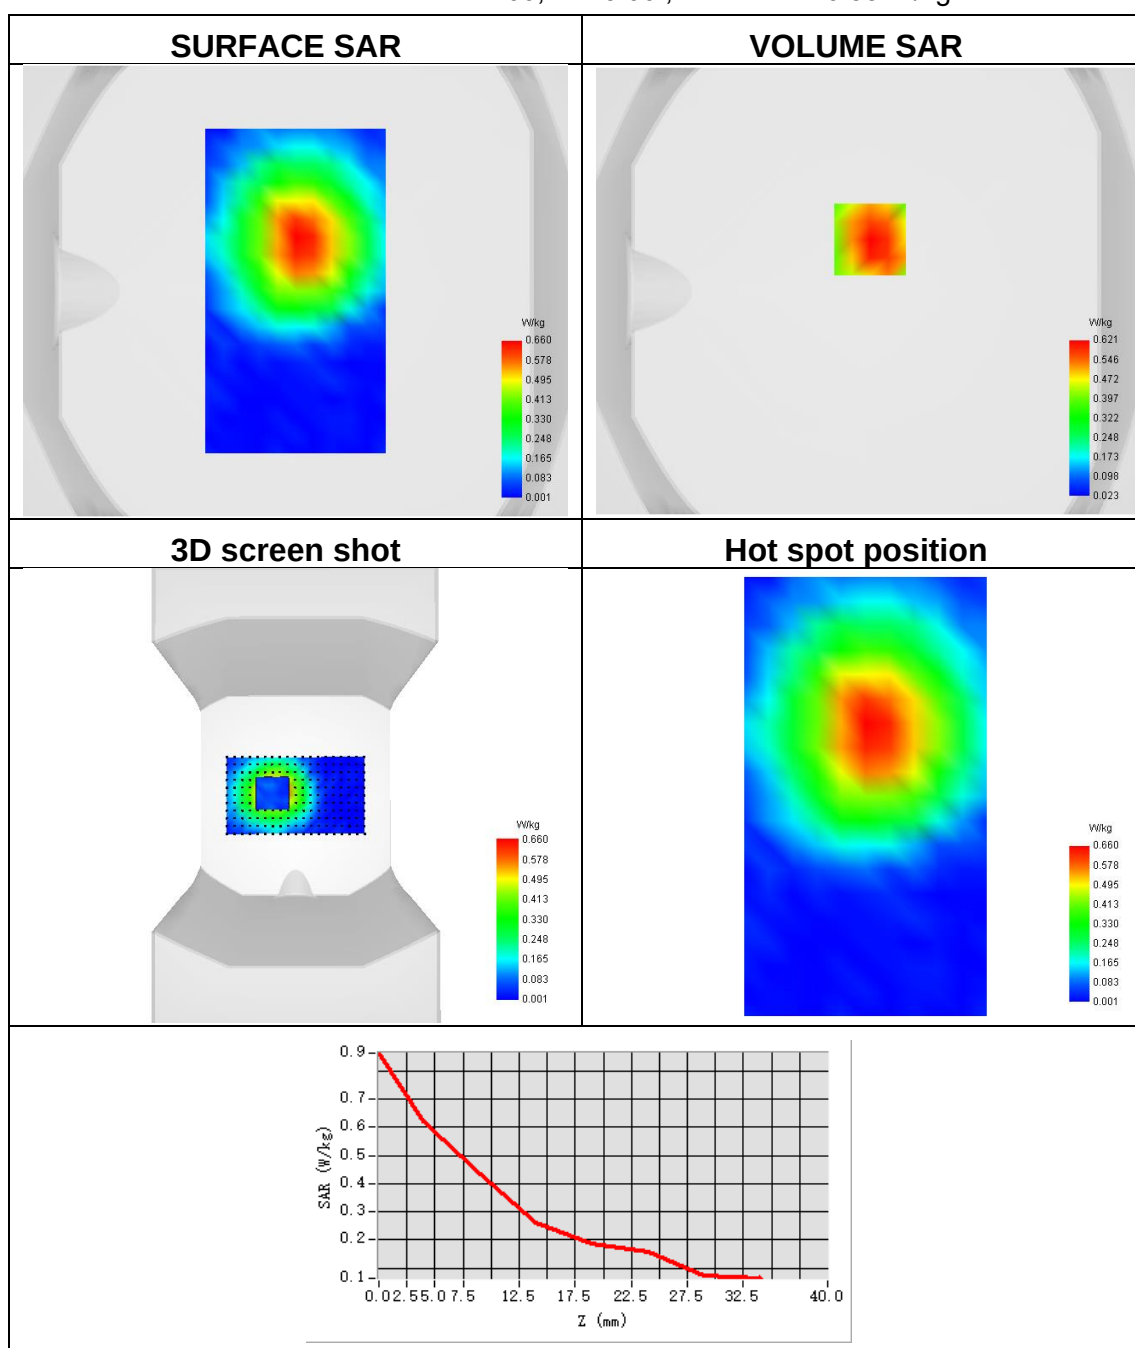




Plot 11:

Test Date	2023-05-13
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	BC0 (US Cellular)
Signal	CDMA (CDMA2000)
Frequency	836.52
SAR 10g (W/Kg)	0.030
SAR 1g (W/Kg)	0.058

Maximum location: X=-41.00, Y=-17.00 ; SAR Peak: 0.18 W/kg

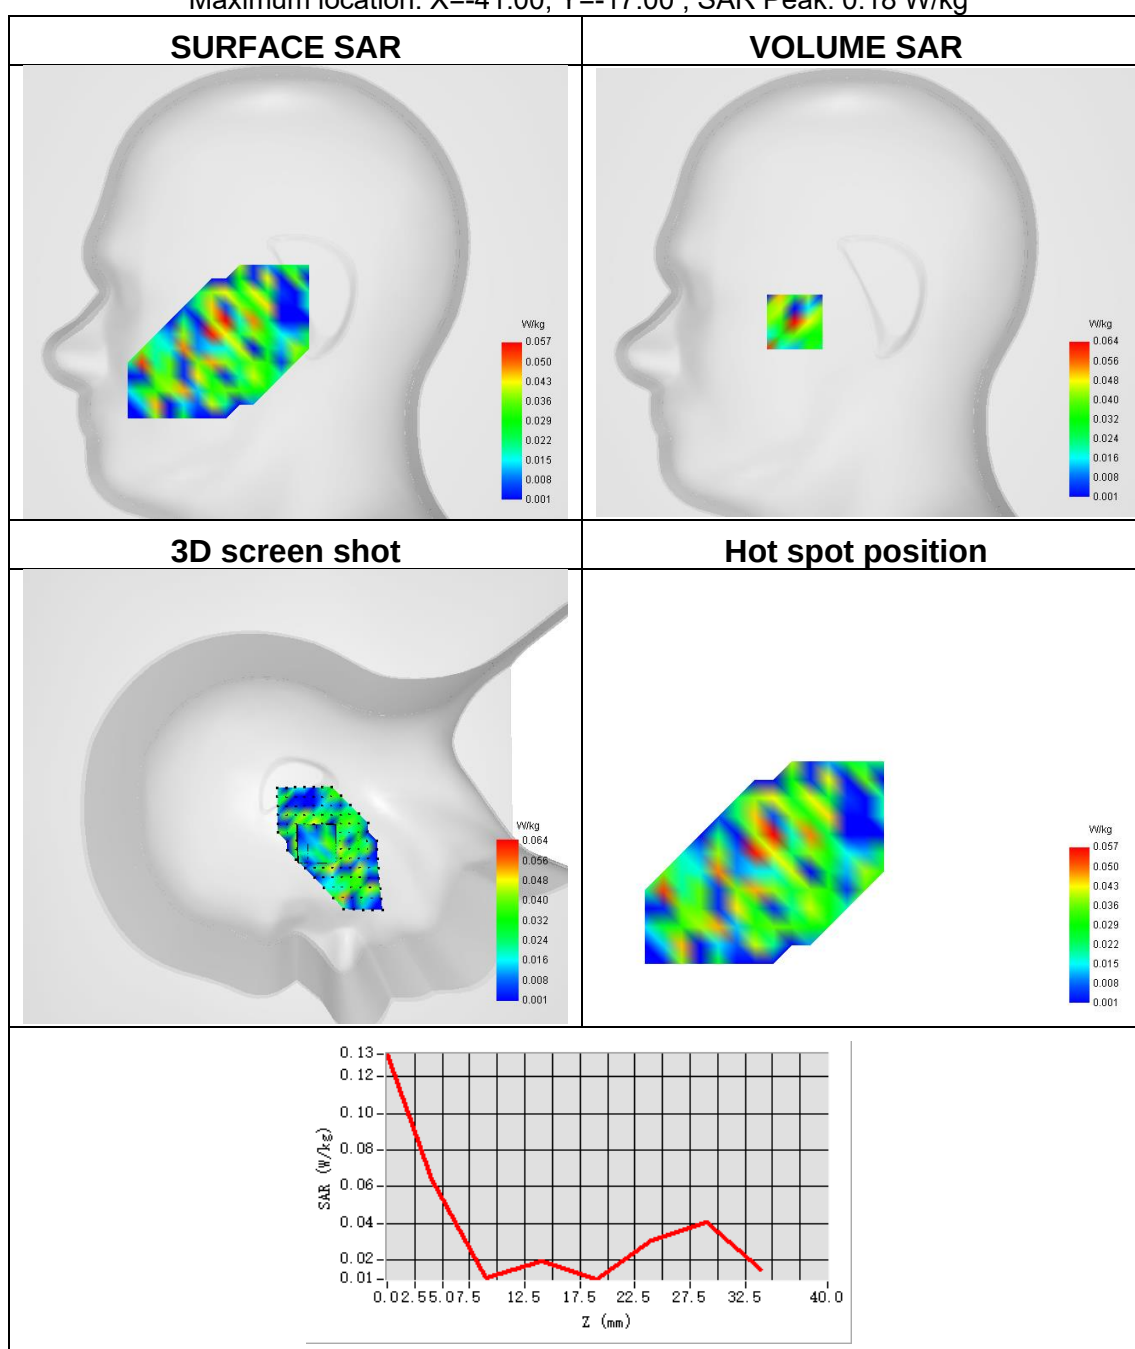




Plot 12:

Test Date	2023-05-13
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	BC0 (US Cellular)
Signal	CDMA (CDMA2000)
Frequency	836.52
SAR 10g (W/Kg)	0.035
SAR 1g (W/Kg)	0.077

Maximum location: X=0.00, Y=16.00 ; SAR Peak: 0.18 W/kg

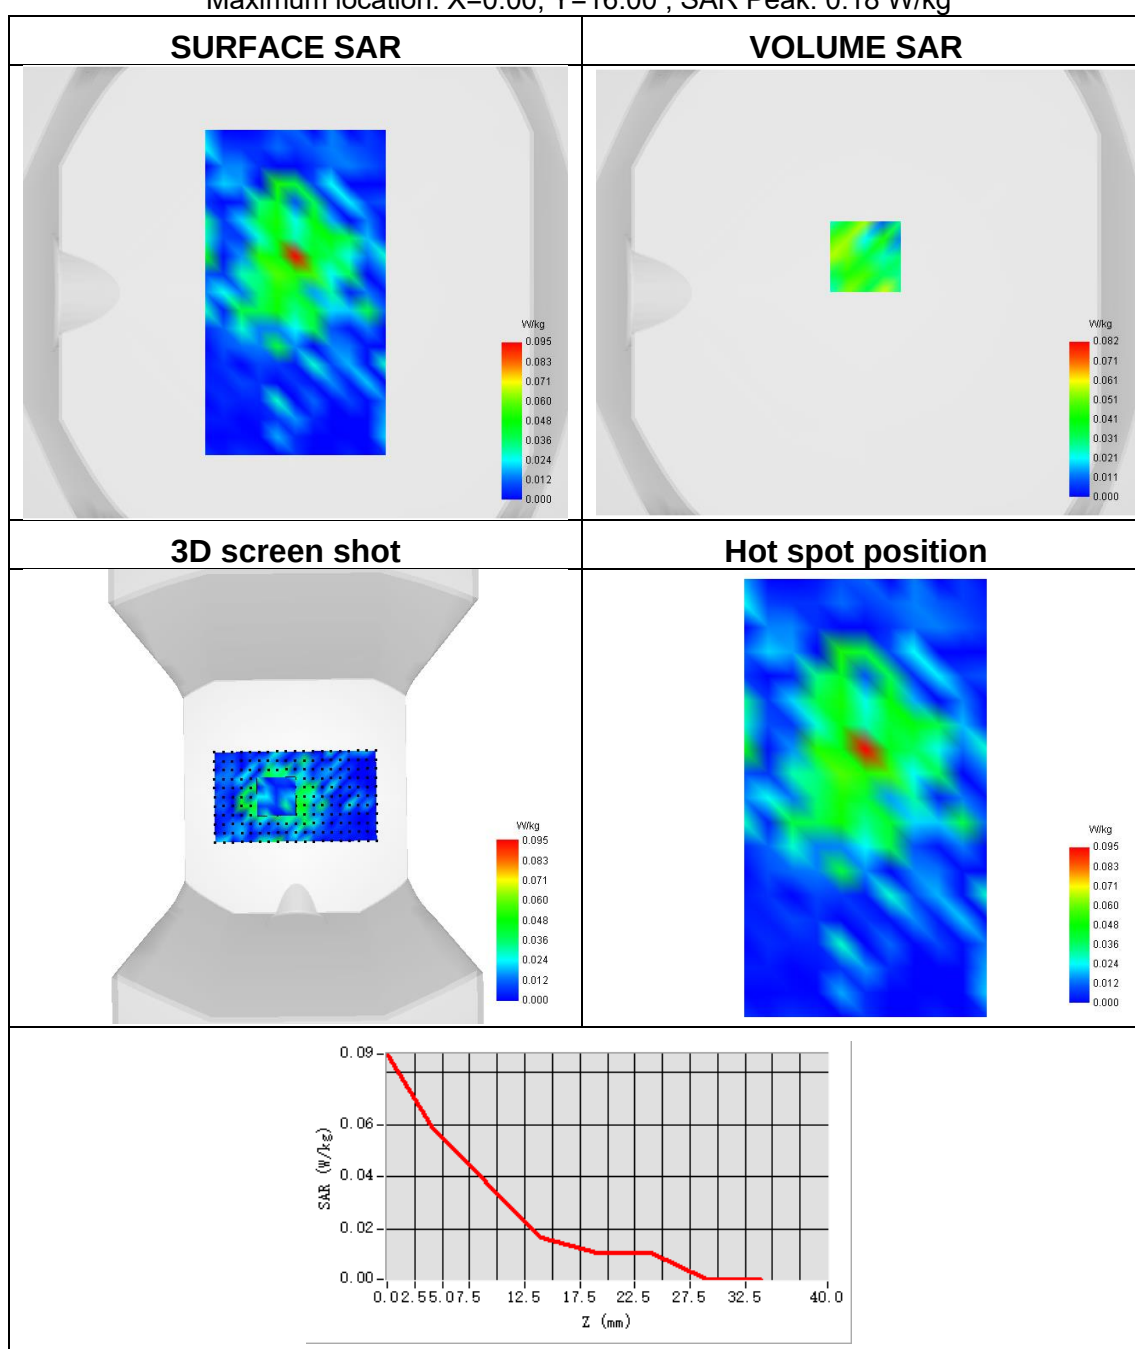




Plot 13:

Test Date	2023-05-14
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	BC1 (North American PCS)
Signal	CDMA (CDMA2000)
Frequency	1851.25
SAR 10g (W/Kg)	0.015
SAR 1g (W/Kg)	0.035

Maximum location: X=-24.00, Y=1.00 ; SAR Peak: 0.12 W/kg

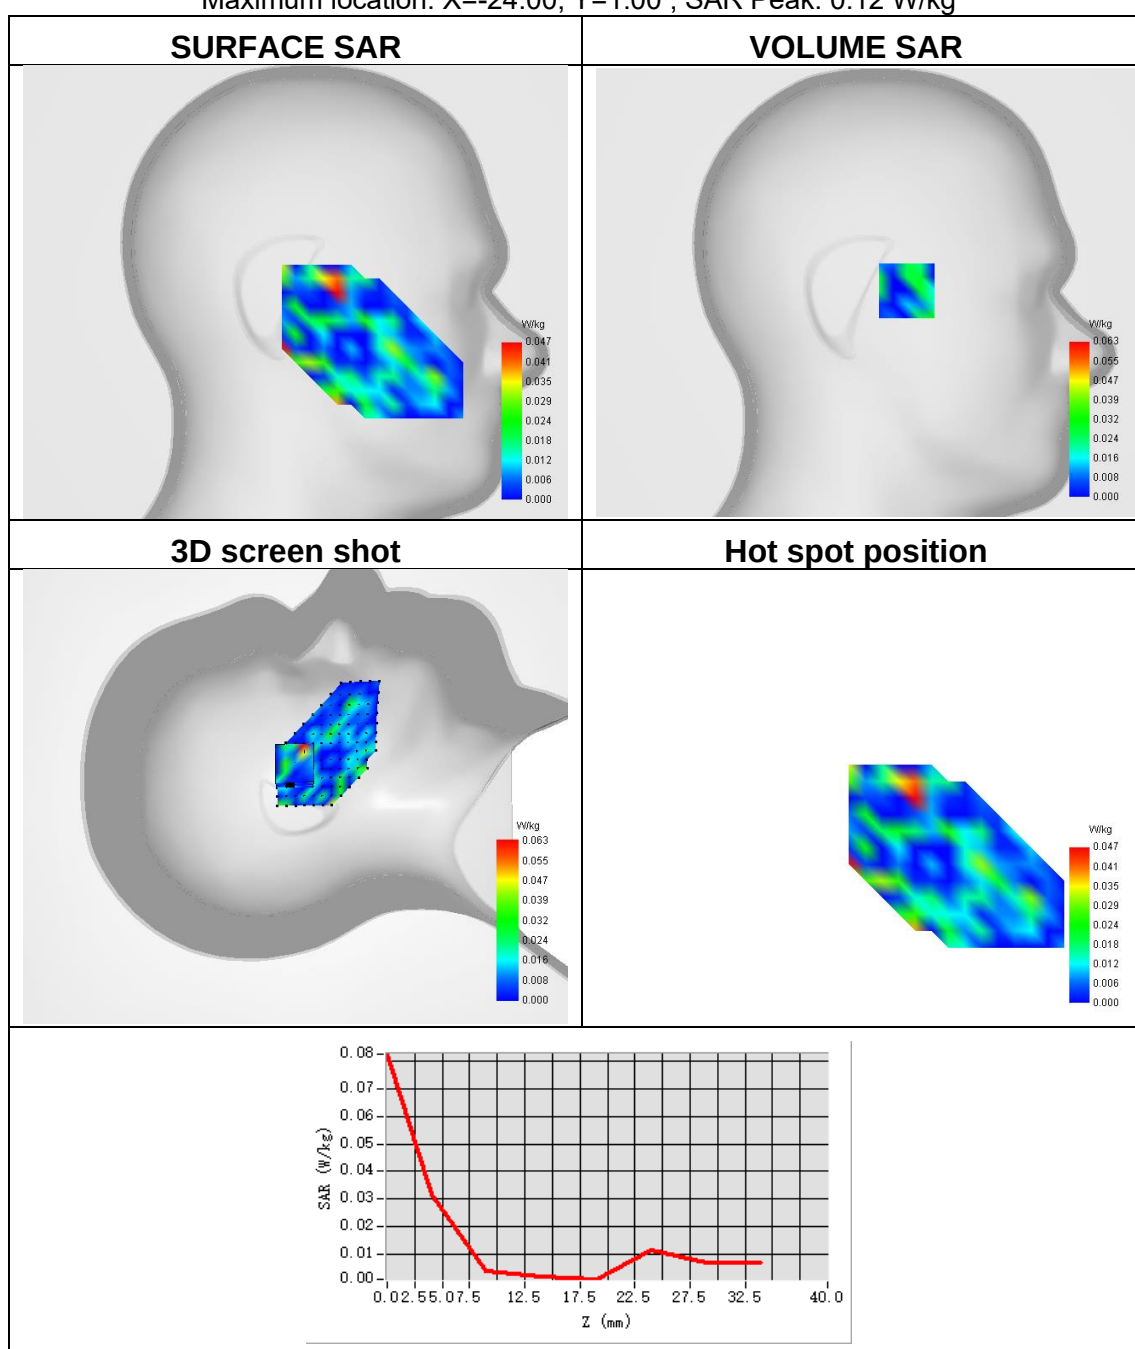




Plot 14:

Test Date	2023-05-14
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	BC1 (North American PCS)
Signal	CDMA (CDMA2000)
Frequency	1851.25
SAR 10g (W/Kg)	0.013
SAR 1g (W/Kg)	0.030

Maximum location: X=9.00, Y=48.00 ; SAR Peak: 0.10 W/kg

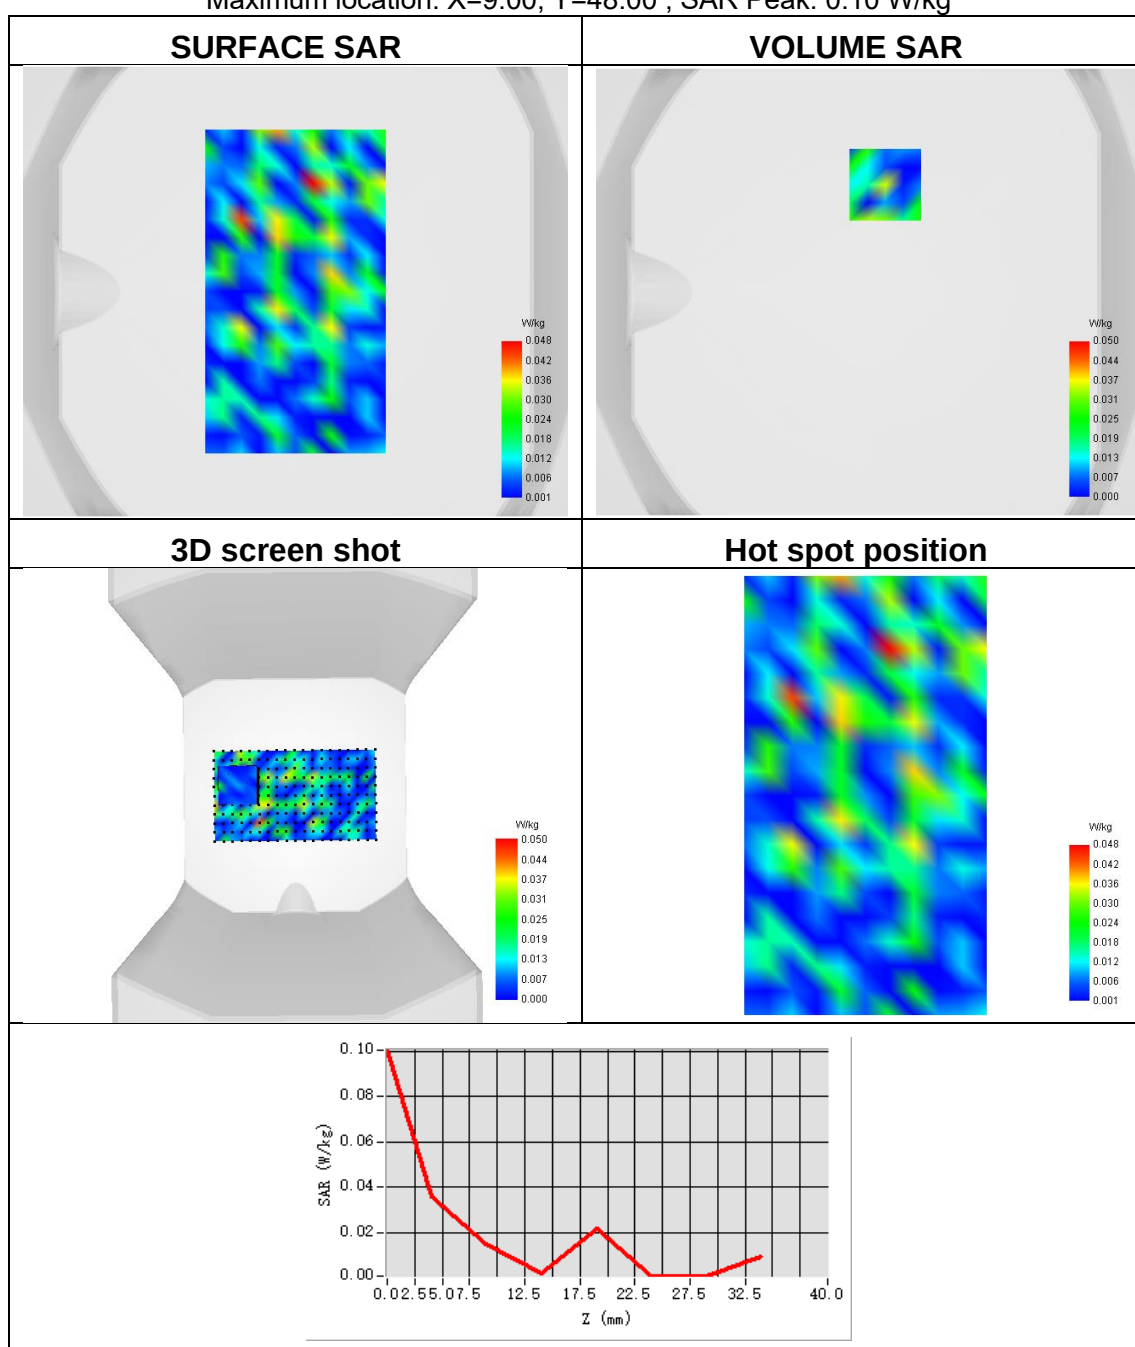




Plot 15:

Test Date	2023-05-16
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.437
SAR 1g (W/Kg)	0.852

Maximum location: X=-50.00, Y=-41.00 ; SAR Peak: 1.43 W/kg

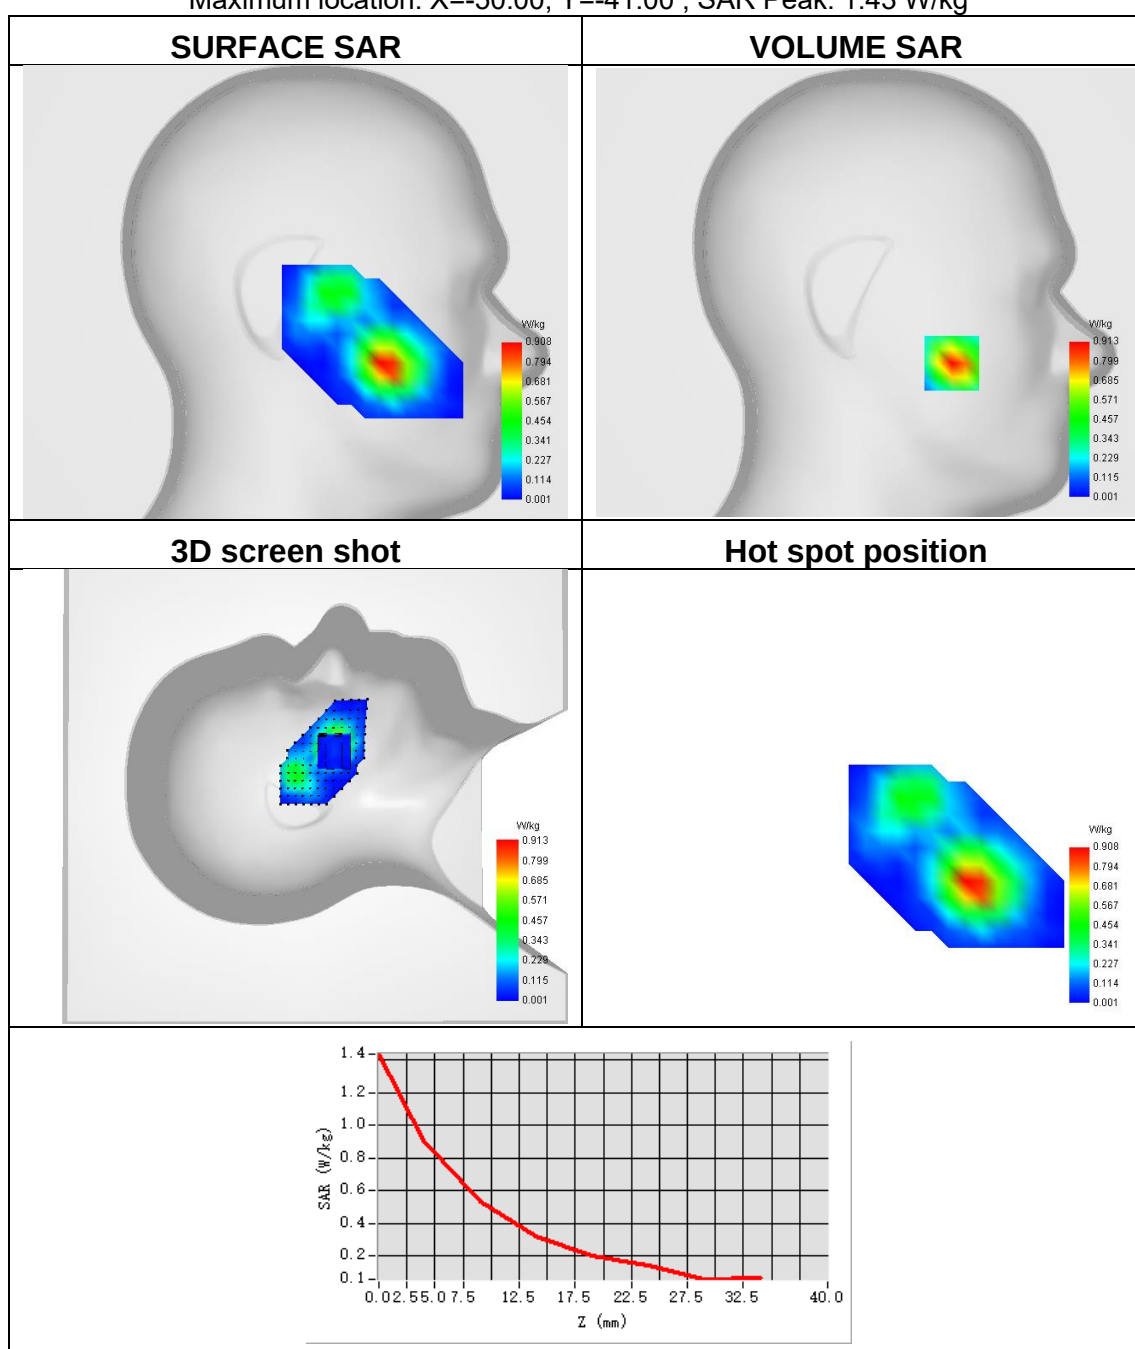




Plot 16:

Test Date	2023-05-16
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.370
SAR 1g (W/Kg)	0.644

Maximum location: X=2.00, Y=39.00 ; SAR Peak: 1.02 W/kg

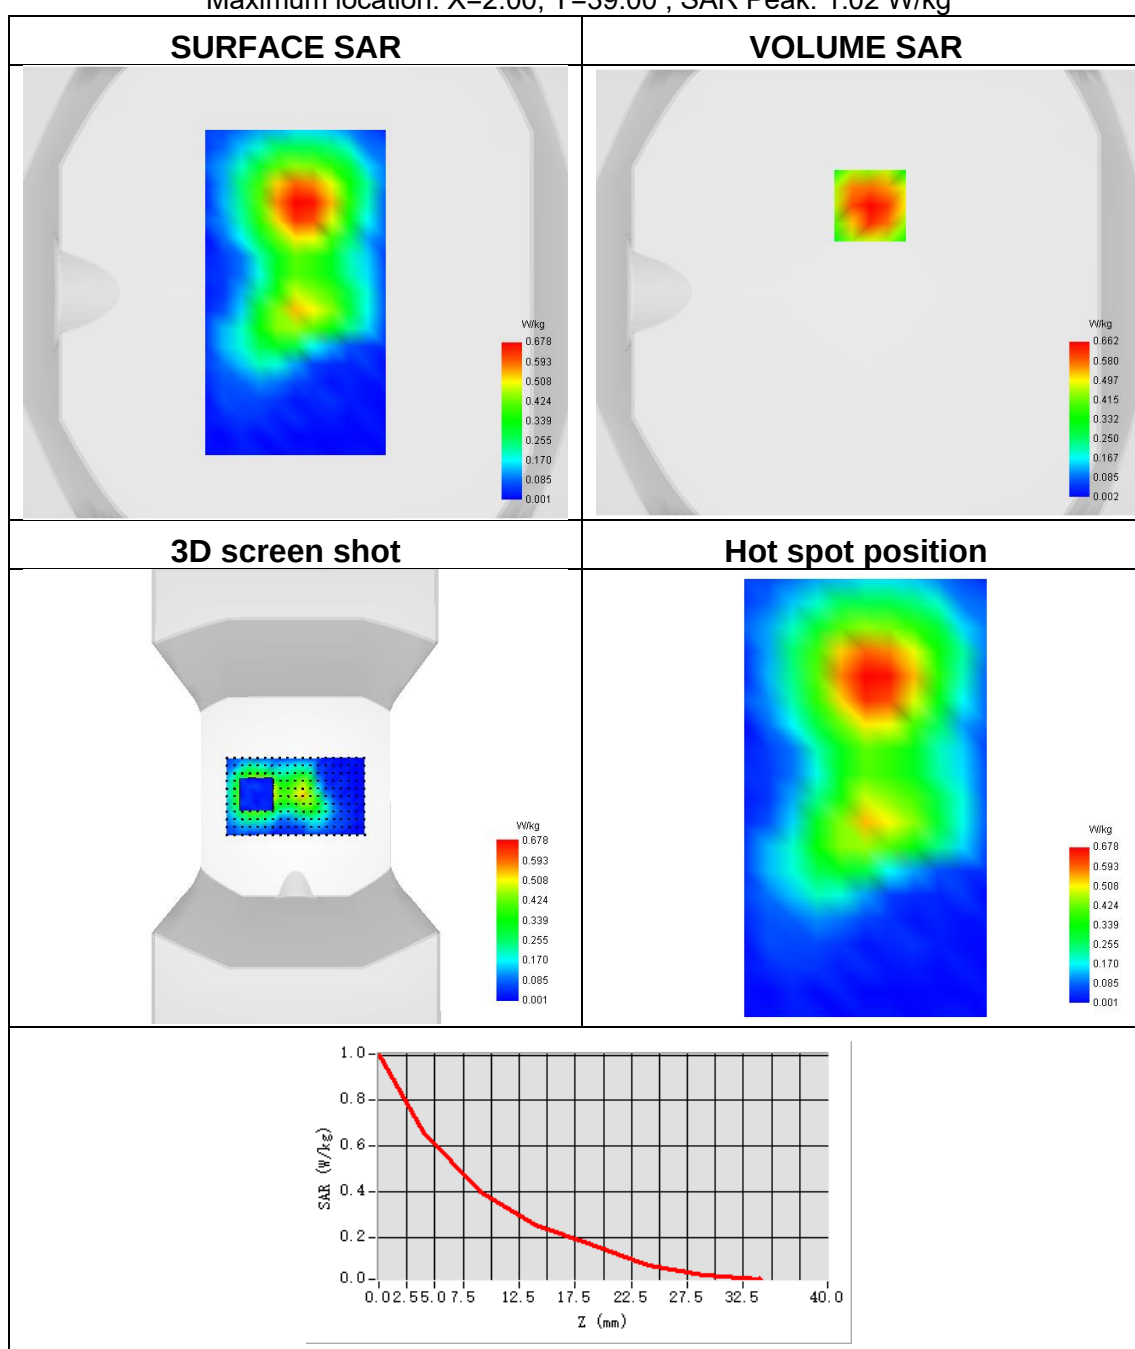




Plot 17:

Test Date	2023-05-14
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 4
Signal	LTE FDD
Frequency	1732.5
SAR 10g (W/Kg)	0.564
SAR 1g (W/Kg)	1.081

Maximum location: X=-48.00, Y=-40.00 ; SAR Peak: 1.73 W/kg

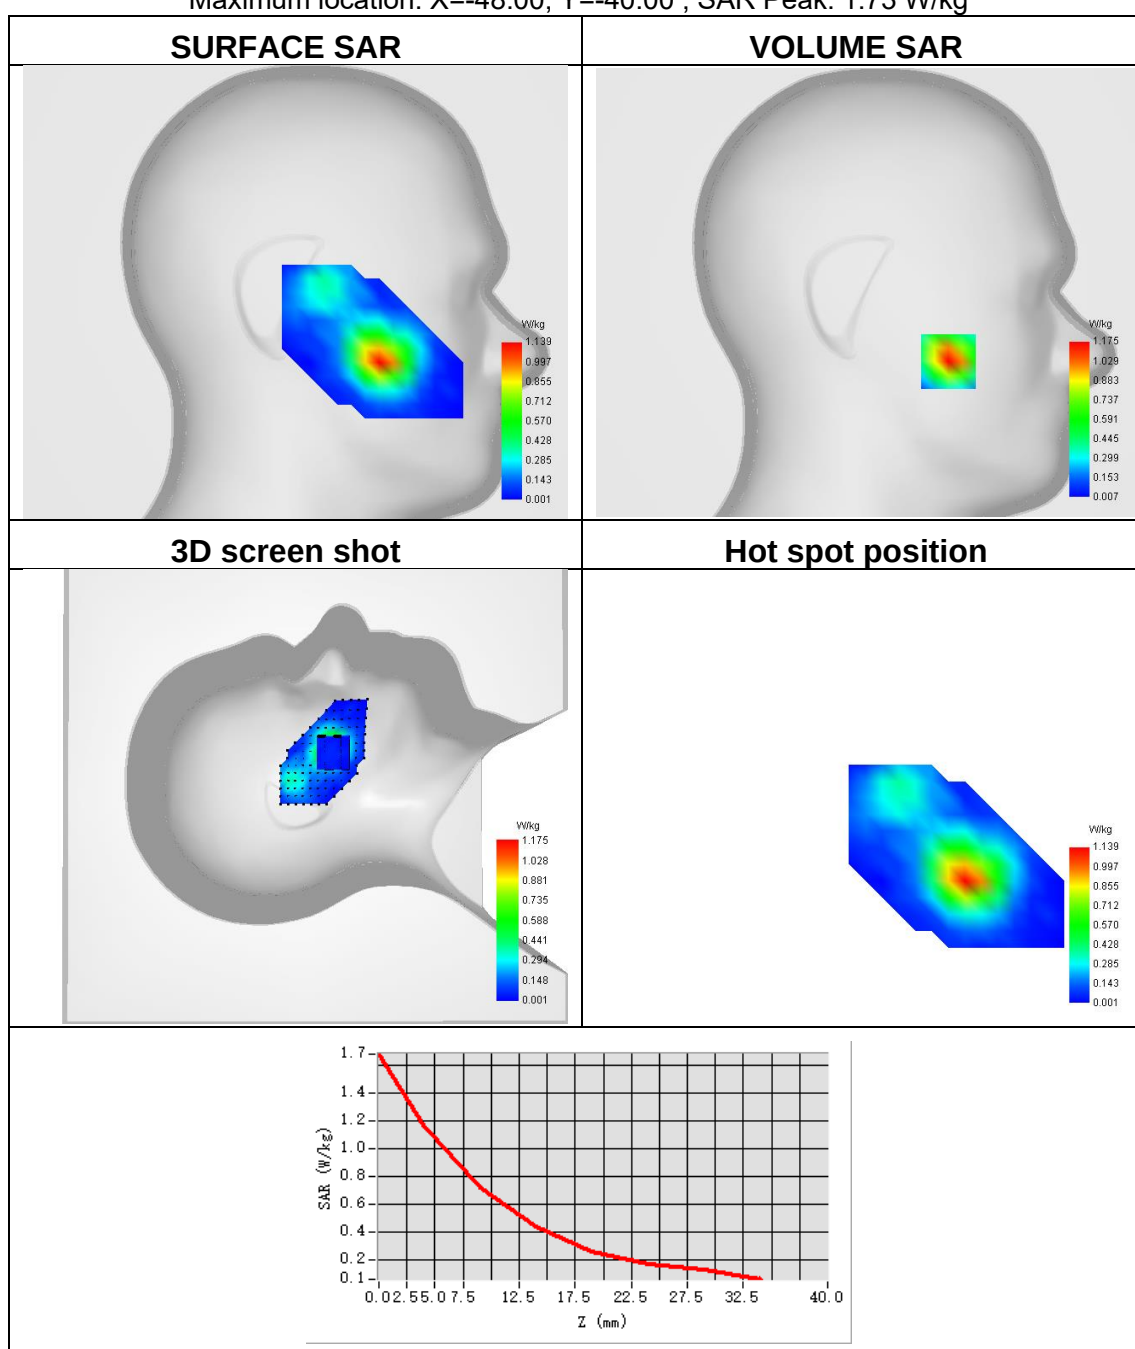




Plot 18:

Test Date	2023-05-14
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1732.5
SAR 10g (W/Kg)	0.395
SAR 1g (W/Kg)	0.735

Maximum location: X=0.00, Y=8.00 ; SAR Peak: 1.17 W/kg

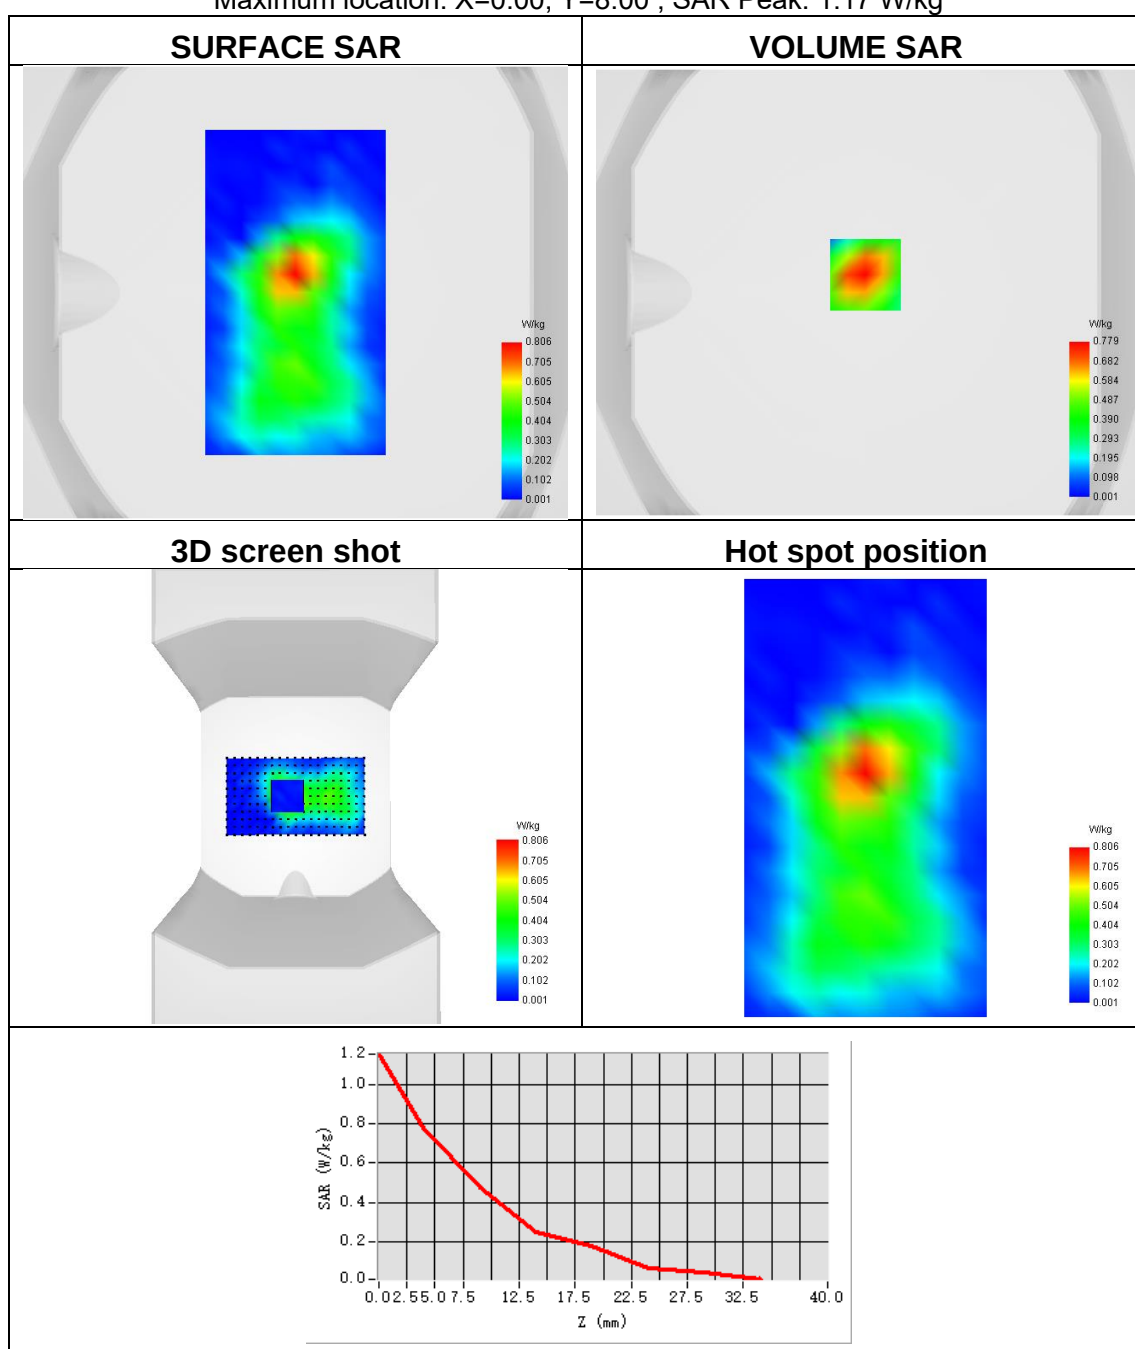




Plot 19:

Test Date	2023-05-12
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 5
Signal	LTE FDD
Frequency	829
SAR 10g (W/Kg)	0.317
SAR 1g (W/Kg)	0.502

Maximum location: X=-48.00, Y=-24.00 ; SAR Peak: 0.79 W/kg

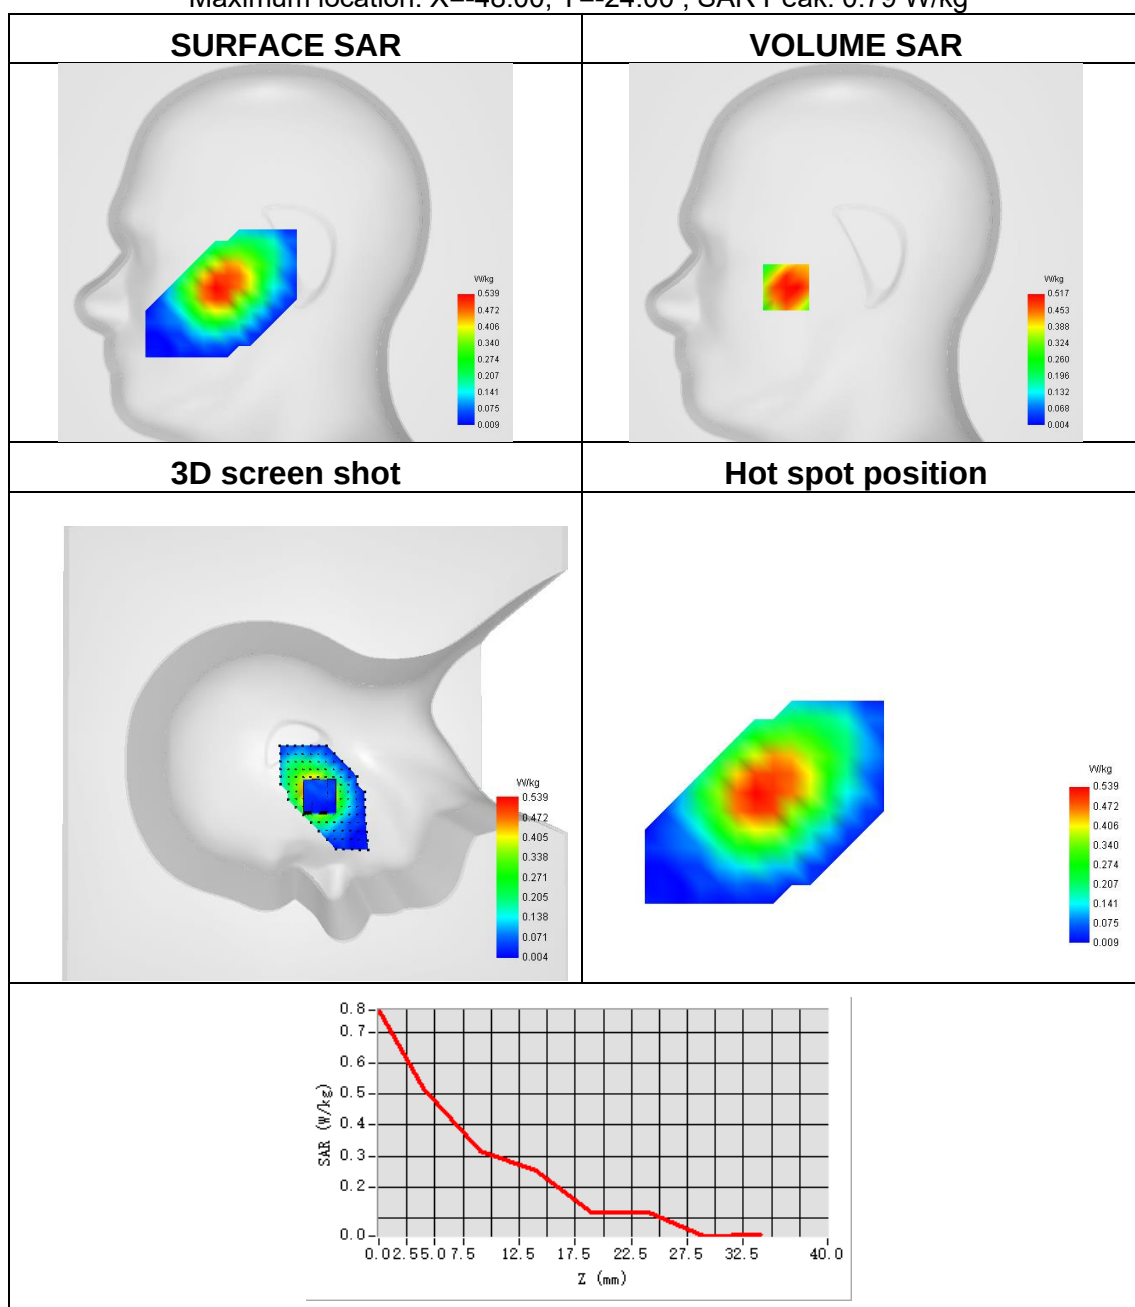




Plot 20:

Test Date	2023-05-12
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	829
SAR 10g (W/Kg)	0.418
SAR 1g (W/Kg)	0.641

Maximum location: X=8.00, Y=-8.00 ; SAR Peak: 0.94 W/kg

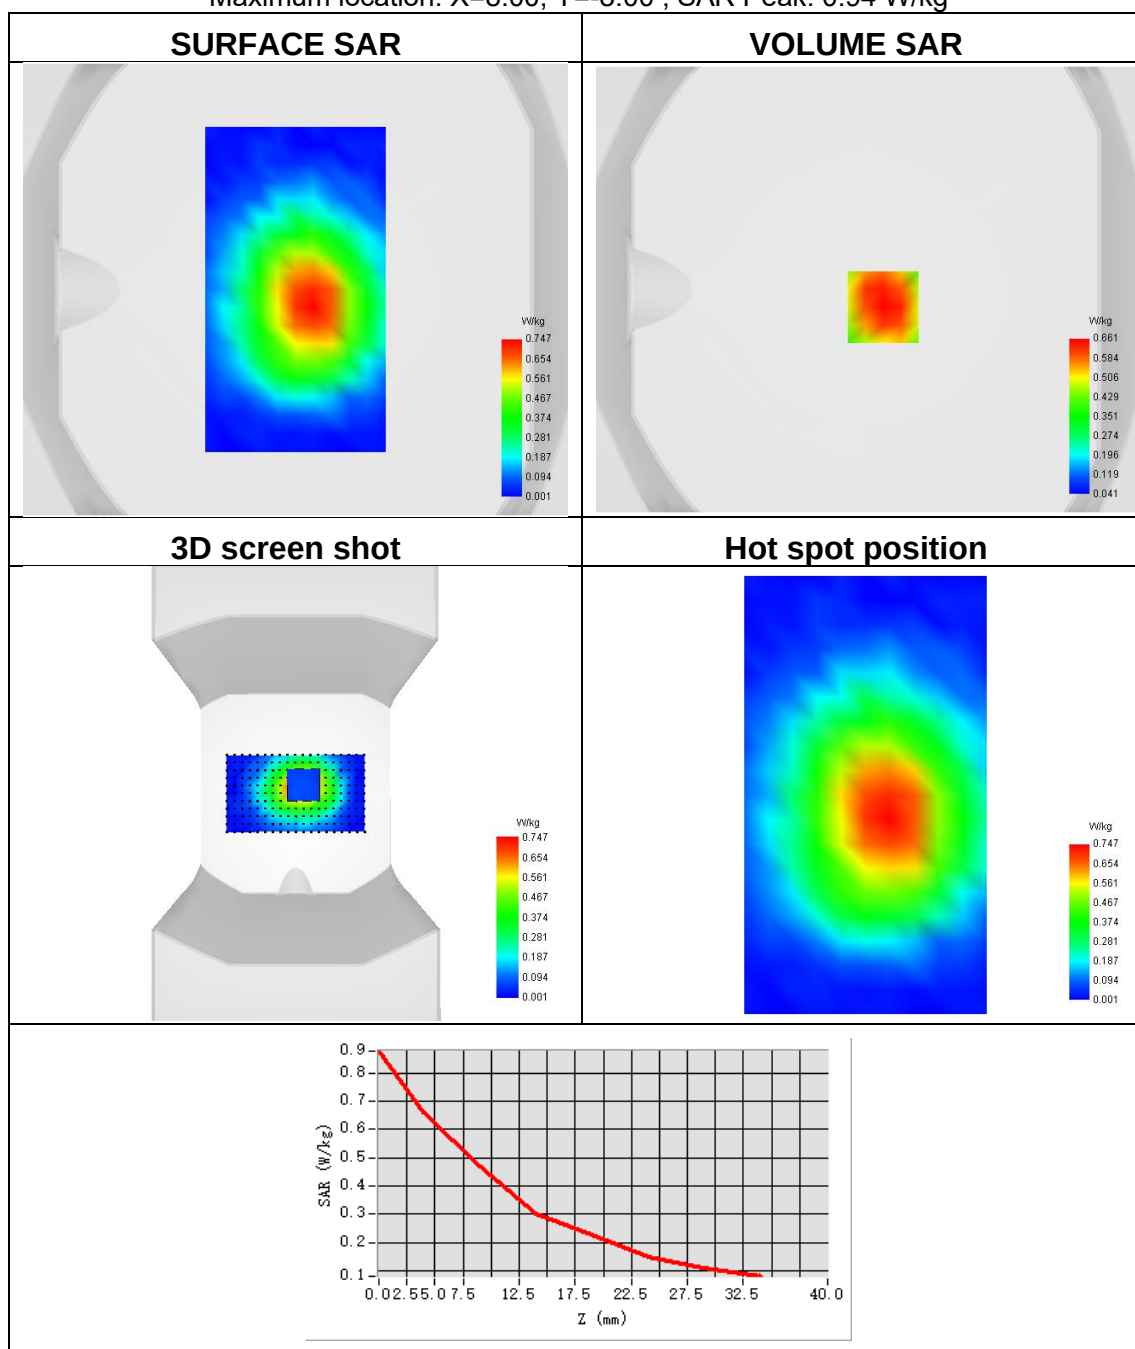




Plot 21:

Test Date	2023-06-04
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 7
Signal	LTE FDD
Frequency	2560
SAR 10g (W/Kg)	0.114
SAR 1g (W/Kg)	0.252

Maximum location: X=-49.00, Y=-31.00 ; SAR Peak: 0.48 W/kg

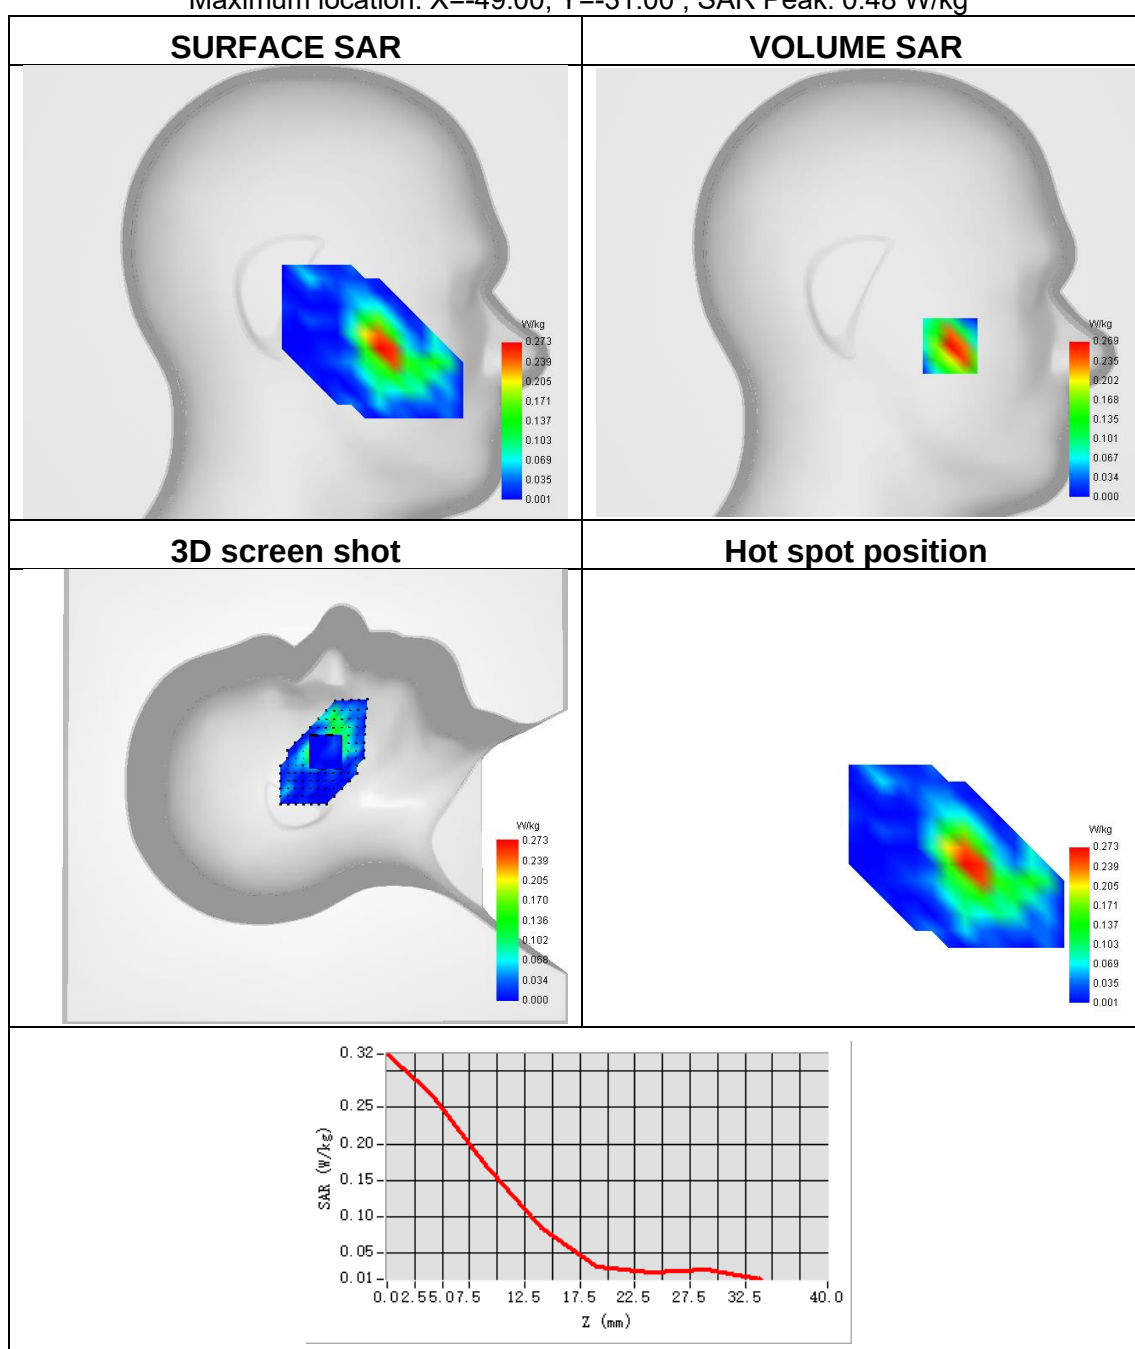




Plot 22:

Test Date	2023-06-04
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2560
SAR 10g (W/Kg)	0.317
SAR 1g (W/Kg)	0.724

Maximum location: X=-7.00, Y=17.00 ; SAR Peak: 1.31 W/kg

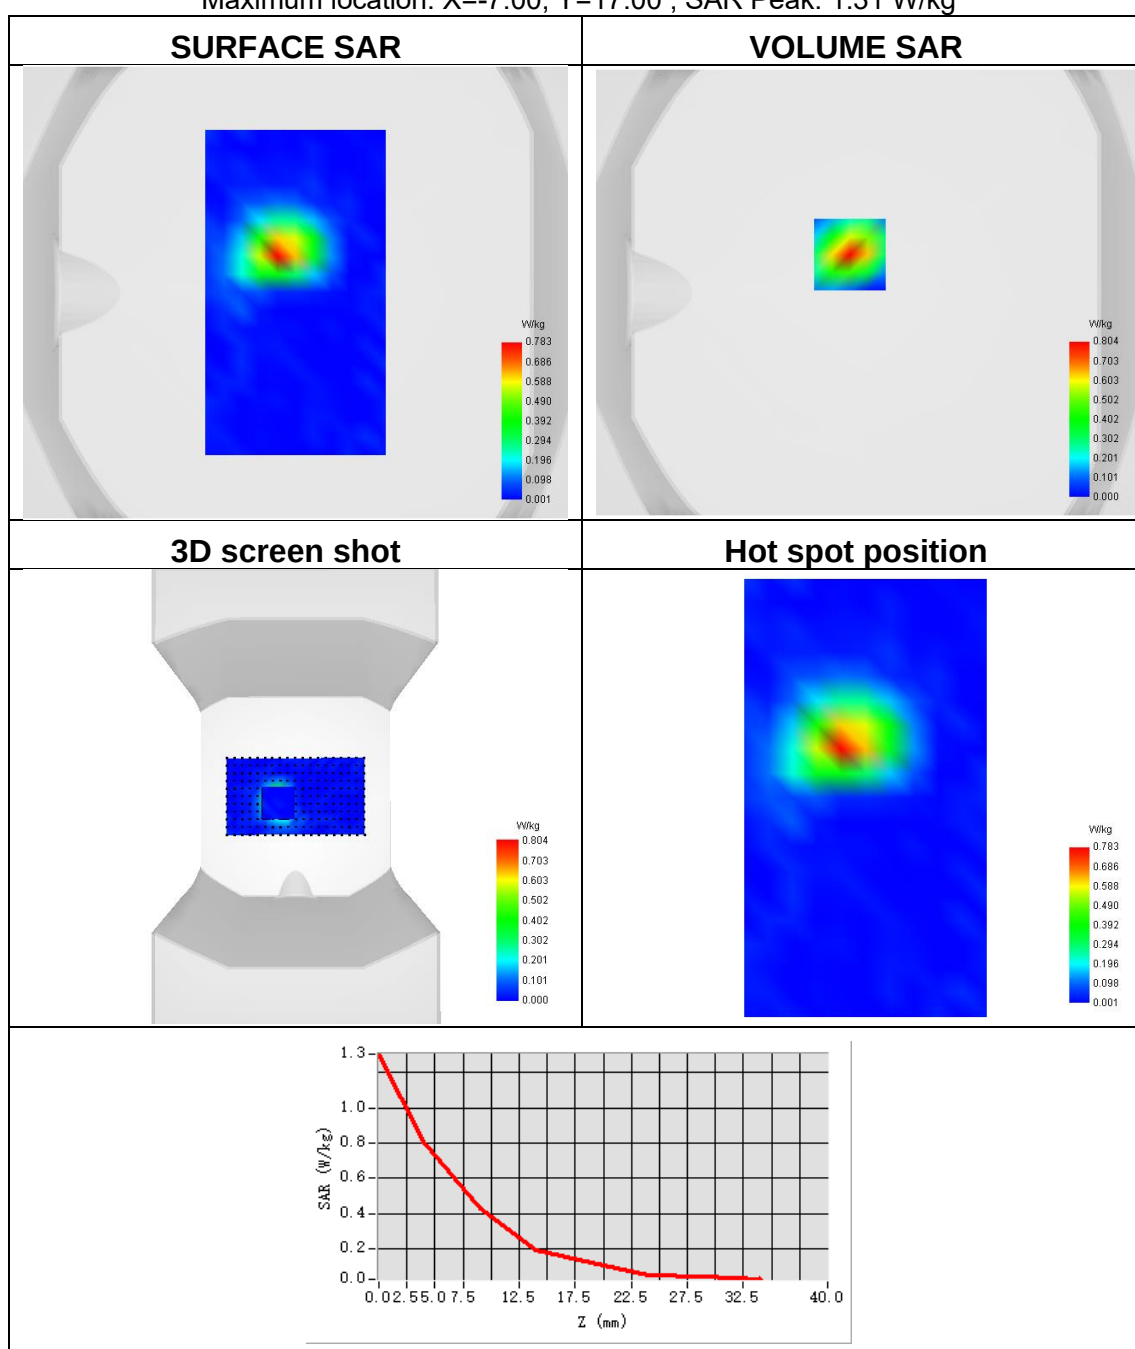




Plot 23:

Test Date	2023-05-11
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 12
Signal	LTE FDD
Frequency	707.5
SAR 10g (W/Kg)	0.114
SAR 1g (W/Kg)	0.252

Maximum location: X=-49.00, Y=-31.00 ; SAR Peak: 0.48 W/kg

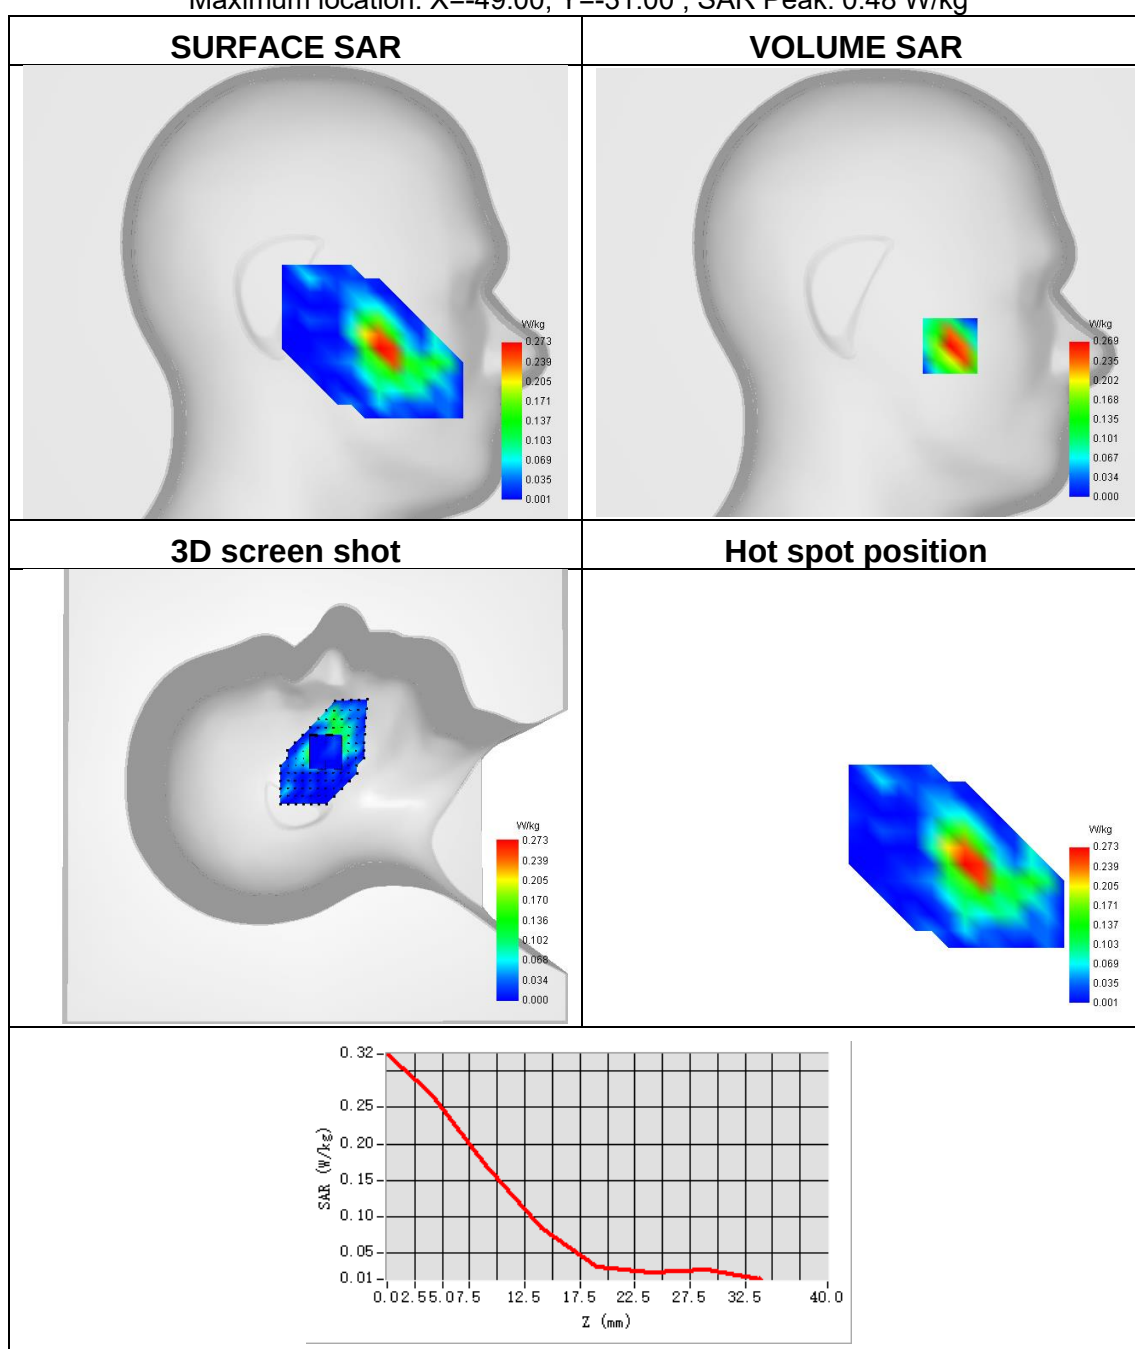




Plot 24:

Test Date	2023-05-11
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	707.5
SAR 10g (W/Kg)	0.220
SAR 1g (W/Kg)	0.379

Maximum location: X=0.00, Y=-9.00 ; SAR Peak: 0.58 W/kg

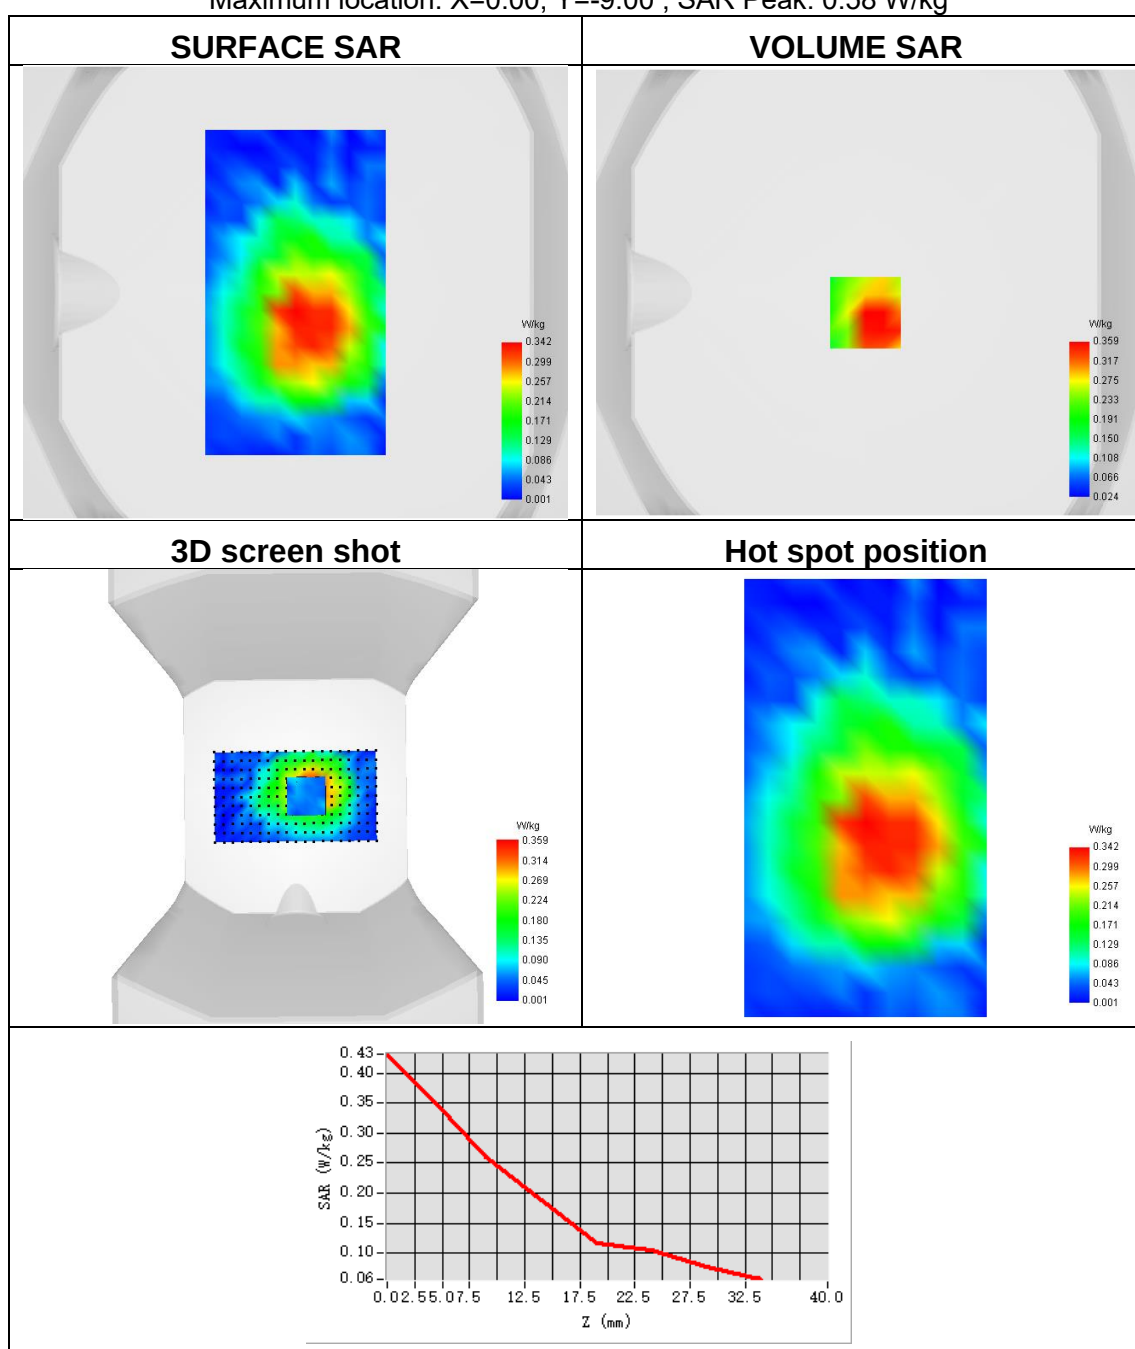




Plot 25:

Test Date	2023-05-11
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.261
SAR 1g (W/Kg)	0.405

Maximum location: X=-49.00, Y=-26.00 ; SAR Peak: 0.59 W/kg

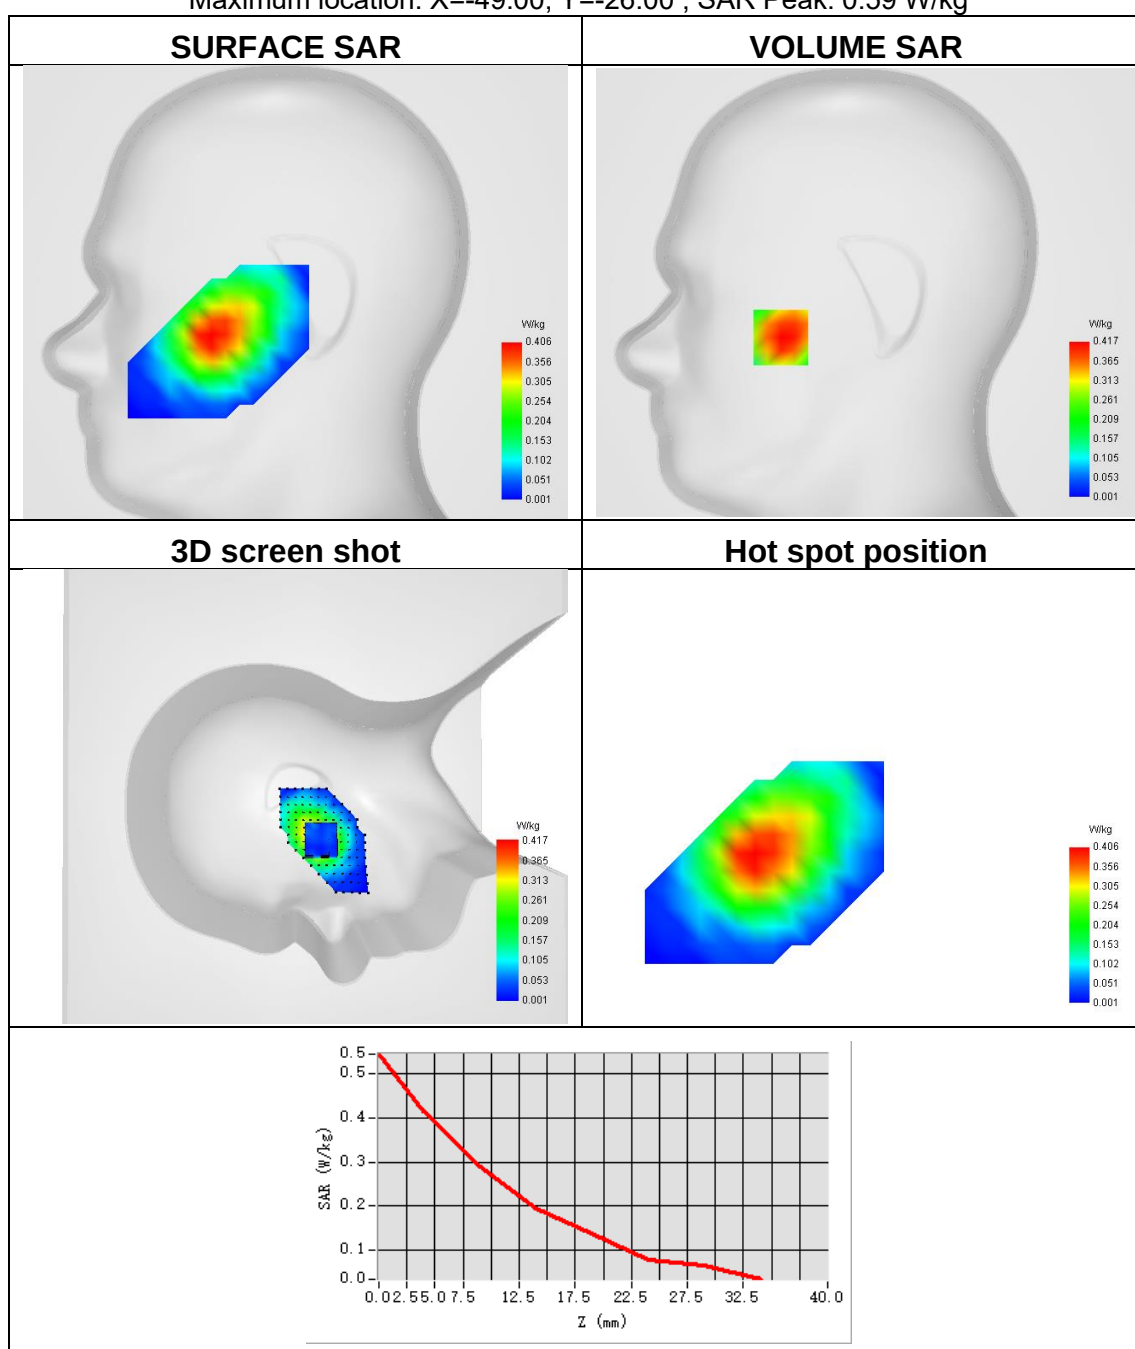




Plot 26:

Test Date	2023-05-11
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.296
SAR 1g (W/Kg)	0.462


Maximum location: X=2.00, Y=18.00 ; SAR Peak: 0.69 W/kg

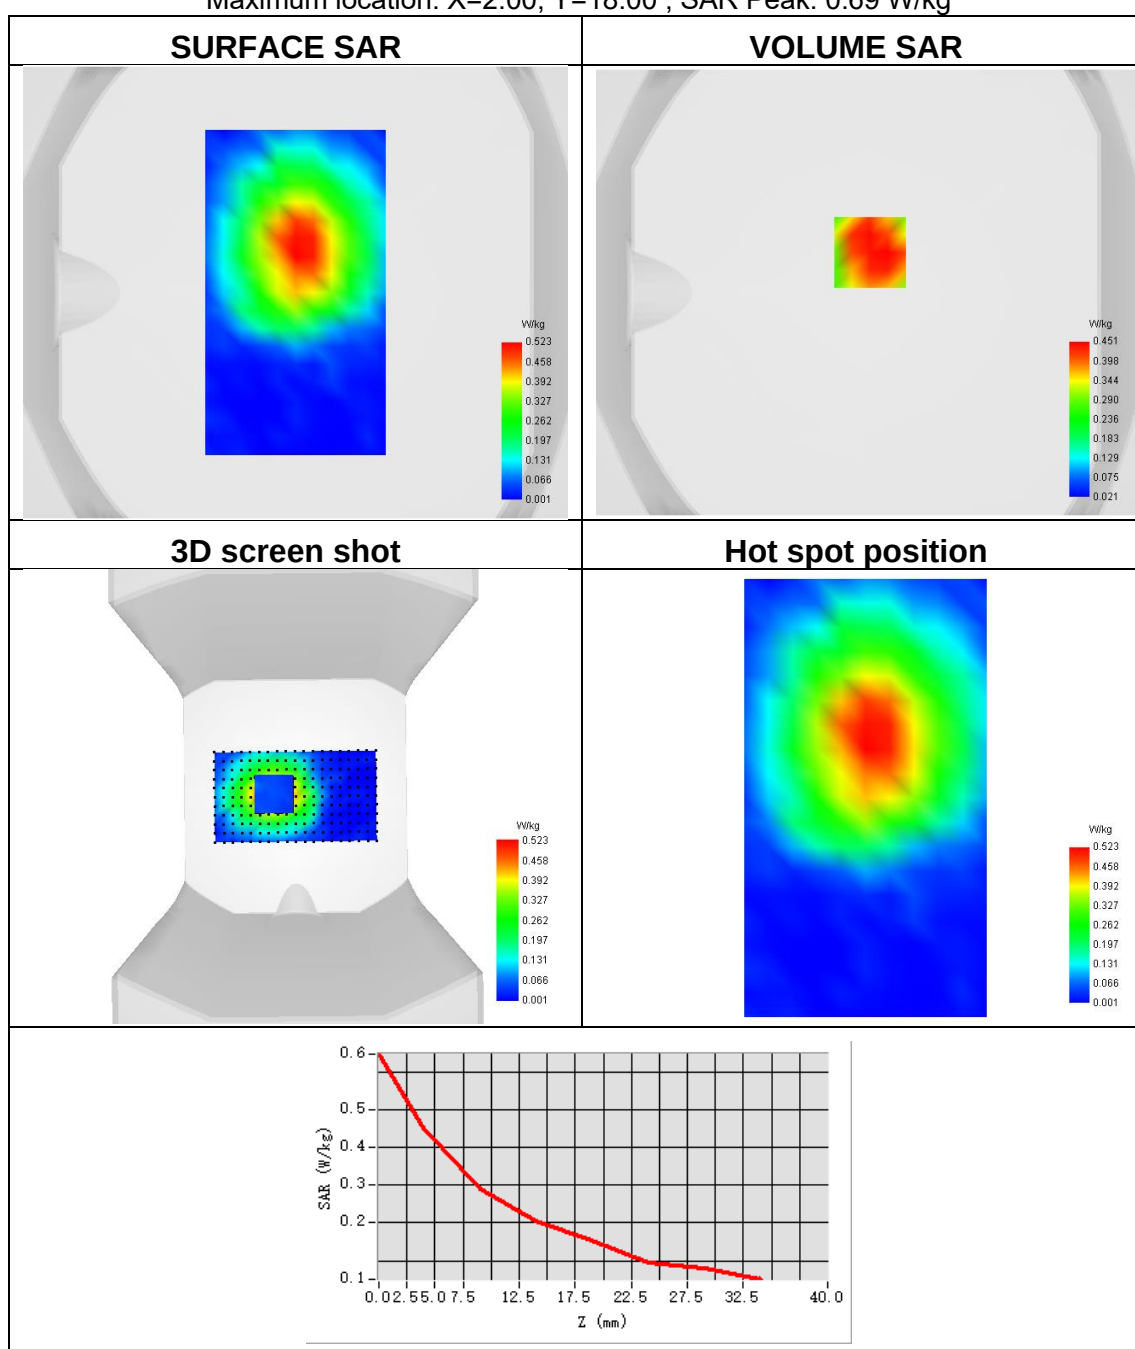

Plot 27:

Test Date	2023-05-11
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.158
SAR 1g (W/Kg)	0.256

Maximum location: X=-47.00, Y=-16.00 ; SAR Peak: 0.41 W/kg

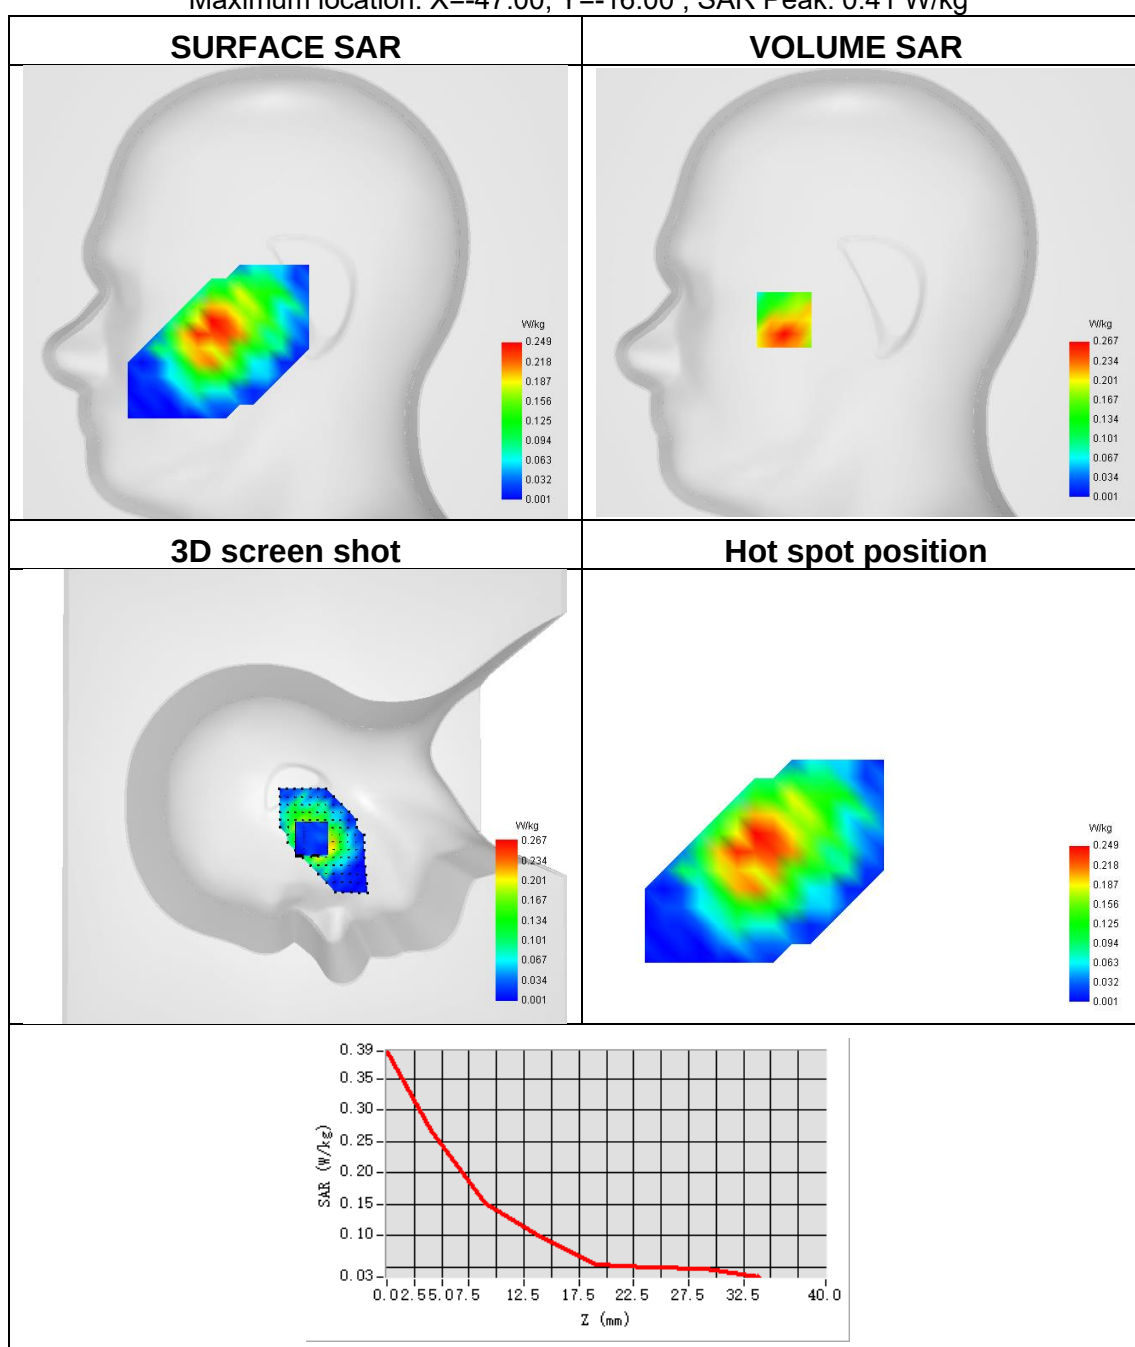




Plot 28:

Test Date	2023-05-11
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.200
SAR 1g (W/Kg)	0.316

Maximum location: X=8.00, Y=16.00 ; SAR Peak: 0.49 W/kg

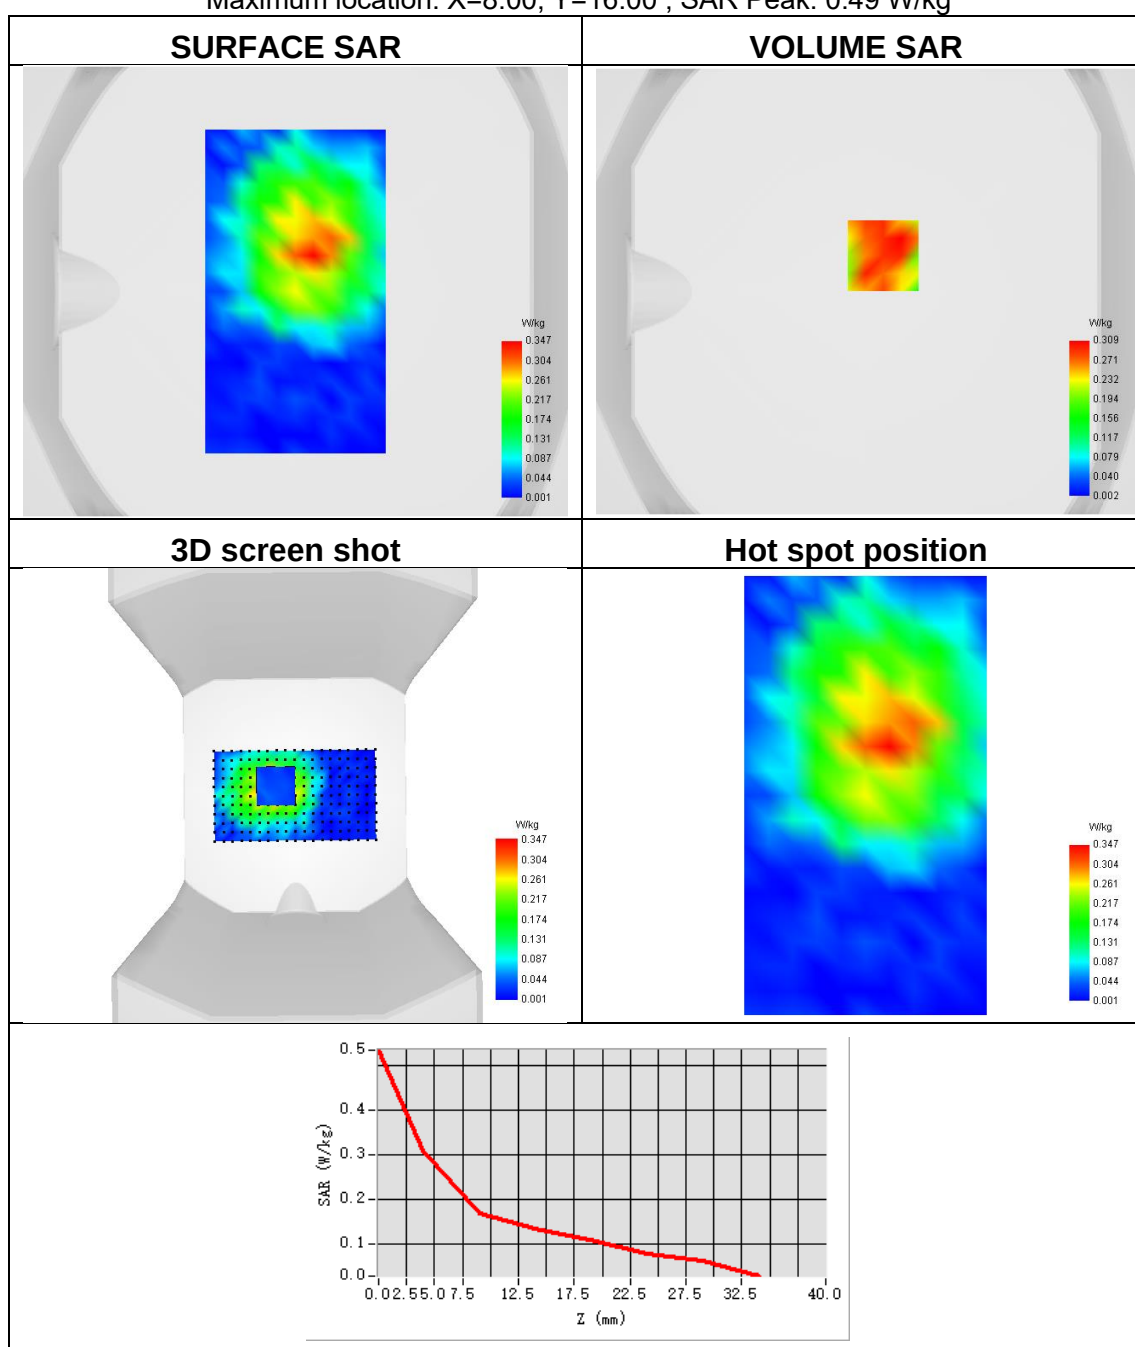




Plot 29:

Test Date	2023-05-15
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 25
Signal	LTE FDD
Frequency	1882.5
SAR 10g (W/Kg)	0.457
SAR 1g (W/Kg)	0.891

Maximum location: X=-55.00, Y=-37.00 ; SAR Peak: 1.42 W/kg

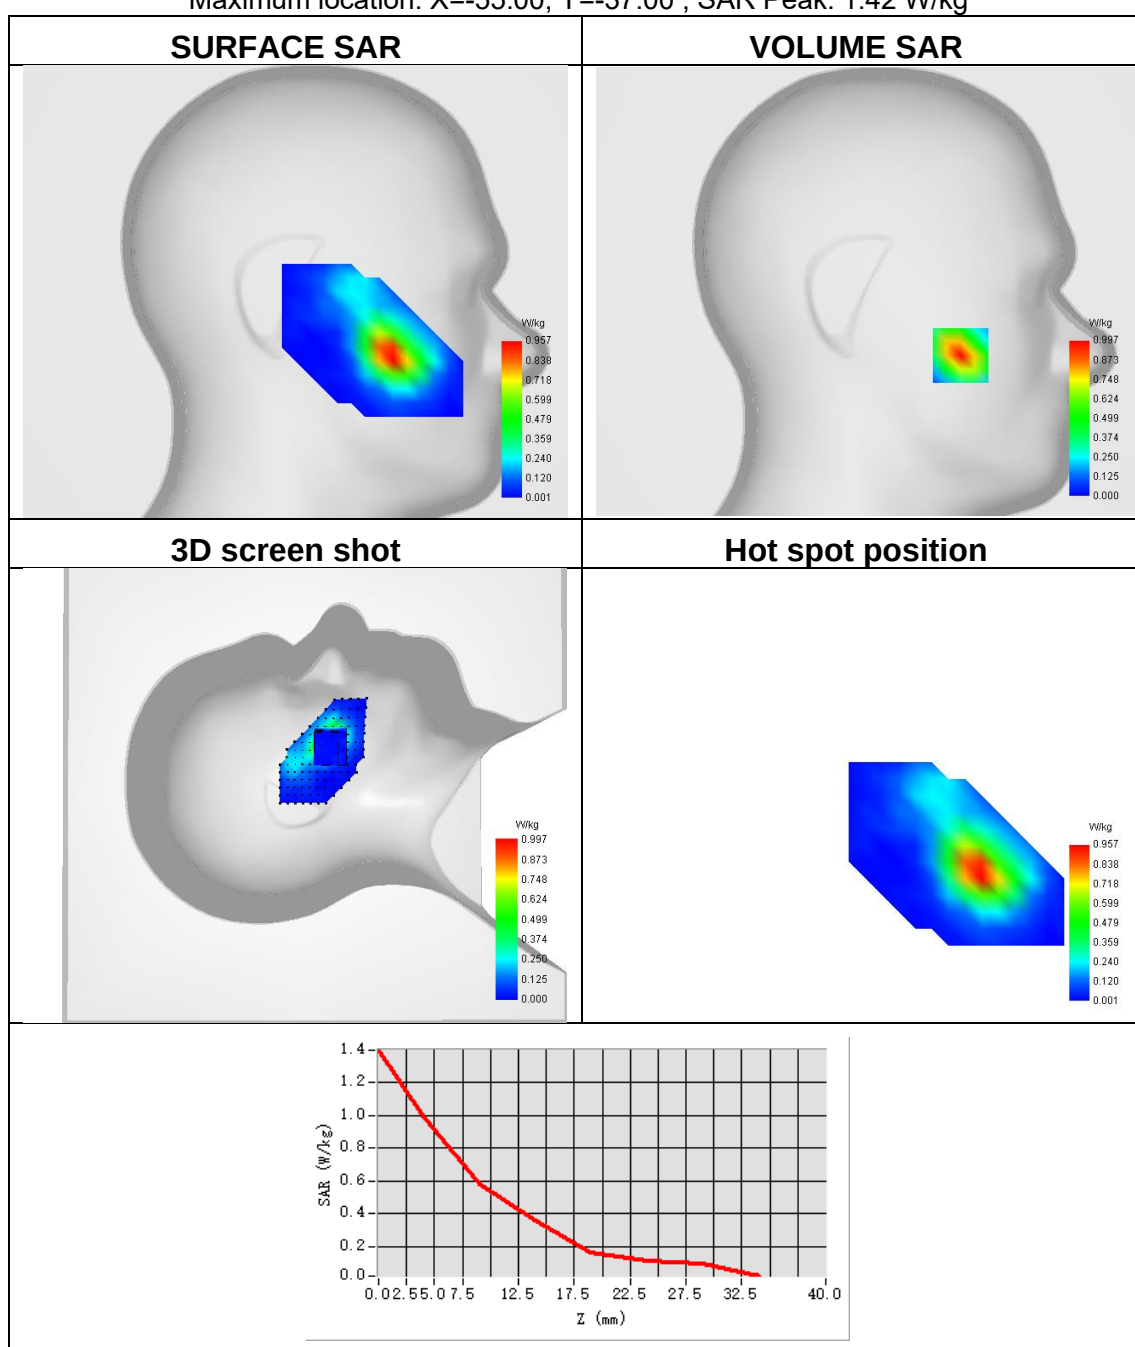




Plot 30:

Test Date	2023-05-15
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 25
Signal	LTE FDD
Frequency	1882.5
SAR 10g (W/Kg)	0.335
SAR 1g (W/Kg)	0.627

Maximum location: X=-8.00, Y=2.00 ; SAR Peak: 1.06 W/kg

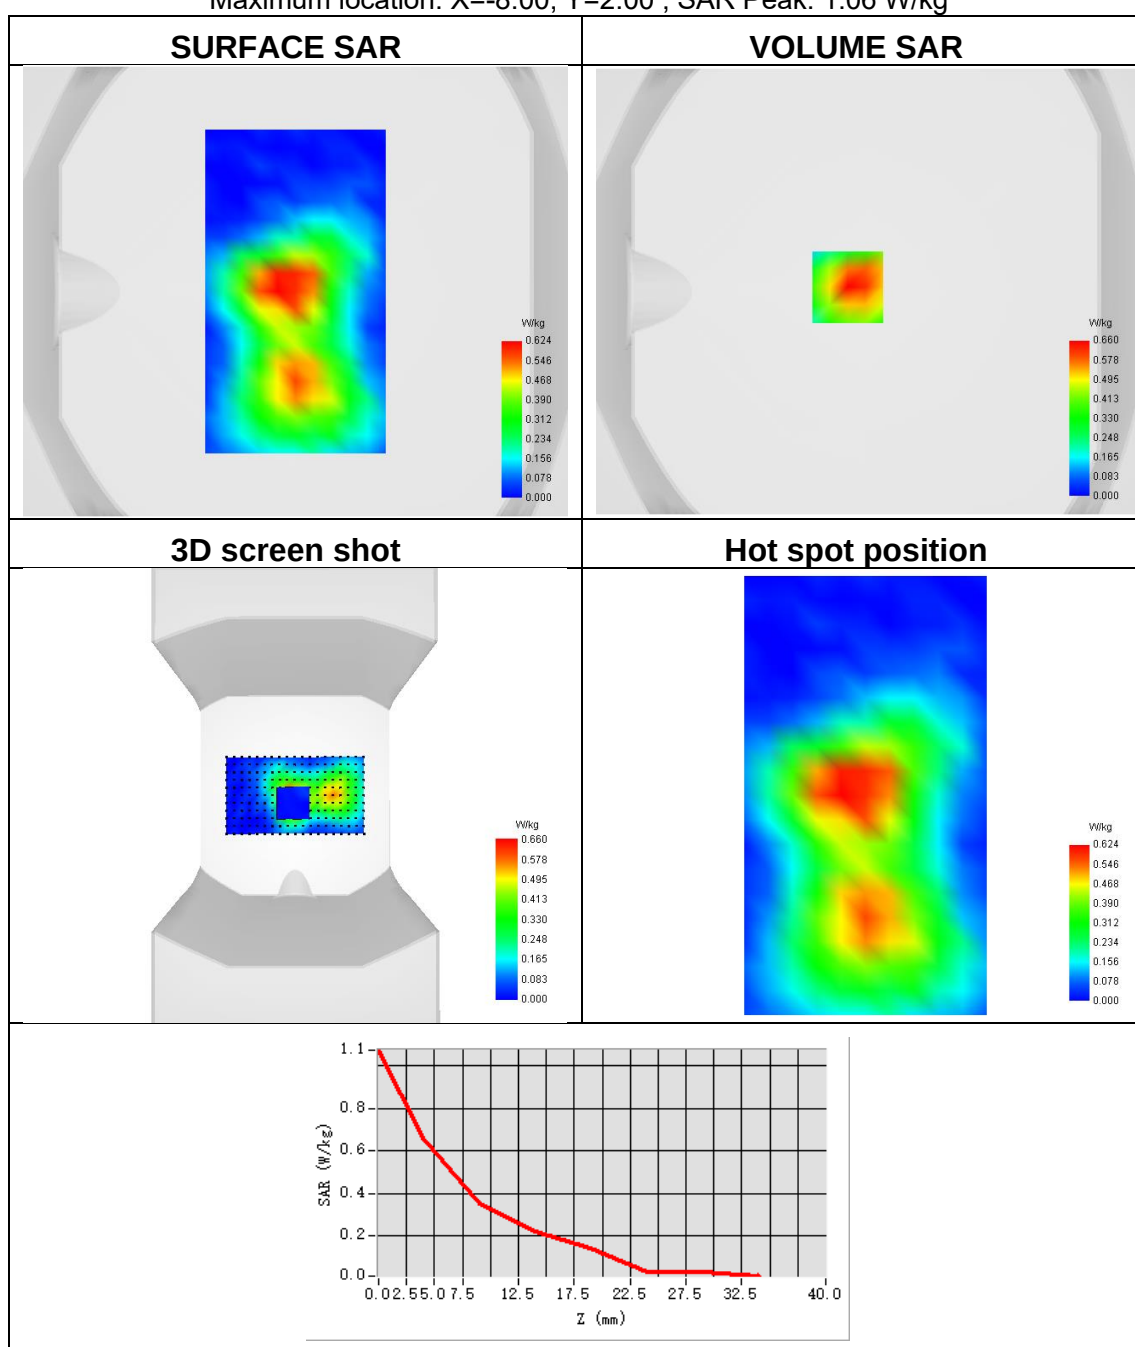




Plot 31:

Test Date	2023-05-12
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 26
Signal	LTE FDD
Frequency	821.5
SAR 10g (W/Kg)	0.277
SAR 1g (W/Kg)	0.435

Maximum location: X=-49.00, Y=-24.00 ; SAR Peak: 0.69 W/kg

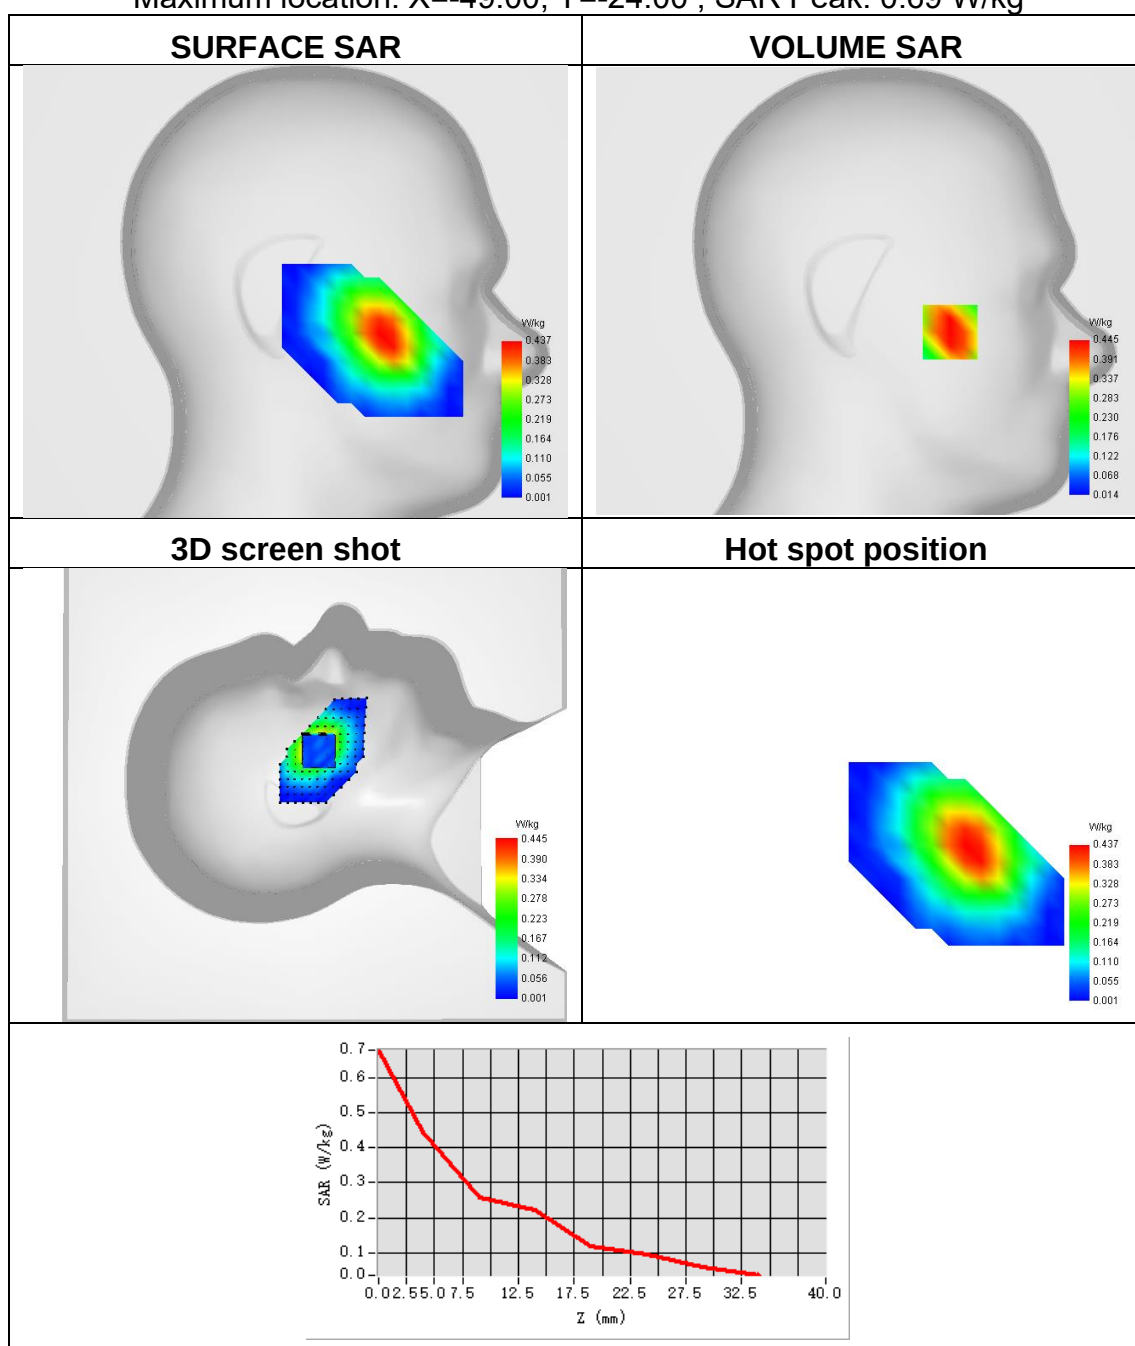




Plot 32:

Test Date	2023-05-12
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 26
Signal	LTE FDD
Frequency	821.5
SAR 10g (W/Kg)	0.469
SAR 1g (W/Kg)	0.735

Maximum location: X=-14.00, Y=12.00 ; SAR Peak: 1.08 W/kg

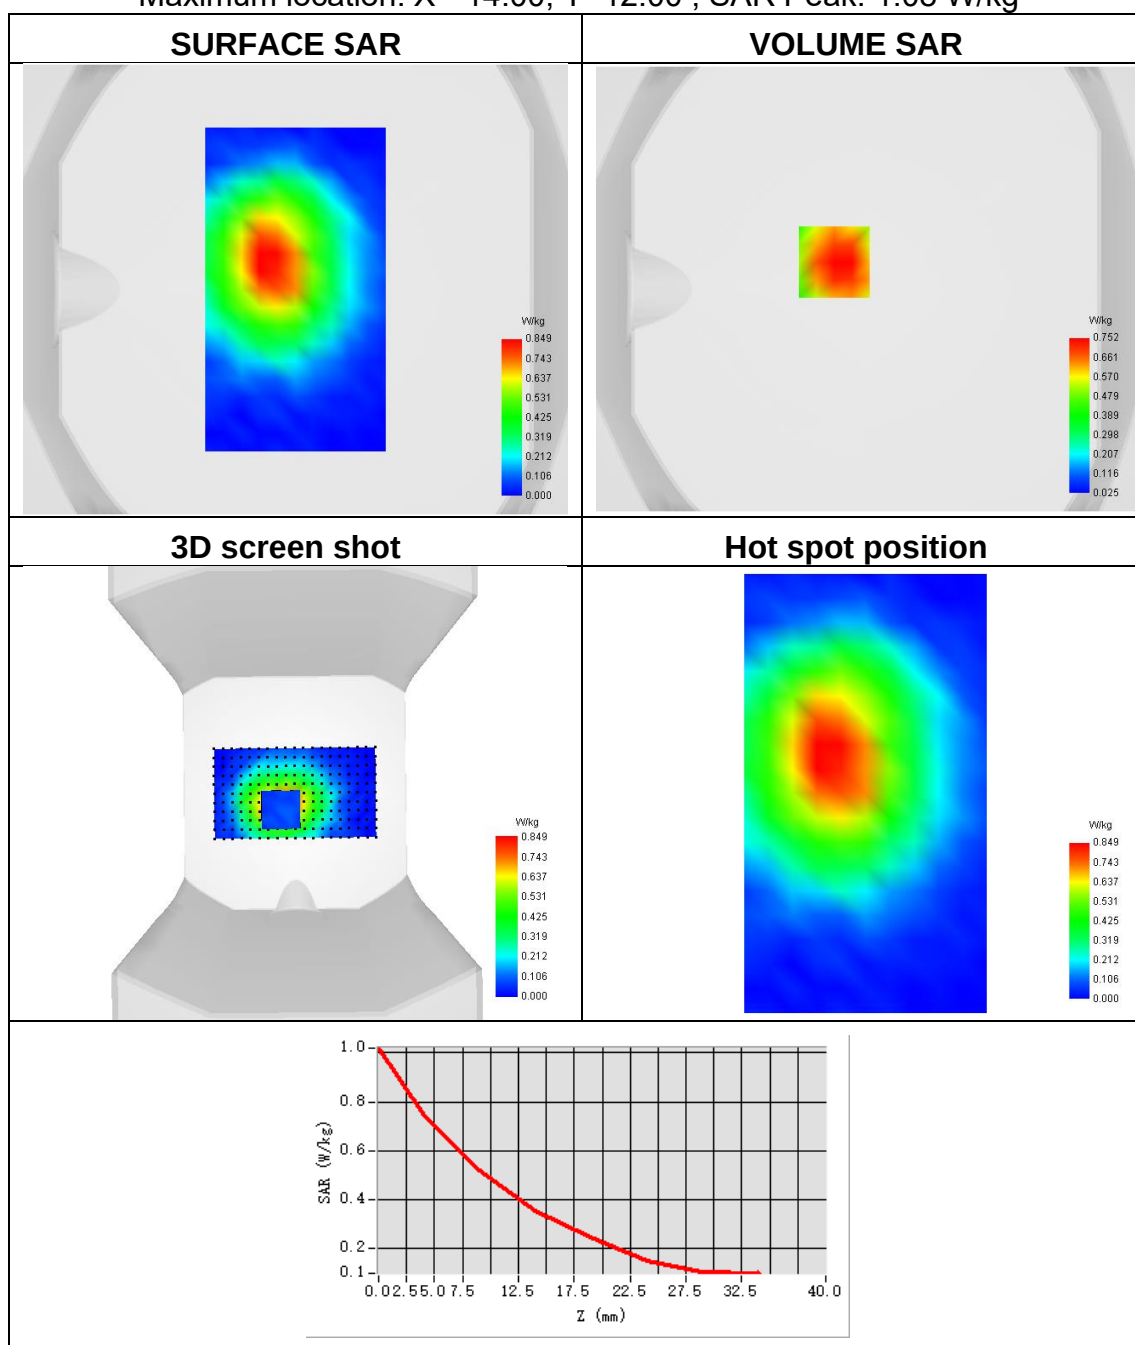




Plot 33:

Test Date	2023-06-08
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.046
SAR 1g (W/Kg)	0.110

Maximum location: X=-72.00, Y=-48.00 ; SAR Peak: 0.24 W/kg

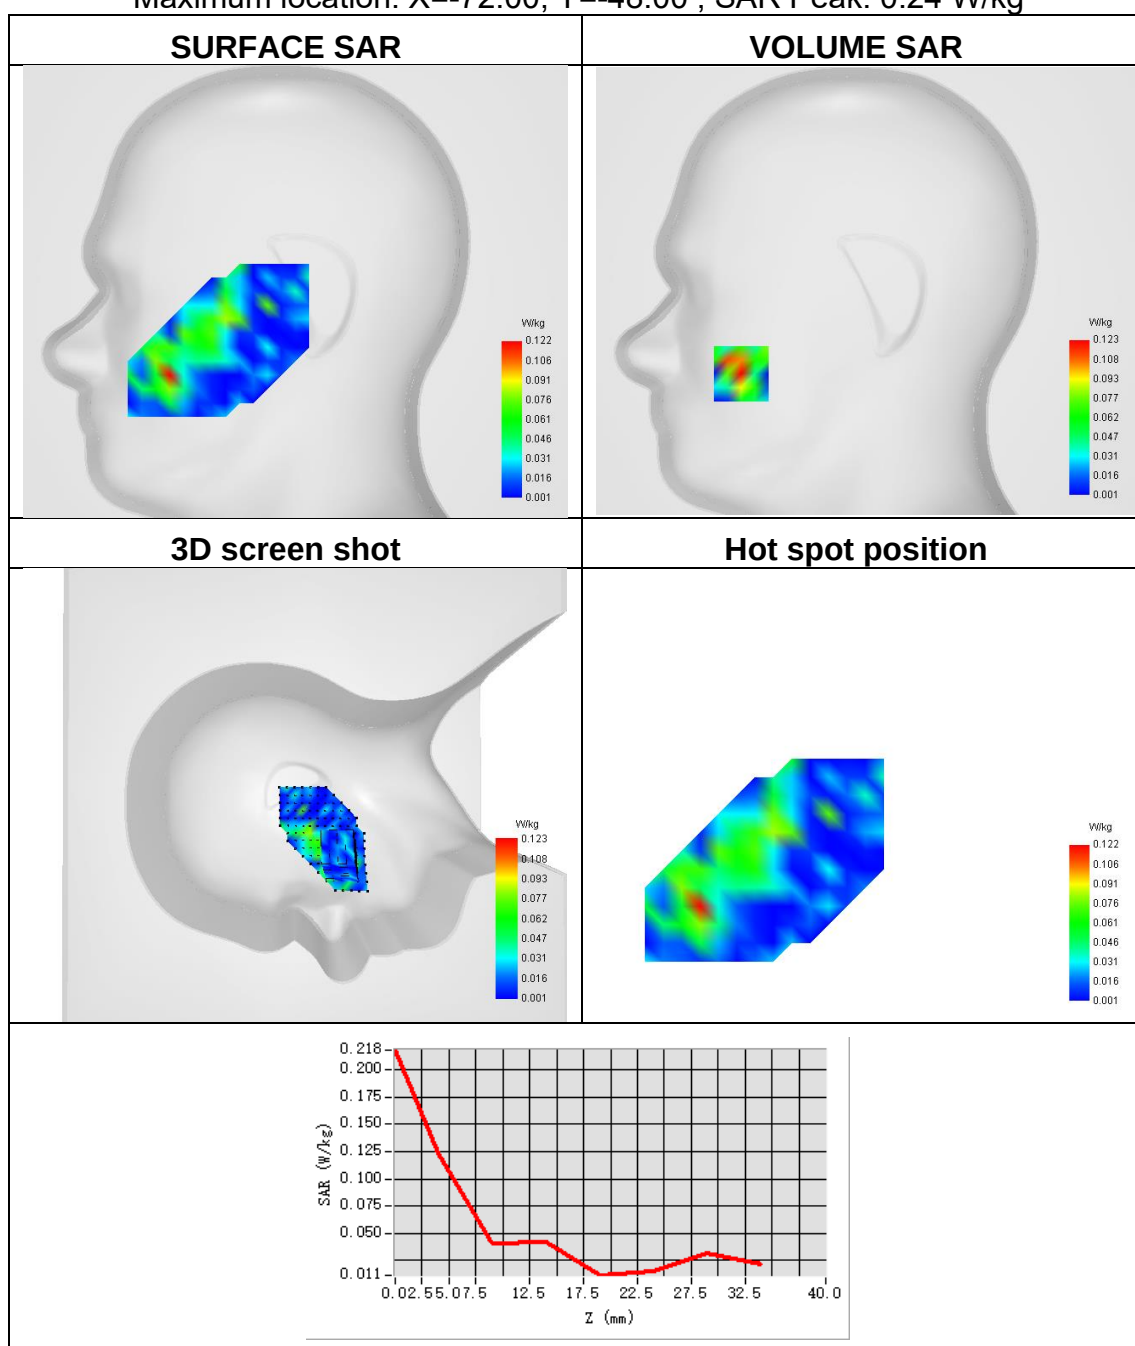




Plot 34:

Test Date	2023-06-08
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.232
SAR 1g (W/Kg)	0.533

Maximum location: X=8.00, Y=-42.00 ; SAR Peak: 1.02 W/kg

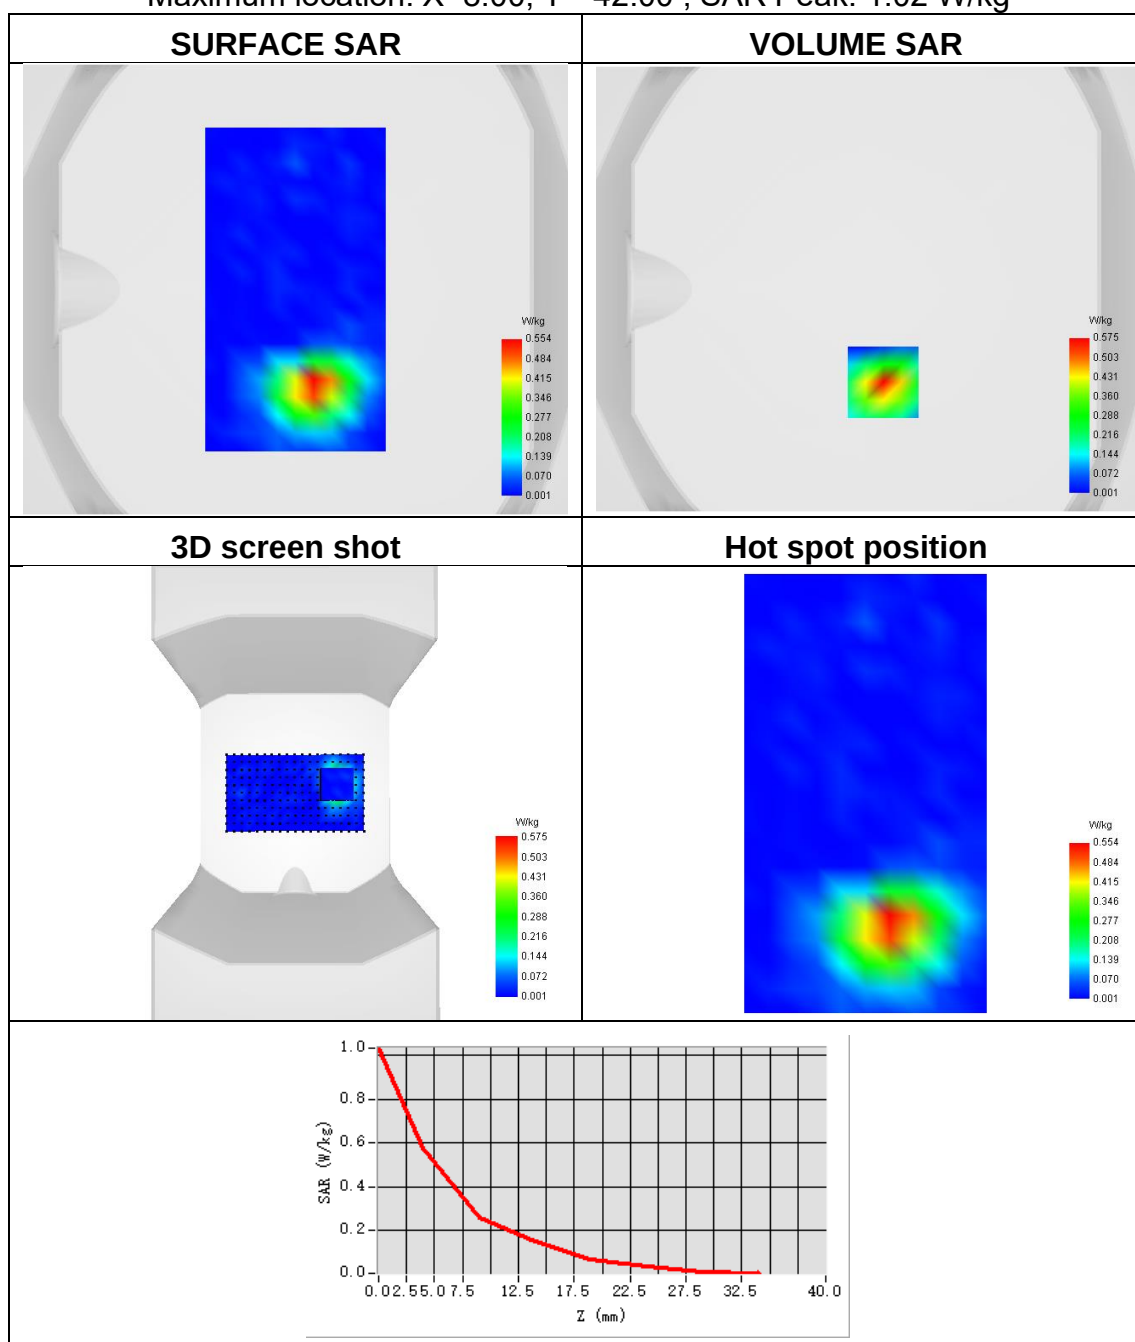




Plot 35:

Test Date	2023-06-03
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 40
Signal	LTE TDD
Frequency	2350
SAR 10g (W/Kg)	0.098
SAR 1g (W/Kg)	0.226

Maximum location: X=-49.00, Y=-31.00 ; SAR Peak: 0.44 W/kg

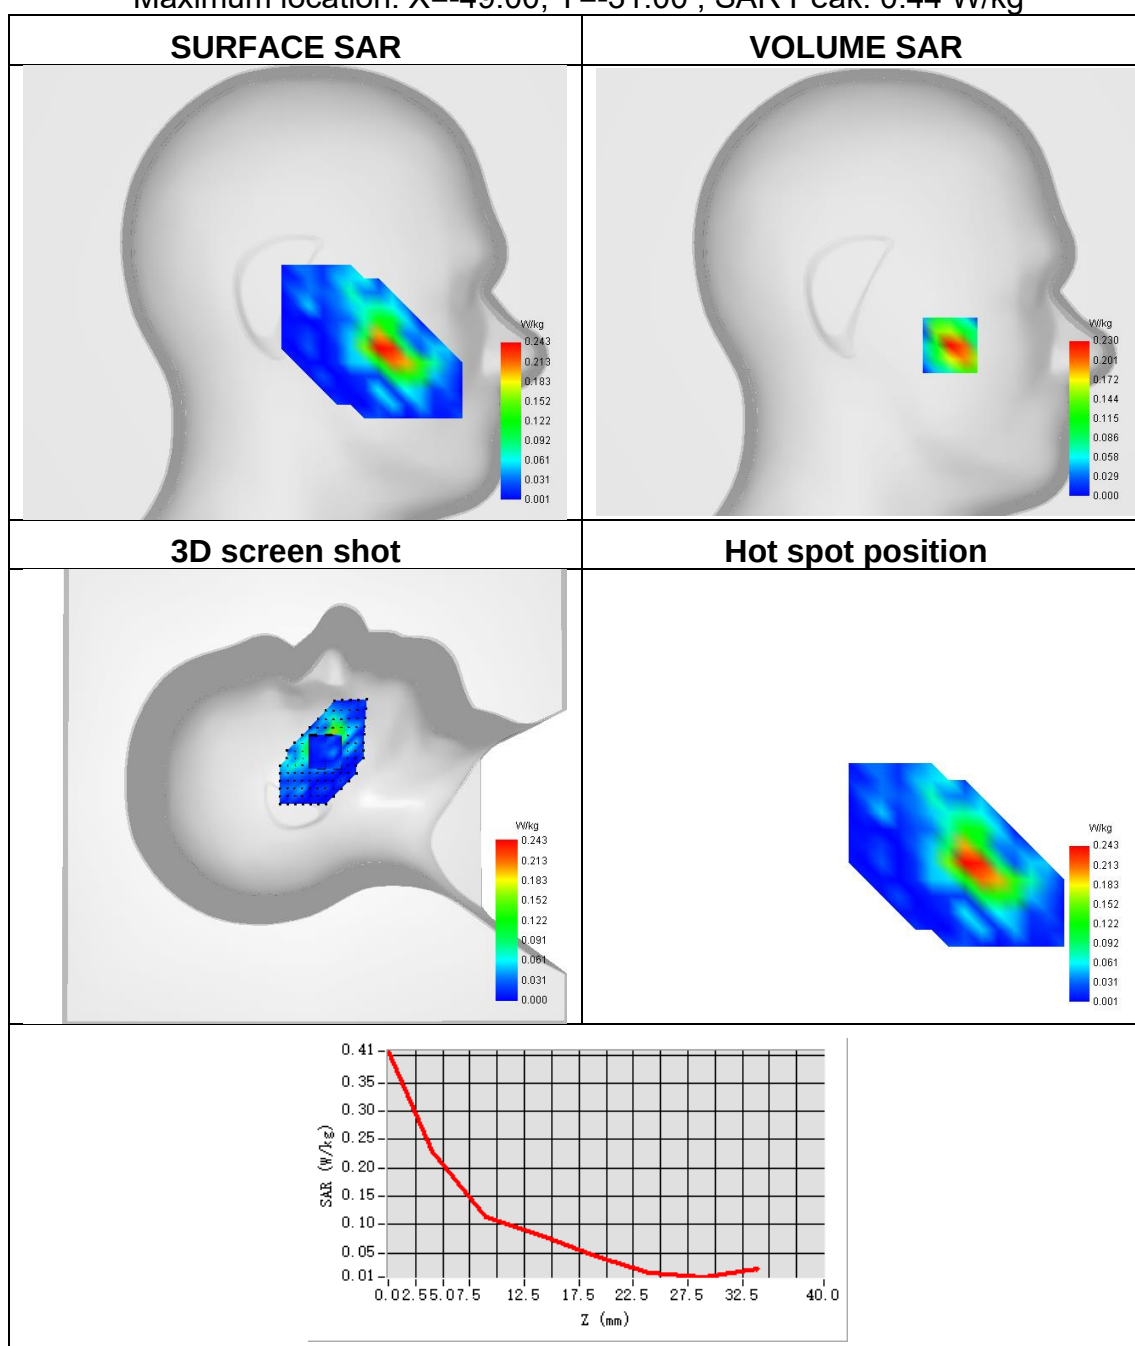




Plot 36:

Test Date	2023-06-03
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 40
Signal	LTE TDD
Frequency	2350
SAR 10g (W/Kg)	0.089
SAR 1g (W/Kg)	0.198

Maximum location: X=15.00, Y=-41.00 ; SAR Peak: 0.40 W/kg

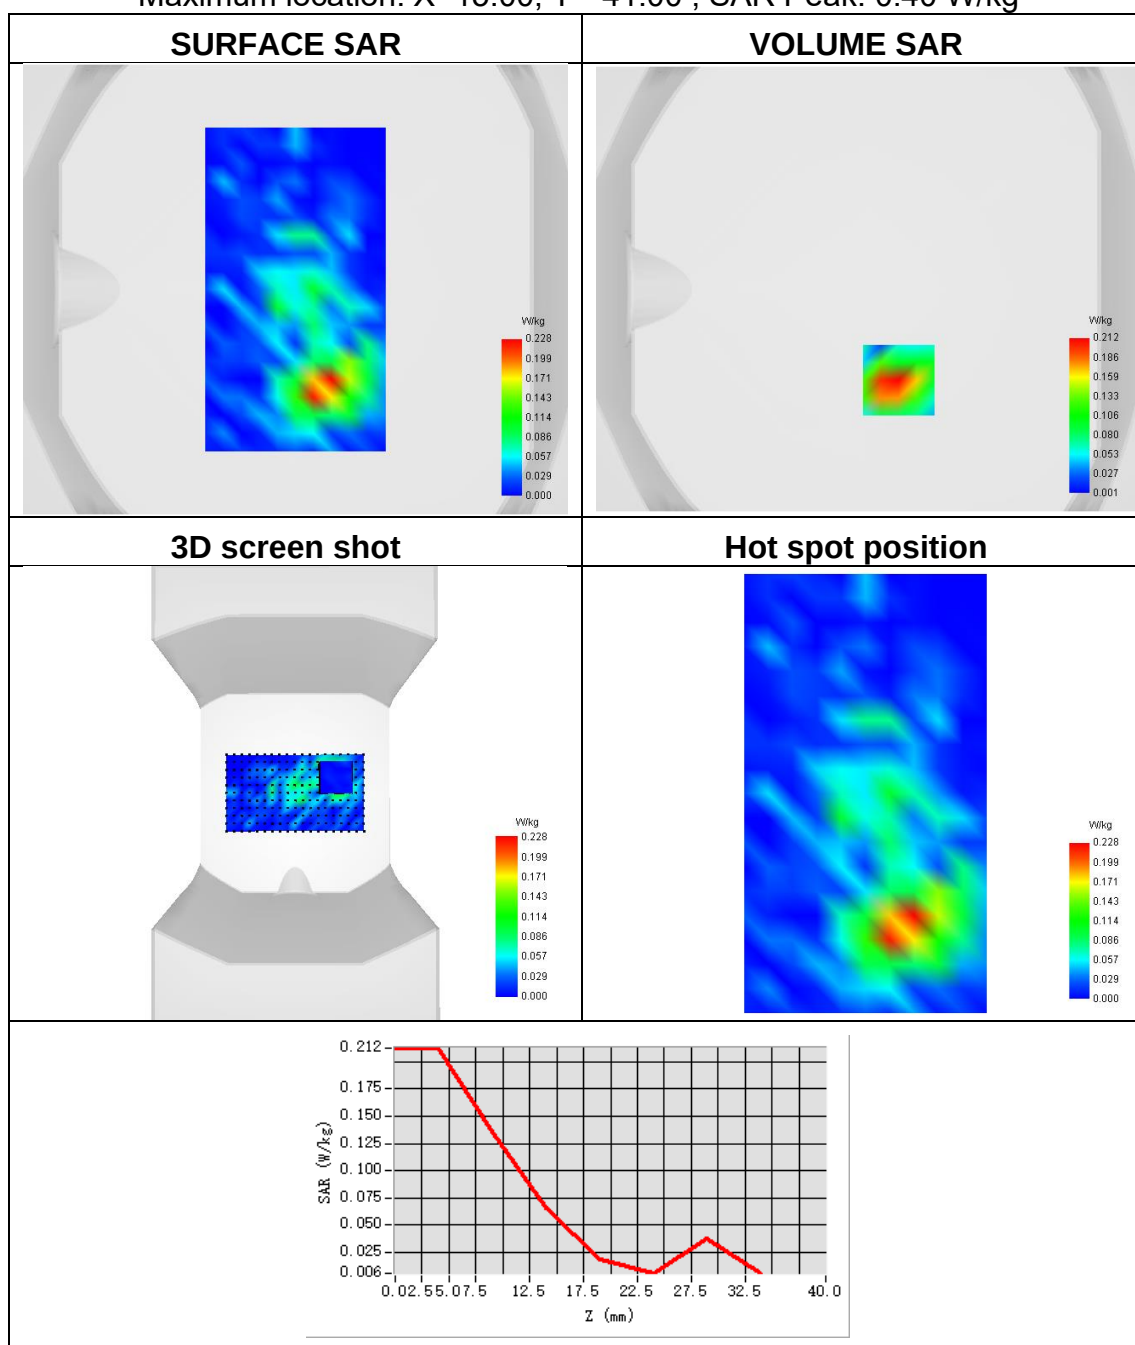




Plot 37:

Test Date	2023-06-08
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.055
SAR 1g (W/Kg)	0.119

Maximum location: X=-48.00, Y=-32.00 ; SAR Peak: 0.27 W/kg

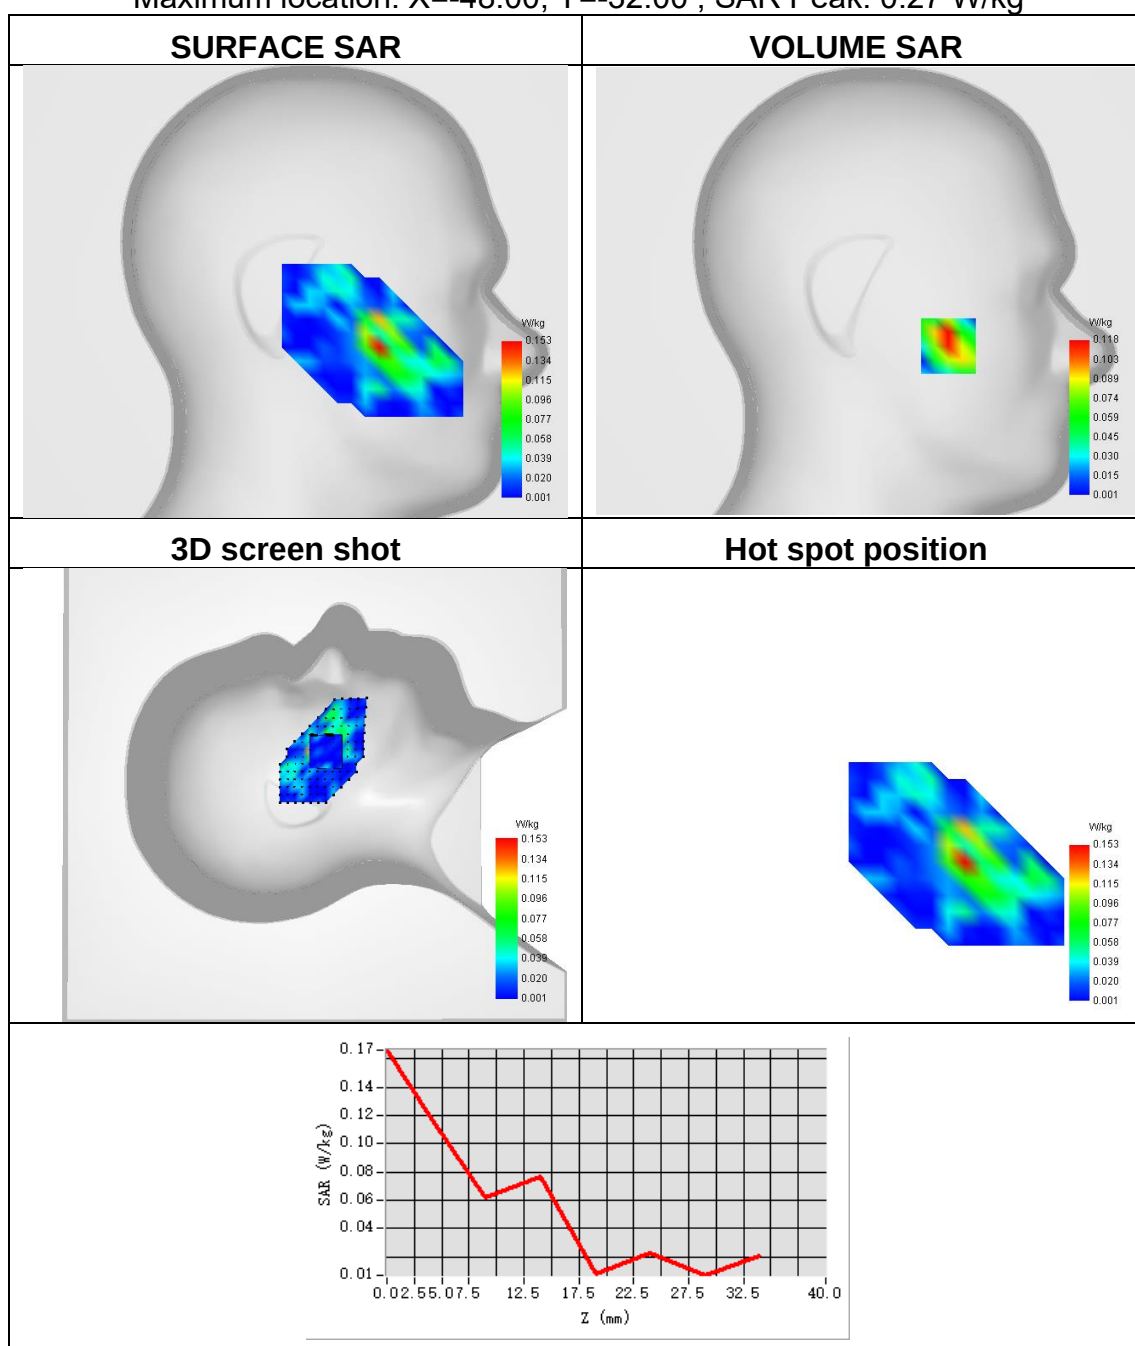




Plot 38:

Test Date	2023-06-08
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.227
SAR 1g (W/Kg)	0.513

Maximum location: X=8.00, Y=-46.00 ; SAR Peak: 0.95 W/kg

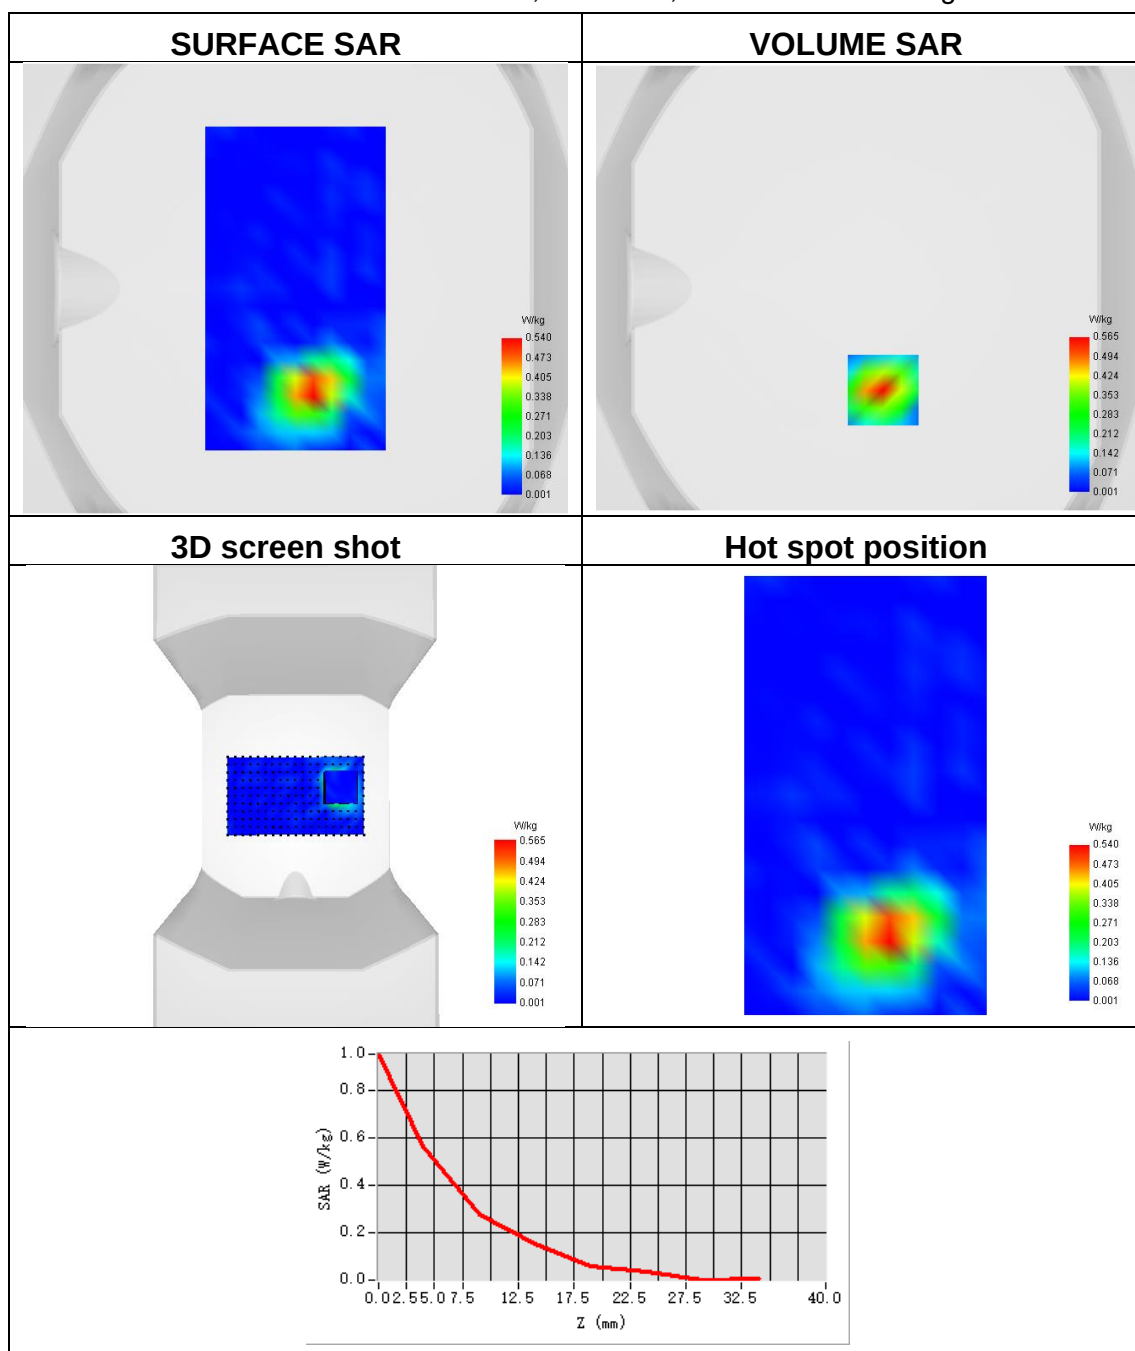




Plot 39:

Test Date	2023-05-14
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 66
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.439
SAR 1g (W/Kg)	0.879

Maximum location: X=-55.00, Y=-38.00 ; SAR Peak: 1.53 W/kg

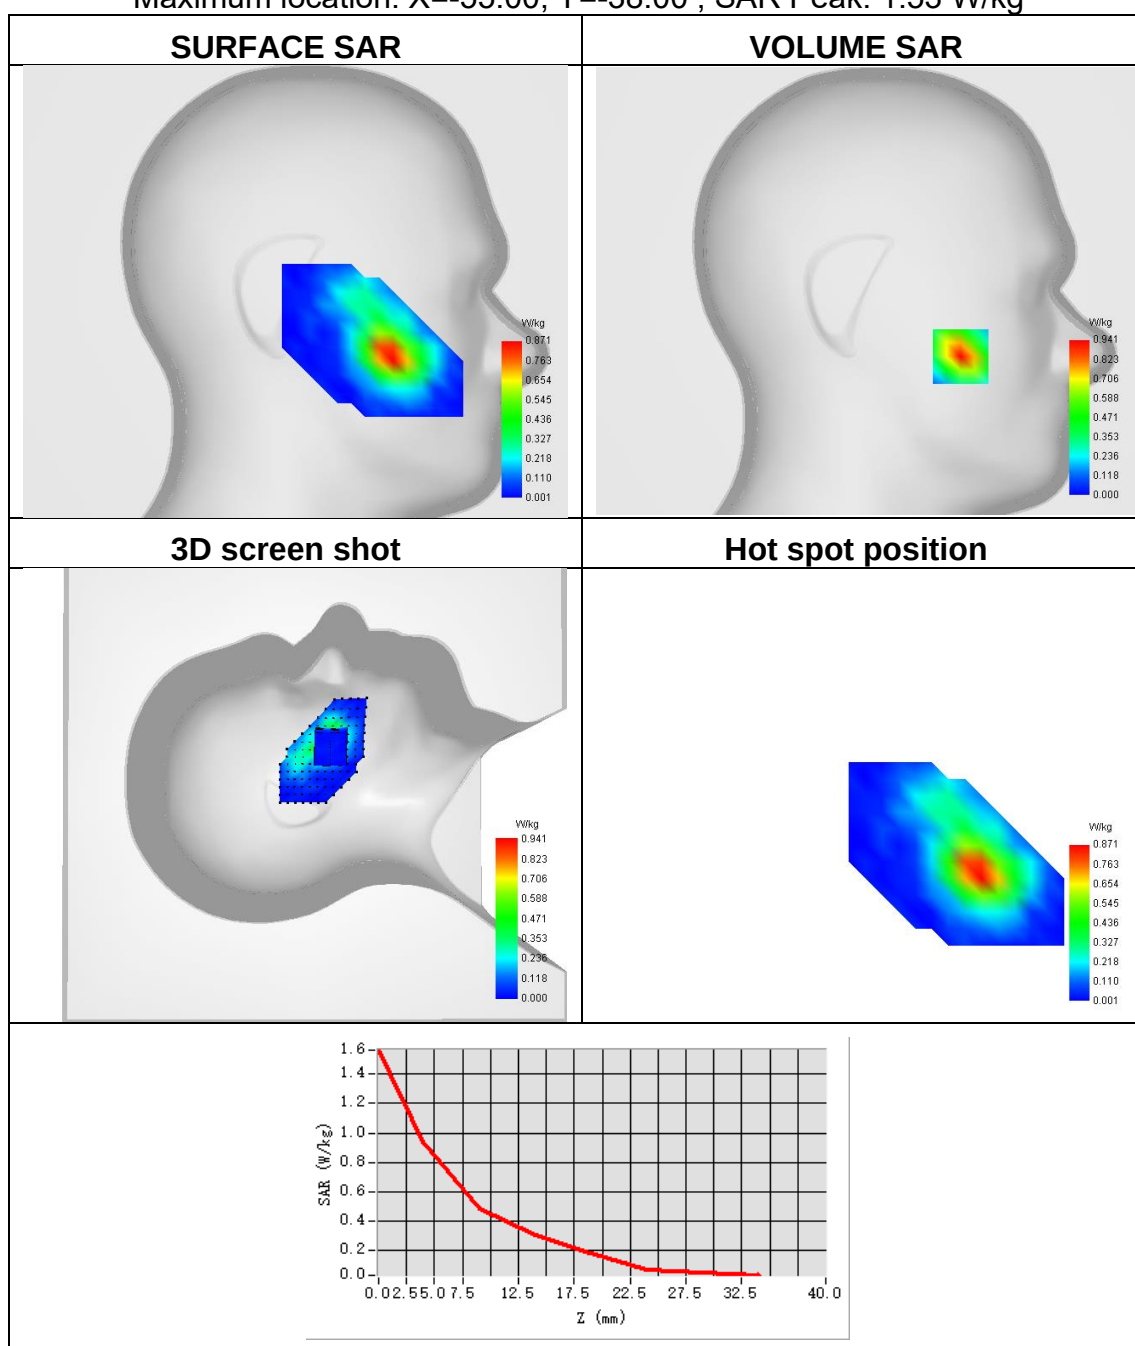




Plot 40:

Test Date	2023-05-14
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.292
SAR 1g (W/Kg)	0.569

Maximum location: X=1.00, Y=6.00 ; SAR Peak: 1.01 W/kg

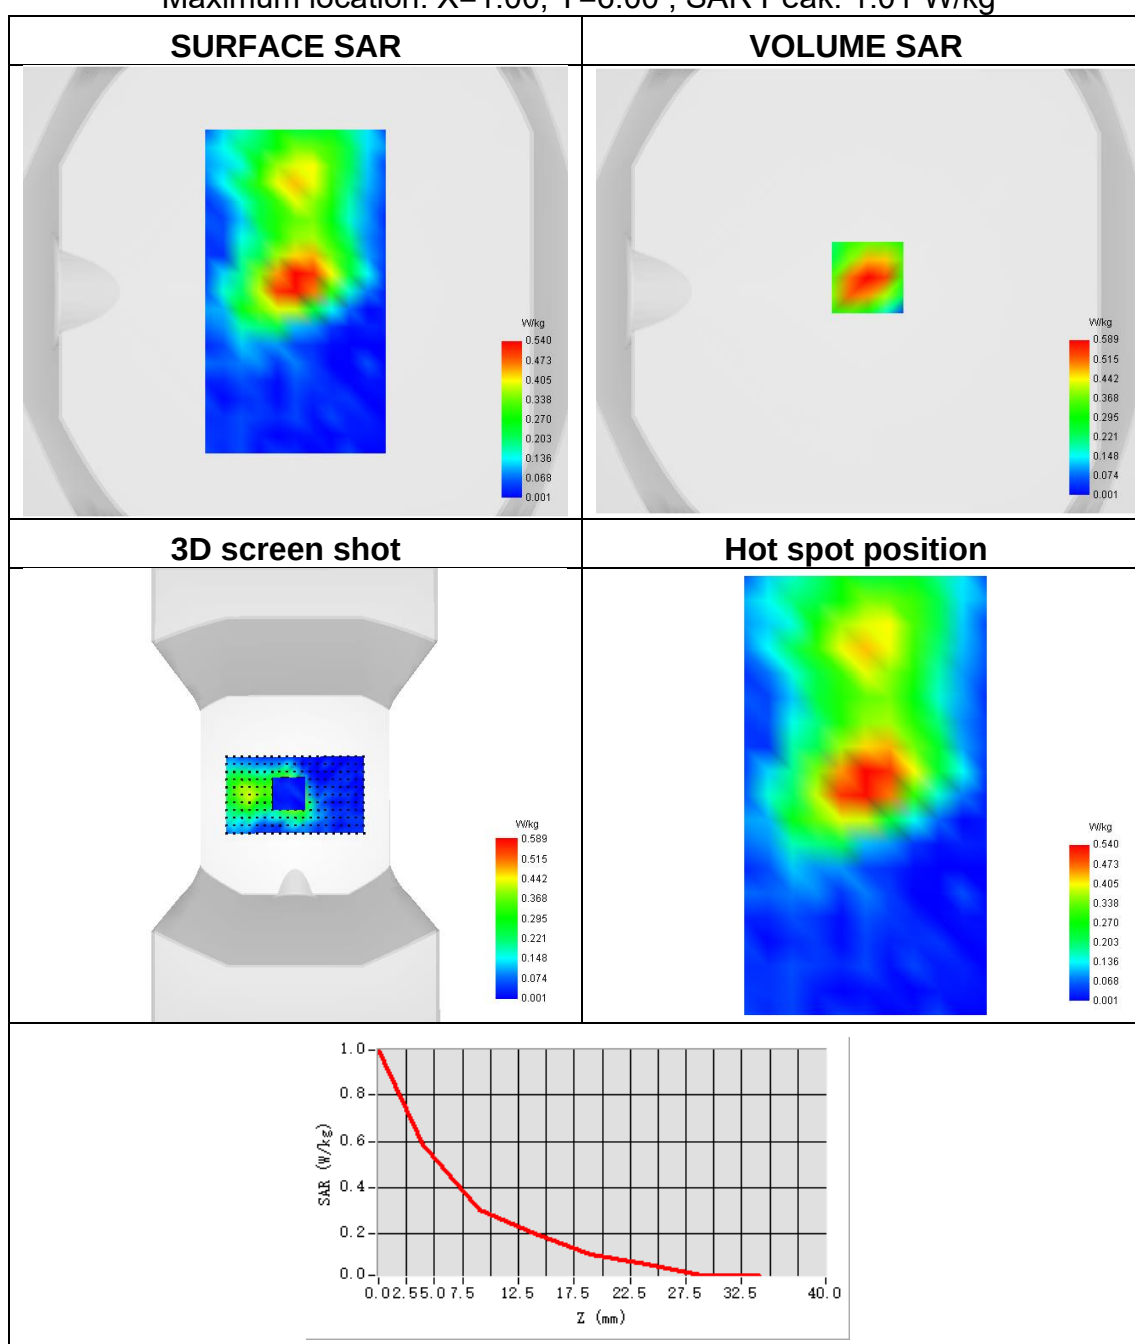




Plot 41:

Test Date	2023-06-03
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11b ISM
Signal	IEEE 802.11
Frequency	2442
SAR 10g (W/Kg)	0.060
SAR 1g (W/Kg)	0.135

Maximum location: X=-31.00, Y=-10.00 ; SAR Peak: 0.32 W/kg

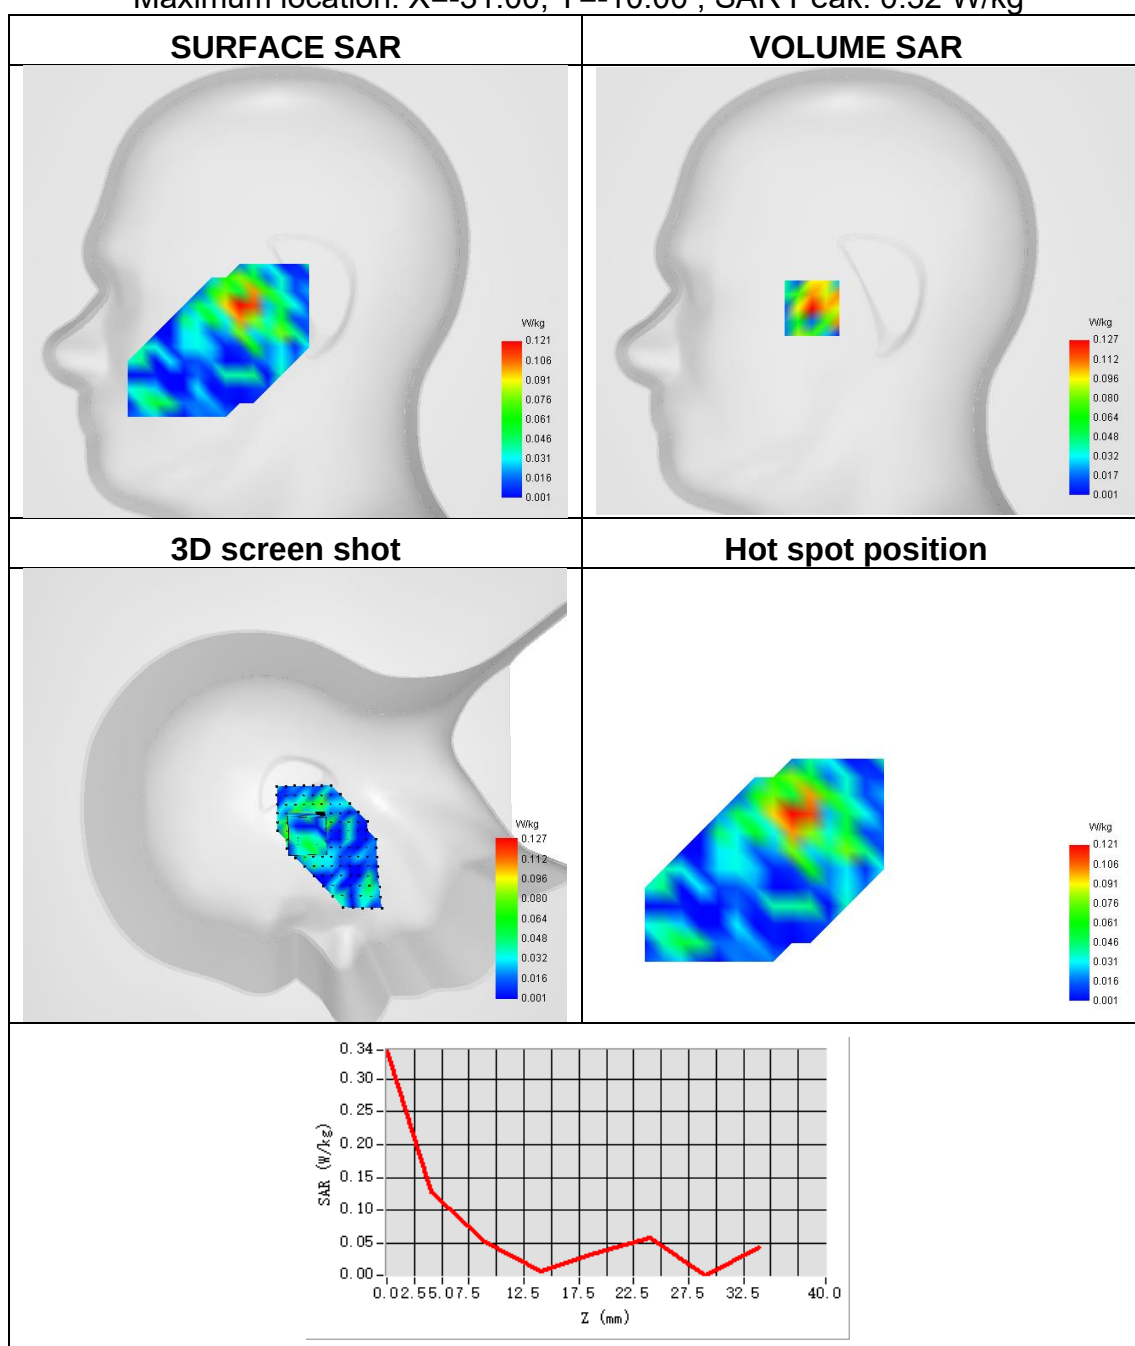




Plot 42:

Test Date	2023-06-03
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Signal	IEEE 802.11
Frequency	2442
SAR 10g (W/Kg)	0.030
SAR 1g (W/Kg)	0.076

Maximum location: X=10.00, Y=43.00 ; SAR Peak: 0.23 W/kg

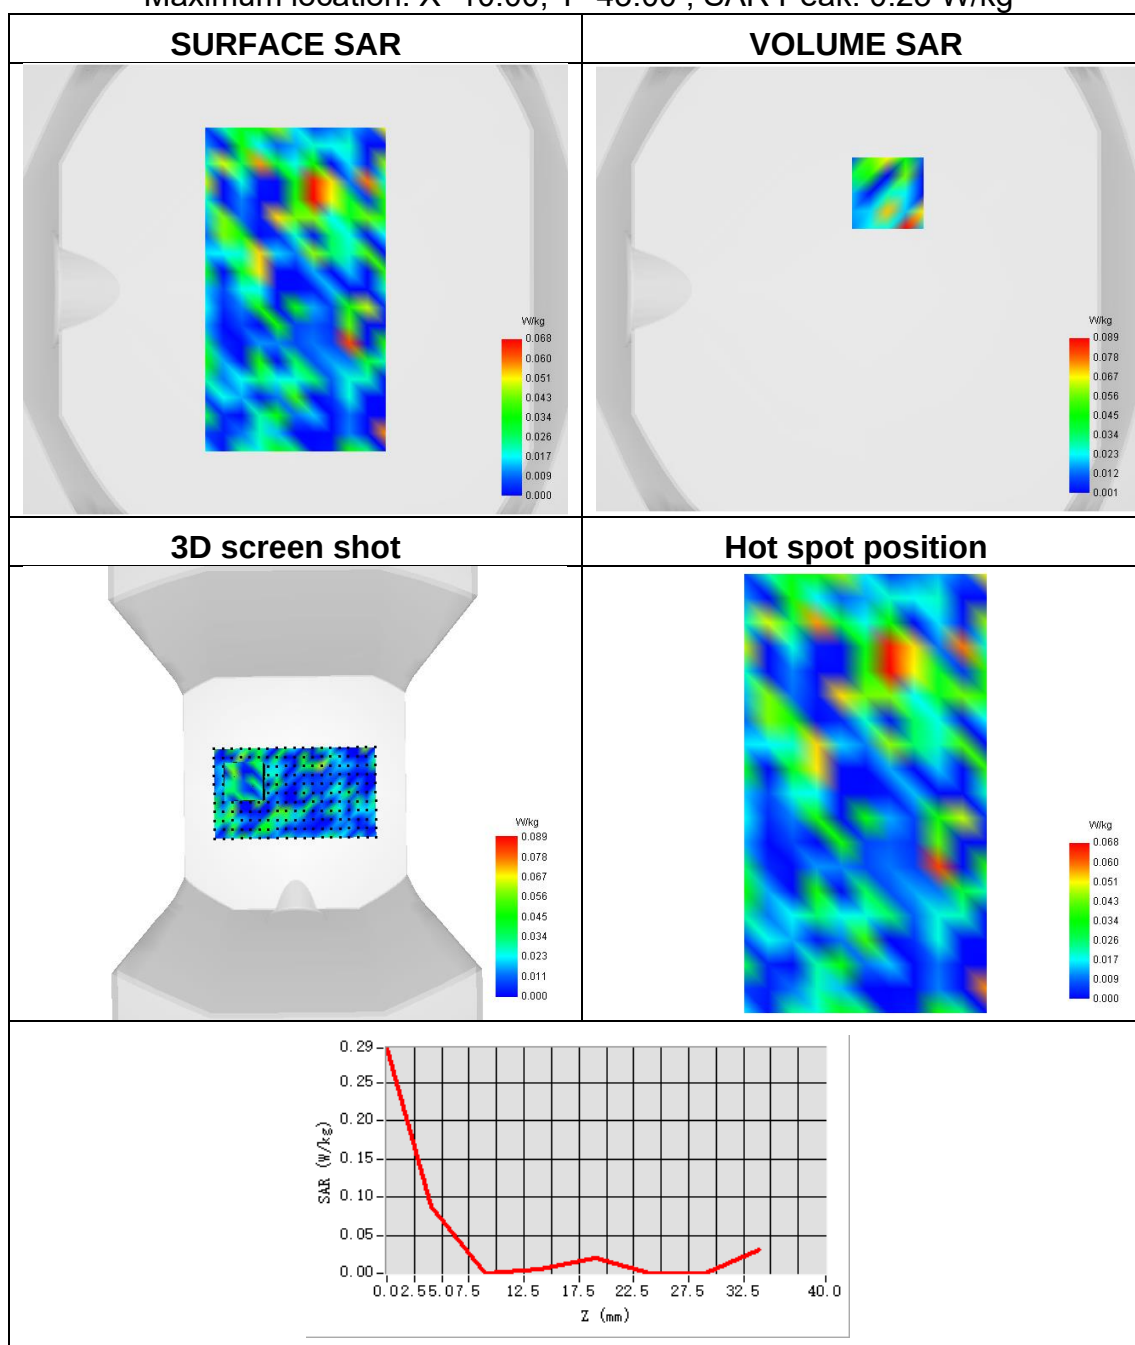




Plot 43:

Test Date	2023-06-03
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	Bluetooth
Signal	GFSK
Frequency	2441
SAR 10g (W/Kg)	0.041
SAR 1g (W/Kg)	0.098

Maximum location: X=-40.00, Y=-8.00 ; SAR Peak: 0.27 W/kg

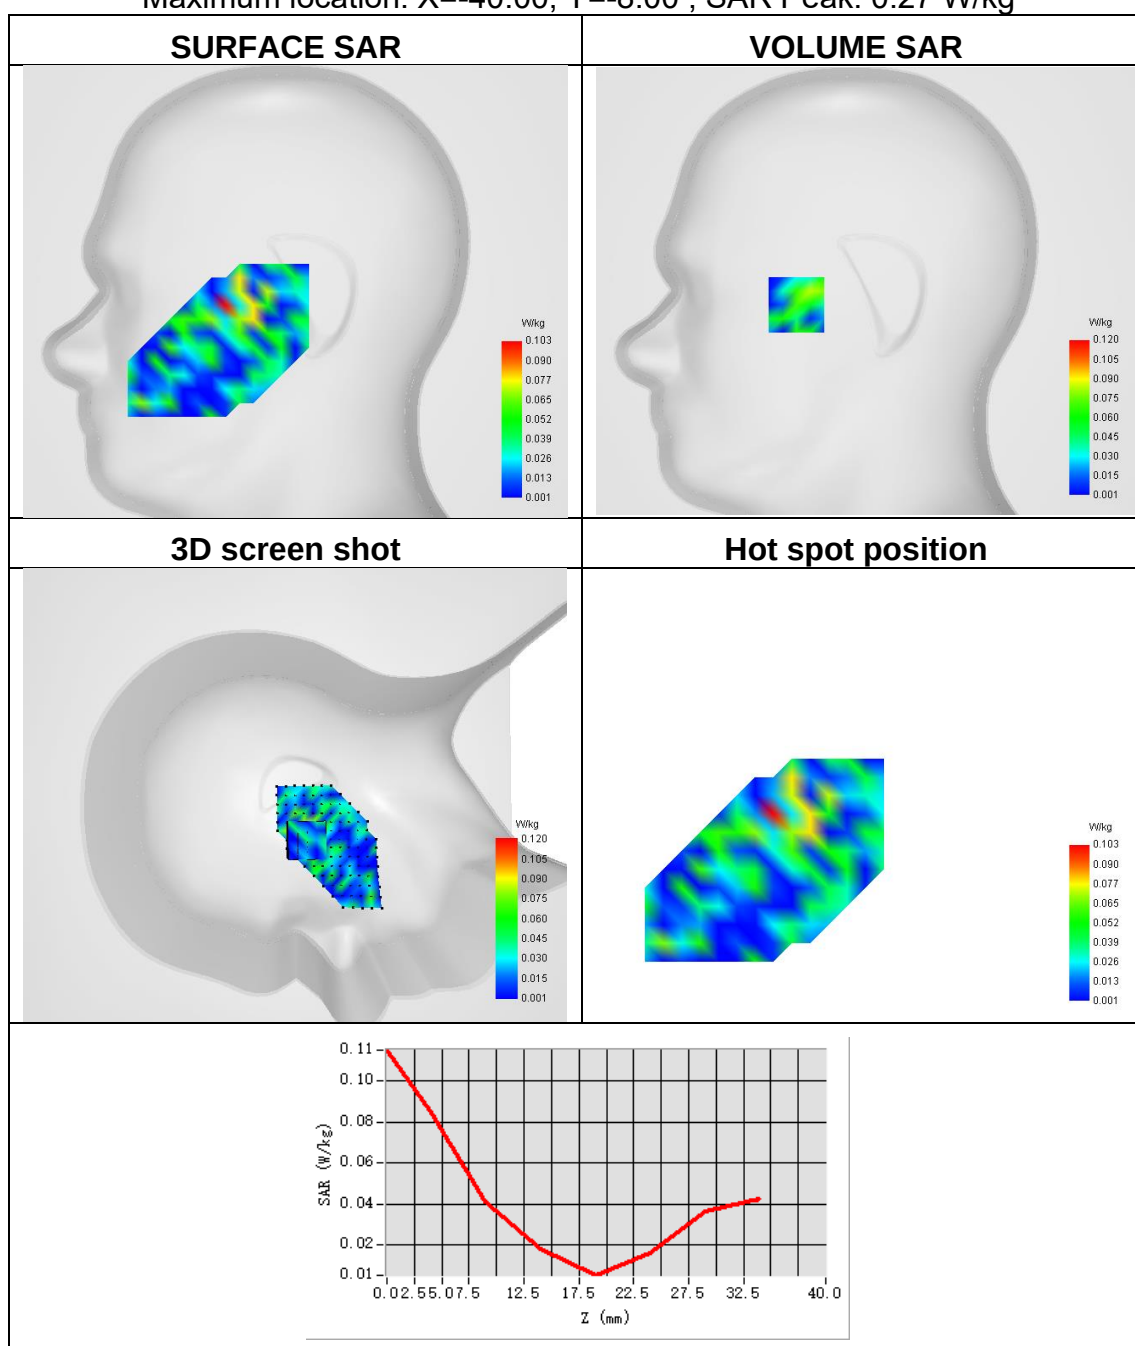




Plot 44:

Test Date	2023-06-03
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	Bluetooth
Signal	GFSK
Frequency	2441
SAR 10g (W/Kg)	0.022
SAR 1g (W/Kg)	0.064

Maximum location: X=1.00, Y=-31.00 ; SAR Peak: 0.21 W/kg

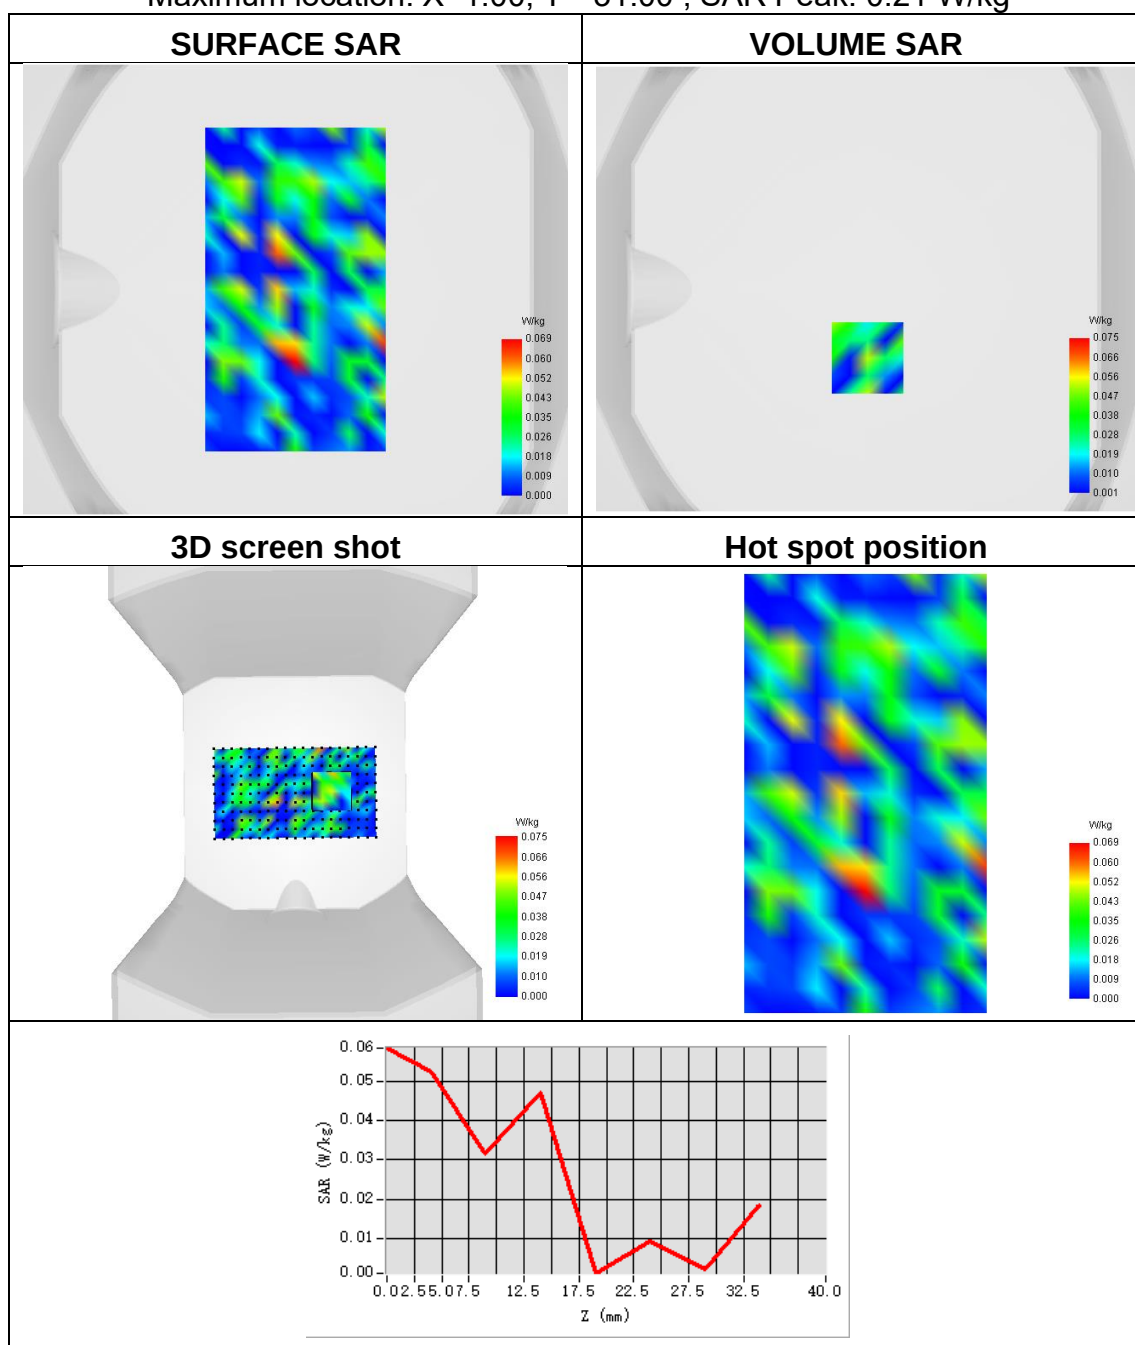



Plot 45:

Test Date	2023-05-13
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11a U-NII
Signal	IEEE 802.11
Frequency	5180
SAR 10g (W/Kg)	0.060
SAR 1g (W/Kg)	0.113

Maximum location: X=-15.00, Y=5.00 ; SAR Peak: 0.62 W/kg

