




Plot 44:

Test Date	2026-02-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5785
SAR 10g (W/Kg)	0.040
SAR 1g (W/Kg)	0.059
ConvF	1.19
Relative permittivity	35.84
Conductivity (S/m)	5.29

Maximum location: X=15.00, Y=32.00 ; SAR Peak: 0.18 W/kg

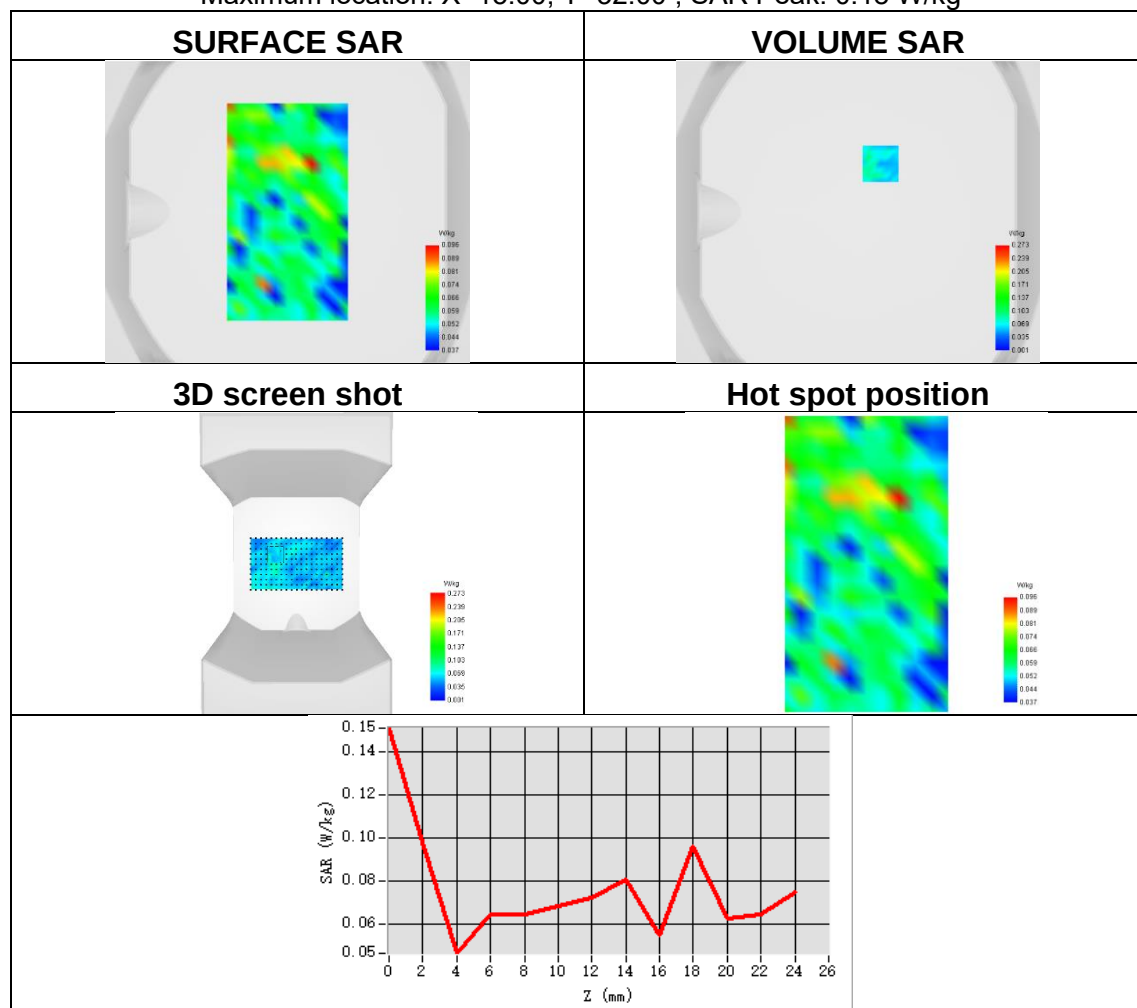




Plot 45:

Test Date	2026-02-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5785
SAR 10g (W/Kg)	0.150
SAR 1g (W/Kg)	0.418
ConvF	1.19
Relative permittivity	35.84
Conductivity (S/m)	5.29

Maximum location: X=-40.00, Y=0.00 ; SAR Peak: 1.69 W/kg

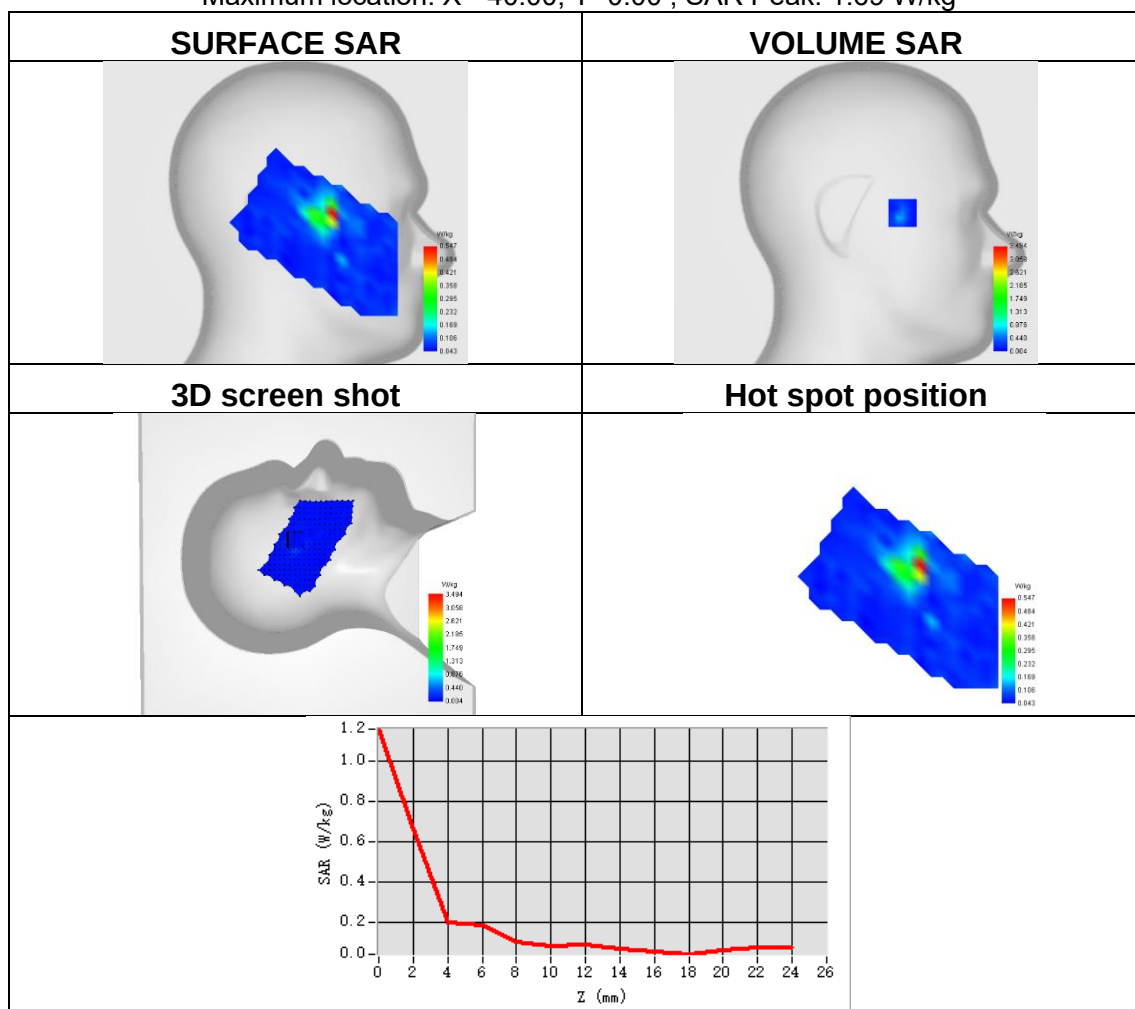




Plot 46:

Test Date	2026-02-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5785
SAR 10g (W/Kg)	0.067
SAR 1g (W/Kg)	0.116
ConvF	1.19
Relative permittivity	35.84
Conductivity (S/m)	5.29

Maximum location: X=0.00, Y=-9.00 ; SAR Peak: 0.44 W/kg

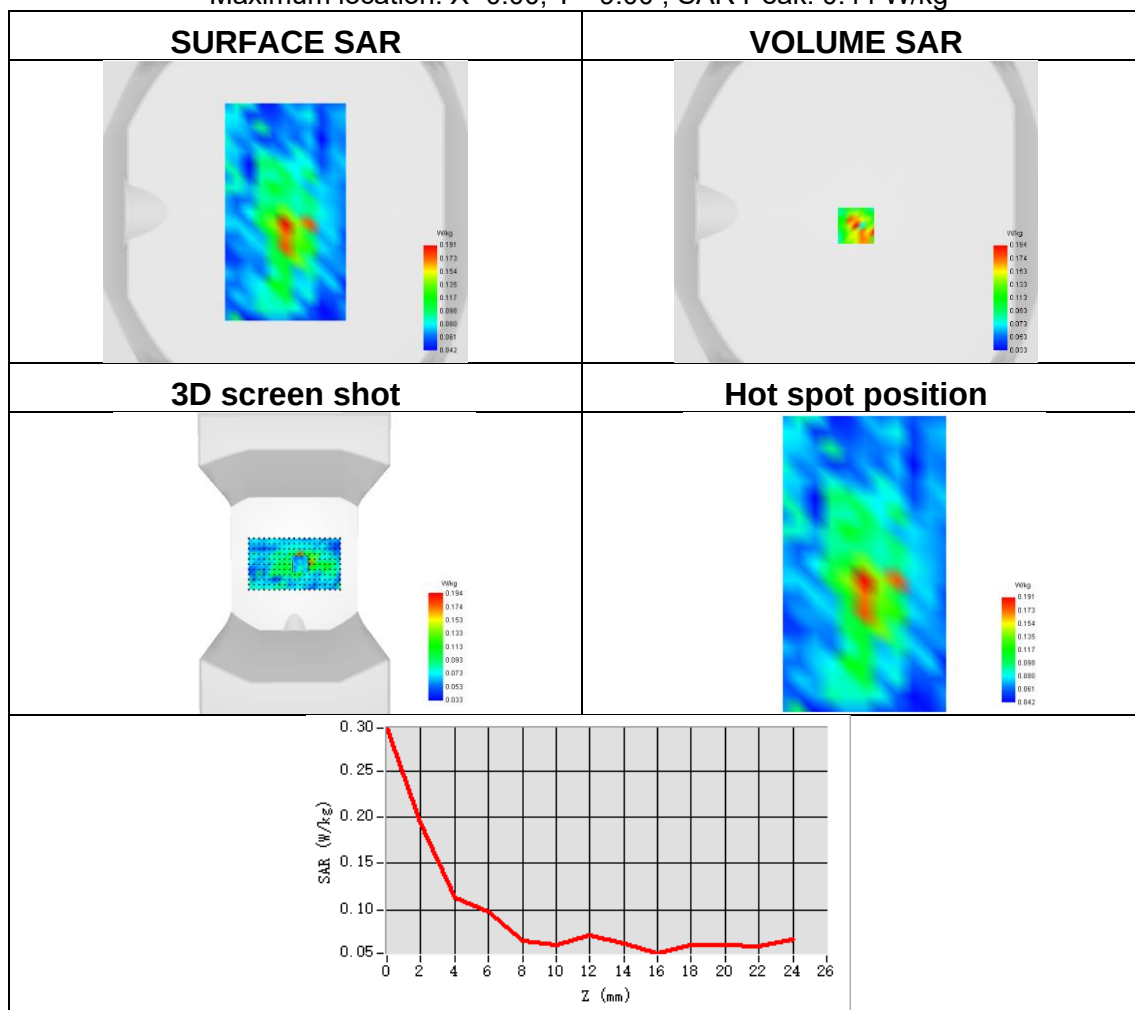




Plot 47:

Test Date	2026-02-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11ax
Frequency	5785
SAR 10g (W/Kg)	0.037
SAR 1g (W/Kg)	0.065
ConvF	1.19
Relative permittivity	35.84
Conductivity (S/m)	5.29

Maximum location: X=-32.00, Y=-32.00 ; SAR Peak: 0.24 W/kg

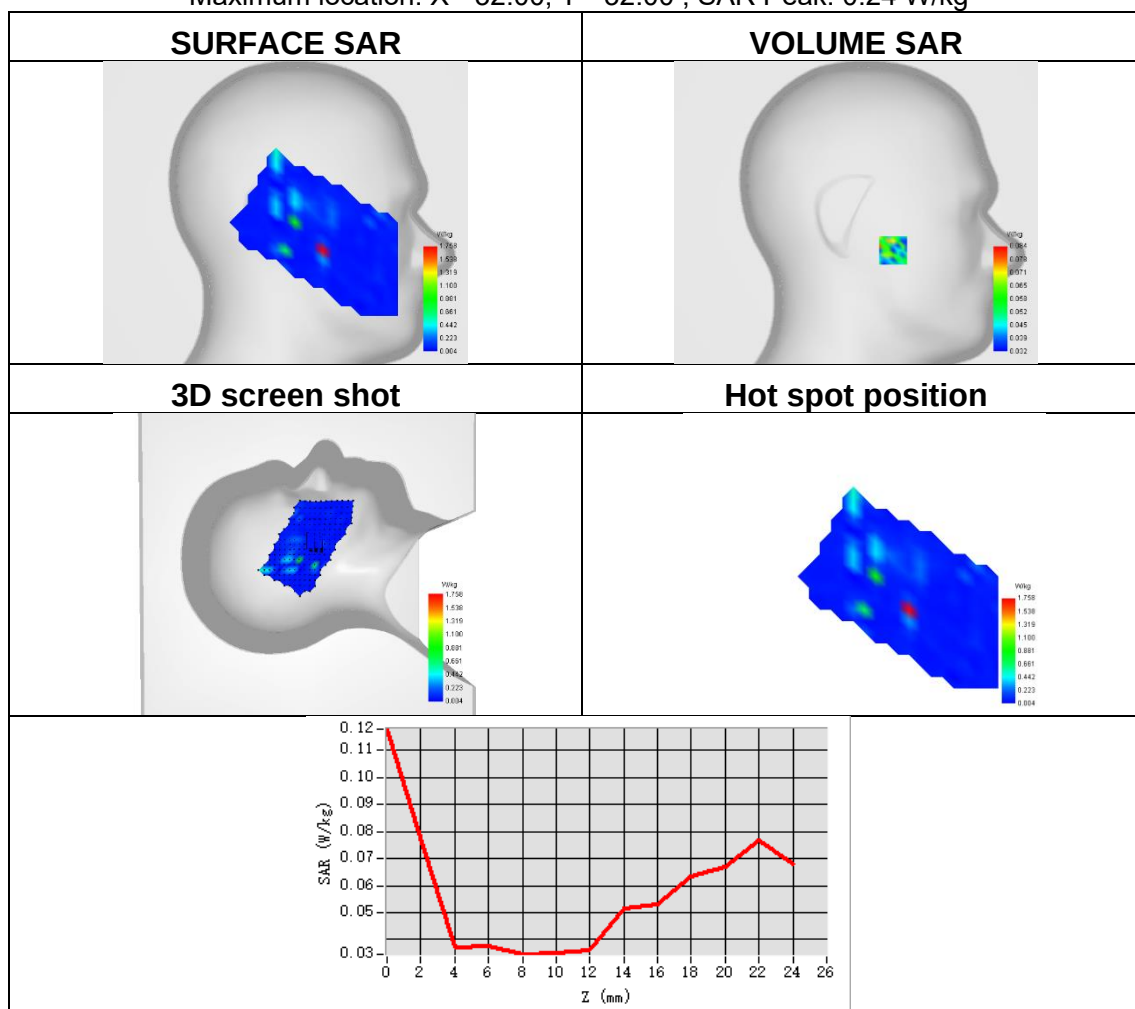




Plot 48:

Test Date	2026-02-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-3
Signal	IEEE 802.11ax
Frequency	5785
SAR 10g (W/Kg)	0.042
SAR 1g (W/Kg)	0.077
ConvF	1.19
Relative permittivity	35.84
Conductivity (S/m)	5.29

Maximum location: X=-8.00, Y=-40.00 ; SAR Peak: 0.62 W/kg

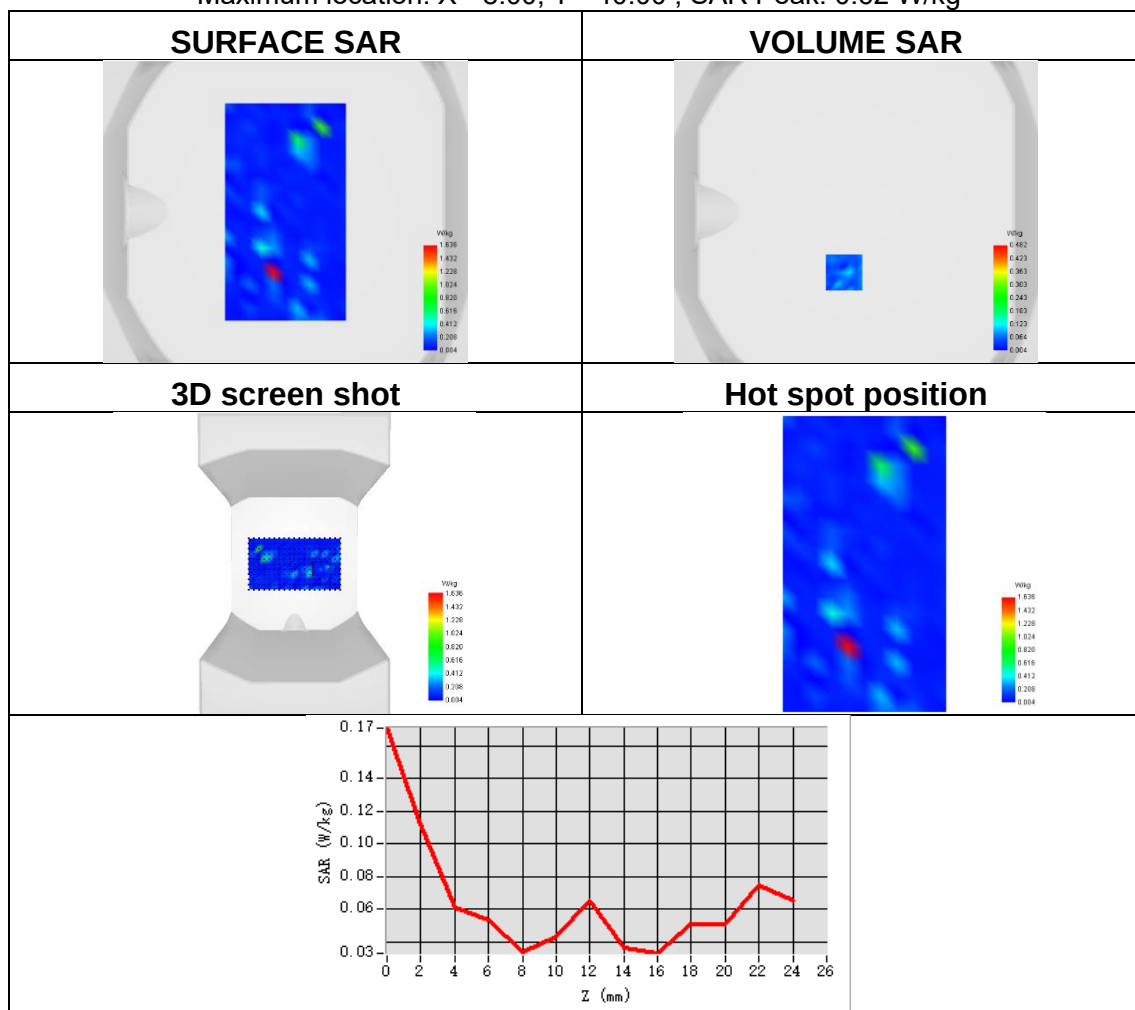




Plot 49:

Test Date	2026-02-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11ax
Frequency	5785
SAR 10g (W/Kg)	0.113
SAR 1g (W/Kg)	0.358
ConvF	1.19
Relative permittivity	35.84
Conductivity (S/m)	5.29

Maximum location: X=-16.00, Y=0.00 ; SAR Peak: 10.21 W/kg

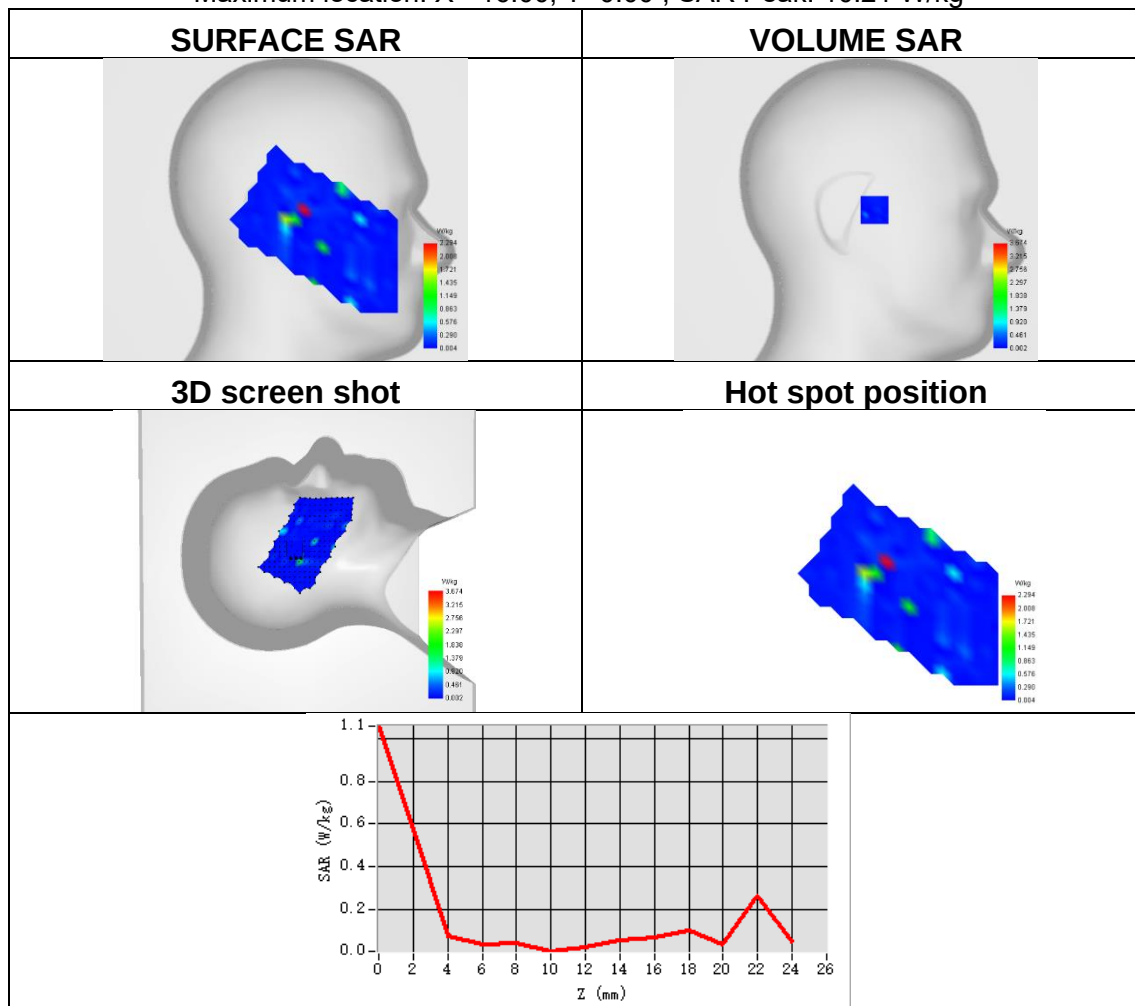




Plot 50:

Test Date	2026-02-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-3
Signal	IEEE 802.11ax
Frequency	5785
SAR 10g (W/Kg)	0.067
SAR 1g (W/Kg)	0.154
ConvF	1.19
Relative permittivity	35.84
Conductivity (S/m)	5.29

Maximum location: X=8.00, Y=-40.00 ; SAR Peak: 1.43 W/kg

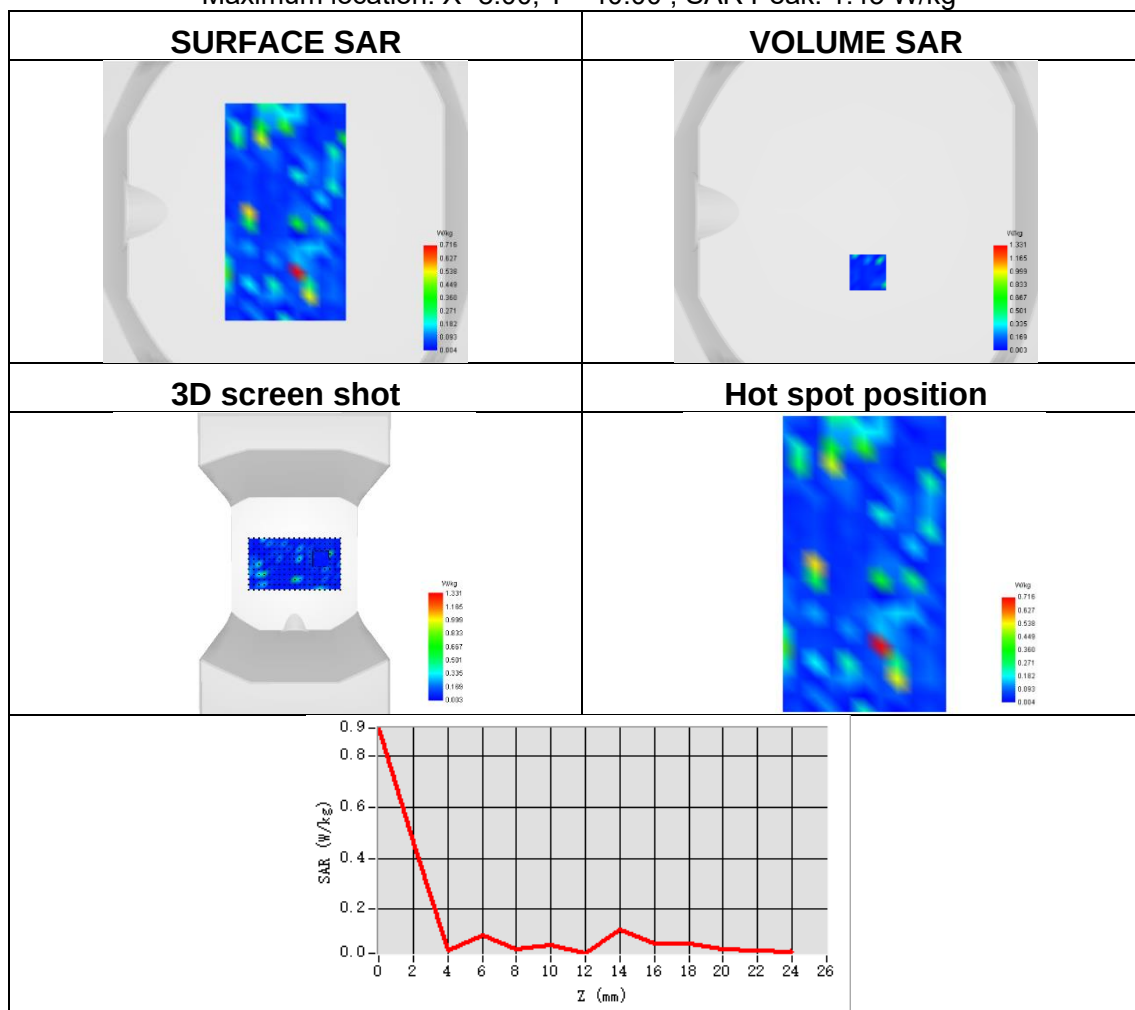




Plot 51:

Test Date	2026-02-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	0.153
SAR 1g (W/Kg)	0.583
ConvF	2.25
Relative permittivity	40.90
Conductivity (S/m)	1.41

Maximum location: X=-8.00, Y=24.00 ; SAR Peak: 2.82 W/kg

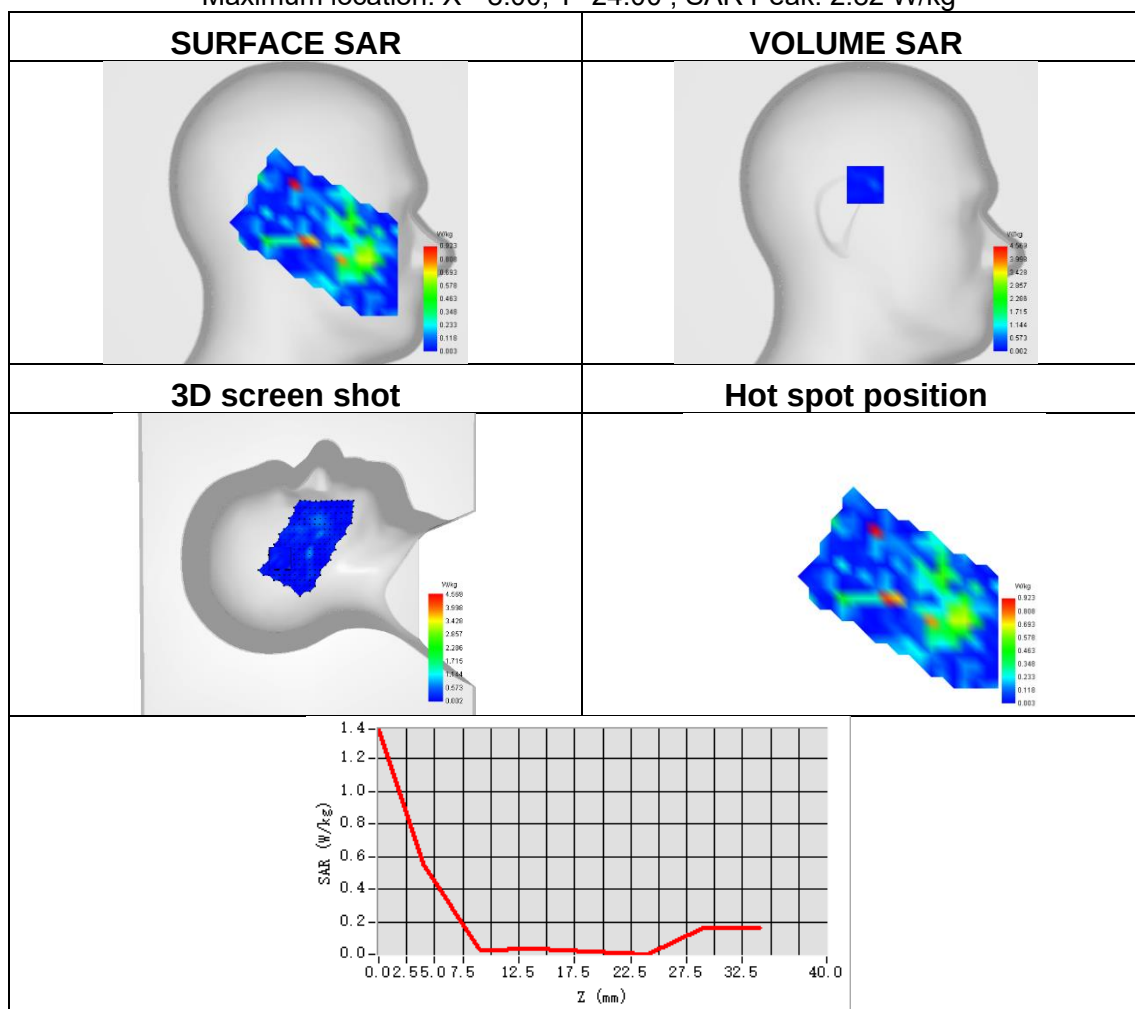




Plot 52:

Test Date	2026-02-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	0.404
SAR 1g (W/Kg)	0.905
ConvF	2.25
Relative permittivity	40.90
Conductivity (S/m)	1.41

Maximum location: X=1.00, Y=1.00 ; SAR Peak: 2.07 W/kg

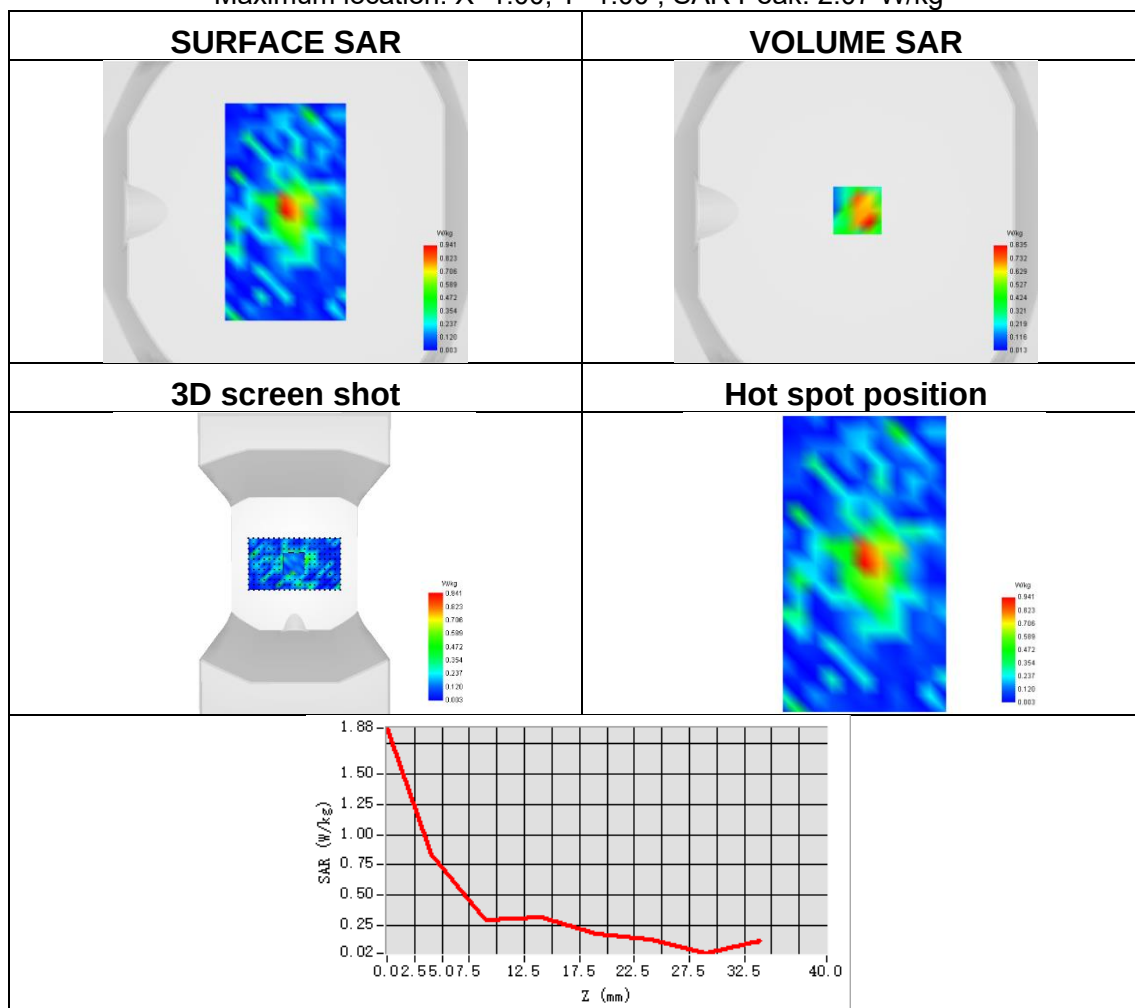




Plot 53:

Test Date	2026-02-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 4
Signal	LTE FDD
Frequency	1732.5
SAR 10g (W/Kg)	0.124
SAR 1g (W/Kg)	0.396
ConvF	0.69
Relative permittivity	40.84
Conductivity (S/m)	1.39

Maximum location: X=-24.00, Y=0.00 ; SAR Peak: 1.48 W/kg

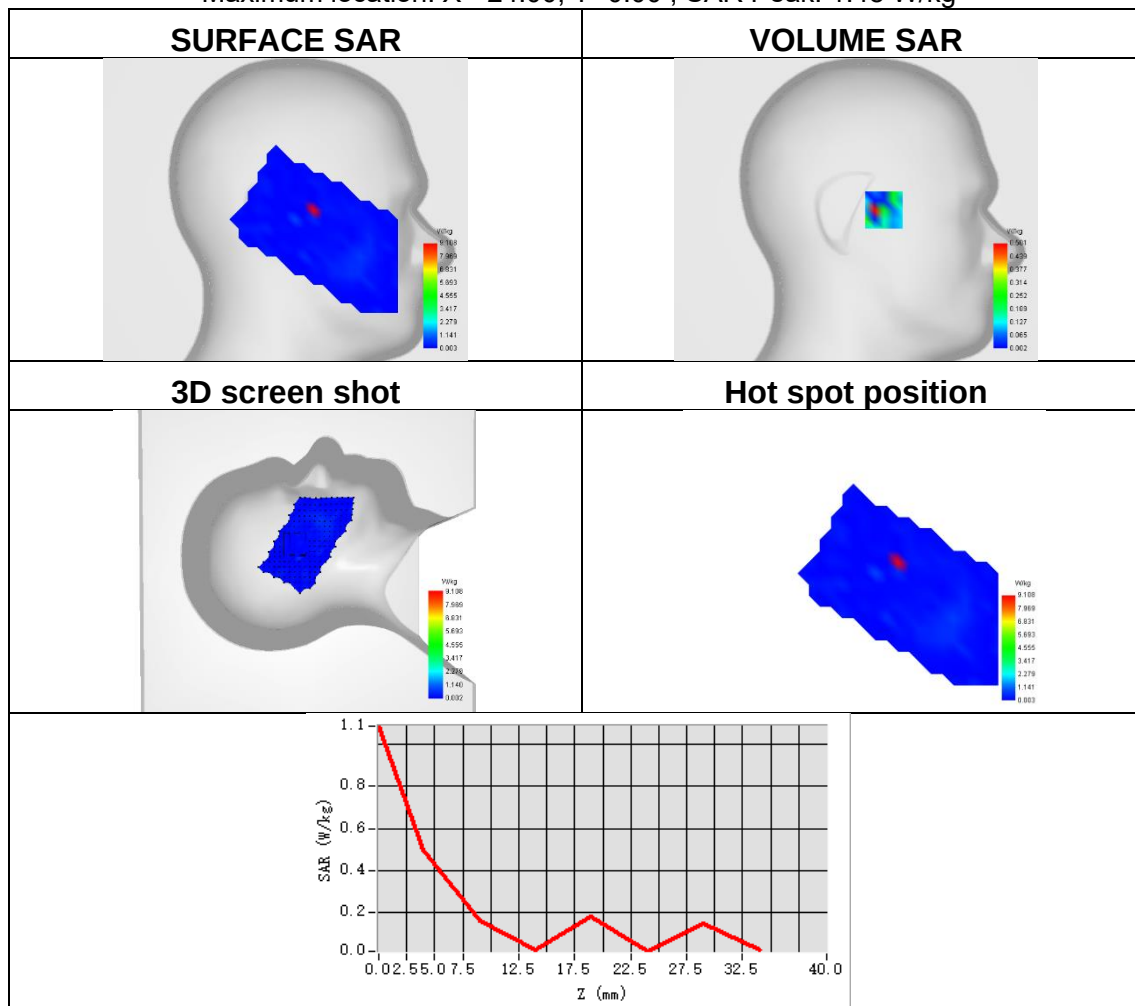




Plot 54:

Test Date	2026-02-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1732.5
SAR 10g (W/Kg)	0.220
SAR 1g (W/Kg)	0.472
ConvF	0.69
Relative permittivity	40.84
Conductivity (S/m)	1.39

Maximum location: X=24.00, Y=8.00 ; SAR Peak: 2.74 W/kg

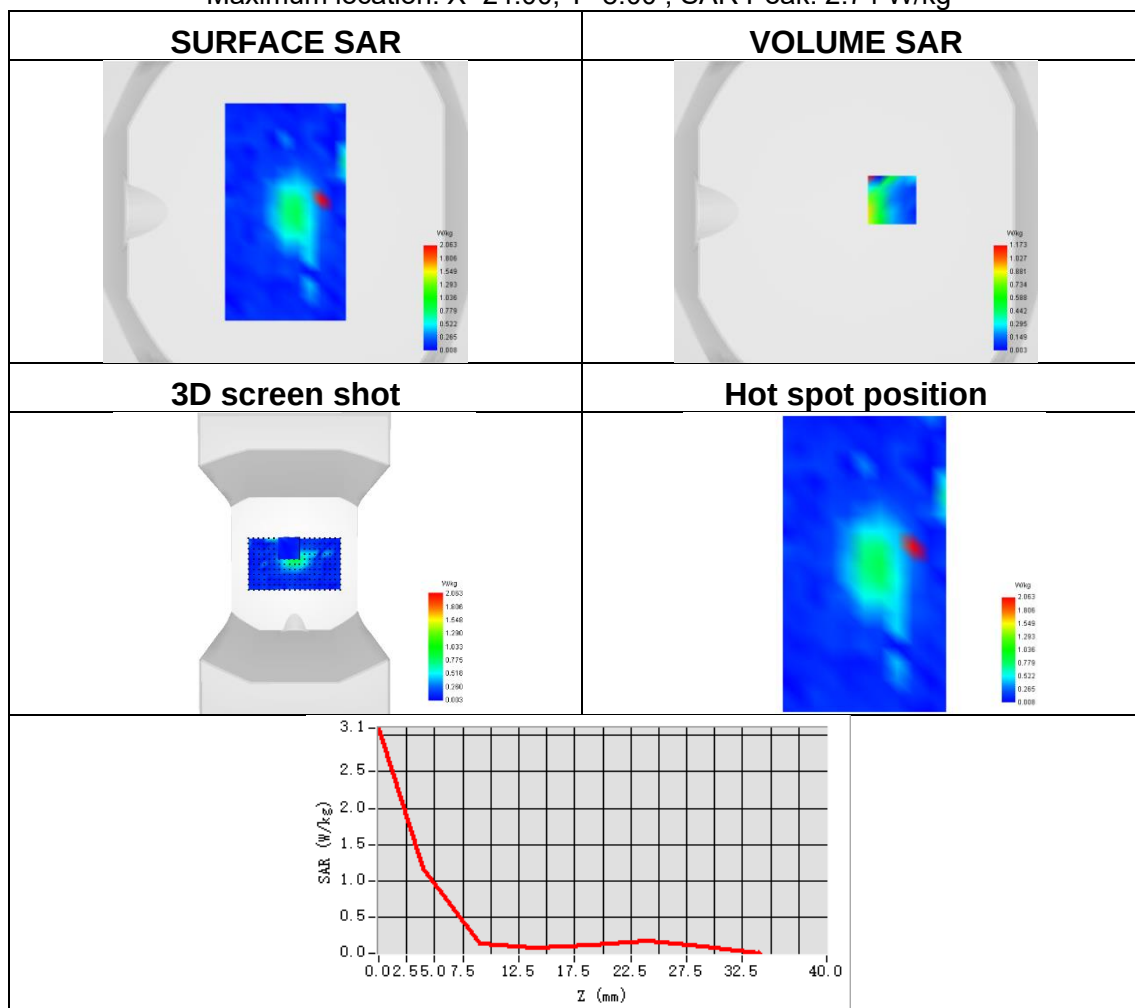




Plot 55:

Test Date	2026-02-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.374
SAR 1g (W/Kg)	0.672
ConvF	0.69
Relative permittivity	42.19
Conductivity (S/m)	0.91

Maximum location: X=-64.00, Y=-48.00 ; SAR Peak: 1.69 W/kg

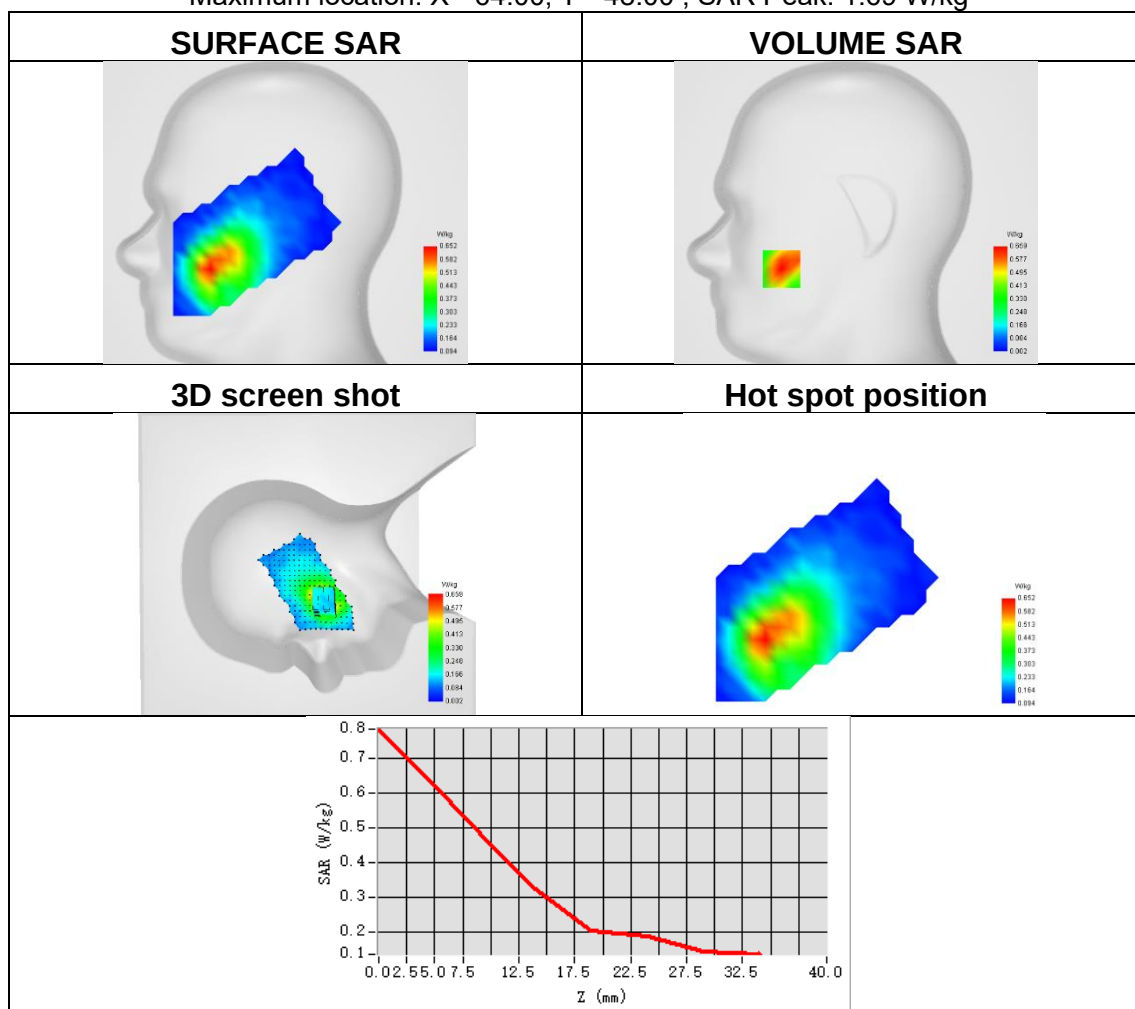




Plot 56:

Test Date	2026-02-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.287
SAR 1g (W/Kg)	0.555
ConvF	0.69
Relative permittivity	42.19
Conductivity (S/m)	0.91

Maximum location: X=-16.00, Y=-39.00 ; SAR Peak: 0.81 W/kg

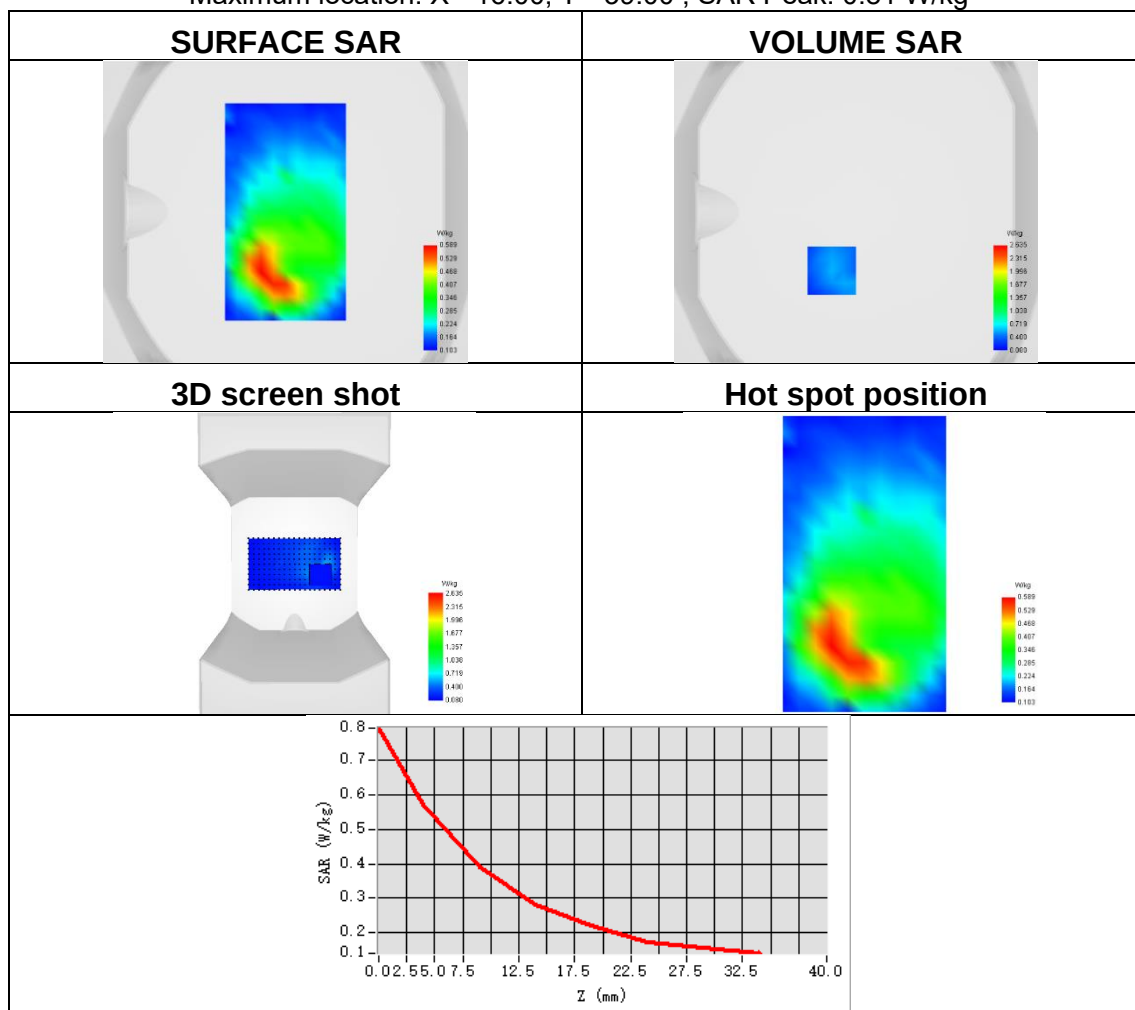




Plot 57:

Test Date	2026-02-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.103
SAR 1g (W/Kg)	0.272
ConvF	0.98
Relative permittivity	39.04
Conductivity (S/m)	1.90

Maximum location: X=-32.00, Y=-56.00 ; SAR Peak: 0.84 W/kg

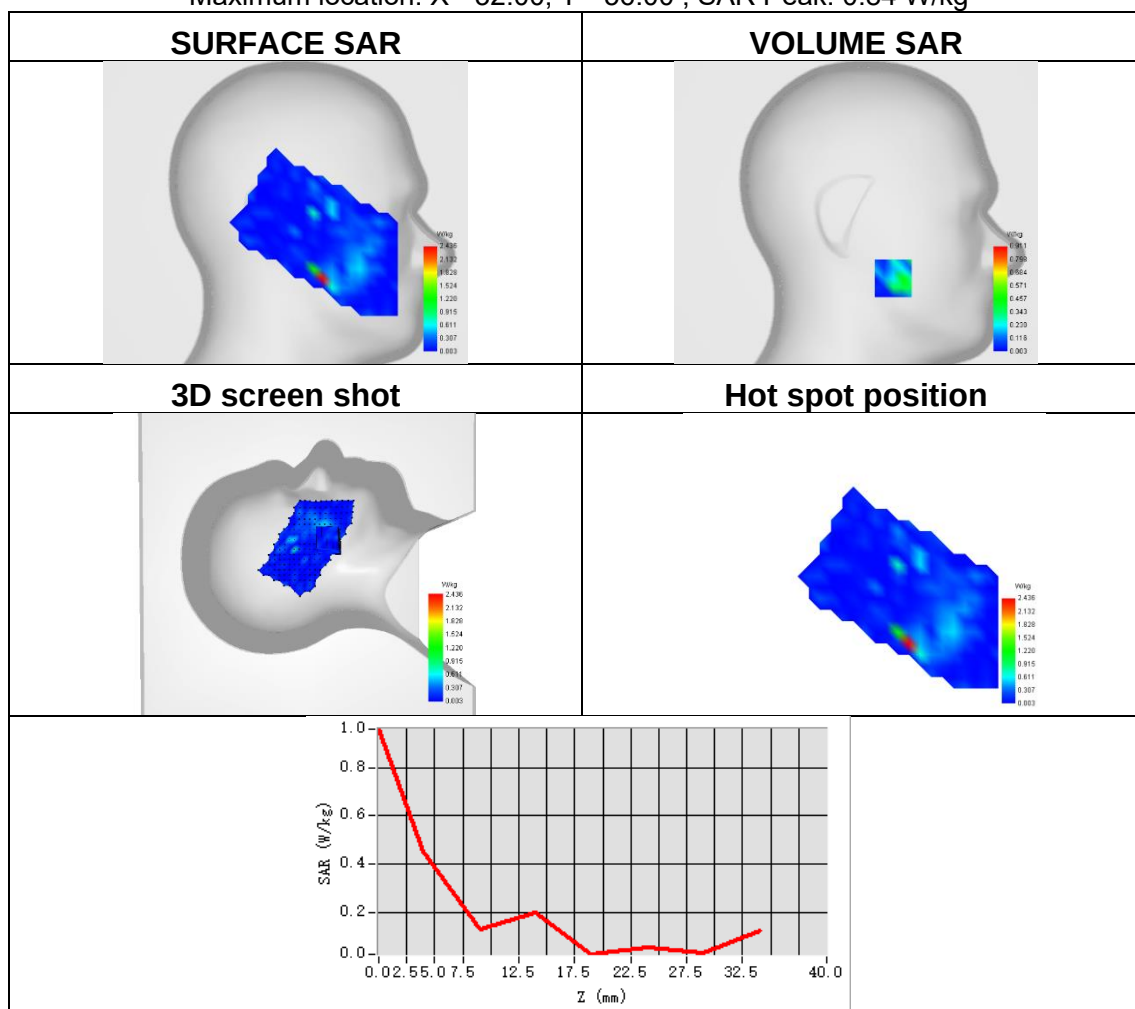




Plot 58:

Test Date	2026-02-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.354
SAR 1g (W/Kg)	0.860
ConvF	0.98
Relative permittivity	39.04
Conductivity (S/m)	1.90

Maximum location: X=9.00, Y=-1.00 ; SAR Peak: 1.65 W/kg

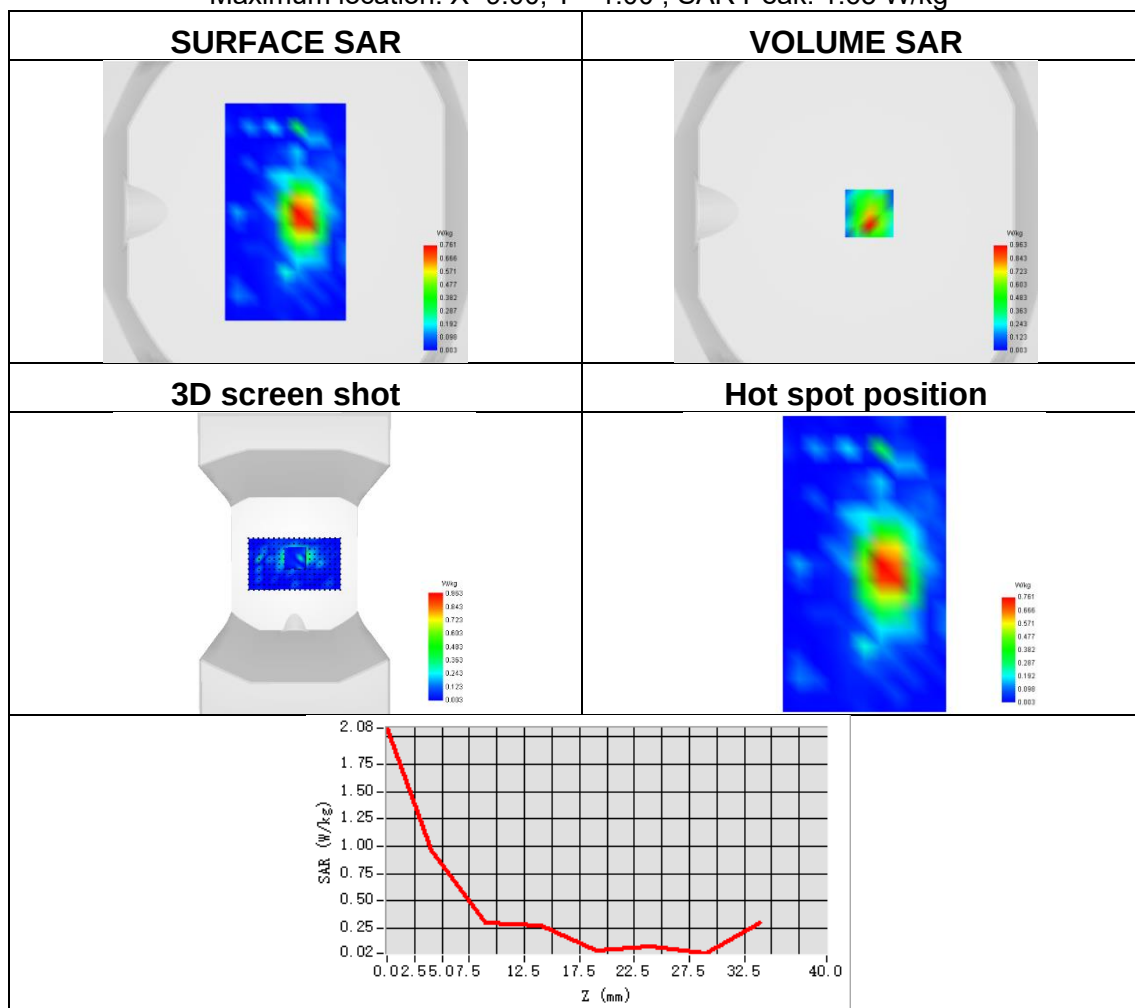




Plot 59:

Test Date	2026-02-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 12
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.396
SAR 1g (W/Kg)	0.633
ConvF	0.71
Relative permittivity	42.72
Conductivity (S/m)	0.88

Maximum location: X=-62.00, Y=-46.00 ; SAR Peak: 0.87 W/kg

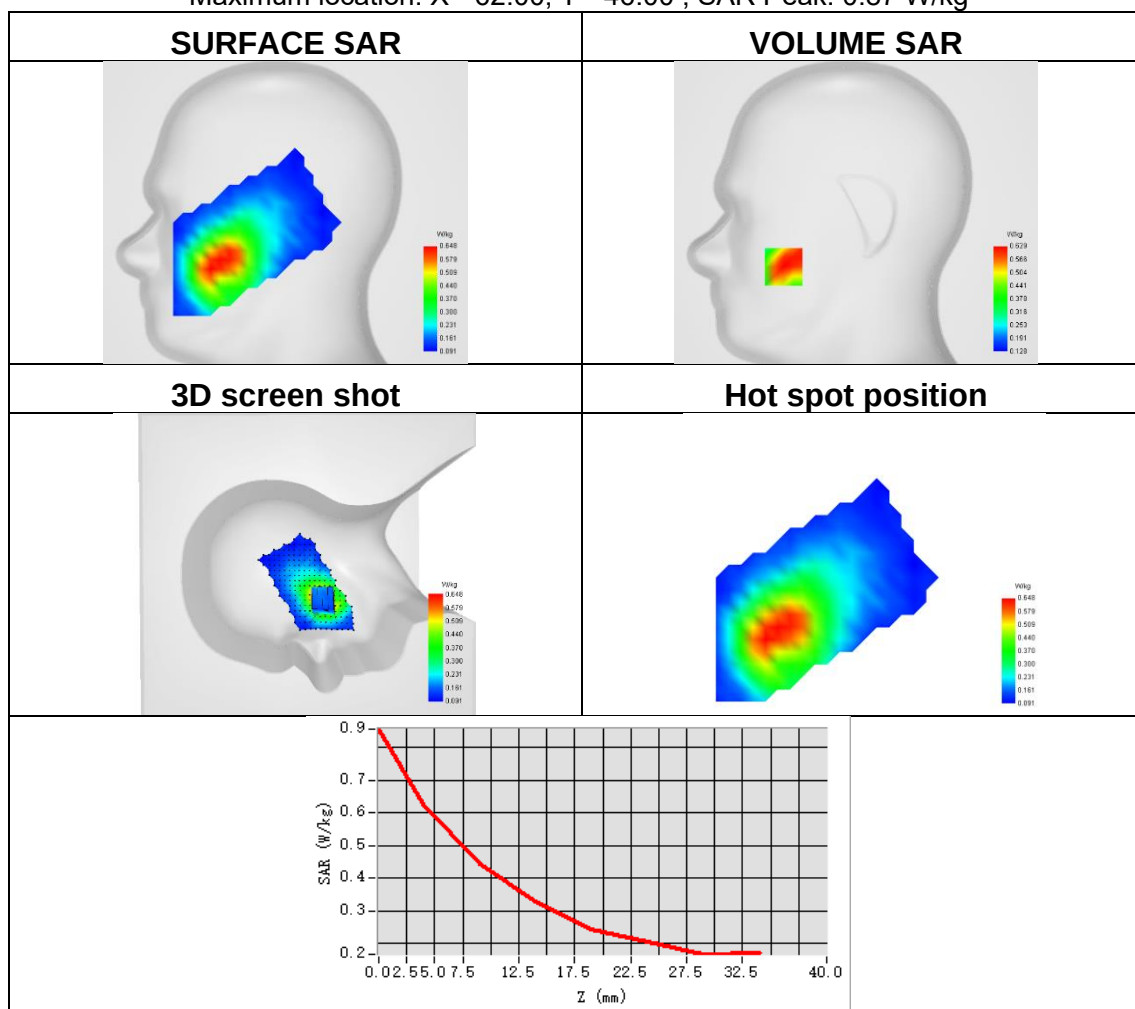




Plot 60:

Test Date	2026-02-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 12
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.111
SAR 1g (W/Kg)	0.179
ConvF	0.71
Relative permittivity	42.72
Conductivity (S/m)	0.88

Maximum location: X=-17.00, Y=-36.00 ; SAR Peak: 0.25 W/kg

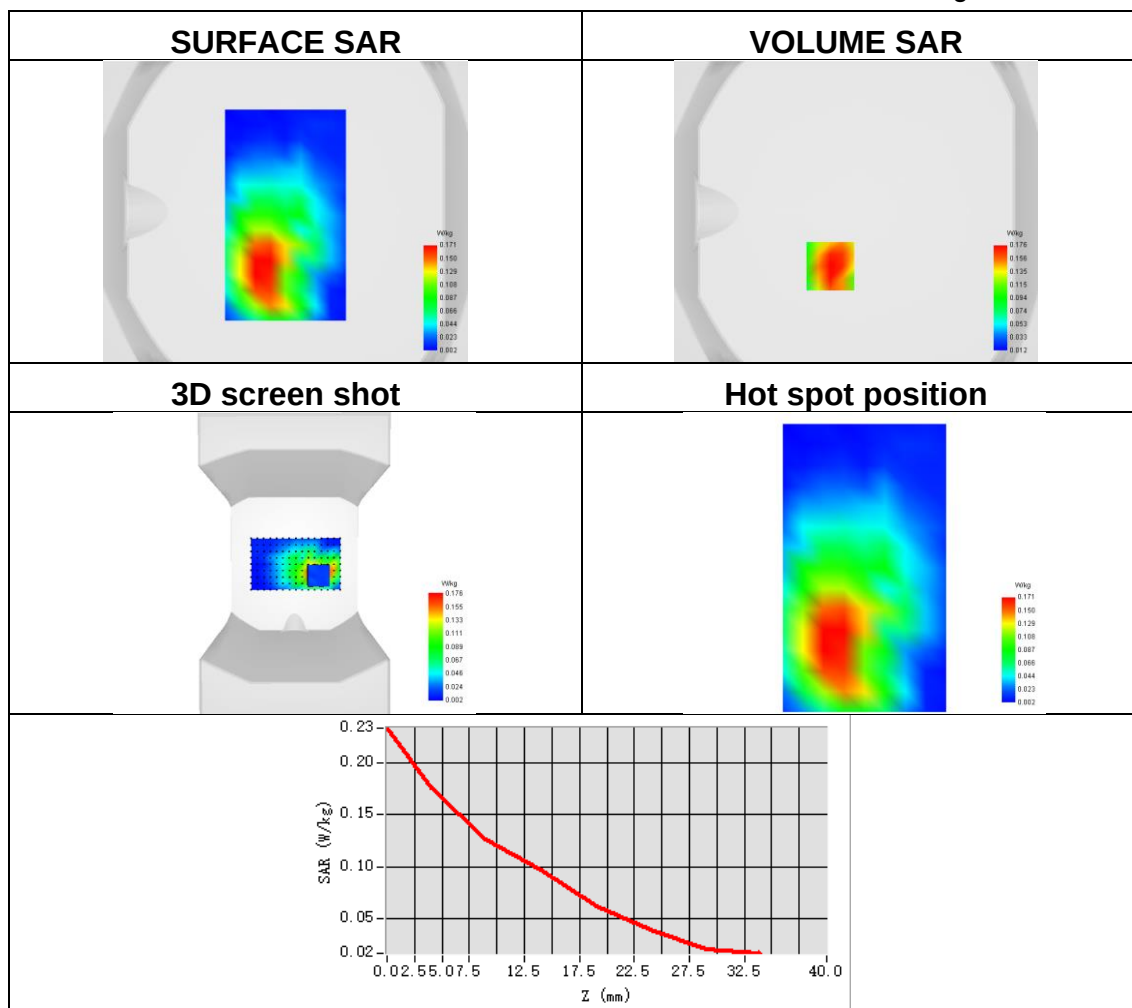




Plot 61:

Test Date	2026-02-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.219
SAR 1g (W/Kg)	0.347
ConvF	0.71
Relative permittivity	42.91
Conductivity (S/m)	0.85

Maximum location: X=-64.00, Y=-47.00 ; SAR Peak: 0.50 W/kg

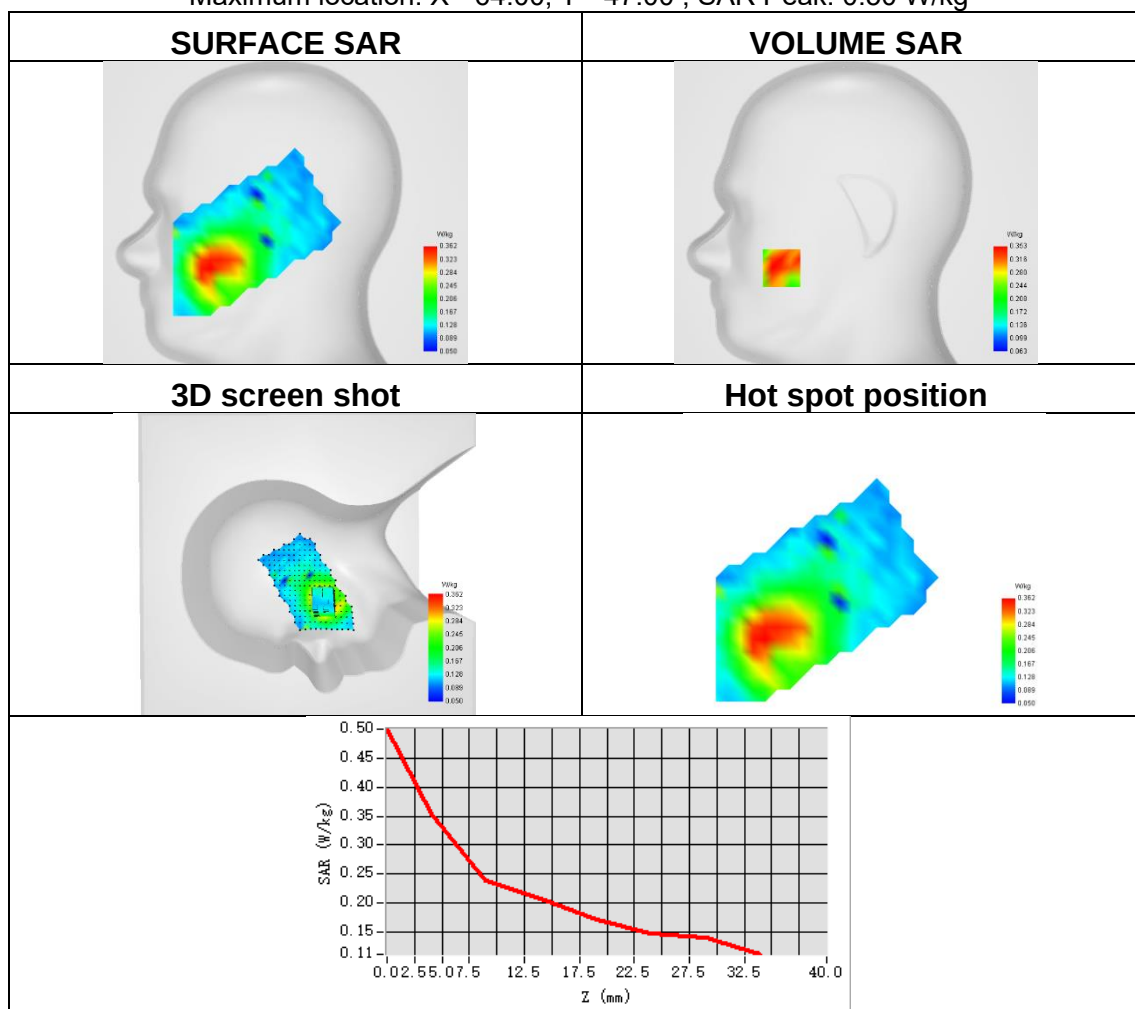




Plot 62:

Test Date	2026-02-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.041
SAR 1g (W/Kg)	0.081
ConvF	0.71
Relative permittivity	42.91
Conductivity (S/m)	0.85

Maximum location: X=-20.00, Y=-42.00 ; SAR Peak: 0.15 W/kg

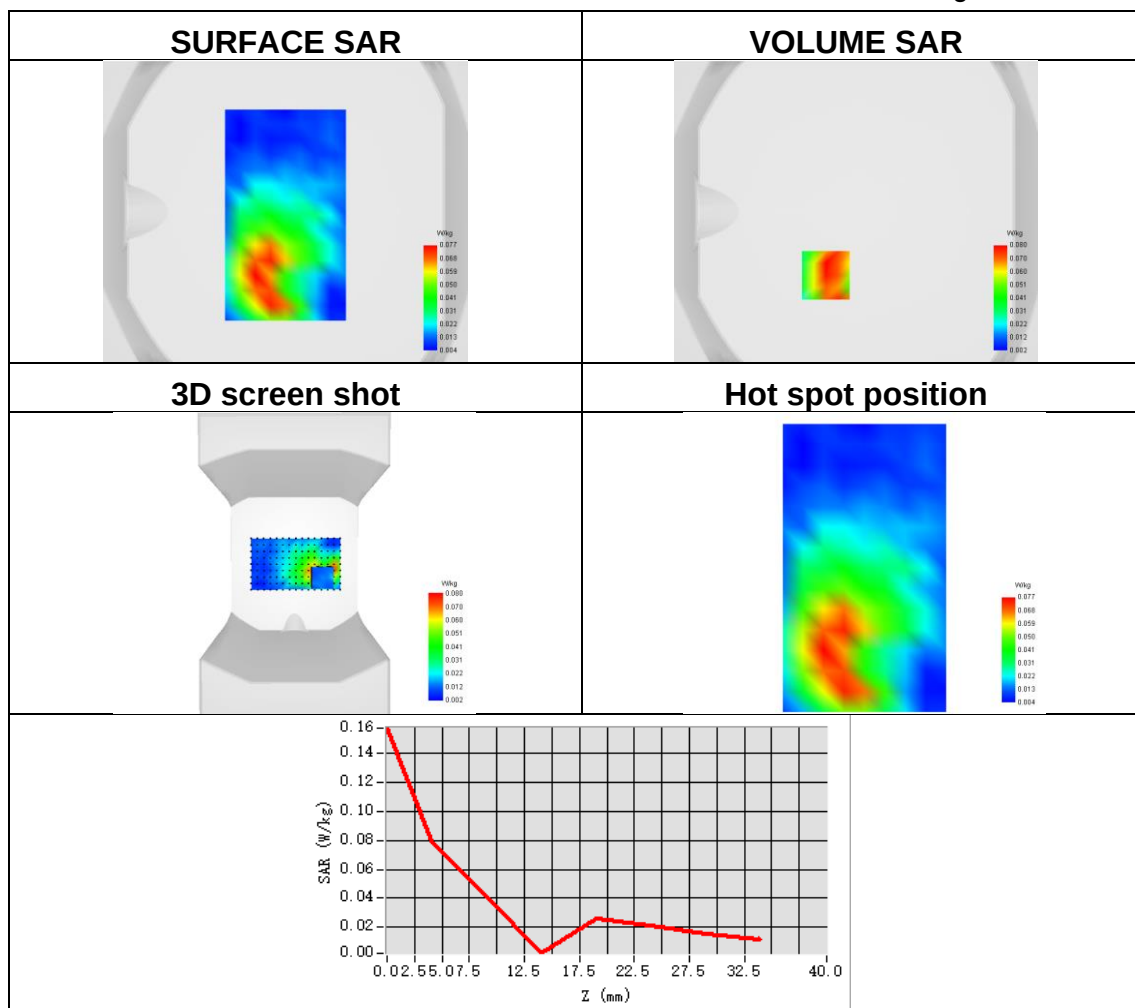




Plot 63:

Test Date	2026-02-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.355
SAR 1g (W/Kg)	0.644
ConvF	0.71
Relative permittivity	42.72
Conductivity (S/m)	0.88

Maximum location: X=-63.00, Y=-47.00 ; SAR Peak: 2.16 W/kg

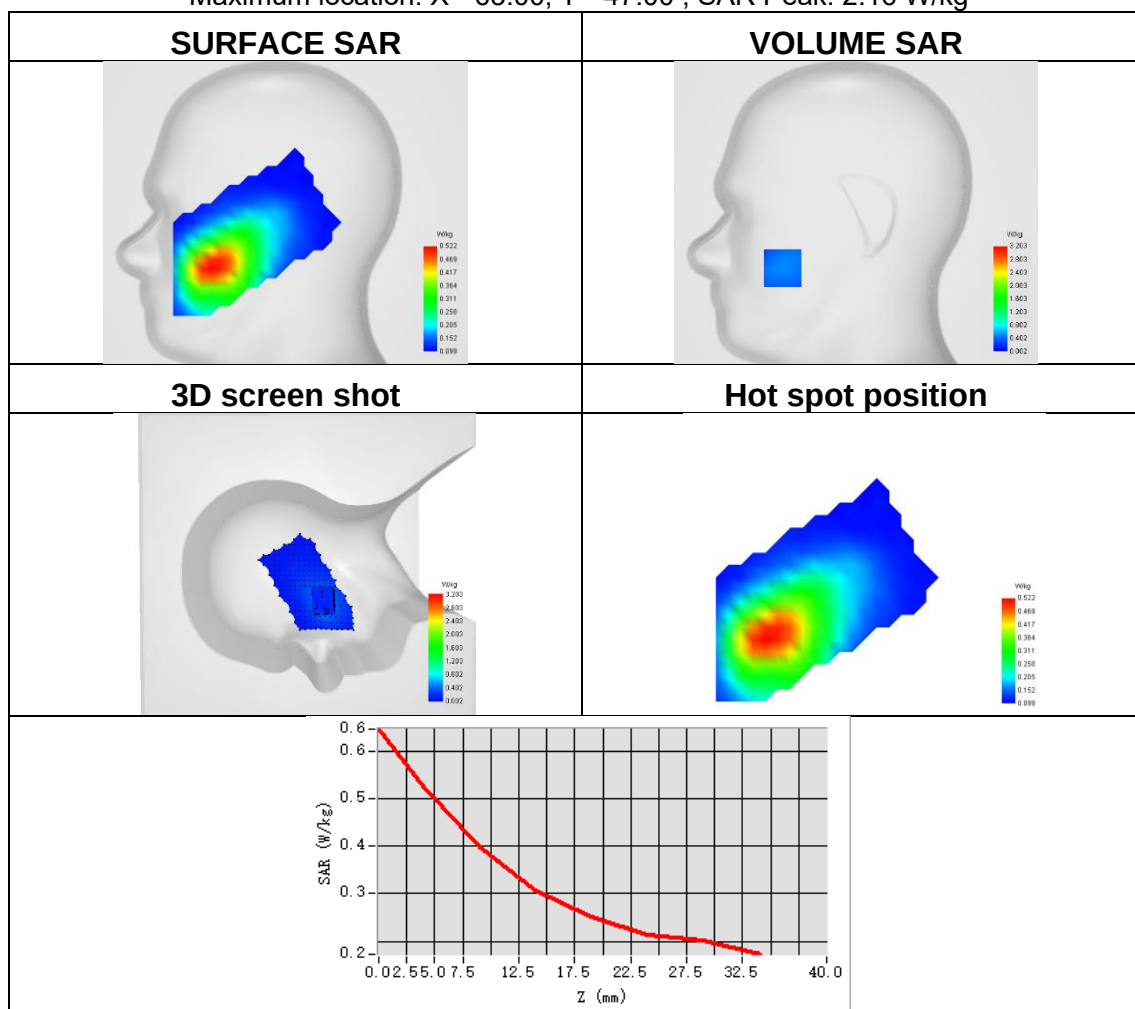




Plot 64:

Test Date	2026-02-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.129
SAR 1g (W/Kg)	0.208
ConvF	0.71
Relative permittivity	42.72
Conductivity (S/m)	0.88

Maximum location: X=-14.00, Y=-35.00 ; SAR Peak: 0.30 W/kg

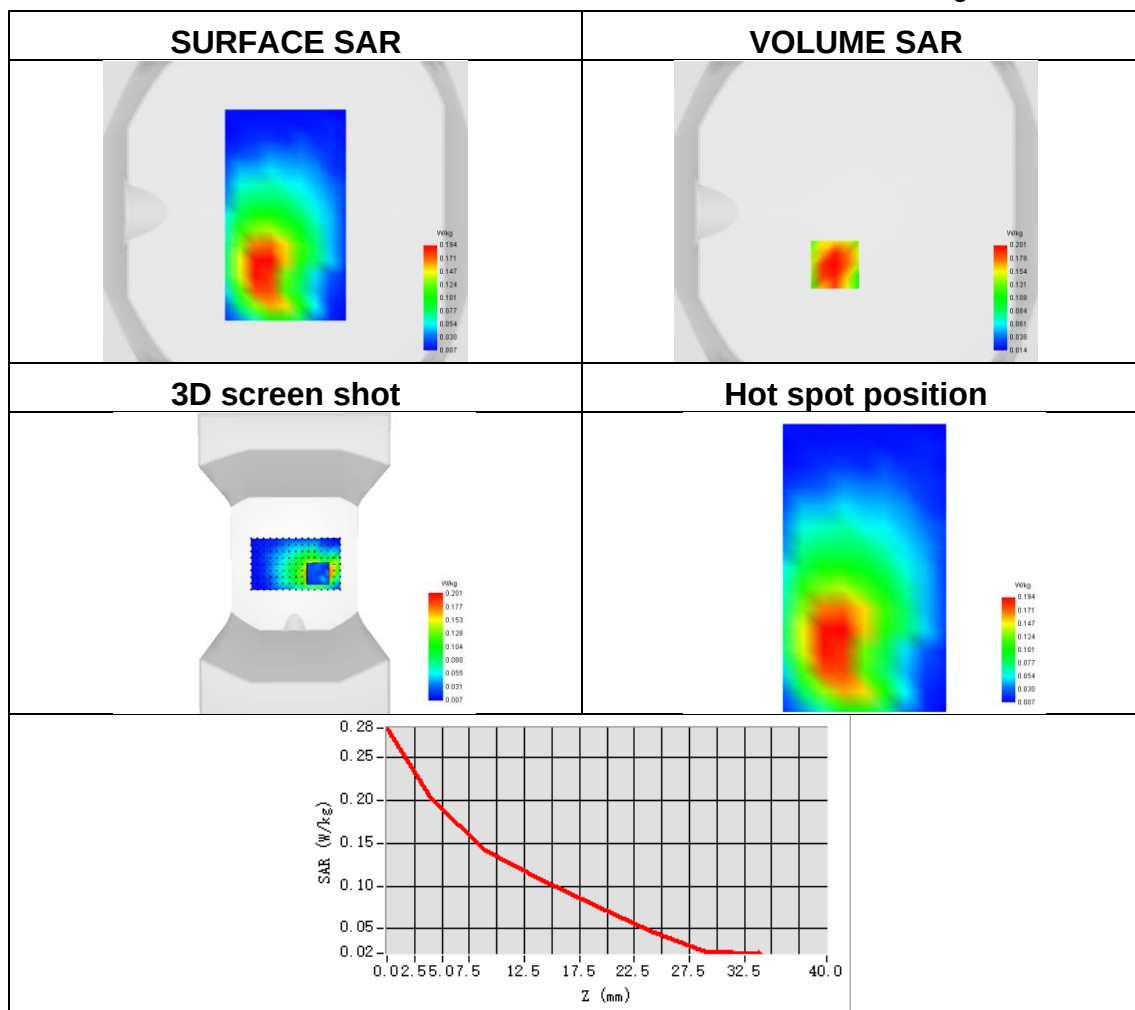




Plot 65:

Test Date	2026-02-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 25
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.096
SAR 1g (W/Kg)	0.269
ConvF	0.90
Relative permittivity	40.75
Conductivity (S/m)	1.36

Maximum location: X=-24.00, Y=-32.00 ; SAR Peak: 0.84 W/kg

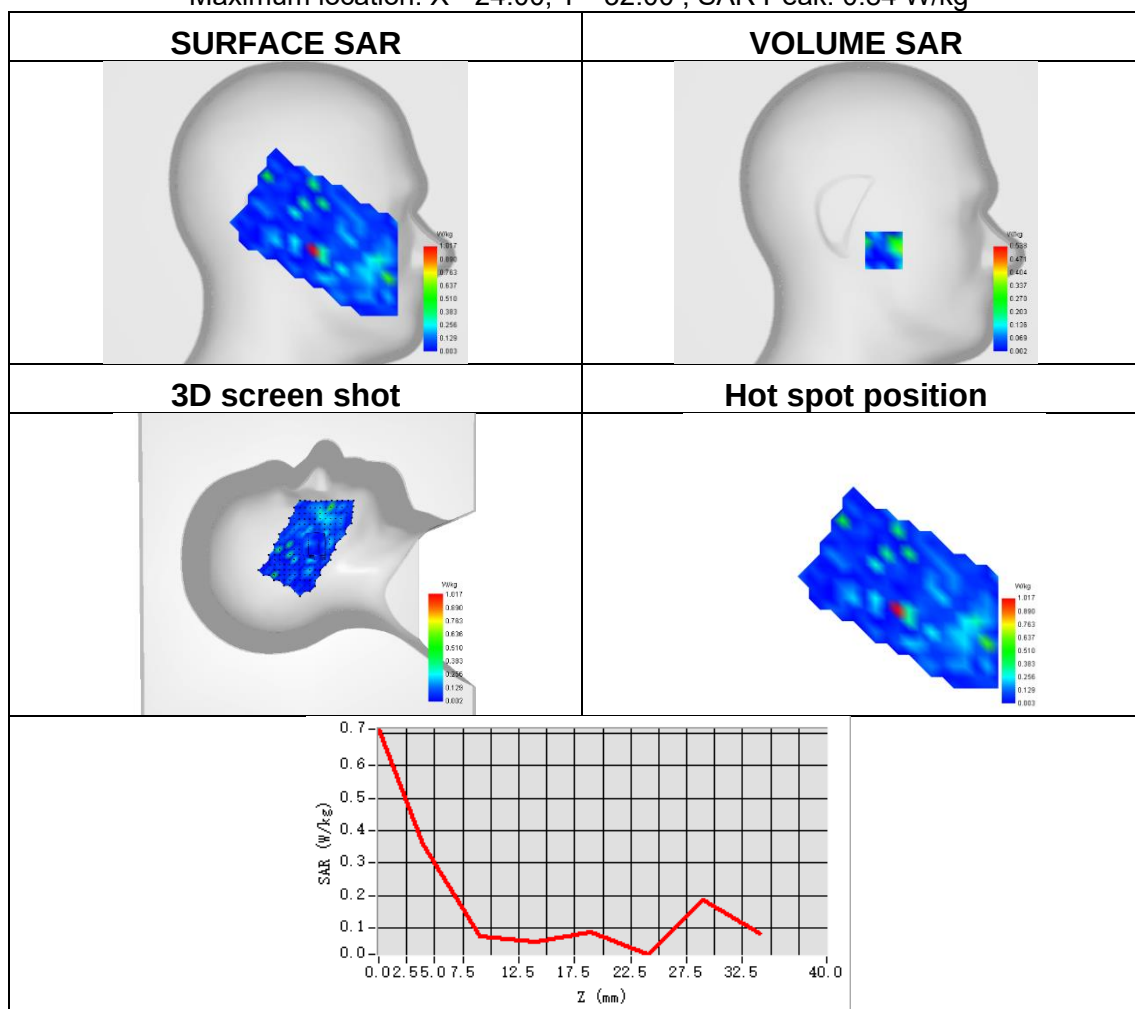




Plot 66:

Test Date	2026-02-14
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 25
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.191
SAR 1g (W/Kg)	0.498
ConvF	0.90
Relative permittivity	40.75
Conductivity (S/m)	1.36

Maximum location: X=16.00, Y=-24.00 ; SAR Peak: 0.97 W/kg

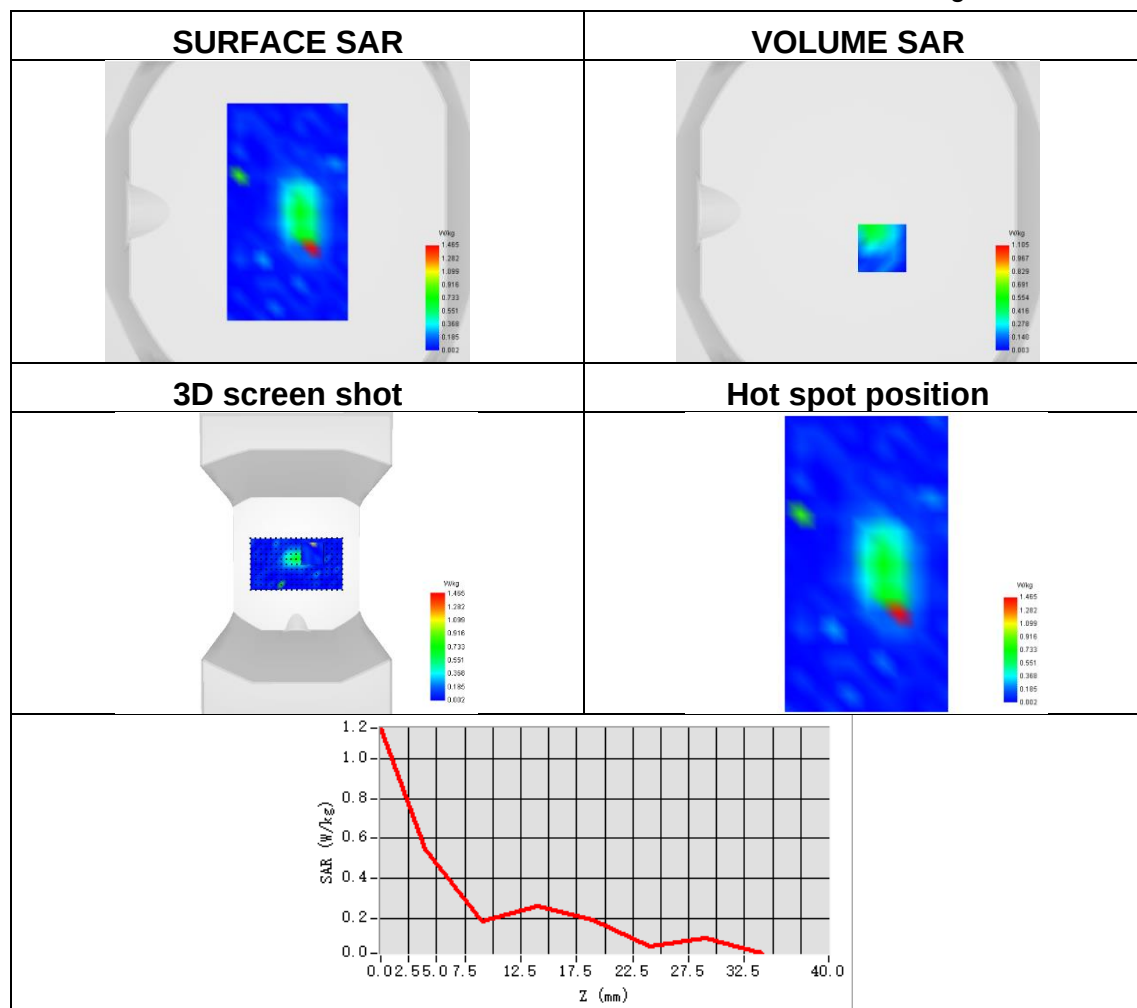




Plot 67:

Test Date	2026-02-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 26
Signal	LTE FDD
Frequency	819
SAR 10g (W/Kg)	0.272
SAR 1g (W/Kg)	0.394
ConvF	0.69
Relative permittivity	42.88
Conductivity (S/m)	0.94

Maximum location: X=-63.00, Y=-45.00 ; SAR Peak: 0.57 W/kg

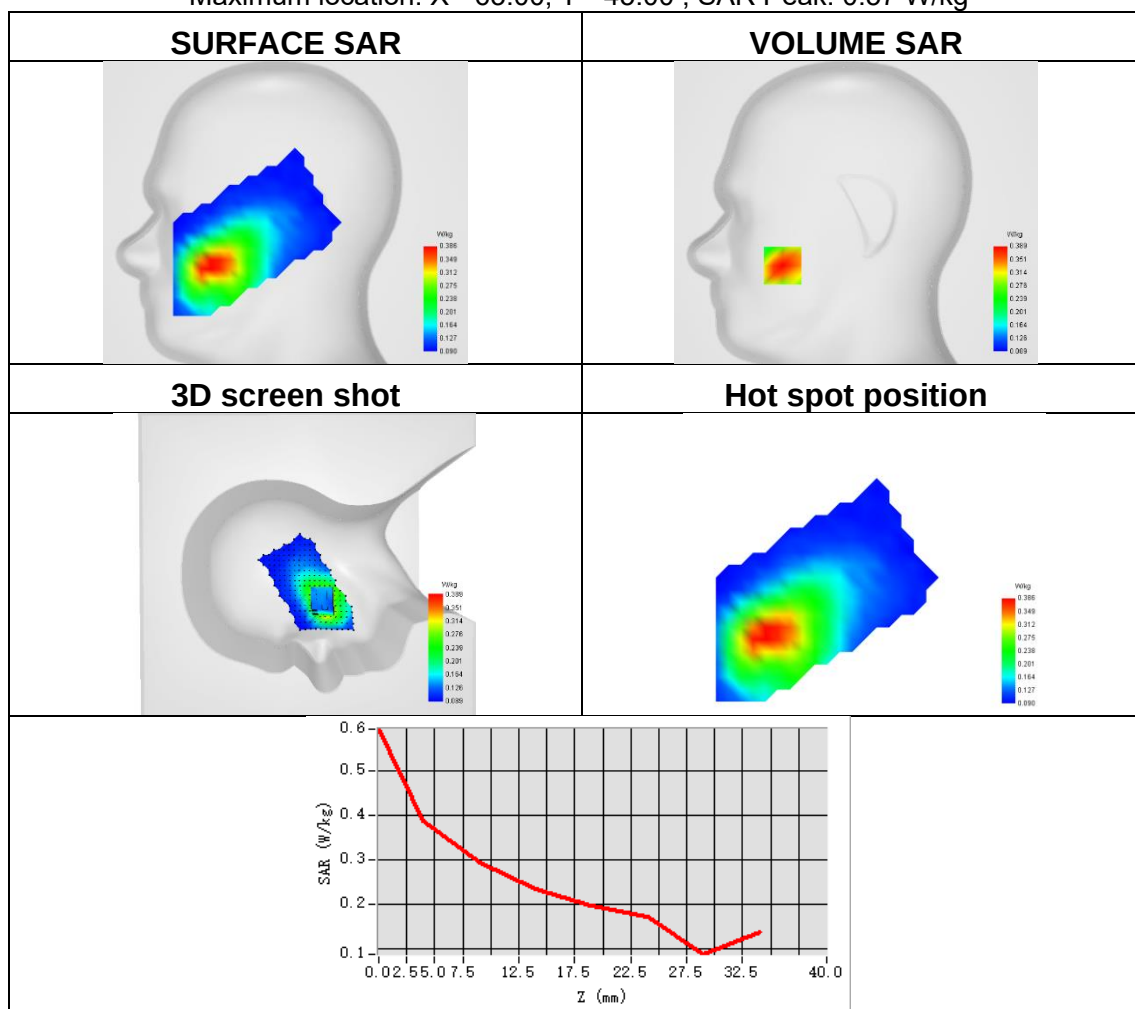




Plot 68:

Test Date	2026-02-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 26
Signal	LTE FDD
Frequency	819
SAR 10g (W/Kg)	0.070
SAR 1g (W/Kg)	0.125
ConvF	0.69
Relative permittivity	42.88
Conductivity (S/m)	0.94

Maximum location: X=-12.00, Y=-33.00 ; SAR Peak: 0.43 W/kg

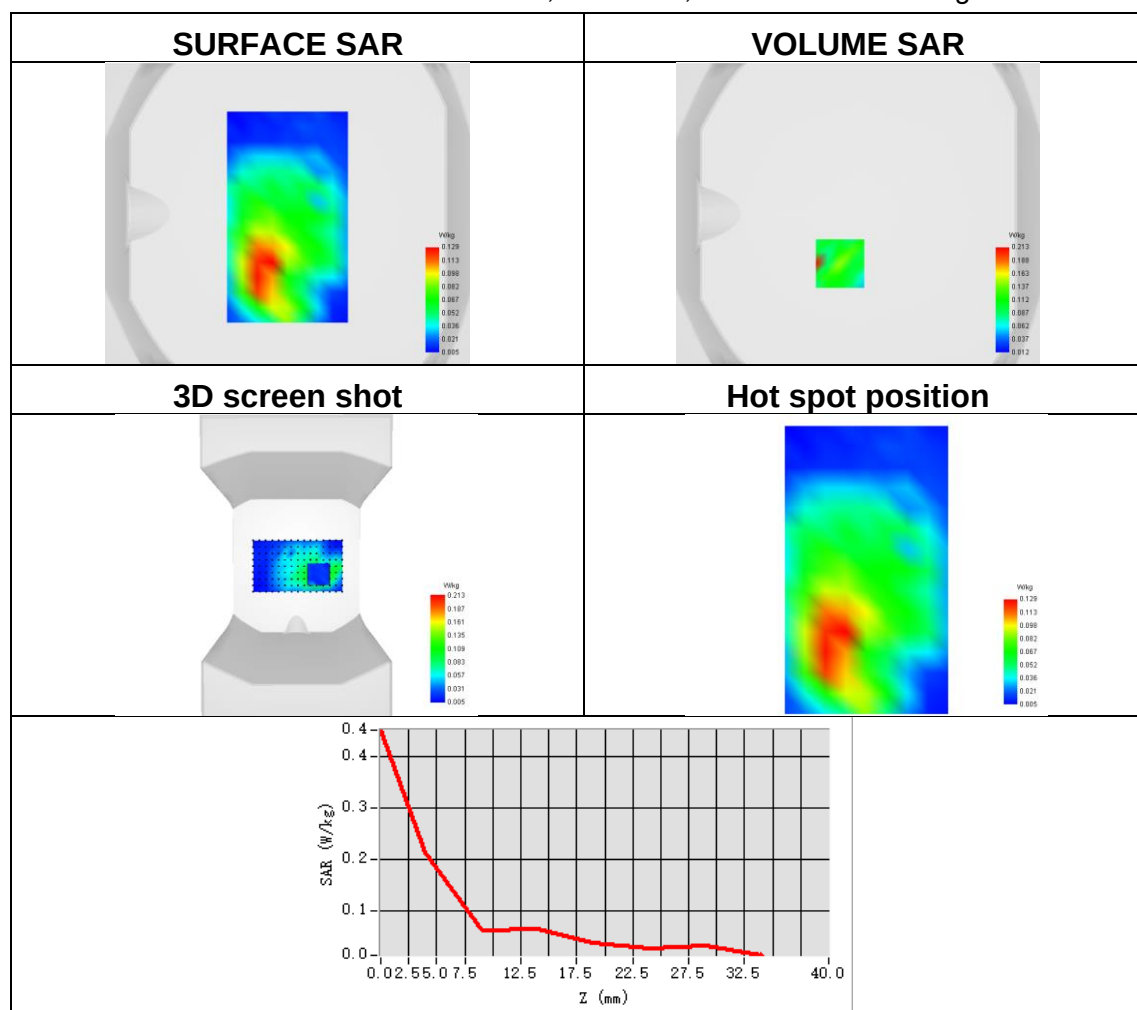




Plot 69:

Test Date	2026-02-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 38
Signal	LTE TDD
Frequency	2595
SAR 10g (W/Kg)	0.273
SAR 1g (W/Kg)	0.515
ConvF	0.98
Relative permittivity	39.69
Conductivity (S/m)	1.95

Maximum location: X=-40.00, Y=-57.00 ; SAR Peak: 0.85 W/kg

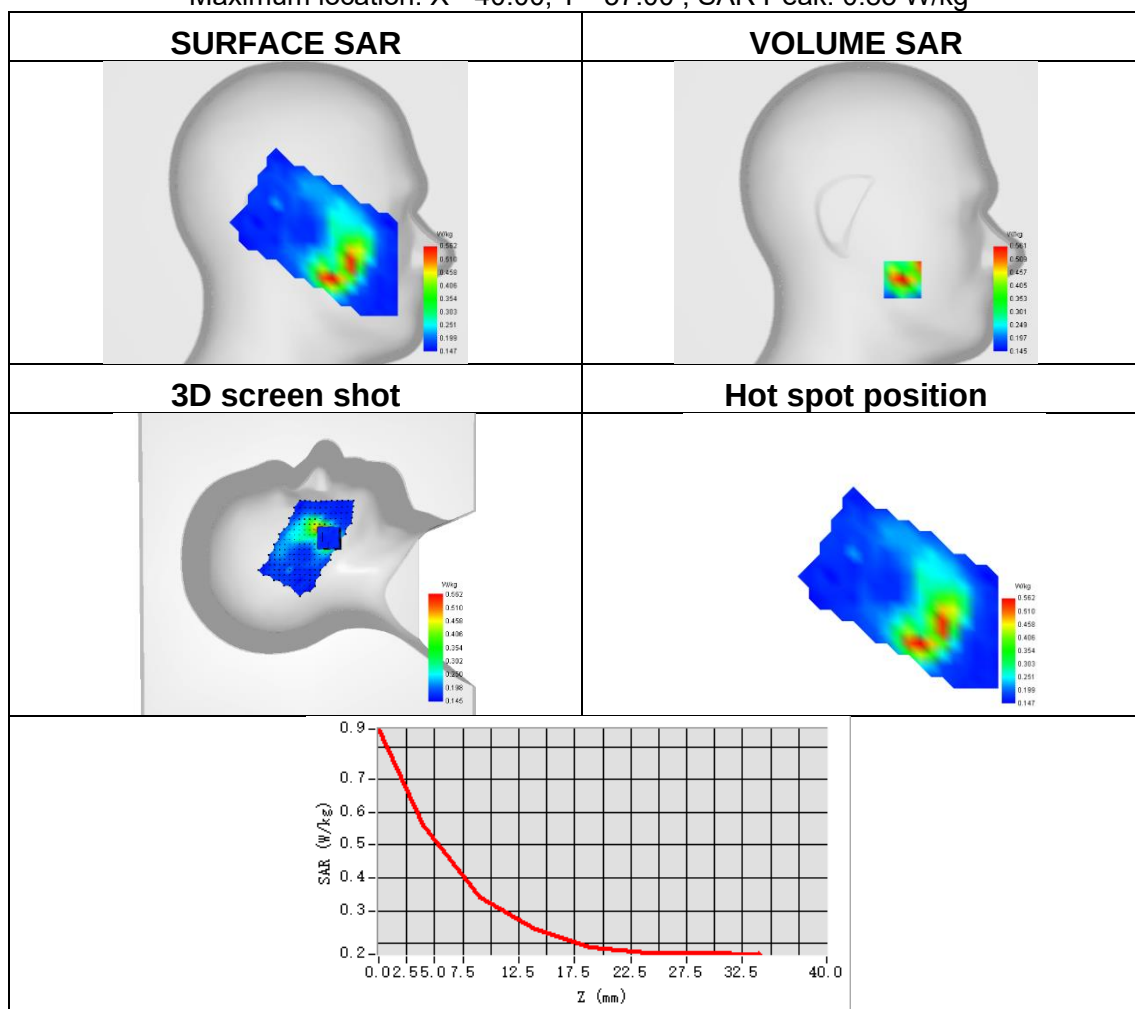




Plot 70:

Test Date	2026-02-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2595
SAR 10g (W/Kg)	0.547
SAR 1g (W/Kg)	0.953
ConvF	0.98
Relative permittivity	39.69
Conductivity (S/m)	1.95

Maximum location: X=9.00, Y=-1.00 ; SAR Peak: 1.49 W/kg

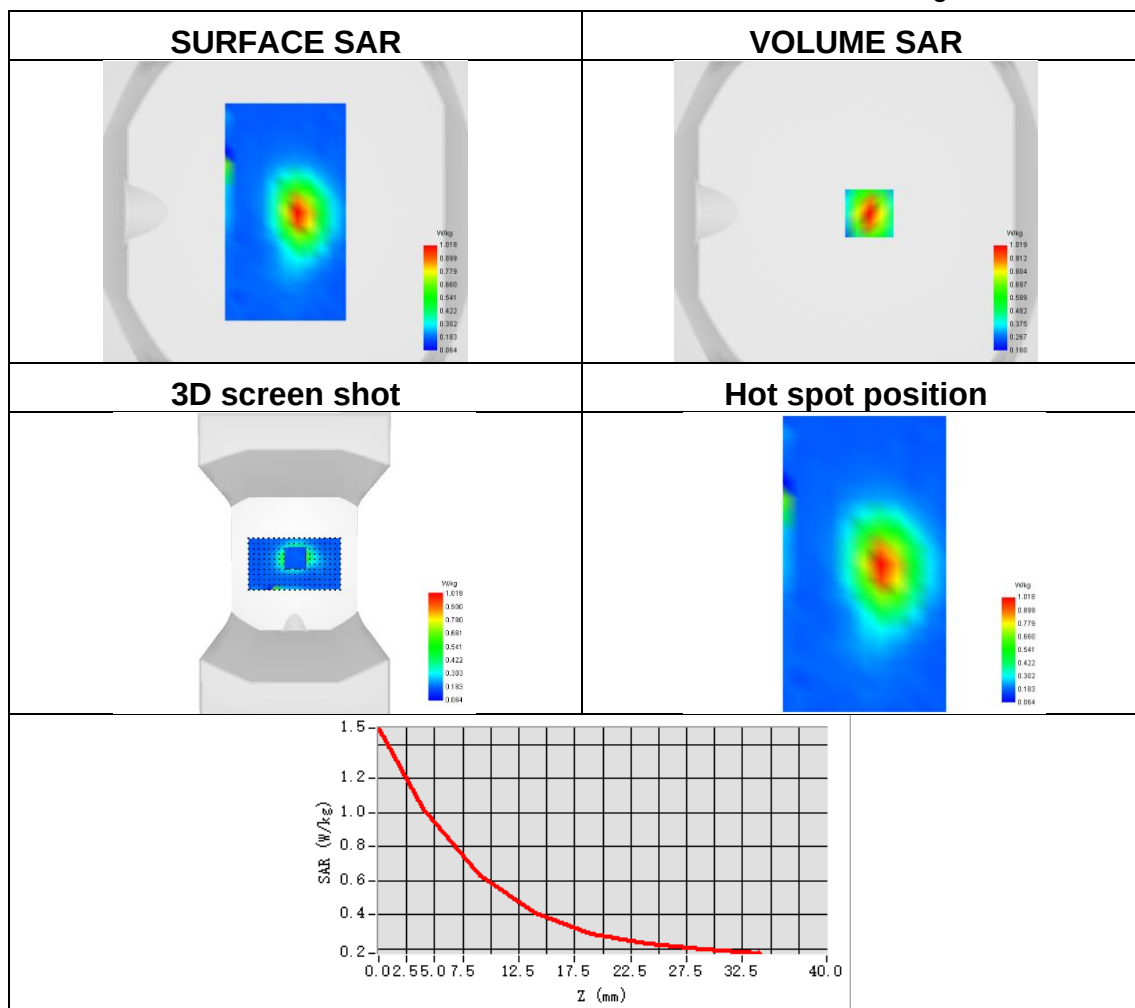




Plot 71:

Test Date	2026-02-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 40
Signal	LTE TDD
Frequency	2310
SAR 10g (W/Kg)	0.084
SAR 1g (W/Kg)	0.206
ConvF	0.97
Relative permittivity	40.63
Conductivity (S/m)	1.62

Maximum location: X=0.00, Y=-32.00 ; SAR Peak: 1.39 W/kg

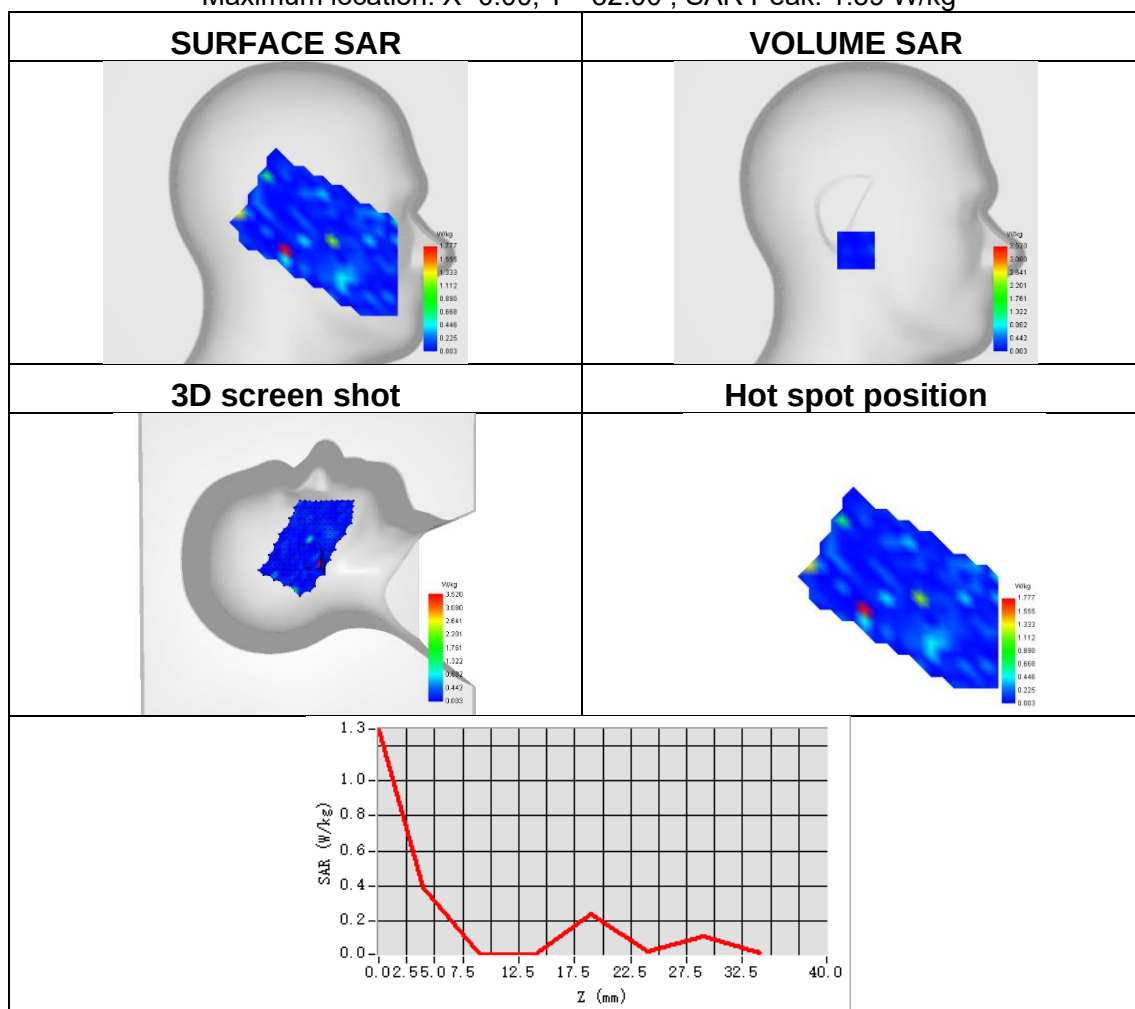




Plot 72:

Test Date	2026-02-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 40
Signal	LTE TDD
Frequency	2310
SAR 10g (W/Kg)	0.307
SAR 1g (W/Kg)	0.630
ConvF	0.97
Relative permittivity	40.63
Conductivity (S/m)	1.62

Maximum location: X=-1.00, Y=7.00 ; SAR Peak: 1.10 W/kg

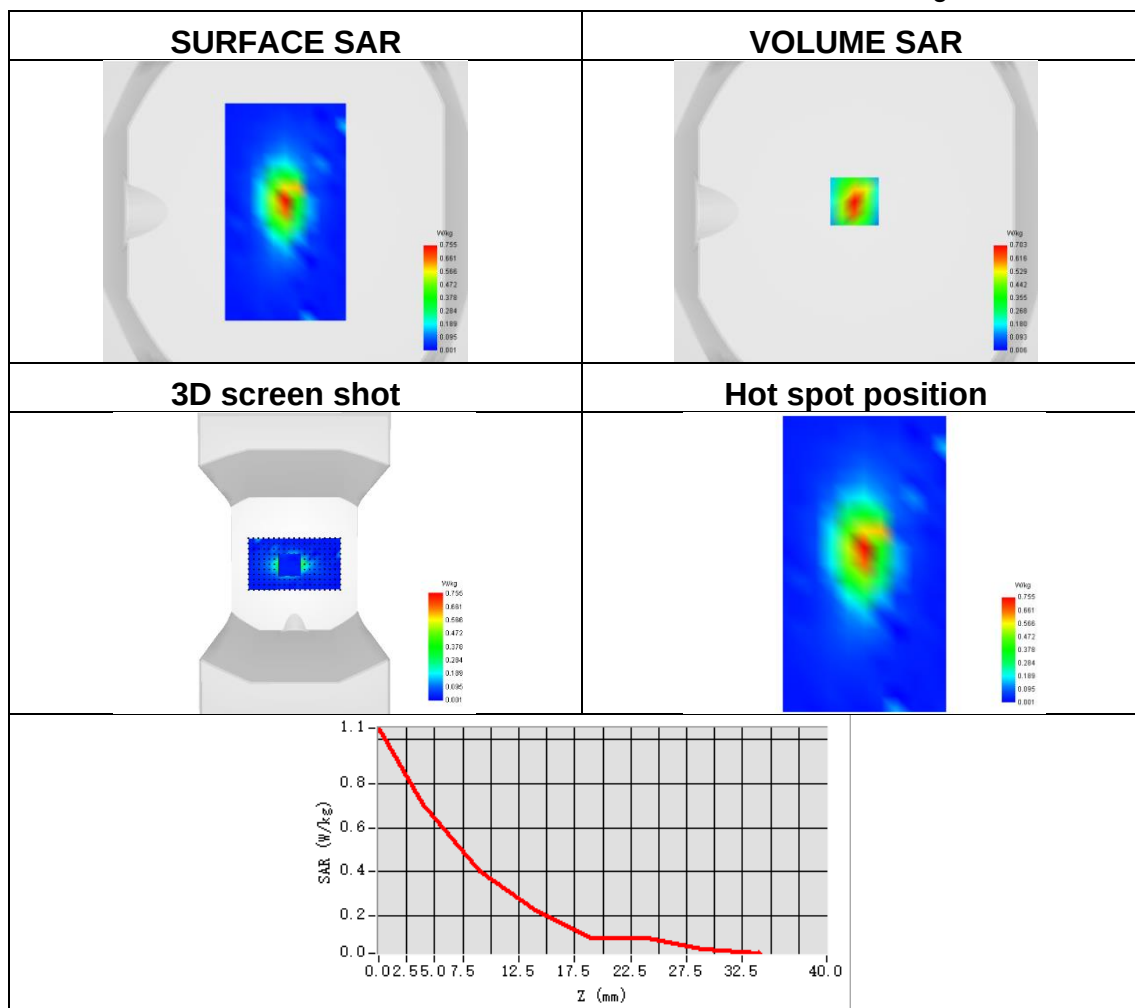




Plot 73:

Test Date	2026-02-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.188
SAR 1g (W/Kg)	0.252
ConvF	0.98
Relative permittivity	39.36
Conductivity (S/m)	1.99

Maximum location: X=-63.00, Y=-56.00 ; SAR Peak: 0.32 W/kg

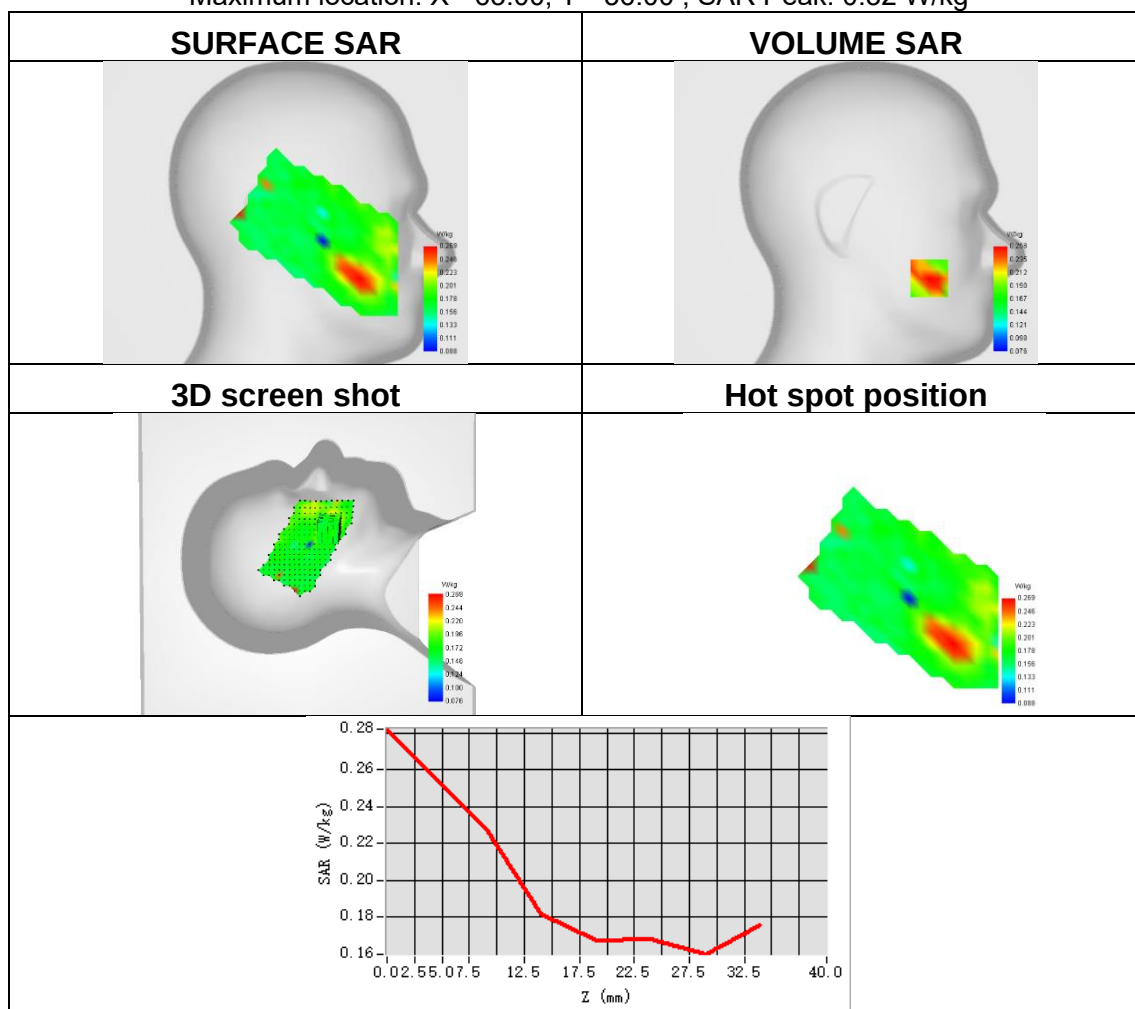




Plot 74:

Test Date	2026-02-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.553
SAR 1g (W/Kg)	0.968
ConvF	0.98
Relative permittivity	39.36
Conductivity (S/m)	1.99

Maximum location: X=5.00, Y=0.00 ; SAR Peak: 1.54 W/kg

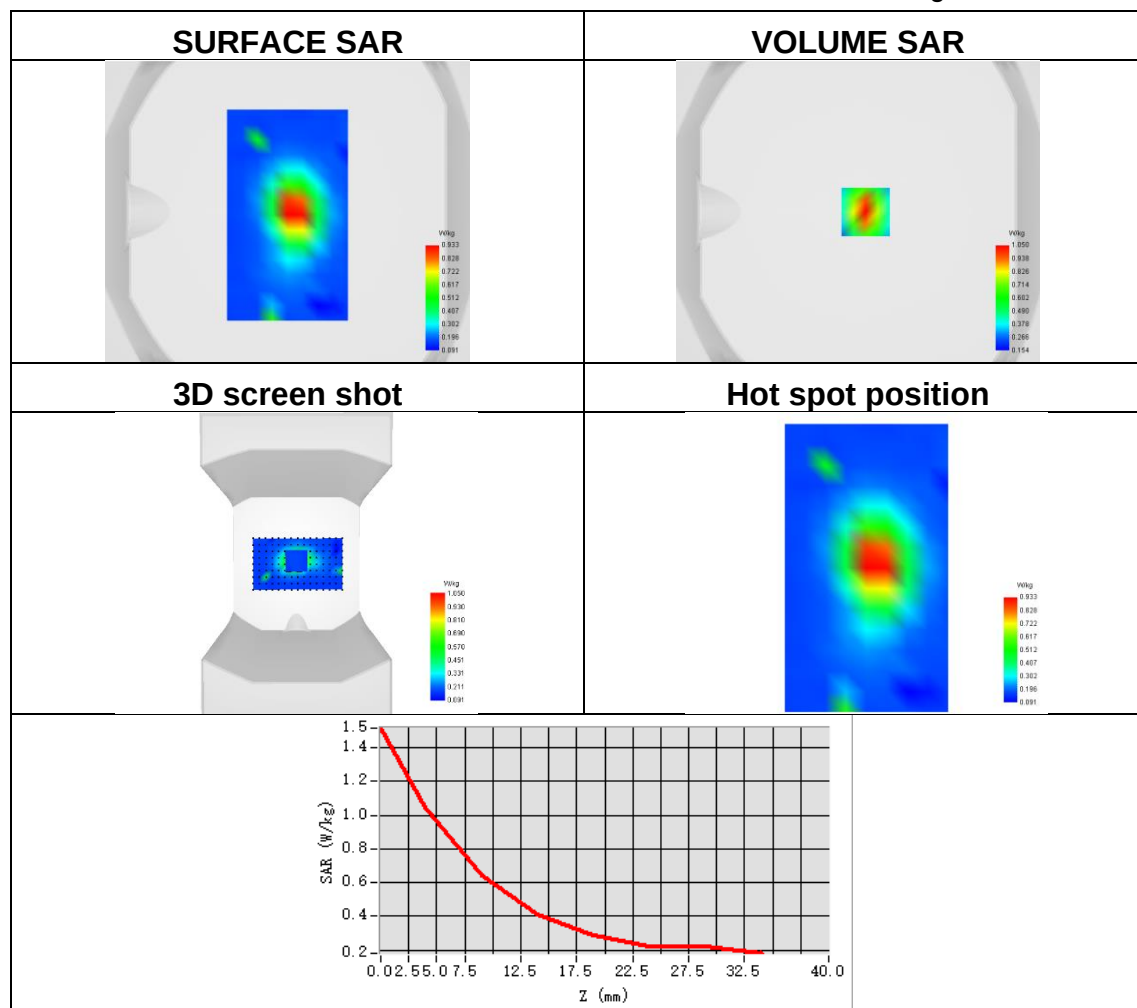




Plot 75:

Test Date	2026-02-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 66
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.174
SAR 1g (W/Kg)	0.375
ConvF	0.69
Relative permittivity	40.56
Conductivity (S/m)	1.40

Maximum location: X=-24.00, Y=-48.00 ; SAR Peak: 1.97 W/kg

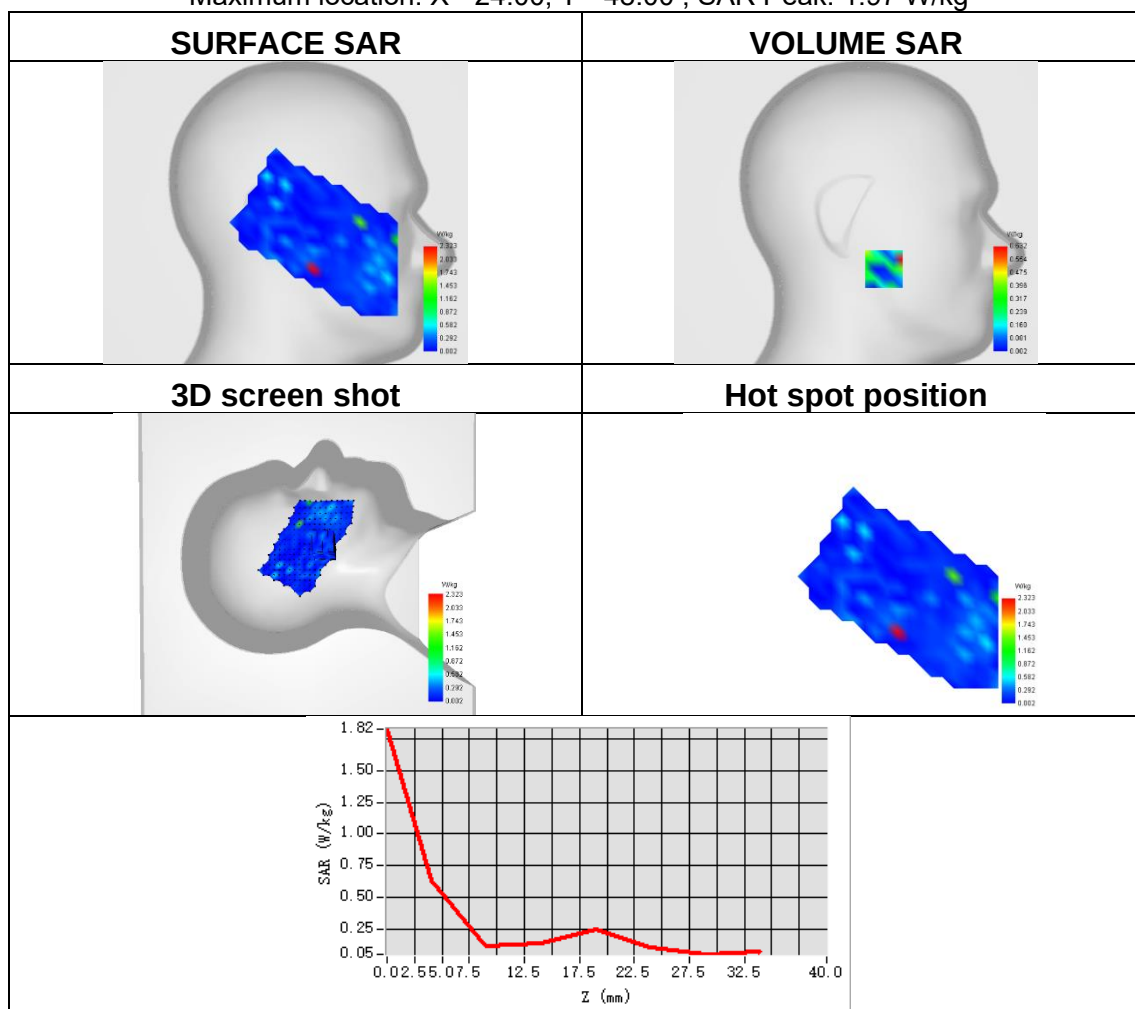




Plot 76:

Test Date	2026-02-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.541
SAR 1g (W/Kg)	1.001
ConvF	0.69
Relative permittivity	40.56
Conductivity (S/m)	1.40

Maximum location: X=7.00, Y=-1.00 ; SAR Peak: 1.68 W/kg

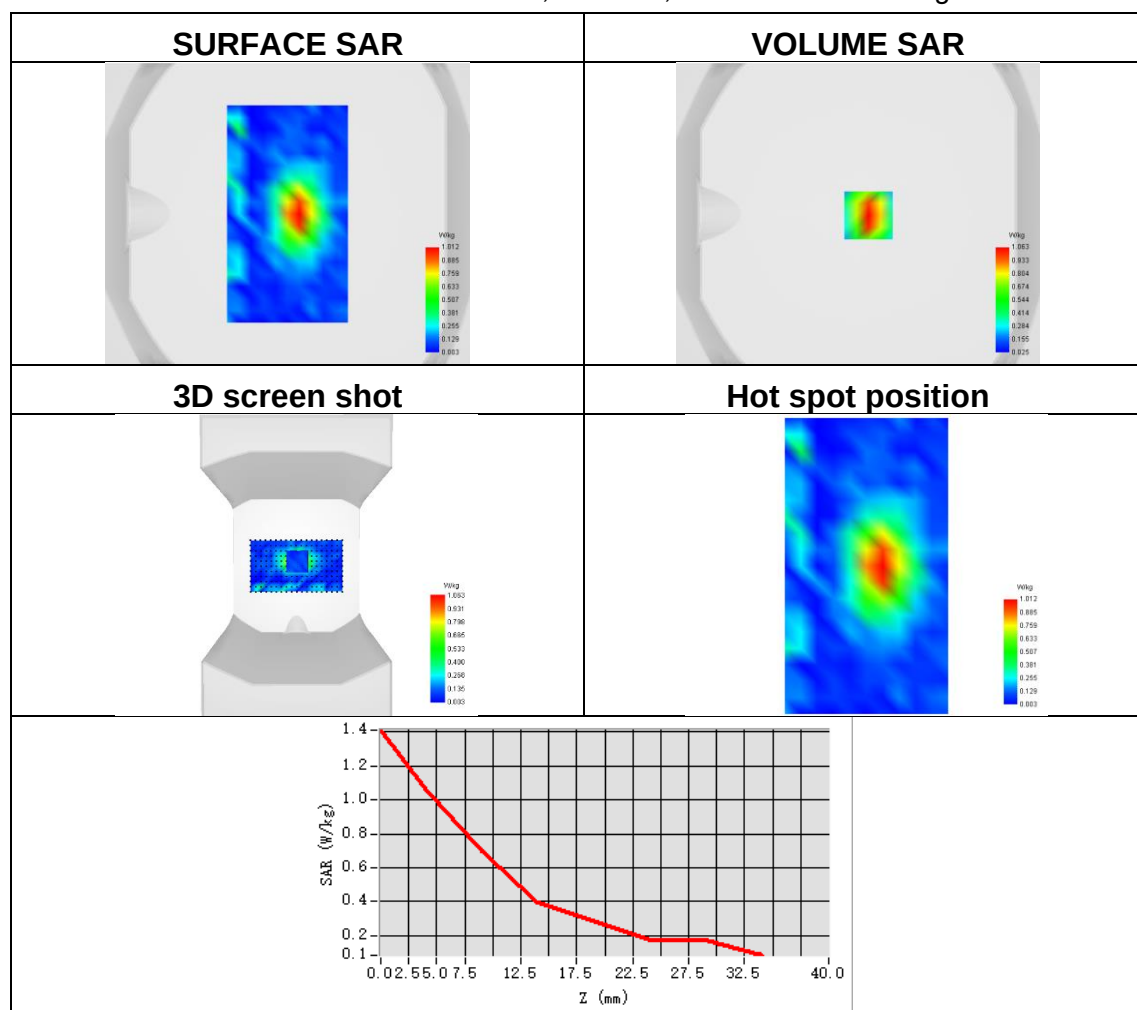




Plot 77:

Test Date	2026-02-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 71
Signal	LTE FDD
Frequency	688
SAR 10g (W/Kg)	0.322
SAR 1g (W/Kg)	0.454
ConvF	0.71
Relative permittivity	42.43
Conductivity (S/m)	0.85

Maximum location: X=-63.00, Y=-46.00 ; SAR Peak: 0.59 W/kg

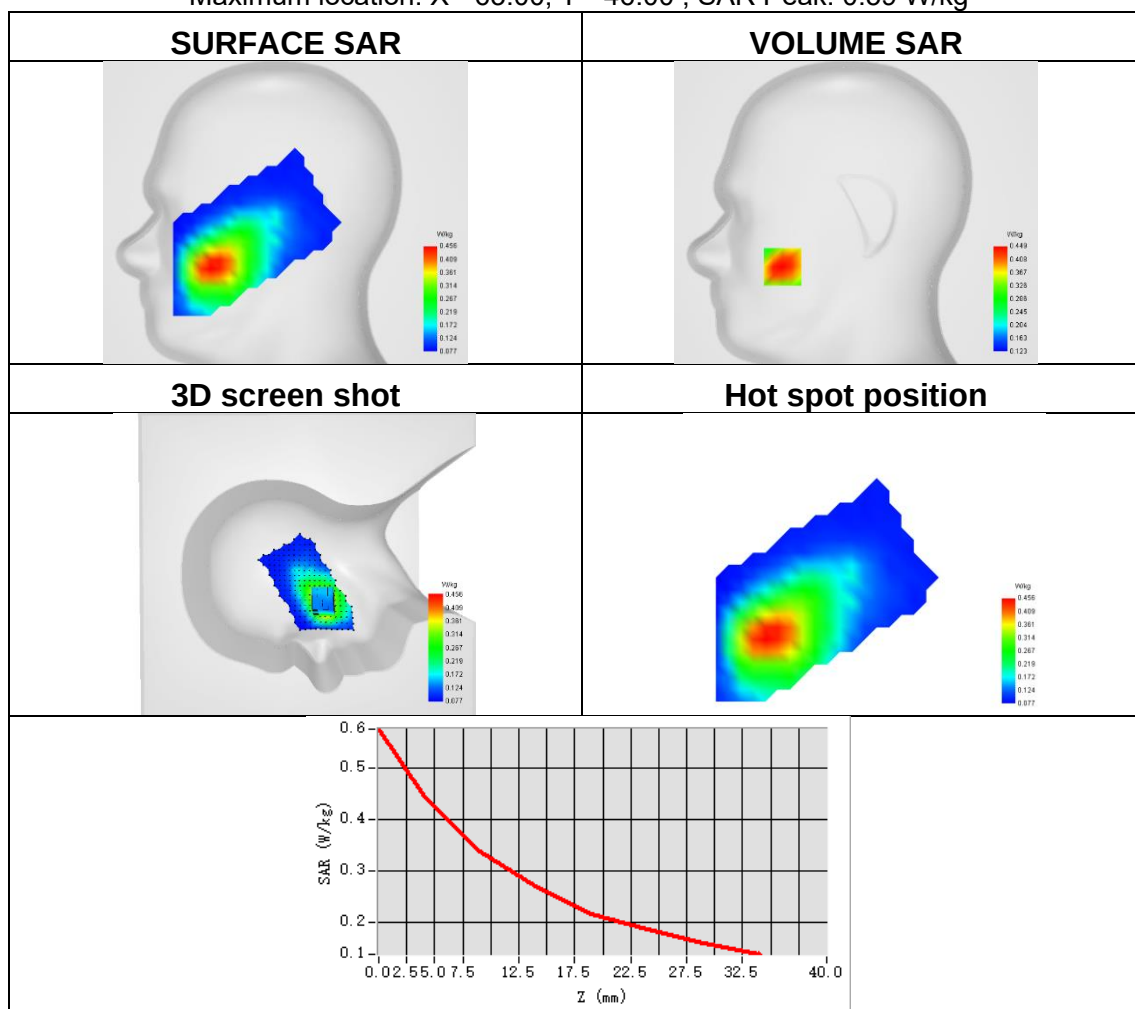




Plot 78:

Test Date	2026-02-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 71
Signal	LTE FDD
Frequency	688
SAR 10g (W/Kg)	0.112
SAR 1g (W/Kg)	0.191
ConvF	0.71
Relative permittivity	42.43
Conductivity (S/m)	0.85

Maximum location: X=-18.00, Y=-31.00 ; SAR Peak: 0.28 W/kg

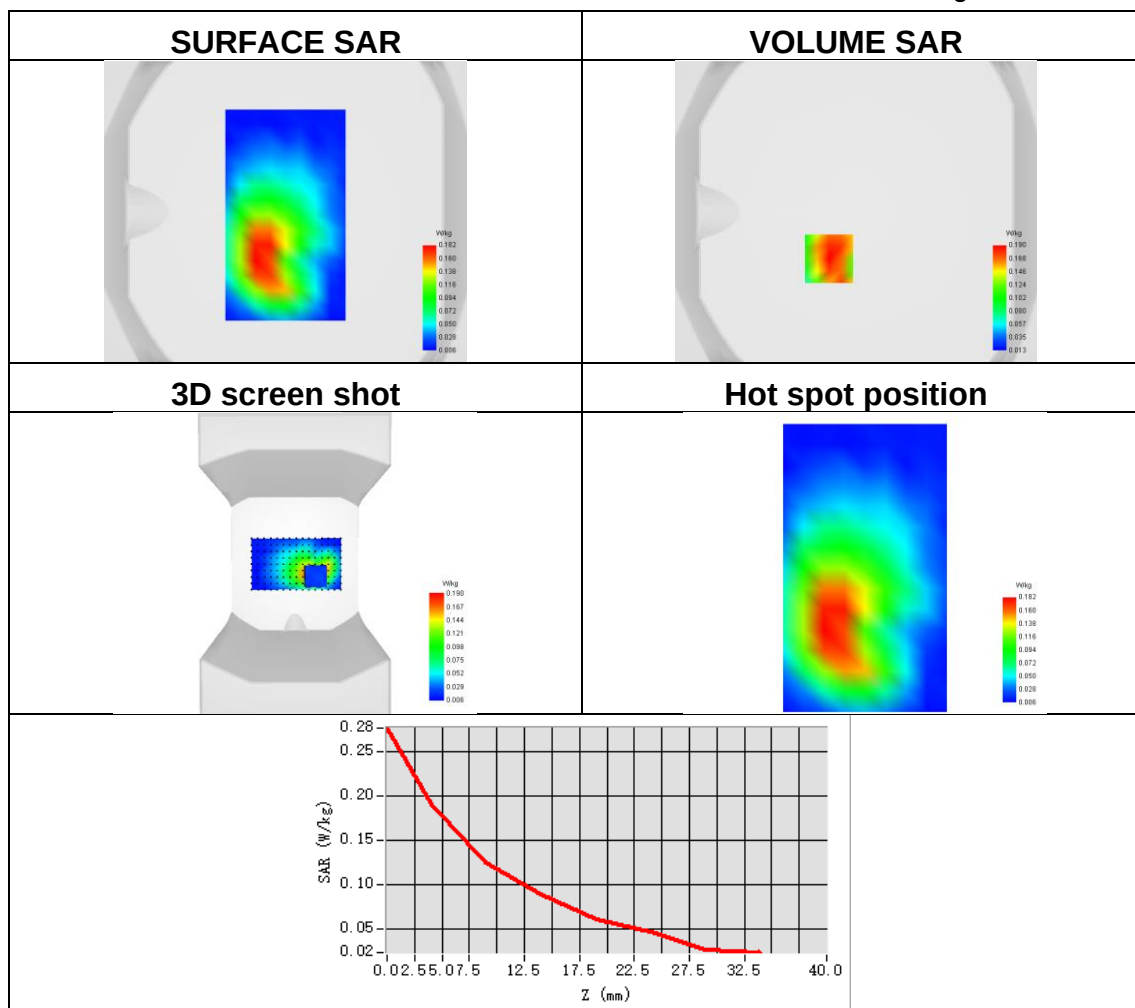




Plot 79:

Test Date	2026-02-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 2
Signal	NR FDD
Frequency	1880
SAR 10g (W/Kg)	0.403
SAR 1g (W/Kg)	0.882
ConvF	0.90
Relative permittivity	40.90
Conductivity (S/m)	1.41

Maximum location: X=-64.00, Y=-40.00 ; SAR Peak: 1.65 W/kg

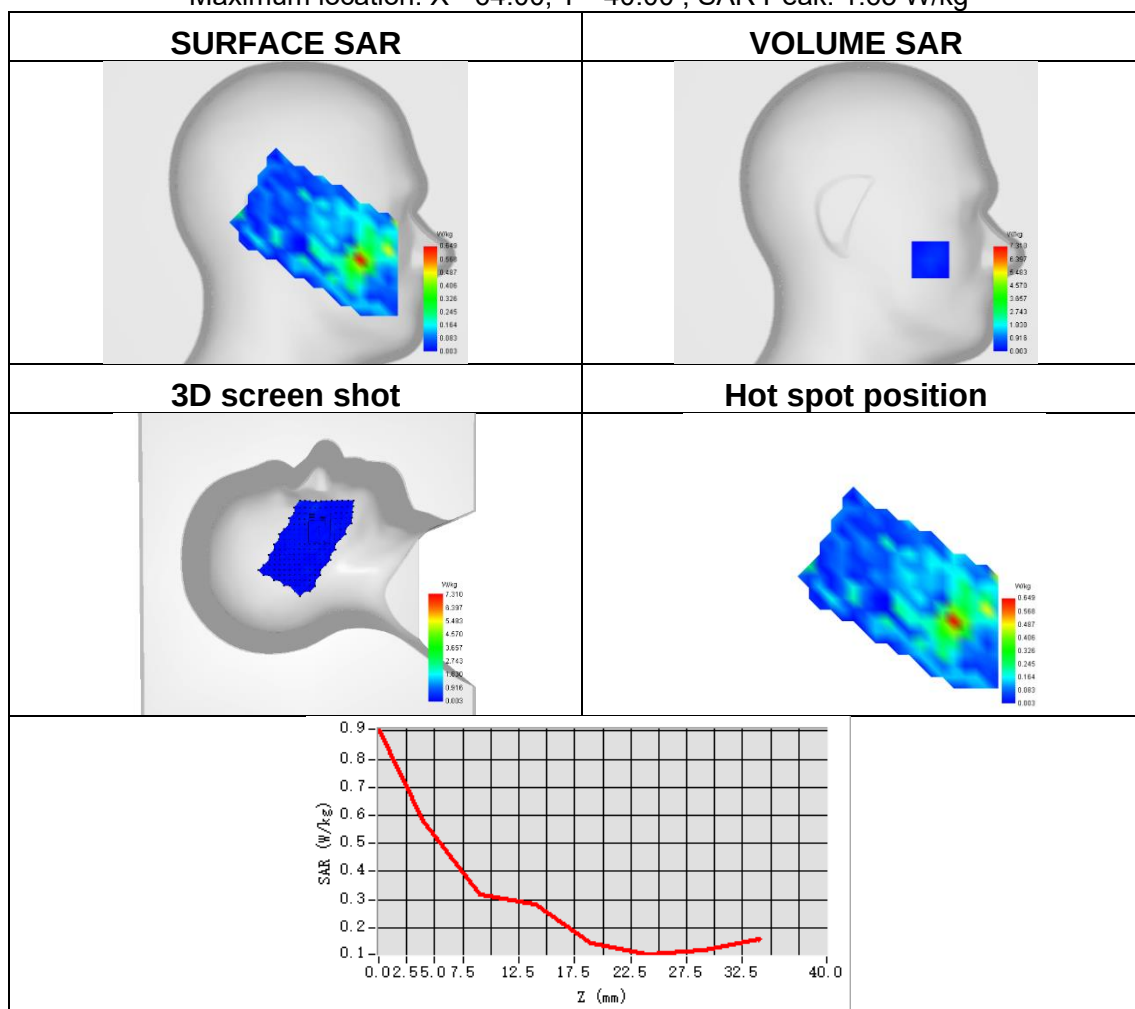




Plot 80:

Test Date	2026-02-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 2
Signal	NR FDD
Frequency	1880
SAR 10g (W/Kg)	0.278
SAR 1g (W/Kg)	0.600
ConvF	0.90
Relative permittivity	40.90
Conductivity (S/m)	1.41

Maximum location: X=1.00, Y=1.00 ; SAR Peak: 2.34 W/kg

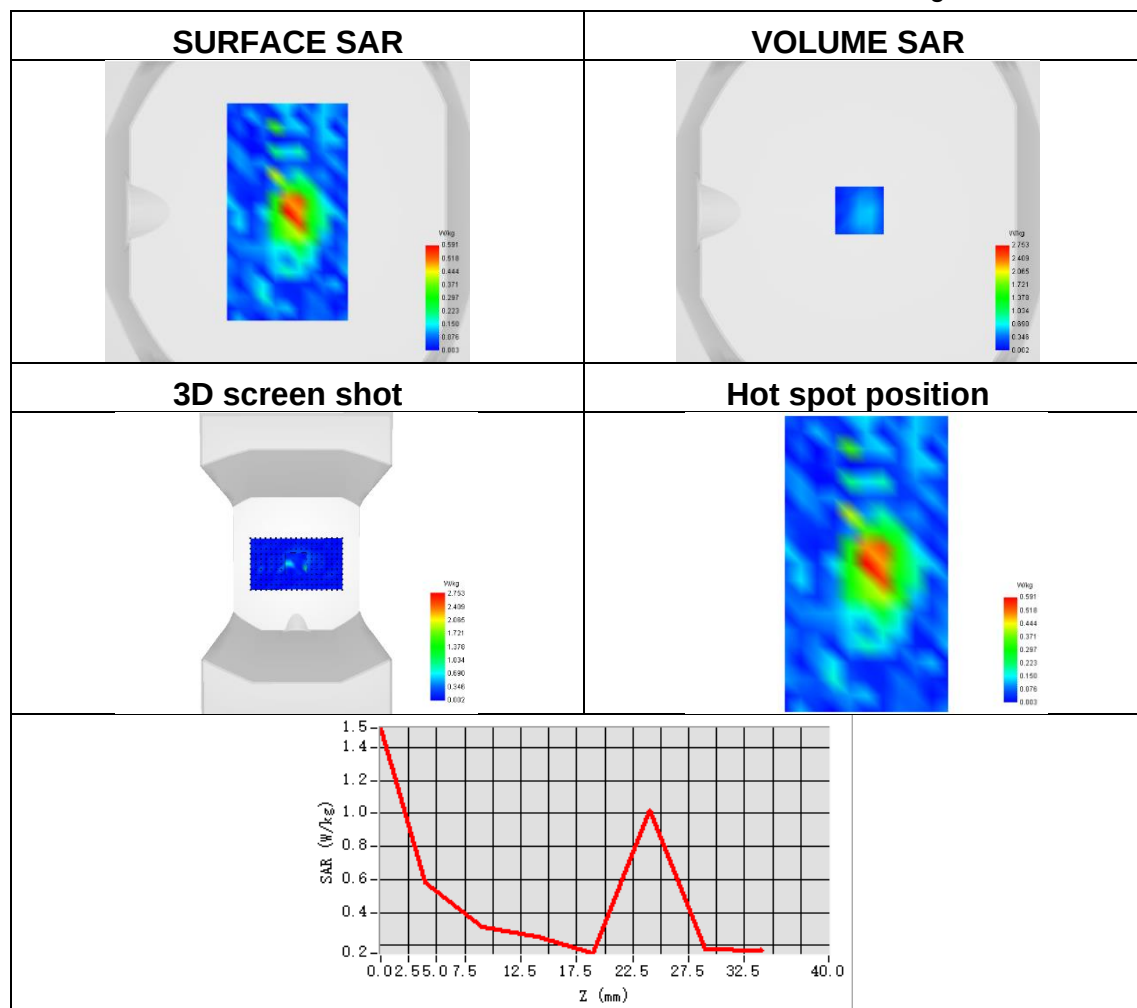




Plot 81:

Test Date	2026-02-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 5
Signal	NR FDD
Frequency	834
SAR 10g (W/Kg)	0.207
SAR 1g (W/Kg)	0.423
ConvF	0.69
Relative permittivity	42.19
Conductivity (S/m)	0.91

Maximum location: X=-56.00, Y=-18.00 ; SAR Peak: 1.45 W/kg

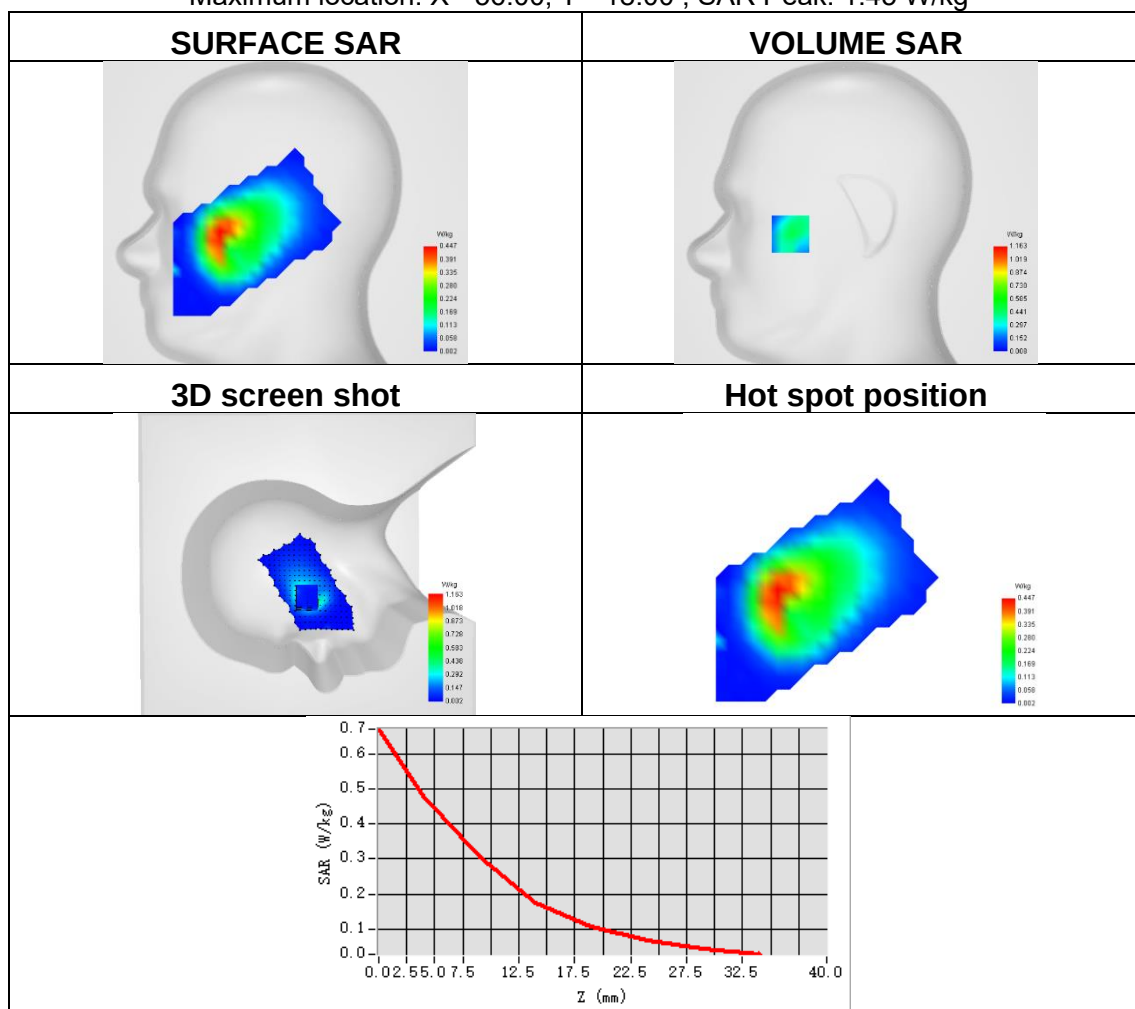




Plot 82:

Test Date	2026-02-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 5
Signal	NR FDD
Frequency	834
SAR 10g (W/Kg)	0.070
SAR 1g (W/Kg)	0.113
ConvF	0.69
Relative permittivity	42.19
Conductivity (S/m)	0.91

Maximum location: X=-10.00, Y=-26.00 ; SAR Peak: 0.17 W/kg

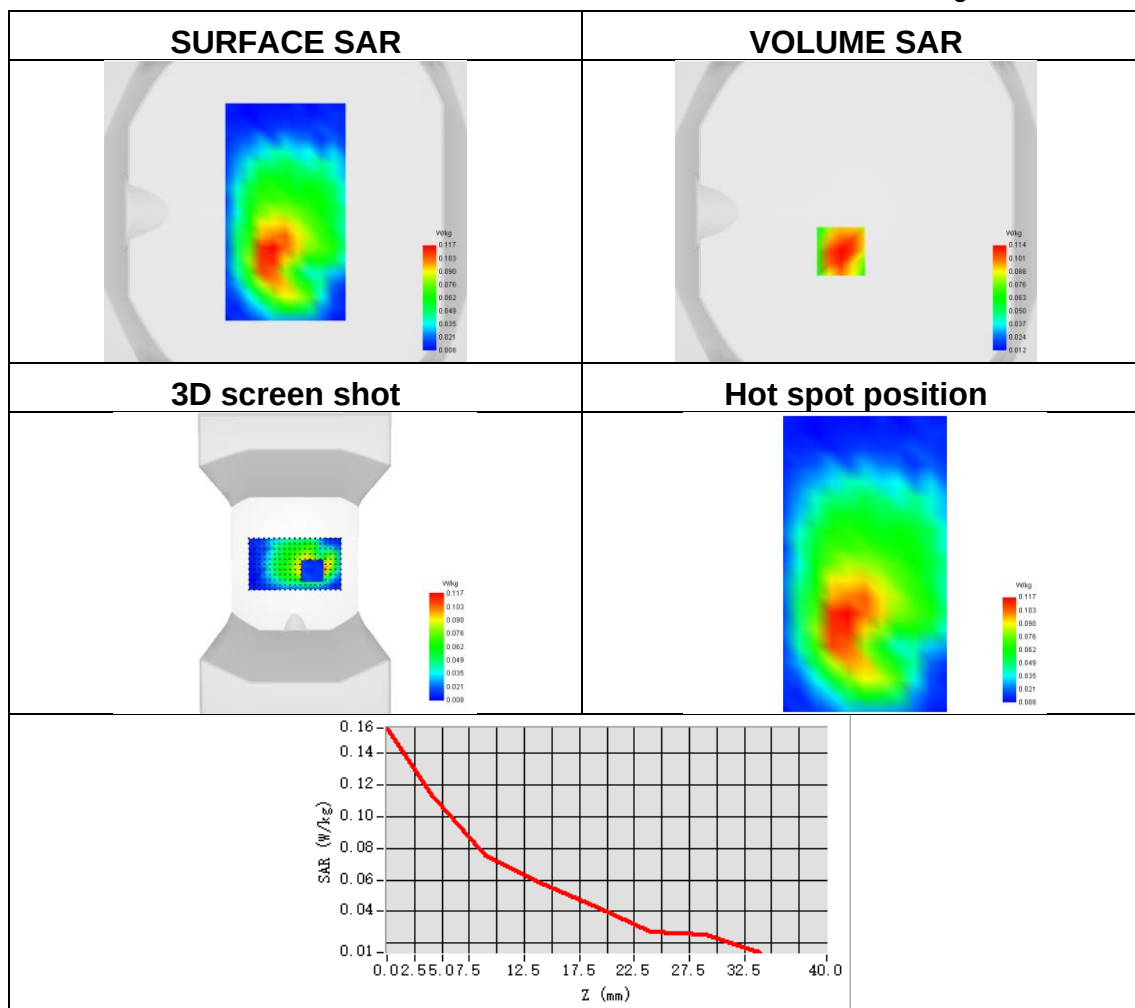




Plot 83:

Test Date	2026-02-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 7
Signal	NR FDD
Frequency	2510
SAR 10g (W/Kg)	0.302
SAR 1g (W/Kg)	0.757
ConvF	0.98
Relative permittivity	39.04
Conductivity (S/m)	1.90

Maximum location: X=-41.00, Y=-56.00 ; SAR Peak: 1.36 W/kg

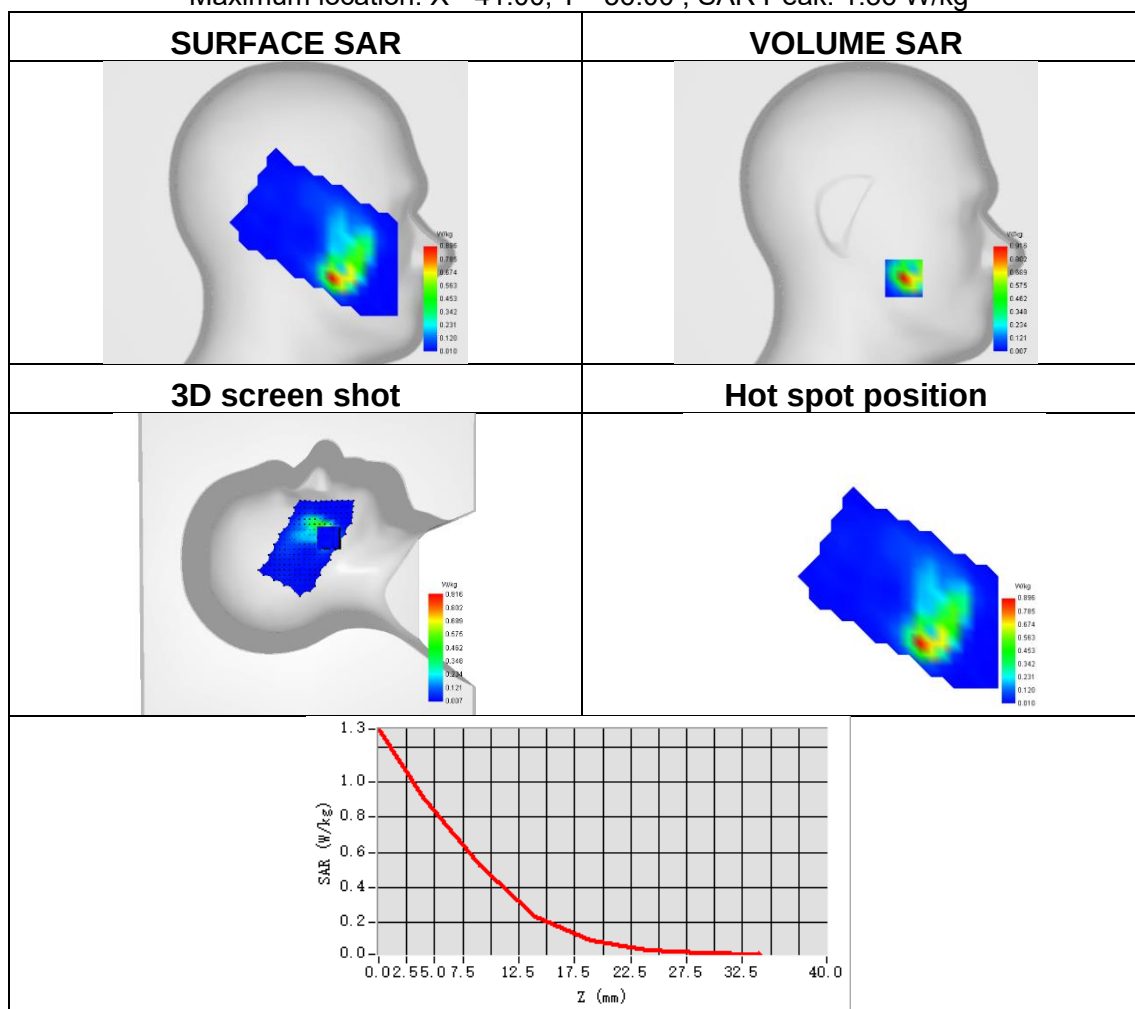




Plot 84:

Test Date	2026-02-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 7
Signal	NR FDD
Frequency	2510
SAR 10g (W/Kg)	0.387
SAR 1g (W/Kg)	0.844
ConvF	0.98
Relative permittivity	39.04
Conductivity (S/m)	1.90

Maximum location: X=10.00, Y=-1.00 ; SAR Peak: 1.53 W/kg

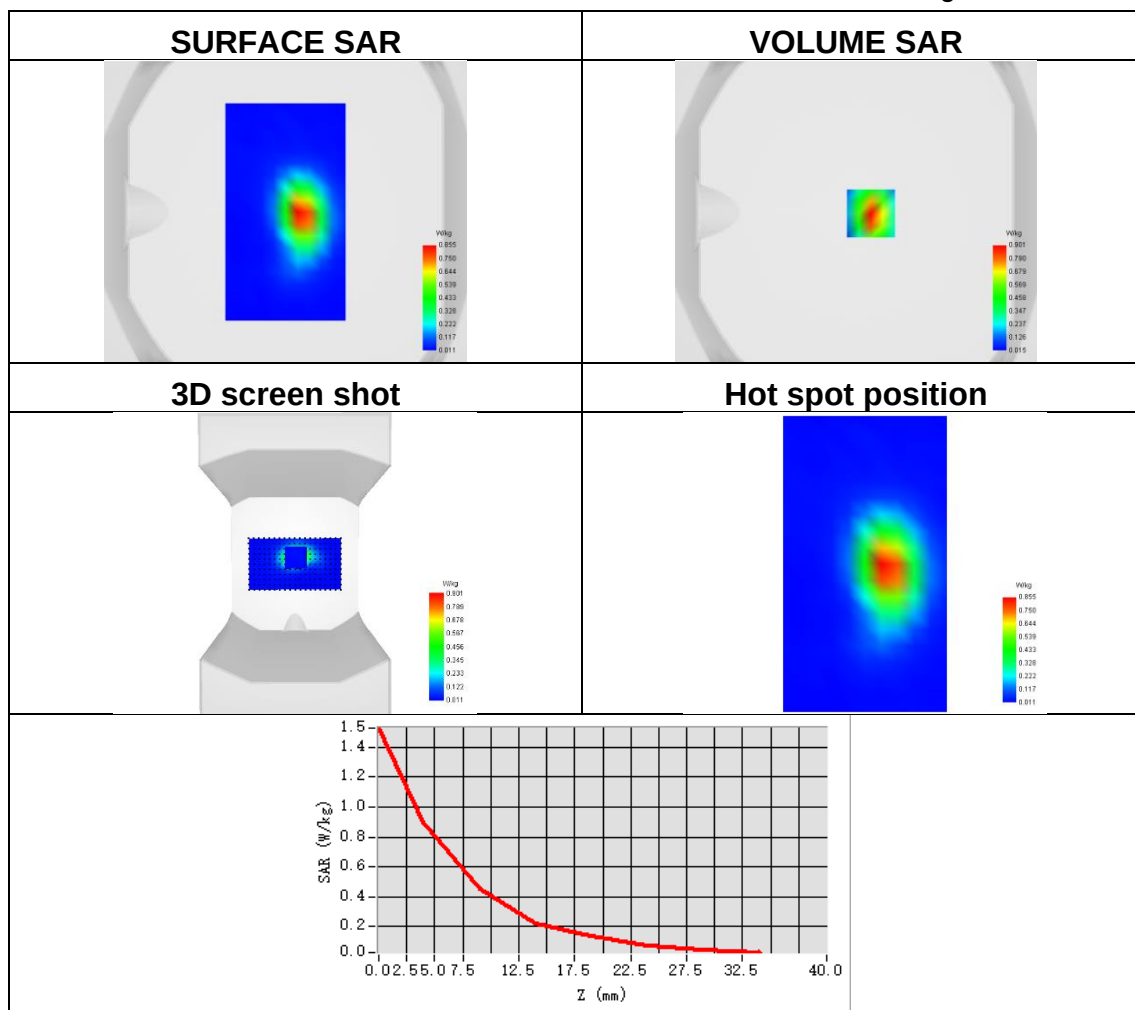




Plot 85:

Test Date	2026-02-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 12
Signal	NR FDD
Frequency	708.5
SAR 10g (W/Kg)	0.147
SAR 1g (W/Kg)	0.290
ConvF	0.71
Relative permittivity	42.72
Conductivity (S/m)	0.88

Maximum location: X=-77.00, Y=-32.00 ; SAR Peak: 0.52 W/kg

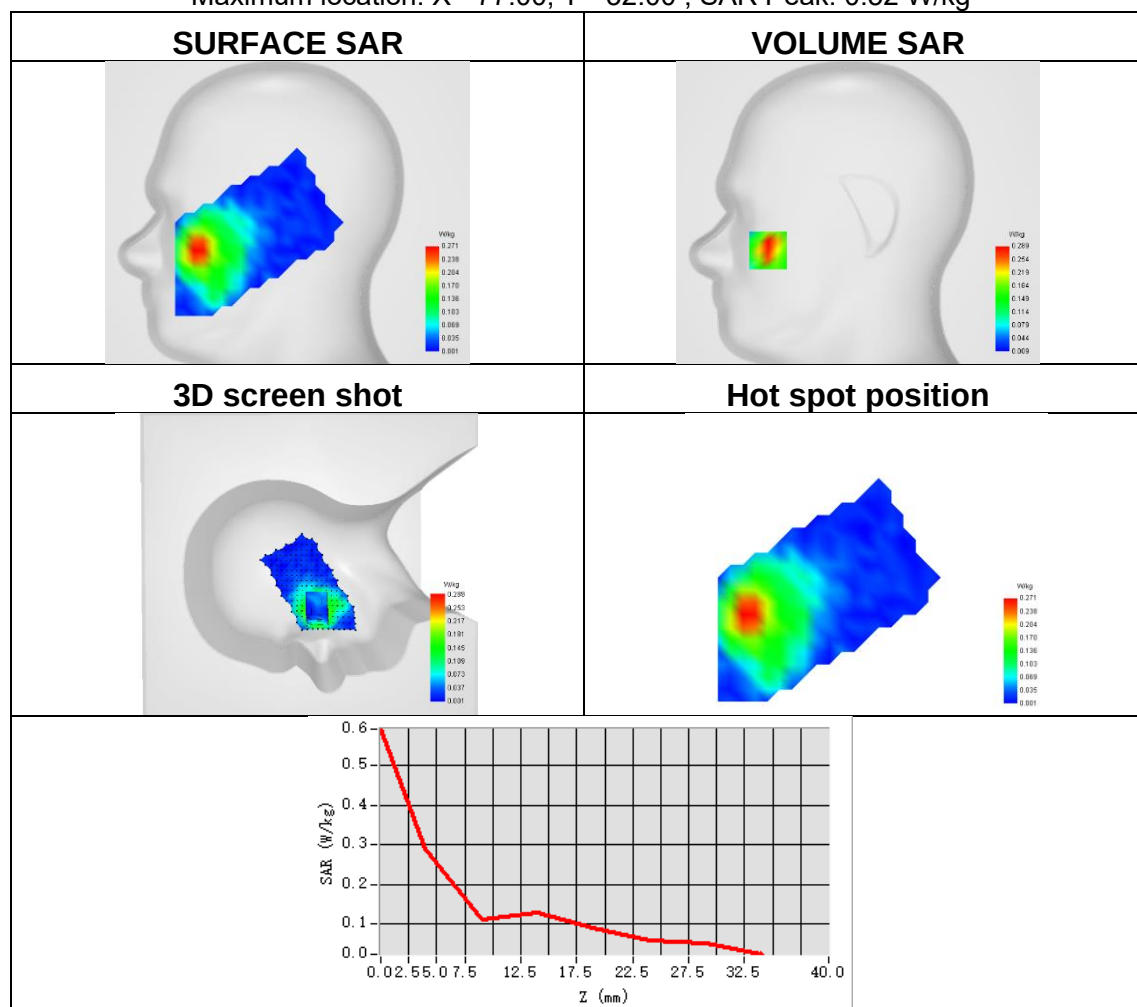




Plot 86:

Test Date	2026-02-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 12
Signal	NR FDD
Frequency	708.5
SAR 10g (W/Kg)	0.109
SAR 1g (W/Kg)	0.169
ConvF	0.71
Relative permittivity	42.72
Conductivity (S/m)	0.88

Maximum location: X=-10.00, Y=-3.00 ; SAR Peak: 0.23 W/kg

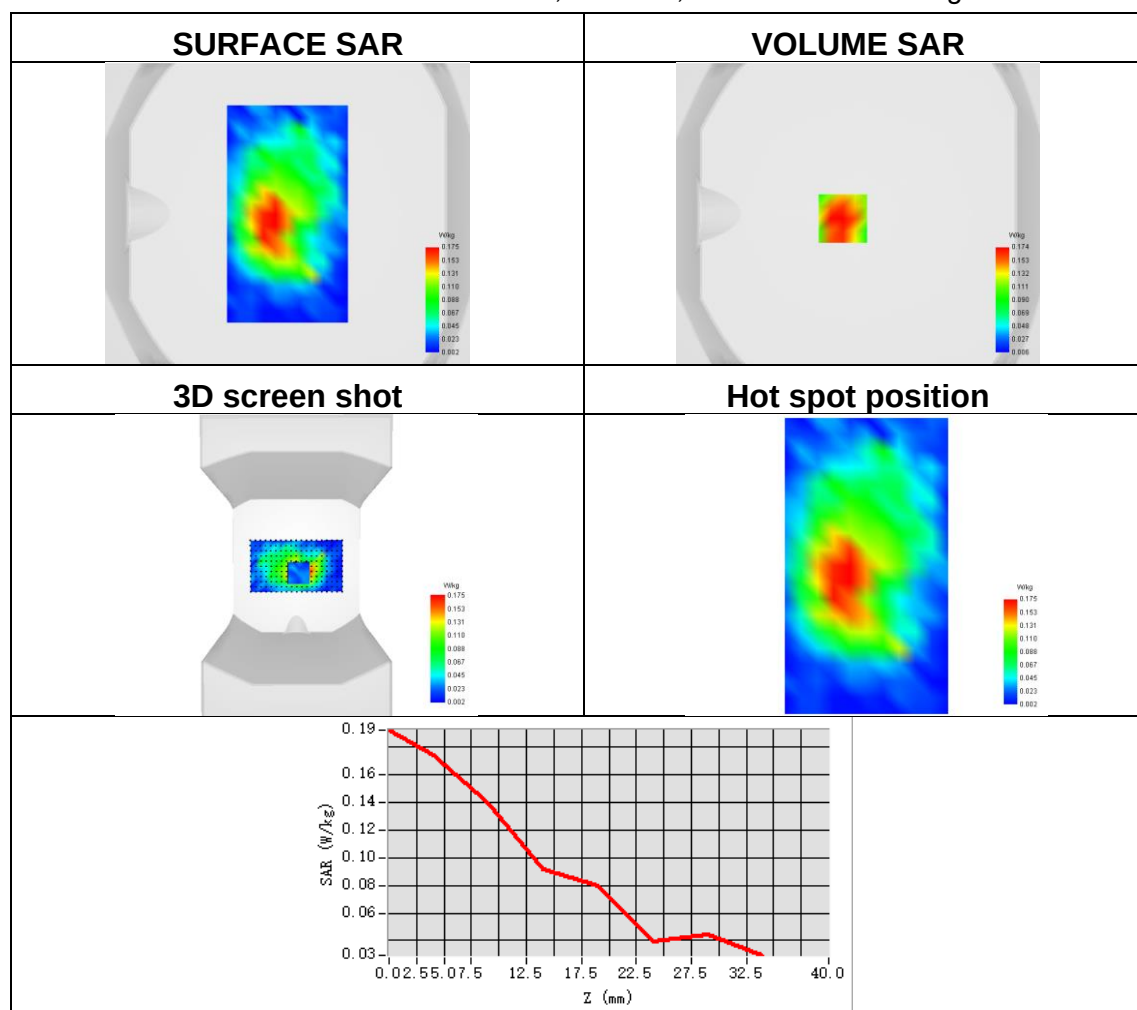




Plot 87:

Test Date	2026-02-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 13
Signal	NR FDD
Frequency	782
SAR 10g (W/Kg)	0.124
SAR 1g (W/Kg)	0.247
ConvF	0.71
Relative permittivity	42.91
Conductivity (S/m)	0.85

Maximum location: X=-71.00, Y=-32.00 ; SAR Peak: 0.42 W/kg

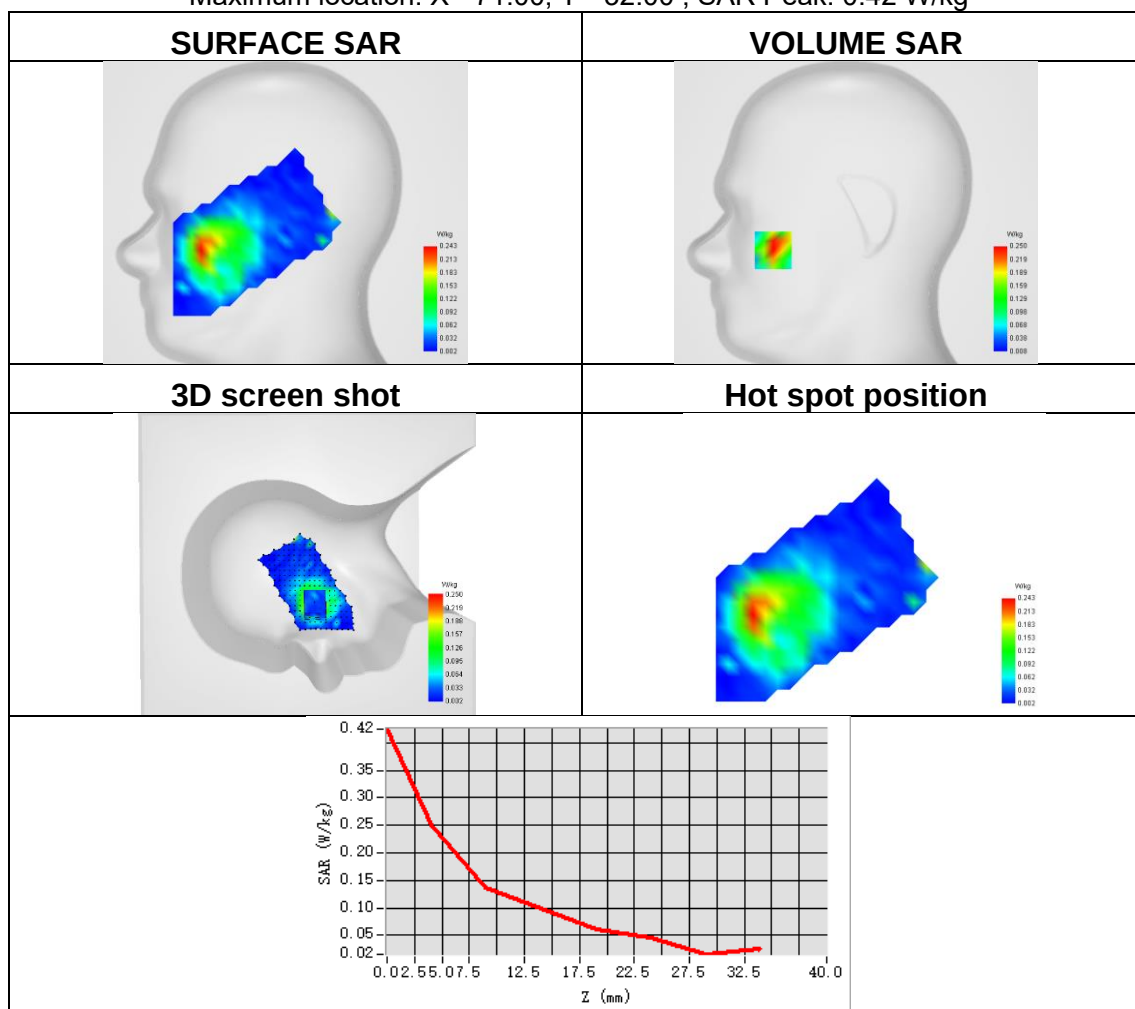




Plot 88:

Test Date	2026-02-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 13
Signal	NR FDD
Frequency	782
SAR 10g (W/Kg)	0.039
SAR 1g (W/Kg)	0.070
ConvF	0.71
Relative permittivity	42.91
Conductivity (S/m)	0.85

Maximum location: X=-16.00, Y=8.00 ; SAR Peak: 0.13 W/kg

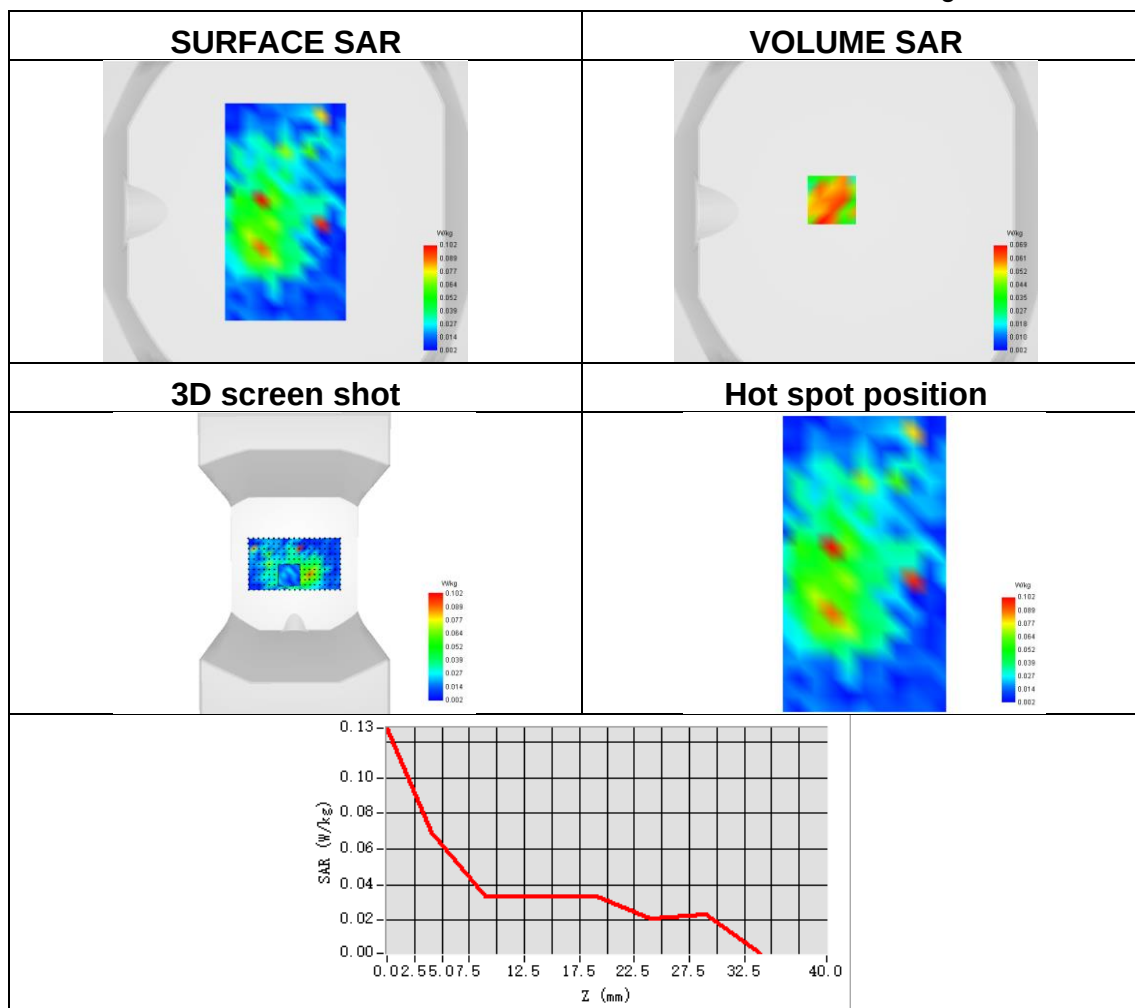




Plot 89:

Test Date	2026-02-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 25
Signal	NR FDD
Frequency	1882.5
SAR 10g (W/Kg)	0.305
SAR 1g (W/Kg)	0.645
ConvF	0.90
Relative permittivity	40.90
Conductivity (S/m)	1.41

Maximum location: X=-66.00, Y=-40.00 ; SAR Peak: 1.09 W/kg

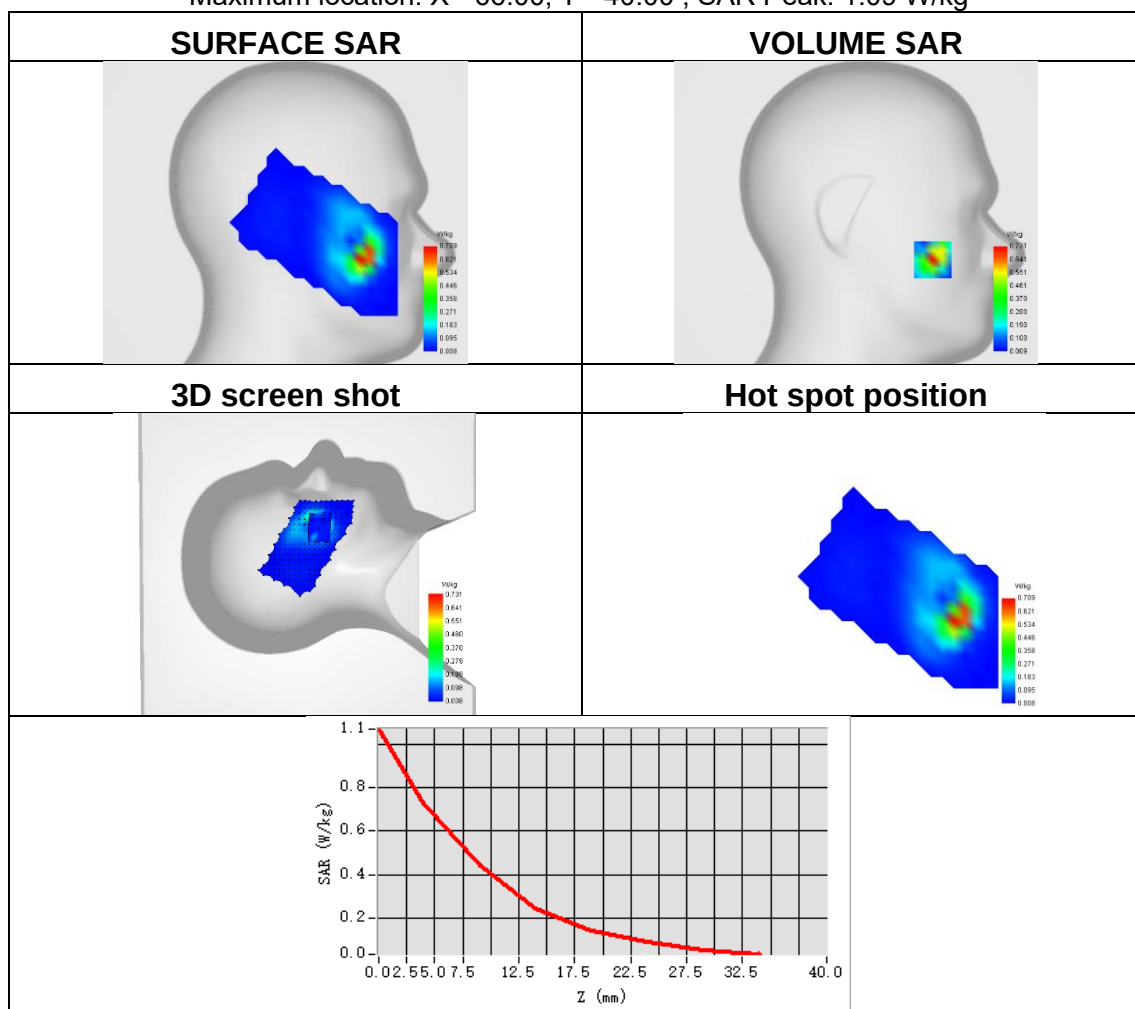




Plot 90:

Test Date	2026-02-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 25
Signal	NR FDD
Frequency	1882.5
SAR 10g (W/Kg)	0.354
SAR 1g (W/Kg)	0.694
ConvF	0.90
Relative permittivity	40.90
Conductivity (S/m)	1.41

Maximum location: X=9.00, Y=0.00 ; SAR Peak: 1.10 W/kg

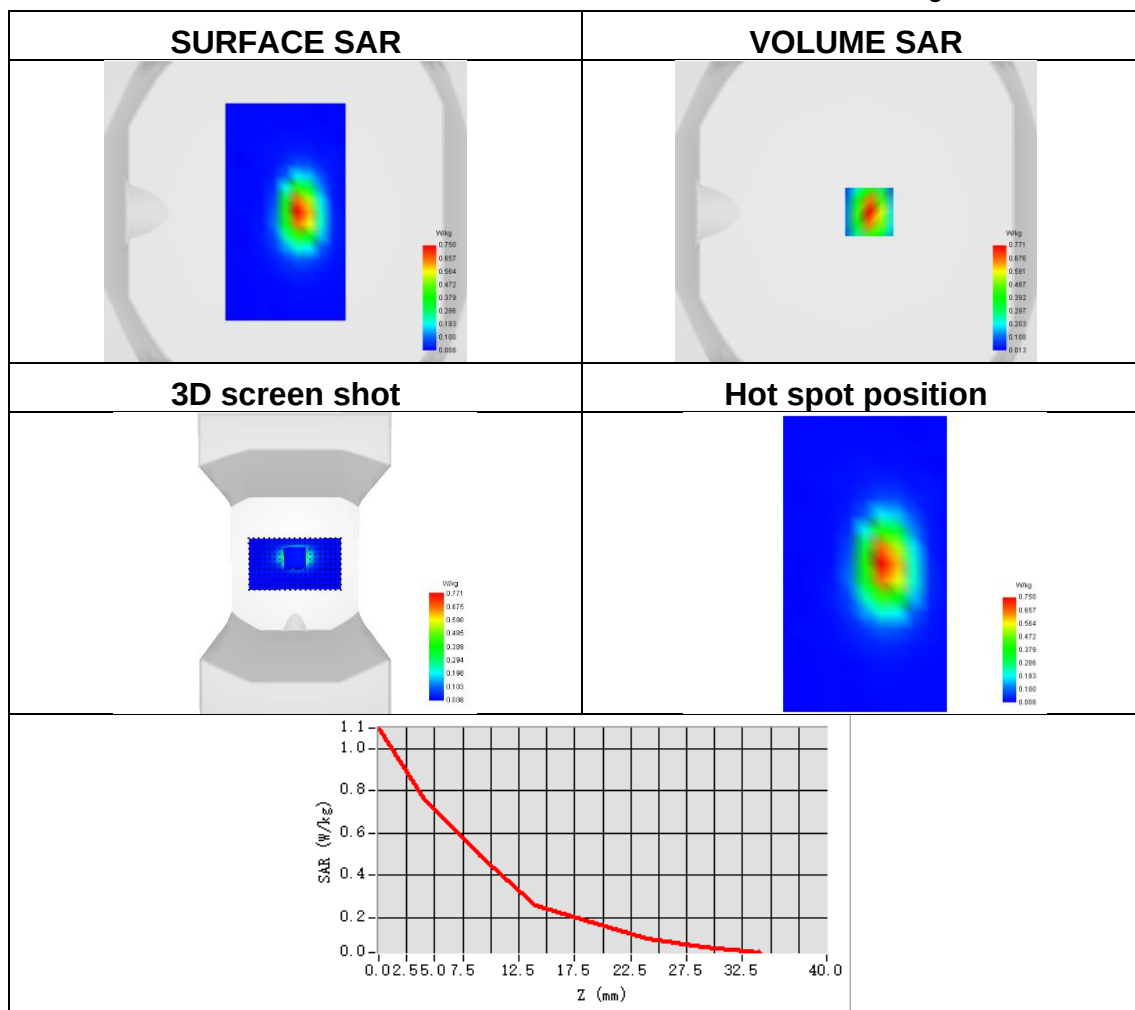




Plot 91:

Test Date	2026-02-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 26
Signal	NR FDD
Frequency	819
SAR 10g (W/Kg)	0.188
SAR 1g (W/Kg)	0.335
ConvF	0.69
Relative permittivity	42.88
Conductivity (S/m)	0.94

Maximum location: X=-72.00, Y=-32.00 ; SAR Peak: 1.42 W/kg

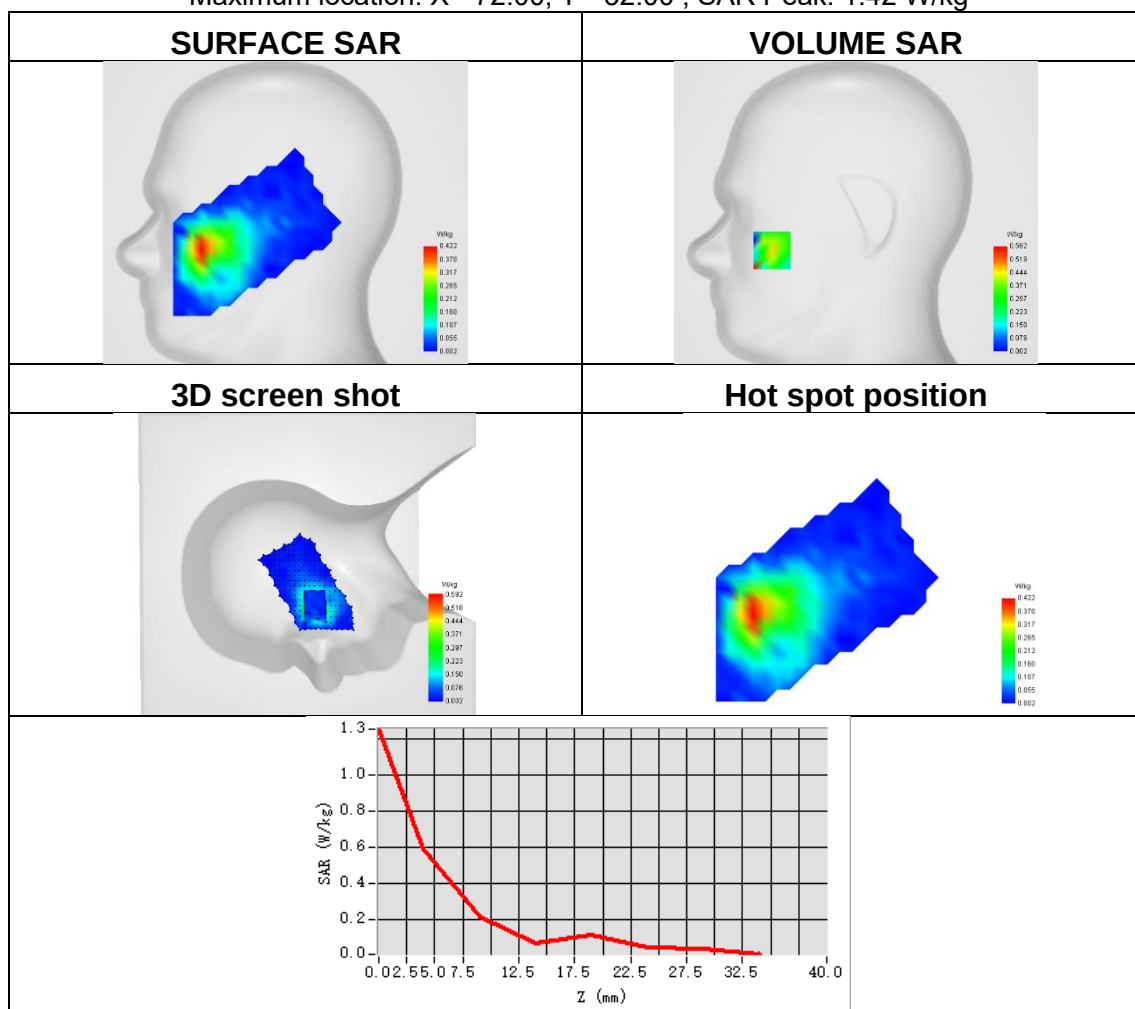




Plot 92:

Test Date	2026-02-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 26
Signal	NR FDD
Frequency	819
SAR 10g (W/Kg)	0.041
SAR 1g (W/Kg)	0.093
ConvF	0.69
Relative permittivity	42.88
Conductivity (S/m)	0.94

Maximum location: X=-24.00, Y=-39.00 ; SAR Peak: 0.38 W/kg

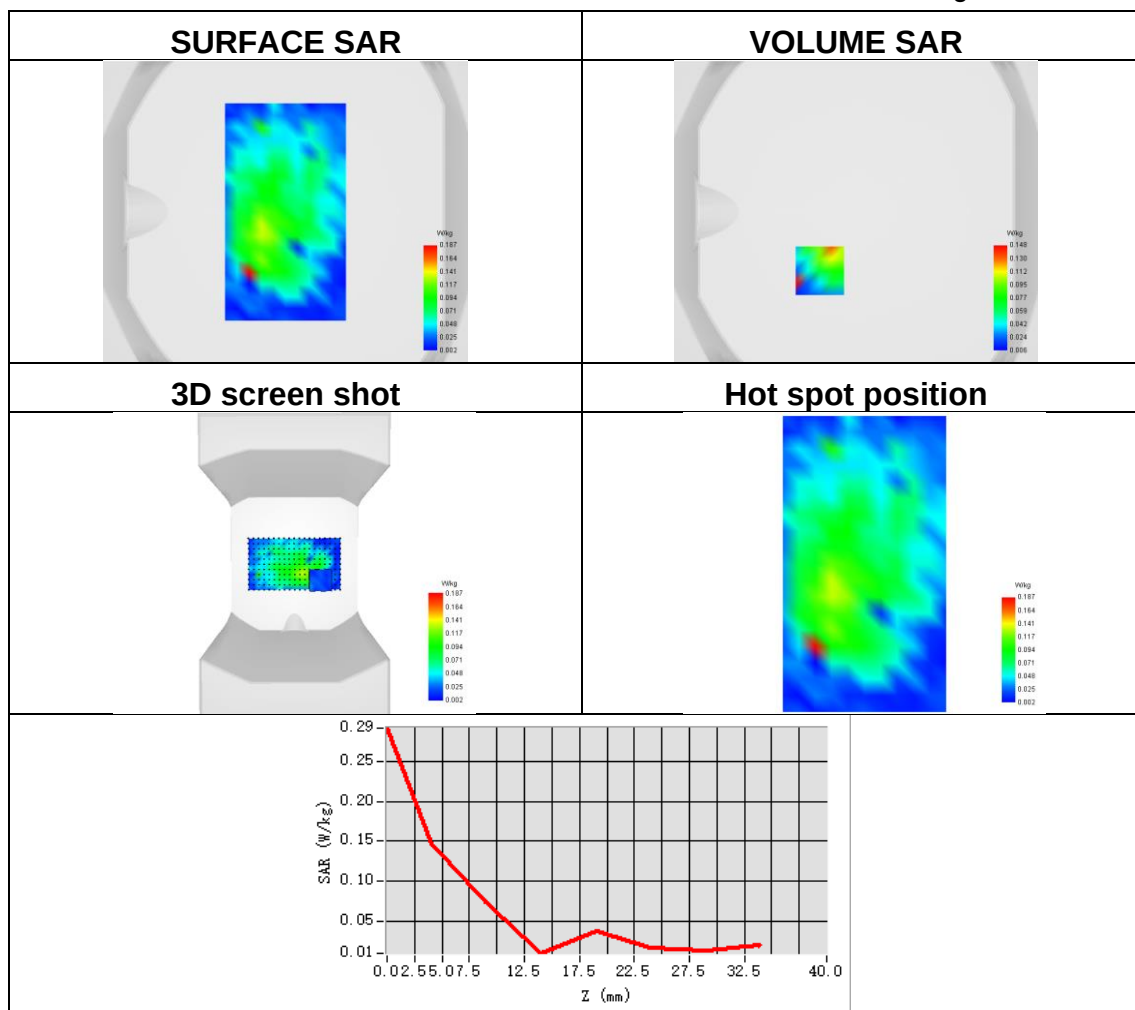




Plot 93:

Test Date	2026-02-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 38
Signal	NR TDD
Frequency	2595
SAR 10g (W/Kg)	0.186
SAR 1g (W/Kg)	0.443
ConvF	0.98
Relative permittivity	39.69
Conductivity (S/m)	1.95

Maximum location: X=-51.00, Y=-49.00 ; SAR Peak: 0.81 W/kg

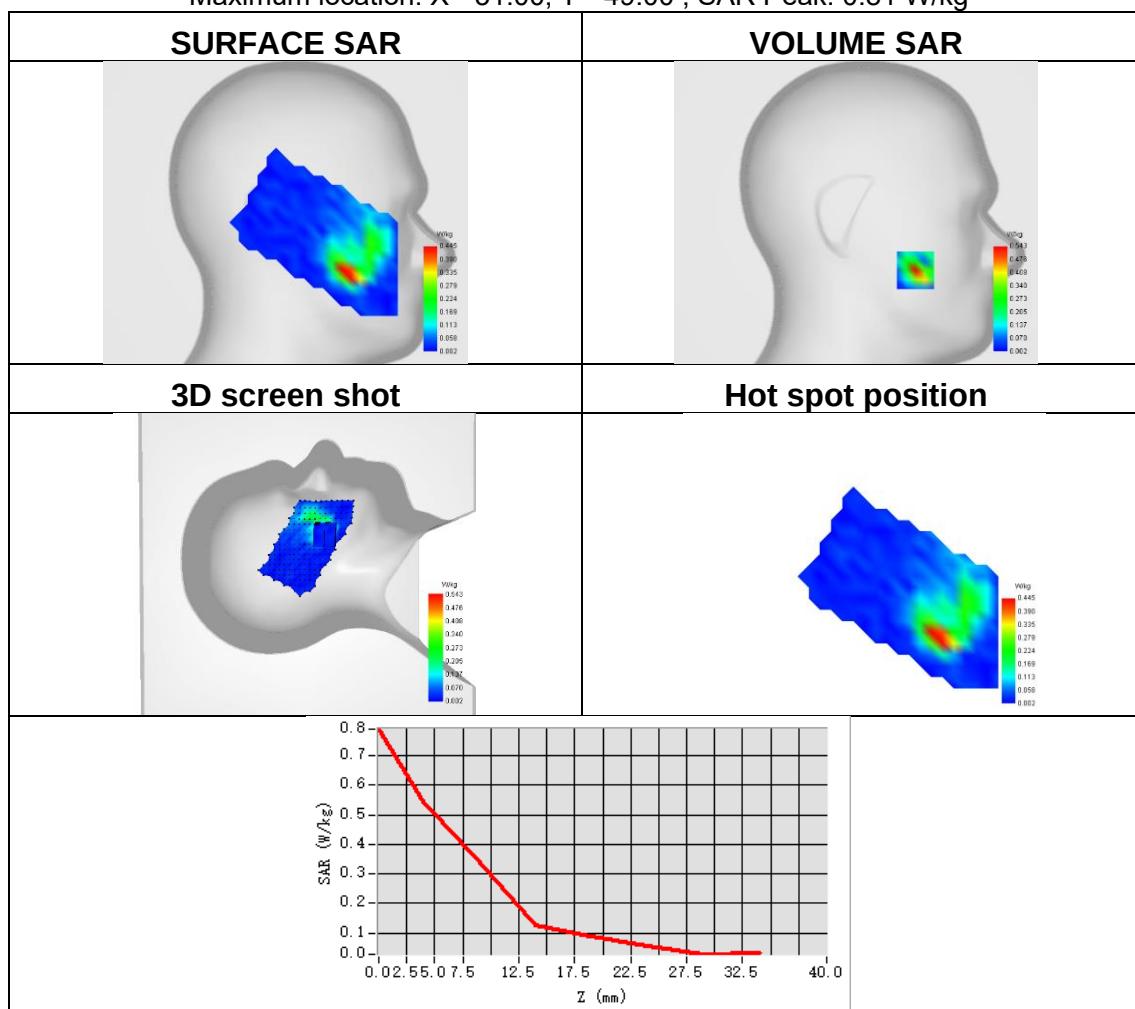




Plot 94:

Test Date	2026-02-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 38
Signal	NR TDD
Frequency	2595
SAR 10g (W/Kg)	0.331
SAR 1g (W/Kg)	0.740
ConvF	0.69
Relative permittivity	39.69
Conductivity (S/m)	1.95

Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.39 W/kg

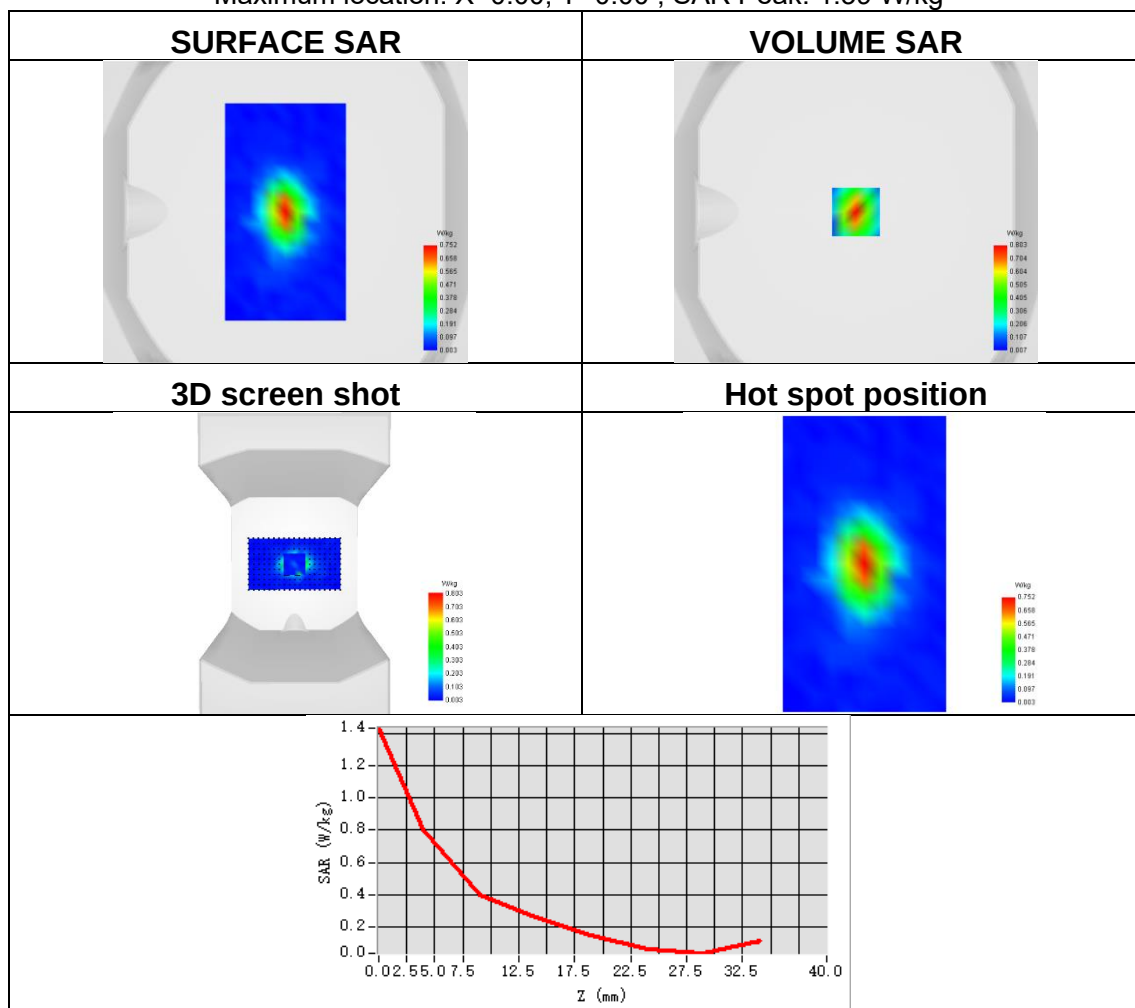




Plot 95:

Test Date	2026-02-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 41
Signal	NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.112
SAR 1g (W/Kg)	0.205
ConvF	0.98
Relative permittivity	39.36
Conductivity (S/m)	1.99

Maximum location: X=-80.00, Y=-49.00 ; SAR Peak: 0.34 W/kg

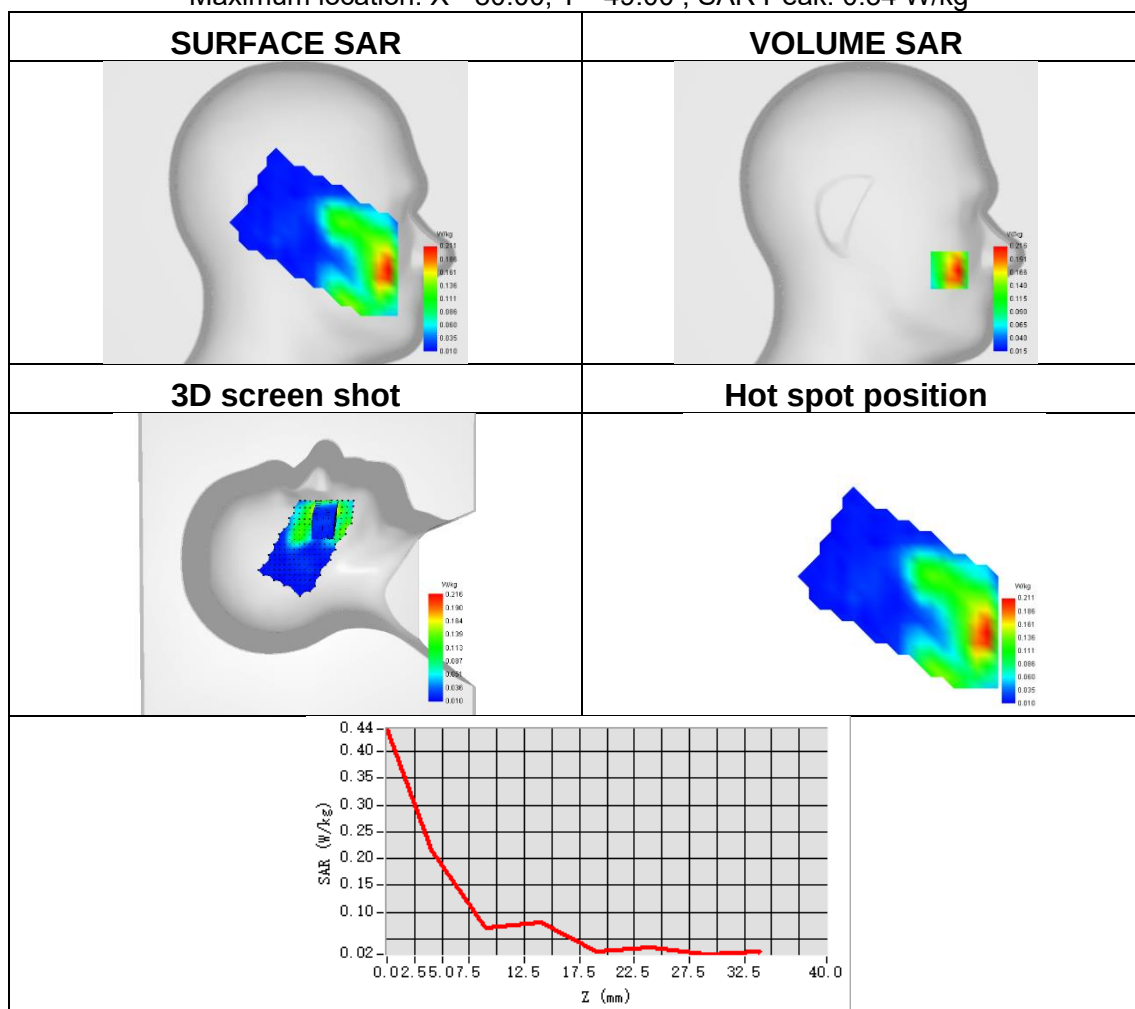




Plot 96:

Test Date	2026-02-17
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 41
Signal	NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.230
SAR 1g (W/Kg)	0.629
ConvF	0.98
Relative permittivity	39.36
Conductivity (S/m)	1.99

Maximum location: X=8.00, Y=3.00 ; SAR Peak: 1.71 W/kg

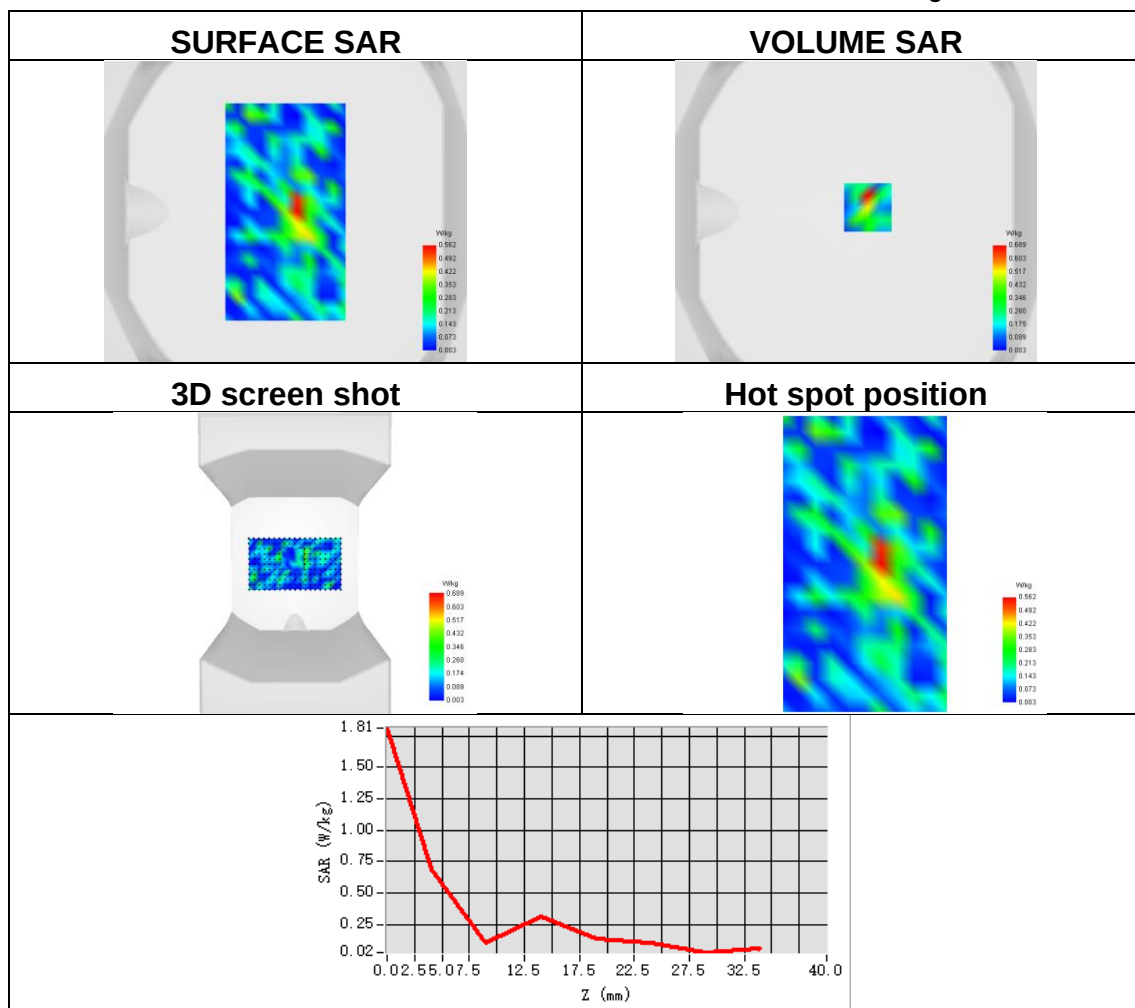




Plot 97:

Test Date	2026-02-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 66
Signal	NR FDD
Frequency	1730
SAR 10g (W/Kg)	0.166
SAR 1g (W/Kg)	0.340
ConvF	0.69
Relative permittivity	40.84
Conductivity (S/m)	1.39

Maximum location: X=-79.00, Y=-48.00 ; SAR Peak: 0.62 W/kg

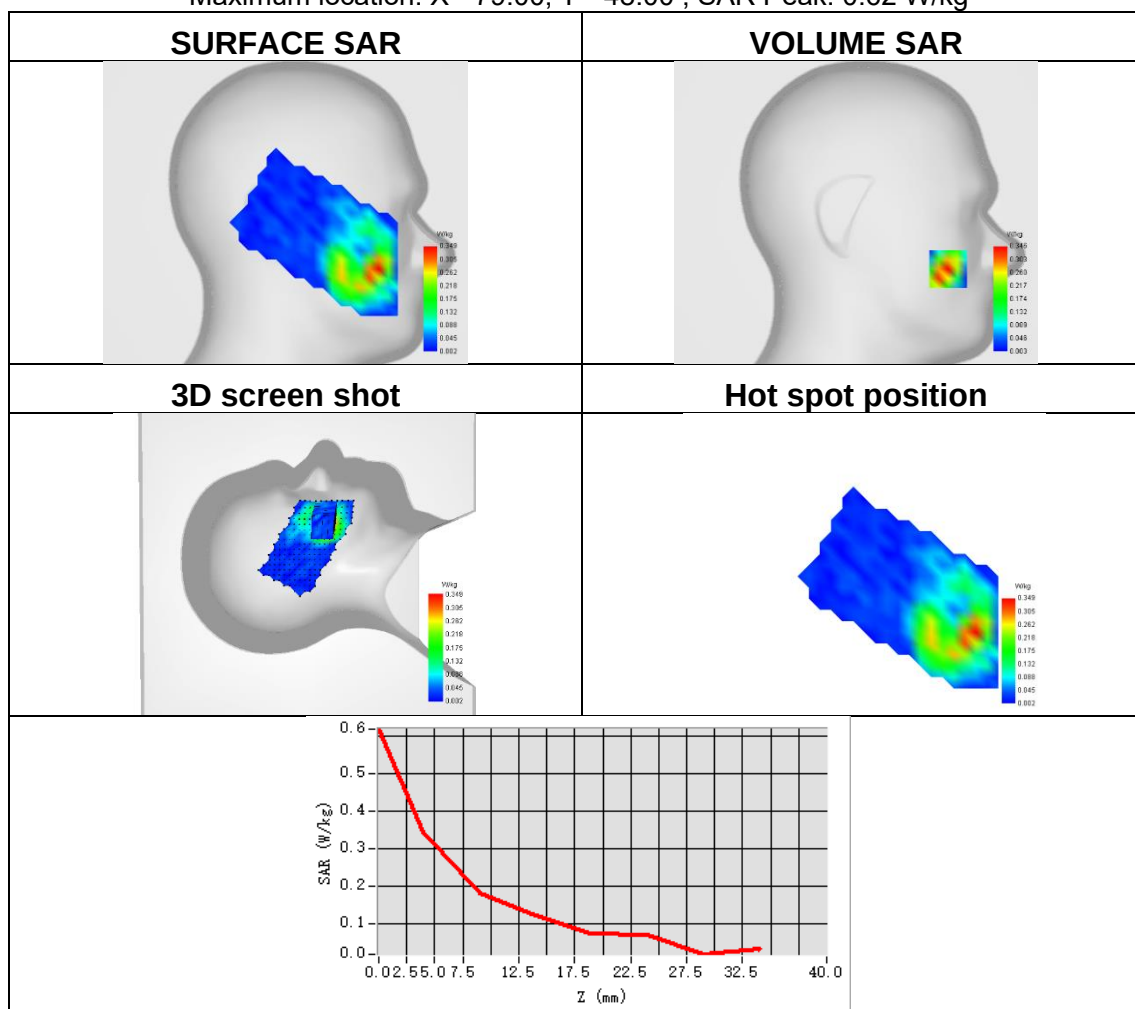




Plot 98:

Test Date	2026-02-09
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 66
Signal	NR FDD
Frequency	1730
SAR 10g (W/Kg)	0.422
SAR 1g (W/Kg)	0.849
ConvF	0.69
Relative permittivity	40.84
Conductivity (S/m)	1.39

Maximum location: X=-1.00, Y=1.00 ; SAR Peak: 1.52 W/kg

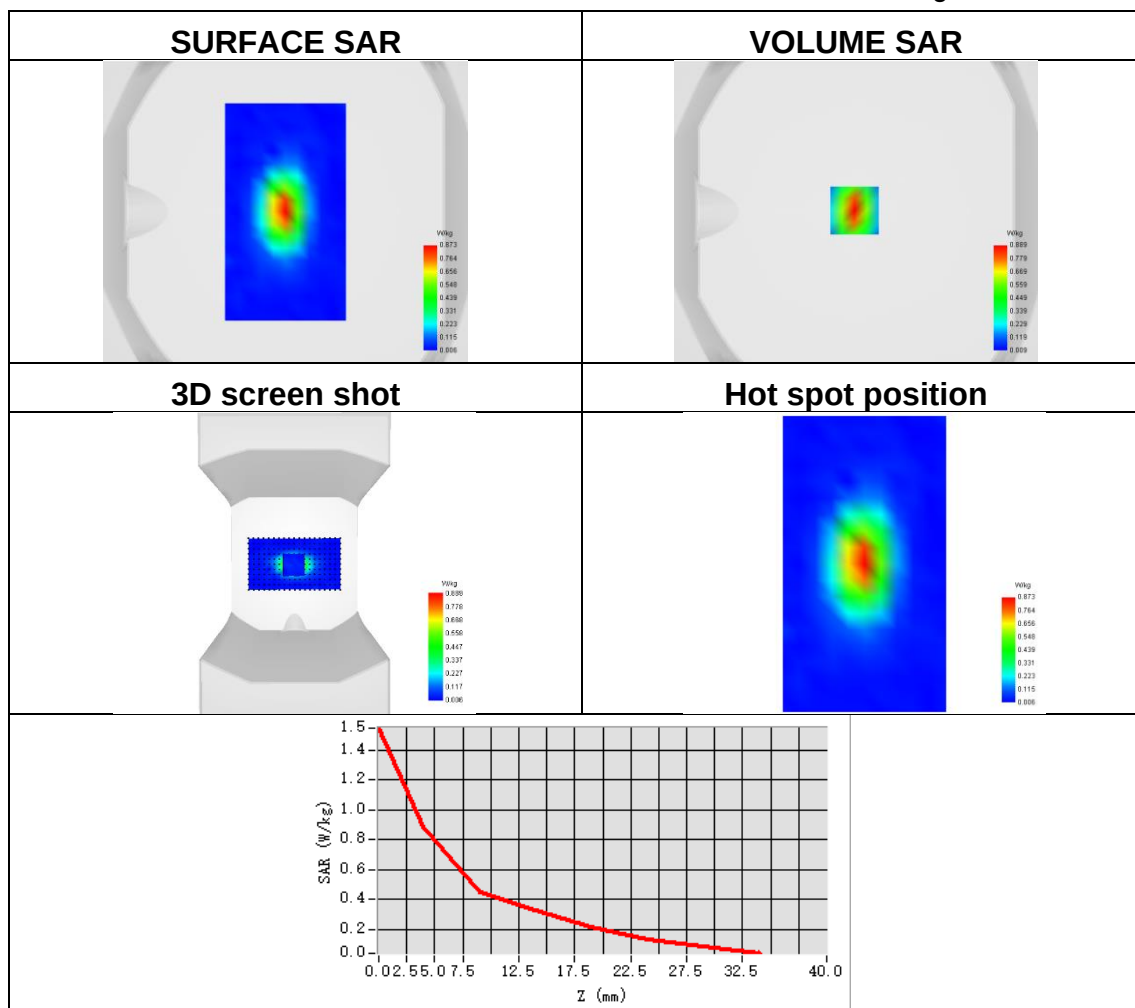




Plot 99:

Test Date	2026-02-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 71
Signal	NR FDD
Frequency	688
SAR 10g (W/Kg)	0.337
SAR 1g (W/Kg)	0.570
ConvF	0.71
Relative permittivity	42.43
Conductivity (S/m)	0.85

Maximum location: X=-67.00, Y=-35.00 ; SAR Peak: 0.83 W/kg

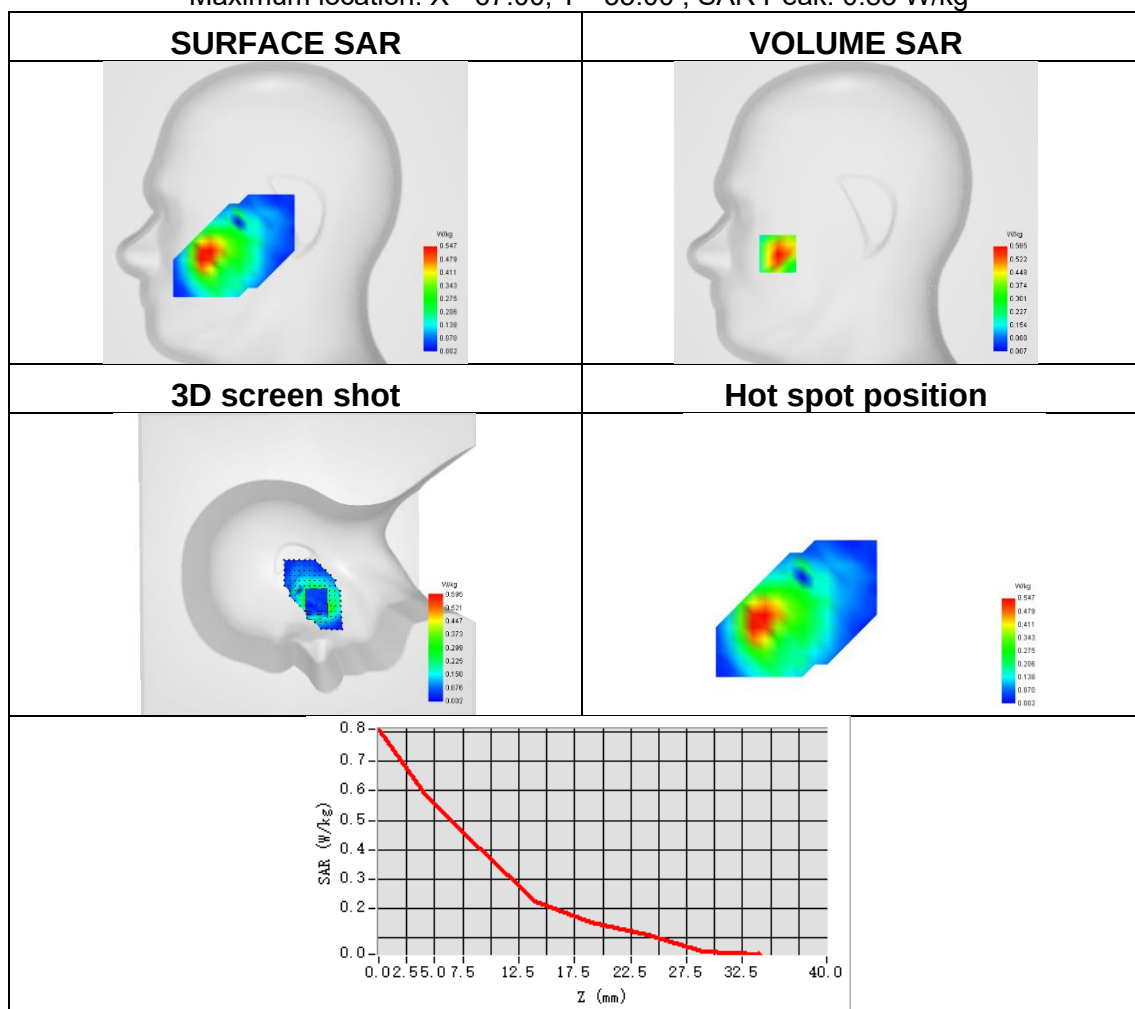




Plot 100:

Test Date	2026-02-13
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 71
Signal	NR FDD
Frequency	688
SAR 10g (W/Kg)	0.124
SAR 1g (W/Kg)	0.200
ConvF	0.71
Relative permittivity	42.43
Conductivity (S/m)	0.85

Maximum location: X=-17.00, Y=-1.00 ; SAR Peak: 0.30 W/kg

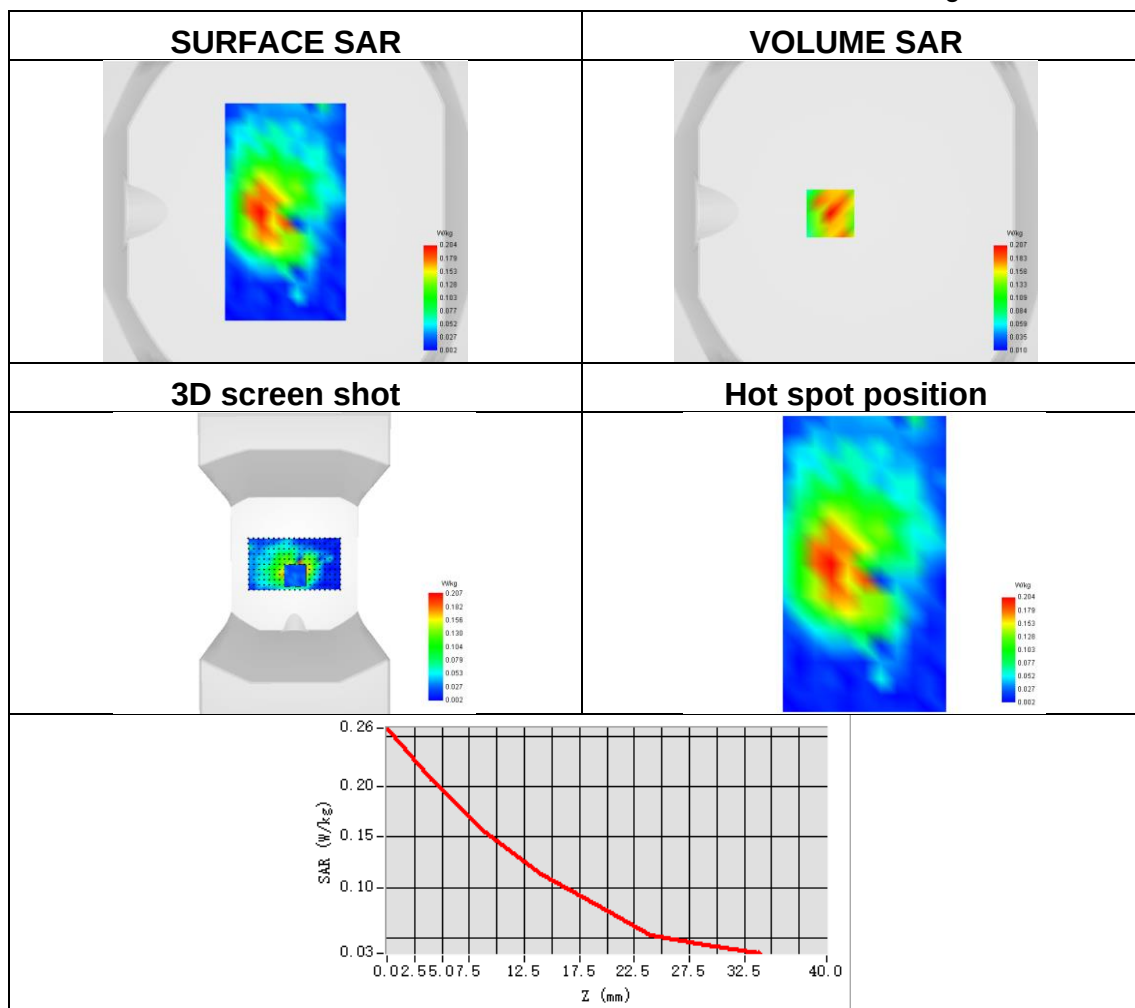




Plot 101:

Test Date	2026-02-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	NR band 77
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.116
SAR 1g (W/Kg)	0.370
ConvF	0.91
Relative permittivity	38.44
Conductivity (S/m)	3.14

Maximum location: X=-47.00, Y=-48.00 ; SAR Peak: 7.68 W/kg

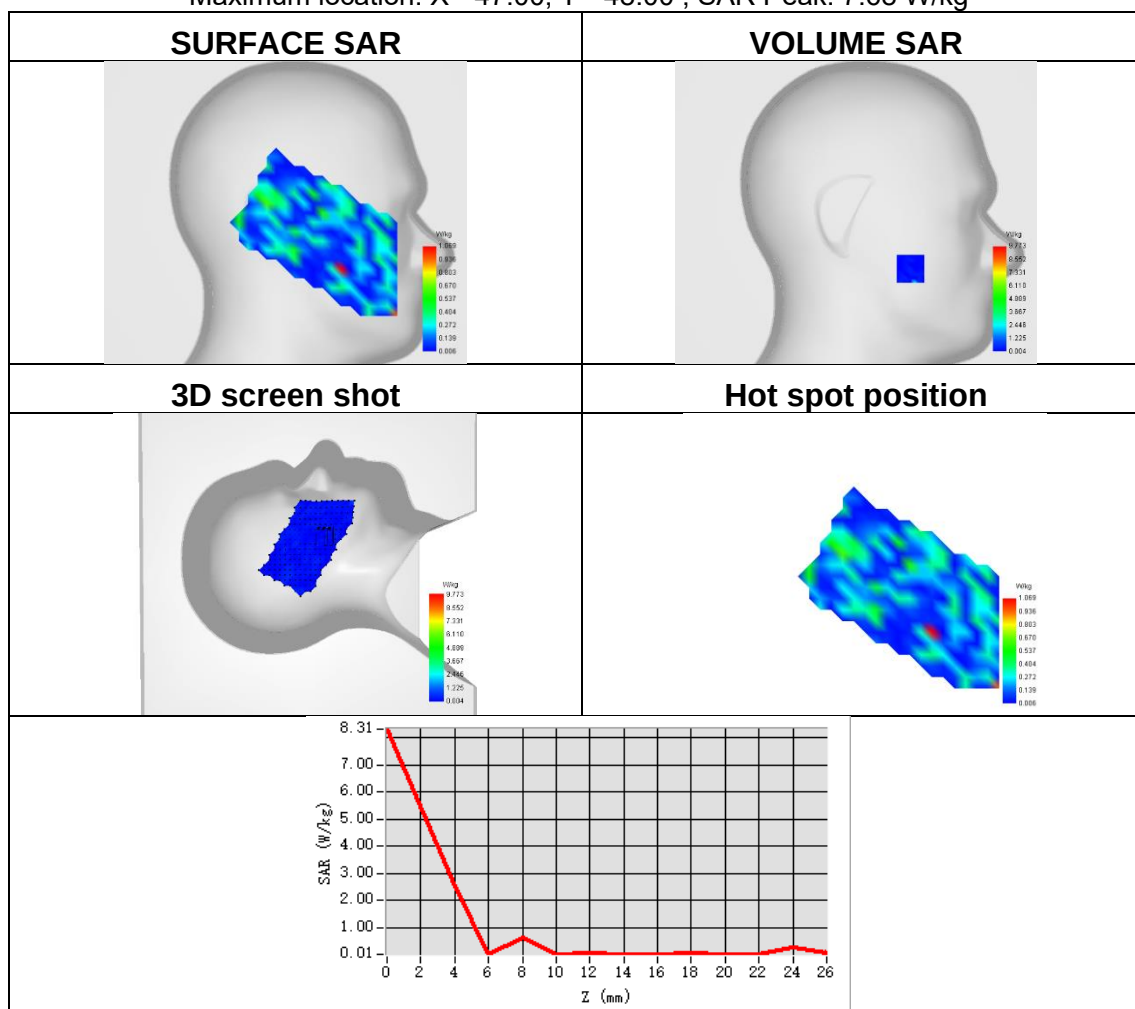




Plot 102:

Test Date	2026-02-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Left Side
Band	NR band 77
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.120
SAR 1g (W/Kg)	0.268
ConvF	0.91
Relative permittivity	38.44
Conductivity (S/m)	3.14

Maximum location: X=8.00, Y=-56.00 ; SAR Peak: 1.89 W/kg

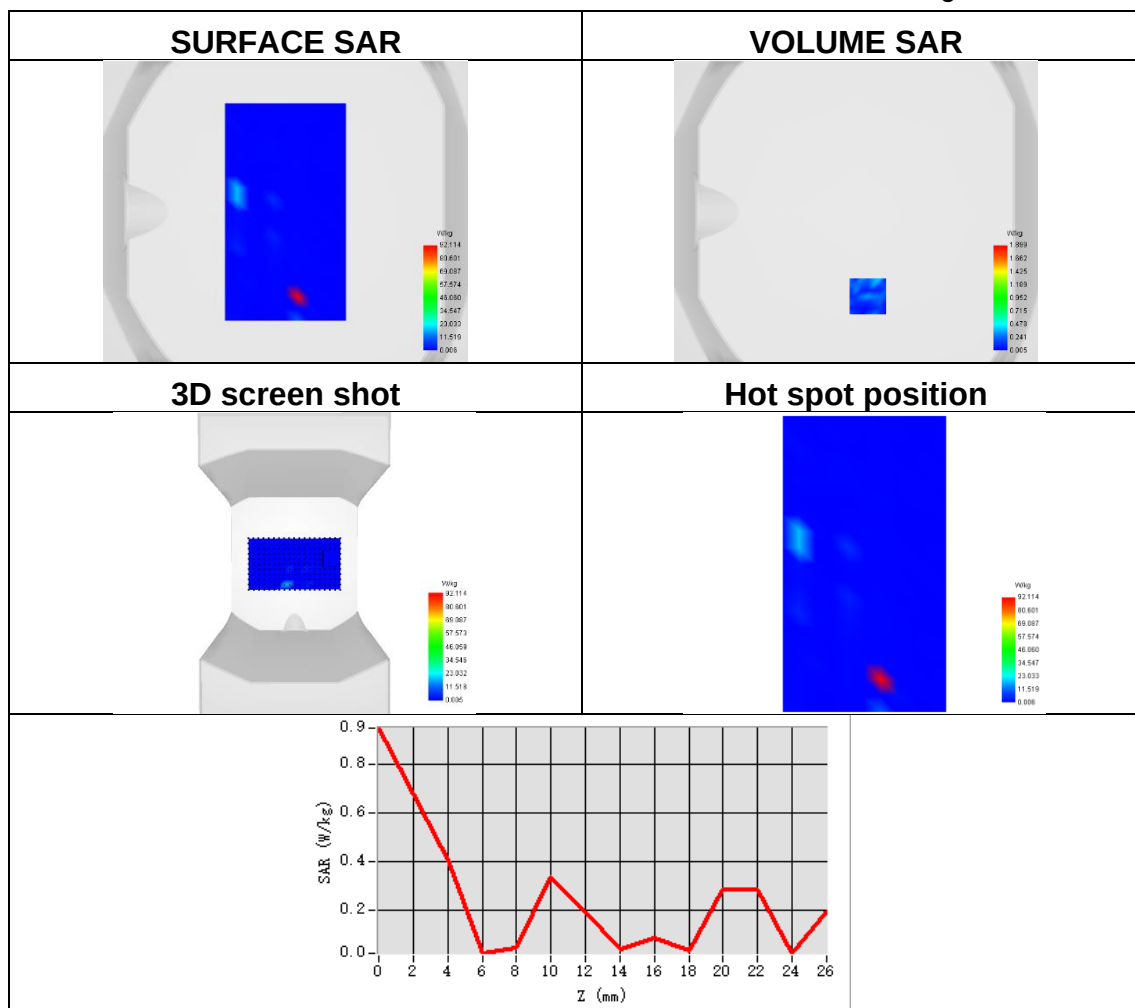




Plot 103:

Test Date	2026-02-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	NR band 78
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.205
SAR 1g (W/Kg)	0.739
ConvF	0.91
Relative permittivity	38.44
Conductivity (S/m)	3.14

Maximum location: X=-72.00, Y=-64.00 ; SAR Peak: 15.27 W/kg

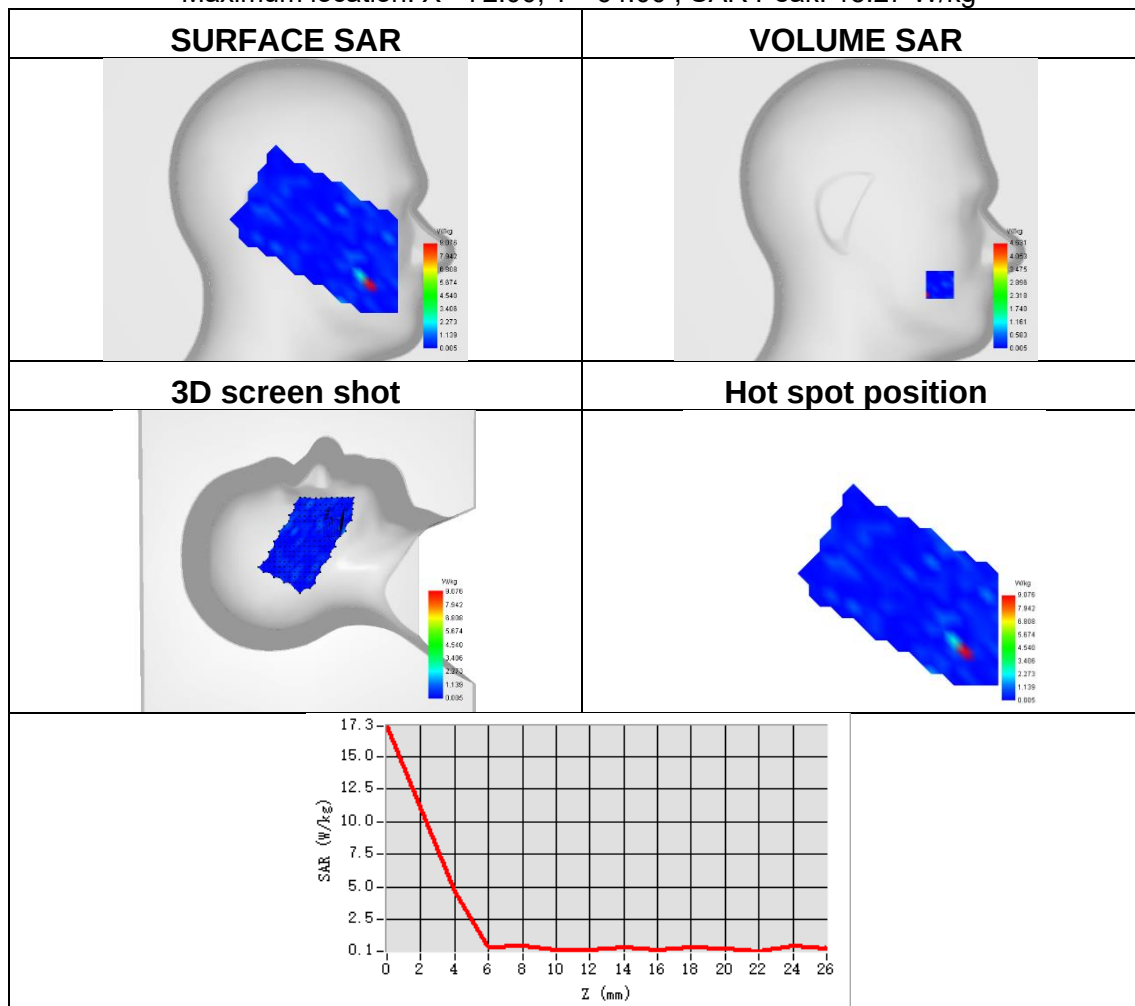




Plot 104:

Test Date	2026-02-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Left Side
Band	NR band 78
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.202
SAR 1g (W/Kg)	0.484
ConvF	0.91
Relative permittivity	38.44
Conductivity (S/m)	3.14

Maximum location: X=7.00, Y=0.00 ; SAR Peak: 0.96 W/kg

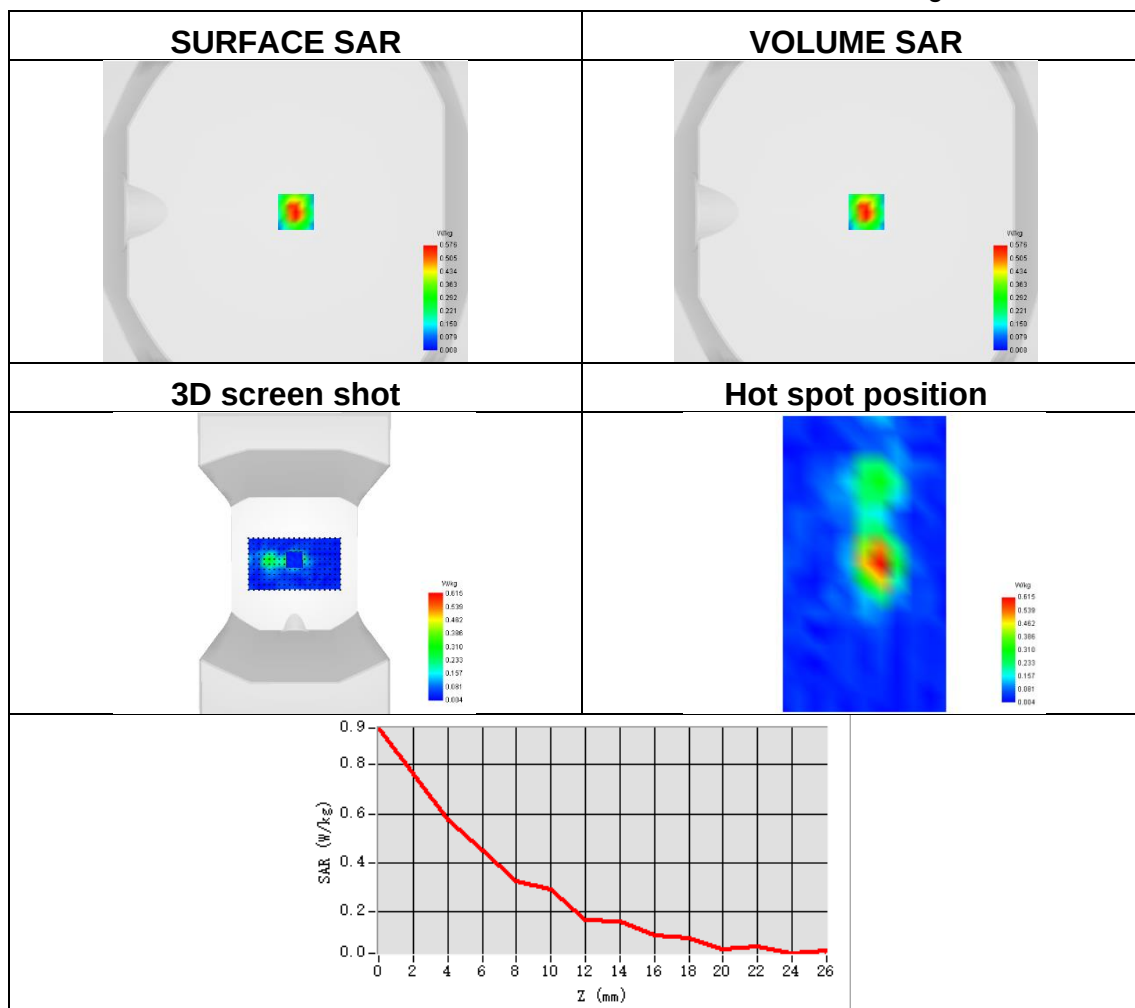




Plot 105:

Test Date	2026-02-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	Bluetooth
Signal	Bluetooth
Frequency	2440
SAR 10g (W/Kg)	0.033
SAR 1g (W/Kg)	0.064
ConvF	1.03
Relative permittivity	38.44
Conductivity (S/m)	3.14

Maximum location: X=-8.00, Y=0.00 ; SAR Peak: 0.10 W/kg

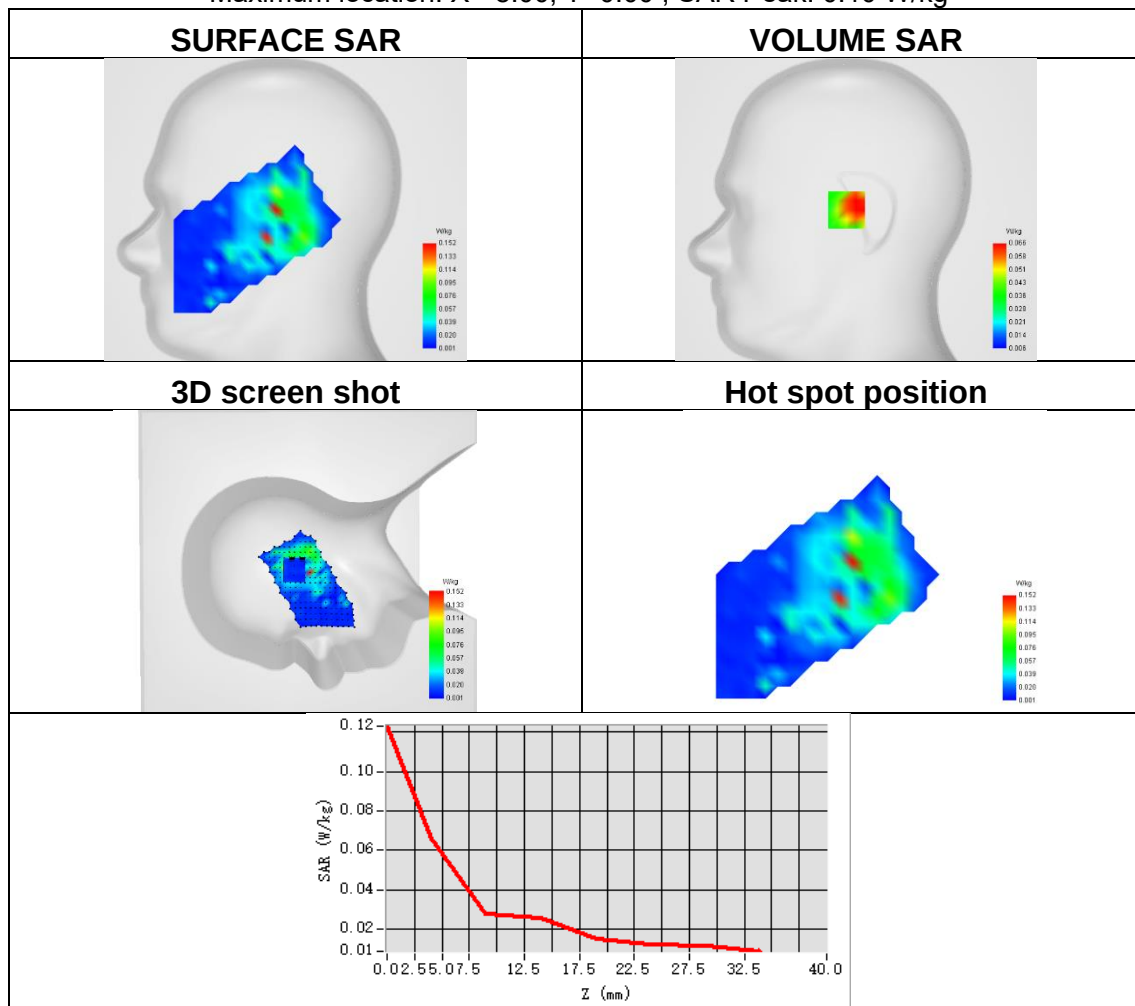




Plot 106:

Test Date	2026-02-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	Bluetooth
Signal	Bluetooth
Frequency	2440
SAR 10g (W/Kg)	0.012
SAR 1g (W/Kg)	0.021
ConvF	1.03
Relative permittivity	38.44
Conductivity (S/m)	3.14

Maximum location: X=0.00, Y=16.00 ; SAR Peak: 0.05 W/kg

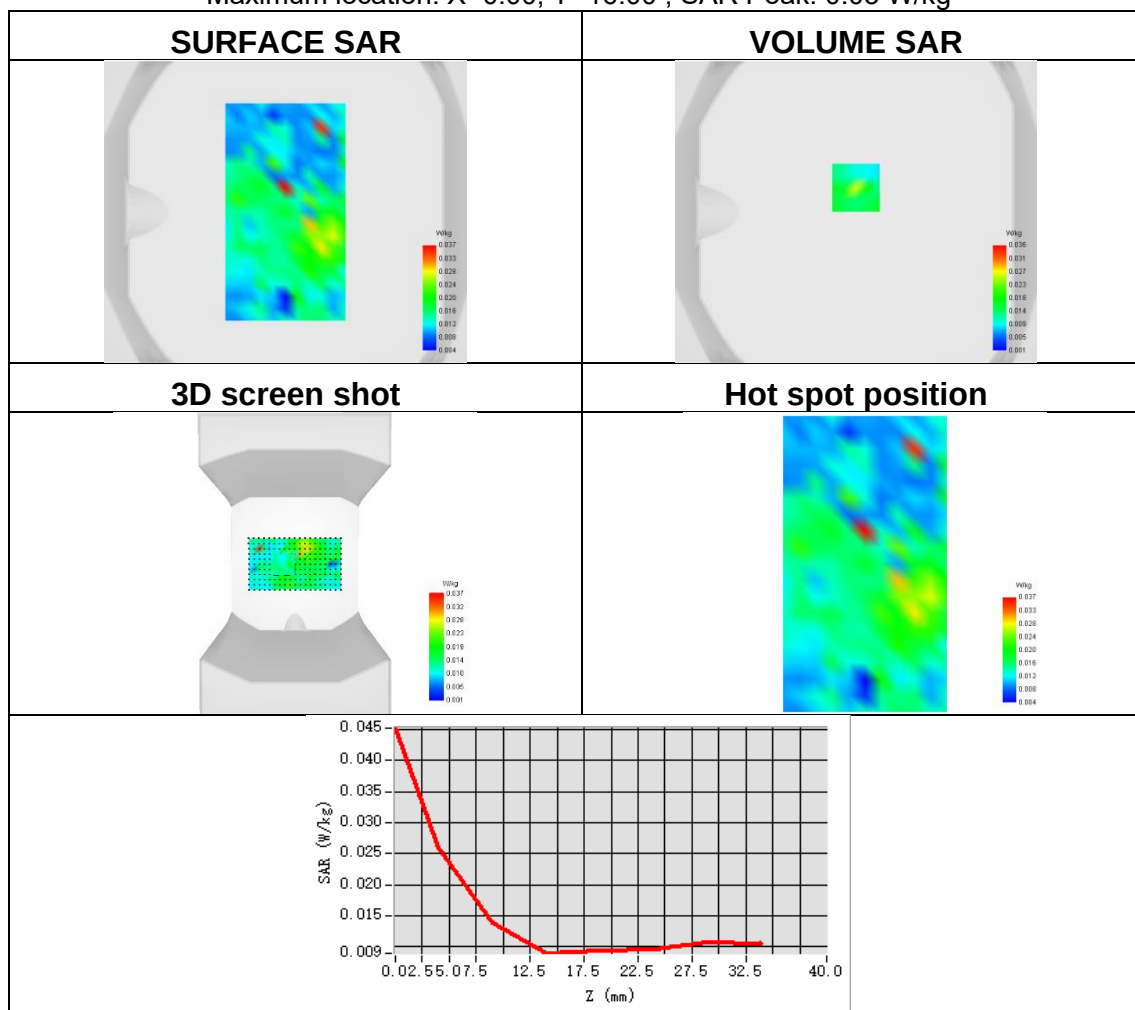



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※