




Plot 96:

Test Date	2026-06-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 41
Signal	NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.273
SAR 1g (W/Kg)	0.573
ConvF	0.98
Relative permittivity	39.61
Conductivity (S/m)	1.97

Maximum location: X=9.00, Y=-1.00 ; SAR Peak: 1.00 W/kg

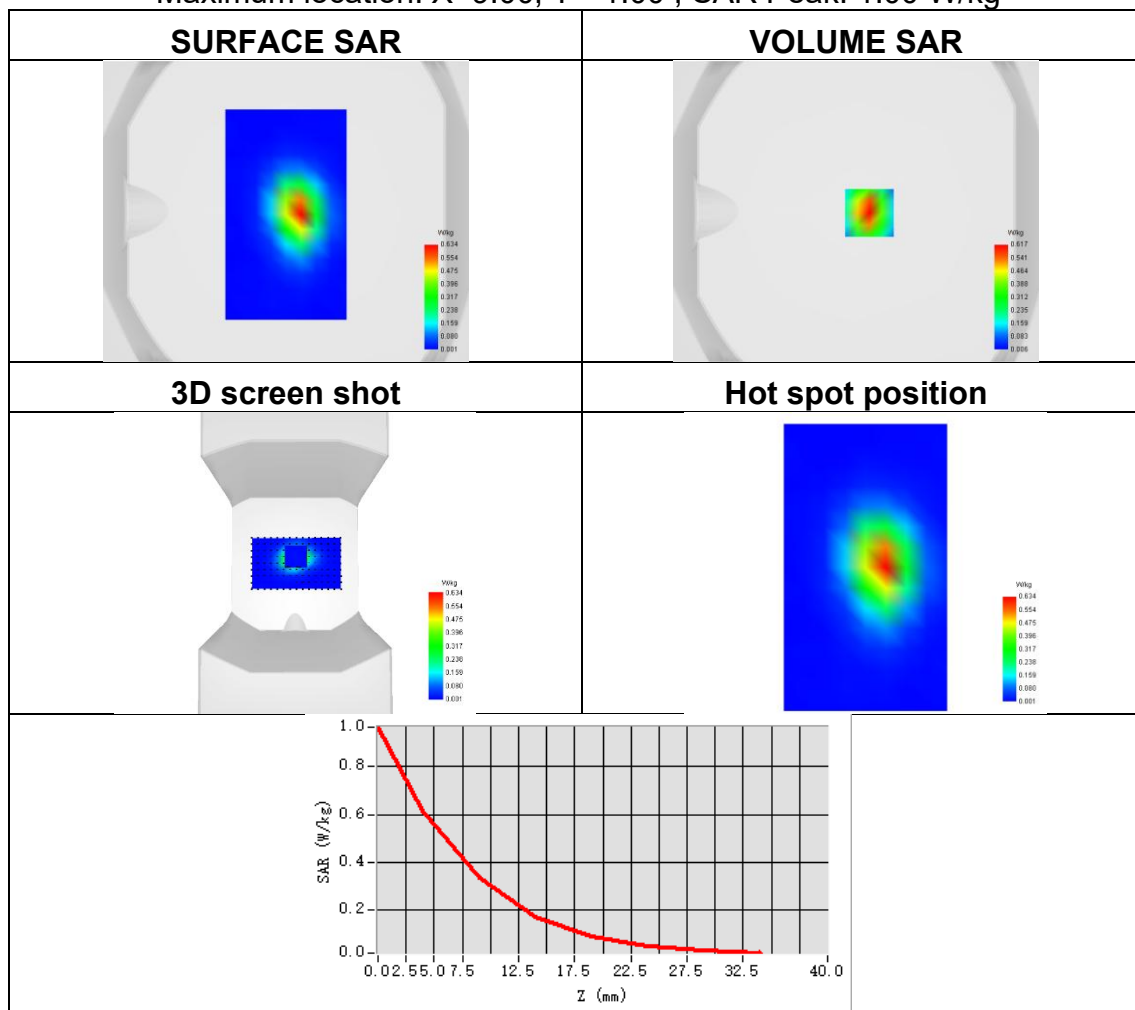




Plot 97:

Test Date	2026-06-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 66
Signal	NR FDD
Frequency	1745
SAR 10g (W/Kg)	0.110
SAR 1g (W/Kg)	0.375
ConvF	0.69
Relative permittivity	41.03
Conductivity (S/m)	1.42

Maximum location: X=-80.00, Y=-65.00 ; SAR Peak: 1.09 W/kg

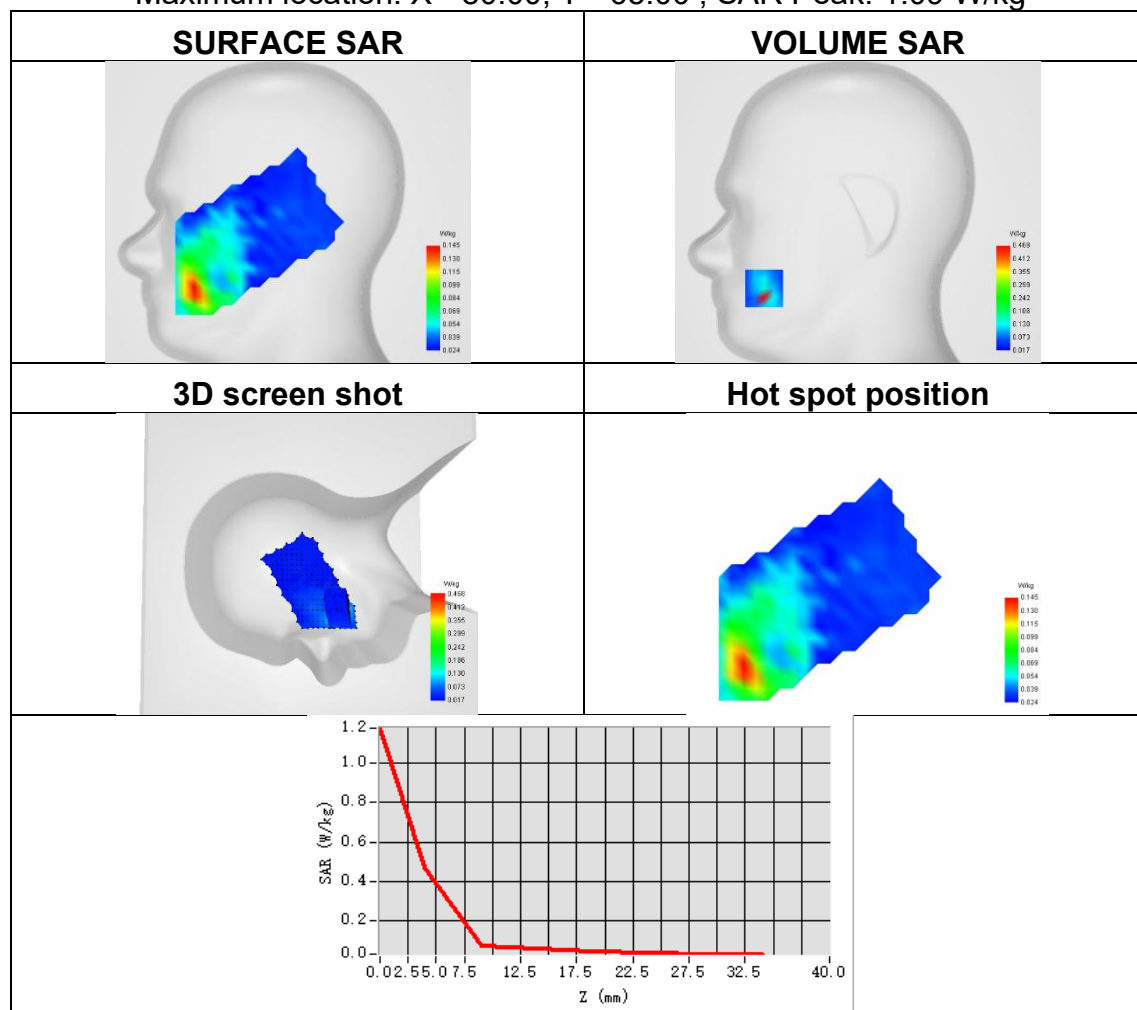




Plot 98:

Test Date	2026-06-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 66
Signal	NR FDD
Frequency	1745
SAR 10g (W/Kg)	0.273
SAR 1g (W/Kg)	0.493
ConvF	0.69
Relative permittivity	41.03
Conductivity (S/m)	1.42

Maximum location: X=8.00, Y=1.00 ; SAR Peak: 0.78 W/kg

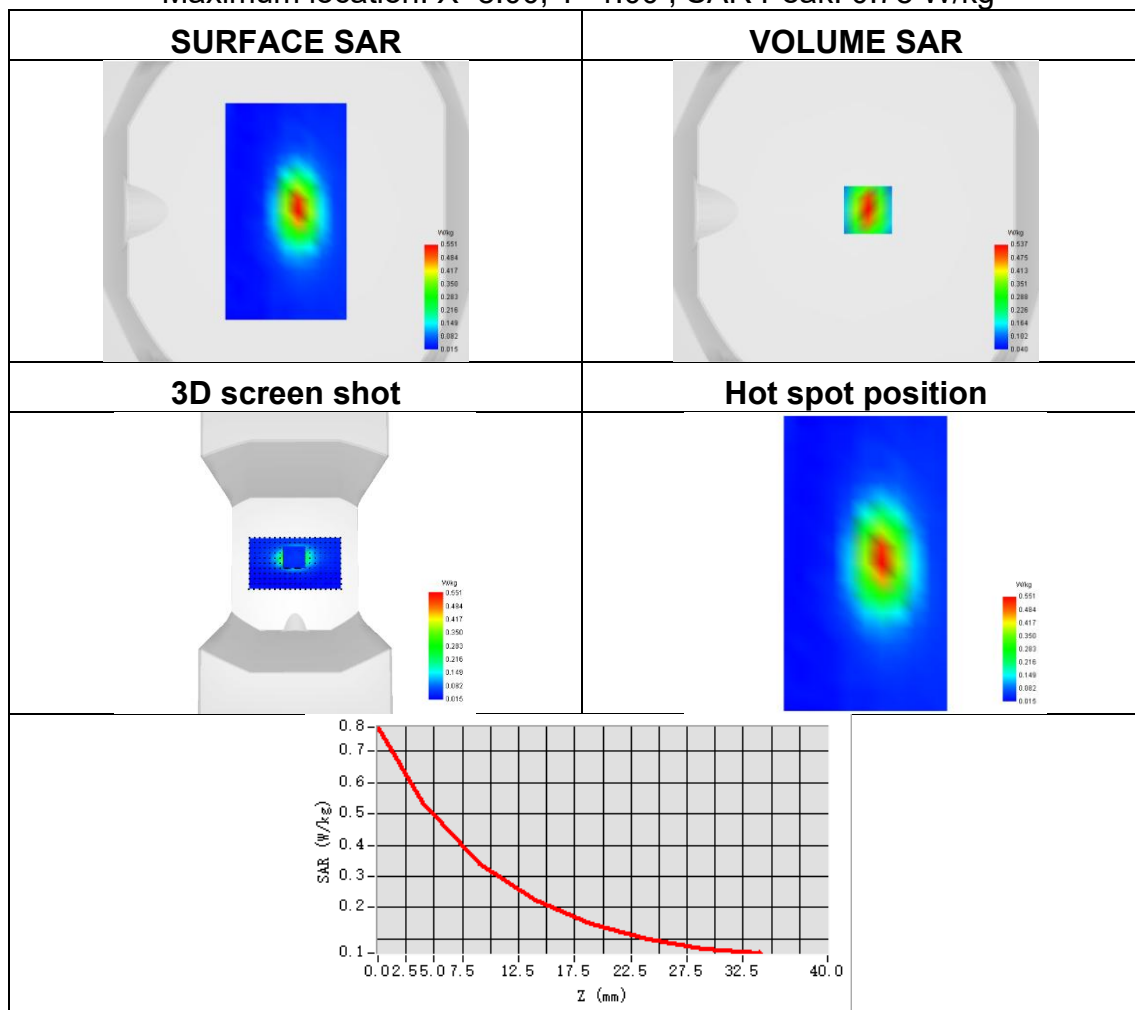




Plot 99:

Test Date	2026-06-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 71
Signal	NR FDD
Frequency	673
SAR 10g (W/Kg)	0.012
SAR 1g (W/Kg)	0.021
ConvF	0.71
Relative permittivity	42.63
Conductivity (S/m)	0.85

Maximum location: X=-32.00, Y=-47.00 ; SAR Peak: 0.04 W/kg

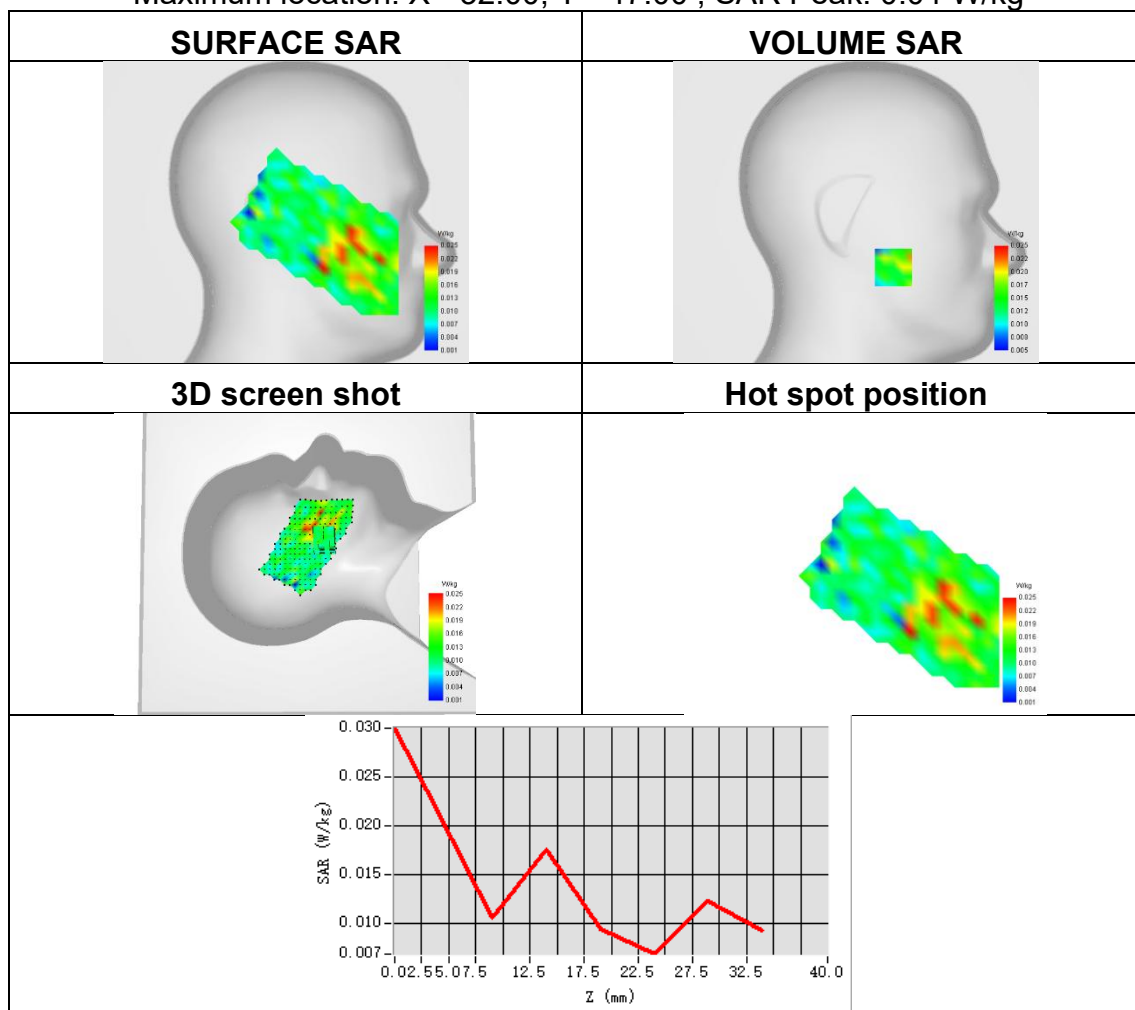




Plot 100:

Test Date	2026-06-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 71
Signal	NR FDD
Frequency	673
SAR 10g (W/Kg)	0.016
SAR 1g (W/Kg)	0.031
ConvF	0.71
Relative permittivity	42.63
Conductivity (S/m)	0.85

Maximum location: X=-15.00, Y=8.00 ; SAR Peak: 0.05 W/kg

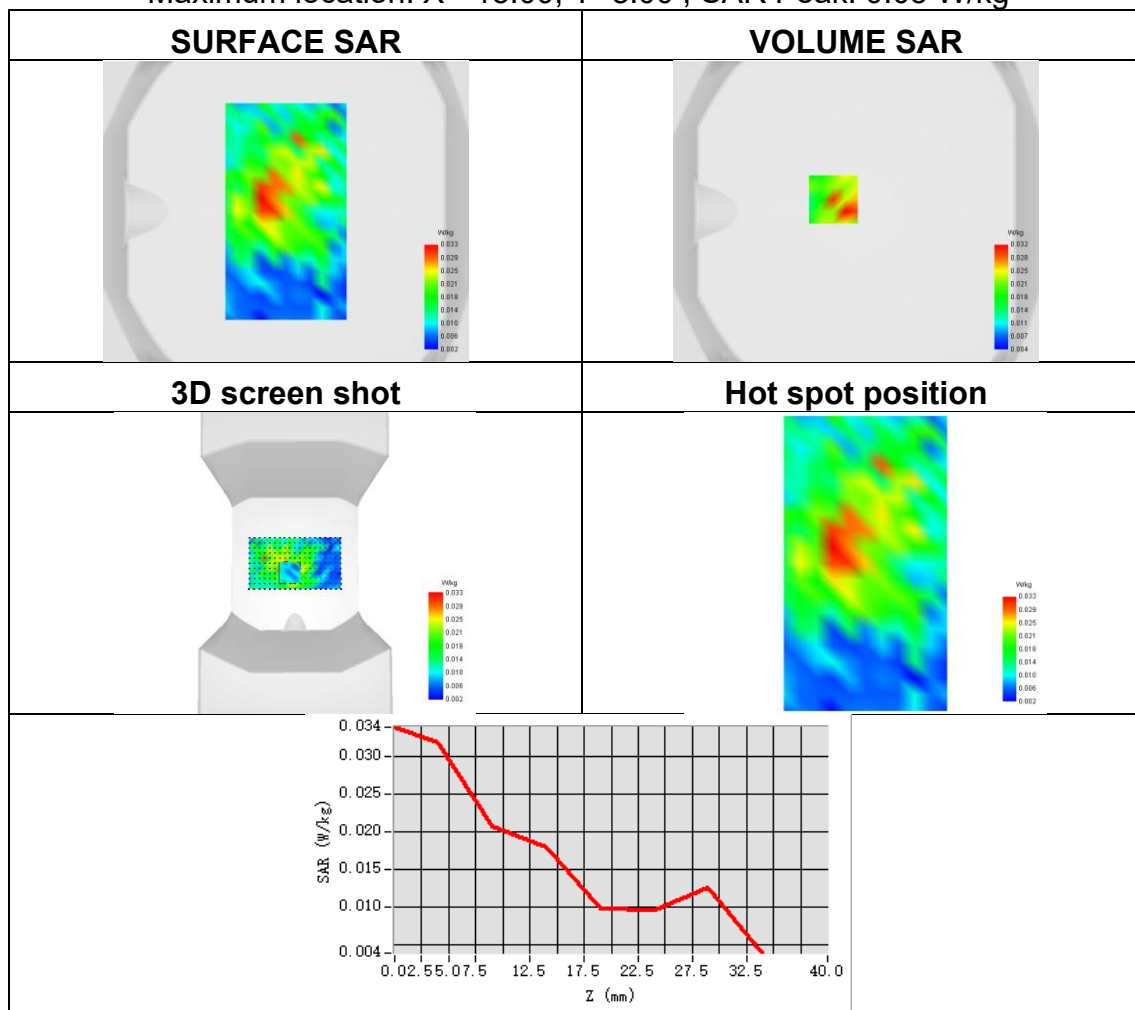




Plot 101:

Test Date	2026-06-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	NR band 77
Signal	NR TDD
Frequency	3840
SAR 10g (W/Kg)	0.113
SAR 1g (W/Kg)	0.228
ConvF	0.91
Relative permittivity	38.02
Conductivity (S/m)	3.16

Maximum location: X=-34.00, Y=0.00 ; SAR Peak: 0.92 W/kg

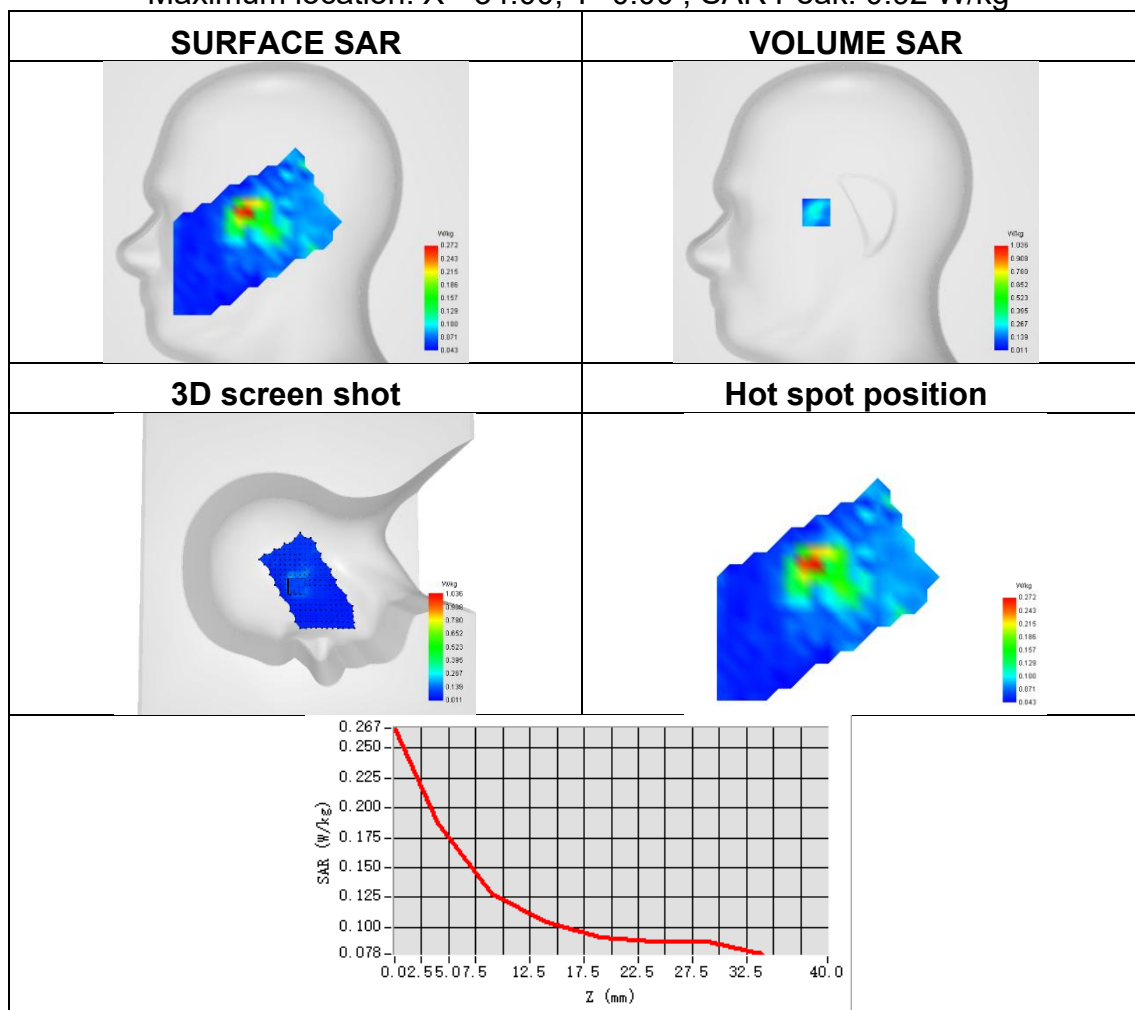




Plot 102:

Test Date	2026-06-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Left Side
Band	NR band 77
Signal	NR TDD
Frequency	3840
SAR 10g (W/Kg)	0.070
SAR 1g (W/Kg)	0.140
ConvF	0.91
Relative permittivity	38.02
Conductivity (S/m)	3.16

Maximum location: X=24.00, Y=0.00 ; SAR Peak: 0.46 W/kg

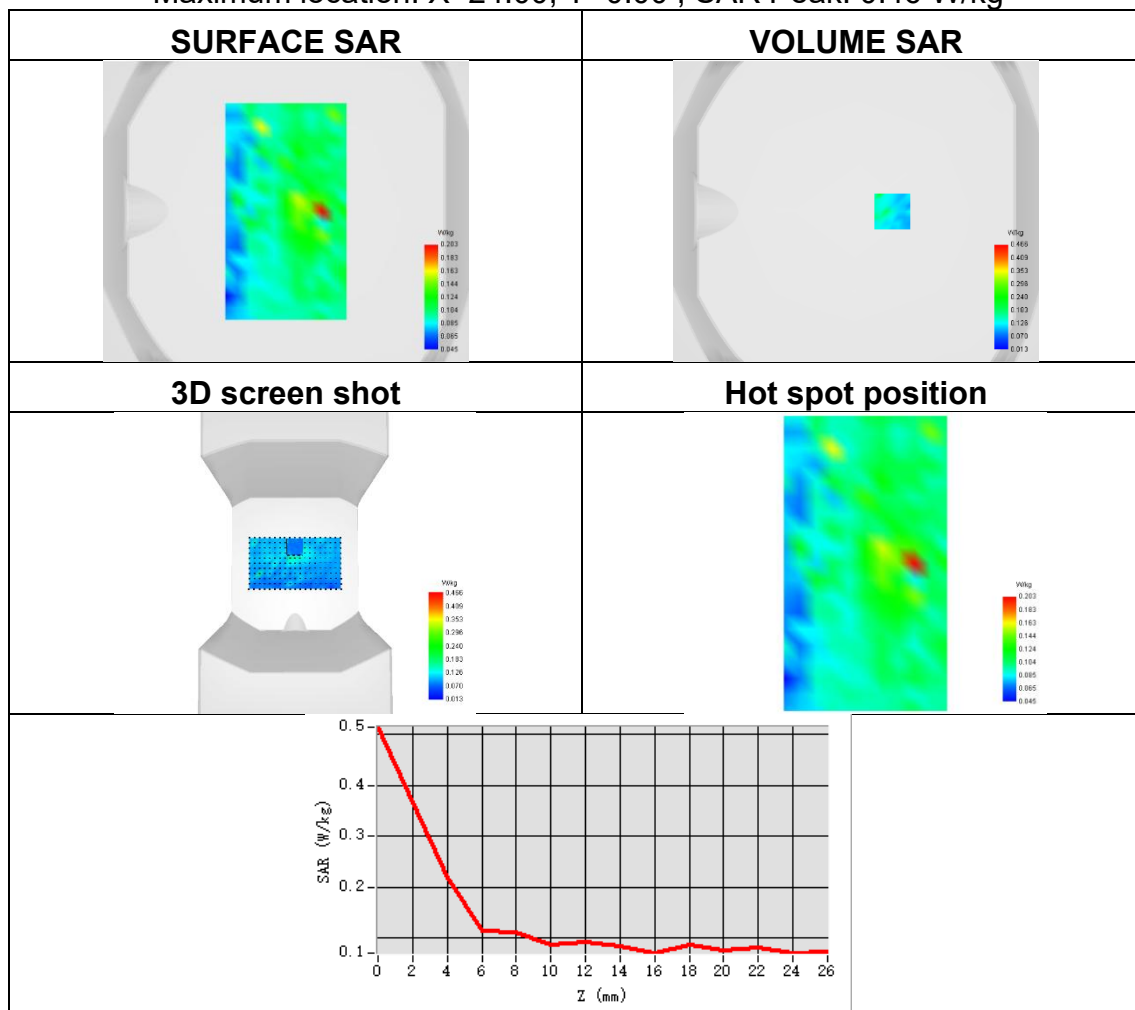




Plot 103:

Test Date	2026-06-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	NR band 78
Signal	NR TDD
Frequency	3500
SAR 10g (W/Kg)	0.257
SAR 1g (W/Kg)	0.645
ConvF	0.91
Relative permittivity	38.71
Conductivity (S/m)	3.03

Maximum location: X=-32.00, Y=-8.00 ; SAR Peak: 6.31 W/kg

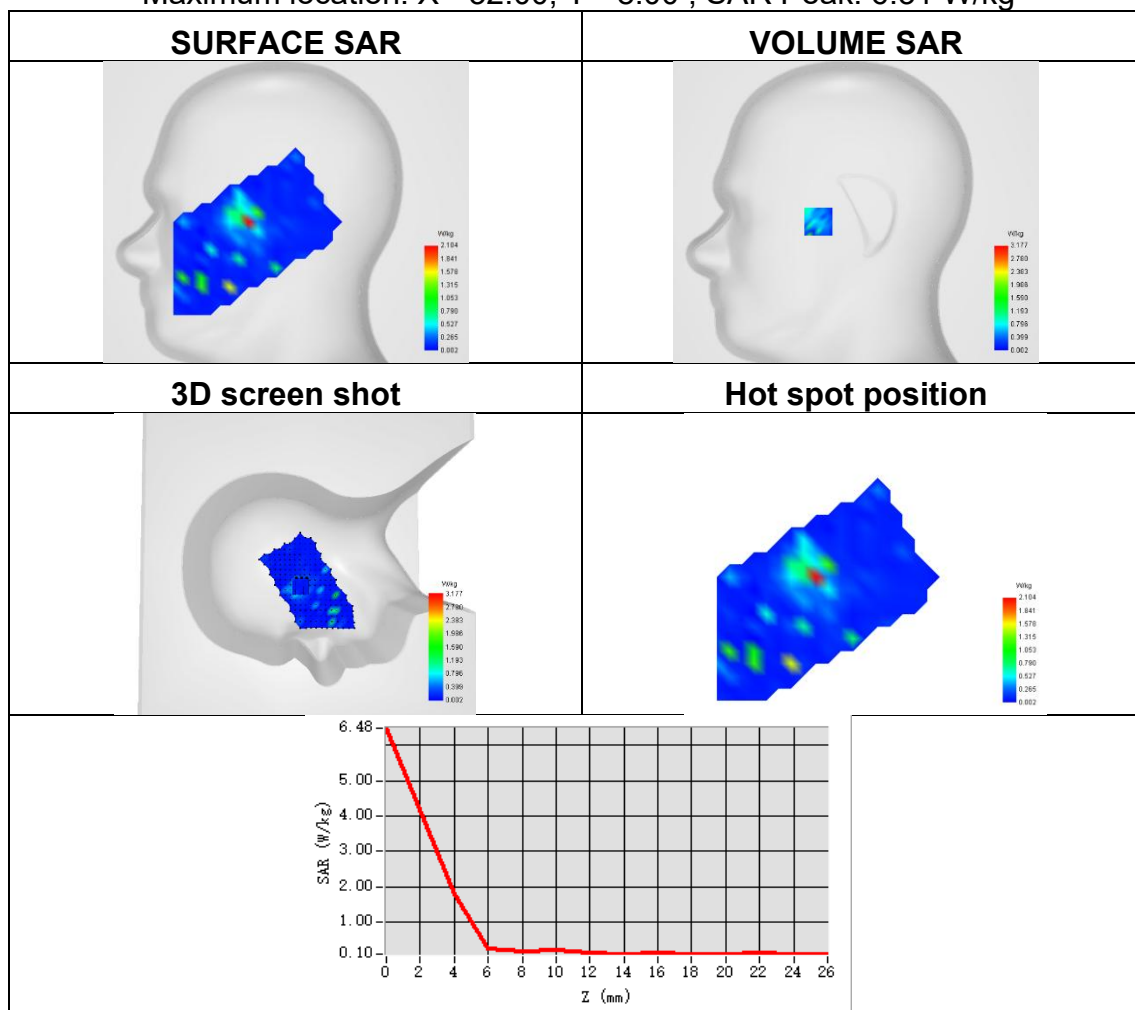




Plot 104:

Test Date	2026-06-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Left Side
Band	NR band 78
Signal	NR TDD
Frequency	3500
SAR 10g (W/Kg)	0.115
SAR 1g (W/Kg)	0.198
ConvF	0.91
Relative permittivity	38.71
Conductivity (S/m)	3.03

Maximum location: X=9.00, Y=-8.00 ; SAR Peak: 0.32 W/kg

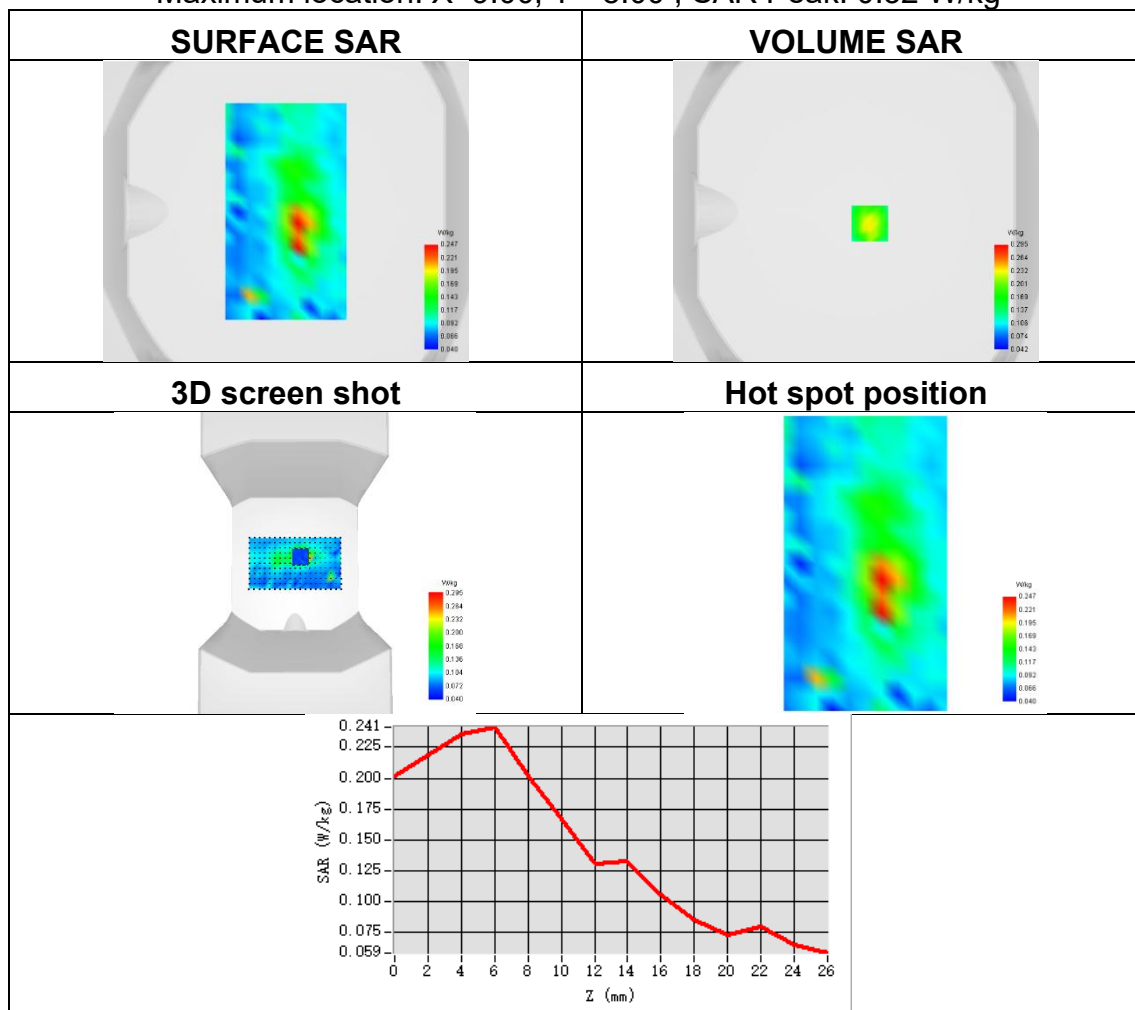



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※