




Plot 14:

Test Date	2026-06-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	ISM
Signal	IEEE 802.11b
Frequency	2462
SAR 10g (W/Kg)	0.192
SAR 1g (W/Kg)	0.350
ConvF	1.03
Relative permittivity	39.71
Conductivity (S/m)	1.78

Maximum location: X=10.00, Y=28.00 ; SAR Peak: 0.79 W/kg

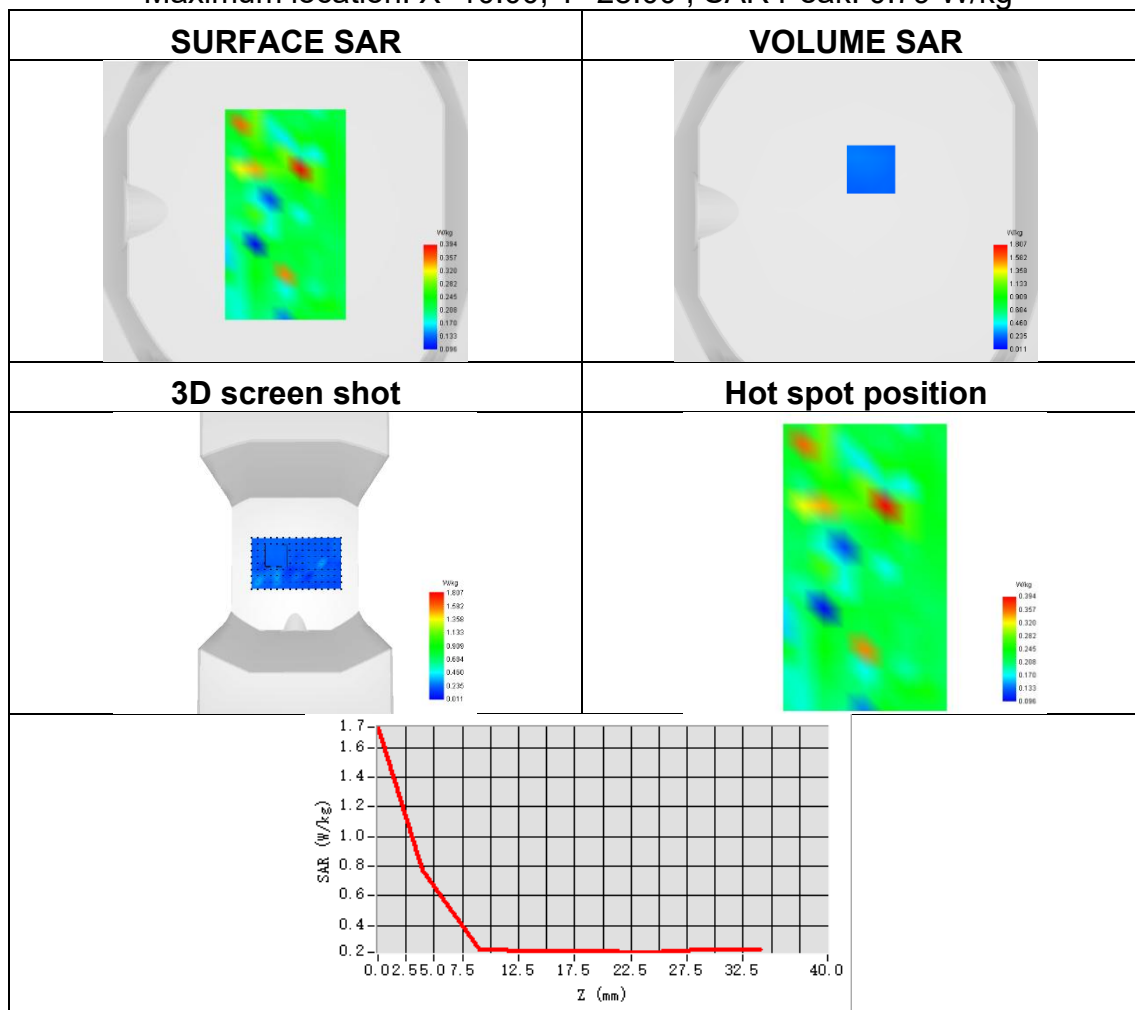




Plot 15:

Test Date	2026-06-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	ISM
Signal	IEEE 802.11ac
Frequency	2437
SAR 10g (W/Kg)	0.099
SAR 1g (W/Kg)	0.222
ConvF	1.03
Relative permittivity	39.71
Conductivity (S/m)	1.78

Maximum location: X=-13.00, Y=23.00 ; SAR Peak: 0.43 W/kg

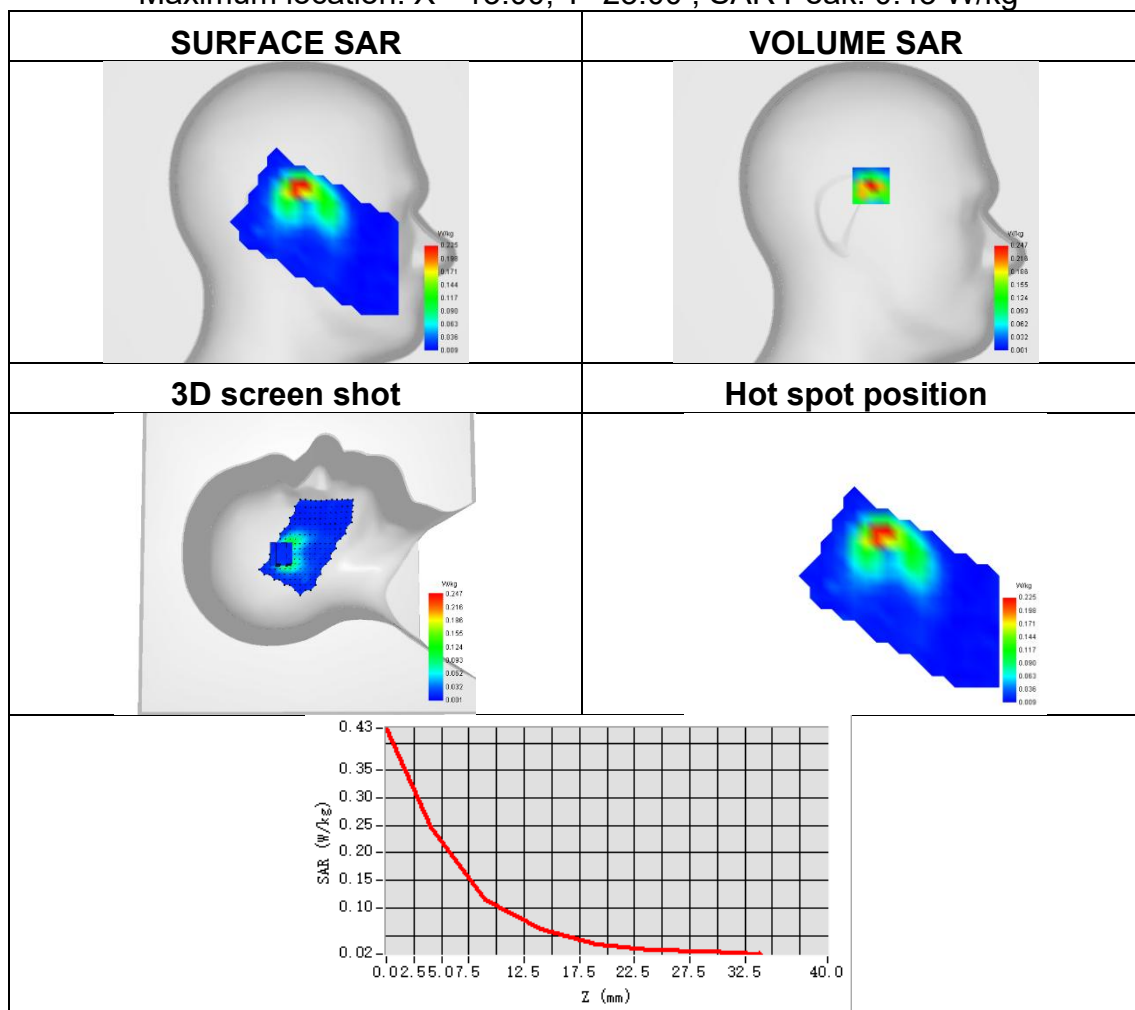




Plot 16:

Test Date	2026-06-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	ISM
Signal	IEEE 802.11ac
Frequency	2437
SAR 10g (W/Kg)	0.035
SAR 1g (W/Kg)	0.069
ConvF	1.03
Relative permittivity	39.71
Conductivity (S/m)	1.78

Maximum location: X=1.00, Y=15.00 ; SAR Peak: 0.12 W/kg

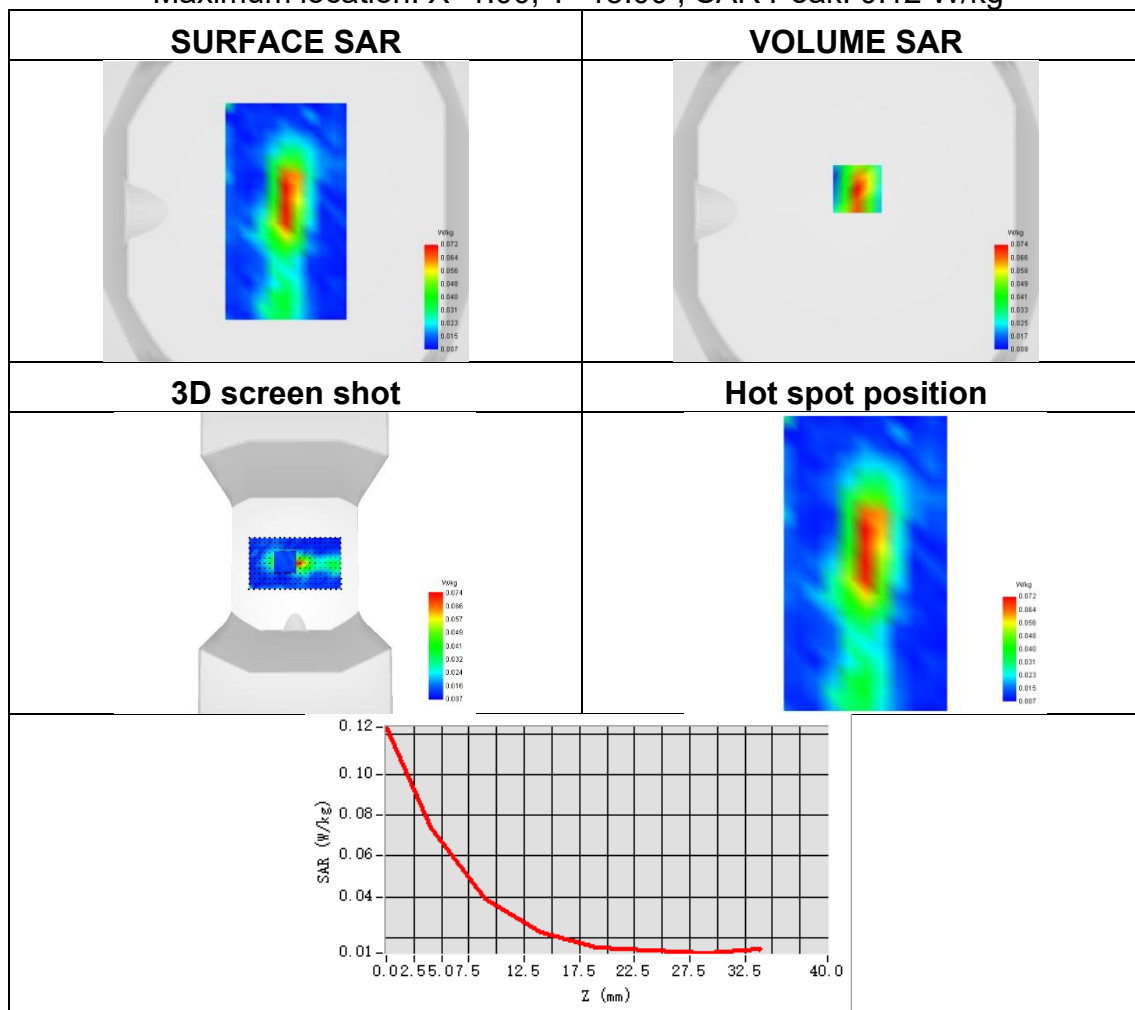




Plot 17:

Test Date	2026-06-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	ISM
Signal	IEEE 802.11ac
Frequency	2437
SAR 10g (W/Kg)	0.103
SAR 1g (W/Kg)	0.233
ConvF	1.03
Relative permittivity	39.71
Conductivity (S/m)	1.78

Maximum location: X=-11.00, Y=16.00 ; SAR Peak: 0.46 W/kg

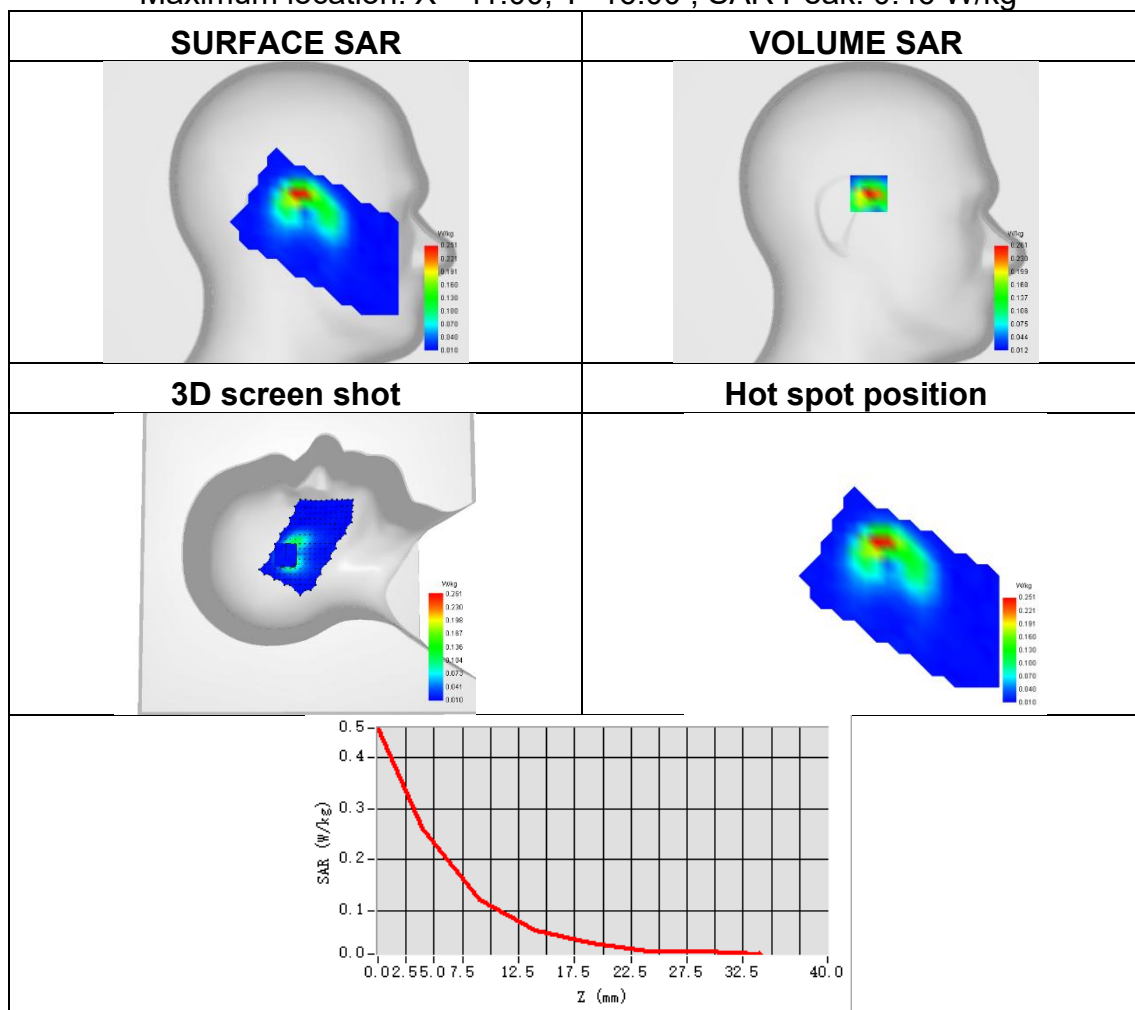




Plot 18:

Test Date	2026-06-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	ISM
Signal	IEEE 802.11ac
Frequency	2437
SAR 10g (W/Kg)	0.036
SAR 1g (W/Kg)	0.067
ConvF	1.03
Relative permittivity	39.71
Conductivity (S/m)	1.78

Maximum location: X=1.00, Y=1.00 ; SAR Peak: 0.11 W/kg

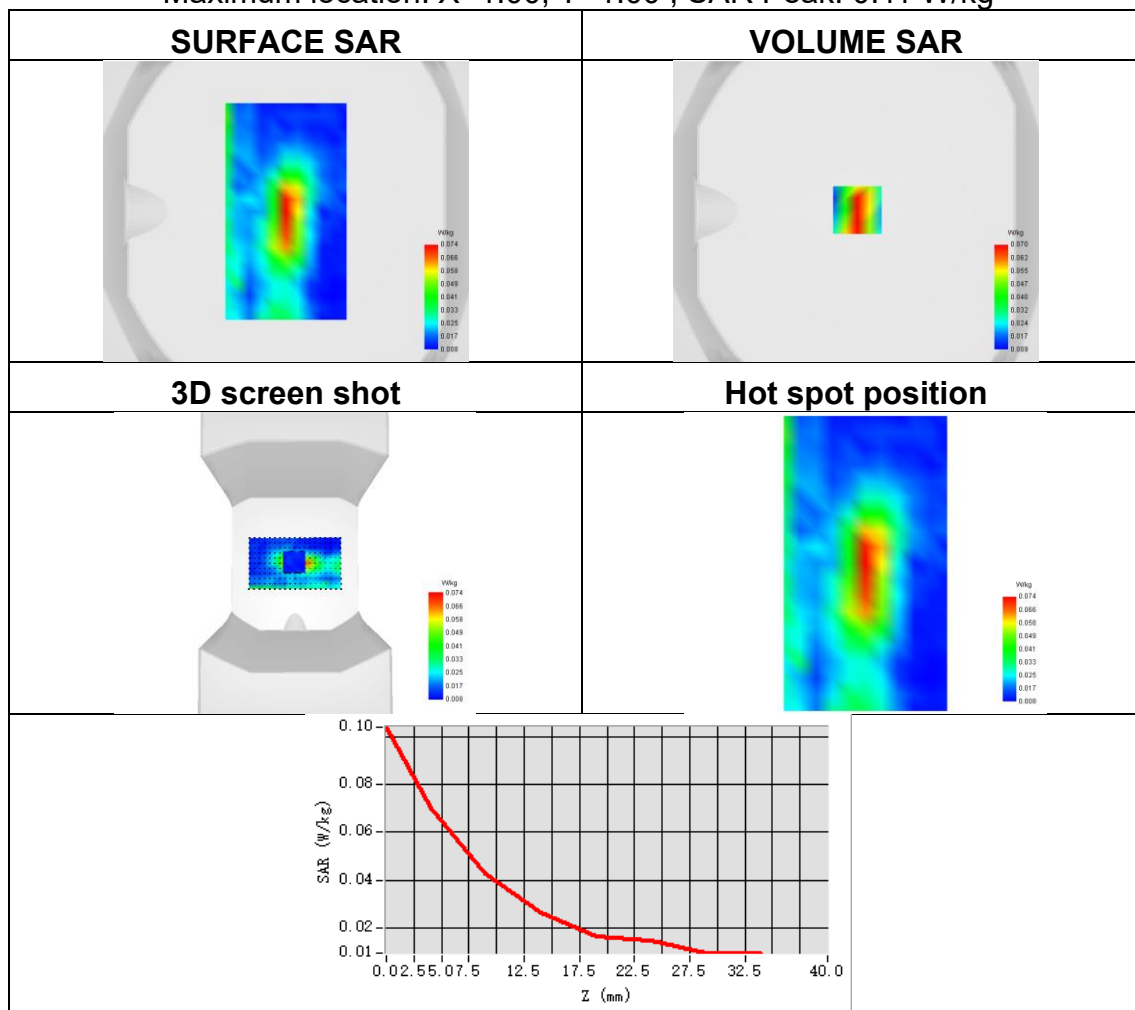




Plot 19:

Test Date	2026-07-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5180
SAR 10g (W/Kg)	0.113
SAR 1g (W/Kg)	0.358
ConvF	1.08
Relative permittivity	36.79
Conductivity (S/m)	4.65

Maximum location: X=-9.00, Y=15.00 ; SAR Peak: 0.99 W/kg

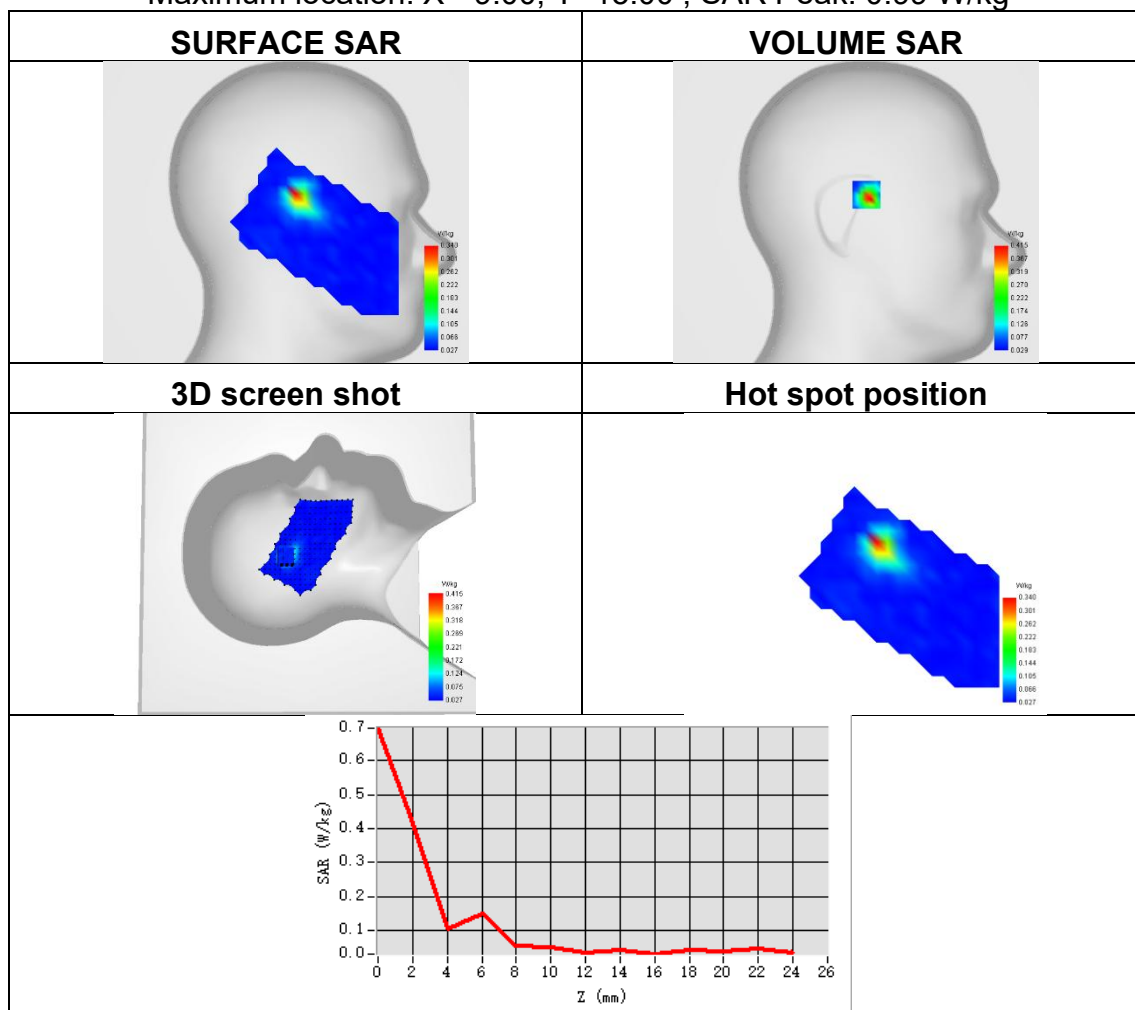




Plot 20:

Test Date	2026-07-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5180
SAR 10g (W/Kg)	0.032
SAR 1g (W/Kg)	0.054
ConvF	1.08
Relative permittivity	36.79
Conductivity (S/m)	4.65

Maximum location: X=0.00, Y=22.00 ; SAR Peak: 0.20 W/kg

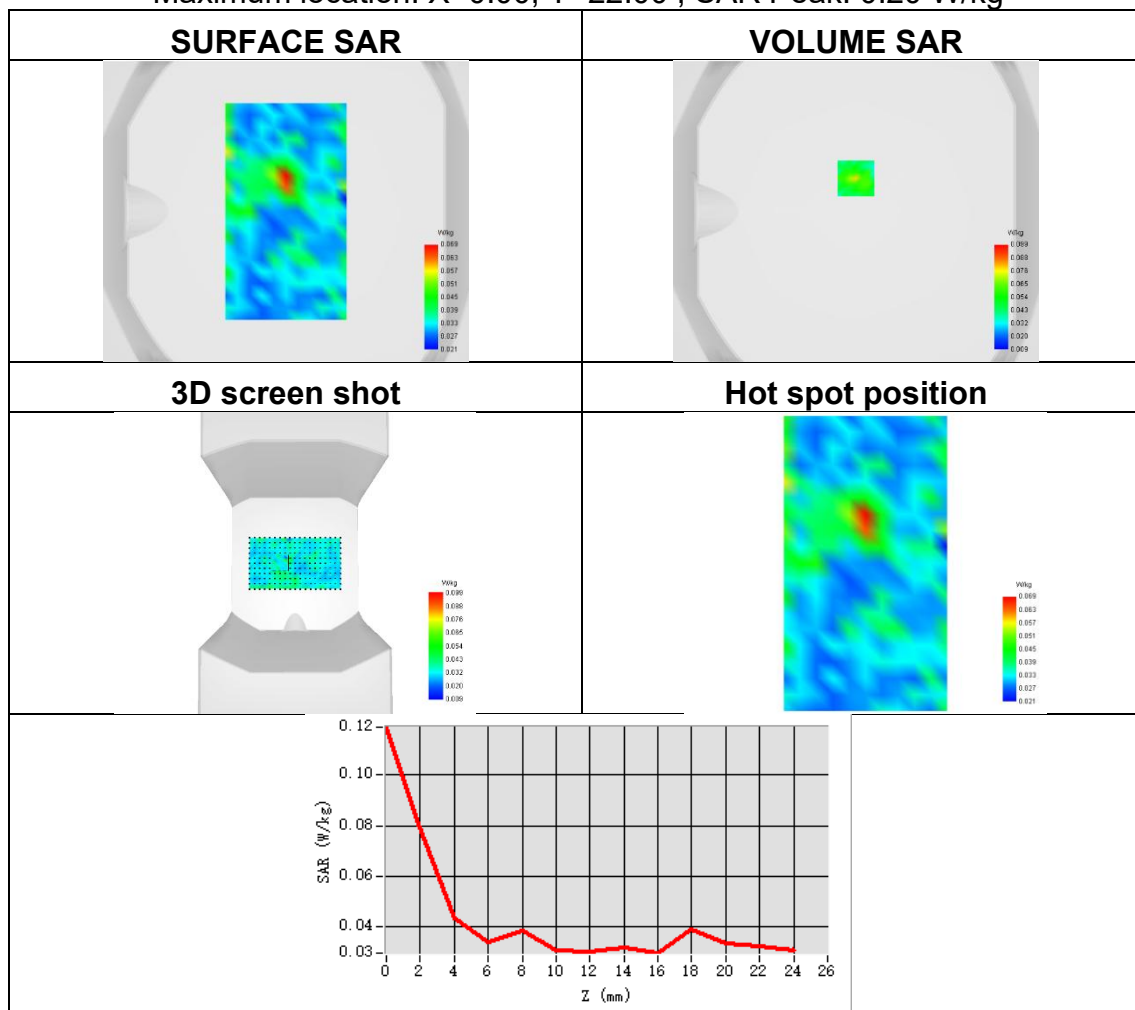




Plot 21:

Test Date	2026-07-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5180
SAR 10g (W/Kg)	0.194
SAR 1g (W/Kg)	0.443
ConvF	1.08
Relative permittivity	36.79
Conductivity (S/m)	4.65

Maximum location: X=-40.00, Y=-2.00 ; SAR Peak: 11.03 W/kg

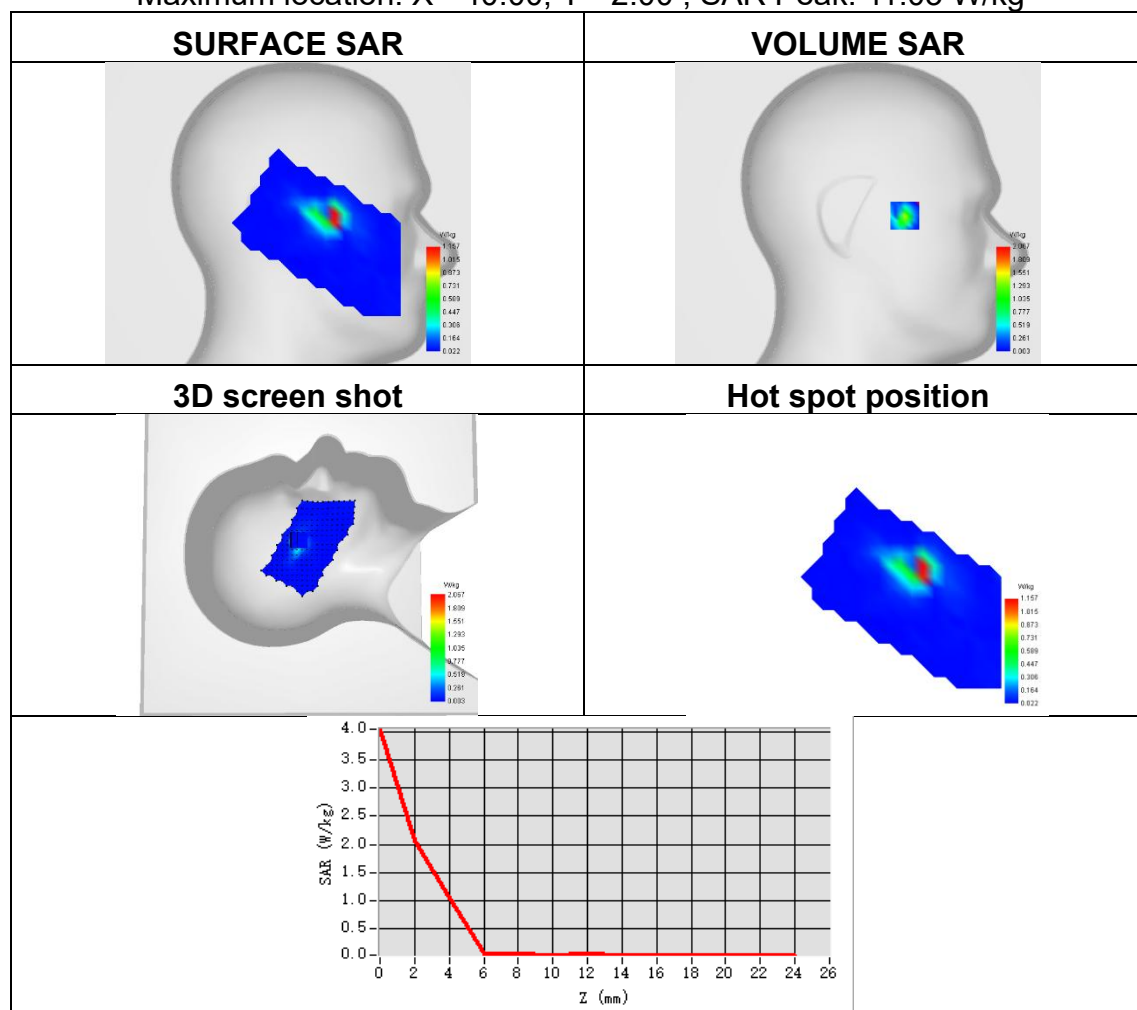




Plot 22:

Test Date	2026-07-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5180
SAR 10g (W/Kg)	0.132
SAR 1g (W/Kg)	0.309
ConvF	1.08
Relative permittivity	36.79
Conductivity (S/m)	4.65

Maximum location: X=0.00, Y=-8.00 ; SAR Peak: 0.81 W/kg

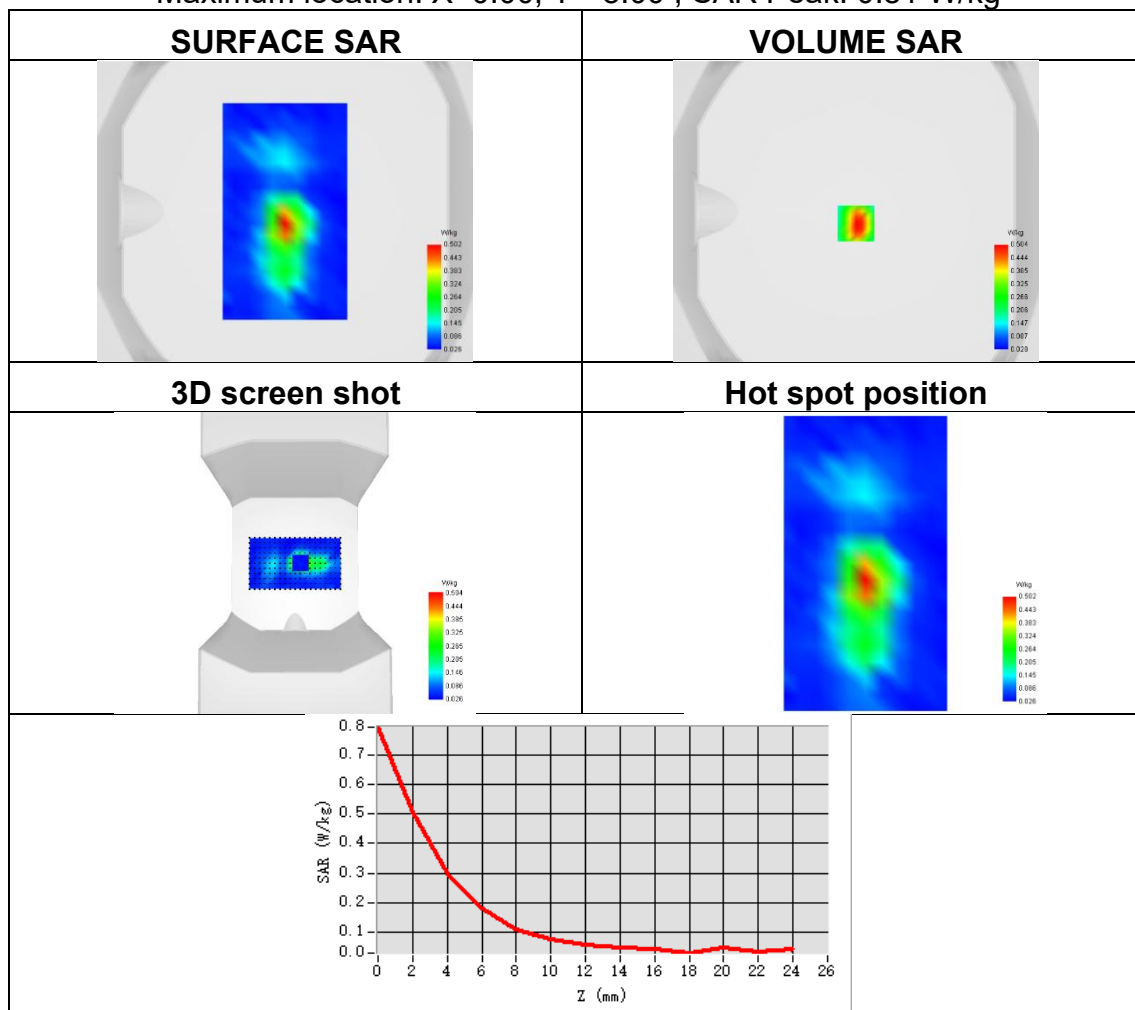




Plot 23:

Test Date	2026-07-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-1
Signal	IEEE 802.11ax
Frequency	5180
SAR 10g (W/Kg)	0.109
SAR 1g (W/Kg)	0.321
ConvF	1.08
Relative permittivity	36.79
Conductivity (S/m)	4.65

Maximum location: X=-40.00, Y=0.00 ; SAR Peak: 1.11 W/kg

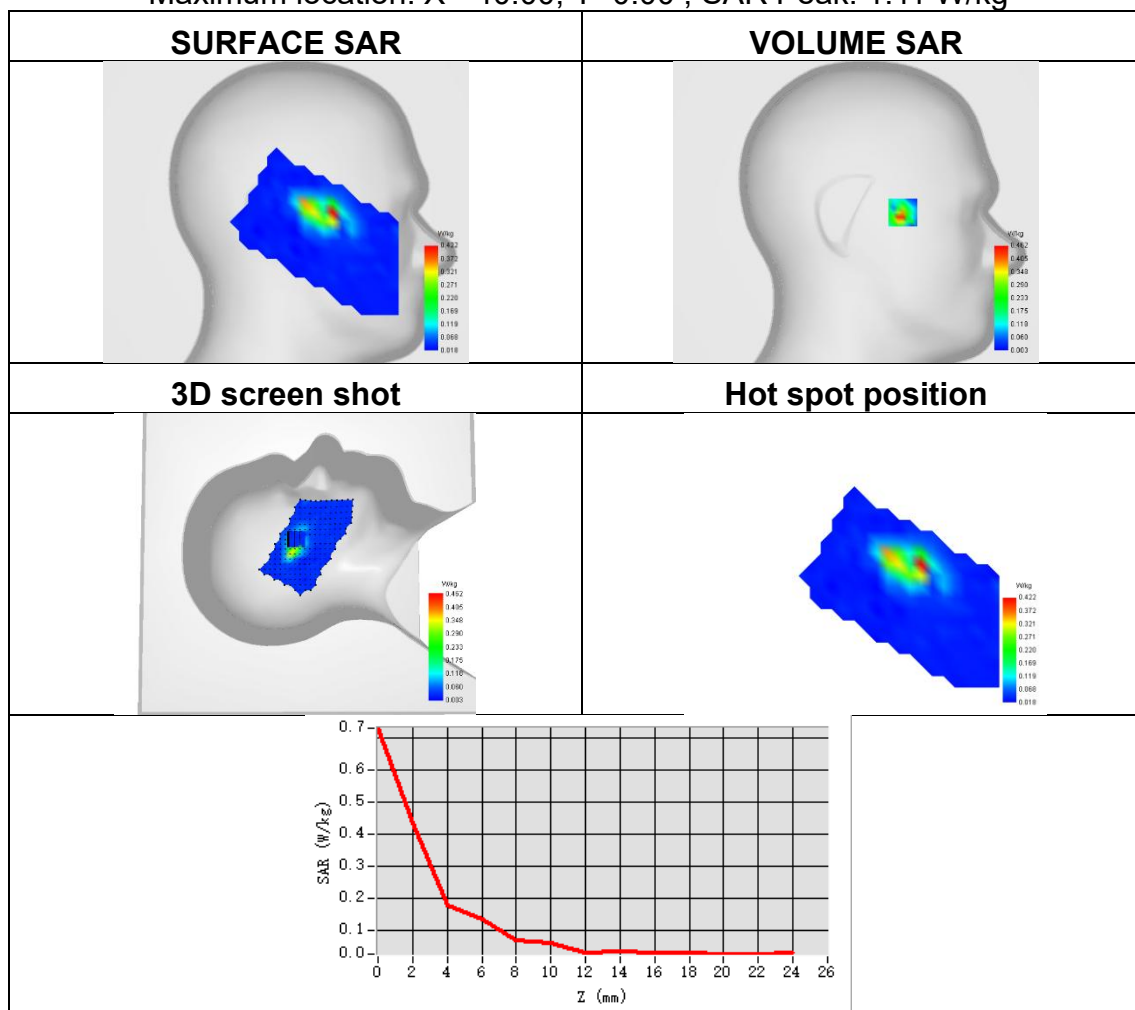




Plot 24:

Test Date	2026-07-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-1
Signal	IEEE 802.11ax
Frequency	5180
SAR 10g (W/Kg)	0.056
SAR 1g (W/Kg)	0.124
ConvF	1.08
Relative permittivity	36.79
Conductivity (S/m)	4.65

Maximum location: X=7.00, Y=-11.00 ; SAR Peak: 0.41 W/kg

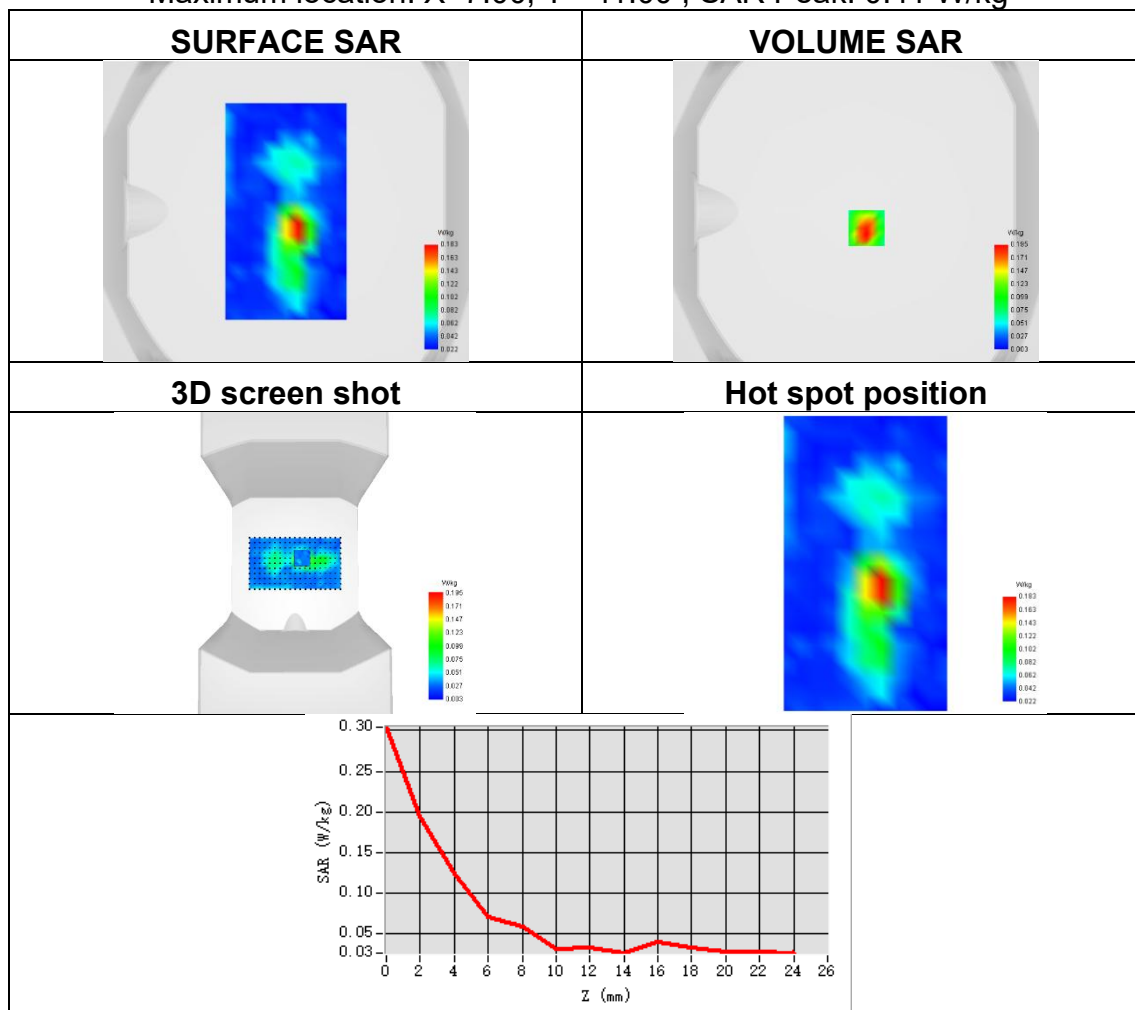




Plot 25:

Test Date	2026-07-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-1
Signal	IEEE 802.11ax
Frequency	5180
SAR 10g (W/Kg)	0.125
SAR 1g (W/Kg)	0.312
ConvF	1.08
Relative permittivity	36.79
Conductivity (S/m)	4.65

Maximum location: X=-40.00, Y=0.00 ; SAR Peak: 1.65 W/kg

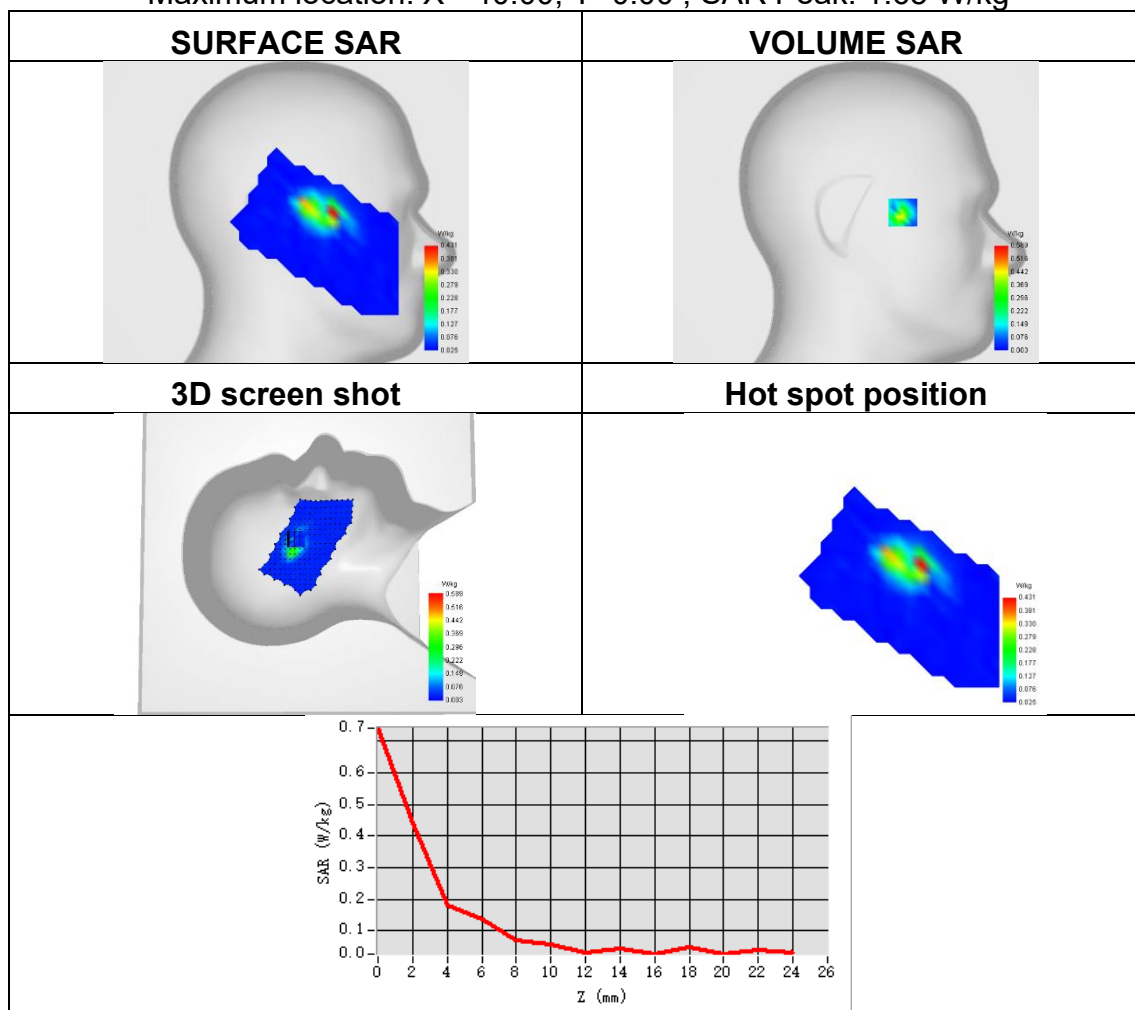




Plot 26:

Test Date	2026-07-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-1
Signal	IEEE 802.11ax
Frequency	5180
SAR 10g (W/Kg)	0.034
SAR 1g (W/Kg)	0.084
ConvF	1.08
Relative permittivity	36.79
Conductivity (S/m)	4.65

Maximum location: X=0.00, Y=0.00 ; SAR Peak: 0.60 W/kg

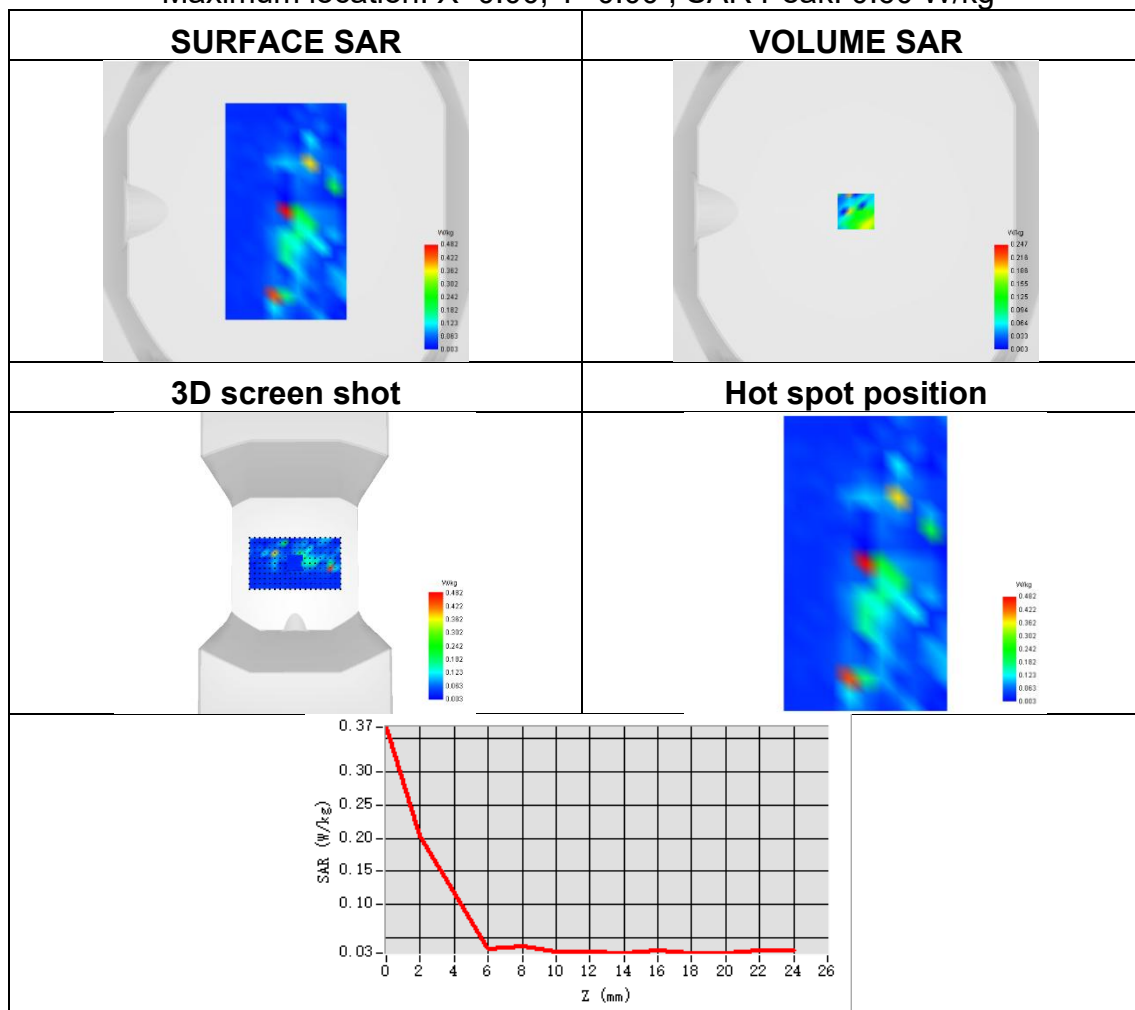




Plot 27:

Test Date	2026-07-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2A
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	0.142
SAR 1g (W/Kg)	0.454
ConvF	1.16
Relative permittivity	36.83
Conductivity (S/m)	4.88

Maximum location: X=-8.00, Y=16.00 ; SAR Peak: 1.40 W/kg

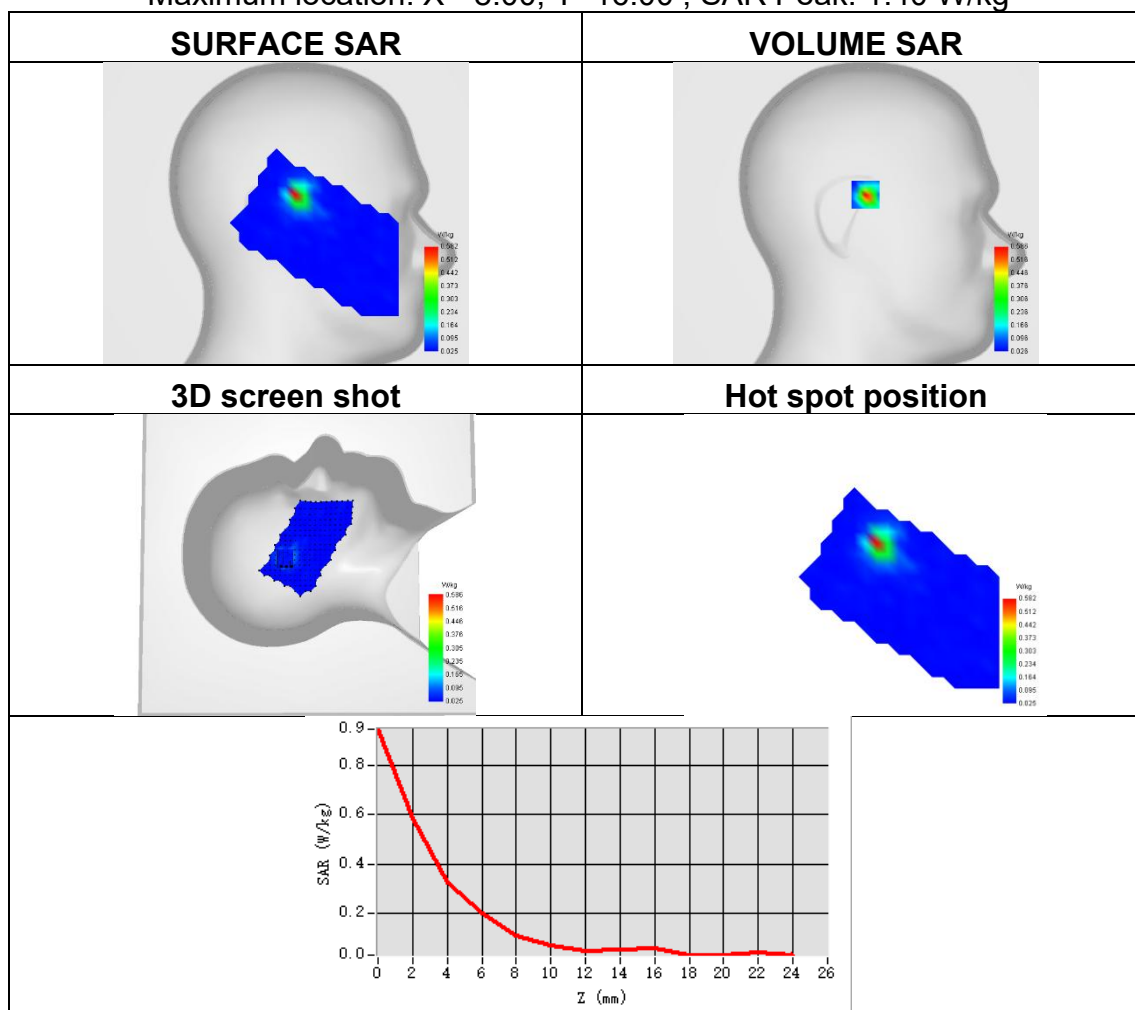




Plot 28:

Test Date	2026-07-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-2A
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	0.034
SAR 1g (W/Kg)	0.069
ConvF	1.16
Relative permittivity	36.83
Conductivity (S/m)	4.88

Maximum location: X=0.00, Y=17.00 ; SAR Peak: 0.20 W/kg

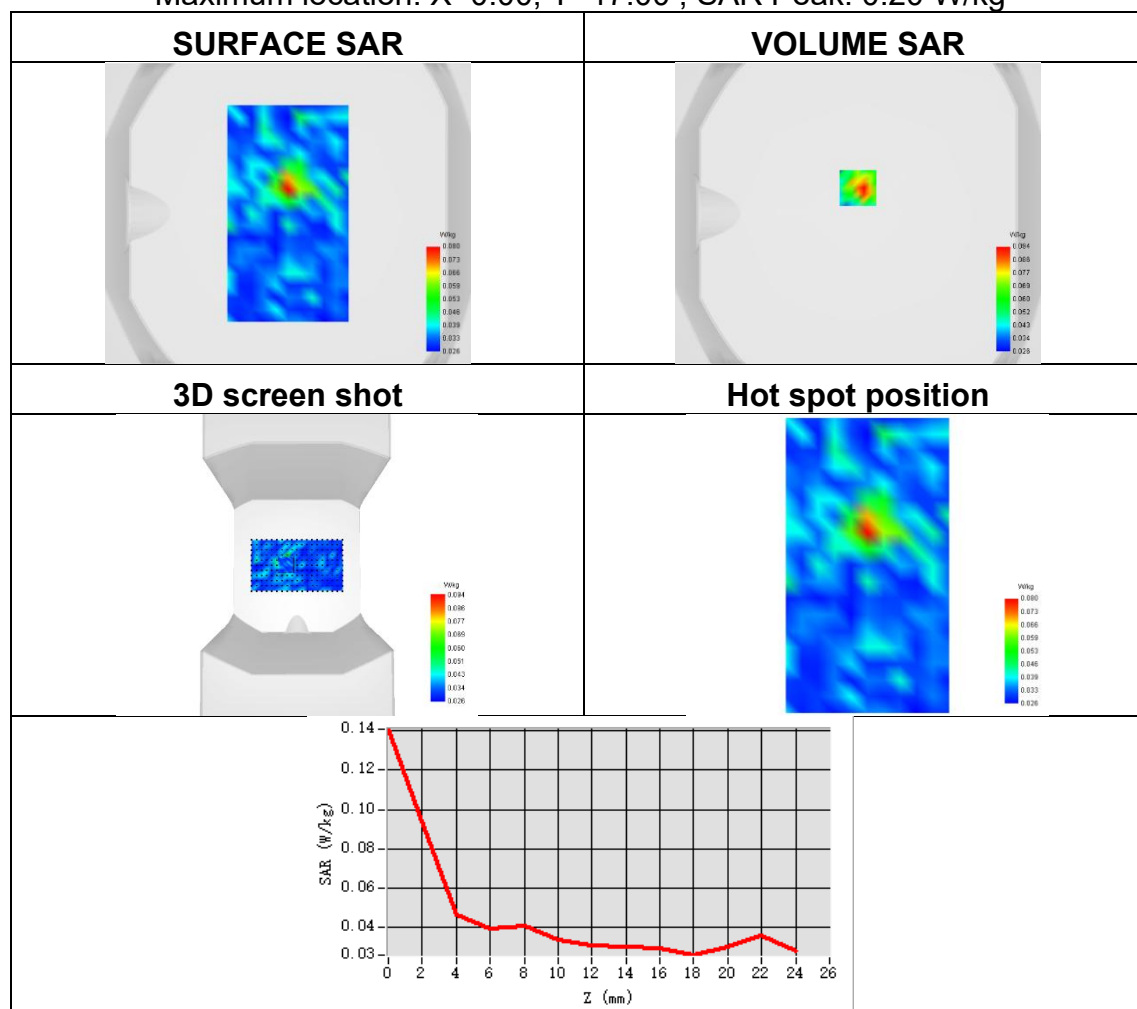




Plot 29:

Test Date	2026-07-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2A
Signal	IEEE 802.11ax
Frequency	5260
SAR 10g (W/Kg)	0.157
SAR 1g (W/Kg)	0.530
ConvF	1.16
Relative permittivity	36.83
Conductivity (S/m)	4.88

Maximum location: X=-30.00, Y=1.00 ; SAR Peak: 1.56 W/kg

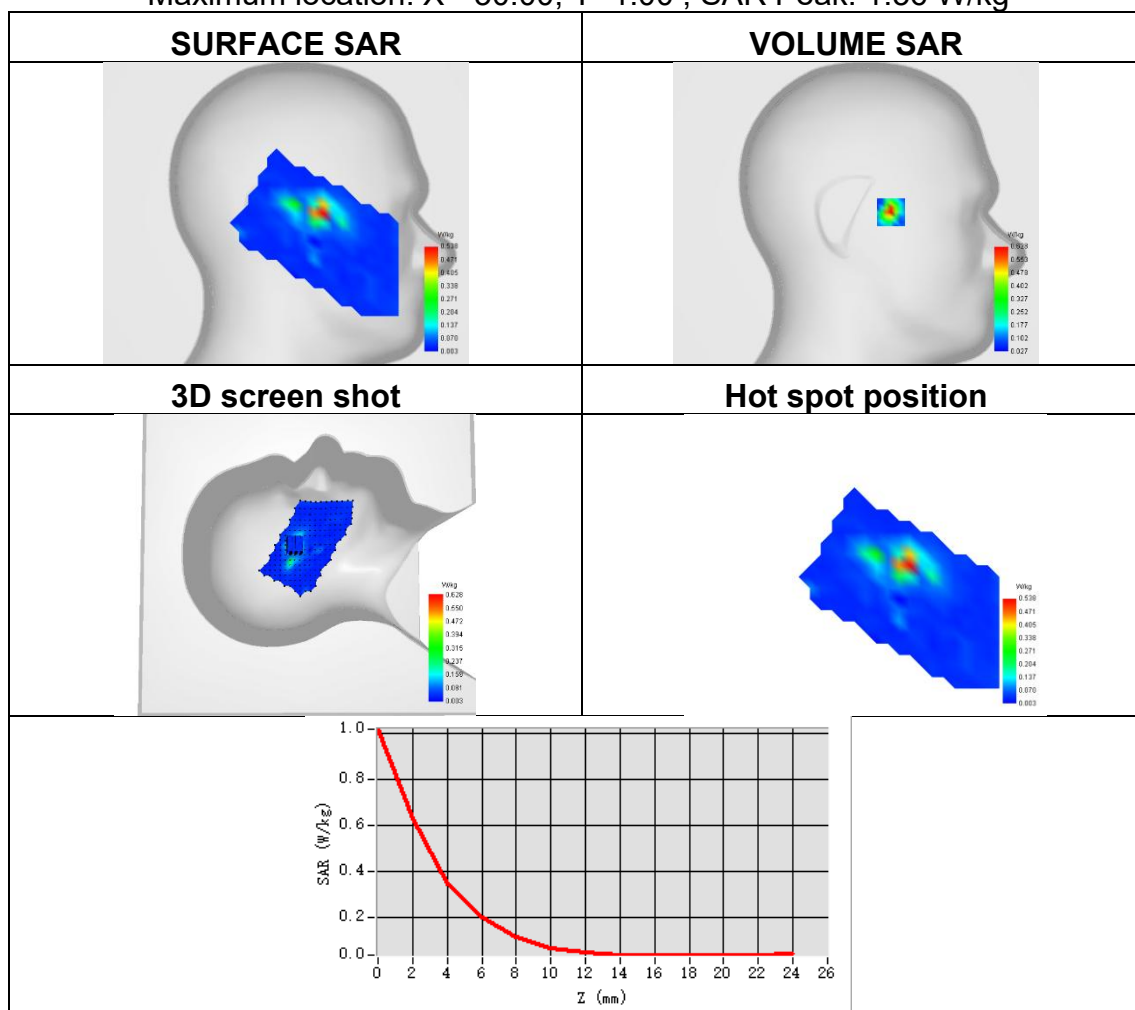




Plot 30:

Test Date	2026-07-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2A
Signal	IEEE 802.11ax
Frequency	5260
SAR 10g (W/Kg)	0.050
SAR 1g (W/Kg)	0.134
ConvF	1.16
Relative permittivity	36.83
Conductivity (S/m)	4.88

Maximum location: X=2.00, Y=-26.00 ; SAR Peak: 2.31 W/kg

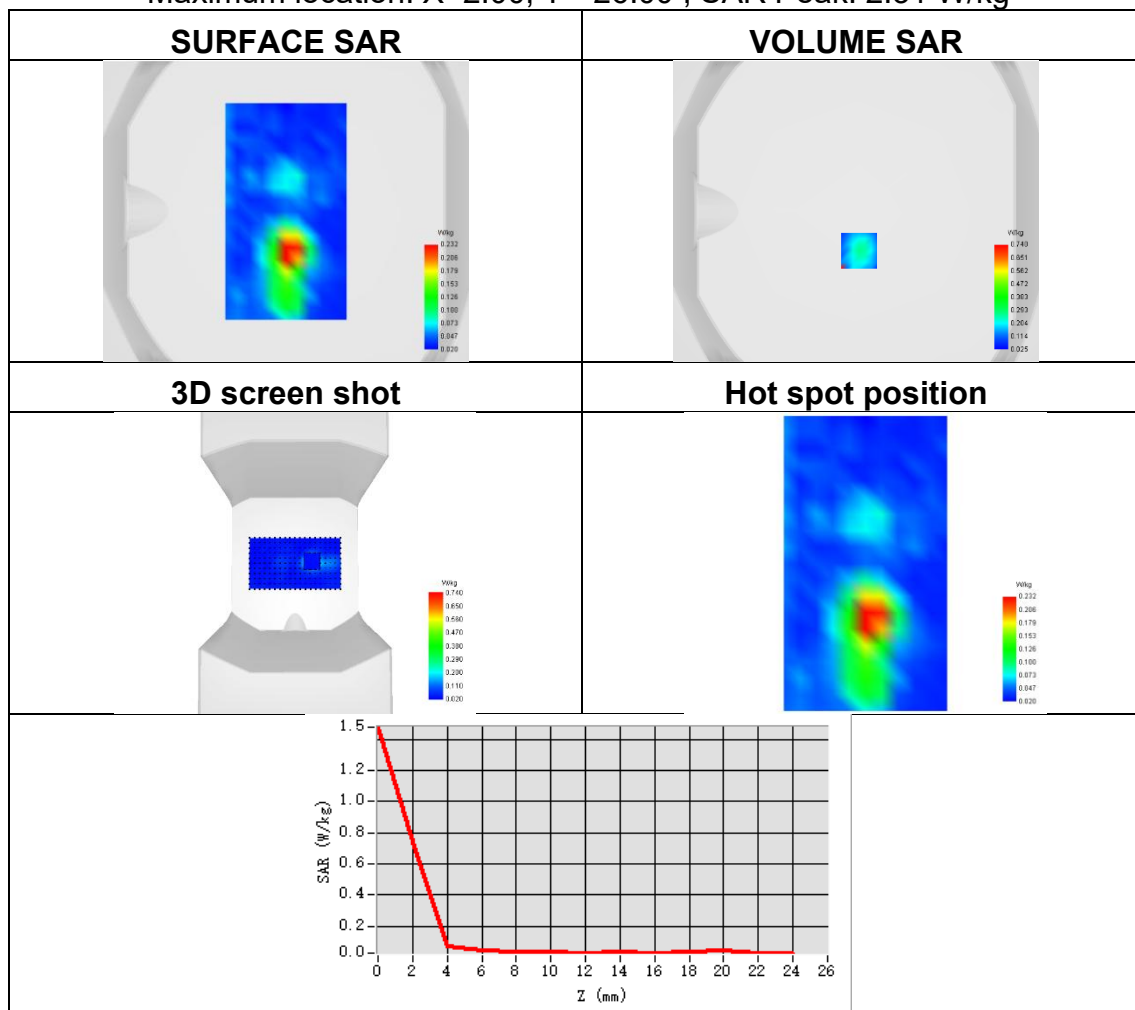




Plot 31:

Test Date	2026-07-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2A
Signal	IEEE 802.11ax
Frequency	5300
SAR 10g (W/Kg)	0.109
SAR 1g (W/Kg)	0.301
ConvF	1.16
Relative permittivity	36.83
Conductivity (S/m)	4.88

Maximum location: X=-7.00, Y=17.00 ; SAR Peak: 0.91 W/kg

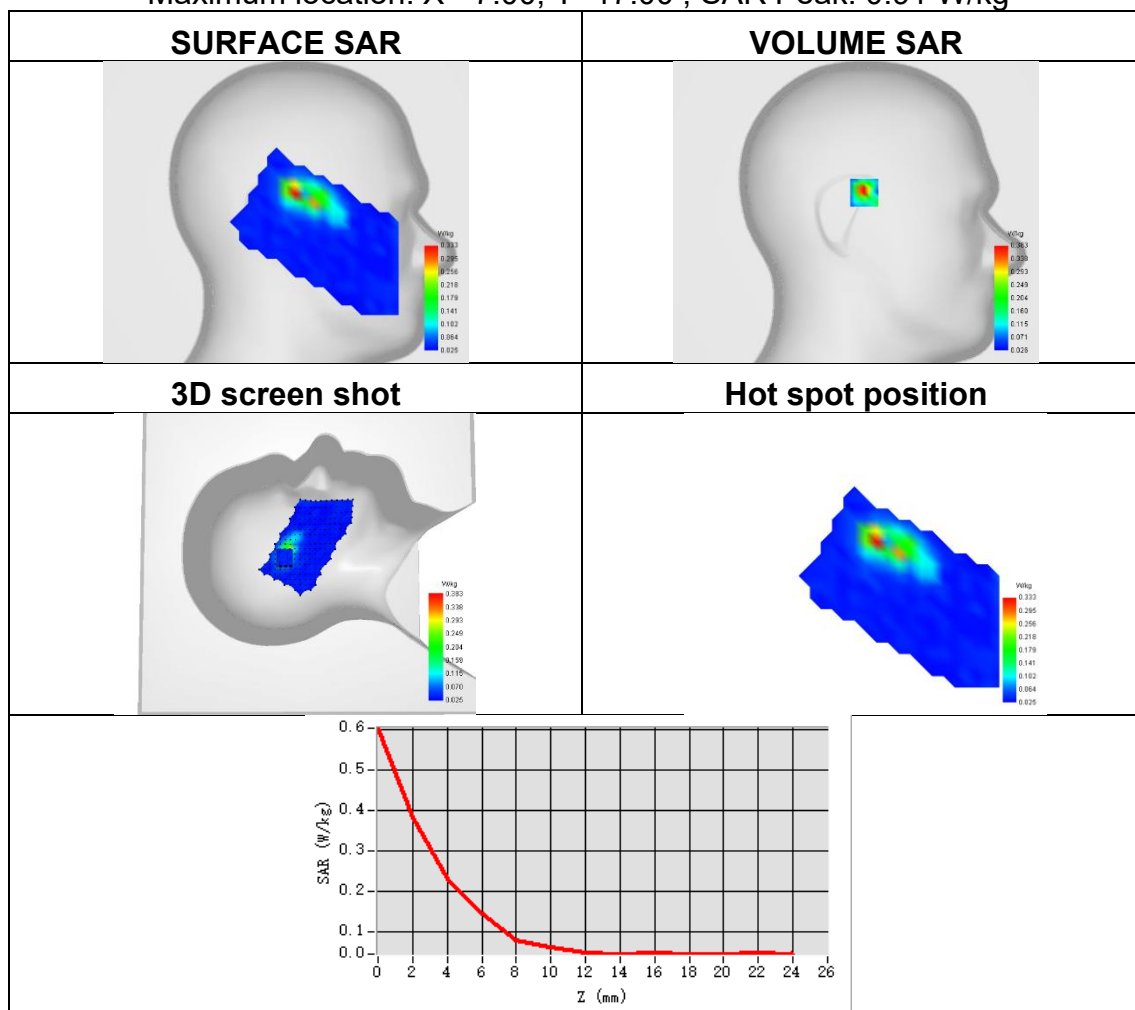




Plot 32:

Test Date	2026-07-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-2A
Signal	IEEE 802.11ax
Frequency	5300
SAR 10g (W/Kg)	0.048
SAR 1g (W/Kg)	0.102
ConvF	1.16
Relative permittivity	36.83
Conductivity (S/m)	4.88

Maximum location: X=2.00, Y=-25.00 ; SAR Peak: 0.33 W/kg

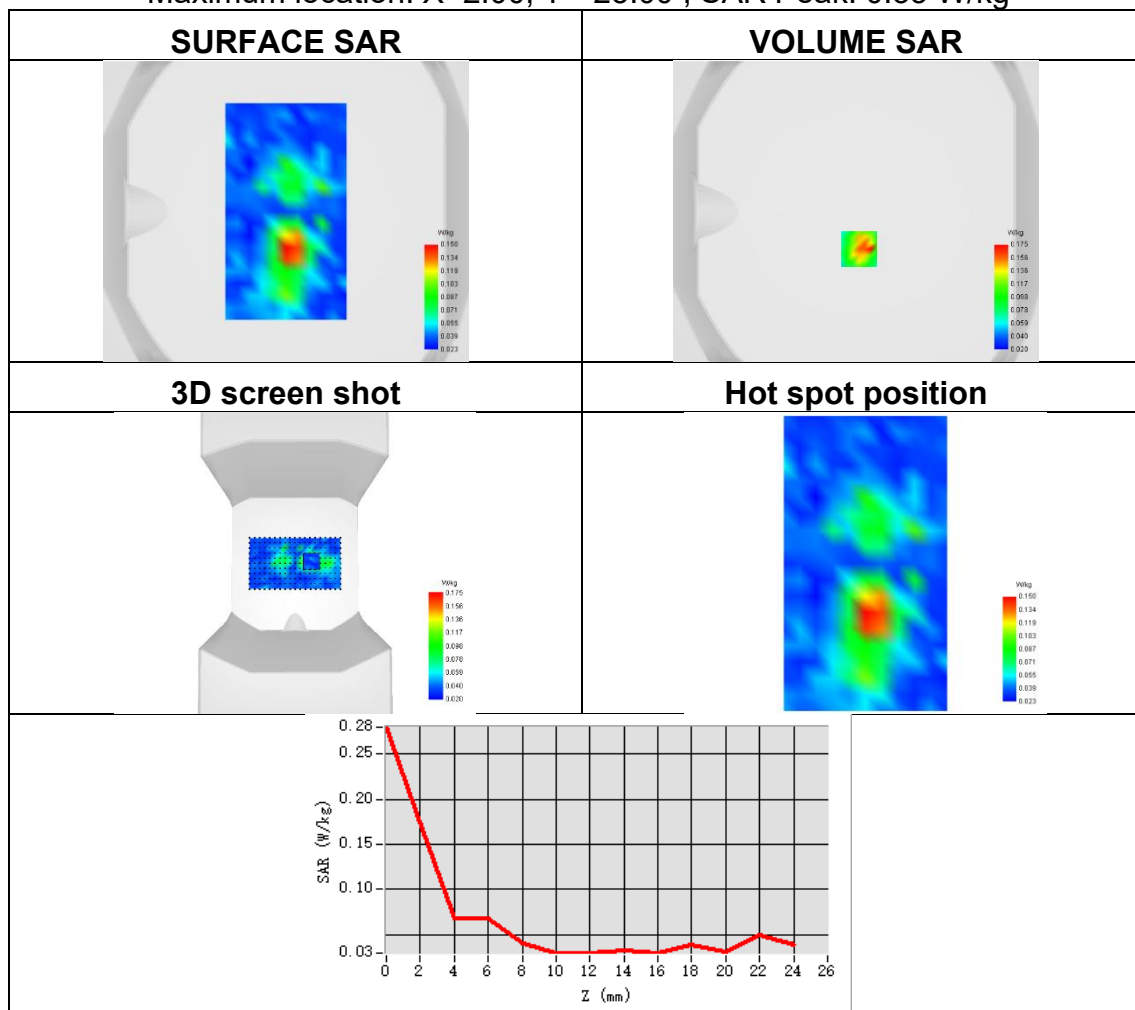




Plot 33:

Test Date	2026-07-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2A
Signal	IEEE 802.11ax
Frequency	5300
SAR 10g (W/Kg)	0.115
SAR 1g (W/Kg)	0.303
ConvF	1.16
Relative permittivity	36.83
Conductivity (S/m)	4.88

Maximum location: X=-7.00, Y=17.00 ; SAR Peak: 0.92 W/kg

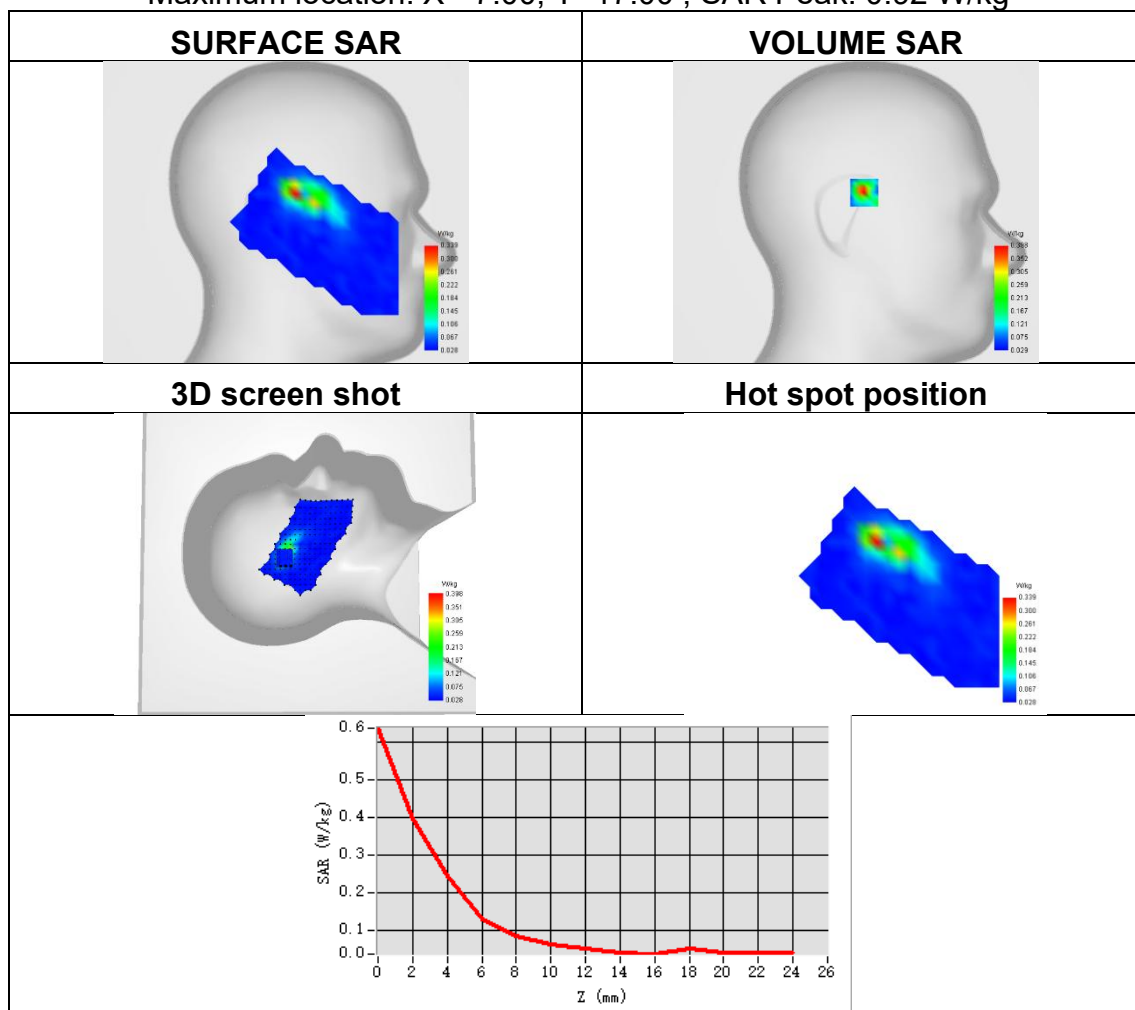




Plot 34:

Test Date	2026-07-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-2A
Signal	IEEE 802.11ax
Frequency	5300
SAR 10g (W/Kg)	0.048
SAR 1g (W/Kg)	0.102
ConvF	1.16
Relative permittivity	36.83
Conductivity (S/m)	4.88

Maximum location: X=2.00, Y=-25.00 ; SAR Peak: 0.33 W/kg

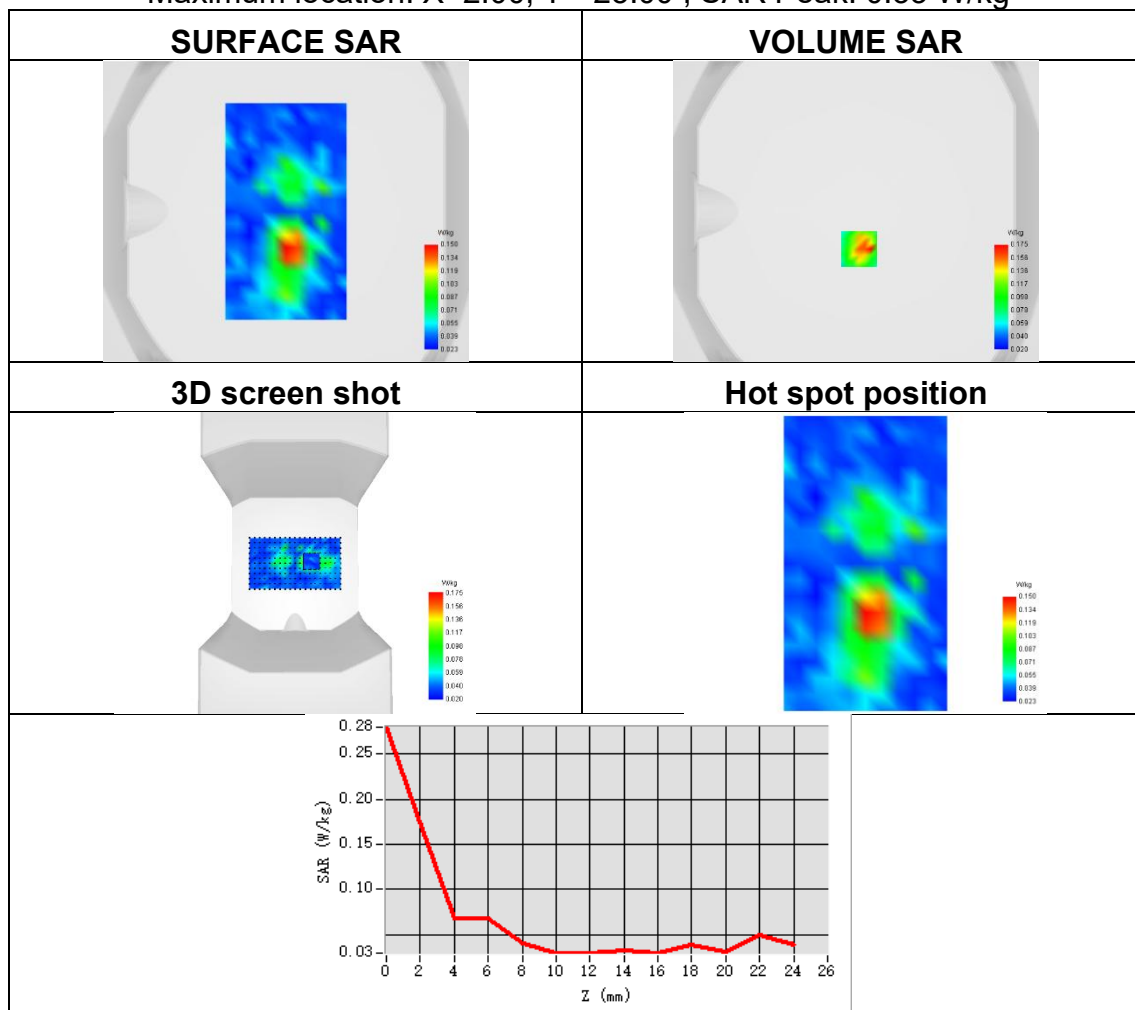




Plot 35:

Test Date	2026-07-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2C
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.090
SAR 1g (W/Kg)	0.207
ConvF	1.07
Relative permittivity	36.34
Conductivity (S/m)	5.10

Maximum location: X=-9.00, Y=8.00 ; SAR Peak: 2.10 W/kg

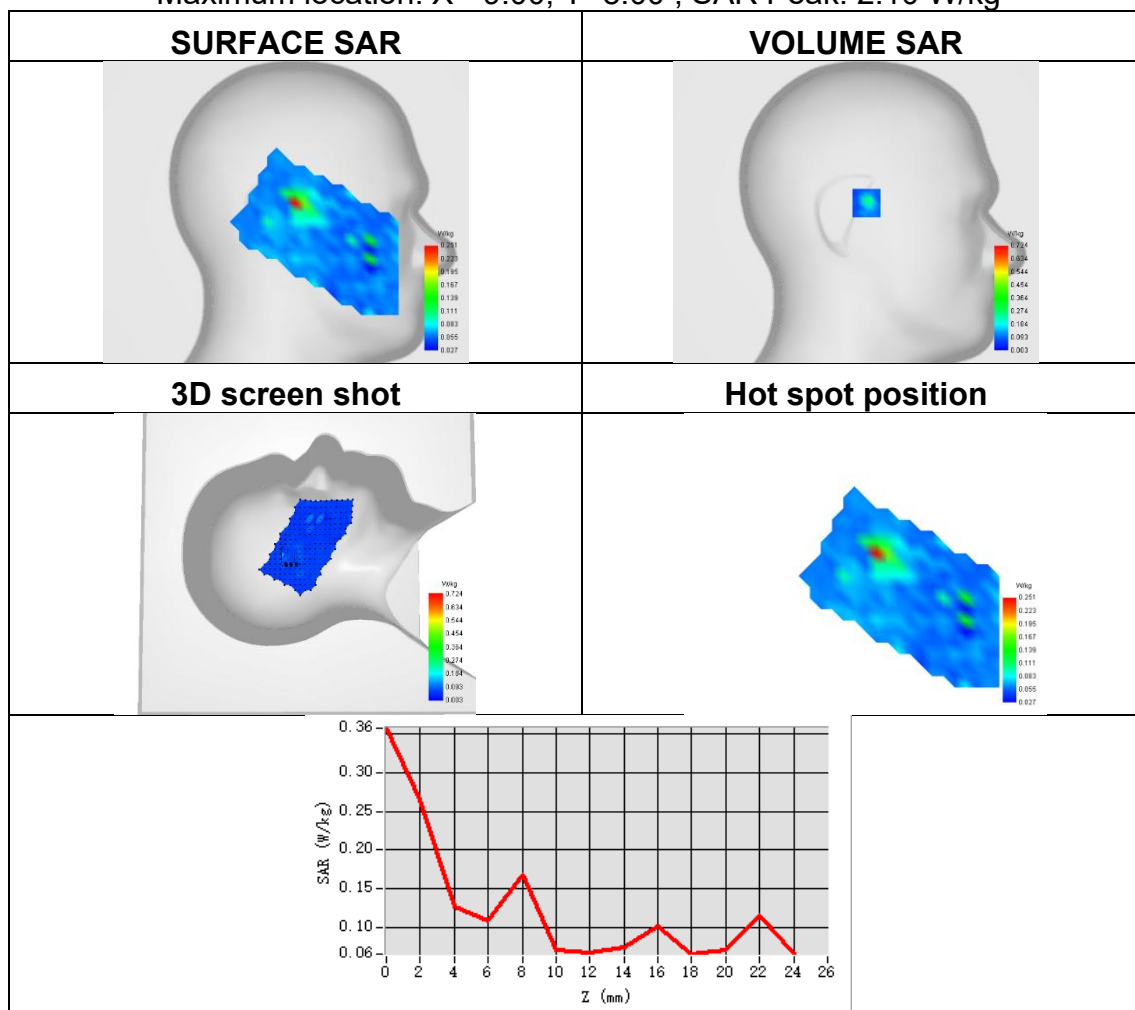




Plot 36:

Test Date	2026-07-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-2C
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.048
SAR 1g (W/Kg)	0.096
ConvF	1.07
Relative permittivity	36.34
Conductivity (S/m)	5.10

Maximum location: X=16.00, Y=-16.00 ; SAR Peak: 0.82 W/kg

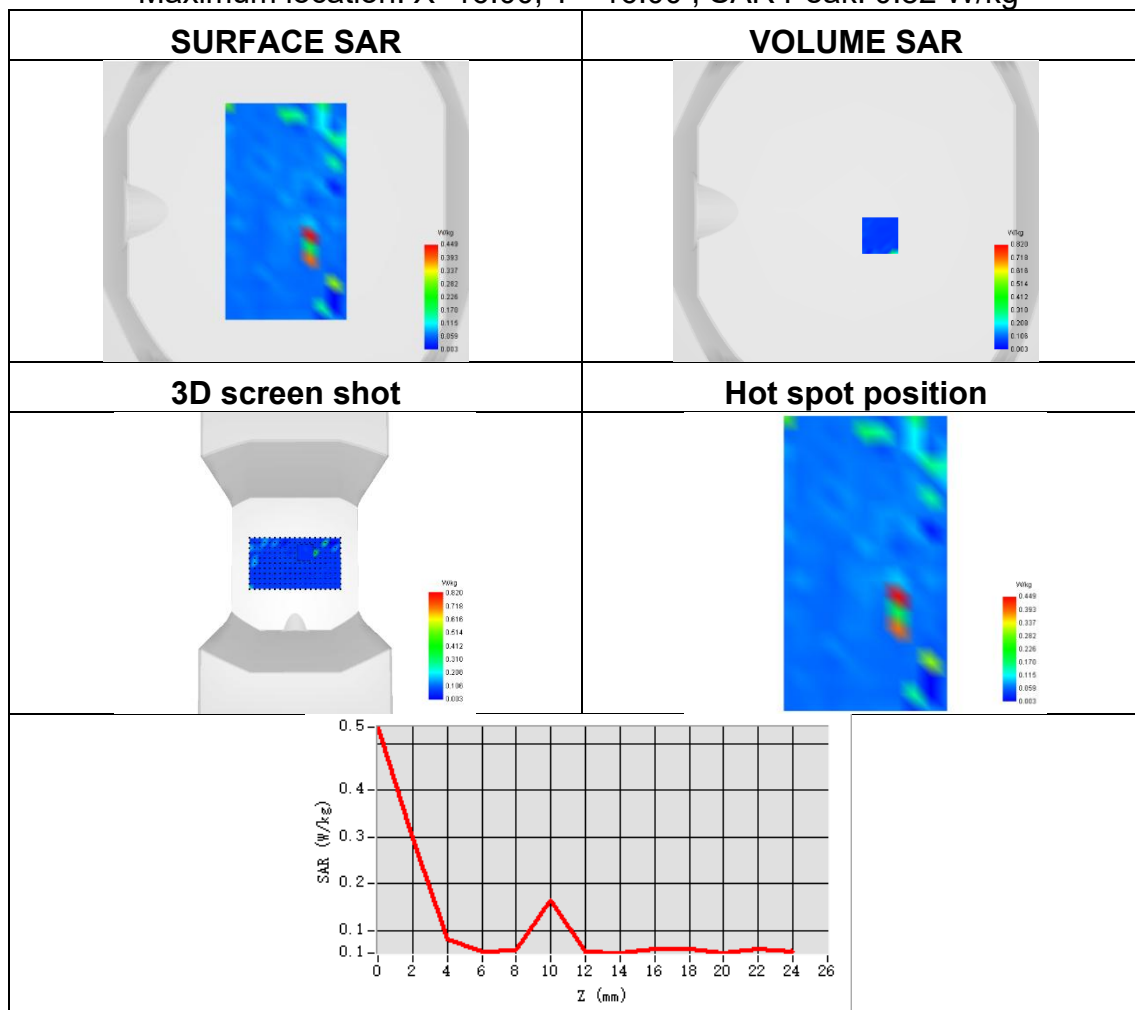




Plot 37:

Test Date	2026-07-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2C
Signal	IEEE 802.11a
Frequency	5500
SAR 10g (W/Kg)	0.163
SAR 1g (W/Kg)	0.616
ConvF	1.07
Relative permittivity	36.34
Conductivity (S/m)	5.10

Maximum location: X=-48.00, Y=-8.00 ; SAR Peak: 1.94 W/kg

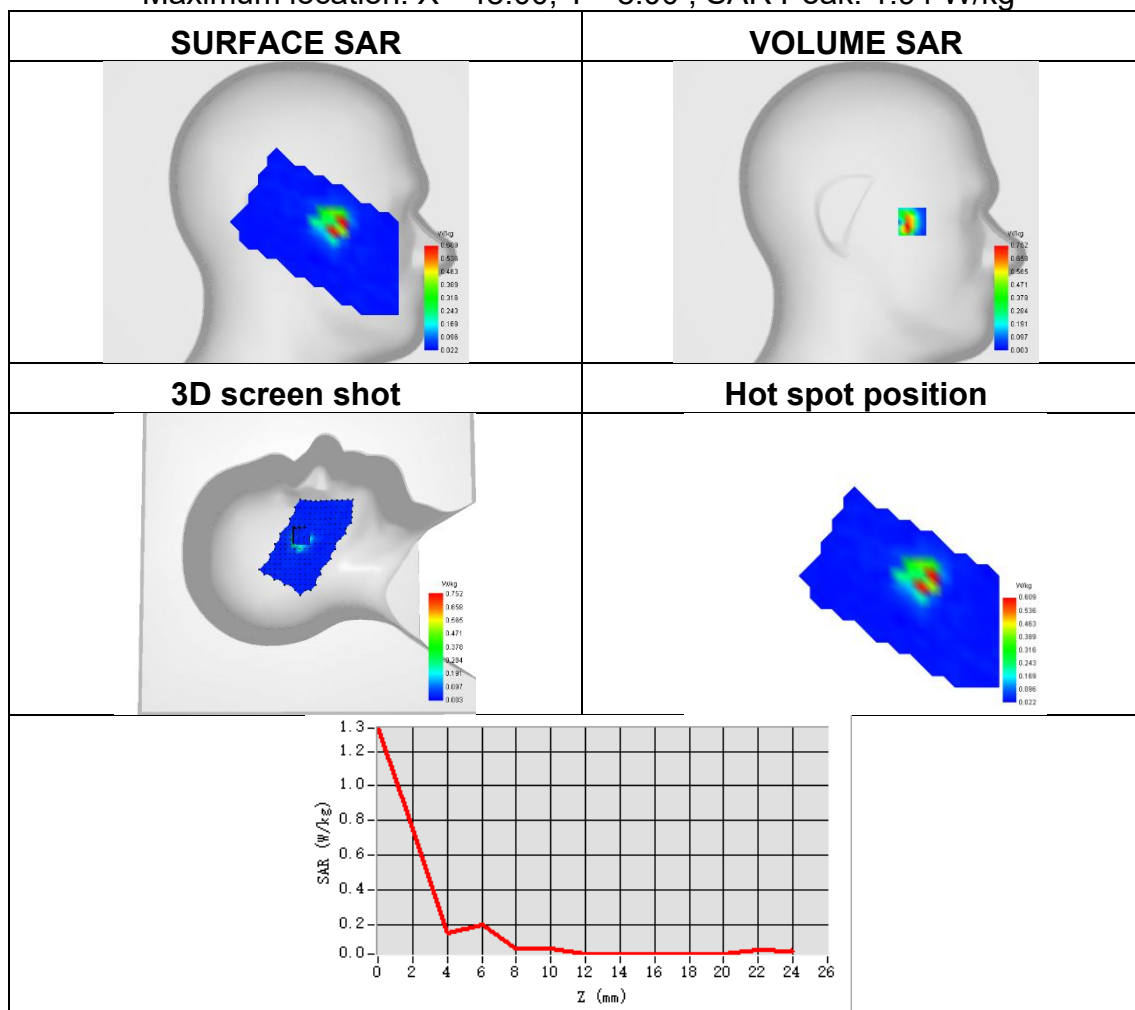




Plot 38:

Test Date	2026-07-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-2C
Signal	IEEE 802.11a
Frequency	5500
SAR 10g (W/Kg)	0.047
SAR 1g (W/Kg)	0.115
ConvF	1.07
Relative permittivity	36.34
Conductivity (S/m)	5.10

Maximum location: X=7.00, Y=7.00 ; SAR Peak: 1.23 W/kg

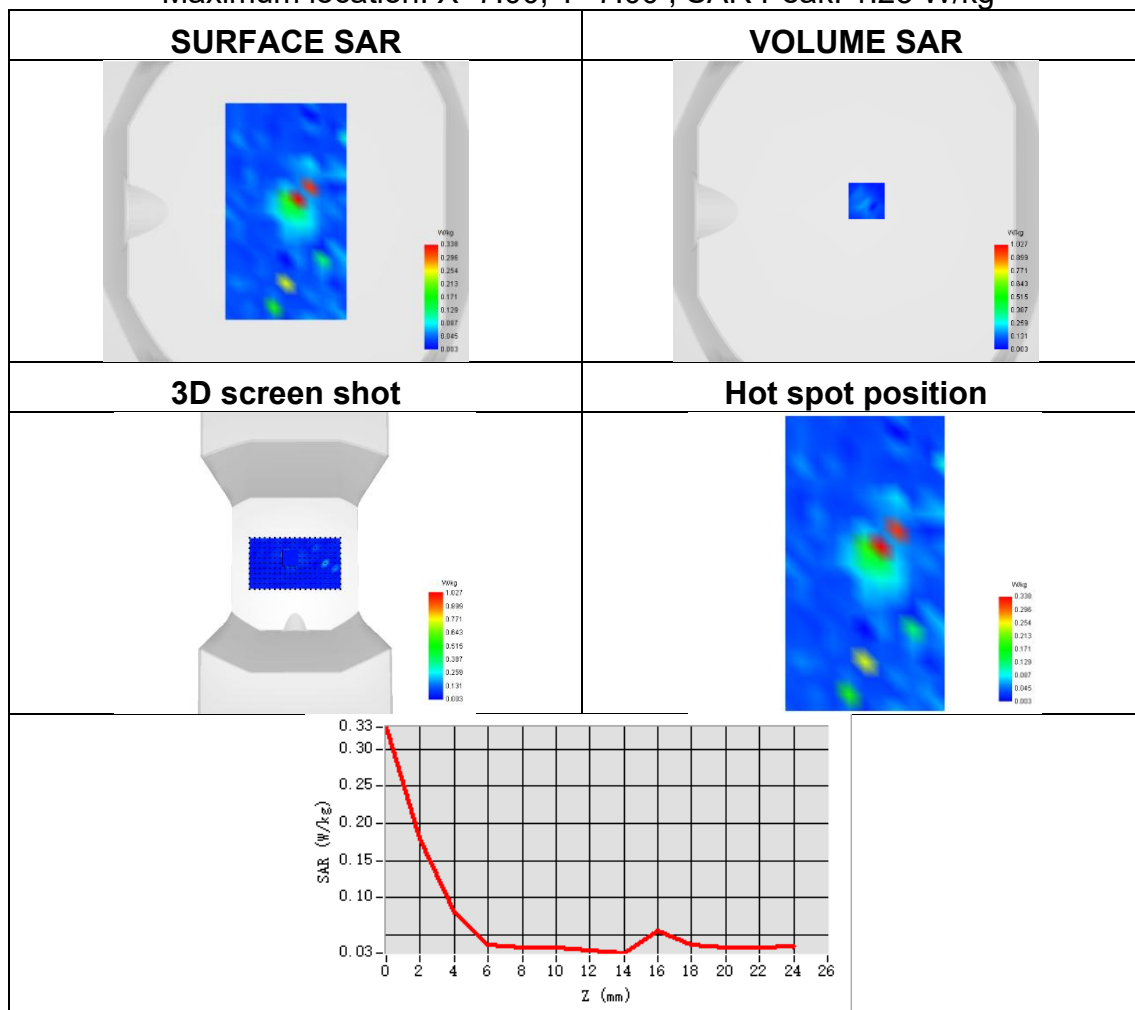




Plot 39:

Test Date	2026-07-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2C
Signal	IEEE 802.11ax
Frequency	5700
SAR 10g (W/Kg)	0.058
SAR 1g (W/Kg)	0.159
ConvF	1.07
Relative permittivity	36.34
Conductivity (S/m)	5.10

Maximum location: X=-38.00, Y=1.00 ; SAR Peak: 0.61 W/kg

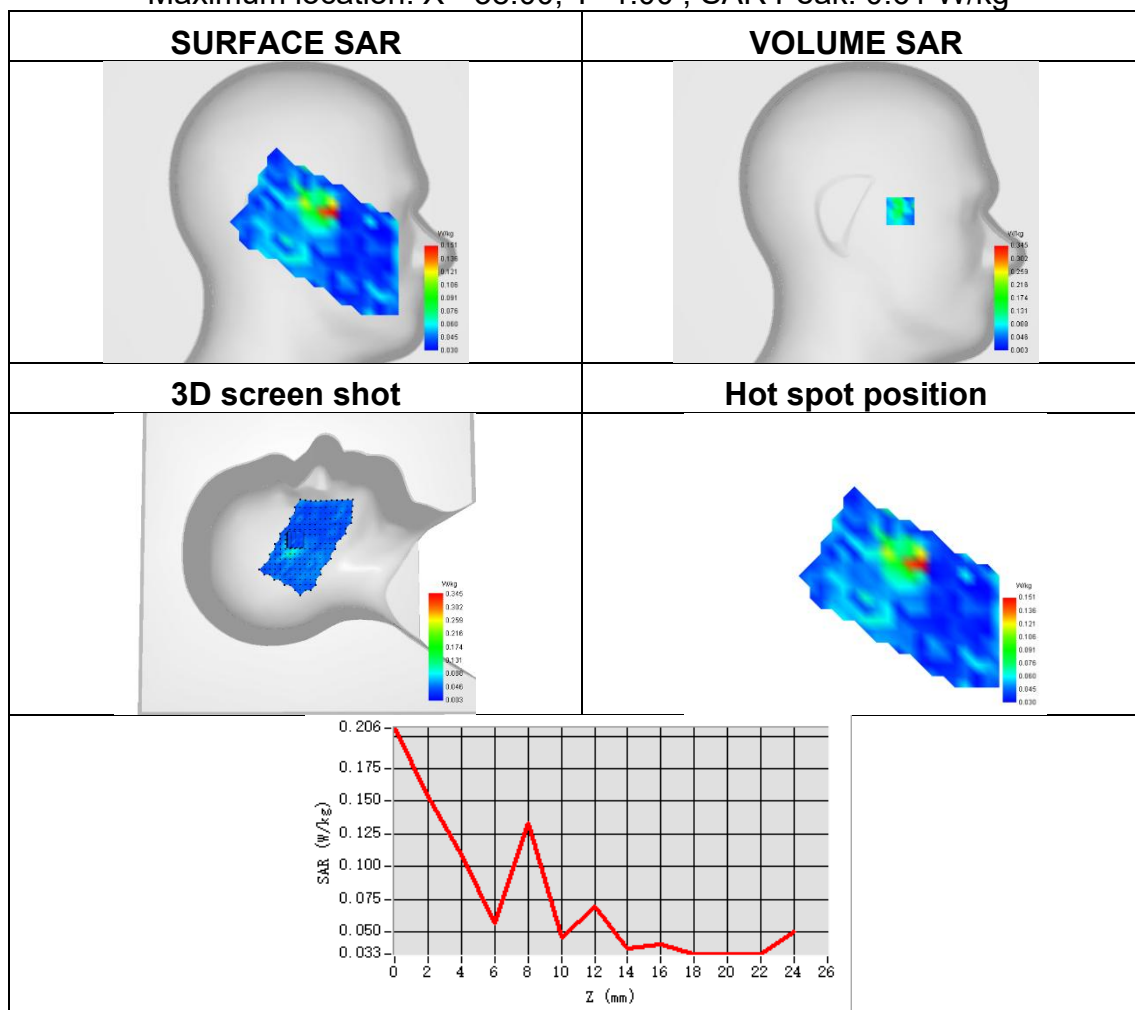




Plot 40:

Test Date	2026-07-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-2C
Signal	IEEE 802.11ax
Frequency	5700
SAR 10g (W/Kg)	0.035
SAR 1g (W/Kg)	0.055
ConvF	1.07
Relative permittivity	36.34
Conductivity (S/m)	5.10

Maximum location: X=-8.00, Y=-55.00 ; SAR Peak: 0.17 W/kg

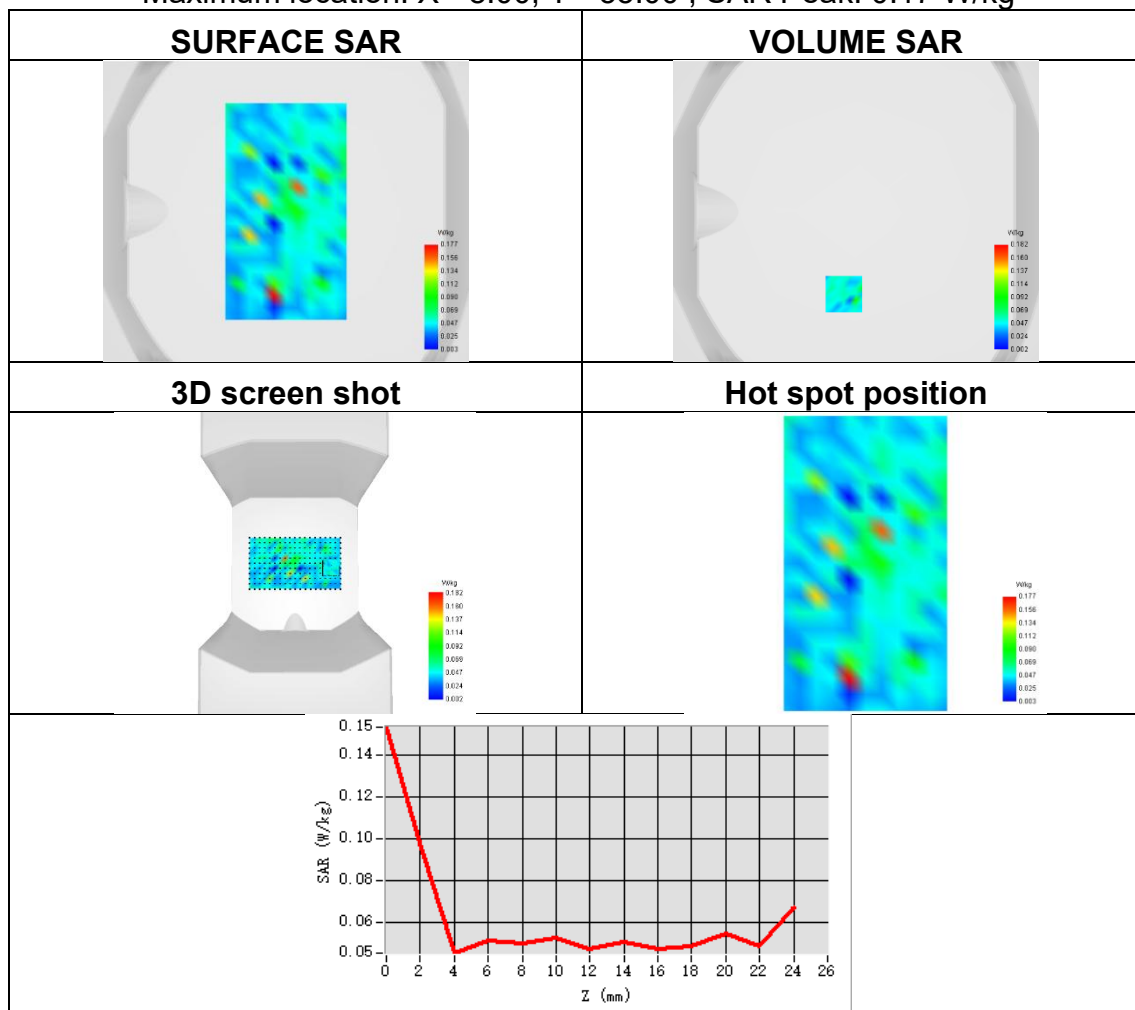




Plot 41:

Test Date	2026-07-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2C
Signal	IEEE 802.11ax
Frequency	5700
SAR 10g (W/Kg)	0.058
SAR 1g (W/Kg)	0.126
ConvF	1.07
Relative permittivity	36.34
Conductivity (S/m)	5.10

Maximum location: X=-37.00, Y=1.00 ; SAR Peak: 0.66 W/kg

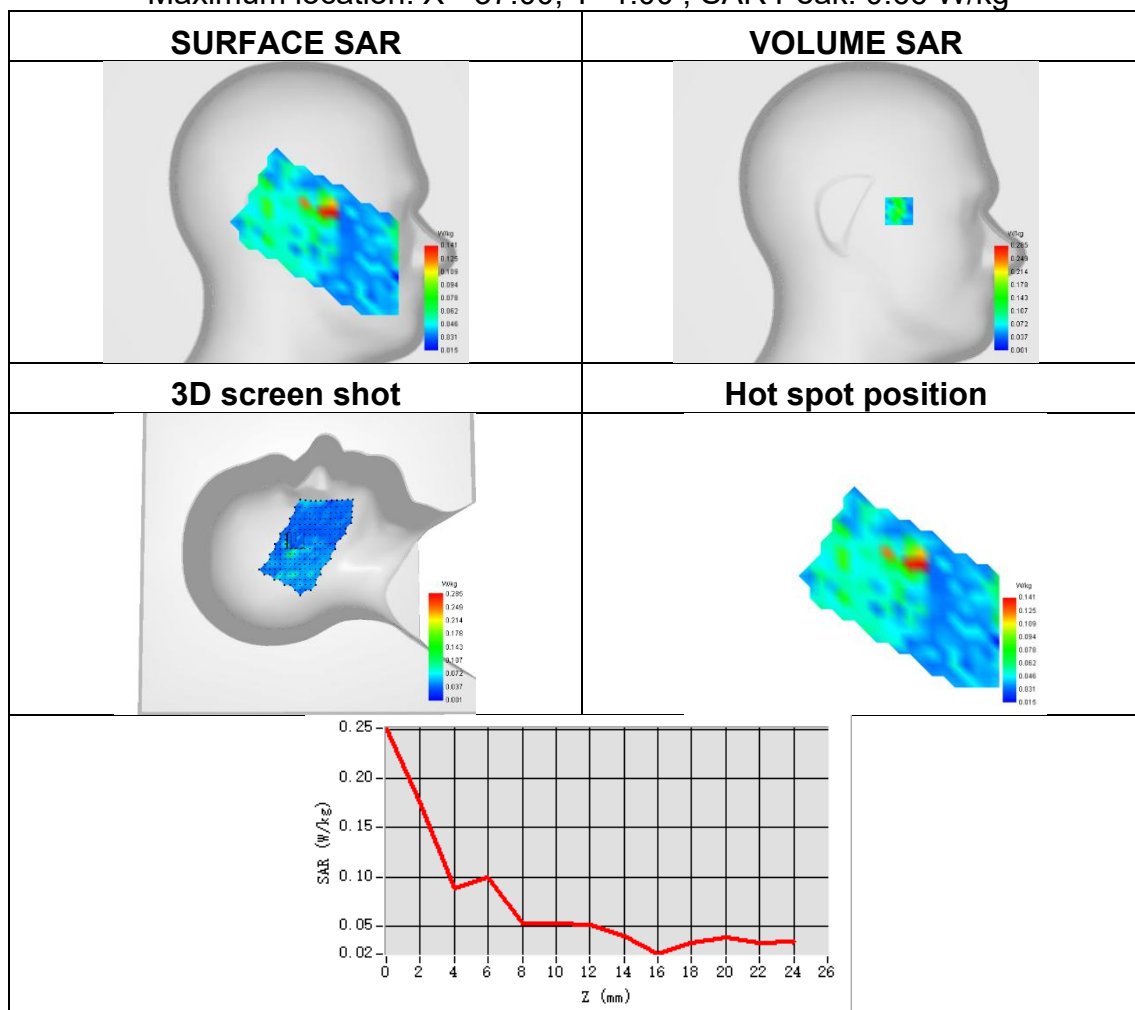




Plot 42:

Test Date	2026-07-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-2C
Signal	IEEE 802.11ax
Frequency	5700
SAR 10g (W/Kg)	0.036
SAR 1g (W/Kg)	0.065
ConvF	1.07
Relative permittivity	36.34
Conductivity (S/m)	5.10

Maximum location: X=16.00, Y=-32.00 ; SAR Peak: 0.88 W/kg

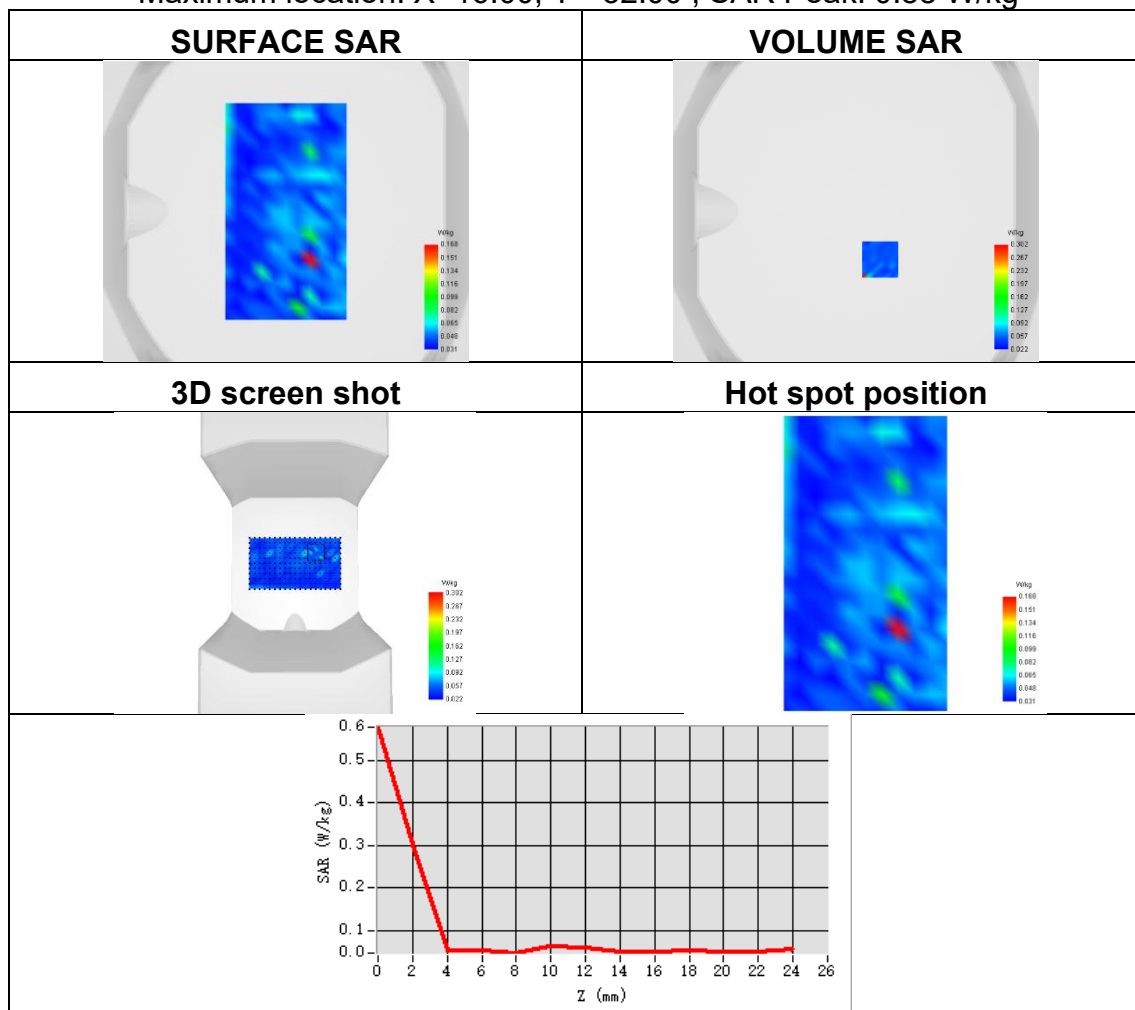




Plot 43:

Test Date	2026-07-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.099
SAR 1g (W/Kg)	0.324
ConvF	1.19
Relative permittivity	35.43
Conductivity (S/m)	5.24

Maximum location: X=-16.00, Y=8.00 ; SAR Peak: 1.26 W/kg

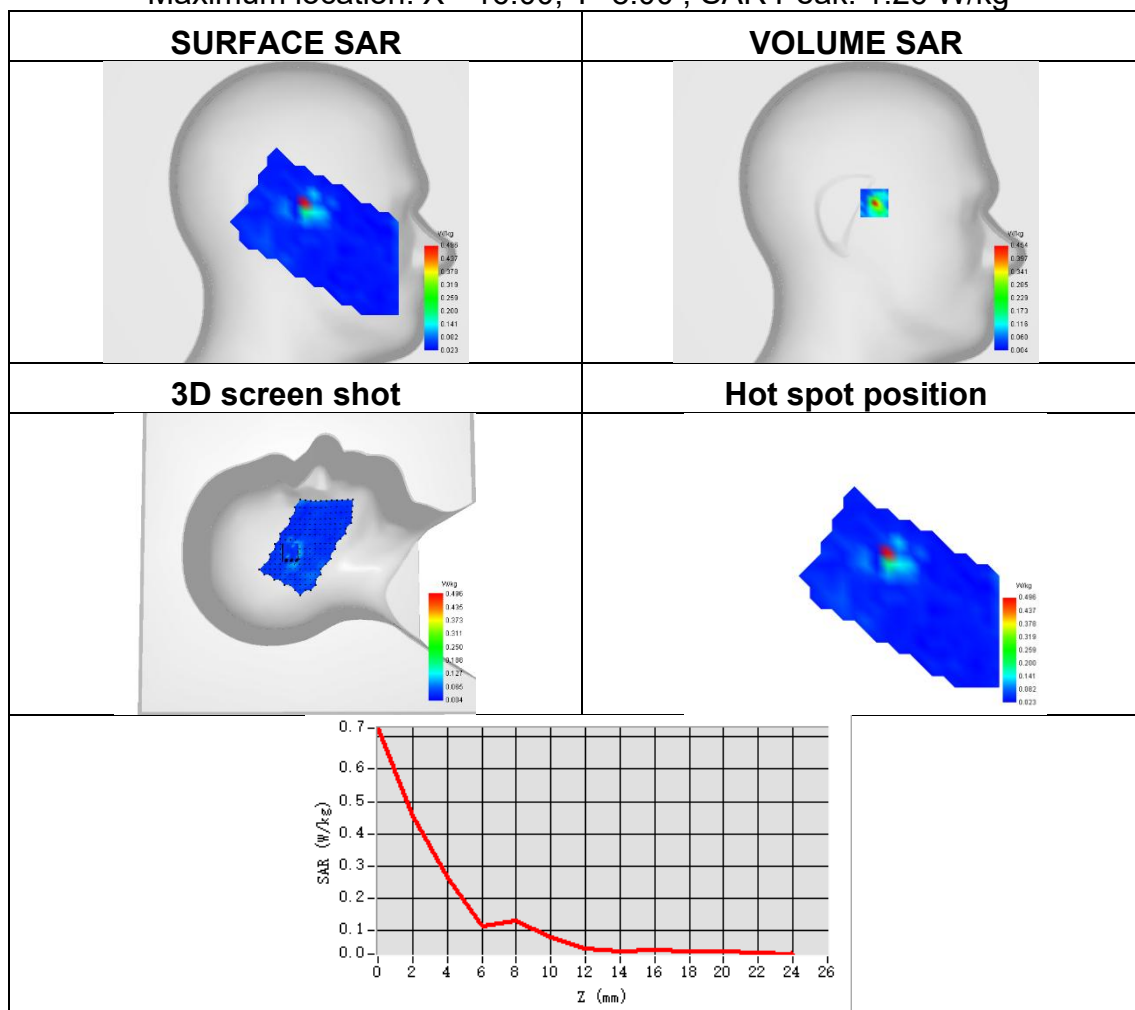




Plot 44:

Test Date	2026-07-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.036
SAR 1g (W/Kg)	0.058
ConvF	1.19
Relative permittivity	35.43
Conductivity (S/m)	5.24

Maximum location: X=0.00, Y=-16.00 ; SAR Peak: 0.14 W/kg

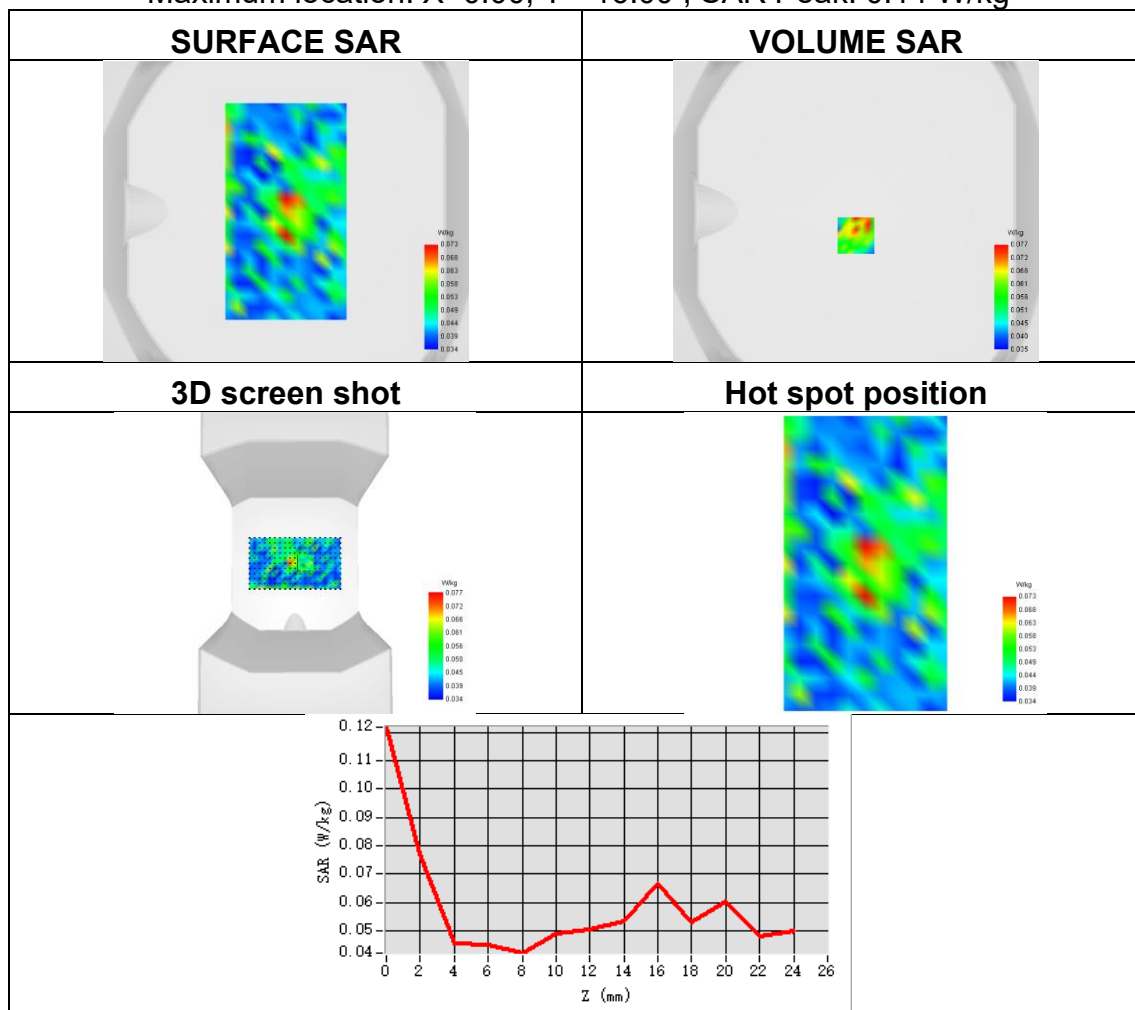




Plot 45:

Test Date	2026-07-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.143
SAR 1g (W/Kg)	0.472
ConvF	1.19
Relative permittivity	35.43
Conductivity (S/m)	5.24

Maximum location: X=-32.00, Y=6.00 ; SAR Peak: 2.11 W/kg

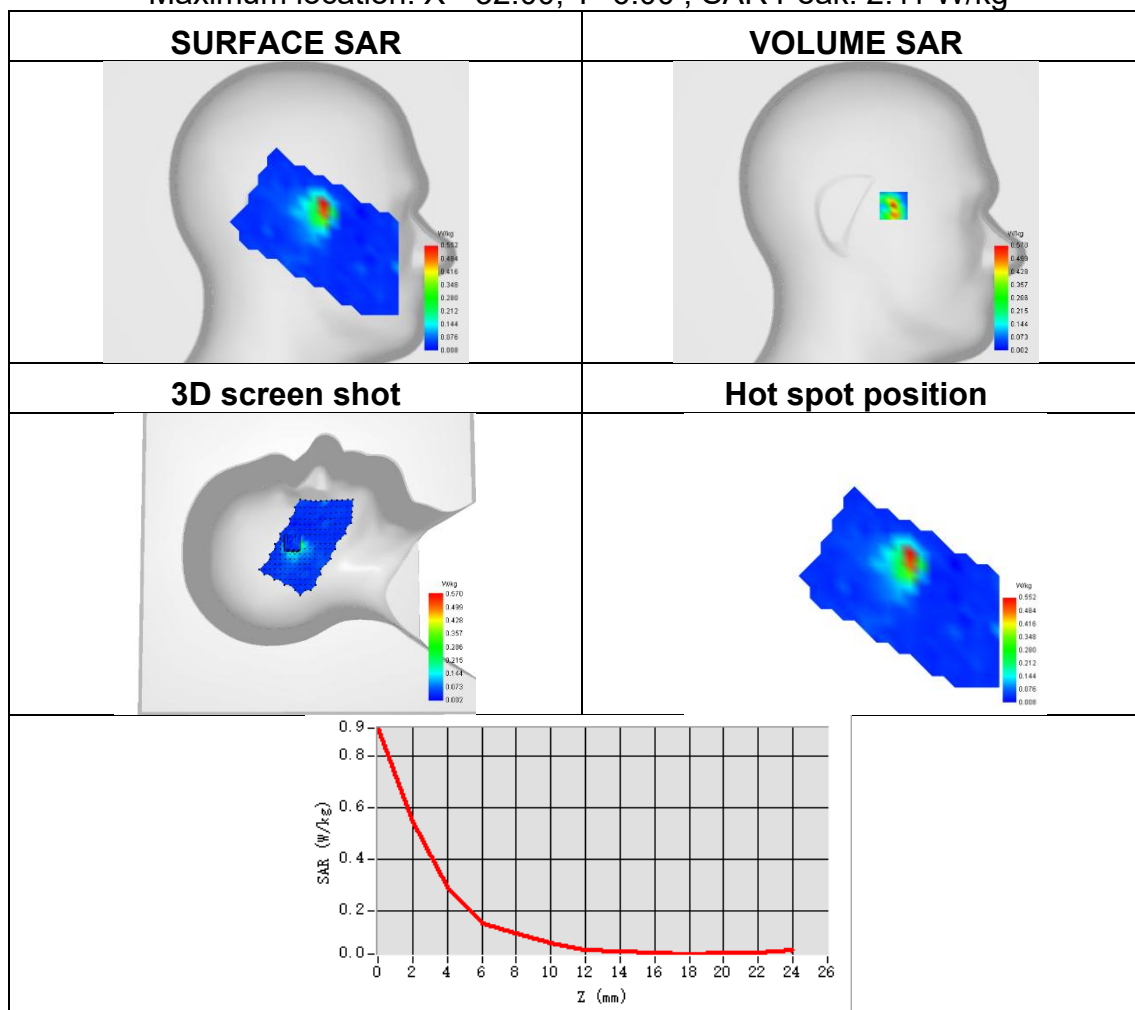




Plot 46:

Test Date	2026-07-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.065
SAR 1g (W/Kg)	0.115
ConvF	1.19
Relative permittivity	35.43
Conductivity (S/m)	5.24

Maximum location: X=0.00, Y=-10.00 ; SAR Peak: 0.40 W/kg

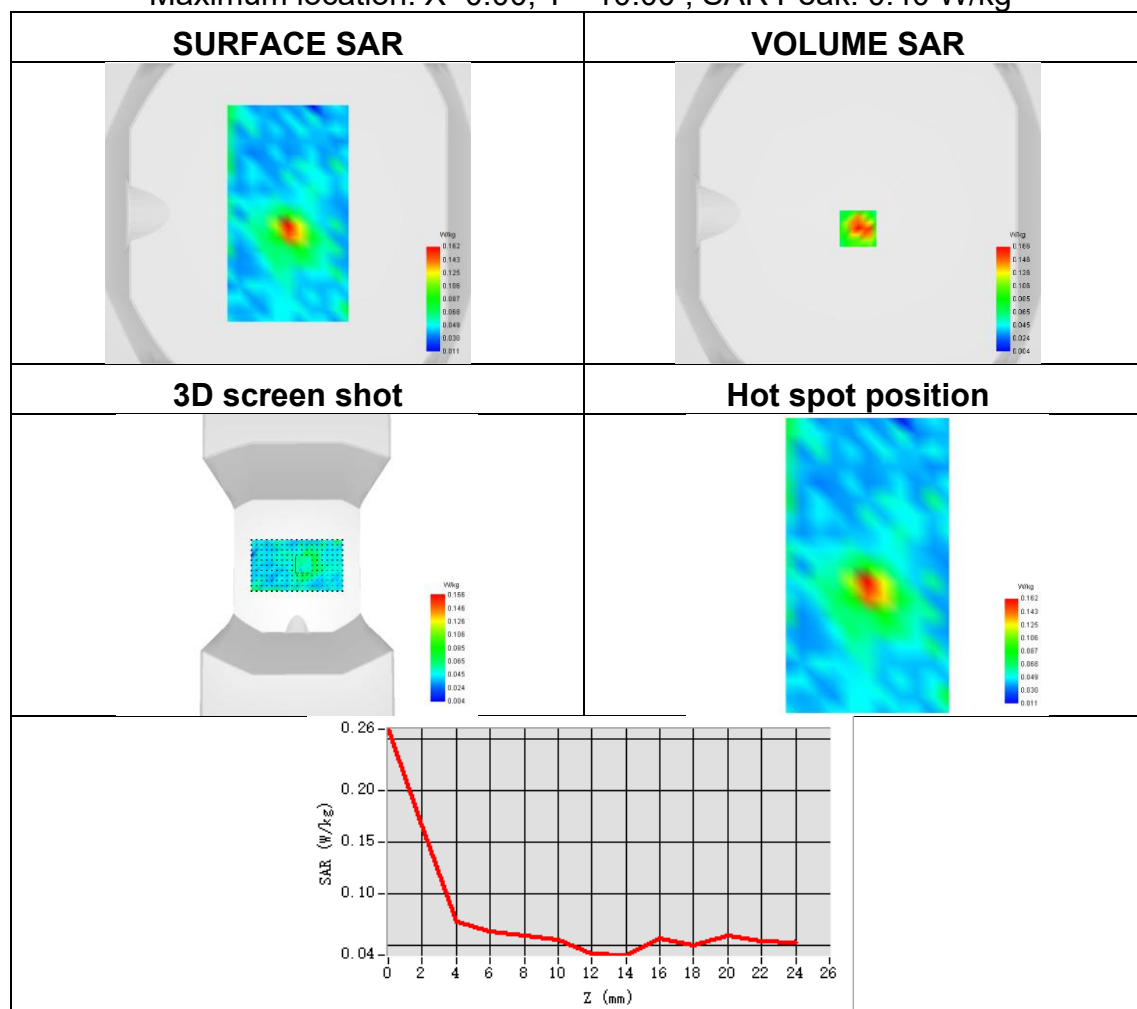




Plot 47:

Test Date	2026-07-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11ax
Frequency	5745
SAR 10g (W/Kg)	0.075
SAR 1g (W/Kg)	0.226
ConvF	1.19
Relative permittivity	35.43
Conductivity (S/m)	5.24

Maximum location: X=-32.00, Y=1.00 ; SAR Peak: 0.83 W/kg

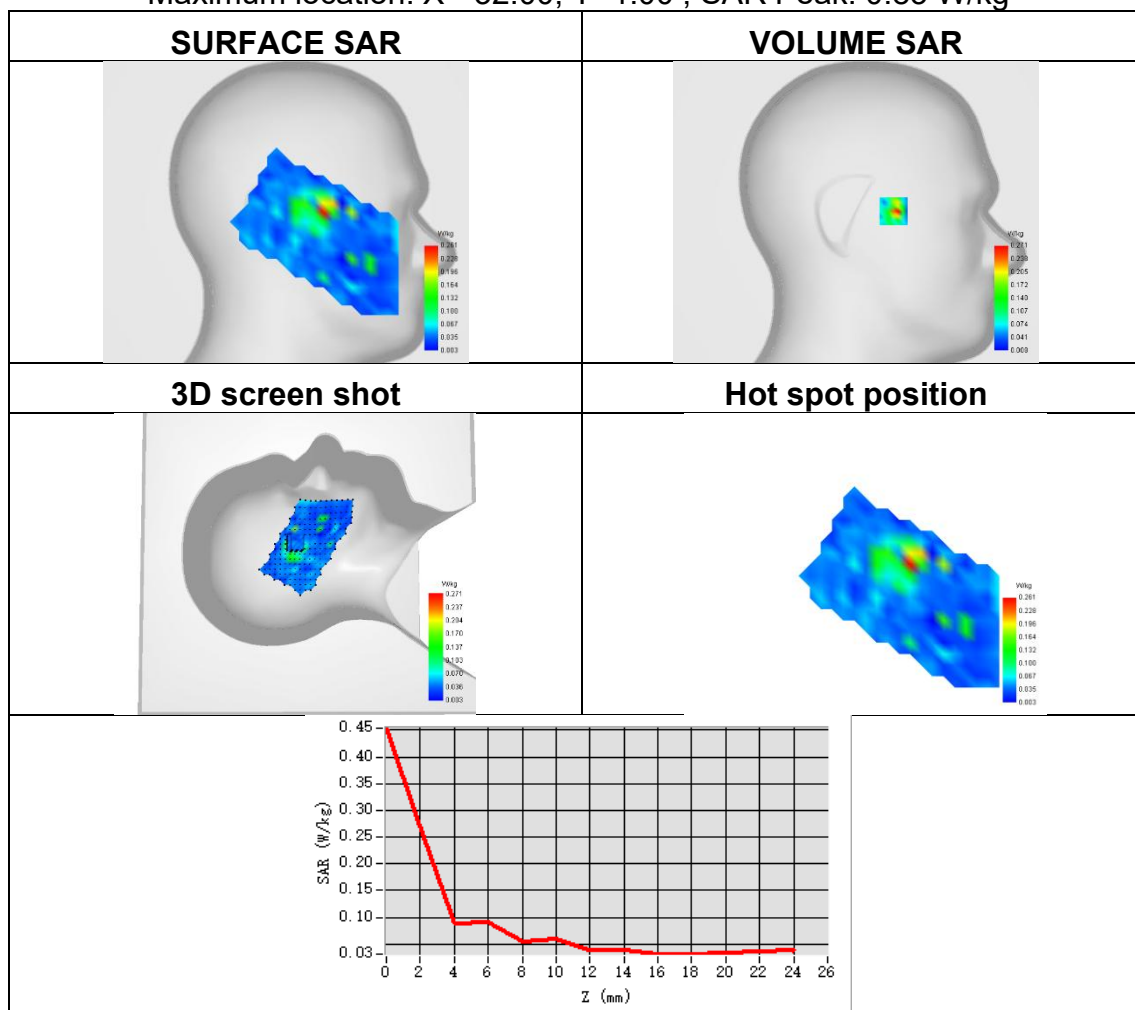




Plot 48:

Test Date	2026-07-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-3
Signal	IEEE 802.11ax
Frequency	5745
SAR 10g (W/Kg)	0.046
SAR 1g (W/Kg)	0.106
ConvF	1.19
Relative permittivity	35.43
Conductivity (S/m)	5.24

Maximum location: X=10.00, Y=-2.00 ; SAR Peak: 0.98 W/kg

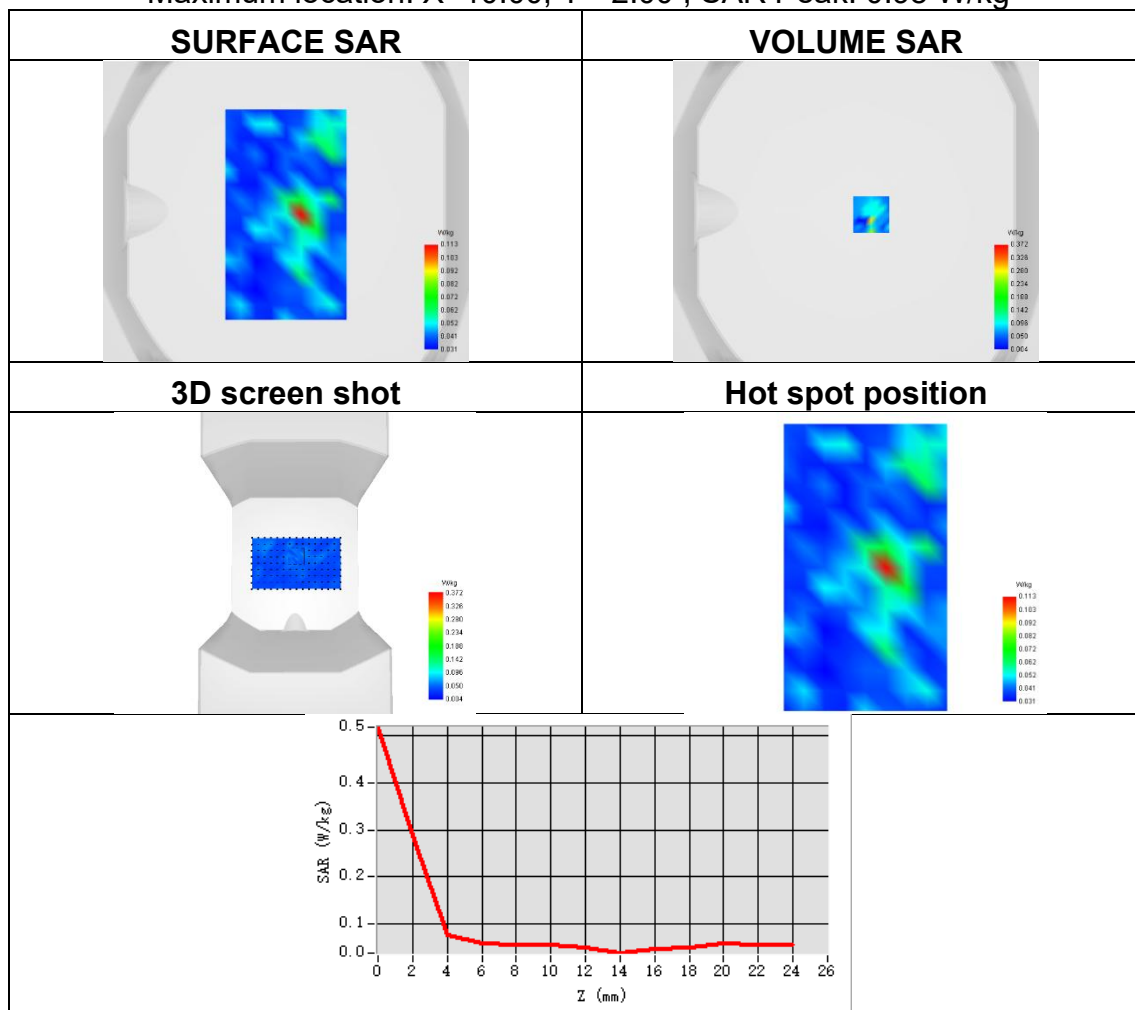




Plot 49:

Test Date	2026-07-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11ax
Frequency	5745
SAR 10g (W/Kg)	0.089
SAR 1g (W/Kg)	0.257
ConvF	1.19
Relative permittivity	35.43
Conductivity (S/m)	5.24

Maximum location: X=-32.00, Y=1.00 ; SAR Peak: 0.90 W/kg

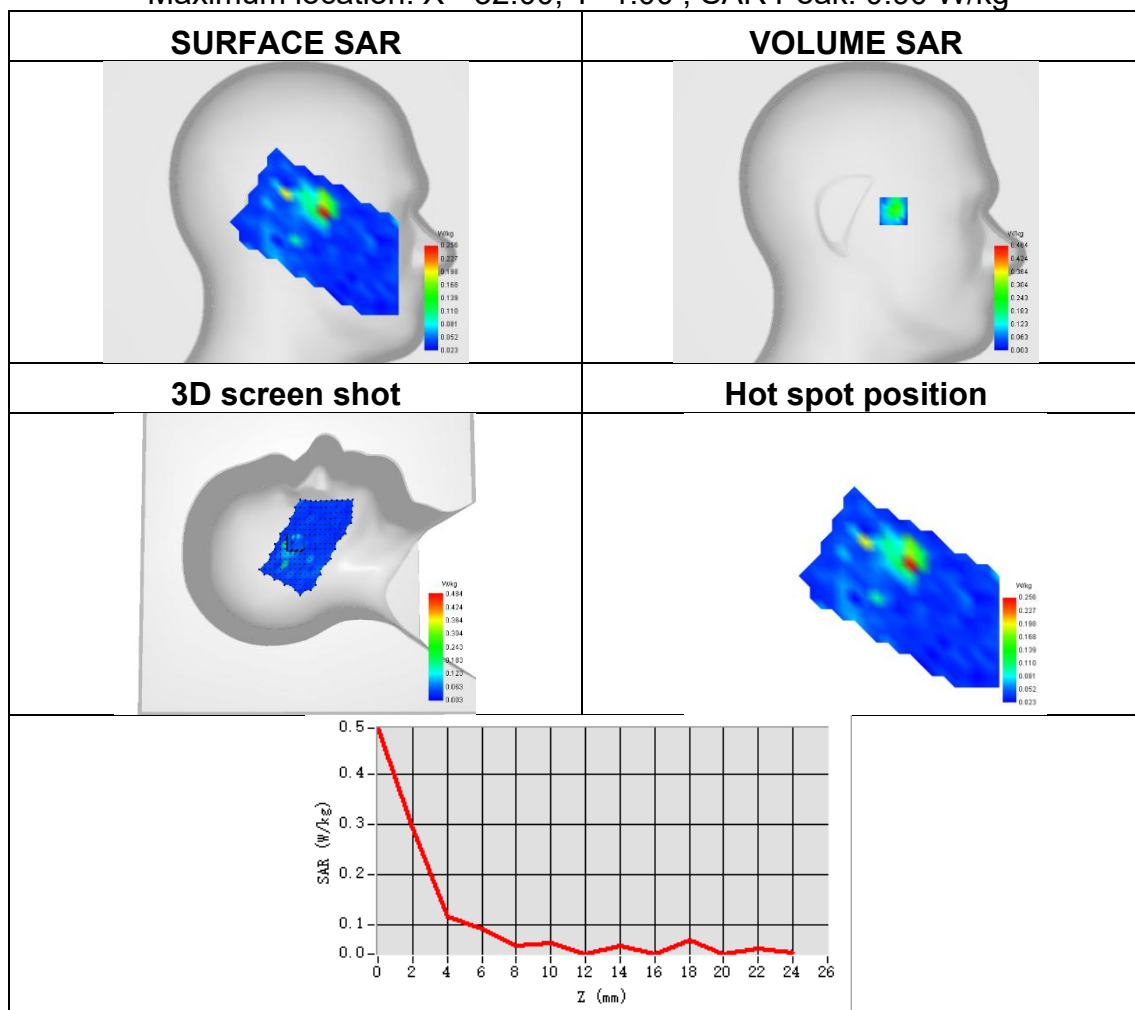




Plot 50:

Test Date	2026-07-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-3
Signal	IEEE 802.11ax
Frequency	5745
SAR 10g (W/Kg)	0.054
SAR 1g (W/Kg)	0.105
ConvF	1.19
Relative permittivity	35.43
Conductivity (S/m)	5.24


Maximum location: X=20.00, Y=38.00 ; SAR Peak: 0.62 W/kg

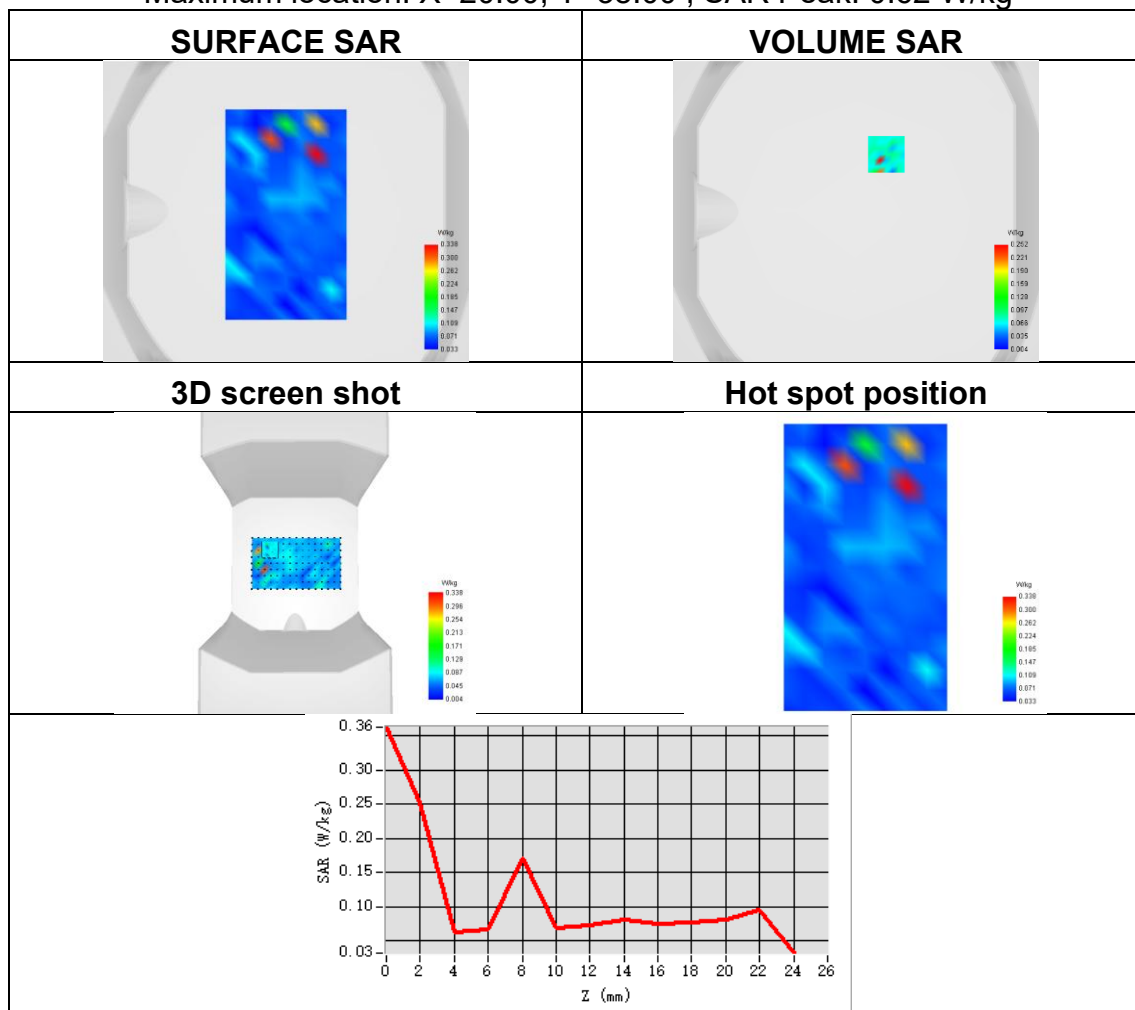

Plot 51:

Test Date	2026-06-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.117
SAR 1g (W/Kg)	0.205
ConvF	0.90
Relative permittivity	40.82
Conductivity (S/m)	1.45

Maximum location: X=-70.00, Y=-47.00 ; SAR Peak: 0.35 W/kg

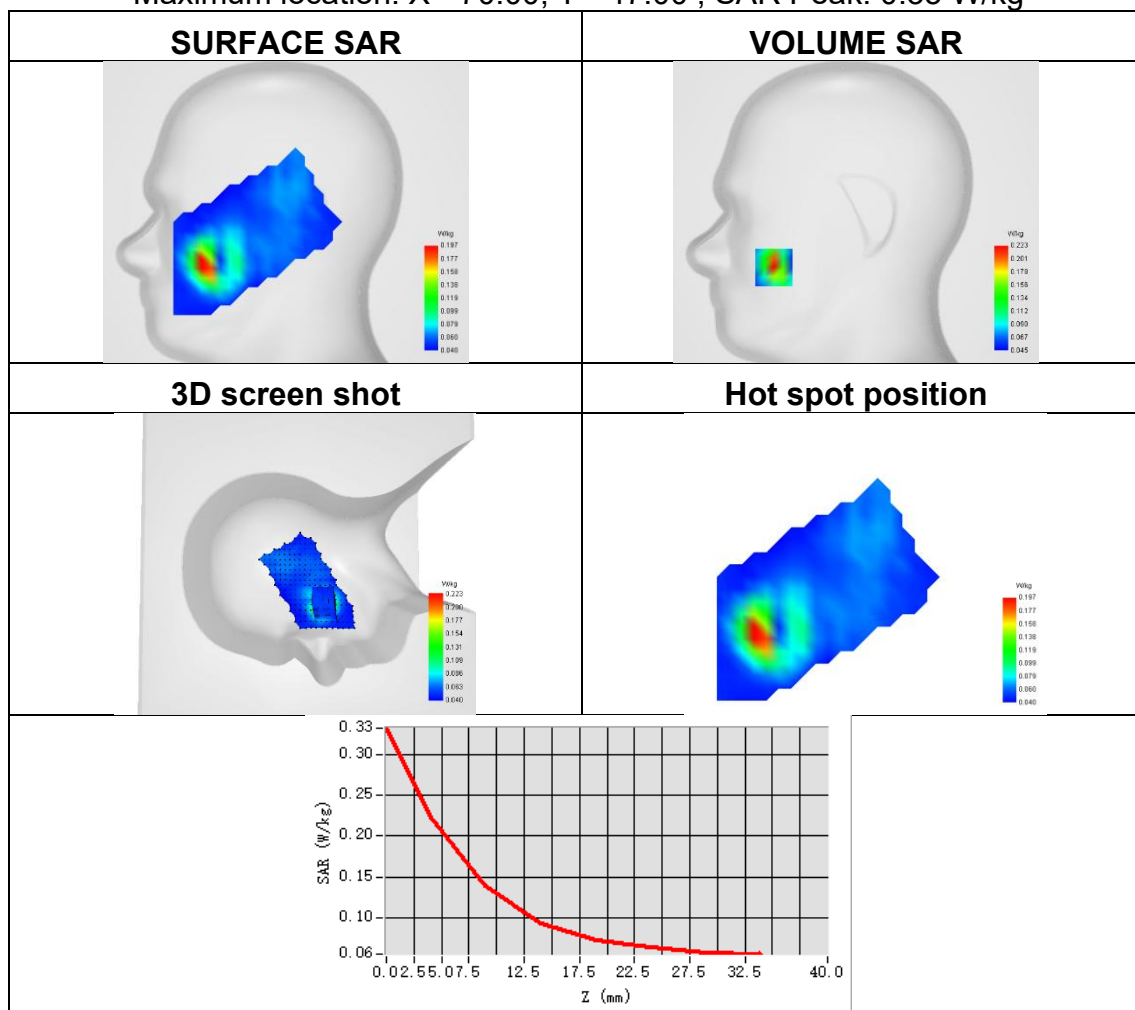




Plot 52:

Test Date	2026-06-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.141
SAR 1g (W/Kg)	0.252
ConvF	0.90
Relative permittivity	40.82
Conductivity (S/m)	1.45


Maximum location: X=8.00, Y=2.00 ; SAR Peak: 0.39 W/kg

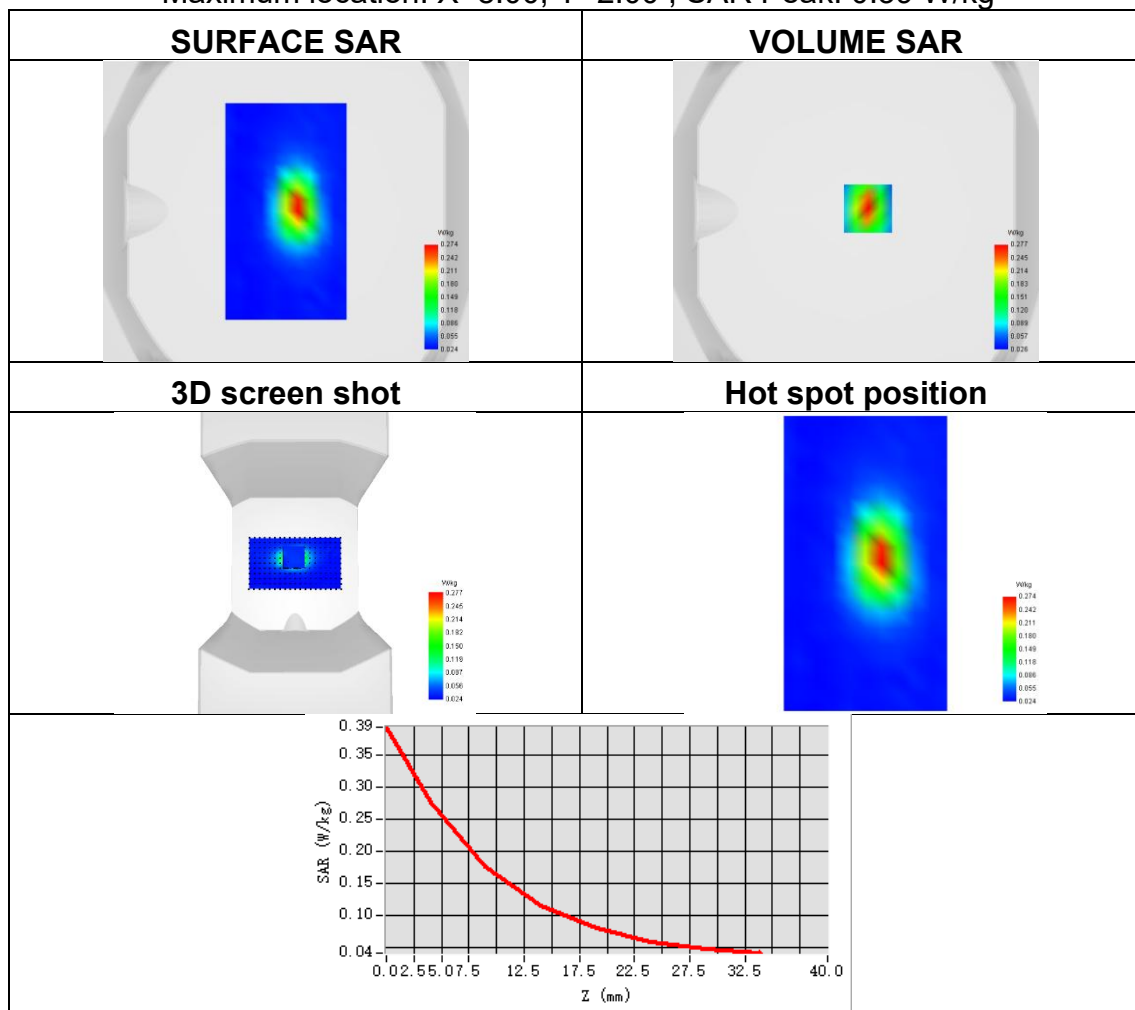

Plot 53:

Test Date	2026-06-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.115
SAR 1g (W/Kg)	0.208
ConvF	0.69
Relative permittivity	40.88
Conductivity (S/m)	1.39

Maximum location: X=-79.00, Y=-63.00 ; SAR Peak: 0.34 W/kg

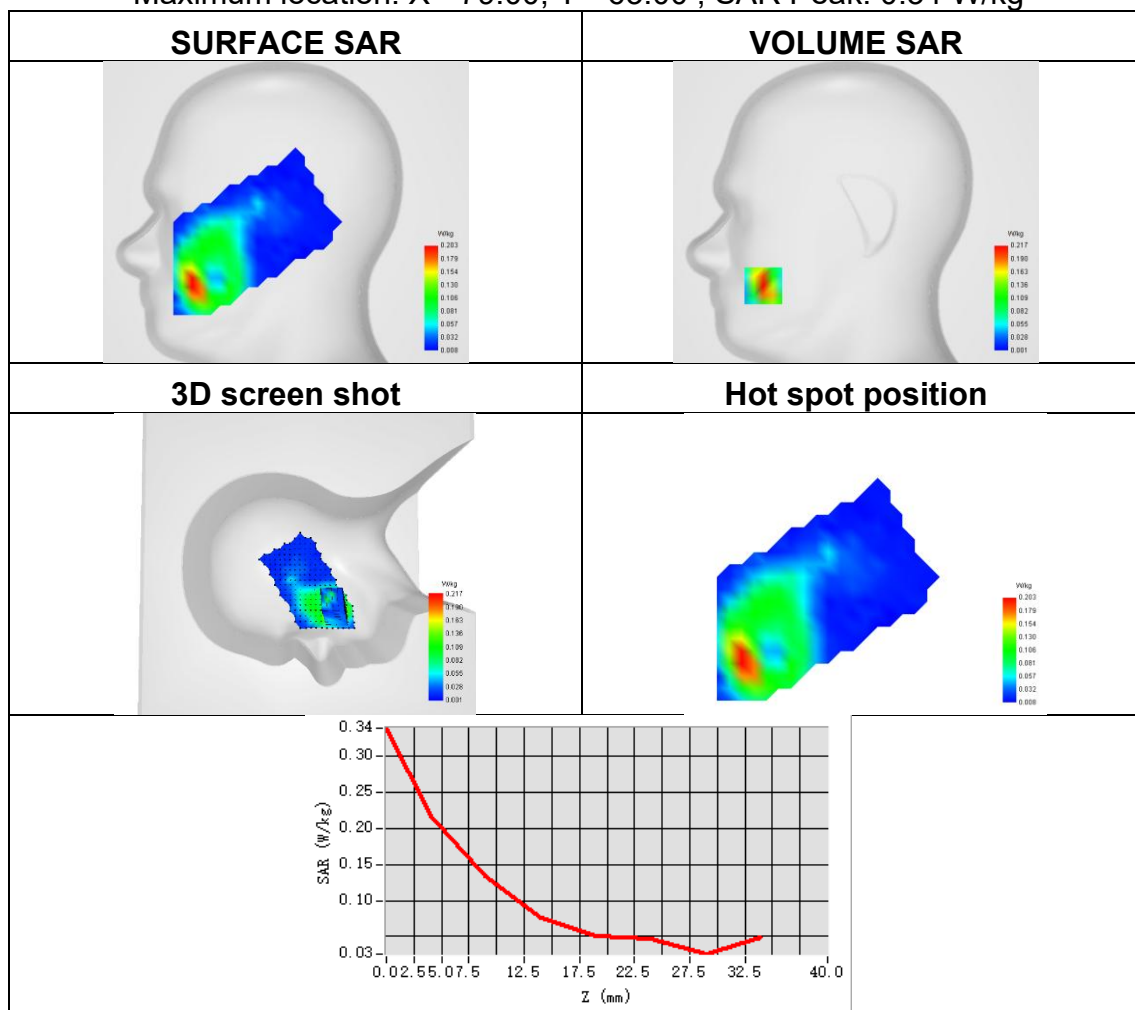




Plot 54:

Test Date	2026-06-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.493
SAR 1g (W/Kg)	0.940
ConvF	0.69
Relative permittivity	40.88
Conductivity (S/m)	1.39

Maximum location: X=10.00, Y=0.00 ; SAR Peak: 1.54 W/kg

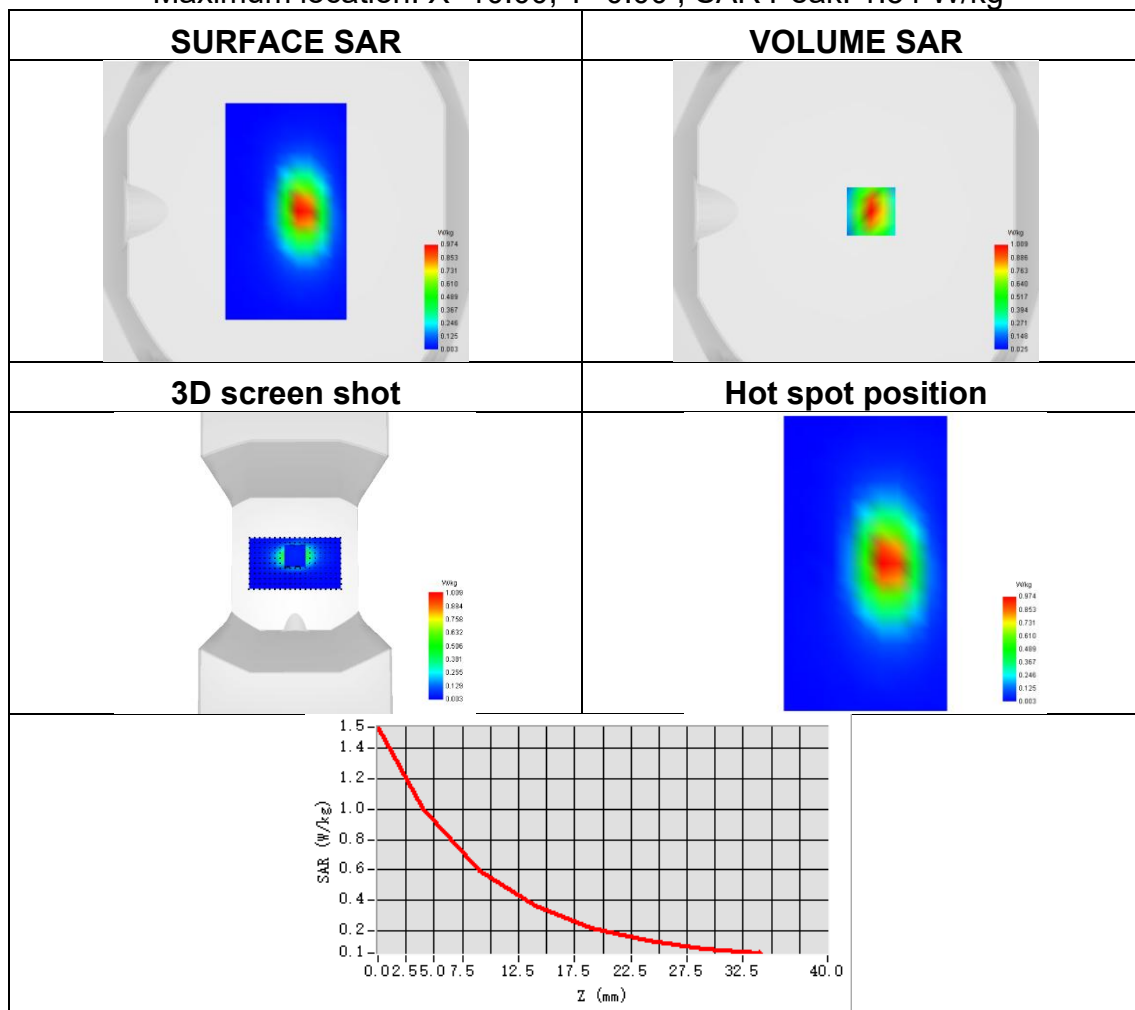




Plot 55:

Test Date	2026-06-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.139
SAR 1g (W/Kg)	0.213
ConvF	0.69
Relative permittivity	42.15
Conductivity (S/m)	0.92

Maximum location: X=-49.00, Y=-56.00 ; SAR Peak: 0.28 W/kg

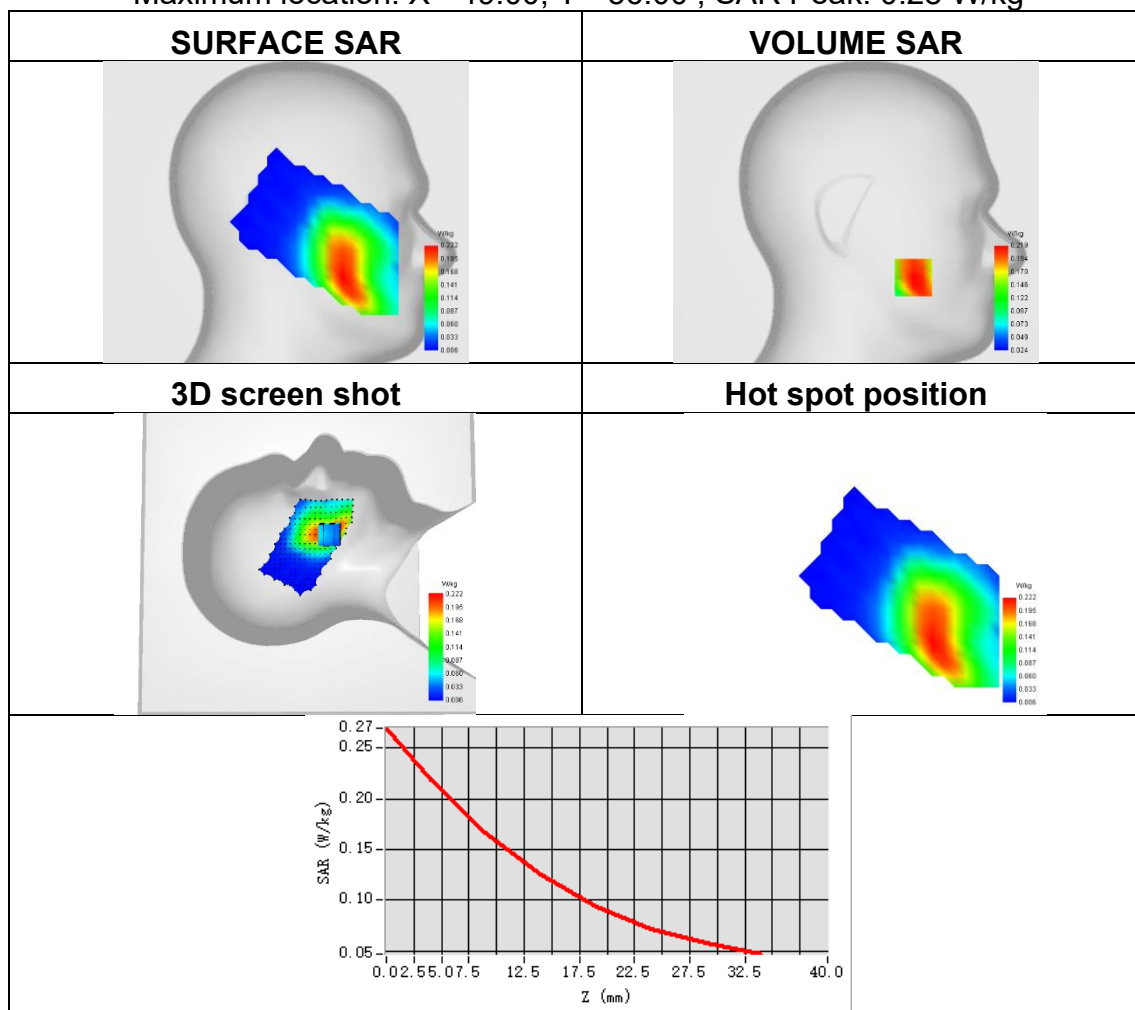




Plot 56:

Test Date	2026-06-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.336
SAR 1g (W/Kg)	0.599
ConvF	0.69
Relative permittivity	42.15
Conductivity (S/m)	0.92

Maximum location: X=-15.00, Y=-23.00 ; SAR Peak: 0.97 W/kg

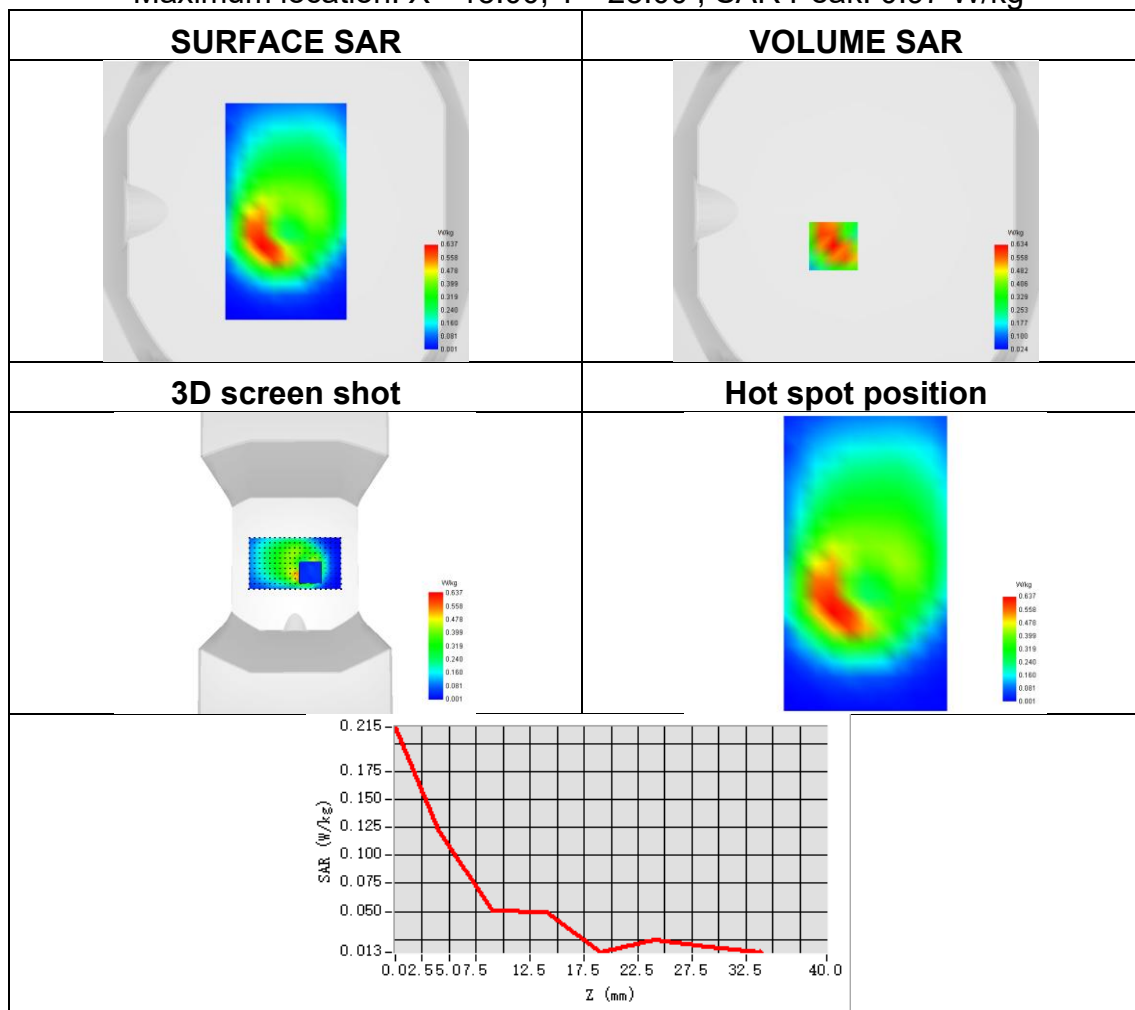




Plot 57:

Test Date	2026-06-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.209
SAR 1g (W/Kg)	0.419
ConvF	0.98
Relative permittivity	40.00
Conductivity (S/m)	1.92

Maximum location: X=-66.00, Y=-29.00 ; SAR Peak: 0.74 W/kg

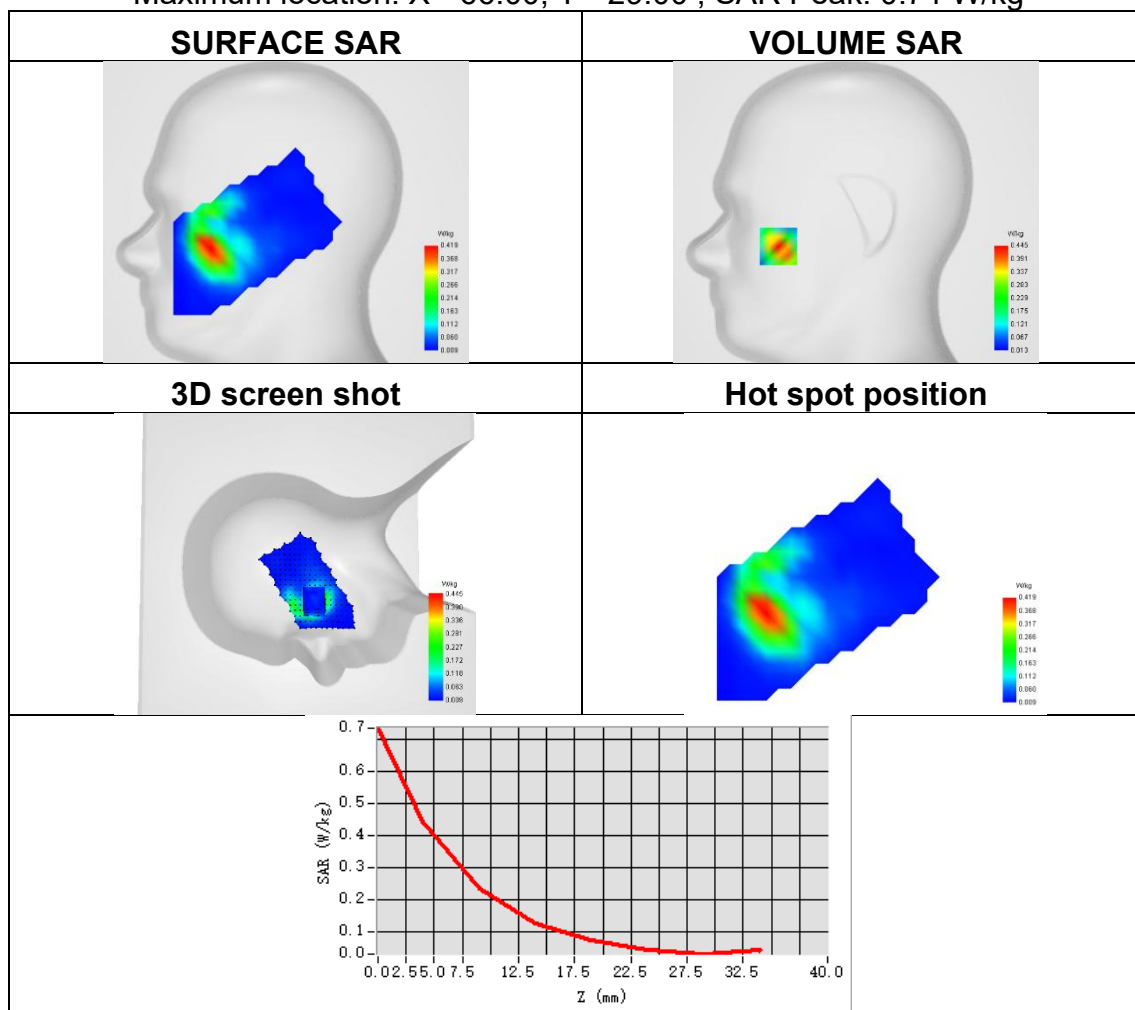




Plot 58:

Test Date	2026-06-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.362
SAR 1g (W/Kg)	0.733
ConvF	0.98
Relative permittivity	40.00
Conductivity (S/m)	1.92

Maximum location: X=11.00, Y=-1.00 ; SAR Peak: 1.25 W/kg

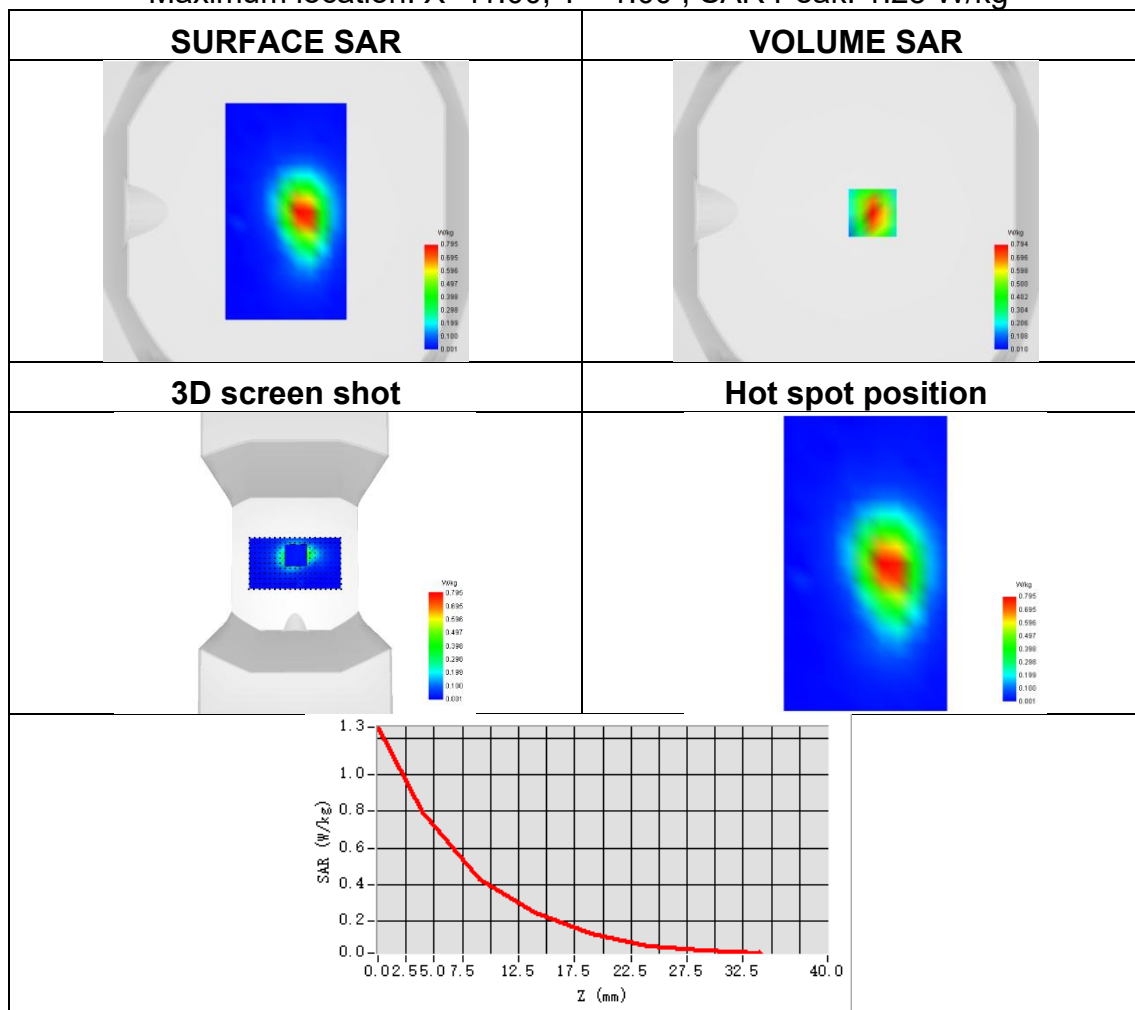




Plot 59:

Test Date	2026-06-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.176
SAR 1g (W/Kg)	0.269
ConvF	0.71
Relative permittivity	42.77
Conductivity (S/m)	0.90

Maximum location: X=-54.00, Y=-58.00 ; SAR Peak: 0.37 W/kg

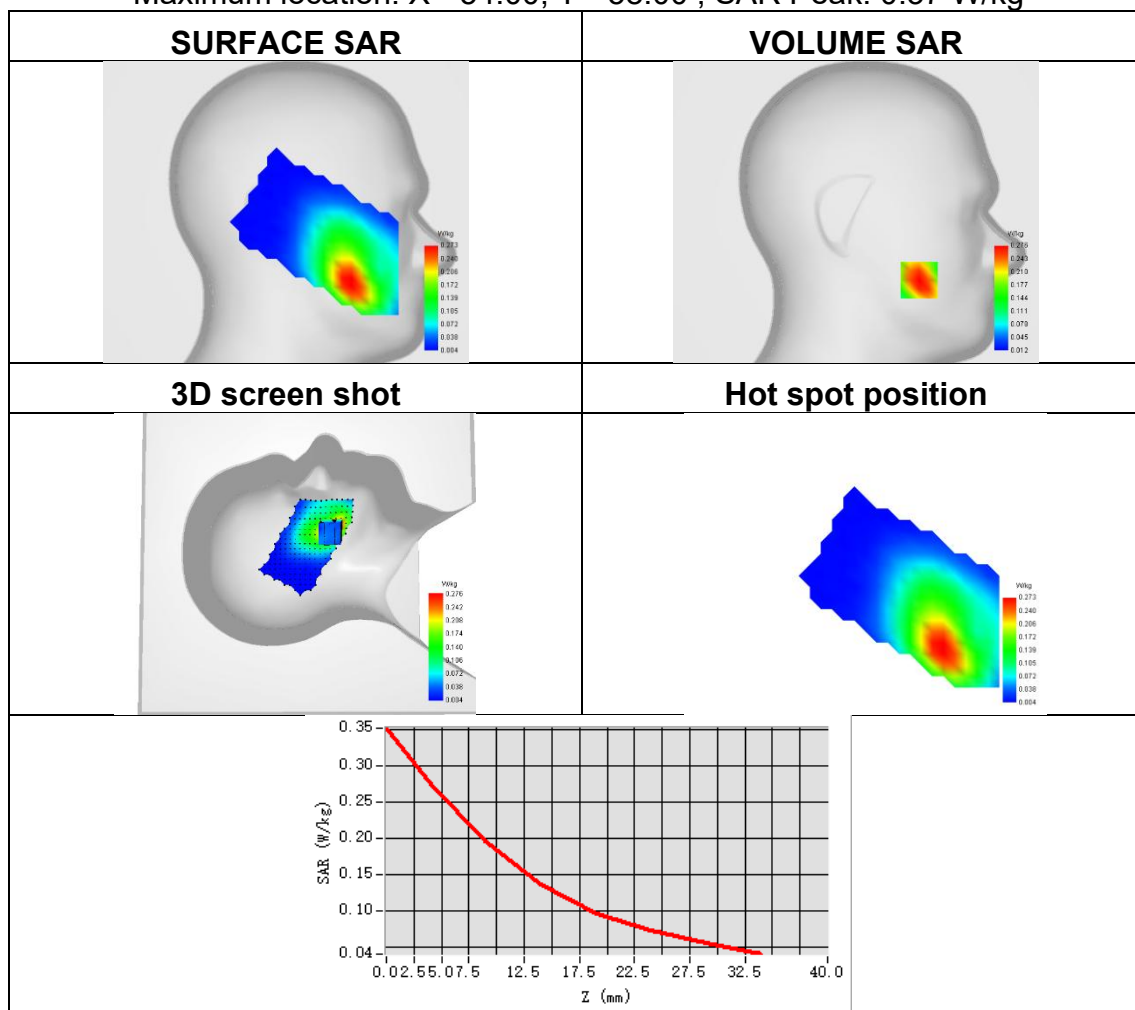




Plot 60:

Test Date	2026-06-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.277
SAR 1g (W/Kg)	0.528
ConvF	0.71
Relative permittivity	42.77
Conductivity (S/m)	0.90

Maximum location: X=-17.00, Y=-20.00 ; SAR Peak: 0.84 W/kg

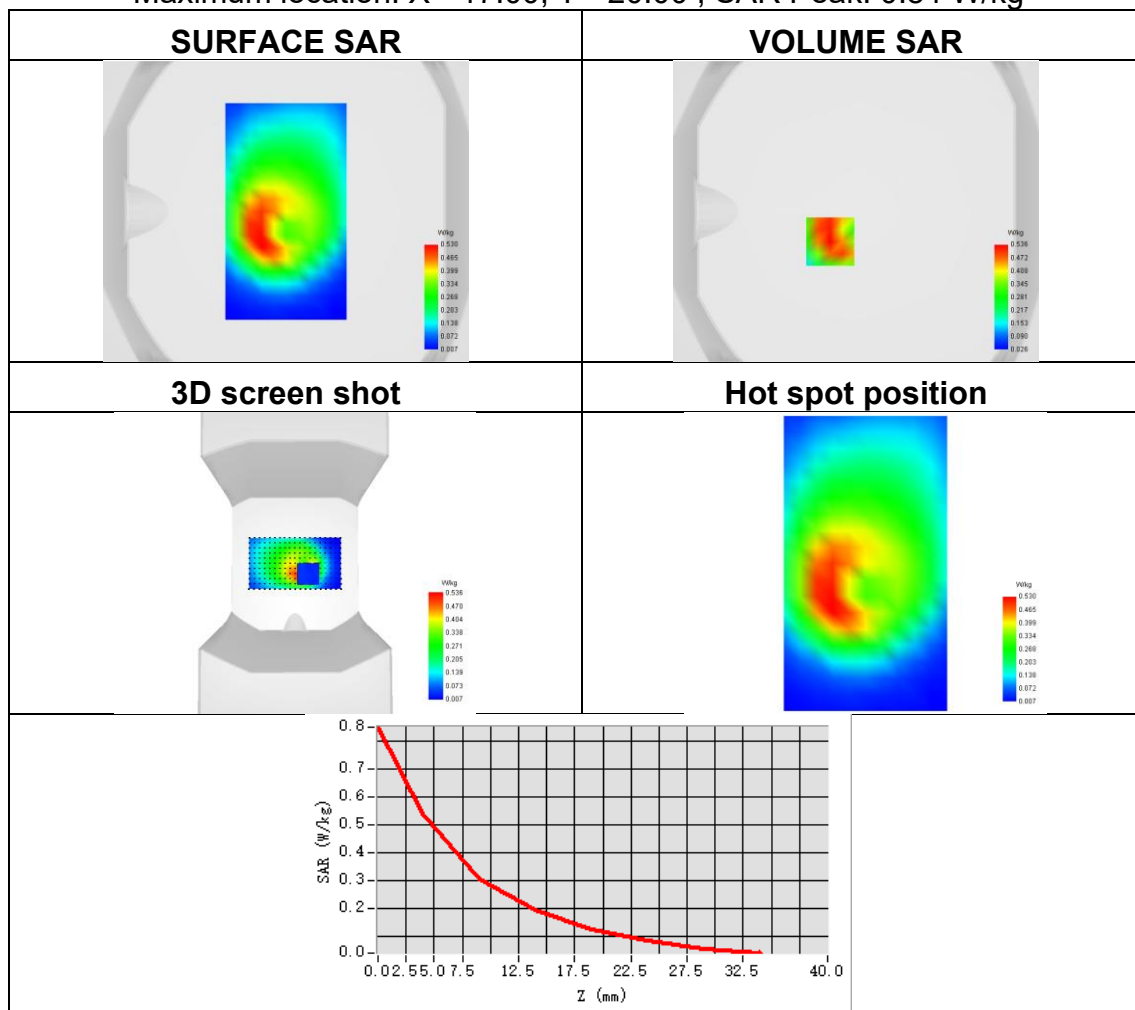




Plot 61:

Test Date	2026-06-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.038
SAR 1g (W/Kg)	0.060
ConvF	0.71
Relative permittivity	42.70
Conductivity (S/m)	0.87

Maximum location: X=-62.00, Y=-47.00 ; SAR Peak: 0.10 W/kg

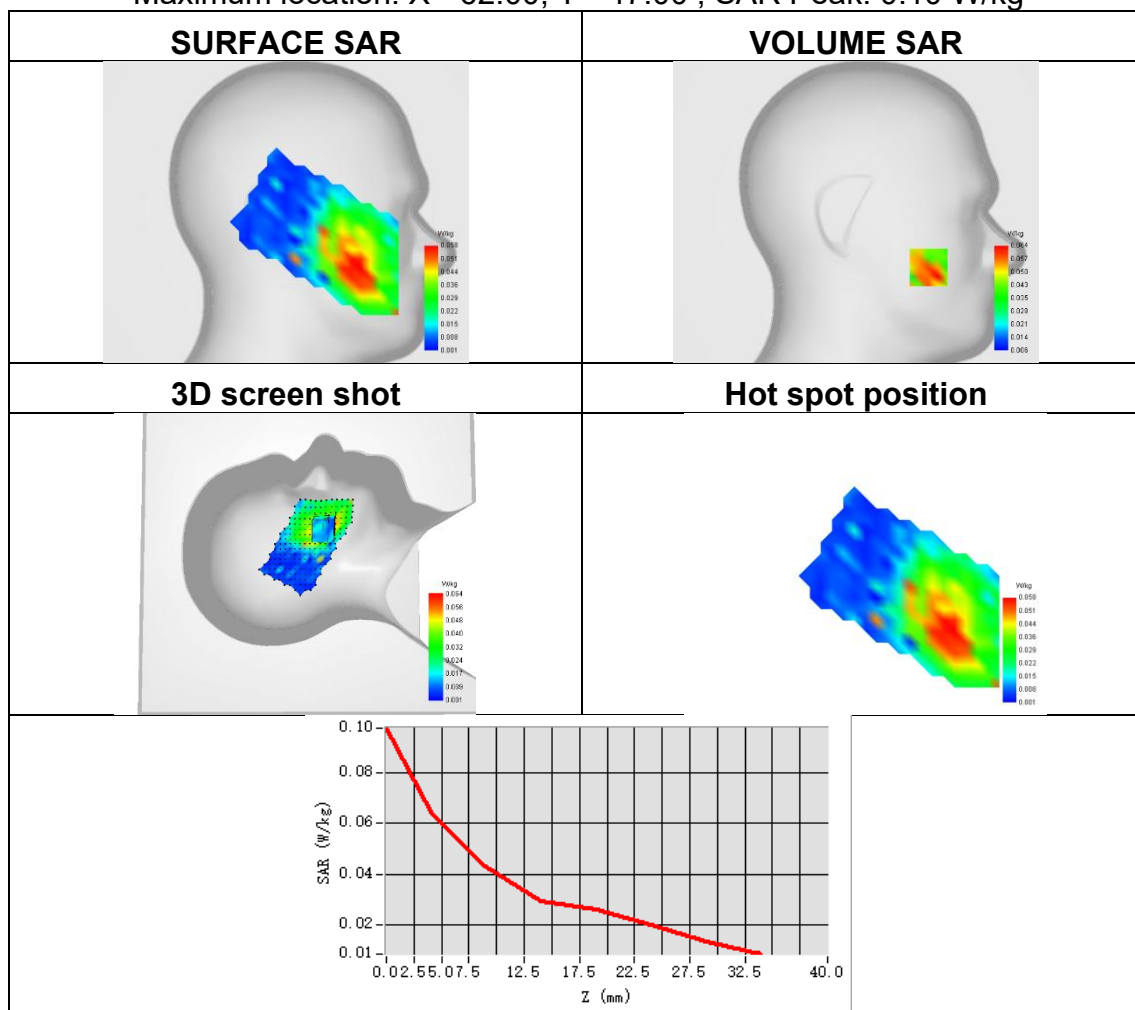




Plot 62:

Test Date	2026-06-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.150
SAR 1g (W/Kg)	0.272
ConvF	0.71
Relative permittivity	42.70
Conductivity (S/m)	0.87


Maximum location: X=-15.00, Y=-25.00 ; SAR Peak: 0.45 W/kg

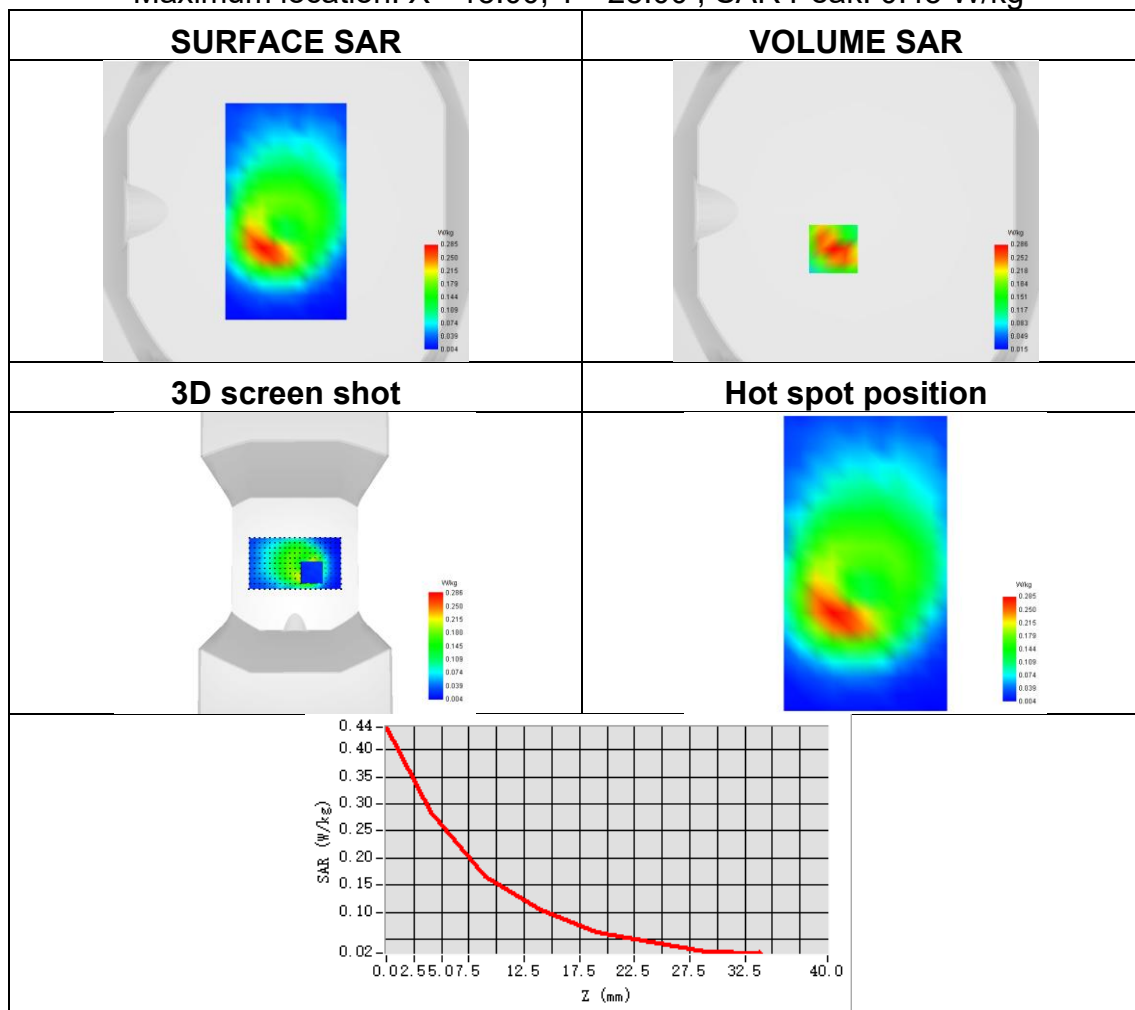

Plot 63:

Test Date	2026-06-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.098
SAR 1g (W/Kg)	0.211
ConvF	0.71
Relative permittivity	42.77
Conductivity (S/m)	0.90

Maximum location: X=-56.00, Y=-50.00 ; SAR Peak: 0.90 W/kg

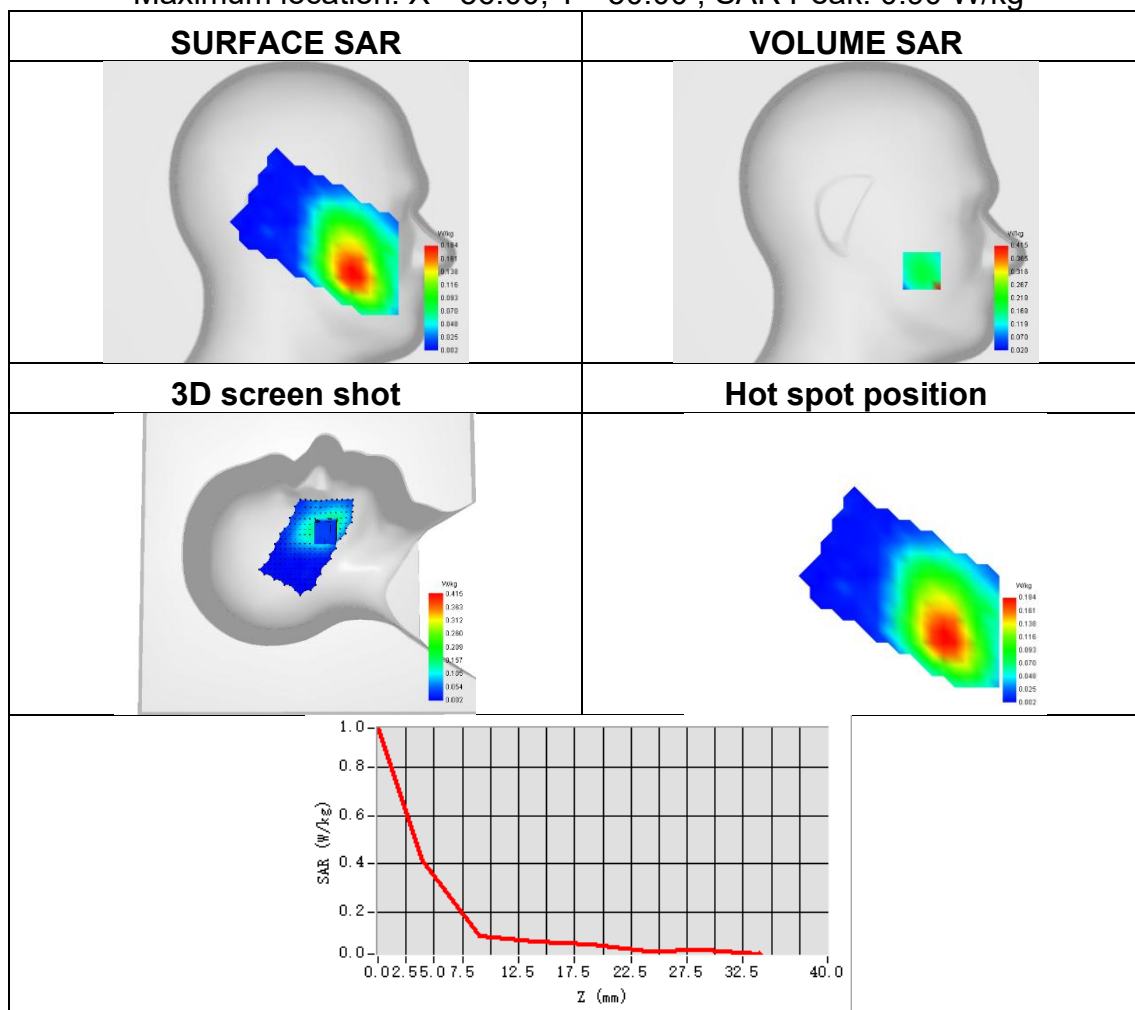




Plot 64:

Test Date	2026-06-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 17
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.270
SAR 1g (W/Kg)	0.512
ConvF	0.71
Relative permittivity	42.77
Conductivity (S/m)	0.90

Maximum location: X=-17.00, Y=-21.00 ; SAR Peak: 0.82 W/kg

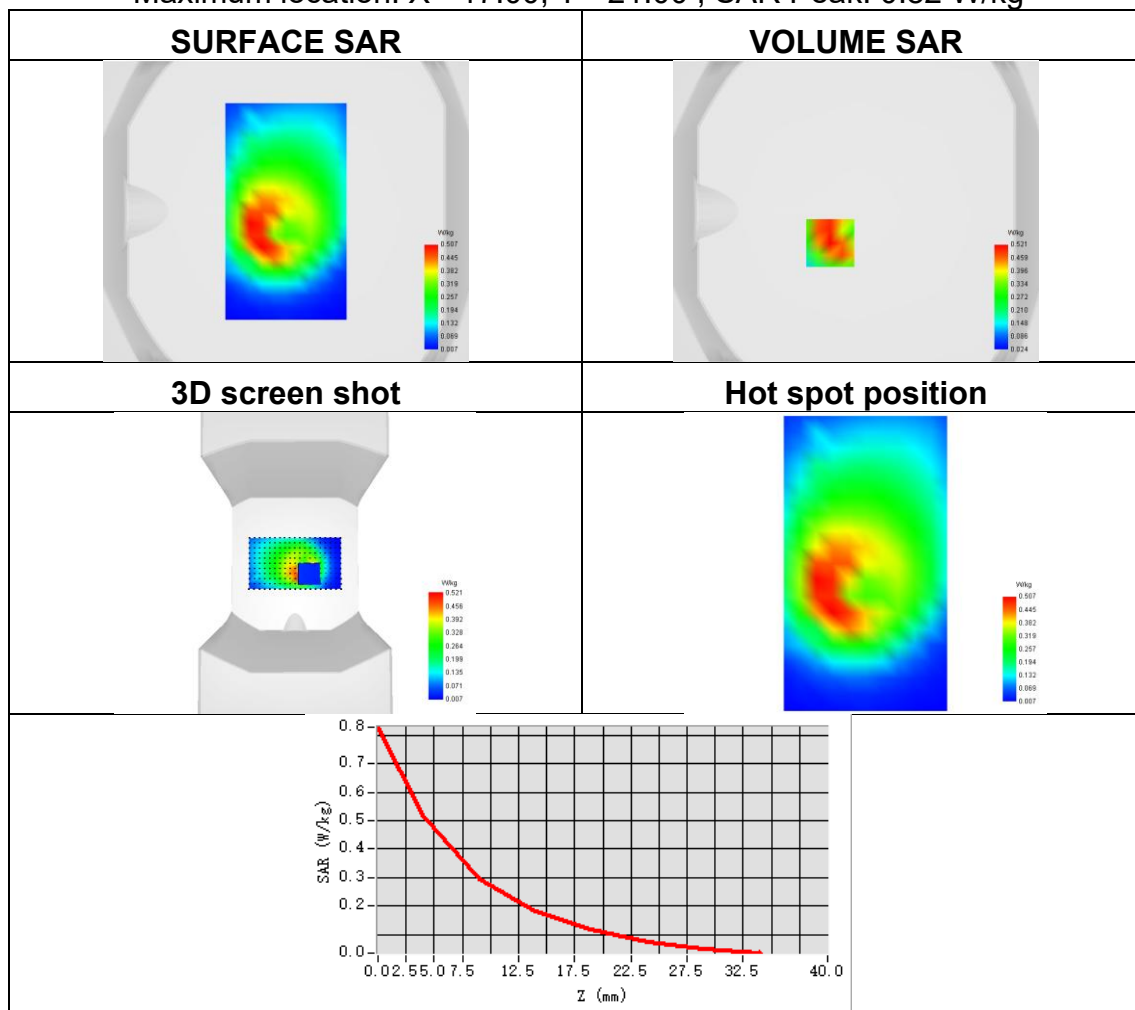




Plot 65:

Test Date	2026-06-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 25
Signal	LTE FDD
Frequency	1882.5
SAR 10g (W/Kg)	0.289
SAR 1g (W/Kg)	0.625
ConvF	0.90
Relative permittivity	40.38
Conductivity (S/m)	1.39

Maximum location: X=-66.00, Y=-45.00 ; SAR Peak: 1.15 W/kg

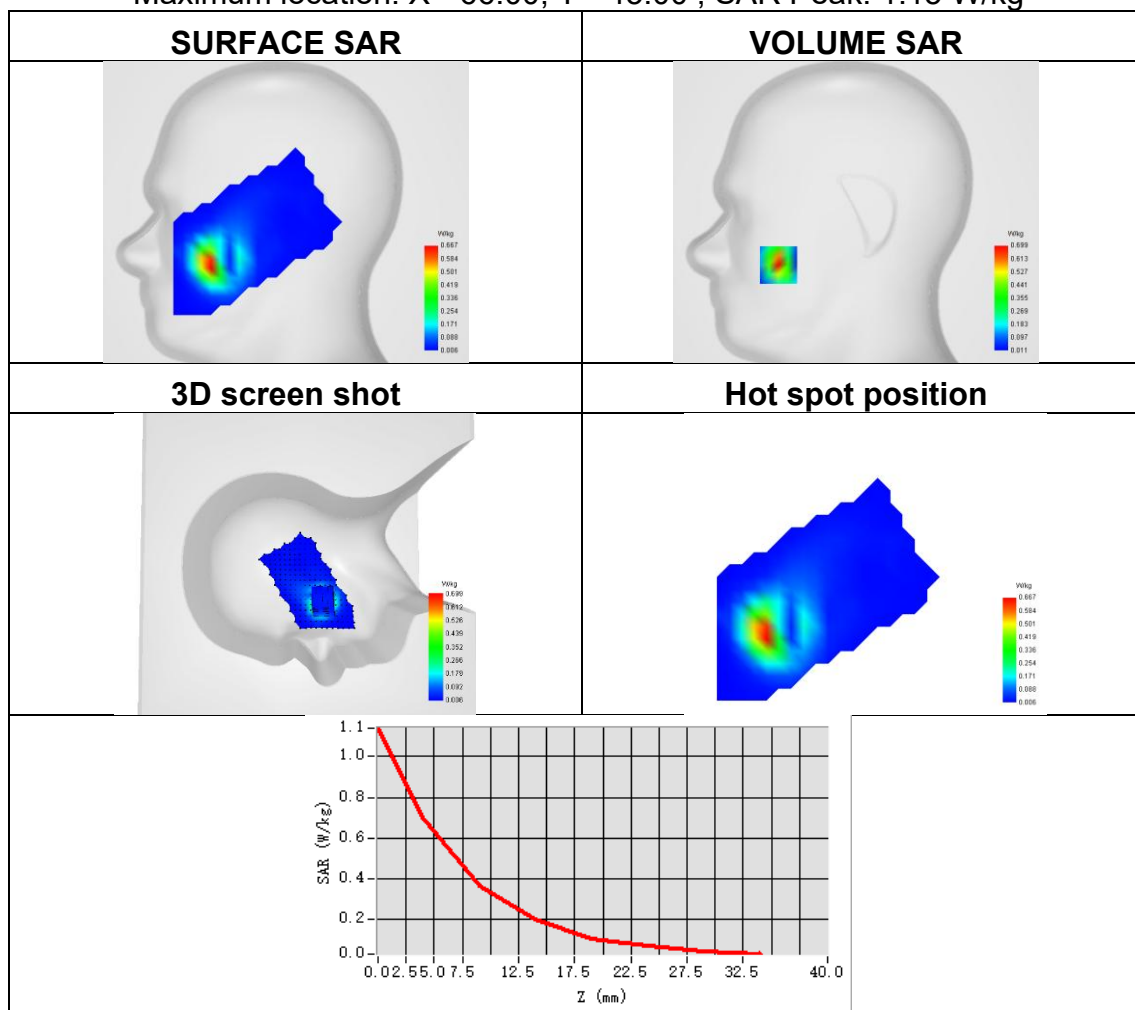




Plot 66:

Test Date	2026-06-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 25
Signal	LTE FDD
Frequency	1882.5
SAR 10g (W/Kg)	0.313
SAR 1g (W/Kg)	0.626
ConvF	0.90
Relative permittivity	40.38
Conductivity (S/m)	1.39

Maximum location: X=7.00, Y=2.00 ; SAR Peak: 1.05 W/kg

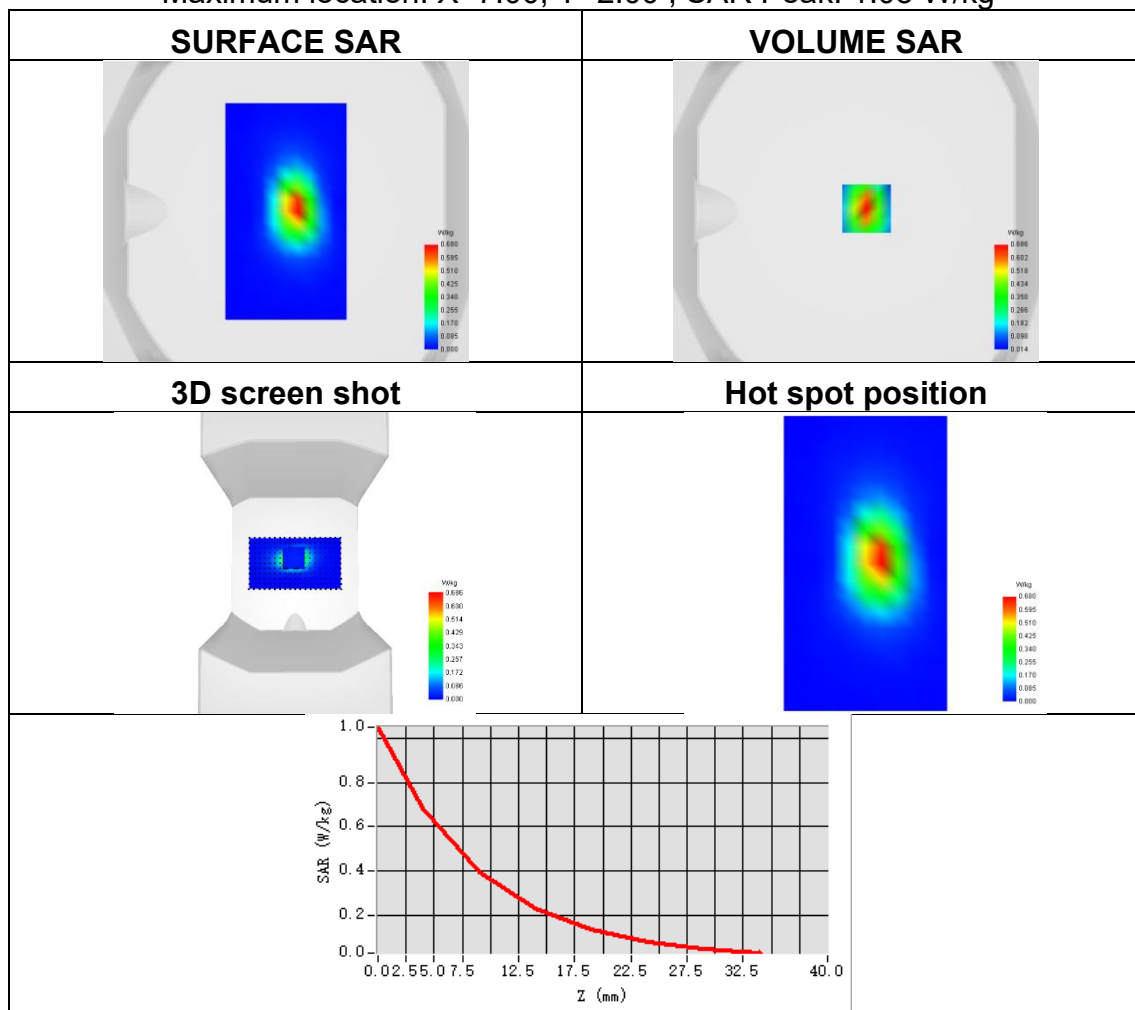




Plot 67:

Test Date	2026-06-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 26
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.174
SAR 1g (W/Kg)	0.269
ConvF	0.69
Relative permittivity	42.15
Conductivity (S/m)	0.92

Maximum location: X=-56.00, Y=-55.00 ; SAR Peak: 0.39 W/kg

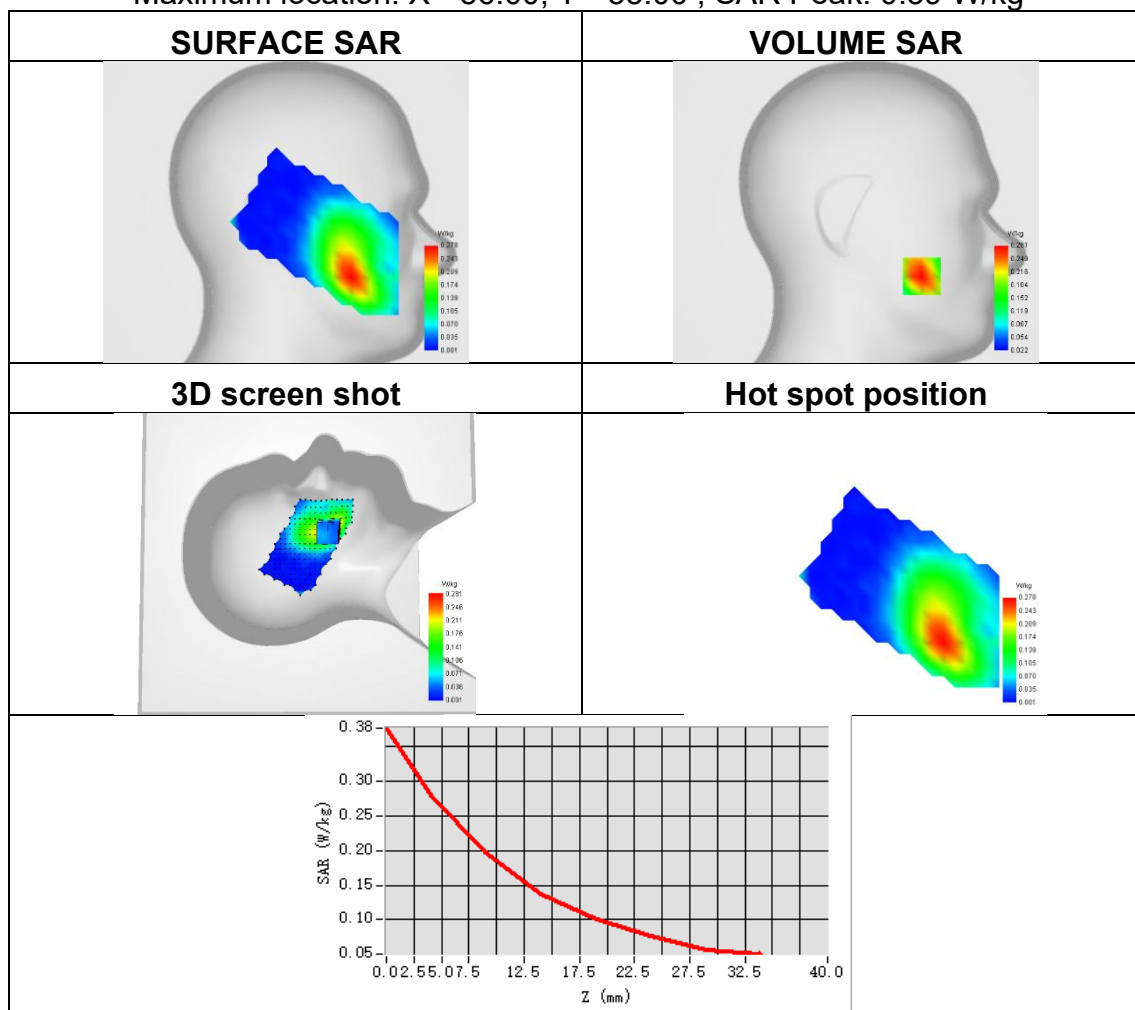




Plot 68:

Test Date	2026-06-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 26
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.320
SAR 1g (W/Kg)	0.578
ConvF	0.69
Relative permittivity	42.15
Conductivity (S/m)	0.92


Maximum location: X=-16.00, Y=-21.00 ; SAR Peak: 0.92 W/kg

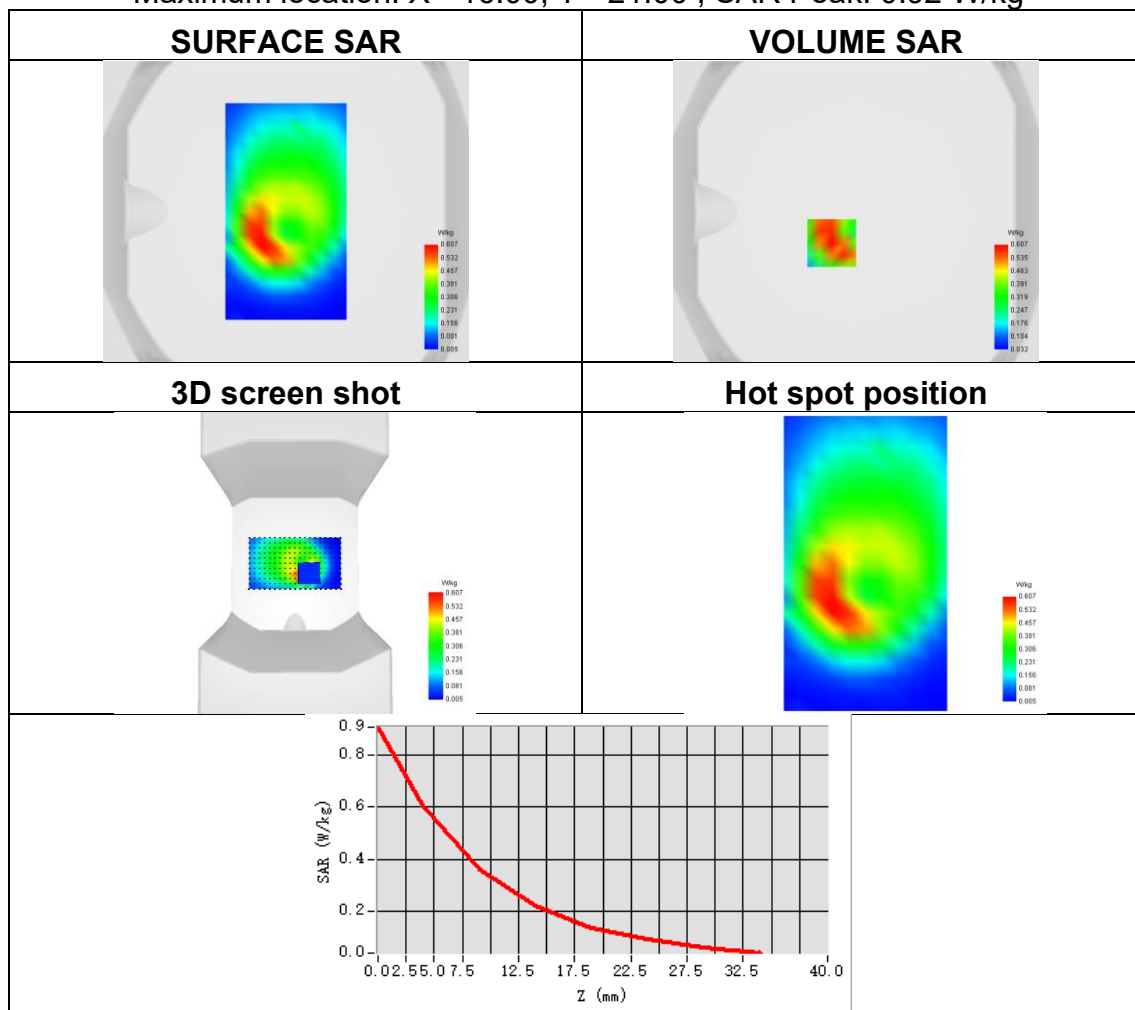

Plot 69:

Test Date	2026-06-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.053
SAR 1g (W/Kg)	0.094
ConvF	0.98
Relative permittivity	39.61
Conductivity (S/m)	1.97

Maximum location: X=-48.00, Y=-57.00 ; SAR Peak: 0.16 W/kg

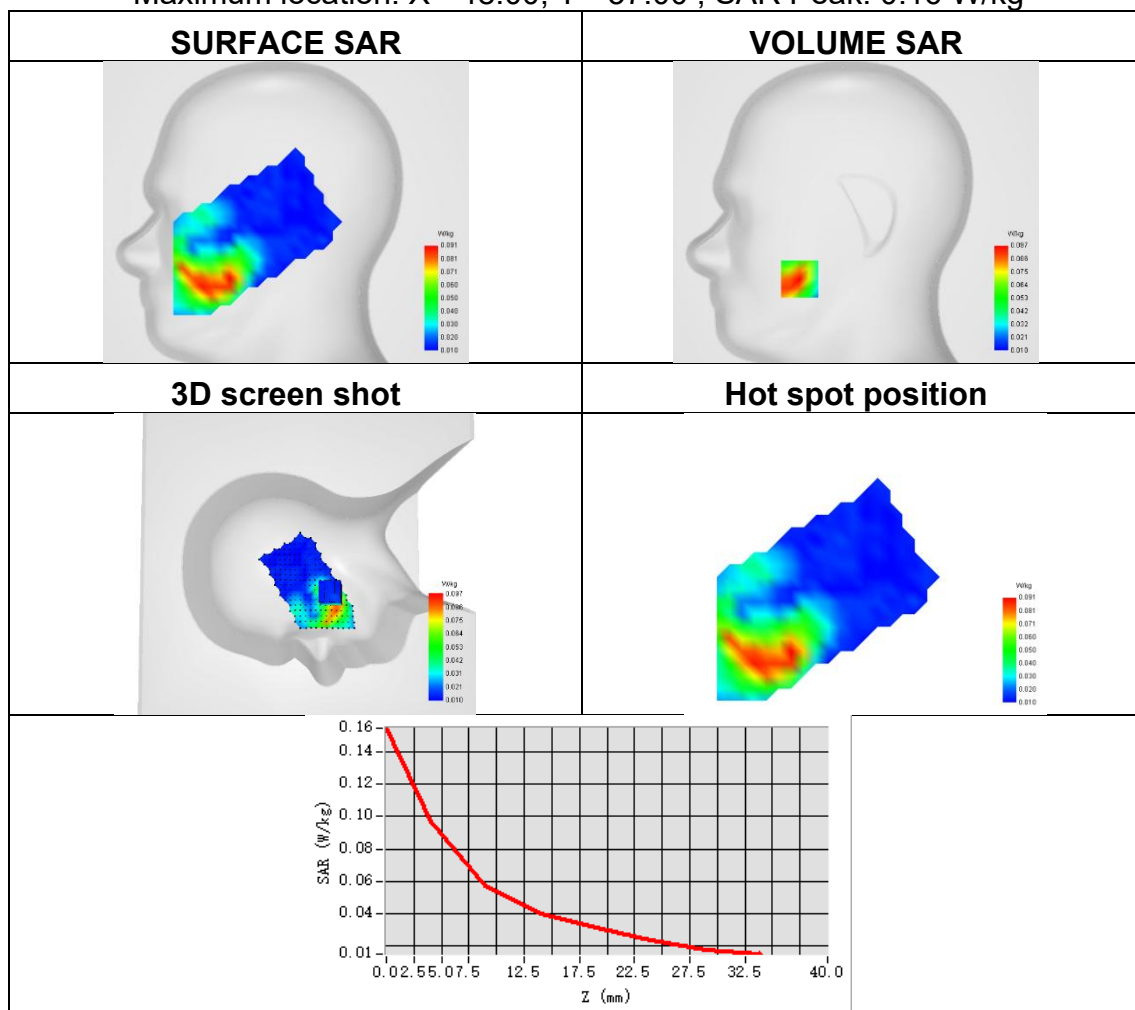




Plot 70:

Test Date	2026-06-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.395
SAR 1g (W/Kg)	0.809
ConvF	0.98
Relative permittivity	39.61
Conductivity (S/m)	1.97

Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.39 W/kg

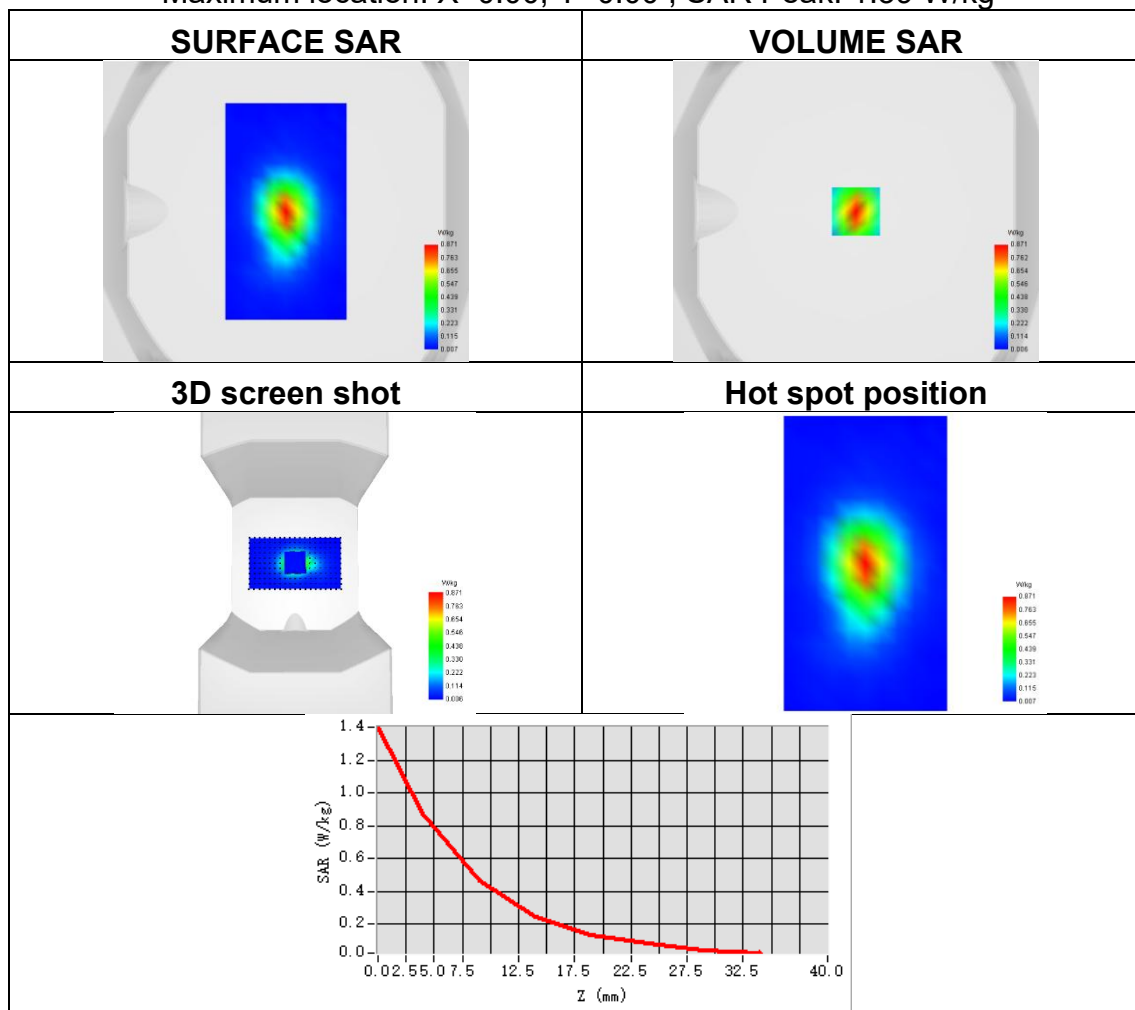




Plot 71:

Test Date	2026-06-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 40
Signal	LTE TDD
Frequency	2350
SAR 10g (W/Kg)	0.167
SAR 1g (W/Kg)	0.340
ConvF	0.97
Relative permittivity	39.52
Conductivity (S/m)	1.78

Maximum location: X=-65.00, Y=-33.00 ; SAR Peak: 0.62 W/kg

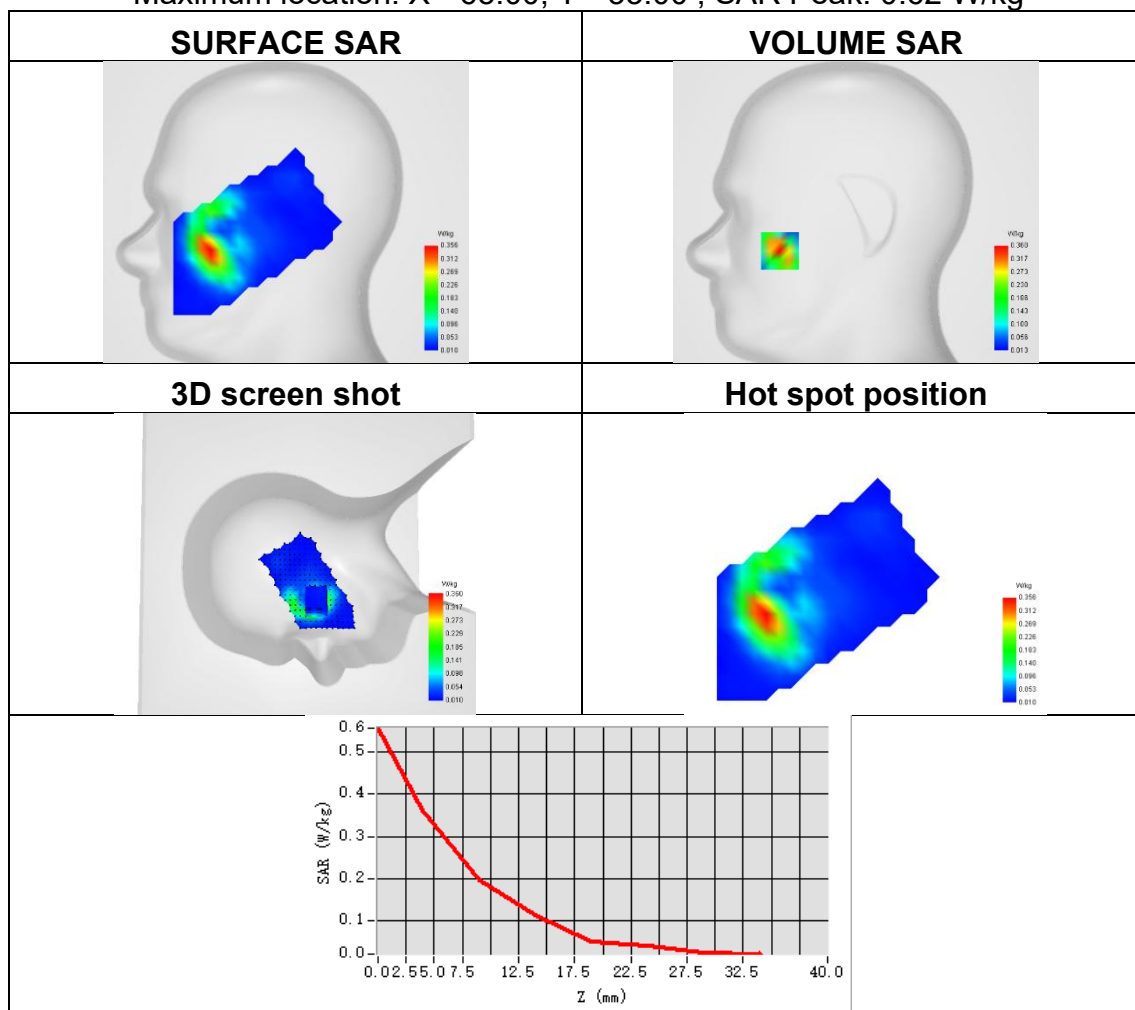




Plot 72:

Test Date	2026-06-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 40
Signal	LTE TDD
Frequency	2350
SAR 10g (W/Kg)	0.328
SAR 1g (W/Kg)	0.665
ConvF	0.97
Relative permittivity	39.52
Conductivity (S/m)	1.78

Maximum location: X=10.00, Y=2.00 ; SAR Peak: 1.11 W/kg

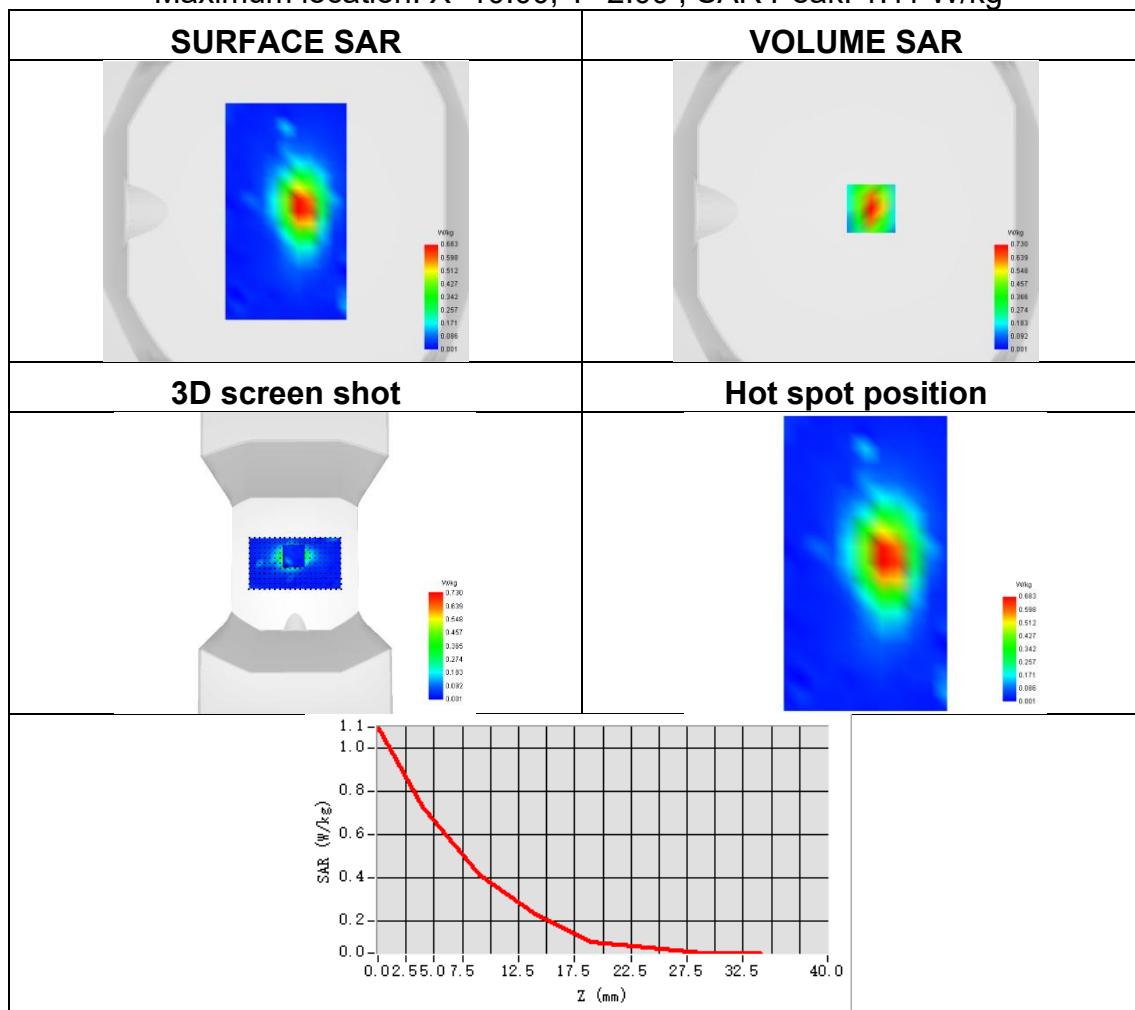




Plot 73:

Test Date	2026-06-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.039
SAR 1g (W/Kg)	0.069
ConvF	0.98
Relative permittivity	39.61
Conductivity (S/m)	1.97

Maximum location: X=-64.00, Y=-57.00 ; SAR Peak: 0.11 W/kg

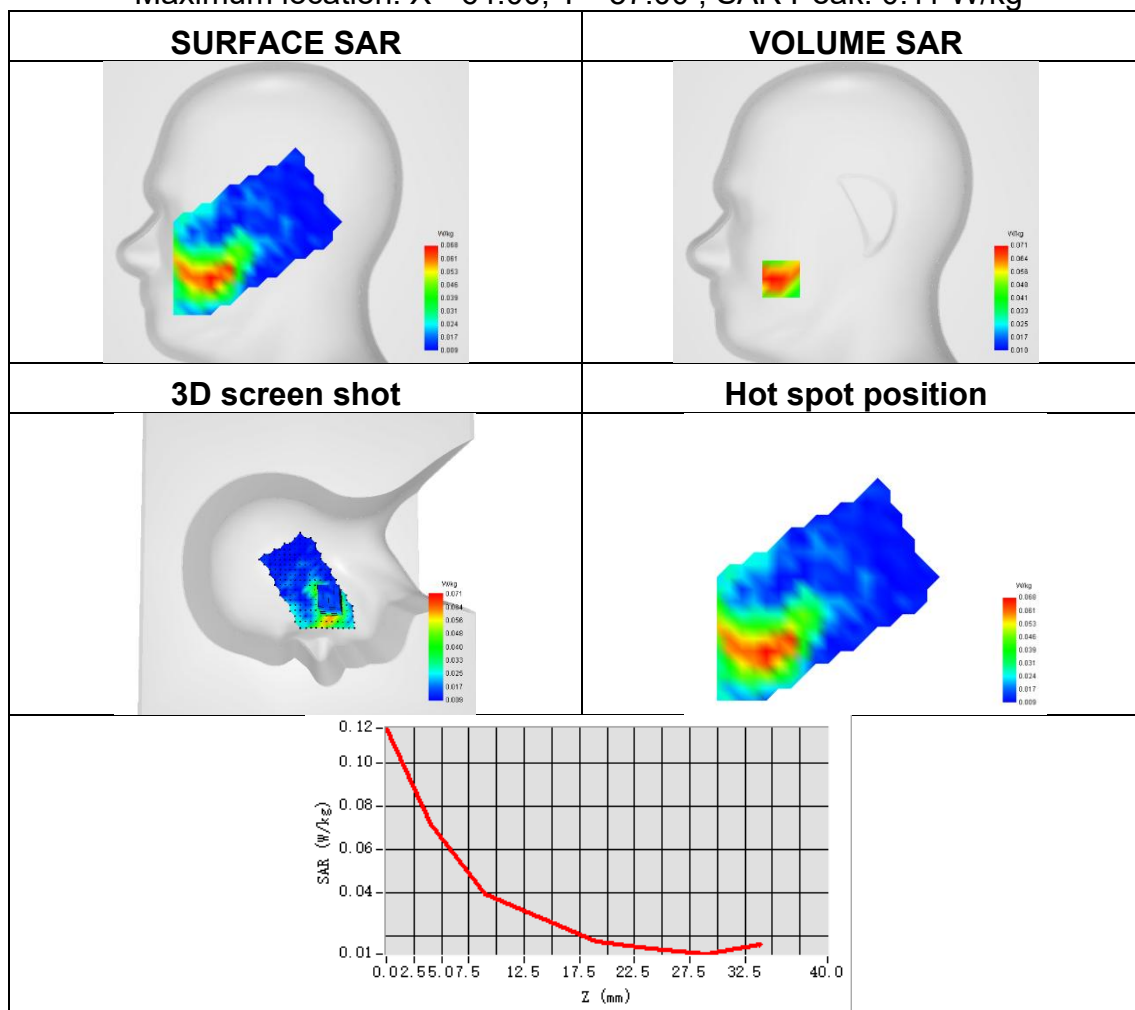




Plot 74:

Test Date	2026-06-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.385
SAR 1g (W/Kg)	0.789
ConvF	0.98
Relative permittivity	39.61
Conductivity (S/m)	1.97

Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.36 W/kg

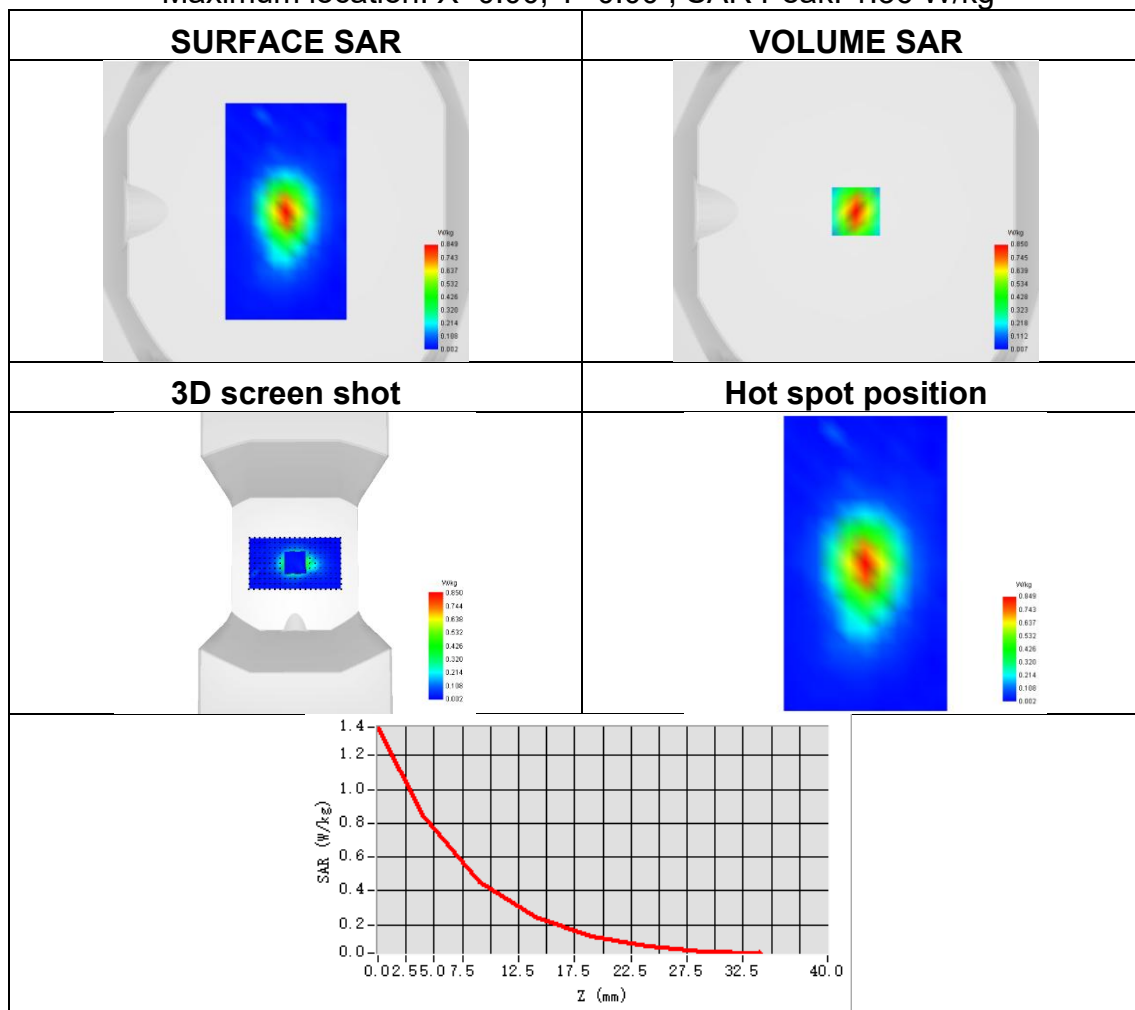




Plot 75:

Test Date	2026-06-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 66
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.116
SAR 1g (W/Kg)	0.208
ConvF	0.69
Relative permittivity	41.03
Conductivity (S/m)	1.42

Maximum location: X=-80.00, Y=-49.00 ; SAR Peak: 0.33 W/kg

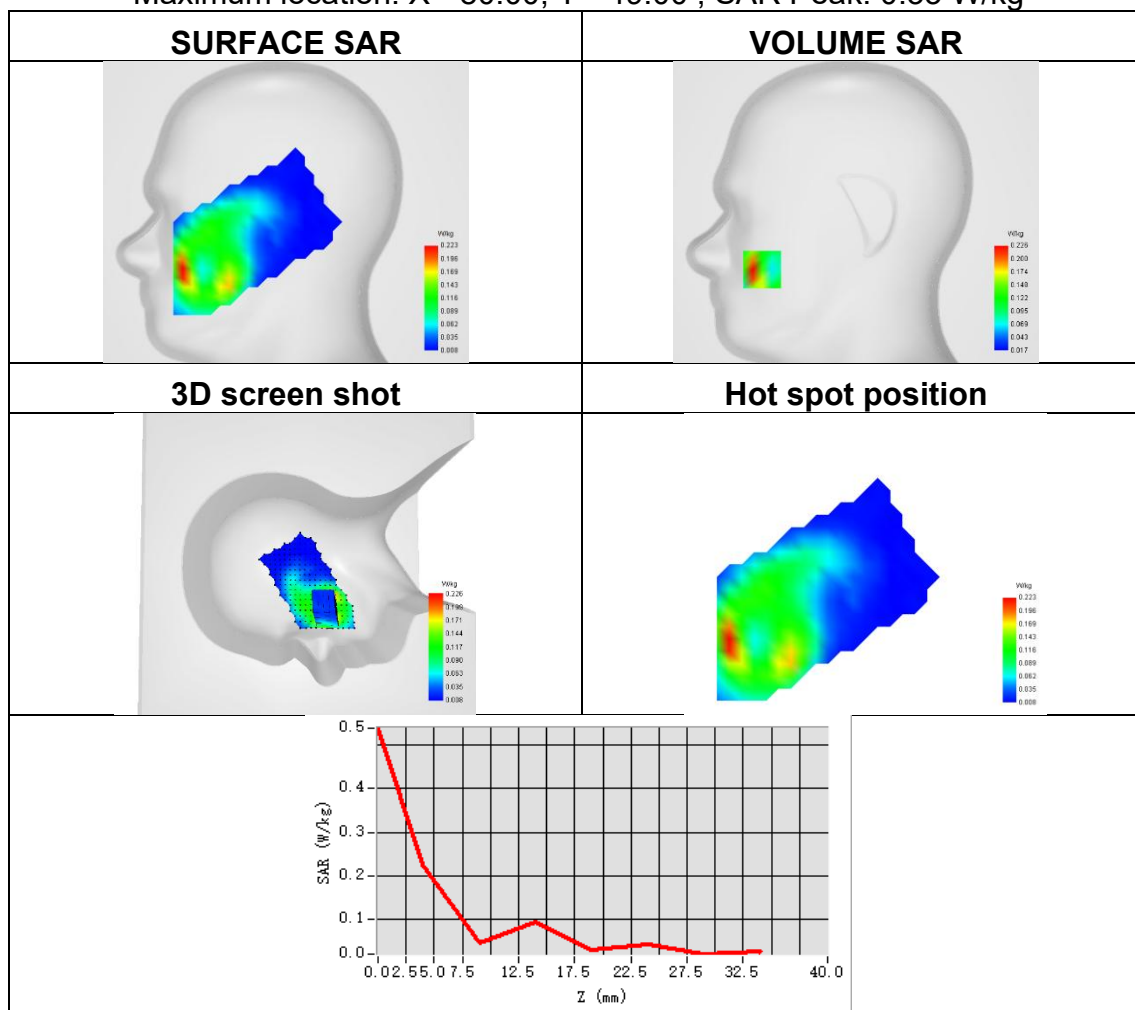




Plot 76:

Test Date	2026-06-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.280
SAR 1g (W/Kg)	0.519
ConvF	0.69
Relative permittivity	41.03
Conductivity (S/m)	1.42

Maximum location: X=0.00, Y=1.00 ; SAR Peak: 0.83 W/kg

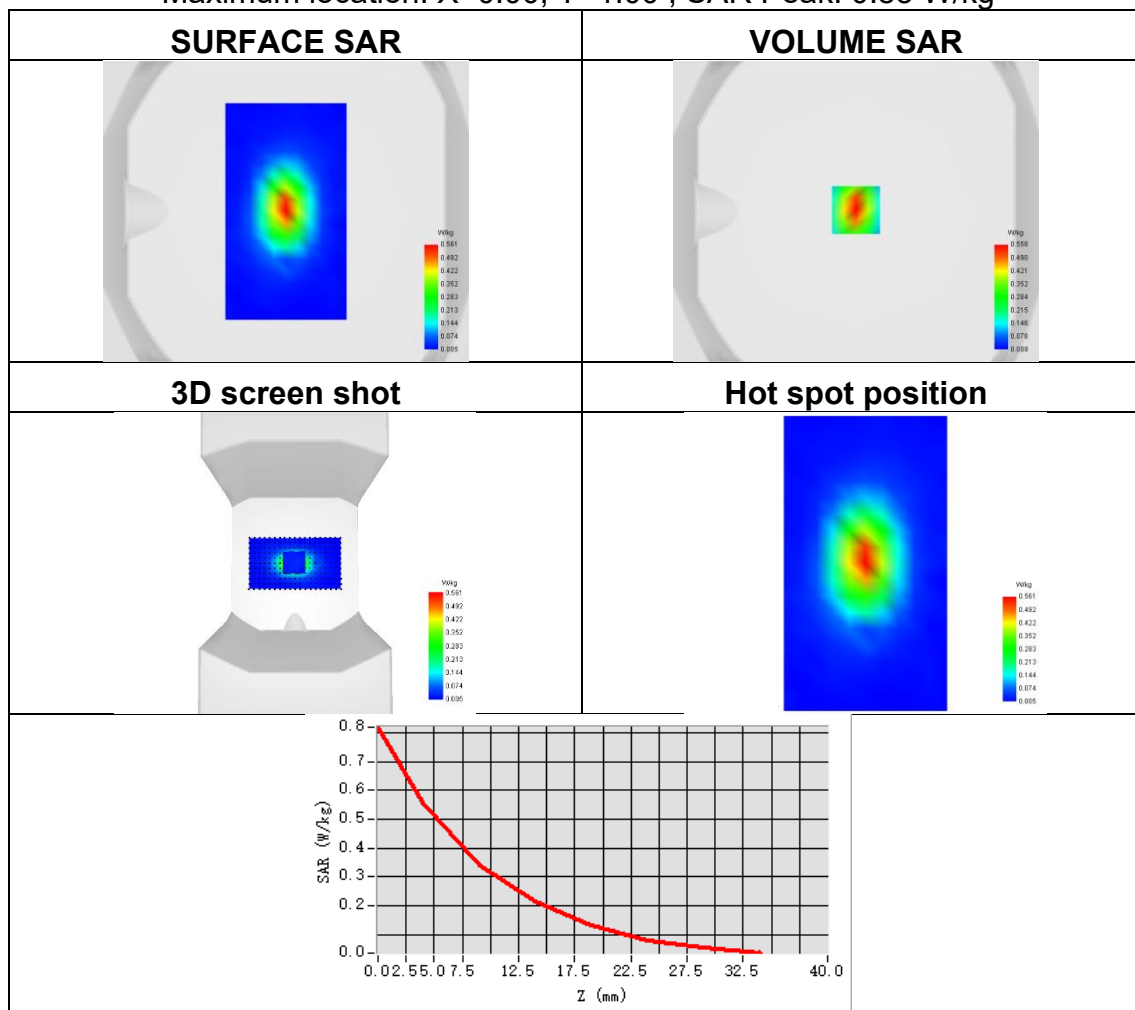




Plot 77:

Test Date	2026-06-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 71
Signal	LTE FDD
Frequency	688
SAR 10g (W/Kg)	0.034
SAR 1g (W/Kg)	0.125
ConvF	0.71
Relative permittivity	42.63
Conductivity (S/m)	0.85

Maximum location: X=-40.00, Y=-48.00 ; SAR Peak: 0.46 W/kg

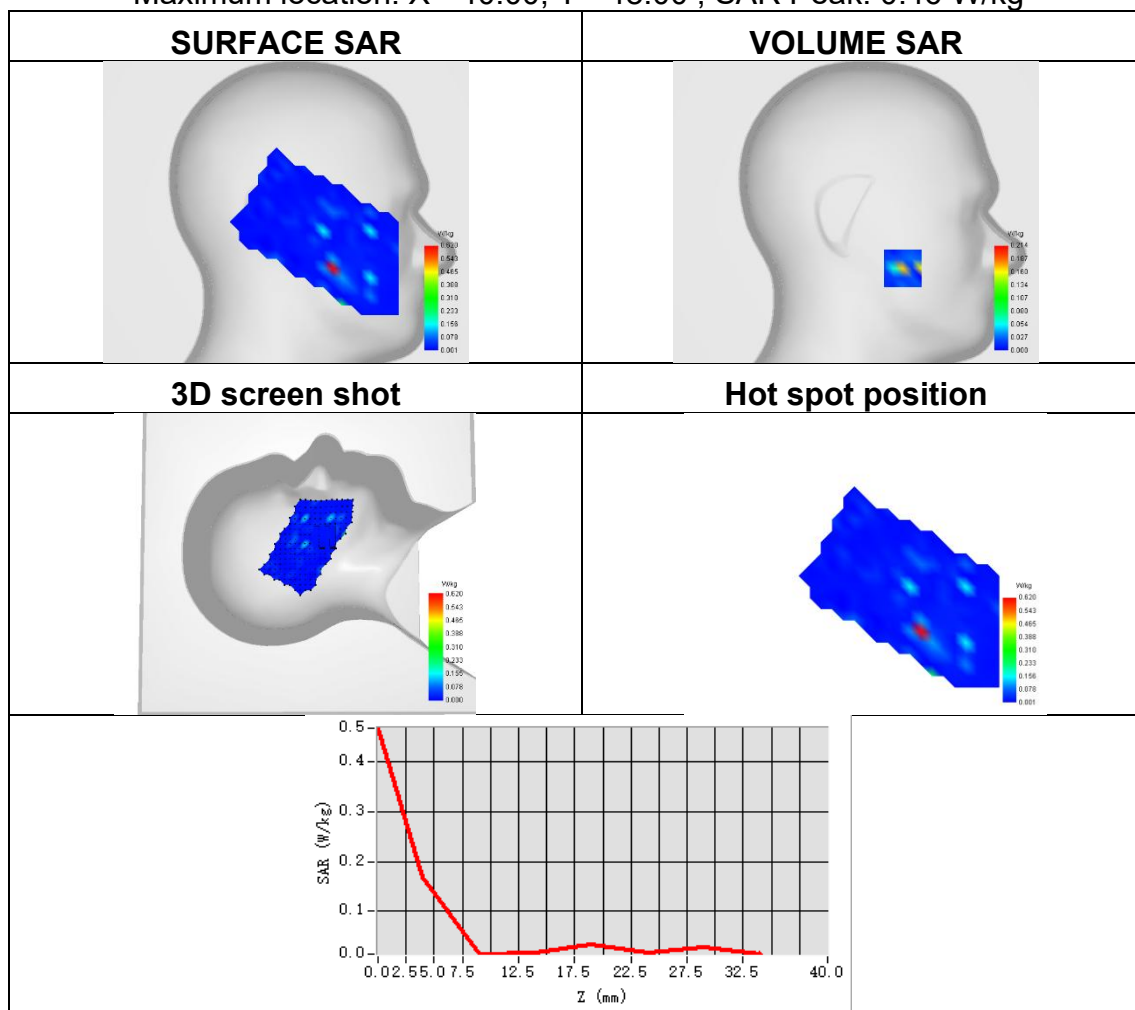




Plot 78:

Test Date	2026-06-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 71
Signal	LTE FDD
Frequency	688
SAR 10g (W/Kg)	0.056
SAR 1g (W/Kg)	0.118
ConvF	0.71
Relative permittivity	42.63
Conductivity (S/m)	0.85

Maximum location: X=16.00, Y=24.00 ; SAR Peak: 0.77 W/kg

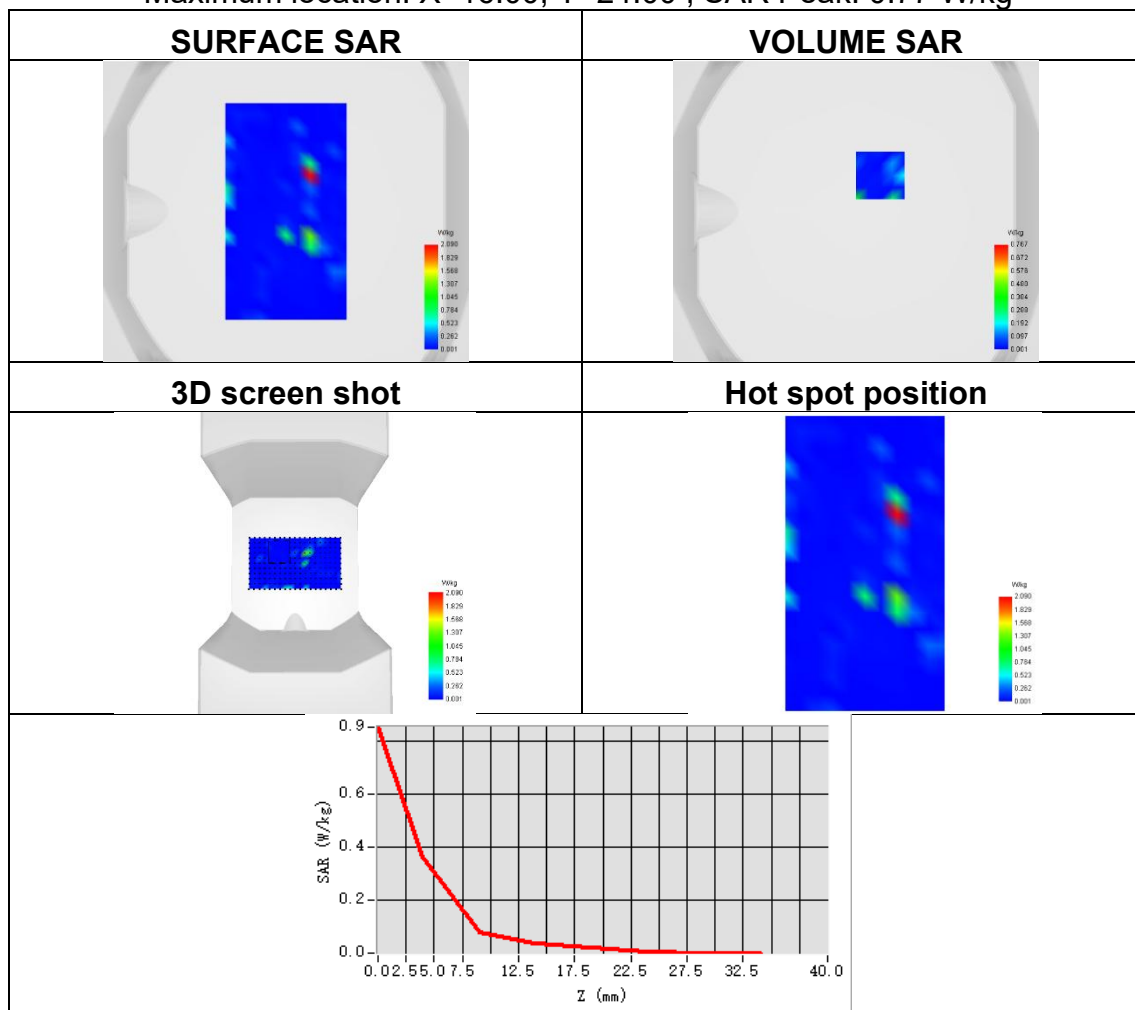




Plot 79:

Test Date	2026-06-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 2
Signal	NR FDD
Frequency	1860
SAR 10g (W/Kg)	0.098
SAR 1g (W/Kg)	0.189
ConvF	0.90
Relative permittivity	40.82
Conductivity (S/m)	1.45

Maximum location: X=-71.00, Y=-48.00 ; SAR Peak: 0.32 W/kg

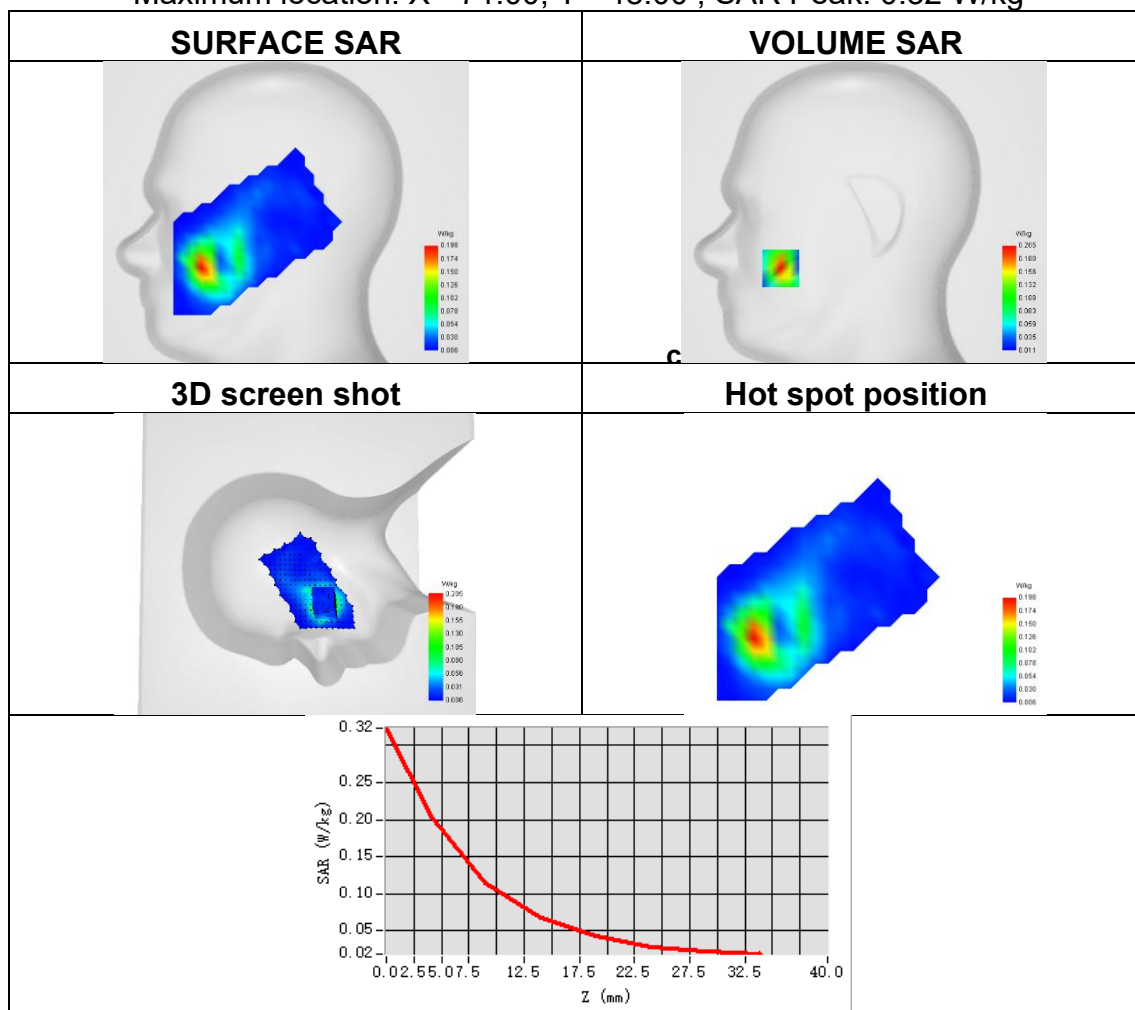




Plot 80:

Test Date	2026-06-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 2
Signal	NR FDD
Frequency	1860
SAR 10g (W/Kg)	0.231
SAR 1g (W/Kg)	0.456
ConvF	0.90
Relative permittivity	40.82
Conductivity (S/m)	1.45

Maximum location: X=8.00, Y=0.00 ; SAR Peak: 0.76 W/kg

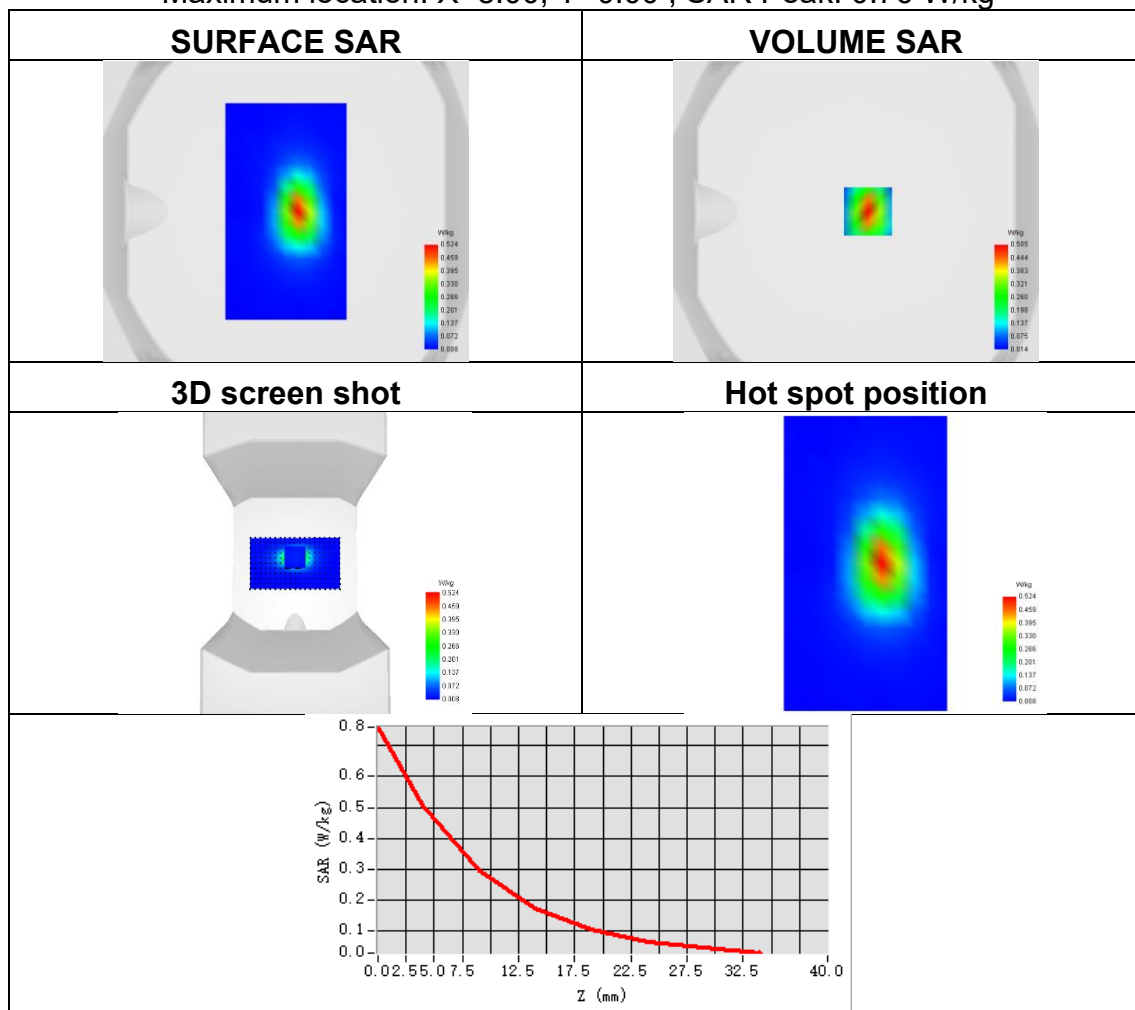




Plot 81:

Test Date	2026-06-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 5
Signal	NR FDD
Frequency	839
SAR 10g (W/Kg)	0.184
SAR 1g (W/Kg)	0.293
ConvF	0.69
Relative permittivity	41.52
Conductivity (S/m)	0.93

Maximum location: X=-54.00, Y=-48.00 ; SAR Peak: 0.43 W/kg

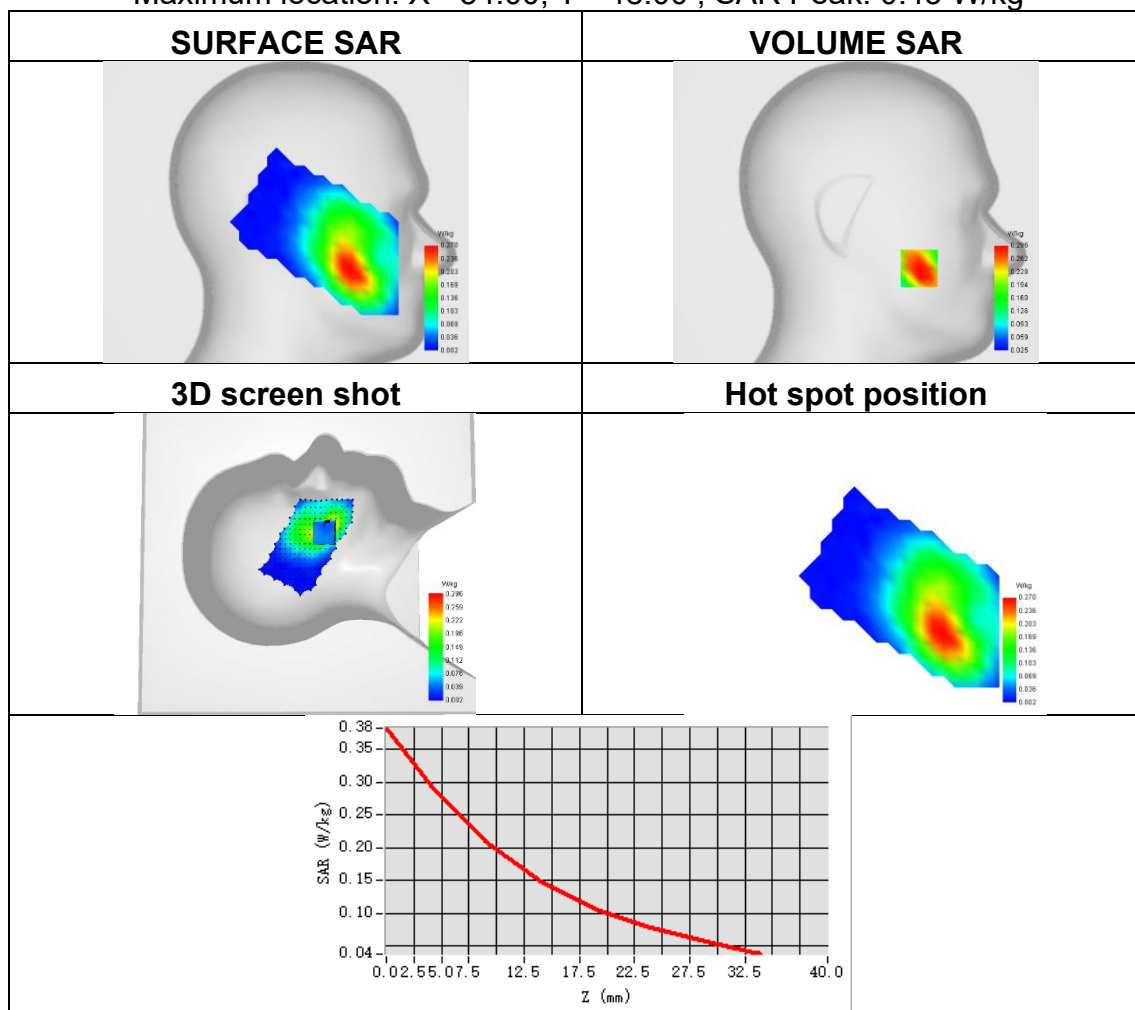




Plot 82:

Test Date	2026-06-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 5
Signal	NR FDD
Frequency	839
SAR 10g (W/Kg)	0.204
SAR 1g (W/Kg)	0.333
ConvF	0.69
Relative permittivity	41.52
Conductivity (S/m)	0.93

Maximum location: X=7.00, Y=-24.00 ; SAR Peak: 0.48 W/kg

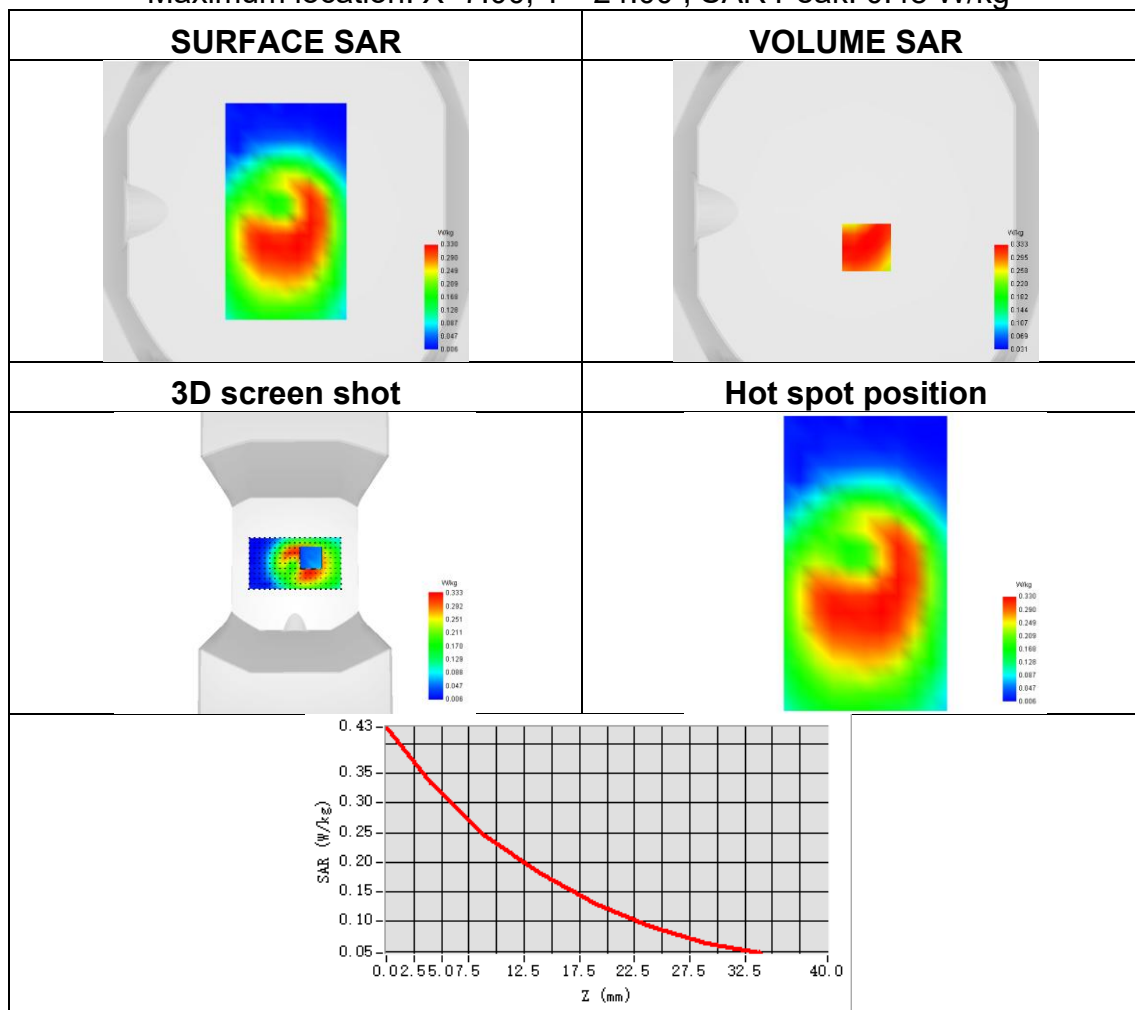




Plot 83:

Test Date	2026-06-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 7
Signal	NR FDD
Frequency	2510
SAR 10g (W/Kg)	0.107
SAR 1g (W/Kg)	0.209
ConvF	0.98
Relative permittivity	40.00
Conductivity (S/m)	1.92

Maximum location: X=-65.00, Y=-42.00 ; SAR Peak: 0.38 W/kg

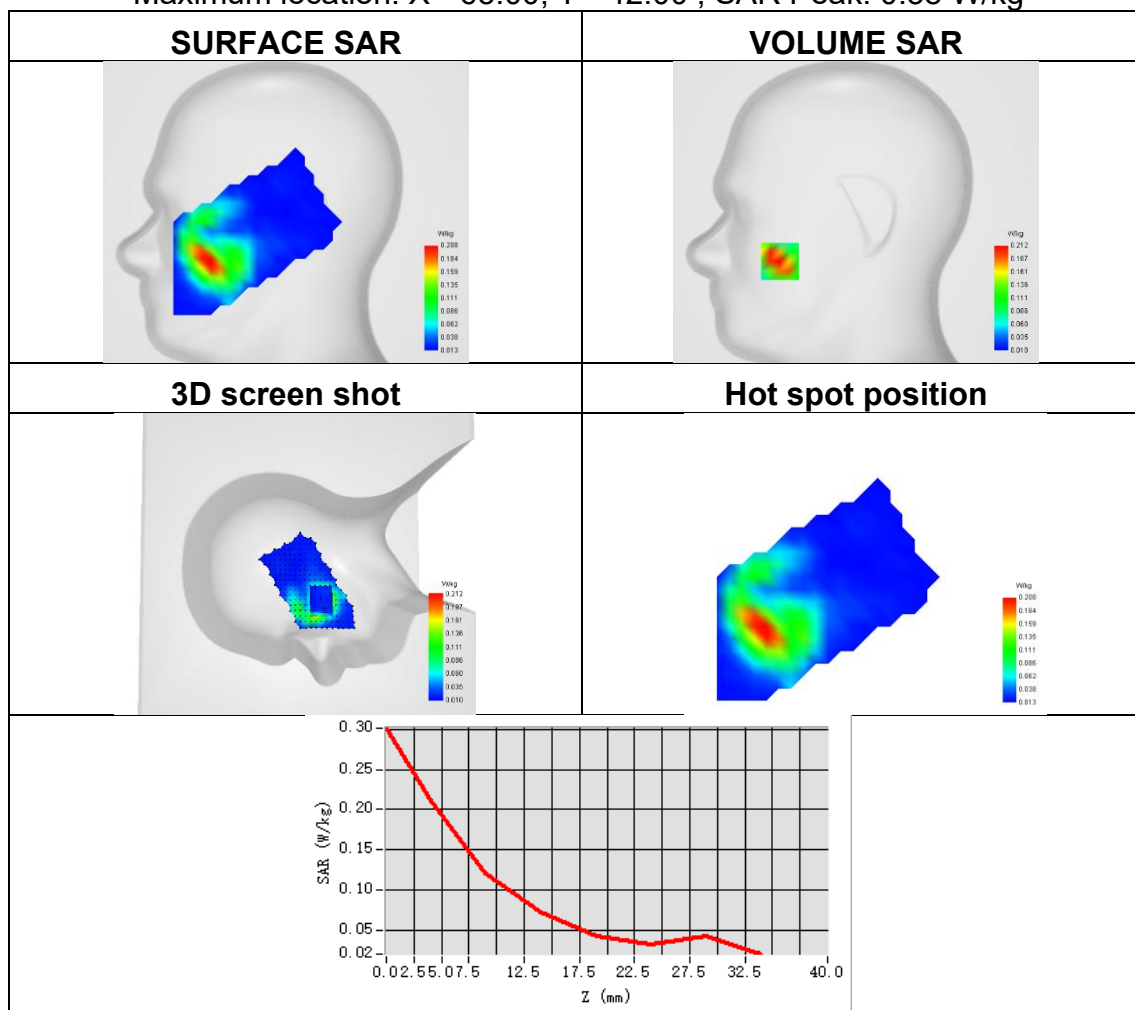




Plot 84:

Test Date	2026-06-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 7
Signal	NR FDD
Frequency	2510
SAR 10g (W/Kg)	0.232
SAR 1g (W/Kg)	0.480
ConvF	0.98
Relative permittivity	40.00
Conductivity (S/m)	1.92

Maximum location: X=9.00, Y=-1.00 ; SAR Peak: 0.83 W/kg

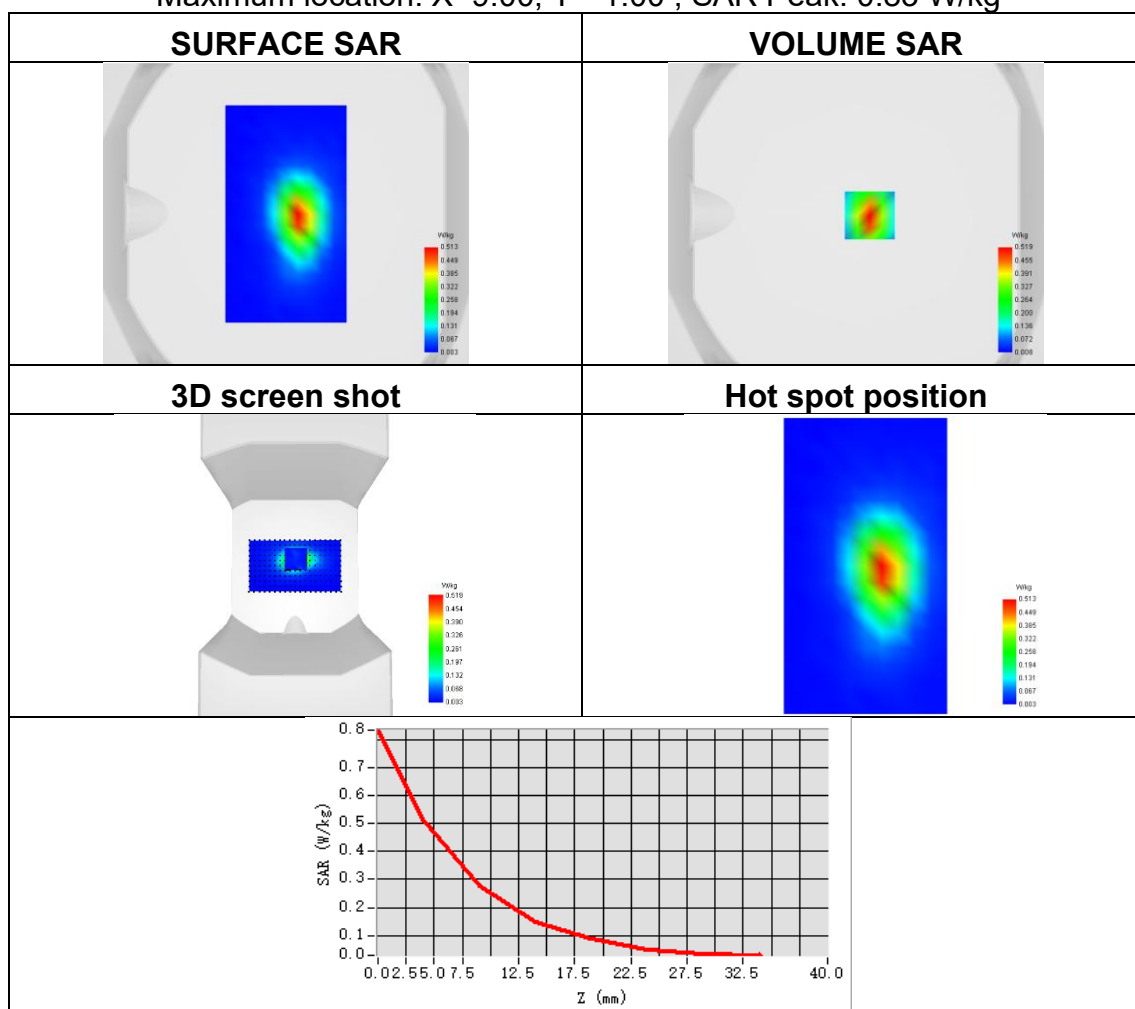




Plot 85:

Test Date	2026-06-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 12
Signal	NR FDD
Frequency	711
SAR 10g (W/Kg)	0.141
SAR 1g (W/Kg)	0.219
ConvF	0.71
Relative permittivity	42.77
Conductivity (S/m)	0.90

Maximum location: X=-53.00, Y=-46.00 ; SAR Peak: 0.30 W/kg

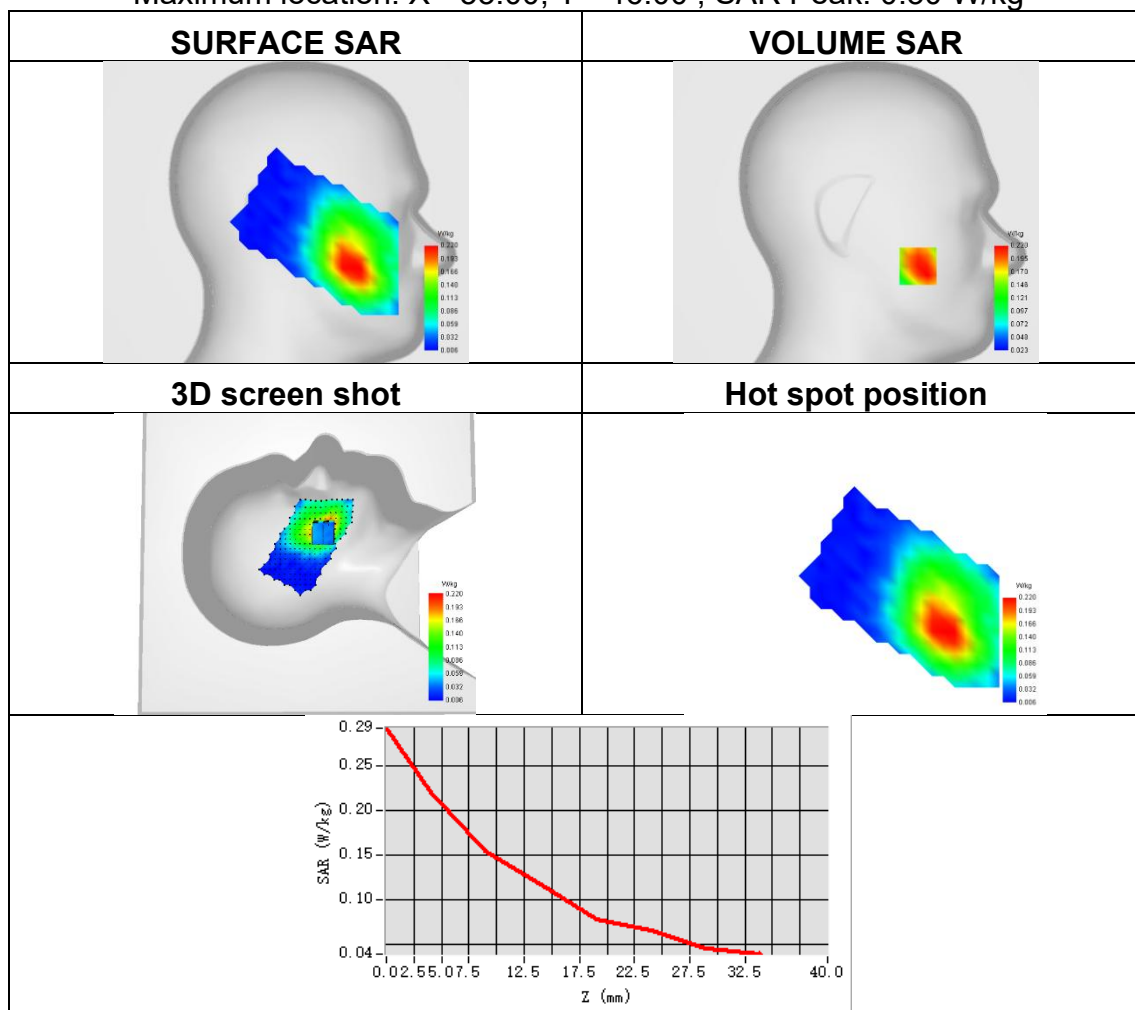




Plot 86:

Test Date	2026-06-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 12
Signal	NR FDD
Frequency	711
SAR 10g (W/Kg)	0.188
SAR 1g (W/Kg)	0.322
ConvF	0.71
Relative permittivity	42.77
Conductivity (S/m)	0.90

Maximum location: X=-23.00, Y=0.00 ; SAR Peak: 0.46 W/kg

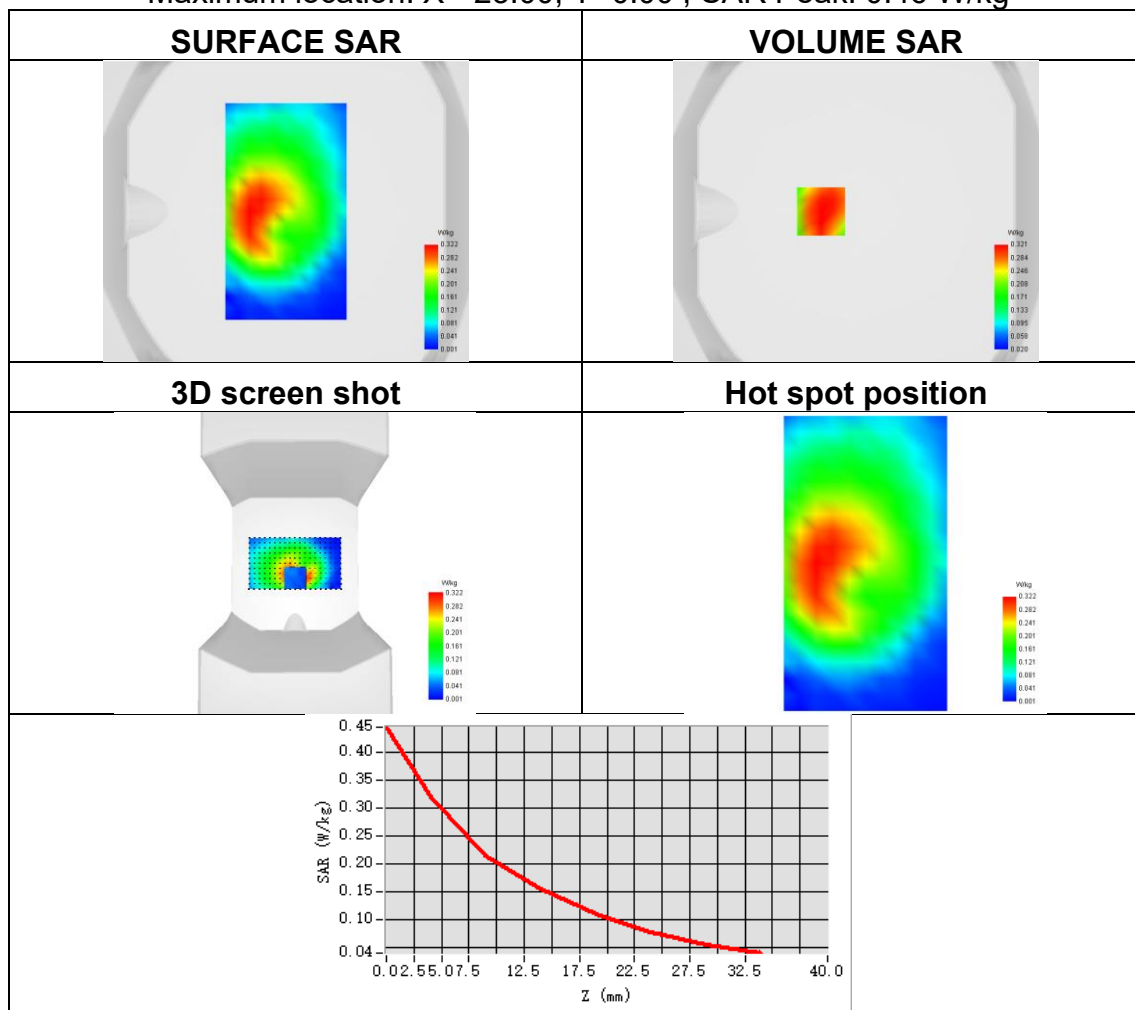




Plot 87:

Test Date	2026-06-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 13
Signal	NR FDD
Frequency	711
SAR 10g (W/Kg)	0.141
SAR 1g (W/Kg)	0.219
ConvF	0.71
Relative permittivity	42.77
Conductivity (S/m)	0.90

Maximum location: X=-53.00, Y=-46.00 ; SAR Peak: 0.30 W/kg

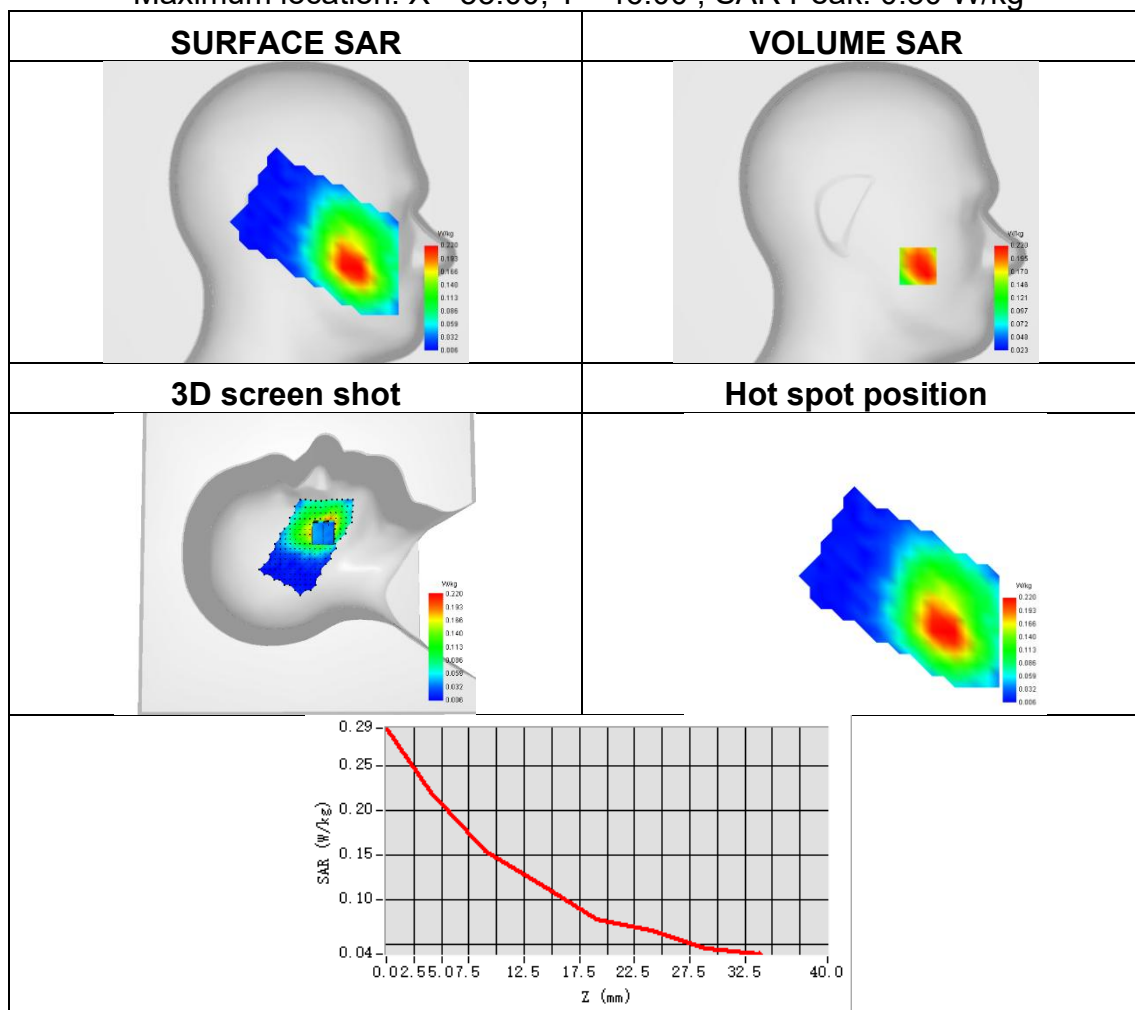




Plot 88:

Test Date	2026-06-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 13
Signal	NR FDD
Frequency	711
SAR 10g (W/Kg)	0.188
SAR 1g (W/Kg)	0.322
ConvF	0.71
Relative permittivity	42.77
Conductivity (S/m)	0.90

Maximum location: X=-23.00, Y=0.00 ; SAR Peak: 0.46 W/kg

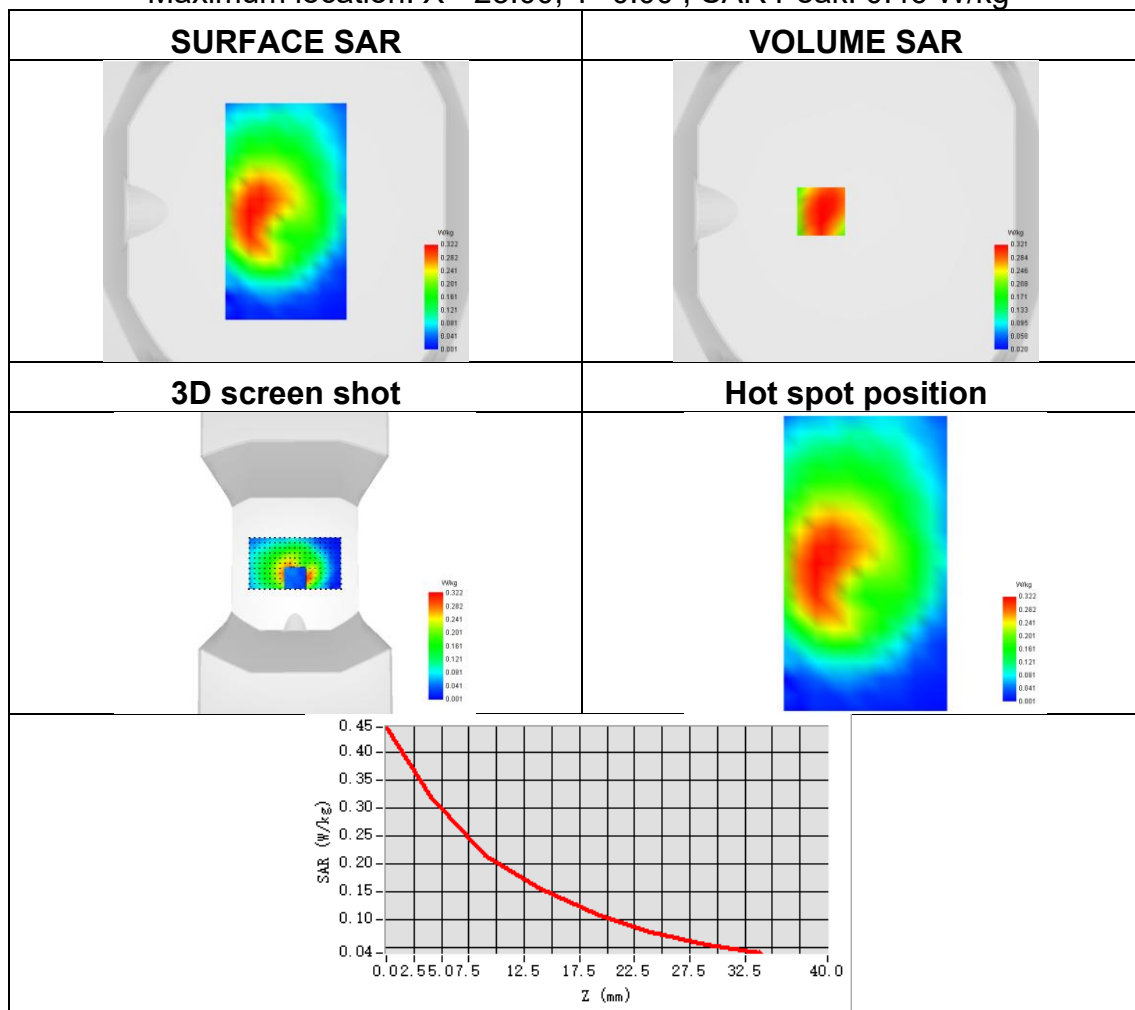




Plot 89:

Test Date	2026-06-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 25
Signal	NR FDD
Frequency	1905
SAR 10g (W/Kg)	0.213
SAR 1g (W/Kg)	0.455
ConvF	0.90
Relative permittivity	40.82
Conductivity (S/m)	1.45

Maximum location: X=-66.00, Y=-46.00 ; SAR Peak: 0.83 W/kg

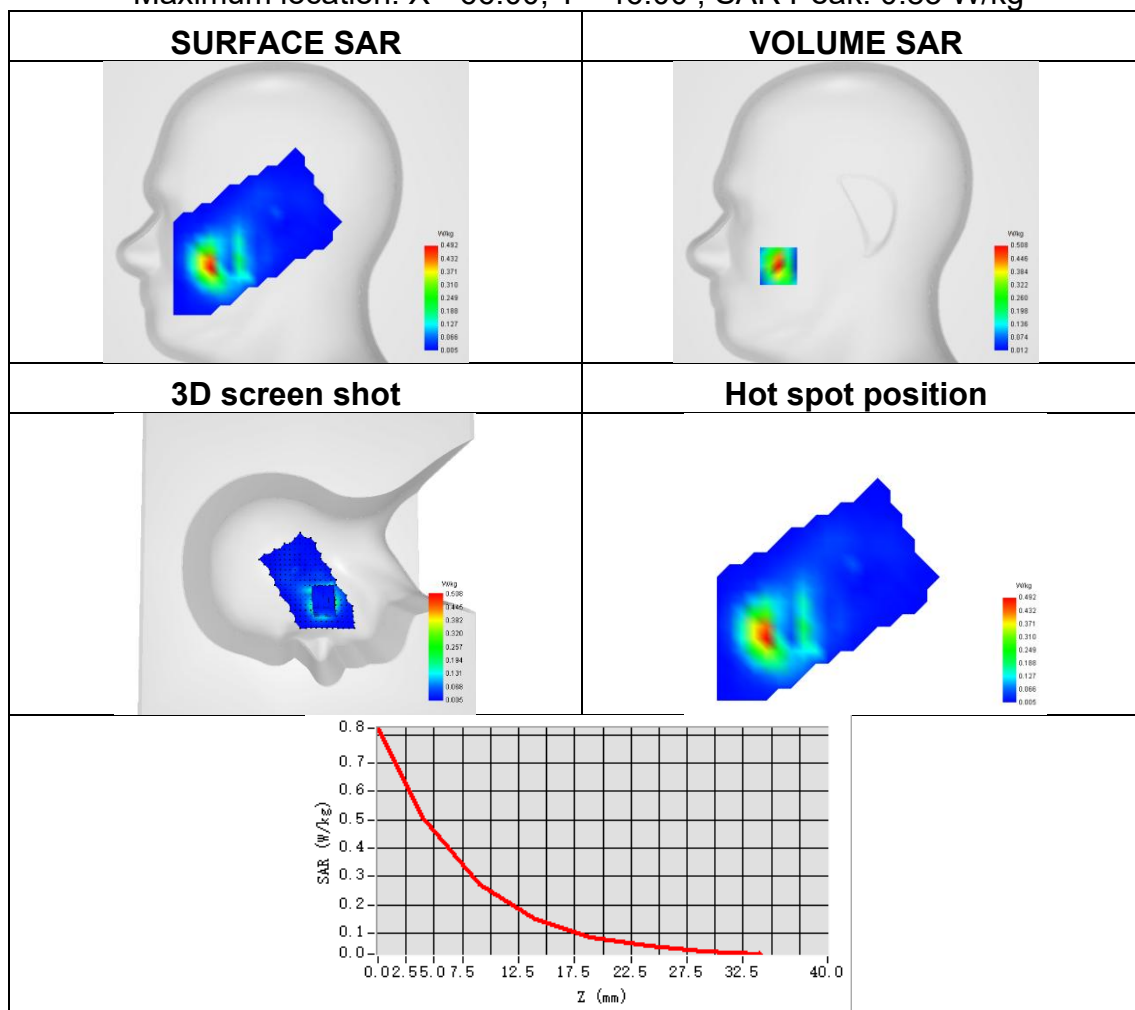




Plot 90:

Test Date	2026-06-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 25
Signal	NR FDD
Frequency	1905
SAR 10g (W/Kg)	0.325
SAR 1g (W/Kg)	0.647
ConvF	0.90
Relative permittivity	40.82
Conductivity (S/m)	1.45

Maximum location: X=7.00, Y=2.00 ; SAR Peak: 1.08 W/kg

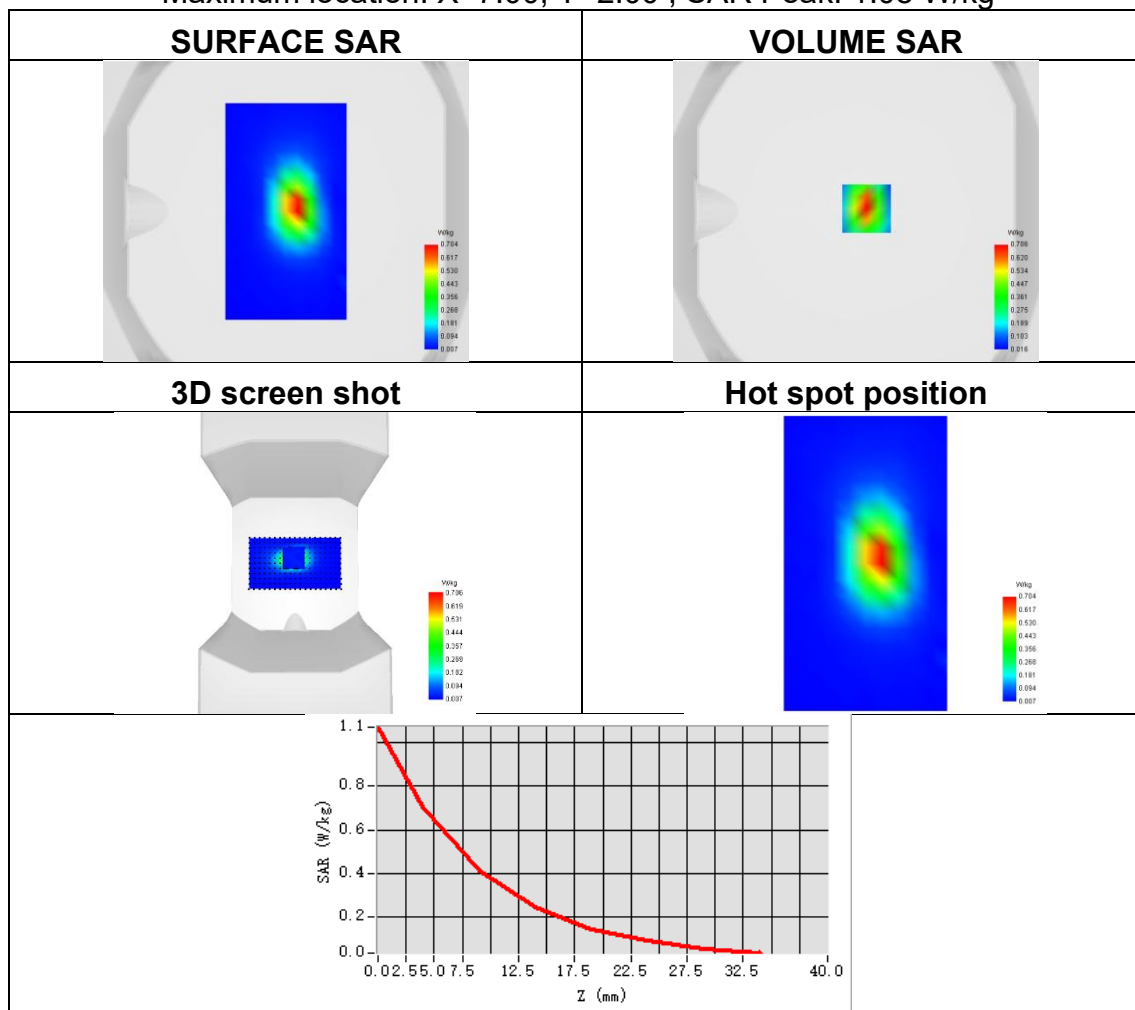




Plot 91:

Test Date	2026-06-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 26
Signal	NR FDD
Frequency	844
SAR 10g (W/Kg)	0.121
SAR 1g (W/Kg)	0.185
ConvF	0.69
Relative permittivity	42.15
Conductivity (S/m)	0.92

Maximum location: X=-55.00, Y=-47.00 ; SAR Peak: 0.27 W/kg

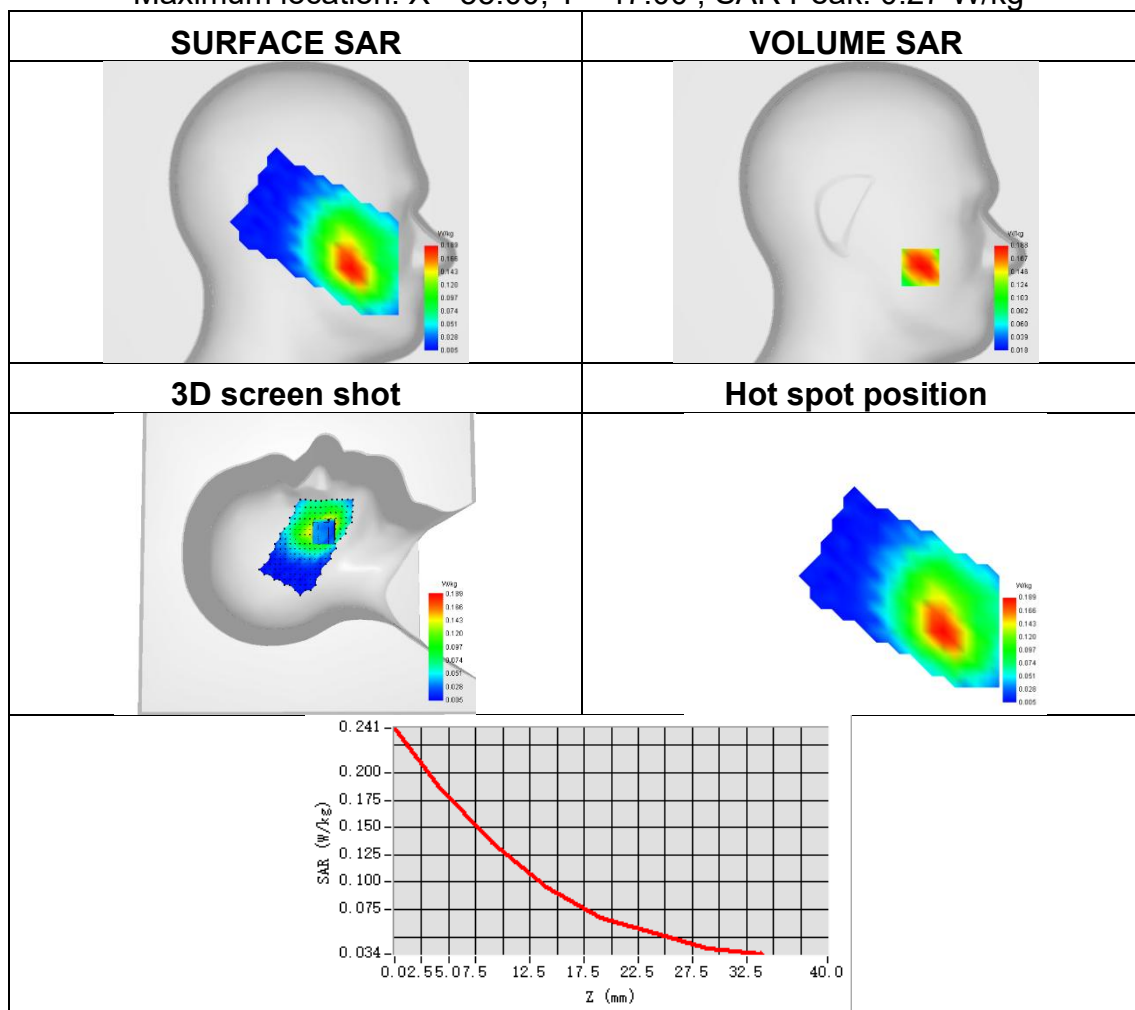




Plot 92:

Test Date	2026-06-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	NR band 26
Signal	NR FDD
Frequency	844
SAR 10g (W/Kg)	0.151
SAR 1g (W/Kg)	0.261
ConvF	0.69
Relative permittivity	42.15
Conductivity (S/m)	0.92

Maximum location: X=-16.00, Y=0.00 ; SAR Peak: 0.38 W/kg

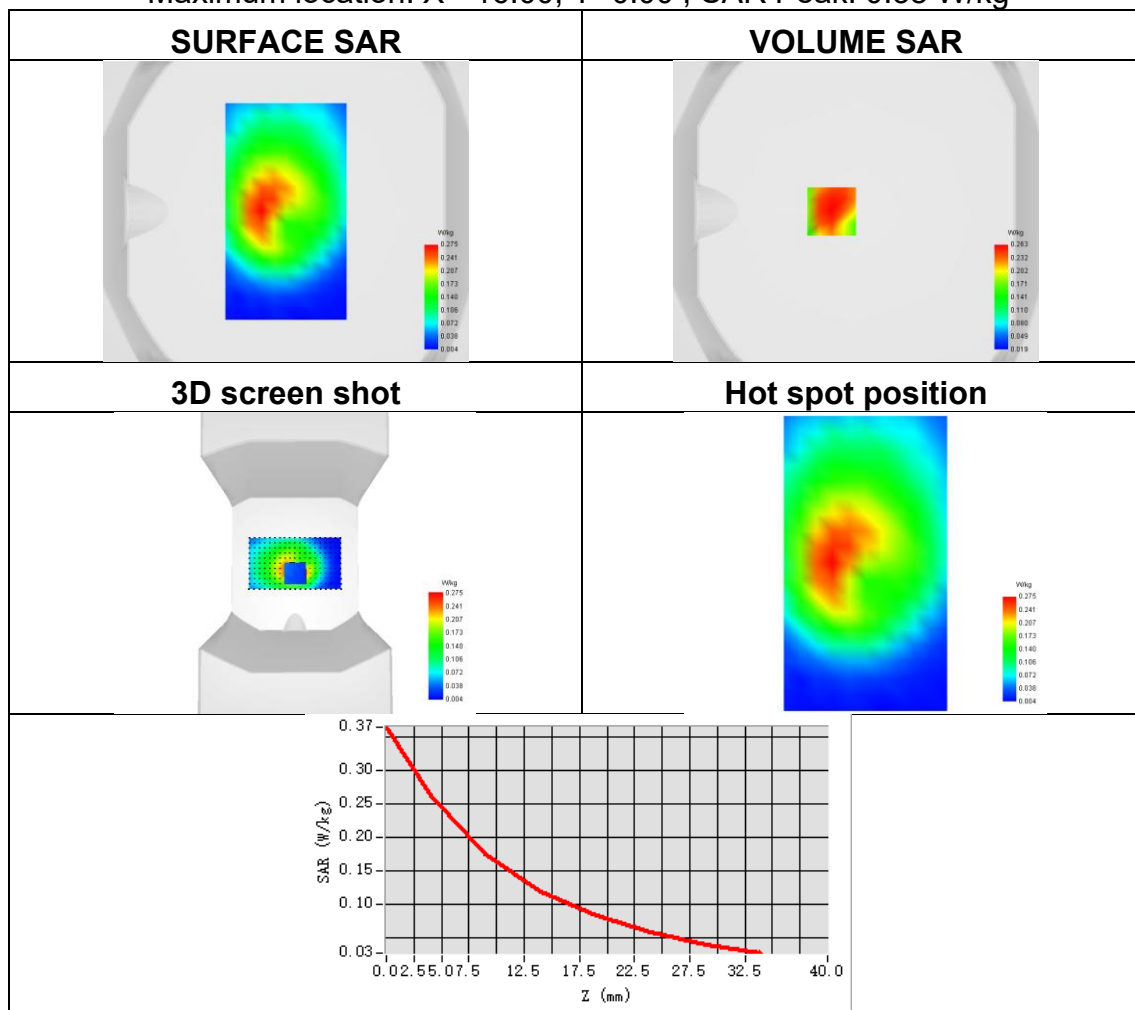




Plot 93:

Test Date	2026-06-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 38
Signal	NR TDD
Frequency	2595
SAR 10g (W/Kg)	0.083
SAR 1g (W/Kg)	0.156
ConvF	0.98
Relative permittivity	40.00
Conductivity (S/m)	1.92

Maximum location: X=-64.00, Y=-40.00 ; SAR Peak: 0.28 W/kg

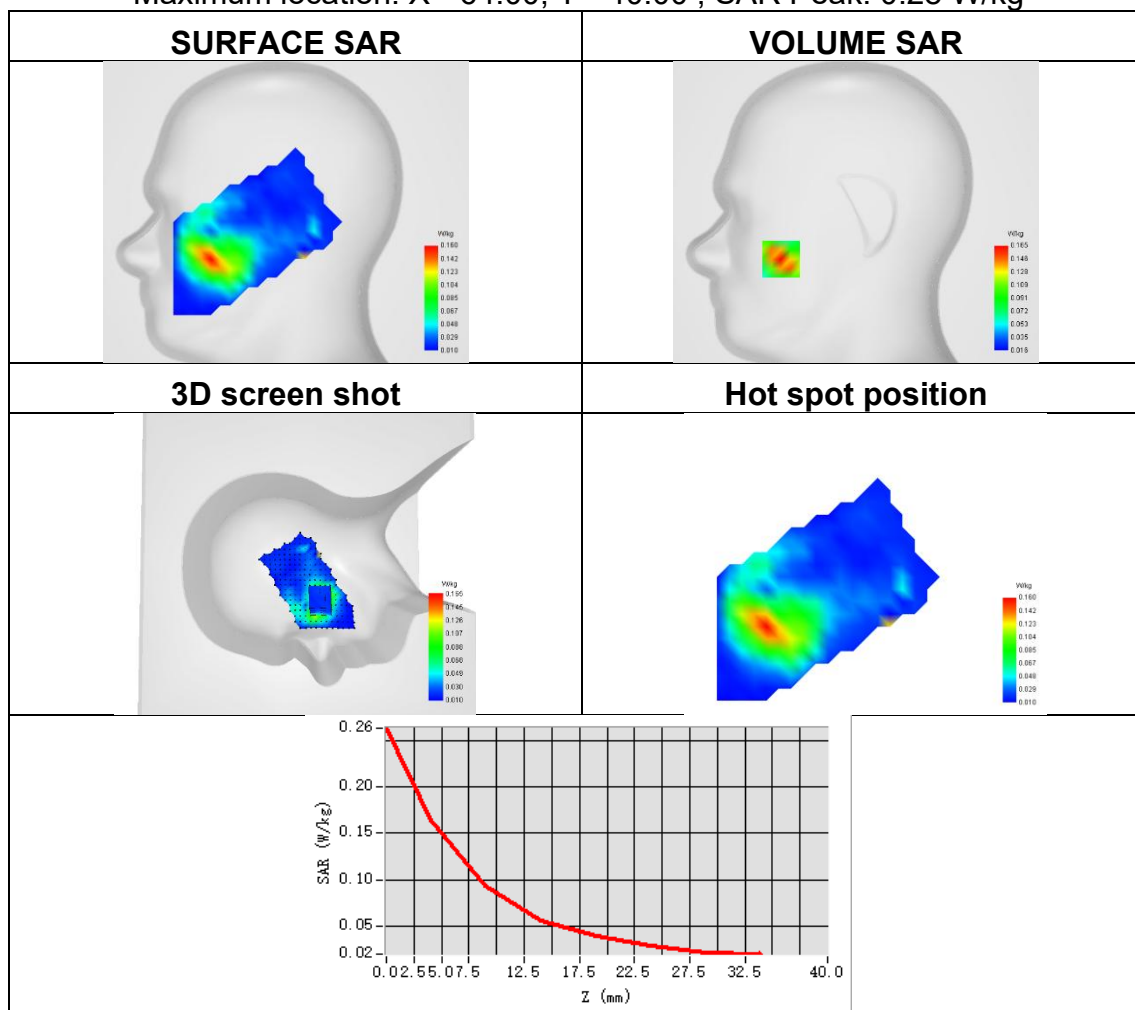




Plot 94:

Test Date	2026-06-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 38
Signal	NR TDD
Frequency	2595
SAR 10g (W/Kg)	0.275
SAR 1g (W/Kg)	0.573
ConvF	0.98
Relative permittivity	40.00
Conductivity (S/m)	1.92

Maximum location: X=5.00, Y=1.00 ; SAR Peak: 1.00 W/kg

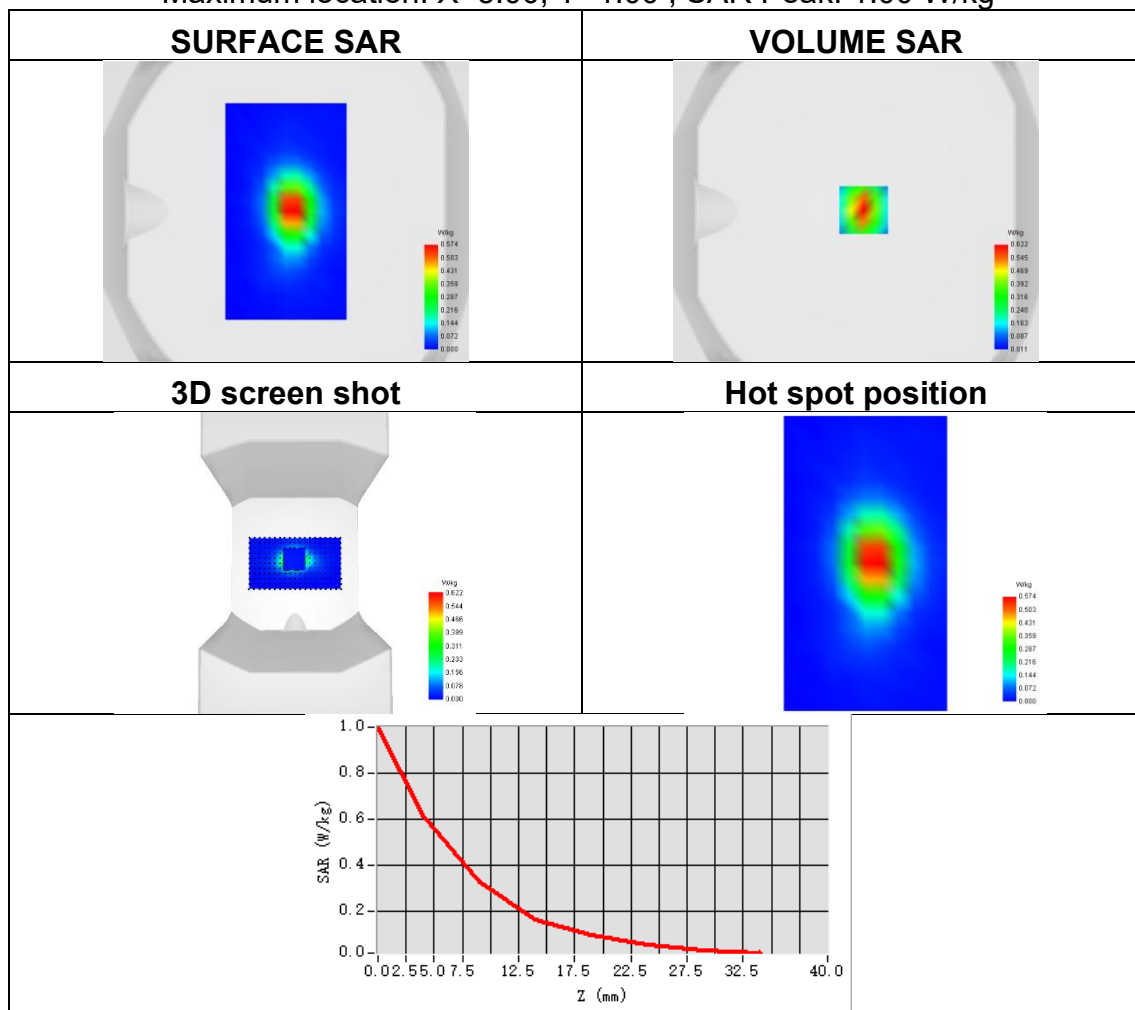



Plot 95:

Test Date	2026-06-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	NR band 41
Signal	NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.264
SAR 1g (W/Kg)	0.546
ConvF	0.98
Relative permittivity	39.61
Conductivity (S/m)	1.97

Maximum location: X=-62.00, Y=-26.00 ; SAR Peak: 0.97 W/kg

