Mode	59	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	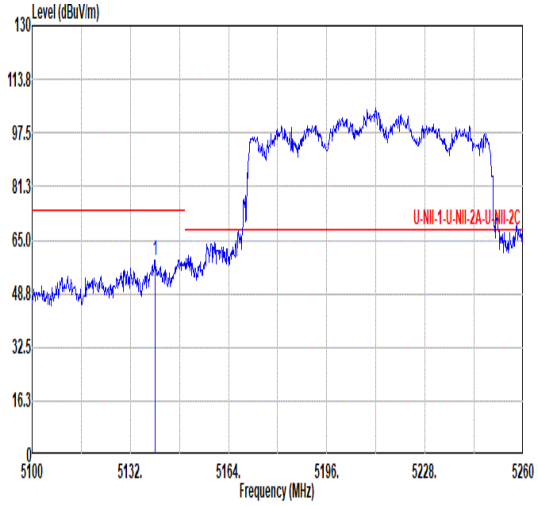 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5140.00 59.06 74.00 -14.94 51.01 34.12 10.60 36.67 0.00 161 164 PEAK	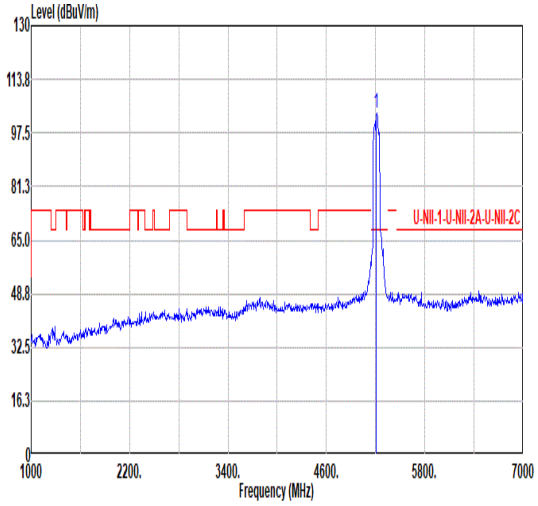 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 103.27 ------ ------ 94.85 34.32 10.67 36.57 0.00 161 164 PEAK
Avg	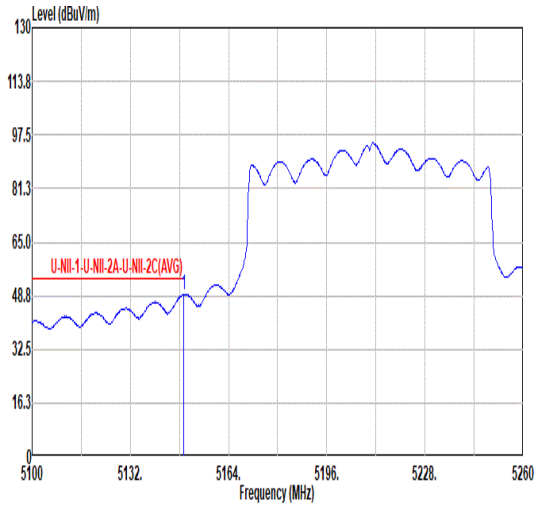 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.44 49.09 54.00 -4.91 40.98 34.15 10.61 36.65 0.00 161 164 AVERAGE	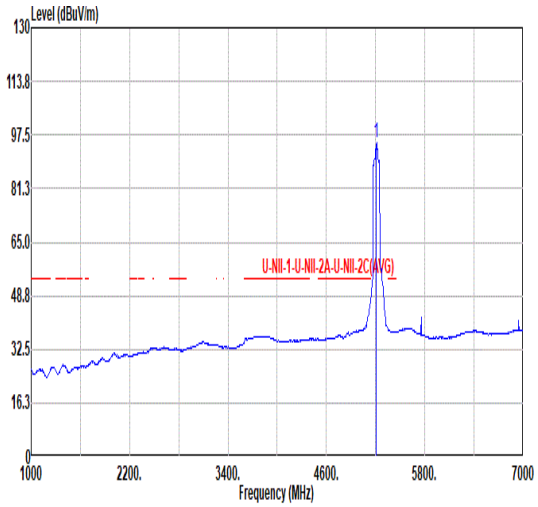 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 95.16 ------ ------ 86.74 34.32 10.67 36.57 0.00 161 164 AVERAGE

Mode	59	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	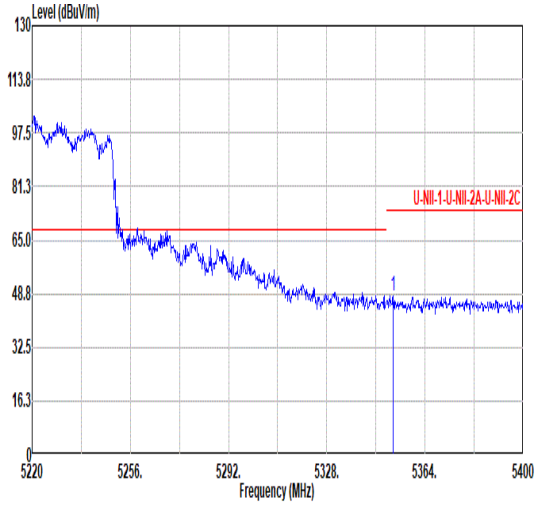 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.30 48.29 74.00 -25.71 39.41 34.50 10.75 36.37 0.00 161 164 PEAK	Blank
Avg	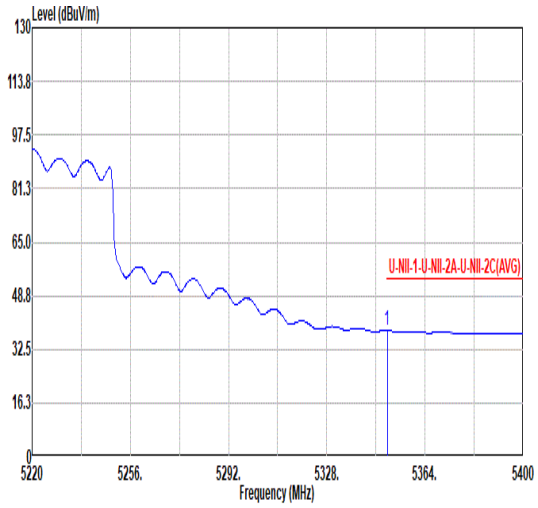 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.14 38.19 54.00 -15.81 29.31 34.50 10.75 36.37 0.00 161 164 AVERAGE	Blank

Mode	59	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	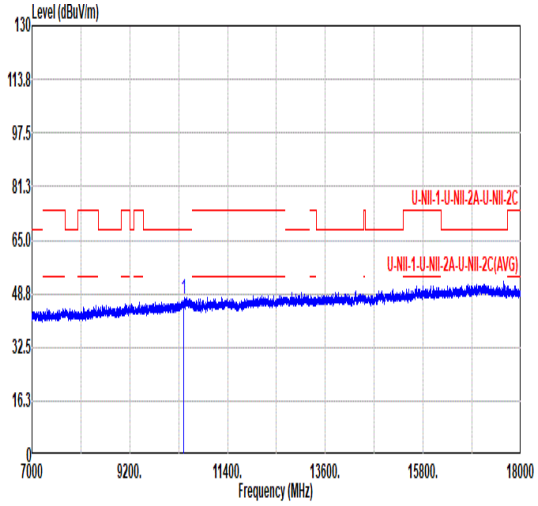 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10420.00 47.33 68.20 -20.87 60.10 37.49 15.50 65.76 0.00 -- -- PEAK	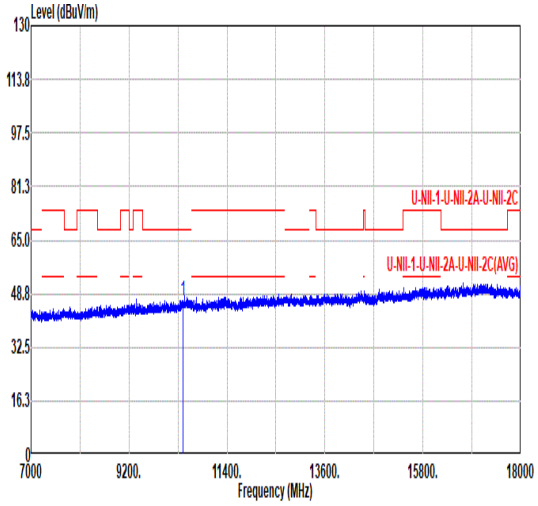 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10420.00 46.51 68.20 -21.69 59.30 37.48 15.49 65.76 0.00 -- -- PEAK

Mode	60	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	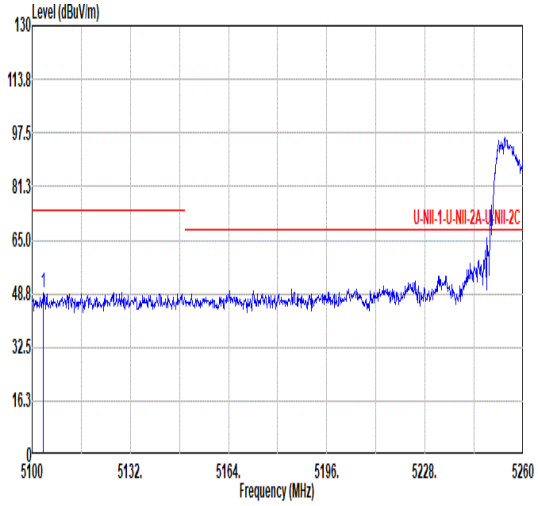 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5103.68 48.95 74.00 -25.05 41.10 34.01 10.56 36.72 0.00 336 265 PEAK	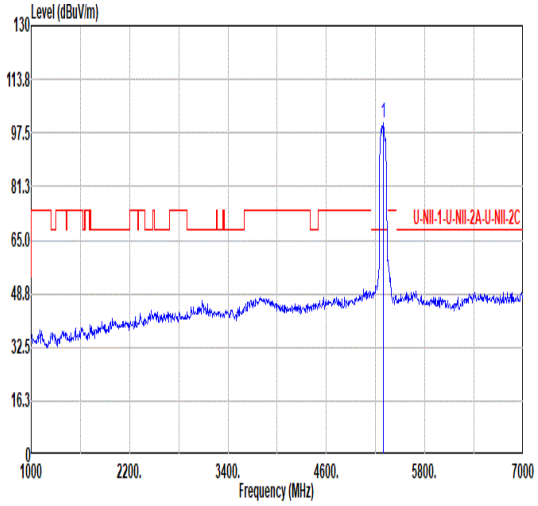 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 100.35 ------ ------ 91.59 34.49 10.72 36.45 0.00 336 265 PEAK
Avg	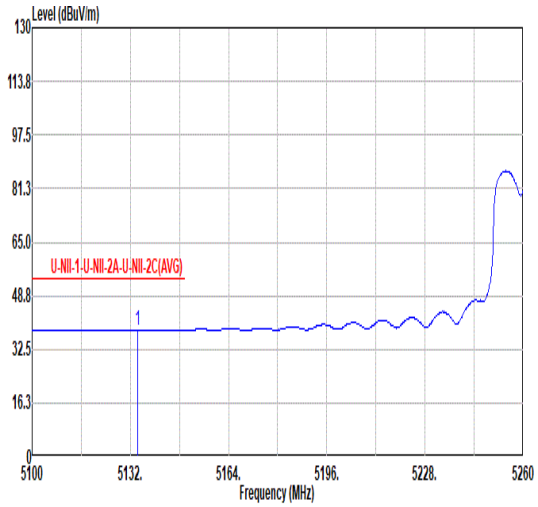 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5134.40 38.47 54.00 -15.53 30.46 34.10 10.59 36.68 0.00 336 265 AVERAGE	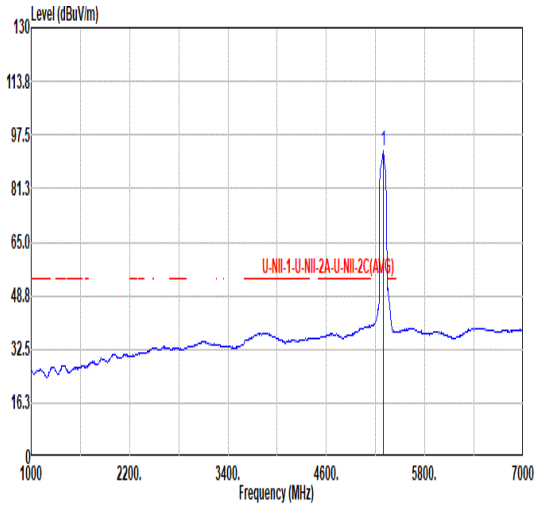 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 92.57 ------ ------ 83.81 34.49 10.72 36.45 0.00 336 265 AVERAGE

Mode	60	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	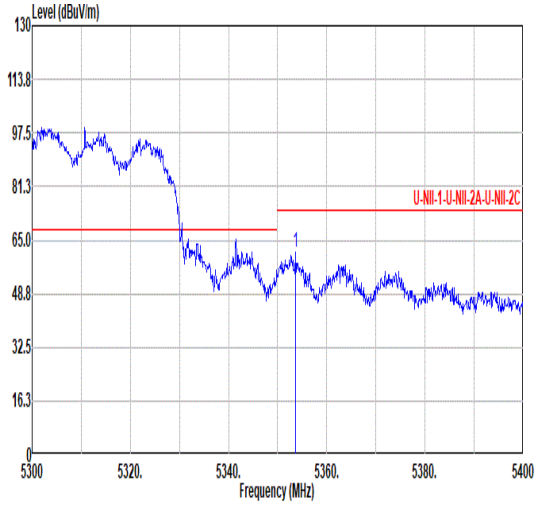 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.60 61.25 74.00 -12.75 52.37 34.50 10.75 36.37 0.00 336 265 PEAK	Blank
Avg	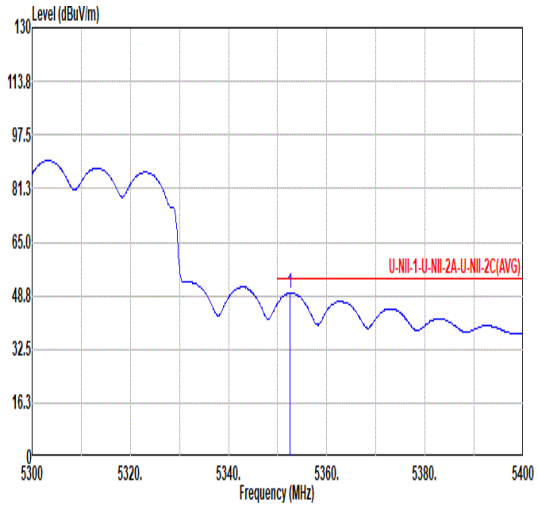 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.50 49.61 54.00 -4.39 40.73 34.50 10.75 36.37 0.00 336 265 AVERAGE	Blank

Mode	60	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	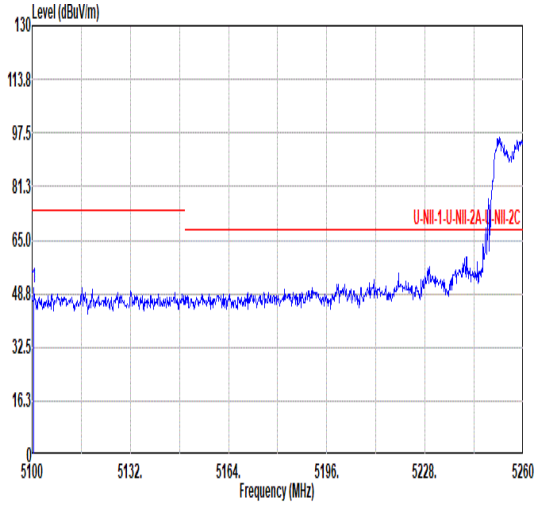 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5100.64 50.54 74.00 -23.46 42.70 34.00 10.56 36.72 0.00 132 158 PEAK	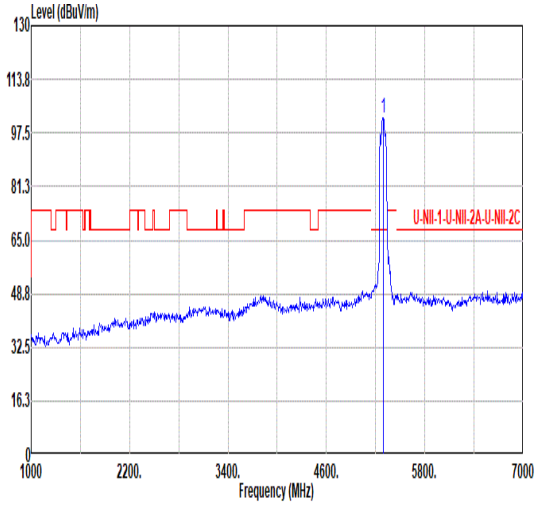 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 102.25 ------ ------ 93.52 34.48 10.71 36.46 0.00 132 158 PEAK
Avg	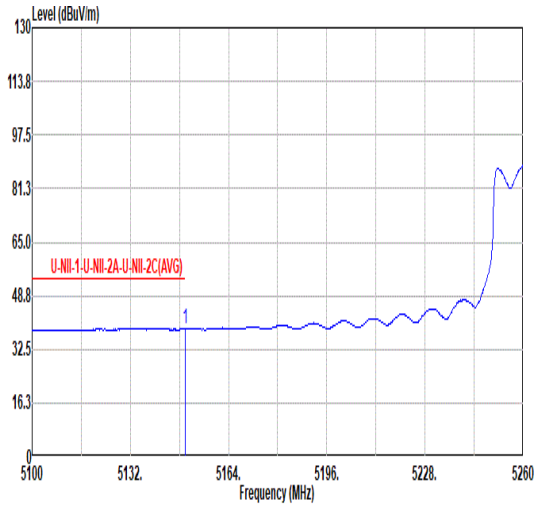 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.92 38.63 54.00 -15.37 30.52 34.15 10.61 36.65 0.00 132 158 AVERAGE	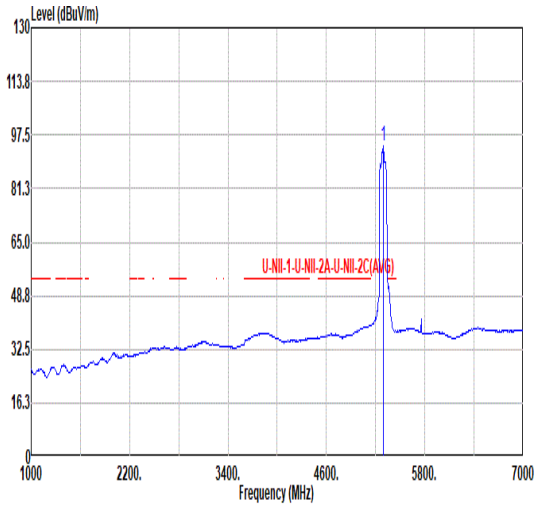 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 94.33 ------ ------ 85.60 34.48 10.71 36.46 0.00 132 158 AVERAGE

Mode	60	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	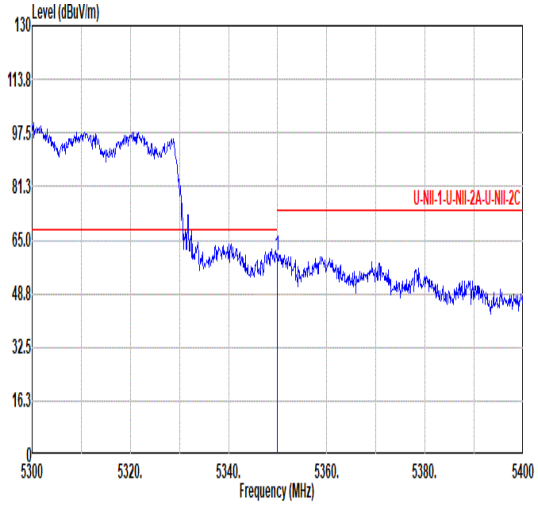 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.00 60.50 74.00 -13.50 51.62 34.50 10.75 36.37 0.00 132 158 PEAK	Blank
Avg	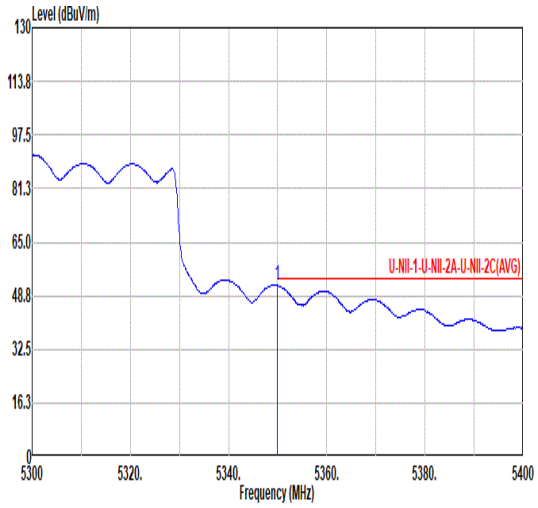 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.00 51.83 54.00 -2.17 42.95 34.50 10.75 36.37 0.00 132 158 AVERAGE	Blank

Mode	60	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	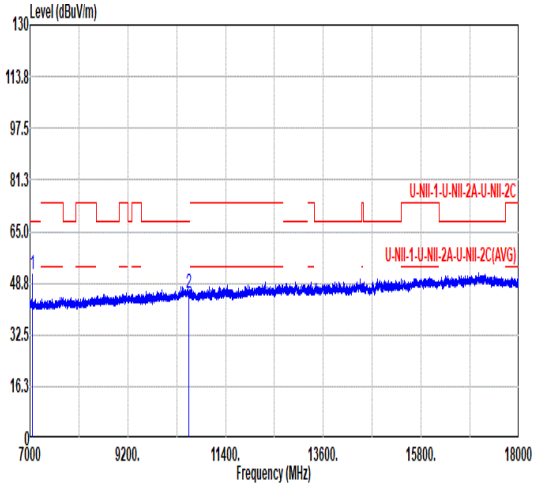 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7053.60 51.49 68.20 -16.71 67.86 35.65 12.53 64.55 0.00 -- -- Peak 2 10580.00 45.45 74.00 -28.55 57.81 37.62 15.68 65.66 0.00 -- -- PEAK	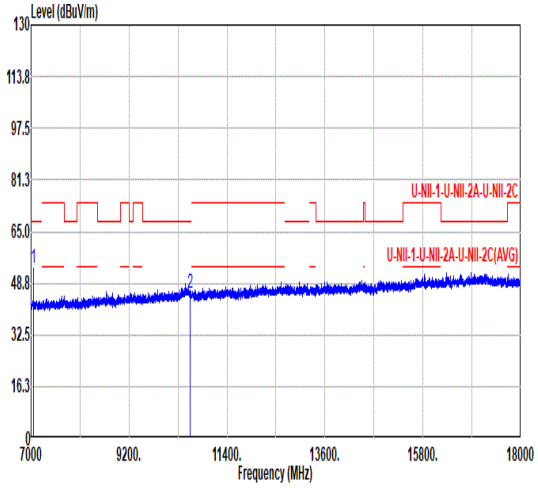 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7053.60 53.35 68.20 -14.85 69.72 35.65 12.53 64.55 0.00 -- -- Peak 2 10580.00 45.50 68.20 -22.70 57.97 37.59 15.63 65.69 0.00 -- -- PEAK

Mode	61	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	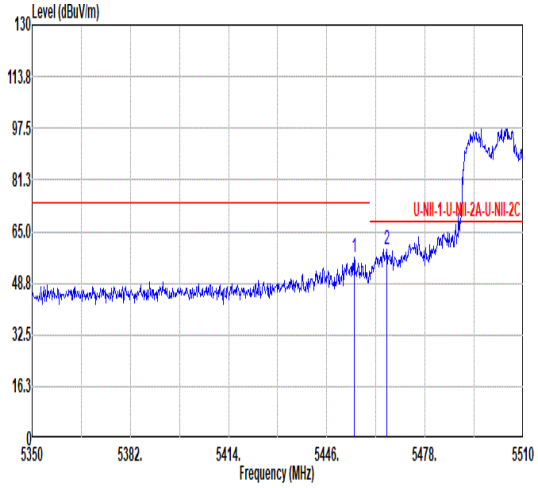 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5454.96 56.86 74.00 -17.14 47.70 34.55 10.83 36.22 0.00 274 248 PEAK 2 5465.52 59.55 68.20 -8.65 50.34 34.57 10.85 36.21 0.00 274 248 PEAK	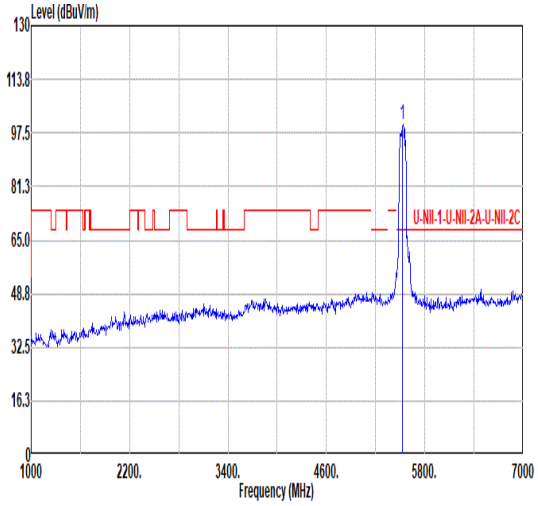 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 100.15 ------ ------ 90.73 34.60 10.93 36.11 0.00 274 248 PEAK
Avg	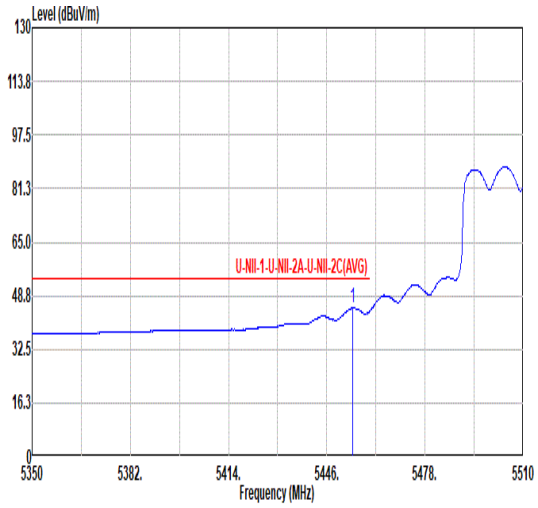 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5454.32 45.10 54.00 -8.90 35.94 34.55 10.83 36.22 0.00 274 248 AVERAGE	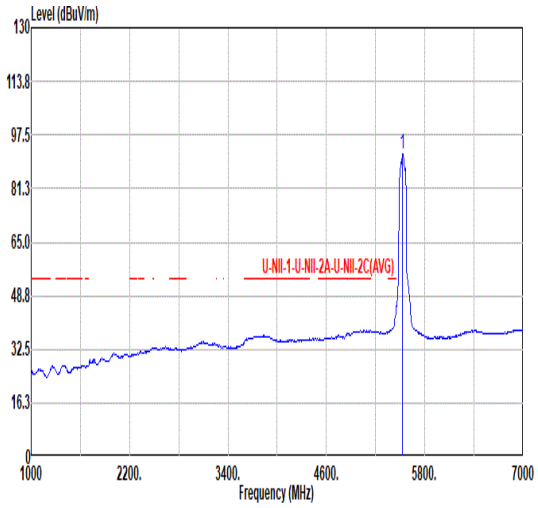 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 91.85 ------ ------ 82.43 34.60 10.93 36.11 0.00 274 248 AVERAGE

Mode	61	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	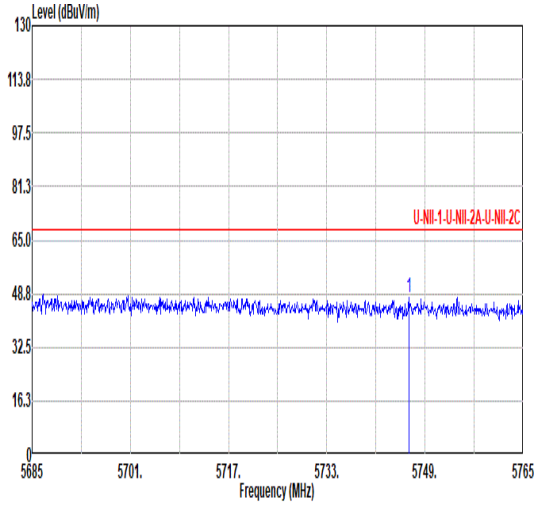 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5746.44 47.67 68.20 -20.53 39.35 34.74 11.21 37.63 0.00 274 248 PEAK	Blank

Mode	61	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	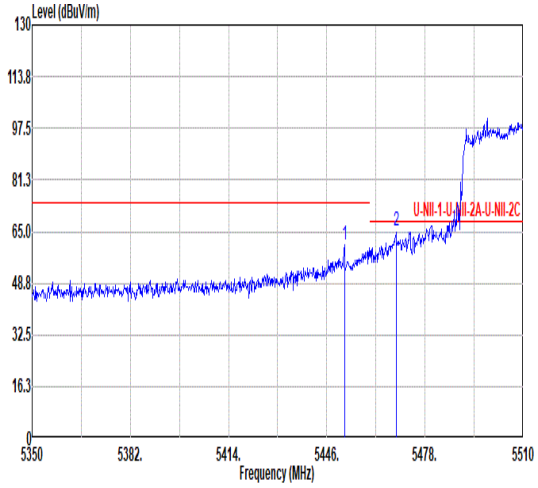 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5451.76 60.70 74.00 -13.30 51.55 34.55 10.83 36.23 0.00 158 161 PEAK 2 5468.56 65.30 68.20 -2.90 56.08 34.57 10.85 36.20 0.00 158 161 PEAK	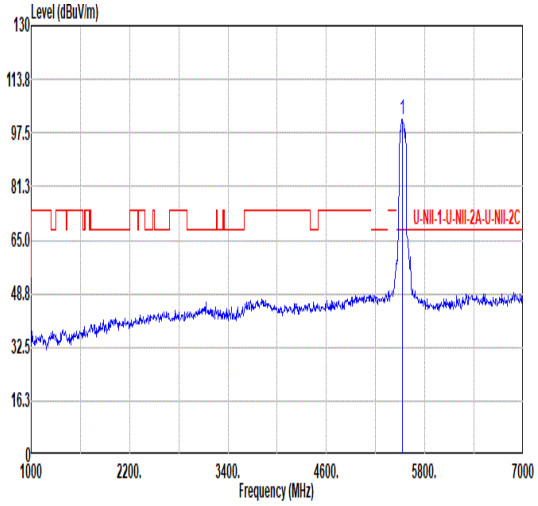 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 101.57 ------ ------ 92.17 34.60 10.92 36.12 0.00 158 161 PEAK
Avg	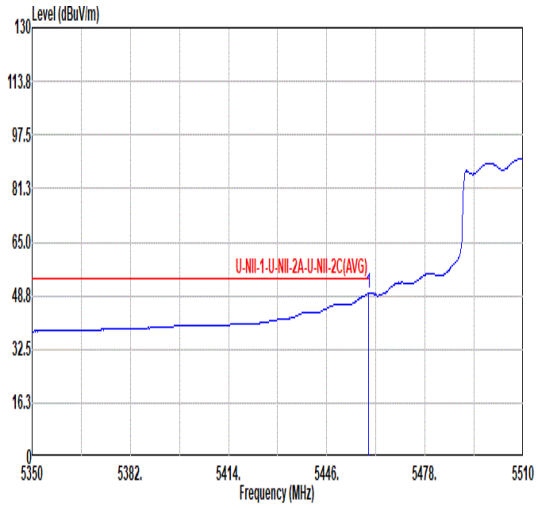 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.60 49.49 54.00 -4.51 40.31 34.56 10.84 36.22 0.00 158 161 AVERAGE	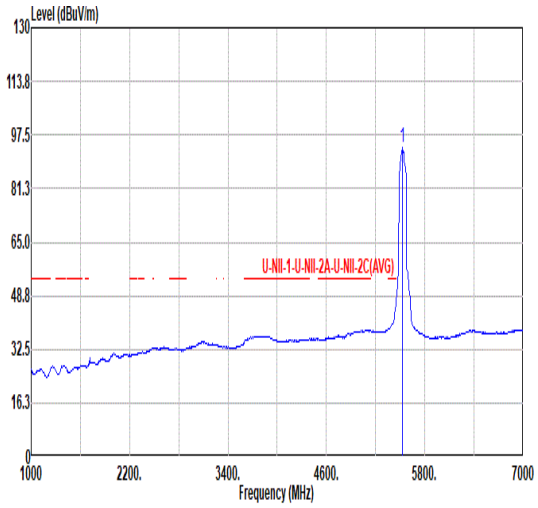 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 93.76 ------ ------ 84.36 34.60 10.92 36.12 0.00 158 161 AVERAGE

Mode	61	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	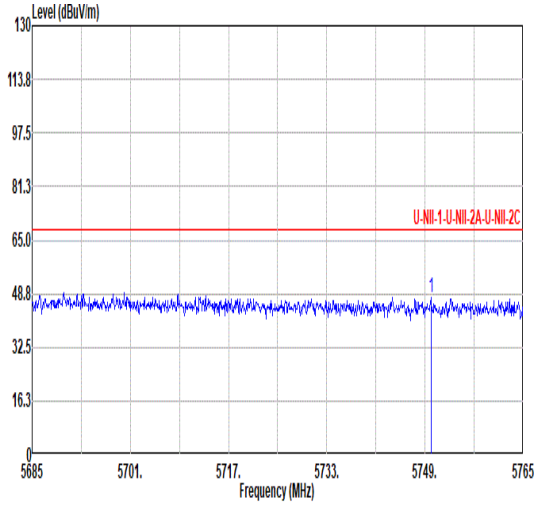 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5749.96 47.62 68.20 -20.58 39.35 34.75 11.21 37.69 0.00 158 161 PEAK	Blank

Mode	61	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full_5530MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	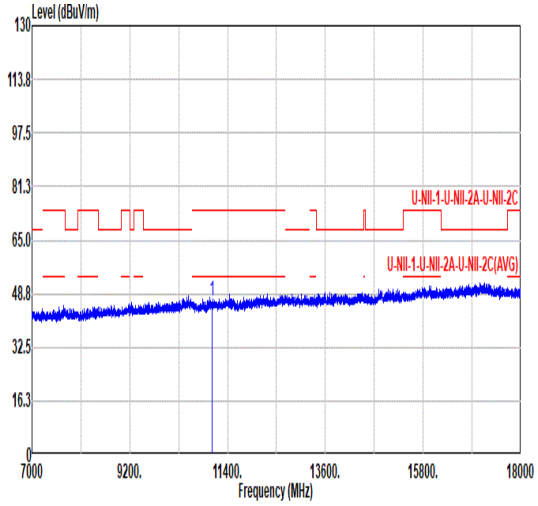 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 46.63 74.00 -27.37 58.05 37.95 16.08 65.45 0.00 -- -- PEAK	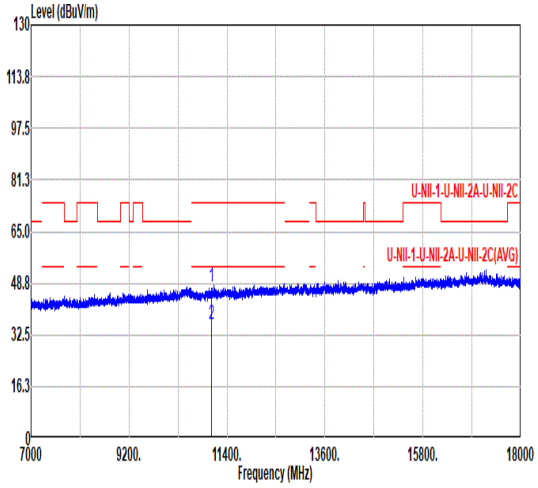 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 47.53 74.00 -26.47 58.95 37.95 16.08 65.45 0.00 300 360 PEAK 2 11060.00 35.86 54.00 -18.14 47.22 37.97 16.10 65.43 0.00 300 360 AVERAGE

Mode	63	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE160_CH50_Full_5250MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	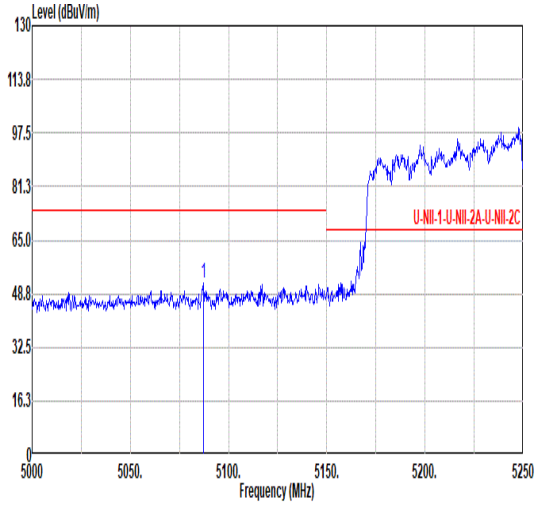 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5087.25 51.75 74.00 -22.25 43.94 34.01 10.54 36.74 0.00 241 111 PEAK	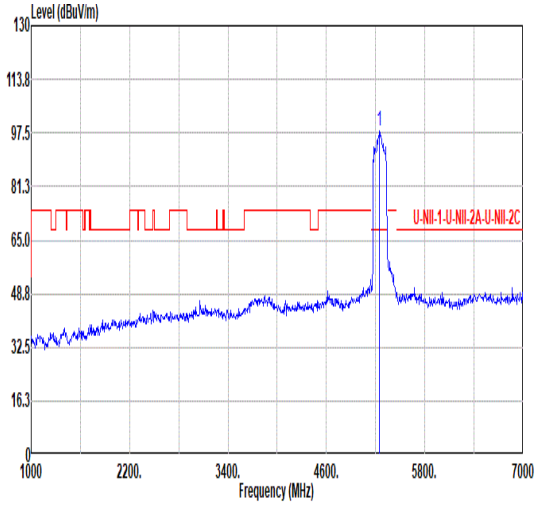 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 97.98 ------ ------ 89.40 34.40 10.69 36.51 0.00 241 111 PEAK
Avg	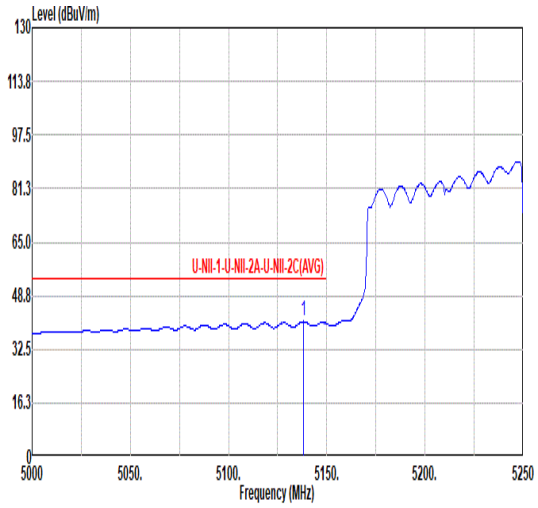 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5138.00 40.97 54.00 -13.03 32.93 34.11 10.60 36.67 0.00 241 111 AVERAGE	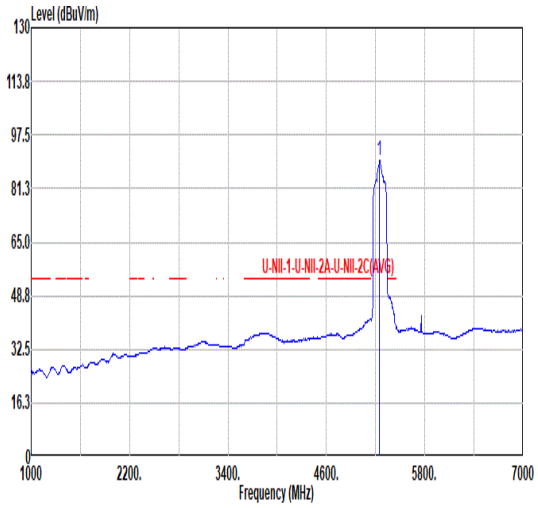 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 89.89 ------ ------ 81.31 34.40 10.69 36.51 0.00 241 111 AVERAGE

Mode	63	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE160_CH50_Full_5250MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	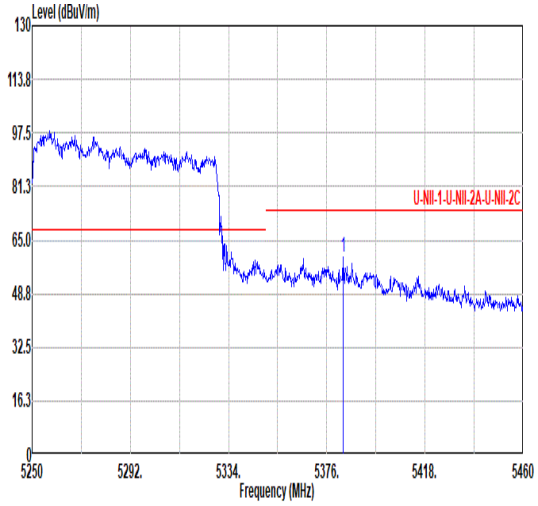 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5383.14 59.68 74.00 -14.32 50.73 34.50 10.77 36.32 0.00 241 111 PEAK	Blank
Avg	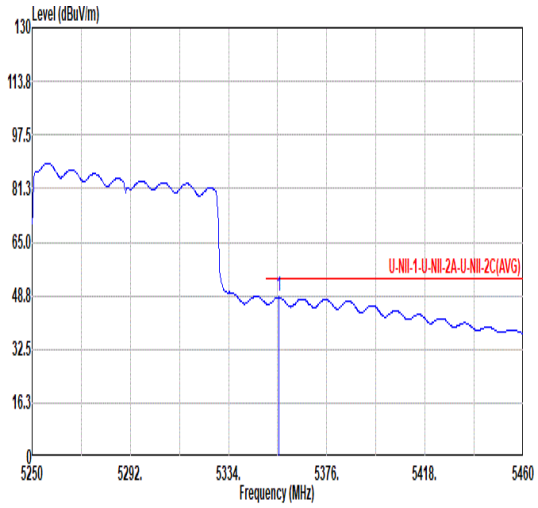 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.42 48.33 54.00 -5.67 39.44 34.50 10.75 36.36 0.00 241 111 AVERAGE	Blank

Mode	63	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE160_CH50_Full_5250MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	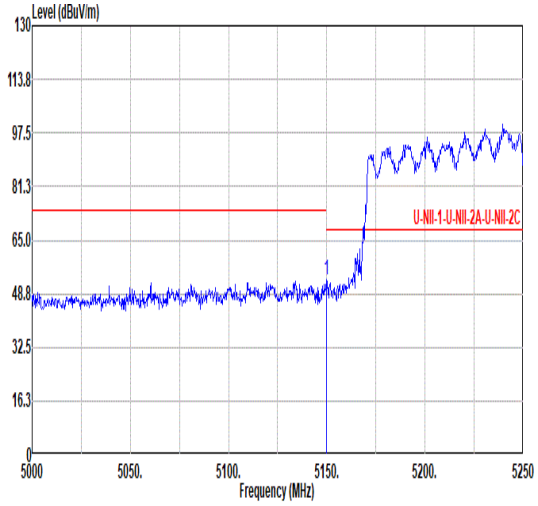 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5150.00 52.79 74.00 -21.21 44.68 34.15 10.61 36.65 0.00 151 161 PEAK	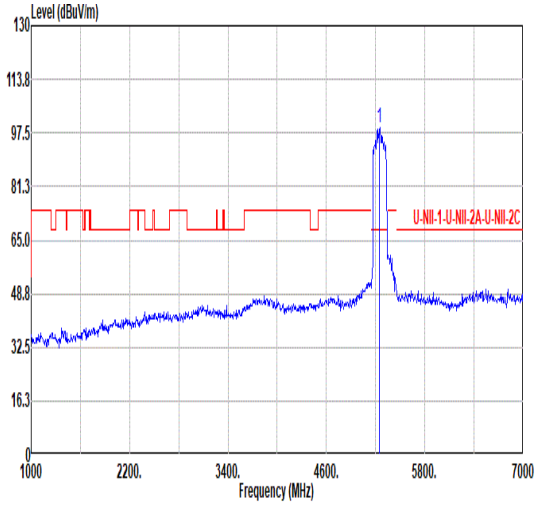 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 98.97 ------ ------ 90.38 34.41 10.69 36.51 0.00 151 161 PEAK
Avg	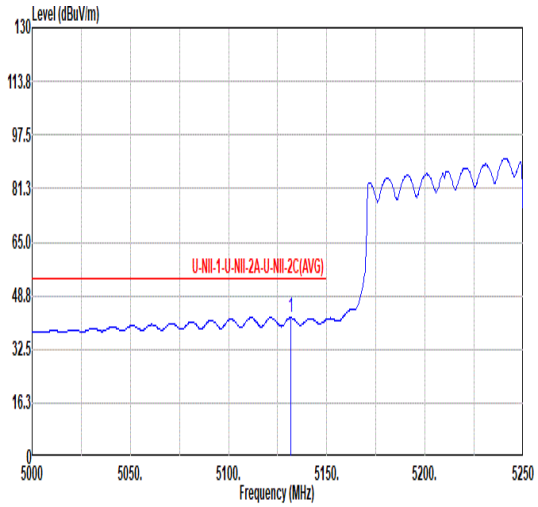 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5131.75 42.11 54.00 -11.89 34.10 34.10 10.59 36.68 0.00 151 161 AVERAGE	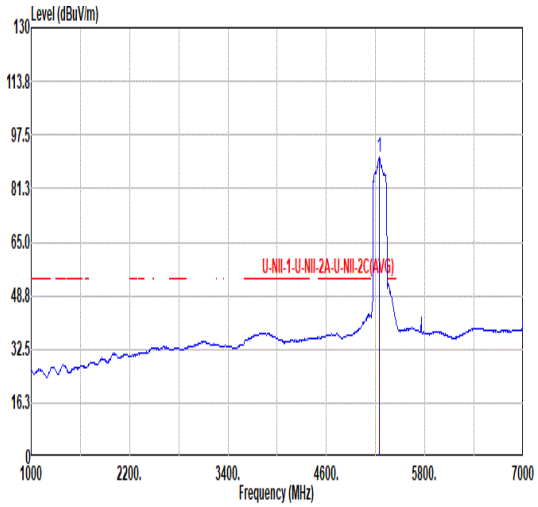 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5250.00 90.80 ------ ------ 82.26 34.38 10.68 36.52 0.00 151 161 AVERAGE

Mode	63	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE160_CH50_Full_5250MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	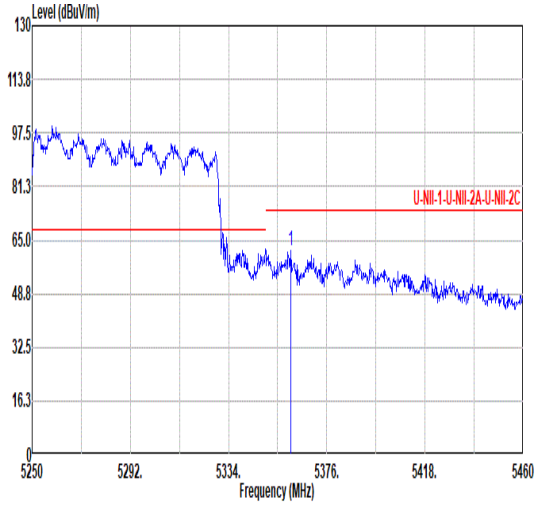 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5360.46 61.95 74.00 -12.05 53.06 34.50 10.75 36.36 0.00 151 161 PEAK	Blank
Avg	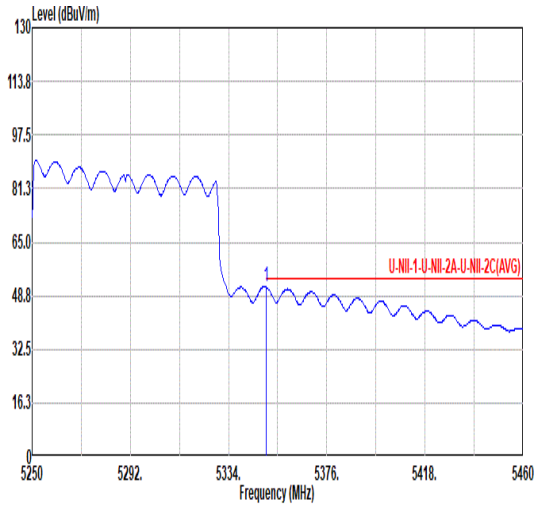 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.17 51.28 54.00 -2.72 42.40 34.50 10.75 36.37 0.00 151 161 AVERAGE	Blank

Mode	63	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE160_CH50_Full_5250MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	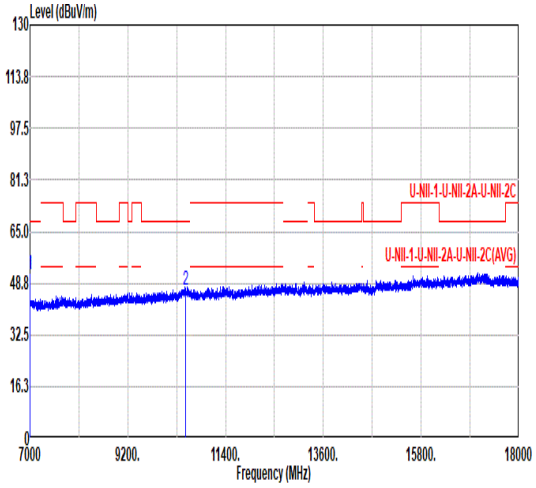 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7000.80 51.74 68.20 -16.46 68.13 35.60 12.46 64.45 0.00 -- -- Peak 2 10500.00 46.59 68.20 -21.61 59.25 37.52 15.55 65.73 0.00 -- -- PEAK	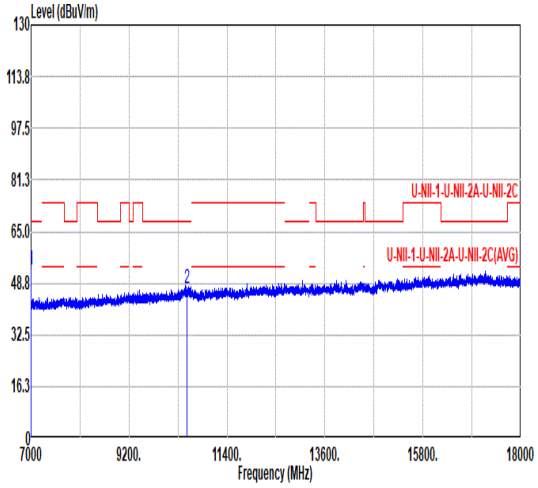 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7000.06 53.17 68.20 -15.03 69.56 35.60 12.46 64.45 0.00 -- -- Peak 2 10500.00 47.10 68.20 -21.10 59.75 37.53 15.55 65.73 0.00 -- -- PEAK

Mode	60	
	18G-40G	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	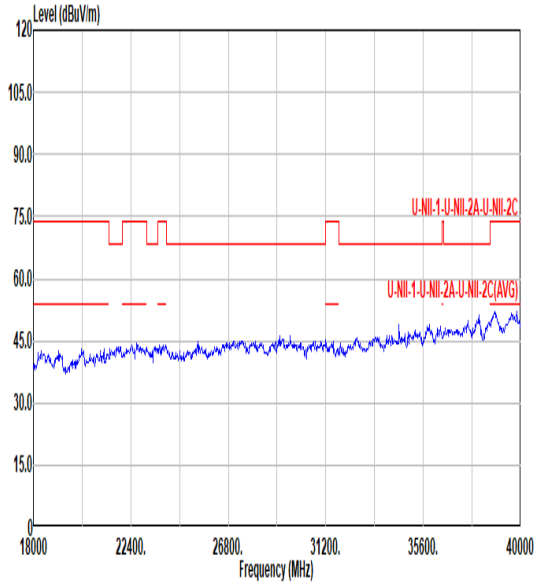	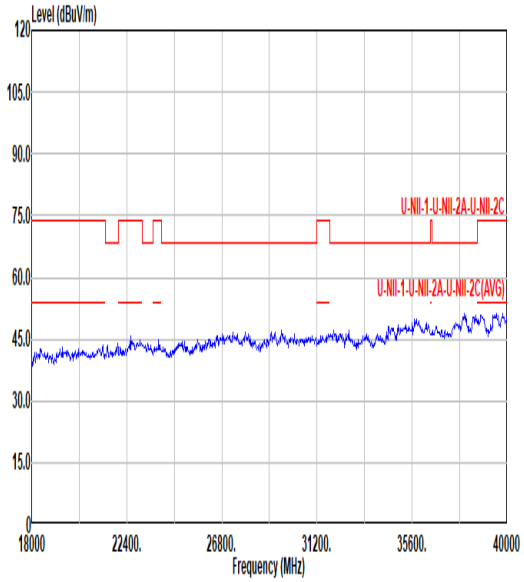

Mode	60	
	30-1G	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
QP	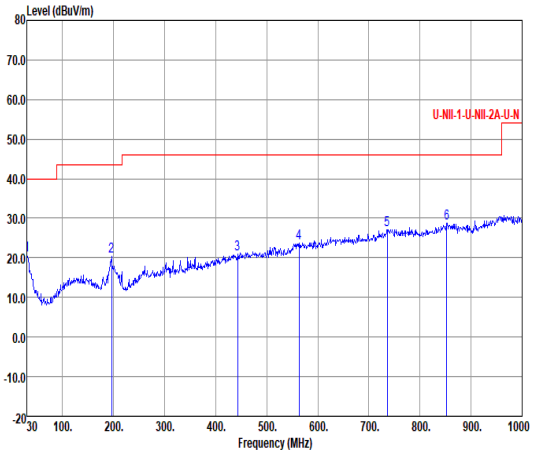 Freq Level Over Limit Limit Line Read Level CableLoss Antenna Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB dB/m dB cm deg 1 30.00 20.57 -19.43 40.00 28.31 0.71 24.57 33.02 --- --- Peak 2 195.87 20.29 -23.21 43.50 35.51 2.13 15.49 32.84 --- --- Peak 3 443.22 20.90 -25.10 46.00 28.31 3.21 22.41 33.03 --- --- Peak 4 563.50 23.76 -22.24 46.00 28.18 3.62 25.06 33.10 --- --- Peak 5 736.16 27.04 -18.96 46.00 30.09 4.15 25.67 32.87 --- --- Peak 6 852.56 28.71 -17.29 46.00 30.01 4.46 26.59 32.35 --- --- Peak	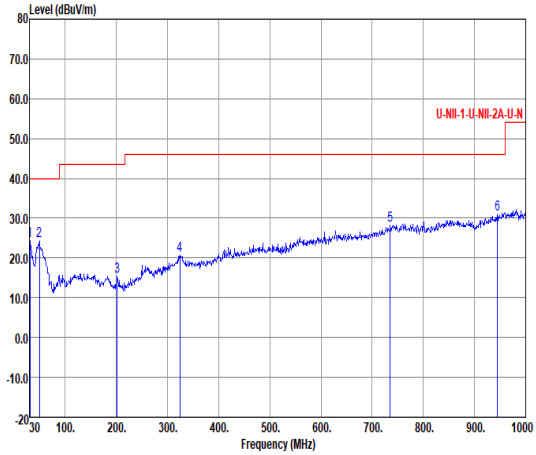 Freq Level Over Limit Limit Line Read Level CableLoss Antenna Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB dB/m dB cm deg 1 30.97 24.41 -15.59 40.00 32.60 0.73 24.07 32.99 --- --- Peak 2 49.40 24.18 -15.82 40.00 41.37 1.04 14.69 32.92 --- --- Peak 3 201.69 15.45 -28.05 43.50 30.60 2.16 15.53 32.84 --- --- Peak 4 323.91 20.73 -25.27 46.00 31.01 2.74 19.85 32.87 --- --- Peak 5 735.19 28.21 -17.79 46.00 31.29 4.15 25.65 32.88 --- --- Peak 6 944.71 31.02 -14.98 46.00 30.52 4.70 27.47 31.67 --- --- Peak

Mode	65	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	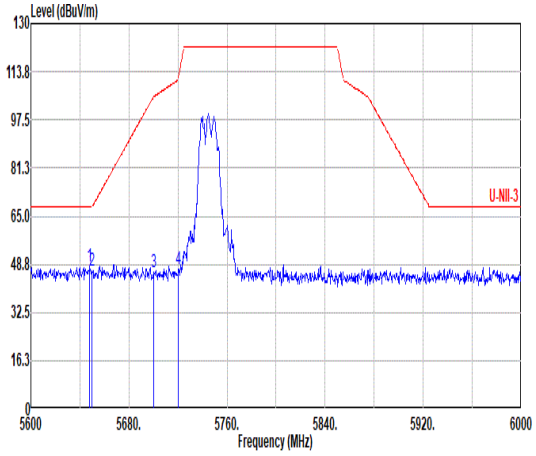 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5648.00 48.24 68.20 -19.96 38.66 34.60 11.07 36.09 0.00 100 237 PEAK 2 5650.00 46.53 68.20 -21.67 36.98 34.60 11.07 36.12 0.00 100 237 PEAK 3 5700.00 46.03 105.30 -59.27 37.19 34.60 11.14 36.90 0.00 100 237 PEAK 4 5720.40 46.90 111.81 -64.91 38.29 34.66 11.17 37.22 0.00 100 237 PEAK	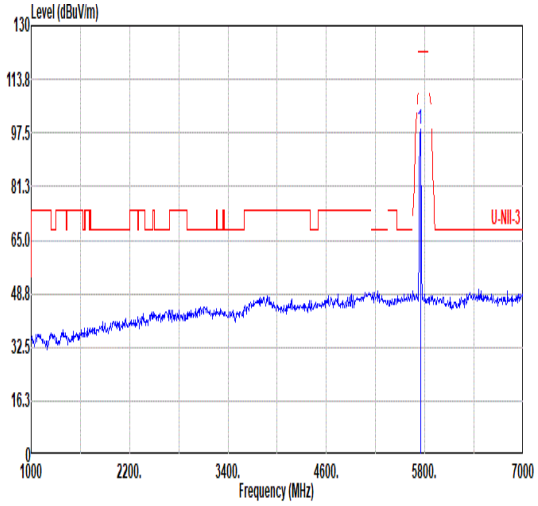 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 98.60 ------ ------ 90.27 34.74 11.21 37.62 0.00 100 237 PEAK
Avg	Blank	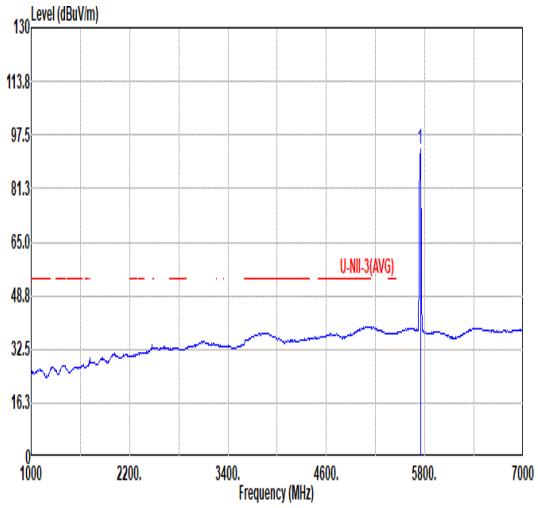 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 93.19 ------ ------ 84.86 34.74 11.21 37.62 0.00 100 237 AVERAGE

Mode	65	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	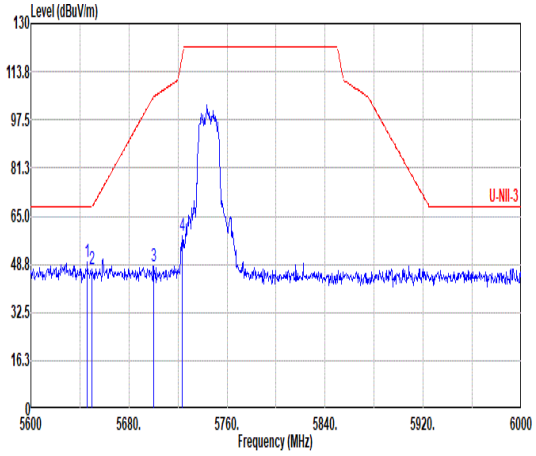 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5646.00 49.61 68.20 -18.59 39.99 34.60 11.07 36.05 0.00 137 161 PEAK 2 5650.00 46.88 68.20 -21.32 37.33 34.60 11.07 36.12 0.00 137 161 PEAK 3 5700.00 47.92 105.30 -57.38 39.08 34.60 11.14 36.90 0.00 137 161 PEAK 4 5723.20 58.29 118.20 -59.91 49.72 34.67 11.17 37.27 0.00 137 161 PEAK	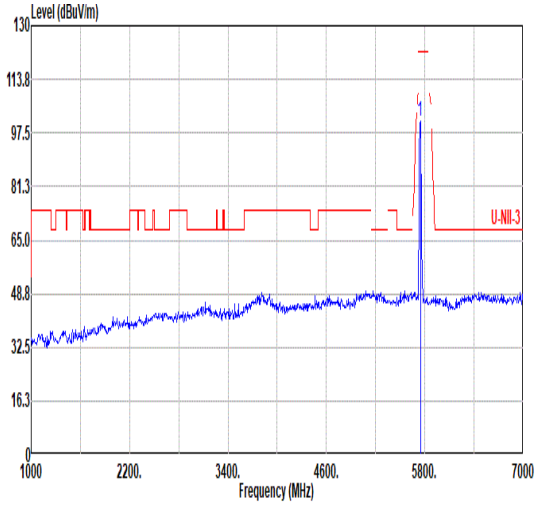 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 101.13 ------ ------ 92.80 34.74 11.21 37.62 0.00 137 161 PEAK
Avg	Blank	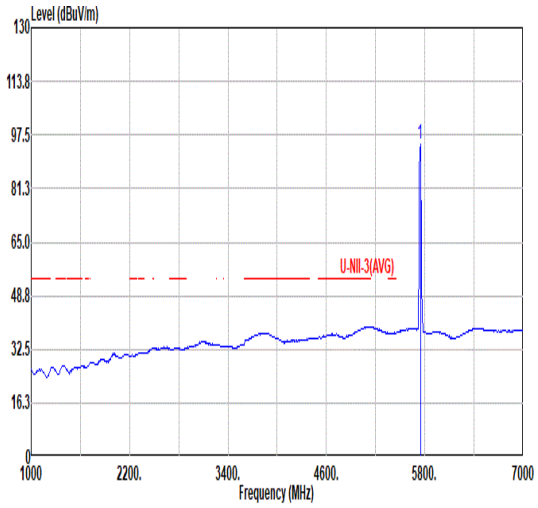 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 94.70 ------ ------ 86.37 34.74 11.21 37.62 0.00 137 161 AVERAGE

Mode	65	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	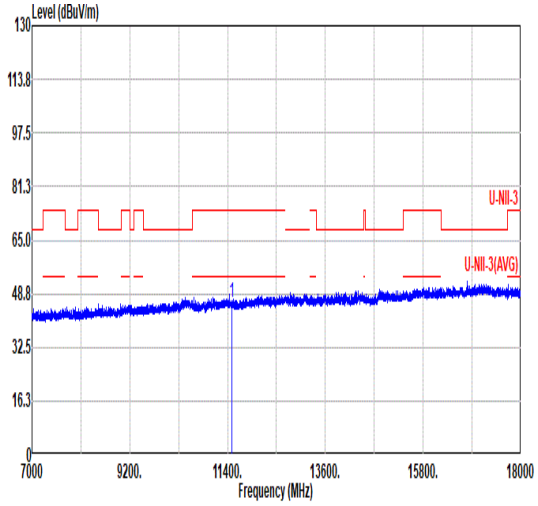 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 46.29 74.00 -27.71 56.88 38.29 16.36 65.24 0.00 -- -- PEAK	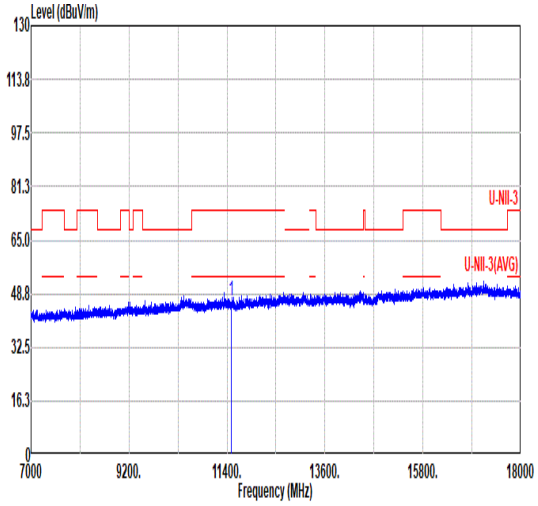 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 46.48 74.00 -27.52 57.07 38.29 16.36 65.24 0.00 -- -- PEAK

Mode	66	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	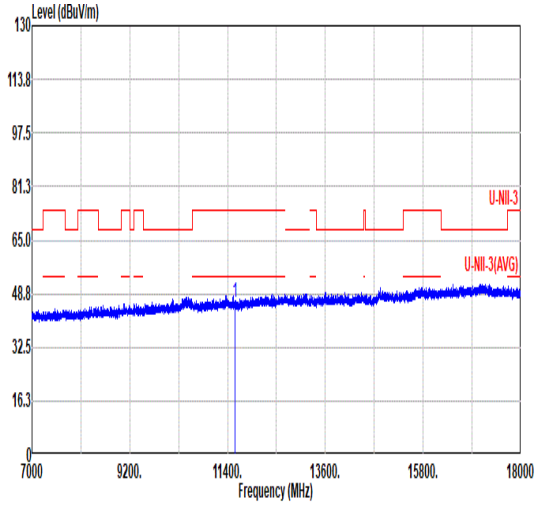 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 45.94 74.00 -28.06 56.39 38.36 16.41 65.22 0.00 -- -- PEAK	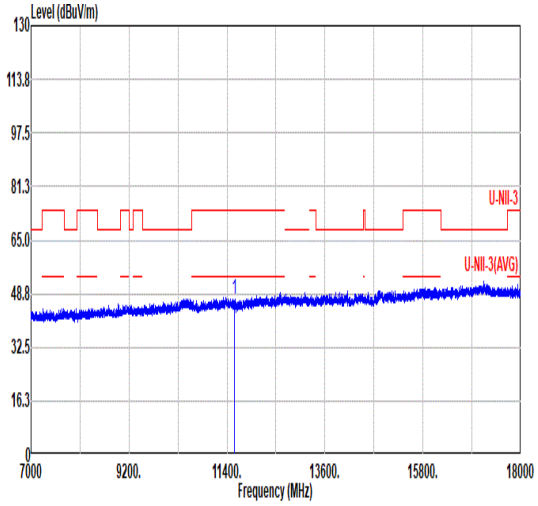 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 47.08 74.00 -26.92 57.53 38.36 16.41 65.22 0.00 -- -- PEAK

Mode	67	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	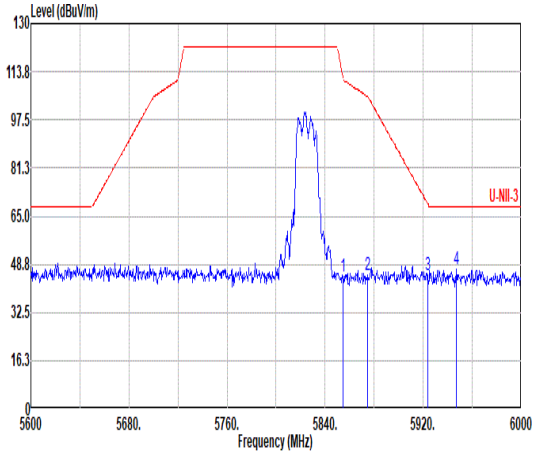 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 44.58 112.27 -67.69 37.56 35.01 11.33 39.32 0.00 162 234 PEAK 2 5874.40 44.94 105.47 -60.53 37.84 35.05 11.35 39.30 0.00 162 234 PEAK 3 5924.00 45.00 68.94 -23.94 37.70 35.12 11.40 39.22 0.00 162 234 PEAK 4 5946.80 46.87 68.20 -21.33 39.48 35.15 11.42 39.18 0.00 162 234 PEAK	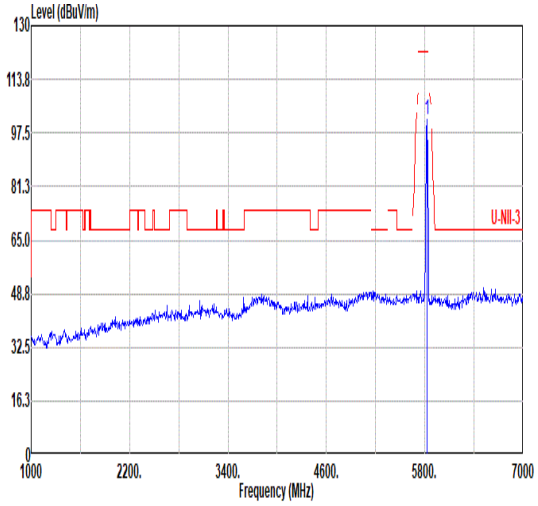 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 101.38 ------ ------ 93.97 34.95 11.31 38.85 0.00 162 234 PEAK
Avg	Blank	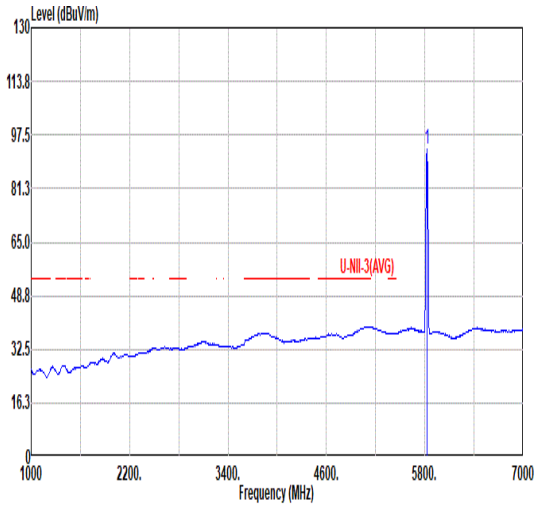 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 93.40 ------ ------ 85.99 34.95 11.31 38.85 0.00 162 234 AVERAGE

Mode	67	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	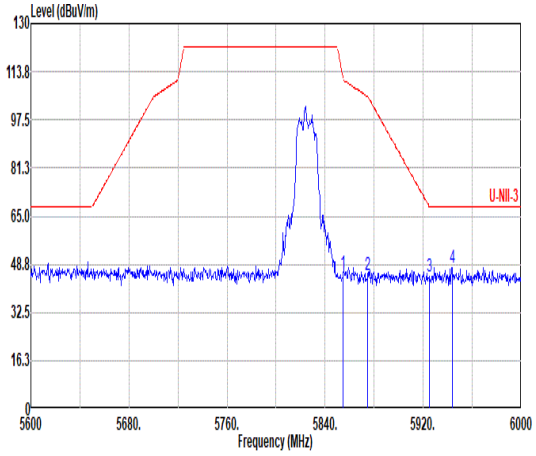 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 45.71 111.36 -65.65 38.69 35.01 11.34 39.33 0.00 138 151 PEAK 2 5874.80 45.37 105.36 -59.99 38.27 35.05 11.35 39.30 0.00 138 151 PEAK 3 5924.80 44.53 68.35 -23.82 37.23 35.12 11.40 39.22 0.00 138 151 PEAK 4 5943.60 47.76 68.20 -20.44 40.38 35.14 11.42 39.18 0.00 138 151 PEAK	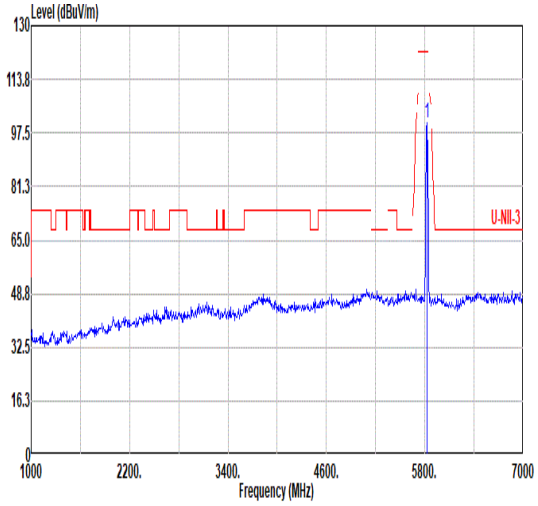 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 100.40 ------ ------ 92.99 34.95 11.31 38.85 0.00 138 151 PEAK
Avg	Blank	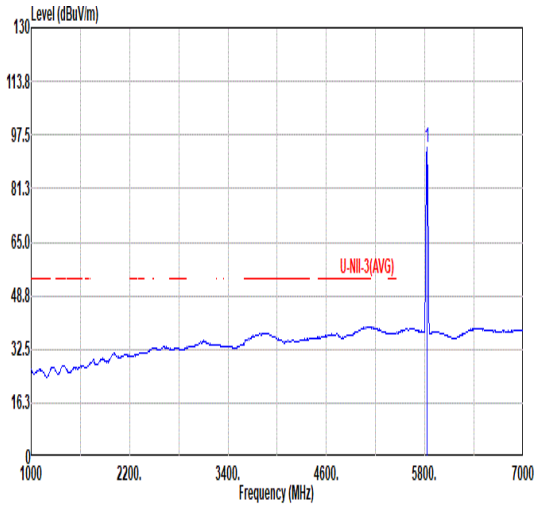 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 93.82 ------ ------ 86.41 34.95 11.31 38.85 0.00 138 151 AVERAGE

Mode	67	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	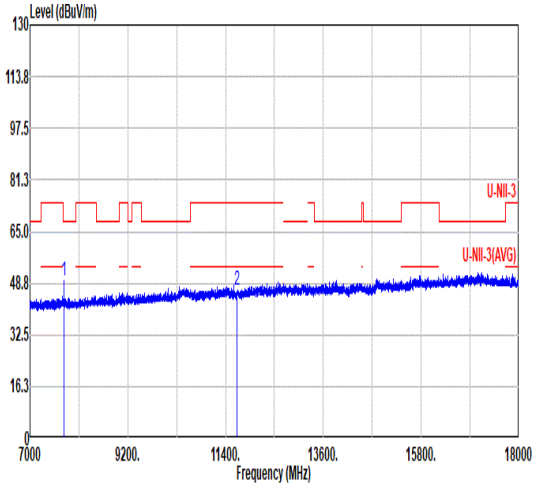 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7766.40 49.61 68.20 -18.59 66.04 35.97 13.17 65.57 0.00 -- -- Peak 2 11650.00 46.37 74.00 -27.63 56.69 38.42 16.46 65.20 0.00 -- -- PEAK	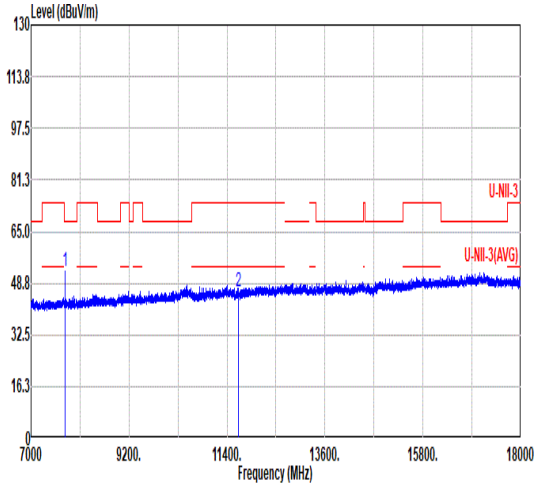 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7766.40 52.61 68.20 -15.59 69.04 35.97 13.17 65.57 0.00 -- -- Peak 2 11650.00 45.89 74.00 -28.11 56.21 38.42 16.46 65.20 0.00 -- -- PEAK

Mode	68	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_Full_5745MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	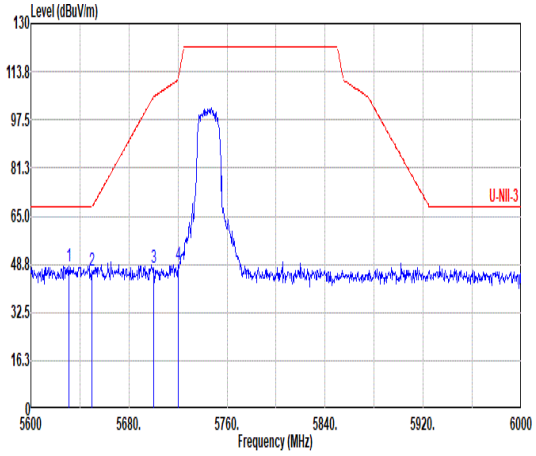 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5631.20 48.07 68.20 -20.13 38.39 34.60 11.05 35.97 0.00 309 109 PEAK 2 5650.00 46.39 68.20 -21.81 36.84 34.60 11.07 36.12 0.00 309 109 PEAK 3 5700.00 47.34 105.30 -57.96 38.50 34.60 11.14 36.90 0.00 309 109 PEAK 4 5720.00 48.33 110.90 -62.57 39.72 34.66 11.17 37.22 0.00 309 109 PEAK	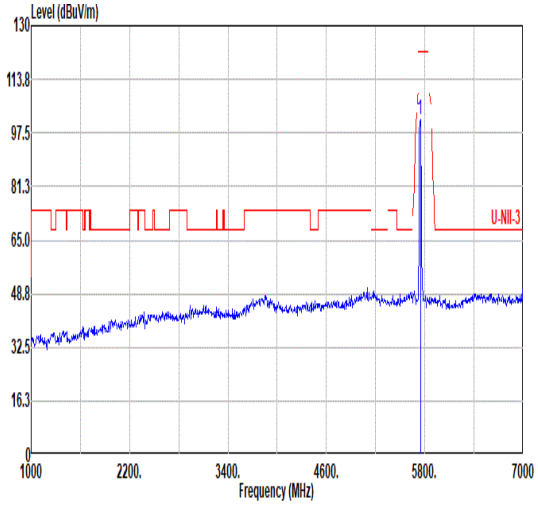 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 101.58 ------ ------ 93.25 34.74 11.21 37.62 0.00 309 109 PEAK
Avg	Blank	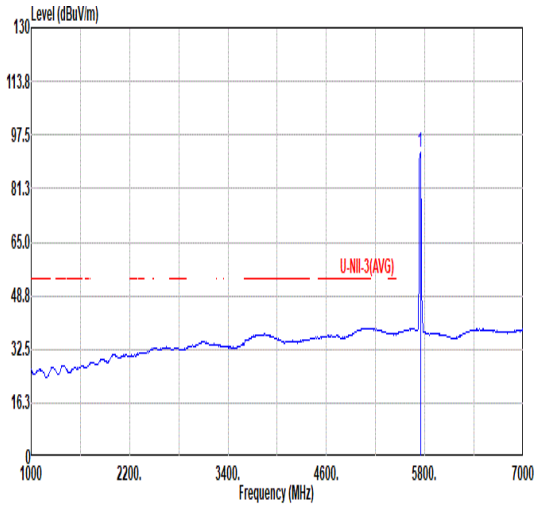 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 92.38 ------ ------ 84.05 34.74 11.21 37.62 0.00 309 109 AVERAGE

Mode	68	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_Full_5745MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	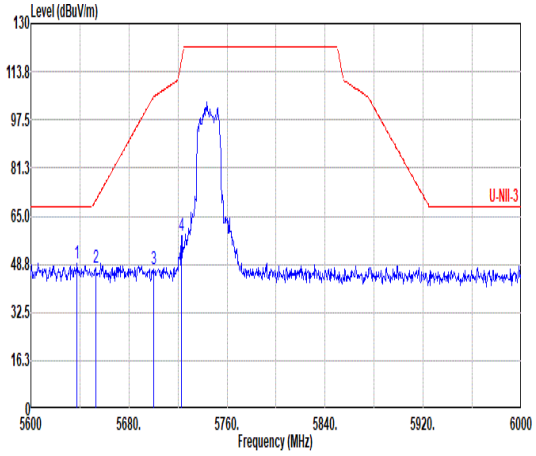 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5637.60 49.08 68.20 -19.12 39.39 34.60 11.05 35.96 0.00 131 153 PEAK 2 5652.80 47.43 70.29 -22.86 37.91 34.60 11.08 36.16 0.00 131 153 PEAK 3 5700.00 47.21 105.30 -58.09 38.37 34.60 11.14 36.90 0.00 131 153 PEAK 4 5722.80 58.38 117.28 -58.90 49.80 34.67 11.17 37.26 0.00 131 153 PEAK	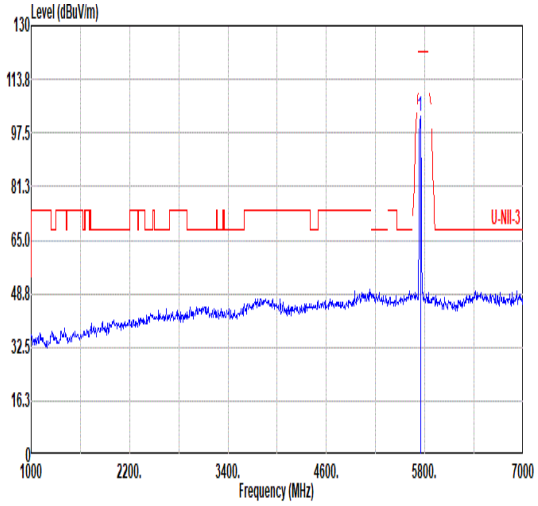 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 102.33 ------ ------ 94.00 34.74 11.21 37.62 0.00 131 153 PEAK
Avg	Blank	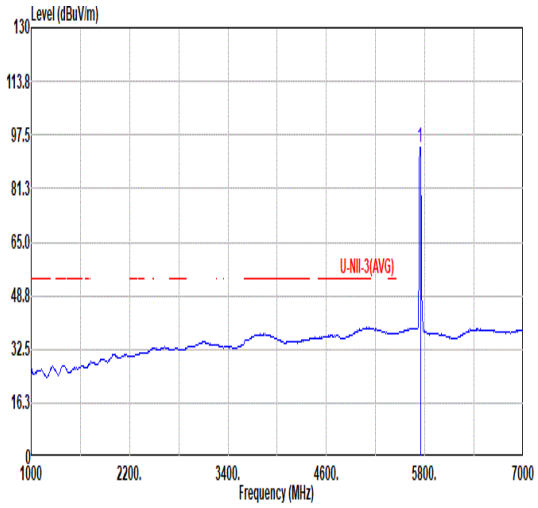 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 93.91 ------ ------ 85.58 34.74 11.21 37.62 0.00 131 153 AVERAGE

Mode	68	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_Full_5745MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	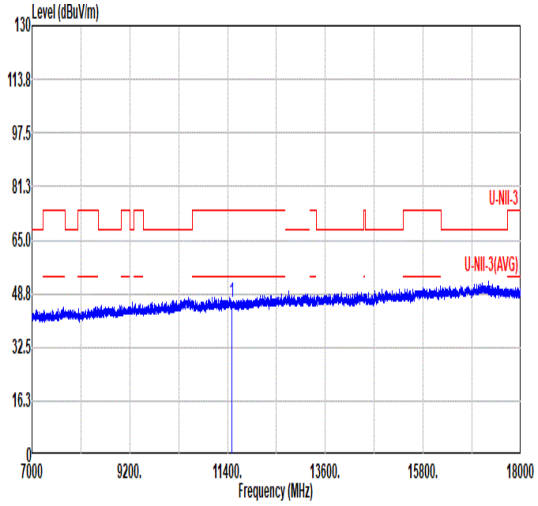 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 46.27 74.00 -27.73 56.86 38.29 16.36 65.24 0.00 -- -- PEAK	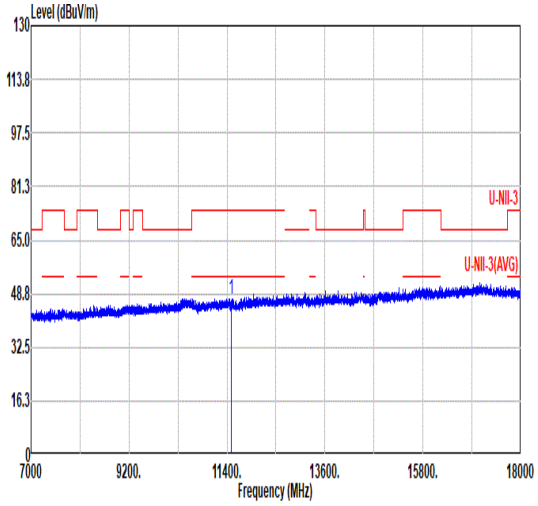 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 46.87 74.00 -27.13 57.46 38.29 16.36 65.24 0.00 -- -- PEAK

Mode	69	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH157_Full_5785MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	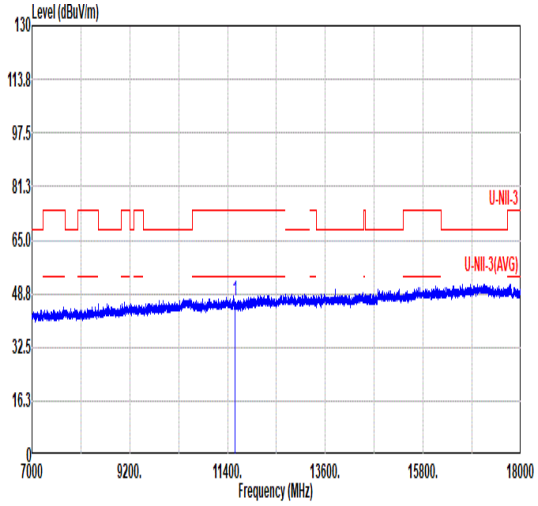 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 46.55 74.00 -27.45 57.00 38.36 16.41 65.22 0.00 -- -- PEAK	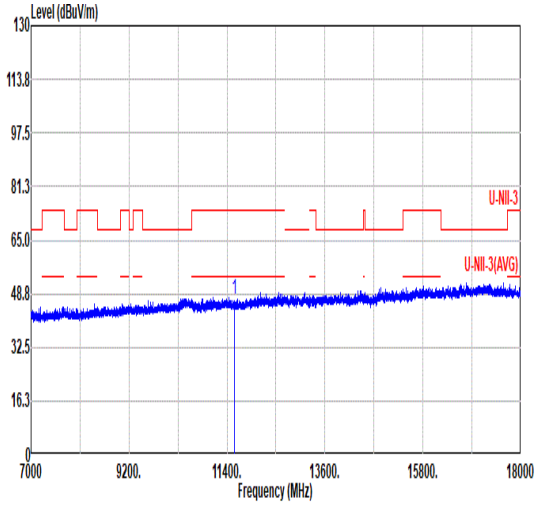 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 46.89 74.00 -27.11 57.34 38.36 16.41 65.22 0.00 -- -- PEAK

Mode	70	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_Full_5825MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	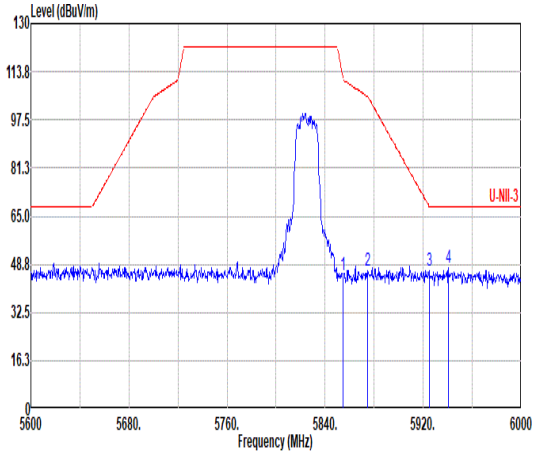 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 45.05 111.36 -66.31 38.03 35.01 11.34 39.33 0.00 248 132 PEAK 2 5874.40 46.45 105.47 -59.02 39.35 35.05 11.35 39.30 0.00 248 132 PEAK 3 5924.80 46.40 68.35 -21.95 39.10 35.12 11.40 39.22 0.00 248 132 PEAK 4 5940.40 47.44 68.20 -20.76 40.07 35.14 11.42 39.19 0.00 248 132 PEAK	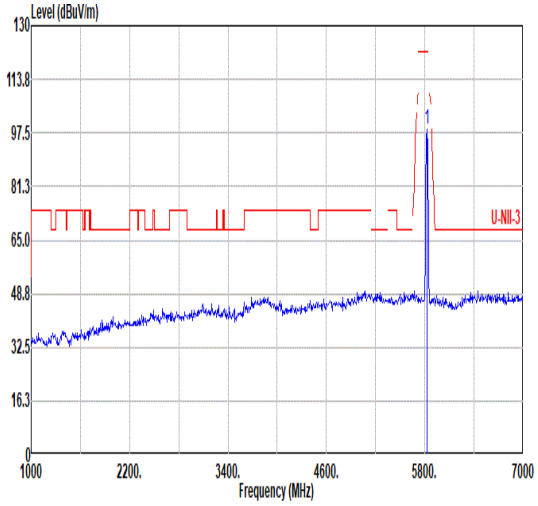 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 98.74 ------ ------ 91.33 34.95 11.31 38.85 0.00 248 132 PEAK
Avg	Blank	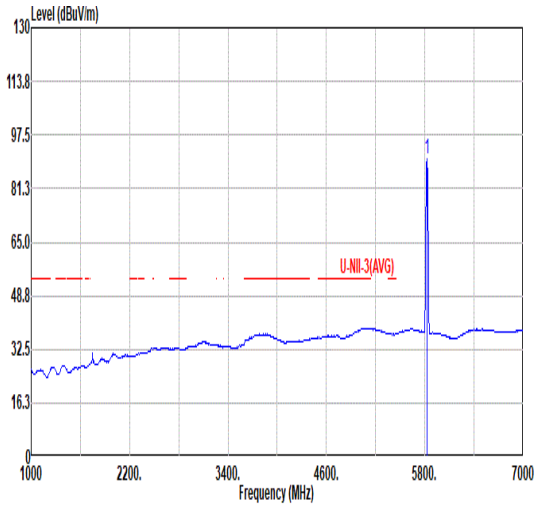 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 90.22 ------ ------ 82.81 34.95 11.31 38.85 0.00 248 132 AVERAGE

Mode	70	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_Full_5825MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	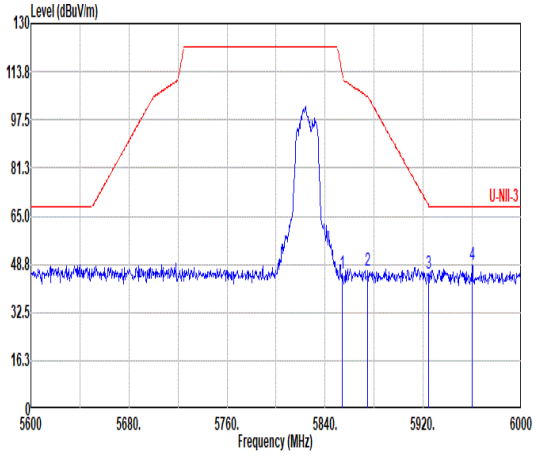 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.00 45.57 113.18 -67.61 38.55 35.01 11.33 39.32 0.00 137 149 PEAK 2 5874.80 46.51 105.36 -58.85 39.41 35.05 11.35 39.30 0.00 137 149 PEAK 3 5924.40 45.73 68.64 -22.91 38.43 35.12 11.40 39.22 0.00 137 149 PEAK 4 5960.00 48.34 68.20 -19.86 40.91 35.16 11.43 39.16 0.00 137 149 PEAK	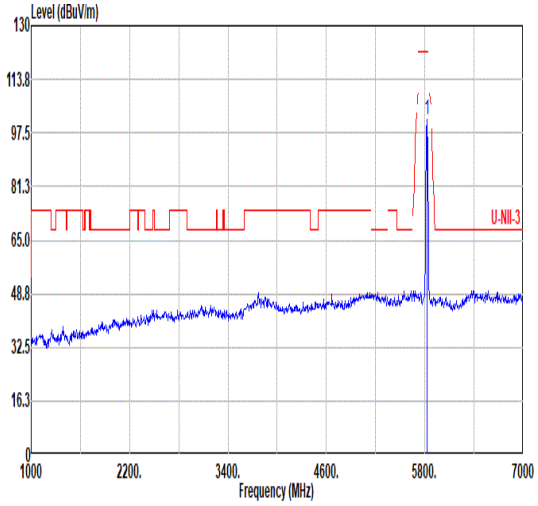 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 101.32 ------ ------ 93.91 34.95 11.31 38.85 0.00 137 149 PEAK
Avg	Blank	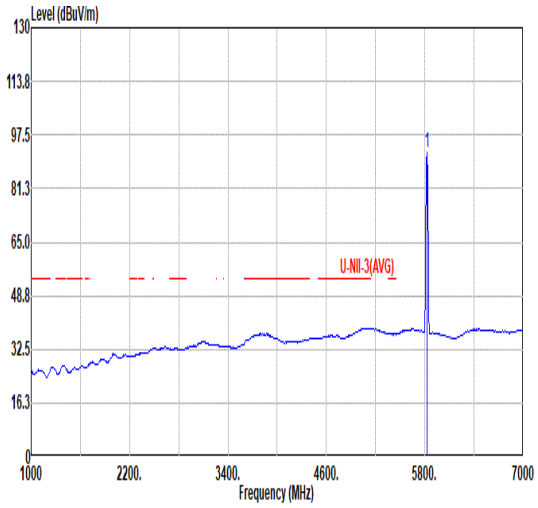 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 92.18 ------ ------ 84.77 34.95 11.31 38.85 0.00 137 149 AVERAGE

Mode	70	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT20_CH165_Full_5825MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	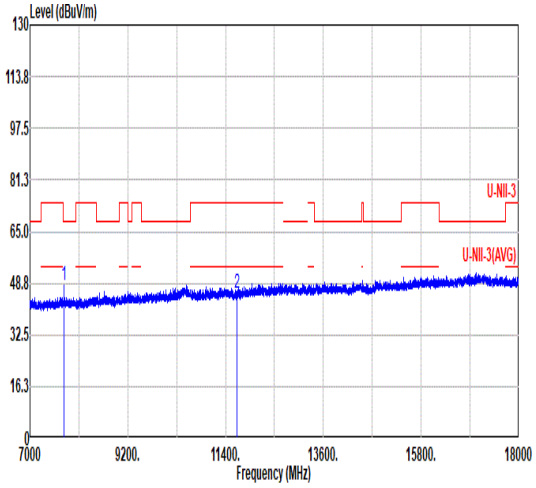 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7766.40 48.00 68.20 -20.20 64.43 35.97 13.17 65.57 0.00 -- -- Peak 2 11650.00 45.85 74.00 -28.15 56.17 38.42 16.46 65.20 0.00 -- -- PEAK	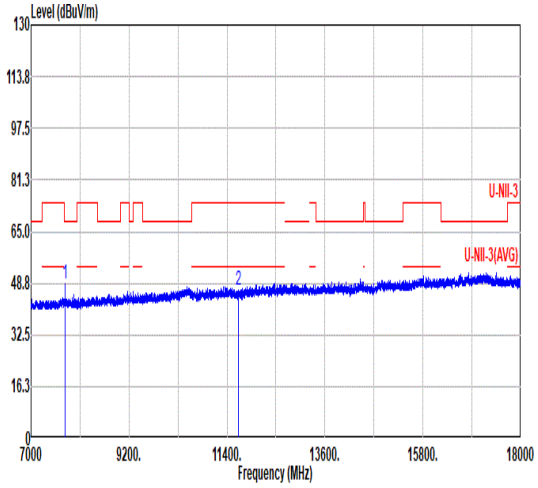 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7766.40 48.61 68.20 -19.59 65.04 35.97 13.17 65.57 0.00 -- -- Peak 2 11650.00 46.58 74.00 -27.42 56.90 38.42 16.46 65.20 0.00 -- -- PEAK

Mode	71	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_Full_5755MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	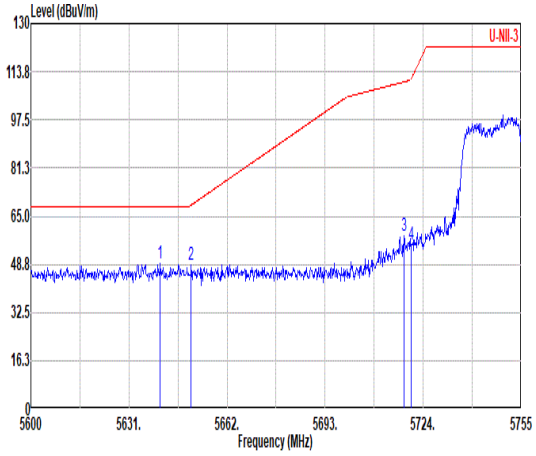 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5640.92 49.12 68.20 -19.08 39.43 34.60 11.06 35.97 0.00 243 109 PEAK 2 5650.69 48.44 68.71 -20.27 38.90 34.60 11.07 36.13 0.00 243 109 PEAK 3 5717.96 58.25 110.33 -52.08 49.61 34.65 11.17 37.18 0.00 243 109 PEAK 4 5720.28 55.36 111.54 -56.18 46.75 34.66 11.17 37.22 0.00 243 109 PEAK	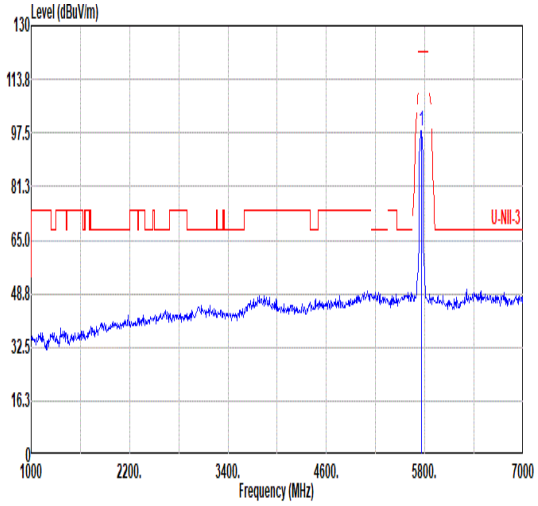 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 98.24 ------ ------ 90.06 34.77 11.22 37.81 0.00 243 109 PEAK
Avg	Blank	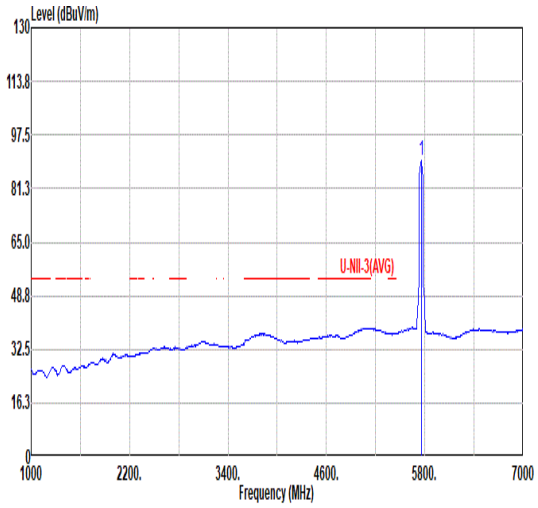 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 89.77 ------ ------ 81.59 34.77 11.22 37.81 0.00 243 109 AVERAGE

Mode	71	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_Full_5755MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	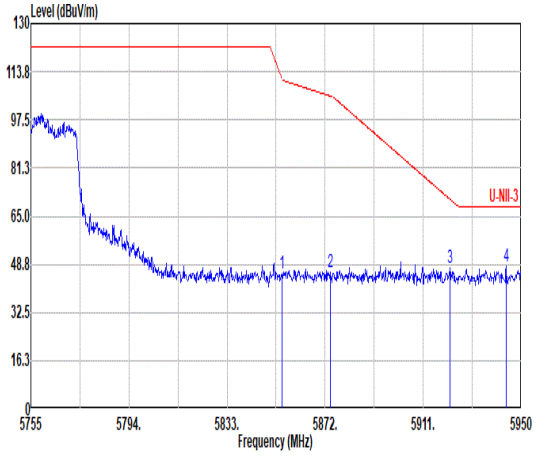 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.84 45.62 111.26 -65.64 38.60 35.01 11.34 39.33 0.00 243 109 PEAK 2 5873.95 46.15 105.59 -59.44 39.05 35.05 11.35 39.30 0.00 243 109 PEAK 3 5921.53 47.72 70.76 -23.04 40.42 35.12 11.40 39.22 0.00 243 109 PEAK 4 5943.96 48.28 68.20 -19.92 40.90 35.14 11.42 39.18 0.00 243 109 PEAK	Blank

Mode	71	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_Full_5755MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	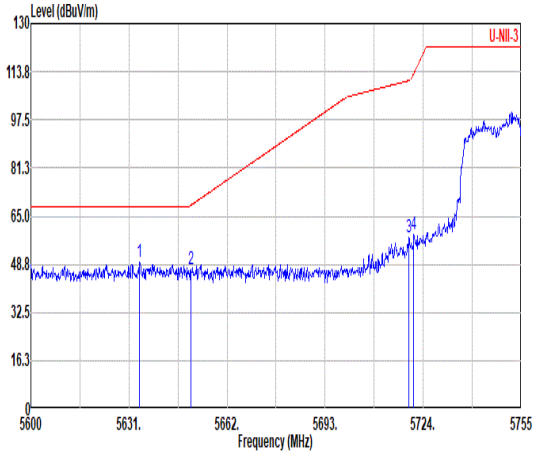 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5634.26 49.72 68.20 -18.48 40.04 34.60 11.05 35.97 0.00 159 150 PEAK 2 5650.53 47.06 68.59 -21.53 37.52 34.60 11.07 36.13 0.00 159 150 PEAK 3 5719.51 58.04 110.76 -52.72 49.42 34.66 11.17 37.21 0.00 159 150 PEAK 4 5721.06 58.82 113.31 -54.49 50.22 34.66 11.17 37.23 0.00 159 150 PEAK	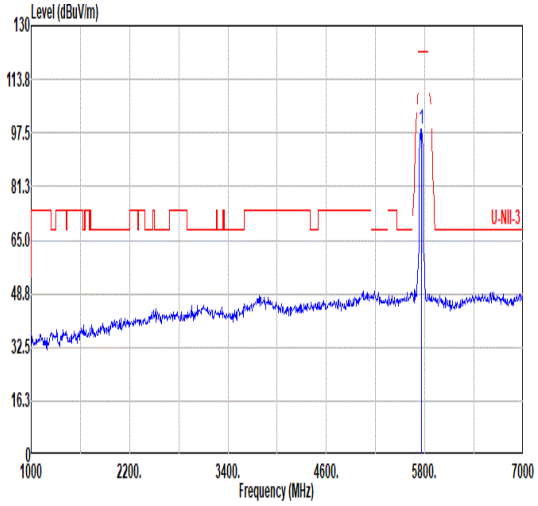 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 98.65 ------ ------ 90.54 34.79 11.23 37.91 0.00 159 150 PEAK
Avg	Blank	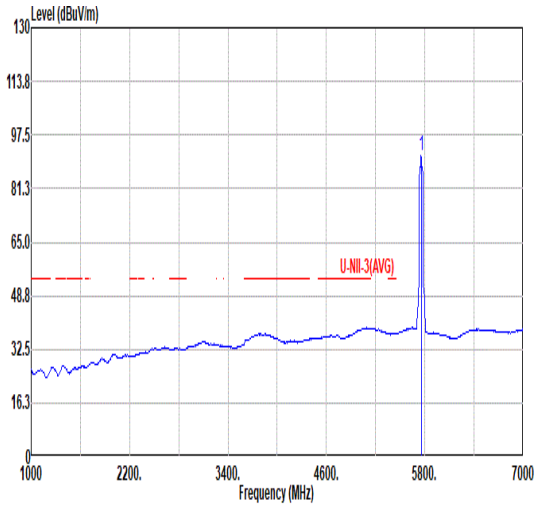 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 91.18 ------ ------ 82.93 34.76 11.21 37.72 0.00 159 150 AVERAGE

Mode	71	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_Full_5755MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	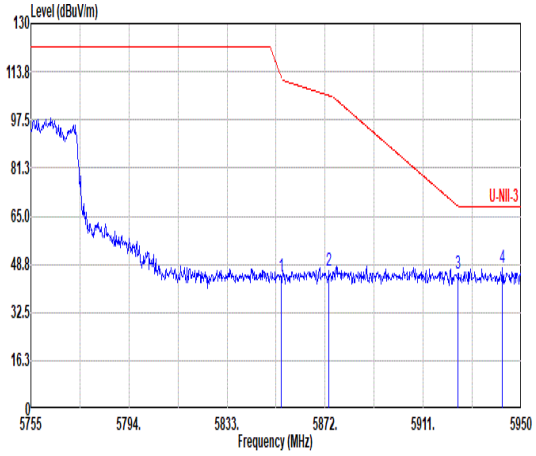 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.65 44.43 111.71 -67.28 37.41 35.01 11.34 39.33 0.00 159 150 PEAK 2 5873.56 46.67 105.70 -59.03 39.57 35.05 11.35 39.30 0.00 159 150 PEAK 3 5924.85 45.44 68.31 -22.87 38.14 35.12 11.40 39.22 0.00 159 150 PEAK 4 5942.59 47.55 68.20 -20.65 40.18 35.14 11.42 39.19 0.00 159 150 PEAK	Blank

Mode	71	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_Full_5755MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	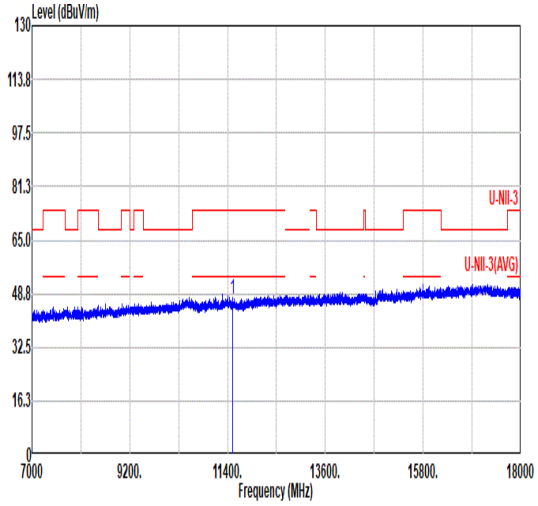 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11510.00 47.23 74.00 -26.77 57.78 38.31 16.37 65.23 0.00 -- -- PEAK	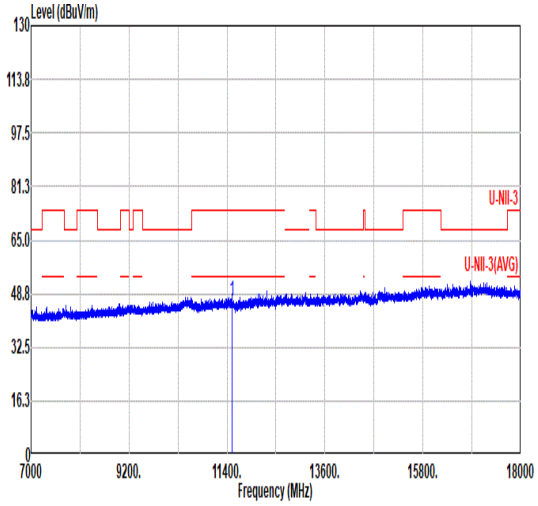 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11510.00 46.43 74.00 -27.57 56.98 38.31 16.37 65.23 0.00 -- -- PEAK

Mode	72	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_Full_5795MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	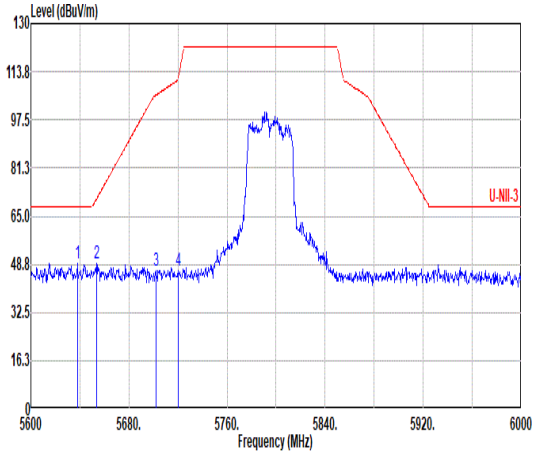 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5638.00 48.87 68.20 -19.33 39.17 34.60 11.06 35.96 0.00 226 108 PEAK 2 5653.60 48.82 70.88 -22.06 39.31 34.60 11.08 36.17 0.00 226 108 PEAK 3 5702.00 46.51 105.86 -59.35 37.69 34.61 11.14 36.93 0.00 226 108 PEAK 4 5720.00 46.51 110.90 -64.39 37.90 34.66 11.17 37.22 0.00 226 108 PEAK	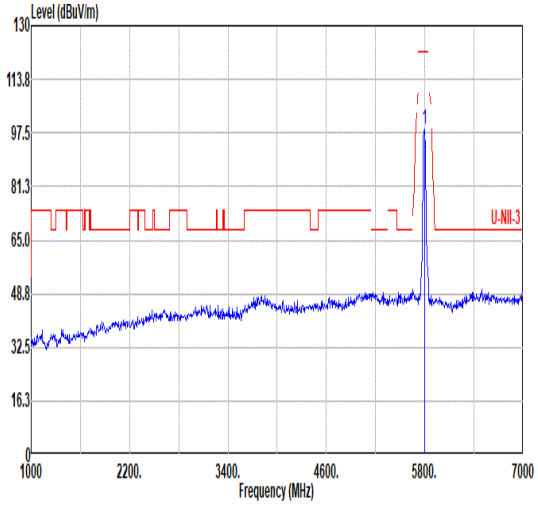 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 98.37 ------ ------ 90.60 34.88 11.27 38.38 0.00 226 108 PEAK
Avg	Blank	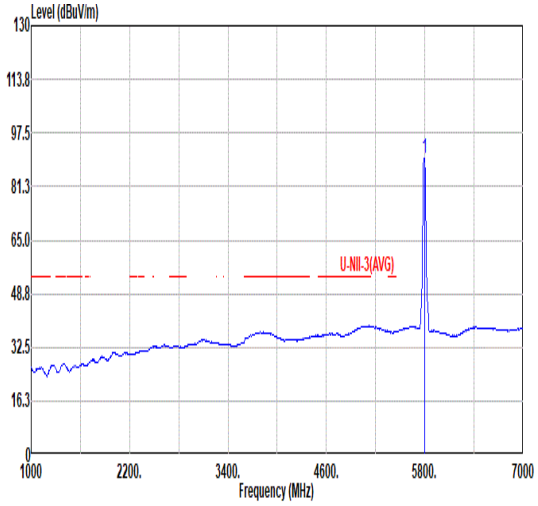 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 89.73 ------ ------ 81.89 34.86 11.26 38.28 0.00 226 108 AVERAGE

Mode	72	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_Full_5795MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	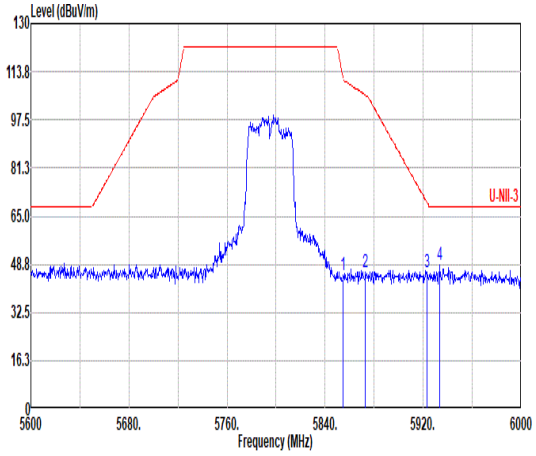 Freq / Level / Limit Line / Margin / Read Level / Ant Factor / Cable Loss / Preamp Factor / Aux Factor / APos / TPos / Remark MHz / dBuV/m / dBuV/m / dB / dBuV / dB/m / dB / dB / dB / cm / deg 1 5854.80 45.03 111.36 -66.33 38.01 35.01 11.34 39.33 0.00 226 108 PEAK 2 5872.80 45.89 105.92 -60.03 38.79 35.05 11.35 39.30 0.00 226 108 PEAK 3 5923.20 46.14 69.53 -23.39 38.84 35.12 11.40 39.22 0.00 226 108 PEAK 4 5933.60 48.50 68.20 -19.70 41.16 35.13 11.41 39.20 0.00 226 108 PEAK	Blank

Mode	72	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_Full_5795MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	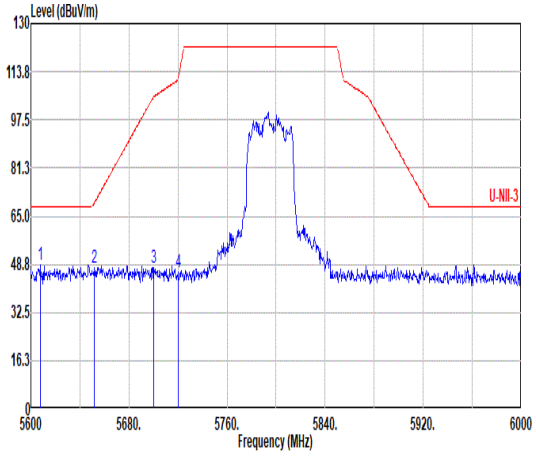 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5607.60 48.60 68.20 -19.60 39.00 34.60 11.01 36.01 0.00 152 148 PEAK 2 5652.00 47.67 69.69 -22.02 38.15 34.60 11.07 36.15 0.00 152 148 PEAK 3 5700.40 47.63 105.41 -57.78 38.80 34.60 11.14 36.91 0.00 152 148 PEAK 4 5720.00 46.00 110.90 -64.90 37.39 34.66 11.17 37.22 0.00 152 148 PEAK	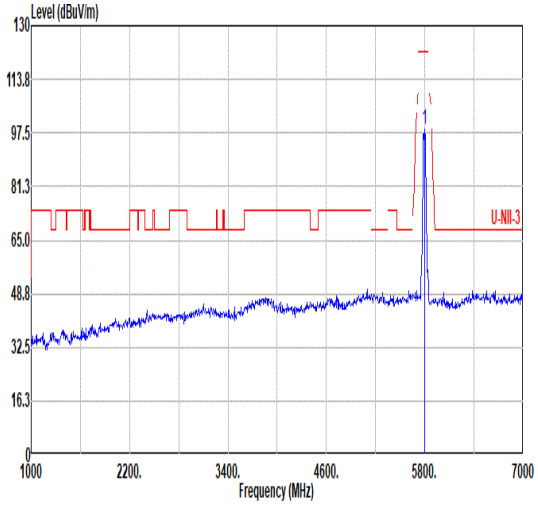 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 98.65 ------ ------ 90.88 34.88 11.27 38.38 0.00 152 148 PEAK
Avg	Blank	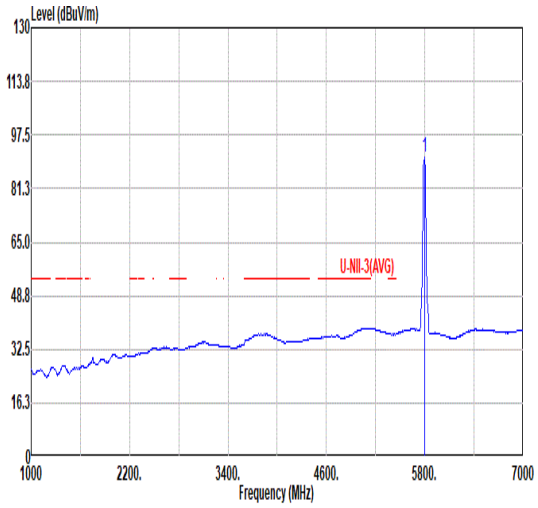 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 90.94 ------ ------ 83.17 34.88 11.27 38.38 0.00 152 148 AVERAGE

Mode	72	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_Full_5795MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	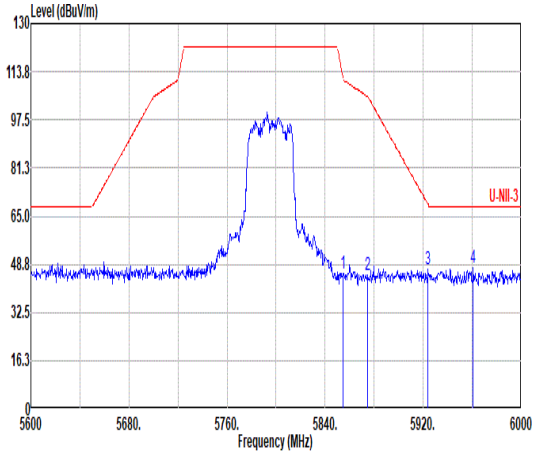 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 45.46 111.36 -65.90 38.44 35.01 11.34 39.33 0.00 152 148 PEAK 2 5874.40 44.93 105.47 -60.54 37.83 35.05 11.35 39.30 0.00 152 148 PEAK 3 5924.00 46.89 68.94 -22.05 39.59 35.12 11.40 39.22 0.00 152 148 PEAK 4 5960.80 47.61 68.20 -20.59 40.17 35.16 11.44 39.16 0.00 152 148 PEAK	Blank

Mode	72	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_Full_5795MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	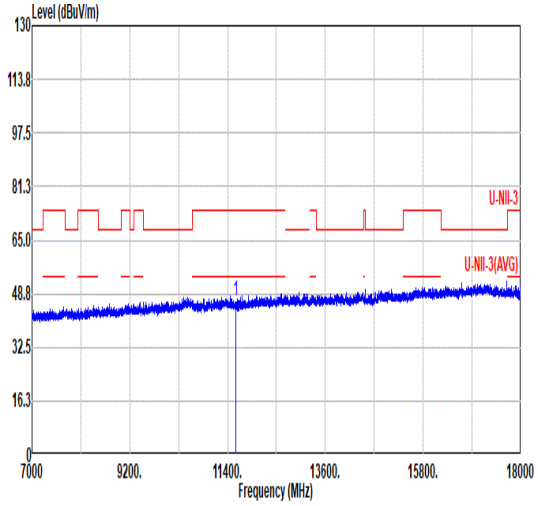 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 46.53 74.00 -27.47 56.95 38.37 16.42 65.21 0.00 -- -- PEAK	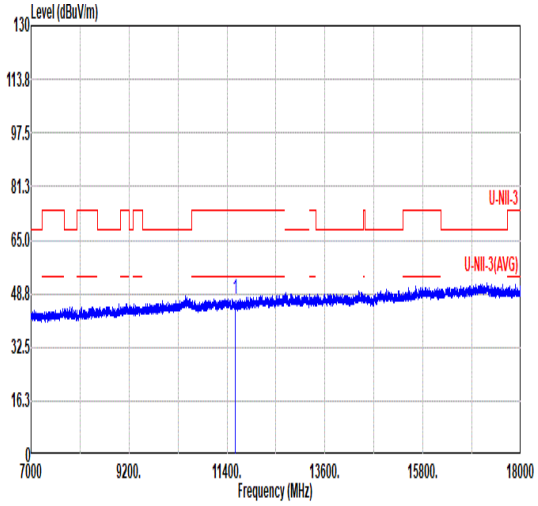 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 46.88 74.00 -27.12 57.30 38.37 16.42 65.21 0.00 -- -- PEAK

Mode	73	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_Full_5775MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	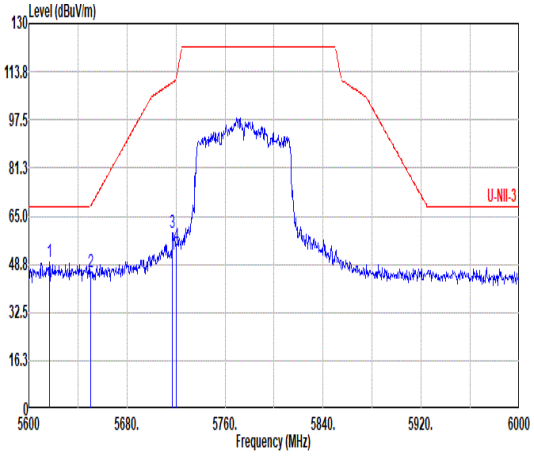 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5616.80 49.52 68.20 -18.68 39.88 34.60 11.03 35.99 0.00 230 115 PEAK 2 5650.40 46.05 68.50 -22.45 36.50 34.60 11.07 36.12 0.00 230 115 PEAK 3 5717.20 59.41 110.12 -50.71 50.76 34.65 11.17 37.17 0.00 230 115 PEAK 4 5720.00 55.00 110.90 -55.90 46.39 34.66 11.17 37.22 0.00 230 115 PEAK	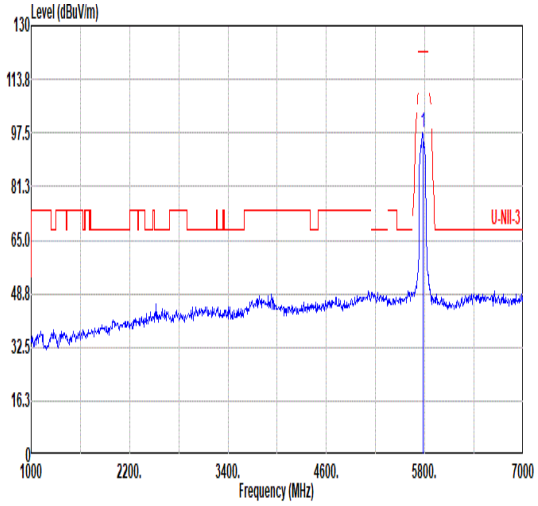 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 97.44 ------ ------ 89.39 34.81 11.24 38.00 0.00 230 115 PEAK
Avg	Blank	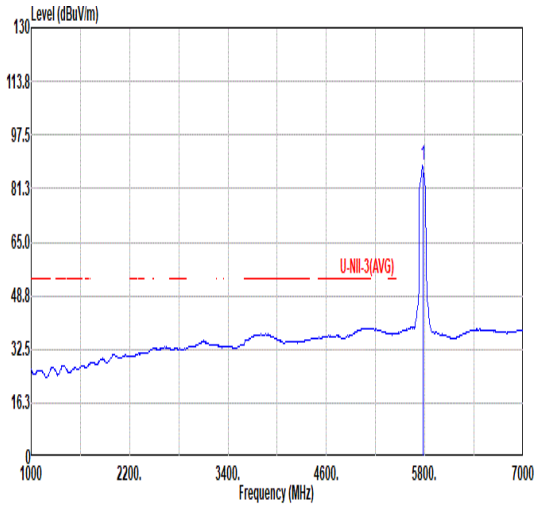 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 88.29 ------ ------ 80.24 34.81 11.24 38.00 0.00 230 115 AVERAGE

Mode	73	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_Full_5775MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	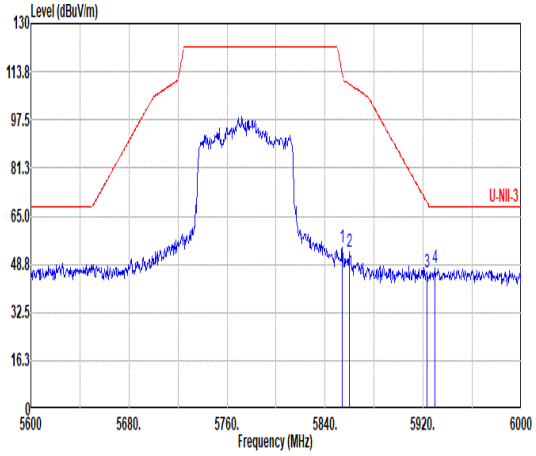 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.00 54.56 113.18 -58.62 47.54 35.01 11.33 39.32 0.00 230 115 PEAK 2 5859.60 52.92 109.61 -56.69 45.88 35.02 11.34 39.32 0.00 230 115 PEAK 3 5923.20 46.12 69.53 -23.41 38.82 35.12 11.40 39.22 0.00 230 115 PEAK 4 5929.60 47.68 68.20 -20.52 40.35 35.13 11.41 39.21 0.00 230 115 PEAK	Blank

Mode	73	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_Full_5775MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	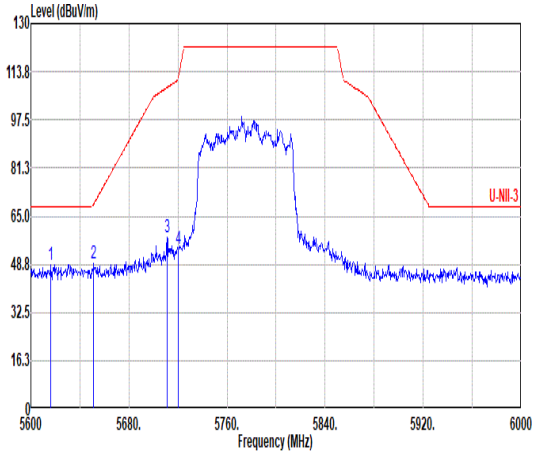 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5616.00 48.67 68.20 -19.53 39.04 34.60 11.02 35.99 0.00 168 151 PEAK 2 5651.20 49.25 69.09 -19.84 39.72 34.60 11.07 36.14 0.00 168 151 PEAK 3 5711.20 57.65 108.44 -50.79 48.94 34.63 11.16 37.08 0.00 168 151 PEAK 4 5720.00 53.83 110.90 -57.07 45.22 34.66 11.17 37.22 0.00 168 151 PEAK	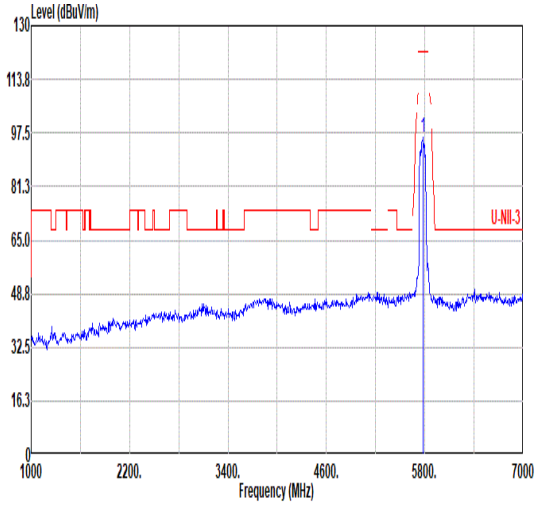 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 96.32 ------ ------ 88.40 34.85 11.26 38.19 0.00 168 151 PEAK
Avg	Blank	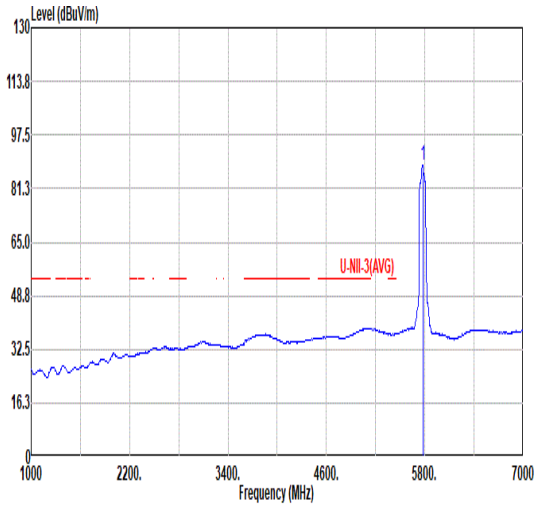 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 88.55 ------ ------ 80.56 34.83 11.25 38.09 0.00 168 151 AVERAGE

Mode	73	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_Full_5775MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	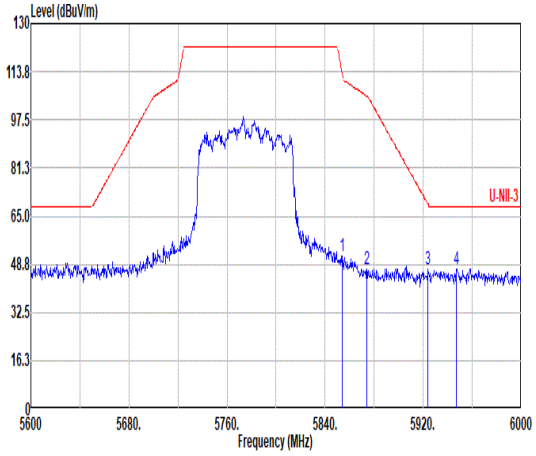 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.00 51.61 113.18 -61.57 44.59 35.01 11.33 39.32 0.00 168 151 PEAK 2 5874.00 47.06 105.58 -58.52 39.96 35.05 11.35 39.30 0.00 168 151 PEAK 3 5924.00 47.14 68.94 -21.80 39.84 35.12 11.40 39.22 0.00 168 151 PEAK 4 5946.80 47.32 68.20 -20.88 39.93 35.15 11.42 39.18 0.00 168 151 PEAK	Blank

Mode	73	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_Full_5775MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	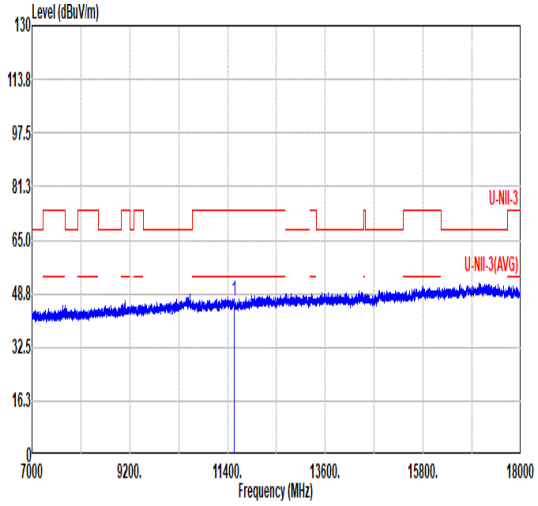 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 46.49 74.00 -27.51 56.98 38.34 16.39 65.22 0.00 -- -- PEAK	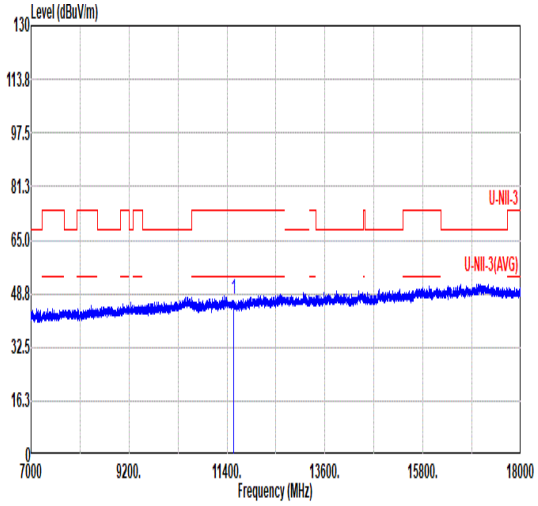 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 47.00 74.00 -27.00 57.49 38.34 16.39 65.22 0.00 -- -- PEAK

Mode	74	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full_5745MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	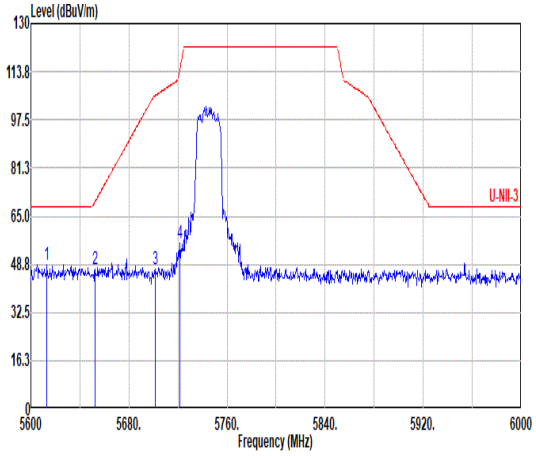 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5613.20 48.71 68.20 -19.49 39.09 34.60 11.02 36.00 0.00 296 111 PEAK 2 5652.40 47.17 69.99 -22.82 37.64 34.60 11.08 36.15 0.00 296 111 PEAK 3 5701.60 47.34 105.75 -58.41 38.53 34.60 11.14 36.93 0.00 296 111 PEAK 4 5721.20 55.75 113.64 -57.89 47.15 34.66 11.17 37.23 0.00 296 111 PEAK	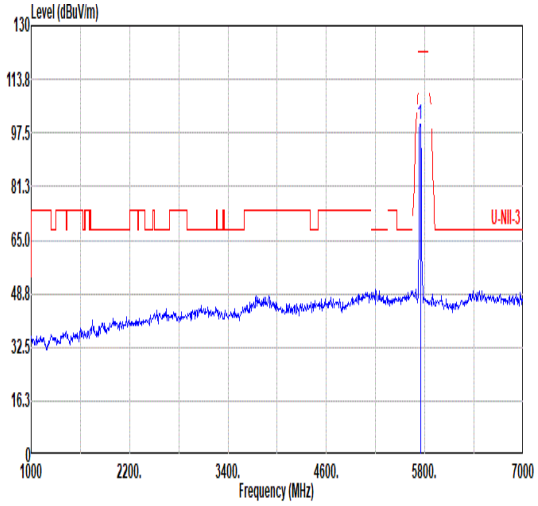 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 100.28 ------ ------ 91.89 34.72 11.20 37.53 0.00 296 111 PEAK
Avg	Blank	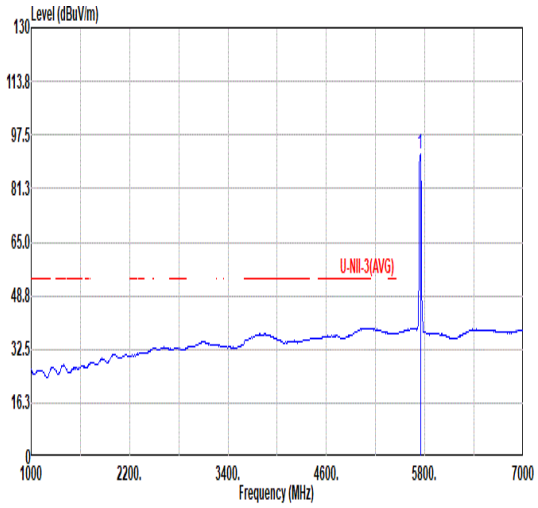 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 91.61 ------ ------ 83.28 34.74 11.21 37.62 0.00 296 111 AVERAGE

Mode	74	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full_5745MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	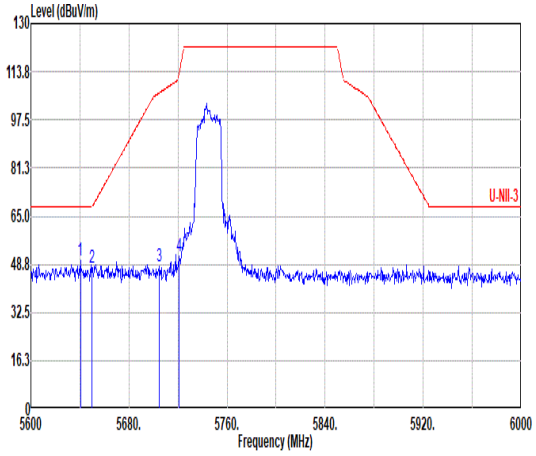 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5640.40 49.89 68.20 -18.31 40.20 34.60 11.06 35.97 0.00 142 157 PEAK 2 5650.00 47.42 68.20 -20.78 37.87 34.60 11.07 36.12 0.00 142 157 PEAK 3 5704.80 48.25 106.65 -58.40 39.47 34.61 11.15 36.98 0.00 142 157 PEAK 4 5720.80 51.28 112.72 -61.44 42.68 34.66 11.17 37.23 0.00 142 157 PEAK	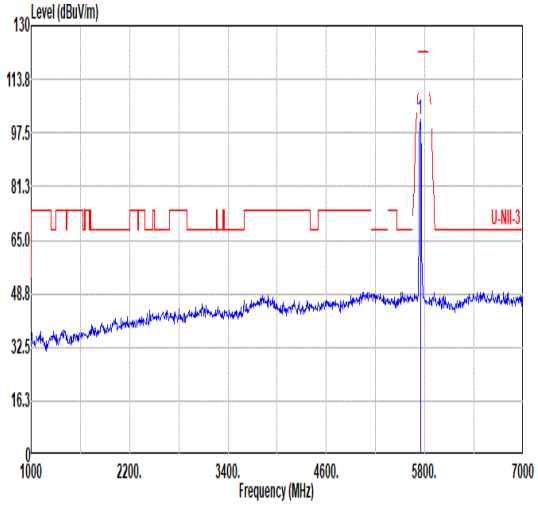 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 101.35 ------ ------ 93.10 34.76 11.21 37.72 0.00 142 157 PEAK
Avg	Blank	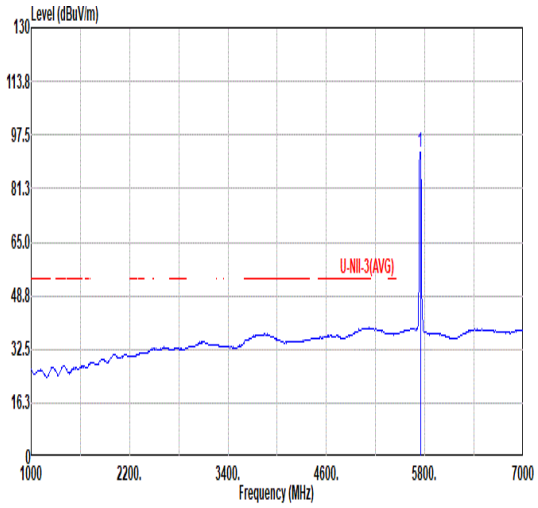 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 92.46 ------ ------ 84.13 34.74 11.21 37.62 0.00 142 157 AVERAGE

Mode	74	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_Full_5745MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	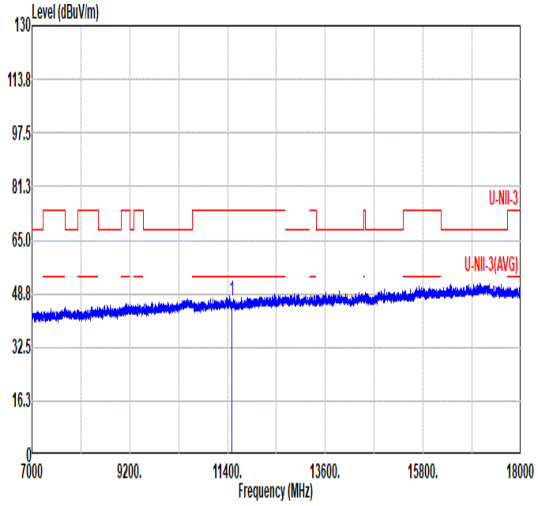 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 46.63 74.00 -27.37 57.22 38.29 16.36 65.24 0.00 -- -- PEAK	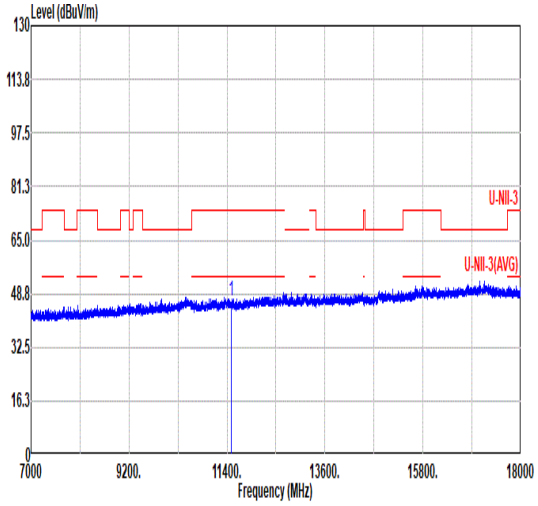 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 46.38 74.00 -27.62 56.97 38.29 16.36 65.24 0.00 -- -- PEAK

Mode	75	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH157_Full_5785MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	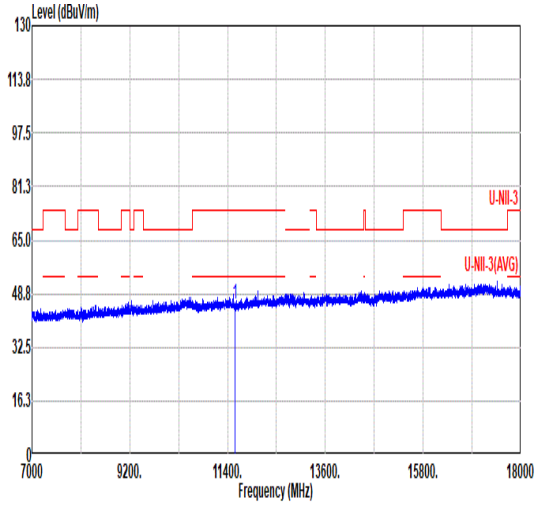 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 45.86 74.00 -28.14 56.31 38.36 16.41 65.22 0.00 -- -- PEAK	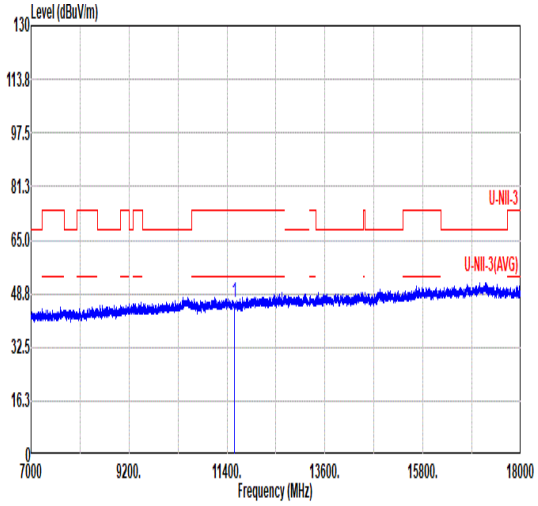 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 45.90 74.00 -28.10 56.35 38.36 16.41 65.22 0.00 -- -- PEAK

Mode	76	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full_5825MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	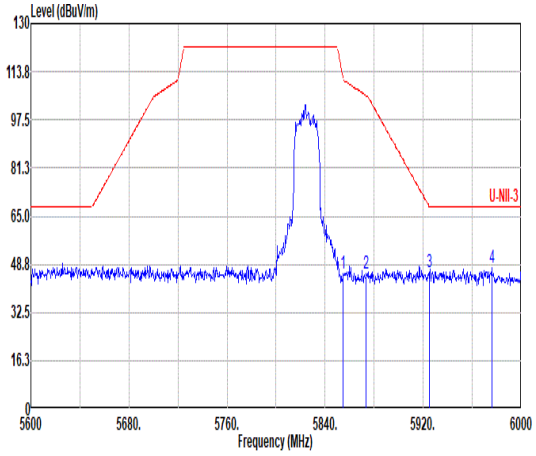 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 45.66 111.36 -65.70 38.64 35.01 11.34 39.33 0.00 249 132 PEAK 2 5873.60 45.68 105.69 -60.01 38.58 35.05 11.35 39.30 0.00 249 132 PEAK 3 5924.80 46.22 68.35 -22.13 38.92 35.12 11.40 39.22 0.00 249 132 PEAK 4 5976.00 47.35 68.20 -20.85 39.85 35.18 11.45 39.13 0.00 249 132 PEAK	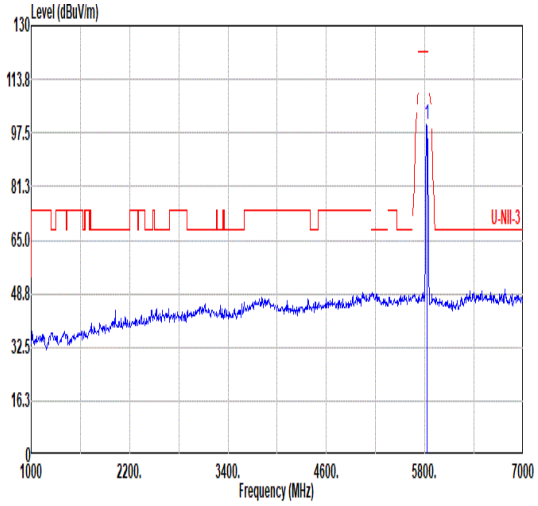 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 100.10 ------ ------ 92.61 34.94 11.30 38.75 0.00 249 132 PEAK
Avg	Blank	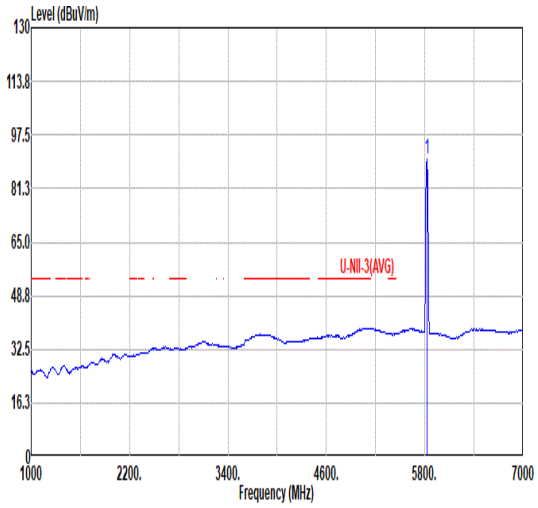 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 90.07 ------ ------ 82.66 34.95 11.31 38.85 0.00 249 132 AVERAGE

Mode	76	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full_5825MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	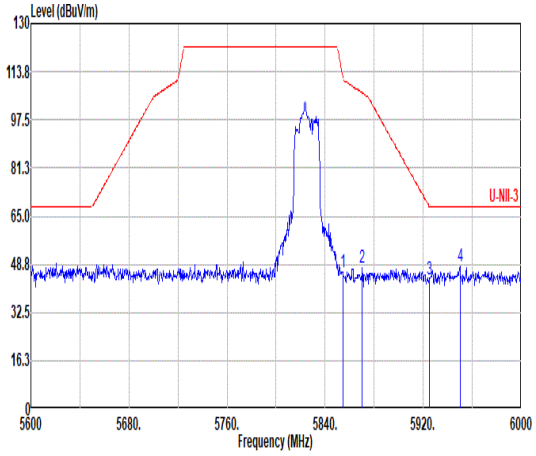 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 46.27 112.27 -66.00 39.25 35.01 11.33 39.32 0.00 136 149 PEAK 2 5870.40 47.70 106.59 -58.89 40.61 35.04 11.35 39.30 0.00 136 149 PEAK 3 5924.80 43.63 68.35 -24.72 36.33 35.12 11.40 39.22 0.00 136 149 PEAK 4 5950.00 47.92 68.20 -20.28 40.51 35.15 11.43 39.17 0.00 136 149 PEAK	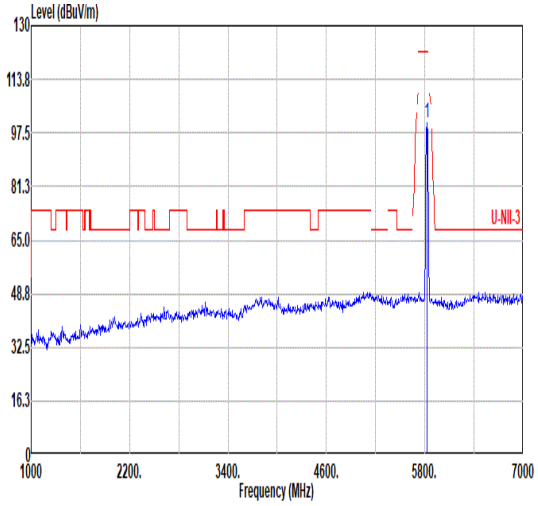 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 100.41 ------ ------ 93.00 34.95 11.31 38.85 0.00 136 149 PEAK
Avg	Blank	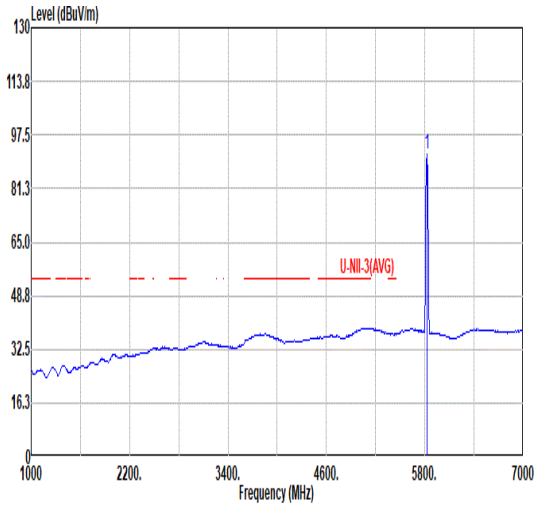 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 91.96 ------ ------ 84.55 34.95 11.31 38.85 0.00 136 149 AVERAGE

Mode	76	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Full_5825MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	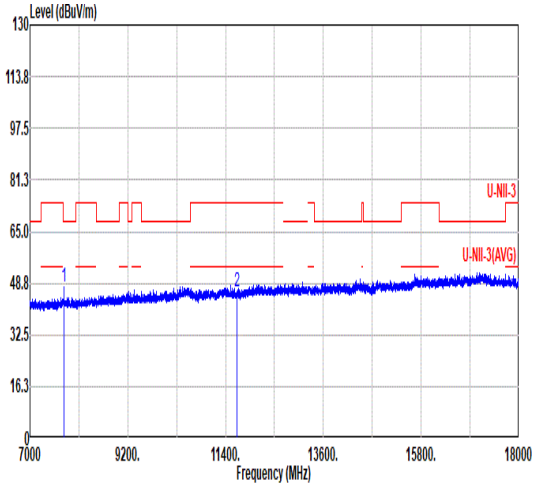 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7766.40 47.36 68.20 -20.84 63.79 35.97 13.17 65.57 0.00 -- -- Peak 2 11650.00 45.89 74.00 -28.11 56.21 38.42 16.46 65.20 0.00 -- -- PEAK	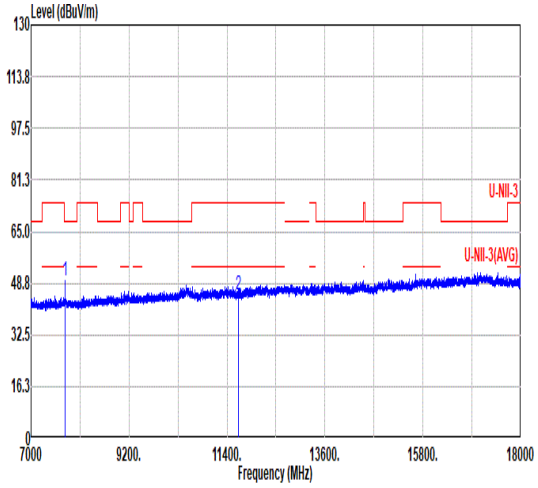 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 7766.40 49.39 68.20 -18.81 65.82 35.97 13.17 65.57 0.00 -- -- Peak 2 11649.60 45.31 74.00 -28.69 55.63 38.42 16.46 65.20 0.00 -- -- Peak

Mode	77	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	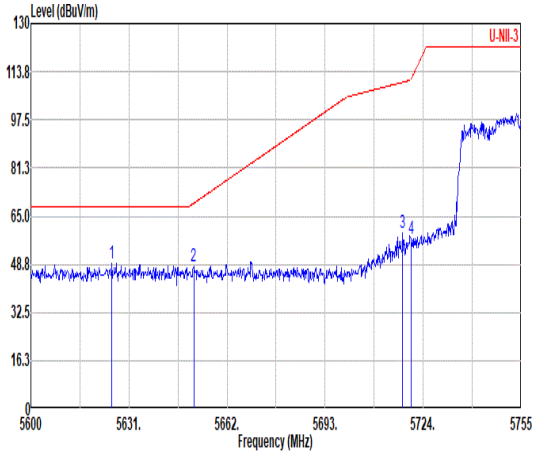 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5625.58 49.07 68.20 -19.13 39.41 34.60 11.04 35.98 0.00 246 106 PEAK 2 5651.46 47.88 69.29 -21.41 38.35 34.60 11.07 36.14 0.00 246 106 PEAK 3 5717.49 59.23 110.20 -50.97 50.59 34.65 11.17 37.18 0.00 246 106 PEAK 4 5720.13 57.39 111.19 -53.80 48.78 34.66 11.17 37.22 0.00 246 106 PEAK	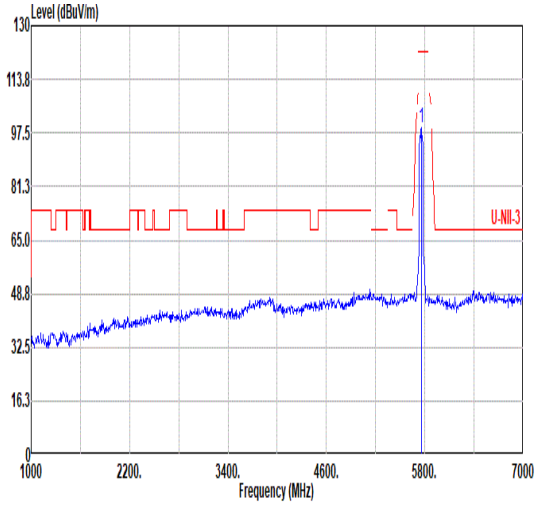 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 99.32 ------ ------ 91.14 34.77 11.22 37.81 0.00 246 106 PEAK
Avg	Blank	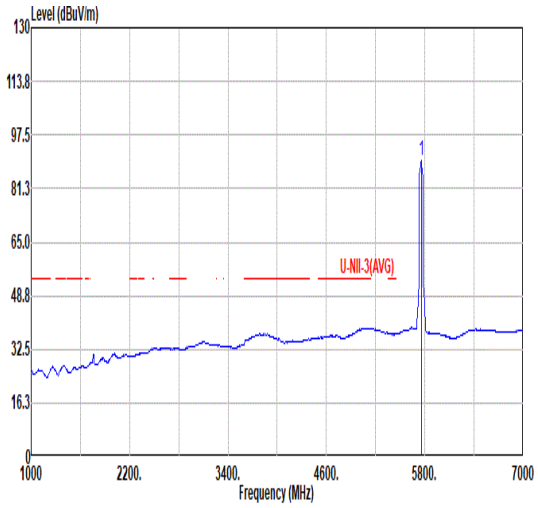 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 89.72 ------ ------ 81.54 34.77 11.22 37.81 0.00 246 106 AVERAGE

Mode	77	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	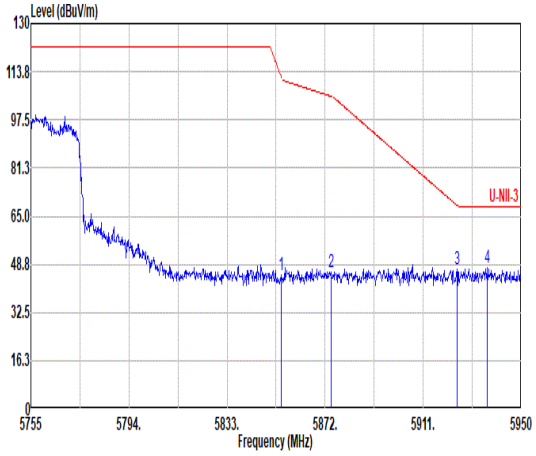 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.65 45.15 111.71 -66.56 38.13 35.01 11.34 39.33 0.00 246 106 PEAK 2 5874.34 45.87 105.48 -59.61 38.77 35.05 11.35 39.30 0.00 246 106 PEAK 3 5924.46 46.91 68.60 -21.69 39.61 35.12 11.40 39.22 0.00 246 106 PEAK 4 5936.35 47.67 68.20 -20.53 40.32 35.14 11.41 39.20 0.00 246 106 PEAK	Blank

Mode	77	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	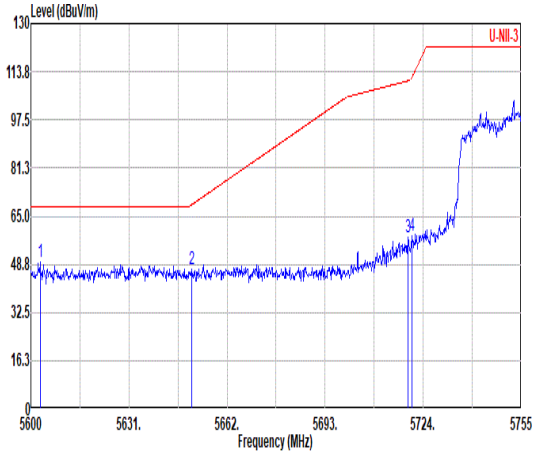 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5602.95 49.52 68.20 -18.68 39.92 34.60 11.01 36.01 0.00 144 152 PEAK 2 5650.84 47.08 68.83 -21.75 37.54 34.60 11.07 36.13 0.00 144 152 PEAK 3 5719.20 57.92 110.67 -52.75 49.29 34.66 11.17 37.20 0.00 144 152 PEAK 4 5720.44 58.35 111.89 -53.54 49.74 34.66 11.17 37.22 0.00 144 152 PEAK	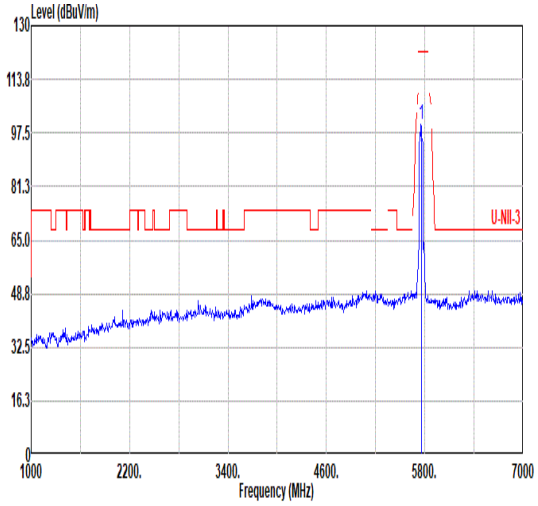 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 99.96 ------ ------ 91.71 34.76 11.21 37.72 0.00 144 152 PEAK
Avg	Blank	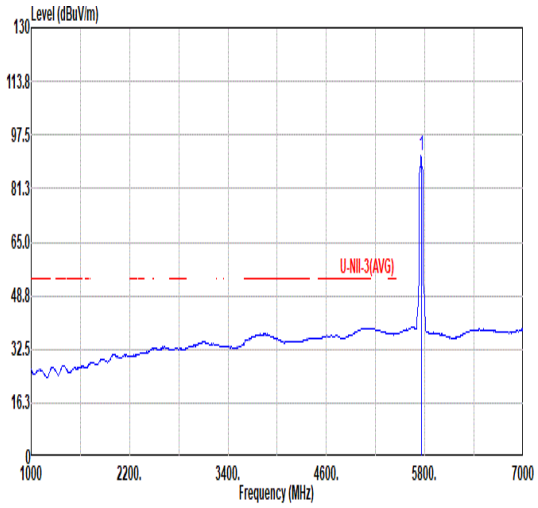 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 91.30 ------ ------ 83.05 34.76 11.21 37.72 0.00 144 152 AVERAGE

Mode	77	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	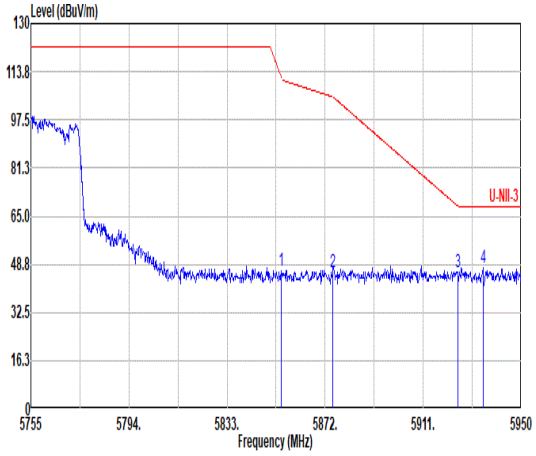 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.45 46.72 112.15 -65.43 39.70 35.01 11.33 39.32 0.00 144 152 PEAK 2 5874.93 46.25 105.32 -59.07 39.15 35.05 11.35 39.30 0.00 144 152 PEAK 3 5924.85 46.15 68.31 -22.16 38.85 35.12 11.40 39.22 0.00 144 152 PEAK 4 5934.79 47.80 68.20 -20.40 40.46 35.13 11.41 39.20 0.00 144 152 PEAK	Blank

Mode	77	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full_5755MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	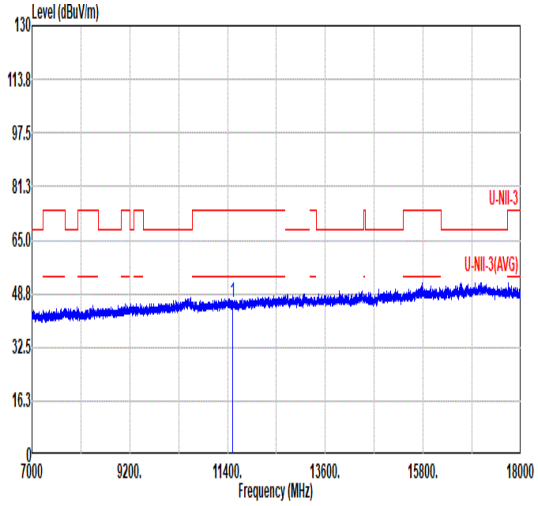 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11510.00 46.34 74.00 -27.66 56.89 38.31 16.37 65.23 0.00 -- -- PEAK	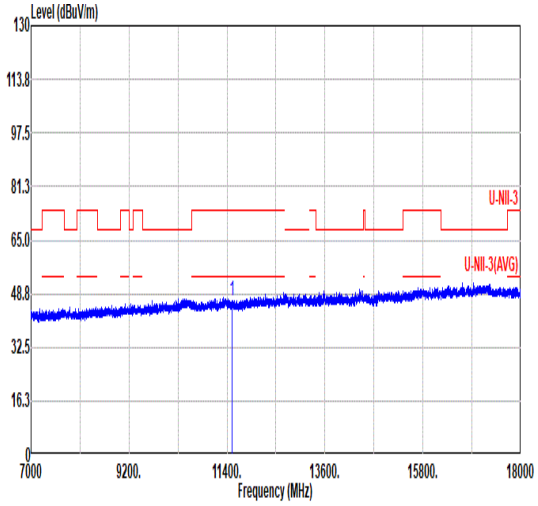 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11510.00 46.48 74.00 -27.52 57.03 38.31 16.37 65.23 0.00 -- -- PEAK

Mode	78	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	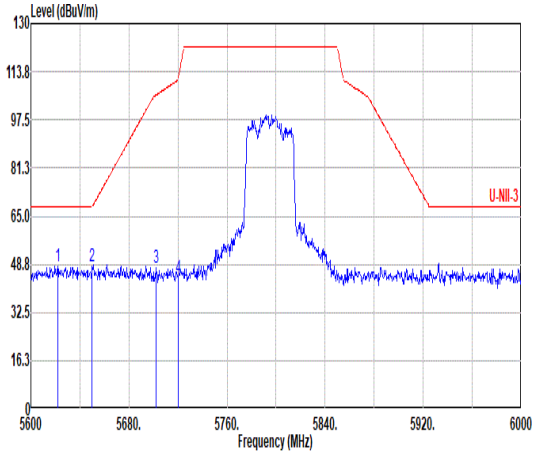 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5622.00 48.14 68.20 -20.06 38.50 34.60 11.03 35.99 0.00 224 108 PEAK 2 5650.00 47.87 68.20 -20.33 38.32 34.60 11.07 36.12 0.00 224 108 PEAK 3 5702.00 47.62 105.86 -58.24 38.80 34.61 11.14 36.93 0.00 224 108 PEAK 4 5720.00 44.20 110.90 -66.70 35.59 34.66 11.17 37.22 0.00 224 108 PEAK	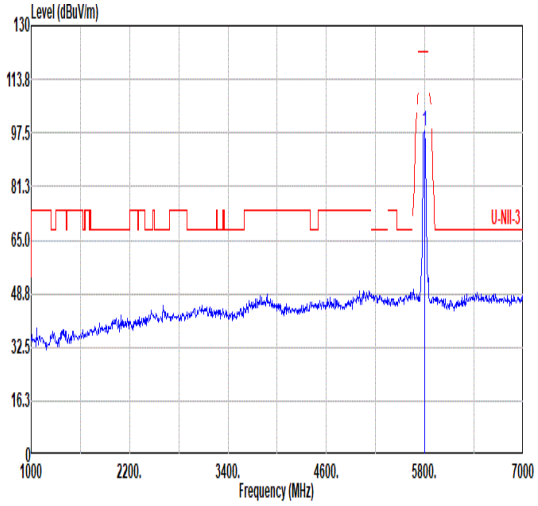 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 98.01 ------ ------ 90.24 34.88 11.27 38.38 0.00 224 108 PEAK
Avg	Blank	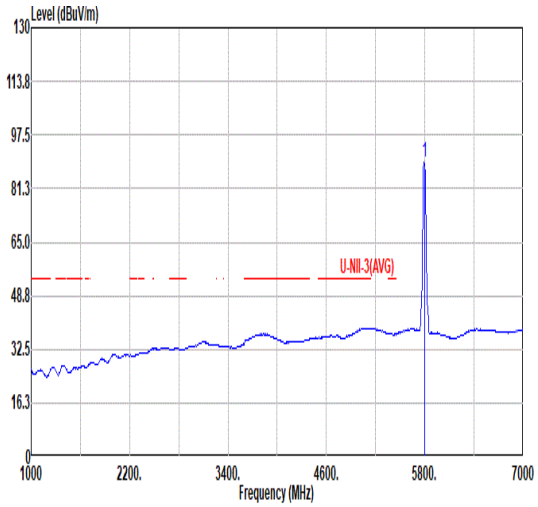 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 89.12 ------ ------ 81.28 34.86 11.26 38.28 0.00 224 108 AVERAGE

Mode	78	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	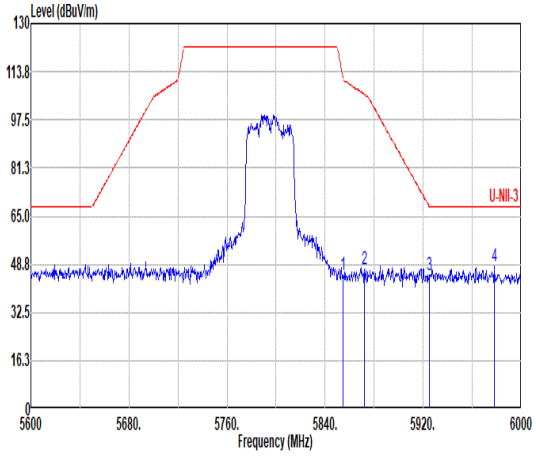 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 44.97 111.36 -66.39 37.95 35.01 11.34 39.33 0.00 224 108 PEAK 2 5872.00 47.29 106.14 -58.85 40.20 35.04 11.35 39.30 0.00 224 108 PEAK 3 5924.80 44.98 68.35 -23.37 37.68 35.12 11.40 39.22 0.00 224 108 PEAK 4 5978.00 47.87 68.20 -20.33 40.37 35.18 11.45 39.13 0.00 224 108 PEAK	Blank

Mode	78	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	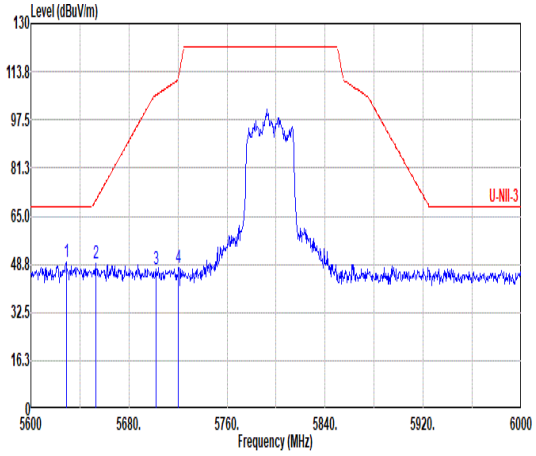 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5628.80 49.60 68.20 -18.60 39.94 34.60 11.04 35.98 0.00 149 151 PEAK 2 5652.80 49.06 70.29 -21.23 39.54 34.60 11.08 36.16 0.00 149 151 PEAK 3 5702.40 47.04 105.97 -58.93 38.23 34.61 11.14 36.94 0.00 149 151 PEAK 4 5720.40 47.82 111.81 -63.99 39.21 34.66 11.17 37.22 0.00 149 151 PEAK	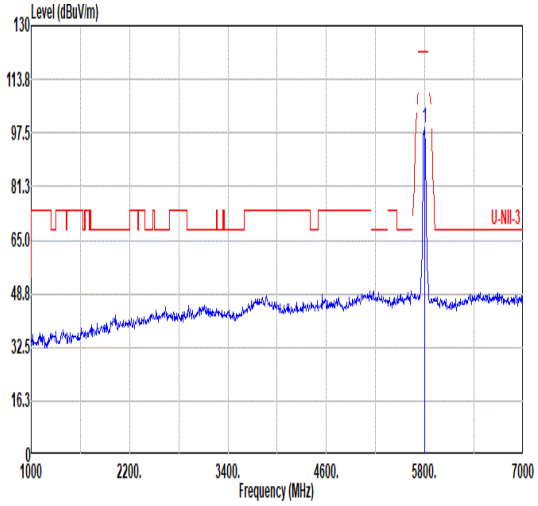 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 99.12 ------ ------ 91.35 34.88 11.27 38.38 0.00 149 151 PEAK
Avg	Blank	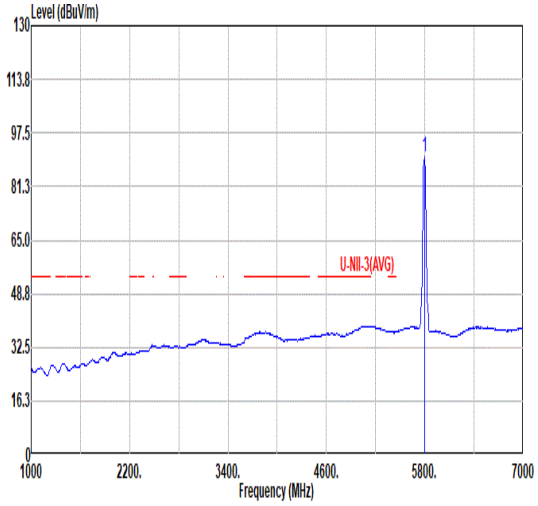 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 90.41 ------ ------ 82.64 34.88 11.27 38.38 0.00 149 151 AVERAGE

Mode	78	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	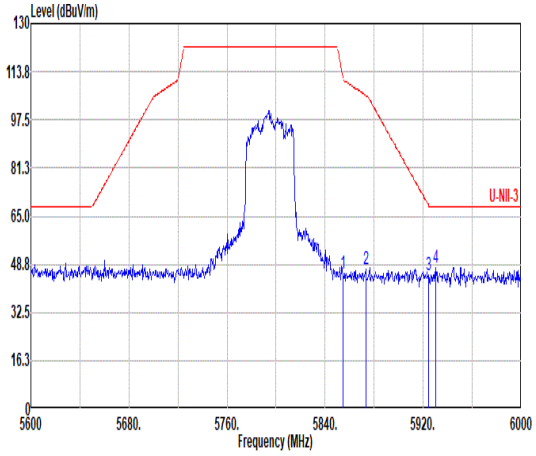 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 45.81 111.36 -65.55 38.79 35.01 11.34 39.33 0.00 149 151 PEAK 2 5873.20 46.96 105.80 -58.84 39.86 35.05 11.35 39.30 0.00 149 151 PEAK 3 5924.40 45.22 68.64 -23.42 37.92 35.12 11.40 39.22 0.00 149 151 PEAK 4 5930.00 47.71 68.20 -20.49 40.38 35.13 11.41 39.21 0.00 149 151 PEAK	Blank

Mode	78	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full_5795MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	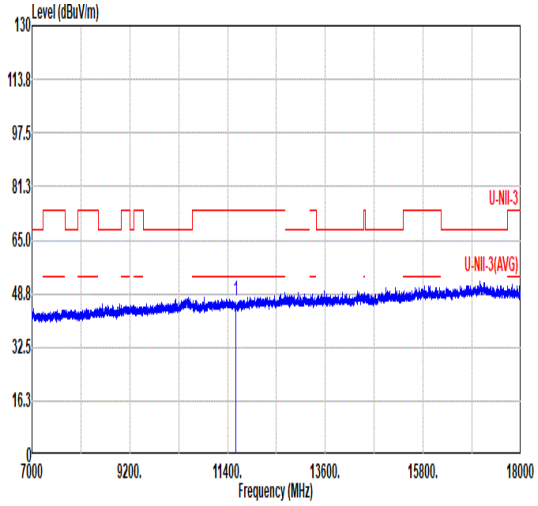 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 46.55 74.00 -27.45 56.97 38.37 16.42 65.21 0.00 -- -- PEAK	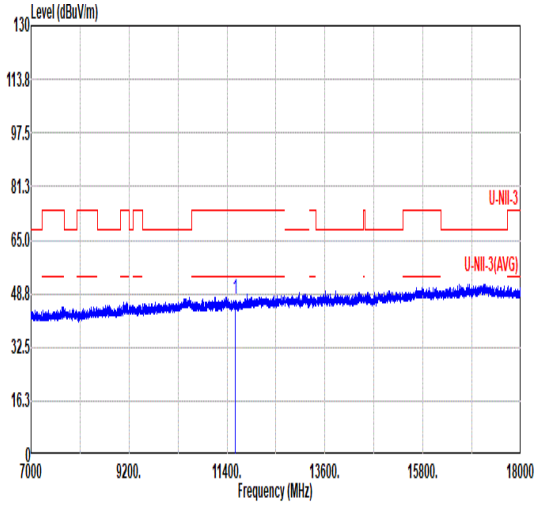 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 47.26 74.00 -26.74 57.68 38.37 16.42 65.21 0.00 -- -- PEAK

Mode	79	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	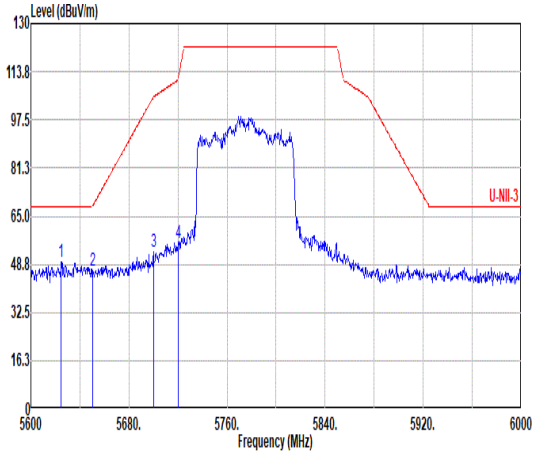 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5624.80 49.46 68.20 -18.74 39.80 34.60 11.04 35.98 0.00 228 116 PEAK 2 5650.40 46.72 68.50 -21.78 37.17 34.60 11.07 36.12 0.00 228 116 PEAK 3 5700.00 52.91 105.30 -52.39 44.07 34.60 11.14 36.90 0.00 228 116 PEAK 4 5720.00 56.08 110.90 -54.82 47.47 34.66 11.17 37.22 0.00 228 116 PEAK	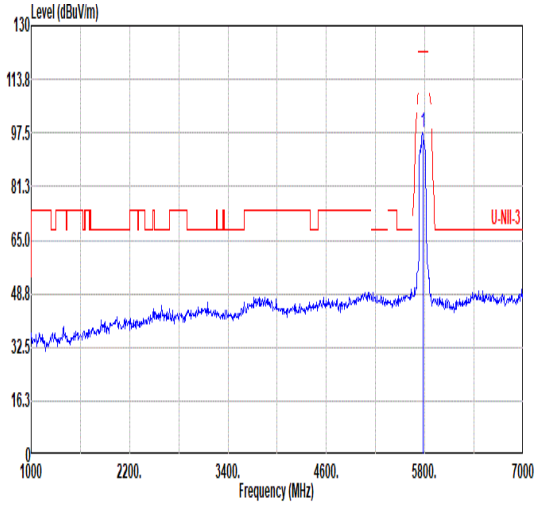 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 97.68 ------ ------ 89.63 34.81 11.24 38.00 0.00 228 116 PEAK
Avg	Blank	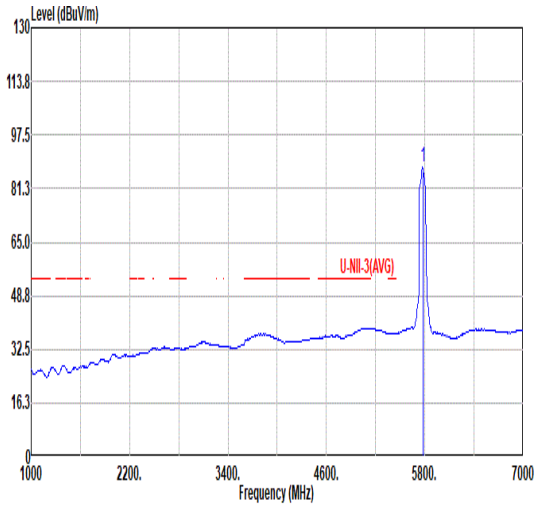 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 87.95 ------ ------ 79.90 34.81 11.24 38.00 0.00 228 116 AVERAGE

Mode	79	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	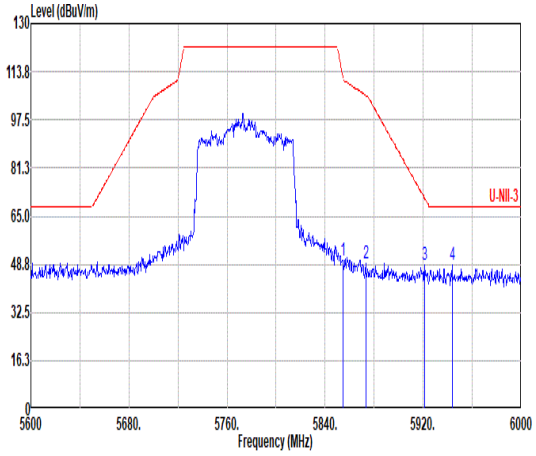 Freq / Level / Limit Line / Margin / Read Level / Ant Factor / Cable Loss / Preamp Factor / Aux Factor / APos / TPos / Remark MHz / dBuV/m / dBuV/m / dB / dBuV / dB/m / dB / dB / dB / cm / deg 1 5854.80 50.09 111.36 -61.27 43.07 35.01 11.34 39.33 0.00 228 116 PEAK 2 5873.20 48.92 105.80 -56.88 41.82 35.05 11.35 39.30 0.00 228 116 PEAK 3 5921.20 48.54 71.01 -22.47 41.24 35.12 11.40 39.22 0.00 228 116 PEAK 4 5943.60 48.59 68.20 -19.61 41.21 35.14 11.42 39.18 0.00 228 116 PEAK	Blank

Mode	79	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	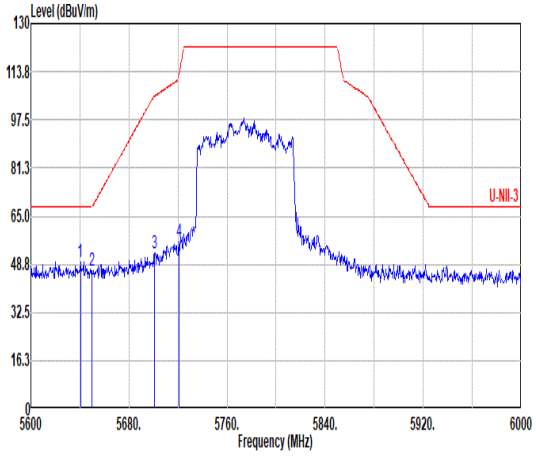 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5640.40 49.51 68.20 -18.69 39.82 34.60 11.06 35.97 0.00 169 151 PEAK 2 5650.00 46.45 68.20 -21.75 36.90 34.60 11.07 36.12 0.00 169 151 PEAK 3 5700.80 52.28 105.52 -53.24 43.45 34.60 11.14 36.91 0.00 169 151 PEAK 4 5720.80 56.39 112.72 -56.33 47.79 34.66 11.17 37.23 0.00 169 151 PEAK	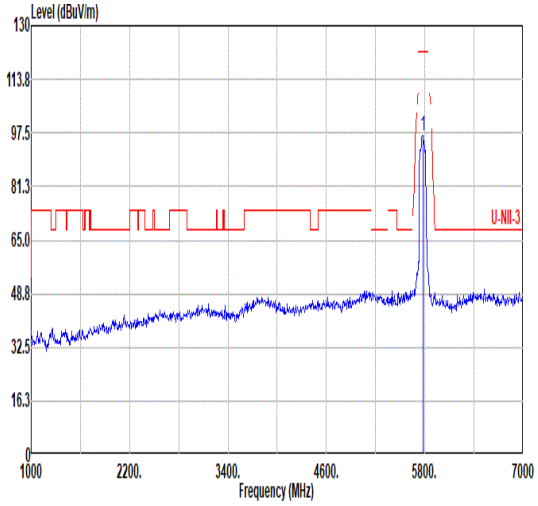 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 96.82 ------ ------ 88.83 34.83 11.25 38.09 0.00 169 151 PEAK
Avg	Blank	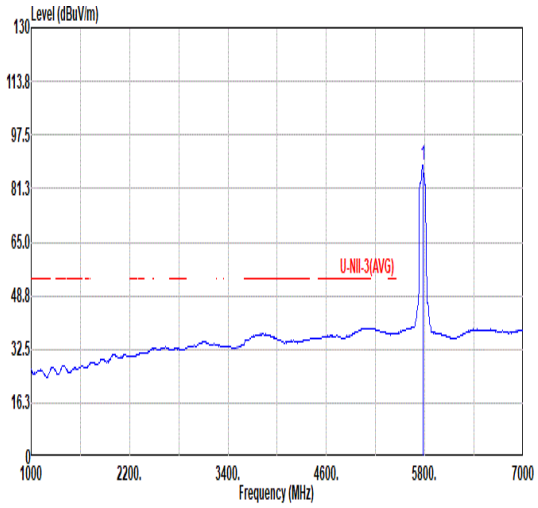 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 88.28 ------ ------ 80.29 34.83 11.25 38.09 0.00 169 151 AVERAGE

Mode	79	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	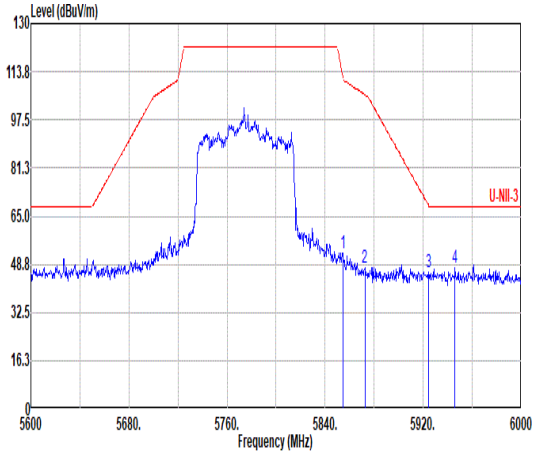 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 52.37 112.27 -59.90 45.35 35.01 11.33 39.32 0.00 169 151 PEAK 2 5872.40 47.69 106.03 -58.34 40.60 35.04 11.35 39.30 0.00 169 151 PEAK 3 5924.40 46.27 68.64 -22.37 38.97 35.12 11.40 39.22 0.00 169 151 PEAK 4 5946.00 47.63 68.20 -20.57 40.24 35.15 11.42 39.18 0.00 169 151 PEAK	Blank

Mode	79	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full_5775MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	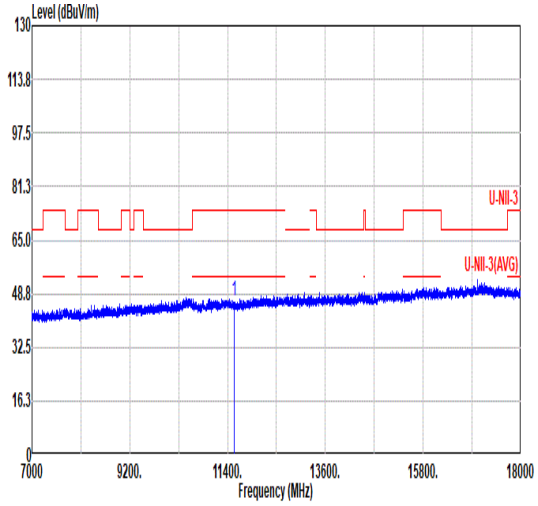 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 46.66 74.00 -27.34 57.15 38.34 16.39 65.22 0.00 -- -- PEAK	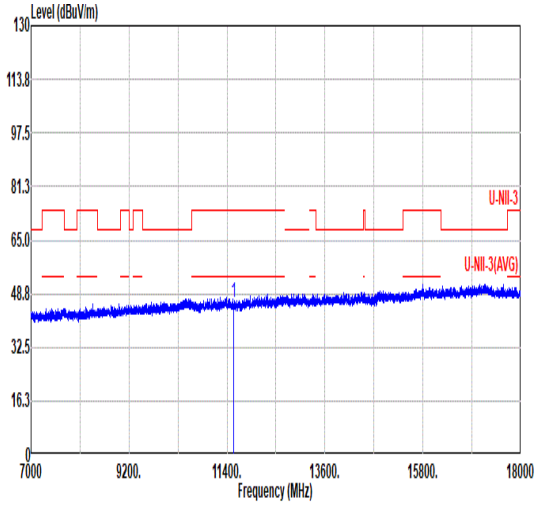 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 46.21 74.00 -27.79 56.70 38.34 16.39 65.22 0.00 -- -- PEAK

Mode	80	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU26/0_5745MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	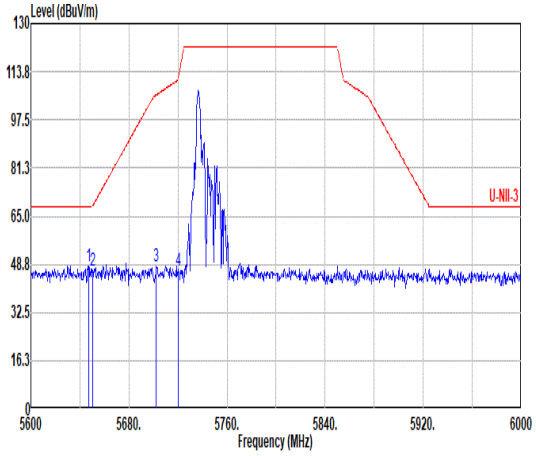 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5647.20 48.06 68.20 -20.14 38.46 34.60 11.07 36.07 0.00 324 112 PEAK 2 5650.40 46.70 68.50 -21.80 37.15 34.60 11.07 36.12 0.00 324 112 PEAK 3 5702.40 47.94 105.97 -58.03 39.13 34.61 11.14 36.94 0.00 324 112 PEAK 4 5720.00 46.74 110.90 -64.16 38.13 34.66 11.17 37.22 0.00 324 112 PEAK	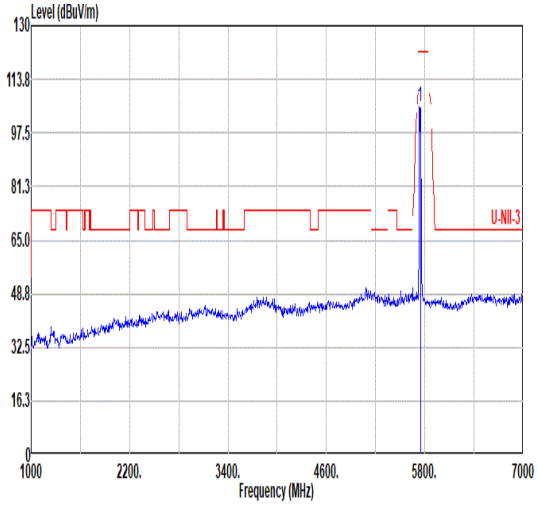 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 105.23 ------ ------ 96.77 34.70 11.19 37.43 0.00 324 112 PEAK
Avg	Blank	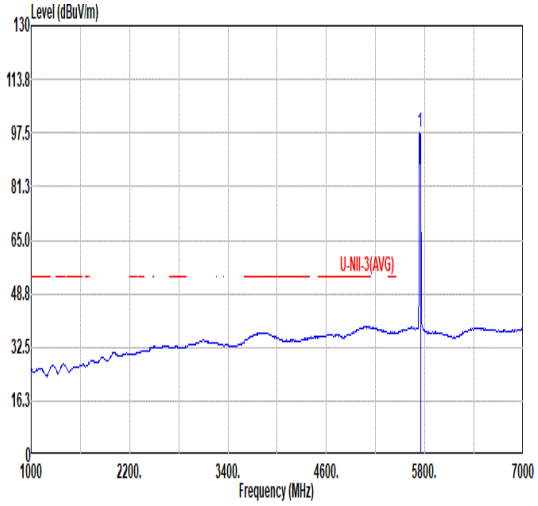 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 97.45 ------ ------ 88.99 34.70 11.19 37.43 0.00 324 112 AVERAGE

Mode	80	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU26/0_5745MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	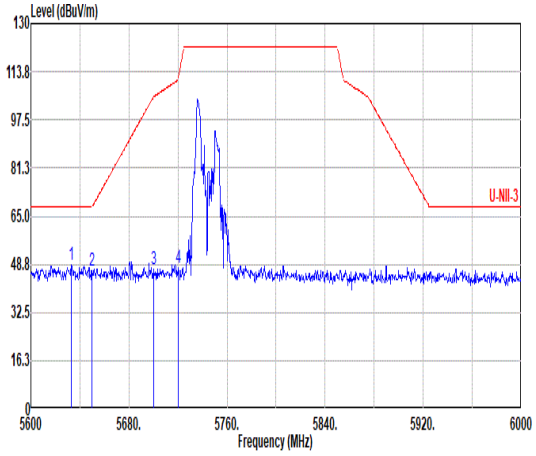 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5632.80 48.62 68.20 -19.58 38.94 34.60 11.05 35.97 0.00 145 149 PEAK 2 5650.00 46.64 68.20 -21.56 37.09 34.60 11.07 36.12 0.00 145 149 PEAK 3 5700.00 47.01 105.30 -58.29 38.17 34.60 11.14 36.90 0.00 145 149 PEAK 4 5720.40 47.57 111.81 -64.24 38.96 34.66 11.17 37.22 0.00 145 149 PEAK	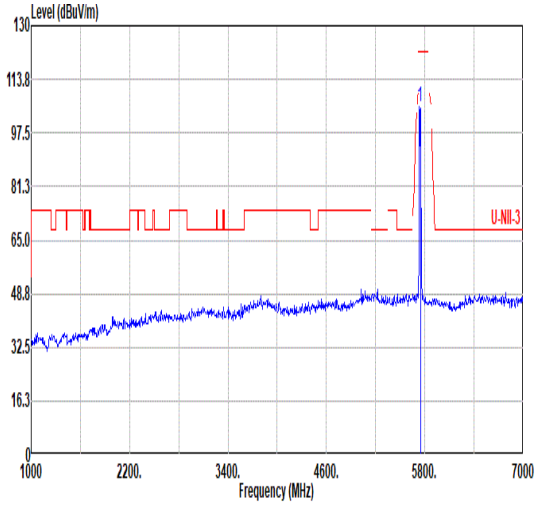 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 105.26 ------ ------ 96.80 34.70 11.19 37.43 0.00 145 149 PEAK
Avg	Blank	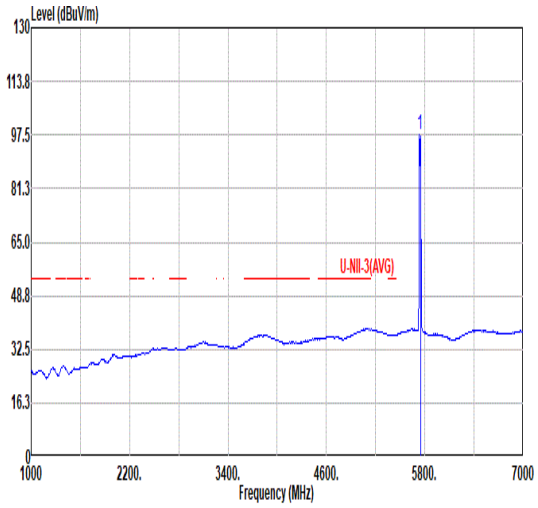 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 97.56 ------ ------ 89.10 34.70 11.19 37.43 0.00 145 149 AVERAGE

Mode	81	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU26/8_5825MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	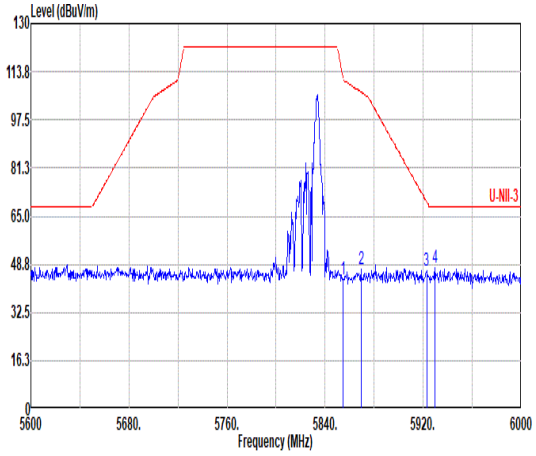 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 43.55 111.36 -67.81 36.53 35.01 11.34 39.33 0.00 379 129 PEAK 2 5869.20 47.04 106.92 -59.88 39.96 35.04 11.35 39.31 0.00 379 129 PEAK 3 5922.80 46.77 69.83 -23.06 39.47 35.12 11.40 39.22 0.00 379 129 PEAK 4 5929.60 47.35 68.20 -20.85 40.02 35.13 11.41 39.21 0.00 379 129 PEAK	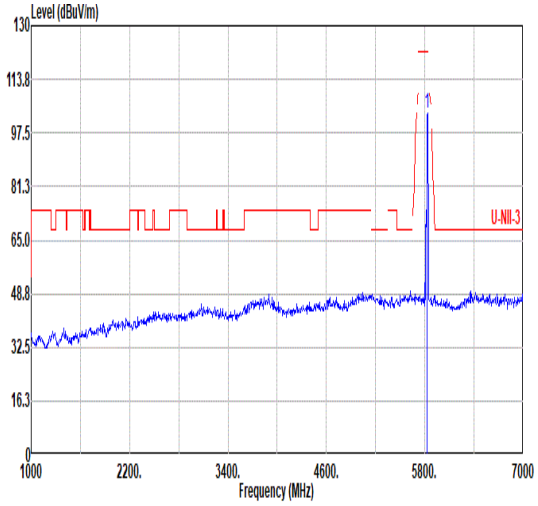 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 103.56 ------ ------ 96.31 34.97 11.32 39.04 0.00 379 129 PEAK
Avg	Blank	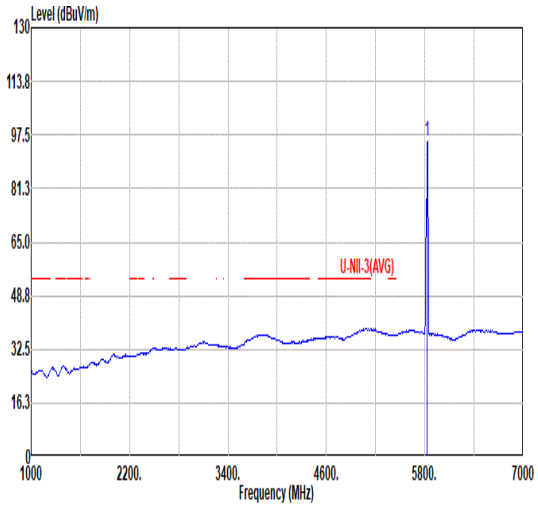 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 95.71 ------ ------ 88.46 34.97 11.32 39.04 0.00 379 129 AVERAGE

Mode	81	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU26/8_5825MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	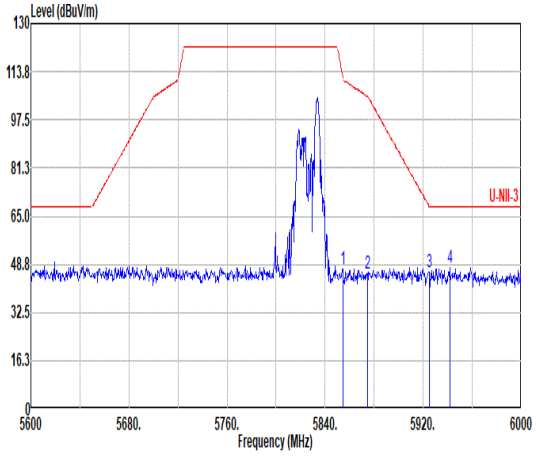 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 47.32 112.27 -64.95 40.30 35.01 11.33 39.32 0.00 144 172 PEAK 2 5874.40 45.82 105.47 -59.65 38.72 35.05 11.35 39.30 0.00 144 172 PEAK 3 5924.80 46.10 68.35 -22.25 38.80 35.12 11.40 39.22 0.00 144 172 PEAK 4 5941.60 47.55 68.20 -20.65 40.18 35.14 11.42 39.19 0.00 144 172 PEAK	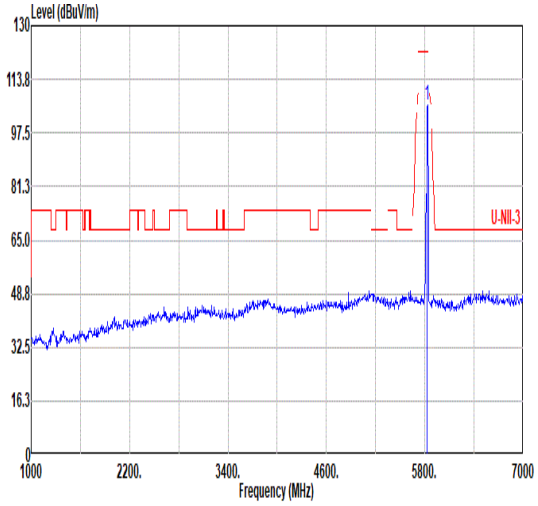 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 105.89 ------ ------ 98.64 34.97 11.32 39.04 0.00 144 172 PEAK
Avg	Blank	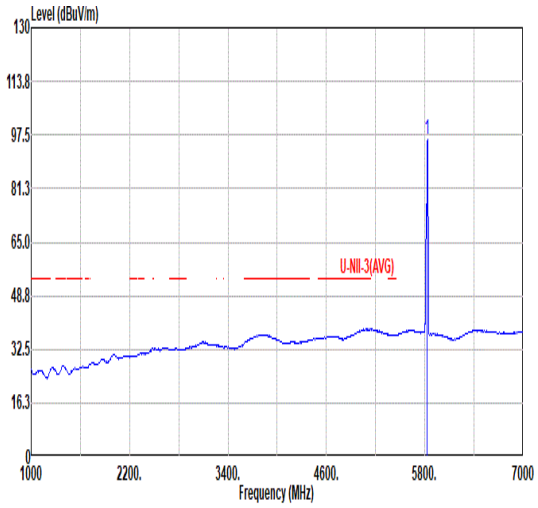 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 96.13 ------ ------ 88.88 34.97 11.32 39.04 0.00 144 172 AVERAGE

Mode	82	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU52/37_5745MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	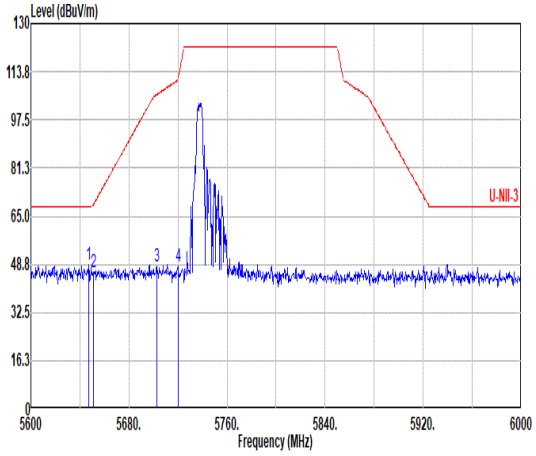 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5647.20 48.60 68.20 -19.60 39.00 34.60 11.07 36.07 0.00 307 112 PEAK 2 5650.80 46.15 68.80 -22.65 36.61 34.60 11.07 36.13 0.00 307 112 PEAK 3 5702.80 48.04 106.09 -58.05 39.23 34.61 11.15 36.95 0.00 307 112 PEAK 4 5720.00 48.10 110.90 -62.80 39.49 34.66 11.17 37.22 0.00 307 112 PEAK	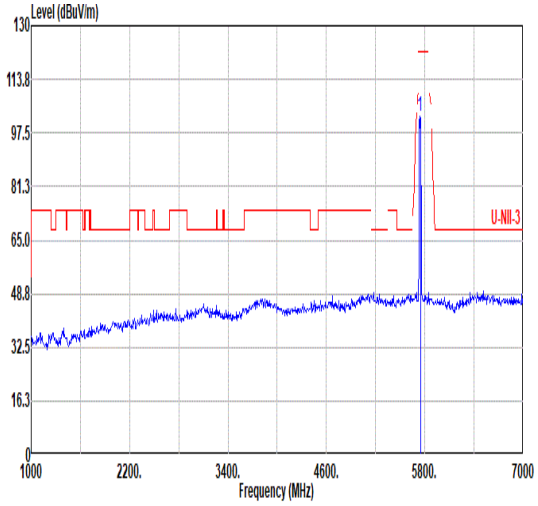 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 102.54 ------ ------ 94.15 34.72 11.20 37.53 0.00 307 112 PEAK
Avg	Blank	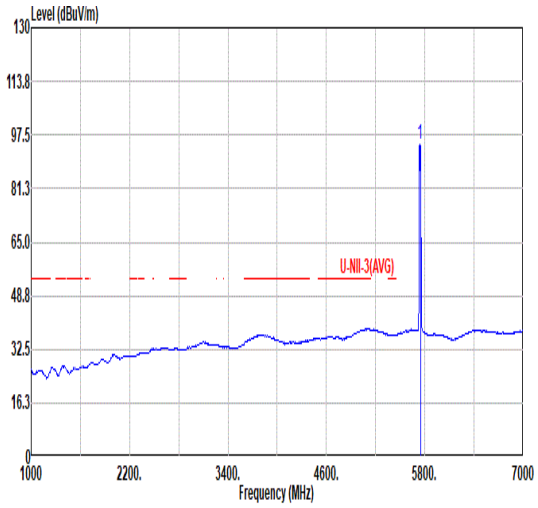 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 94.55 ------ ------ 86.16 34.72 11.20 37.53 0.00 307 112 AVERAGE

Mode	82	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU52/37_5745MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	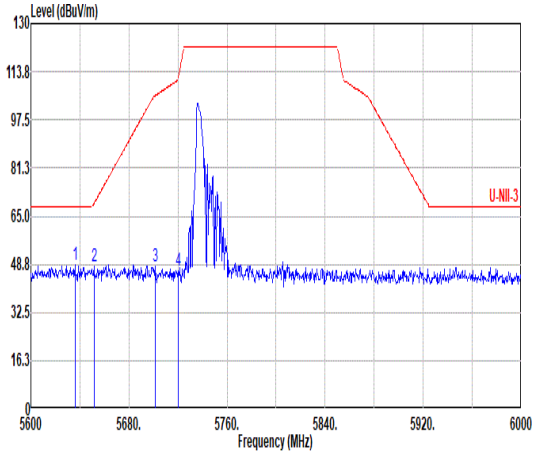 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5636.00 48.67 68.20 -19.53 38.99 34.60 11.05 35.97 0.00 146 151 PEAK 2 5651.60 48.02 69.39 -21.37 38.49 34.60 11.07 36.14 0.00 146 151 PEAK 3 5701.20 48.04 105.64 -57.60 39.22 34.60 11.14 36.92 0.00 146 151 PEAK 4 5720.00 46.48 110.90 -64.42 37.87 34.66 11.17 37.22 0.00 146 151 PEAK	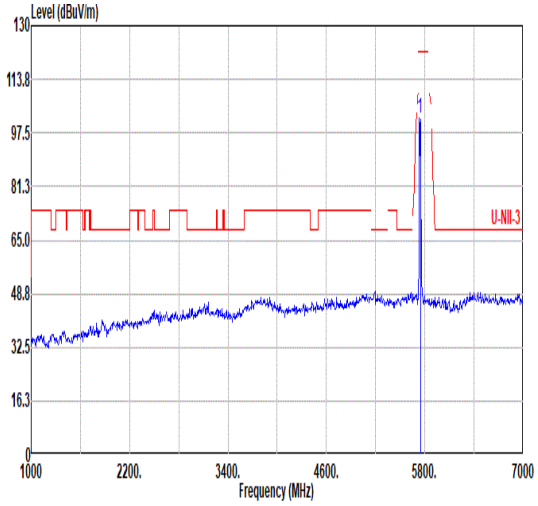 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 101.93 ------ ------ 93.47 34.70 11.19 37.43 0.00 146 151 PEAK
Avg	Blank	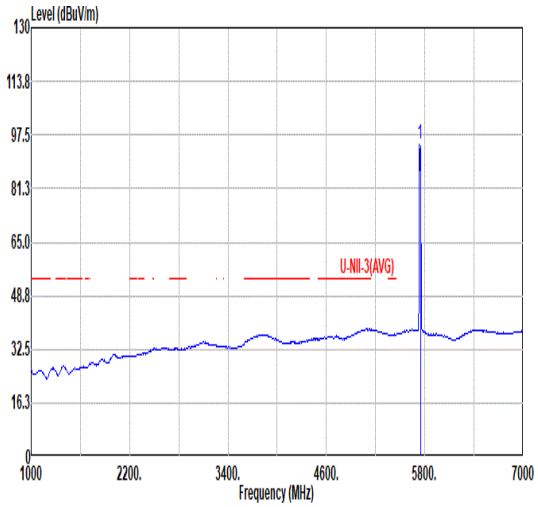 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 94.80 ------ ------ 86.34 34.70 11.19 37.43 0.00 146 151 AVERAGE

Mode	83	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU52/40_5825MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	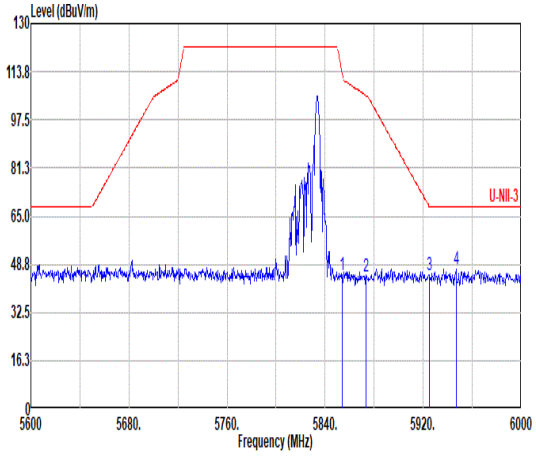 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.00 45.04 113.18 -68.14 38.02 35.01 11.33 39.32 0.00 379 128 PEAK 2 5873.60 44.85 105.69 -60.84 37.75 35.05 11.35 39.30 0.00 379 128 PEAK 3 5924.80 44.96 68.35 -23.39 37.66 35.12 11.40 39.22 0.00 379 128 PEAK 4 5946.80 46.92 68.20 -21.28 39.53 35.15 11.42 39.18 0.00 379 128 PEAK	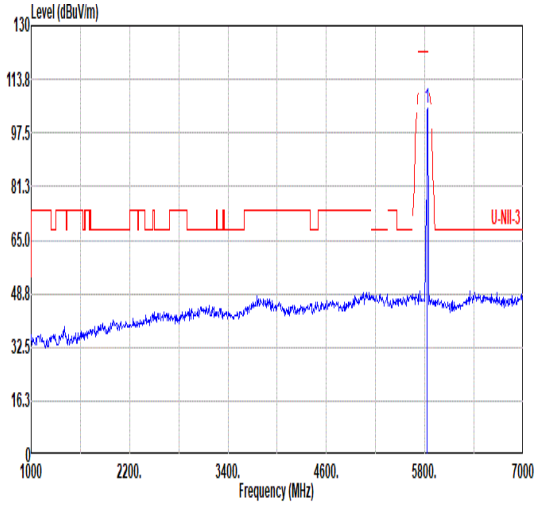 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 104.95 ------ ------ 97.70 34.97 11.32 39.04 0.00 379 128 PEAK
Avg	Blank	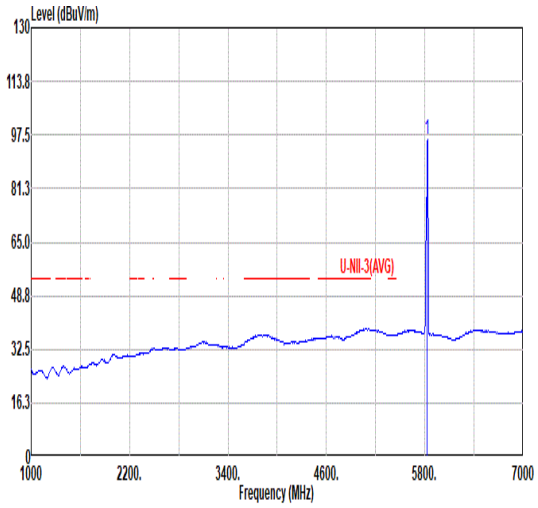 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 96.19 ------ ------ 88.94 34.97 11.32 39.04 0.00 379 128 AVERAGE

Mode	83	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU52/40_5825MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	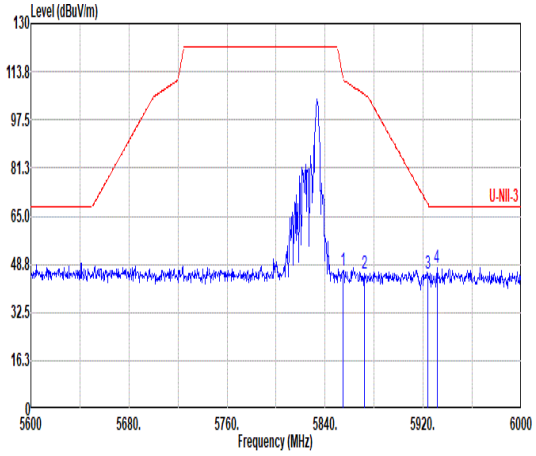 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 46.38 112.27 -65.89 39.36 35.01 11.33 39.32 0.00 105 190 PEAK 2 5872.00 45.52 106.14 -60.62 38.43 35.04 11.35 39.30 0.00 105 190 PEAK 3 5923.60 45.61 69.23 -23.62 38.31 35.12 11.40 39.22 0.00 105 190 PEAK 4 5931.20 47.61 68.20 -20.59 40.27 35.13 11.41 39.20 0.00 105 190 PEAK	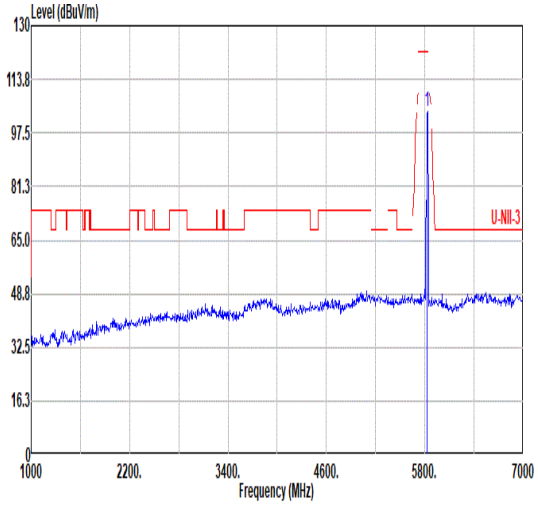 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 103.83 ------ ------ 96.58 34.97 11.32 39.04 0.00 105 190 PEAK
Avg	Blank	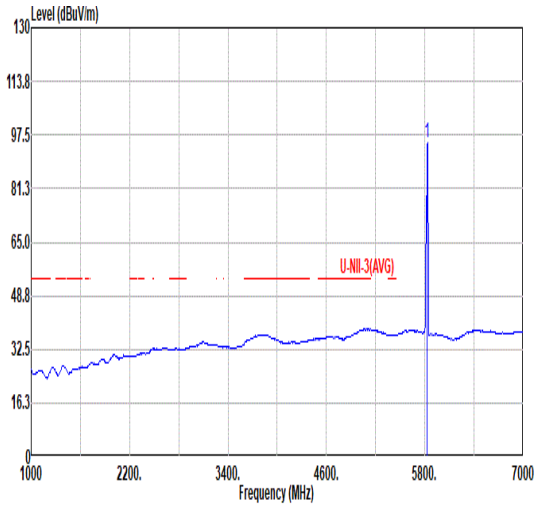 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 95.12 ------ ------ 87.87 34.97 11.32 39.04 0.00 105 190 AVERAGE

Mode	84	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU106/53_5745MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	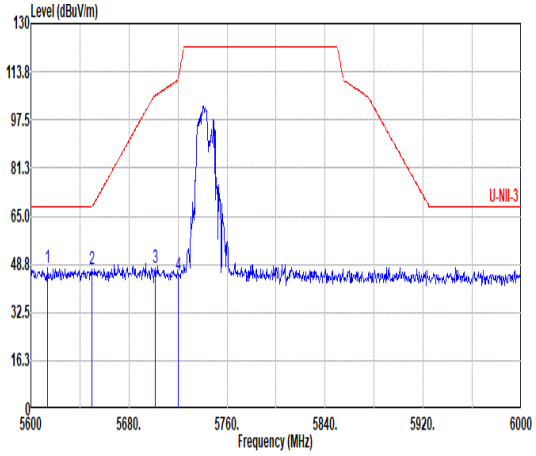 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5613.60 47.34 68.20 -20.86 37.72 34.60 11.02 36.00 0.00 243 112 PEAK 2 5650.00 47.11 68.20 -21.09 37.56 34.60 11.07 36.12 0.00 243 112 PEAK 3 5701.20 47.63 105.64 -58.01 38.81 34.60 11.14 36.92 0.00 243 112 PEAK 4 5720.00 44.93 110.90 -65.97 36.32 34.66 11.17 37.22 0.00 243 112 PEAK	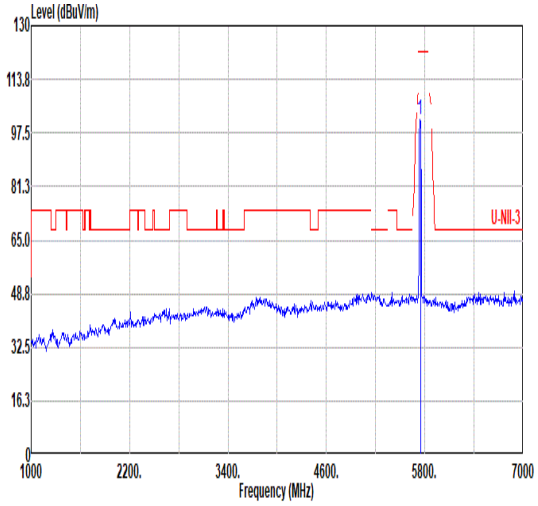 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 101.72 ------ ------ 93.33 34.72 11.20 37.53 0.00 243 112 PEAK
Avg	Blank	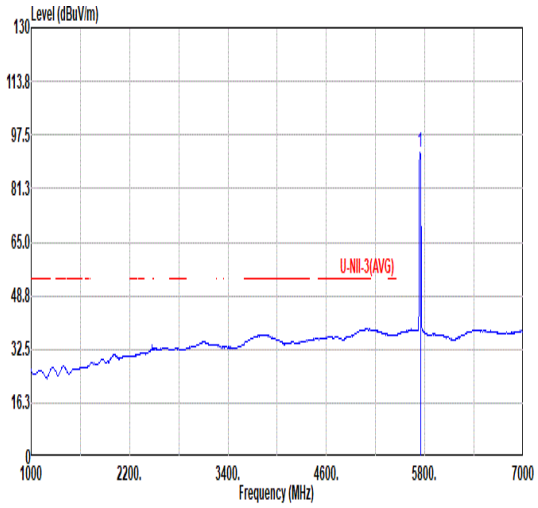 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 92.29 ------ ------ 83.90 34.72 11.20 37.53 0.00 243 112 AVERAGE

Mode	84	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH149_RU106/53_5745MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	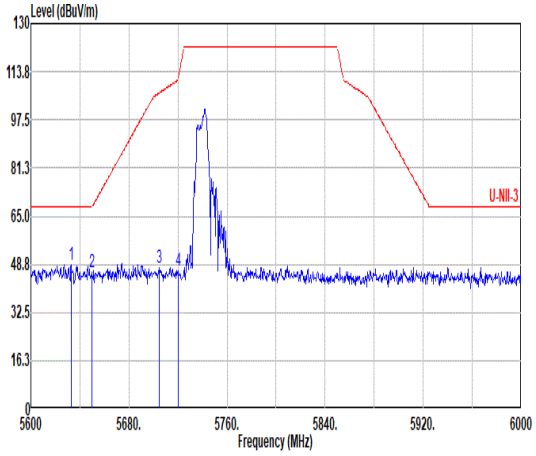 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5632.80 48.81 68.20 -19.39 39.13 34.60 11.05 35.97 0.00 119 182 PEAK 2 5650.00 46.31 68.20 -21.89 36.76 34.60 11.07 36.12 0.00 119 182 PEAK 3 5704.40 47.52 106.53 -59.01 38.73 34.61 11.15 36.97 0.00 119 182 PEAK 4 5720.00 46.45 110.90 -64.45 37.84 34.66 11.17 37.22 0.00 119 182 PEAK	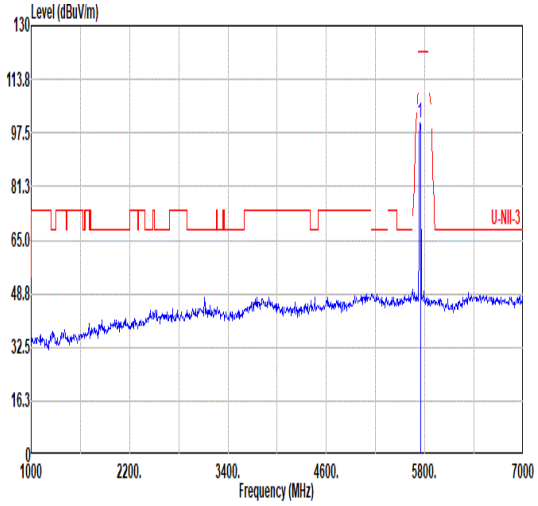 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 100.58 ------ ------ 92.19 34.72 11.20 37.53 0.00 119 182 PEAK
Avg	Blank	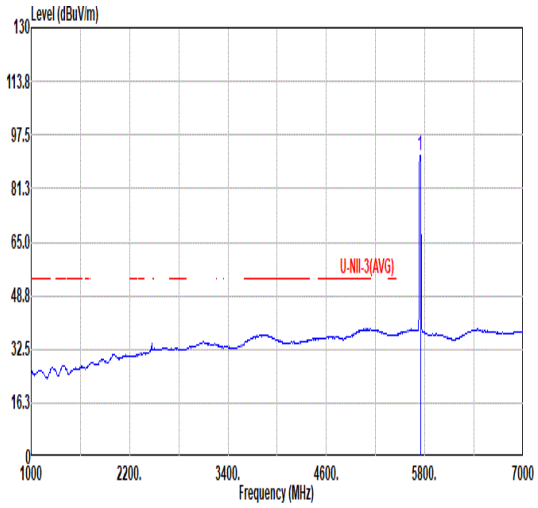 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 91.44 ------ ------ 83.05 34.72 11.20 37.53 0.00 119 182 AVERAGE

Mode	85	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU106/54_5825MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	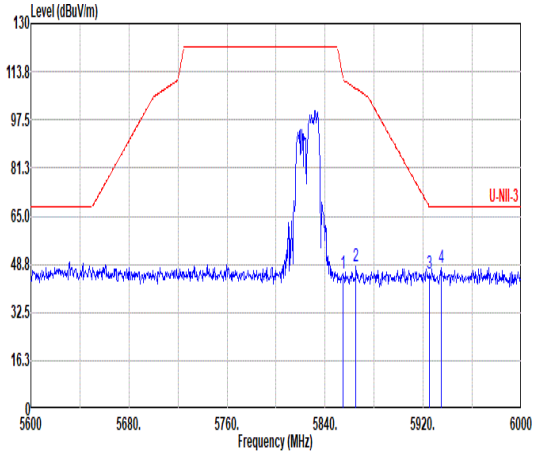 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 45.75 111.36 -65.61 38.73 35.01 11.34 39.33 0.00 331 128 PEAK 2 5865.20 48.20 108.04 -59.84 41.13 35.03 11.35 39.31 0.00 331 128 PEAK 3 5924.80 45.65 68.35 -22.70 38.35 35.12 11.40 39.22 0.00 331 128 PEAK 4 5934.80 47.69 68.20 -20.51 40.35 35.13 11.41 39.20 0.00 331 128 PEAK	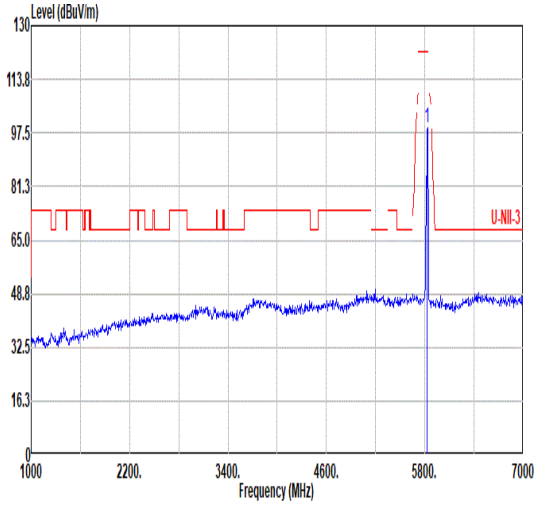 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 99.28 ------ ------ 92.03 34.97 11.32 39.04 0.00 331 128 PEAK
Avg	Blank	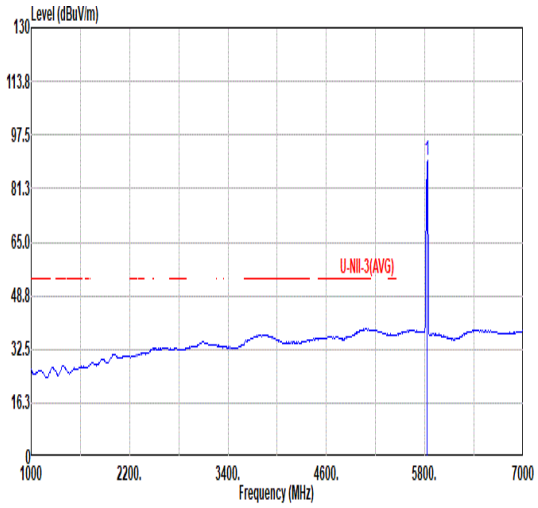 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 89.74 ------ ------ 82.49 34.97 11.32 39.04 0.00 331 128 AVERAGE

Mode	85	
	Band Edge	
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_RU106/54_5825MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	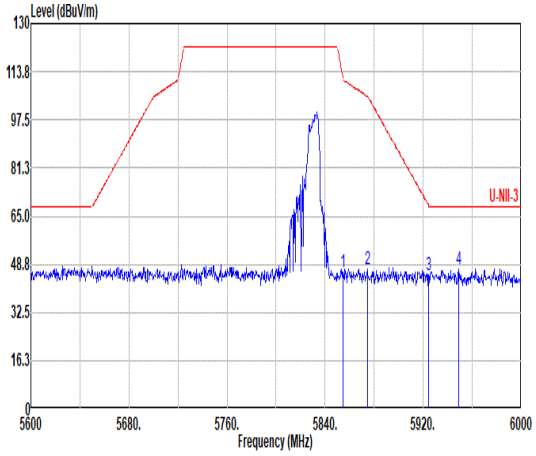 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 45.89 111.36 -65.47 38.87 35.01 11.34 39.33 0.00 142 173 PEAK 2 5874.40 47.18 105.47 -58.29 40.08 35.05 11.35 39.30 0.00 142 173 PEAK 3 5924.40 45.13 68.64 -23.51 37.83 35.12 11.40 39.22 0.00 142 173 PEAK 4 5948.80 47.23 68.20 -20.97 39.84 35.15 11.42 39.18 0.00 142 173 PEAK	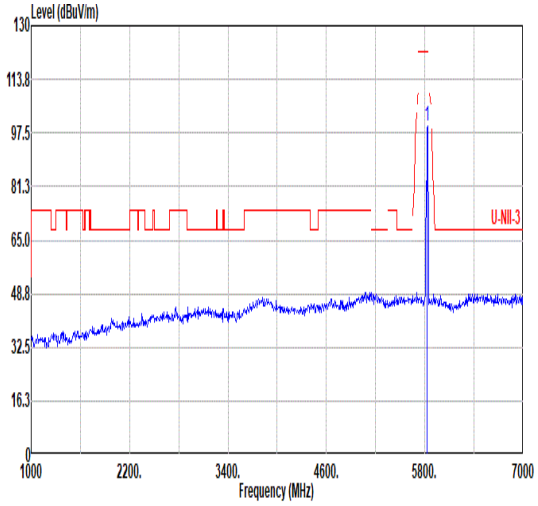 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 99.39 ------ ------ 92.14 34.97 11.32 39.04 0.00 142 173 PEAK
Avg	Blank	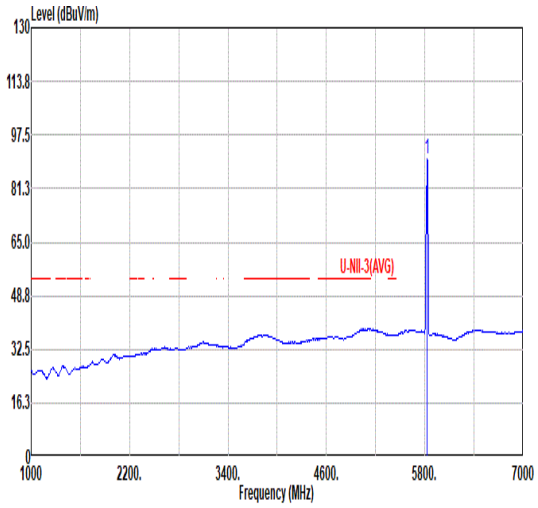 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 90.15 ------ ------ 82.82 34.96 11.31 38.94 0.00 142 173 AVERAGE

Mode	67	
	18G-40G	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	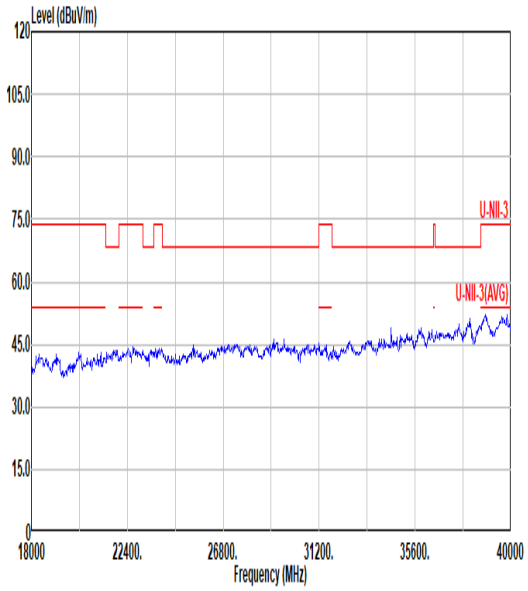	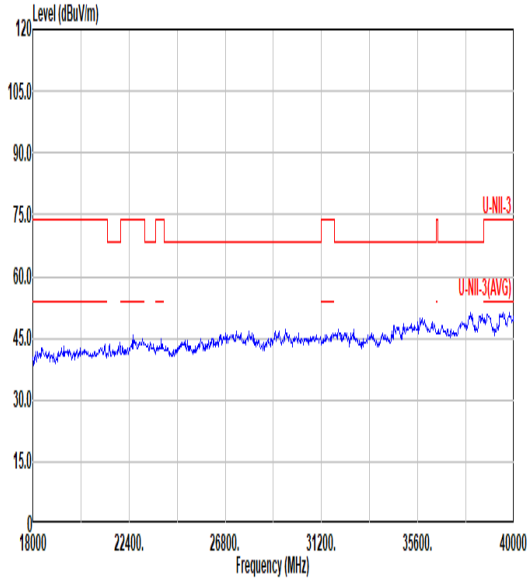

Mode	67	
	30-1G	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
QP	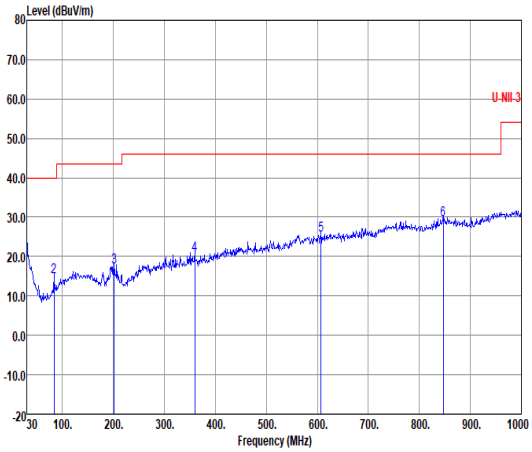	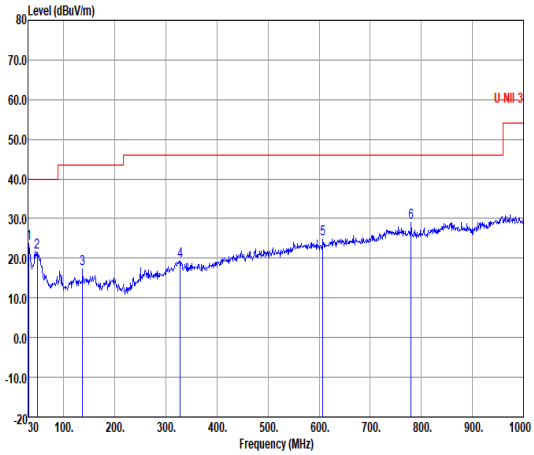

Horizontal:

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg	
1	30.00	20.03	-19.97	40.00	27.77	0.71	24.57	33.02	---	---	Peak
2	83.35	14.92	-25.08	40.00	32.54	1.36	13.82	32.80	---	---	Peak
3	201.69	17.42	-26.08	43.50	32.57	2.16	15.53	32.84	---	---	Peak
4	359.80	20.35	-25.65	46.00	29.70	2.89	20.67	32.91	---	---	Peak
5	607.15	25.45	-20.55	46.00	29.77	3.76	24.98	33.06	---	---	Peak
6	846.74	29.33	-16.67	46.00	30.72	4.44	26.57	32.40	---	---	Peak

Vertical:

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	dB	cm	deg	
1	31.94	23.69	-16.31	40.00	32.35	0.74	23.57	32.97	---	---	Peak
2	48.43	21.53	-18.47	40.00	38.39	1.03	15.04	32.93	---	---	Peak
3	136.70	17.19	-26.31	43.50	31.67	1.76	16.59	32.83	---	---	Peak
4	327.79	19.30	-26.70	46.00	29.48	2.76	19.94	32.88	---	---	Peak
5	607.15	24.83	-21.17	46.00	29.15	3.76	24.98	33.06	---	---	Peak
6	779.81	28.92	-17.08	46.00	31.32	4.27	26.09	32.76	---	---	Peak

Co-location

Mode	86	
	Band Edge	
	2400-2483.5_Bluetooth-LE _CH39_2480MHz	
ANT	4	
Pol.	Horizontal	Fundamental
Peak	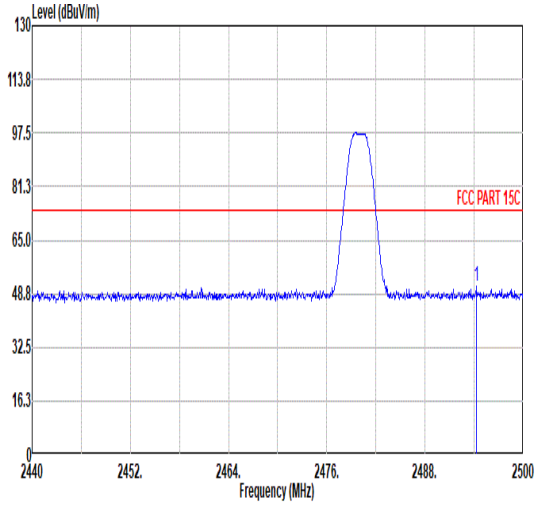 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2494.30 50.89 74.00 -23.11 41.38 33.06 7.27 36.82 6.00 107 0 PEAK	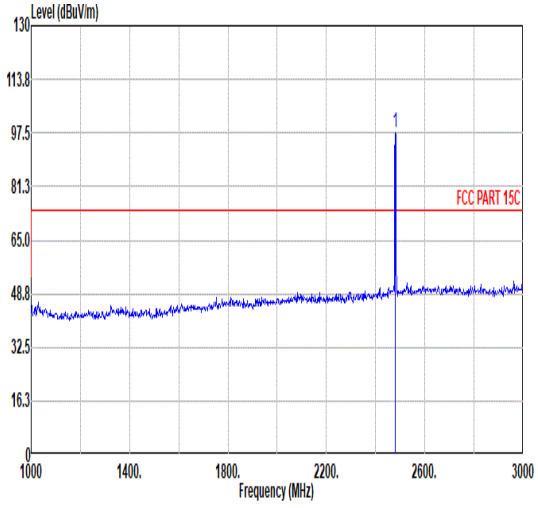 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 97.70 ------ ------ 88.35 32.96 7.25 36.86 6.00 107 0 PEAK
Avg	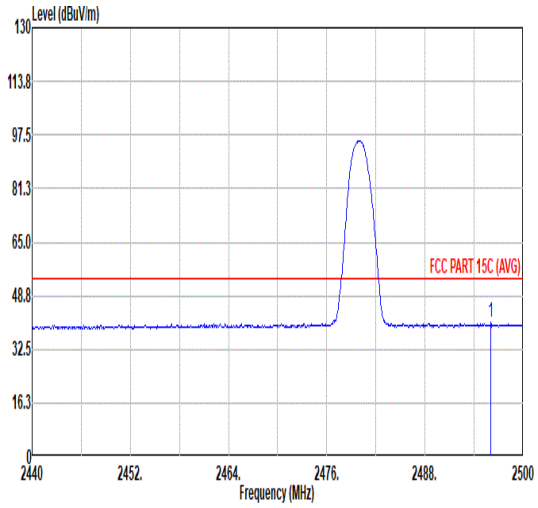 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2496.04 40.52 54.00 -13.48 30.99 33.07 7.28 36.82 6.00 107 0 AVERAGE	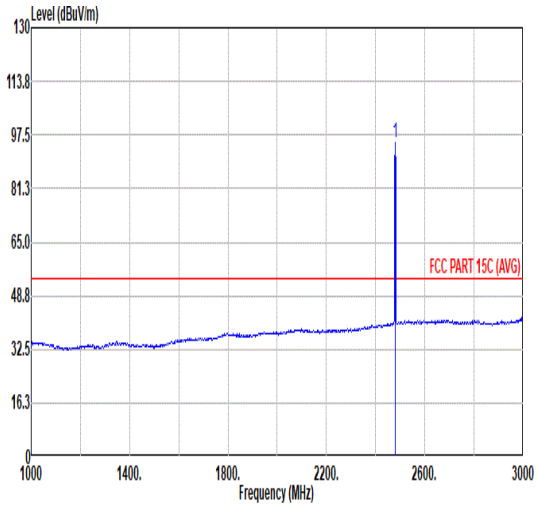 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 95.41 ------ ------ 86.06 32.96 7.25 36.86 6.00 107 0 AVERAGE

Mode	86	
	Band Edge	
	2400-2483.5_Bluetooth-LE _CH39_2480MHz	
ANT	4	
Pol.	Vertical	Fundamental
Peak	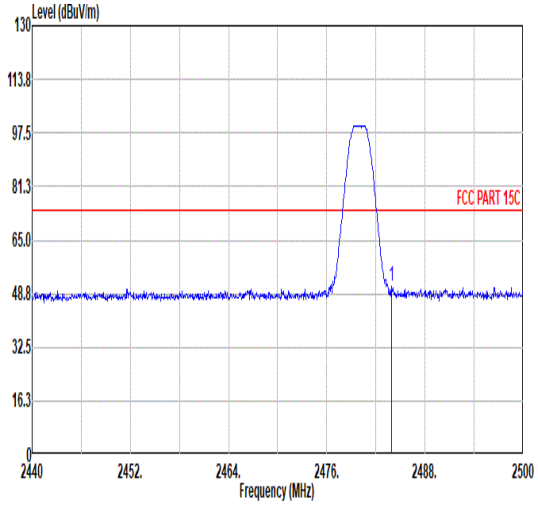 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.92 50.89 74.00 -23.11 41.49 32.99 7.26 36.85 6.00 298 178 PEAK	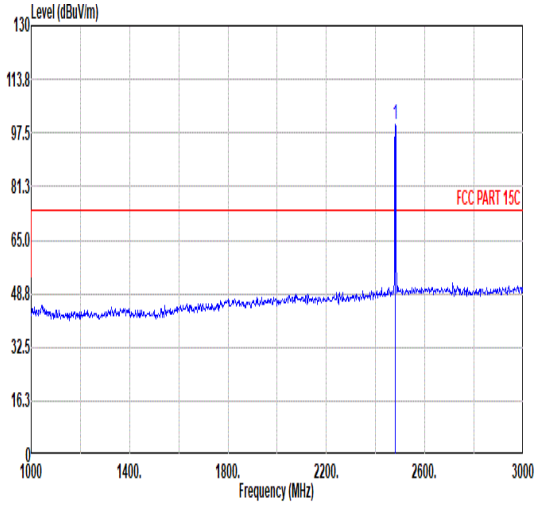 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 100.00 ------ ------ 90.65 32.96 7.25 36.86 6.00 298 178 PEAK
Avg	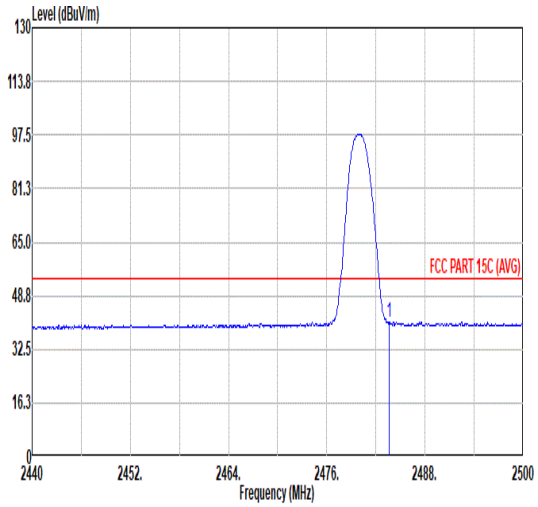 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2483.62 40.70 54.00 -13.30 31.30 32.99 7.26 36.85 6.00 298 178 AVERAGE	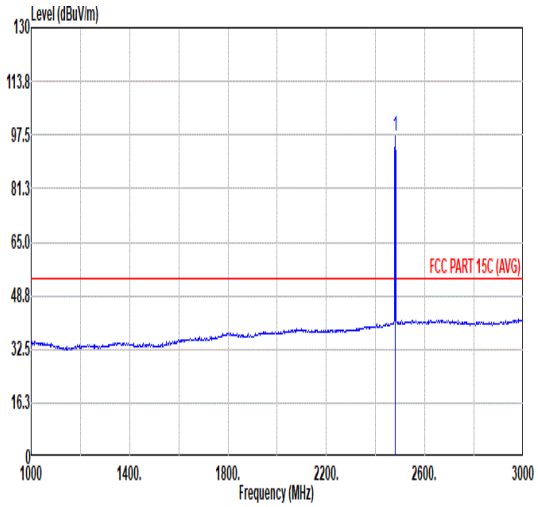 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 97.29 ------ ------ 87.94 32.96 7.25 36.86 6.00 298 178 AVERAGE

Mode	86	
	Harmonic	
	2400-2483.5_Bluetooth-LE _CH39_2480MHz	
ANT	4	
Pol.	Horizontal	Vertical
Peak Avg	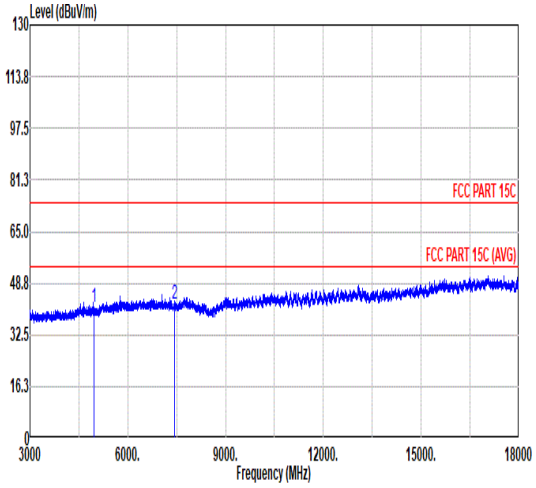 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4960.00 41.29 74.00 -32.71 62.24 34.24 10.40 65.59 0.00 -- -- PEAK 2 7440.00 42.38 74.00 -31.62 60.29 35.94 12.78 66.63 0.00 -- -- PEAK	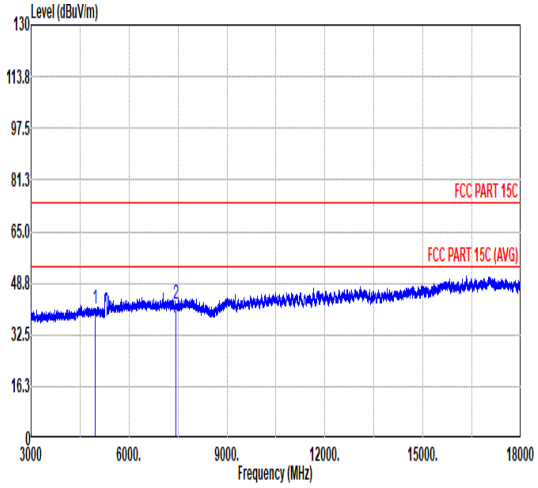 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 4960.00 40.87 74.00 -33.13 61.82 34.24 10.40 65.59 0.00 -- -- PEAK 2 7440.00 42.21 74.00 -31.79 60.12 35.94 12.78 66.63 0.00 -- -- PEAK

Mode	86	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	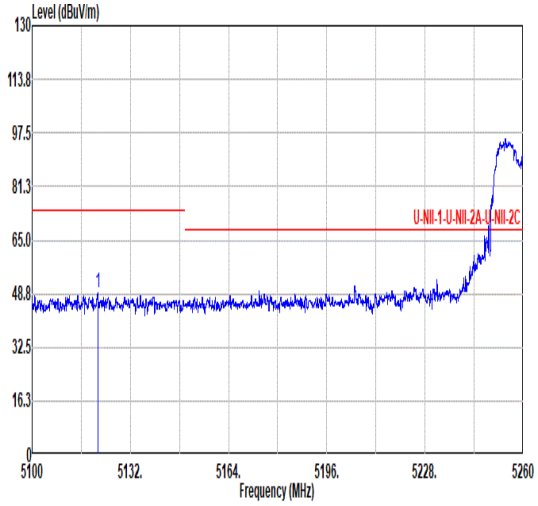 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5121.37 49.02 74.00 -24.98 40.67 34.46 10.58 36.69 0.00 328 80 PEAK	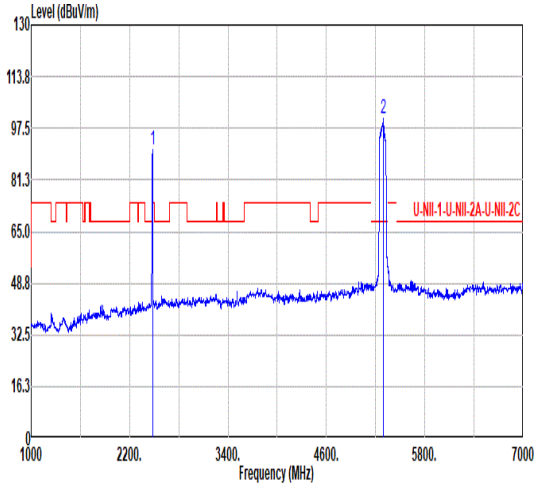 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 90.52 ------ ------ 87.17 32.96 7.25 36.86 0.00 328 80 PEAK 2 5290.00 100.64 ------ ------ 91.31 35.07 10.71 36.45 0.00 328 80 PEAK
Avg	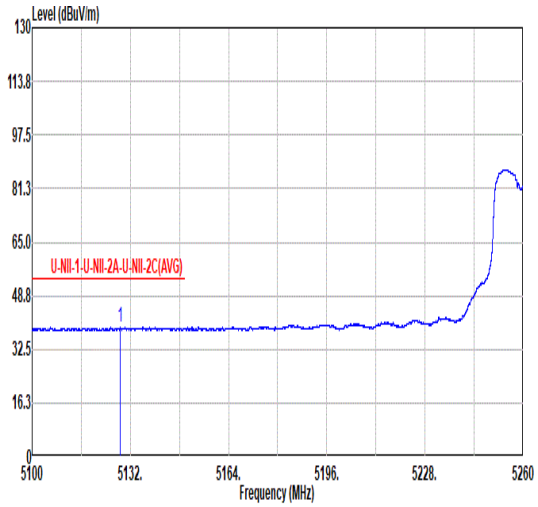 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5128.72 39.26 54.00 -14.74 30.86 34.49 10.59 36.68 0.00 328 80 AVERAGE	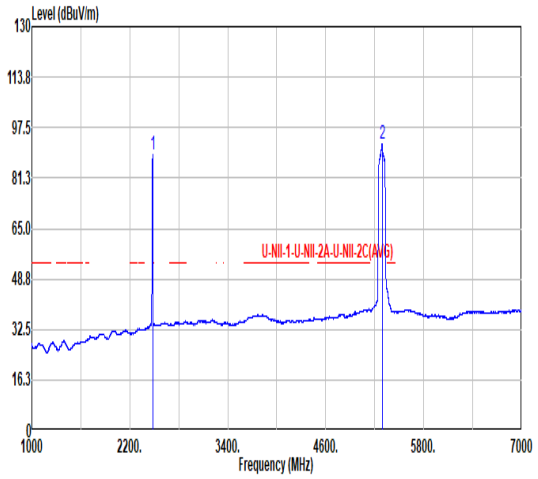 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 88.83 ------ ------ 85.48 32.96 7.25 36.86 0.00 328 80 AVERAG 2 5290.00 92.15 ------ ------ 82.82 35.07 10.71 36.45 0.00 328 80 AVERAGE

Mode	86	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	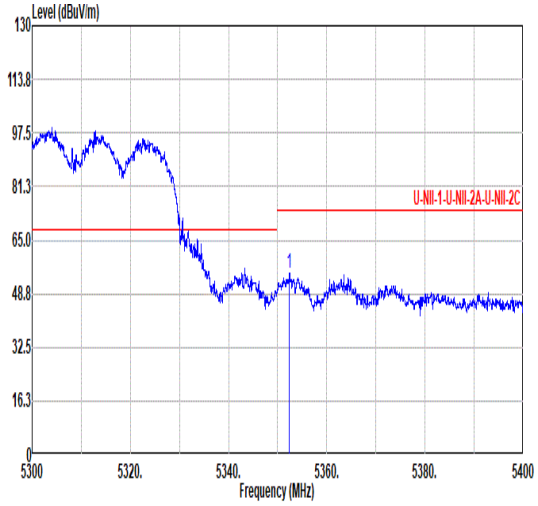 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.35 55.11 74.00 -18.89 45.53 35.20 10.75 36.37 0.00 328 80 PEAK	Blank
Avg	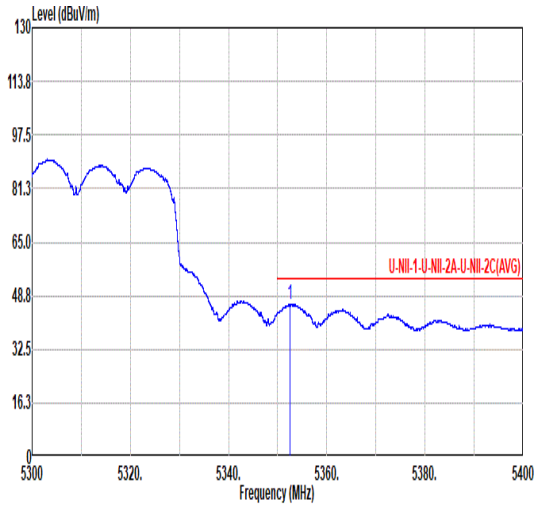 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.46 46.27 54.00 -7.73 36.69 35.20 10.75 36.37 0.00 328 80 AVERAGE	Blank

Mode	86	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	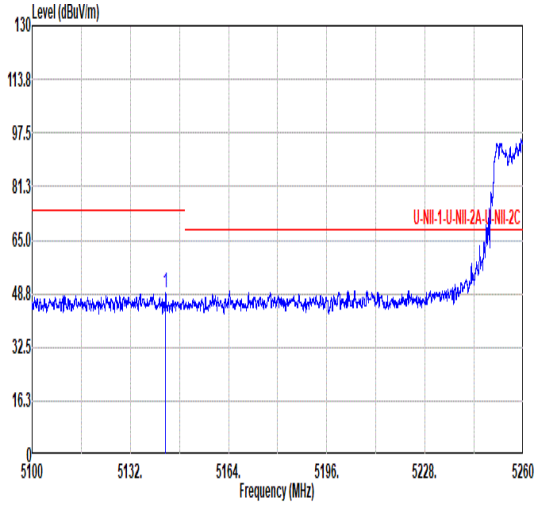 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5143.45 48.86 74.00 -25.14 40.39 34.53 10.60 36.66 0.00 141 336 PEAK	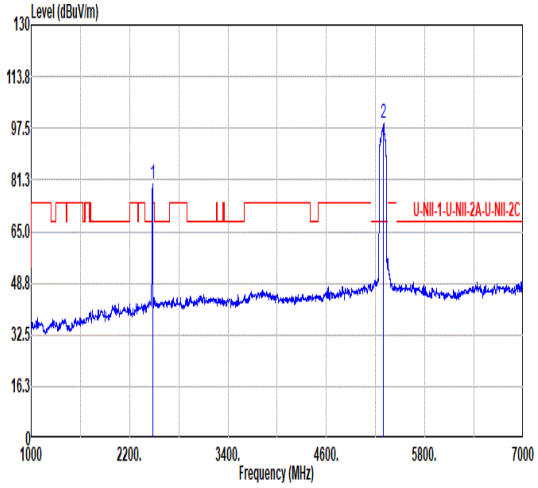 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2480.00 79.79 ------ ------ 76.44 32.96 7.25 36.86 0.00 141 336 PEAK 2 5290.00 98.97 ------ ------ 89.59 35.10 10.72 36.44 0.00 141 336 PEAK
Avg	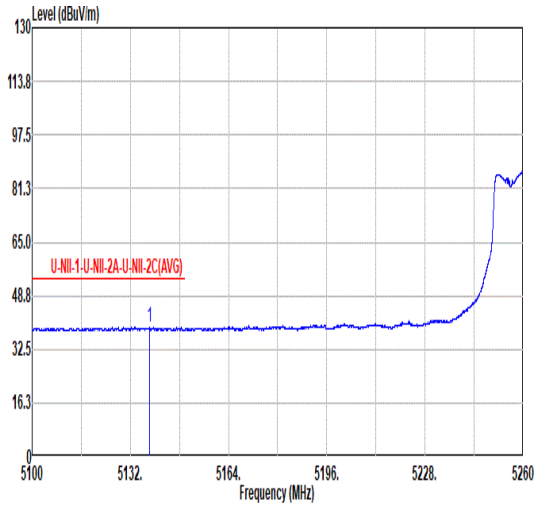 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5138.17 39.11 54.00 -14.89 30.67 34.51 10.60 36.67 0.00 141 336 AVERAGE	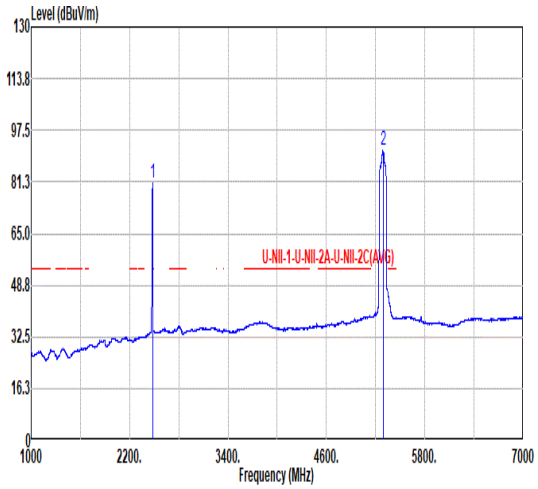 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 2479.33 80.95 ------ ------ 77.60 32.96 7.25 36.86 0.00 141 336 AVERAGE 2 5290.00 91.26 ------ ------ 81.96 35.05 10.71 36.46 0.00 141 336 AVERAGE

Mode	86	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	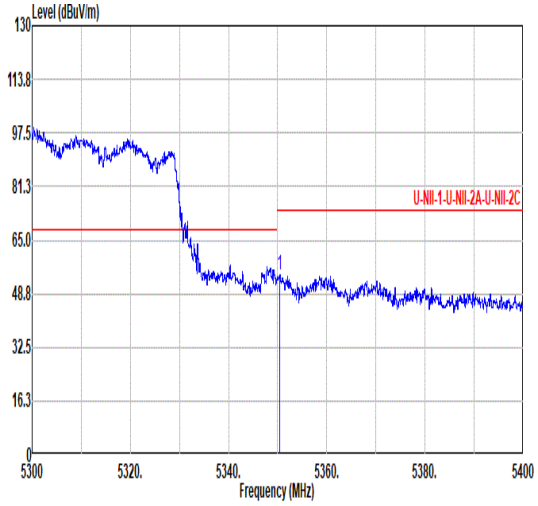 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.46 54.58 74.00 -19.42 45.00 35.20 10.75 36.37 0.00 141 336 PEAK	Blank
Avg	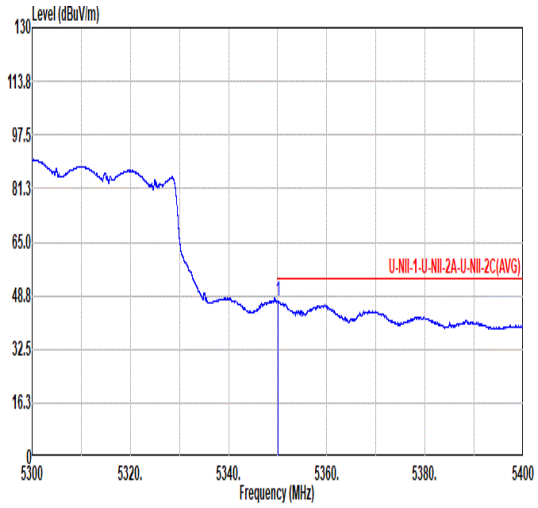 Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.16 47.04 54.00 -6.96 37.46 35.20 10.75 36.37 0.00 141 336 AVERAGE	Blank

Mode	86	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	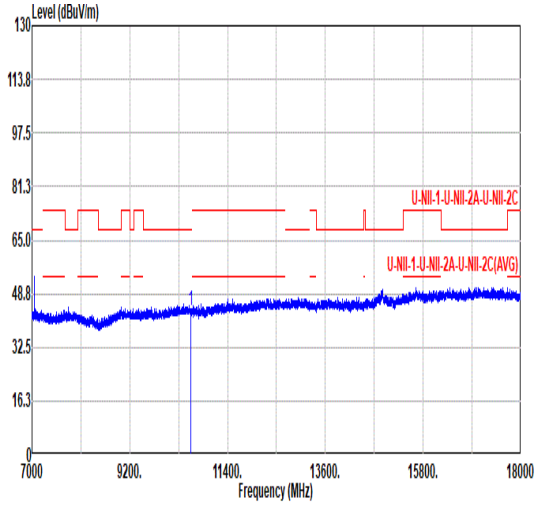 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10580.00 43.44 68.20 -24.76 57.16 37.52 15.62 66.86 0.00 -- -- PEAK	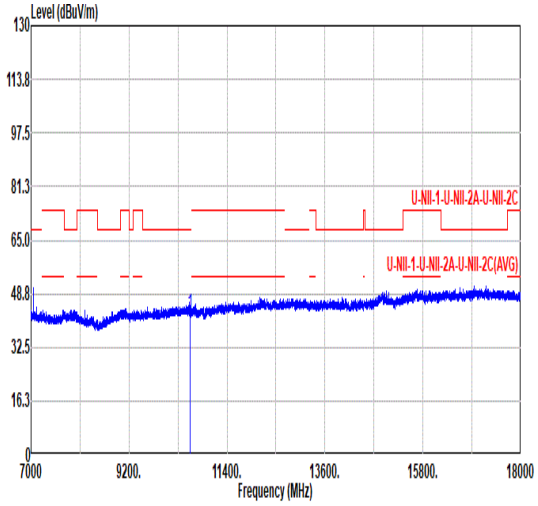 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10580.00 42.84 68.20 -25.36 56.55 37.53 15.62 66.86 0.00 -- -- PEAK

Mode	87	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	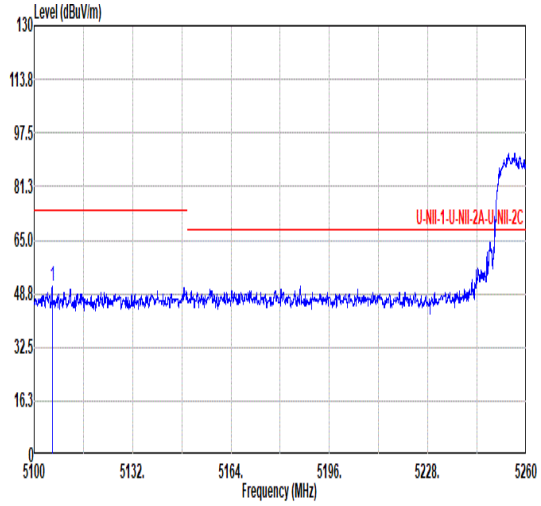 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5105.84 50.90 74.00 -23.10 42.64 34.42 10.56 36.72 0.00 395 118 PEAK	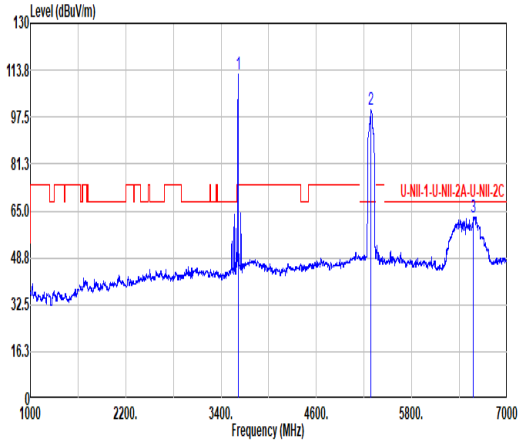 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 3613.00 112.57 ------ ------ 107.19 33.23 8.78 36.63 0.00 395 118 Peak 2 5287.33 99.95 ------ ------ 90.65 35.05 10.71 36.46 0.00 395 118 Peak 3 6577.67 62.91 ------ ------ 53.19 35.80 12.07 38.15 0.00 395 118 Peak
Avg	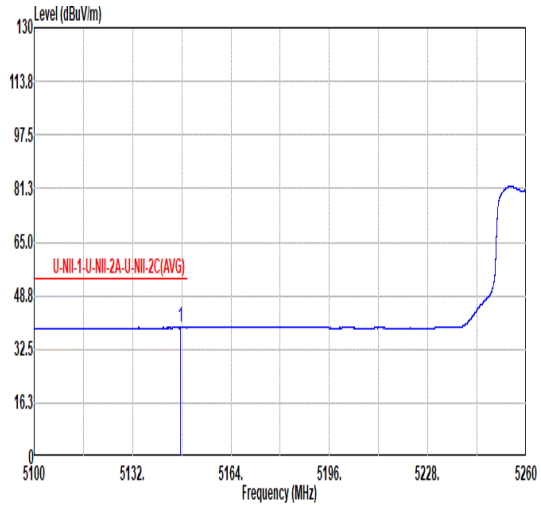 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.57 39.09 54.00 -14.91 30.60 34.54 10.61 36.66 0.00 395 118 AVERAGE	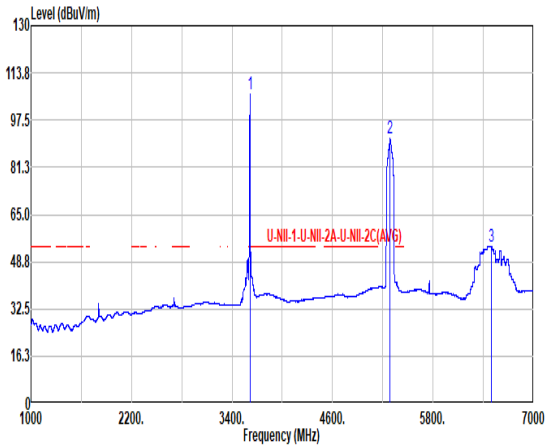 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 3613.00 106.66 ------ ------ 101.28 33.23 8.78 36.63 0.00 395 118 Average 2 5287.33 91.04 ------ ------ 81.74 35.05 10.71 36.46 0.00 395 118 Average 3 6493.00 54.07 ------ ------ 44.57 35.79 11.99 38.28 0.00 395 118 Average

Mode	87	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Fundamental
Peak	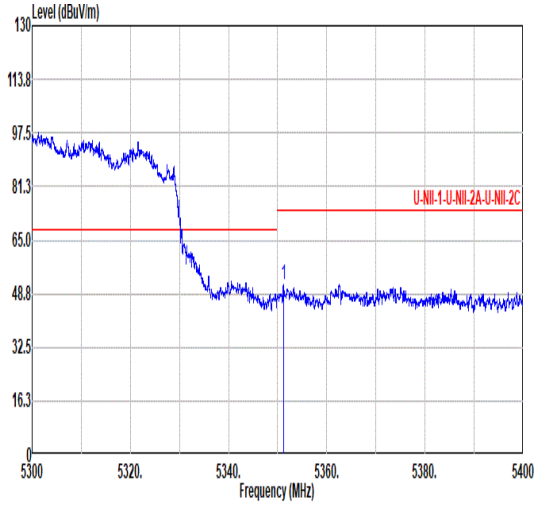 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.16 51.59 74.00 -22.41 42.01 35.20 10.75 36.37 0.00 395 118 PEAK	Blank
Avg	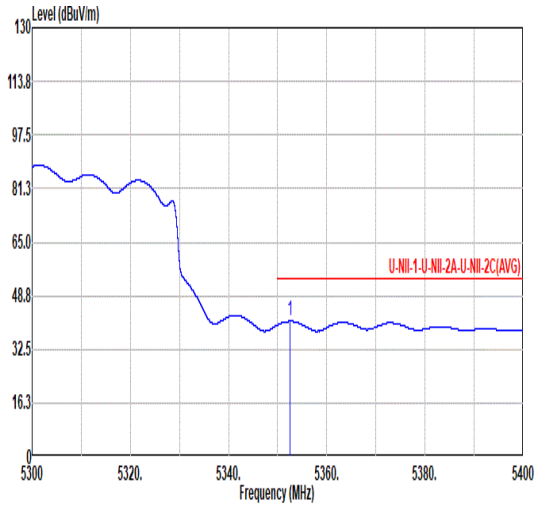 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.43 41.07 54.00 -12.93 31.49 35.20 10.75 36.37 0.00 395 118 AVERAGE	Blank

Mode	87	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	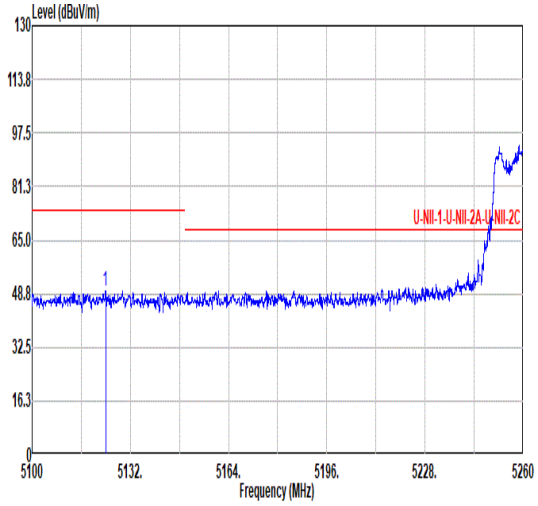 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5123.92 49.57 74.00 -24.43 41.21 34.47 10.58 36.69 0.00 126 155 PEAK	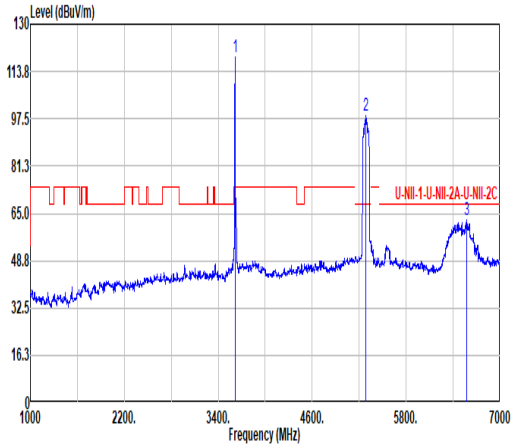 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 3613.00 118.77 ------ ------ 113.39 33.23 8.78 36.63 0.00 126 155 Peak 2 5287.33 98.80 ------ ------ 89.50 35.05 10.71 36.46 0.00 126 155 Peak 3 6577.00 62.83 ------ ------ 53.11 35.80 12.07 38.15 0.00 126 155 Peak
Avg	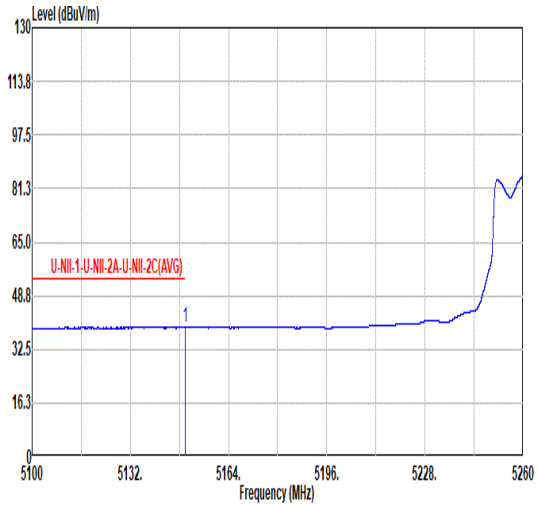 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.77 39.12 54.00 -14.88 30.61 34.55 10.61 36.65 0.00 126 155 AVERAGE	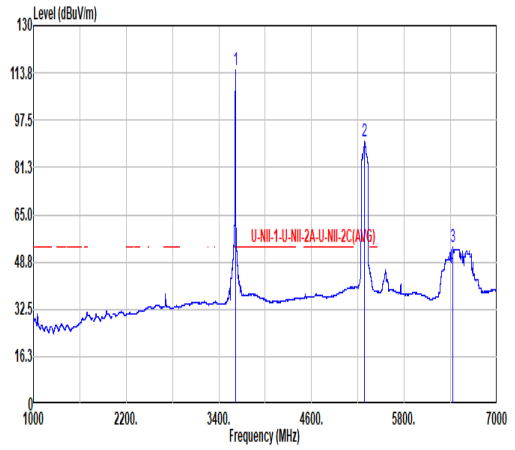 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 3613.00 114.83 ------ ------ 109.45 33.23 8.78 36.63 0.00 126 155 Average 2 5287.33 90.41 ------ ------ 81.11 35.05 10.71 36.46 0.00 126 155 Average 3 6432.67 54.00 ------ ------ 44.77 35.67 11.94 38.38 0.00 126 155 Average

Mode	87	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Vertical	Fundamental
Peak	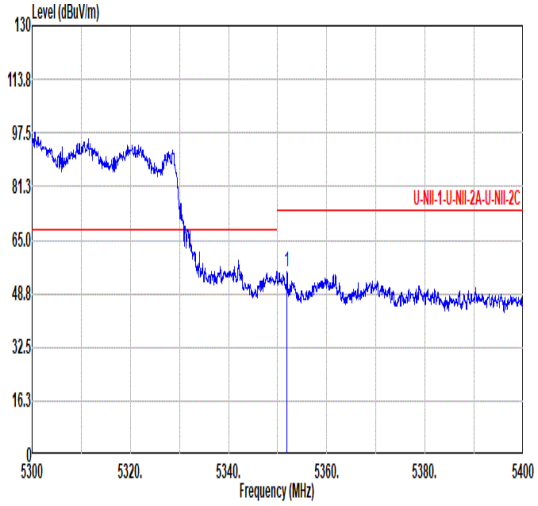 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.85 55.19 74.00 -18.81 45.61 35.20 10.75 36.37 0.00 126 155 PEAK	Blank
Avg	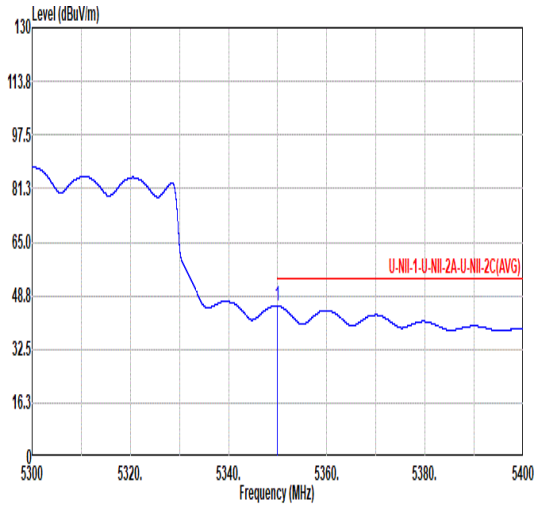 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.00 45.69 54.00 -8.31 36.11 35.20 10.75 36.37 0.00 126 155 AVERAGE	Blank

Mode	87	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz	
ANT	CDD 3+4	
Pol.	Horizontal	Vertical
Peak Avg	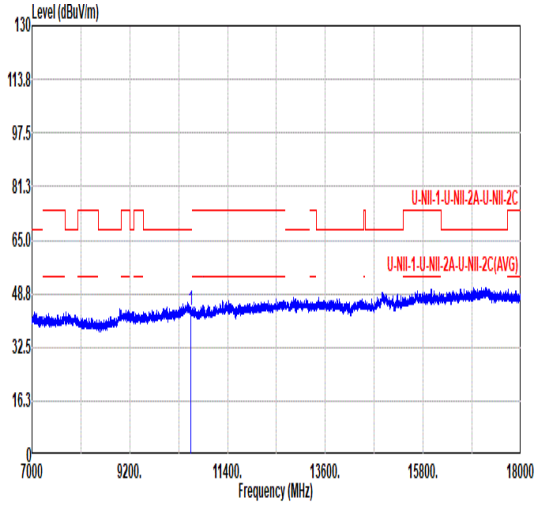 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10580.00 43.85 74.00 -30.15 57.45 37.56 15.67 66.83 0.00 -- -- PEAK	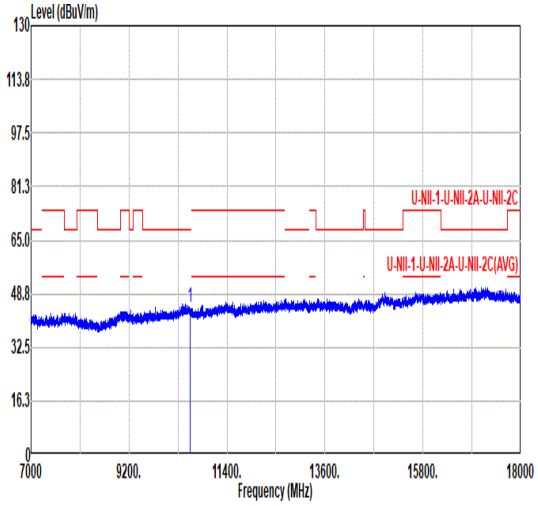 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10580.00 44.84 68.20 -23.36 58.54 37.53 15.63 66.86 0.00 -- -- PEAK

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	99.31	-	-	10Hz
802.11ac VHT20	100	-	-	10Hz
802.11ac VHT40	100	-	-	10Hz
802.11ac VHT80	100	-	-	10Hz
802.11ac VHT160	100	-	-	10Hz
802.11ax HE20	100	-	-	10Hz
802.11ax HE40	100	-	-	10Hz
802.11ax HE80	100	-	-	10Hz
802.11ax HE160	100	-	-	10Hz

802.11a

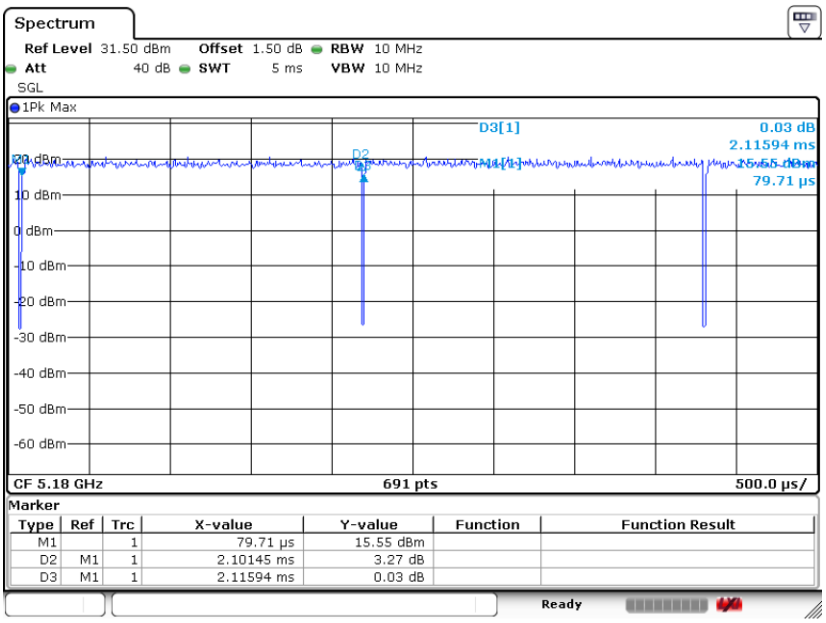

802.11ac VHT20

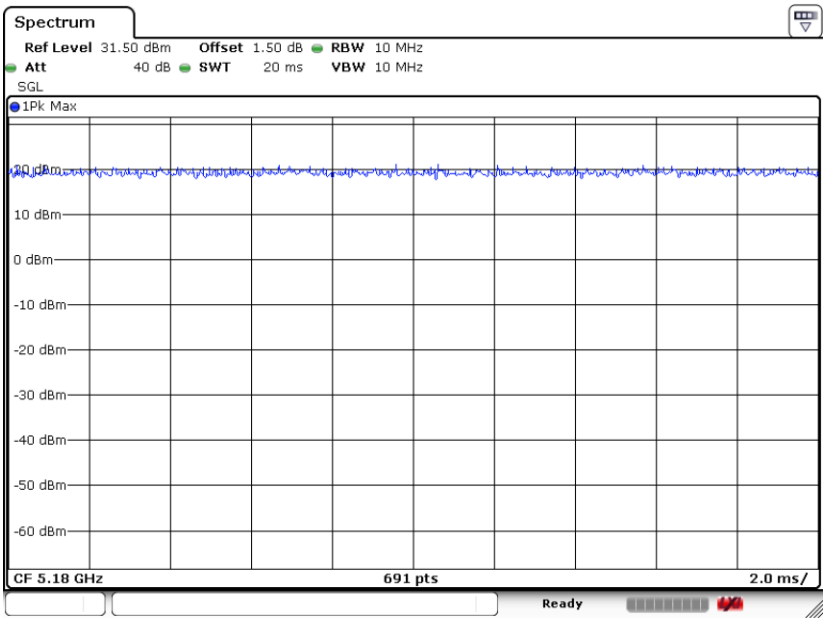

Date: 18.FEB.2024 11:55:18

802.11ac VHT40

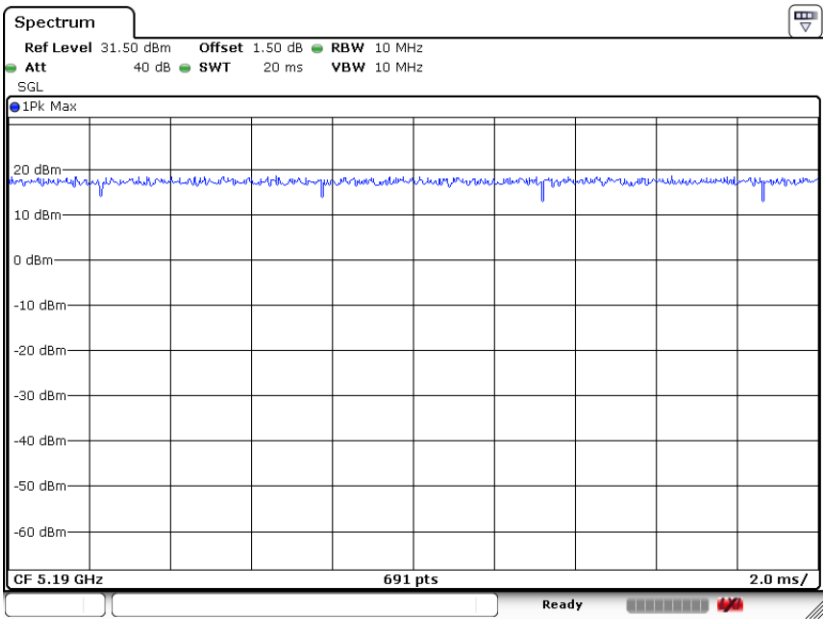

Date: 18.FEB.2024 11:56:15

802.11ac VHT80

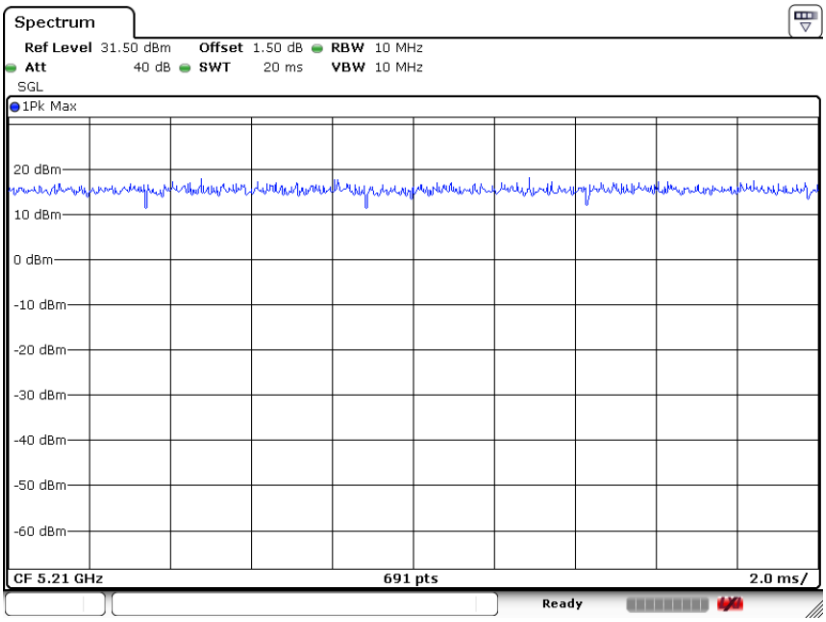

Date: 18.FEB.2024 10:56:02

802.11ac VHT160

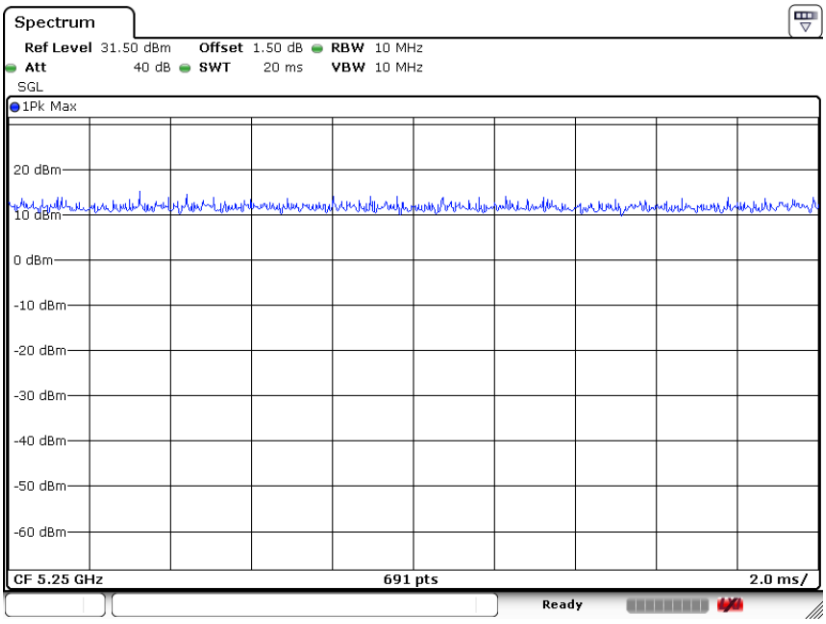

Date: 18.FEB.2024 11:57:36

802.11ax HE20

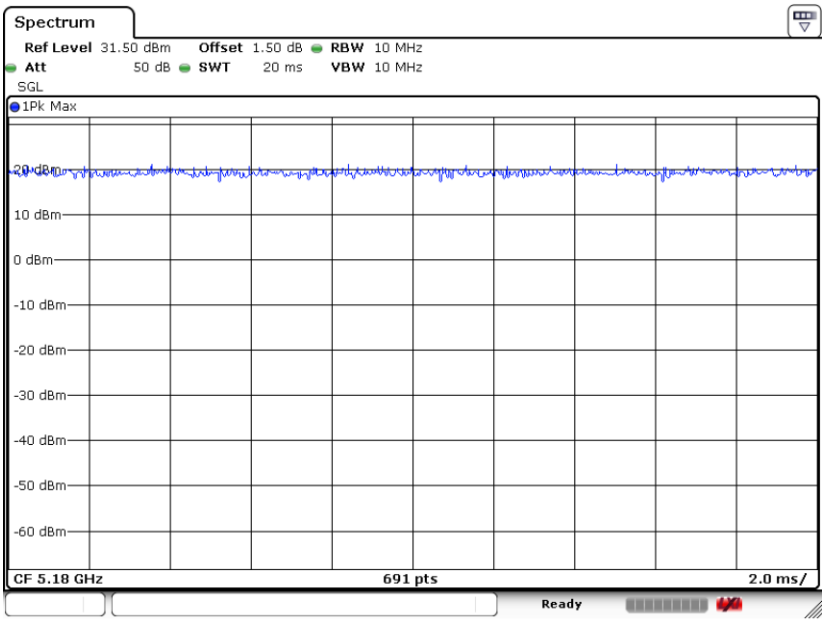

802.11ax HE40

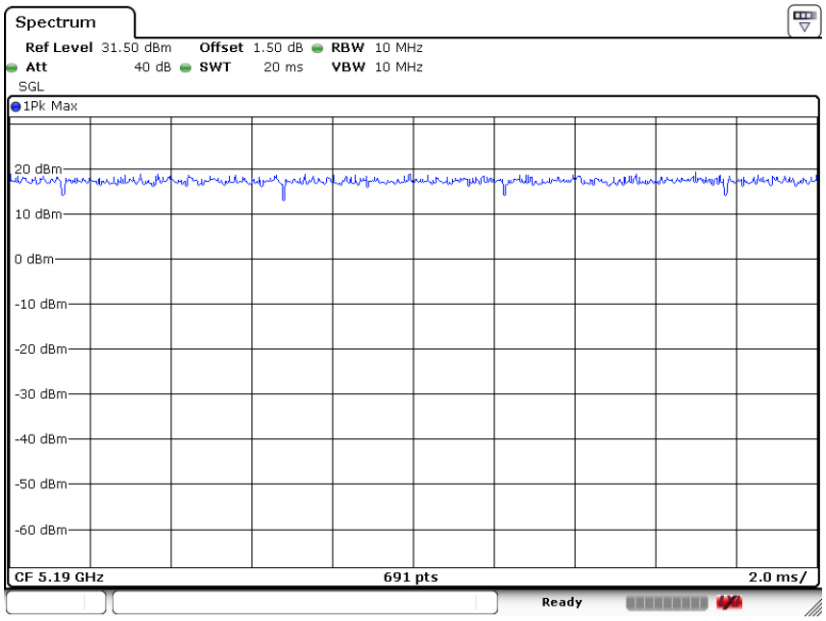

802.11ax HE80

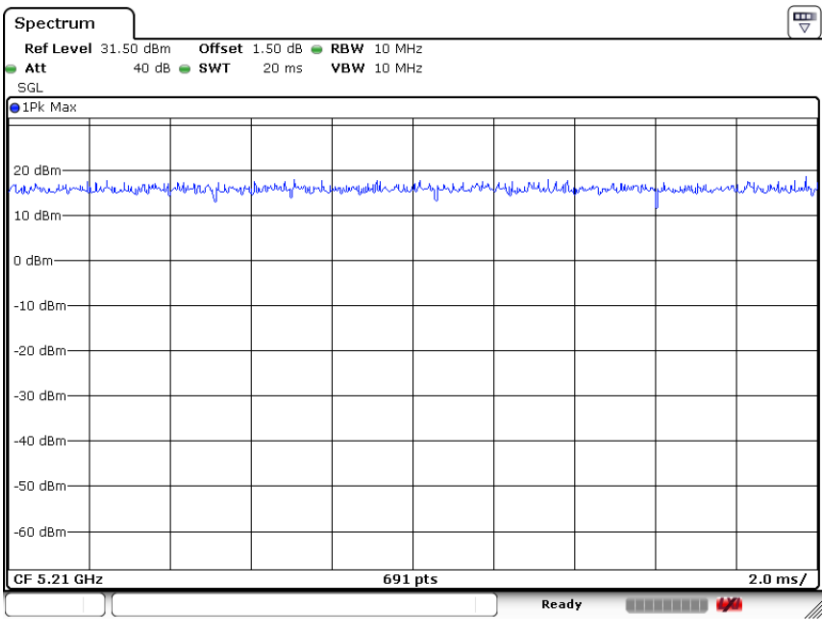
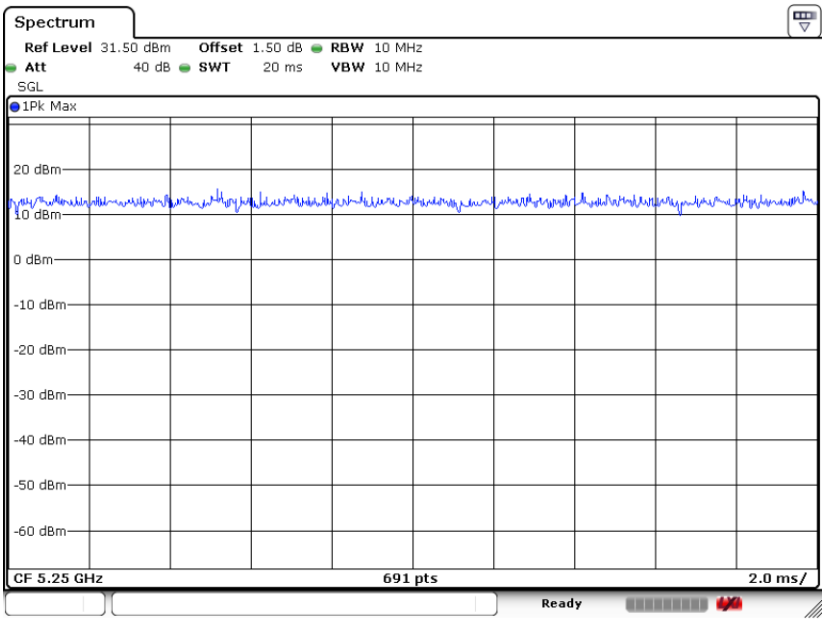
802.11ax HE160