


Appendix A: Test Results of 13.56MHz


APPENDIX A: TEST RESULTS OF 13.56MHZ	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
TX, Marker 1	2
TX, Marker 2	2
APPENDIX A.2: TEST RESULTS OF 99% BANDWIDTH.....	3
TX, Marker 1	3
TX, Marker 2	3
APPENDIX A.3: TEST RESULTS OF FREQUENCY STABILITY	4
APPENDIX A.4: TEST RESULTS OF RADIATED SPURIOUS EMISSION (IN-BAND & OUT-BAND EMISSIONS)	5
TX, Marker 1 (EUT1#).....	5
TX, Marker 2 (EUT1#).....	10
Standby (EUT1#)	15
TX, Marker 2 (EUT2#).....	20
Standby (EUT2#)	21
APPENDIX A.5: TEST RESULTS OF CONDUCTED EMISSIONS ON AC MAINS	22

Appendix A.1: Test Results of 20dB Bandwidth

TX, Marker 1

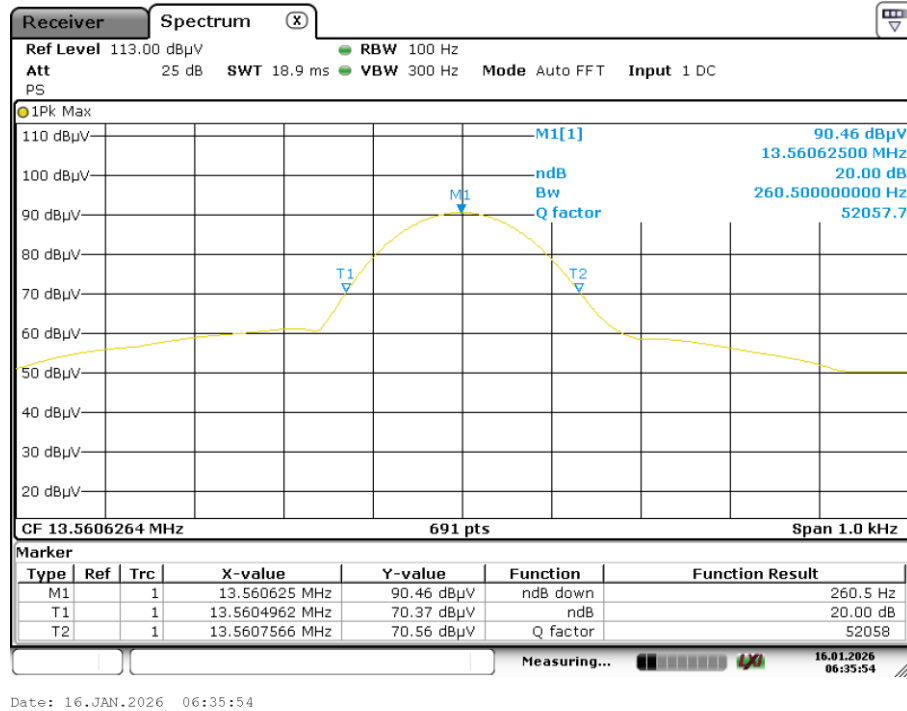


TX, Marker 2

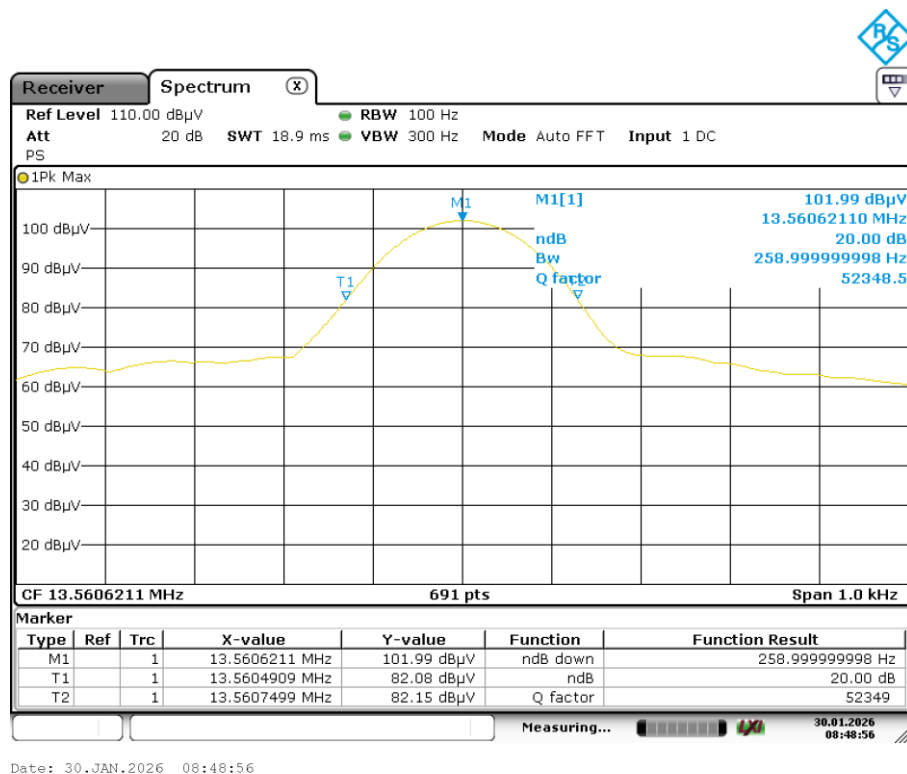


Appendix A.2: Test Results of 99% Bandwidth

TX, Marker 1

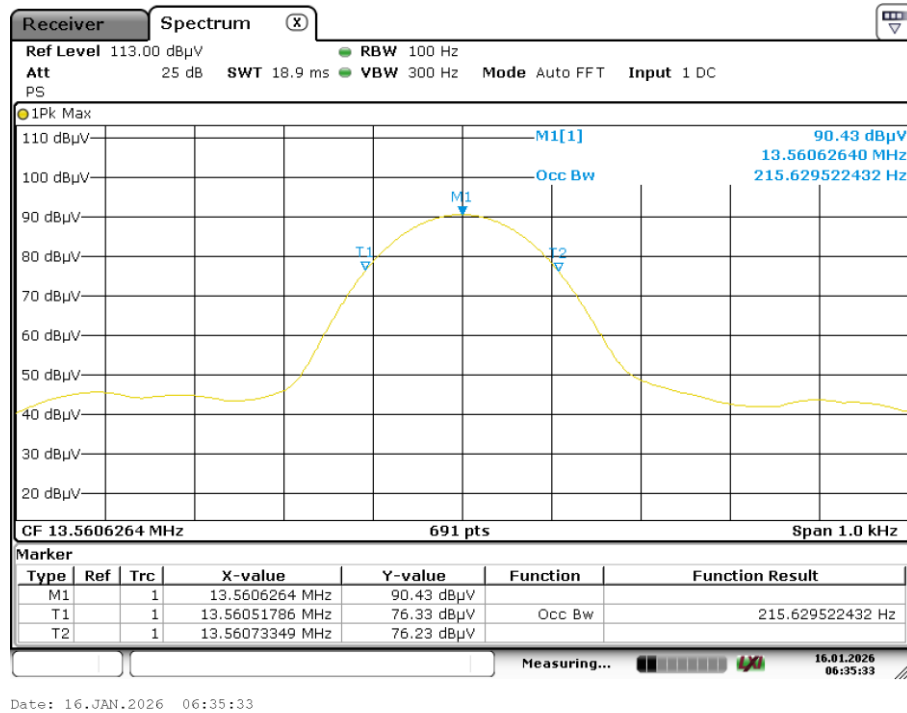

TX, Marker 2

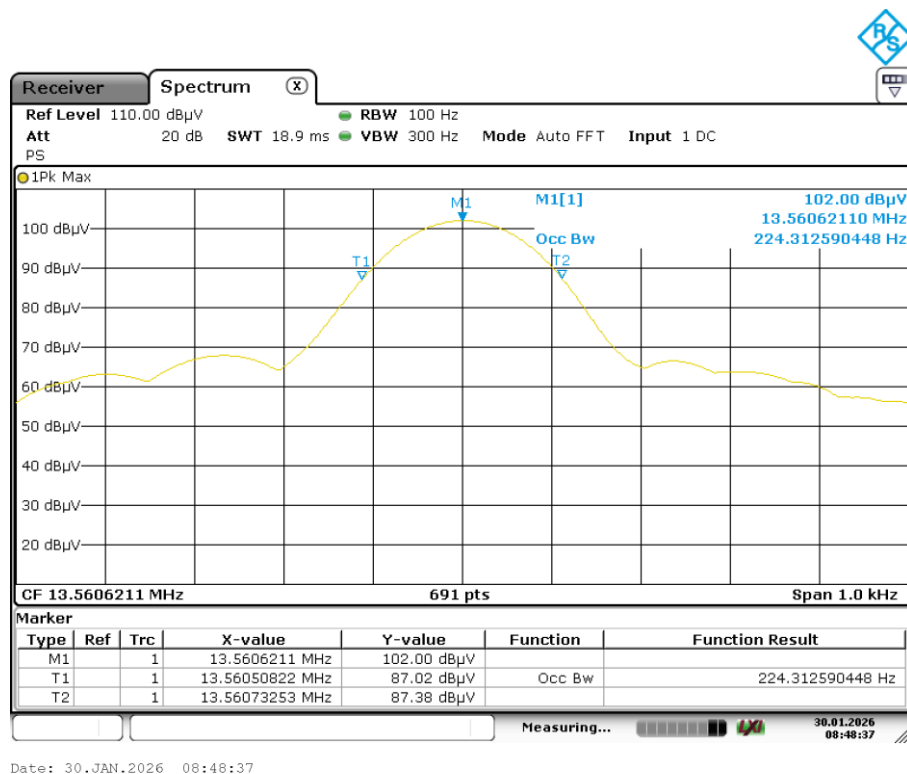

Appendix A.3: Test Results of Frequency Stability

Test Frequency (MHz)	Test Conditions		Test Results (MHz)	Deviation (KHz)	Limit (kHz)	Result
	Temp(°C)	Volt (V DC)				
13.56	0	3.87	13.560261	0.261	±0.01% (1.356 kHz)	Pass
	10	3.87	13.560127	0.127		Pass
	20	3.87	13.560463	0.463		Pass
	30	3.87	13.560549	0.549		Pass
	40	3.87	13.560382	0.382		Pass
	25	3.483	13.560704	0.704		Pass
		4.257	13.560947	0.947		Pass

Note: Deviation (kHz) = (Test Result-13.56MHz)*1000


Appendix A.4: Test Results of Radiated Spurious Emission (In-Band & Out-Band Emissions)

TX, Marker 1 (EUT1#)

Note: The highest waveform in the figure is Fundamental.

EUT Information

EUT Name: reMarkable RM12A
Model: RM12A
Test Mode: 13.56MHz
Order No/Sample No: 168564257/A004156581-003
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.225
Tested By: Kei Zhang
Reviewed By: Terry Yin

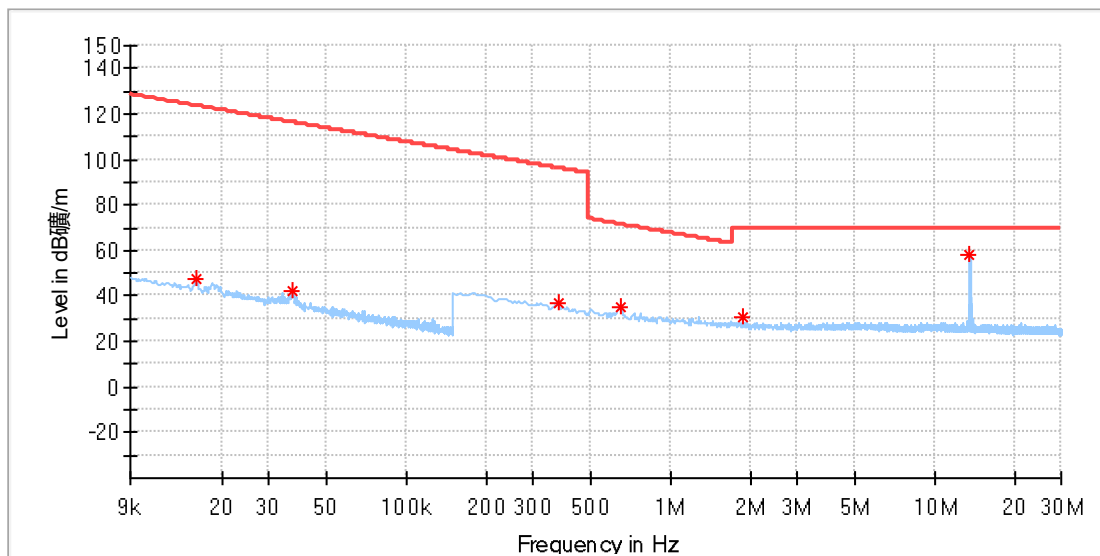

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.015949	47.44	123.53	76.09	100.0	X	189.0	19.9
0.036999	41.80	116.23	74.43	100.0	X	0.0	19.9
0.373875	37.02	96.15	59.13	100.0	X	227.0	19.9
0.641647	34.96	71.47	36.51	100.0	X	209.0	19.9
1.883934	30.34	69.50	39.16	100.0	X	281.0	20.0
13.560552	58.46	69.50	11.04	100.0	X	253.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: reMarkable RM12A
Model: RM12A
Test Mode: 13.56MHz
Order No/Sample No: 168564257/A004156581-003
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.225
Tested By: Kei Zhang
Reviewed By: Terry Yin

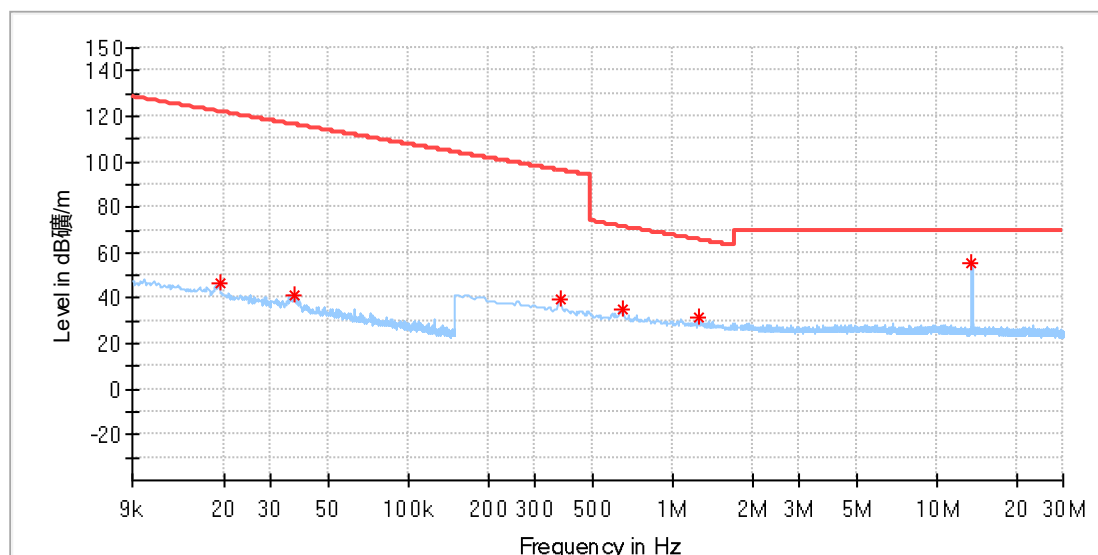

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019273	46.90	121.89	74.99	100.0	Y	86.0	19.9
0.037200	41.73	116.18	74.45	100.0	Y	278.0	19.9
0.373875	39.93	96.15	56.21	100.0	Y	91.0	19.9
0.641647	35.07	71.47	36.40	100.0	Y	155.0	19.9
1.247427	31.49	65.71	34.22	100.0	Y	52.0	19.9
13.560552	55.15	69.50	14.35	100.0	Y	176.0	20.3

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: reMarkable RM12A
Model: RM12A
Test Mode: 13.56MHz
Order No/Sample No: 168564257/A004156581-003
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.225
Tested By: Kei Zhang
Reviewed By: Terry Yin

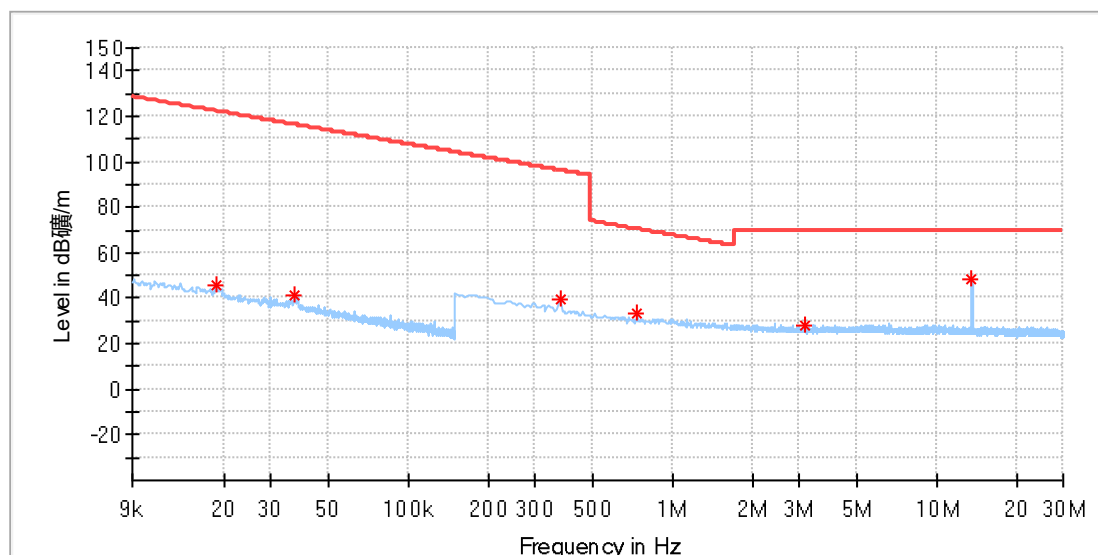

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018568	45.93	122.21	76.29	100.0	Z	226.0	19.9
0.036999	41.31	116.23	74.92	100.0	Z	299.0	19.9
0.373875	39.16	96.15	56.99	100.0	Z	194.0	19.9
0.733831	32.97	70.30	37.34	100.0	Z	32.0	19.9
3.178897	28.44	69.50	41.06	100.0	Z	241.0	20.0
13.560552	48.42	69.50	21.08	100.0	Z	79.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: reMarkable RM12A
Model: RM12A
Test Mode: 13.56MHz
Order No/Sample No: 168564257/A004156581-003
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.225
Tested By: Kei Zhang
Reviewed By: Terry Yin

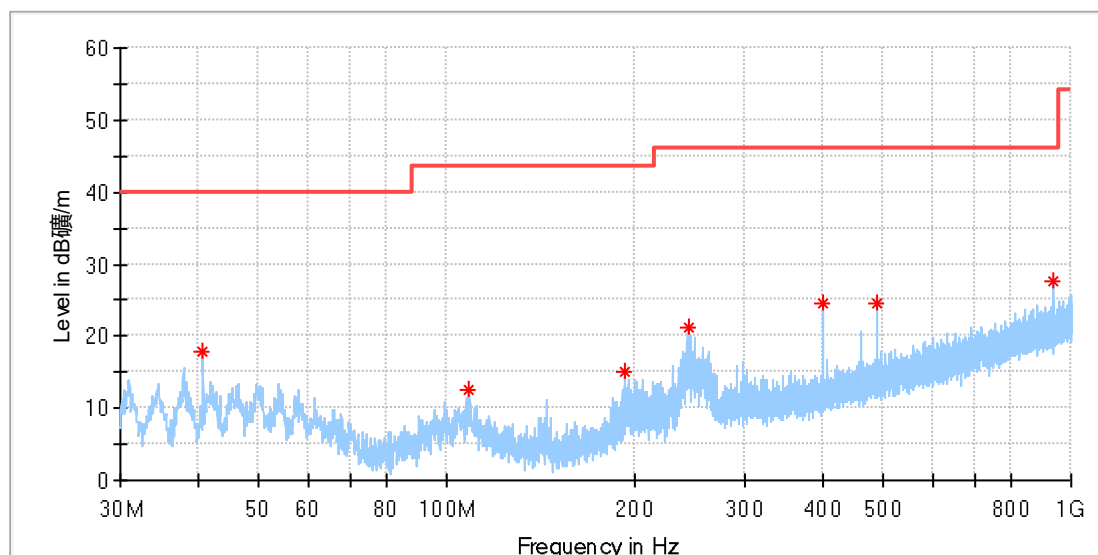

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.670000	17.95	40.00	22.05	100.0	H	65.0	-20.0
108.731667	12.44	43.50	31.06	100.0	H	172.0	-19.1
193.067778	15.10	43.50	28.40	100.0	H	0.0	-19.4
243.292222	21.16	46.00	24.84	100.0	H	0.0	-17.6
400.001111	24.57	46.00	21.43	100.0	H	298.0	-13.8
488.163333	24.56	46.00	21.44	100.0	H	143.0	-12.0
938.458889	27.70	46.00	18.30	100.0	H	261.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: reMarkable RM12A
Model: RM12A
Test Mode: 13.56MHz
Order No/Sample No: 168564257/A004156581-003
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.225
Tested By: Kei Zhang
Reviewed By: Terry Yin

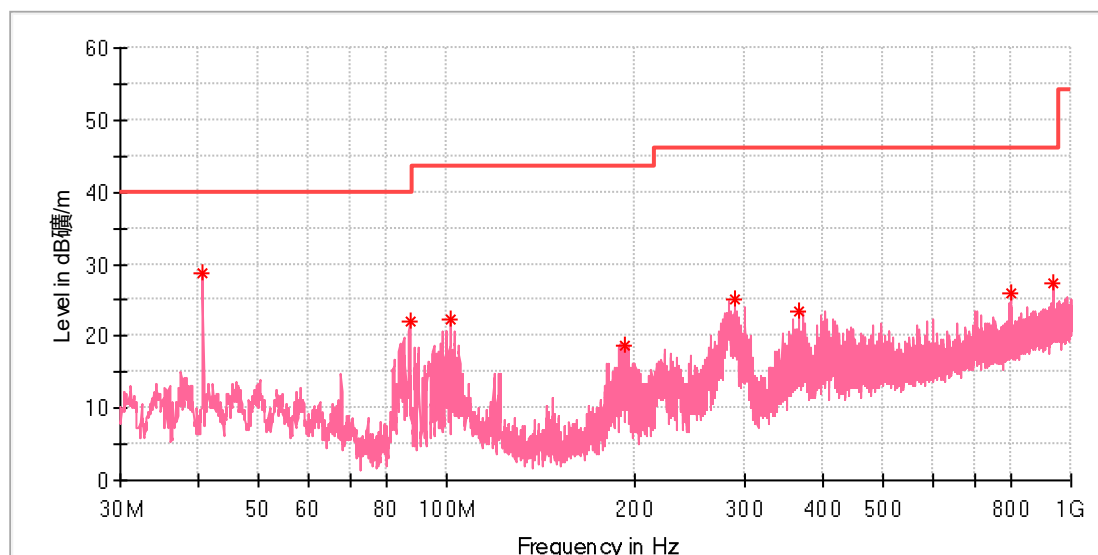

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.670000	28.83	40.00	11.17	100.0	V	186.0	-20.0
87.176111	22.02	40.00	17.98	100.0	V	334.0	-21.9
101.241111	22.27	43.50	21.23	100.0	V	56.0	-19.1
192.636667	18.78	43.50	24.72	100.0	V	327.0	-19.5
289.421111	25.18	46.00	20.82	100.0	V	163.0	-16.5
366.590000	23.58	46.00	22.42	100.0	V	263.0	-14.5
798.455556	26.03	46.00	19.97	100.0	V	170.0	-6.2
938.458889	27.25	46.00	18.75	100.0	V	242.0	-4.4

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

TX, Marker 2 (EUT1#)

Note: The highest waveform in the figure is Fundamental.

EUT Information

EUT Name:	reMarkable RM12A
Model:	RM12A
Test Mode:	13.56MHz
Order No/Sample No:	168564257/A004156581-003
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.225
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

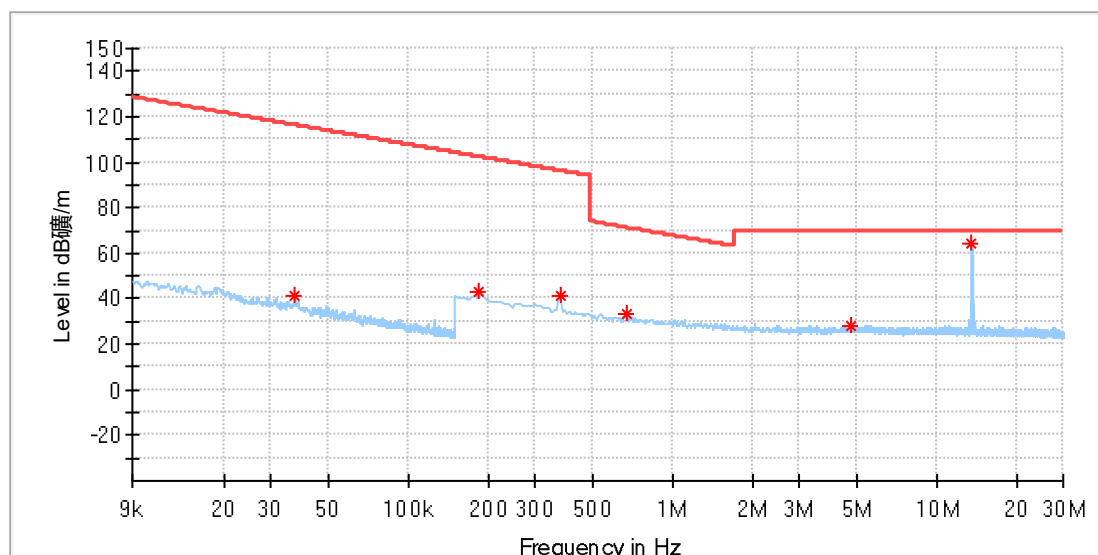

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036898	41.10	116.25	75.15	100.0	X	160.0	19.9
0.185118	42.69	102.25	59.56	100.0	X	315.0	19.8
0.373875	41.26	96.15	54.89	100.0	X	81.0	19.9
0.663596	33.22	71.17	37.95	100.0	X	301.0	19.9
4.697735	28.43	69.50	41.07	100.0	X	240.0	20.1
13.560552	64.16	69.50	5.34	100.0	X	359.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: reMarkable RM12A
Model: RM12A
Test Mode: 13.56MHz
Order No/Sample No: 168564257/A004156581-003
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.225
Tested By: Kei Zhang
Reviewed By: Terry Yin

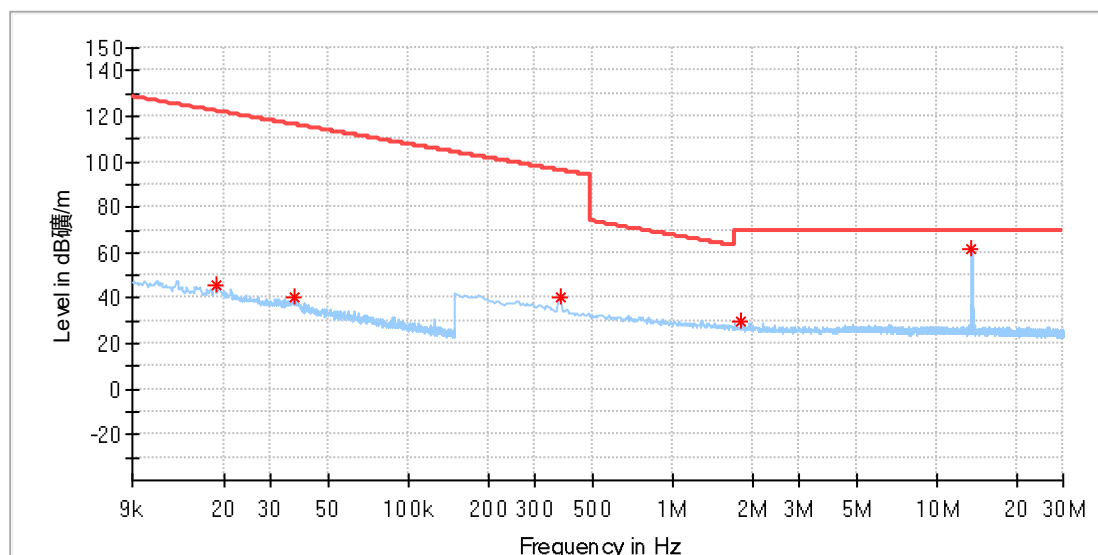

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018568	45.59	122.21	76.62	100.0	Y	112.0	19.9
0.036898	40.28	116.25	75.97	100.0	Y	84.0	19.9
0.373875	40.62	96.15	55.53	100.0	Y	318.0	19.9
1.822478	29.63	69.50	39.87	100.0	Y	55.0	20.0
13.560552	61.42	69.50	8.08	100.0	Y	285.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: reMarkable RM12A
Model: RM12A
Test Mode: 13.56MHz
Order No/Sample No: 168564257/A004156581-003
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.225
Tested By: Kei Zhang
Reviewed By: Terry Yin

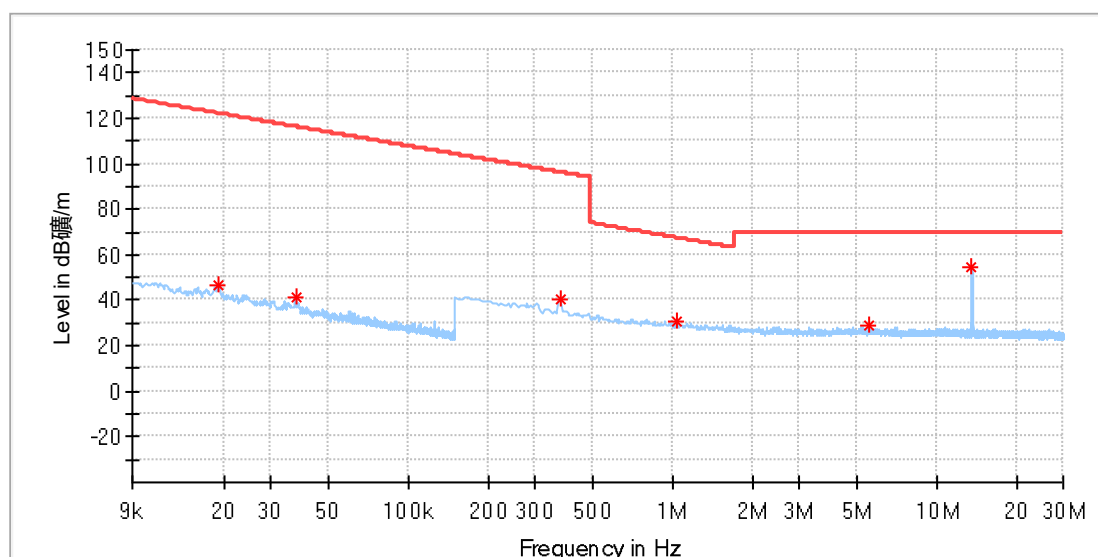

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	46.70	121.94	75.24	100.0	Z	132.0	19.9
0.037301	41.08	116.16	75.08	100.0	Z	114.0	19.9
0.373875	40.85	96.15	55.30	100.0	Z	141.0	19.9
1.036721	30.90	67.31	36.41	100.0	Z	335.0	19.9
5.562507	28.61	69.50	40.89	100.0	Z	260.0	20.1
13.560552	54.31	69.50	15.19	100.0	Z	177.0	20.3

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: reMarkable RM12A
Model: RM12A
Test Mode: 13.56MHz
Order No/Sample No: 168564257/A004156581-003
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.225
Tested By: Kei Zhang
Reviewed By: Terry Yin

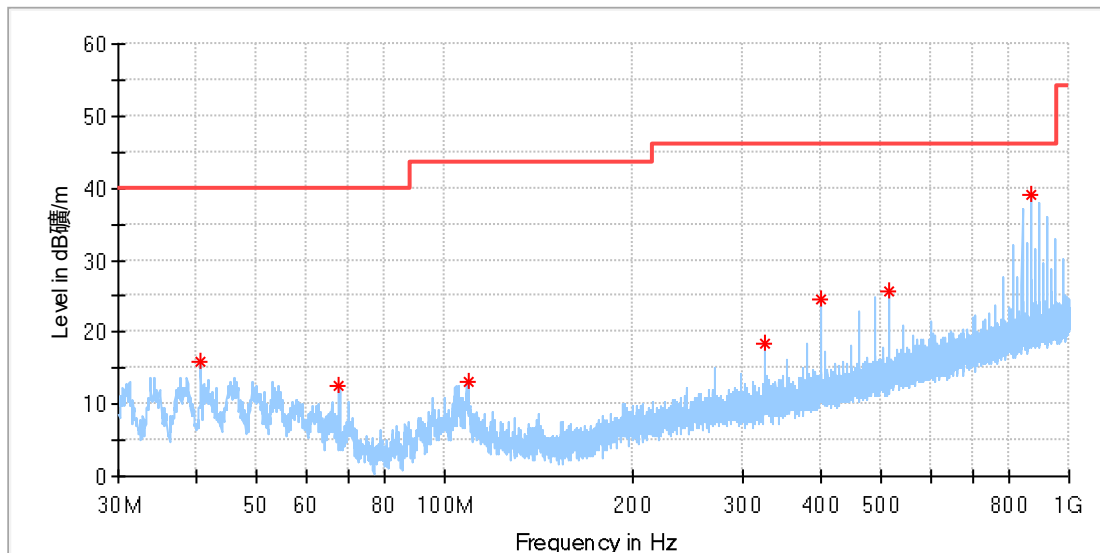

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.670000	15.82	40.00	24.18	100.0	H	328.0	-20.0
67.776111	12.48	40.00	27.52	100.0	H	320.0	-21.2
108.839444	13.07	43.50	30.43	100.0	H	336.0	-19.1
325.472778	18.46	46.00	27.54	100.0	H	55.0	-15.5
400.001111	24.47	46.00	21.53	100.0	H	206.0	-13.8
515.323333	25.62	46.00	20.38	100.0	H	184.0	-11.6
867.918333	39.16	46.00	6.84	100.0	H	272.0	-5.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: reMarkable RM12A
Model: RM12A
Test Mode: 13.56MHz
Order No/Sample No: 168564257/A004156581-003
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.225
Tested By: Kei Zhang
Reviewed By: Terry Yin

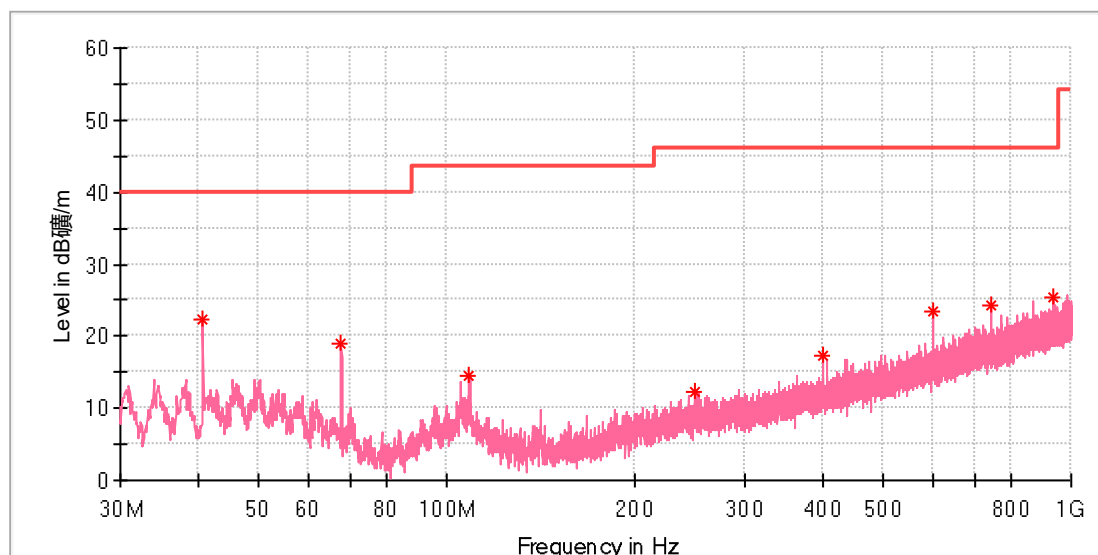

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.670000	22.40	40.00	17.60	100.0	V	244.0	-20.0
67.776111	18.85	40.00	21.15	100.0	V	49.0	-21.2
108.731667	14.64	43.50	28.86	100.0	V	127.0	-19.1
249.866667	12.40	46.00	33.60	100.0	V	320.0	-17.4
400.055000	17.40	46.00	28.60	100.0	V	34.0	-13.8
600.036667	23.56	46.00	22.44	100.0	V	158.0	-9.7
742.518889	24.31	46.00	21.69	100.0	V	171.0	-7.2
938.405000	25.44	46.00	20.56	100.0	V	42.0	-4.4


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Standby (EUT1#)

EUT Information

EUT Name: reMarkable RM12A
Model: RM12A
Test Mode: 13.56MHz
Order No/Sample No: 168564257/A004156581-003
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.225
Tested By: Kei Zhang
Reviewed By: Terry Yin

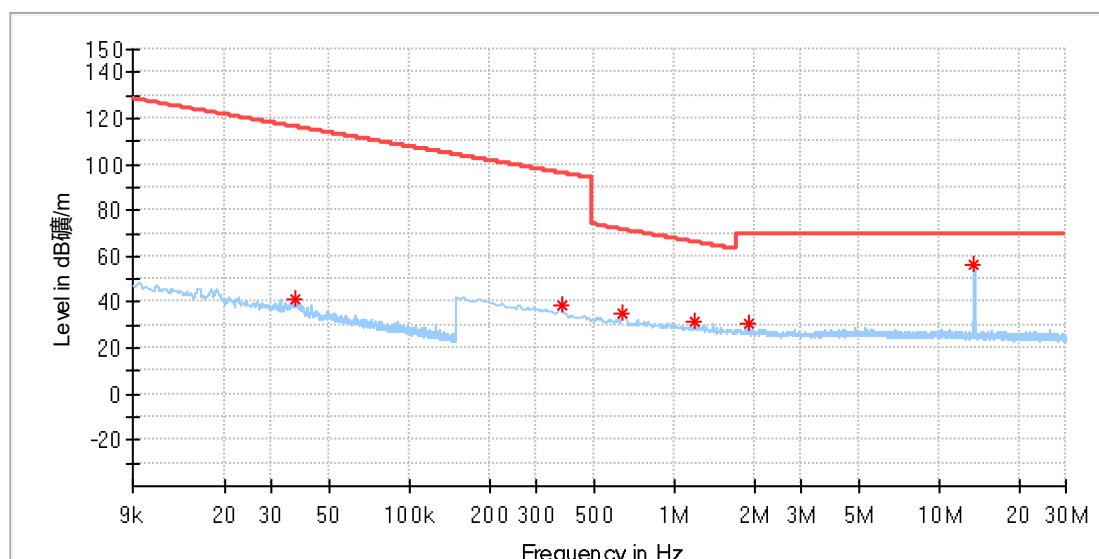

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036999	41.70	116.23	74.53	100.0	X	189.0	19.9
0.373875	38.98	96.15	57.16	100.0	X	42.0	19.9
0.637258	35.53	71.52	35.99	100.0	X	349.0	19.9
1.199140	31.61	66.05	34.44	100.0	X	243.0	19.9
1.905882	30.57	69.50	38.93	100.0	X	182.0	20.0
13.560552	56.75	69.50	12.75	100.0	X	265.0	20.3

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: reMarkable RM12A
Model: RM12A
Test Mode: 13.56MHz
Order No/Sample No: 168564257/A004156581-003
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.225
Tested By: Kei Zhang
Reviewed By: Terry Yin

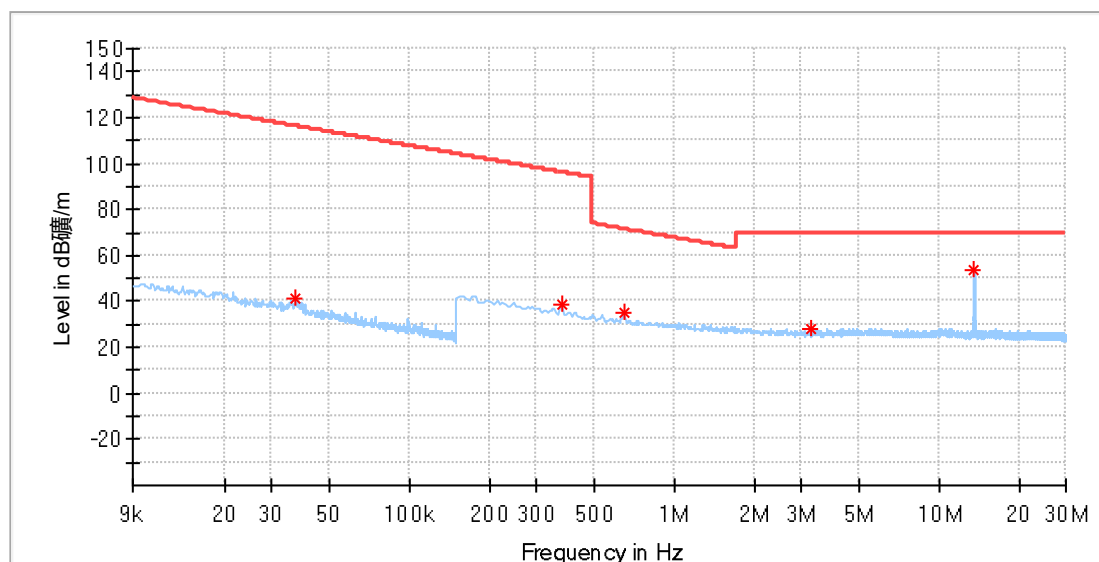

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036999	41.28	116.23	74.95	100.0	Y	220.0	19.9
0.373875	38.79	96.15	57.36	100.0	Y	141.0	19.9
0.646037	35.02	71.41	36.38	100.0	Y	315.0	19.9
3.266691	27.72	69.50	41.78	100.0	Y	294.0	20.0
13.560552	53.70	69.50	15.80	100.0	Y	156.0	20.3

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: reMarkable RM12A
Model: RM12A
Test Mode: 13.56MHz
Order No/Sample No: 168564257/A004156581-003
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.225
Tested By: Kei Zhang
Reviewed By: Terry Yin

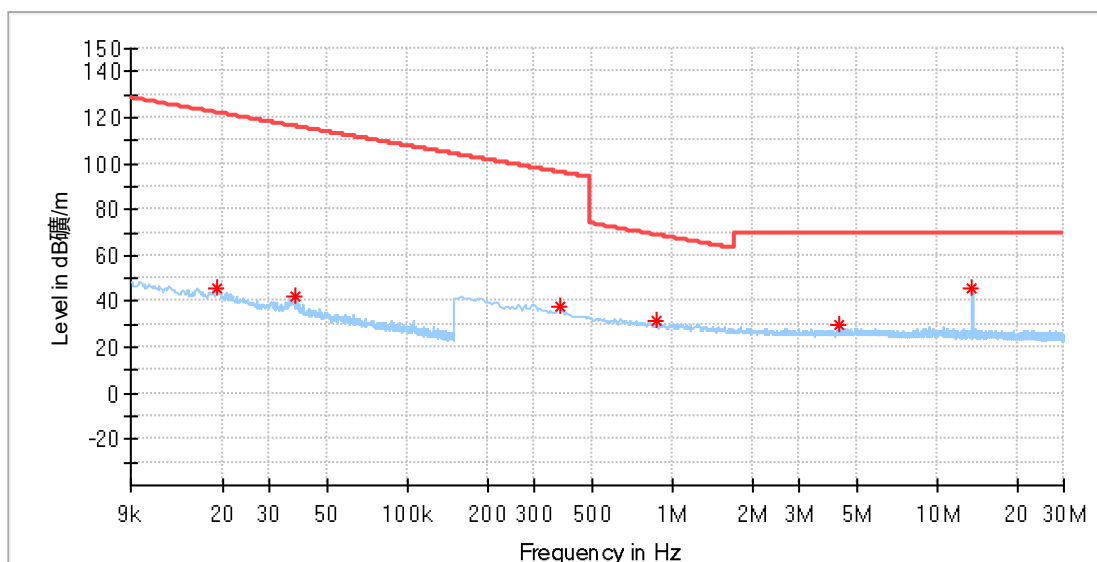

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019071	45.59	121.98	76.39	100.0	Z	162.0	19.9
0.037301	42.37	116.16	73.79	100.0	Z	0.0	19.9
0.373875	38.10	96.15	58.05	100.0	Z	87.0	19.9
0.869912	31.29	68.83	37.53	100.0	Z	297.0	19.9
4.236816	29.74	69.50	39.76	100.0	Z	308.0	20.1
13.560552	45.53	69.50	23.97	100.0	Z	275.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: reMarkable RM12A
Model: RM12A
Test Mode: 13.56MHz
Order No/Sample No: 168564257/A004156581-003
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.225
Tested By: Kei Zhang
Reviewed By: Terry Yin

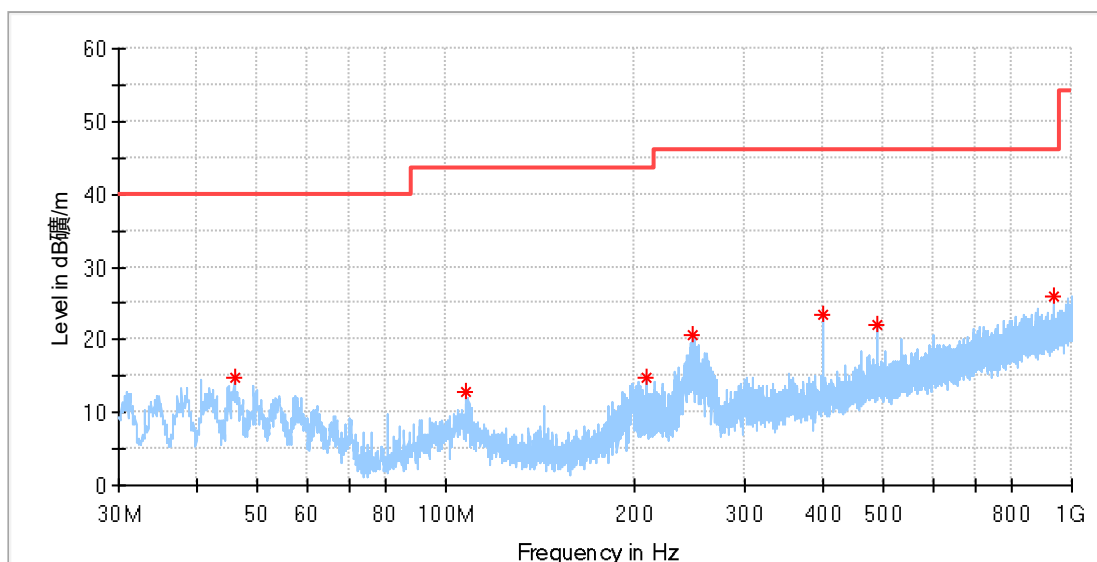

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.897222	14.68	40.00	25.32	100.0	H	121.0	-18.8
107.600000	12.75	43.50	30.75	100.0	H	121.0	-19.1
209.450000	14.67	43.50	28.83	100.0	H	37.0	-18.9
247.064444	20.67	46.00	25.33	100.0	H	215.0	-17.5
400.001111	23.44	46.00	22.56	100.0	H	322.0	-13.8
488.217222	21.95	46.00	24.05	100.0	H	112.0	-12.0
936.950000	26.02	46.00	19.98	100.0	H	62.0	-4.4

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: reMarkable RM12A
 Model: RM12A
 Test Mode: 13.56MHz
 Order No/Sample No: 168564257/A004156581-003
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.225
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

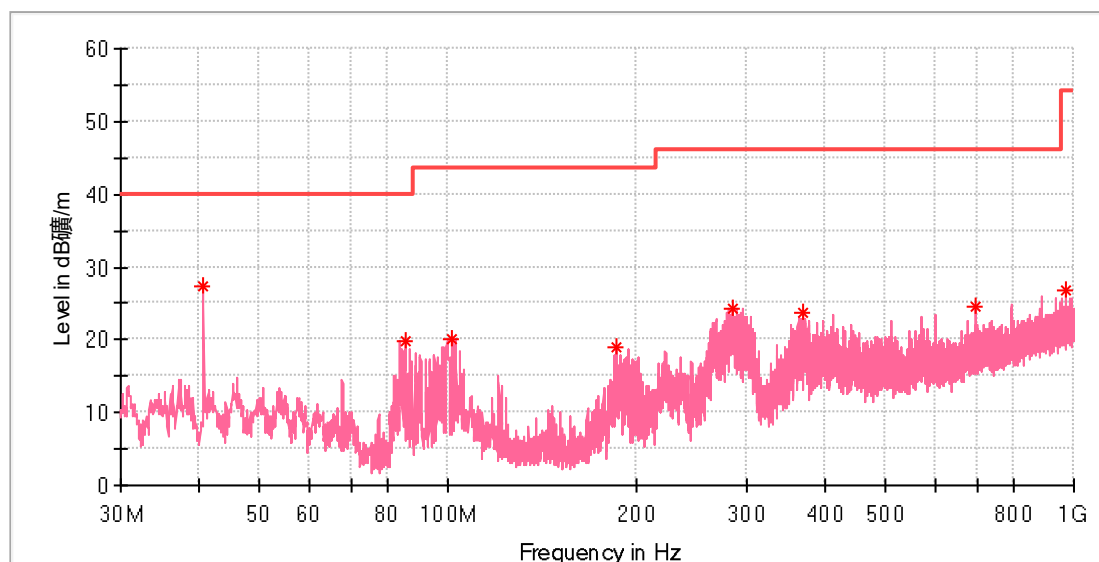

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.670000	27.40	40.00	12.60	100.0	V	181.0	-20.0
85.397778	19.83	40.00	20.17	100.0	V	0.0	-22.4
101.726111	20.11	43.50	23.39	100.0	V	233.0	-19.0
186.170000	18.90	43.50	24.60	100.0	V	218.0	-20.0
285.325556	24.25	46.00	21.75	100.0	V	331.0	-16.6
368.530000	23.70	46.00	22.30	100.0	V	0.0	-14.5
697.737222	24.44	46.00	21.56	100.0	V	158.0	-8.0
972.355000	26.70	54.00	27.30	100.0	V	258.0	-3.9

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

TX, Marker 2 (EUT2#)

Note: The highest waveform in the figure is Fundamental.

EUT Information

EUT Name:	reMarkable RM12A
Model:	RM12A
Test Mode:	13.56MHz
Order No/Sample No:	168564257/A004156581-006
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.225
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

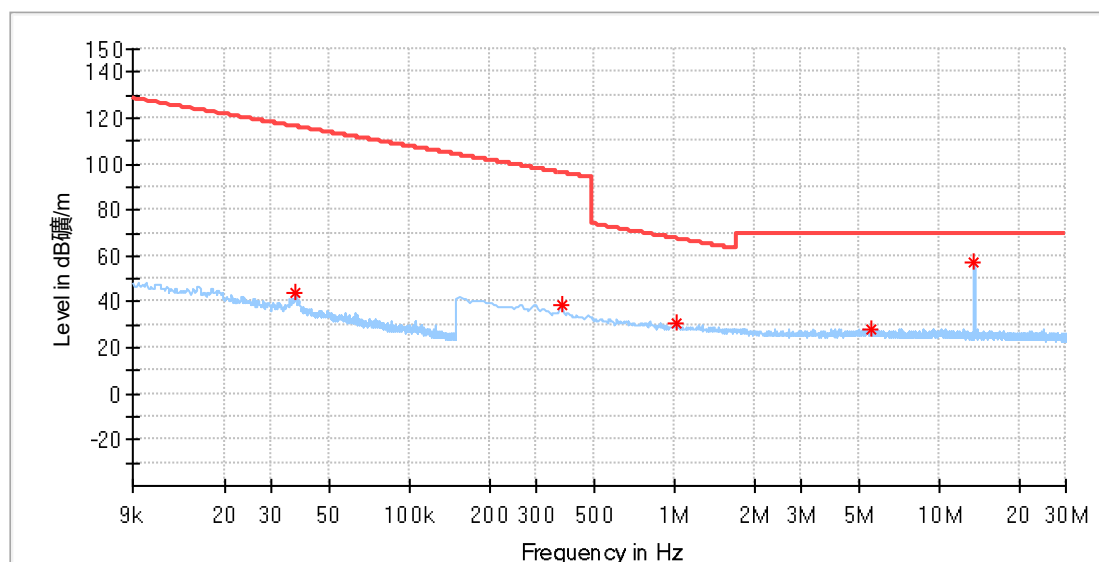

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.036999	43.52	116.23	72.71	100.0	X	7.0	19.9
0.373875	38.82	96.15	57.32	100.0	X	1.0	19.9
1.019162	30.76	67.46	36.69	100.0	X	218.0	19.9
5.518610	28.24	69.50	41.26	100.0	X	352.0	20.1
13.560552	57.24	69.50	12.26	100.0	X	247.0	20.3


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Standby (EUT2#)

EUT Information

EUT Name: reMarkable RM12A
Model: RM12A
Test Mode: 13.56MHz
Order No/Sample No: 168564257/A004156581-006
Test Voltage: Battery
Remark: Temp 22 Humi:55%
Test Standard: FCC 15.225
Tested By: Kei Zhang
Reviewed By: Terry Yin

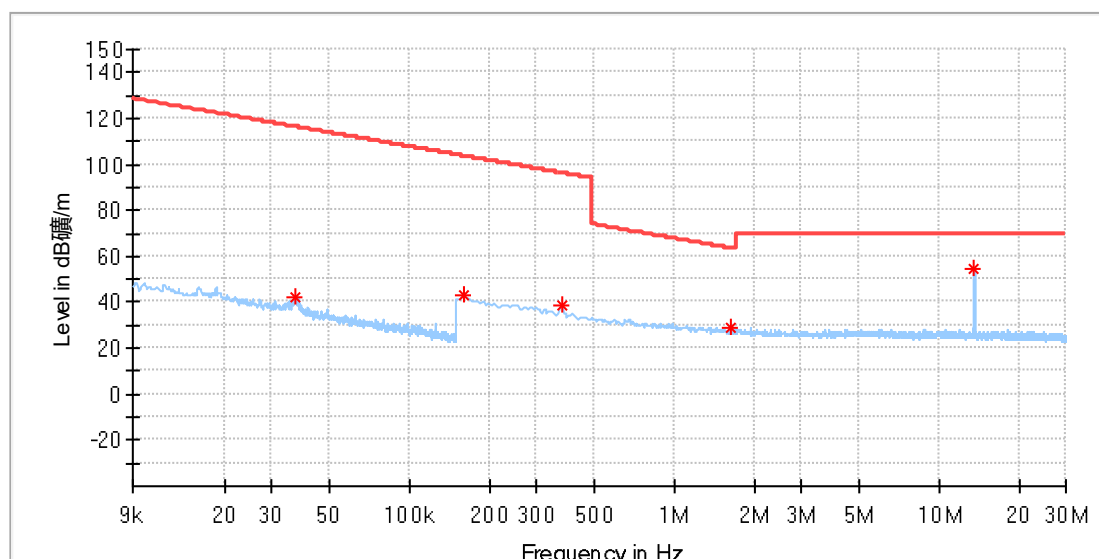

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037200	42.56	116.18	73.62	100.0	X	120.0	19.9
0.158780	43.09	103.58	60.49	100.0	X	235.0	19.9
0.373875	38.97	96.15	57.18	100.0	X	123.0	19.9
1.620552	29.14	63.44	34.30	100.0	X	161.0	19.9
13.560552	54.79	69.50	14.71	100.0	X	76.0	20.3


Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Appendix A.5: Test Results of Conducted Emissions on AC Mains

EUT Information

EUT Name: reMarkable RM12A
Order Number: 168564257_Item370
Model: RM12A
Test Mode: Charging + 13.56MHz, Mark 1
Test Voltage: AC 120V/ 60Hz
Test Standard: FCC Part 15C
Test By:/Review By: Aric Wang/Murphy Chen
Tem./Hum./Pressure: 24.0°C/49.3%/101kPa
Remark: SR 2

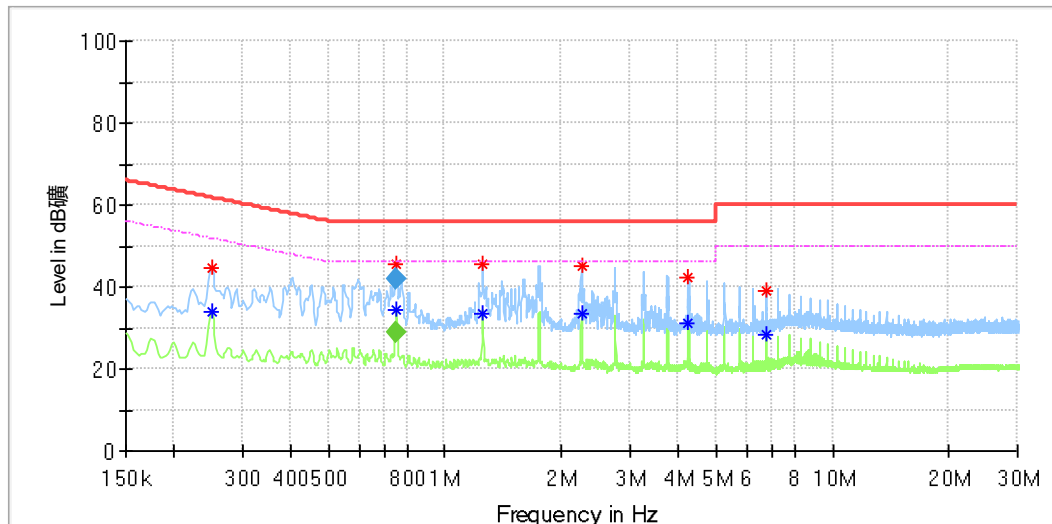

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.250	44.6	---	61.77	17.21	L1	9.7
0.250	---	33.9	51.77	17.88	L1	9.7
0.749	45.6	---	56.00	10.38	L1	9.7
0.749	---	34.6	46.00	11.42	L1	9.7
1.247	---	33.7	46.00	12.28	L1	9.6
1.249	45.6	---	56.00	10.40	L1	9.6
2.249	---	33.6	46.00	12.43	L1	9.6
2.249	45.2	---	56.00	10.85	L1	9.6
4.249	---	31.3	46.00	14.72	L1	9.7
4.249	42.1	---	56.00	13.90	L1	9.7
6.749	---	28.4	50.00	21.56	L1	9.9
6.749	39.0	---	60.00	20.96	L1	9.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.749	---	29.0	46.00	17.01	1000.0	9.0	L1	9.7
0.749	42.1	---	56.00	13.92	1000.0	9.0	L1	9.7

EUT Information

EUT Name: reMarkable RM12A
Order Number: 168564257_Item370
Model: RM12A
Test Mode: Charging + 13.56MHz, Mark 1
Test Voltage: AC 120V/ 60Hz
Test Standard: FCC Part 15C
Test By./Review By: Aric Wang/Murphy Chen
Tem./Hum./Pressure: 24.0°C/49.3%/101kPa
Remark: SR 2

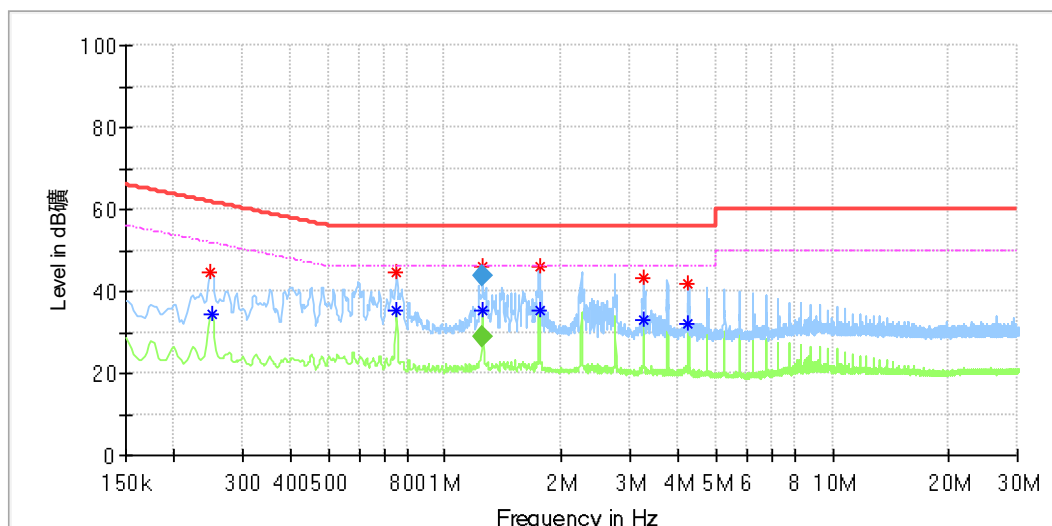

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.247	44.5	---	61.86	17.38	N	9.9
0.250	---	34.5	51.77	17.23	N	9.9
0.749	---	35.3	46.00	10.74	N	9.8
0.752	44.6	---	56.00	11.36	N	9.8
1.249	---	35.3	46.00	10.65	N	9.8
1.249	45.9	---	56.00	10.05	N	9.8
1.749	45.9	---	56.00	10.11	N	9.9
1.749	---	35.1	46.00	10.88	N	9.9
3.249	43.4	---	56.00	12.64	N	9.8
3.249	---	33.2	46.00	12.82	N	9.8
4.247	41.7	---	56.00	14.27	N	9.7
4.249	---	32.0	46.00	14.03	N	9.7

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
1.249	43.5	---	56.00	12.53	1000.0	9.0	N	9.8
1.249	---	28.9	46.00	17.08	1000.0	9.0	N	9.8