

Appendix A: Test Results of Bluetooth LE

APPENDIX A: TEST RESULTS OF BLUETOOTH LE	1
APPENDIX A.1: TEST RESULTS OF 6dB BANDWIDTH	2
Test Result	2
Test Graphs	3
APPENDIX A.2: TEST RESULTS OF 99% BANDWIDTH	6
Test Result	6
Test Graphs	7
APPENDIX A.3: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	10
Test Result	10
Test Graphs	11
APPENDIX A.4: TEST RESULTS OF BAND EDGE MEASUREMENTS	14
Bluetooth LE, 1Mbps	14
Bluetooth LE, 2Mbps	15
APPENDIX A.5: TEST RESULTS OF CONDUCTED SPURIOUS EMISSION	16
Test Result	16
Test Graphs	17
APPENDIX A.6: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	24
30MHz - 1GHz	24
1GHz - 18GHz	26
APPENDIX A.7: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	38
APPENDIX A.8: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS	46


Appendix A.1: Test Results of 6dB Bandwidth

Test Result


TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.66	2401.68	2402.34	0.5	PASS
		2440	0.66	2439.68	2440.34	0.5	PASS
		2480	0.66	2479.68	2480.34	0.5	PASS
BLE_2M	Ant1	2402	1.18	2401.42	2402.60	0.5	PASS
		2440	1.17	2439.42	2440.60	0.5	PASS
		2480	1.17	2479.42	2480.60	0.5	PASS

Test Graphs


BLE 1M Ant1_2402

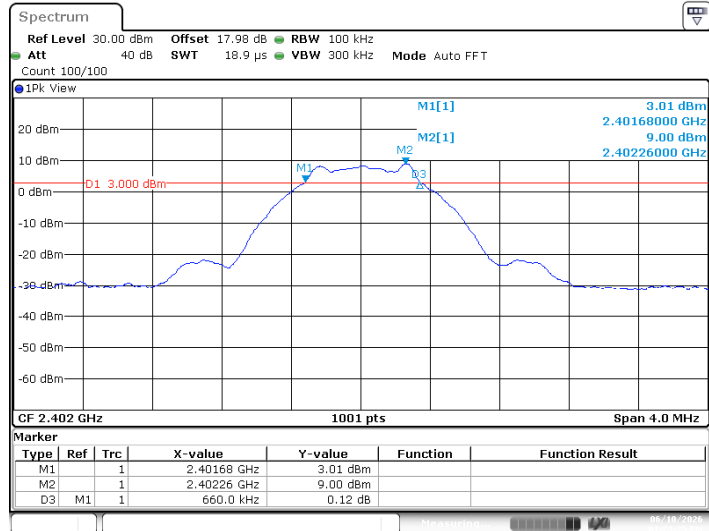

BLE 1M Ant1_2440

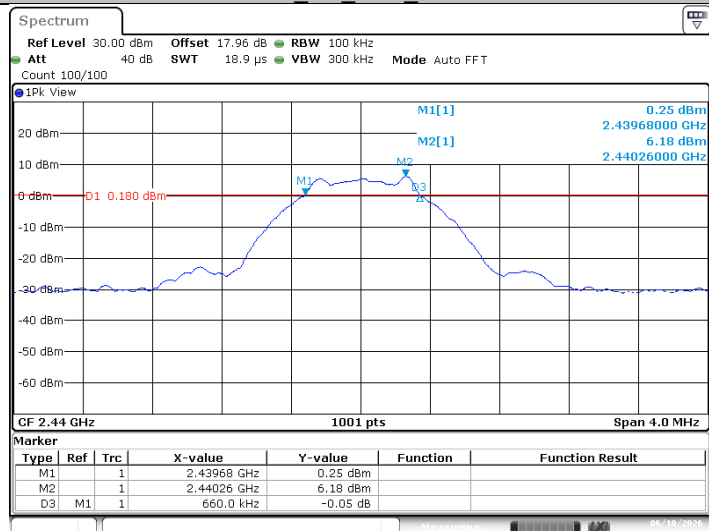


BLE 1M Ant1_2480

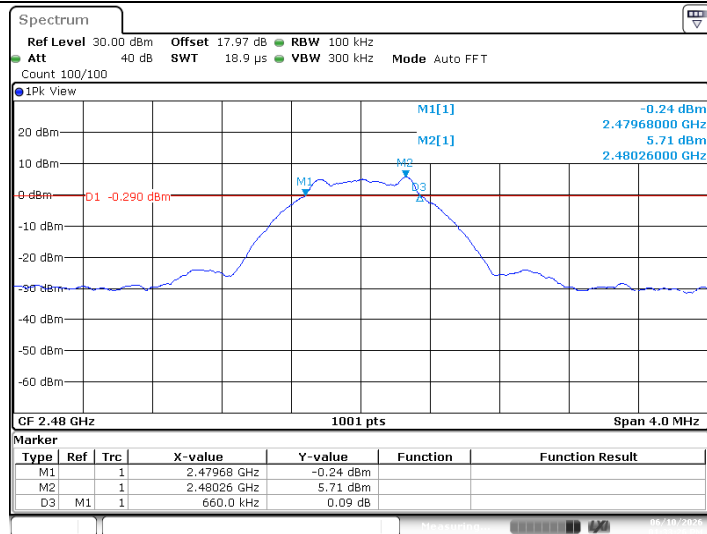


Date: 10.JUN.2026 13:33:26

BLE 2M Ant1_2402

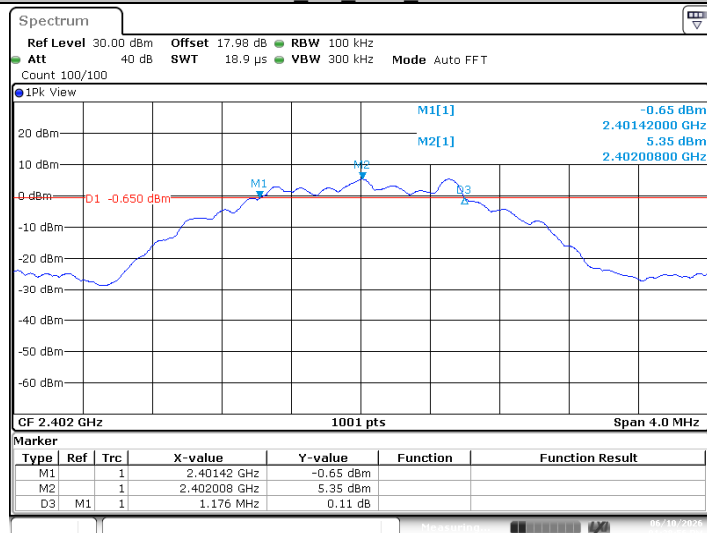


Date: 10.JUN.2026 13:38:56

BLE 2M Ant1_2440

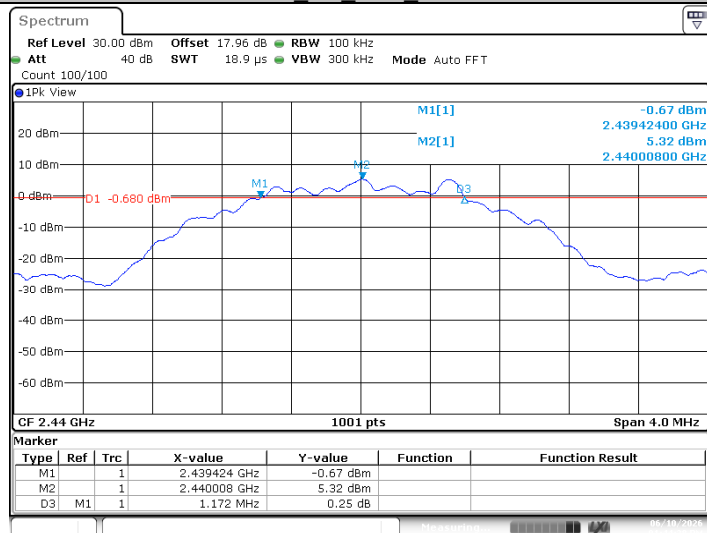

Date: 10.JUN.2026 13:44:28

BLE 2M Ant1_2480

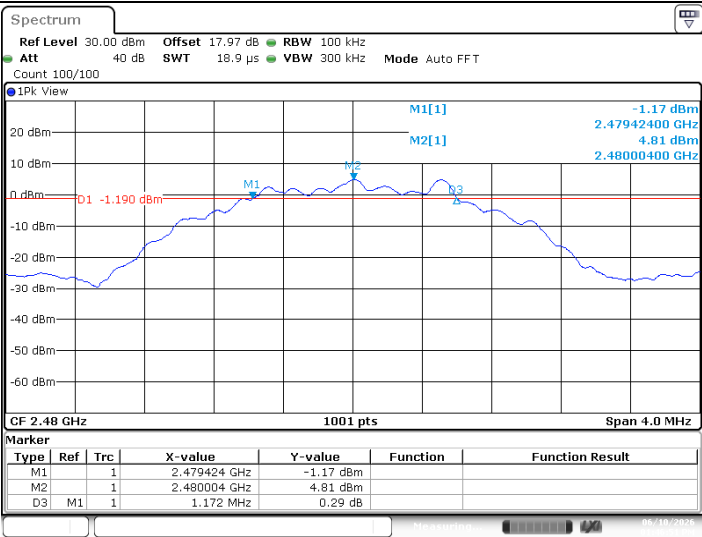

Date: 10.JUN.2026 13:46:51


Appendix A.2: Test Results of 99% Bandwidth

Test Result


TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0310	2401.5005	2402.5315	---	PASS
		2440	1.0430	2439.4925	2440.5355	---	PASS
		2480	1.0430	2479.4925	2480.5355	---	PASS
BLE_2M	Ant1	2402	2.0699	2400.9930	2403.0629	---	PASS
		2440	2.0779	2438.9850	2441.0629	---	PASS
		2480	2.0739	2478.9890	2481.0629	---	PASS

Test Graphs


BLE 1M Ant1_2402

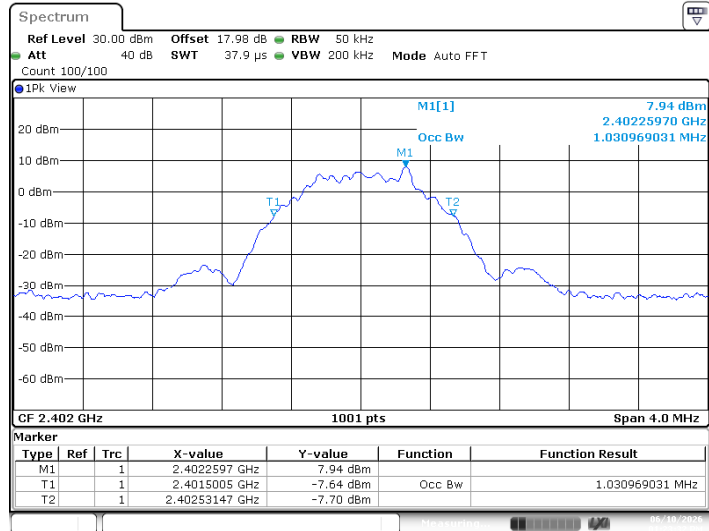


BLE 1M Ant1_2440

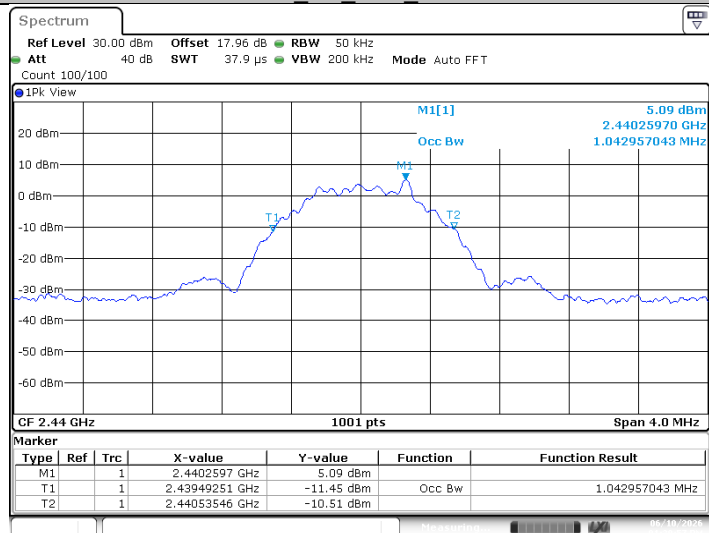


BLE 1M Ant1_2480

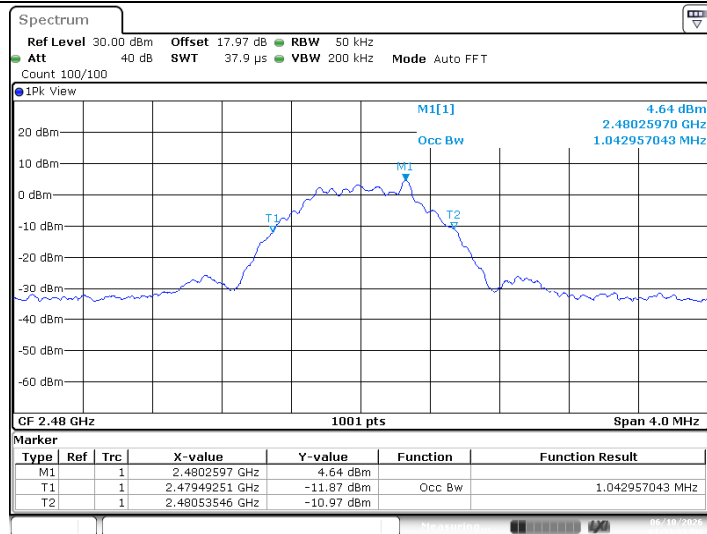


BLE 2M Ant1_2402

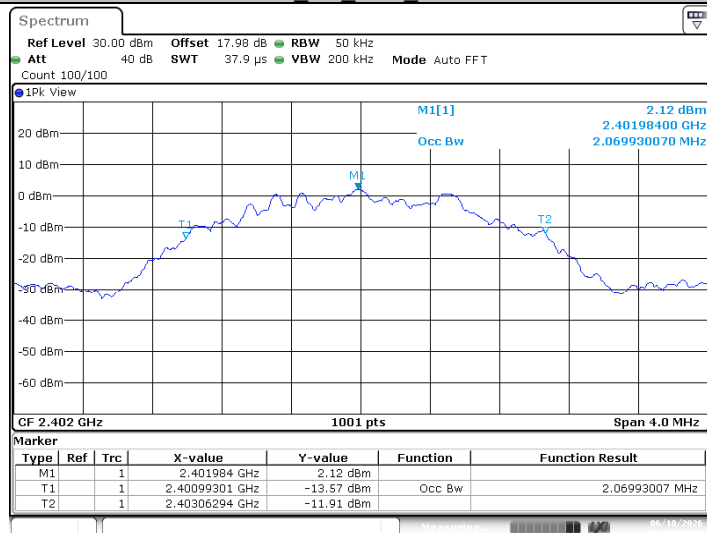

BLE 2M Ant1_2440

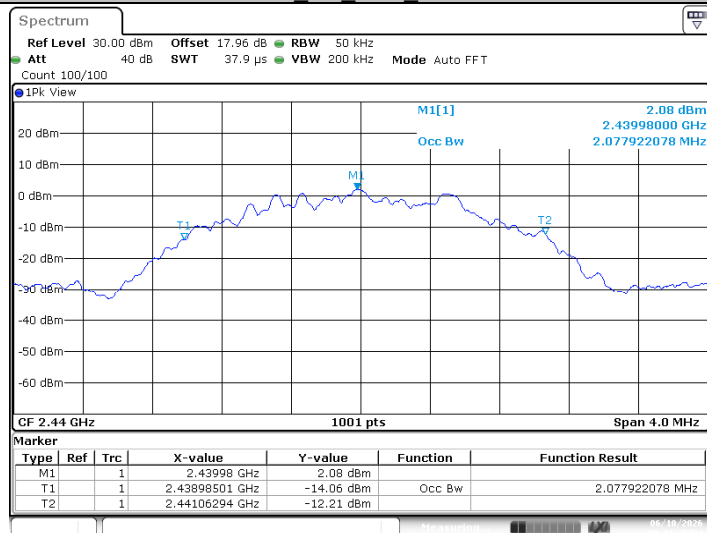

BLE 2M Ant1_2480

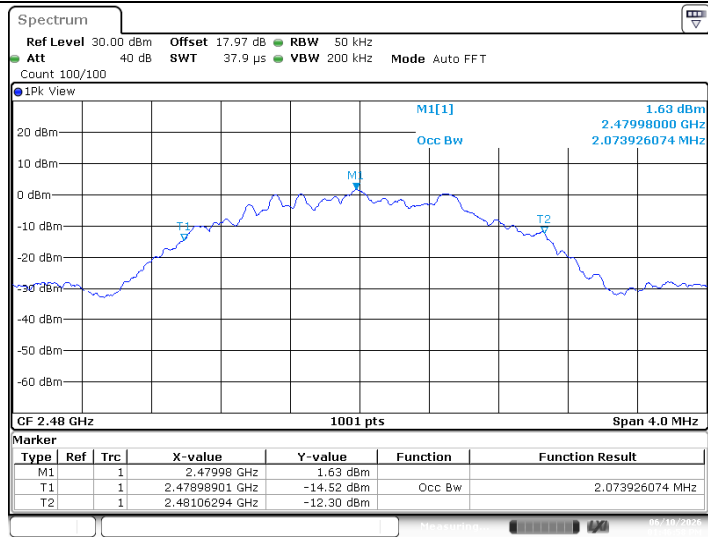

Date: 10.JUN.2026 13:46:58


Appendix A.3: Test Results of Conducted Power Spectral Density

Test Result

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-7.73	≤8.00	PASS
		2440	-10.43	≤8.00	PASS
		2480	-10.98	≤8.00	PASS
BLE_2M	Ant1	2402	-13.11	≤8.00	PASS
		2440	-13.08	≤8.00	PASS
		2480	-13.60	≤8.00	PASS


Test Graphs

BLE_1M_Ant1_2402

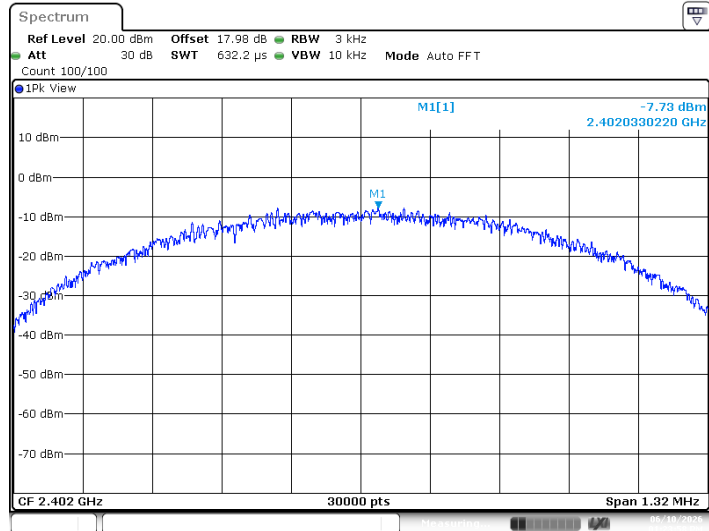


Date: 10.JUN.2026 13:23:57

BLE_1M_Ant1_2440

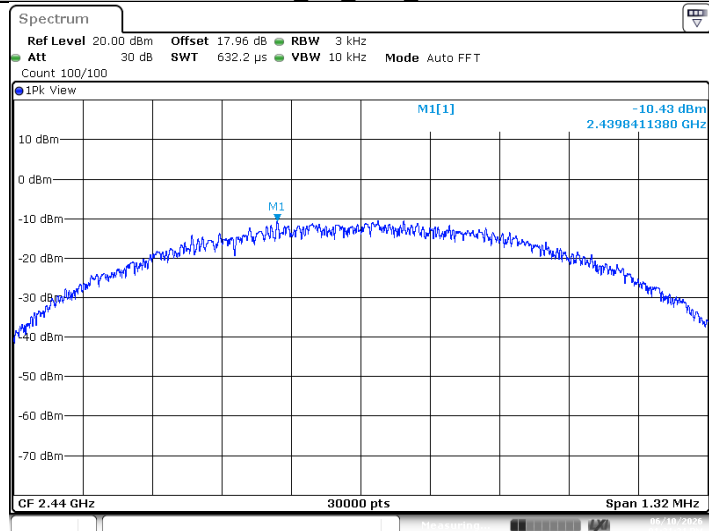


Date: 10.JUN.2026 13:31:21

BLE_1M_Ant1_2480

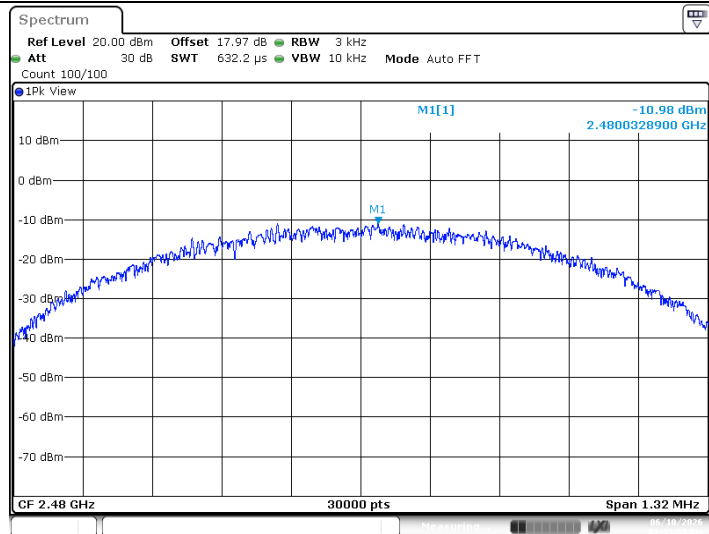


Date: 10.JUN.2026 13:33:59

BLE 2M Ant1_2402

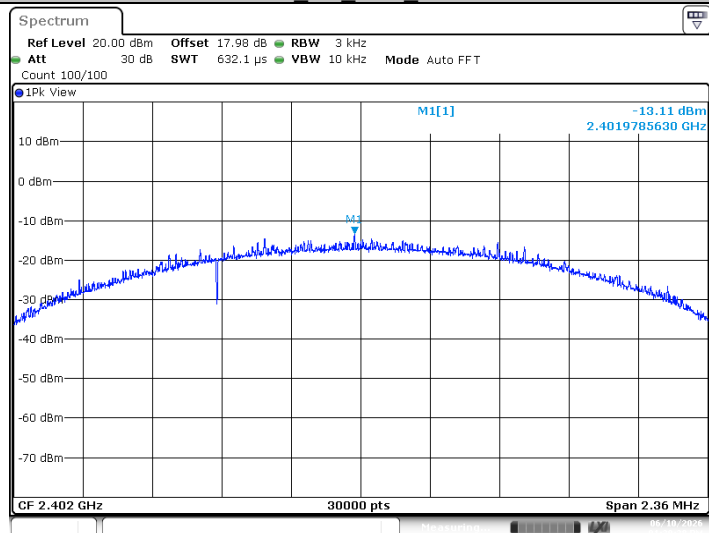


Date: 10.JUN.2026 13:39:28

BLE 2M Ant1_2440

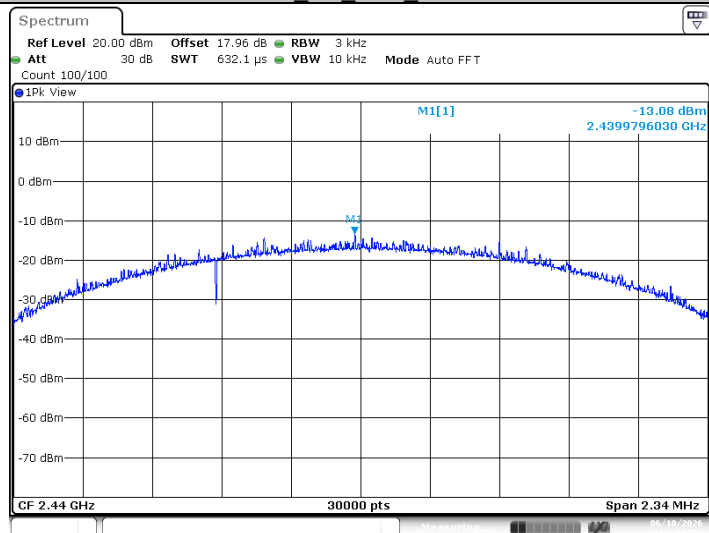

Date: 10.JUN.2026 13:44:59

BLE 2M Ant1_2480

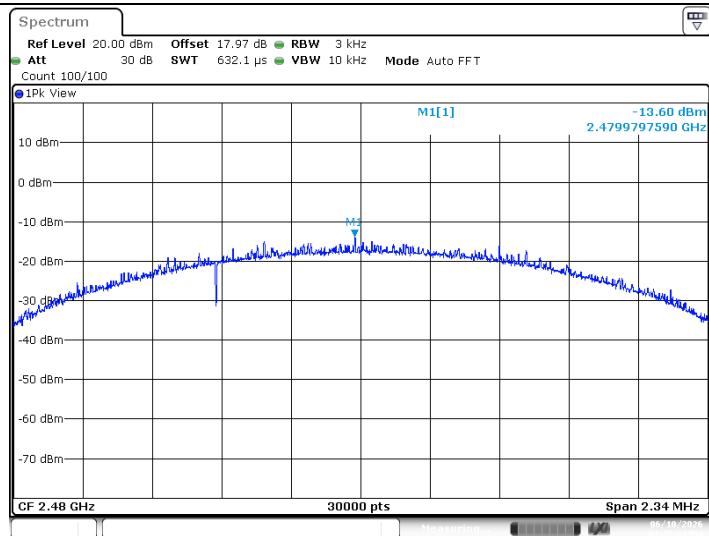


Date: 10.JUN.2026 13:47:23


Appendix A.4: Test Results of Band Edge Measurements

Bluetooth LE, 1Mbps

Low Channel

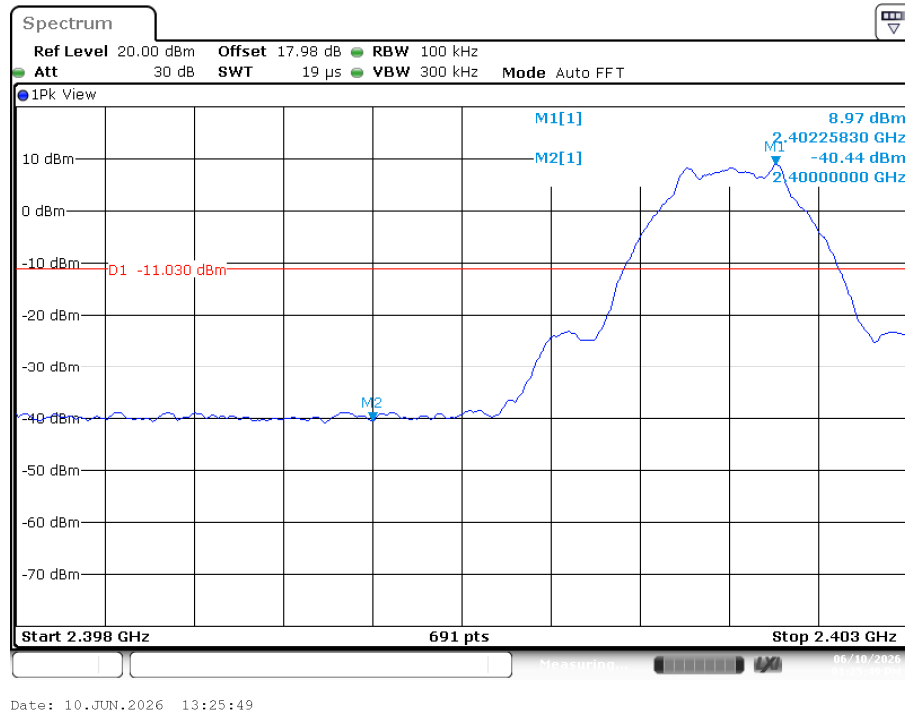


High Channel

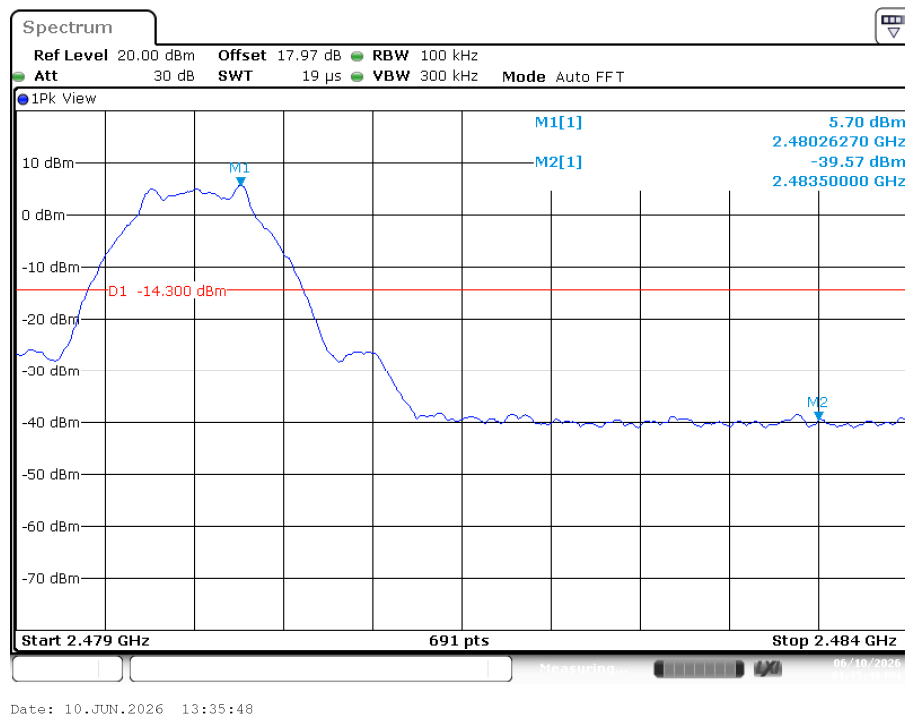


Bluetooth LE, 2Mbps

Low Channel

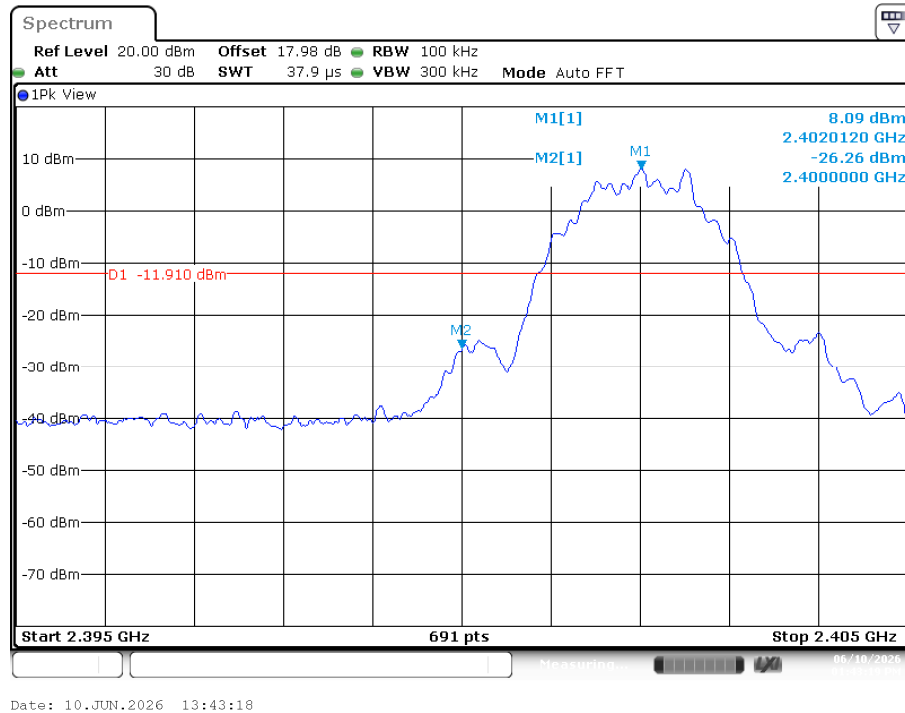

High Channel

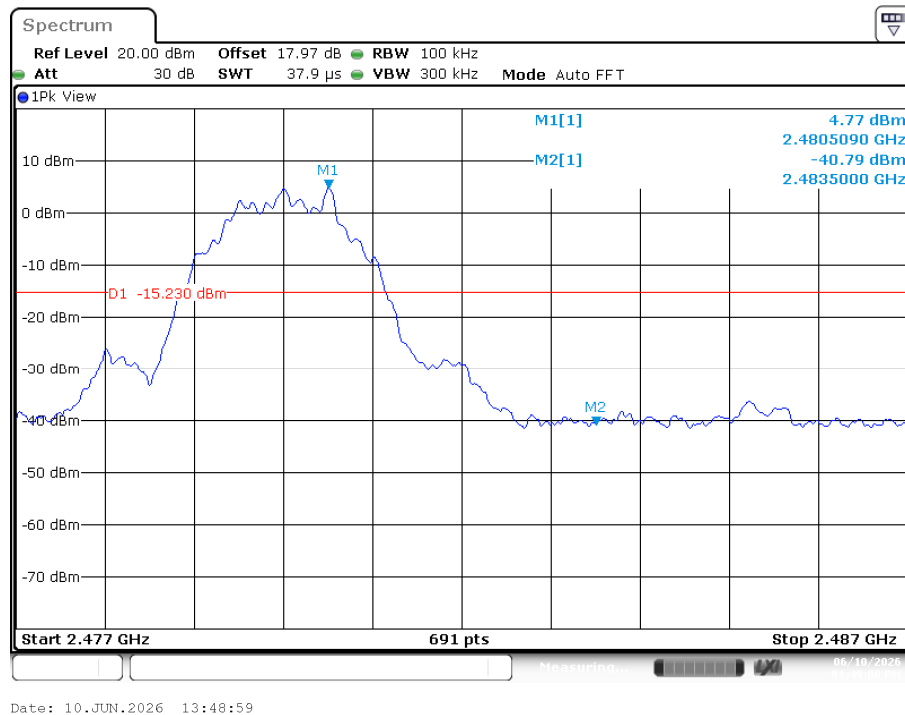


Appendix A.5: Test Results of Conducted Spurious Emission

Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	9.01	9.01	---	PASS
			30~1000	9.01	-48.11	≤-10.99	PASS
			1000~26500	9.01	-42.3	≤-10.99	PASS
		2440	Reference	6.17	6.17	---	PASS
			30~1000	6.17	-49.26	≤-13.83	PASS
			1000~26500	6.17	-42.85	≤-13.83	PASS
		2480	Reference	5.71	5.71	---	PASS
			30~1000	5.71	-48.67	≤-14.29	PASS
			1000~26500	5.71	-42.82	≤-14.29	PASS
BLE_2M	Ant1	2402	Reference	5.37	5.37	---	PASS
			30~1000	5.37	-47.97	≤-14.63	PASS
			1000~26500	5.37	-42.57	≤-14.63	PASS
		2440	Reference	5.33	5.33	---	PASS
			30~1000	5.33	-48.18	≤-14.67	PASS
			1000~26500	5.33	-42.58	≤-14.67	PASS
		2480	Reference	4.81	4.81	---	PASS
			30~1000	4.81	-48.66	≤-15.19	PASS
			1000~26500	4.81	-42.61	≤-15.19	PASS


Test Graphs

BLE_1M_Ant1_2402_0~Reference

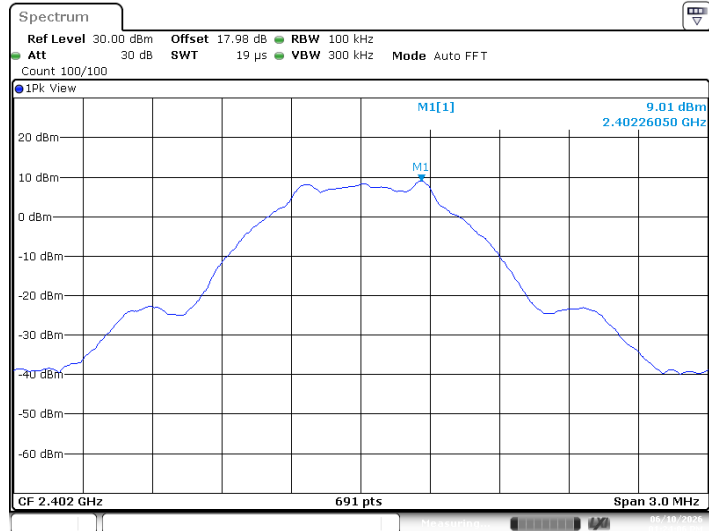


Date: 10.JUN.2026 13:24:06

BLE_1M_Ant1_2402_30~1000

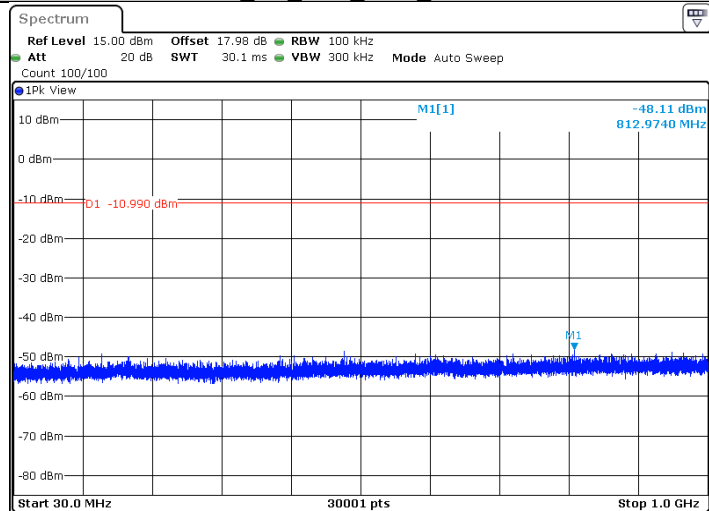


Date: 10.JUN.2026 13:24:20

BLE_1M_Ant1_2402_1000~26500

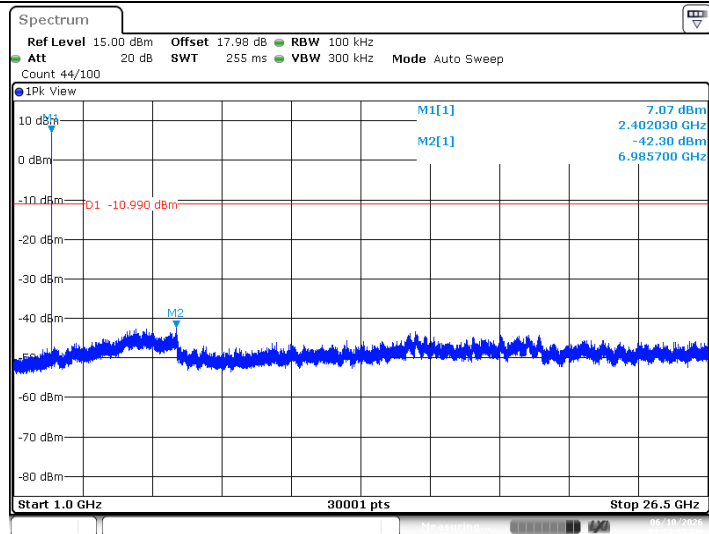


Date: 10.JUN.2026 13:24:58

BLE_1M_Ant1_2440_0~Reference

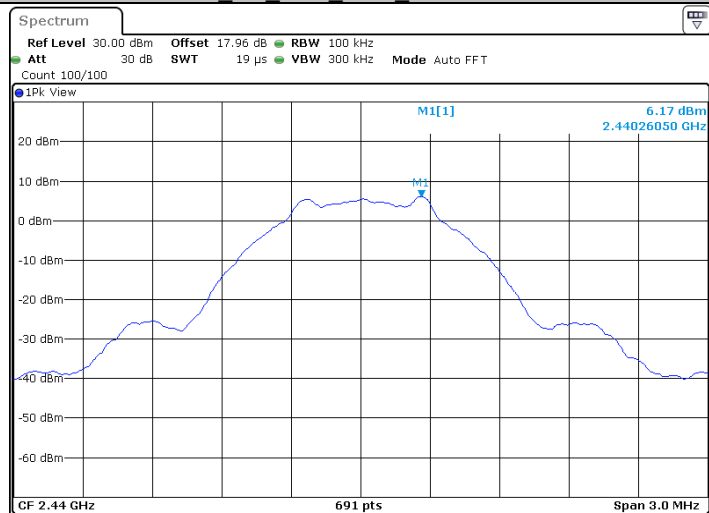


Date: 10.JUN.2026 13:31:30

BLE_1M_Ant1_2440_30~1000

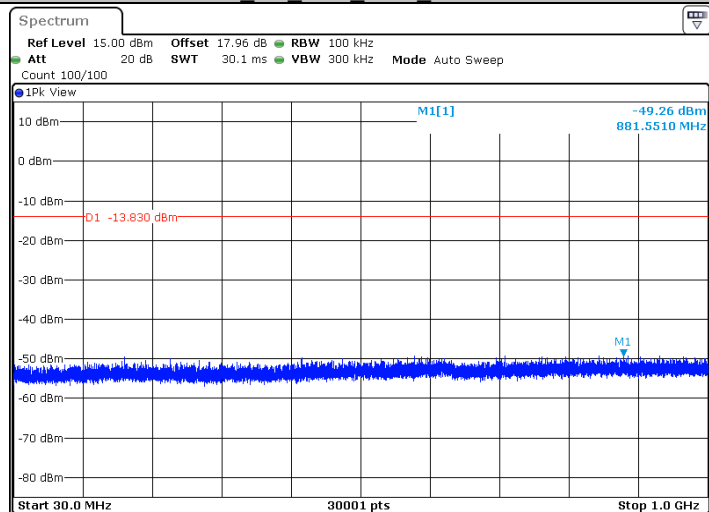


Date: 10.JUN.2026 13:31:43

BLE_1M_Ant1_2440_1000~26500

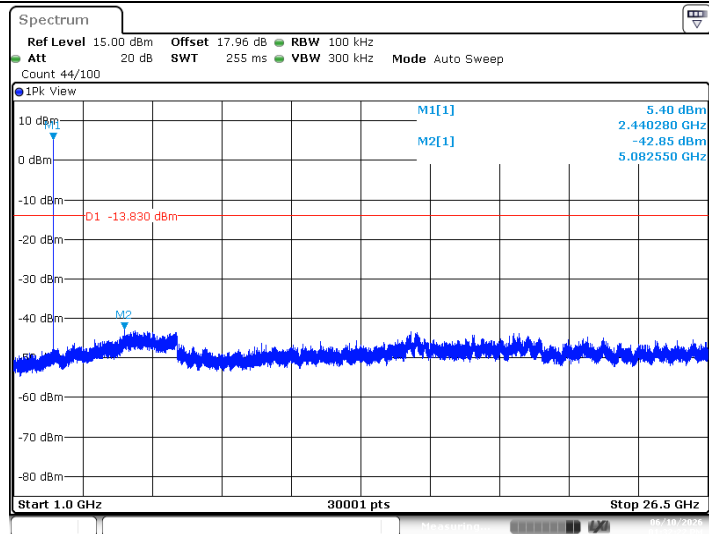


Date: 10.JUN.2026 13:32:22

BLE_1M_Ant1_2480_0~Reference

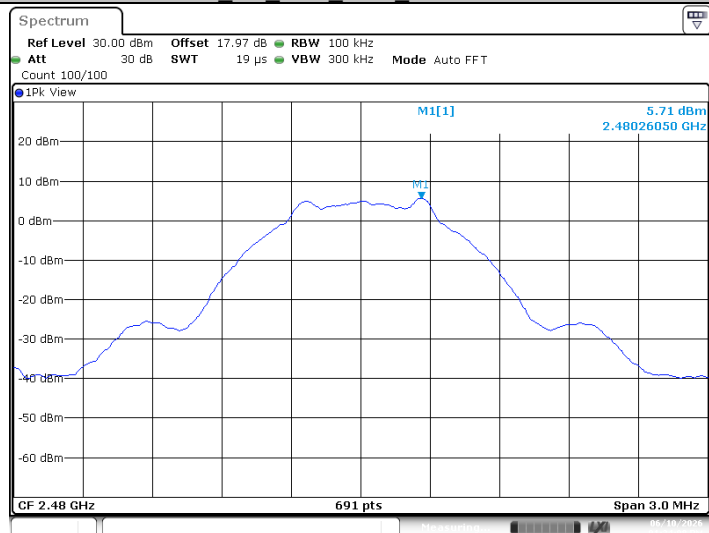


Date: 10.JUN.2026 13:34:07

BLE_1M_Ant1_2480_30~1000

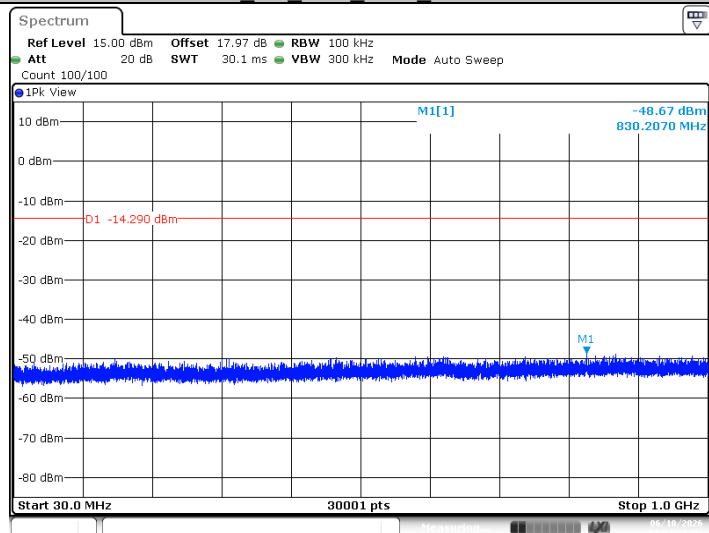


Date: 10.JUN.2026 13:34:21

BLE_1M_Ant1_2480_1000~26500

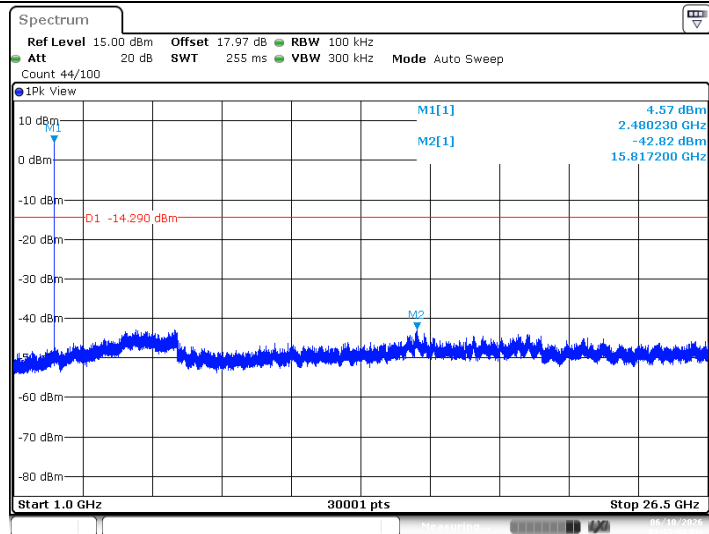


Date: 10.JUN.2026 13:35:00

BLE_2M_Ant1_2402_0~Reference

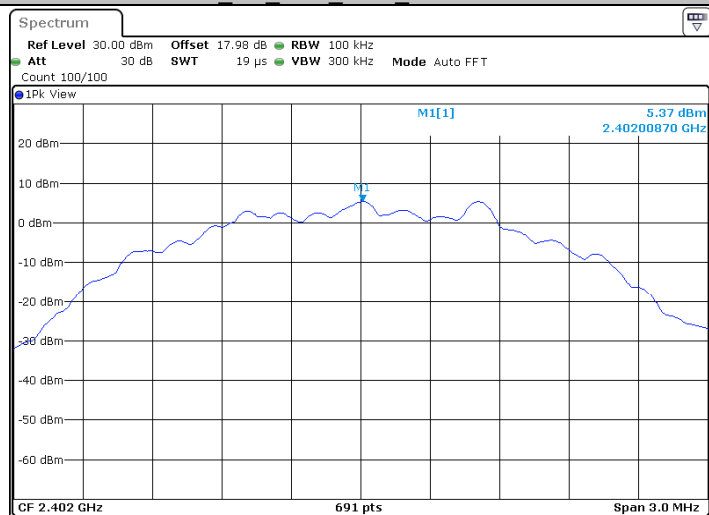


Date: 10.JUN.2026 13:39:36

BLE_2M_Ant1_2402_30~1000

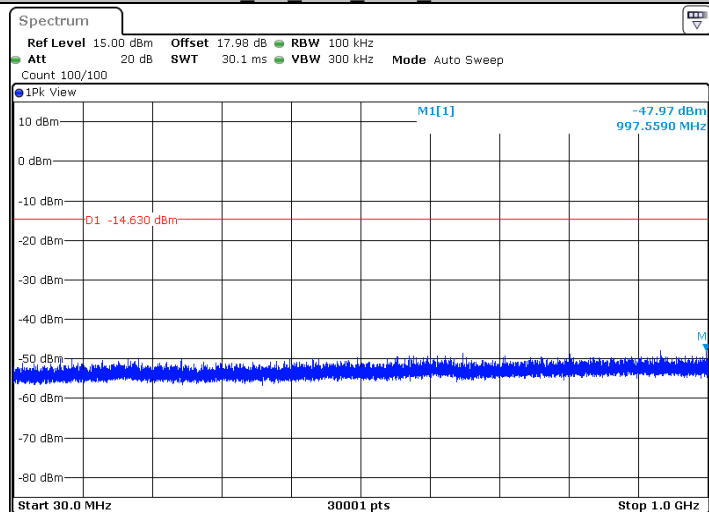


Date: 10.JUN.2026 13:39:50

BLE_2M_Ant1_2402_1000~26500

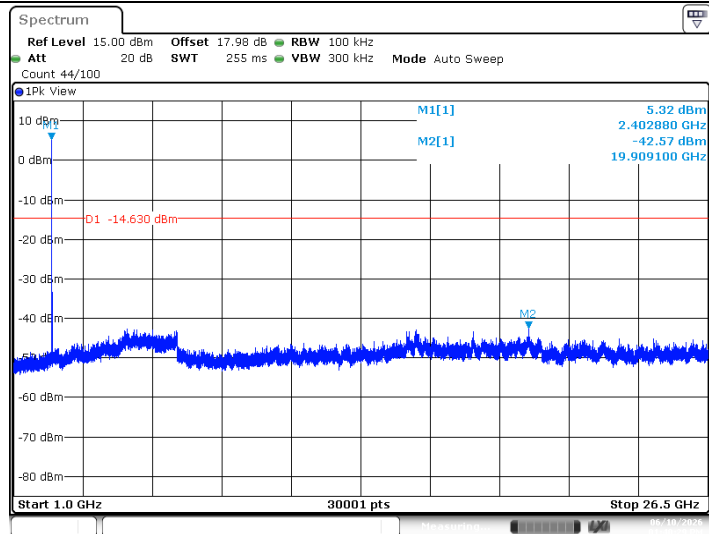


Date: 10.JUN.2026 13:40:29

BLE 2M Ant1 2440 0~Reference

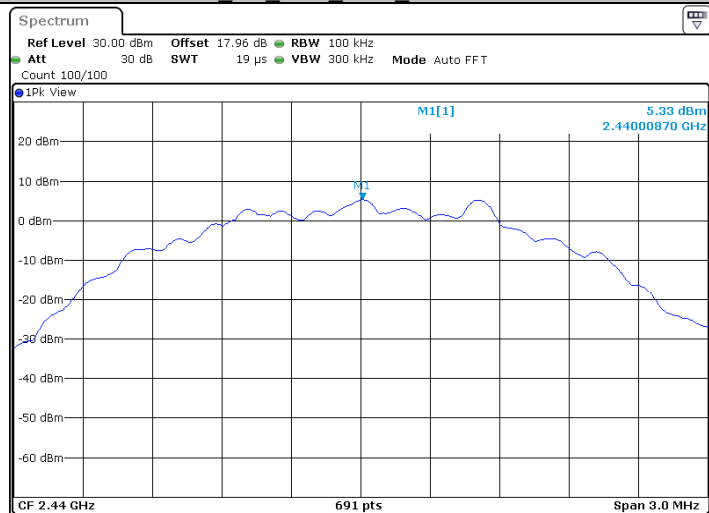


Date: 10.JUN.2026 13:45:08

BLE 2M Ant1 2440 30~1000

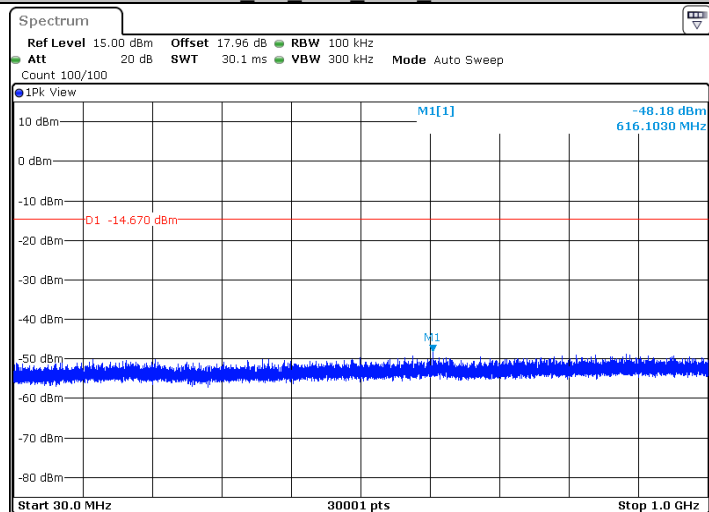


Date: 10.JUN.2026 13:45:22

BLE 2M Ant1 2440 1000~26500

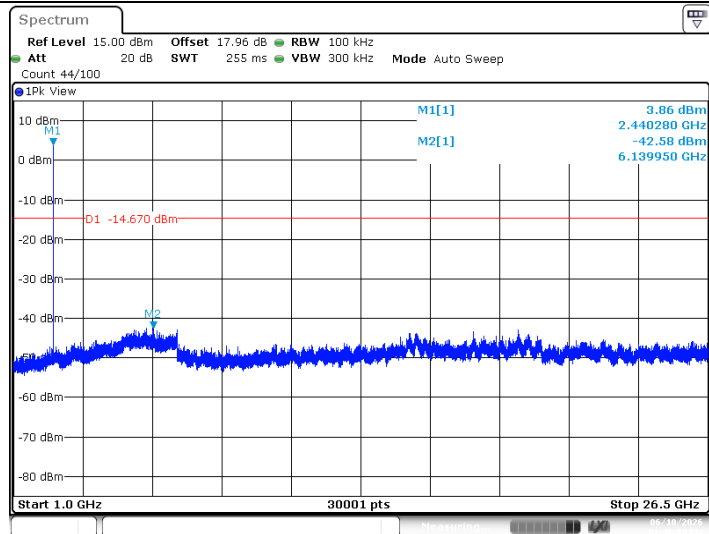


Date: 10.JUN.2026 13:46:00

BLE 2M Ant1 2480 0~Reference

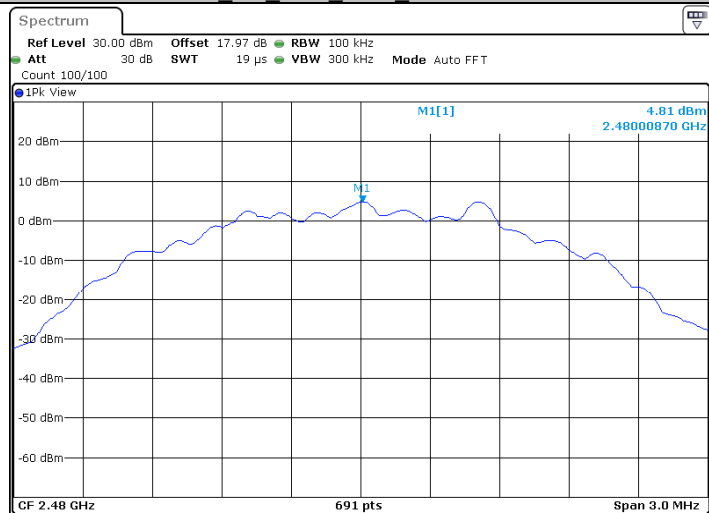


Date: 10.JUN.2026 13:47:31

BLE 2M Ant1 2480 30~1000

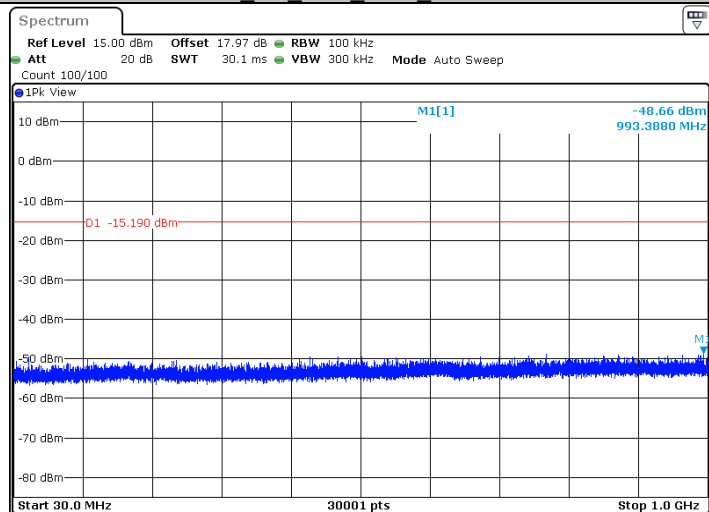

Date: 10.JUN.2026 13:47:45

BLE 2M Ant1 2480 1000~26500

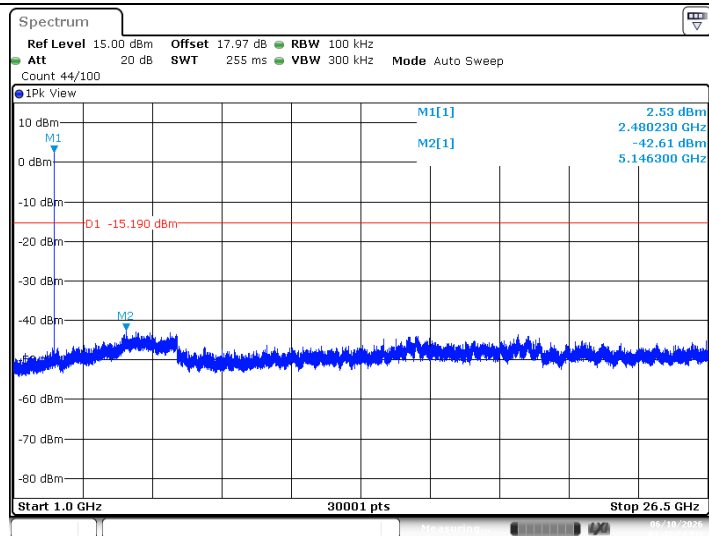

Date: 10.JUN.2026 13:48:23

Appendix A.6: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

EUT Information

EUT Name:	Robotic Vacuum Cleaner
Model:	RRE0BES
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	27234857/A004285282-003
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

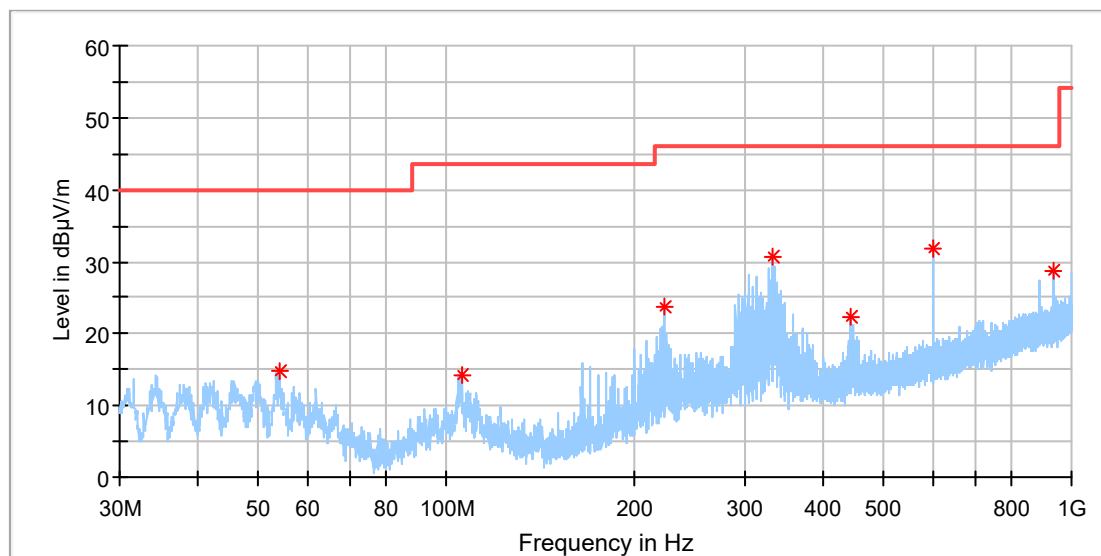

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
54.142222	14.92	40.00	25.08	100.0	H	285.0	-18.5
106.091111	14.29	43.50	29.21	100.0	H	0.0	-19.0
223.191667	23.80	46.00	22.20	100.0	H	104.0	-18.5
333.556111	30.60	46.00	15.40	100.0	H	285.0	-15.2
445.160000	22.32	46.00	23.68	100.0	H	237.0	-12.9
599.982778	31.75	46.00	14.25	100.0	H	209.0	-9.7
938.405000	28.81	46.00	17.19	100.0	H	95.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Robotic Vacuum Cleaner
Model: RRE0BES
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 27234857/A004285282-003
Test Voltage: Battery
Remark: Temp 23.2°C Humi:51%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

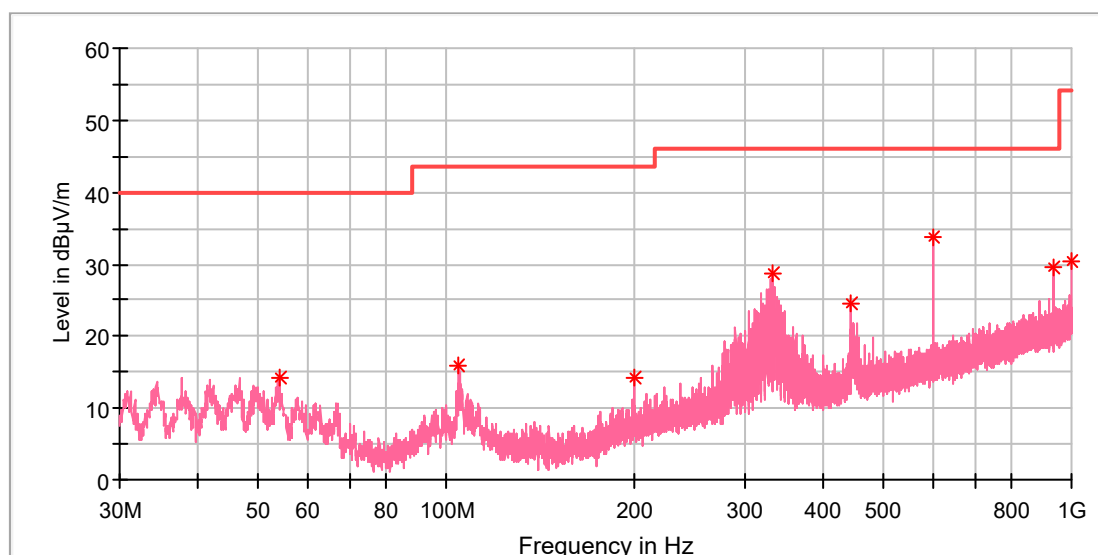

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
54.142222	14.36	40.00	25.64	100.0	V	0.0	-18.5
104.797778	15.81	43.50	27.69	100.0	V	326.0	-18.9
199.965556	14.13	43.50	29.37	100.0	V	133.0	-19.1
333.610000	28.72	46.00	17.28	100.0	V	290.0	-15.2
443.974444	24.49	46.00	21.51	100.0	V	212.0	-12.9
599.982778	33.81	46.00	12.19	100.0	V	334.0	-9.7
938.405000	29.47	46.00	16.53	100.0	V	308.0	-4.4
1000.000000	30.42	54.00	23.58	100.0	V	0.0	-3.4

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Robotic Vacuum Cleaner
Model:	RRE0BES
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	27234857/A004285282-003
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

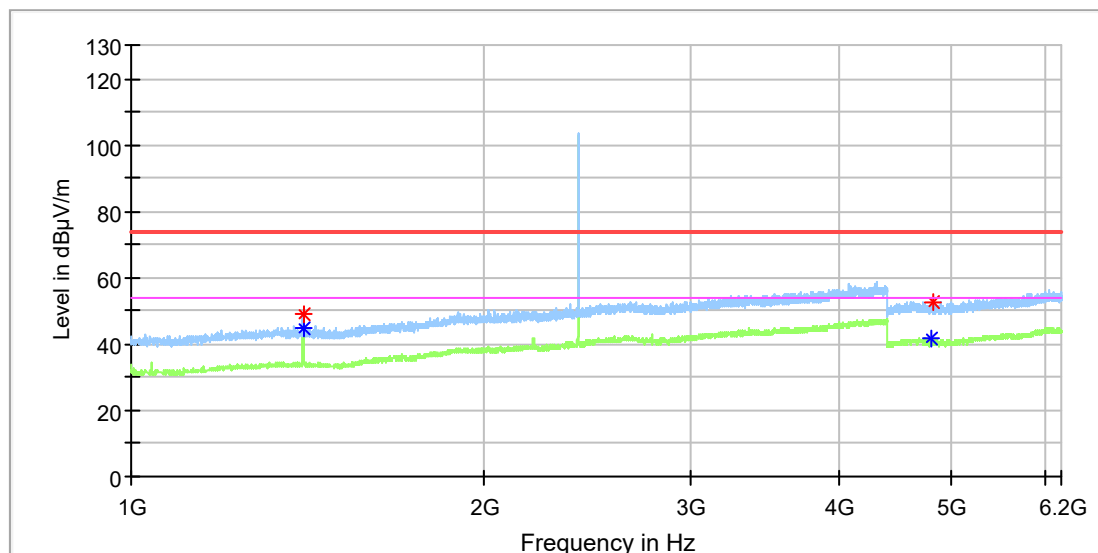

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1400.000000	48.86	---	74.00	25.14	150.0	H	316.0	3.0
1400.000000	---	44.66	54.00	9.34	150.0	H	316.0	3.0
4803.500000	---	41.76	54.00	12.24	150.0	H	329.0	13.3
4811.500000	52.54	---	74.00	21.46	150.0	H	348.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Robotic Vacuum Cleaner
Model:	RRE0BES
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	27234857/A004285282-003
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

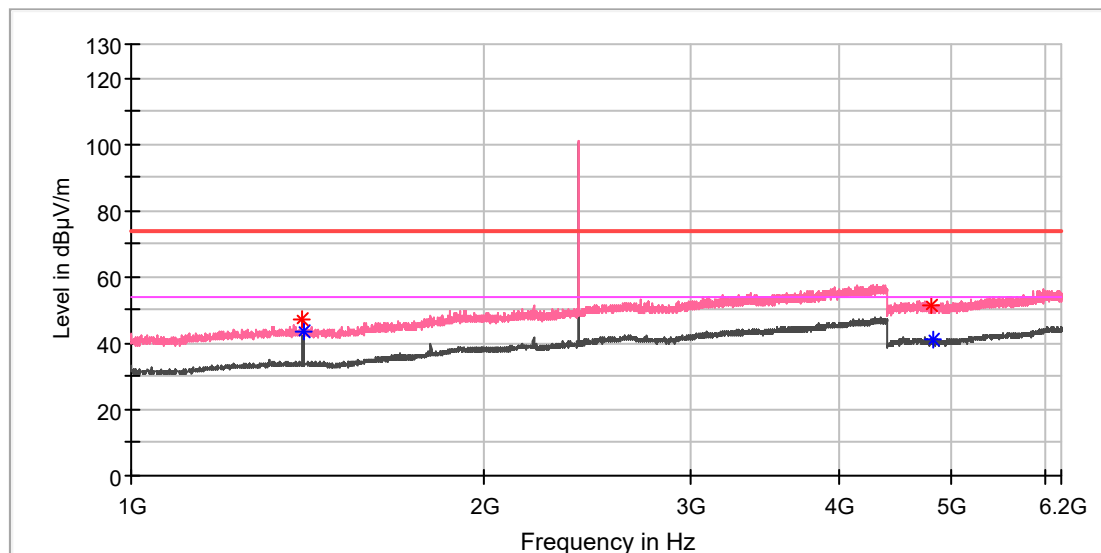

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1399.500000	47.19	---	74.00	26.81	150.0	V	192.0	3.0
1400.000000	---	43.35	54.00	10.65	150.0	V	192.0	3.0
4804.500000	51.52	---	74.00	22.48	150.0	V	179.0	13.3
4812.000000	---	41.24	54.00	12.76	150.0	V	248.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Robotic Vacuum Cleaner
Model:	RRE0BES
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	27234857/A004285282-003
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

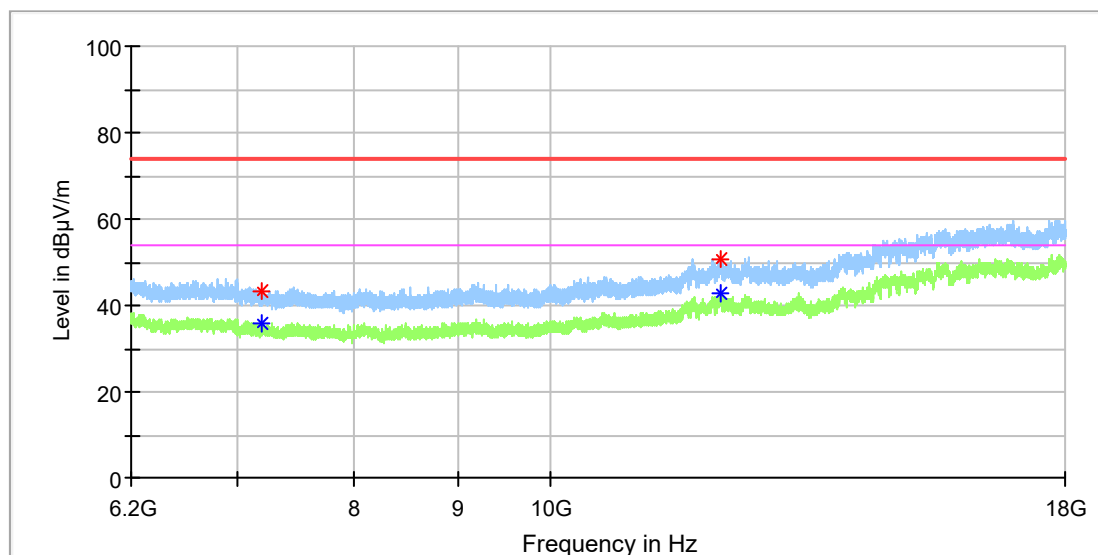

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7190.216667	43.45	---	74.00	30.55	150.0	H	0.0	8.8
7196.116667	---	35.79	54.00	18.21	150.0	H	164.0	8.8
12139.825000	50.81	---	74.00	23.19	150.0	H	45.0	16.5
12156.050000	---	42.62	54.00	11.38	150.0	H	131.0	16.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Robotic Vacuum Cleaner
Model:	RRE0BES
Test Mode:	BLE 1M_High channel
Order No/Sample No:	27234857/A004285282-003
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

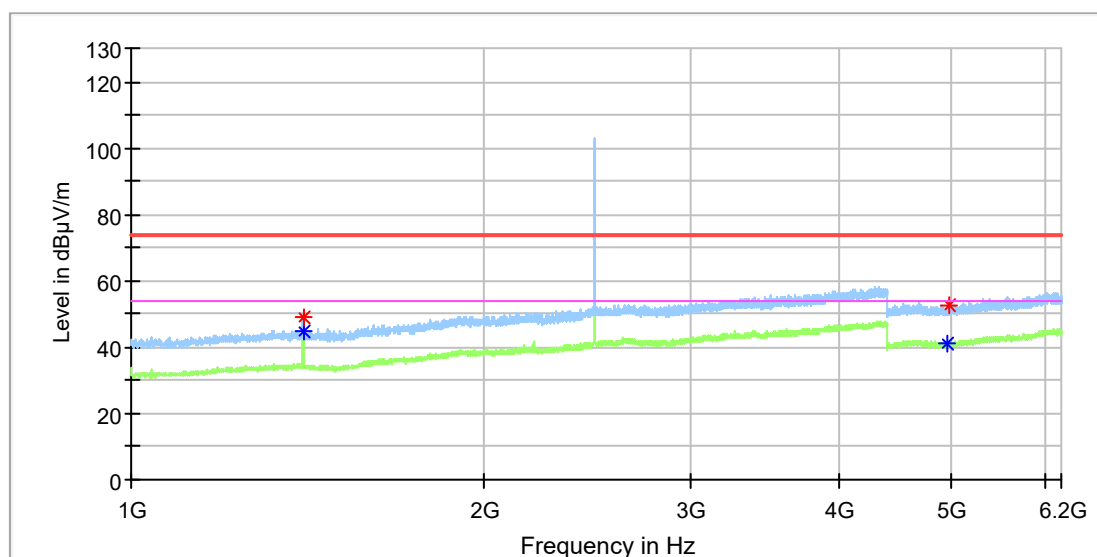

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB/m)
1400.000000	49.06	---	74.00	24.94	150.0	H	194.0	3.0
1400.000000	---	45.01	54.00	8.99	150.0	H	194.0	3.0
4957.000000	---	41.36	54.00	12.64	150.0	H	190.0	13.3
4965.500000	52.82	---	74.00	21.18	150.0	H	348.0	13.3


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

Appendix A.7: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Robotic Vacuum Cleaner
Model:	RRE0BES
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	27234857/A004285282-003
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

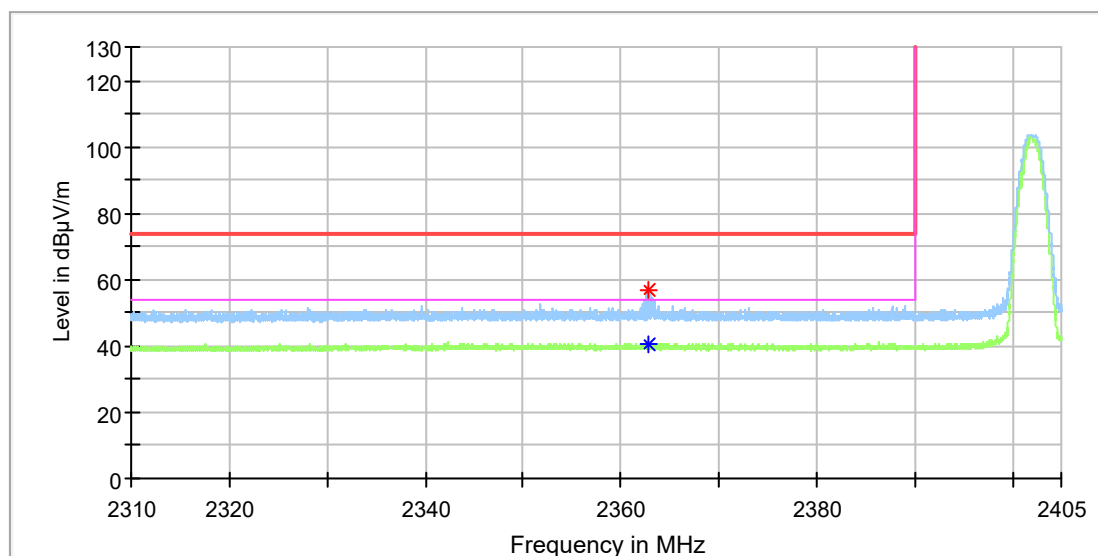

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2362.790294	56.89	---	74.00	17.11	150.0	H	304.0	8.5
2362.891177	---	40.52	54.00	13.48	150.0	H	269.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.0	100.0	100.0	100.0	100.0	100.0		100.0	100.0

EUT Information

EUT Name:	Robotic Vacuum Cleaner
Model:	RRE0BES
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	27234857/A004285282-003
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

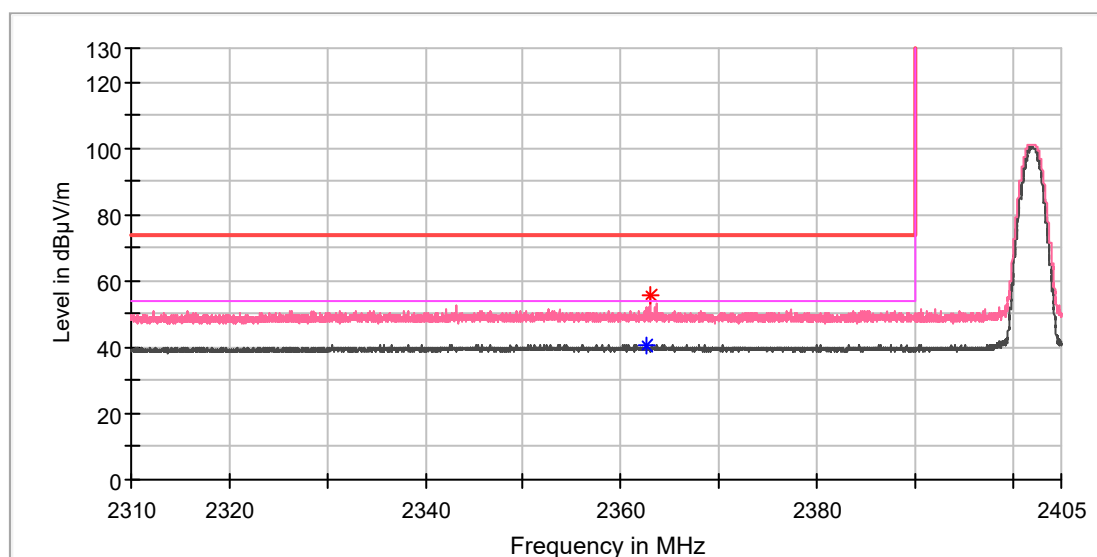

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2362.703824	---	40.40	54.00	13.60	150.0	V	119.0	8.5
2363.006471	55.48	---	74.00	18.52	150.0	V	205.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

EUT Information

EUT Name:	Robotic Vacuum Cleaner
Model:	RRE0BES
Test Mode:	BLE 1M_High channel
Order No/Sample No:	27234857/A004285282-003
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

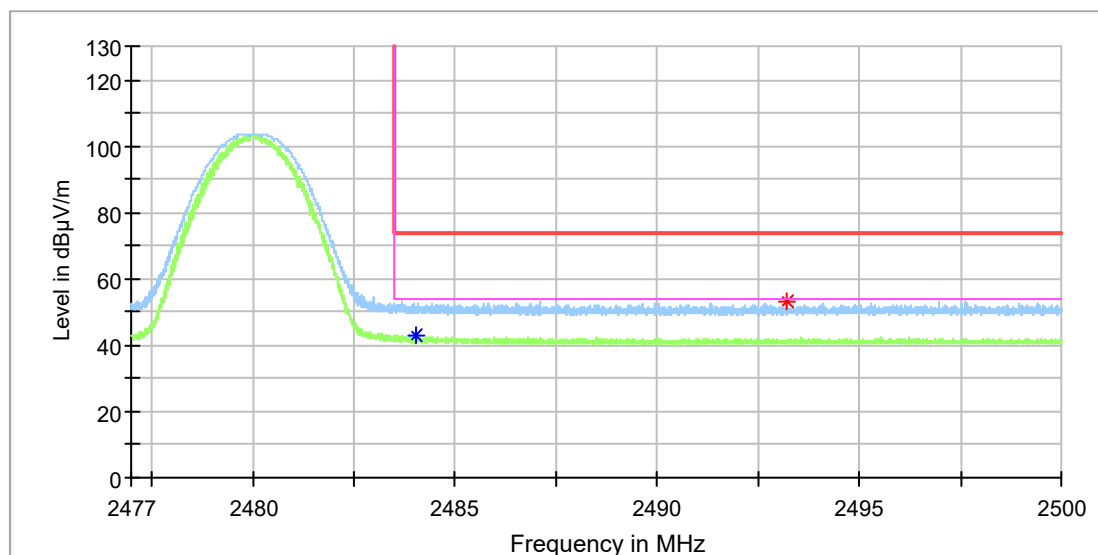

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.062500	---	43.18	54.00	10.82	150.0	H	35.0	9.0
2493.209559	53.27	---	74.00	20.73	150.0	H	170.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Robotic Vacuum Cleaner
Model:	RRE0BES
Test Mode:	BLE 1M_High channel
Order No/Sample No:	27234857/A004285282-003
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

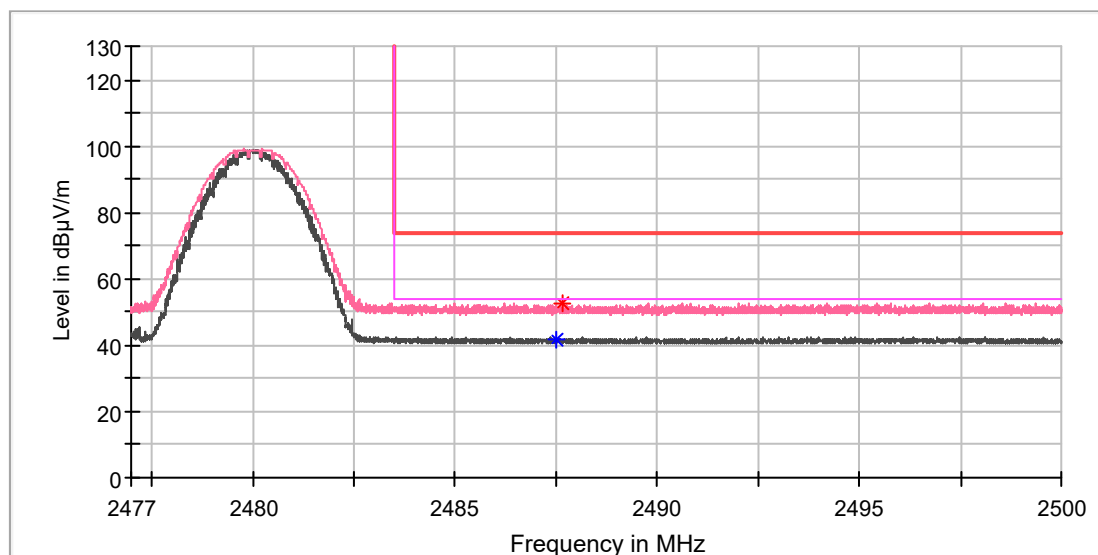

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.529412	---	41.92	54.00	12.08	150.0	V	168.0	9.0
2487.676471	52.82	---	74.00	21.18	150.0	V	277.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Robotic Vacuum Cleaner
Model:	RRE0BES
Test Mode:	BLE 2M_Low channel
Order No/Sample No:	27234857/A004285282-003
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

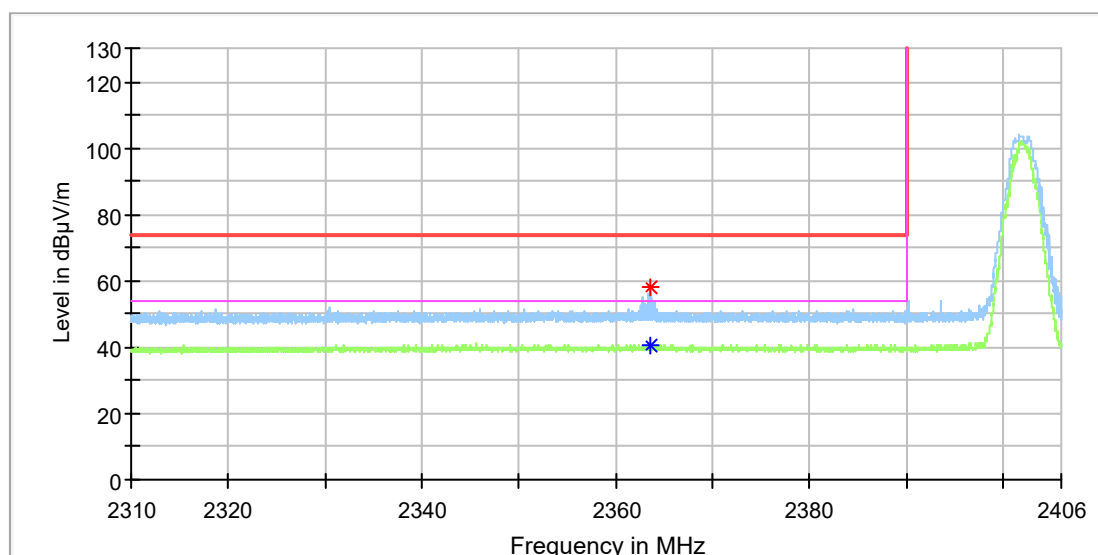

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2363.539706	---	40.74	54.00	13.26	150.0	H	226.0	8.5
2363.626177	57.96	---	74.00	16.04	150.0	H	309.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

EUT Information

EUT Name:	Robotic Vacuum Cleaner
Model:	RRE0BES
Test Mode:	BLE 2M_Low channel
Order No/Sample No:	27234857/A004285282-003
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

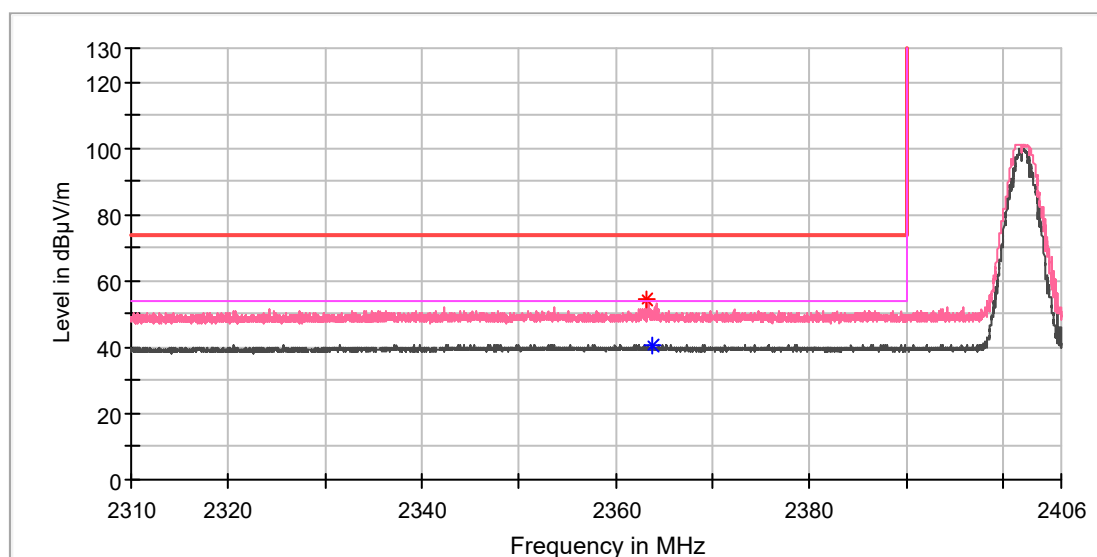

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2363.237059	54.62	---	74.00	19.38	150.0	V	297.0	8.5
2363.755882	---	40.45	54.00	13.55	150.0	V	159.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	

EUT Information

EUT Name:	Robotic Vacuum Cleaner
Model:	RRE0BES
Test Mode:	BLE 2M_High channel
Order No/Sample No:	27234857/A004285282-003
Test Voltage:	Battery
Remark:	Temp 23.2°C Humi:51%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

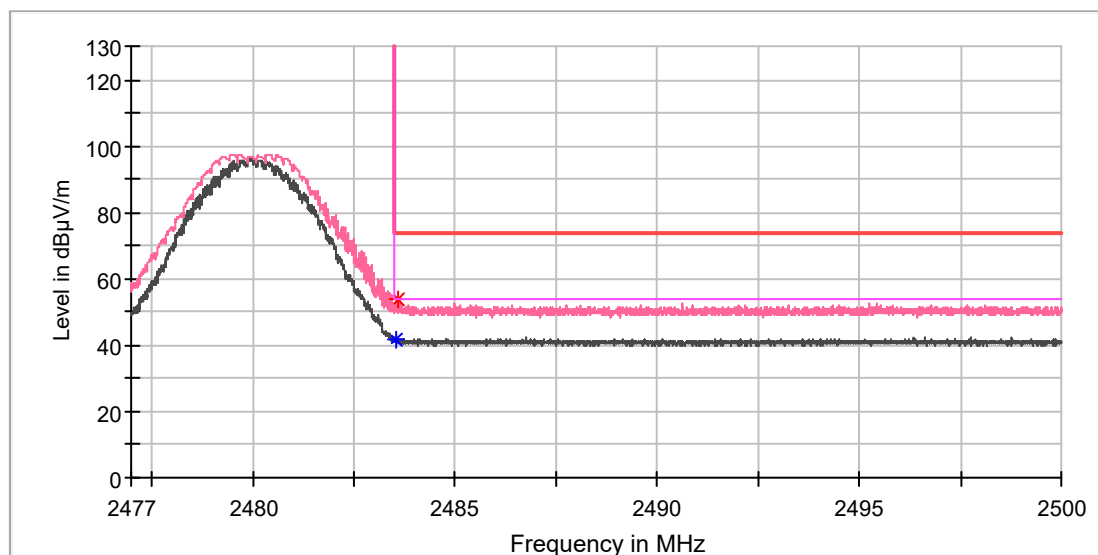

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.522059	---	41.97	54.00	12.03	150.0	V	268.0	9.0
2483.584559	53.63	---	74.00	20.37	150.0	V	358.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----


Appendix A.8: Test Results of Conducted Emission on AC Mains

EMI Auto Test Template: FCC PART15 CLASS B_L LINE

Hardware Setup: ESR CE ENV432 1P
Measurement Type: 2 Line LISN
Frequency Range: 150 kHz - 30 MHz
Graphics Level Range: -10 dBuV - 80 dBuV

Preview Measurements:
Scan Test Template: CE ENV432 1P 150k

Final Measurements:
Template for Single Meas.: CE ENV432 1P 150k FIN

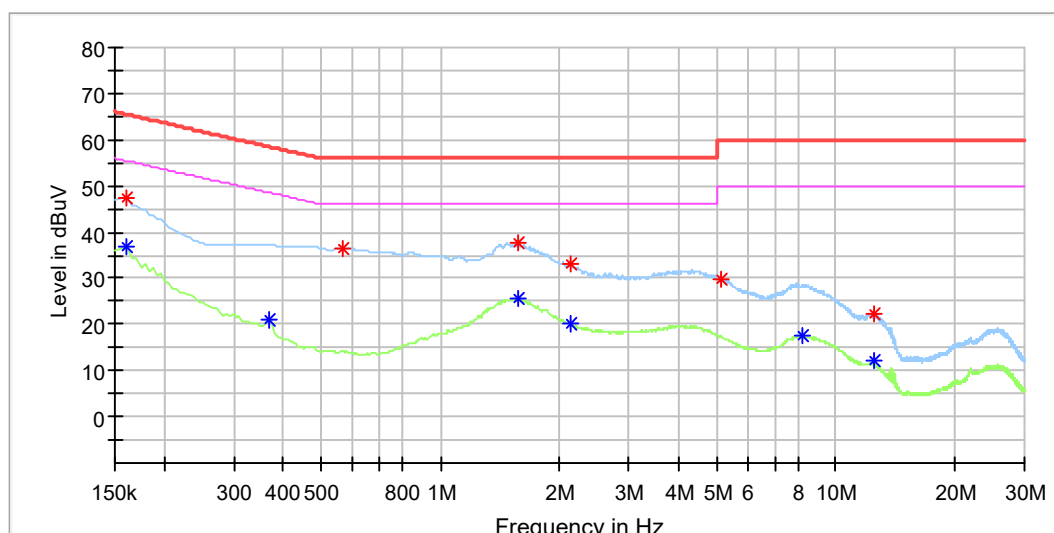

Critical Freqs


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)	Comment
0.161250	47.52	---	65.40	17.88	L1	10.4	
0.161250	---	36.98	55.40	18.42	L1	10.4	
0.368250	---	21.08	48.54	27.46	L1	10.4	
0.566250	36.58	---	56.00	19.42	L1	10.4	
1.569750	37.64	---	56.00	18.36	L1	10.4	
1.574250	---	25.65	46.00	20.35	L1	10.4	
2.123250	---	20.21	46.00	25.79	L1	10.4	
2.123250	33.27	---	56.00	22.73	L1	10.4	
5.133750	29.88	---	60.00	30.12	L1	10.5	
8.193750	---	17.62	50.00	32.38	L1	10.7	
12.437250	---	12.00	50.00	38.00	L1	10.9	
12.446250	22.26	---	60.00	37.74	L1	10.9	

EMI Auto Test Template: FCC PART15 CLASS B_N LINE

Hardware Setup: ESR CE ENV432 1P
Measurement Type: 2 Line LISN
Frequency Range: 150 kHz - 30 MHz
Graphics Level Range: -10 dBuV - 80 dBuV

Preview Measurements:
Scan Test Template: CE ENV432 1P 150k

Final Measurements:
Template for Single Meas.: CE ENV432 1P 150k FIN

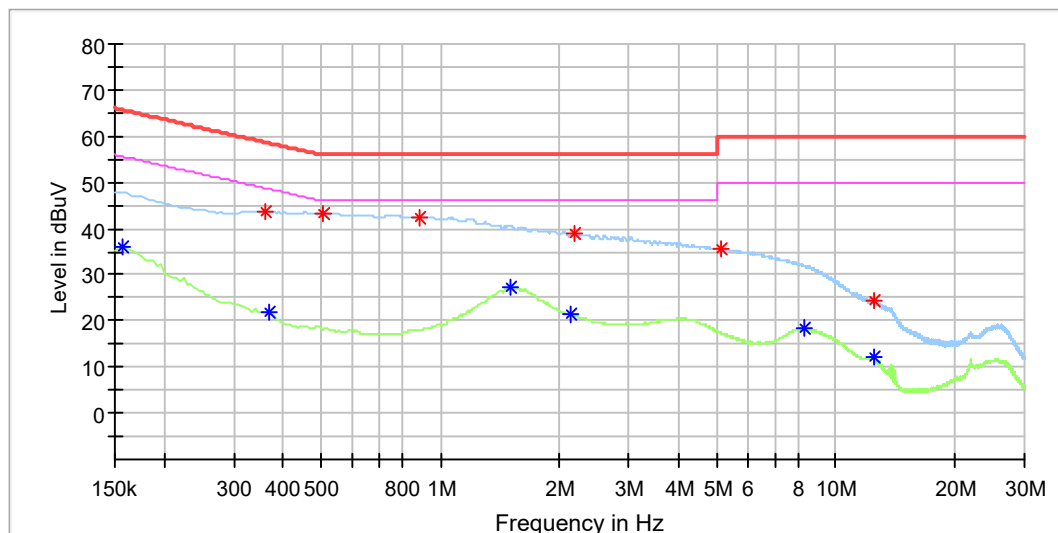

Critical Freqs

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)	Comment
0.156750	---	36.18	55.63	19.46	N	10.3	
0.359250	43.61	---	58.75	15.14	N	10.3	
0.368250	---	21.98	48.54	26.56	N	10.3	
0.507750	43.24	---	56.00	12.76	N	10.3	
0.885750	42.38	---	56.00	13.62	N	10.3	
1.502250	---	27.22	46.00	18.78	N	10.4	
2.127750	---	21.41	46.00	24.59	N	10.4	
2.177250	39.07	---	56.00	16.93	N	10.4	
5.138250	35.56	---	60.00	24.44	N	10.5	
8.328750	---	18.37	50.00	31.63	N	10.7	
12.428250	24.33	---	60.00	35.67	N	10.9	
12.437250	---	12.18	50.00	37.82	N	10.9	