

Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2026/3/17	Relative Humidity:	40~51	%

BLE1M**TEST RESULTS DATA****6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.02	0.68	0.50	Pass
BLE	1Mbps	1	19	2440	1.02	0.69	0.50	Pass
BLE	1Mbps	1	39	2480	1.02	0.69	0.50	Pass

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	6.34	30.00	0.88	7.22	36.00	Pass
BLE	1Mbps	1	19	2440	6.42	30.00	0.88	7.30	36.00	Pass
BLE	1Mbps	1	39	2480	6.13	30.00	0.88	7.01	36.00	Pass

TEST RESULTS DATA**Average Power Table
(Reporting Only)**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	0.00	6.12
BLE	1Mbps	1	19	2440	0.00	6.23
BLE	1Mbps	1	39	2480	0.00	5.92

TEST RESULTS DATA**Peak Power Density**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	5.04	-11.01	0.88	8.00	Pass
BLE	1Mbps	1	19	2440	5.18	-10.91	0.88	8.00	Pass
BLE	1Mbps	1	39	2480	4.88	-11.12	0.88	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2026/3/17	Relative Humidity:	40~51	%

BLE2M**TEST RESULTS DATA****6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.05	1.36	0.50	Pass
BLE	2Mbps	1	19	2440	2.05	1.36	0.50	Pass
BLE	2Mbps	1	39	2480	2.05	1.36	0.50	Pass

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	6.22	30.00	0.88	7.10	36.00	Pass
BLE	2Mbps	1	19	2440	6.36	30.00	0.88	7.24	36.00	Pass
BLE	2Mbps	1	39	2480	6.08	30.00	0.88	6.96	36.00	Pass

TEST RESULTS DATA**Average Power Table
(Reporting Only)**

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	0.00	6.12
BLE	2Mbps	1	19	2440	0.00	6.16
BLE	2Mbps	1	39	2480	0.00	5.93

TEST RESULTS DATA**Peak Power Density**

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.99	-15.10	0.88	8.00	Pass
BLE	2Mbps	1	19	2440	3.17	-14.89	0.88	8.00	Pass
BLE	2Mbps	1	39	2480	2.86	-15.21	0.88	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2026/3/17	Relative Humidity:	40~51	%

BLE125K**TEST RESULTS DATA****6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	125Kbps	1	0	2402	1.02	0.68	0.50	Pass
BLE	125Kbps	1	19	2440	1.02	0.69	0.50	Pass
BLE	125Kbps	1	39	2480	1.02	0.69	0.50	Pass

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125Kbps	1	0	2402	6.19	30.00	0.88	7.07	36.00	Pass
BLE	125Kbps	1	19	2440	6.33	30.00	0.88	7.21	36.00	Pass
BLE	125Kbps	1	39	2480	6.04	30.00	0.88	6.92	36.00	Pass

TEST RESULTS DATA**Average Power Table**
(Reporting Only)

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	125Kbps	1	0	2402	0.00	6.02
BLE	125Kbps	1	19	2440	0.00	6.12
BLE	125Kbps	1	39	2480	0.00	5.85

TEST RESULTS DATA**Peak Power Density**

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	125Kbps	1	0	2402	5.07	-10.98	0.88	8.00	Pass
BLE	125Kbps	1	19	2440	5.20	-10.82	0.88	8.00	Pass
BLE	125Kbps	1	39	2480	4.94	-11.17	0.88	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2026/3/17	Relative Humidity:	40~51	%

BLE500K**TEST RESULTS DATA****6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	500Kbps	1	0	2402	1.02	0.69	0.50	Pass
BLE	500Kbps	1	19	2440	1.02	0.68	0.50	Pass
BLE	500Kbps	1	39	2480	1.02	0.69	0.50	Pass

TEST RESULTS DATA**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500Kbps	1	0	2402	6.22	30.00	0.88	7.10	36.00	Pass
BLE	500Kbps	1	19	2440	6.35	30.00	0.88	7.23	36.00	Pass
BLE	500Kbps	1	39	2480	6.02	30.00	0.88	6.90	36.00	Pass

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	500Kbps	1	0	2402	0.00	6.02
BLE	500Kbps	1	19	2440	0.00	6.16
BLE	500Kbps	1	39	2480	0.00	5.87

TEST RESULTS DATA**Peak Power Density**


Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	500Kbps	1	0	2402	5.06	-10.85	0.88	8.00	Pass
BLE	500Kbps	1	19	2440	5.35	-10.63	0.88	8.00	Pass
BLE	500Kbps	1	39	2480	4.99	-11.10	0.88	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3 ~ 26.2°C
		Relative Humidity :	38 ~ 40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

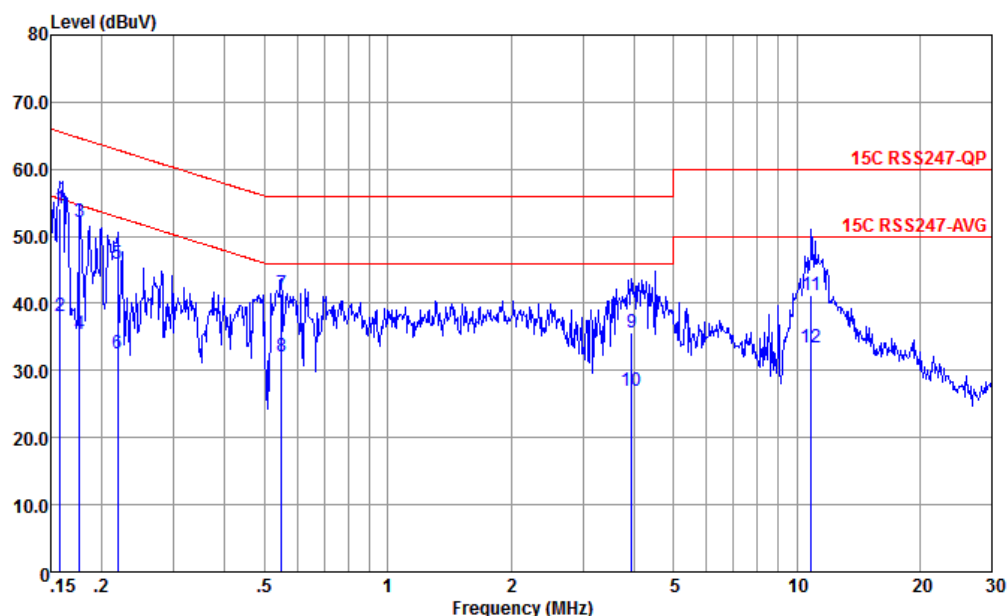


Site : CO01-KS
Condition : 15C RSS247-QP LISN-100334-L 2025 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.158	54.20	-11.36	65.56	34.20	9.55	10.45	QP
2	0.158	38.20	-17.36	55.56	18.20	9.55	10.45	Average
3	0.177	52.21	-12.43	64.64	32.20	9.55	10.46	QP
4	0.177	35.51	-19.13	54.64	15.50	9.55	10.46	Average
5	0.219	45.85	-17.03	62.88	25.81	9.58	10.46	QP
6	0.219	32.55	-20.33	52.88	12.51	9.58	10.46	Average
7	0.549	41.48	-14.52	56.00	21.50	9.59	10.39	QP
8	0.549	32.18	-13.82	46.00	12.20	9.59	10.39	Average
9	3.943	35.72	-20.28	56.00	15.90	9.61	10.21	QP
10	3.943	27.02	-18.98	46.00	7.20	9.61	10.21	Average
11	10.847	41.30	-18.70	60.00	21.21	9.85	10.24	QP
12	10.847	33.40	-16.60	50.00	13.31	9.85	10.24	Average



Test Engineer :	Amos Zhang	Temperature :	25.3 ~ 26.2°C
		Relative Humidity :	38 ~ 40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

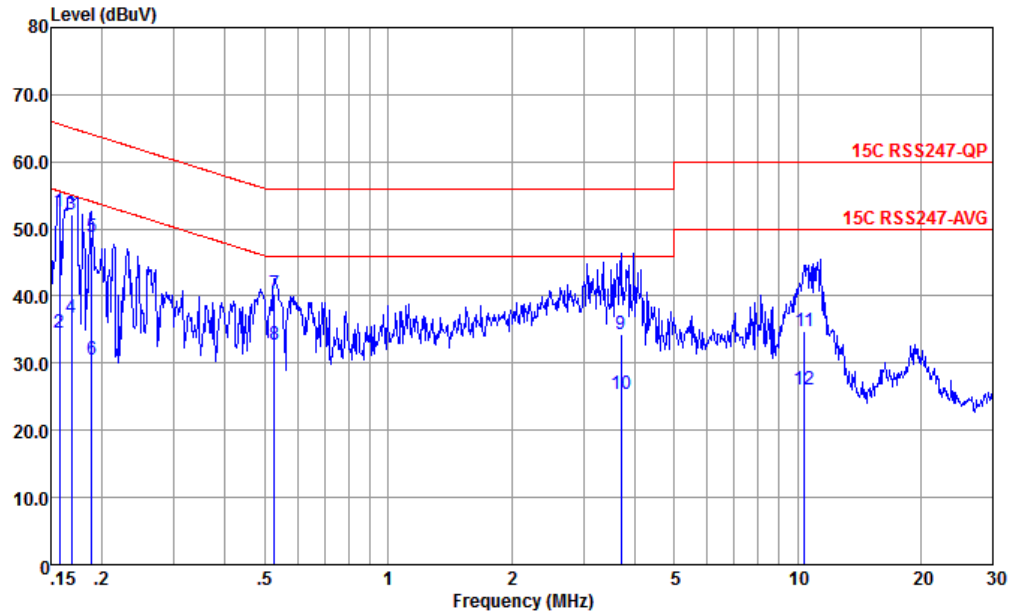

Site : CO01-KS
Condition : 15C RSS247-QP LISN-100334-N 2025 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.157	52.50	-13.10	65.60	32.50	9.55	10.45	QP
2	0.157	34.50	-21.10	55.60	14.50	9.55	10.45	Average
3 *	0.169	52.20	-12.83	65.03	32.21	9.54	10.45	QP
4	0.169	36.80	-18.23	55.03	16.81	9.54	10.45	Average
5	0.188	48.84	-15.27	64.11	28.80	9.58	10.46	QP
6	0.188	30.54	-23.57	54.11	10.50	9.58	10.46	Average
7	0.527	40.36	-15.64	56.00	20.20	9.76	10.40	QP
8	0.527	32.76	-13.24	46.00	12.60	9.76	10.40	Average
9	3.700	34.35	-21.65	56.00	14.51	9.63	10.21	QP
10	3.700	25.45	-20.55	46.00	5.61	9.63	10.21	Average
11	10.397	34.73	-25.27	60.00	14.80	9.69	10.24	QP
12	10.397	26.13	-23.87	50.00	6.20	9.69	10.24	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jerry Xu	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth-LE	0	2402	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth-LE	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	1	Bluetooth-LE	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	1	Bluetooth-LE	0	2402	2Mbps	-	-
Mode 5	2400-2483.5	1	Bluetooth-LE	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	1	Bluetooth-LE	39	2480	2Mbps	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE	0	2389.95	39.40	54.00	-14.60	H	AVERAGE	Pass	Band Edge
1	Bluetooth-LE	0	6405.00	54.14	80.52	-26.38	V	Peak	Pass	Harmonic
2	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
2	Bluetooth-LE	19	6507.00	53.08	83.26	-30.18	V	Peak	Pass	Harmonic
3	Bluetooth-LE	39	2483.50	41.01	54.00	-12.99	H	AVERAGE	Pass	Band Edge
3	Bluetooth-LE	39	6613.50	55.27	80.60	-25.33	V	Peak	Pass	Harmonic
4	Bluetooth-LE	0	2389.95	39.36	54.00	-14.64	H	AVERAGE	Pass	Band Edge
4	Bluetooth-LE	0	6405.00	52.67	79.90	-27.23	V	Peak	Pass	Harmonic
5	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
5	Bluetooth-LE	19	6507.00	54.31	82.33	-28.02	V	Peak	Pass	Harmonic
6	Bluetooth-LE	39	2483.50	41.28	54.00	-12.72	H	AVERAGE	Pass	Band Edge
6	Bluetooth-LE	39	6613.50	54.43	79.07	-24.64	V	Peak	Pass	Harmonic





Mode	1																																																																																									
	Band Edge																																																																																									
	2400-2483.5 Bluetooth-LE_CH0_2402MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>52.08</td><td>74.00</td><td>-21.92</td><td>43.59</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>104 105 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	52.08	74.00	-21.92	43.59	31.92	7.16	36.59	6.00	104 105 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>104.57</td><td>-----</td><td>-----</td><td>95.96</td><td>32.01</td><td>7.18</td><td>36.58</td><td>6.00</td><td>104 105 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	104.57	-----	-----	95.96	32.01	7.18	36.58	6.00	104 105 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.82	52.08	74.00	-21.92	43.59	31.92	7.16	36.59	6.00	104 105 PEAK																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	104.57	-----	-----	95.96	32.01	7.18	36.58	6.00	104 105 PEAK																																																																																
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>39.40</td><td>54.00</td><td>-14.60</td><td>30.91</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>104 105 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	39.40	54.00	-14.60	30.91	31.92	7.16	36.59	6.00	104 105 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>103.61</td><td>-----</td><td>-----</td><td>95.00</td><td>32.01</td><td>7.18</td><td>36.58</td><td>6.00</td><td>104 105 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	103.61	-----	-----	95.00	32.01	7.18	36.58	6.00	104 105 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.95	39.40	54.00	-14.60	30.91	31.92	7.16	36.59	6.00	104 105 AVERAGE																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	103.61	-----	-----	95.00	32.01	7.18	36.58	6.00	104 105 AVERAGE																																																																																



Mode	1																																																																																									
	Band Edge																																																																																									
	2400-2483.5 Bluetooth-LE_CH0_2402MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2367.20</td><td>50.46</td><td>74.00</td><td>-23.54</td><td>42.22</td><td>31.74</td><td>7.13</td><td>36.63</td><td>6.00</td><td>316 138 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2367.20	50.46	74.00	-23.54	42.22	31.74	7.13	36.63	6.00	316 138 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>99.46</td><td>-----</td><td>-----</td><td>90.85</td><td>32.01</td><td>7.18</td><td>36.58</td><td>6.00</td><td>316 138 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	99.46	-----	-----	90.85	32.01	7.18	36.58	6.00	316 138 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2367.20	50.46	74.00	-23.54	42.22	31.74	7.13	36.63	6.00	316 138 PEAK																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	99.46	-----	-----	90.85	32.01	7.18	36.58	6.00	316 138 PEAK																																																																																
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>37.82</td><td>54.00</td><td>-16.18</td><td>29.33</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>316 138 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	37.82	54.00	-16.18	29.33	31.92	7.16	36.59	6.00	316 138 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>98.45</td><td>-----</td><td>-----</td><td>89.84</td><td>32.01</td><td>7.18</td><td>36.58</td><td>6.00</td><td>316 138 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	98.45	-----	-----	89.84	32.01	7.18	36.58	6.00	316 138 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.95	37.82	54.00	-16.18	29.33	31.92	7.16	36.59	6.00	316 138 AVERAGE																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	98.45	-----	-----	89.84	32.01	7.18	36.58	6.00	316 138 AVERAGE																																																																																

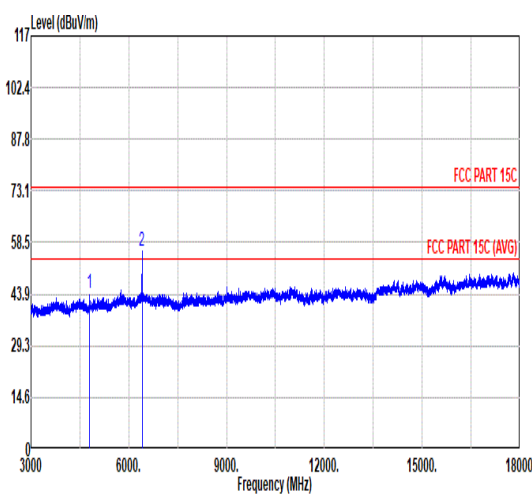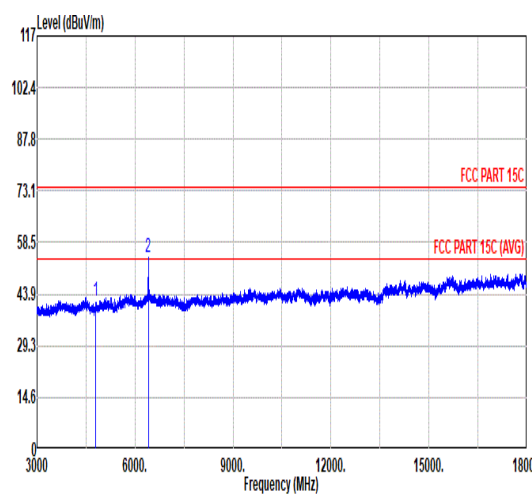





Mode	1																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_Bluetooth-LE_CH0_2402MHz																																																																																																																									
ANT	1																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>43.93</td><td>74.00</td><td>-30.07</td><td>64.06</td><td>33.80</td><td>10.27</td><td>64.20</td><td>0.00</td><td>--- PEAK</td></tr><tr><td>2</td><td>6405.00</td><td>56.11</td><td>87.63</td><td>-31.52</td><td>73.60</td><td>35.50</td><td>12.13</td><td>65.12</td><td>0.00</td><td>--- Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4804.00	43.93	74.00	-30.07	64.06	33.80	10.27	64.20	0.00	--- PEAK	2	6405.00	56.11	87.63	-31.52	73.60	35.50	12.13	65.12	0.00	--- Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>41.90</td><td>74.00</td><td>-32.10</td><td>62.03</td><td>33.80</td><td>10.27</td><td>64.20</td><td>0.00</td><td>--- PEAK</td></tr><tr><td>2</td><td>6405.00</td><td>54.14</td><td>80.52</td><td>-26.38</td><td>71.63</td><td>35.50</td><td>12.13</td><td>65.12</td><td>0.00</td><td>--- Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4804.00	41.90	74.00	-32.10	62.03	33.80	10.27	64.20	0.00	--- PEAK	2	6405.00	54.14	80.52	-26.38	71.63	35.50	12.13	65.12	0.00	--- Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	4804.00	43.93	74.00	-30.07	64.06	33.80	10.27	64.20	0.00	--- PEAK																																																																																																																
2	6405.00	56.11	87.63	-31.52	73.60	35.50	12.13	65.12	0.00	--- Peak																																																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																
1	4804.00	41.90	74.00	-32.10	62.03	33.80	10.27	64.20	0.00	--- PEAK																																																																																																																
2	6405.00	54.14	80.52	-26.38	71.63	35.50	12.13	65.12	0.00	--- Peak																																																																																																																



Mode	2																																																																																																																																																		
	Harmonic																																																																																																																																																		
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																																		
ANT	1																																																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																																																												
Peak Avg																																																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>42.81</td><td>74.00</td><td>-31.19</td><td>62.88</td><td>33.86</td><td>10.35</td><td>64.28</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6507.00</td><td>55.29</td><td>86.39</td><td>-31.10</td><td>72.83</td><td>35.51</td><td>12.16</td><td>65.21</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7320.00</td><td>42.88</td><td>74.00</td><td>-31.12</td><td>60.64</td><td>35.56</td><td>12.79</td><td>66.11</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4880.00	42.81	74.00	-31.19	62.88	33.86	10.35	64.28	0.00	---	--- PEAK	2	6507.00	55.29	86.39	-31.10	72.83	35.51	12.16	65.21	0.00	---	--- Peak	3	7320.00	42.88	74.00	-31.12	60.64	35.56	12.79	66.11	0.00	---	--- PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>40.77</td><td>74.00</td><td>-33.23</td><td>60.84</td><td>33.86</td><td>10.35</td><td>64.28</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6507.00</td><td>53.08</td><td>83.26</td><td>-30.18</td><td>70.62</td><td>35.51</td><td>12.16</td><td>65.21</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7320.00</td><td>42.77</td><td>74.00</td><td>-31.23</td><td>60.53</td><td>35.56</td><td>12.79</td><td>66.11</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4880.00	40.77	74.00	-33.23	60.84	33.86	10.35	64.28	0.00	---	--- PEAK	2	6507.00	53.08	83.26	-30.18	70.62	35.51	12.16	65.21	0.00	---	--- Peak	3	7320.00	42.77	74.00	-31.23	60.53	35.56	12.79	66.11	0.00	---	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																									
1	4880.00	42.81	74.00	-31.19	62.88	33.86	10.35	64.28	0.00	---	--- PEAK																																																																																																																																								
2	6507.00	55.29	86.39	-31.10	72.83	35.51	12.16	65.21	0.00	---	--- Peak																																																																																																																																								
3	7320.00	42.88	74.00	-31.12	60.64	35.56	12.79	66.11	0.00	---	--- PEAK																																																																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																									
1	4880.00	40.77	74.00	-33.23	60.84	33.86	10.35	64.28	0.00	---	--- PEAK																																																																																																																																								
2	6507.00	53.08	83.26	-30.18	70.62	35.51	12.16	65.21	0.00	---	--- Peak																																																																																																																																								
3	7320.00	42.77	74.00	-31.23	60.53	35.56	12.79	66.11	0.00	---	--- PEAK																																																																																																																																								

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

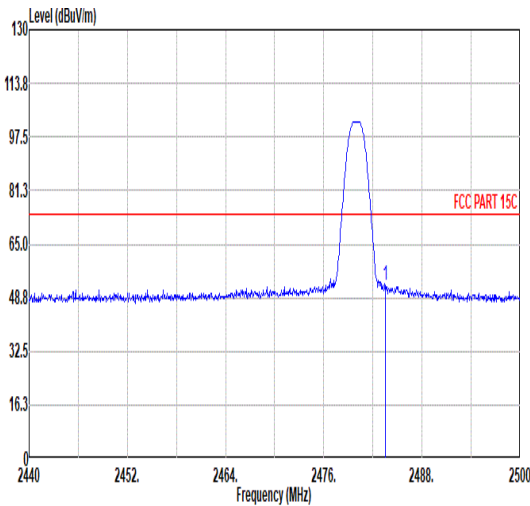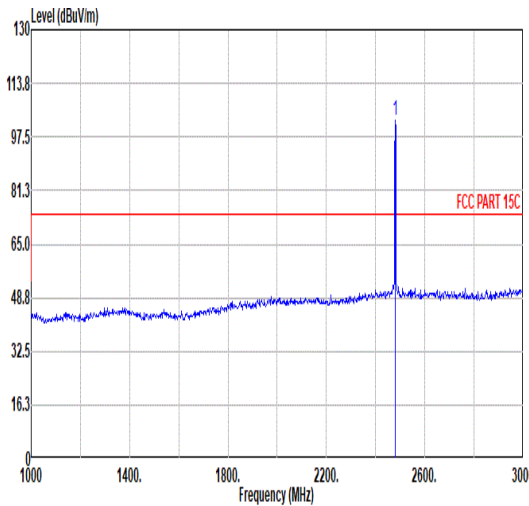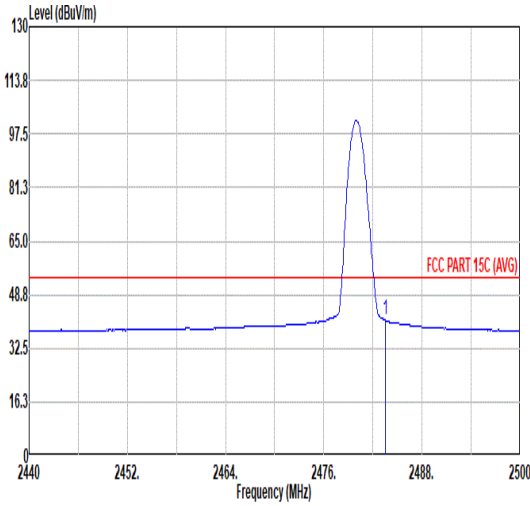
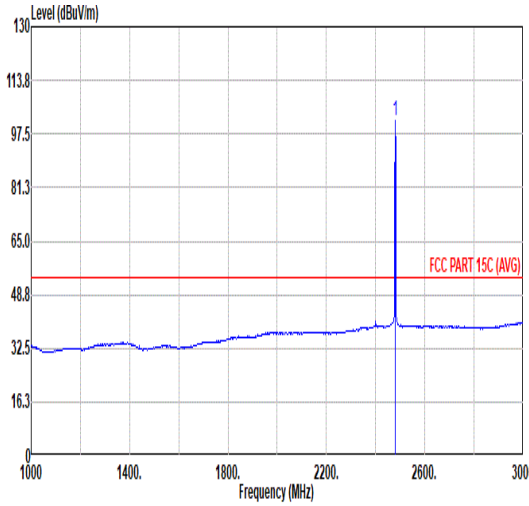


Mode	3																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal					Fundamental																																																																																												
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>52.28</td><td>74.00</td><td>-21.72</td><td>43.25</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>139 102 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	52.28	74.00	-21.72	43.25	32.27	7.33	36.57	6.00	139 102 PEAK	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>102.53</td><td>-----</td><td>-----</td><td>93.52</td><td>32.26</td><td>7.32</td><td>36.57</td><td>6.00</td><td>139 102 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	102.53	-----	-----	93.52	32.26	7.32	36.57	6.00	139 102 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.50	52.28	74.00	-21.72	43.25	32.27	7.33	36.57	6.00	139 102 PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2480.00	102.53	-----	-----	93.52	32.26	7.32	36.57	6.00	139 102 PEAK																																																																																								
Avg	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>41.01</td><td>54.00</td><td>-12.99</td><td>31.98</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>139 102 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	41.01	54.00	-12.99	31.98	32.27	7.33	36.57	6.00	139 102 AVERAGE	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>101.50</td><td>-----</td><td>-----</td><td>92.49</td><td>32.26</td><td>7.32</td><td>36.57</td><td>6.00</td><td>139 102 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.50	-----	-----	92.49	32.26	7.32	36.57	6.00	139 102 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.50	41.01	54.00	-12.99	31.98	32.27	7.33	36.57	6.00	139 102 AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2480.00	101.50	-----	-----	92.49	32.26	7.32	36.57	6.00	139 102 AVERAGE																																																																																								







Mode	3																																																						
	Band Edge																																																						
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																						
ANT	1																																																						
Pol.	Vertical																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.72</td><td>50.73</td><td>74.00</td><td>-23.27</td><td>41.70</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>335 143 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.72	50.73	74.00	-23.27	41.70	32.27	7.33	36.57	6.00	335 143 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2485.72	50.73	74.00	-23.27	41.70	32.27	7.33	36.57	6.00	335 143 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>98.37</td><td>-----</td><td>-----</td><td>89.36</td><td>32.26</td><td>7.32</td><td>36.57</td><td>6.00</td><td>335 143 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.37	-----	-----	89.36	32.26	7.32	36.57	6.00	335 143 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	98.37	-----	-----	89.36	32.26	7.32	36.57	6.00	335 143 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>39.13</td><td>54.00</td><td>-14.87</td><td>30.10</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>335 143 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	39.13	54.00	-14.87	30.10	32.27	7.33	36.57	6.00	335 143 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	39.13	54.00	-14.87	30.10	32.27	7.33	36.57	6.00	335 143 AVERAGE																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>97.41</td><td>-----</td><td>-----</td><td>88.40</td><td>32.26</td><td>7.32</td><td>36.57</td><td>6.00</td><td>335 143 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.41	-----	-----	88.40	32.26	7.32	36.57	6.00	335 143 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	97.41	-----	-----	88.40	32.26	7.32	36.57	6.00	335 143 AVERAGE																																													

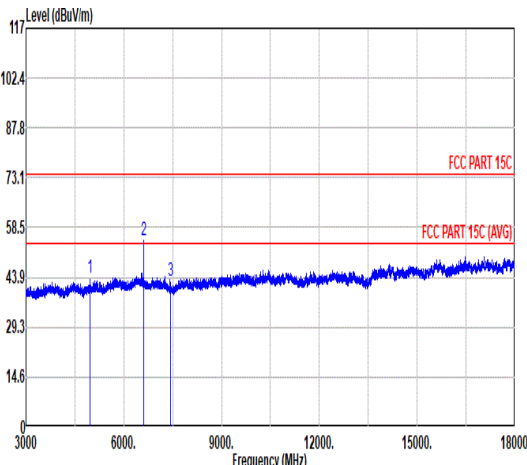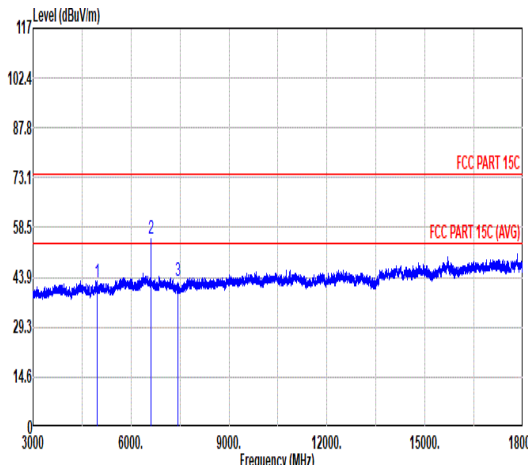





Mode	3																																																																																																																																																					
	Harmonic																																																																																																																																																					
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																																					
ANT	1																																																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																																																															
Peak Avg																																																																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>43.61</td><td>74.00</td><td>-30.39</td><td>63.57</td><td>33.90</td><td>10.44</td><td>64.30</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6613.50</td><td>54.88</td><td>85.39</td><td>-30.51</td><td>72.43</td><td>35.53</td><td>12.21</td><td>65.29</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>42.74</td><td>74.00</td><td>-31.26</td><td>60.51</td><td>35.60</td><td>12.93</td><td>66.30</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	43.61	74.00	-30.39	63.57	33.90	10.44	64.30	0.00	---	PEAK	2	6613.50	54.88	85.39	-30.51	72.43	35.53	12.21	65.29	0.00	---	Peak	3	7440.00	42.74	74.00	-31.26	60.51	35.60	12.93	66.30	0.00	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>42.38</td><td>74.00</td><td>-31.62</td><td>62.34</td><td>33.90</td><td>10.44</td><td>64.30</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6613.50</td><td>55.27</td><td>80.60</td><td>-25.33</td><td>72.82</td><td>35.53</td><td>12.21</td><td>65.29</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>42.73</td><td>74.00</td><td>-31.27</td><td>60.50</td><td>35.60</td><td>12.93</td><td>66.30</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	42.38	74.00	-31.62	62.34	33.90	10.44	64.30	0.00	---	PEAK	2	6613.50	55.27	80.60	-25.33	72.82	35.53	12.21	65.29	0.00	---	Peak	3	7440.00	42.73	74.00	-31.27	60.50	35.60	12.93	66.30	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																												
1	4960.00	43.61	74.00	-30.39	63.57	33.90	10.44	64.30	0.00	---	PEAK																																																																																																																																											
2	6613.50	54.88	85.39	-30.51	72.43	35.53	12.21	65.29	0.00	---	Peak																																																																																																																																											
3	7440.00	42.74	74.00	-31.26	60.51	35.60	12.93	66.30	0.00	---	PEAK																																																																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																												
1	4960.00	42.38	74.00	-31.62	62.34	33.90	10.44	64.30	0.00	---	PEAK																																																																																																																																											
2	6613.50	55.27	80.60	-25.33	72.82	35.53	12.21	65.29	0.00	---	Peak																																																																																																																																											
3	7440.00	42.73	74.00	-31.27	60.50	35.60	12.93	66.30	0.00	---	PEAK																																																																																																																																											

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

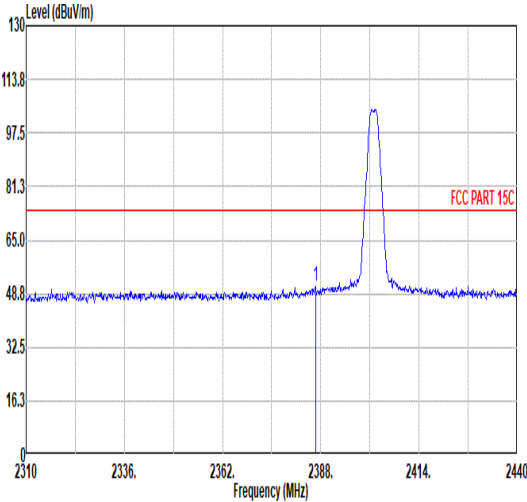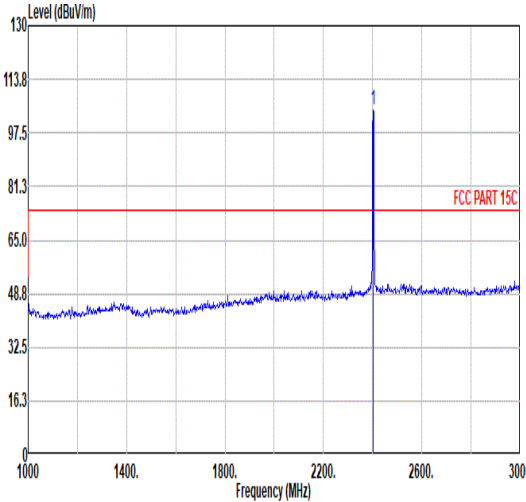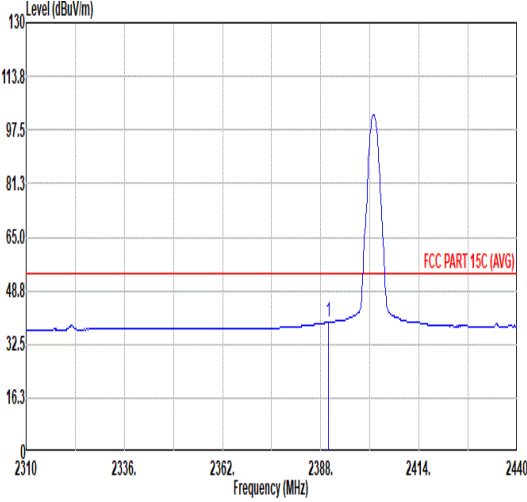
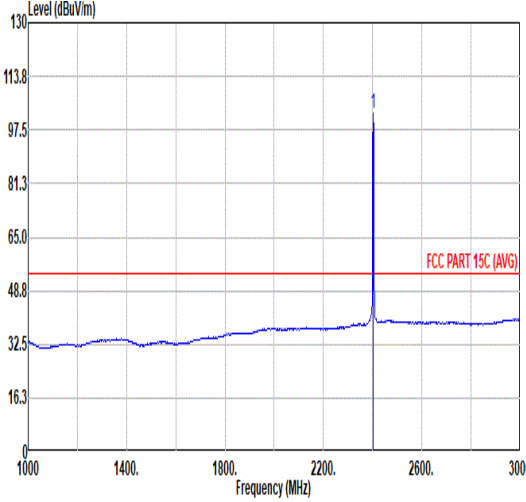


Mode	4																																																																																																							
	Band Edge																																																																																																							
	2400-2483.5_Bluetooth-LE_CH0_2402MHz																																																																																																							
ANT	1																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																	
Peak																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.57</td><td>50.92</td><td>74.00</td><td>-23.08</td><td>42.47</td><td>31.89</td><td>7.16</td><td>36.60</td><td>6.00</td><td>102</td><td>106</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2386.57	50.92	74.00	-23.08	42.47	31.89	7.16	36.60	6.00	102	106	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>104.71</td><td>-----</td><td>-----</td><td>96.10</td><td>32.01</td><td>7.18</td><td>36.58</td><td>6.00</td><td>102</td><td>106</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	104.71	-----	-----	96.10	32.01	7.18	36.58	6.00	102	106	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2386.57	50.92	74.00	-23.08	42.47	31.89	7.16	36.60	6.00	102	106	PEAK																																																																																												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2402.00	104.71	-----	-----	96.10	32.01	7.18	36.58	6.00	102	106	PEAK																																																																																												
Avg																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>39.36</td><td>54.00</td><td>-14.64</td><td>30.87</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>102</td><td>106</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.95	39.36	54.00	-14.64	30.87	31.92	7.16	36.59	6.00	102	106	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>102.36</td><td>-----</td><td>-----</td><td>93.75</td><td>32.01</td><td>7.18</td><td>36.58</td><td>6.00</td><td>102</td><td>106</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	102.36	-----	-----	93.75	32.01	7.18	36.58	6.00	102	106	AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2389.95	39.36	54.00	-14.64	30.87	31.92	7.16	36.59	6.00	102	106	AVERAGE																																																																																												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	2402.00	102.36	-----	-----	93.75	32.01	7.18	36.58	6.00	102	106	AVERAGE																																																																																												

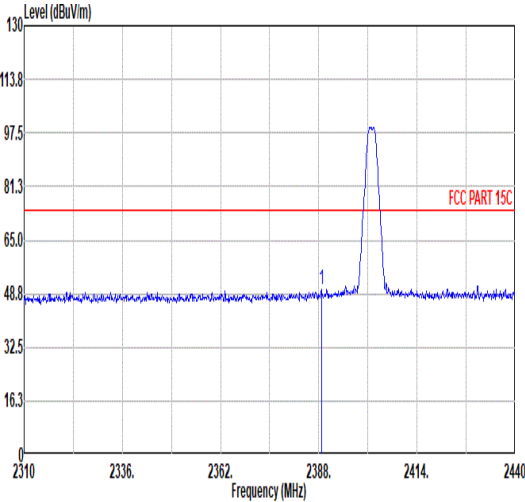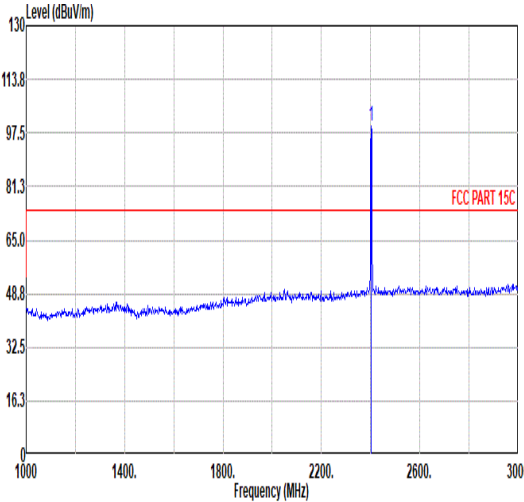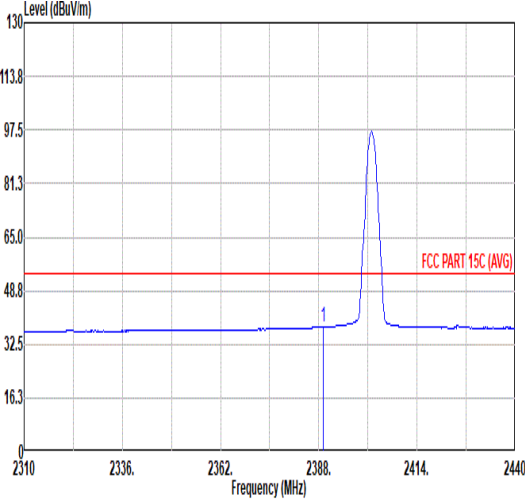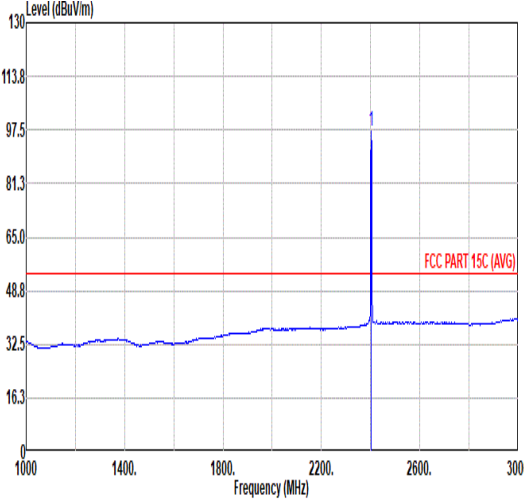



Mode	4																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_Bluetooth-LE_CH0_2402MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Vertical						Fundamental																																																																																															
Peak																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.78</td><td>50.02</td><td>74.00</td><td>-23.98</td><td>41.55</td><td>31.91</td><td>7.16</td><td>36.60</td><td>6.00</td><td>316</td><td>138 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.78	50.02	74.00	-23.98	41.55	31.91	7.16	36.60	6.00	316	138 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>99.43</td><td>-----</td><td>-----</td><td>90.82</td><td>32.01</td><td>7.18</td><td>36.58</td><td>6.00</td><td>316</td><td>138 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	99.43	-----	-----	90.82	32.01	7.18	36.58	6.00	316
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2388.78	50.02	74.00	-23.98	41.55	31.91	7.16	36.60	6.00	316	138 PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2402.00	99.43	-----	-----	90.82	32.01	7.18	36.58	6.00	316	138 PEAK																																																																																											
Avg																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.17</td><td>37.77</td><td>54.00</td><td>-16.23</td><td>29.30</td><td>31.91</td><td>7.16</td><td>36.60</td><td>6.00</td><td>316</td><td>138 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.17	37.77	54.00	-16.23	29.30	31.91	7.16	36.60	6.00	316	138 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>97.02</td><td>-----</td><td>-----</td><td>88.41</td><td>32.01</td><td>7.18</td><td>36.58</td><td>6.00</td><td>316</td><td>138 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	97.02	-----	-----	88.41	32.01	7.18	36.58	6.00	316
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2389.17	37.77	54.00	-16.23	29.30	31.91	7.16	36.60	6.00	316	138 AVERAGE																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2402.00	97.02	-----	-----	88.41	32.01	7.18	36.58	6.00	316	138 AVERAGE																																																																																											

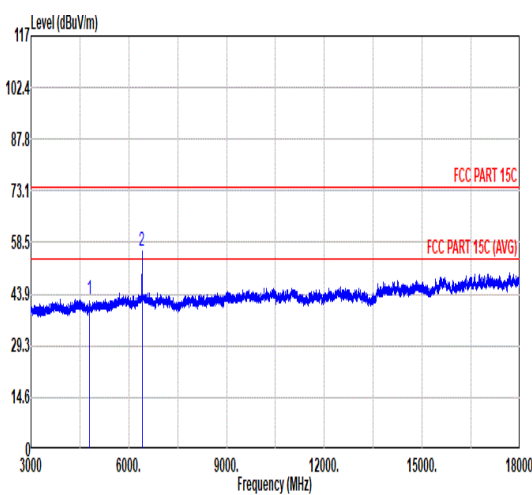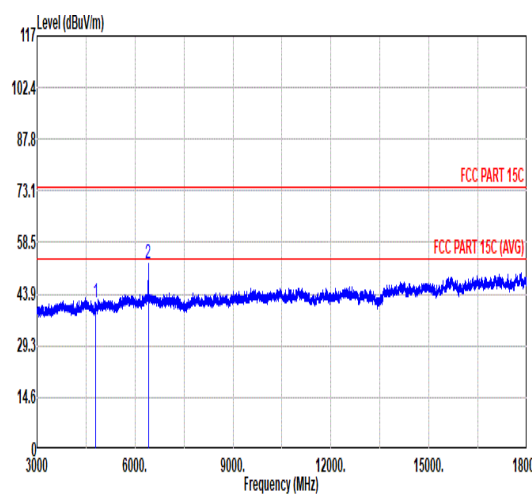

Mode	4																																																																	
	Harmonic																																																																	
	2400-2483.5_Bluetooth-LE_CH0_2402MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal						Vertical																																																											
Peak Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>42.48</td><td>74.00</td><td>-31.52</td><td>62.61</td><td>33.80</td><td>10.27</td><td>64.20</td><td>0.00</td><td>--- PEAK</td></tr><tr><td>2</td><td>6405.00</td><td>56.02</td><td>85.07</td><td>-29.05</td><td>73.51</td><td>35.50</td><td>12.13</td><td>65.12</td><td>0.00</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	42.48	74.00	-31.52	62.61	33.80	10.27	64.20	0.00	--- PEAK	2	6405.00	56.02	85.07	-29.05	73.51	35.50	12.13	65.12	0.00	--- Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4804.00	42.48	74.00	-31.52	62.61	33.80	10.27	64.20	0.00	--- PEAK																																																								
2	6405.00	56.02	85.07	-29.05	73.51	35.50	12.13	65.12	0.00	--- Peak																																																								
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>41.38</td><td>74.00</td><td>-32.62</td><td>61.51</td><td>33.80</td><td>10.27</td><td>64.20</td><td>0.00</td><td>--- PEAK</td></tr><tr><td>2</td><td>6405.00</td><td>52.67</td><td>79.90</td><td>-27.23</td><td>70.16</td><td>35.50</td><td>12.13</td><td>65.12</td><td>0.00</td><td>--- Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.38	74.00	-32.62	61.51	33.80	10.27	64.20	0.00	--- PEAK	2	6405.00	52.67	79.90	-27.23	70.16	35.50	12.13	65.12	0.00	--- Peak	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	4804.00	41.38	74.00	-32.62	61.51	33.80	10.27	64.20	0.00	--- PEAK																																																								
2	6405.00	52.67	79.90	-27.23	70.16	35.50	12.13	65.12	0.00	--- Peak																																																								

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

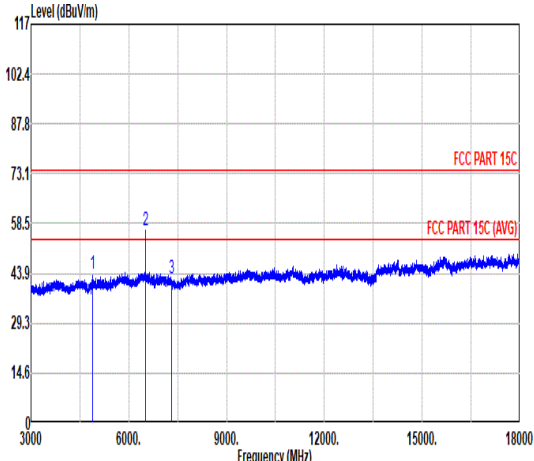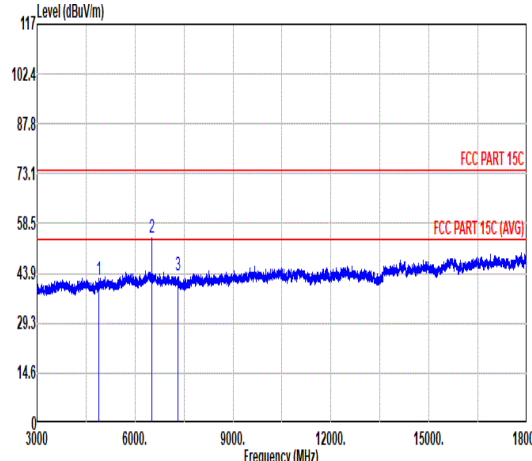





Mode	5																																																																																																																																																											
	Harmonic																																																																																																																																																											
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																																											
ANT	1																																																																																																																																																											
Pol.	Horizontal										Vertical																																																																																																																																																	
Peak Avg																																																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>43.85</td><td>74.00</td><td>-30.15</td><td>63.92</td><td>33.86</td><td>10.35</td><td>64.28</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6507.00</td><td>56.41</td><td>84.61</td><td>-28.20</td><td>73.95</td><td>35.51</td><td>12.16</td><td>65.21</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7320.00</td><td>42.59</td><td>74.00</td><td>-31.41</td><td>60.35</td><td>35.56</td><td>12.79</td><td>66.11</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4880.00	43.85	74.00	-30.15	63.92	33.86	10.35	64.28	0.00	---	--- PEAK	2	6507.00	56.41	84.61	-28.20	73.95	35.51	12.16	65.21	0.00	---	--- Peak	3	7320.00	42.59	74.00	-31.41	60.35	35.56	12.79	66.11	0.00	---	--- PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>41.97</td><td>74.00</td><td>-32.03</td><td>62.04</td><td>33.86</td><td>10.35</td><td>64.28</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6507.00</td><td>54.31</td><td>82.33</td><td>-28.02</td><td>71.85</td><td>35.51</td><td>12.16</td><td>65.21</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7320.00</td><td>43.06</td><td>74.00</td><td>-30.94</td><td>60.82</td><td>35.56</td><td>12.79</td><td>66.11</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>									Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4880.00	41.97	74.00	-32.03	62.04	33.86	10.35	64.28	0.00	---	--- PEAK	2	6507.00	54.31	82.33	-28.02	71.85	35.51	12.16	65.21	0.00	---	--- Peak	3	7320.00	43.06	74.00	-30.94	60.82	35.56	12.79	66.11	0.00	---	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																	
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4880.00	43.85	74.00	-30.15	63.92	33.86	10.35	64.28	0.00	---	--- PEAK																																																																																																																																																	
2	6507.00	56.41	84.61	-28.20	73.95	35.51	12.16	65.21	0.00	---	--- Peak																																																																																																																																																	
3	7320.00	42.59	74.00	-31.41	60.35	35.56	12.79	66.11	0.00	---	--- PEAK																																																																																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4880.00	41.97	74.00	-32.03	62.04	33.86	10.35	64.28	0.00	---	--- PEAK																																																																																																																																																	
2	6507.00	54.31	82.33	-28.02	71.85	35.51	12.16	65.21	0.00	---	--- Peak																																																																																																																																																	
3	7320.00	43.06	74.00	-30.94	60.82	35.56	12.79	66.11	0.00	---	--- PEAK																																																																																																																																																	

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB





Mode	6																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal					Fundamental																																																																																												
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>52.92</td><td>74.00</td><td>-21.08</td><td>43.89</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>100 106 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	52.92	74.00	-21.08	43.89	32.27	7.33	36.57	6.00	100 106 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>101.66</td><td>-----</td><td>-----</td><td>92.65</td><td>32.26</td><td>7.32</td><td>36.57</td><td>6.00</td><td>100 106 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.66	-----	-----	92.65	32.26	7.32	36.57	6.00	100 106 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.50	52.92	74.00	-21.08	43.89	32.27	7.33	36.57	6.00	100 106 PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2480.00	101.66	-----	-----	92.65	32.26	7.32	36.57	6.00	100 106 PEAK																																																																																								
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>41.28</td><td>54.00</td><td>-12.72</td><td>32.25</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>100 106 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	41.28	54.00	-12.72	32.25	32.27	7.33	36.57	6.00	100 106 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>99.20</td><td>-----</td><td>-----</td><td>90.19</td><td>32.26</td><td>7.32</td><td>36.57</td><td>6.00</td><td>100 106 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.20	-----	-----	90.19	32.26	7.32	36.57	6.00	100 106 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.50	41.28	54.00	-12.72	32.25	32.27	7.33	36.57	6.00	100 106 AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2480.00	99.20	-----	-----	90.19	32.26	7.32	36.57	6.00	100 106 AVERAGE																																																																																								

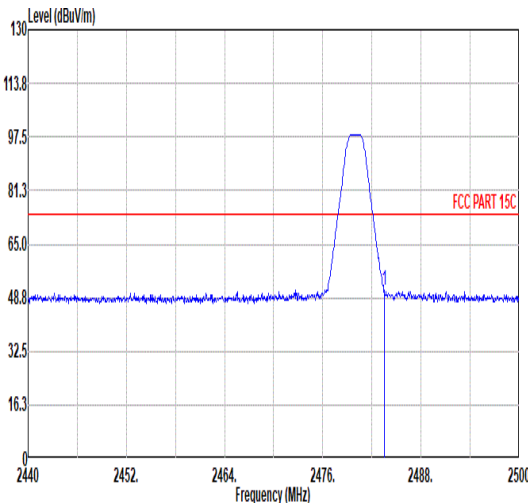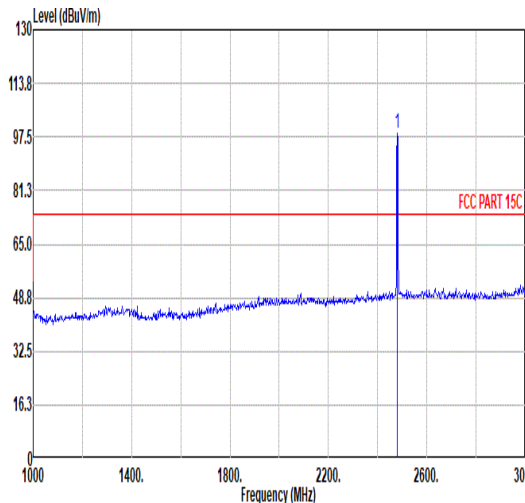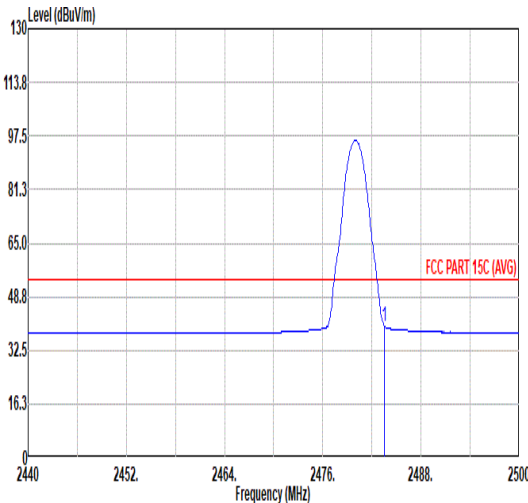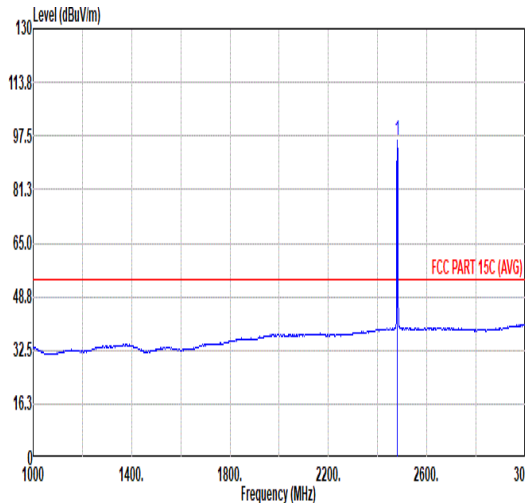



Mode	6																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>51.18</td><td>74.00</td><td>-22.82</td><td>42.15</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>336 143 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	51.18	74.00	-22.82	42.15	32.27	7.33	36.57	6.00	336 143 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>98.50</td><td>-----</td><td>-----</td><td>89.49</td><td>32.26</td><td>7.32</td><td>36.57</td><td>6.00</td><td>336 143 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.50	-----	-----	89.49	32.26	7.32	36.57	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.50	51.18	74.00	-22.82	42.15	32.27	7.33	36.57	6.00	336 143 PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2480.00	98.50	-----	-----	89.49	32.26	7.32	36.57	6.00	336 143 PEAK																																																																																								
Avg																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>39.94</td><td>54.00</td><td>-14.06</td><td>30.91</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>336 143 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	39.94	54.00	-14.06	30.91	32.27	7.33	36.57	6.00	336 143 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>96.13</td><td>-----</td><td>-----</td><td>87.12</td><td>32.26</td><td>7.32</td><td>36.57</td><td>6.00</td><td>336 143 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	96.13	-----	-----	87.12	32.26	7.32	36.57	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.50	39.94	54.00	-14.06	30.91	32.27	7.33	36.57	6.00	336 143 AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2480.00	96.13	-----	-----	87.12	32.26	7.32	36.57	6.00	336 143 AVERAGE																																																																																								

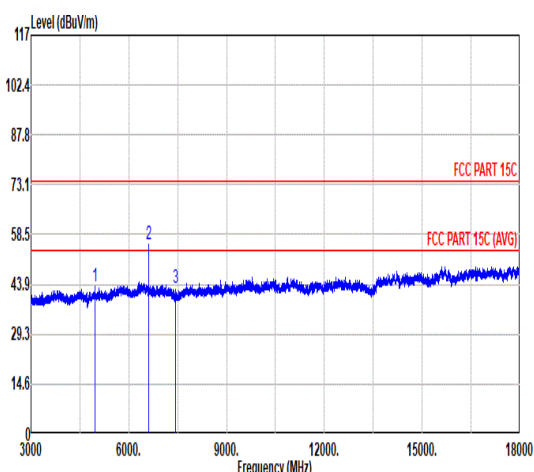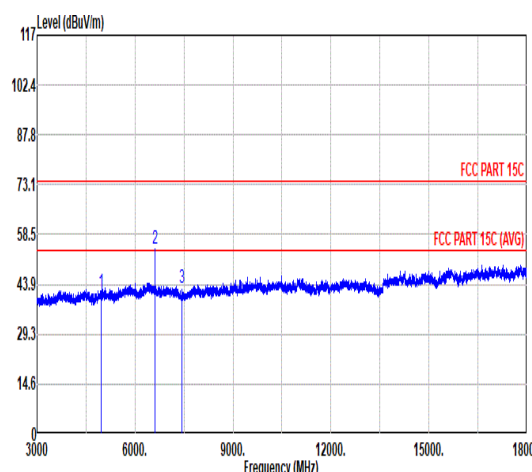



Mode	6																																																																																																																																														
	Harmonic																																																																																																																																														
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																														
ANT	1																																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																																								
Peak Avg																																																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>43.24</td><td>74.00</td><td>-30.76</td><td>63.20</td><td>33.90</td><td>10.44</td><td>64.30</td><td>0.00</td><td>--- PEAK</td></tr><tr><td>2</td><td>6613.50</td><td>55.85</td><td>83.22</td><td>-27.37</td><td>73.40</td><td>35.53</td><td>12.21</td><td>65.29</td><td>0.00</td><td>--- Peak</td></tr><tr><td>3</td><td>7440.00</td><td>42.84</td><td>74.00</td><td>-31.16</td><td>60.61</td><td>35.60</td><td>12.93</td><td>66.30</td><td>0.00</td><td>--- PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	43.24	74.00	-30.76	63.20	33.90	10.44	64.30	0.00	--- PEAK	2	6613.50	55.85	83.22	-27.37	73.40	35.53	12.21	65.29	0.00	--- Peak	3	7440.00	42.84	74.00	-31.16	60.61	35.60	12.93	66.30	0.00	--- PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.54</td><td>74.00</td><td>-32.46</td><td>61.50</td><td>33.90</td><td>10.44</td><td>64.30</td><td>0.00</td><td>--- PEAK</td></tr><tr><td>2</td><td>6613.50</td><td>54.43</td><td>79.07</td><td>-24.64</td><td>71.98</td><td>35.53</td><td>12.21</td><td>65.29</td><td>0.00</td><td>--- Peak</td></tr><tr><td>3</td><td>7440.00</td><td>42.93</td><td>74.00</td><td>-31.07</td><td>60.70</td><td>35.60</td><td>12.93</td><td>66.30</td><td>0.00</td><td>--- PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	41.54	74.00	-32.46	61.50	33.90	10.44	64.30	0.00	--- PEAK	2	6613.50	54.43	79.07	-24.64	71.98	35.53	12.21	65.29	0.00	--- Peak	3	7440.00	42.93	74.00	-31.07	60.70	35.60	12.93	66.30	0.00	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																					
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																					
1	4960.00	43.24	74.00	-30.76	63.20	33.90	10.44	64.30	0.00	--- PEAK																																																																																																																																					
2	6613.50	55.85	83.22	-27.37	73.40	35.53	12.21	65.29	0.00	--- Peak																																																																																																																																					
3	7440.00	42.84	74.00	-31.16	60.61	35.60	12.93	66.30	0.00	--- PEAK																																																																																																																																					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																					
1	4960.00	41.54	74.00	-32.46	61.50	33.90	10.44	64.30	0.00	--- PEAK																																																																																																																																					
2	6613.50	54.43	79.07	-24.64	71.98	35.53	12.21	65.29	0.00	--- Peak																																																																																																																																					
3	7440.00	42.93	74.00	-31.07	60.70	35.60	12.93	66.30	0.00	--- PEAK																																																																																																																																					

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

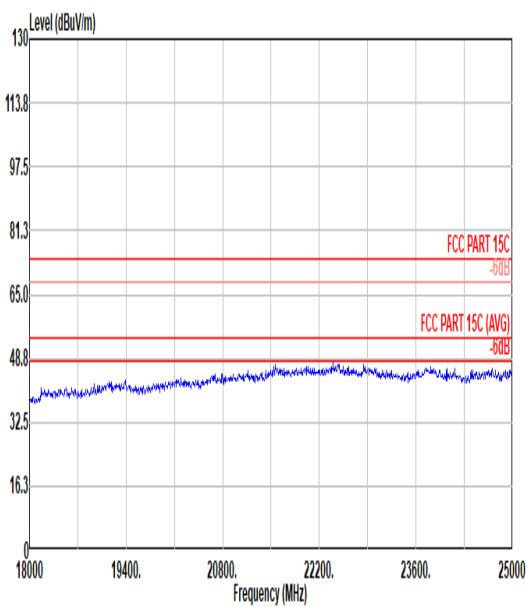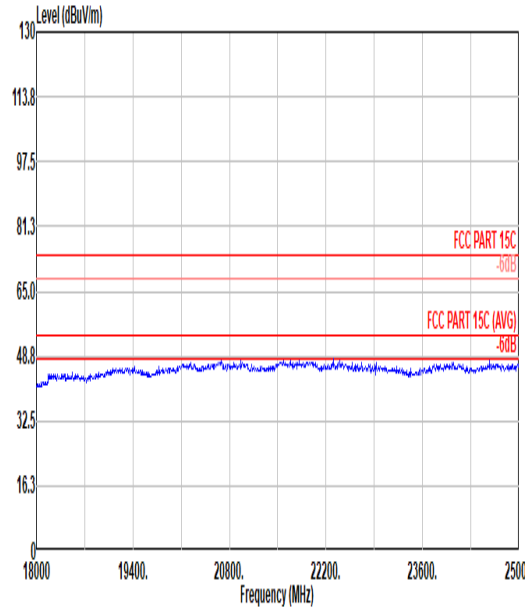

Mode	6	
	18G-25G	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg		

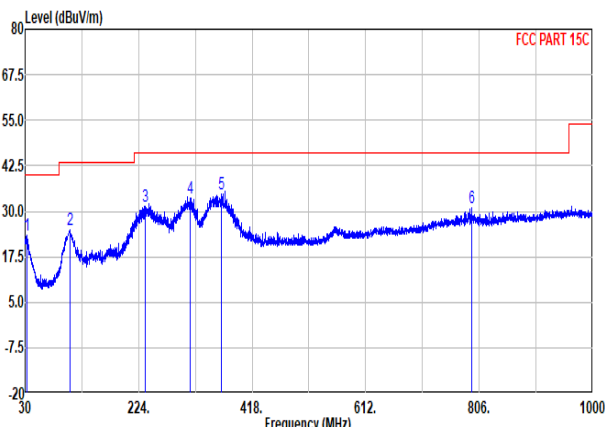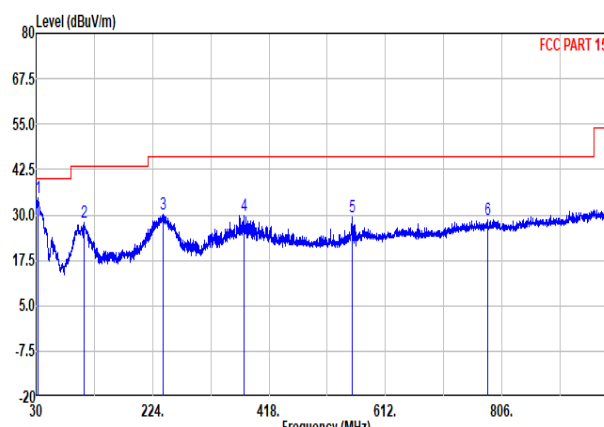


Mode	6																																																																																																																																																																																																																												
	LF																																																																																																																																																																																																																												
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																																																																																																												
ANT	1																																																																																																																																																																																																																												
Pol.	Horizontal							Vertical																																																																																																																																																																																																																					
Peak																																																																																																																																																																																																																													
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>32.67</td><td>23.46</td><td>40.00</td><td>-16.54</td><td>31.13</td><td>23.66</td><td>0.87</td><td>32.20</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>106.15</td><td>24.95</td><td>43.50</td><td>-18.55</td><td>38.80</td><td>16.64</td><td>1.57</td><td>32.06</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>235.64</td><td>31.30</td><td>46.00</td><td>-14.70</td><td>44.15</td><td>16.71</td><td>2.34</td><td>31.90</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>311.79</td><td>33.51</td><td>46.00</td><td>-12.49</td><td>43.78</td><td>19.25</td><td>2.71</td><td>32.23</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>364.65</td><td>34.67</td><td>46.00</td><td>-11.33</td><td>43.17</td><td>20.61</td><td>2.91</td><td>32.02</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>792.66</td><td>30.92</td><td>46.00</td><td>-15.08</td><td>30.60</td><td>27.76</td><td>4.28</td><td>31.72</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	32.67	23.46	40.00	-16.54	31.13	23.66	0.87	32.20	0.00	---	---	Peak	2	106.15	24.95	43.50	-18.55	38.80	16.64	1.57	32.06	0.00	---	---	Peak	3	235.64	31.30	46.00	-14.70	44.15	16.71	2.34	31.90	0.00	---	---	Peak	4	311.79	33.51	46.00	-12.49	43.78	19.25	2.71	32.23	0.00	---	---	Peak	5	364.65	34.67	46.00	-11.33	43.17	20.61	2.91	32.02	0.00	---	---	Peak	6	792.66	30.92	46.00	-15.08	30.60	27.76	4.28	31.72	0.00	---	---	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>33.40</td><td>34.85</td><td>40.00</td><td>-5.15</td><td>42.97</td><td>23.20</td><td>0.88</td><td>32.20</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>110.03</td><td>27.76</td><td>43.50</td><td>-15.74</td><td>41.15</td><td>17.07</td><td>1.60</td><td>32.06</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>241.22</td><td>30.17</td><td>46.00</td><td>-15.83</td><td>42.28</td><td>17.38</td><td>2.38</td><td>31.87</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>377.02</td><td>29.65</td><td>46.00</td><td>-16.35</td><td>37.86</td><td>20.90</td><td>2.96</td><td>32.07</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>556.95</td><td>29.38</td><td>46.00</td><td>-16.62</td><td>32.34</td><td>25.85</td><td>3.59</td><td>32.40</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>781.51</td><td>28.78</td><td>46.00</td><td>-17.22</td><td>28.38</td><td>27.88</td><td>4.25</td><td>31.73</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	33.40	34.85	40.00	-5.15	42.97	23.20	0.88	32.20	0.00	---	---	Peak	2	110.03	27.76	43.50	-15.74	41.15	17.07	1.60	32.06	0.00	---	---	Peak	3	241.22	30.17	46.00	-15.83	42.28	17.38	2.38	31.87	0.00	---	---	Peak	4	377.02	29.65	46.00	-16.35	37.86	20.90	2.96	32.07	0.00	---	---	Peak	5	556.95	29.38	46.00	-16.62	32.34	25.85	3.59	32.40	0.00	---	---	Peak	6	781.51	28.78	46.00	-17.22	28.38	27.88	4.25	31.73	0.00	---	---	Peak
		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																		
1	32.67	23.46	40.00	-16.54	31.13	23.66	0.87	32.20	0.00	---	---	Peak																																																																																																																																																																																																																	
2	106.15	24.95	43.50	-18.55	38.80	16.64	1.57	32.06	0.00	---	---	Peak																																																																																																																																																																																																																	
3	235.64	31.30	46.00	-14.70	44.15	16.71	2.34	31.90	0.00	---	---	Peak																																																																																																																																																																																																																	
4	311.79	33.51	46.00	-12.49	43.78	19.25	2.71	32.23	0.00	---	---	Peak																																																																																																																																																																																																																	
5	364.65	34.67	46.00	-11.33	43.17	20.61	2.91	32.02	0.00	---	---	Peak																																																																																																																																																																																																																	
6	792.66	30.92	46.00	-15.08	30.60	27.76	4.28	31.72	0.00	---	---	Peak																																																																																																																																																																																																																	
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																		
1	33.40	34.85	40.00	-5.15	42.97	23.20	0.88	32.20	0.00	---	---	Peak																																																																																																																																																																																																																	
2	110.03	27.76	43.50	-15.74	41.15	17.07	1.60	32.06	0.00	---	---	Peak																																																																																																																																																																																																																	
3	241.22	30.17	46.00	-15.83	42.28	17.38	2.38	31.87	0.00	---	---	Peak																																																																																																																																																																																																																	
4	377.02	29.65	46.00	-16.35	37.86	20.90	2.96	32.07	0.00	---	---	Peak																																																																																																																																																																																																																	
5	556.95	29.38	46.00	-16.62	32.34	25.85	3.59	32.40	0.00	---	---	Peak																																																																																																																																																																																																																	
6	781.51	28.78	46.00	-17.22	28.38	27.88	4.25	31.73	0.00	---	---	Peak																																																																																																																																																																																																																	

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth –LE (1Mbps)	100	-	-	10Hz
Bluetooth –LE (2Mbps)	100	-	-	10Hz

Bluetooth – LE (1Mbps)

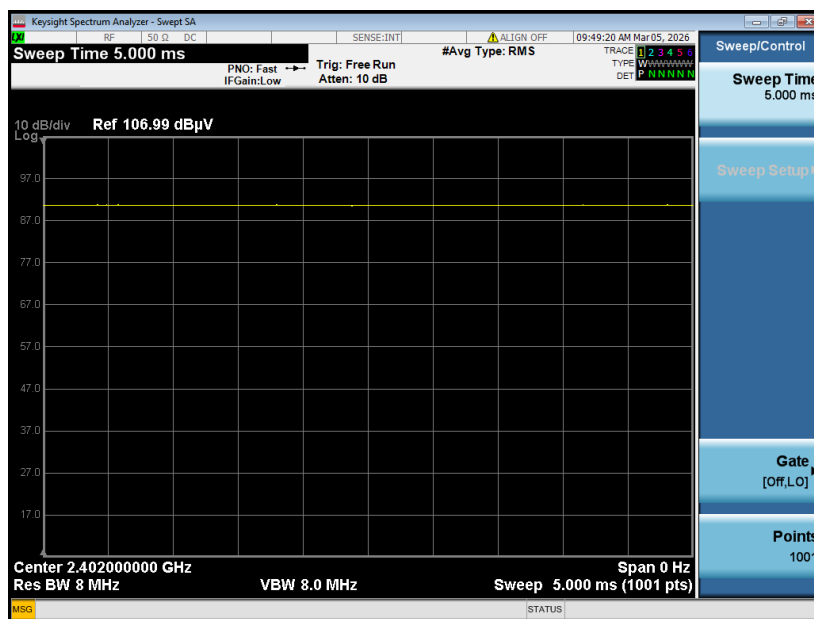

Bluetooth – LE (2Mbps)

