



1.6dB Bandwidth

Test Mode	Test Channel	Ant	EBW[MHz]	Limit	Verdict
BLE	2402	Ant1	0.6840	0.5	PASS
BLE	2440	Ant1	0.6946	0.5	PASS
BLE	2480	Ant1	0.6973	0.5	PASS


6dB Bandwidth_BLE_2402_Ant1

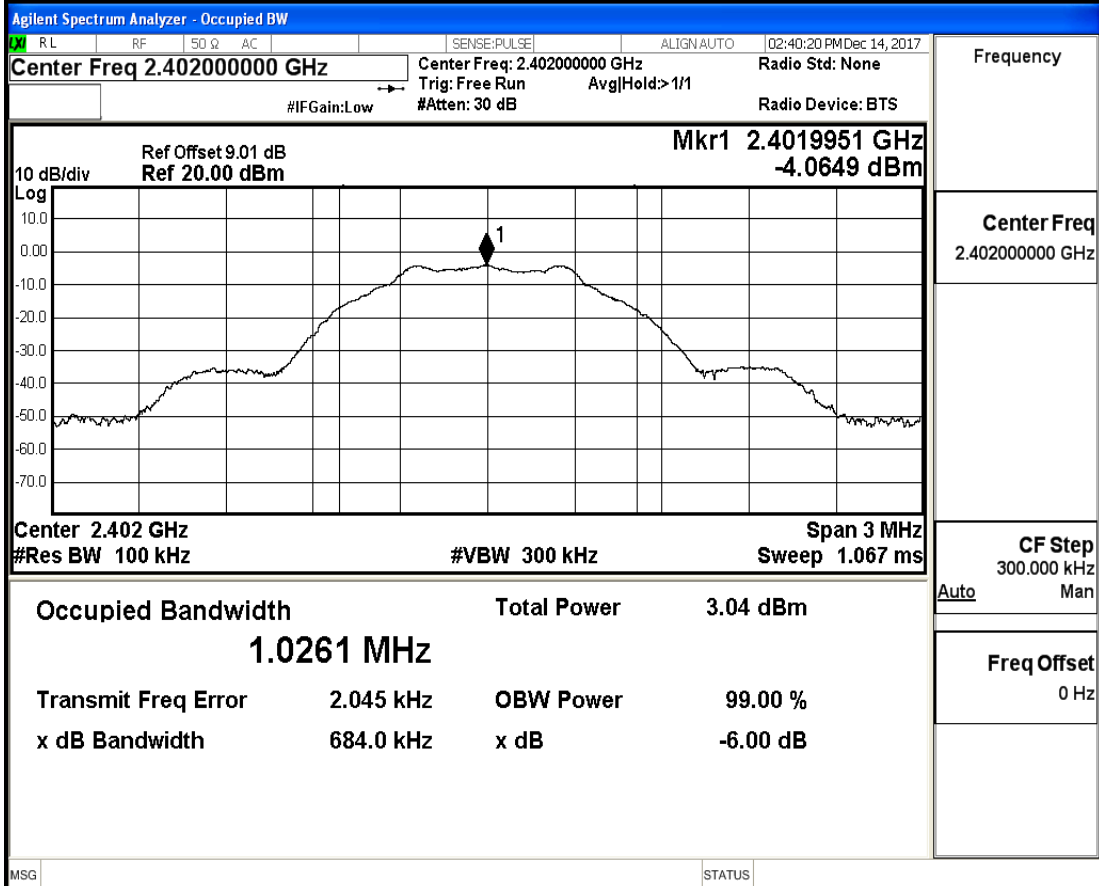

6dB Bandwidth_BLE_2440_Ant1

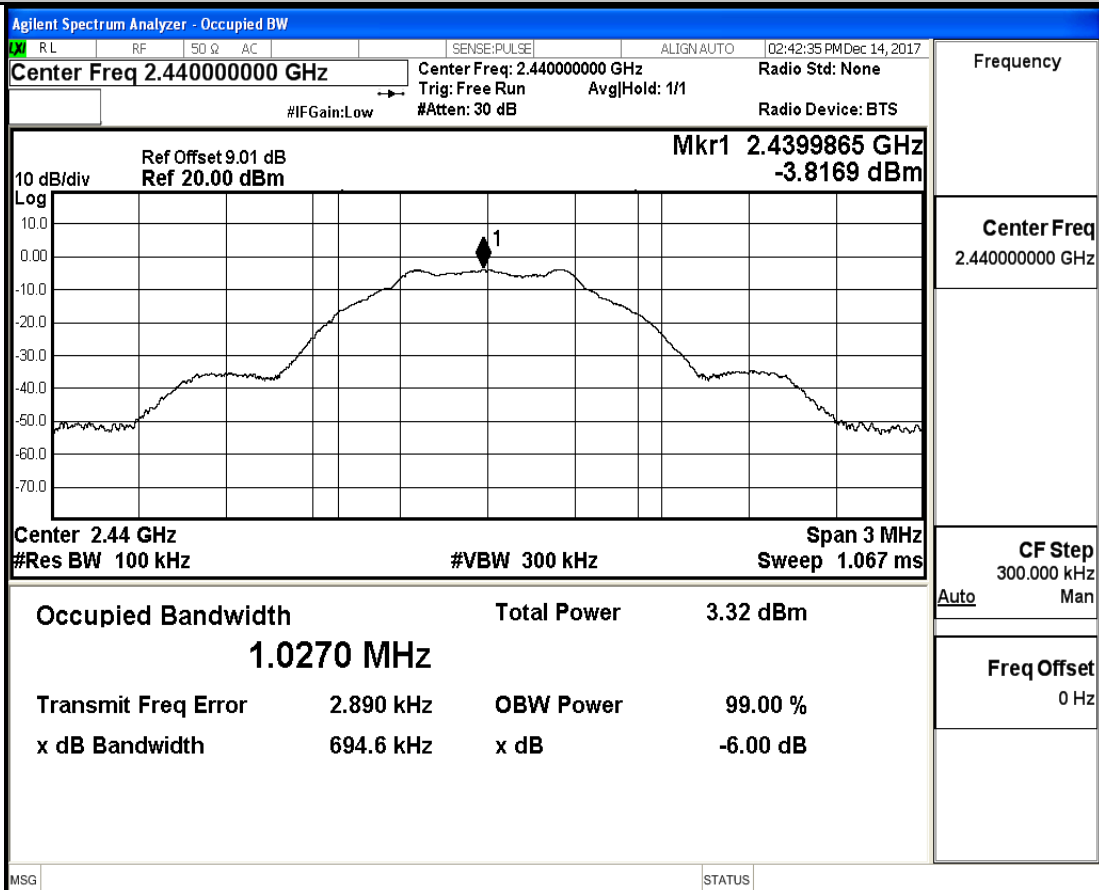

6dB Bandwidth_BLE_2480_Ant1

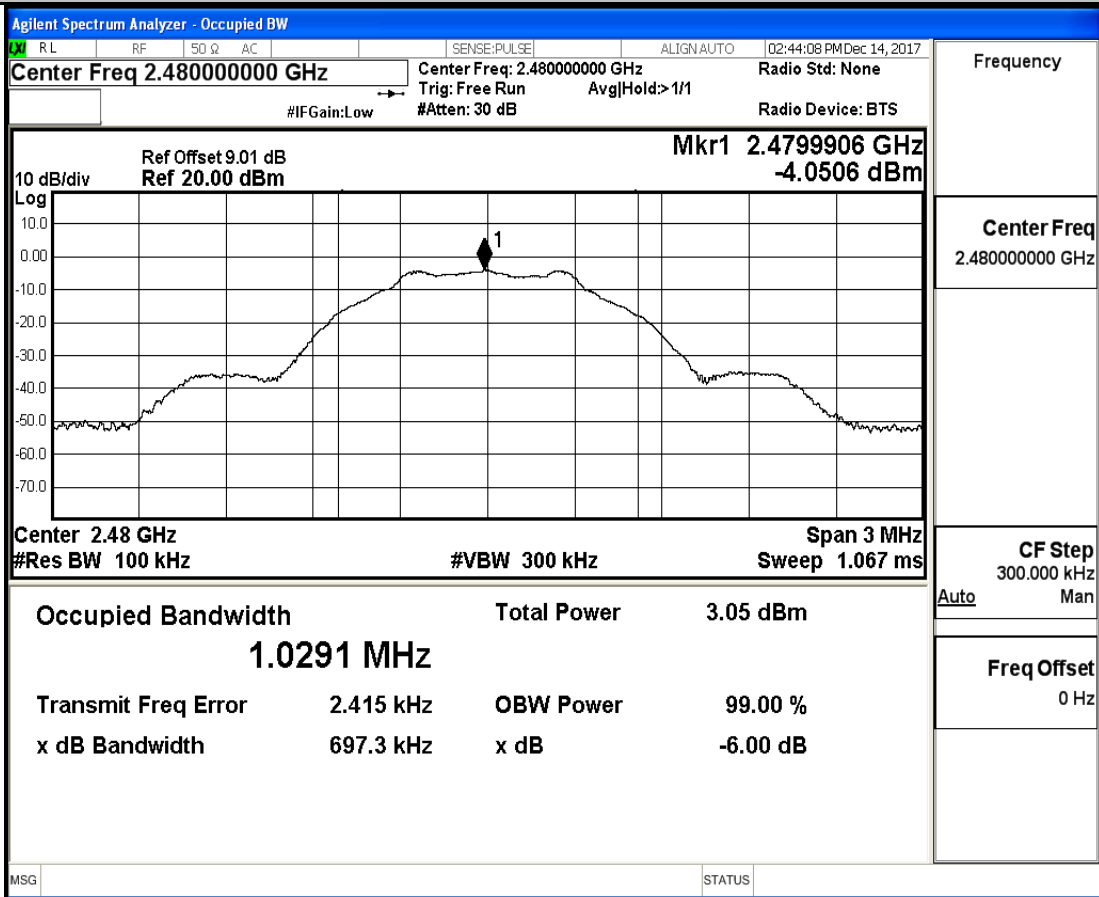


2.Occupied Bandwidth

Test Mode	Test Channel	Ant	OBW[MHz]	Limit[MHz]	Verdict
-----------	--------------	-----	----------	------------	---------


3.Maximum peak conducted output power


Test Mode	Test Channel	Ant	Power[dBm]	Limit[dBm]	Verdict
BLE	2402	Ant1	-3.036	30	PASS
BLE	2440	Ant1	-2.811	30	PASS
BLE	2480	Ant1	-3.041	30	PASS

Maximum peak conducted output power_BLE_2402_Ant1

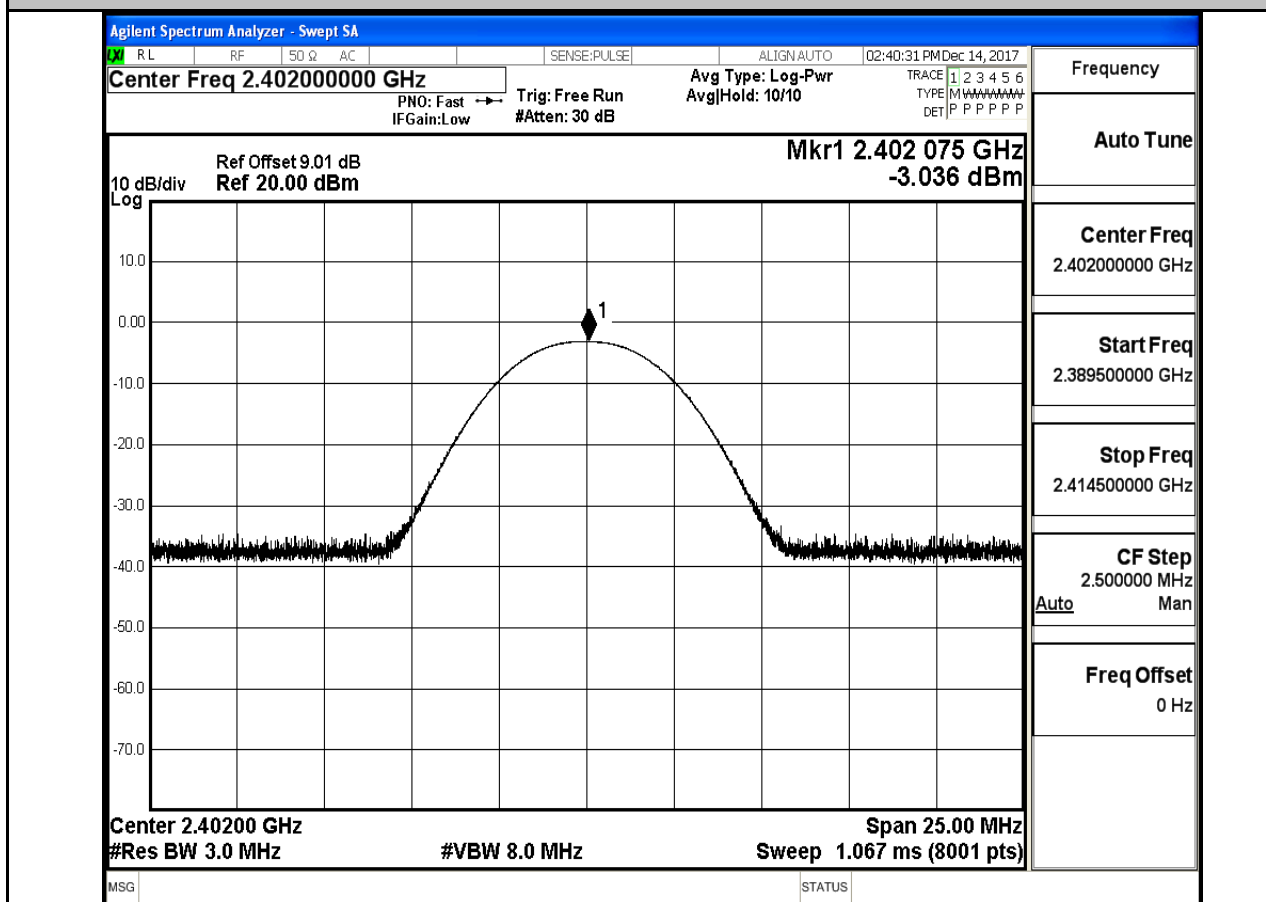

Maximum peak conducted output power_BLE_2440_Ant1

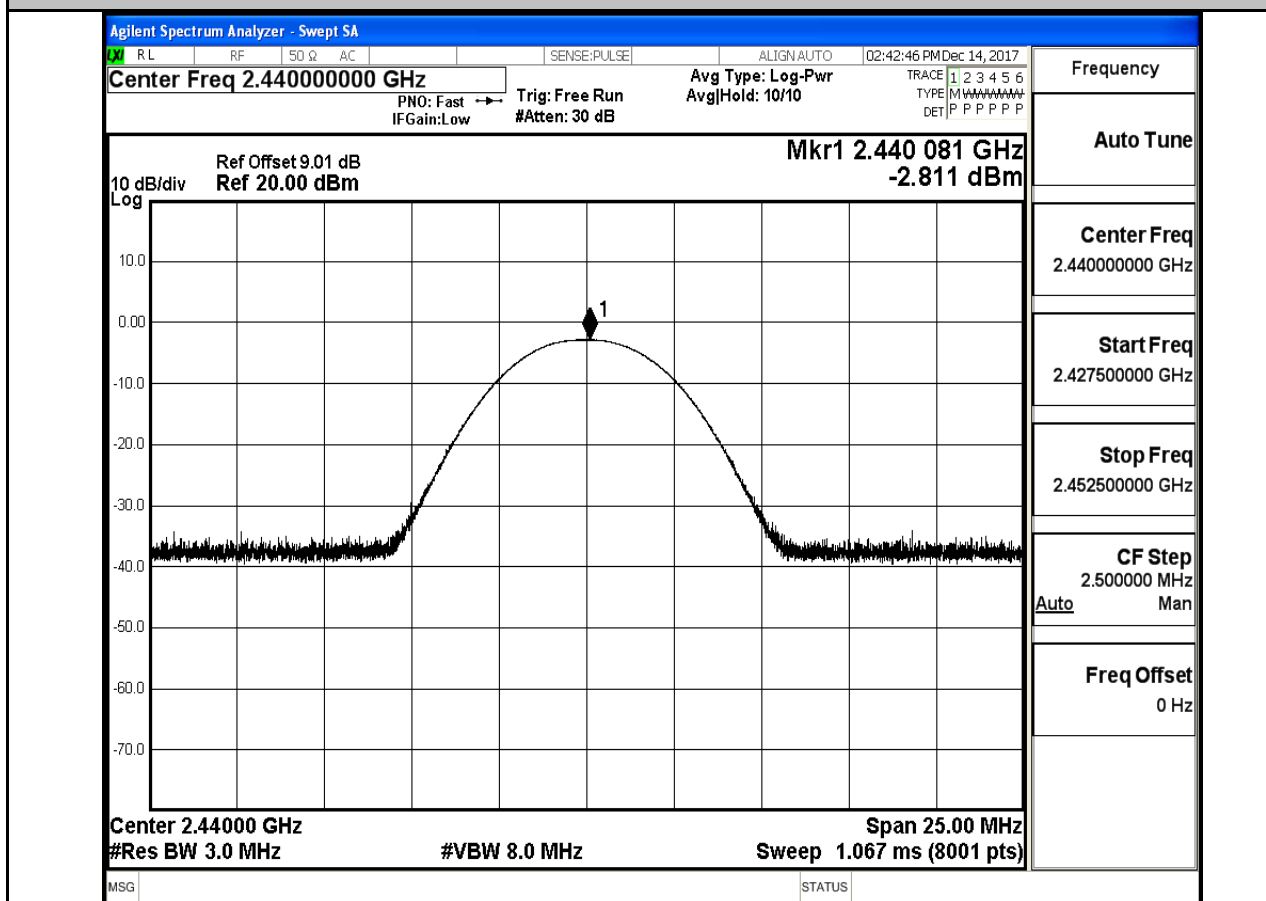


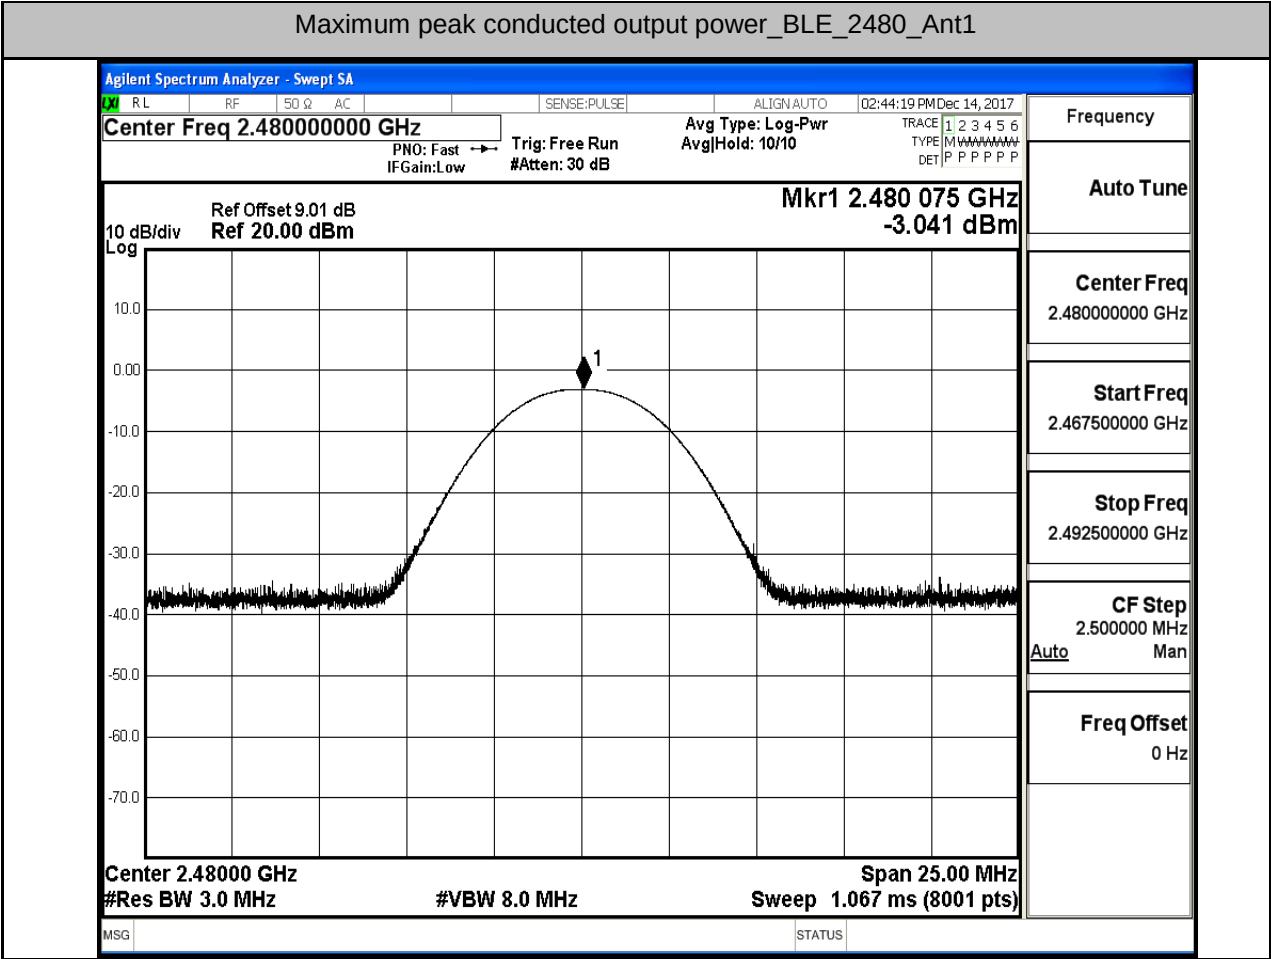


4.Maximum Peak power spectral density


Test Mode	Test Channel	Ant	PSD[dBm/3KHz]	Limit[dBm/3KHz]	Verdict
BLE	2402	Ant1	-18.582	8.00	PASS
BLE	2440	Ant1	-18.601	8.00	PASS
BLE	2480	Ant1	-18.618	8.00	PASS

Maximum Peak power spectral density_BLE_2402_Ant1

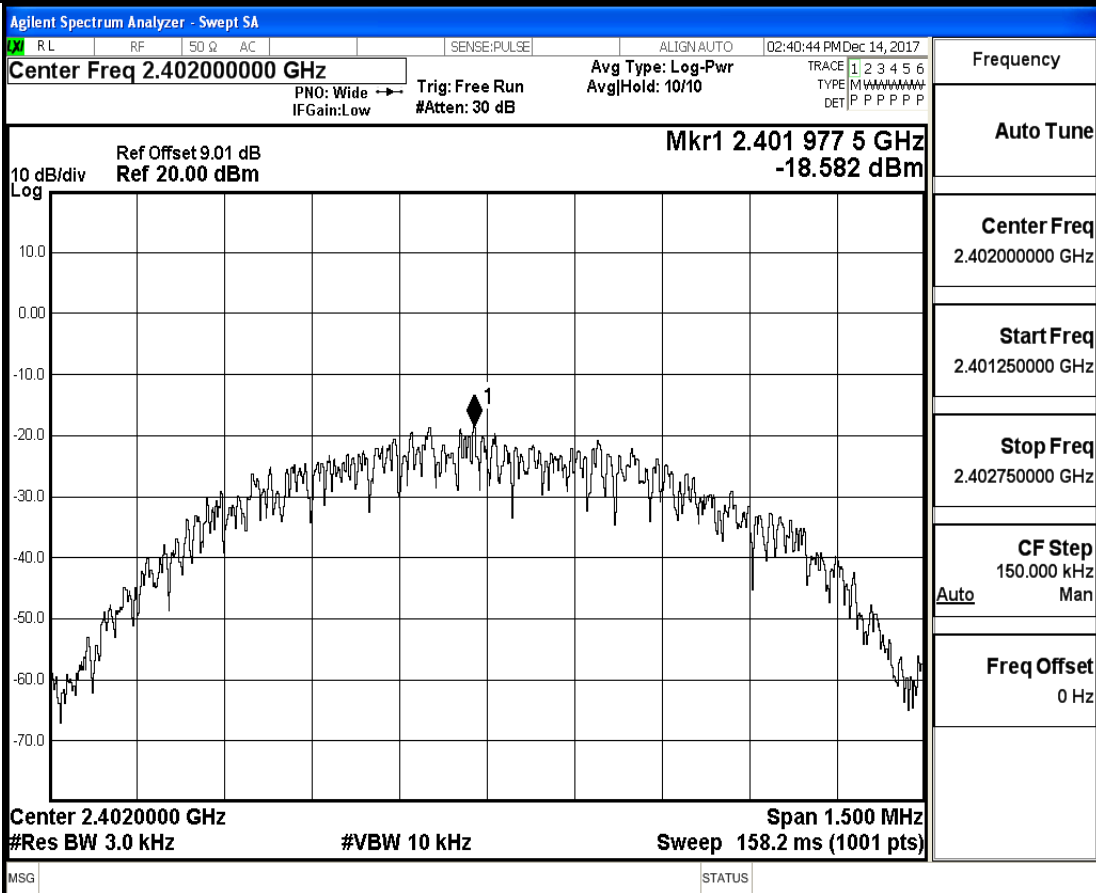

Maximum Peak power spectral density_BLE_2440_Ant1

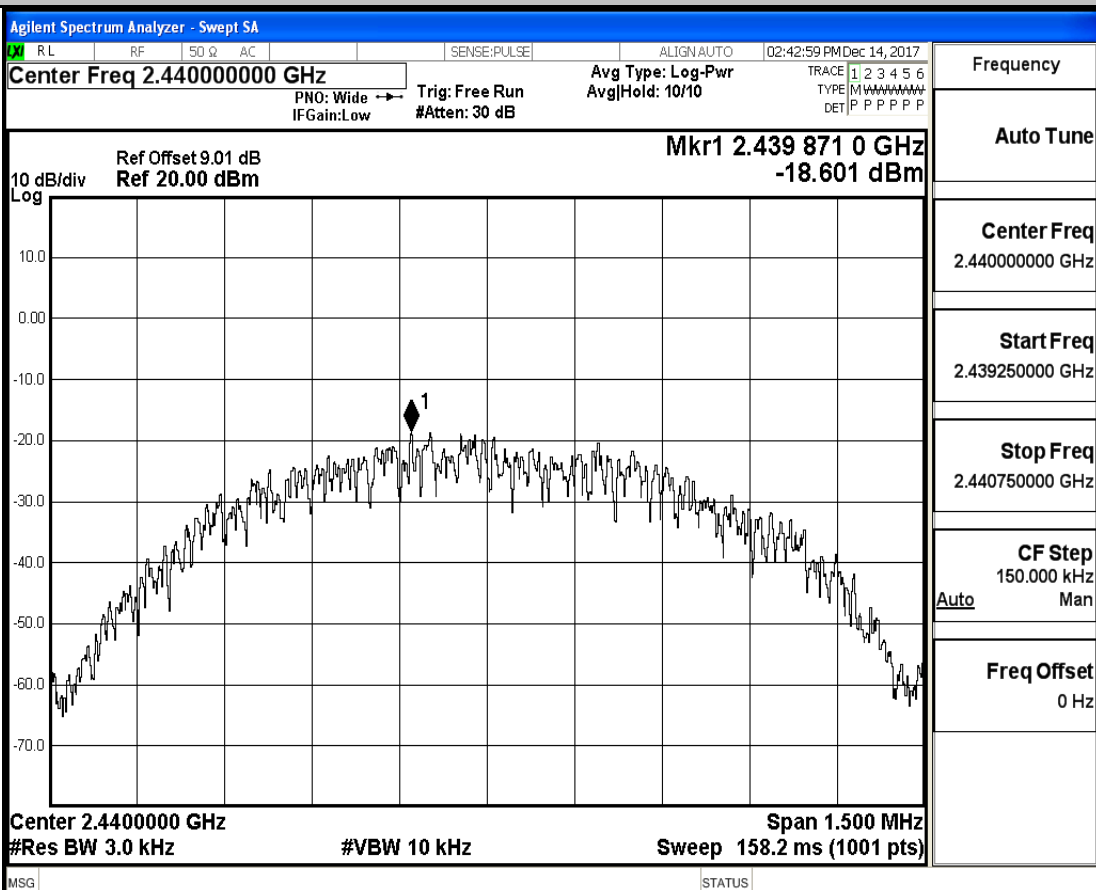


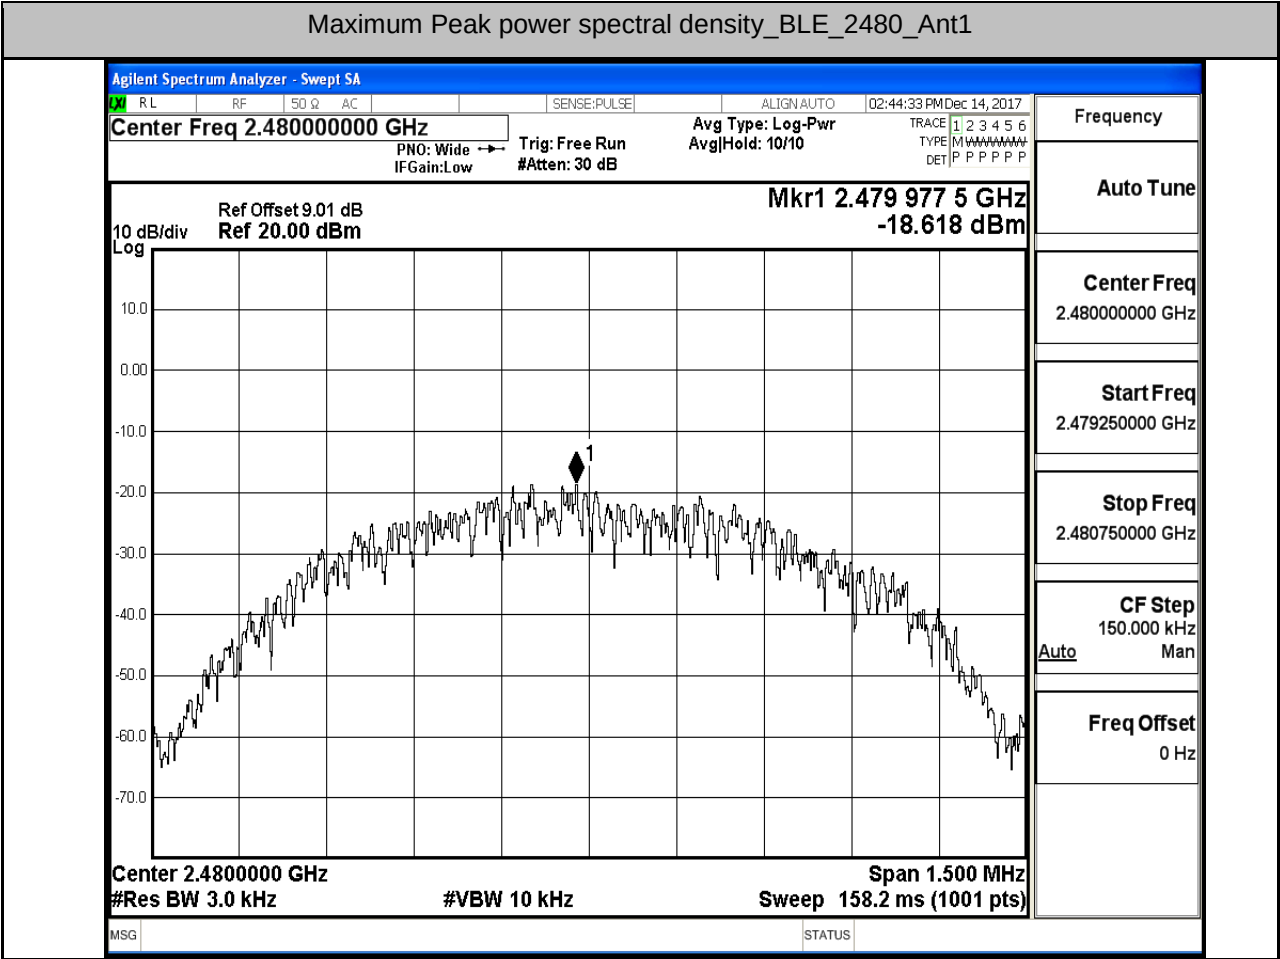


5.Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Ant	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	2402	Ant1	-3.888	-49.237	-23.89	PASS
BLE	2480	Ant1	-3.964	-48.886	-23.96	PASS

Band-edge for RF Conducted Emissions_BLE_2402_Ant1

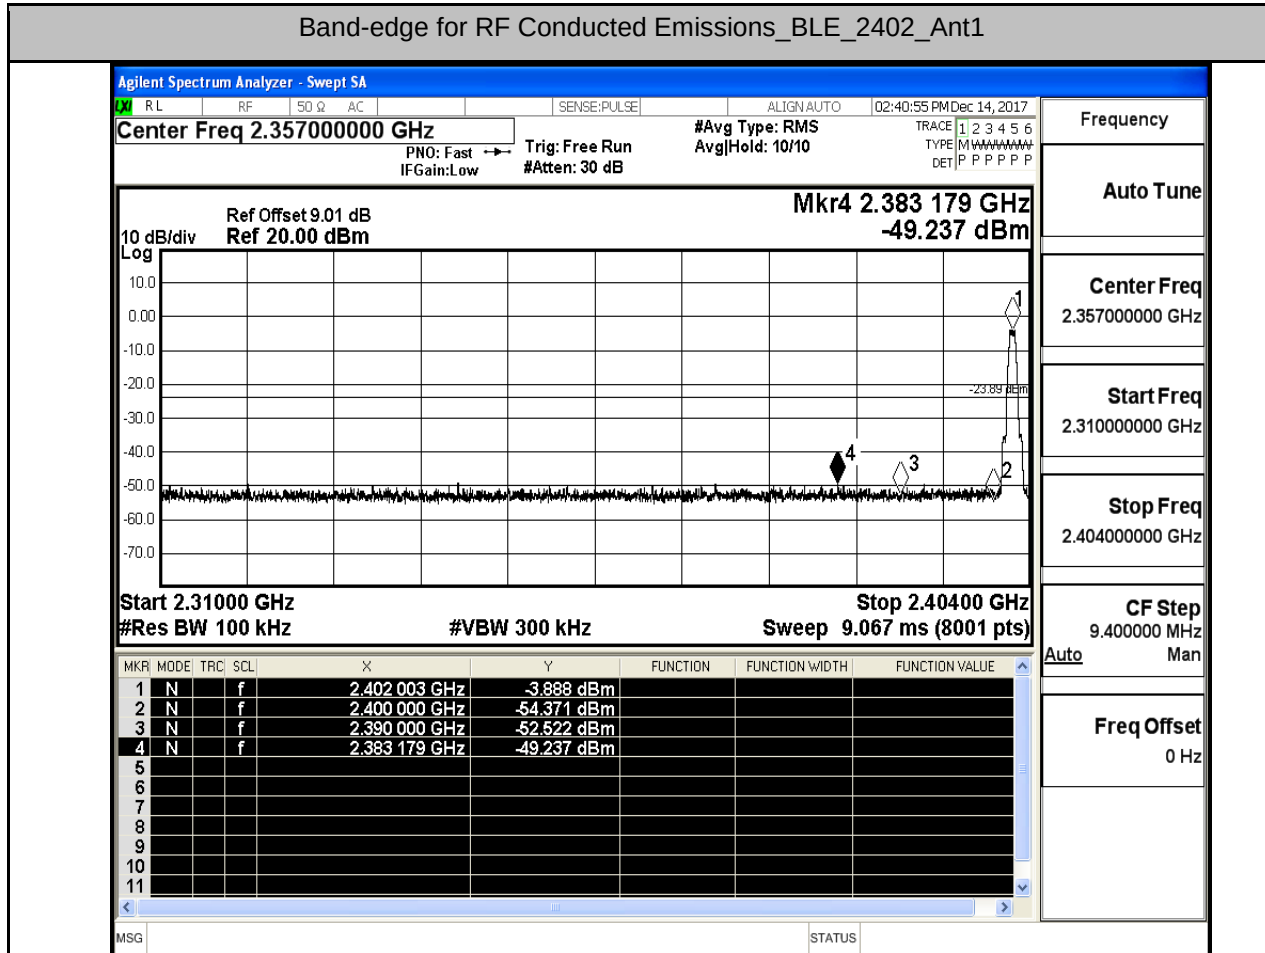



Band-edge for RF Conducted Emissions_BLE_2480_Ant1

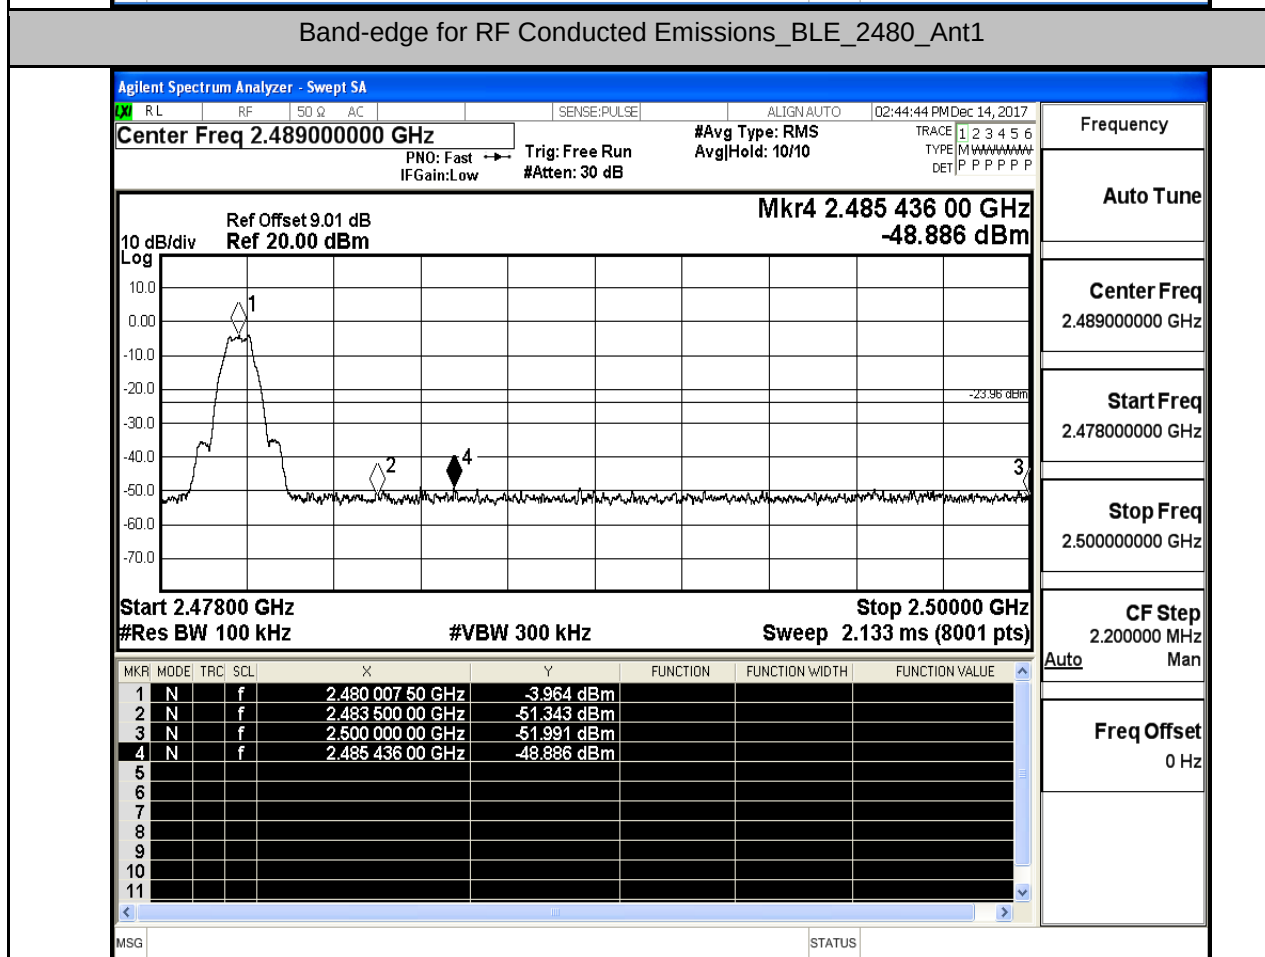



6.RF Conducted Spurious Emissions

Test Mode	Test Channel	Ant	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BLE	2402	Ant1	30	25000	100	300	-4.182	-42.734	<-24.182	PASS
BLE	2440	Ant1	30	25000	100	300	-3.772	-42.503	<-23.772	PASS
BLE	2480	Ant1	30	25000	100	300	-4.058	-42.665	<-24.058	PASS



RF Conducted Spurious Emissions_BLE_2402_Ant1

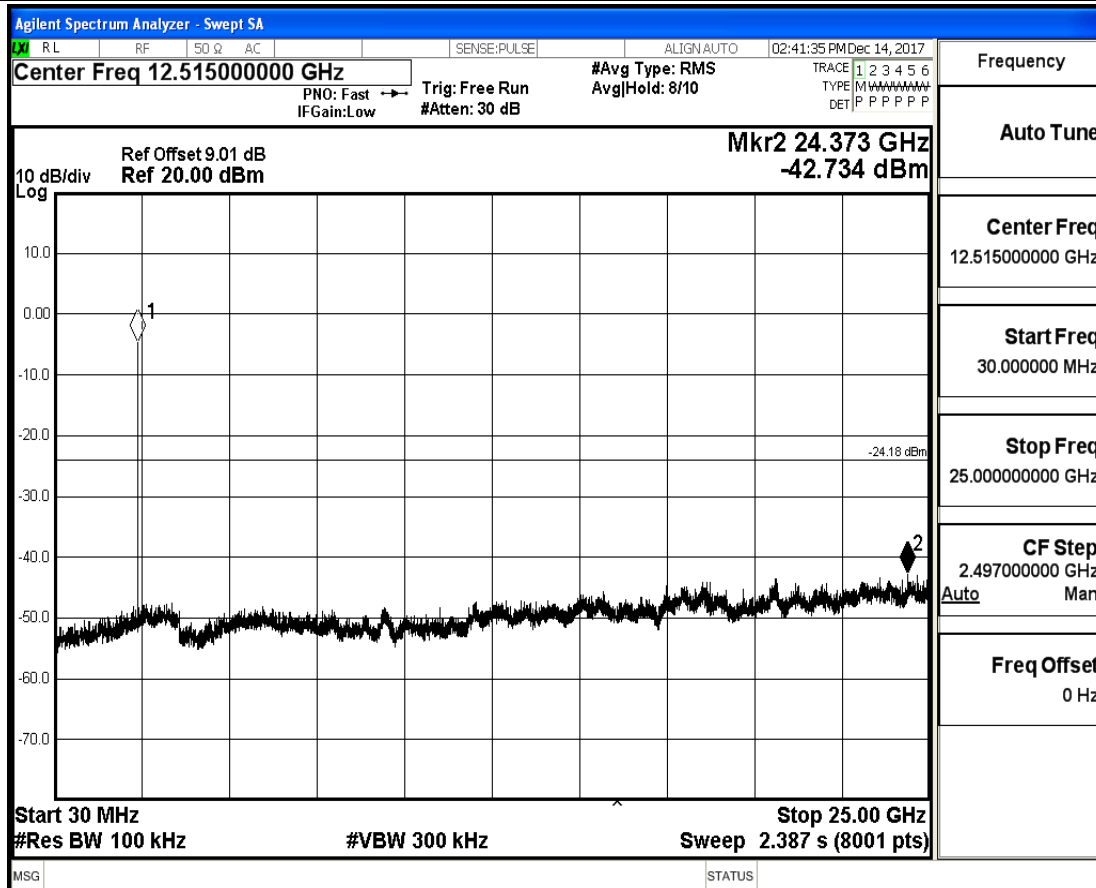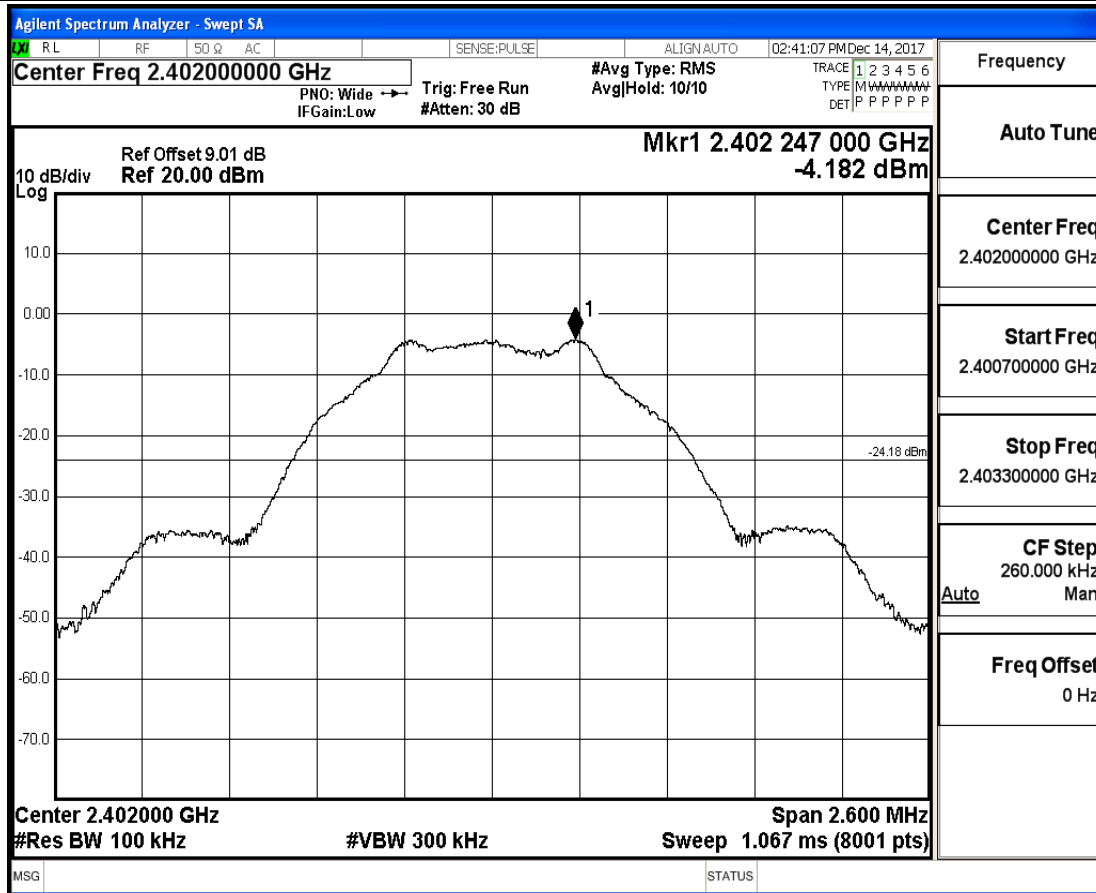

RF Conducted Spurious Emissions_BLE_2440_Ant1

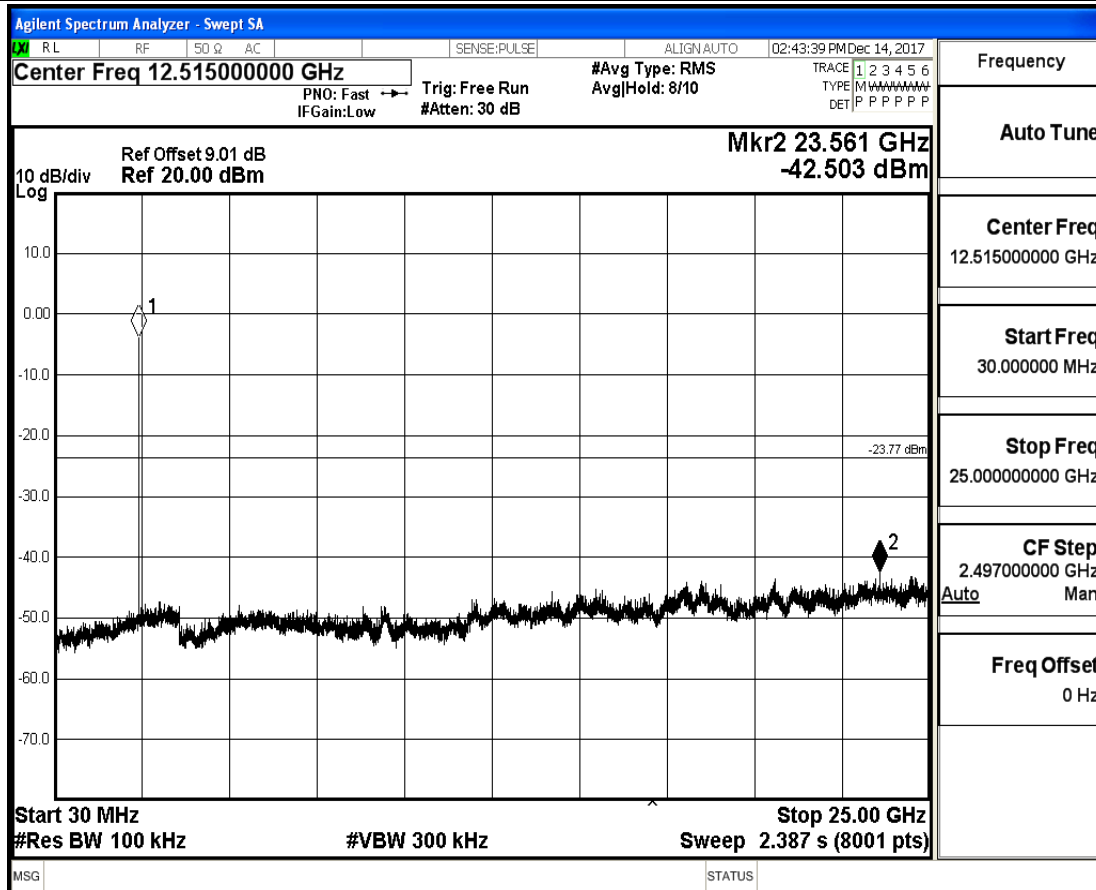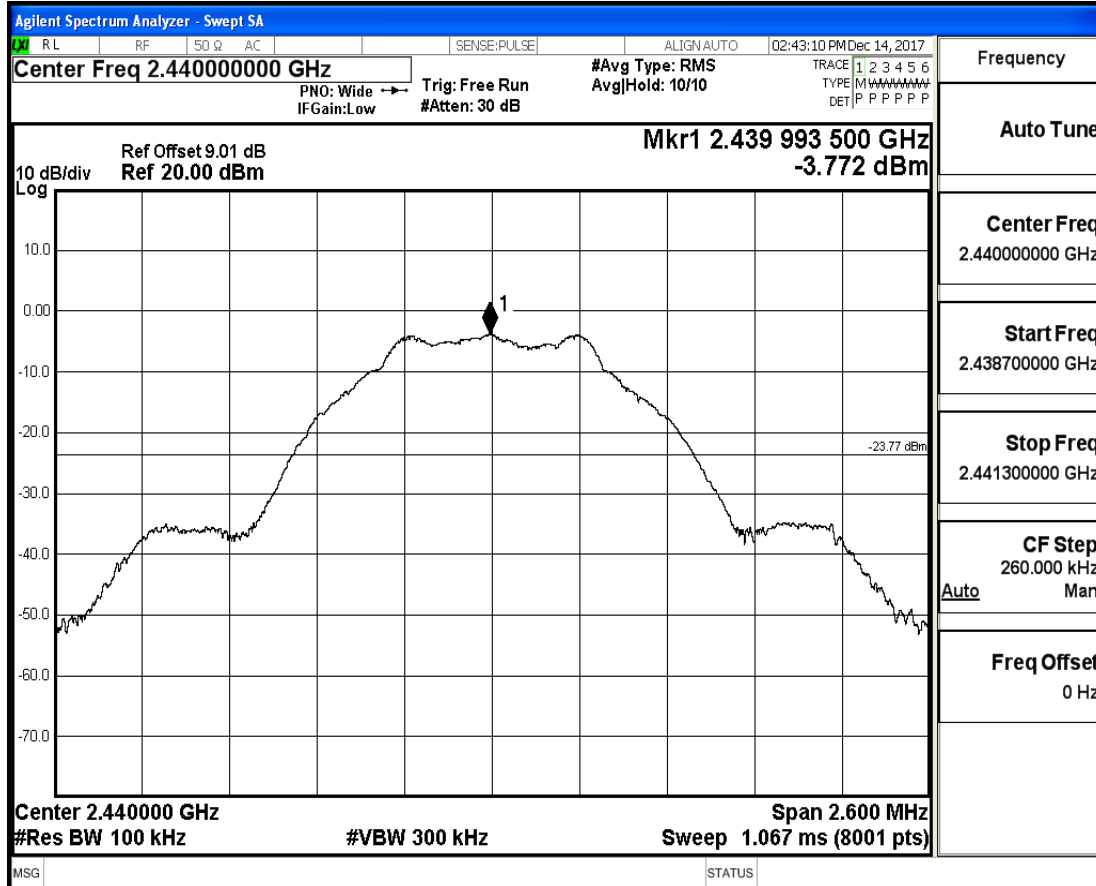


RF Conducted Spurious Emissions_BLE_2480_Ant1

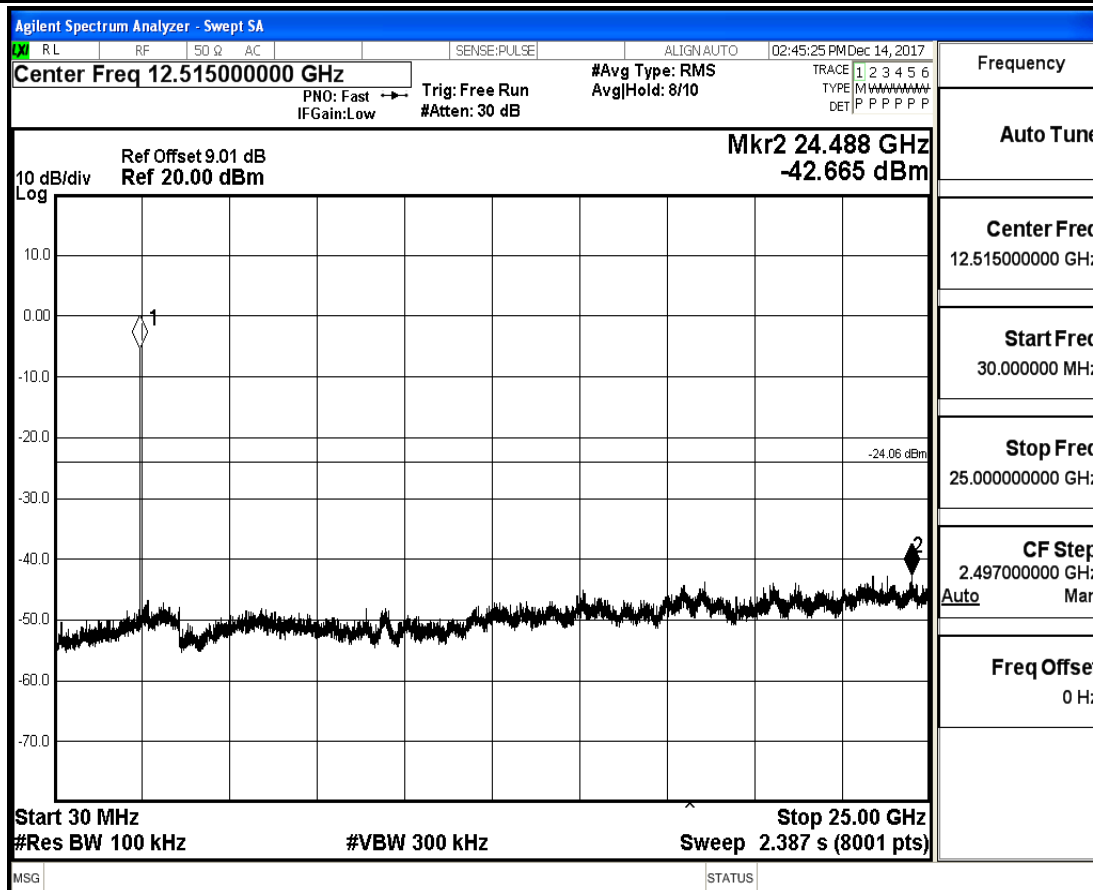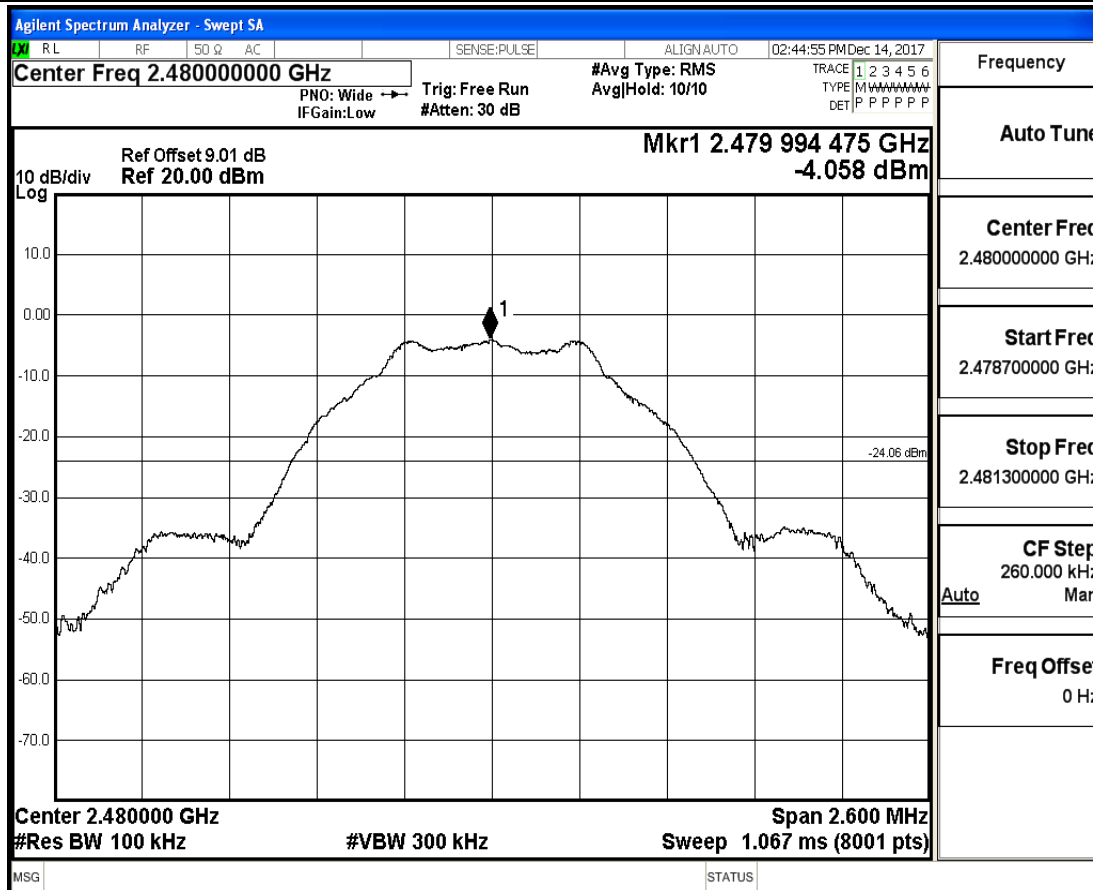


7.Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdict
BLE	2402	Ant1	2310.0	-42.81	2	0	54.44	PEAK	74	PASS
BLE	2402	Ant1	2310.0	-53.19	2	0	44.07	AV	54	PASS
BLE	2402	Ant1	2390.0	-42.64	2	0	54.62	PEAK	74	PASS
BLE	2402	Ant1	2390.0	-52.92	2	0	44.33	AV	54	PASS
BLE	2480	Ant1	2483.5	-42.32	2	0	54.93	PEAK	74	PASS
BLE	2480	Ant1	2483.5	-52.72	2	0	44.54	AV	54	PASS
BLE	2480	Ant1	2500.0	-41.99	2	0	55.27	PEAK	74	PASS
BLE	2480	Ant1	2500.0	-52.58	2	0	44.68	AV	54	PASS


Restrict-band band-edge measurements_BLE_2402_Ant1_PEAK

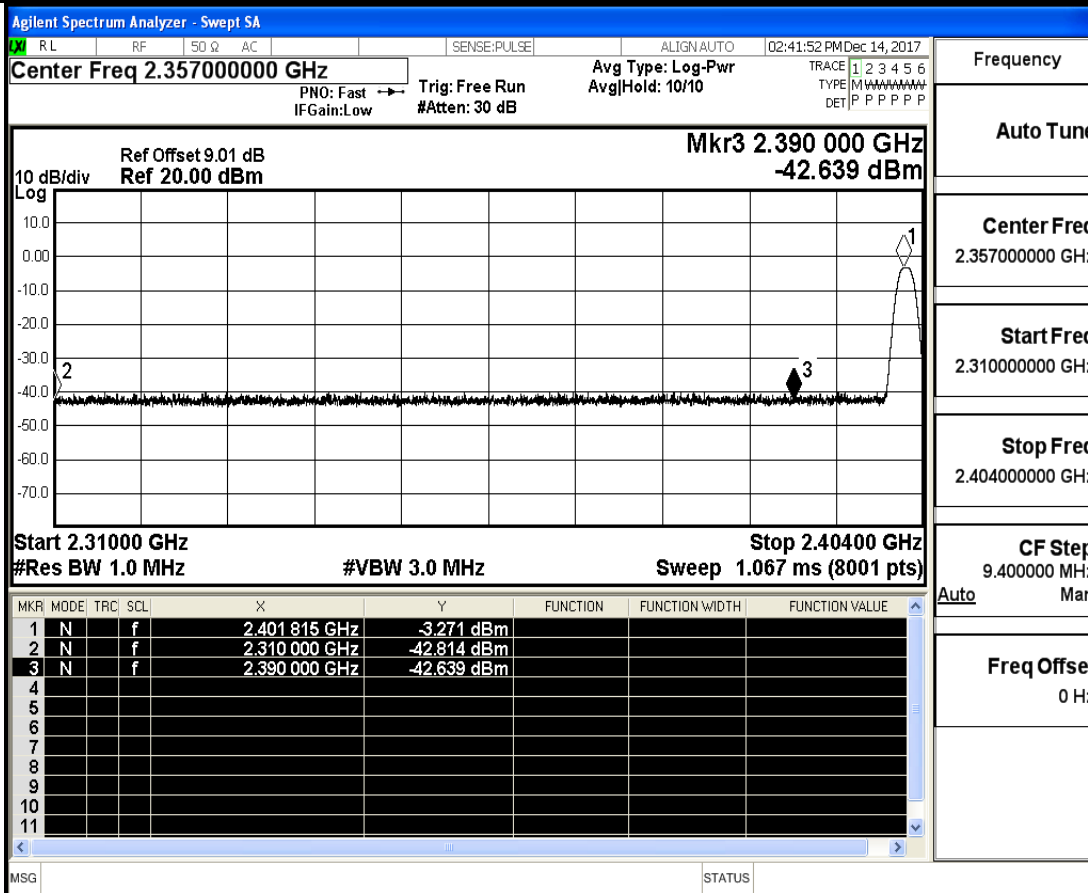


Restrict-band band-edge measurements_BLE_2402_Ant1_AV

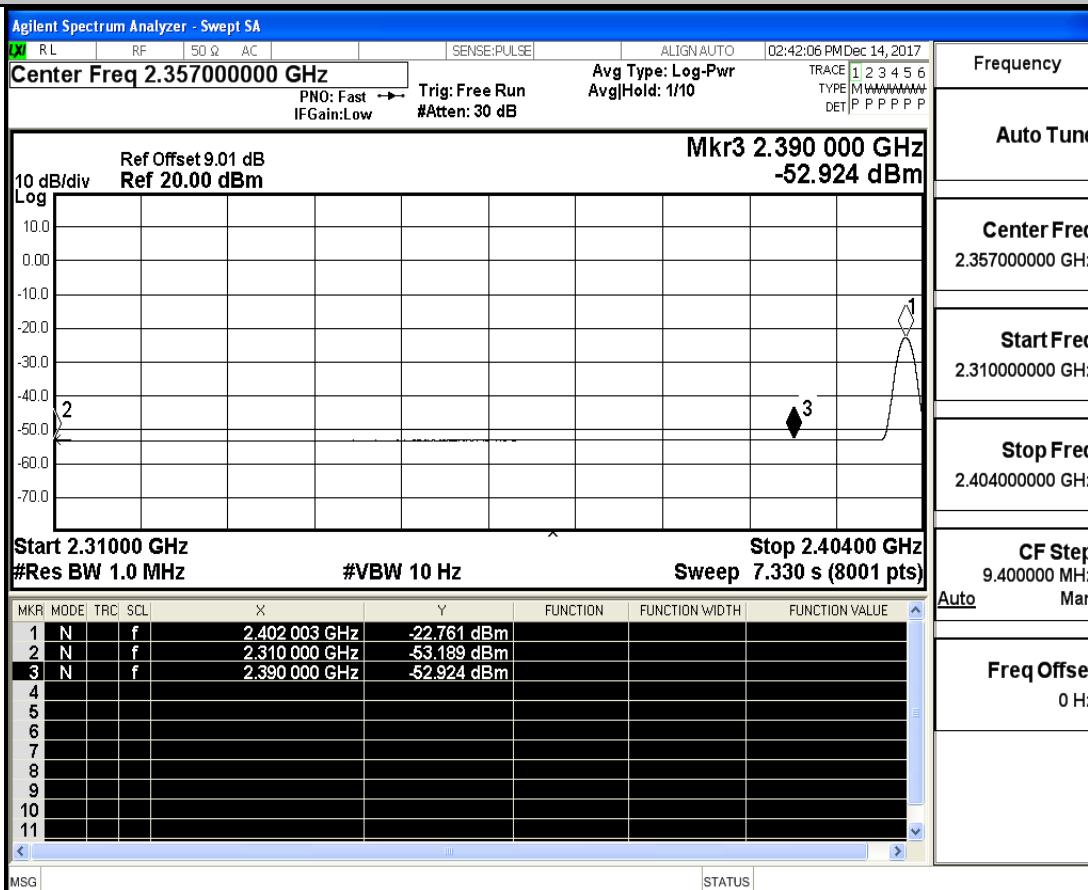

Restrict-band band-edge measurements_BLE_2480_Ant1_PEAK

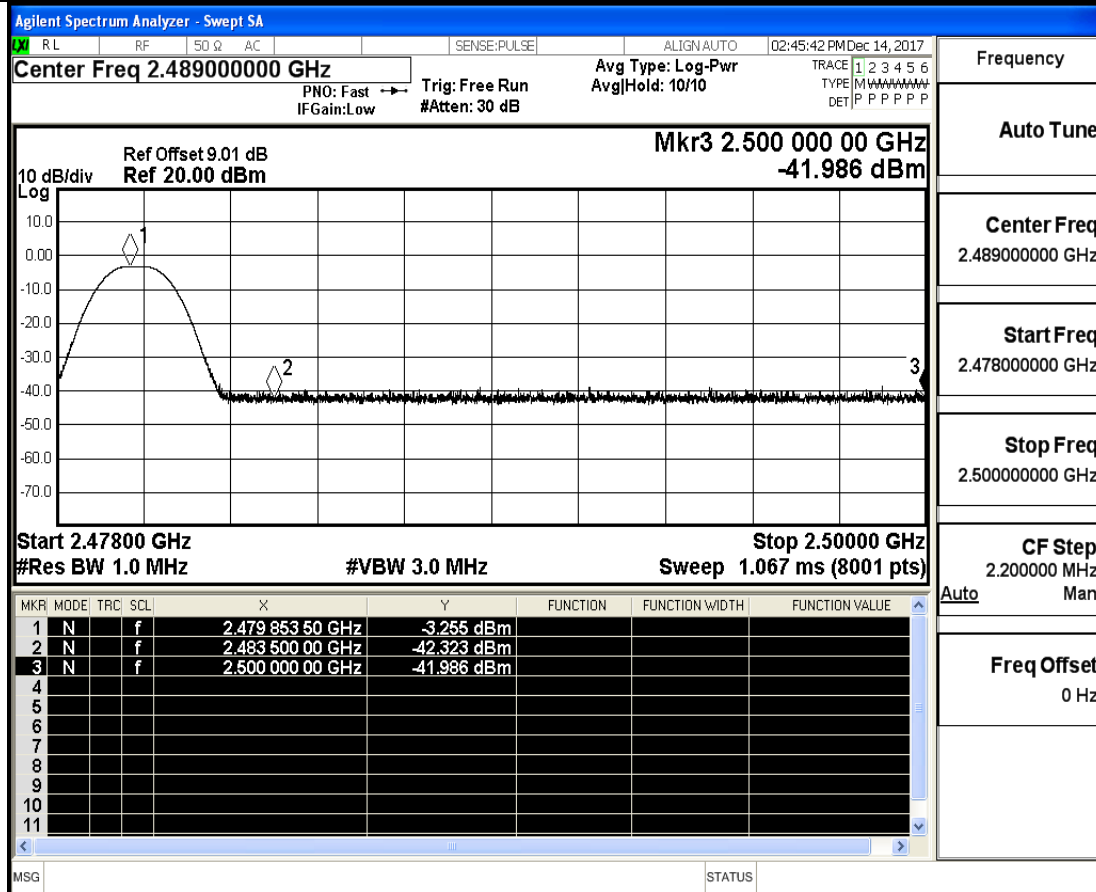

Restrict-band band-edge measurements_BLE_2480_Ant1_AV

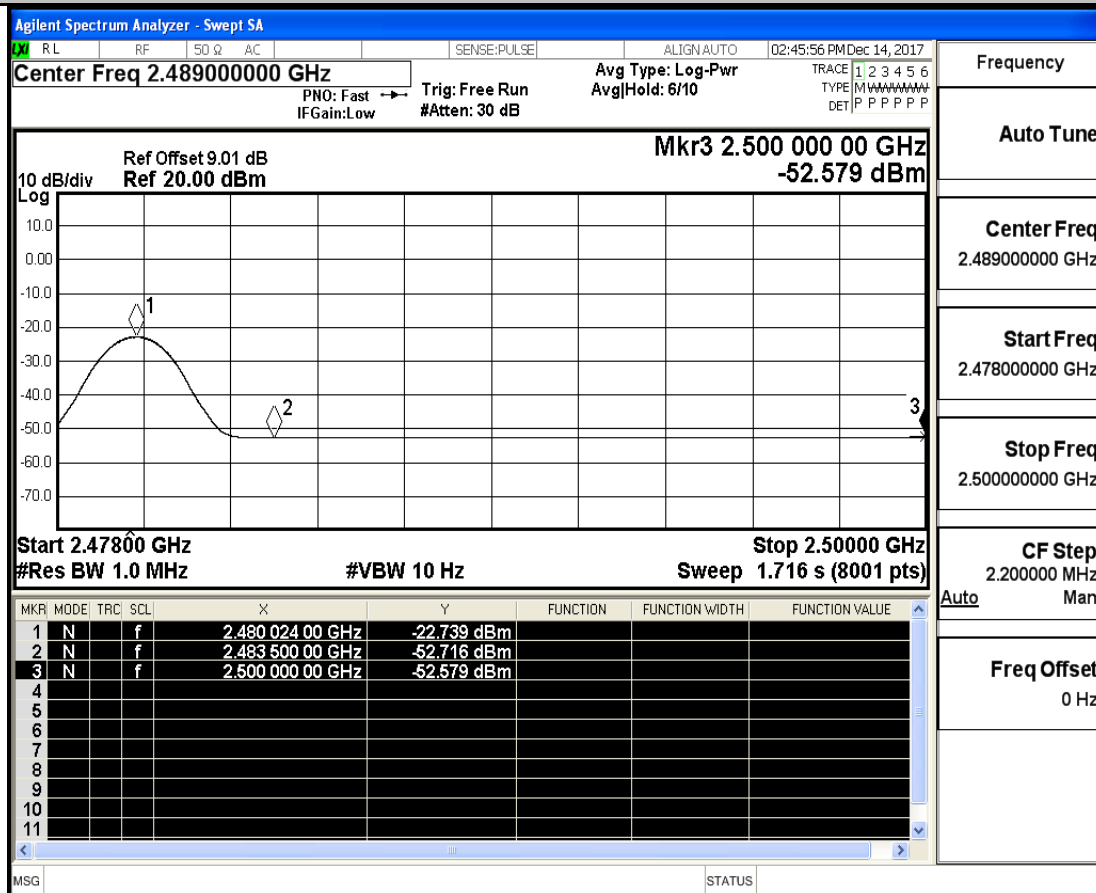

8.Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BLE	2440	Ant1	100	PASS

