

FCC Radio Test Report

FCC ID : 2AODLH12110
Equipment : PoE Wi-Fi 7 Access Point
Brand Name : Schneider Electric
Model Name : SAH121101
Applicant / Manufacturer : Schneider Electric USA, Inc.
201 Washington Street, One Boston Place, Suite
2700, Boston, Massachusetts, United States 02108
Standard : 47 CFR FCC Part 15.407

The product was received on Jan. 12, 2026, and testing was started from May 14, 2026 and completed on Jun. 23, 2026. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.


Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	9
1.3 Testing Location Information	9
1.4 Measurement Uncertainty	9
2 TEST CONFIGURATION OF EUT.....	10
2.1 Test Channel Mode	10
2.2 The Worst Case Measurement Configuration	14
2.3 Accessories	15
2.4 Support Equipment.....	15
2.5 Test Setup Diagram	16
3 TRANSMITTER TEST RESULT	17
3.1 AC Power-line Conducted Emissions	17
3.2 Emission Bandwidth	19
3.3 Maximum Conducted Output Power	20
3.4 Peak Power Spectral Density.....	22
3.5 Unwanted Emissions.....	24
4 TEST EQUIPMENT AND CALIBRATION DATA.....	28
APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS	
APPENDIX B. TEST RESULTS OF EMISSION BANDWIDTH	
APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	
APPENDIX D. TEST RESULTS OF PEAK POWER SPECTRAL DENSITY	
APPENDIX E. TEST RESULTS OF UNWANTED EMISSIONS	
APPENDIX F. TEST RESULTS OF RADIATED EMISSION CO-LOCATION	
APPENDIX G. TEST PHOTOS	
PHOTOGRAPHS OF EUT V01	

History of this test report

[illegible]

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Conducted Output Power	PASS	-
3.4	15.407(a)	Peak Power Spectral Density	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and explanations:

The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.

Reviewed by: Ben Tseng

Report Producer: Amber Chiu

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20), be (EHT20)	5180-5240	36-48 [4]
5250-5350		5260-5320	52-64 [4]
5470-5725		5500-5700	100-140 [11]
Straddle 5720		5720	144 [1]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax (HEW40), be (EHT40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5470-5725		5510-5670	102-134 [5]
Straddle 5710		5710	142 [1]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax (HEW80), be (EHT80)	5210	42 [1]
5250-5350		5290	58 [1]
5470-5725		5530-5610	106-122 [2]
Straddle 5690		5690	138 [1]
5725-5850		5775	155 [1]
5150-5350	ac (VHT160), ax (HEW160), be (EHT160)	5250	50 [1]
5470-5725		5570	114 [1]
5470-5725	be (EHT240)	5610	122[1]

Non-Beamforming

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11a	20	2TX
5.25-5.35GHz	802.11a	20	2TX
5.47-5.725GHz	802.11a	20	2TX
5.725-5.85GHz	802.11a	20	2TX
5.15-5.25GHz	802.11be EHT20	20	2TX
5.25-5.35GHz	802.11be EHT20	20	2TX
5.47-5.725GHz	802.11be EHT20	20	2TX
5.725-5.85GHz	802.11be EHT20	20	2TX
5.15-5.25GHz	802.11be EHT40	40	2TX
5.25-5.35GHz	802.11be EHT40	40	2TX



Band	Mode	BWch (MHz)	Nant
5.47-5.725GHz	802.11be EHT40	40	2TX
5.725-5.85GHz	802.11be EHT40	40	2TX
5.15-5.25GHz	802.11be EHT80	80	2TX
5.25-5.35GHz	802.11be EHT80	80	2TX
5.47-5.725GHz	802.11be EHT80	80	2TX
5.725-5.85GHz	802.11be EHT80	80	2TX
5.15-5.25GHz	802.11be EHT160	160	2TX
5.25-5.35GHz	802.11be EHT160	160	2TX
5.47-5.725GHz	802.11be EHT160	160	2TX
5.47-5.725GHz	802.11be EHT240	240	2TX
5.725-5.85GHz	802.11be EHT240	240	2TX

Beamforming

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11be EHT20-BF	20	2TX
5.25-5.35GHz	802.11be EHT20-BF	20	2TX
5.47-5.725GHz	802.11be EHT20-BF	20	2TX
5.725-5.85GHz	802.11be EHT20-BF	20	2TX
5.15-5.25GHz	802.11be EHT40-BF	40	2TX
5.25-5.35GHz	802.11be EHT40-BF	40	2TX
5.47-5.725GHz	802.11be EHT40-BF	40	2TX
5.725-5.85GHz	802.11be EHT40-BF	40	2TX
5.15-5.25GHz	802.11be EHT80-BF	80	2TX
5.25-5.35GHz	802.11be EHT80-BF	80	2TX
5.47-5.725GHz	802.11be EHT80-BF	80	2TX
5.725-5.85GHz	802.11be EHT80-BF	80	2TX
5.15-5.25GHz	802.11be EHT160-BF	160	2TX
5.25-5.35GHz	802.11be EHT160-BF	160	2TX
5.47-5.725GHz	802.11be EHT160-BF	160	2TX
5.47-5.725GHz	802.11be EHT240-BF	240	2TX
5.725-5.85GHz	802.11be EHT240-BF	240	2TX

Note:

- 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- VHT20, VHT40, VHT80, VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- HEW20, HEW40, HEW80, HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80, EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- BWch is the nominal channel bandwidth.
- Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80/VHT160/HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.

1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Support
1	PSA	WA2202	Dipole	I-Pex	Thread
2	PSA	WA2202	PIFA	I-Pex	2.4G+5G
3	PSA	WA2202	PIFA	I-Pex	2.4G+5G

Ant.	Port	Gain (dBi)		
		2.4G	5G	802.15.4
1	1	-	-	3.75
2	1	3.42	4.53	-
3	2	3.12	4.78	-

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX)

Ant. 2(port 1) and Ant 3(port 2) could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode (2TX/2RX)

Ant. 2(port 1) and Ant 3(port 2) could transmit/receive simultaneously.

For 802.15.4 function:

For IEEE 802.15.4 mode (1TX/1RX)

Ant. 1(port 1) could transmit/receive.

Note 1: Directional gain information

	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$
BF	$DirectionalGain = 10 \cdot \log \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$	$DirectionalGain = 10 \cdot \log \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}}$

1.1.3 EUT Information

Operational Condition			
EUT Power Type	From PoE		
EUT Function	☐ Outdoor AP	☒	Indoor AP
	☐ Fixed P2P AP	☐	Client
Beamforming Function	☒ With beamforming	☐	Without beamforming
TPC Function	☒ With TPC Function	☐	Without TPC Function
Weather Band	☒ With 5600~5650MHz	☐	Without 5600~5650MHz
Resource Unit	☒ Full RU	☐	Partial RU
	☐ Multi-RU		
Channel Puncturing	☐ Support	☒	Not support
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.: ...		
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		
☐	Other:		

1.1.4 Mode Test Duty Cycle

Non-Beamforming

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss1,(6Mbps)_2TX	0.992	0.03	1.978m	10Hz (DC>=0.98)
802.11be EHT20_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT80_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT160_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT240_Nss1,(MCS0)_2TX	0.997	0.01	5.43m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Beamforming

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT40-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT80-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT160-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT240-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.43m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024
- ♦ KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ KDB 662911 D01 v02r01
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☒ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)			
	TEL: 886-3-327-3456		FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Rian Chung	20.6~23.5℃ / 53~58%	13/Jun/2026
☒ Wenhua 3rd. (TAF: 3785)	ADD: No. 58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Guishan Dist. Taoyuan City 333, Taiwan (R.O.C.)			
	TEL: 886-3-327-0868			
Test site Designation No. TW0036 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH06-HY	Wayne Chiu	23.4~23.9℃ / 52~55%	10/Jun/2026
Radiated	03CH26-HY	Andy Wang	23.4~24.5℃ / 52~55%	14/May/2026~03/Jun/2026
Radiated (Co-location)	03CH26-HY	Lego Lin	23.7~25.1℃ / 56~59%	23/Jun/2026

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	3.24 dB	Confidence levels of 95%
Conducted Output Power	1.12 dB	Confidence levels of 95%
Bandwidth	0.07 MHz	Confidence levels of 95%
Conducted Emission	1.12 dB	Confidence levels of 95%
Power Spectral Density	1.22 dB	Confidence levels of 95%
Radiated Emission (9 kHz ~ 30 MHz)	1.76 dB	Confidence levels of 95%
Radiated Emission (30 MHz ~ 1 GHz)	5.38 dB	Confidence levels of 95%
Radiated Emission (1 GHz ~ 18 GHz)	4.94 dB	Confidence levels of 95%
Radiated Emission (18 GHz ~ 40 GHz)	4.92 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Test Software Version	qdart_conn.win.1.0_installer_00099
------------------------------	------------------------------------

Non-Beamforming

Mode	Power Setting
802.11a_Nss1,(6Mbps)_2TX	-
5180MHz	20.5
5200MHz	23
5240MHz	23
5260MHz	17
5300MHz	17.5
5320MHz	17.5
5500MHz	16.5
5580MHz	16.5
5700MHz	16.5
5720MHz Straddle 5.47-5.725GHz	17
5720MHz Straddle 5.725-5.85GHz	17
5745MHz	26.5
5785MHz	26.5
5825MHz	26.5
802.11be EHT20_Nss1,(MCS0)_2TX	-
5180MHz	21
5200MHz	22.5
5240MHz	24
5260MHz	18
5300MHz	18
5320MHz	18
5500MHz	17
5580MHz	17
5700MHz	17.5
5720MHz Straddle 5.47-5.725GHz	17.5
5720MHz Straddle 5.725-5.85GHz	17.5
5745MHz	26.5
5785MHz	26.5



Mode	Power Setting
5825MHz	26.5
802.11be EHT40_Nss1,(MCS0)_2TX	-
5190MHz	17
5230MHz	22.5
5270MHz	20.5
5310MHz	19.5
5510MHz	18
5550MHz	20
5670MHz	20.5
5710MHz Straddle 5.47-5.725GHz	20.5
5710MHz Straddle 5.725-5.85GHz	20.5
5755MHz	24
5795MHz	26.5
802.11be EHT80_Nss1,(MCS0)_2TX	-
5210MHz	16
5290MHz	20
5530MHz	17.5
5610MHz	20.5
5690MHz Straddle 5.47-5.725GHz	20.5
5690MHz Straddle 5.725-5.85GHz	20.5
5775MHz	22
802.11be EHT160_Nss1,(MCS0)_2TX	-
5250MHz Straddle 5.15-5.25GHz	15
5250MHz Straddle 5.25-5.35GHz	15
5570MHz	16
802.11be EHT240_Nss1,(MCS0)_2TX	-
5610MHz Straddle 5.47-5.725GHz	15.5
5610MHz Straddle 5.725-5.85GHz	15.5

**Beamforming**

Mode	Power Setting
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-
5180MHz	21
5200MHz	22.5
5240MHz	24
5260MHz	18
5300MHz	18
5320MHz	18
5500MHz	17
5580MHz	17
5700MHz	17.5
5720MHz Straddle 5.47-5.725GHz	17.5
5720MHz Straddle 5.725-5.85GHz	17.5
5745MHz	25
5785MHz	25
5825MHz	25
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-
5190MHz	17
5230MHz	22.5
5270MHz	18.5
5310MHz	18.5
5510MHz	18
5550MHz	18.5
5670MHz	18.5
5710MHz Straddle 5.47-5.725GHz	18.5
5710MHz Straddle 5.725-5.85GHz	18.5
5755MHz	24
5795MHz	25
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-
5210MHz	16
5290MHz	18.5
5530MHz	17.5
5610MHz	18.5
5690MHz Straddle 5.47-5.725GHz	18
5690MHz Straddle 5.725-5.85GHz	18
5775MHz	22



Mode	Power Setting
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-
5250MHz Straddle 5.15-5.25GHz	15
5250MHz Straddle 5.25-5.35GHz	15
5570MHz	16
802.11be EHT240-BF_Nss1,(MCS0)_2TX	-
5610MHz Straddle 5.47-5.725GHz	15.5
5610MHz Straddle 5.725-5.85GHz	15.5

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	PoE Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Conducted Output Power Peak Power Spectral Density
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Unwanted Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	PoE Mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT	V		

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Test Condition	Radiated measurement
Operating Mode	CTX
1	2.4G+5G+802.15.4
Refer to Sporton Test Report No.: FA5D2917 for Co-location RF Exposure Evaluation and Appendix F for Radiated Emission Co-location.	



2.3 Accessories

Accessories				
Screw Kit	Brand Name	Schneider Electric	Model Name	SAH121101

Reminder: Regarding to more detail and other information, please refer to user manual.



2.4 Support Equipment

Support Equipment – AC Conduction					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	RJ45 Cable	Power sync	CAT-6E-03	-	-
2	PoE	PHIHONG	POE20U-560(G)	-	-
3	AC power cable	Power sync	PW-GPC180-3	-	-

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-

Support Equipment – Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	RJ45 Cable	Power sync	CAT-6E-03	-	-
2	PoE (Remote)	PHIHONG	POE20U-560(G)	-	-
3	AC power cable (Remote)	Power sync	PW-GPC180-3	-	-

2.5 Test Setup Diagram

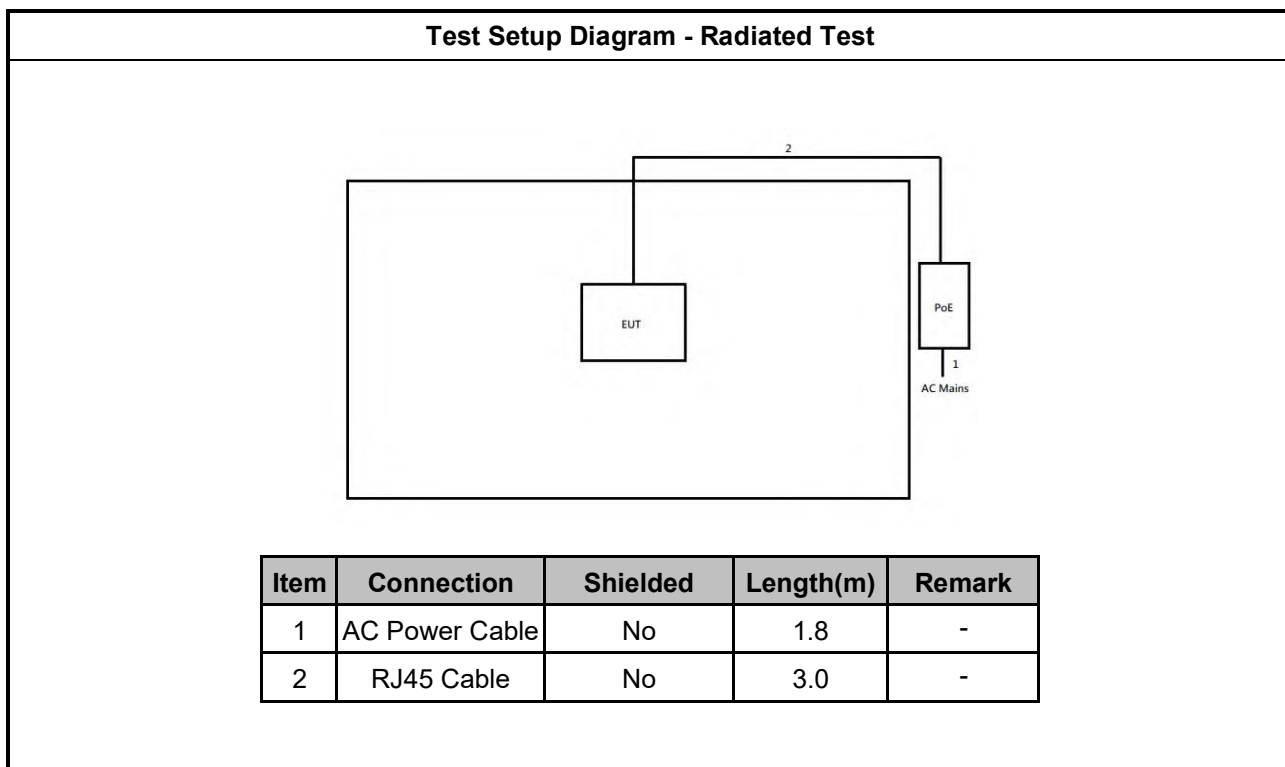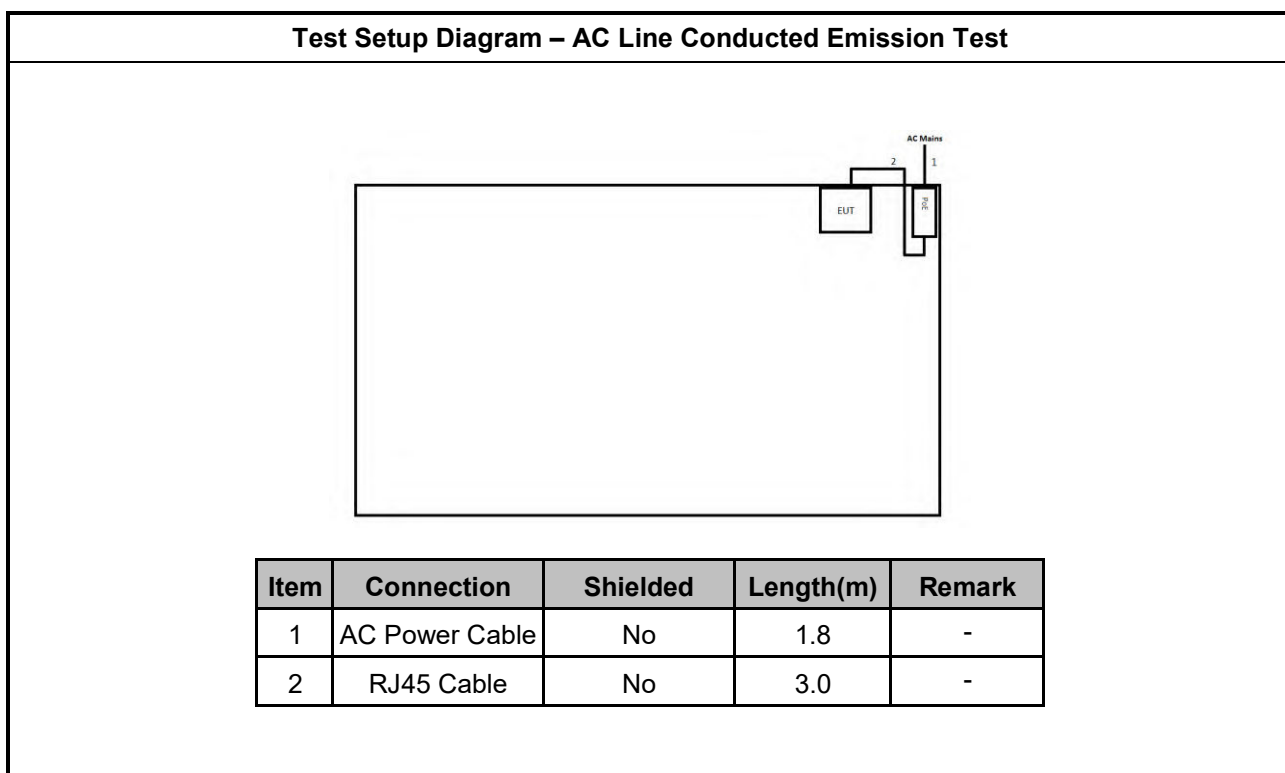

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
☒ Refer as ANSI C63.10, clause 6.2 for AC power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

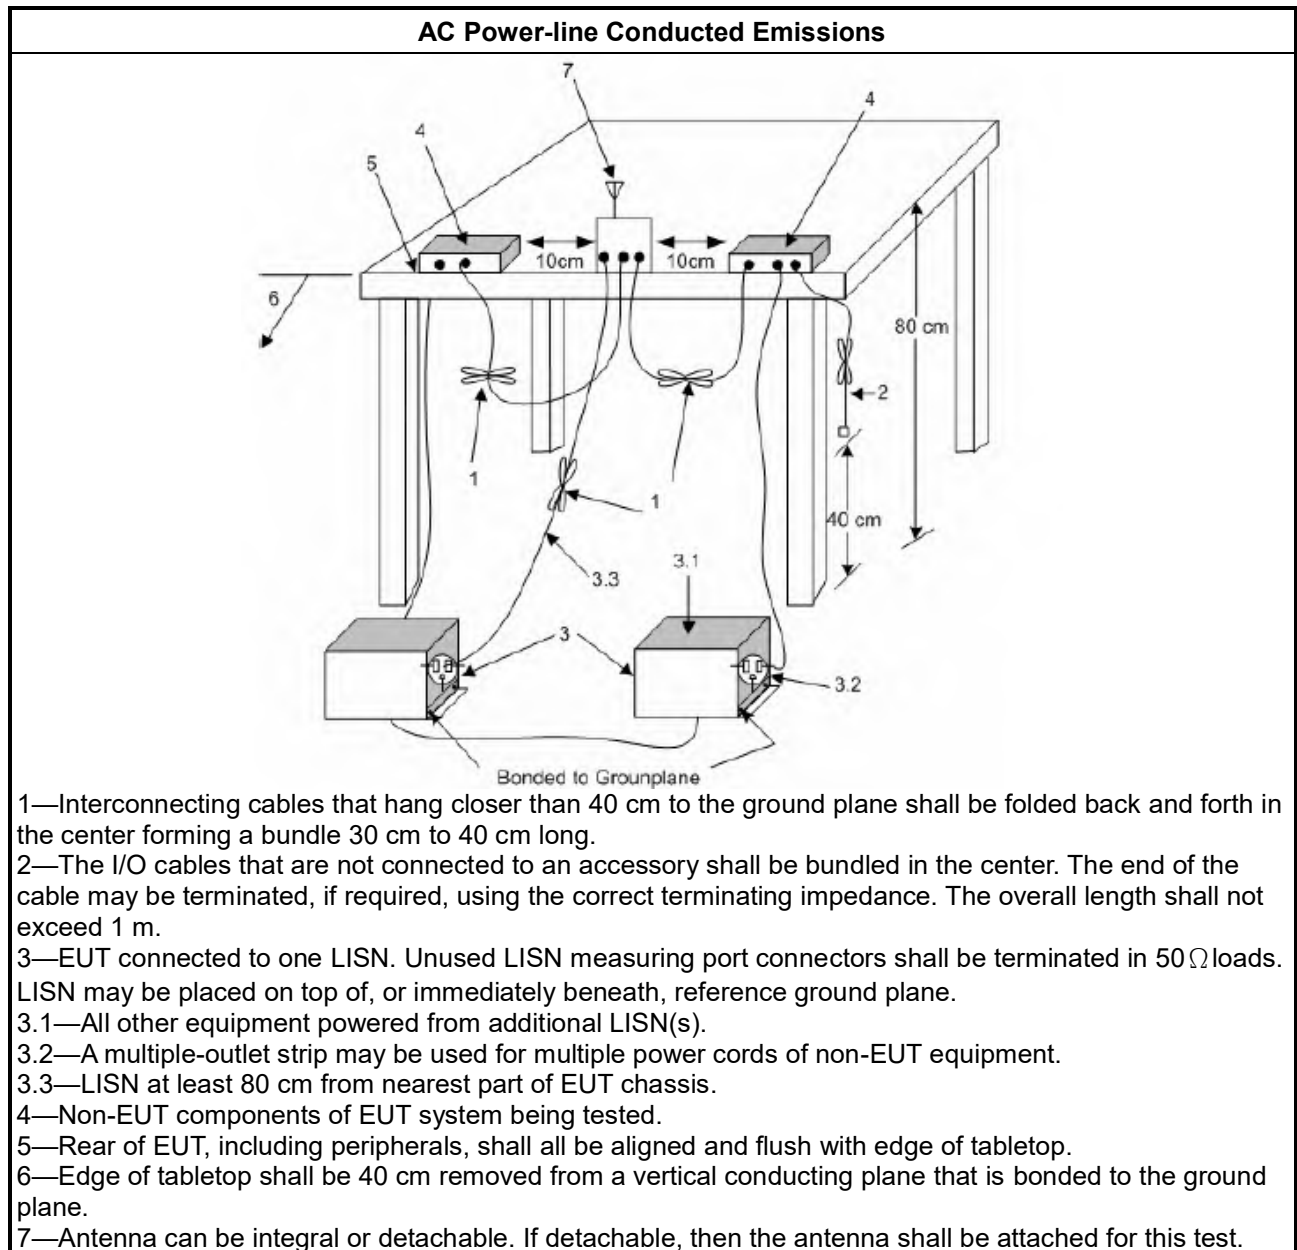

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☒	For the 5.25-5.35 GHz band, N/A
☒	For the 5.47-5.725 GHz band, N/A
☒	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 6.7 for bandwidth testing.

3.2.4 Test Setup

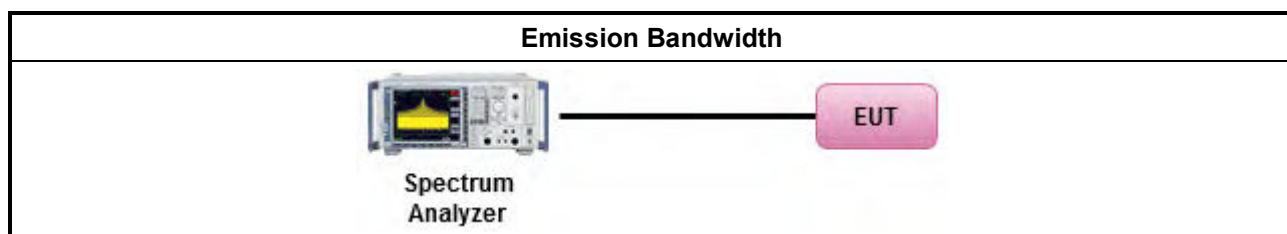

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band:
	Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm]
	Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
	Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$.
	Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒	For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒	For the 5.725-5.85 GHz band:
	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
Maximum Conducted Output Power	
	Duty cycle $\geq 98\%$
☒	Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).
	Duty cycle $< 98\%$
☐	Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
☒	Refer as KDB 789033, clause E Method PM (using an RF average power meter).
For conducted measurement.	
	If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$

3.3.4 Test Setup

For Straddle channel

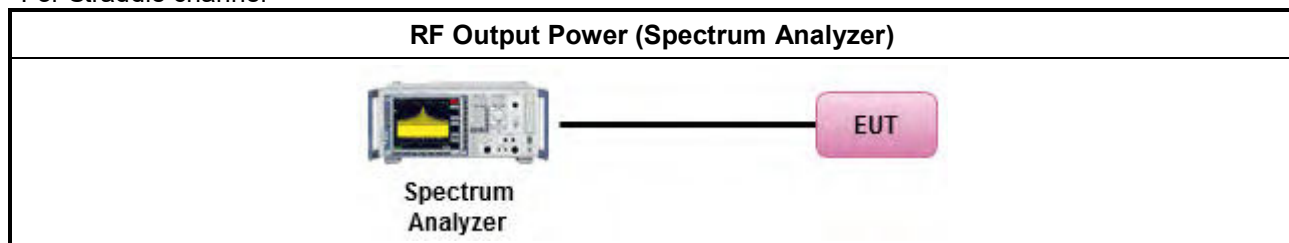

For Other channel

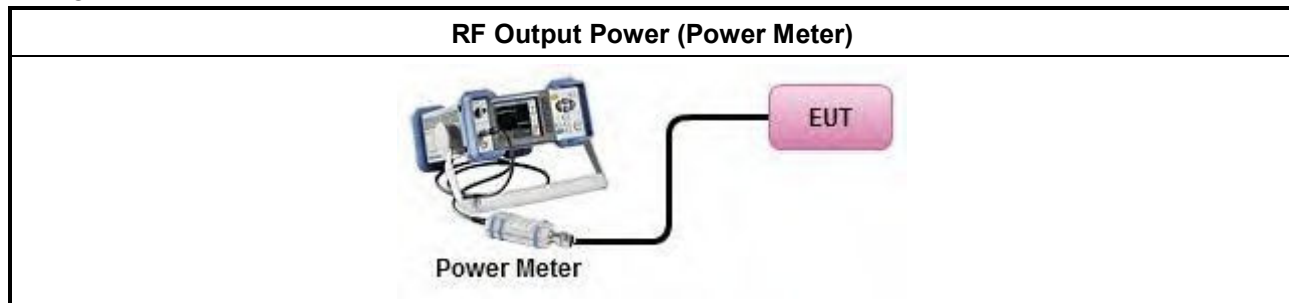

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band:
☐	Outdoor AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
☐	Indoor AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
☐	Point-to-point AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$.
☐	Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒	For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒	For the 5.725-5.85 GHz band:
☐	Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$.
☐	Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐ Refer as KDB 789033, F(5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth	
Duty cycle ≥ 98%	
☒ Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).	
Duty cycle < 98%	
☐ Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)	
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.	
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

3.4.4 Test Setup

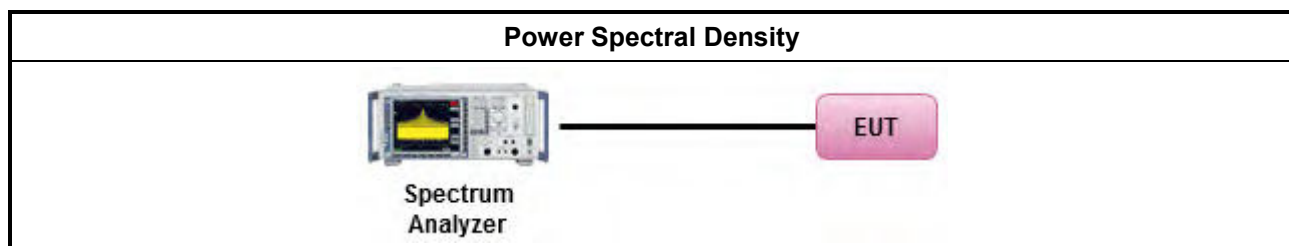

3.4.5 Test Result of Peak Power Spectral Density

Refer as Appendix D

3.5 Unwanted Emissions

3.5.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.85 GHz	5.650-5700 GHz: e.i.r.p. -27 ~ 10 dBm [68.2 ~ 105.2 dBuV/m@3m] 5.700-5720 GHz: e.i.r.p. 10 ~ 15.6 dBm [105.2 ~ 110.8 dBuV/m@3m] 5.720-5725 GHz: e.i.r.p. 15.6 ~ 27 dBm [110.8 ~ 122.2 dBuV/m@3m] 5.850-5.855 GHz: e.i.r.p. 27 ~ 15.6 dBm [122.2 ~ 110.8 dBuV/m@3m] 5.855-5.875 GHz: e.i.r.p. 15.6 ~ 10 dBm [110.8 ~ 105.2 dBuV/m@3m] 5.875-5.925 GHz: e.i.r.p. 10 ~ -27 dBm [105.2 ~ 68.2dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures


Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as KDB 789033, clause G)1) for unwanted emissions into restricted bands.
☒	Refer as KDB 789033, G)6) Method VB (ANSI C63.10, clause 4.1.5.2.3), Reduced VBW.
☒	Refer as KDB 789033, clause G)5) (ANSI C63.10, clause 4.1.5.2.2), measurement procedure peak limit.
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	
Use the following spectrum analyzer settings:	
	Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.	
	Based on FCC 15.31(f)(2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
	Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


3.5.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamp Factor)

3.5.5 Test Setup

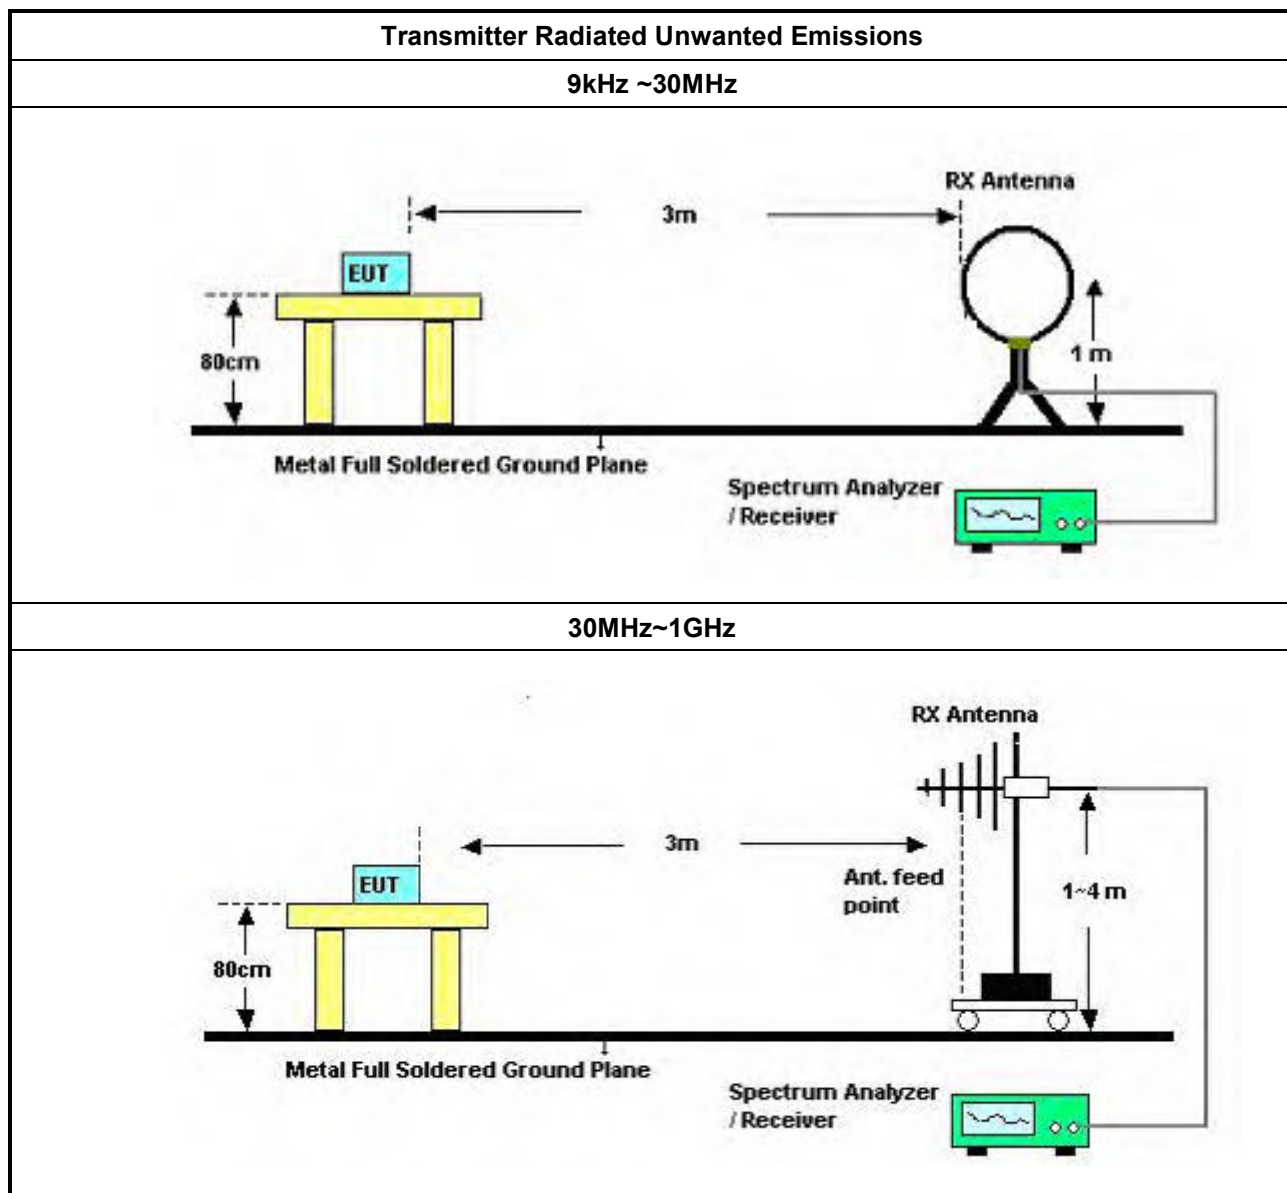

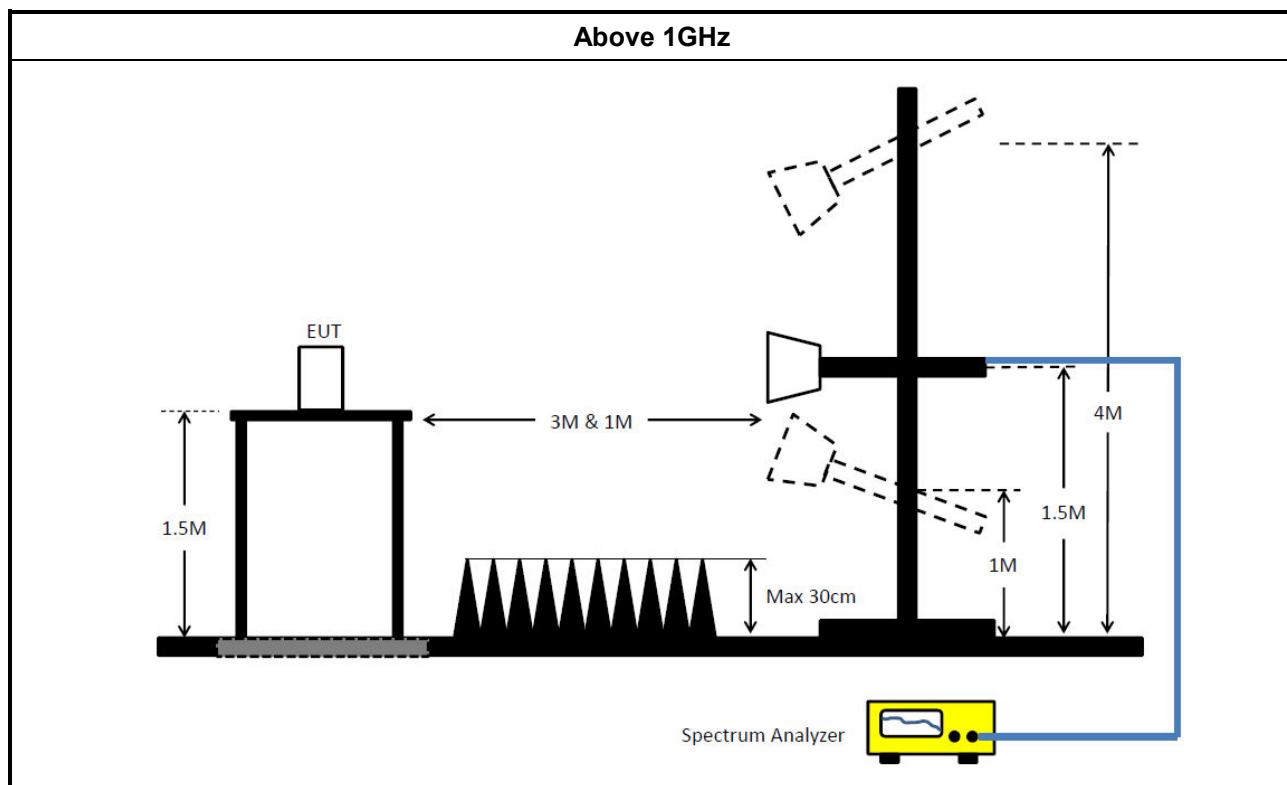

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESR7	102956	9kHz ~ 3.6GHz	26/Aug/2025	25/Aug/2026
Two-Line V-Network	ROHDE & SCHWARZ	ENV 216	101578	9kHz ~ 30MHz	24/Aug/2025	23/Aug/2026
RF Cable 5m	TITAN	TITAN	CO04-cable-01	9 kHz~200MHz	25/Feb/2026	24/Feb/2027
Pulse Limiter	SCHWARZBECK	VTSD 9561F-N	1056	9kHz ~ 30MHz	25/Jun/2025	24/Jun/2026
Software	Sporton	SENSE-EMI	V5.11.6	-	NCR	NCR

NCR: No Calibration Required

Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101029	10Hz~40GHz	30/Oct/2025	29/Oct/2026
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	29/Oct/2025	28/Oct/2026
Power Meter	Anritsu	ML2495A	1124009	300MHz~40GHz	26/Mar/2026	25/Mar/2027
Pulse Sensor	Anritsu	MA2411B	1027452	300MHz~40GHz	26/Mar/2026	25/Mar/2027
SENSE-15407_NII	Sporton	V5.11.27	N/A	N/A	N/A	N/A

**Instrument for Radiated Test (03CH26-HY)**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	30MHz~1GHz 3m	06/Aug/2025	05/Aug/2026
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	1GHz~18GHz 3m	06/Aug/2025	05/Aug/2026
EMI Test Receiver	ROHDE & SCHWARZ	ESR	102318	9kHz~3.6GHz	08/Dec/2025	07/Dec/2026
Signal Analyzer	ROHDE& SCHWARZ	FSV3044	101411	10Hz~44GHz	30/Sep/2025	29/Sep/2026
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	16/Mar/2026	15/Mar/2027
Bilog Antenna & 6dB Attenuator	TESEQ & VGT	CBL 6111D & VFA 04002-06	63540/002	30MHz~1GHz	04/Jun/2025	03/Jun/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02877	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+ SUHNER	SUOFLEX 104	CB009	9kHz~1GHz	03/Oct/2025	02/Oct/2026
RF Cable	HUBER+ SUHNER	SUOFLEX 104	CB009	1GHz~40GHz	03/Oct/2025	02/Oct/2026
Preamplifier	SGH	PRAMP 903	20230515-2	30MHz~1GHz	21/May/2025	20/May/2026
Preamplifier	SGH	PRAMP 118-H	20230515-4	1GHz ~18GHz	21/May/2025	20/May/2026
Preamplifier	SGH	PRAMP 118-H	20230515-4	1GHz ~18GHz	20/May/2026	21/May/2027
Microwave Preamplifier	Agilent	8449B	3008A02602	1GHz ~18GHz	10/Mar/2026	09/Mar/2027
Amplifier	EM	EM18G40G	060874	18GHz ~ 40GHz	27/Apr/2026	26/Apr/2027
SENSE-15407-NII	Sporton	V5.11.27	NA	NA	NA	NA

Instrument for Radiated Test (Co-location)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	1GHz~18GHz 3m	06/Aug/2025	05/Aug/2026
Signal Analyzer	ROHDE& SCHWARZ	FSV3044	101411	10Hz~44GHz	30/Sep/2025	29/Sep/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02877	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+ SUHNER	SUOFLEX 104	CB009	1GHz~40GHz	03/Oct/2025	02/Oct/2026
Preamplifier	SGH	PRAMP 118-H	20230515-4	1GHz ~18GHz	20/May/2026	21/May/2027
Amplifier	EM	EM18G40G	060874	18GHz ~ 40GHz	27/Apr/2026	26/Apr/2027
SENSE-EMI	Sporton	V5.11.9	NA	NA	NA	NA



Conducted Emissions at Powerline

Appendix A

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	28.57M	38.74	50.00	-11.26	Line




Conducted Emissions at Powerline

Appendix A

Result


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	178.8k	41.82	64.55	-22.73	Line
Mode 1	Pass	AV	178.8k	35.12	54.55	-19.43	Line
Mode 1	Pass	QP	255.08k	41.26	61.58	-20.32	Line
Mode 1	Pass	AV	255.08k	36.33	51.58	-15.25	Line
Mode 1	Pass	QP	540.27k	40.55	56.00	-15.45	Line
Mode 1	Pass	AV	540.27k	28.38	46.00	-17.62	Line
Mode 1	Pass	QP	818.31k	27.64	56.00	-28.36	Line
Mode 1	Pass	AV	818.31k	20.34	46.00	-25.66	Line
Mode 1	Pass	QP	3.98M	26.29	56.00	-29.71	Line
Mode 1	Pass	AV	3.98M	17.50	46.00	-28.50	Line
Mode 1	Pass	QP	28.57M	41.30	60.00	-18.70	Line
Mode 1	Pass	AV	28.57M	38.74	50.00	-11.26	Line
Mode 1	Pass	QP	163.77k	44.96	65.27	-20.31	Neutral
Mode 1	Pass	AV	163.77k	36.66	55.27	-18.61	Neutral
Mode 1	Pass	QP	254.06k	40.91	61.62	-20.71	Neutral
Mode 1	Pass	AV	254.06k	35.84	51.62	-15.78	Neutral
Mode 1	Pass	QP	540.27k	40.33	56.00	-15.67	Neutral
Mode 1	Pass	AV	540.27k	28.12	46.00	-17.88	Neutral
Mode 1	Pass	QP	1.19M	30.66	56.00	-25.34	Neutral
Mode 1	Pass	AV	1.19M	17.97	46.00	-28.03	Neutral
Mode 1	Pass	QP	2.95M	29.19	56.00	-26.81	Neutral
Mode 1	Pass	AV	2.95M	16.89	46.00	-29.11	Neutral
Mode 1	Pass	QP	27.56M	41.44	60.00	-18.56	Neutral
Mode 1	Pass	AV	27.56M	38.56	50.00	-11.44	Neutral

Conducted Emissions at Powerline_Mode 1

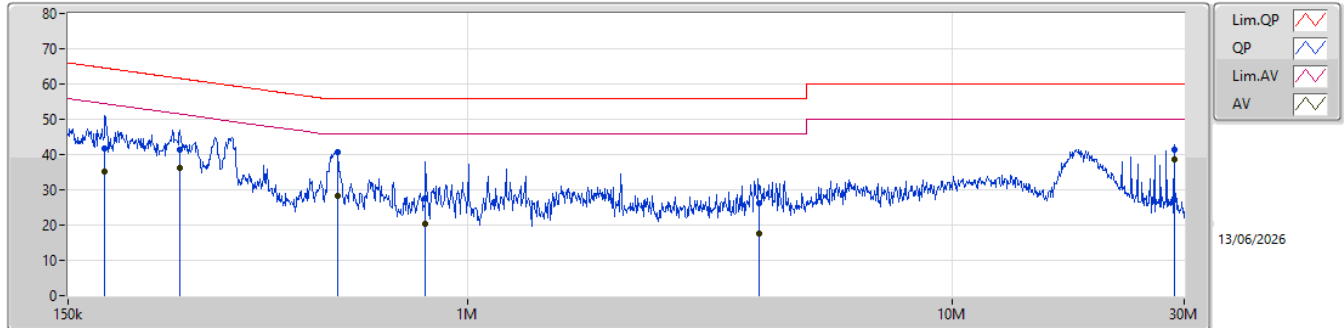

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	178.8k	41.82	64.55	-22.73	19.91	Line	21.91	9.64	0.15	10.12
AV	178.8k	35.12	54.55	-19.43	19.91	Line	15.21	9.64	0.15	10.12
QP	255.08k	41.26	61.58	-20.32	19.88	Line	21.38	9.64	0.12	10.12
AV	255.08k	36.33	51.58	-15.25	19.88	Line	16.45	9.64	0.12	10.12
QP	540.27k	40.55	56.00	-15.45	19.84	Line	20.71	9.63	0.09	10.12
AV	540.27k	28.38	46.00	-17.62	19.84	Line	8.54	9.63	0.09	10.12
QP	818.31k	27.64	56.00	-28.36	19.84	Line	7.80	9.64	0.08	10.12
AV	818.31k	20.34	46.00	-25.66	19.84	Line	0.50	9.64	0.08	10.12
QP	3.98M	26.29	56.00	-29.71	19.92	Line	6.37	9.66	0.13	10.13
AV	3.98M	17.50	46.00	-28.50	19.92	Line	-2.42	9.66	0.13	10.13
QP	28.57M	41.30	60.00	-18.70	19.94	Line	21.36	9.46	0.35	10.13
AV	28.57M	38.74	50.00	-11.26	19.94	Line	18.80	9.46	0.35	10.13

Conducted Emissions at Powerline_Mode 1

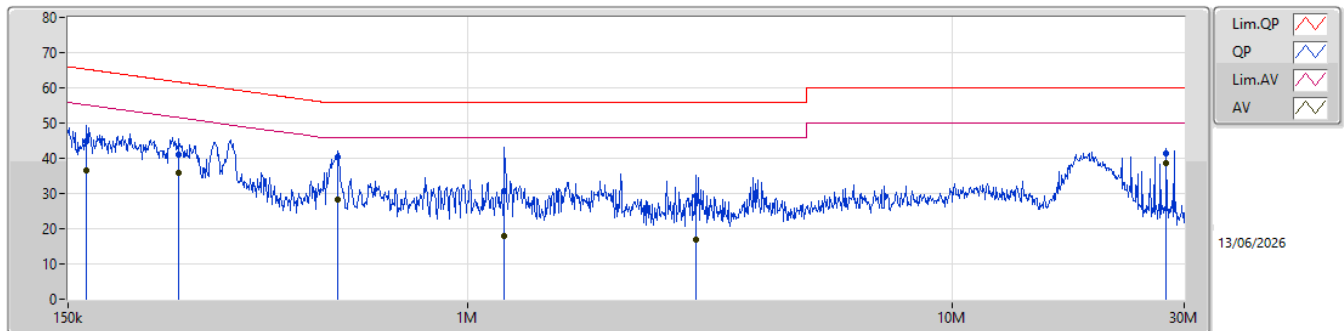

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	163.77k	44.96	65.27	-20.31	19.92	Neutral	25.04	9.64	0.16	10.12
AV	163.77k	36.66	55.27	-18.61	19.92	Neutral	16.74	9.64	0.16	10.12
QP	254.06k	40.91	61.62	-20.71	19.87	Neutral	21.04	9.63	0.12	10.12
AV	254.06k	35.84	51.62	-15.78	19.87	Neutral	15.97	9.63	0.12	10.12
QP	540.27k	40.33	56.00	-15.67	19.84	Neutral	20.49	9.63	0.09	10.12
AV	540.27k	28.12	46.00	-17.88	19.84	Neutral	8.28	9.63	0.09	10.12
QP	1.19M	30.66	56.00	-25.34	19.82	Neutral	10.84	9.64	0.06	10.12
AV	1.19M	17.97	46.00	-28.03	19.82	Neutral	-1.85	9.64	0.06	10.12
QP	2.95M	29.19	56.00	-26.81	19.88	Neutral	9.31	9.66	0.09	10.13
AV	2.95M	16.89	46.00	-29.11	19.88	Neutral	-2.99	9.66	0.09	10.13
QP	27.56M	41.44	60.00	-18.56	20.19	Neutral	21.25	9.68	0.38	10.13
AV	27.56M	38.56	50.00	-11.44	20.19	Neutral	18.37	9.68	0.38	10.13

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	23.76M	17.206M	17M2D1D	21.945M	16.877M
802.11be EHT20_Nss1,(MCS0)_2TX	31.9M	19.35M	19M4D1D	22.55M	19.13M
802.11be EHT40_Nss1,(MCS0)_2TX	45.76M	38.261M	38M3D1D	43.12M	38.041M
802.11be EHT80_Nss1,(MCS0)_2TX	86.46M	77.401M	77M4D1D	86.02M	77.401M
802.11be EHT160_Nss1,(MCS0)_2TX	88M	78.681M	78M7D1D	87.04M	78.681M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.55M	16.932M	16M9D1D	21.56M	16.822M
802.11be EHT20_Nss1,(MCS0)_2TX	23.43M	19.185M	19M2D1D	21.615M	19.02M
802.11be EHT40_Nss1,(MCS0)_2TX	45.54M	38.261M	38M3D1D	43.01M	38.041M
802.11be EHT80_Nss1,(MCS0)_2TX	87.56M	77.401M	77M4D1D	82.28M	77.401M
802.11be EHT160_Nss1,(MCS0)_2TX	89.84M	79.08M	79M1D1D	85.76M	78.601M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.33M	17.041M	17M0D1D	15.72M	13.493M
802.11be EHT20_Nss1,(MCS0)_2TX	23.265M	19.13M	19M1D1D	16.215M	14.453M
802.11be EHT40_Nss1,(MCS0)_2TX	45.21M	38.261M	38M3D1D	36.925M	33.828M
802.11be EHT80_Nss1,(MCS0)_2TX	88.66M	77.841M	77M8D1D	77.85M	73.238M
802.11be EHT160_Nss1,(MCS0)_2TX	175.12M	157.881M	158MD1D	174.68M	157.441M
802.11be EHT240_Nss1,(MCS0)_2TX	135.96M	119.1M	119MD1D	130.56M	118.621M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	16.39M	27.706M	27M7D1D	2.8M	4.918M
802.11be EHT20_Nss1,(MCS0)_2TX	19.085M	30.015M	30M0D1D	4.54M	4.878M
802.11be EHT40_Nss1,(MCS0)_2TX	38.06M	60.58M	60M6D1D	3.5M	5.697M
802.11be EHT80_Nss1,(MCS0)_2TX	77.88M	77.841M	77M8D1D	3.94M	6.857M
802.11be EHT240_Nss1,(MCS0)_2TX	118.68M	118.381M	118MD1D	112.2M	117.781M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	21.945M	16.877M	22.055M	16.932M
5200MHz	Pass	Inf	23.76M	16.932M	23.045M	17.041M
5240MHz	Pass	Inf	22.77M	17.206M	23.595M	17.041M
5260MHz	Pass	Inf	21.835M	16.822M	21.89M	16.932M
5300MHz	Pass	Inf	21.835M	16.877M	21.56M	16.822M
5320MHz	Pass	Inf	22.55M	16.877M	21.725M	16.877M
5500MHz	Pass	Inf	21.945M	16.877M	21.615M	16.822M
5580MHz	Pass	Inf	22.33M	17.041M	20.79M	16.877M
5700MHz	Pass	Inf	22.33M	16.932M	21.175M	16.767M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.605M	13.523M	15.72M	13.493M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.28M	4.918M	2.8M	5.097M
5745MHz	Pass	500k	16.39M	24.023M	16.06M	27.706M
5785MHz	Pass	500k	16.335M	25.122M	14.74M	26.552M
5825MHz	Pass	500k	16.39M	25.397M	14.025M	27.596M
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	22.55M	19.13M	22.605M	19.13M
5200MHz	Pass	Inf	23.045M	19.13M	23.045M	19.13M
5240MHz	Pass	Inf	24.42M	19.295M	31.9M	19.35M
5260MHz	Pass	Inf	22.33M	19.02M	21.835M	19.185M
5300MHz	Pass	Inf	22.385M	19.02M	22.44M	19.185M
5320MHz	Pass	Inf	21.615M	19.075M	23.43M	19.13M
5500MHz	Pass	Inf	21.285M	18.911M	21.615M	19.075M
5580MHz	Pass	Inf	21.45M	19.075M	21.615M	19.075M
5700MHz	Pass	Inf	23.265M	19.13M	21.285M	18.911M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.38M	14.543M	16.215M	14.453M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.54M	4.878M	4.54M	4.878M
5745MHz	Pass	500k	19.085M	29.63M	19.03M	30.015M
5785MHz	Pass	500k	19.085M	26.882M	17.545M	27.871M
5825MHz	Pass	500k	19.03M	25.067M	18.755M	25.672M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	45.21M	38.041M	43.12M	38.151M
5230MHz	Pass	Inf	44.77M	38.261M	45.76M	38.151M
5270MHz	Pass	Inf	43.01M	38.261M	43.23M	38.151M
5310MHz	Pass	Inf	43.56M	38.261M	45.54M	38.041M
5510MHz	Pass	Inf	42.79M	38.261M	43.56M	38.041M
5550MHz	Pass	Inf	44.44M	38.151M	43.78M	38.261M
5670MHz	Pass	Inf	43.45M	38.151M	45.21M	38.261M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	36.925M	33.828M	37.555M	34.038M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.5M	5.697M	4.08M	5.697M
5755MHz	Pass	500k	37.95M	38.041M	38.06M	38.921M
5795MHz	Pass	500k	38.06M	59.92M	37.95M	60.58M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	86.02M	77.401M	86.46M	77.401M
5290MHz	Pass	Inf	87.56M	77.401M	82.28M	77.401M
5530MHz	Pass	Inf	82.28M	77.841M	84.7M	77.621M
5610MHz	Pass	Inf	88.66M	77.621M	85.36M	77.841M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	77.85M	73.313M	78.3M	73.238M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	4.08M	6.997M	3.94M	6.857M
5775MHz	Pass	500k	77.66M	77.401M	77.88M	77.841M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	88M	78.681M	87.04M	78.681M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	89.84M	79.08M	85.76M	78.601M
5570MHz	Pass	Inf	174.68M	157.441M	175.12M	157.881M
802.11be EHT240_Nss1,(MCS0)_2TX	-	-	-	-	-	-





Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
5610MHz Straddle 5.47-5.725GHz	Pass	Inf	130.56M	118.621M	135.96M	119.1M
5610MHz Straddle 5.725-5.85GHz	Pass	500k	112.2M	117.781M	118.68M	118.381M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5200MHz

10/06/2026

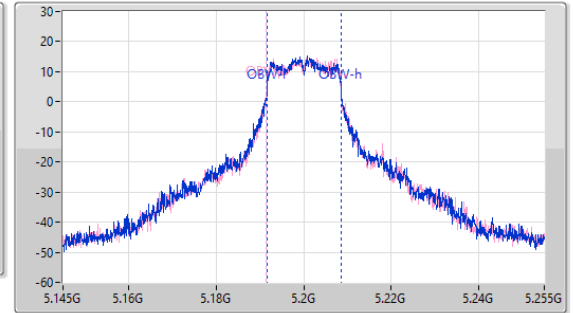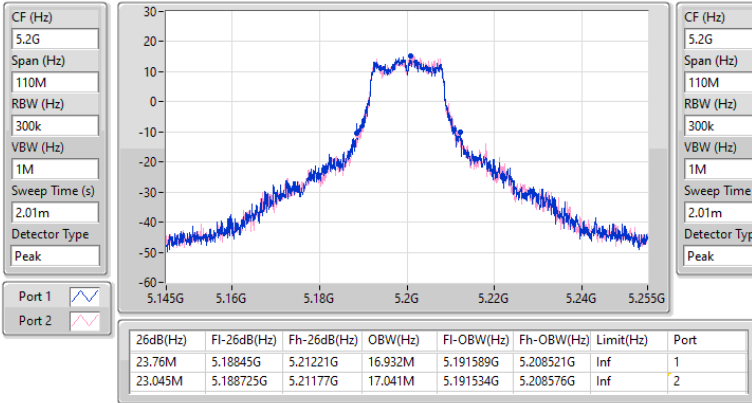

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5240MHz

10/06/2026

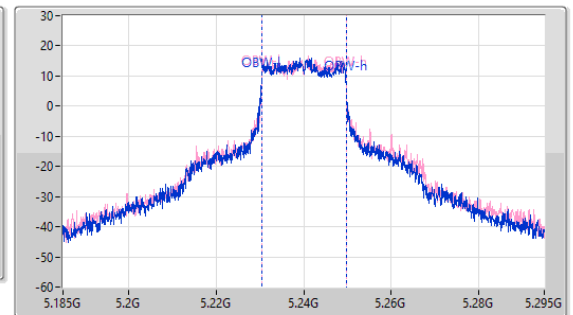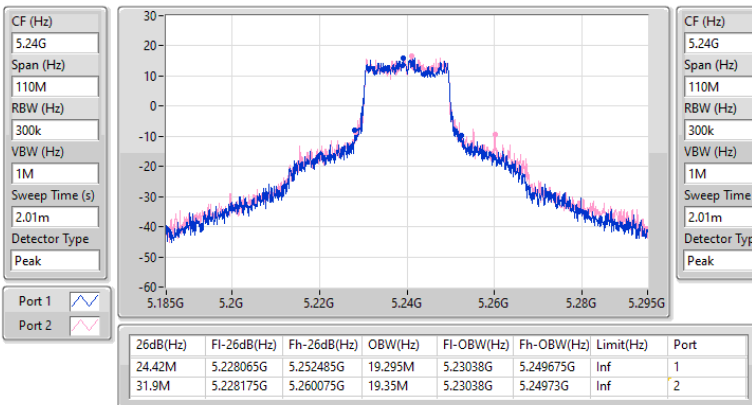


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5230MHz

10/06/2026

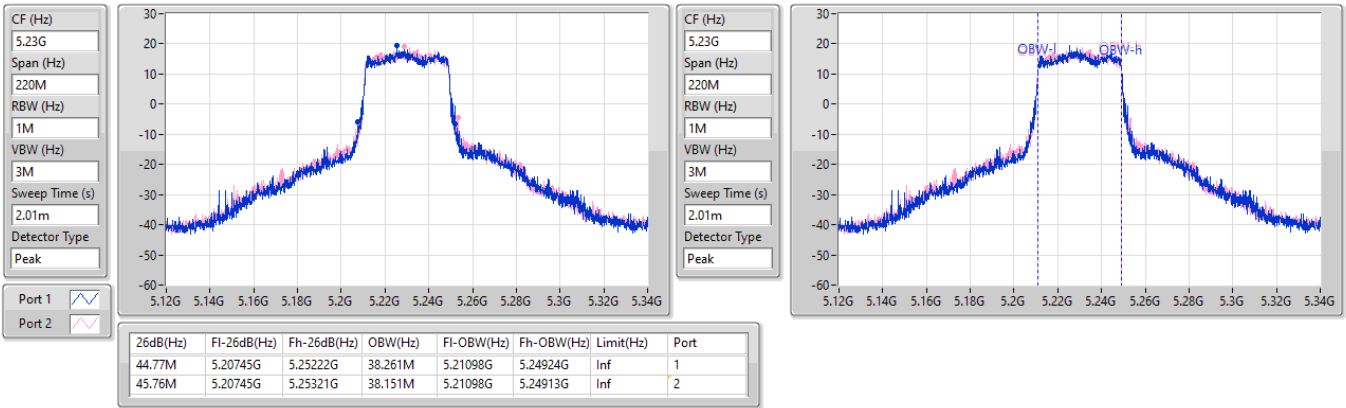
5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5210MHz

10/06/2026


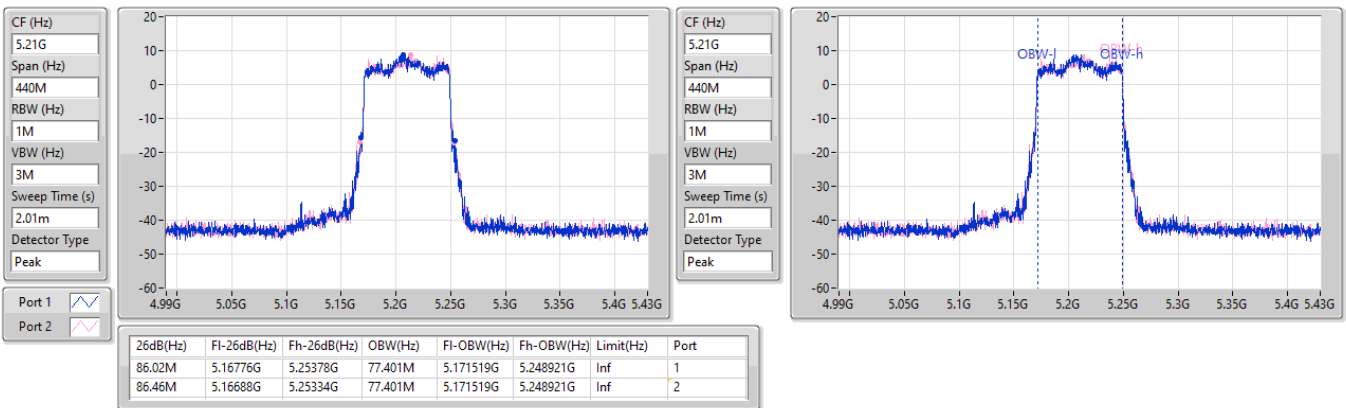


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.15-5.25GHz

10/06/2026

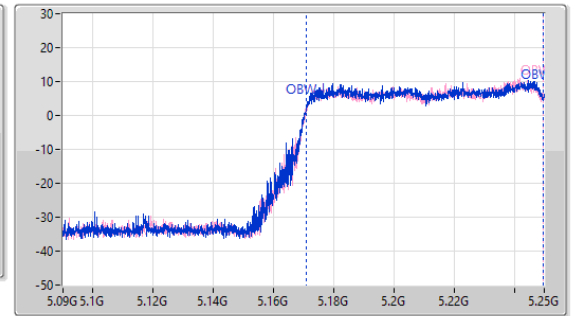
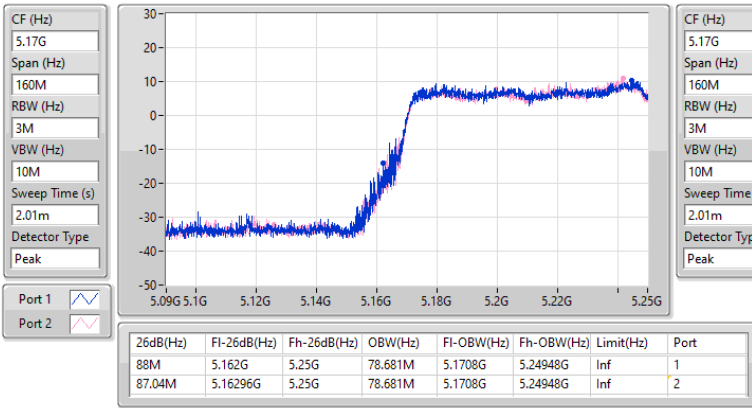


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5320MHz

10/06/2026

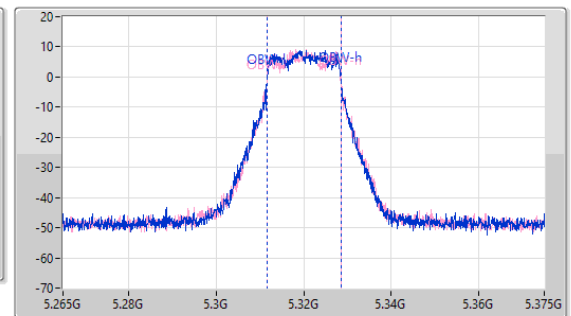
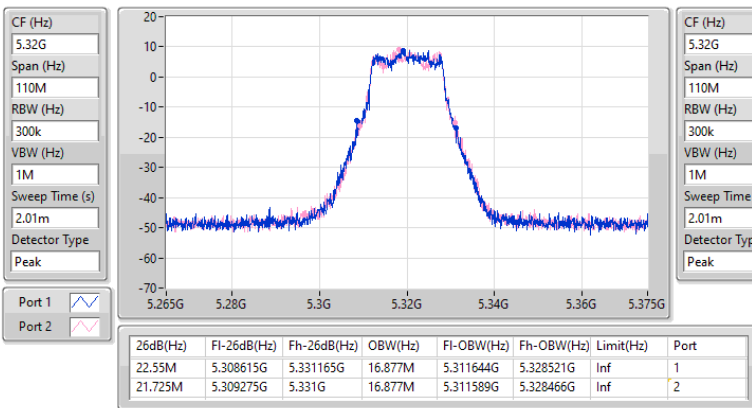


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5320MHz

10/06/2026

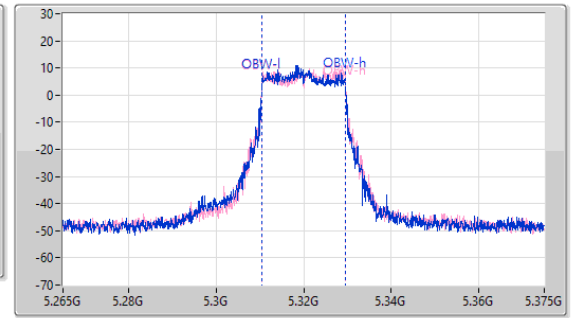
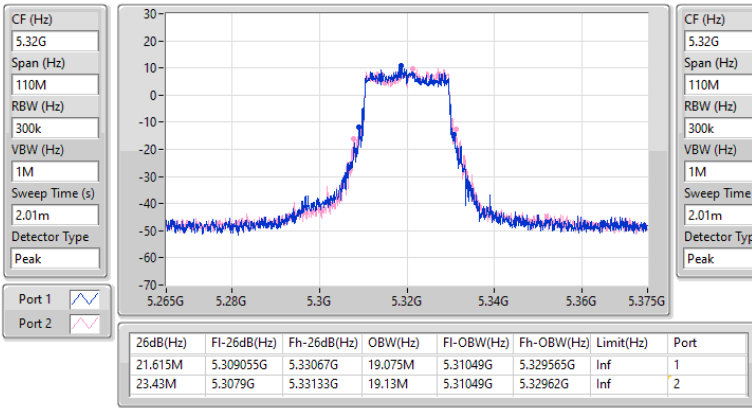


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5310MHz

10/06/2026

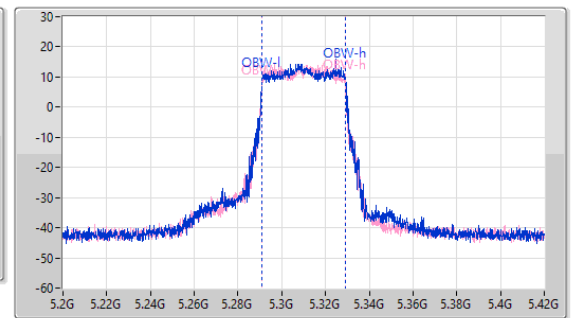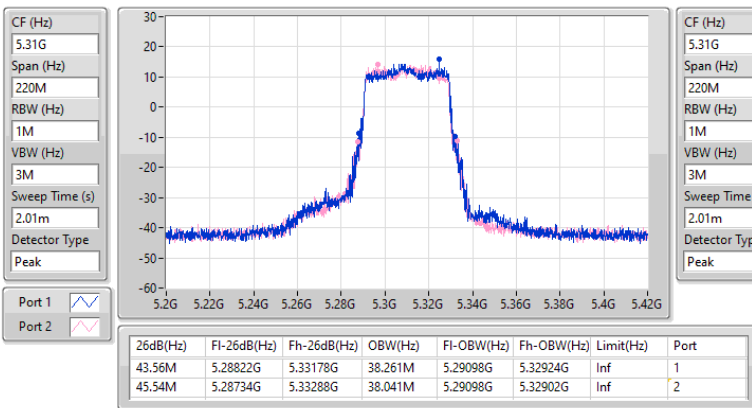


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5290MHz

10/06/2026

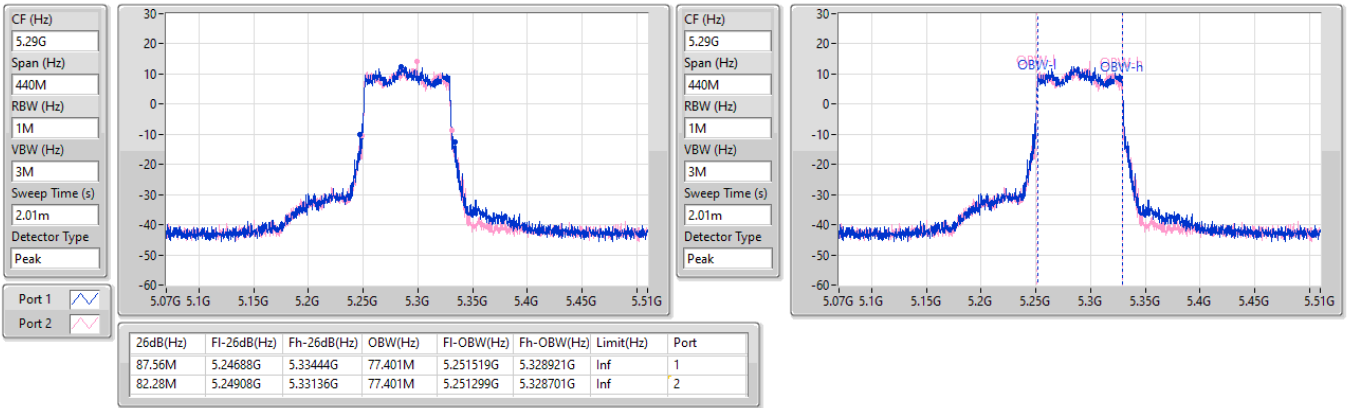


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW


5250MHz Straddle 5.25-5.35GHz

10/06/2026

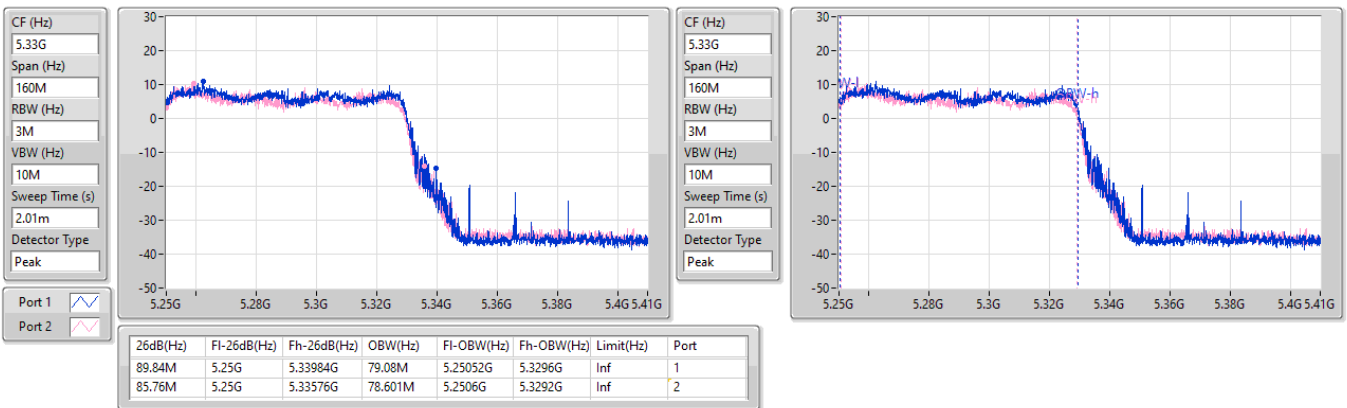


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5580MHz

10/06/2026

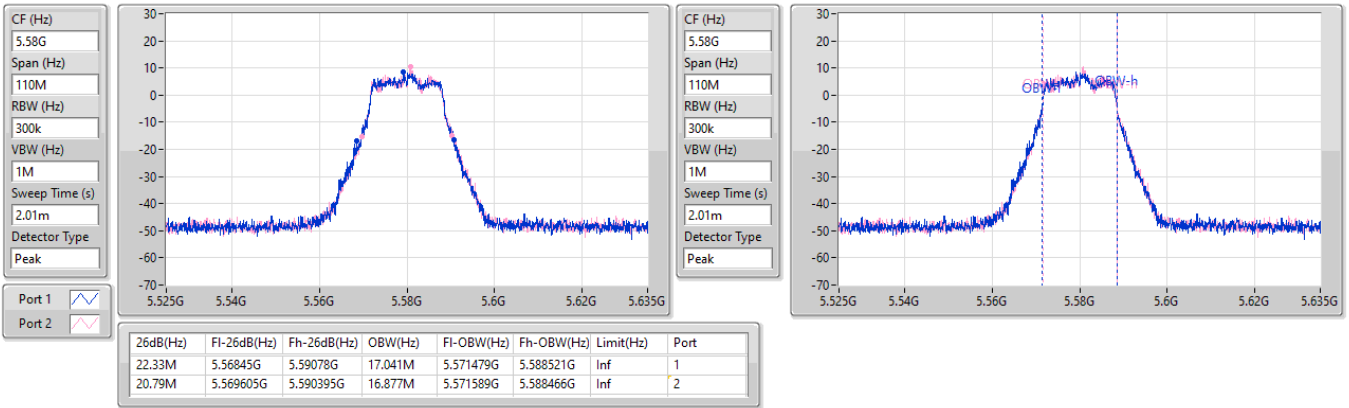
5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5700MHz

10/06/2026

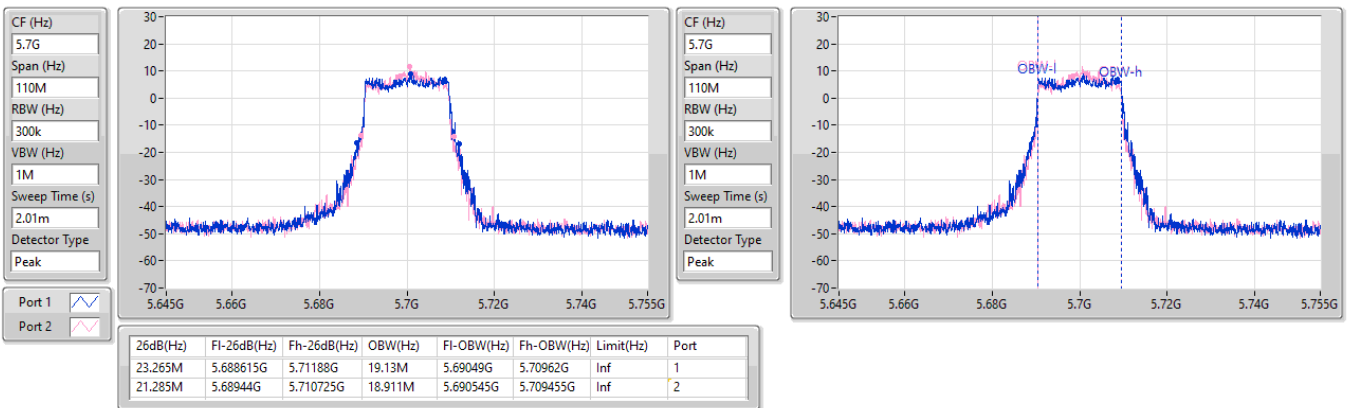


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5670MHz

10/06/2026

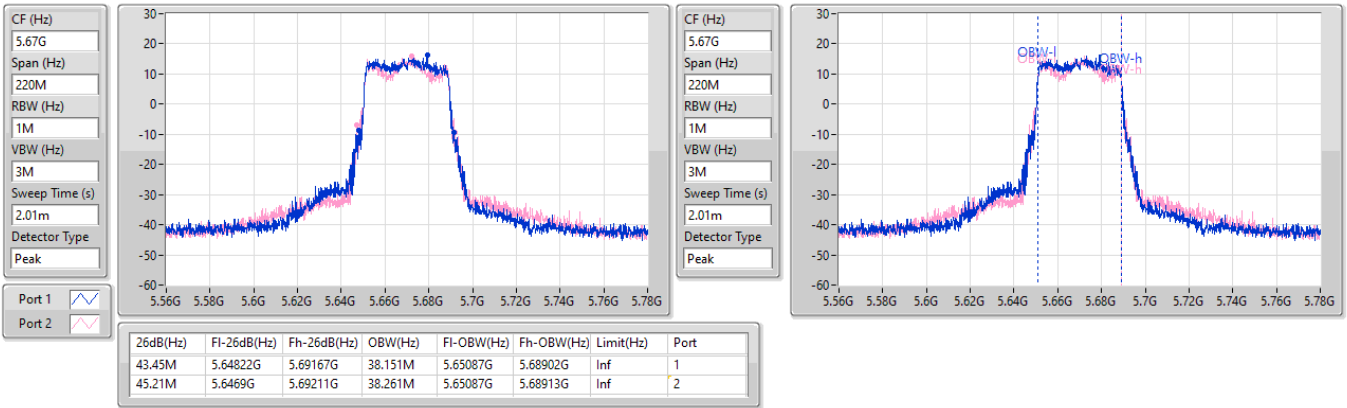


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW


5610MHz

10/06/2026

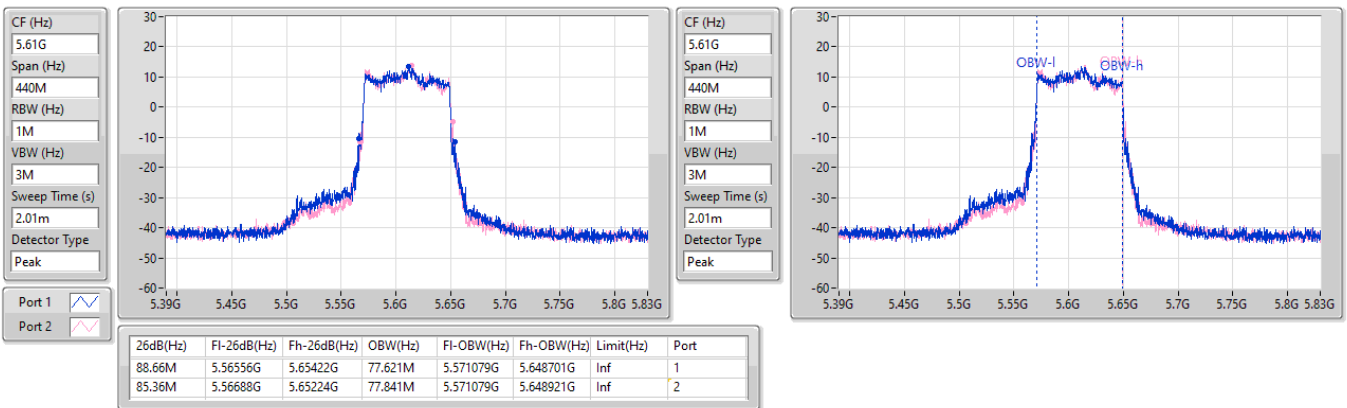


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX
EBW
5570MHz

10/06/2026

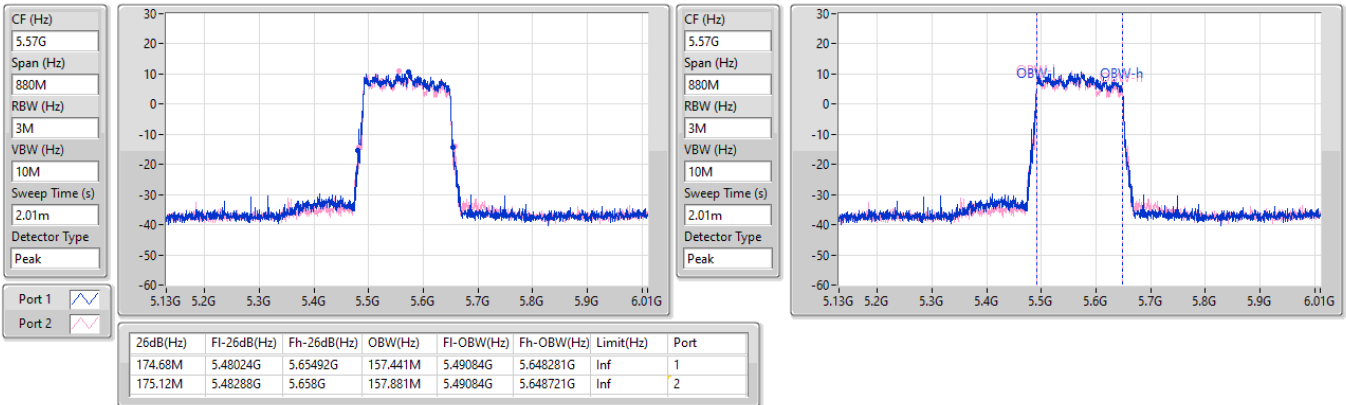
5.47-5.725GHz_802.11be EHT240_Nss1,(MCS0)_2TX
EBW
5610MHz Straddle 5.47-5.725GHz

10/06/2026

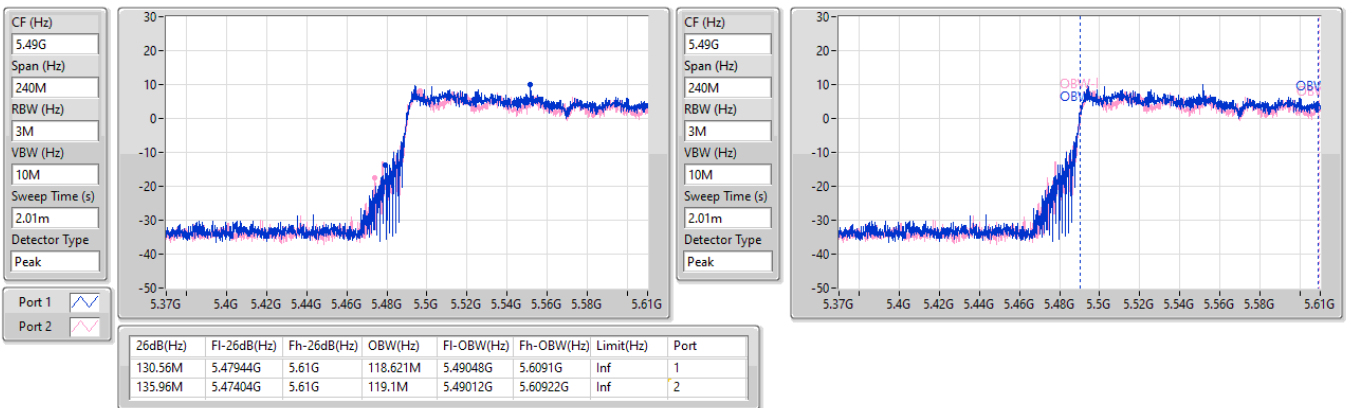


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5745MHz

10/06/2026

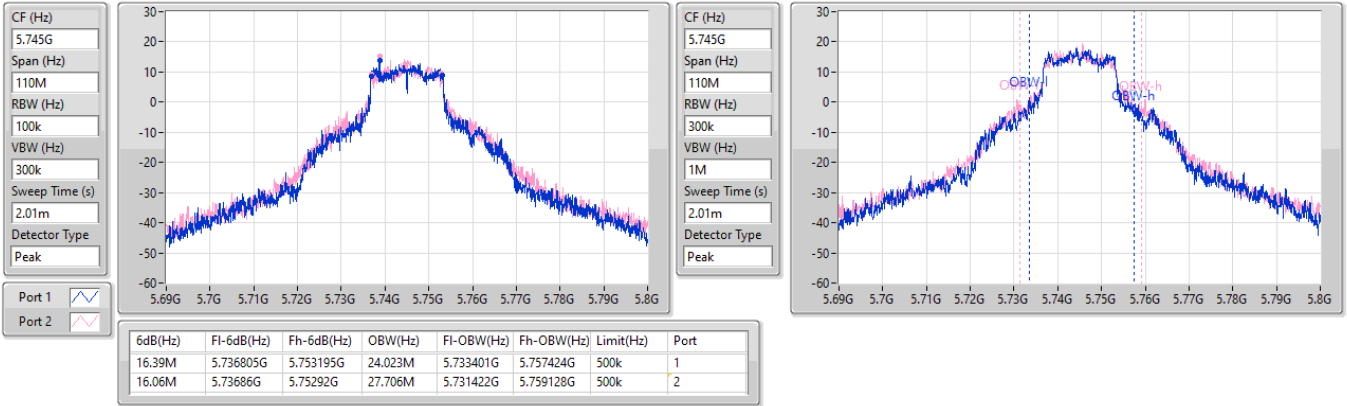


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5745MHz

10/06/2026

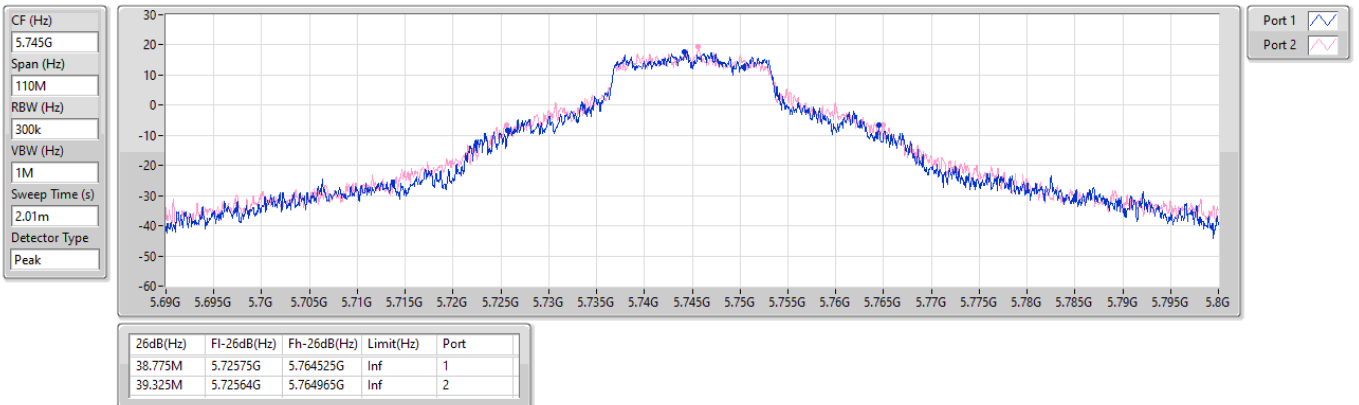


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5745MHz

10/06/2026

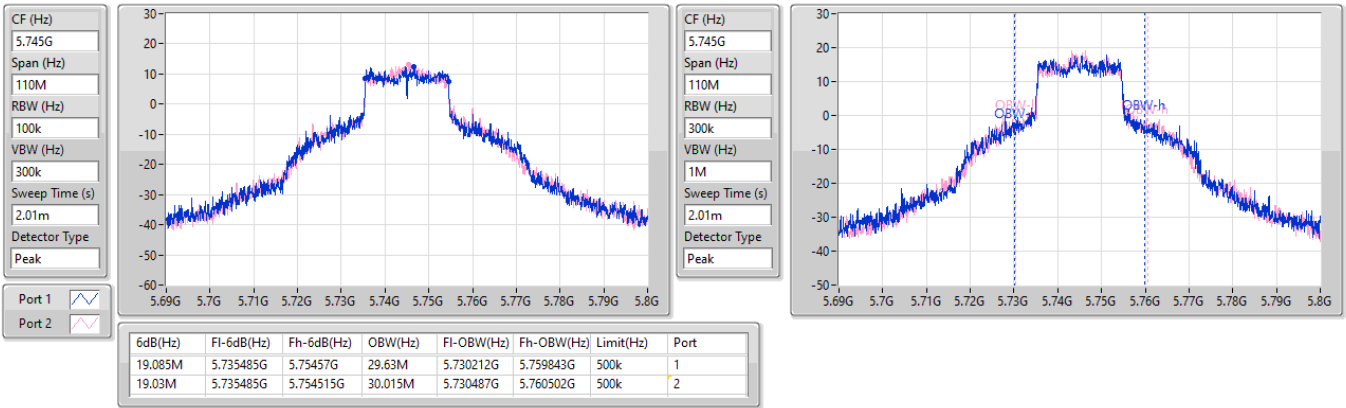


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5745MHz

10/06/2026

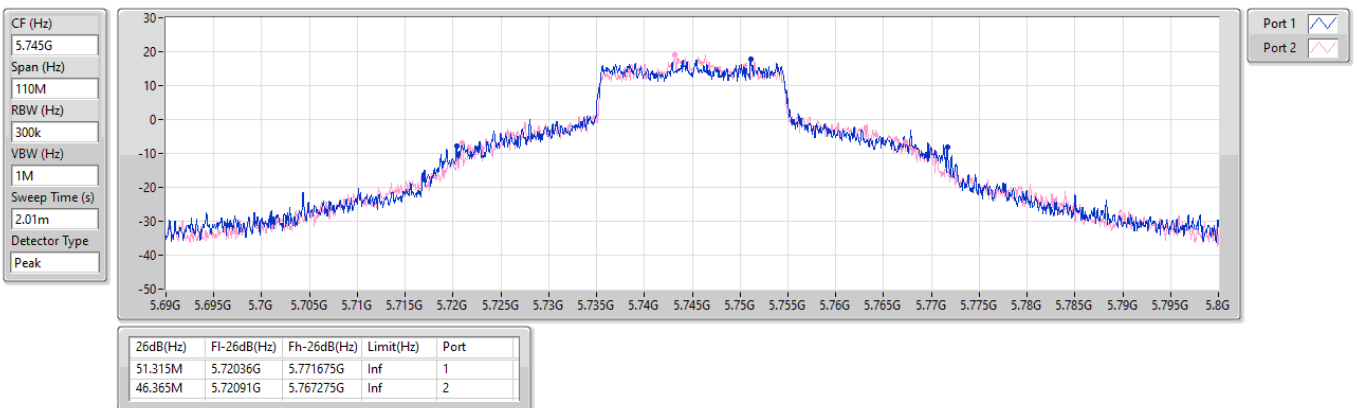


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5755MHz

10/06/2026

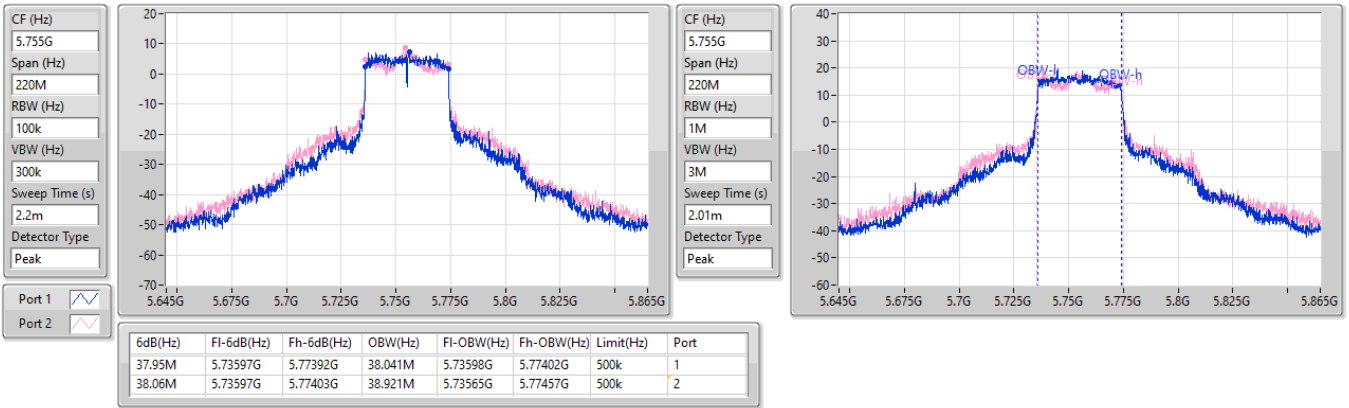


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5755MHz

10/06/2026

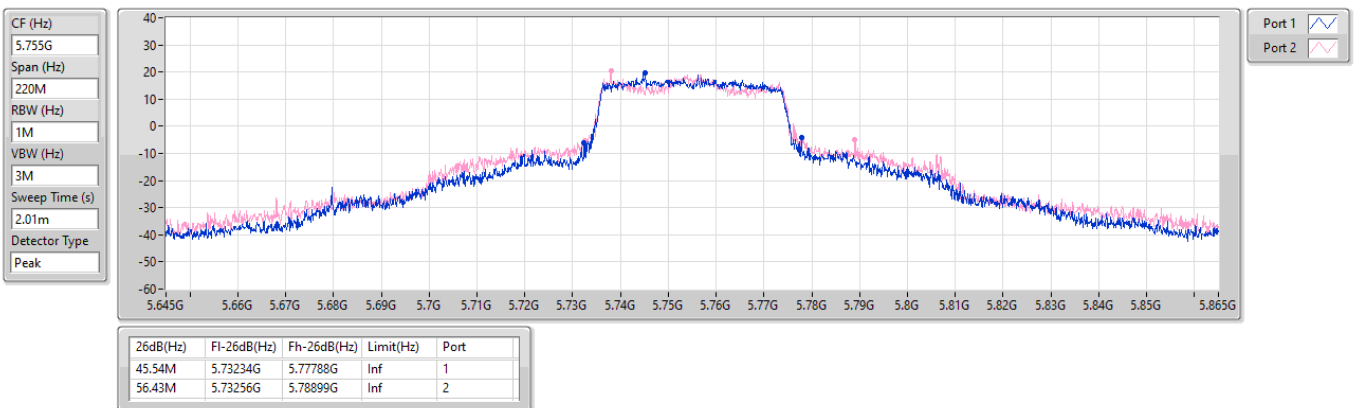


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5775MHz

10/06/2026

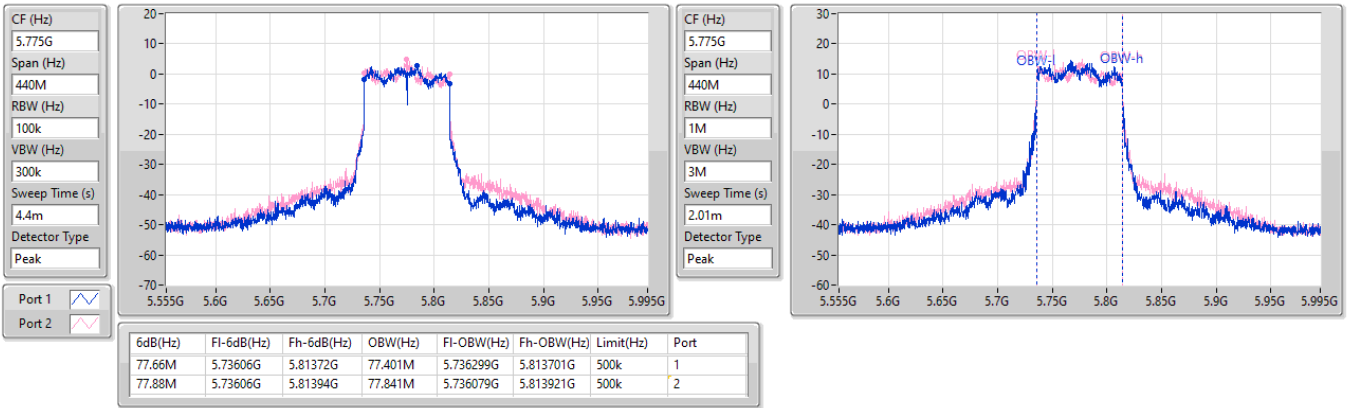


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5775MHz

10/06/2026

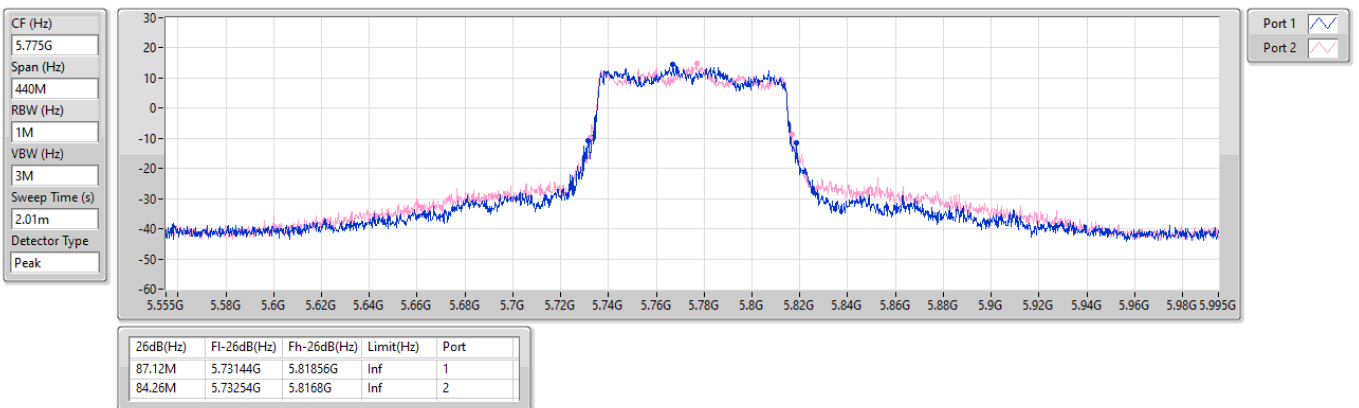


5.725-5.85GHz_802.11be EHT240_Nss1,(MCS0)_2TX

EBW

5610MHz Straddle 5.725-5.85GHz

10/06/2026

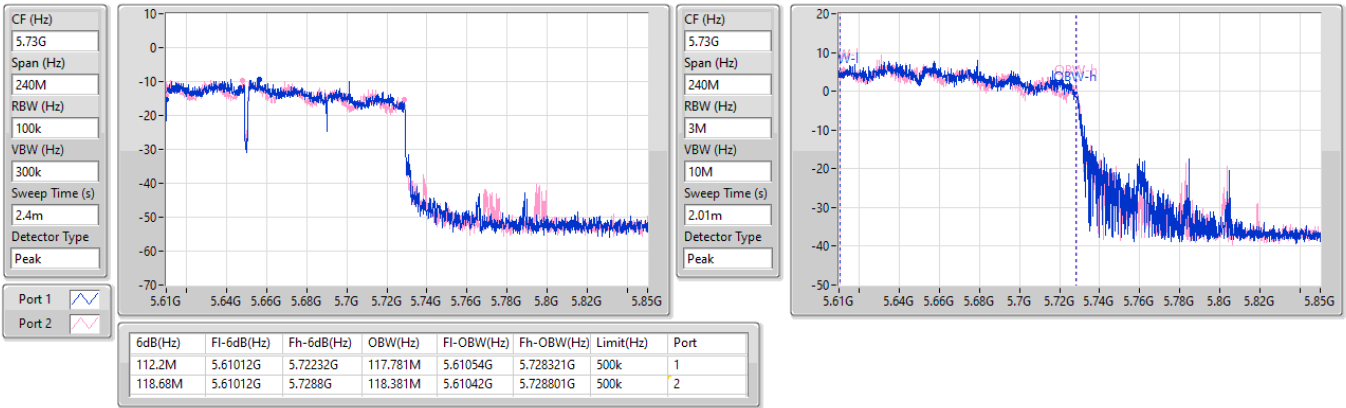


5.725-5.85GHz_802.11be EHT240_Nss1,(MCS0)_2TX

EBW

5610MHz Straddle 5.725-5.85GHz

10/06/2026

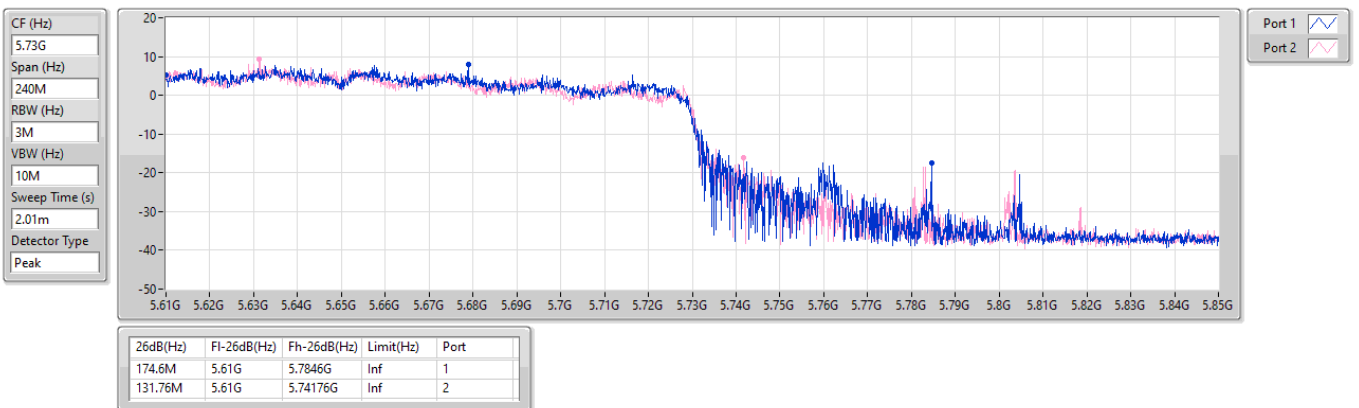

**Summary**

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	26.50	0.44668
802.11be EHT20_Nss1,(MCS0)_2TX	27.32	0.53951
802.11be EHT40_Nss1,(MCS0)_2TX	26.25	0.42170
802.11be EHT80_Nss1,(MCS0)_2TX	19.54	0.08995
802.11be EHT160_Nss1,(MCS0)_2TX	15.42	0.03483
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	20.76	0.11912
802.11be EHT20_Nss1,(MCS0)_2TX	21.46	0.13996
802.11be EHT40_Nss1,(MCS0)_2TX	23.52	0.22491
802.11be EHT80_Nss1,(MCS0)_2TX	23.02	0.20045
802.11be EHT160_Nss1,(MCS0)_2TX	15.13	0.03258
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	19.81	0.09572
802.11be EHT20_Nss1,(MCS0)_2TX	20.94	0.12417
802.11be EHT40_Nss1,(MCS0)_2TX	23.61	0.22961
802.11be EHT80_Nss1,(MCS0)_2TX	23.64	0.23121
802.11be EHT160_Nss1,(MCS0)_2TX	19.10	0.08128
802.11be EHT240_Nss1,(MCS0)_2TX	15.70	0.03715
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	29.24	0.83946
802.11be EHT20_Nss1,(MCS0)_2TX	29.19	0.82985
802.11be EHT40_Nss1,(MCS0)_2TX	29.16	0.82414
802.11be EHT80_Nss1,(MCS0)_2TX	24.60	0.28840
802.11be EHT240_Nss1,(MCS0)_2TX	14.61	0.02891



Average Power Non-Beamforming

Appendix C.1

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	4.78	20.76	20.75	23.77	30.00
5200MHz	Pass	4.78	23.27	23.70	26.50	30.00
5240MHz	Pass	4.78	23.28	23.64	26.47	30.00
5260MHz	Pass	4.78	17.29	17.50	20.41	23.98
5300MHz	Pass	4.78	17.43	17.71	20.58	23.98
5320MHz	Pass	4.78	17.81	17.69	20.76	23.98
5500MHz	Pass	4.78	16.67	16.82	19.76	23.98
5580MHz	Pass	4.78	16.77	16.82	19.81	23.98
5700MHz	Pass	4.78	16.33	16.87	19.62	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	4.78	16.03	16.55	19.31	22.96
5720MHz Straddle 5.725-5.85GHz	Pass	4.78	9.38	9.65	12.53	30.00
5745MHz	Pass	4.78	25.97	26.47	29.24	30.00
5785MHz	Pass	4.78	26.08	26.08	29.09	30.00
5825MHz	Pass	4.78	25.98	25.91	28.96	30.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	4.78	21.25	21.21	24.24	30.00
5200MHz	Pass	4.78	23.00	22.76	25.89	30.00
5240MHz	Pass	4.78	24.17	24.45	27.32	30.00
5260MHz	Pass	4.78	18.53	18.36	21.46	23.98
5300MHz	Pass	4.78	18.45	18.25	21.36	23.98
5320MHz	Pass	4.78	18.23	18.14	21.20	23.98
5500MHz	Pass	4.78	17.50	17.47	20.50	23.98
5580MHz	Pass	4.78	17.64	17.60	20.63	23.98
5700MHz	Pass	4.78	17.62	18.21	20.94	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	4.78	15.99	17.42	19.77	23.10
5720MHz Straddle 5.725-5.85GHz	Pass	4.78	11.52	10.89	14.23	30.00
5745MHz	Pass	4.78	25.85	26.49	29.19	30.00
5785MHz	Pass	4.78	25.99	26.19	29.10	30.00
5825MHz	Pass	4.78	25.92	26.05	29.00	30.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	4.78	17.43	17.20	20.33	30.00
5230MHz	Pass	4.78	23.15	23.33	26.25	30.00
5270MHz	Pass	4.78	21.00	19.96	23.52	23.98
5310MHz	Pass	4.78	19.88	19.66	22.78	23.98
5510MHz	Pass	4.78	18.43	17.33	20.93	23.98
5550MHz	Pass	4.78	20.43	19.64	23.06	23.98
5670MHz	Pass	4.78	20.92	20.25	23.61	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	4.78	20.63	19.61	23.16	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	4.78	9.24	9.40	12.33	30.00
5755MHz	Pass	4.78	23.53	23.27	26.41	30.00
5795MHz	Pass	4.78	26.25	26.05	29.16	30.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	4.78	16.55	16.51	19.54	30.00
5290MHz	Pass	4.78	19.95	20.07	23.02	23.98
5530MHz	Pass	4.78	17.56	17.58	20.58	23.98
5610MHz	Pass	4.78	20.57	20.49	23.54	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	4.78	20.58	20.67	23.64	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	4.78	5.80	7.01	9.46	30.00
5775MHz	Pass	4.78	21.66	21.52	24.60	30.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	4.78	12.85	11.92	15.42	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	4.78	12.31	11.92	15.13	23.98
5570MHz	Pass	4.78	16.57	15.56	19.10	23.98
802.11be EHT240_Nss1,(MCS0)_2TX	-	-	-	-	-	-



Average Power Non-Beamforming

Appendix C.1


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
5610MHz Straddle 5.47-5.725GHz	Pass	4.78	12.45	12.92	15.70	23.98
5610MHz Straddle 5.725-5.85GHz	Pass	4.78	11.59	11.60	14.61	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power


5250MHz Straddle 5.15-5.25GHz_TX

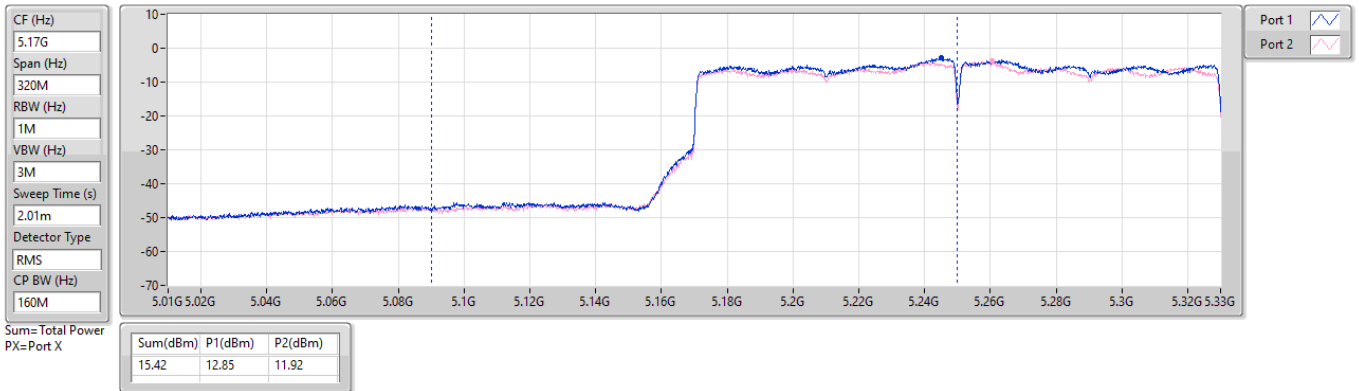

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power


5250MHz Straddle 5.25-5.35GHz_TX

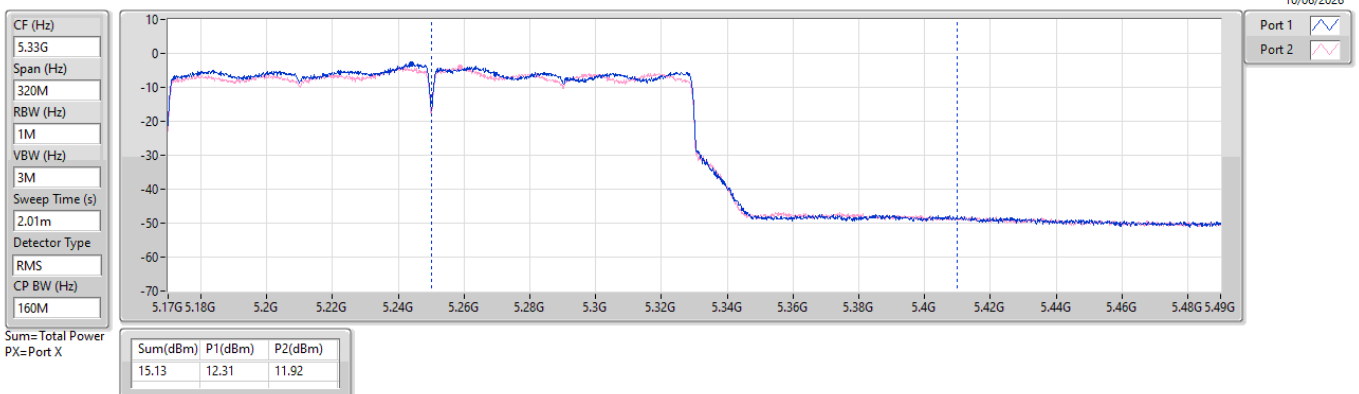

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

AV Power


5690MHz Straddle 5.47-5.725GHz_TX

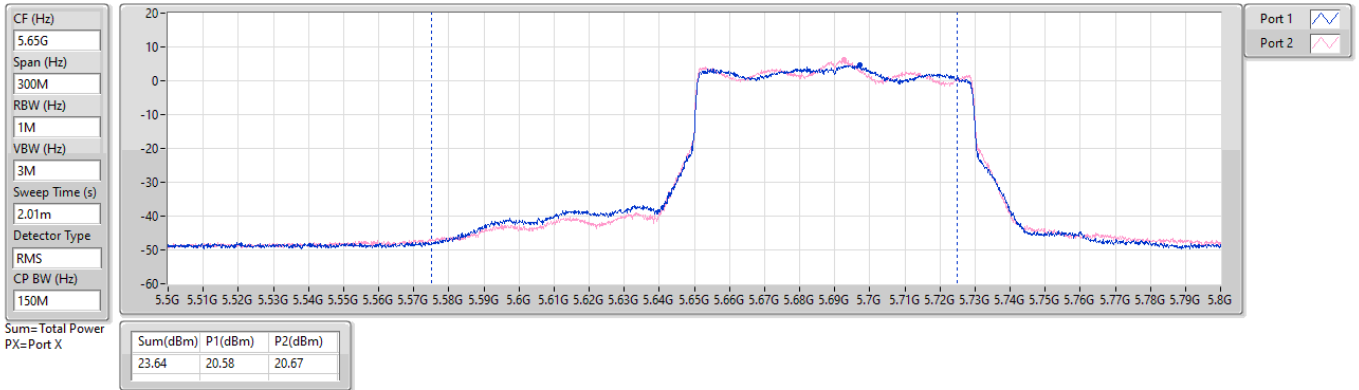


5.47-5.725GHz_802.11be EHT240_Nss1,(MCS0)_2TX

AV Power

5610MHz Straddle 5.47-5.725GHz_TX

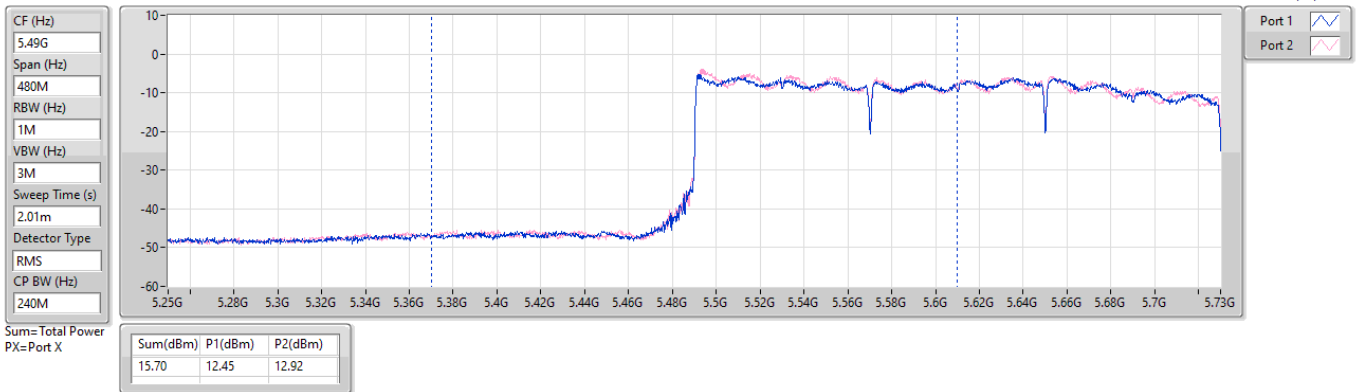

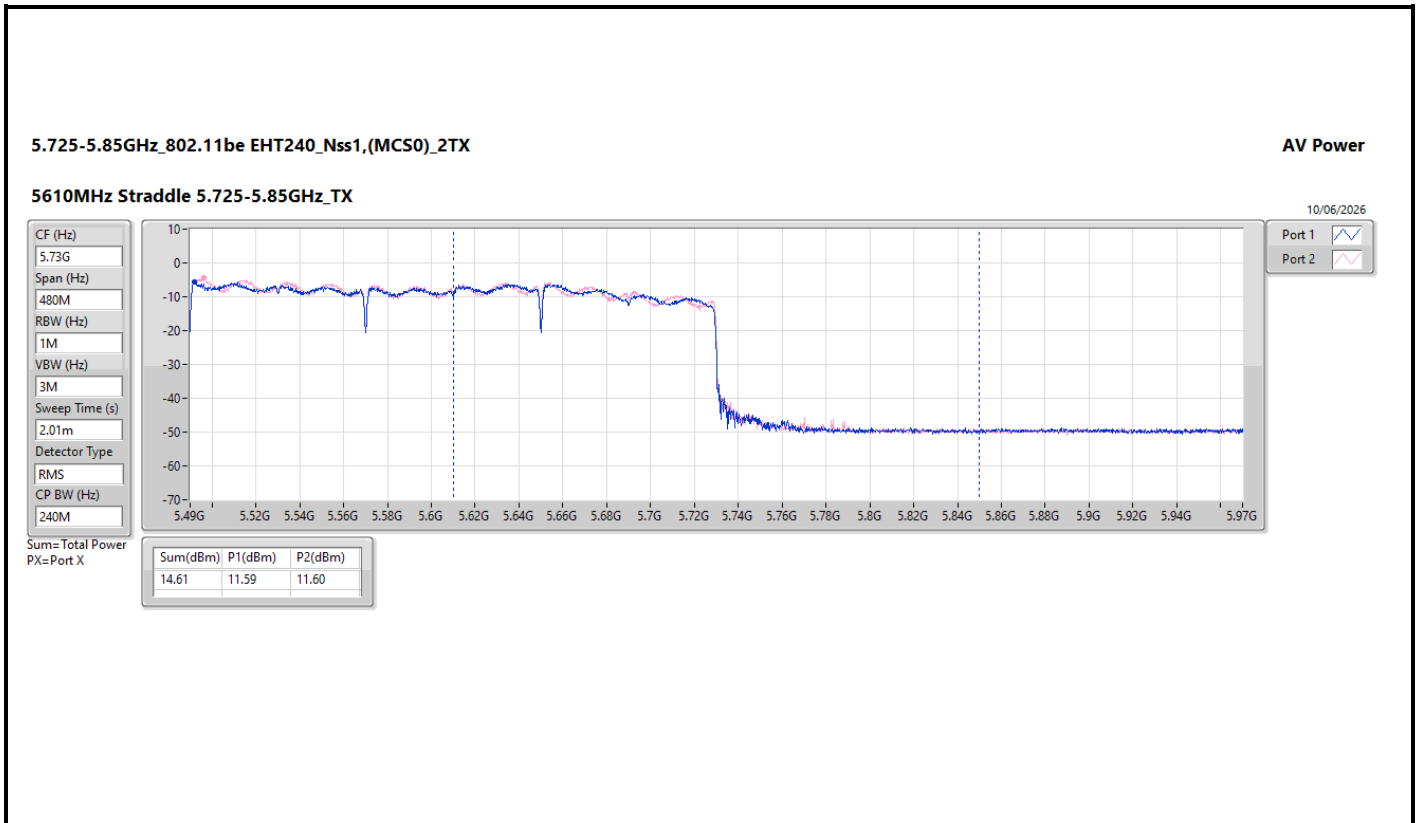

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	27.32	0.53951
802.11be EHT40-BF_Nss1,(MCS0)_2TX	26.25	0.42170
802.11be EHT80-BF_Nss1,(MCS0)_2TX	19.54	0.08995
802.11be EHT160-BF_Nss1,(MCS0)_2TX	15.42	0.03483
5.25-5.35GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.46	0.13996
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.63	0.14555
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.40	0.13804
802.11be EHT160-BF_Nss1,(MCS0)_2TX	15.13	0.03258
5.47-5.725GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	20.94	0.12417
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.67	0.14689
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.40	0.13804
802.11be EHT160-BF_Nss1,(MCS0)_2TX	19.10	0.08128
802.11be EHT240-BF_Nss1,(MCS0)_2TX	15.70	0.03715
5.725-5.85GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	27.56	0.57016
802.11be EHT40-BF_Nss1,(MCS0)_2TX	27.53	0.56624
802.11be EHT80-BF_Nss1,(MCS0)_2TX	24.60	0.28840
802.11be EHT240-BF_Nss1,(MCS0)_2TX	14.61	0.02891



Result


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.67	21.25	21.21	24.24	28.33
5200MHz	Pass	7.67	23.00	22.76	25.89	28.33
5240MHz	Pass	7.67	24.17	24.45	27.32	28.33
5260MHz	Pass	7.67	18.53	18.36	21.46	22.31
5300MHz	Pass	7.67	18.45	18.25	21.36	22.31
5320MHz	Pass	7.67	18.23	18.14	21.20	22.31
5500MHz	Pass	7.67	17.50	17.47	20.50	22.31
5580MHz	Pass	7.67	17.64	17.60	20.63	22.31
5700MHz	Pass	7.67	17.62	18.21	20.94	22.31
5720MHz Straddle 5.47-5.725GHz	Pass	7.67	15.99	17.42	19.77	21.43
5720MHz Straddle 5.725-5.85GHz	Pass	7.67	11.52	10.89	14.23	28.33
5745MHz	Pass	7.67	24.22	24.85	27.56	28.33
5785MHz	Pass	7.67	24.36	24.59	27.49	28.33
5825MHz	Pass	7.67	24.28	24.45	27.38	28.33
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	7.67	17.43	17.20	20.33	28.33
5230MHz	Pass	7.67	23.15	23.33	26.25	28.33
5270MHz	Pass	7.67	18.85	17.85	21.39	22.31
5310MHz	Pass	7.67	18.73	18.51	21.63	22.31
5510MHz	Pass	7.67	18.43	17.33	20.93	22.31
5550MHz	Pass	7.67	18.80	18.02	21.44	22.31
5670MHz	Pass	7.67	18.82	18.11	21.49	22.31
5710MHz Straddle 5.47-5.725GHz	Pass	7.67	18.41	18.90	21.67	22.31
5710MHz Straddle 5.725-5.85GHz	Pass	7.67	7.27	8.89	11.17	28.33
5755MHz	Pass	7.67	23.53	23.27	26.41	28.33
5795MHz	Pass	7.67	24.64	24.40	27.53	28.33
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	7.67	16.55	16.51	19.54	28.33
5290MHz	Pass	7.67	18.35	18.43	21.40	22.31
5530MHz	Pass	7.67	17.56	17.58	20.58	22.31
5610MHz	Pass	7.67	18.43	18.34	21.40	22.31
5690MHz Straddle 5.47-5.725GHz	Pass	7.67	18.17	18.51	21.35	22.31
5690MHz Straddle 5.725-5.85GHz	Pass	7.67	3.26	4.86	7.14	28.33
5775MHz	Pass	7.67	21.66	21.52	24.60	28.33
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	7.67	12.85	11.92	15.42	28.33
5250MHz Straddle 5.25-5.35GHz	Pass	7.67	12.31	11.92	15.13	22.31
5570MHz	Pass	7.67	16.57	15.56	19.10	22.31
802.11be EHT240-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5610MHz Straddle 5.47-5.725GHz	Pass	7.67	12.45	12.92	15.70	22.31
5610MHz Straddle 5.725-5.85GHz	Pass	7.67	11.59	11.60	14.61	28.33

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power


5250MHz Straddle 5.15-5.25GHz_TX

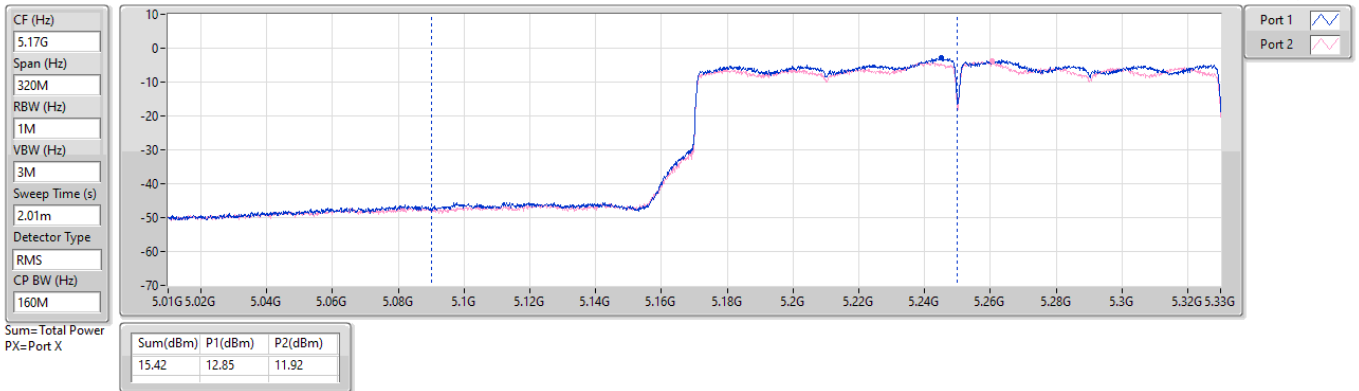

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power


5250MHz Straddle 5.25-5.35GHz_TX

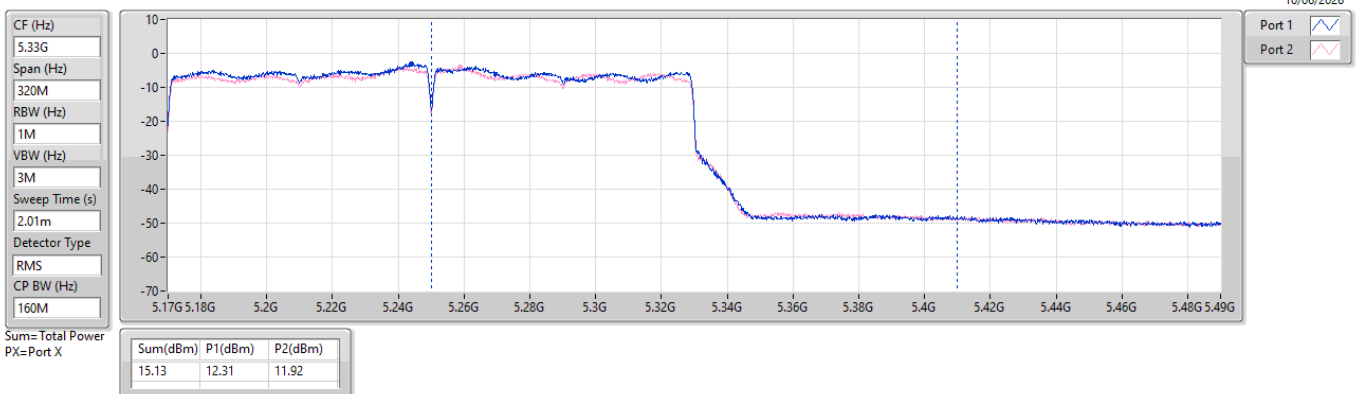

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

AV Power


5710MHz Straddle 5.47-5.725GHz_TX

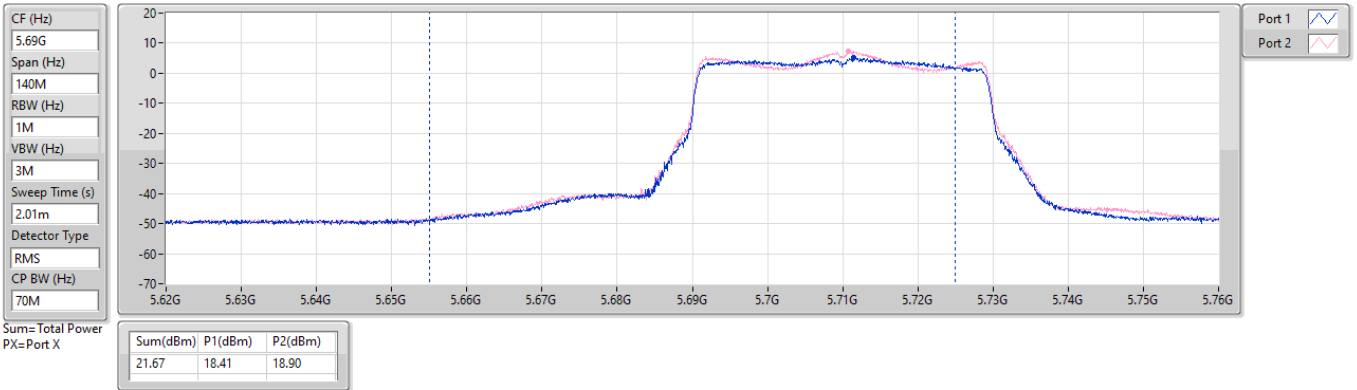


5.47-5.725GHz_802.11be EHT240-BF_Nss1,(MCS0)_2TX

AV Power

5610MHz Straddle 5.47-5.725GHz_TX

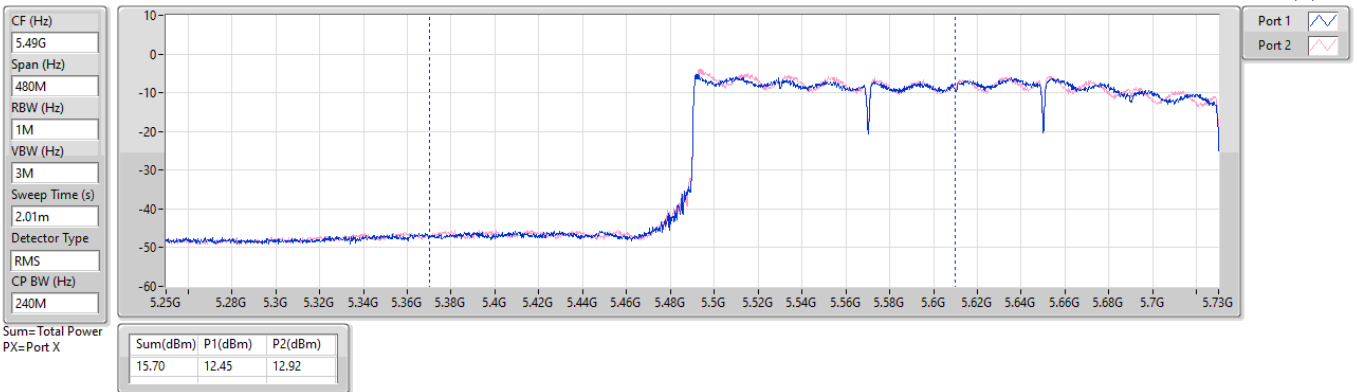

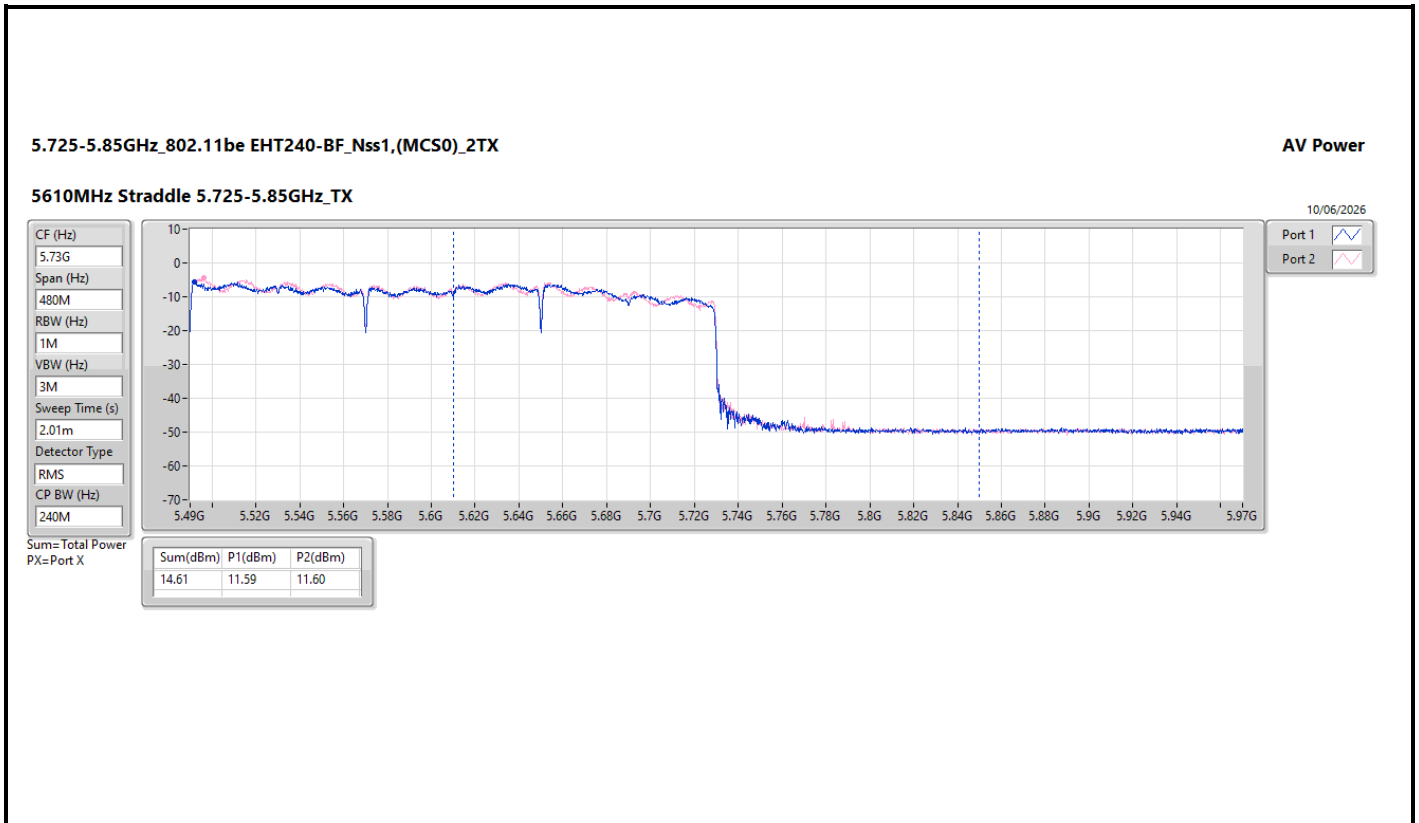

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_2TX	15.26
802.11be EHT20_Nss1,(MCS0)_2TX	15.11
802.11be EHT40_Nss1,(MCS0)_2TX	11.41
802.11be EHT80_Nss1,(MCS0)_2TX	1.49
802.11be EHT160_Nss1,(MCS0)_2TX	-2.34
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_2TX	9.22
802.11be EHT20_Nss1,(MCS0)_2TX	9.07
802.11be EHT40_Nss1,(MCS0)_2TX	8.53
802.11be EHT80_Nss1,(MCS0)_2TX	5.17
802.11be EHT160_Nss1,(MCS0)_2TX	-2.97
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_2TX	9.29
802.11be EHT20_Nss1,(MCS0)_2TX	9.14
802.11be EHT40_Nss1,(MCS0)_2TX	9.27
802.11be EHT80_Nss1,(MCS0)_2TX	6.84
802.11be EHT160_Nss1,(MCS0)_2TX	-1.59
802.11be EHT240_Nss1,(MCS0)_2TX	-4.08
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_2TX	16.59
802.11be EHT20_Nss1,(MCS0)_2TX	15.87
802.11be EHT40_Nss1,(MCS0)_2TX	12.22
802.11be EHT80_Nss1,(MCS0)_2TX	5.61
802.11be EHT240_Nss1,(MCS0)_2TX	-6.48

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.67	9.74	9.19	12.46	15.33
5200MHz	Pass	7.67	12.41	12.12	15.26	15.33
5240MHz	Pass	7.67	12.35	12.05	15.13	15.33
5260MHz	Pass	7.67	6.50	5.69	8.96	9.33
5300MHz	Pass	7.67	6.91	6.26	9.22	9.33
5320MHz	Pass	7.67	6.67	6.38	9.02	9.33
5500MHz	Pass	7.67	5.81	6.35	9.03	9.33
5580MHz	Pass	7.67	6.16	6.44	9.29	9.33
5700MHz	Pass	7.67	4.89	6.52	8.71	9.33
5720MHz Straddle 5.47-5.725GHz	Pass	7.67	5.50	6.96	9.21	9.33
5720MHz Straddle 5.725-5.85GHz	Pass	7.67	2.40	3.01	5.11	28.33
5745MHz	Pass	7.67	12.88	14.29	16.59	28.33
5785MHz	Pass	7.67	12.86	14.15	16.32	28.33
5825MHz	Pass	7.67	13.21	13.81	16.35	28.33
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.67	8.97	8.79	11.88	15.33
5200MHz	Pass	7.67	10.88	10.55	13.68	15.33
5240MHz	Pass	7.67	12.20	12.04	15.11	15.33
5260MHz	Pass	7.67	6.54	5.64	9.07	9.33
5300MHz	Pass	7.67	6.49	5.41	8.87	9.33
5320MHz	Pass	7.67	6.55	5.67	8.96	9.33
5500MHz	Pass	7.67	6.29	5.68	9.00	9.33
5580MHz	Pass	7.67	5.60	6.22	8.87	9.33
5700MHz	Pass	7.67	5.07	7.00	9.14	9.33
5720MHz Straddle 5.47-5.725GHz	Pass	7.67	4.47	7.17	9.04	9.33
5720MHz Straddle 5.725-5.85GHz	Pass	7.67	2.54	2.38	5.06	28.33
5745MHz	Pass	7.67	11.82	13.82	15.87	28.33
5785MHz	Pass	7.67	11.41	13.41	15.45	28.33
5825MHz	Pass	7.67	11.49	13.39	15.52	28.33
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	7.67	2.46	2.01	5.22	15.33
5230MHz	Pass	7.67	8.59	8.37	11.41	15.33
5270MHz	Pass	7.67	6.41	4.67	8.53	9.33
5310MHz	Pass	7.67	5.51	4.46	7.80	9.33
5510MHz	Pass	7.67	4.65	3.03	6.85	9.33
5550MHz	Pass	7.67	6.73	5.63	9.20	9.33
5670MHz	Pass	7.67	6.25	6.37	9.27	9.33
5710MHz Straddle 5.47-5.725GHz	Pass	7.67	5.40	6.22	8.79	9.33
5710MHz Straddle 5.725-5.85GHz	Pass	7.67	0.90	1.21	3.76	28.33
5755MHz	Pass	7.67	6.49	7.91	10.23	28.33
5795MHz	Pass	7.67	9.39	9.26	12.22	28.33
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	7.67	-1.24	-1.66	1.49	15.33
5290MHz	Pass	7.67	2.98	2.12	5.17	9.33
5530MHz	Pass	7.67	0.68	0.56	3.56	9.33
5610MHz	Pass	7.67	3.67	4.11	6.84	9.33
5690MHz Straddle 5.47-5.725GHz	Pass	7.67	2.86	4.23	6.51	9.33
5690MHz Straddle 5.725-5.85GHz	Pass	7.67	-2.86	-1.34	0.69	28.33
5775MHz	Pass	7.67	2.03	3.72	5.61	28.33
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	7.67	-4.88	-5.62	-2.34	15.33
5250MHz Straddle 5.25-5.35GHz	Pass	7.67	-5.72	-5.80	-2.97	9.33
5570MHz	Pass	7.67	-4.40	-4.73	-1.59	9.33
802.11be EHT240_Nss1,(MCS0)_2TX	-	-	-	-	-	-



Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
5610MHz Straddle 5.47-5.725GHz	Pass	7.67	-7.48	-6.47	-4.08	9.33
5610MHz Straddle 5.725-5.85GHz	Pass	7.67	-9.71	-9.14	-6.48	28.33

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5200MHz

10/06/2026

CF (Hz)
5.2G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.956

Detector Type
RMS

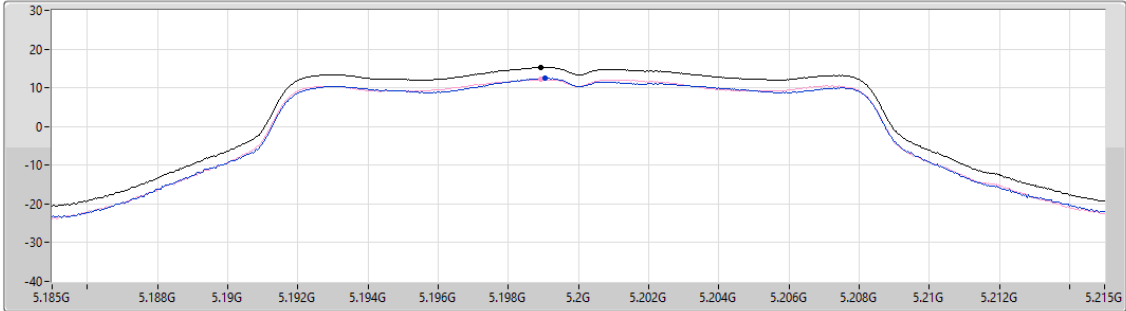

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
15.26	15.26	12.41	12.12

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5240MHz

10/06/2026

CF (Hz)
5.24G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

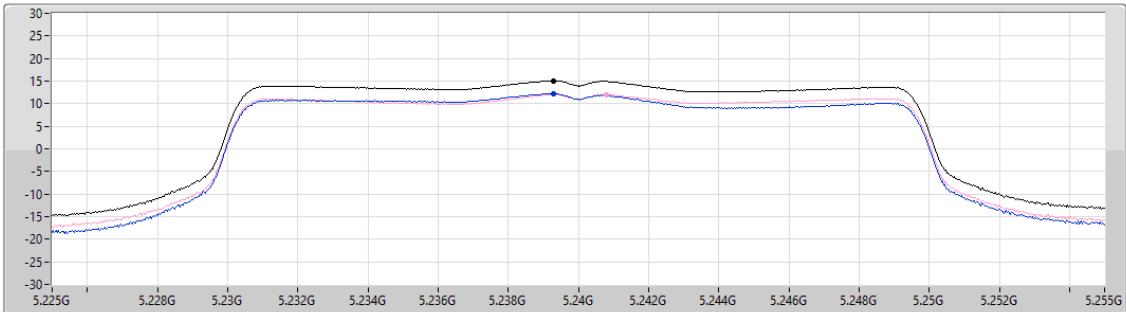

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
15.11	15.11	12.20	12.04

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5230MHz

10/06/2026

CF (Hz)
5.23G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

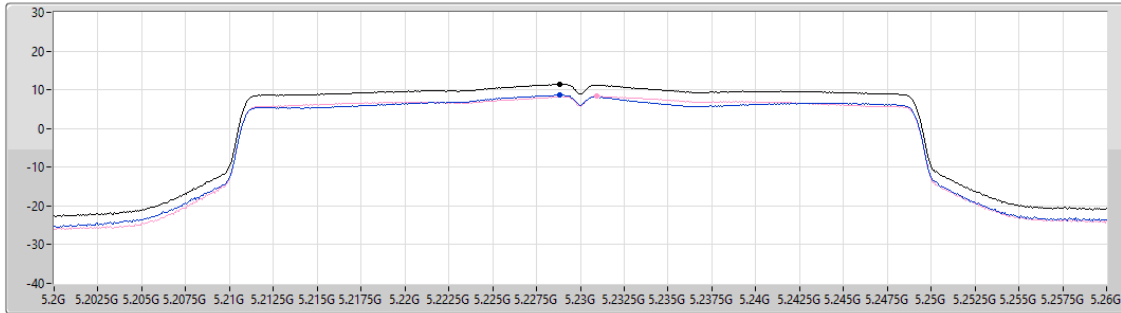

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
11.41	11.41	8.59	8.37

Sum 

Port 1 

Port 2 

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5210MHz

10/06/2026

CF (Hz)
5.21G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

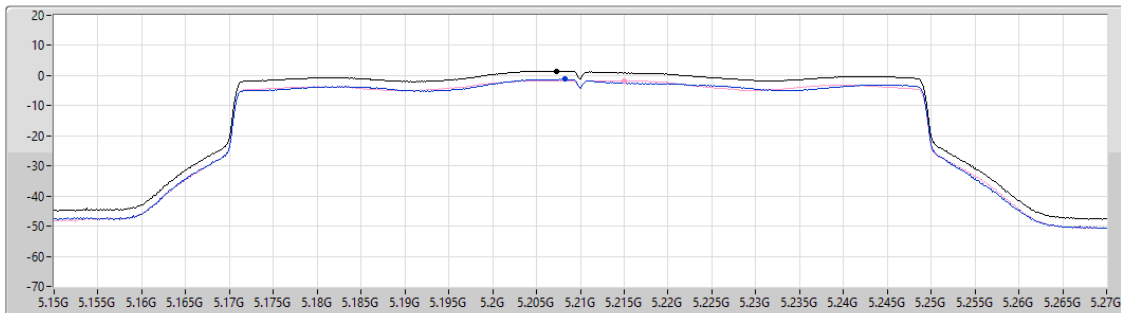

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
1.49	1.49	-1.24	-1.66

Sum 

Port 1 

Port 2 

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

10/06/2026

CF (Hz)
5.17G


Span (Hz)
320M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

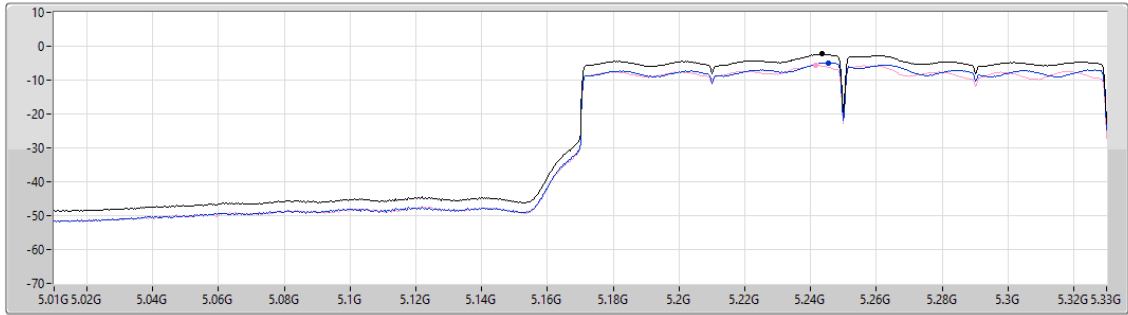

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-2.34	-2.34	-4.88	-5.62

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5300MHz

10/06/2026

CF (Hz)
5.3G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.956

Detector Type
RMS

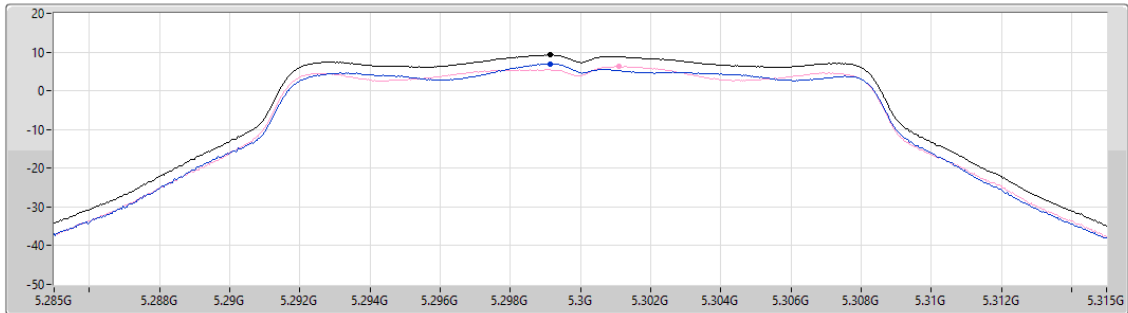

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
9.22	9.22	6.91	6.26

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5260MHz

10/06/2026

CF (Hz)
5.26G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

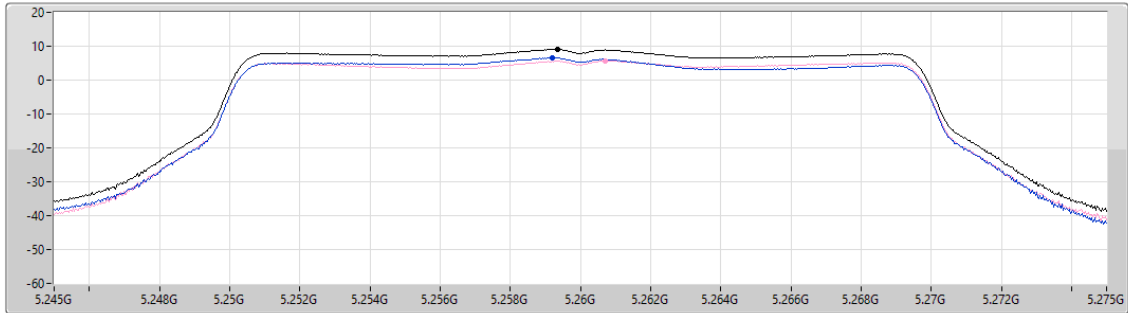

Sum ☒

Port 1 ☒

Port 2 ☒

Sum (dBm/100kHz)	PD (dBm/100kHz)	Port 1 (dBm/100kHz)	Port 2 (dBm/100kHz)
9.07	9.07	6.54	5.64

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5270MHz

10/06/2026

CF (Hz)
5.27G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

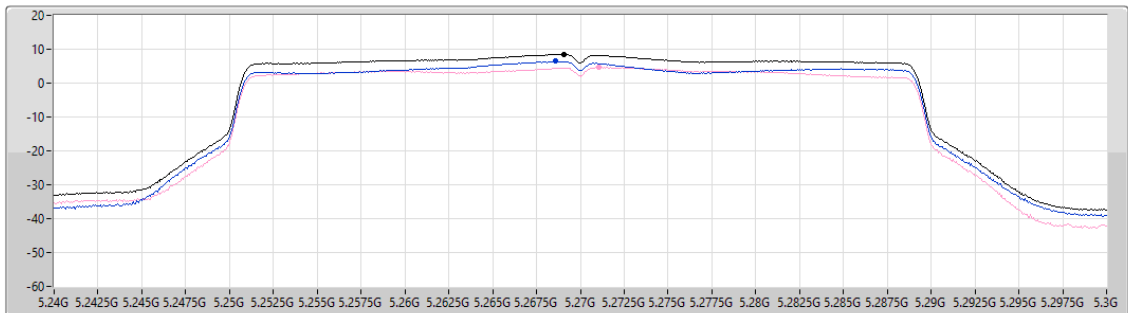

Sum ☒

Port 1 ☒

Port 2 ☒

Sum (dBm/100kHz)	PD (dBm/100kHz)	Port 1 (dBm/100kHz)	Port 2 (dBm/100kHz)
8.53	8.53	6.41	4.67

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5290MHz

10/06/2026

CF (Hz)
5.29G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

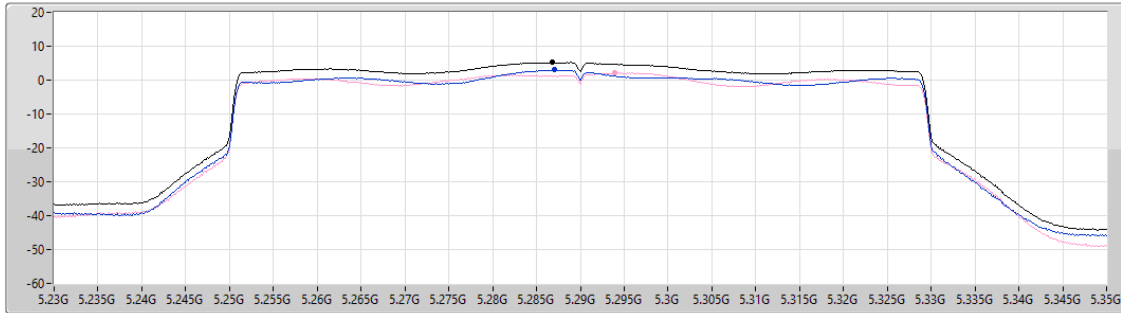

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.17	5.17	2.98	2.12

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.25-5.35GHz

10/06/2026

CF (Hz)
5.33G


Span (Hz)
320M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

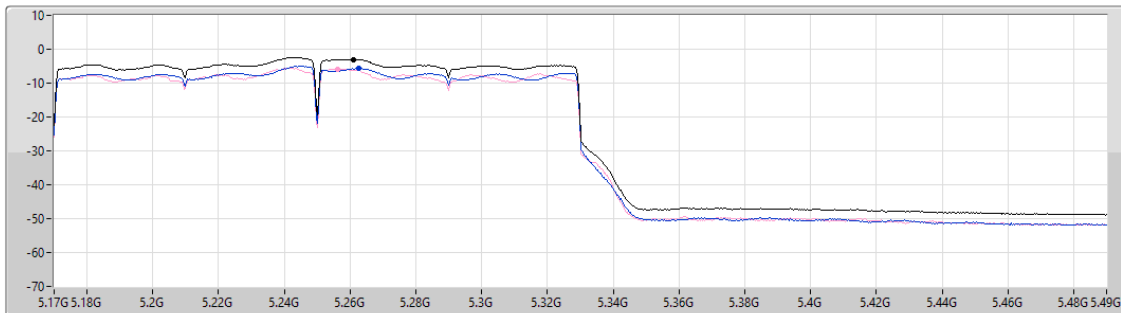

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.97	-2.97	-5.72	-5.80

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5580MHz

10/06/2026

CF (Hz)
5.58G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.956

Detector Type
RMS

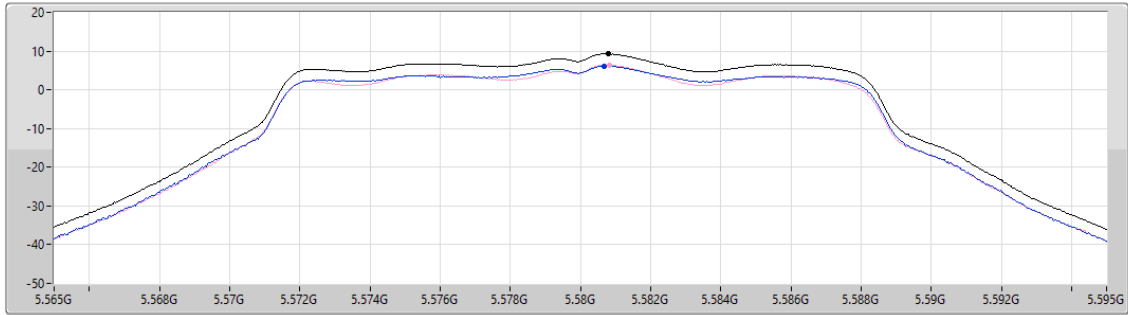

Sum ☒

Port 1 ☒

Port 2 ☒

Sum (dBm/100kHz)	PD (dBm/100kHz)	Port 1 (dBm/100kHz)	Port 2 (dBm/100kHz)
9.29	9.29	6.16	6.44

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5700MHz

10/06/2026

CF (Hz)
5.7G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

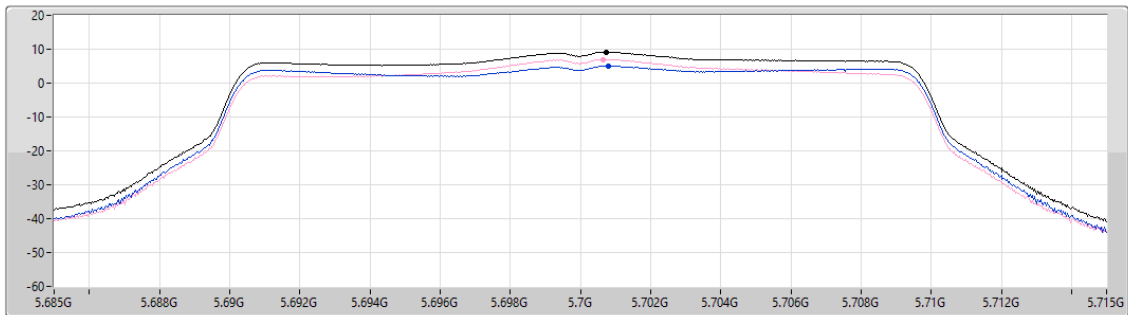

Sum ☒

Port 1 ☒

Port 2 ☒

Sum (dBm/100kHz)	PD (dBm/100kHz)	Port 1 (dBm/100kHz)	Port 2 (dBm/100kHz)
9.14	9.14	5.07	7.00

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5670MHz

10/06/2026

CF (Hz)
5.67G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

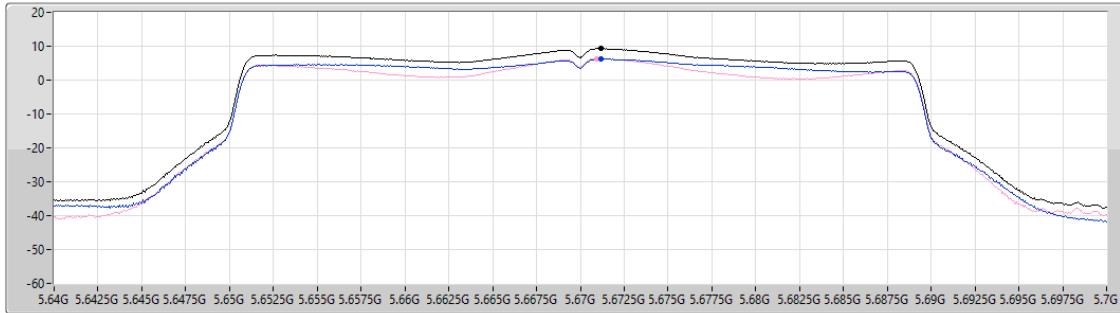

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.27	9.27	6.25	6.37

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5610MHz

10/06/2026

CF (Hz)
5.61G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

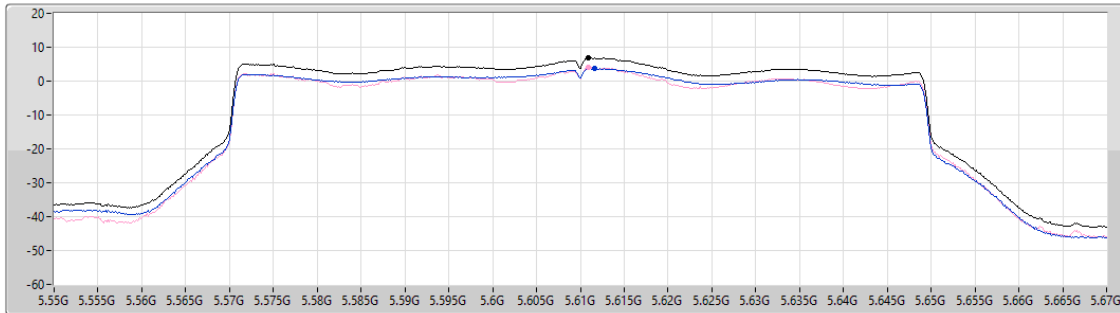

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.84	6.84	3.67	4.11

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5570MHz

10/06/2026

CF (Hz)
5.57G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

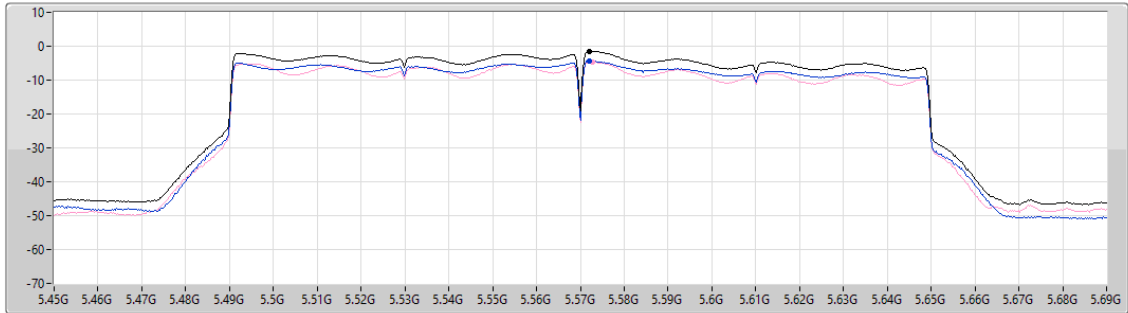

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.59	-1.59	-4.40	-4.73

5.47-5.725GHz_802.11be EHT240_Nss1,(MCS0)_2TX

PSD

5610MHz Straddle 5.47-5.725GHz

10/06/2026

CF (Hz)
5.49G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.51

Detector Type
RMS

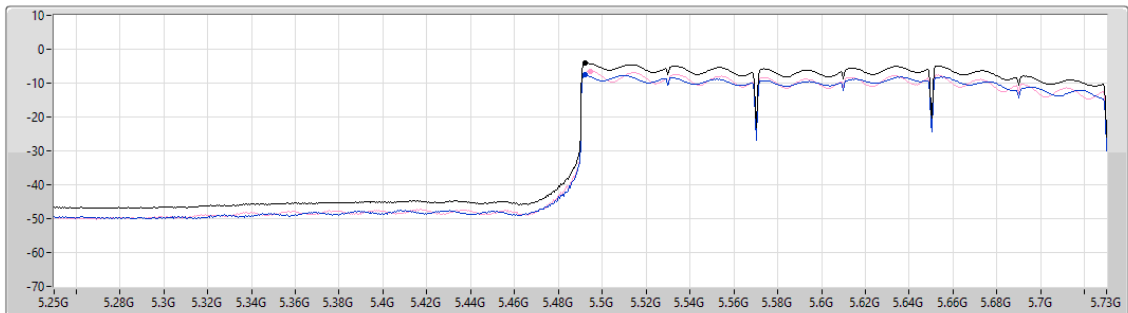

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.08	-4.08	-7.48	-6.47

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5745MHz

10/06/2026

CF (Hz)
5.745G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
19.956

Detector Type
RMS

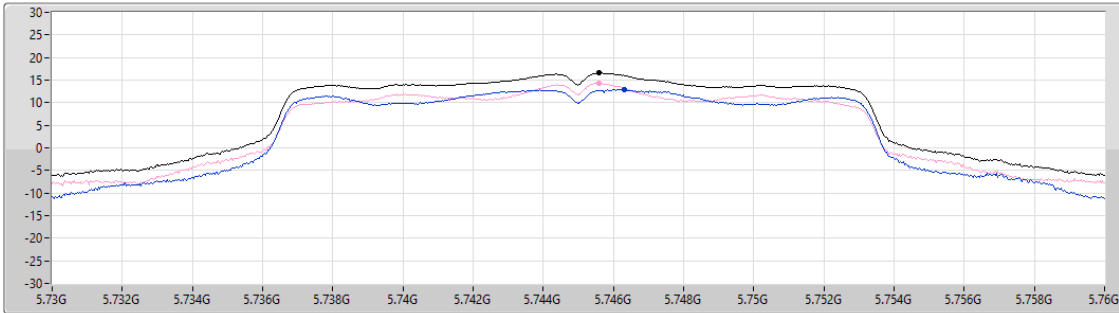

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
16.59	16.59	12.88	14.29

Sum ☒

Port 1 ☐

Port 2 ☐

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5745MHz

10/06/2026

CF (Hz)
5.745G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

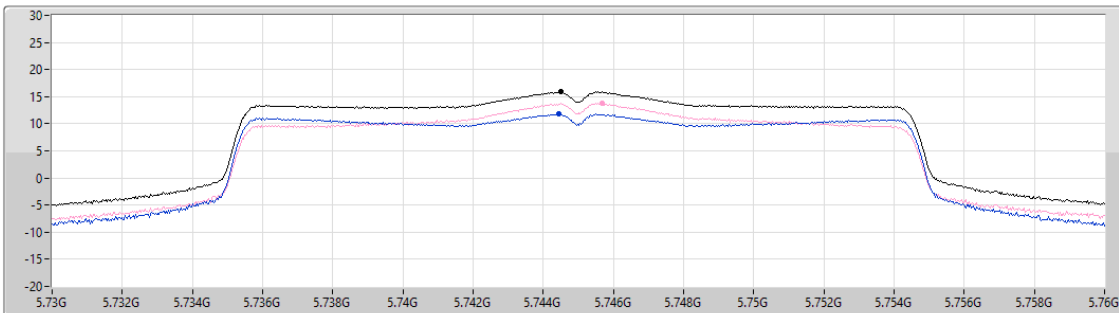

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
15.87	15.87	11.82	13.82

Sum ☒

Port 1 ☐

Port 2 ☐

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5795MHz

10/06/2026

CF (Hz)
5.795G


Span (Hz)
60M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

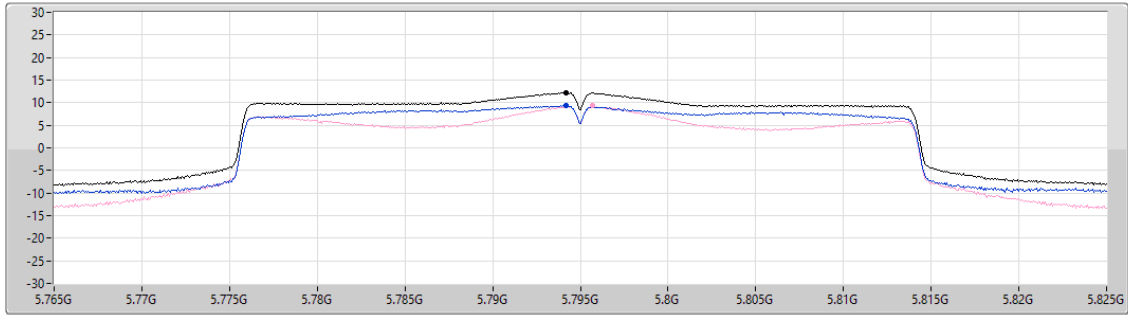

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
12.22	12.22	9.39	9.26

Sum ☒

Port 1 ☐

Port 2 ☐

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5775MHz

10/06/2026

CF (Hz)
5.775G


Span (Hz)
120M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.76

Detector Type
RMS

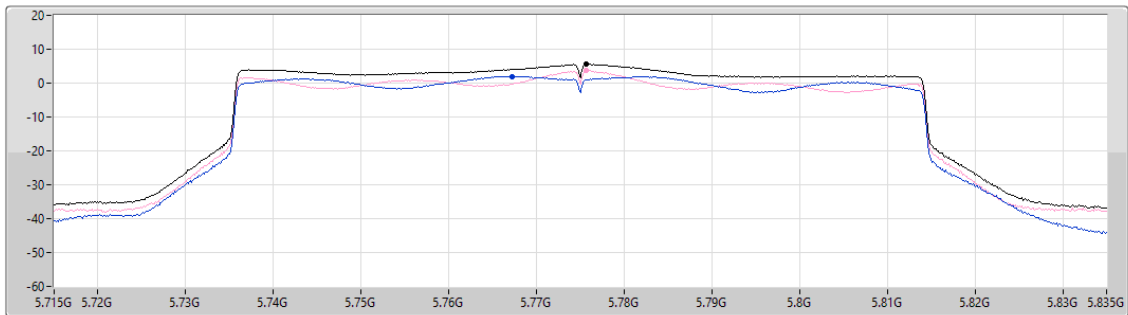

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.61	5.61	2.03	3.72

Sum ☒

Port 1 ☐


Port 2 ☐

5.725-5.85GHz_802.11be EHT240_Nss1,(MCS0)_2TX

PSD

5610MHz Straddle 5.725-5.85GHz

10/06/2026

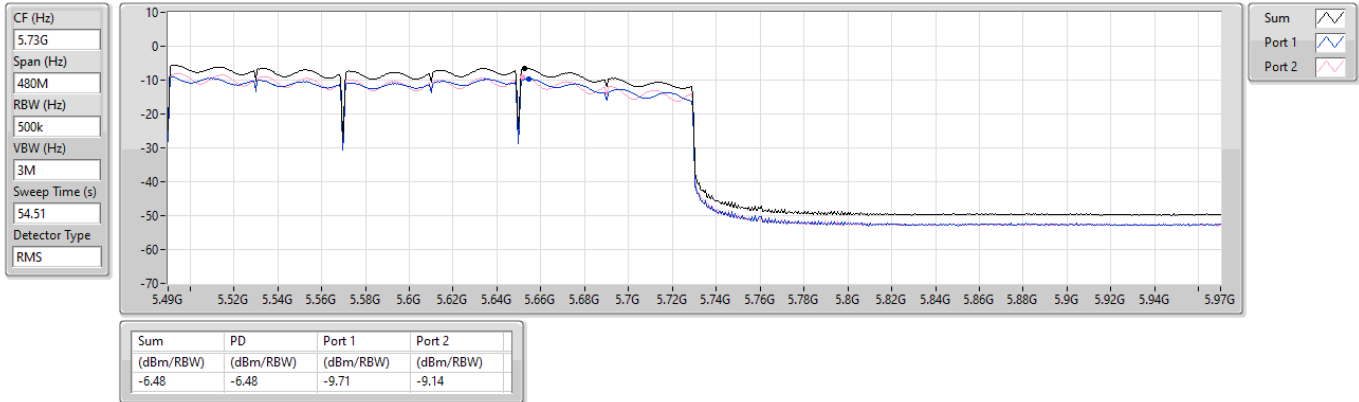



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	QP	35.82M	36.22	40.00	-3.78	3	Vertical	140	1.00

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5775MHz_PoE	Pass	PK	55.22M	35.40	40.00	-4.60	3	Vertical	0	1.00
5775MHz_PoE	Pass	PK	101.78M	25.64	43.50	-17.86	3	Vertical	0	1.00
5775MHz_PoE	Pass	PK	239.52M	19.87	46.00	-26.13	3	Vertical	0	1.00
5775MHz_PoE	Pass	PK	495.6M	31.56	46.00	-14.44	3	Vertical	0	1.00
5775MHz_PoE	Pass	PK	515M	30.74	46.00	-15.26	3	Vertical	0	1.00
5775MHz_PoE	Pass	QP	35.82M	36.22	40.00	-3.78	3	Vertical	140	1.00
5775MHz_PoE	Pass	PK	33.88M	31.20	40.00	-8.80	3	Horizontal	360	1.00
5775MHz_PoE	Pass	PK	53.28M	27.04	40.00	-12.96	3	Horizontal	360	1.00
5775MHz_PoE	Pass	PK	109.54M	19.98	43.50	-23.52	3	Horizontal	360	1.00
5775MHz_PoE	Pass	PK	158.04M	20.70	43.50	-22.80	3	Horizontal	360	1.00
5775MHz_PoE	Pass	PK	237.58M	24.03	46.00	-21.97	3	Horizontal	360	1.00
5775MHz_PoE	Pass	PK	497.54M	31.56	46.00	-14.44	3	Horizontal	360	1.00


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_PoE

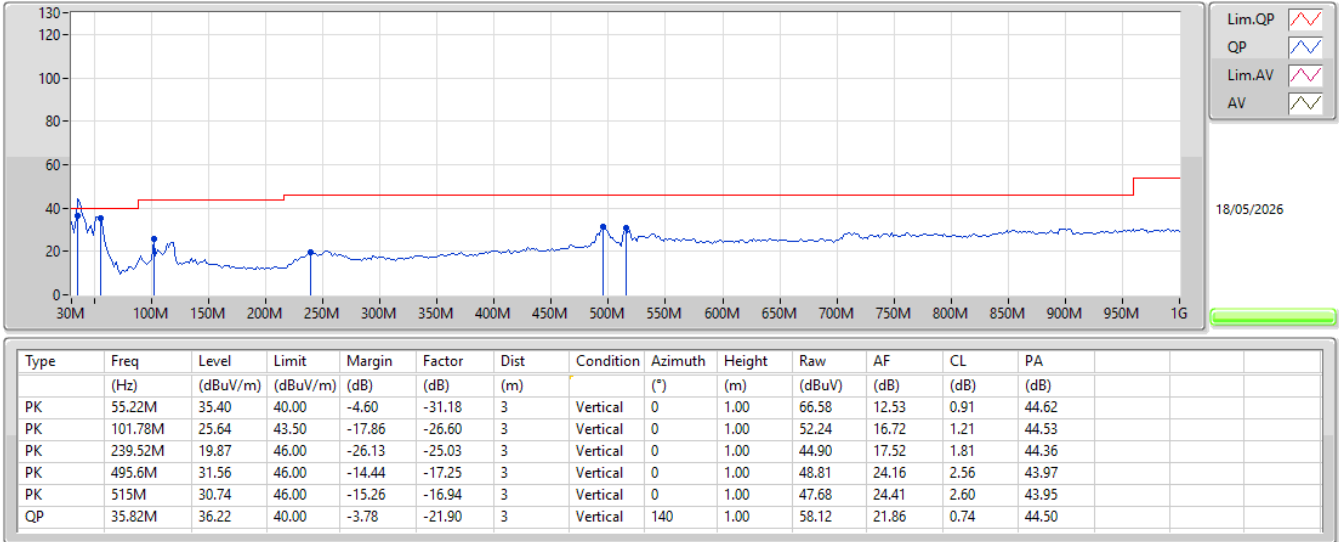

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_PoE

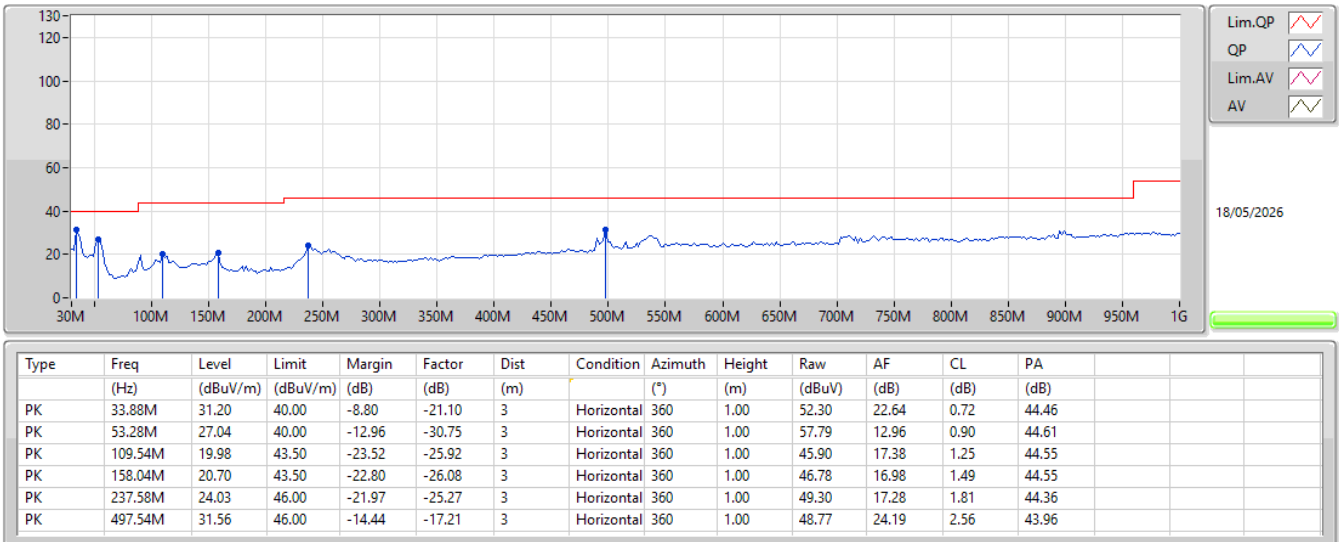

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	AV	5.1492G	53.56	54.00	-0.44	3	Horizontal	28	2.82
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	AV	5.15G	52.80	54.00	-1.20	3	Horizontal	330	1.50
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	AV	5.1428G	53.51	54.00	-0.49	3	Horizontal	333	1.50
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	AV	5.148G	53.83	54.00	-0.17	3	Horizontal	25	2.83
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	AV	5.3504G	53.50	54.00	-0.50	3	Horizontal	302	2.62
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	AV	5.3576G	53.82	54.00	-0.18	3	Horizontal	300	2.63
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	AV	5.3608G	53.97	54.00	-0.03	3	Horizontal	331	1.49
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	AV	5.361G	53.06	54.00	-0.94	3	Horizontal	28	1.80
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	AV	5.1384G	53.00	54.00	-1.00	3	Horizontal	26	1.80
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	PK	5.7264G	66.00	68.20	-2.20	3	Horizontal	285	1.09
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	PK	5.7264G	66.47	68.20	-1.73	3	Horizontal	279	1.26
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	PK	5.4696G	67.69	68.20	-0.51	3	Horizontal	75	1.50
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	PK	5.8508G	68.04	68.20	-0.16	3	Horizontal	15	1.81
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	AV	5.4344G	53.10	54.00	-0.90	3	Horizontal	311	2.56
802.11be EHT240_Nss1,(MCS0)_2TX	Pass	PK	5.4616G	67.15	68.20	-1.05	3	Horizontal	33	1.80
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	PK	6.119G	63.23	68.20	-4.97	3	Vertical	116	1.00
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	PK	5.9966G	63.78	68.20	-4.42	3	Horizontal	18	1.50
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	PK	5.9306G	67.93	68.20	-0.27	3	Horizontal	14	1.50
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	PK	5.649G	67.46	68.20	-0.74	3	Horizontal	14	1.49

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	AV	5.1484G	49.84	54.00	-4.16	3	Vertical	72	1.80
5180MHz	Pass	AV	5.179G	105.79	Inf	-Inf	3	Vertical	72	1.80
5180MHz	Pass	PK	5.1486G	62.68	74.00	-11.32	3	Vertical	72	1.80
5180MHz	Pass	PK	5.1784G	114.14	Inf	-Inf	3	Vertical	72	1.80
5180MHz	Pass	AV	5.1484G	52.64	54.00	-1.36	3	Horizontal	28	3.00
5180MHz	Pass	AV	5.1788G	111.62	Inf	-Inf	3	Horizontal	28	3.00
5180MHz	Pass	PK	5.1488G	67.24	74.00	-6.76	3	Horizontal	28	3.00
5180MHz	Pass	PK	5.1784G	120.04	Inf	-Inf	3	Horizontal	28	3.00
5180MHz	Pass	PK	10.363G	52.71	68.20	-15.49	3	Vertical	101	2.07
5180MHz	Pass	PK	10.3688G	51.82	68.20	-16.38	3	Horizontal	275	1.50
5200MHz	Pass	AV	5.148G	50.08	54.00	-3.92	3	Vertical	99	1.87
5200MHz	Pass	AV	5.1988G	108.73	Inf	-Inf	3	Vertical	99	1.87
5200MHz	Pass	PK	5.1488G	62.11	74.00	-11.89	3	Vertical	99	1.87
5200MHz	Pass	PK	5.1984G	117.45	Inf	-Inf	3	Vertical	99	1.87
5200MHz	Pass	AV	5.1492G	53.56	54.00	-0.44	3	Horizontal	28	2.82
5200MHz	Pass	AV	5.1992G	114.64	Inf	-Inf	3	Horizontal	28	2.82
5200MHz	Pass	PK	5.1484G	67.21	74.00	-6.79	3	Horizontal	28	2.82
5200MHz	Pass	PK	5.1992G	122.81	Inf	-Inf	3	Horizontal	28	2.82
5200MHz	Pass	PK	10.3932G	52.45	68.20	-15.75	3	Vertical	345	2.63
5200MHz	Pass	PK	10.4064G	53.42	68.20	-14.78	3	Horizontal	207	1.50
5200MHz	Pass	AV	31.2388G	43.29	54.00	-10.71	3	Vertical	200	2.29
5200MHz	Pass	PK	31.234G	55.29	74.00	-18.71	3	Vertical	200	2.29
5200MHz	Pass	AV	31.2573G	42.99	54.00	-11.01	3	Horizontal	150	1.65
5200MHz	Pass	PK	31.261G	55.02	74.00	-18.98	3	Horizontal	150	1.65
5240MHz	Pass	AV	5.1476G	49.02	54.00	-4.98	3	Vertical	94	1.50
5240MHz	Pass	AV	5.2418G	109.72	Inf	-Inf	3	Vertical	94	1.50
5240MHz	Pass	AV	5.3846G	48.94	54.00	-5.06	3	Vertical	94	1.50
5240MHz	Pass	PK	5.1368G	60.71	74.00	-13.29	3	Vertical	94	1.50
5240MHz	Pass	PK	5.2424G	118.57	Inf	-Inf	3	Vertical	94	1.50
5240MHz	Pass	PK	5.3678G	61.03	74.00	-12.97	3	Vertical	94	1.50
5240MHz	Pass	AV	5.1476G	49.95	54.00	-4.05	3	Horizontal	307	1.80
5240MHz	Pass	AV	5.2424G	115.52	Inf	-Inf	3	Horizontal	307	1.80
5240MHz	Pass	AV	5.3522G	49.51	54.00	-4.49	3	Horizontal	307	1.80
5240MHz	Pass	PK	5.1476G	63.69	74.00	-10.31	3	Horizontal	307	1.80
5240MHz	Pass	PK	5.2424G	124.45	Inf	-Inf	3	Horizontal	307	1.80
5240MHz	Pass	PK	5.3672G	61.36	74.00	-12.64	3	Horizontal	307	1.80
5240MHz	Pass	PK	10.47784G	54.27	68.20	-13.93	3	Vertical	283	1.08
5240MHz	Pass	PK	10.47448G	57.83	68.20	-10.37	3	Horizontal	46	1.77
5260MHz	Pass	AV	5.1466G	48.38	54.00	-5.62	3	Vertical	94	1.28
5260MHz	Pass	AV	5.2612G	110.49	Inf	-Inf	3	Vertical	94	1.28
5260MHz	Pass	AV	5.3518G	49.28	54.00	-4.72	3	Vertical	94	1.28
5260MHz	Pass	PK	5.1478G	60.44	74.00	-13.56	3	Vertical	94	1.28
5260MHz	Pass	PK	5.2612G	119.06	Inf	-Inf	3	Vertical	94	1.28
5260MHz	Pass	PK	5.3674G	61.60	74.00	-12.40	3	Vertical	94	1.28
5260MHz	Pass	AV	5.1496G	49.76	54.00	-4.24	3	Horizontal	26	2.89
5260MHz	Pass	AV	5.2588G	117.45	Inf	-Inf	3	Horizontal	26	2.89
5260MHz	Pass	AV	5.35G	50.73	54.00	-3.27	3	Horizontal	26	2.89
5260MHz	Pass	PK	5.1442G	62.40	74.00	-11.60	3	Horizontal	26	2.89
5260MHz	Pass	PK	5.2588G	125.88	Inf	-Inf	3	Horizontal	26	2.89
5260MHz	Pass	PK	5.359G	65.80	74.00	-8.20	3	Horizontal	26	2.89
5260MHz	Pass	PK	10.51136G	52.97	68.20	-15.23	3	Vertical	87	1.50
5260MHz	Pass	PK	10.51236G	53.21	68.20	-14.99	3	Horizontal	318	1.01
5300MHz	Pass	AV	5.3008G	108.45	Inf	-Inf	3	Vertical	96	1.11
5300MHz	Pass	AV	5.3508G	50.71	54.00	-3.29	3	Vertical	96	1.11
5300MHz	Pass	PK	5.3008G	116.47	Inf	-Inf	3	Vertical	96	1.11
5300MHz	Pass	PK	5.35G	62.86	74.00	-11.14	3	Vertical	96	1.11
5300MHz	Pass	AV	5.298G	113.28	Inf	-Inf	3	Horizontal	333	1.50
5300MHz	Pass	AV	5.3528G	53.20	54.00	-0.80	3	Horizontal	333	1.50
5300MHz	Pass	PK	5.2984G	122.32	Inf	-Inf	3	Horizontal	333	1.50
5300MHz	Pass	PK	5.3524G	66.40	74.00	-7.60	3	Horizontal	333	1.50

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5300MHz	Pass	PK	10.59008G	53.53	68.20	-14.67	3	Vertical	232	1.50
5300MHz	Pass	PK	10.59676G	52.98	68.20	-15.22	3	Horizontal	282	1.50
5320MHz	Pass	AV	5.321G	105.31	Inf	-Inf	3	Vertical	95	1.22
5320MHz	Pass	AV	5.3508G	50.99	54.00	-3.01	3	Vertical	95	1.22
5320MHz	Pass	PK	5.3214G	113.68	Inf	-Inf	3	Vertical	95	1.22
5320MHz	Pass	PK	5.3512G	63.05	74.00	-10.95	3	Vertical	95	1.22
5320MHz	Pass	AV	5.3206G	110.40	Inf	-Inf	3	Horizontal	302	2.62
5320MHz	Pass	AV	5.3504G	53.50	54.00	-0.50	3	Horizontal	302	2.62
5320MHz	Pass	PK	5.3208G	118.49	Inf	-Inf	3	Horizontal	302	2.62
5320MHz	Pass	PK	5.35G	66.00	74.00	-8.00	3	Horizontal	302	2.62
5320MHz	Pass	AV	10.63128G	40.00	54.00	-14.00	3	Vertical	289	2.38
5320MHz	Pass	PK	10.6354G	53.11	74.00	-20.89	3	Vertical	289	2.38
5320MHz	Pass	AV	10.64776G	40.05	54.00	-13.95	3	Horizontal	26	1.89
5320MHz	Pass	PK	10.64312G	51.98	74.00	-22.02	3	Horizontal	26	1.89
5320MHz	Pass	PK	28.444G	53.95	68.20	-14.25	3	Vertical	191	2.27
5320MHz	Pass	PK	28.237G	54.13	68.20	-14.07	3	Horizontal	333	1.88
5500MHz	Pass	AV	5.46G	48.84	54.00	-5.16	3	Vertical	249	2.62
5500MHz	Pass	AV	5.5006G	106.05	Inf	-Inf	3	Vertical	249	2.62
5500MHz	Pass	PK	5.4588G	60.30	74.00	-13.70	3	Vertical	249	2.62
5500MHz	Pass	PK	5.4664G	61.60	68.20	-6.60	3	Vertical	249	2.62
5500MHz	Pass	PK	5.5008G	114.27	Inf	-Inf	3	Vertical	249	2.62
5500MHz	Pass	AV	5.46G	49.83	54.00	-4.17	3	Horizontal	306	2.58
5500MHz	Pass	AV	5.5008G	110.76	Inf	-Inf	3	Horizontal	306	2.58
5500MHz	Pass	PK	5.4594G	62.15	74.00	-11.85	3	Horizontal	306	2.58
5500MHz	Pass	PK	5.4688G	65.84	68.20	-2.36	3	Horizontal	306	2.58
5500MHz	Pass	PK	5.501G	119.10	Inf	-Inf	3	Horizontal	306	2.58
5500MHz	Pass	AV	10.99012G	40.47	54.00	-13.53	3	Vertical	2	1.50
5500MHz	Pass	PK	10.99164G	52.49	74.00	-21.51	3	Vertical	2	1.50
5500MHz	Pass	AV	10.9904G	40.41	54.00	-13.59	3	Horizontal	254	2.06
5500MHz	Pass	PK	10.99024G	53.75	74.00	-20.25	3	Horizontal	254	2.06
5580MHz	Pass	AV	5.46G	48.61	54.00	-5.39	3	Vertical	265	2.86
5580MHz	Pass	AV	5.5812G	110.98	Inf	-Inf	3	Vertical	265	2.86
5580MHz	Pass	PK	5.4528G	60.68	74.00	-13.32	3	Vertical	265	2.86
5580MHz	Pass	PK	5.4696G	61.69	68.20	-6.51	3	Vertical	265	2.86
5580MHz	Pass	PK	5.5812G	119.34	Inf	-Inf	3	Vertical	265	2.86
5580MHz	Pass	AV	5.457G	48.81	54.00	-5.19	3	Horizontal	75	1.50
5580MHz	Pass	AV	5.5806G	113.32	Inf	-Inf	3	Horizontal	75	1.50
5580MHz	Pass	PK	5.4468G	61.25	74.00	-12.75	3	Horizontal	75	1.50
5580MHz	Pass	PK	5.466G	60.36	68.20	-7.84	3	Horizontal	75	1.50
5580MHz	Pass	PK	5.5806G	121.51	Inf	-Inf	3	Horizontal	75	1.50
5580MHz	Pass	AV	11.15192G	40.63	54.00	-13.37	3	Vertical	69	2.66
5580MHz	Pass	PK	11.16392G	53.29	74.00	-20.71	3	Vertical	69	2.66
5580MHz	Pass	AV	11.15012G	40.64	54.00	-13.36	3	Horizontal	36	1.50
5580MHz	Pass	PK	11.15608G	52.85	74.00	-21.15	3	Horizontal	36	1.50
5700MHz	Pass	AV	5.7008G	106.40	Inf	-Inf	3	Vertical	114	1.05
5700MHz	Pass	PK	5.7008G	114.52	Inf	-Inf	3	Vertical	114	1.05
5700MHz	Pass	PK	5.7264G	63.08	68.20	-5.12	3	Vertical	114	1.05
5700MHz	Pass	AV	5.7008G	108.29	Inf	-Inf	3	Horizontal	285	1.09
5700MHz	Pass	PK	5.7012G	116.77	Inf	-Inf	3	Horizontal	285	1.09
5700MHz	Pass	PK	5.7264G	66.00	68.20	-2.20	3	Horizontal	285	1.09
5700MHz	Pass	AV	11.39312G	40.71	54.00	-13.29	3	Vertical	214	2.39
5700MHz	Pass	PK	11.39332G	52.65	74.00	-21.35	3	Vertical	214	2.39
5700MHz	Pass	AV	11.39376G	40.69	54.00	-13.31	3	Horizontal	182	1.50
5700MHz	Pass	PK	11.393G	53.20	74.00	-20.80	3	Horizontal	182	1.50
5700MHz	Pass	AV	22.06G	38.87	54.00	-15.13	3	Vertical	67	1.52
5700MHz	Pass	PK	22.031G	50.71	74.00	-23.29	3	Vertical	67	1.52
5700MHz	Pass	AV	20.854G	38.16	54.00	-15.84	3	Horizontal	46	2.15
5700MHz	Pass	PK	20.885G	50.02	74.00	-23.98	3	Horizontal	46	2.15
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.4572G	48.54	54.00	-5.46	3	Vertical	117	1.00
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.7212G	111.19	Inf	-Inf	3	Vertical	117	1.00
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4308G	60.57	74.00	-13.43	3	Vertical	117	1.00
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.462G	60.39	68.20	-7.81	3	Vertical	117	1.00

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.7212G	119.58	Inf	-Inf	3	Vertical	117	1.00
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.9072G	63.08	68.20	-5.12	3	Vertical	117	1.00
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.4584G	48.57	54.00	-5.43	3	Horizontal	14	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.7188G	113.47	Inf	-Inf	3	Horizontal	14	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.444G	60.52	74.00	-13.48	3	Horizontal	14	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.462G	61.20	68.20	-7.00	3	Horizontal	14	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.7188G	121.65	Inf	-Inf	3	Horizontal	14	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.912G	62.91	68.20	-5.29	3	Horizontal	14	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.44284G	40.49	54.00	-13.51	3	Vertical	132	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.44904G	52.95	74.00	-21.05	3	Vertical	132	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.43304G	40.42	54.00	-13.58	3	Horizontal	320	1.19
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.44056G	52.90	74.00	-21.10	3	Horizontal	320	1.19
5745MHz	Pass	AV	5.457G	48.69	54.00	-5.31	3	Vertical	120	1.00
5745MHz	Pass	AV	5.7462G	109.99	Inf	-Inf	3	Vertical	120	1.00
5745MHz	Pass	PK	5.6178G	61.15	68.20	-7.05	3	Vertical	120	1.00
5745MHz	Pass	PK	5.7462G	118.29	Inf	-Inf	3	Vertical	120	1.00
5745MHz	Pass	PK	5.9598G	62.57	68.20	-5.63	3	Vertical	120	1.00
5745MHz	Pass	AV	5.457G	48.74	54.00	-5.26	3	Horizontal	286	2.68
5745MHz	Pass	AV	5.7462G	113.65	Inf	-Inf	3	Horizontal	286	2.68
5745MHz	Pass	PK	5.6394G	61.09	68.20	-7.11	3	Horizontal	286	2.68
5745MHz	Pass	PK	5.7462G	122.15	Inf	-Inf	3	Horizontal	286	2.68
5745MHz	Pass	PK	6.0342G	63.05	68.20	-5.15	3	Horizontal	286	2.68
5745MHz	Pass	AV	11.4912G	43.51	54.00	-10.49	3	Vertical	343	2.01
5745MHz	Pass	PK	11.49114G	55.65	74.00	-18.35	3	Vertical	343	2.01
5745MHz	Pass	AV	11.48988G	46.05	54.00	-7.95	3	Horizontal	323	1.80
5745MHz	Pass	PK	11.49024G	58.06	74.00	-15.94	3	Horizontal	323	1.80
5785MHz	Pass	AV	5.78613G	110.26	Inf	-Inf	3	Vertical	113	1.00
5785MHz	Pass	PK	5.55502G	60.97	68.20	-7.23	3	Vertical	113	1.00
5785MHz	Pass	PK	5.78613G	118.71	Inf	-Inf	3	Vertical	113	1.00
5785MHz	Pass	PK	5.98336G	62.95	68.20	-5.25	3	Vertical	113	1.00
5785MHz	Pass	AV	5.78492G	113.62	Inf	-Inf	3	Horizontal	14	1.50
5785MHz	Pass	PK	5.48726G	61.90	68.20	-6.30	3	Horizontal	14	1.50
5785MHz	Pass	PK	5.78371G	121.80	Inf	-Inf	3	Horizontal	14	1.50
5785MHz	Pass	PK	6.01966G	63.22	68.20	-4.98	3	Horizontal	14	1.50
5785MHz	Pass	AV	11.56276G	40.61	54.00	-13.39	3	Vertical	313	1.50
5785MHz	Pass	PK	11.56604G	53.40	74.00	-20.60	3	Vertical	313	1.50
5785MHz	Pass	AV	11.57212G	40.64	54.00	-13.36	3	Horizontal	11	1.50
5785MHz	Pass	PK	11.57592G	53.53	74.00	-20.47	3	Horizontal	11	1.50
5825MHz	Pass	AV	5.8262G	109.90	Inf	-Inf	3	Vertical	116	1.00
5825MHz	Pass	PK	5.543G	61.67	68.20	-6.53	3	Vertical	116	1.00
5825MHz	Pass	PK	5.8262G	117.90	Inf	-Inf	3	Vertical	116	1.00
5825MHz	Pass	PK	6.119G	63.23	68.20	-4.97	3	Vertical	116	1.00
5825MHz	Pass	AV	5.8238G	113.73	Inf	-Inf	3	Horizontal	14	1.50
5825MHz	Pass	PK	5.5418G	61.74	68.20	-6.46	3	Horizontal	14	1.50
5825MHz	Pass	PK	5.8238G	122.04	Inf	-Inf	3	Horizontal	14	1.50
5825MHz	Pass	PK	6.113G	62.72	68.20	-5.48	3	Horizontal	14	1.50
5825MHz	Pass	AV	11.65008G	40.64	54.00	-13.36	3	Vertical	305	1.50
5825MHz	Pass	PK	11.65164G	53.21	74.00	-20.79	3	Vertical	305	1.50
5825MHz	Pass	AV	11.64964G	40.60	54.00	-13.40	3	Horizontal	82	1.18
5825MHz	Pass	PK	11.64688G	53.15	74.00	-20.85	3	Horizontal	82	1.18
5825MHz	Pass	PK	34.027G	56.61	68.20	-11.59	3	Vertical	125	1.69
5825MHz	Pass	PK	34.229G	57.10	68.20	-11.10	3	Horizontal	328	1.11
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	AV	5.15G	52.14	54.00	-1.86	3	Vertical	94	1.50
5180MHz	Pass	AV	5.1886G	103.19	Inf	-Inf	3	Vertical	94	1.50
5180MHz	Pass	PK	5.1496G	64.60	74.00	-9.40	3	Vertical	94	1.50
5180MHz	Pass	PK	5.189G	114.85	Inf	-Inf	3	Vertical	94	1.50
5180MHz	Pass	AV	5.1422G	52.79	54.00	-1.21	3	Horizontal	25	2.80
5180MHz	Pass	AV	5.1792G	108.65	Inf	-Inf	3	Horizontal	25	2.80
5180MHz	Pass	PK	5.138G	71.87	74.00	-2.13	3	Horizontal	25	2.80
5180MHz	Pass	PK	5.1788G	120.45	Inf	-Inf	3	Horizontal	25	2.80
5180MHz	Pass	PK	10.36348G	51.74	68.20	-16.46	3	Vertical	184	1.09

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5180MHz	Pass	PK	10.36428G	52.08	68.20	-16.12	3	Horizontal	174	1.50
5200MHz	Pass	AV	5.1496G	50.42	54.00	-3.58	3	Vertical	93	1.50
5200MHz	Pass	AV	5.1908G	104.99	Inf	-Inf	3	Vertical	93	1.50
5200MHz	Pass	PK	5.1484G	63.70	74.00	-10.30	3	Vertical	93	1.50
5200MHz	Pass	PK	5.1912G	116.22	Inf	-Inf	3	Vertical	93	1.50
5200MHz	Pass	AV	5.15G	52.69	54.00	-1.31	3	Horizontal	333	1.49
5200MHz	Pass	AV	5.1916G	110.67	Inf	-Inf	3	Horizontal	333	1.49
5200MHz	Pass	PK	5.15G	65.08	74.00	-8.92	3	Horizontal	333	1.49
5200MHz	Pass	PK	5.192G	122.18	Inf	-Inf	3	Horizontal	333	1.49
5200MHz	Pass	PK	10.40148G	52.27	68.20	-15.93	3	Vertical	255	1.30
5200MHz	Pass	PK	10.40032G	52.46	68.20	-15.74	3	Horizontal	356	1.50
5240MHz	Pass	AV	5.15G	50.93	54.00	-3.07	3	Vertical	93	1.50
5240MHz	Pass	AV	5.231G	108.46	Inf	-Inf	3	Vertical	93	1.50
5240MHz	Pass	AV	5.3504G	49.23	54.00	-4.77	3	Vertical	93	1.50
5240MHz	Pass	PK	5.1488G	65.11	74.00	-8.89	3	Vertical	93	1.50
5240MHz	Pass	PK	5.2478G	119.50	Inf	-Inf	3	Vertical	93	1.50
5240MHz	Pass	PK	5.387G	61.78	74.00	-12.22	3	Vertical	93	1.50
5240MHz	Pass	AV	5.15G	52.80	54.00	-1.20	3	Horizontal	330	1.50
5240MHz	Pass	AV	5.2322G	114.35	Inf	-Inf	3	Horizontal	330	1.50
5240MHz	Pass	AV	5.35G	50.78	54.00	-3.22	3	Horizontal	330	1.50
5240MHz	Pass	PK	5.15G	68.24	74.00	-5.76	3	Horizontal	330	1.50
5240MHz	Pass	PK	5.2328G	125.41	Inf	-Inf	3	Horizontal	330	1.50
5240MHz	Pass	PK	5.35G	64.36	74.00	-9.64	3	Horizontal	330	1.50
5240MHz	Pass	PK	10.47528G	53.04	68.20	-15.16	3	Vertical	74	1.50
5240MHz	Pass	PK	10.48012G	53.15	68.20	-15.05	3	Horizontal	199	1.42
5240MHz	Pass	PK	31.987G	57.29	68.20	-10.91	3	Vertical	15	1.10
5240MHz	Pass	PK	26.652G	51.91	68.20	-16.29	3	Horizontal	219	1.73
5260MHz	Pass	AV	5.146G	48.62	54.00	-5.38	3	Vertical	107	2.44
5260MHz	Pass	AV	5.2606G	110.65	Inf	-Inf	3	Vertical	107	2.44
5260MHz	Pass	AV	5.3602G	49.46	54.00	-4.54	3	Vertical	107	2.44
5260MHz	Pass	PK	5.125G	60.27	74.00	-13.73	3	Vertical	107	2.44
5260MHz	Pass	PK	5.2612G	121.56	Inf	-Inf	3	Vertical	107	2.44
5260MHz	Pass	PK	5.3578G	62.68	74.00	-11.32	3	Vertical	107	2.44
5260MHz	Pass	AV	5.15G	49.94	54.00	-4.06	3	Horizontal	335	1.50
5260MHz	Pass	AV	5.2522G	114.34	Inf	-Inf	3	Horizontal	335	1.50
5260MHz	Pass	AV	5.35G	53.76	54.00	-0.24	3	Horizontal	335	1.50
5260MHz	Pass	PK	5.1394G	62.06	74.00	-11.94	3	Horizontal	335	1.50
5260MHz	Pass	PK	5.2534G	125.41	Inf	-Inf	3	Horizontal	335	1.50
5260MHz	Pass	PK	5.3512G	69.78	74.00	-4.22	3	Horizontal	335	1.50
5260MHz	Pass	PK	10.51392G	54.15	68.20	-14.05	3	Vertical	63	1.27
5260MHz	Pass	PK	10.52908G	52.99	68.20	-15.21	3	Horizontal	218	1.61
5300MHz	Pass	AV	5.3008G	106.56	Inf	-Inf	3	Vertical	96	2.57
5300MHz	Pass	AV	5.3596G	49.22	54.00	-4.78	3	Vertical	96	2.57
5300MHz	Pass	PK	5.3008G	117.43	Inf	-Inf	3	Vertical	96	2.57
5300MHz	Pass	PK	5.3608G	62.16	74.00	-11.84	3	Vertical	96	2.57
5300MHz	Pass	AV	5.2912G	110.50	Inf	-Inf	3	Horizontal	331	1.50
5300MHz	Pass	AV	5.3504G	52.64	54.00	-1.36	3	Horizontal	331	1.50
5300MHz	Pass	PK	5.2928G	121.90	Inf	-Inf	3	Horizontal	331	1.50
5300MHz	Pass	PK	5.35G	64.97	74.00	-9.03	3	Horizontal	331	1.50
5300MHz	Pass	PK	10.60712G	52.48	74.00	-21.52	3	Vertical	105	1.50
5300MHz	Pass	PK	10.59456G	52.23	68.20	-15.97	3	Horizontal	88	1.50
5320MHz	Pass	AV	5.3208G	105.14	Inf	-Inf	3	Vertical	94	1.05
5320MHz	Pass	AV	5.3586G	51.50	54.00	-2.50	3	Vertical	94	1.05
5320MHz	Pass	PK	5.3212G	116.08	Inf	-Inf	3	Vertical	94	1.05
5320MHz	Pass	PK	5.3578G	68.25	74.00	-5.75	3	Vertical	94	1.05
5320MHz	Pass	AV	5.3206G	109.27	Inf	-Inf	3	Horizontal	300	2.63
5320MHz	Pass	AV	5.3576G	53.82	54.00	-0.18	3	Horizontal	300	2.63
5320MHz	Pass	PK	5.3206G	121.20	Inf	-Inf	3	Horizontal	300	2.63
5320MHz	Pass	PK	5.3628G	70.48	74.00	-3.52	3	Horizontal	300	2.63
5320MHz	Pass	AV	10.64892G	39.99	54.00	-14.01	3	Vertical	307	1.62
5320MHz	Pass	PK	10.63176G	52.12	74.00	-21.88	3	Vertical	307	1.62
5320MHz	Pass	AV	10.64852G	39.94	54.00	-14.06	3	Horizontal	135	1.33

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5320MHz	Pass	PK	10.6312G	52.71	74.00	-21.29	3	Horizontal	135	1.33
5320MHz	Pass	PK	24.204G	50.94	68.20	-17.26	3	Vertical	131	1.96
5320MHz	Pass	PK	34.123G	57.65	68.20	-10.55	3	Horizontal	216	1.46
5500MHz	Pass	AV	5.4594G	49.14	54.00	-4.86	3	Vertical	343	2.96
5500MHz	Pass	AV	5.4992G	104.80	Inf	-Inf	3	Vertical	343	2.96
5500MHz	Pass	PK	5.4582G	61.25	74.00	-12.75	3	Vertical	343	2.96
5500MHz	Pass	PK	5.4672G	61.29	68.20	-6.91	3	Vertical	343	2.96
5500MHz	Pass	PK	5.4992G	115.95	Inf	-Inf	3	Vertical	343	2.96
5500MHz	Pass	AV	5.46G	50.10	54.00	-3.90	3	Horizontal	308	2.64
5500MHz	Pass	AV	5.5008G	107.93	Inf	-Inf	3	Horizontal	308	2.64
5500MHz	Pass	PK	5.4598G	62.62	74.00	-11.38	3	Horizontal	308	2.64
5500MHz	Pass	PK	5.4668G	66.05	68.20	-2.15	3	Horizontal	308	2.64
5500MHz	Pass	PK	5.502G	119.48	Inf	-Inf	3	Horizontal	308	2.64
5500MHz	Pass	AV	10.99064G	40.36	54.00	-13.64	3	Vertical	224	2.94
5500MHz	Pass	PK	10.99848G	53.42	74.00	-20.58	3	Vertical	224	2.94
5500MHz	Pass	AV	10.99044G	40.36	54.00	-13.64	3	Horizontal	281	1.01
5500MHz	Pass	PK	11.0076G	52.35	74.00	-21.65	3	Horizontal	281	1.01
5580MHz	Pass	AV	5.46G	48.87	54.00	-5.13	3	Vertical	273	2.69
5580MHz	Pass	AV	5.5806G	110.29	Inf	-Inf	3	Vertical	273	2.69
5580MHz	Pass	PK	5.4444G	60.65	74.00	-13.35	3	Vertical	273	2.69
5580MHz	Pass	PK	5.463G	60.03	68.20	-8.17	3	Vertical	273	2.69
5580MHz	Pass	PK	5.5812G	121.27	Inf	-Inf	3	Vertical	273	2.69
5580MHz	Pass	PK	5.7294G	62.16	68.20	-6.04	3	Vertical	273	2.69
5580MHz	Pass	AV	5.4594G	49.04	54.00	-4.96	3	Horizontal	78	1.50
5580MHz	Pass	AV	5.5806G	113.30	Inf	-Inf	3	Horizontal	78	1.50
5580MHz	Pass	PK	5.451G	61.91	74.00	-12.09	3	Horizontal	78	1.50
5580MHz	Pass	PK	5.4666G	60.71	68.20	-7.49	3	Horizontal	78	1.50
5580MHz	Pass	PK	5.58G	123.81	Inf	-Inf	3	Horizontal	78	1.50
5580MHz	Pass	PK	5.7288G	60.77	68.20	-7.43	3	Horizontal	78	1.50
5580MHz	Pass	AV	11.1504G	40.63	54.00	-13.37	3	Vertical	275	1.37
5580MHz	Pass	PK	11.15444G	52.65	74.00	-21.35	3	Vertical	275	1.37
5580MHz	Pass	AV	11.15032G	40.61	54.00	-13.39	3	Horizontal	100	1.38
5580MHz	Pass	PK	11.15712G	52.60	74.00	-21.40	3	Horizontal	100	1.38
5700MHz	Pass	AV	5.7012G	105.09	Inf	-Inf	3	Vertical	114	1.05
5700MHz	Pass	PK	5.7012G	117.60	Inf	-Inf	3	Vertical	114	1.05
5700MHz	Pass	PK	5.7252G	63.52	68.20	-4.68	3	Vertical	114	1.05
5700MHz	Pass	AV	5.7004G	106.34	Inf	-Inf	3	Horizontal	279	1.26
5700MHz	Pass	PK	5.702G	117.60	Inf	-Inf	3	Horizontal	279	1.26
5700MHz	Pass	PK	5.7264G	66.47	68.20	-1.73	3	Horizontal	279	1.26
5700MHz	Pass	AV	11.39304G	40.59	54.00	-13.41	3	Vertical	257	1.05
5700MHz	Pass	PK	11.39144G	53.23	74.00	-20.77	3	Vertical	257	1.05
5700MHz	Pass	AV	11.39292G	40.61	54.00	-13.39	3	Horizontal	146	1.47
5700MHz	Pass	PK	11.40068G	53.26	74.00	-20.74	3	Horizontal	146	1.47
5700MHz	Pass	PK	31.96G	56.97	68.20	-11.23	3	Vertical	166	2.09
5700MHz	Pass	PK	23.419G	50.71	68.20	-17.49	3	Horizontal	113	2.68
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.4572G	48.81	54.00	-5.19	3	Vertical	106	1.00
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.7212G	110.66	Inf	-Inf	3	Vertical	106	1.00
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4404G	60.78	74.00	-13.22	3	Vertical	106	1.00
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.468G	60.22	68.20	-7.98	3	Vertical	106	1.00
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.7212G	120.90	Inf	-Inf	3	Vertical	106	1.00
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.96G	63.29	68.20	-4.91	3	Vertical	106	1.00
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.4584G	48.78	54.00	-5.22	3	Horizontal	18	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.7188G	113.21	Inf	-Inf	3	Horizontal	18	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4236G	61.23	74.00	-12.77	3	Horizontal	18	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4692G	60.29	68.20	-7.91	3	Horizontal	18	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.7188G	123.07	Inf	-Inf	3	Horizontal	18	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.8904G	63.39	68.20	-4.81	3	Horizontal	18	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.43004G	40.42	54.00	-13.58	3	Vertical	301	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.43004G	52.92	74.00	-21.08	3	Vertical	301	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.44132G	40.33	54.00	-13.67	3	Horizontal	18	1.50
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.44148G	52.60	74.00	-21.40	3	Horizontal	18	1.50
5745MHz	Pass	AV	5.4498G	48.74	54.00	-5.26	3	Vertical	104	2.19

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5745MHz	Pass	AV	5.7438G	109.72	Inf	-Inf	3	Vertical	104	2.19
5745MHz	Pass	PK	5.5242G	61.35	68.20	-6.85	3	Vertical	104	2.19
5745MHz	Pass	PK	5.745G	120.22	Inf	-Inf	3	Vertical	104	2.19
5745MHz	Pass	PK	6.0006G	62.90	68.20	-5.30	3	Vertical	104	2.19
5745MHz	Pass	AV	5.4522G	48.81	54.00	-5.19	3	Horizontal	15	1.50
5745MHz	Pass	AV	5.7438G	113.35	Inf	-Inf	3	Horizontal	15	1.50
5745MHz	Pass	PK	5.6466G	61.67	68.20	-6.53	3	Horizontal	15	1.50
5745MHz	Pass	PK	5.7438G	123.19	Inf	-Inf	3	Horizontal	15	1.50
5745MHz	Pass	PK	5.979G	63.10	68.20	-5.10	3	Horizontal	15	1.50
5745MHz	Pass	AV	11.4816G	40.96	54.00	-13.04	3	Vertical	153	2.98
5745MHz	Pass	PK	11.48424G	54.18	74.00	-19.82	3	Vertical	153	2.98
5745MHz	Pass	AV	11.48376G	40.97	54.00	-13.03	3	Horizontal	272	1.00
5745MHz	Pass	PK	11.4996G	53.78	74.00	-20.22	3	Horizontal	272	1.00
5785MHz	Pass	AV	5.78613G	109.41	Inf	-Inf	3	Vertical	115	1.01
5785MHz	Pass	PK	5.5284G	61.58	68.20	-6.62	3	Vertical	115	1.01
5785MHz	Pass	PK	5.78734G	120.26	Inf	-Inf	3	Vertical	115	1.01
5785MHz	Pass	PK	5.964G	63.40	68.20	-4.80	3	Vertical	115	1.01
5785MHz	Pass	AV	5.78371G	113.43	Inf	-Inf	3	Horizontal	18	1.50
5785MHz	Pass	PK	5.59132G	61.59	68.20	-6.61	3	Horizontal	18	1.50
5785MHz	Pass	PK	5.78371G	123.83	Inf	-Inf	3	Horizontal	18	1.50
5785MHz	Pass	PK	5.98215G	62.88	68.20	-5.32	3	Horizontal	18	1.50
5785MHz	Pass	AV	11.56876G	40.73	54.00	-13.27	3	Vertical	237	1.50
5785MHz	Pass	PK	11.57652G	53.29	74.00	-20.71	3	Vertical	237	1.50
5785MHz	Pass	AV	11.57096G	40.74	54.00	-13.26	3	Horizontal	346	2.12
5785MHz	Pass	PK	11.5698G	53.09	74.00	-20.91	3	Horizontal	346	2.12
5825MHz	Pass	AV	5.8262G	108.94	Inf	-Inf	3	Vertical	105	1.00
5825MHz	Pass	PK	5.5634G	61.78	68.20	-6.42	3	Vertical	105	1.00
5825MHz	Pass	PK	5.8274G	118.92	Inf	-Inf	3	Vertical	105	1.00
5825MHz	Pass	PK	6.023G	63.33	68.20	-4.87	3	Vertical	105	1.00
5825MHz	Pass	AV	5.8238G	113.37	Inf	-Inf	3	Horizontal	18	1.50
5825MHz	Pass	PK	5.6198G	61.55	68.20	-6.65	3	Horizontal	18	1.50
5825MHz	Pass	PK	5.8238G	123.65	Inf	-Inf	3	Horizontal	18	1.50
5825MHz	Pass	PK	5.9966G	63.78	68.20	-4.42	3	Horizontal	18	1.50
5825MHz	Pass	AV	11.64916G	40.75	54.00	-13.25	3	Vertical	250	1.72
5825MHz	Pass	PK	11.65728G	52.99	74.00	-21.01	3	Vertical	250	1.72
5825MHz	Pass	AV	11.64848G	40.72	54.00	-13.28	3	Horizontal	81	2.00
5825MHz	Pass	PK	11.65064G	53.54	74.00	-20.46	3	Horizontal	81	2.00
5825MHz	Pass	PK	28.44G	53.27	68.20	-14.93	3	Vertical	157	1.86
5825MHz	Pass	PK	27.022G	51.69	68.20	-16.51	3	Horizontal	25	1.56
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	AV	5.1428G	49.35	54.00	-4.65	3	Vertical	93	1.50
5190MHz	Pass	AV	5.1992G	96.73	Inf	-Inf	3	Vertical	93	1.50
5190MHz	Pass	PK	5.1448G	61.34	74.00	-12.66	3	Vertical	93	1.50
5190MHz	Pass	PK	5.1964G	108.34	Inf	-Inf	3	Vertical	93	1.50
5190MHz	Pass	AV	5.15G	53.01	54.00	-0.99	3	Horizontal	23	2.82
5190MHz	Pass	AV	5.1888G	102.62	Inf	-Inf	3	Horizontal	23	2.82
5190MHz	Pass	PK	5.1496G	66.55	74.00	-7.45	3	Horizontal	23	2.82
5190MHz	Pass	PK	5.1868G	113.91	Inf	-Inf	3	Horizontal	23	2.82
5190MHz	Pass	PK	10.36536G	52.58	68.20	-15.62	3	Vertical	92	1.50
5190MHz	Pass	PK	10.39288G	52.64	68.20	-15.56	3	Horizontal	22	2.27
5230MHz	Pass	AV	5.1384G	49.85	54.00	-4.15	3	Vertical	93	1.50
5230MHz	Pass	AV	5.2384G	102.01	Inf	-Inf	3	Vertical	93	1.50
5230MHz	Pass	PK	5.1416G	64.03	74.00	-9.97	3	Vertical	93	1.50
5230MHz	Pass	PK	5.2404G	113.85	Inf	-Inf	3	Vertical	93	1.50
5230MHz	Pass	AV	5.1428G	53.51	54.00	-0.49	3	Horizontal	333	1.50
5230MHz	Pass	AV	5.222G	107.49	Inf	-Inf	3	Horizontal	333	1.50
5230MHz	Pass	PK	5.142G	68.02	74.00	-5.98	3	Horizontal	333	1.50
5230MHz	Pass	PK	5.2224G	119.80	Inf	-Inf	3	Horizontal	333	1.50
5230MHz	Pass	PK	10.47432G	52.75	68.20	-15.45	3	Vertical	102	1.51
5230MHz	Pass	PK	10.44952G	52.84	68.20	-15.36	3	Horizontal	11	1.32
5230MHz	Pass	PK	31.84G	56.44	68.20	-11.76	3	Vertical	360	1.84
5230MHz	Pass	PK	34.117G	57.90	68.20	-10.30	3	Horizontal	29	1.05

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5270MHz	Pass	AV	5.2596G	102.16	Inf	-Inf	3	Vertical	96	1.50
5270MHz	Pass	AV	5.3584G	51.15	54.00	-2.85	3	Vertical	96	1.50
5270MHz	Pass	PK	5.2572G	114.18	Inf	-Inf	3	Vertical	96	1.50
5270MHz	Pass	PK	5.3592G	63.16	74.00	-10.84	3	Vertical	96	1.50
5270MHz	Pass	AV	5.2616G	108.05	Inf	-Inf	3	Horizontal	331	1.49
5270MHz	Pass	AV	5.3608G	53.97	54.00	-0.03	3	Horizontal	331	1.49
5270MHz	Pass	PK	5.26G	119.86	Inf	-Inf	3	Horizontal	331	1.49
5270MHz	Pass	PK	5.362G	67.12	74.00	-6.88	3	Horizontal	331	1.49
5270MHz	Pass	PK	10.54352G	53.50	68.20	-14.70	3	Vertical	73	1.50
5270MHz	Pass	PK	10.5556G	53.47	68.20	-14.73	3	Horizontal	288	1.97
5270MHz	Pass	PK	29.191G	54.19	68.20	-14.01	3	Vertical	333	1.47
5270MHz	Pass	PK	29.003G	54.58	68.20	-13.62	3	Horizontal	23	1.50
5310MHz	Pass	AV	5.312G	100.27	Inf	-Inf	3	Vertical	95	1.11
5310MHz	Pass	AV	5.3572G	49.89	54.00	-4.11	3	Vertical	95	1.11
5310MHz	Pass	PK	5.3148G	111.18	Inf	-Inf	3	Vertical	95	1.11
5310MHz	Pass	PK	5.3552G	61.92	74.00	-12.08	3	Vertical	95	1.11
5310MHz	Pass	AV	5.3112G	106.44	Inf	-Inf	3	Horizontal	300	2.63
5310MHz	Pass	AV	5.3544G	52.60	54.00	-1.40	3	Horizontal	300	2.63
5310MHz	Pass	PK	5.3128G	117.23	Inf	-Inf	3	Horizontal	300	2.63
5310MHz	Pass	PK	5.3564G	65.59	74.00	-8.41	3	Horizontal	300	2.63
5310MHz	Pass	AV	10.6252G	40.11	54.00	-13.89	3	Vertical	131	1.50
5310MHz	Pass	PK	10.61208G	52.69	74.00	-21.31	3	Vertical	131	1.50
5310MHz	Pass	AV	10.61304G	40.09	54.00	-13.91	3	Horizontal	357	2.49
5310MHz	Pass	PK	10.63984G	52.39	74.00	-21.61	3	Horizontal	357	2.49
5510MHz	Pass	AV	5.458G	48.89	54.00	-5.11	3	Vertical	232	1.06
5510MHz	Pass	AV	5.5108G	98.93	Inf	-Inf	3	Vertical	232	1.06
5510MHz	Pass	PK	5.4156G	61.20	74.00	-12.80	3	Vertical	232	1.06
5510MHz	Pass	PK	5.4672G	62.25	68.20	-5.95	3	Vertical	232	1.06
5510MHz	Pass	PK	5.5084G	110.04	Inf	-Inf	3	Vertical	232	1.06
5510MHz	Pass	AV	5.4584G	50.55	54.00	-3.45	3	Horizontal	323	1.19
5510MHz	Pass	AV	5.5112G	103.94	Inf	-Inf	3	Horizontal	323	1.19
5510MHz	Pass	PK	5.4576G	65.60	74.00	-8.40	3	Horizontal	323	1.19
5510MHz	Pass	PK	5.4688G	66.20	68.20	-2.00	3	Horizontal	323	1.19
5510MHz	Pass	PK	5.5128G	115.89	Inf	-Inf	3	Horizontal	323	1.19
5510MHz	Pass	AV	11.02264G	40.18	54.00	-13.82	3	Vertical	326	1.11
5510MHz	Pass	PK	11.02232G	52.57	74.00	-21.43	3	Vertical	326	1.11
5510MHz	Pass	AV	11.02952G	40.16	54.00	-13.84	3	Horizontal	277	2.74
5510MHz	Pass	PK	11.01384G	51.17	74.00	-22.83	3	Horizontal	277	2.74
5550MHz	Pass	AV	5.4564G	49.40	54.00	-4.60	3	Vertical	261	2.71
5550MHz	Pass	AV	5.5516G	104.03	Inf	-Inf	3	Vertical	261	2.71
5550MHz	Pass	PK	5.4576G	60.86	74.00	-13.14	3	Vertical	261	2.71
5550MHz	Pass	PK	5.4688G	62.67	68.20	-5.53	3	Vertical	261	2.71
5550MHz	Pass	PK	5.5516G	116.69	Inf	-Inf	3	Vertical	261	2.71
5550MHz	Pass	AV	5.454G	50.68	54.00	-3.32	3	Horizontal	75	1.50
5550MHz	Pass	AV	5.5508G	108.01	Inf	-Inf	3	Horizontal	75	1.50
5550MHz	Pass	PK	5.46G	63.21	74.00	-10.79	3	Horizontal	75	1.50
5550MHz	Pass	PK	5.4696G	67.69	68.20	-0.51	3	Horizontal	75	1.50
5550MHz	Pass	PK	5.5516G	119.83	Inf	-Inf	3	Horizontal	75	1.50
5550MHz	Pass	AV	11.11288G	40.47	54.00	-13.53	3	Vertical	100	1.50
5550MHz	Pass	PK	11.08632G	52.40	74.00	-21.60	3	Vertical	100	1.50
5550MHz	Pass	AV	11.11432G	40.51	54.00	-13.49	3	Horizontal	96	1.50
5550MHz	Pass	PK	11.0896G	52.27	74.00	-21.73	3	Horizontal	96	1.50
5550MHz	Pass	PK	34.093G	57.88	68.20	-10.32	3	Vertical	219	2.18
5550MHz	Pass	PK	28.396G	53.98	68.20	-14.22	3	Horizontal	333	2.21
5670MHz	Pass	AV	5.6712G	101.60	Inf	-Inf	3	Vertical	288	1.09
5670MHz	Pass	PK	5.6718G	112.57	Inf	-Inf	3	Vertical	288	1.09
5670MHz	Pass	PK	5.7288G	64.39	68.20	-3.81	3	Vertical	288	1.09
5670MHz	Pass	AV	5.6706G	106.42	Inf	-Inf	3	Horizontal	280	1.32
5670MHz	Pass	PK	5.6712G	117.63	Inf	-Inf	3	Horizontal	280	1.32
5670MHz	Pass	PK	5.7288G	67.16	68.20	-1.04	3	Horizontal	280	1.32
5670MHz	Pass	AV	11.35256G	40.52	54.00	-13.48	3	Vertical	296	1.50
5670MHz	Pass	PK	11.35632G	52.10	74.00	-21.90	3	Vertical	296	1.50

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5670MHz	Pass	AV	11.35432G	40.64	54.00	-13.36	3	Horizontal	10	1.50
5670MHz	Pass	PK	11.3576G	53.00	74.00	-21.00	3	Horizontal	10	1.50
5710MHz Straddle 5.47-5.725GHz	Pass	AV	5.4568G	48.87	54.00	-5.13	3	Vertical	106	1.00
5710MHz Straddle 5.47-5.725GHz	Pass	AV	5.7112G	107.57	Inf	-Inf	3	Vertical	106	1.00
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.434G	60.51	74.00	-13.49	3	Vertical	106	1.00
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.464G	61.21	68.20	-6.99	3	Vertical	106	1.00
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.7136G	118.67	Inf	-Inf	3	Vertical	106	1.00
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.8528G	64.63	68.20	-3.57	3	Vertical	106	1.00
5710MHz Straddle 5.47-5.725GHz	Pass	AV	5.4532G	49.01	54.00	-4.99	3	Horizontal	17	1.75
5710MHz Straddle 5.47-5.725GHz	Pass	AV	5.7112G	111.38	Inf	-Inf	3	Horizontal	17	1.75
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.4532G	61.13	74.00	-12.87	3	Horizontal	17	1.75
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.4604G	60.78	68.20	-7.42	3	Horizontal	17	1.75
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.7112G	122.08	Inf	-Inf	3	Horizontal	17	1.75
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.8504G	67.46	68.20	-0.74	3	Horizontal	17	1.75
5710MHz Straddle 5.47-5.725GHz	Pass	AV	11.43128G	40.57	54.00	-13.43	3	Vertical	234	2.74
5710MHz Straddle 5.47-5.725GHz	Pass	PK	11.4108G	53.08	74.00	-20.92	3	Vertical	234	2.74
5710MHz Straddle 5.47-5.725GHz	Pass	AV	11.43184G	40.60	54.00	-13.40	3	Horizontal	260	2.11
5710MHz Straddle 5.47-5.725GHz	Pass	PK	11.40552G	52.46	74.00	-21.54	3	Horizontal	260	2.11
5755MHz	Pass	AV	5.4586G	48.72	54.00	-5.28	3	Vertical	295	1.22
5755MHz	Pass	AV	5.7562G	104.23	Inf	-Inf	3	Vertical	295	1.22
5755MHz	Pass	PK	5.6374G	61.92	68.20	-6.28	3	Vertical	295	1.22
5755MHz	Pass	PK	5.7562G	114.67	Inf	-Inf	3	Vertical	295	1.22
5755MHz	Pass	PK	5.9782G	62.94	68.20	-5.26	3	Vertical	295	1.22
5755MHz	Pass	AV	5.4574G	48.89	54.00	-5.11	3	Horizontal	14	1.69
5755MHz	Pass	AV	5.7538G	109.50	Inf	-Inf	3	Horizontal	14	1.69
5755MHz	Pass	PK	5.653G	67.79	70.42	-2.63	3	Horizontal	14	1.69
5755MHz	Pass	PK	5.7538G	120.55	Inf	-Inf	3	Horizontal	14	1.69
5755MHz	Pass	PK	5.9794G	63.52	68.20	-4.68	3	Horizontal	14	1.69
5755MHz	Pass	AV	11.51776G	40.99	54.00	-13.01	3	Vertical	152	1.50
5755MHz	Pass	PK	11.50504G	53.15	74.00	-20.85	3	Vertical	152	1.50
5755MHz	Pass	AV	11.50936G	40.99	54.00	-13.01	3	Horizontal	59	1.76
5755MHz	Pass	PK	11.4984G	53.95	74.00	-20.05	3	Horizontal	59	1.76
5795MHz	Pass	AV	5.7962G	105.82	Inf	-Inf	3	Vertical	104	1.01
5795MHz	Pass	PK	5.6402G	62.82	68.20	-5.38	3	Vertical	104	1.01
5795MHz	Pass	PK	5.7986G	116.59	Inf	-Inf	3	Vertical	104	1.01
5795MHz	Pass	PK	5.9318G	64.57	68.20	-3.63	3	Vertical	104	1.01
5795MHz	Pass	AV	5.7938G	110.08	Inf	-Inf	3	Horizontal	14	1.50
5795MHz	Pass	PK	5.6522G	66.34	69.83	-3.49	3	Horizontal	14	1.50
5795MHz	Pass	PK	5.7938G	120.43	Inf	-Inf	3	Horizontal	14	1.50
5795MHz	Pass	PK	5.9306G	67.93	68.20	-0.27	3	Horizontal	14	1.50
5795MHz	Pass	AV	11.57192G	40.79	54.00	-13.21	3	Vertical	277	1.50
5795MHz	Pass	PK	11.58664G	52.96	74.00	-21.04	3	Vertical	277	1.50
5795MHz	Pass	AV	11.57072G	40.81	54.00	-13.19	3	Horizontal	213	3.00
5795MHz	Pass	PK	11.57008G	52.96	74.00	-21.04	3	Horizontal	213	3.00
5795MHz	Pass	PK	32.521G	56.17	68.20	-12.03	3	Vertical	189	1.79
5795MHz	Pass	PK	30.451G	54.97	68.20	-13.23	3	Horizontal	120	1.91
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	AV	5.143G	50.45	54.00	-3.55	3	Vertical	99	1.85
5210MHz	Pass	AV	5.205G	94.65	Inf	-Inf	3	Vertical	99	1.85
5210MHz	Pass	AV	5.455G	49.20	54.00	-4.80	3	Vertical	99	1.85
5210MHz	Pass	PK	5.143G	62.08	74.00	-11.92	3	Vertical	99	1.85
5210MHz	Pass	PK	5.206G	105.98	Inf	-Inf	3	Vertical	99	1.85
5210MHz	Pass	PK	5.395G	61.29	74.00	-12.71	3	Vertical	99	1.85
5210MHz	Pass	AV	5.148G	53.83	54.00	-0.17	3	Horizontal	25	2.83
5210MHz	Pass	AV	5.208G	100.21	Inf	-Inf	3	Horizontal	25	2.83
5210MHz	Pass	AV	5.444G	49.12	54.00	-4.88	3	Horizontal	25	2.83
5210MHz	Pass	PK	5.128G	65.99	74.00	-8.01	3	Horizontal	25	2.83
5210MHz	Pass	PK	5.206G	111.46	Inf	-Inf	3	Horizontal	25	2.83
5210MHz	Pass	PK	5.448G	61.50	74.00	-12.50	3	Horizontal	25	2.83
5210MHz	Pass	PK	10.40304G	52.54	68.20	-15.66	3	Vertical	259	1.50
5210MHz	Pass	PK	10.44464G	52.38	68.20	-15.82	3	Horizontal	327	2.34
5210MHz	Pass	PK	34.141G	57.73	68.20	-10.47	3	Vertical	203	1.89

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5210MHz	Pass	PK	29.626G	55.34	68.20	-12.86	3	Horizontal	155	2.28
5290MHz	Pass	AV	5.14G	48.51	54.00	-5.49	3	Vertical	97	1.50
5290MHz	Pass	AV	5.298G	97.14	Inf	-Inf	3	Vertical	97	1.50
5290MHz	Pass	AV	5.36G	50.67	54.00	-3.33	3	Vertical	97	1.50
5290MHz	Pass	PK	5.145G	60.43	74.00	-13.57	3	Vertical	97	1.50
5290MHz	Pass	PK	5.296G	107.84	Inf	-Inf	3	Vertical	97	1.50
5290MHz	Pass	PK	5.353G	64.59	74.00	-9.41	3	Vertical	97	1.50
5290MHz	Pass	PK	5.526G	61.60	68.20	-6.60	3	Vertical	97	1.50
5290MHz	Pass	AV	5.139G	49.26	54.00	-4.74	3	Horizontal	28	1.80
5290MHz	Pass	AV	5.281G	103.37	Inf	-Inf	3	Horizontal	28	1.80
5290MHz	Pass	AV	5.361G	53.06	54.00	-0.94	3	Horizontal	28	1.80
5290MHz	Pass	PK	5.108G	61.34	74.00	-12.66	3	Horizontal	28	1.80
5290MHz	Pass	PK	5.28G	115.29	Inf	-Inf	3	Horizontal	28	1.80
5290MHz	Pass	PK	5.357G	66.21	74.00	-7.79	3	Horizontal	28	1.80
5290MHz	Pass	PK	5.492G	62.02	68.20	-6.18	3	Horizontal	28	1.80
5290MHz	Pass	PK	10.55696G	53.20	68.20	-15.00	3	Vertical	346	2.74
5290MHz	Pass	PK	10.60288G	52.51	74.00	-21.49	3	Horizontal	286	2.51
5290MHz	Pass	PK	28.678G	53.87	68.20	-14.33	3	Vertical	64	1.59
5290MHz	Pass	PK	30.631G	55.51	68.20	-12.69	3	Horizontal	119	2.17
5530MHz	Pass	AV	5.35G	48.04	54.00	-5.96	3	Vertical	338	2.88
5530MHz	Pass	AV	5.451G	49.55	54.00	-4.45	3	Vertical	338	2.88
5530MHz	Pass	AV	5.529G	95.63	Inf	-Inf	3	Vertical	338	2.88
5530MHz	Pass	PK	5.323G	61.17	68.20	-7.03	3	Vertical	338	2.88
5530MHz	Pass	PK	5.456G	61.72	74.00	-12.28	3	Vertical	338	2.88
5530MHz	Pass	PK	5.463G	60.79	68.20	-7.41	3	Vertical	338	2.88
5530MHz	Pass	PK	5.529G	107.24	Inf	-Inf	3	Vertical	338	2.88
5530MHz	Pass	PK	5.761G	62.09	68.20	-6.11	3	Vertical	338	2.88
5530MHz	Pass	AV	5.35G	47.92	54.00	-6.08	3	Horizontal	327	1.29
5530MHz	Pass	AV	5.455G	52.94	54.00	-1.06	3	Horizontal	327	1.29
5530MHz	Pass	AV	5.531G	100.66	Inf	-Inf	3	Horizontal	327	1.29
5530MHz	Pass	PK	5.34G	60.87	68.20	-7.33	3	Horizontal	327	1.29
5530MHz	Pass	PK	5.455G	65.50	74.00	-8.50	3	Horizontal	327	1.29
5530MHz	Pass	PK	5.47G	64.40	68.20	-3.80	3	Horizontal	327	1.29
5530MHz	Pass	PK	5.534G	112.15	Inf	-Inf	3	Horizontal	327	1.29
5530MHz	Pass	PK	5.74G	61.39	68.20	-6.81	3	Horizontal	327	1.29
5530MHz	Pass	AV	11.07488G	40.46	54.00	-13.54	3	Vertical	95	1.50
5530MHz	Pass	PK	11.05872G	52.11	74.00	-21.89	3	Vertical	95	1.50
5530MHz	Pass	AV	11.07136G	40.44	54.00	-13.56	3	Horizontal	320	1.50
5530MHz	Pass	PK	11.0936G	51.60	74.00	-22.40	3	Horizontal	320	1.50
5610MHz	Pass	AV	5.457G	49.40	54.00	-4.60	3	Vertical	278	2.86
5610MHz	Pass	AV	5.613G	100.86	Inf	-Inf	3	Vertical	278	2.86
5610MHz	Pass	PK	5.43G	61.80	74.00	-12.20	3	Vertical	278	2.86
5610MHz	Pass	PK	5.468G	60.65	68.20	-7.55	3	Vertical	278	2.86
5610MHz	Pass	PK	5.615G	112.27	Inf	-Inf	3	Vertical	278	2.86
5610MHz	Pass	PK	5.736G	63.87	68.20	-4.33	3	Vertical	278	2.86
5610MHz	Pass	AV	5.453G	50.87	54.00	-3.13	3	Horizontal	339	1.27
5610MHz	Pass	AV	5.611G	105.20	Inf	-Inf	3	Horizontal	339	1.27
5610MHz	Pass	PK	5.454G	63.68	74.00	-10.32	3	Horizontal	339	1.27
5610MHz	Pass	PK	5.468G	64.20	68.20	-4.00	3	Horizontal	339	1.27
5610MHz	Pass	PK	5.611G	116.96	Inf	-Inf	3	Horizontal	339	1.27
5610MHz	Pass	PK	5.73G	66.90	68.20	-1.30	3	Horizontal	339	1.27
5610MHz	Pass	AV	11.22832G	40.69	54.00	-13.31	3	Vertical	347	1.50
5610MHz	Pass	PK	11.25248G	52.70	74.00	-21.30	3	Vertical	347	1.50
5610MHz	Pass	AV	11.23024G	40.66	54.00	-13.34	3	Horizontal	76	2.16
5610MHz	Pass	PK	11.25296G	52.73	74.00	-21.27	3	Horizontal	76	2.16
5690MHz Straddle 5.47-5.725GHz	Pass	AV	5.4536G	49.26	54.00	-4.74	3	Vertical	117	1.00
5690MHz Straddle 5.47-5.725GHz	Pass	AV	5.6924G	103.25	Inf	-Inf	3	Vertical	117	1.00
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.456G	61.73	74.00	-12.27	3	Vertical	117	1.00
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.4632G	60.21	68.20	-7.99	3	Vertical	117	1.00
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.6912G	114.58	Inf	-Inf	3	Vertical	117	1.00
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.8532G	66.46	68.20	-1.74	3	Vertical	117	1.00
5690MHz Straddle 5.47-5.725GHz	Pass	AV	5.4536G	49.72	54.00	-4.28	3	Horizontal	15	1.81

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5690MHz Straddle 5.47-5.725GHz	Pass	AV	5.6912G	106.39	Inf	-Inf	3	Horizontal	15	1.81
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.45G	61.32	74.00	-12.68	3	Horizontal	15	1.81
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.468G	61.92	68.20	-6.28	3	Horizontal	15	1.81
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.6924G	117.84	Inf	-Inf	3	Horizontal	15	1.81
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.8508G	68.04	68.20	-0.16	3	Horizontal	15	1.81
5690MHz Straddle 5.47-5.725GHz	Pass	AV	11.3936G	40.81	54.00	-13.19	3	Vertical	0	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	PK	11.36768G	52.13	74.00	-21.87	3	Vertical	0	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	AV	11.3936G	40.79	54.00	-13.21	3	Horizontal	275	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	PK	11.39248G	52.30	74.00	-21.70	3	Horizontal	275	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	PK	28.412G	54.25	68.20	-13.95	3	Vertical	0	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	PK	34.121G	57.01	68.20	-11.19	3	Horizontal	360	1.50
5775MHz	Pass	AV	5.7774G	100.34	Inf	-Inf	3	Vertical	121	1.00
5775MHz	Pass	PK	5.6382G	66.53	68.20	-1.67	3	Vertical	121	1.00
5775MHz	Pass	PK	5.7798G	110.93	Inf	-Inf	3	Vertical	121	1.00
5775MHz	Pass	PK	6.075G	63.29	68.20	-4.91	3	Vertical	121	1.00
5775MHz	Pass	AV	5.7738G	104.34	Inf	-Inf	3	Horizontal	14	1.49
5775MHz	Pass	PK	5.649G	67.46	68.20	-0.74	3	Horizontal	14	1.49
5775MHz	Pass	PK	5.7726G	114.93	Inf	-Inf	3	Horizontal	14	1.49
5775MHz	Pass	PK	5.9298G	66.52	68.20	-1.68	3	Horizontal	14	1.49
5775MHz	Pass	AV	11.51944G	40.85	54.00	-13.15	3	Vertical	255	2.86
5775MHz	Pass	PK	11.54792G	53.18	74.00	-20.82	3	Vertical	255	2.86
5775MHz	Pass	AV	11.54984G	41.42	54.00	-12.58	3	Horizontal	32	1.50
5775MHz	Pass	PK	11.546G	53.25	74.00	-20.75	3	Horizontal	32	1.50
5775MHz	Pass	PK	34.15G	57.61	68.20	-10.59	3	Vertical	300	1.62
5775MHz	Pass	PK	27.53G	51.36	68.20	-16.84	3	Horizontal	76	2.22
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	AV	5.1384G	50.29	54.00	-3.71	3	Vertical	95	1.50
5250MHz Straddle 5.25-5.35GHz	Pass	AV	5.2584G	90.21	Inf	-Inf	3	Vertical	95	1.50
5250MHz Straddle 5.25-5.35GHz	Pass	AV	5.418G	49.61	54.00	-4.39	3	Vertical	95	1.50
5250MHz Straddle 5.25-5.35GHz	Pass	PK	5.112G	61.93	74.00	-12.07	3	Vertical	95	1.50
5250MHz Straddle 5.25-5.35GHz	Pass	PK	5.2404G	101.93	Inf	-Inf	3	Vertical	95	1.50
5250MHz Straddle 5.25-5.35GHz	Pass	PK	5.3544G	64.05	74.00	-9.95	3	Vertical	95	1.50
5250MHz Straddle 5.25-5.35GHz	Pass	PK	5.5428G	61.74	68.20	-6.46	3	Vertical	95	1.50
5250MHz Straddle 5.25-5.35GHz	Pass	AV	5.1384G	53.00	54.00	-1.00	3	Horizontal	26	1.80
5250MHz Straddle 5.25-5.35GHz	Pass	AV	5.2596G	96.04	Inf	-Inf	3	Horizontal	26	1.80
5250MHz Straddle 5.25-5.35GHz	Pass	AV	5.3616G	51.46	54.00	-2.54	3	Horizontal	26	1.80
5250MHz Straddle 5.25-5.35GHz	Pass	PK	5.112G	68.34	74.00	-5.66	3	Horizontal	26	1.80
5250MHz Straddle 5.25-5.35GHz	Pass	PK	5.2596G	107.80	Inf	-Inf	3	Horizontal	26	1.80
5250MHz Straddle 5.25-5.35GHz	Pass	PK	5.35G	68.21	74.00	-5.79	3	Horizontal	26	1.80
5250MHz Straddle 5.25-5.35GHz	Pass	PK	5.5188G	61.60	68.20	-6.60	3	Horizontal	26	1.80
5250MHz Straddle 5.25-5.35GHz	Pass	PK	10.57776G	53.40	68.20	-14.80	3	Vertical	14	1.18
5250MHz Straddle 5.25-5.35GHz	Pass	PK	10.48272G	53.15	68.20	-15.05	3	Horizontal	178	2.19
5250MHz Straddle 5.25-5.35GHz	Pass	PK	33.323G	57.13	68.20	-11.07	3	Vertical	162	2.23
5250MHz Straddle 5.25-5.35GHz	Pass	PK	32.701G	56.49	68.20	-11.71	3	Horizontal	336	1.95
5570MHz	Pass	AV	5.4356G	51.26	54.00	-2.74	3	Vertical	264	2.84
5570MHz	Pass	AV	5.5736G	92.12	Inf	-Inf	3	Vertical	264	2.84
5570MHz	Pass	PK	5.2856G	61.04	68.20	-7.16	3	Vertical	264	2.84
5570MHz	Pass	PK	5.4116G	62.99	74.00	-11.01	3	Vertical	264	2.84
5570MHz	Pass	PK	5.462G	60.91	68.20	-7.29	3	Vertical	264	2.84
5570MHz	Pass	PK	5.576G	103.27	Inf	-Inf	3	Vertical	264	2.84
5570MHz	Pass	PK	5.8616G	62.28	68.20	-5.92	3	Vertical	264	2.84
5570MHz	Pass	AV	5.4344G	53.10	54.00	-0.90	3	Horizontal	311	2.56
5570MHz	Pass	AV	5.4944G	96.11	Inf	-Inf	3	Horizontal	311	2.56
5570MHz	Pass	PK	5.35G	60.52	68.20	-7.68	3	Horizontal	311	2.56
5570MHz	Pass	PK	5.4308G	68.54	74.00	-5.46	3	Horizontal	311	2.56
5570MHz	Pass	PK	5.4608G	62.95	68.20	-5.25	3	Horizontal	311	2.56
5570MHz	Pass	PK	5.492G	107.69	Inf	-Inf	3	Horizontal	311	2.56
5570MHz	Pass	PK	5.864G	62.69	68.20	-5.51	3	Horizontal	311	2.56
5570MHz	Pass	AV	11.11184G	40.66	54.00	-13.34	3	Vertical	354	1.44
5570MHz	Pass	PK	11.11248G	53.62	74.00	-20.38	3	Vertical	354	1.44
5570MHz	Pass	AV	11.10576G	40.60	54.00	-13.40	3	Horizontal	102	1.50
5570MHz	Pass	PK	11.06032G	53.47	74.00	-20.53	3	Horizontal	102	1.50




RSE TX above 1GHz

Appendix E.2

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5570MHz	Pass	PK	26.849G	51.05	68.20	-17.15	3	Vertical	98	2.38
5570MHz	Pass	PK	34.126G	58.39	68.20	-9.81	3	Horizontal	353	1.79
802.11be EHT240_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5610MHz Straddle 5.47-5.725GHz	Pass	AV	5.35G	48.85	54.00	-5.15	3	Vertical	126	2.18
5610MHz Straddle 5.47-5.725GHz	Pass	AV	5.4316G	50.08	54.00	-3.92	3	Vertical	126	2.18
5610MHz Straddle 5.47-5.725GHz	Pass	AV	5.4916G	88.03	Inf	-Inf	3	Vertical	126	2.18
5610MHz Straddle 5.47-5.725GHz	Pass	PK	5.35G	61.03	74.00	-12.97	3	Vertical	126	2.18
5610MHz Straddle 5.47-5.725GHz	Pass	PK	5.3944G	63.53	74.00	-10.47	3	Vertical	126	2.18
5610MHz Straddle 5.47-5.725GHz	Pass	PK	5.464G	62.20	68.20	-6.00	3	Vertical	126	2.18
5610MHz Straddle 5.47-5.725GHz	Pass	PK	5.5108G	98.94	Inf	-Inf	3	Vertical	126	2.18
5610MHz Straddle 5.47-5.725GHz	Pass	PK	5.8684G	62.94	68.20	-5.26	3	Vertical	126	2.18
5610MHz Straddle 5.47-5.725GHz	Pass	AV	5.35G	49.84	54.00	-4.16	3	Horizontal	33	1.80
5610MHz Straddle 5.47-5.725GHz	Pass	AV	5.4316G	52.13	54.00	-1.87	3	Horizontal	33	1.80
5610MHz Straddle 5.47-5.725GHz	Pass	AV	5.4928G	92.76	Inf	-Inf	3	Horizontal	33	1.80
5610MHz Straddle 5.47-5.725GHz	Pass	PK	5.35G	61.65	74.00	-12.35	3	Horizontal	33	1.80
5610MHz Straddle 5.47-5.725GHz	Pass	PK	5.3956G	67.04	74.00	-6.96	3	Horizontal	33	1.80
5610MHz Straddle 5.47-5.725GHz	Pass	PK	5.4616G	67.15	68.20	-1.05	3	Horizontal	33	1.80
5610MHz Straddle 5.47-5.725GHz	Pass	PK	5.494G	104.41	Inf	-Inf	3	Horizontal	33	1.80
5610MHz Straddle 5.47-5.725GHz	Pass	PK	5.95G	63.03	68.20	-5.17	3	Horizontal	33	1.80
5610MHz Straddle 5.47-5.725GHz	Pass	AV	11.32016G	40.64	54.00	-13.36	3	Vertical	58	1.50
5610MHz Straddle 5.47-5.725GHz	Pass	PK	11.36768G	51.89	74.00	-22.11	3	Vertical	58	1.50
5610MHz Straddle 5.47-5.725GHz	Pass	AV	11.264G	40.55	54.00	-13.45	3	Horizontal	139	1.50
5610MHz Straddle 5.47-5.725GHz	Pass	PK	11.1872G	51.85	74.00	-22.15	3	Horizontal	139	1.50
5610MHz Straddle 5.47-5.725GHz	Pass	PK	34.163G	56.77	68.20	-11.43	3	Vertical	32	1.10
5610MHz Straddle 5.47-5.725GHz	Pass	PK	33.455G	57.28	68.20	-10.92	3	Horizontal	58	1.39


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

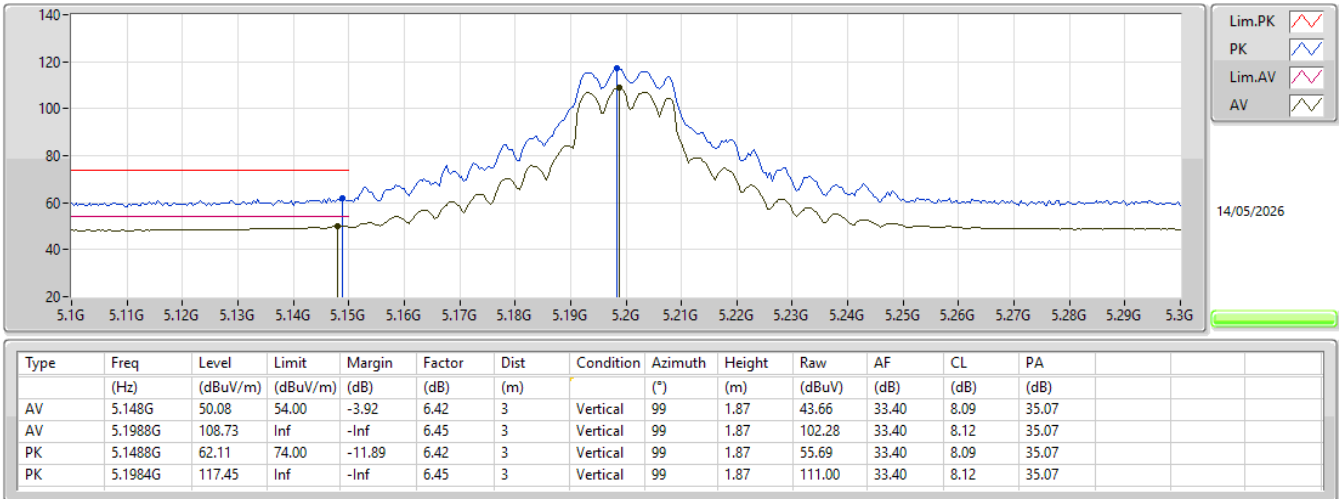


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

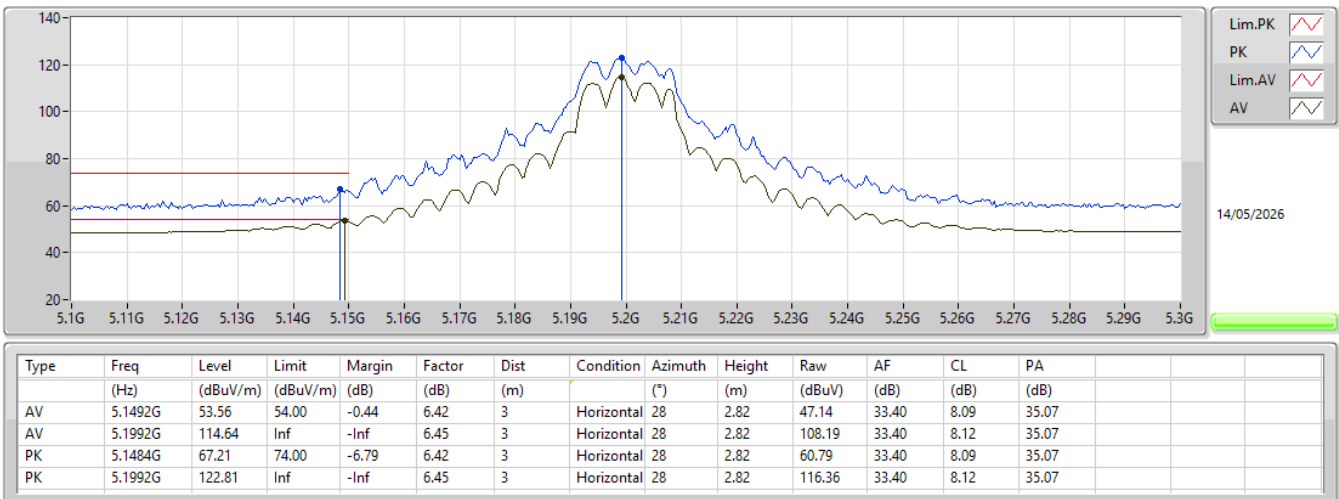


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

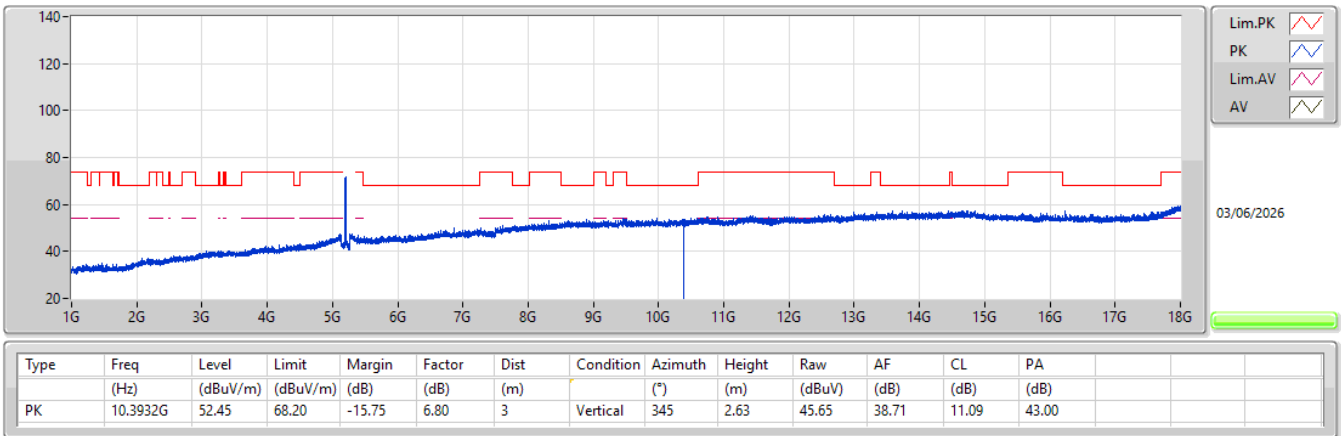


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

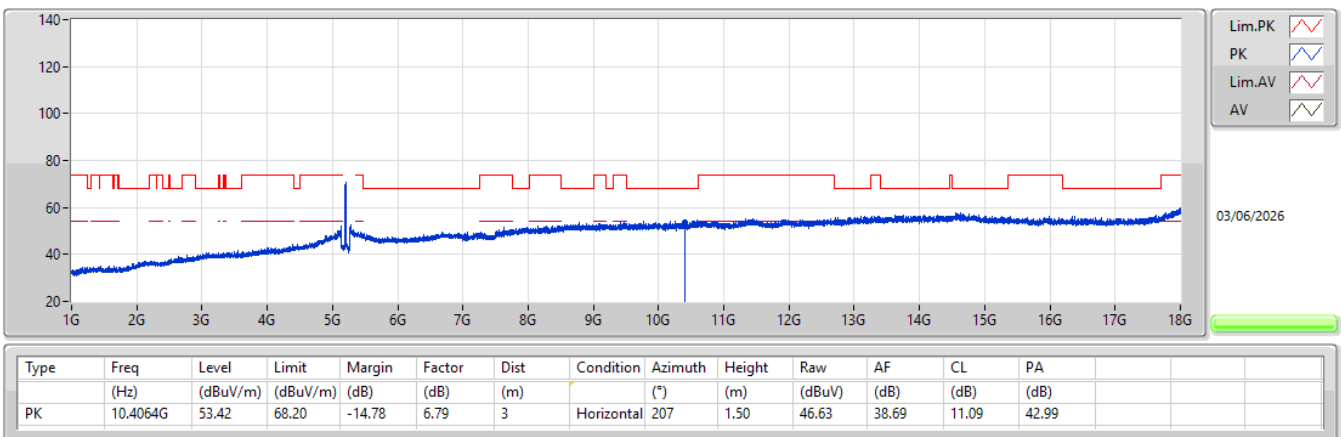


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

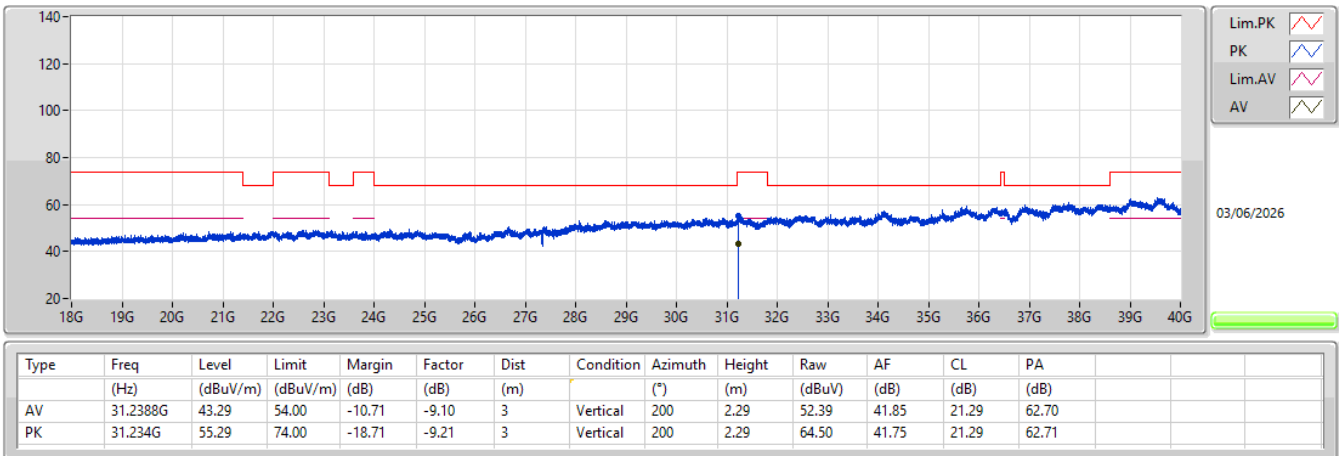


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5200MHz_TX

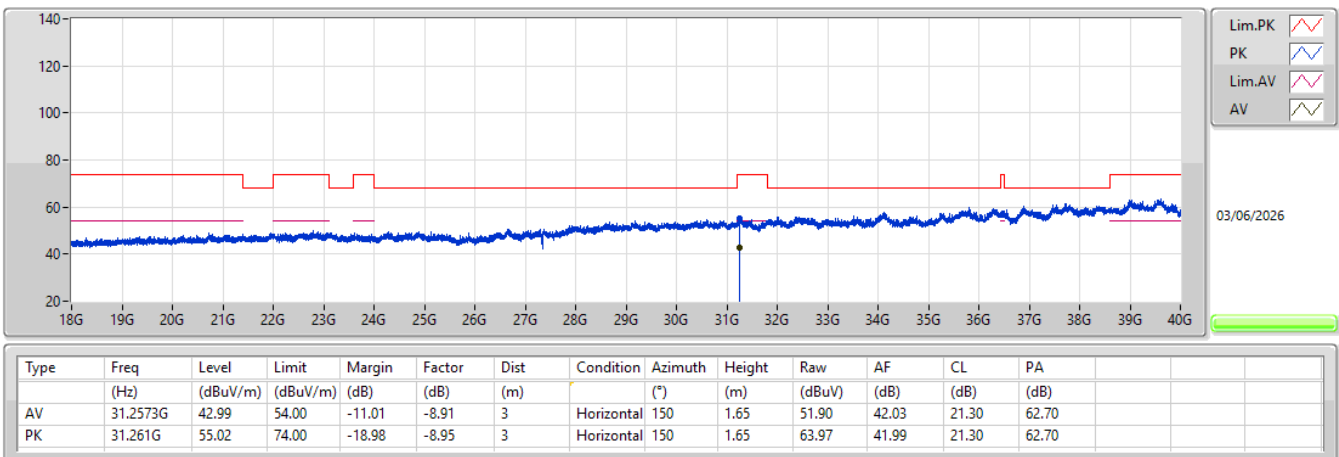

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5240MHz_TX

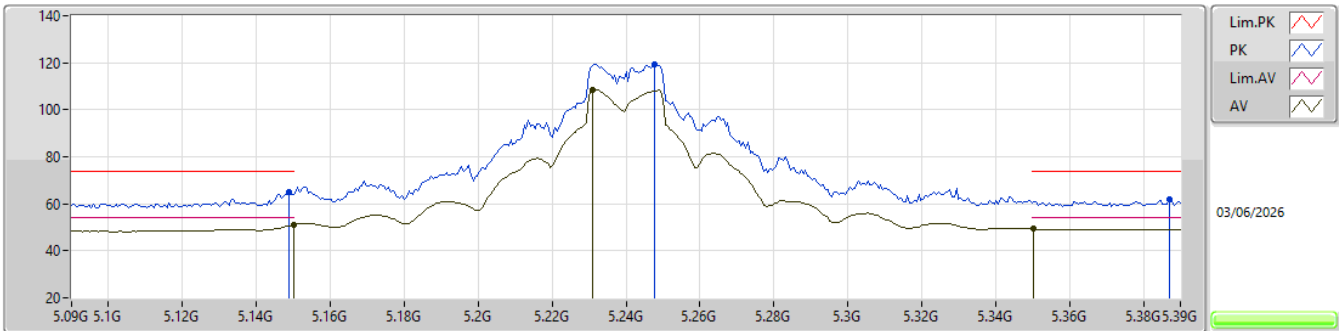

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	50.93	54.00	-3.07	6.42	3	Vertical	93	1.50	44.51	33.40	8.09	35.07
AV	5.231G	108.46	Inf	-Inf	6.40	3	Vertical	93	1.50	102.06	33.34	8.13	35.07
AV	5.3504G	49.23	54.00	-4.77	6.11	3	Vertical	93	1.50	43.12	33.00	8.19	35.08
PK	5.1488G	65.11	74.00	-8.89	6.42	3	Vertical	93	1.50	58.69	33.40	8.09	35.07
PK	5.2478G	119.50	Inf	-Inf	6.37	3	Vertical	93	1.50	113.13	33.30	8.14	35.07
PK	5.387G	61.78	74.00	-12.22	6.19	3	Vertical	93	1.50	55.59	33.07	8.20	35.08

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX


5240MHz_TX

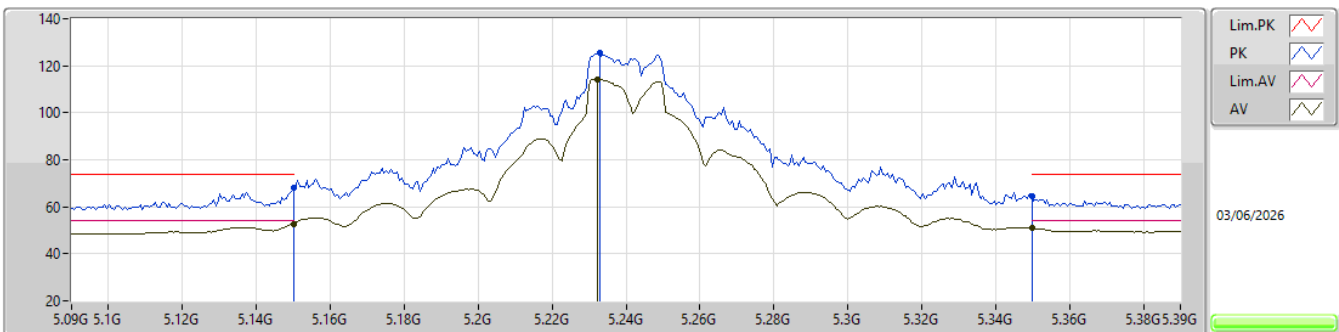

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	52.80	54.00	-1.20	6.42	3	Horizontal	330	1.50	46.38	33.40	8.09	35.07
AV	5.2322G	114.35	Inf	-Inf	6.40	3	Horizontal	330	1.50	107.95	33.34	8.13	35.07
AV	5.35G	50.78	54.00	-3.22	6.11	3	Horizontal	330	1.50	44.67	33.00	8.19	35.08
PK	5.15G	68.24	74.00	-5.76	6.42	3	Horizontal	330	1.50	61.82	33.40	8.09	35.07
PK	5.2328G	125.41	Inf	-Inf	6.39	3	Horizontal	330	1.50	119.02	33.33	8.13	35.07
PK	5.35G	64.36	74.00	-9.64	6.11	3	Horizontal	330	1.50	58.25	33.00	8.19	35.08


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5240MHz_TX

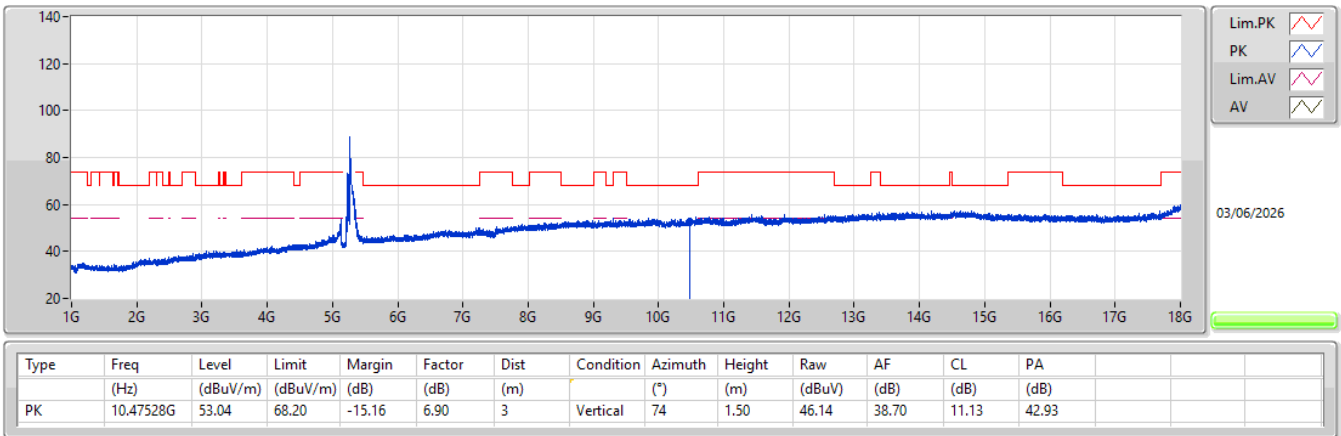


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5240MHz_TX

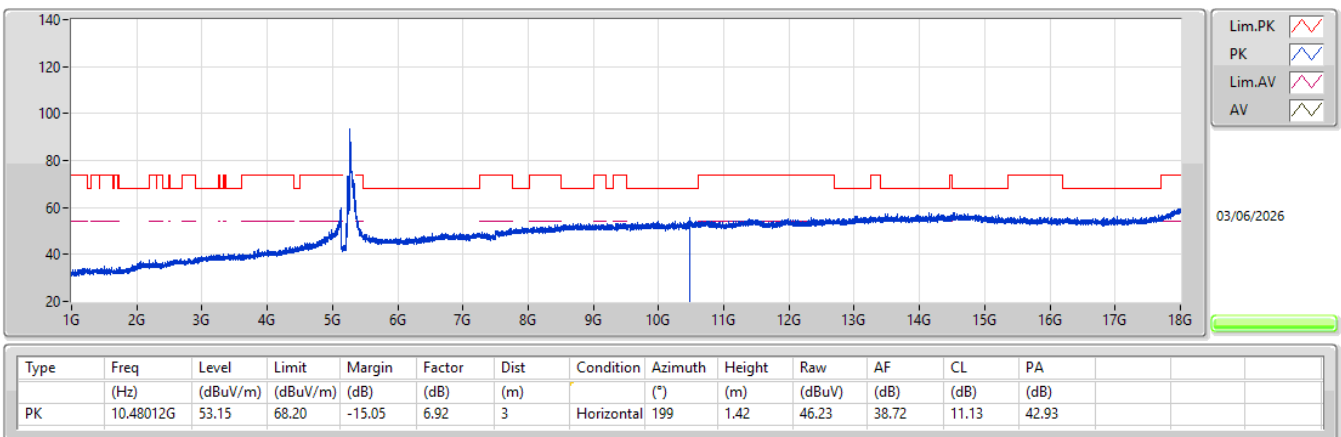


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5240MHz_TX

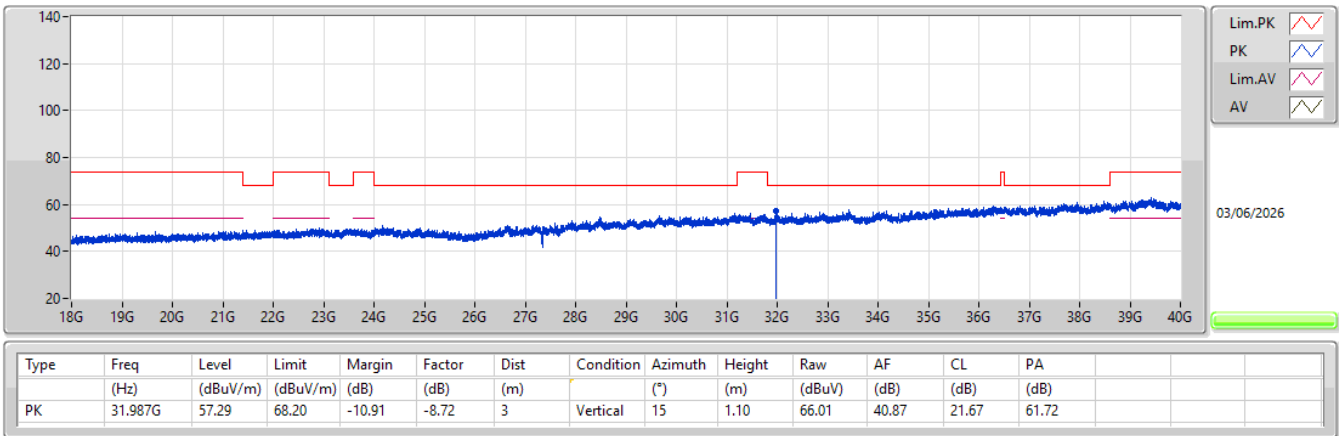


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5240MHz_TX

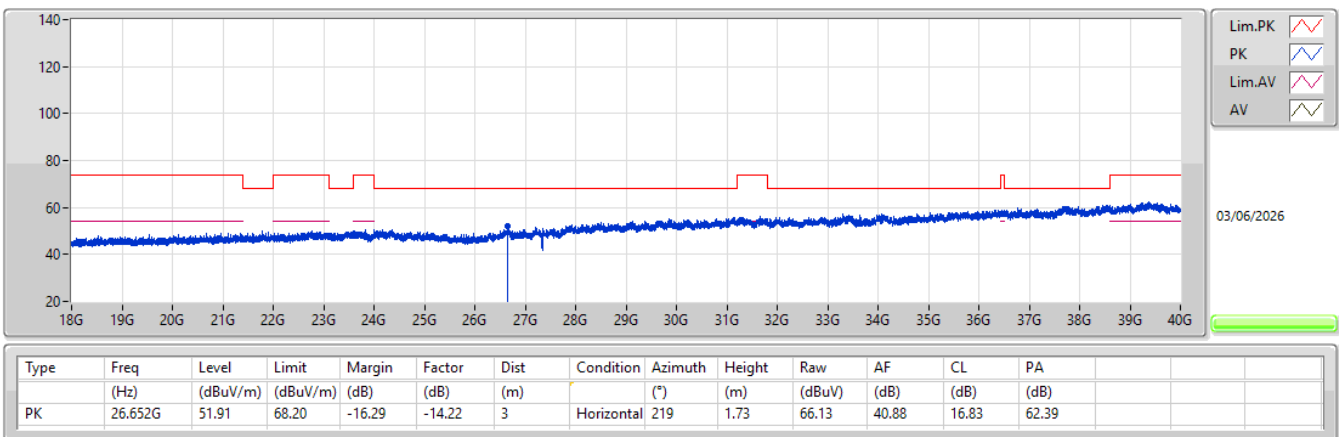


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5230MHz_TX

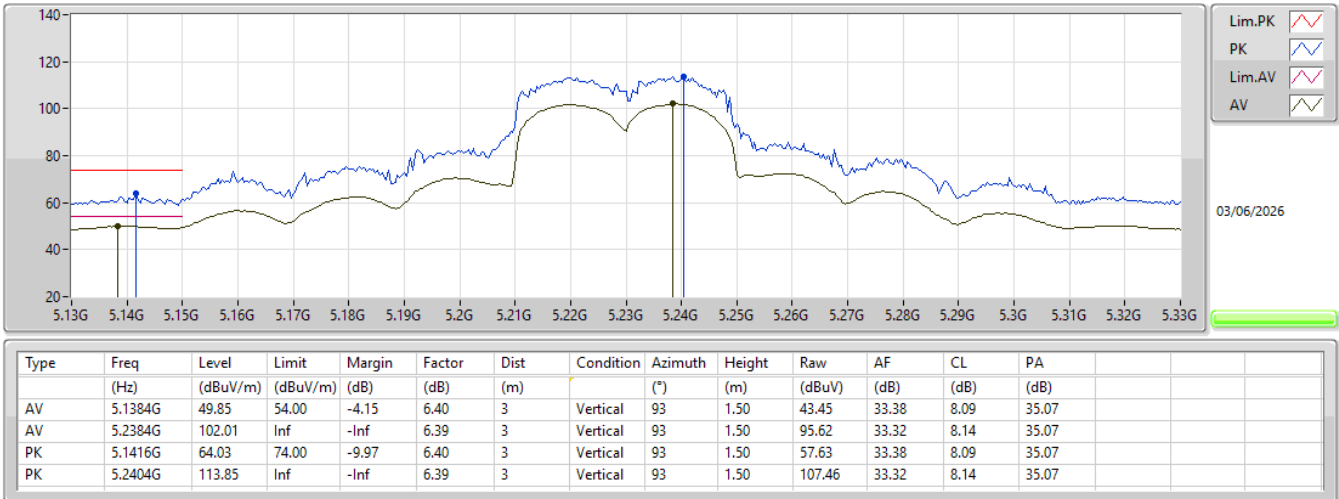


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5230MHz_TX

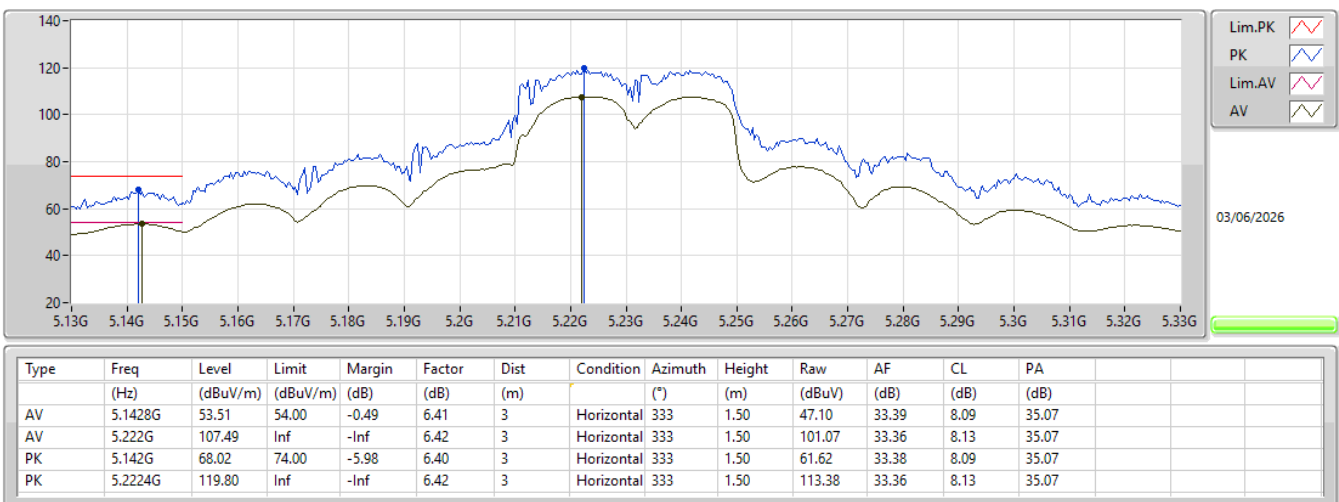


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5230MHz_TX

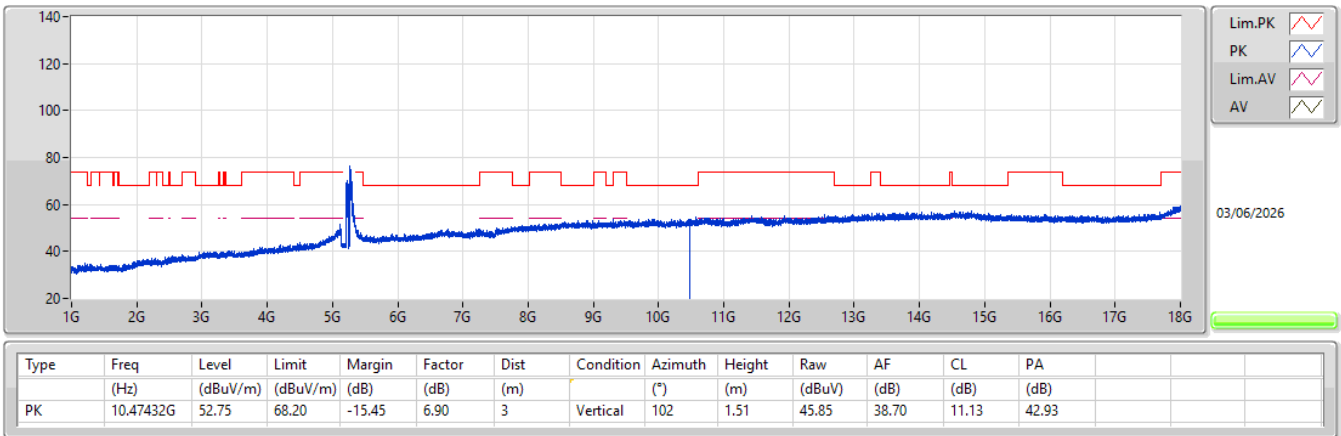


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5230MHz_TX

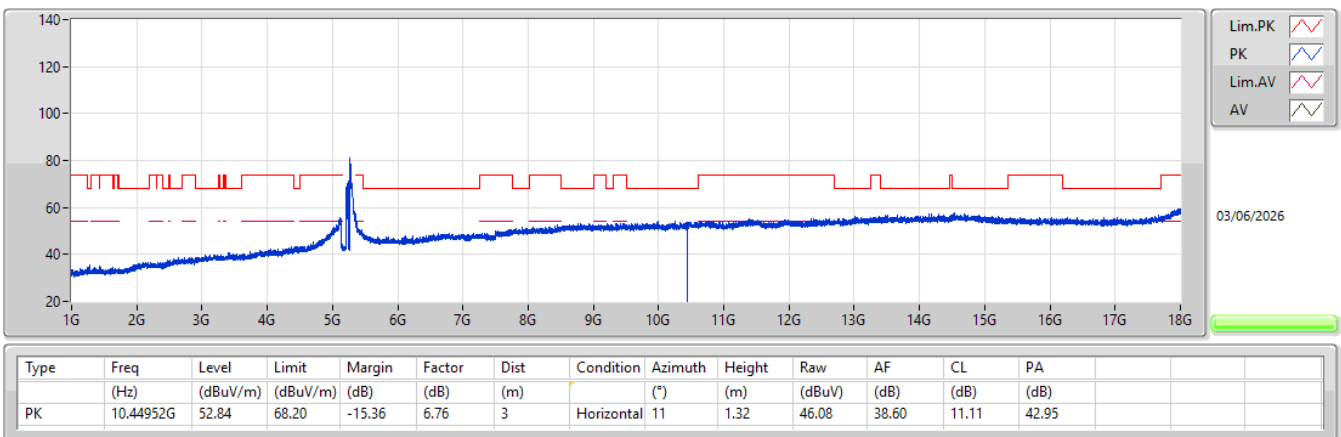


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5230MHz_TX

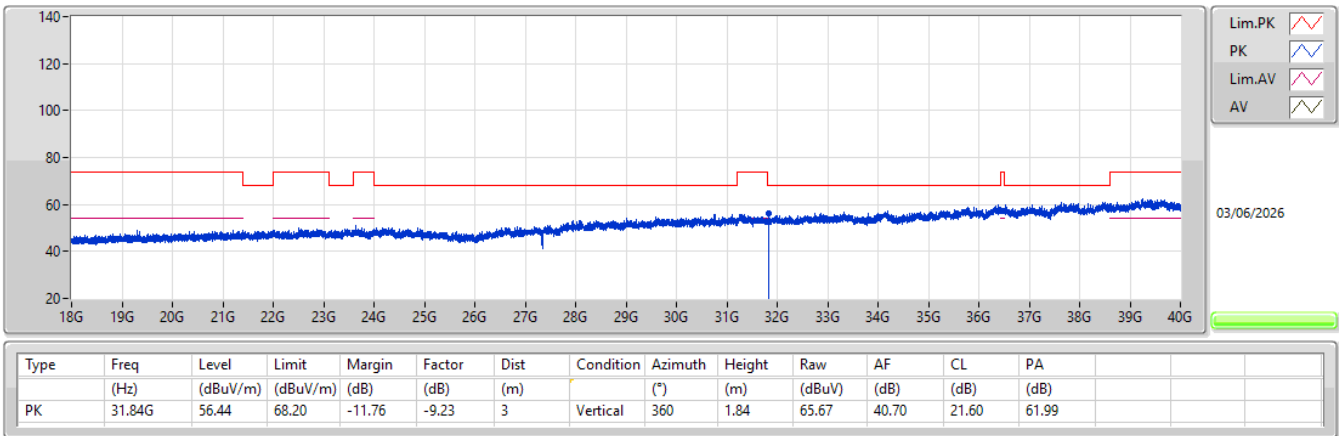


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5230MHz_TX

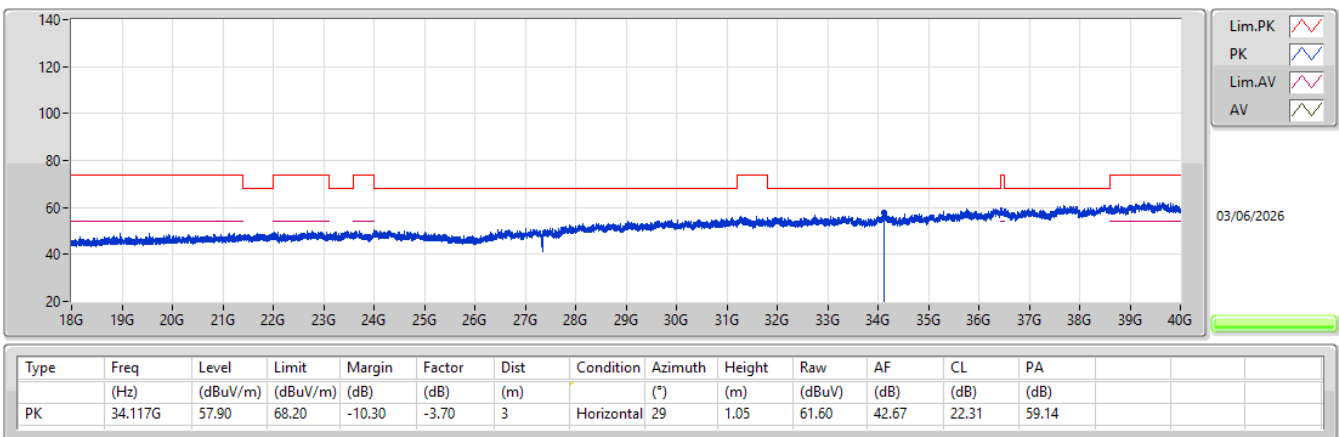

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5210MHz_TX

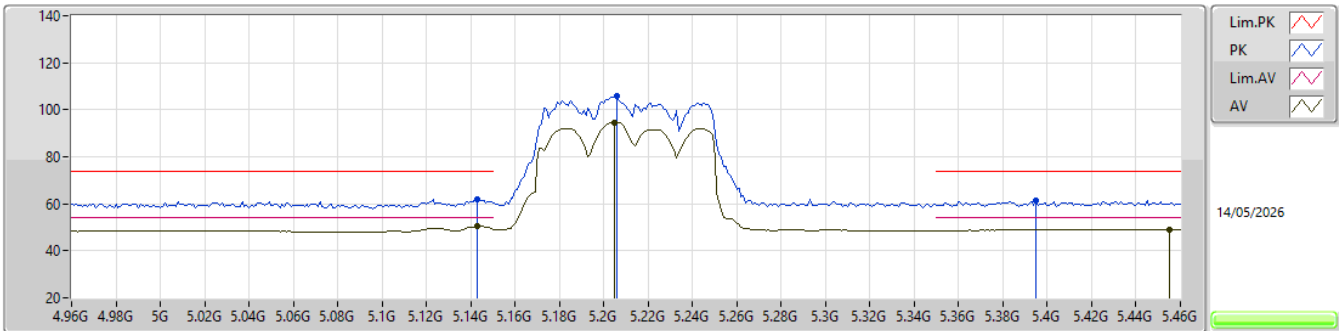

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.143G	50.45	54.00	-3.55	6.41	3	Vertical	99	1.85	44.04	33.39	8.09	35.07
AV	5.205G	94.65	Inf	-Inf	6.44	3	Vertical	99	1.85	88.21	33.39	8.12	35.07
AV	5.455G	49.20	54.00	-4.80	6.40	3	Vertical	99	1.85	42.80	33.20	8.28	35.08
PK	5.143G	62.08	74.00	-11.92	6.41	3	Vertical	99	1.85	55.67	33.39	8.09	35.07
PK	5.206G	105.98	Inf	-Inf	6.44	3	Vertical	99	1.85	99.54	33.39	8.12	35.07
PK	5.395G	61.29	74.00	-12.71	6.22	3	Vertical	99	1.85	55.07	33.09	8.21	35.08

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5210MHz_TX

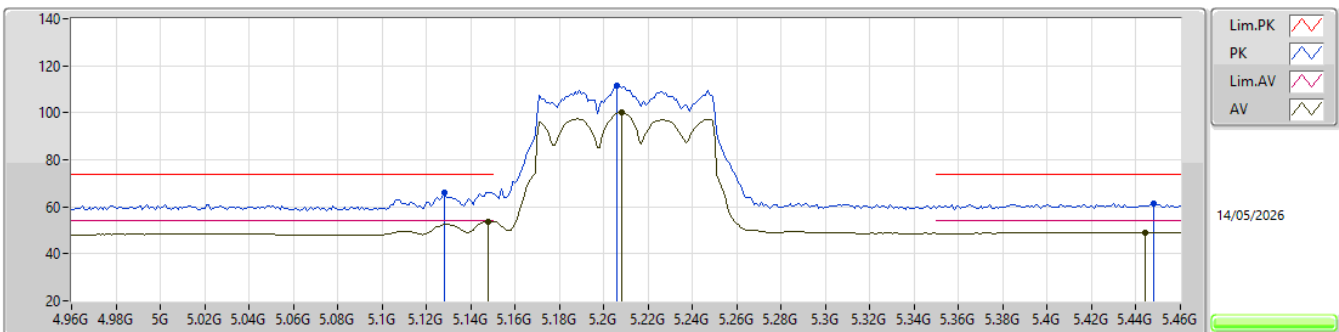

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.148G	53.83	54.00	-0.17	6.42	3	Horizontal	25	2.83	47.41	33.40	8.09	35.07
AV	5.208G	100.21	Inf	-Inf	6.43	3	Horizontal	25	2.83	93.78	33.38	8.12	35.07
AV	5.444G	49.12	54.00	-4.88	6.38	3	Horizontal	25	2.83	42.74	33.19	8.27	35.08
PK	5.128G	65.99	74.00	-8.01	6.37	3	Horizontal	25	2.83	59.62	33.36	8.08	35.07
PK	5.206G	111.46	Inf	-Inf	6.44	3	Horizontal	25	2.83	105.02	33.39	8.12	35.07
PK	5.448G	61.50	74.00	-12.50	6.39	3	Horizontal	25	2.83	55.11	33.20	8.27	35.08


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

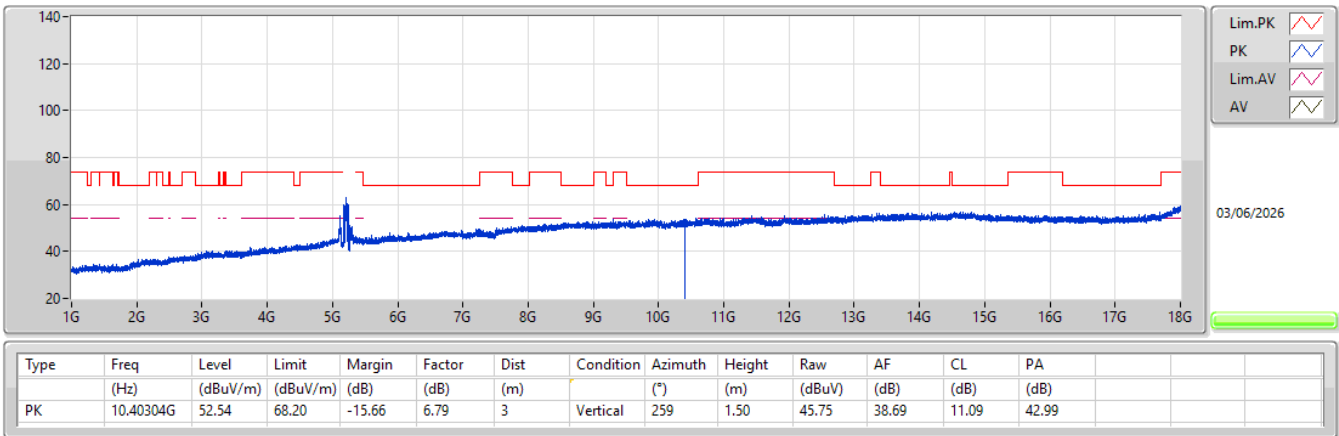


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

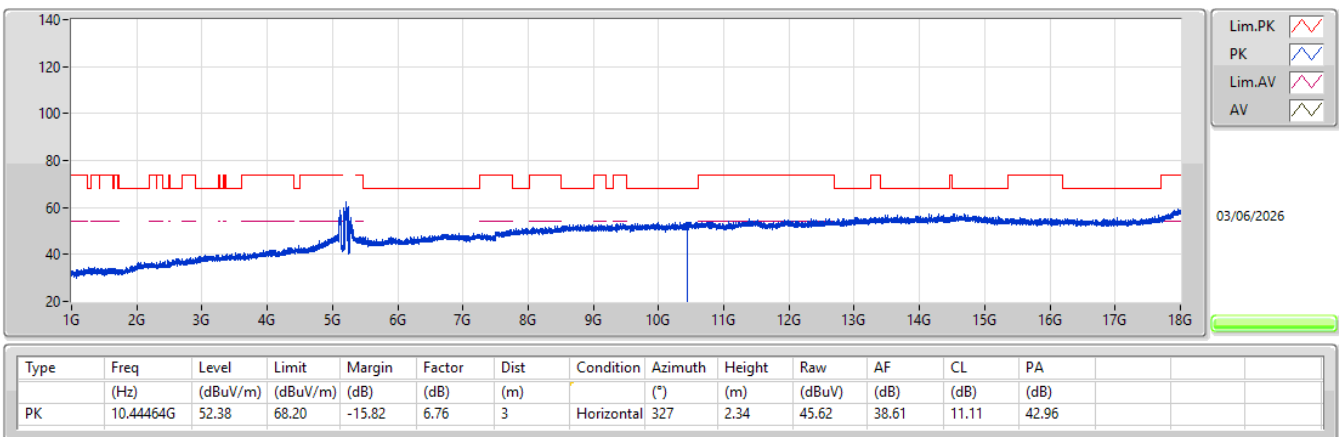


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

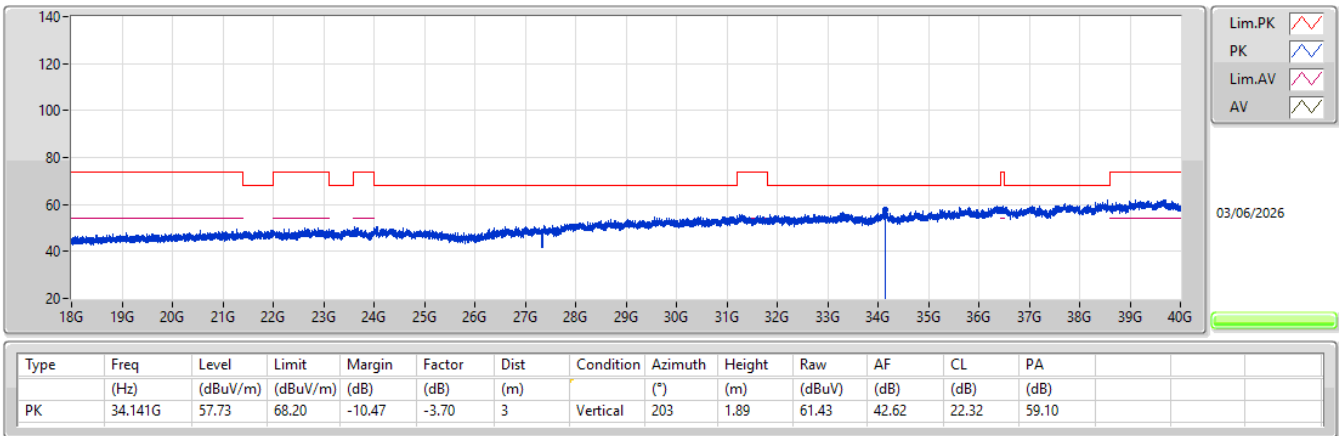


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

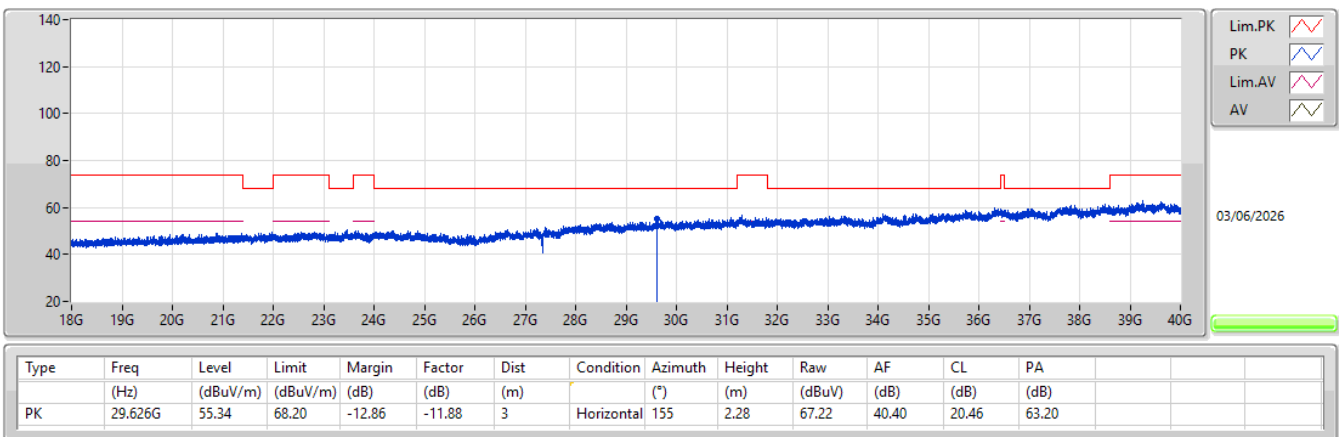


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

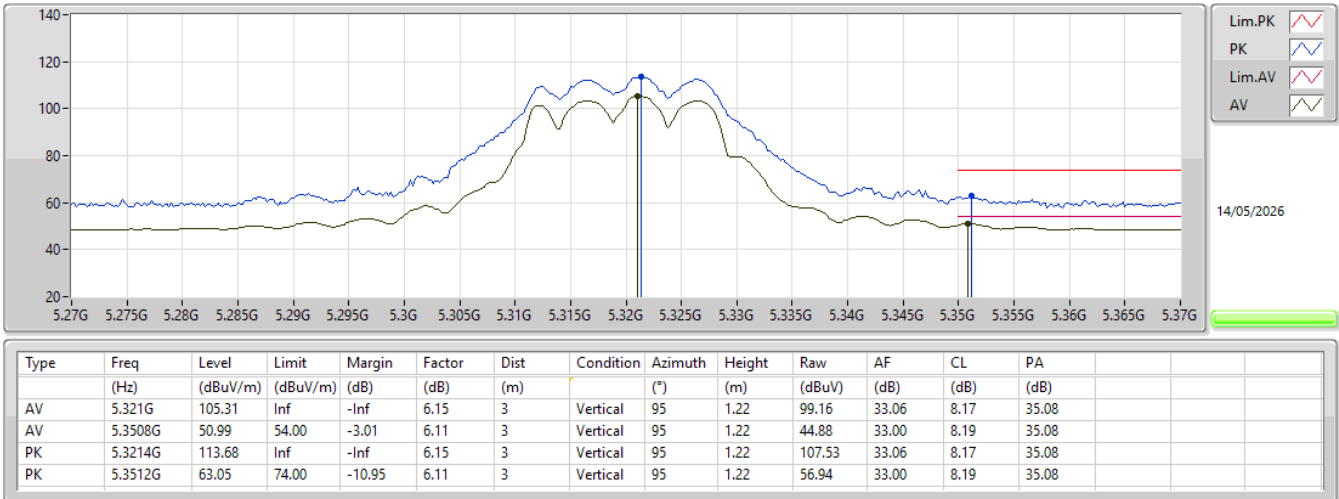


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

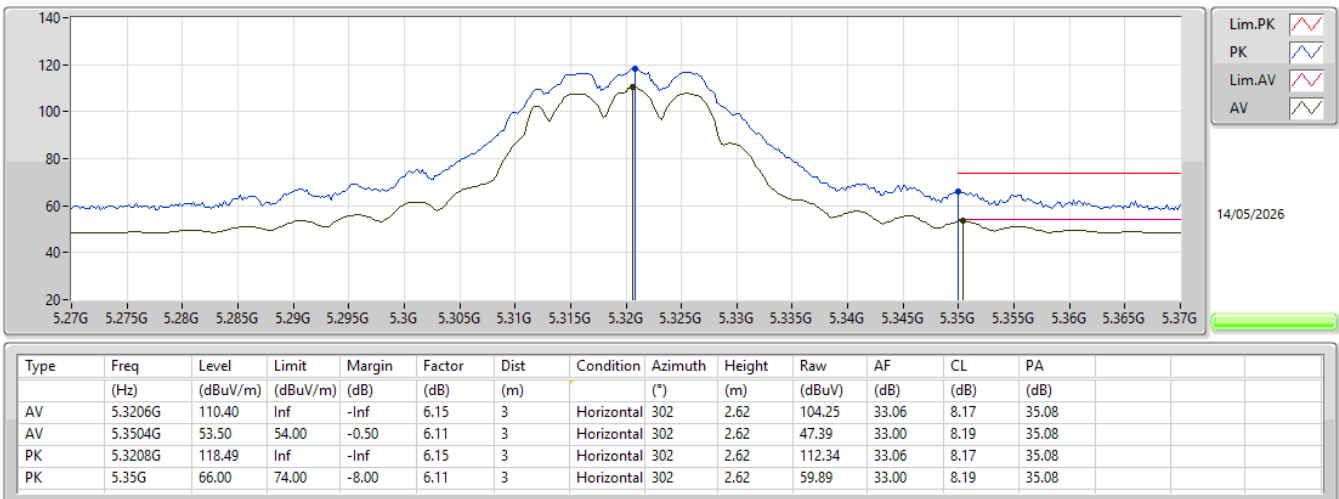


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

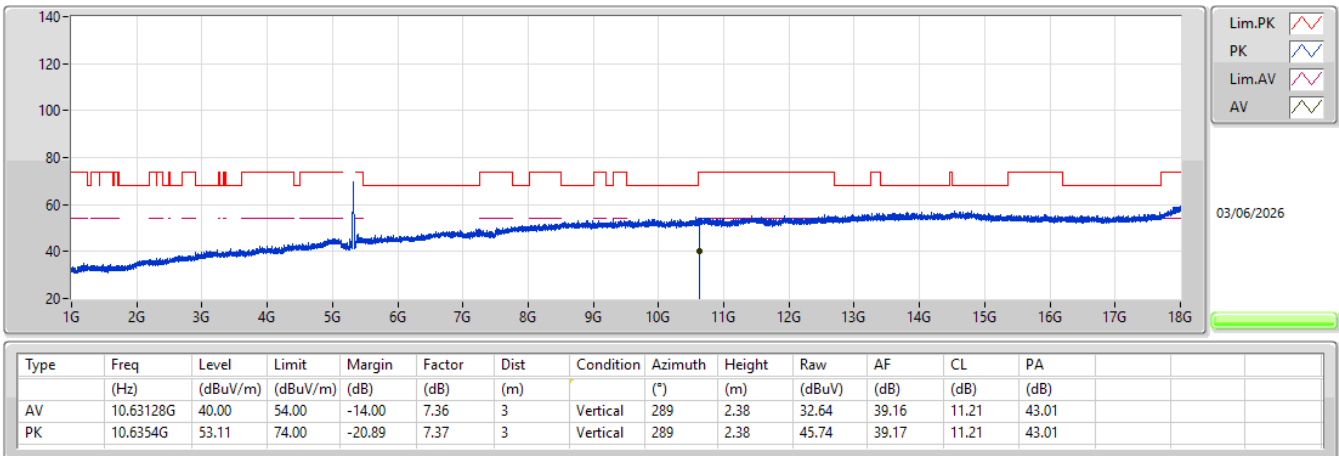


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

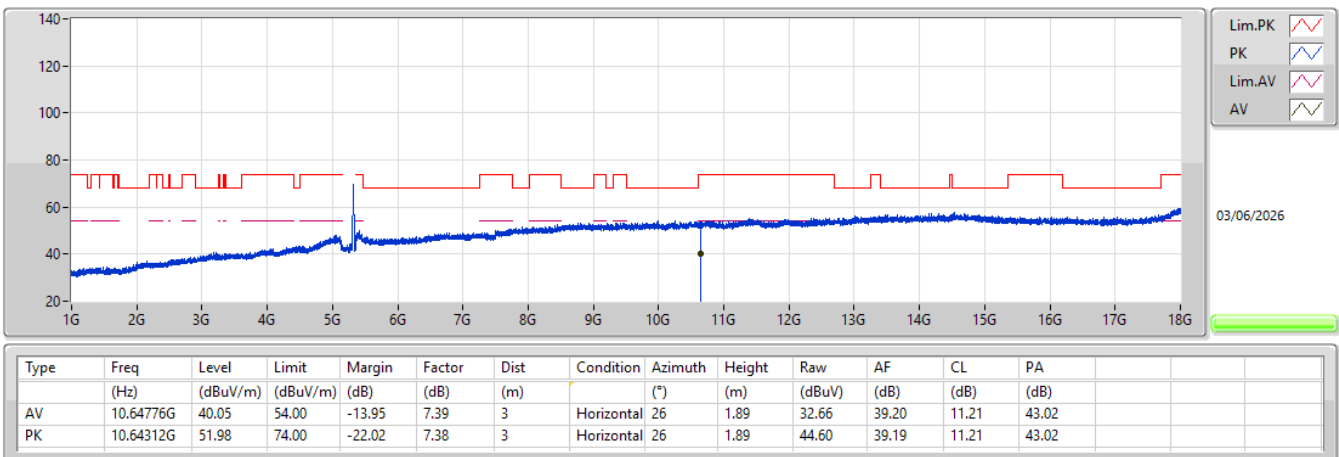


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

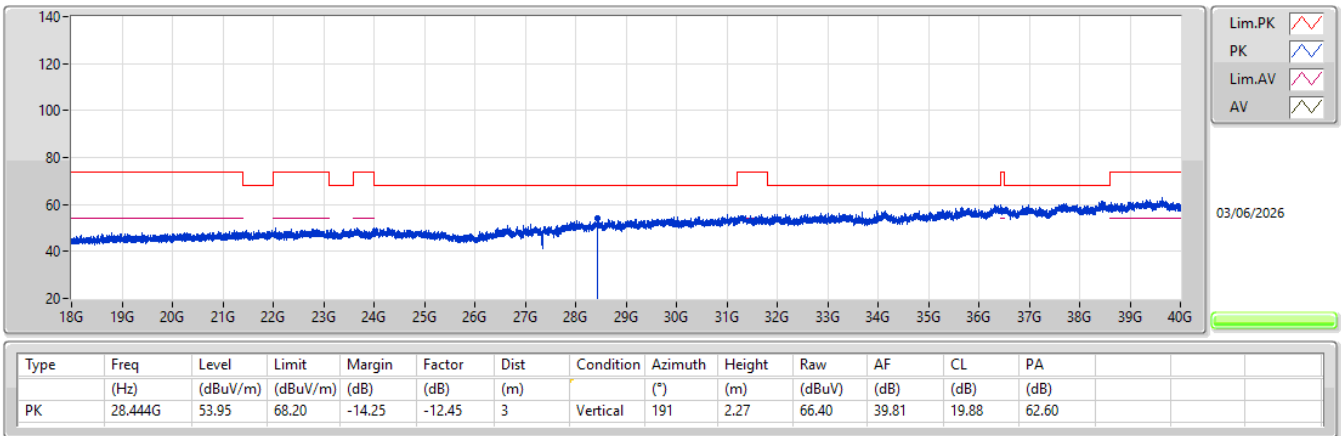


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

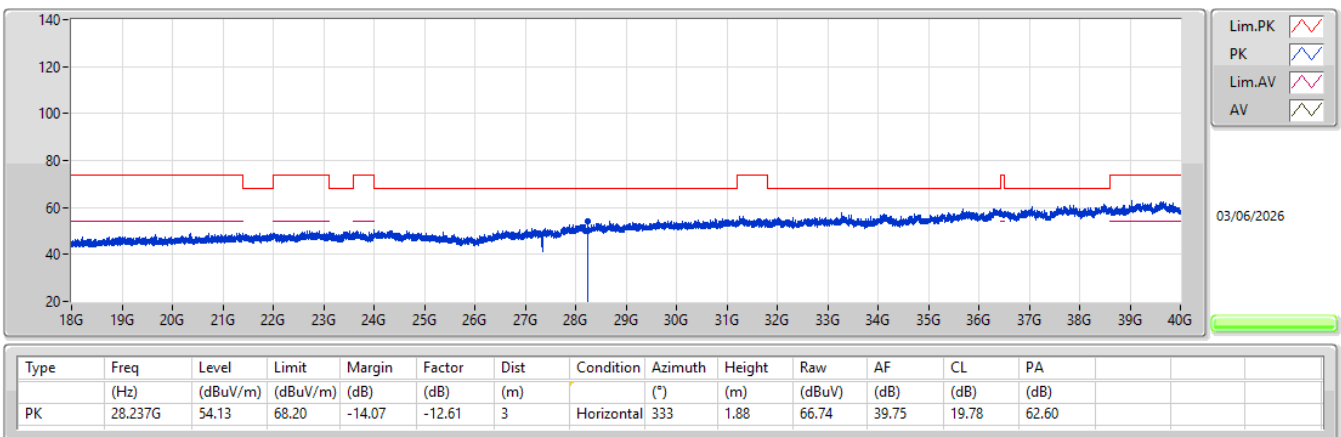


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

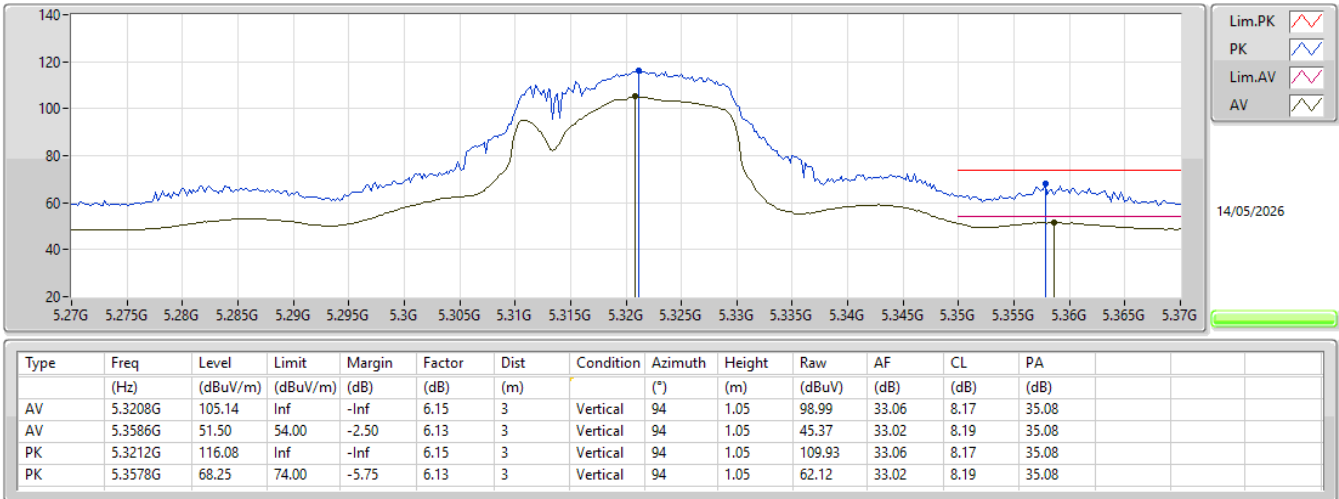


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

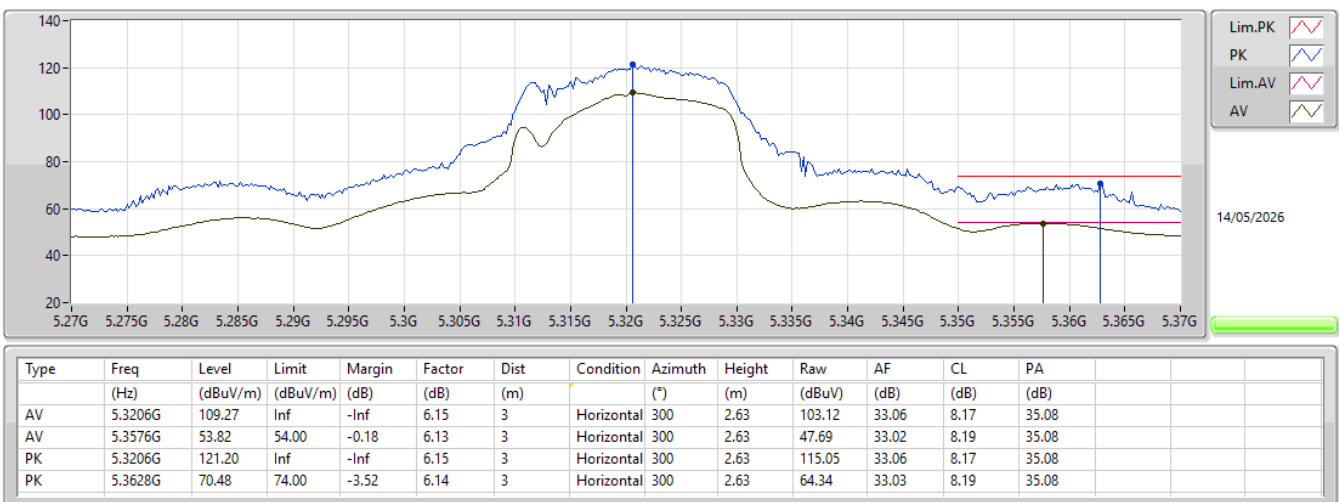


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

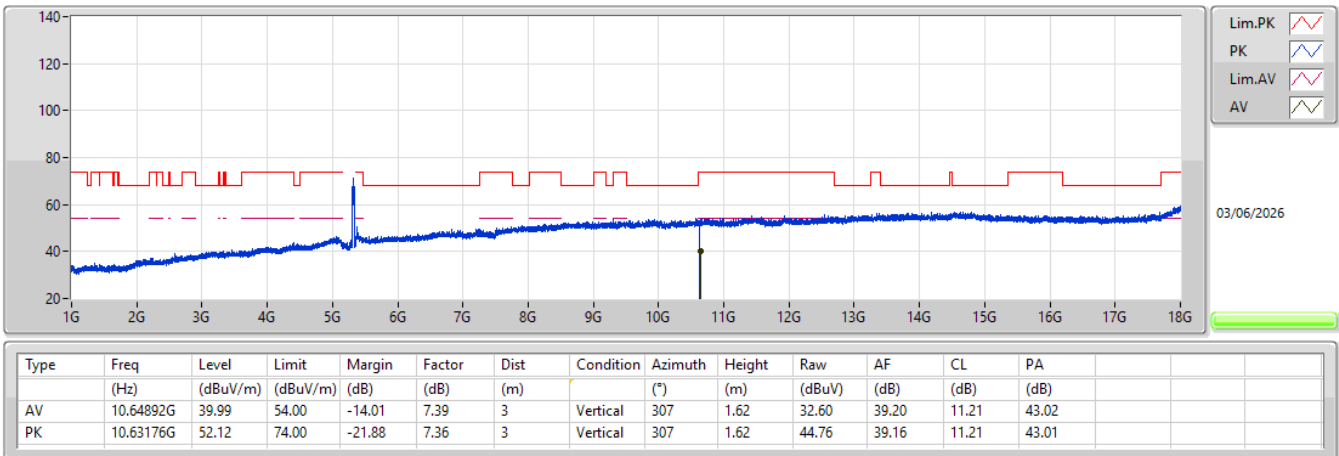


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

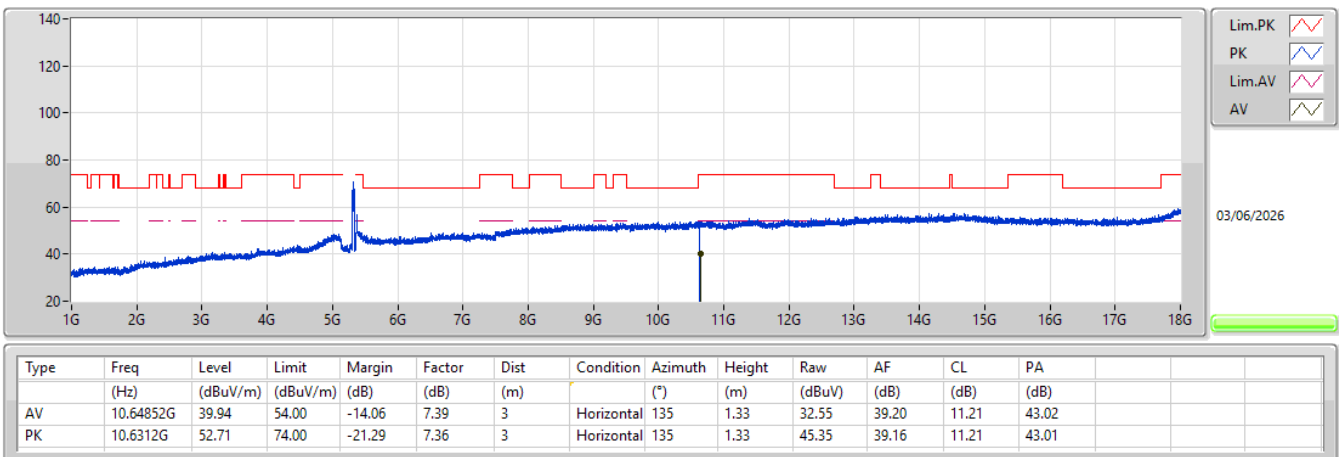


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

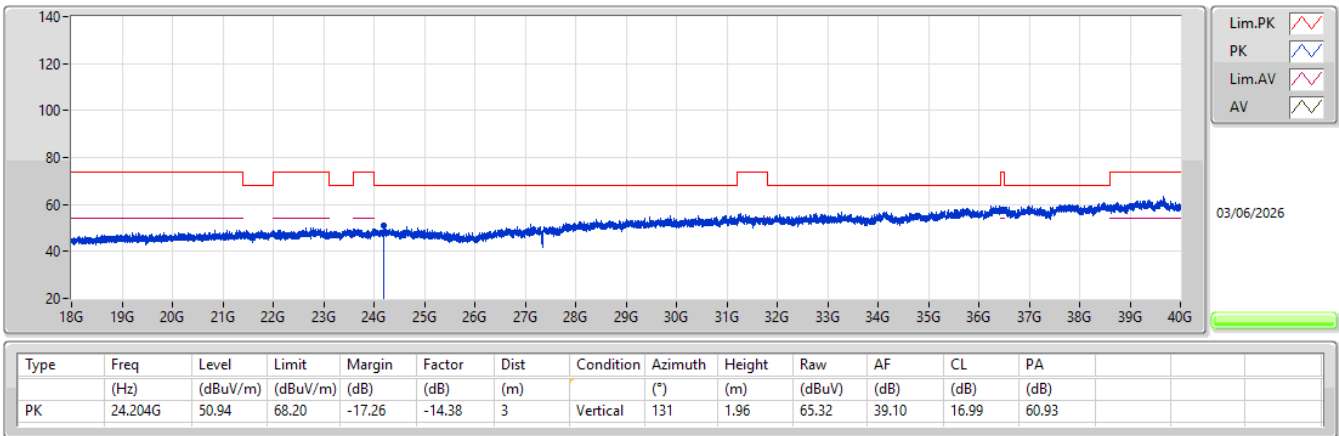


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

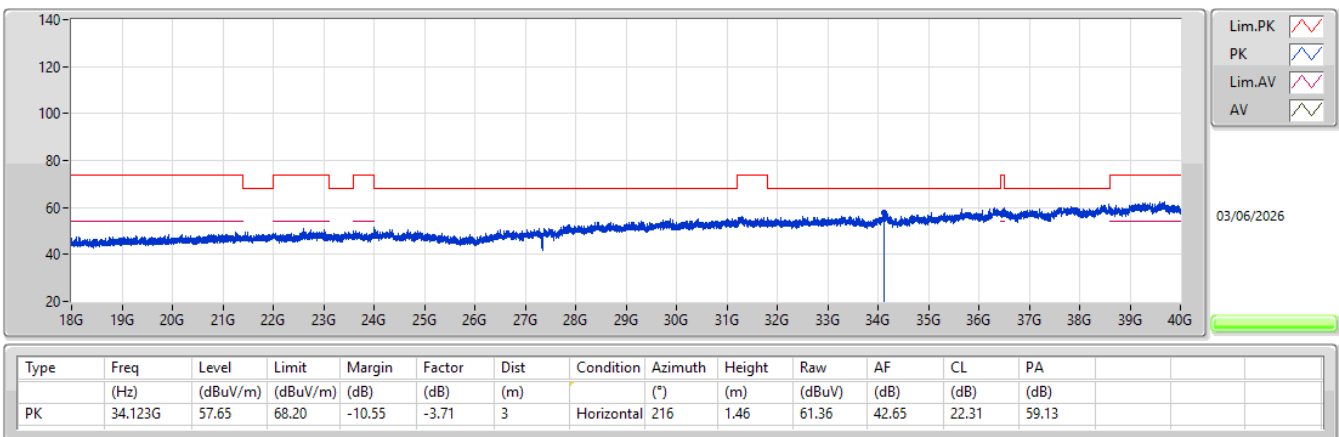


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

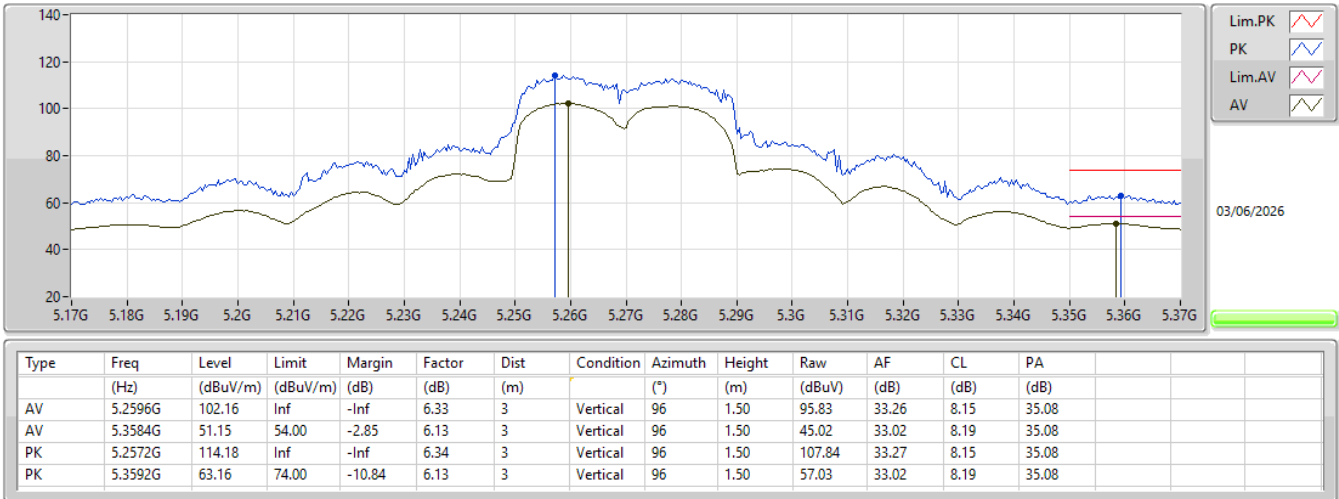


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

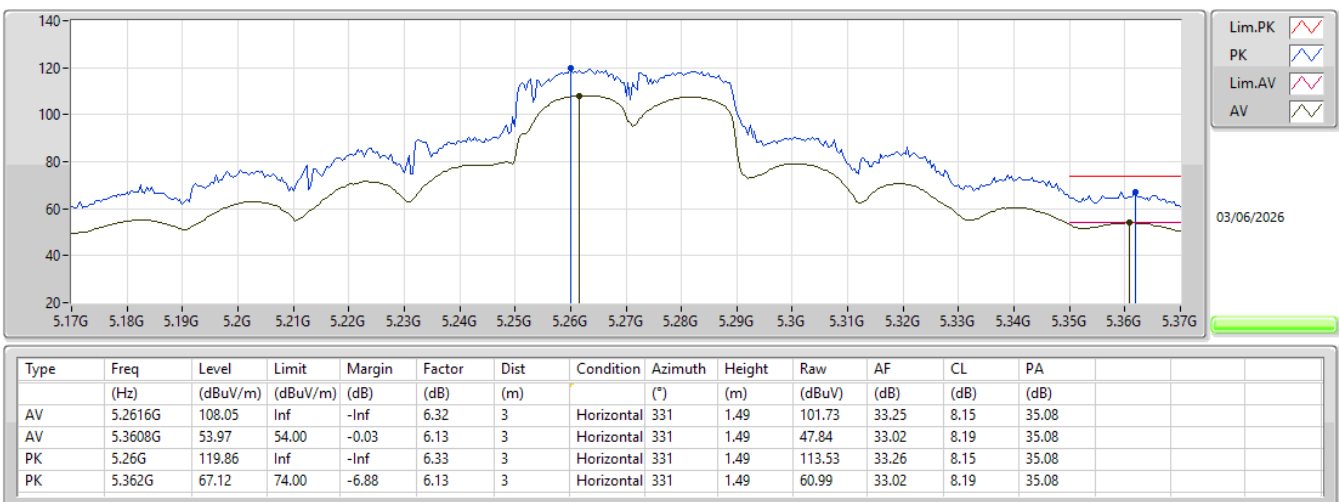


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

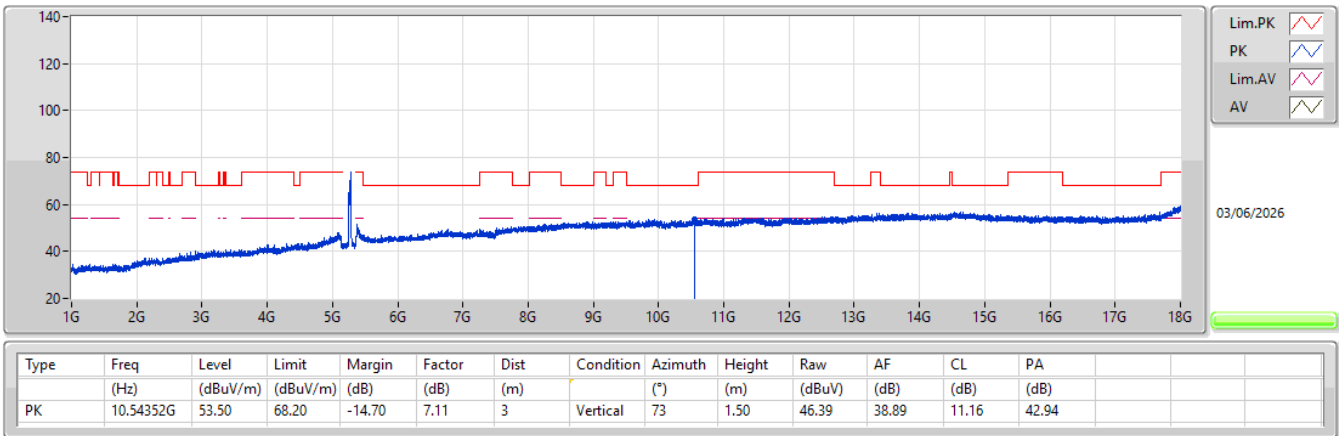


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

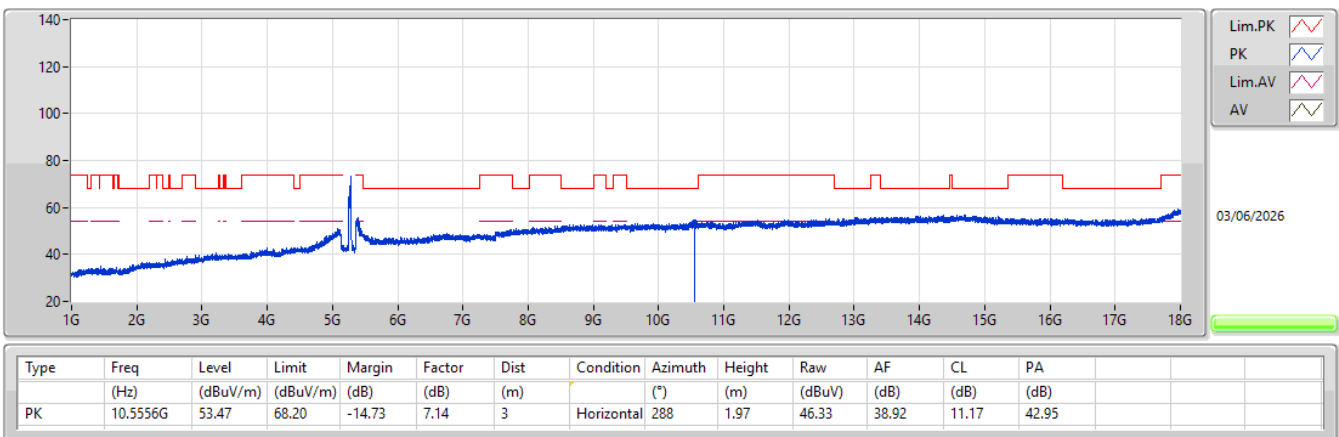


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

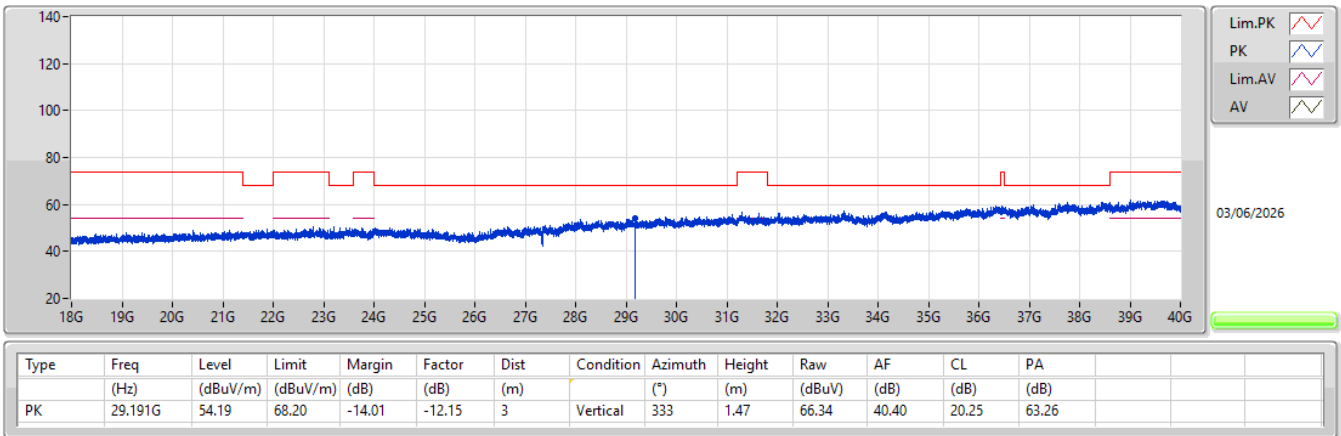


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

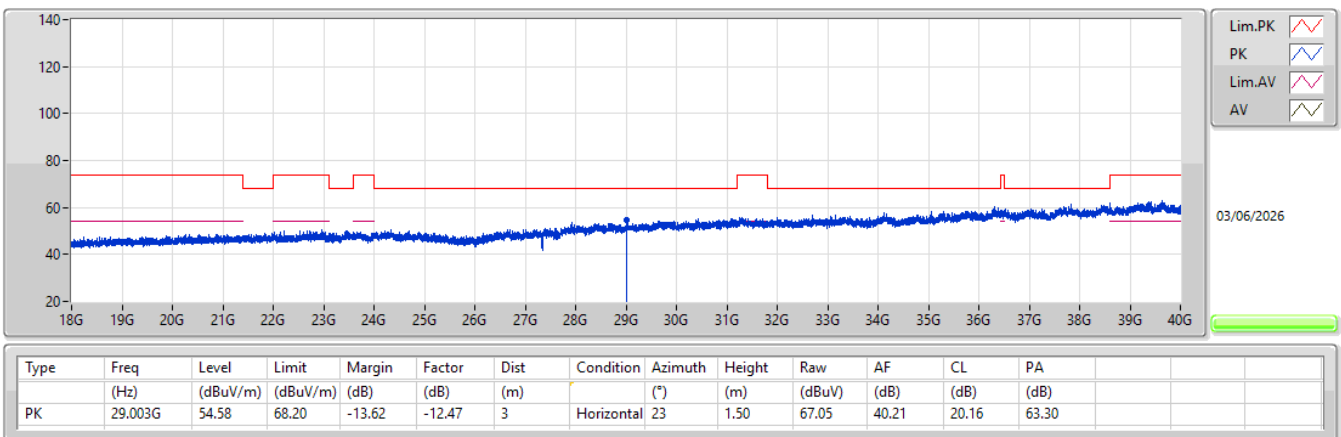


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

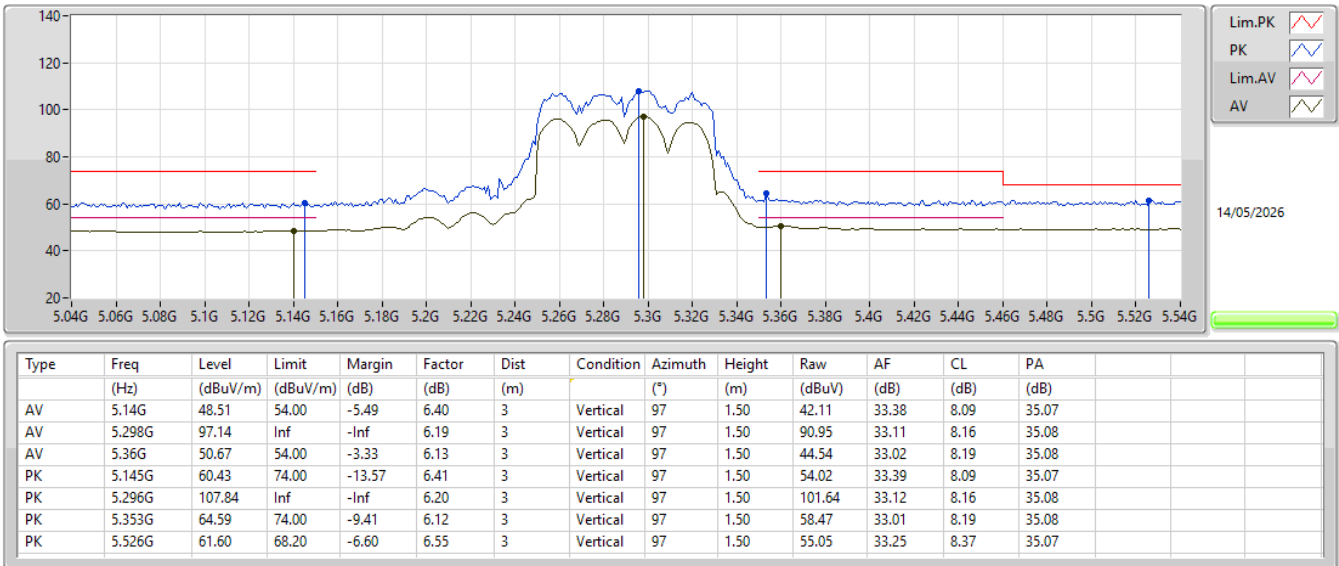


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

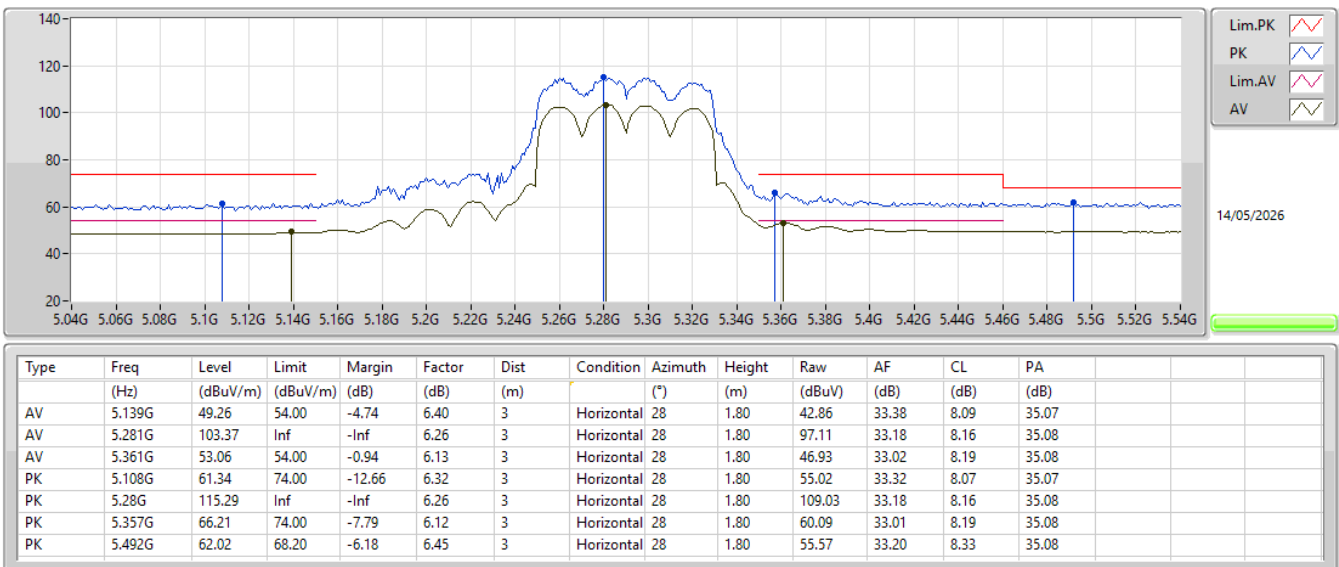


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

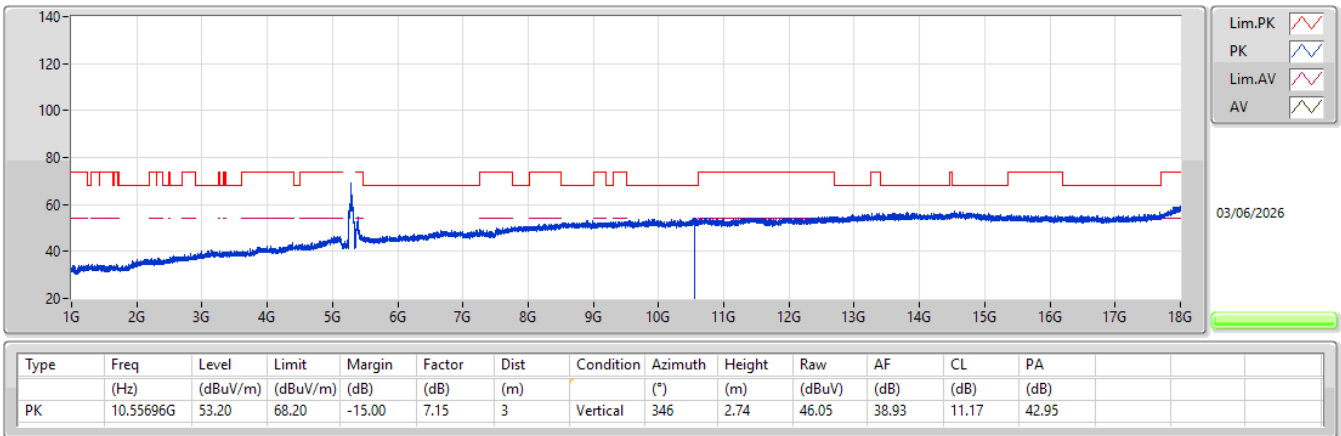


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

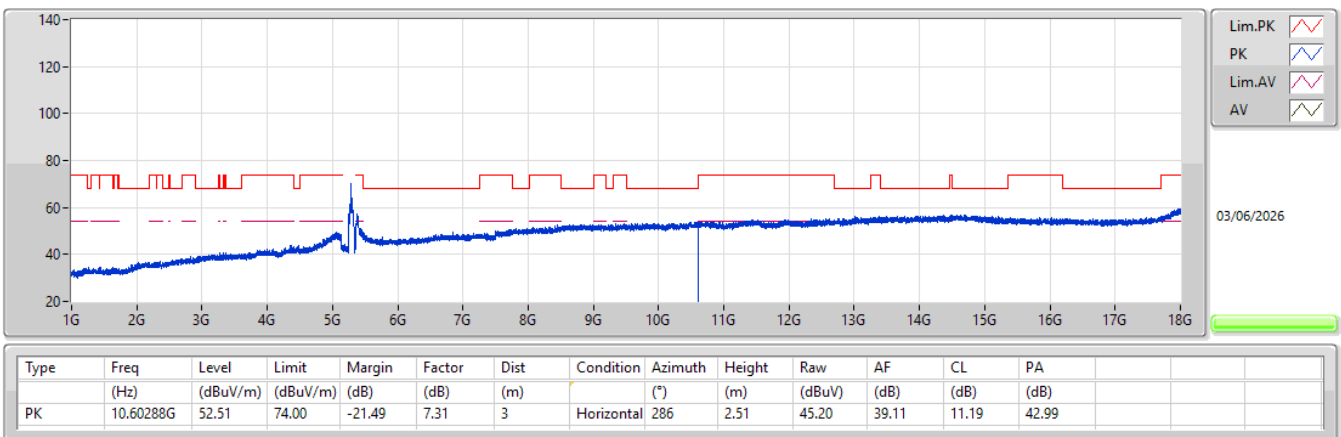


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

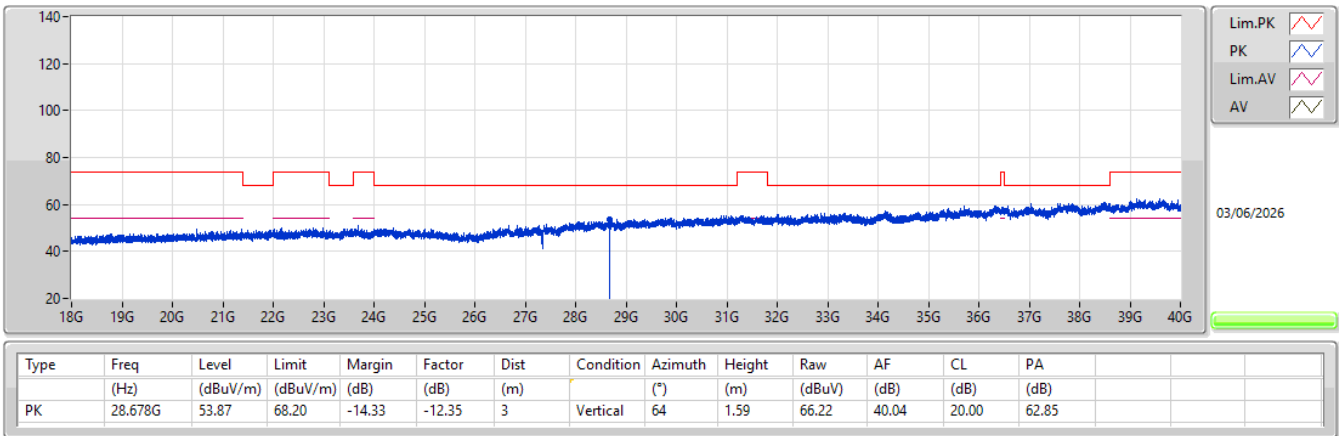


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

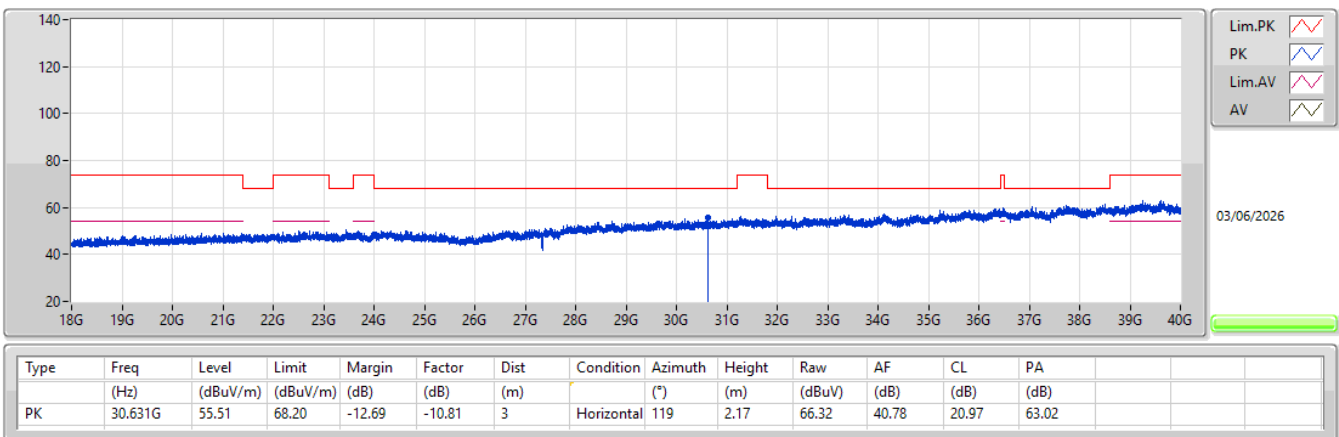


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

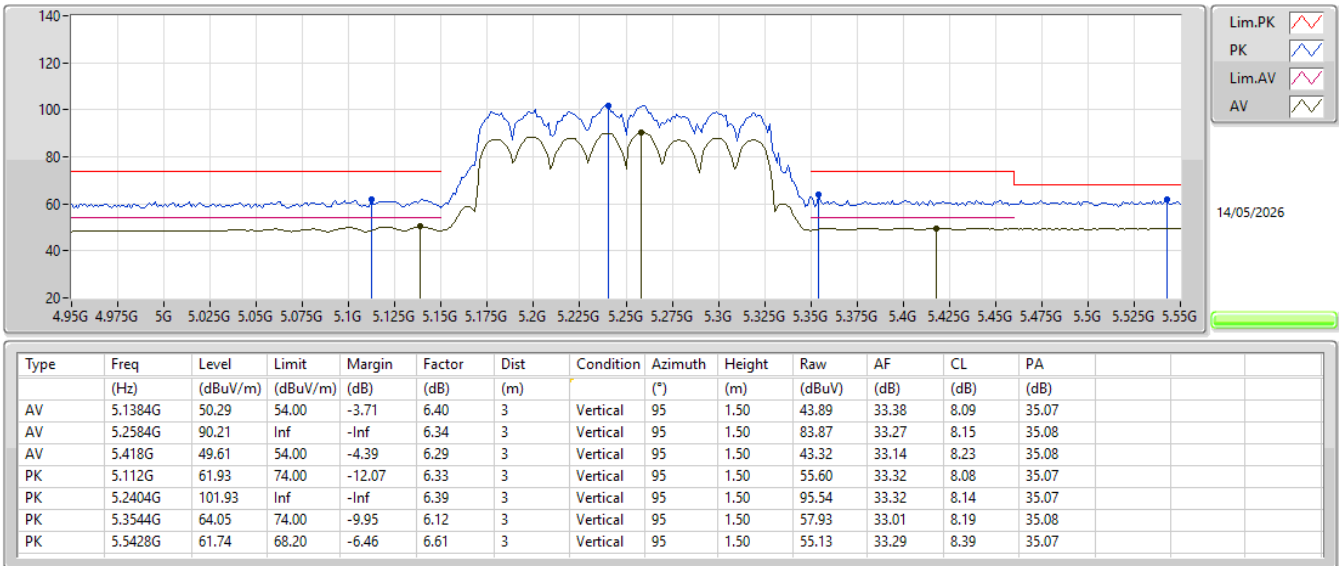


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

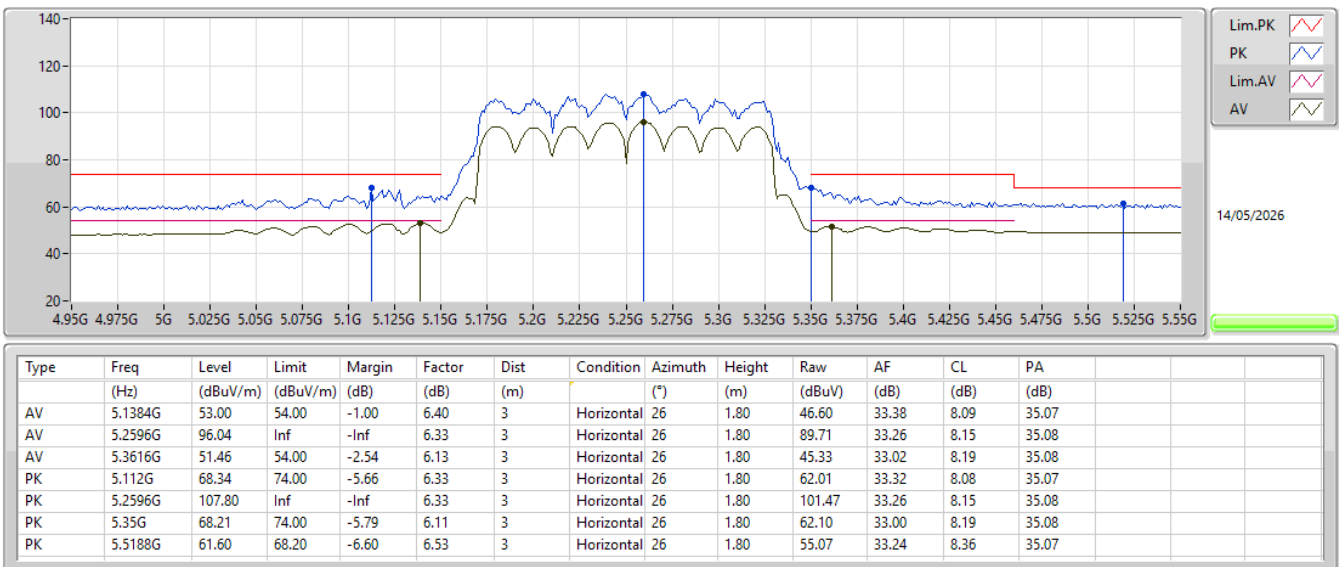


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

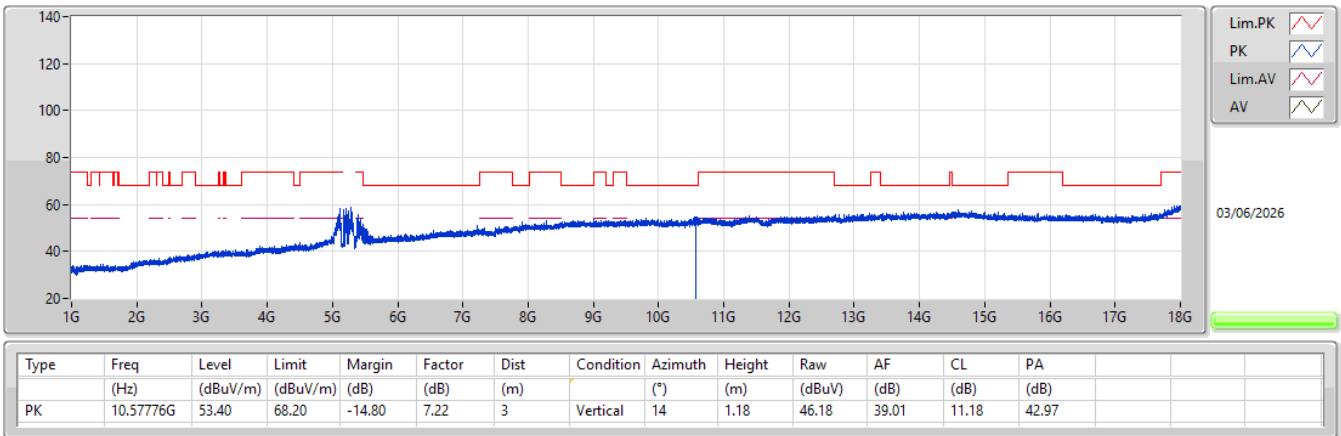


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

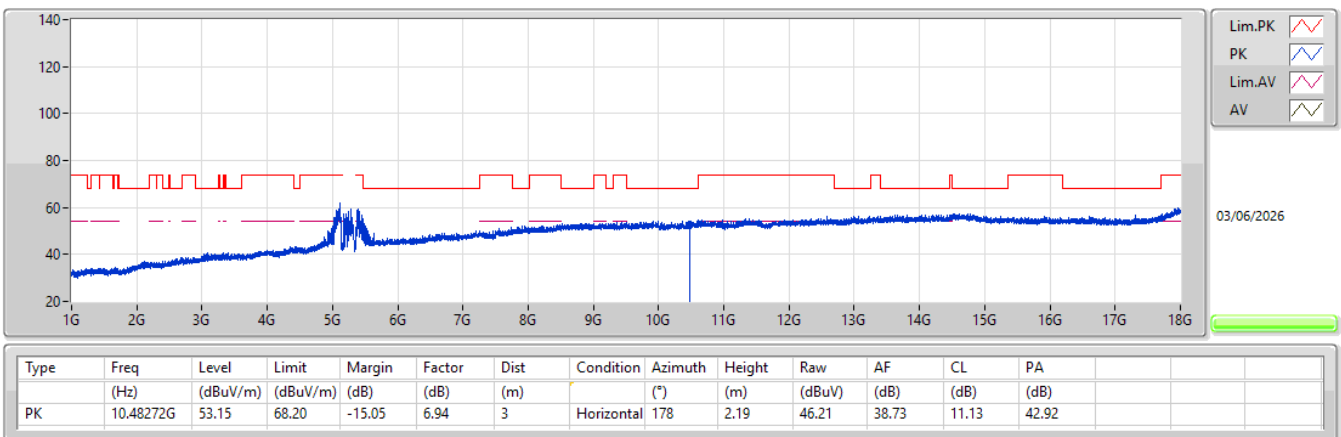


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

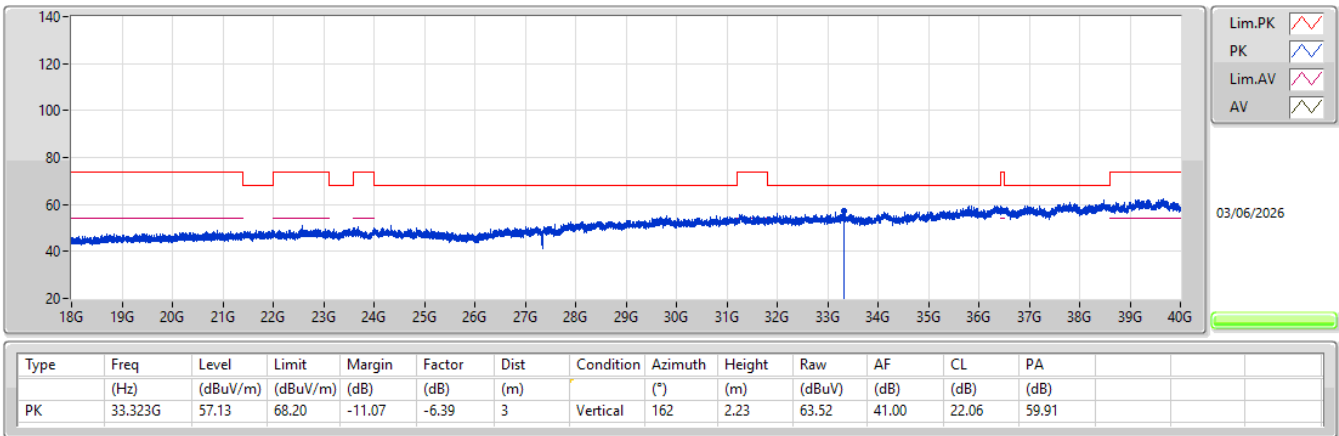


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

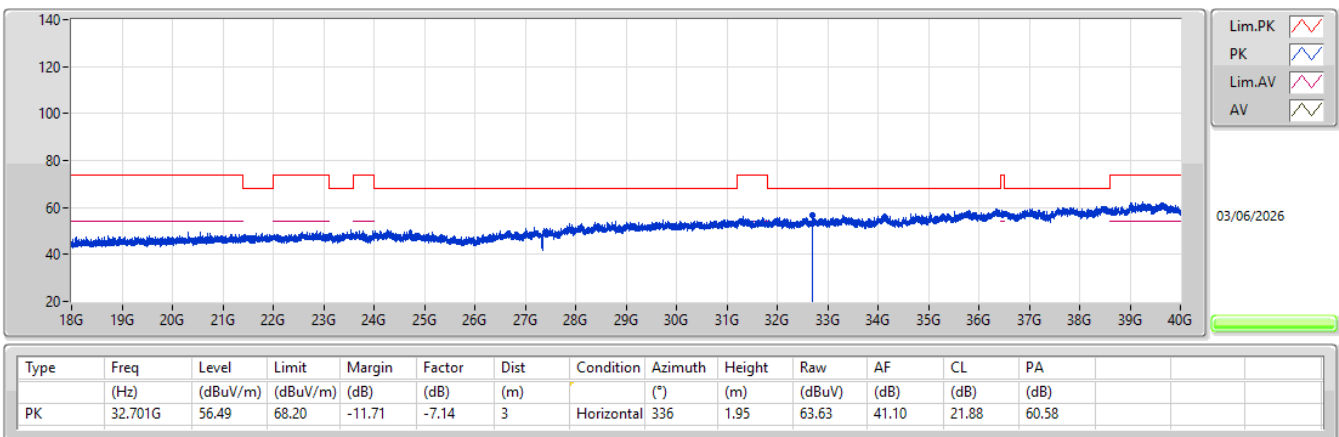


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

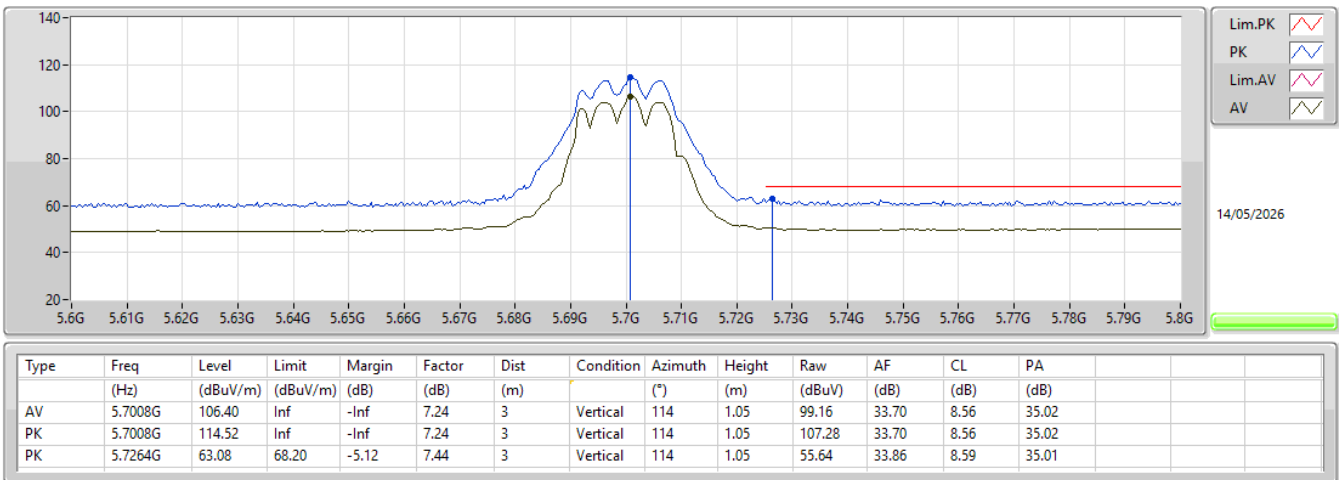


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

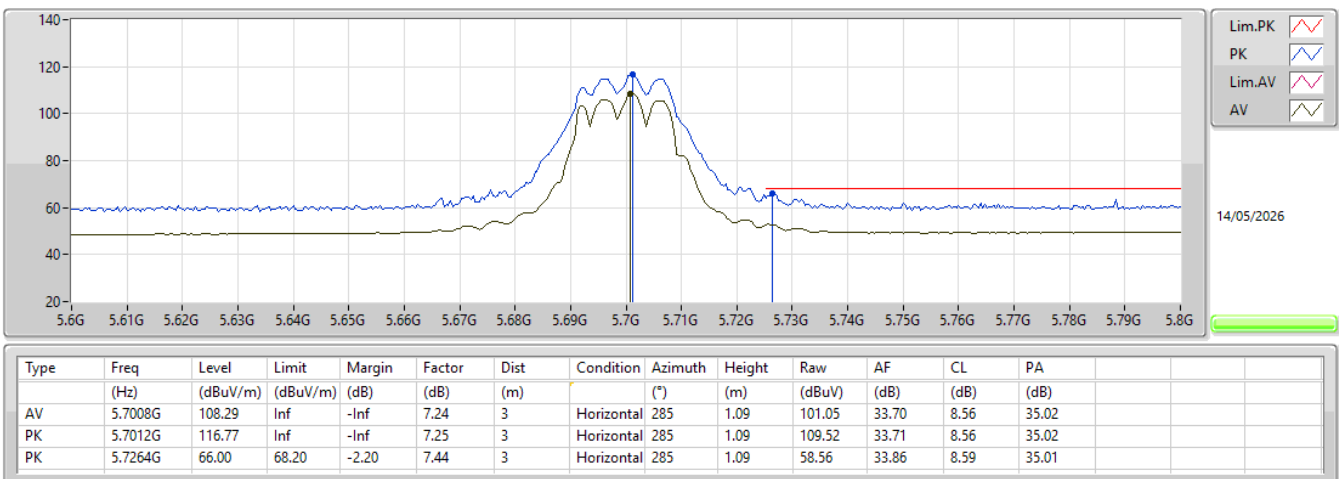


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

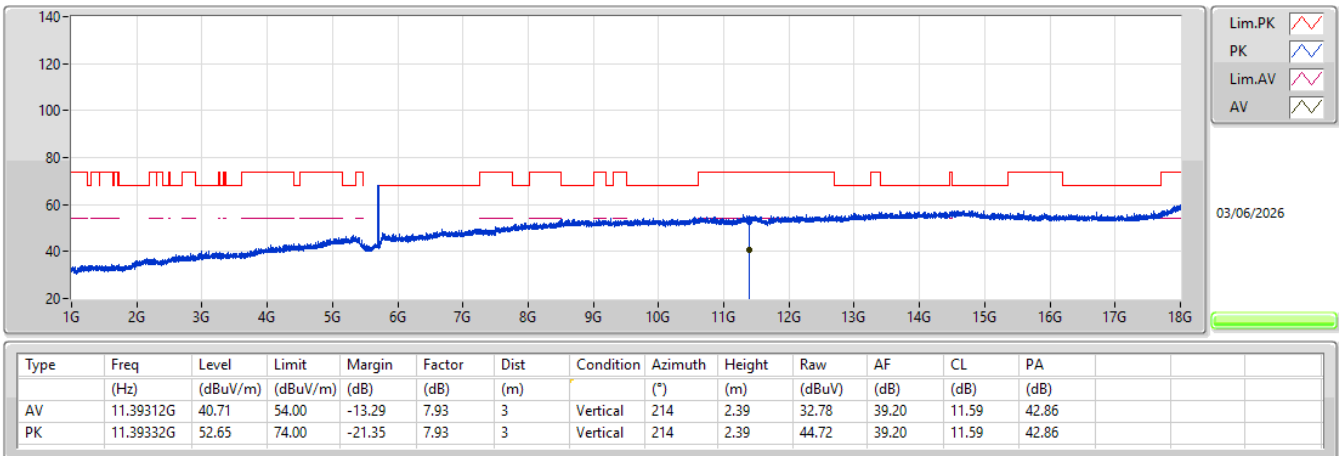


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

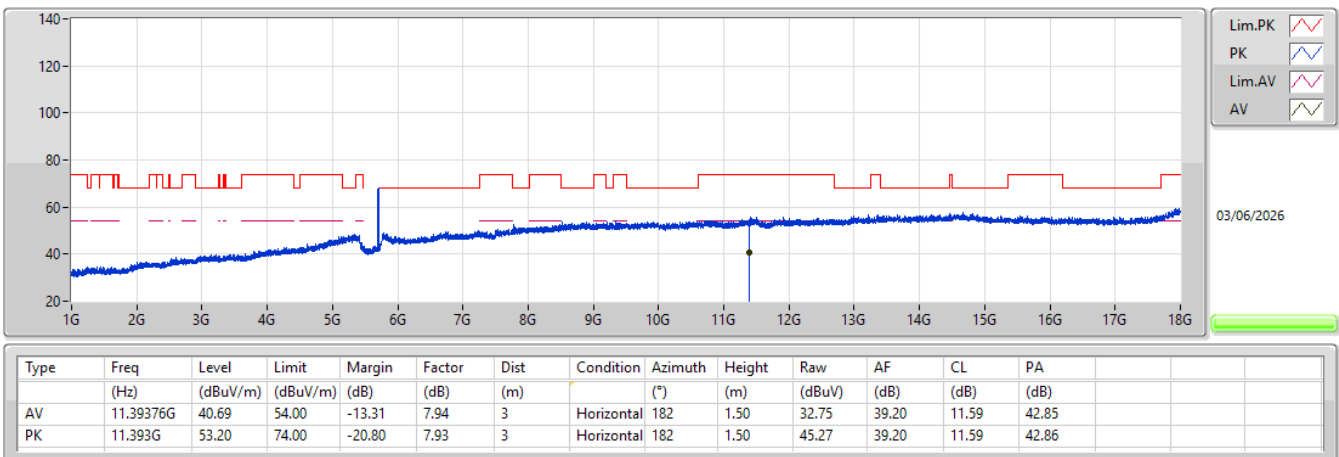


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

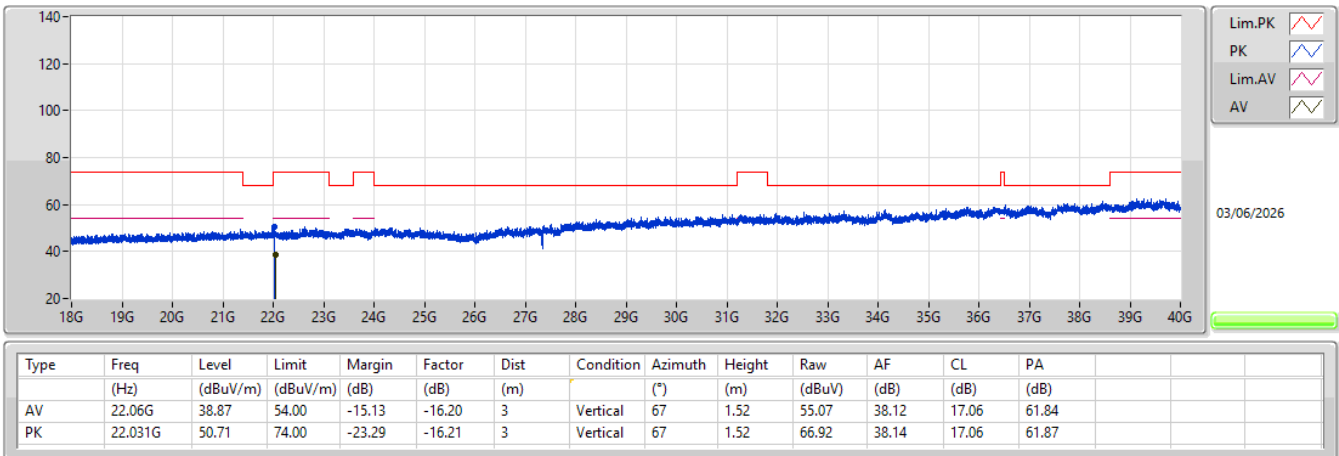


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5700MHz_TX

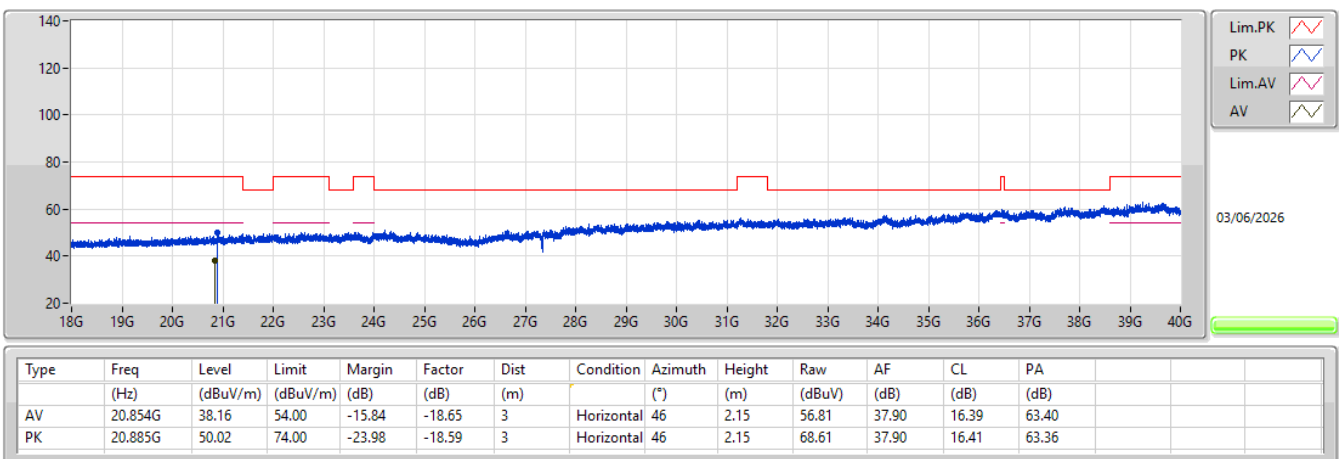


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

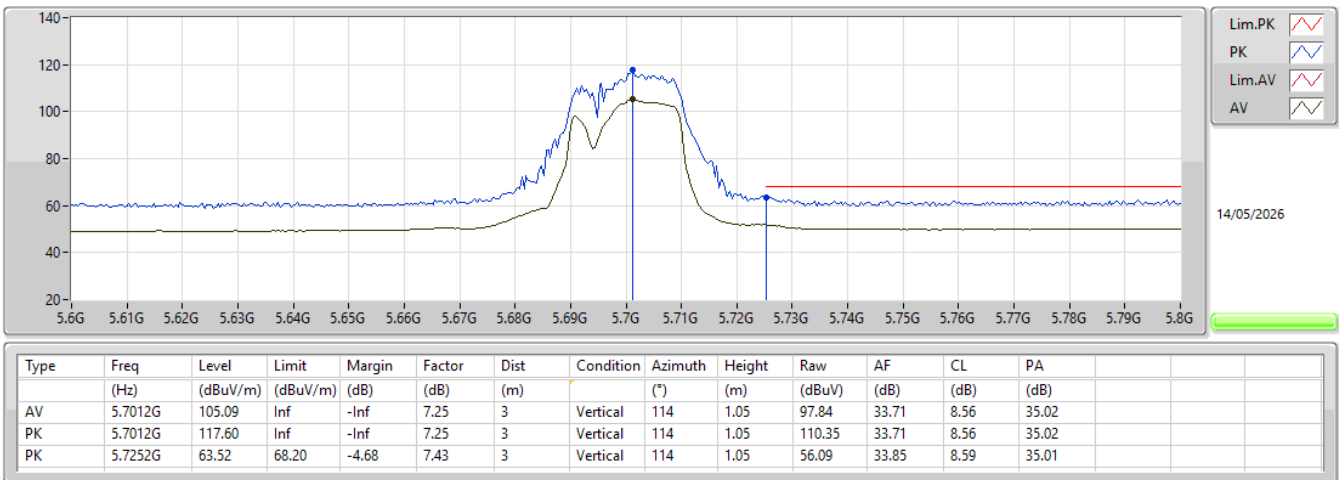


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

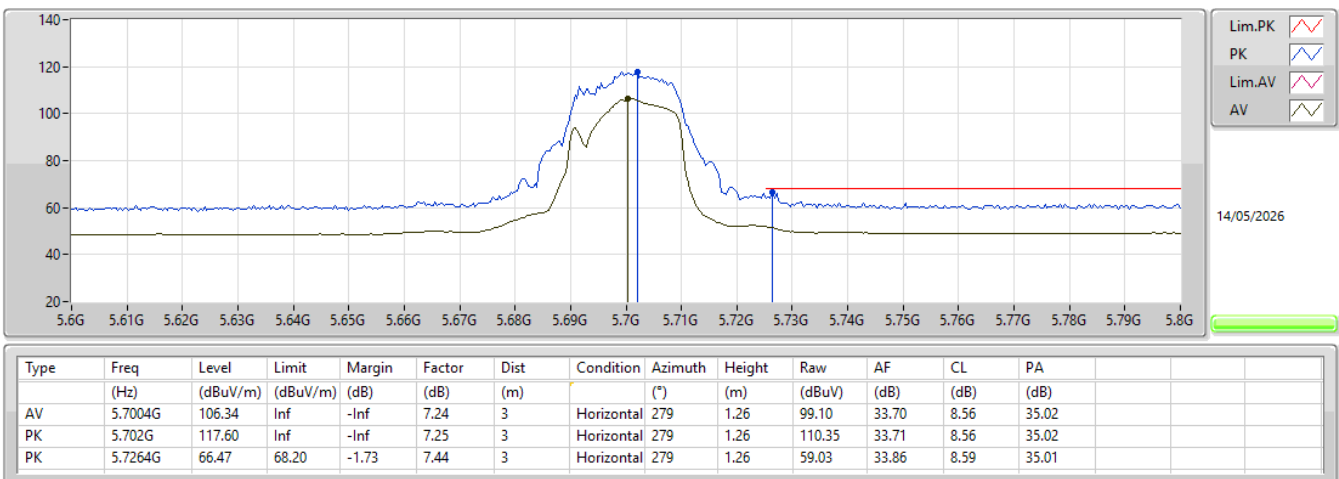


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

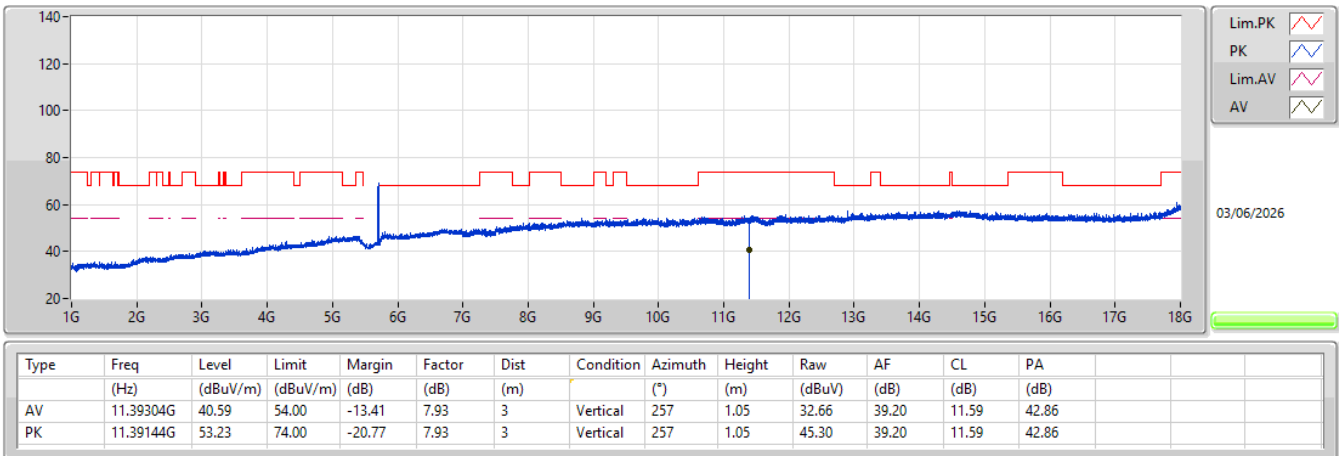


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

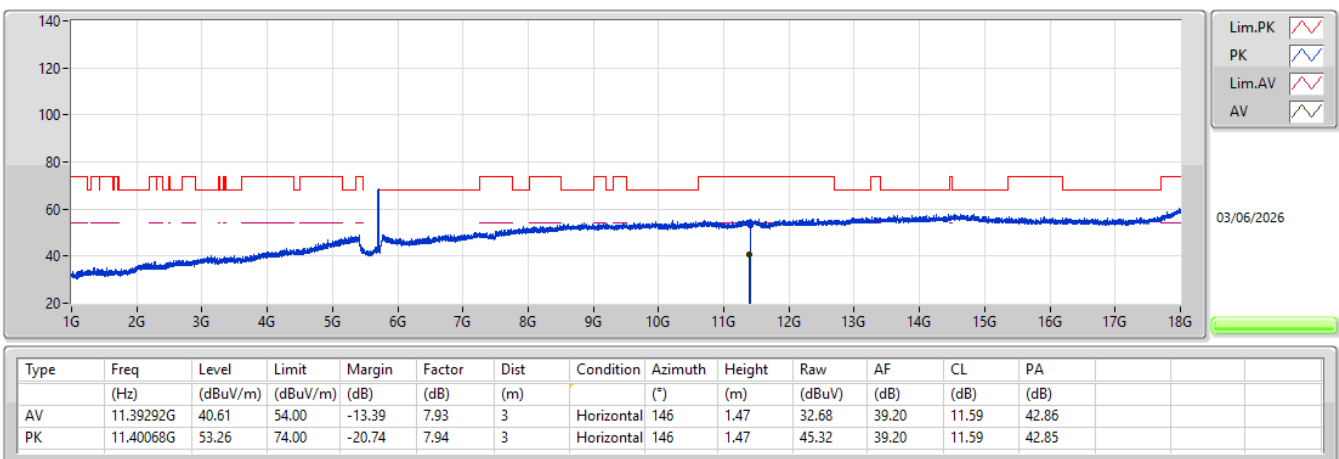


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

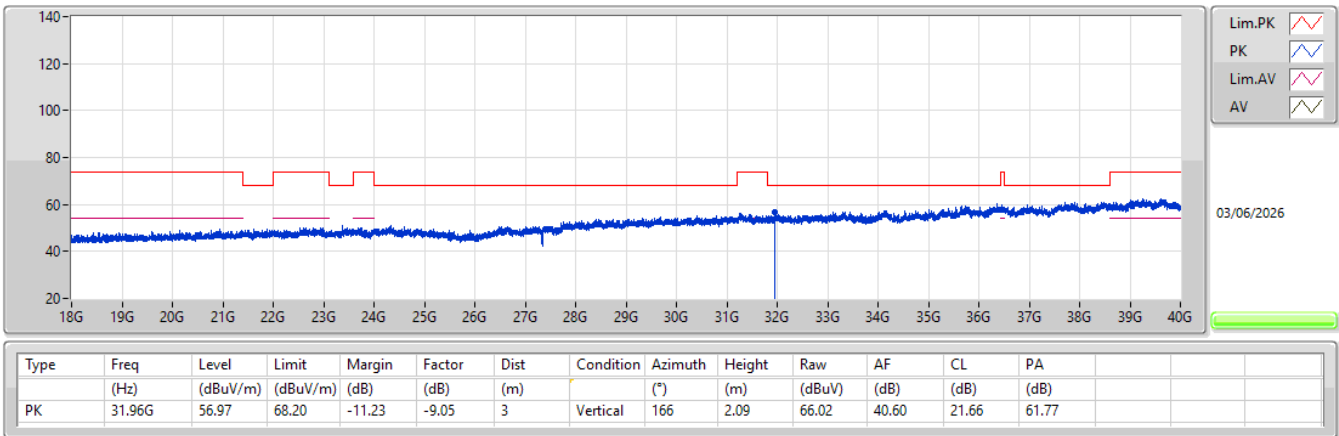


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5700MHz_TX

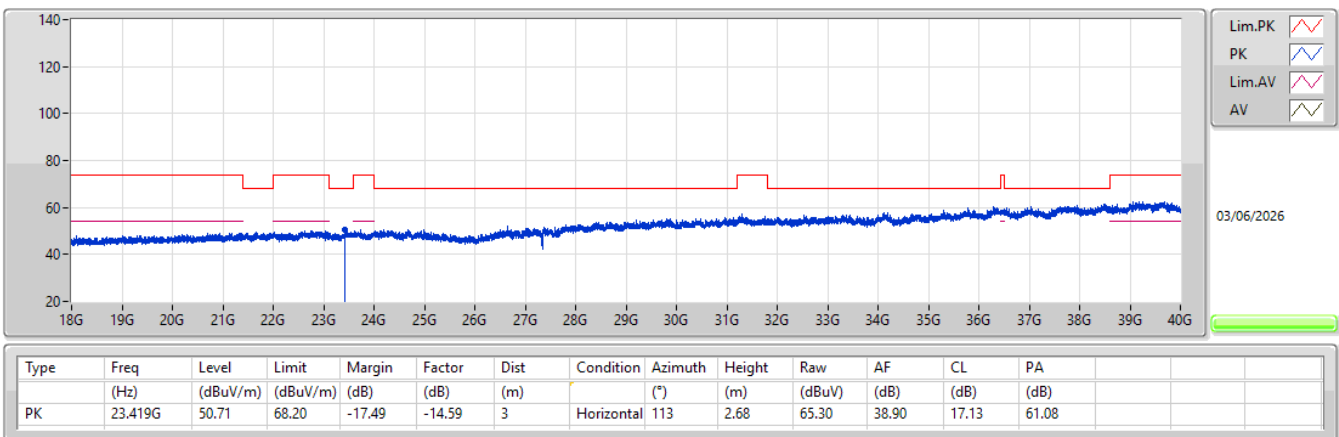


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

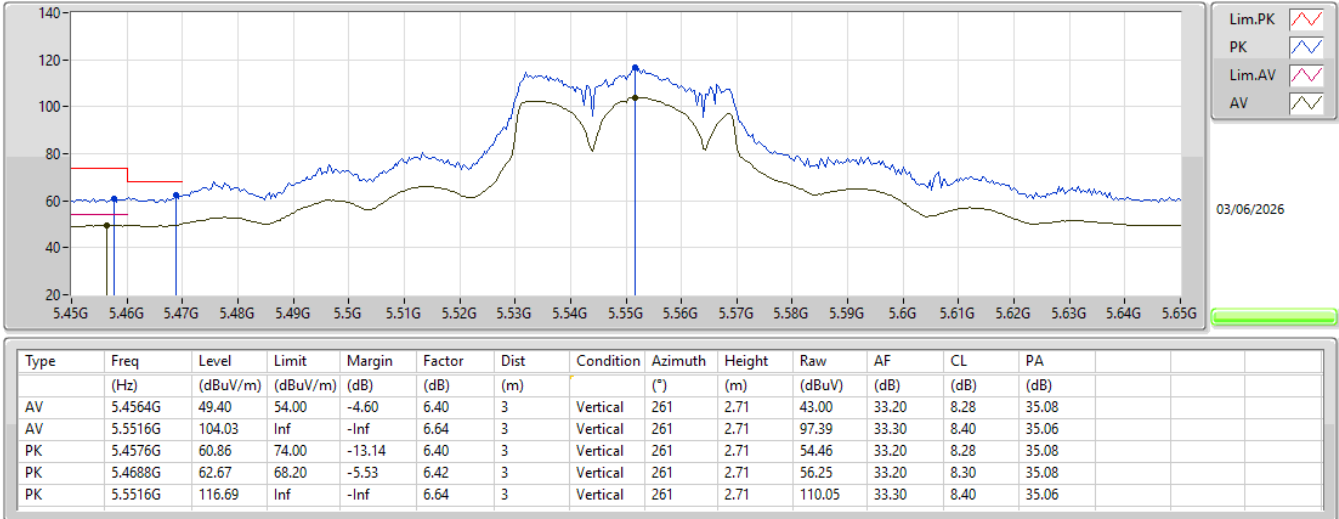


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

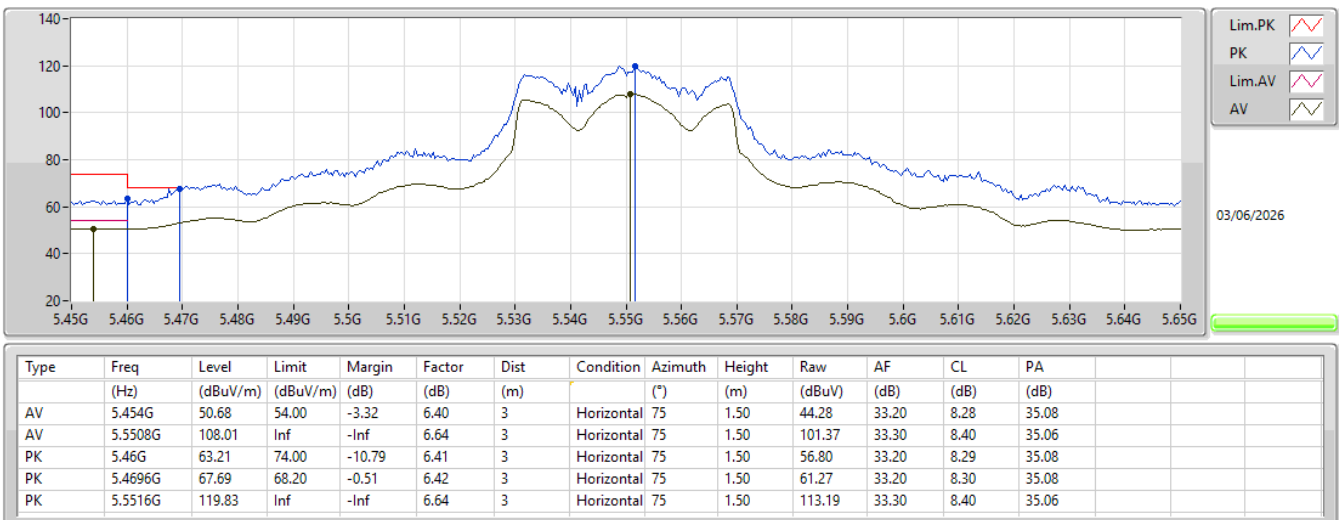


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

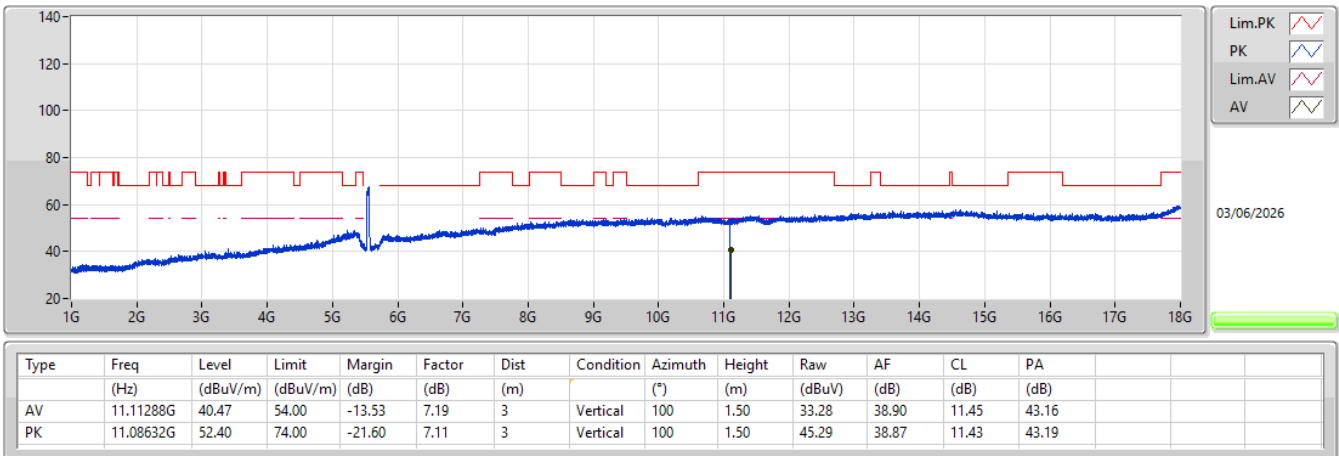


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

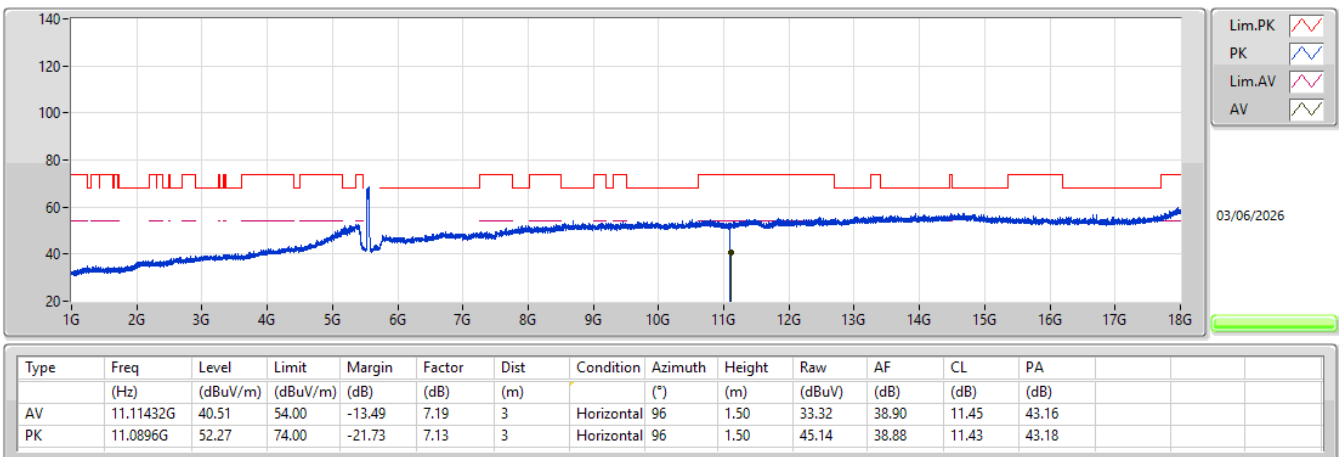


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

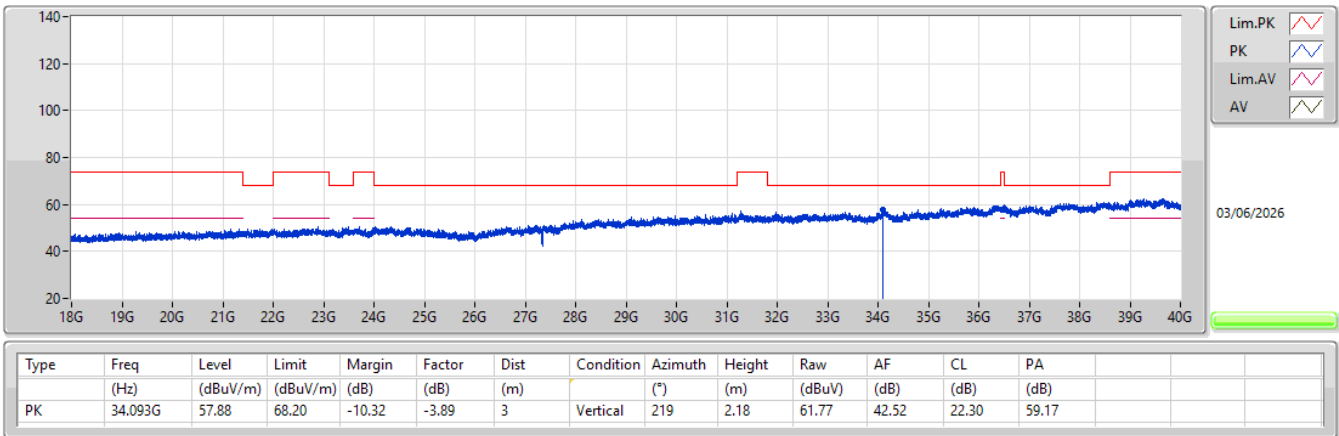


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

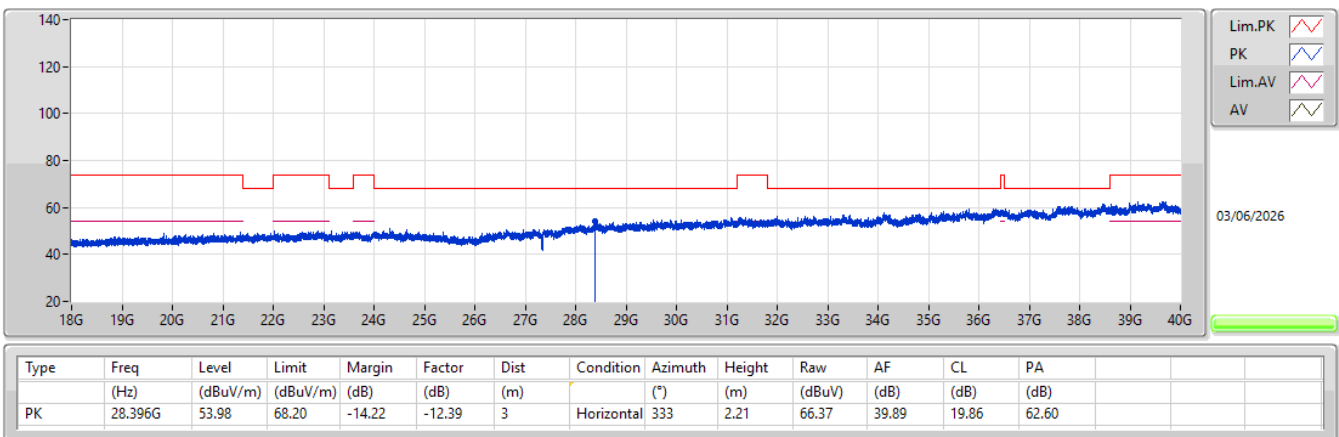


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

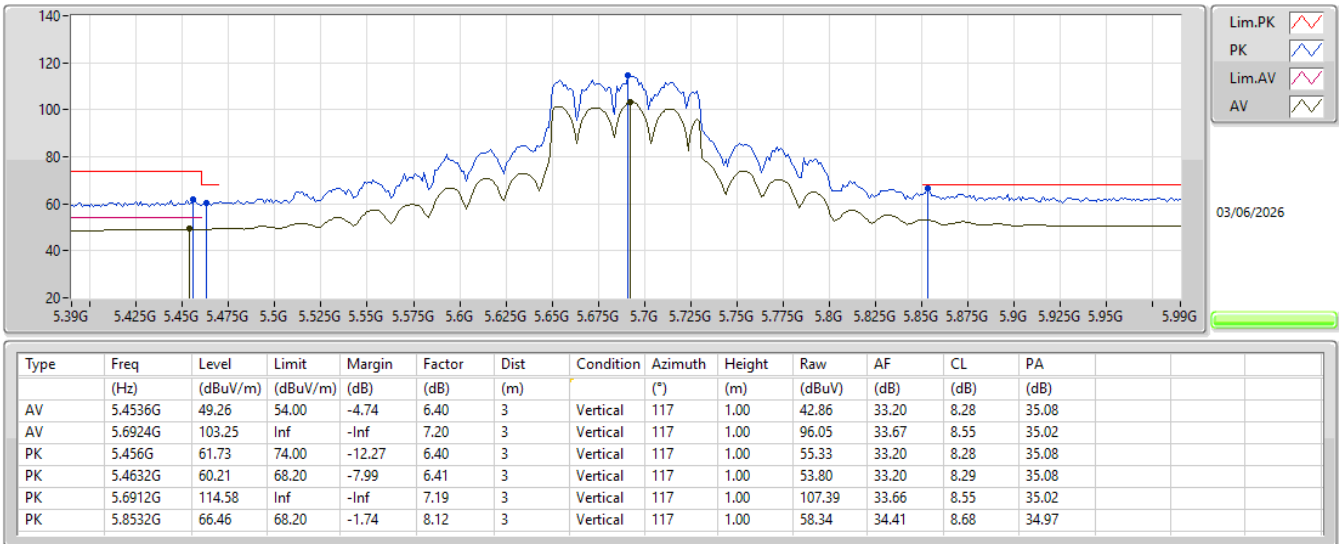


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

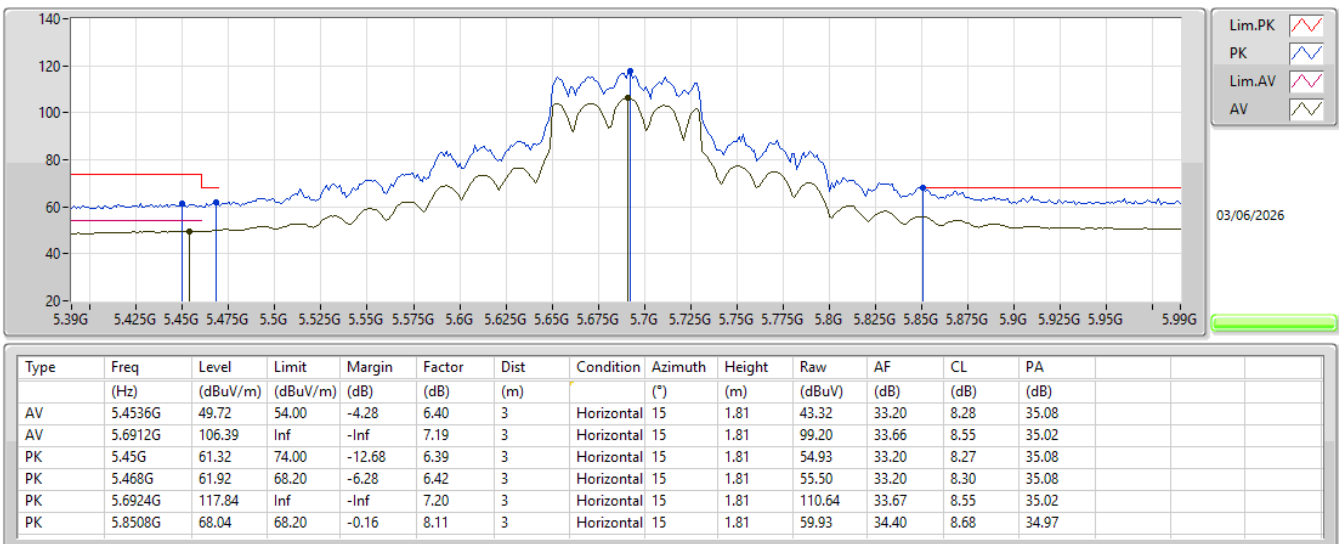


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

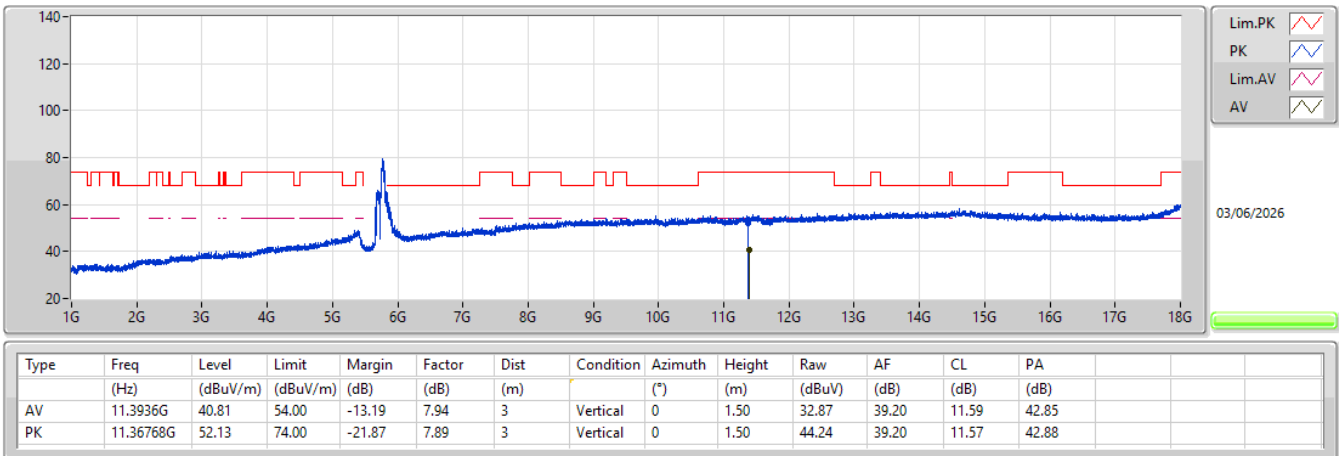


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

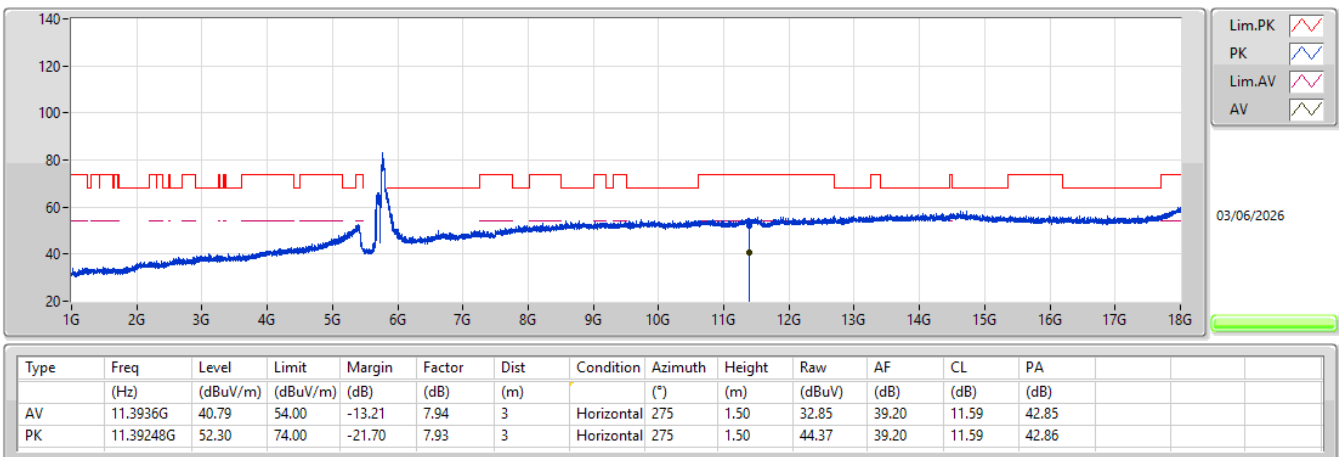


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

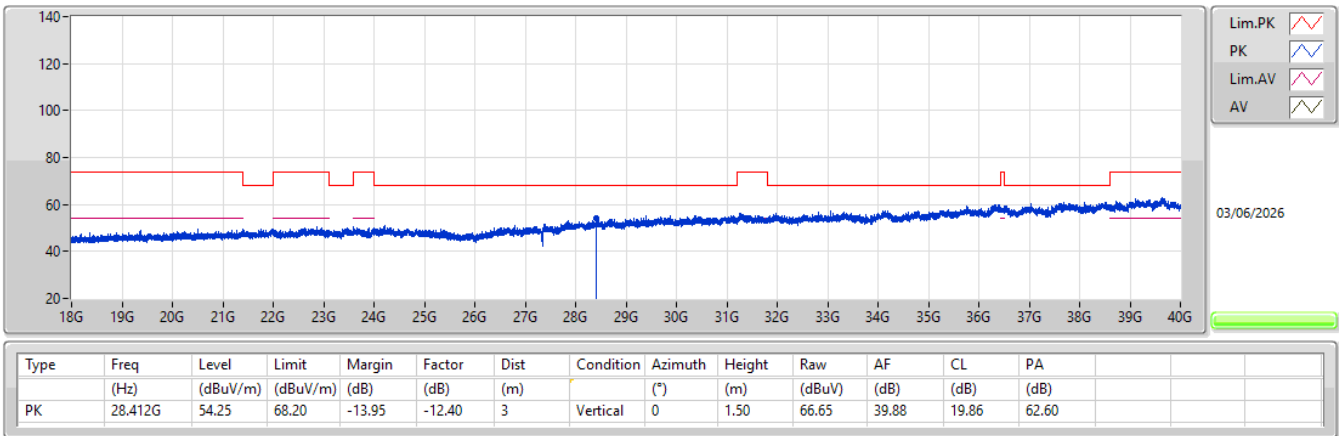


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TX

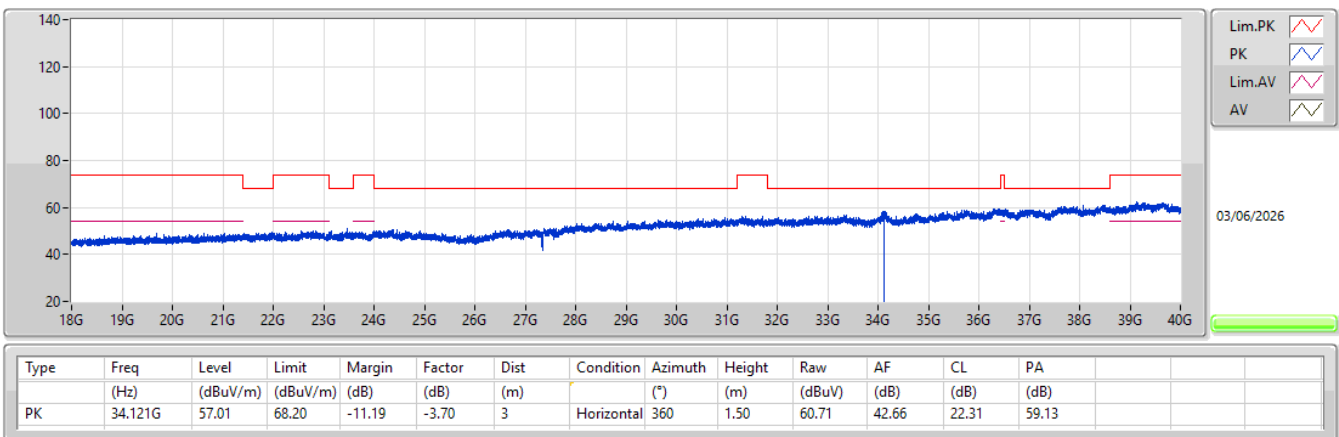


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

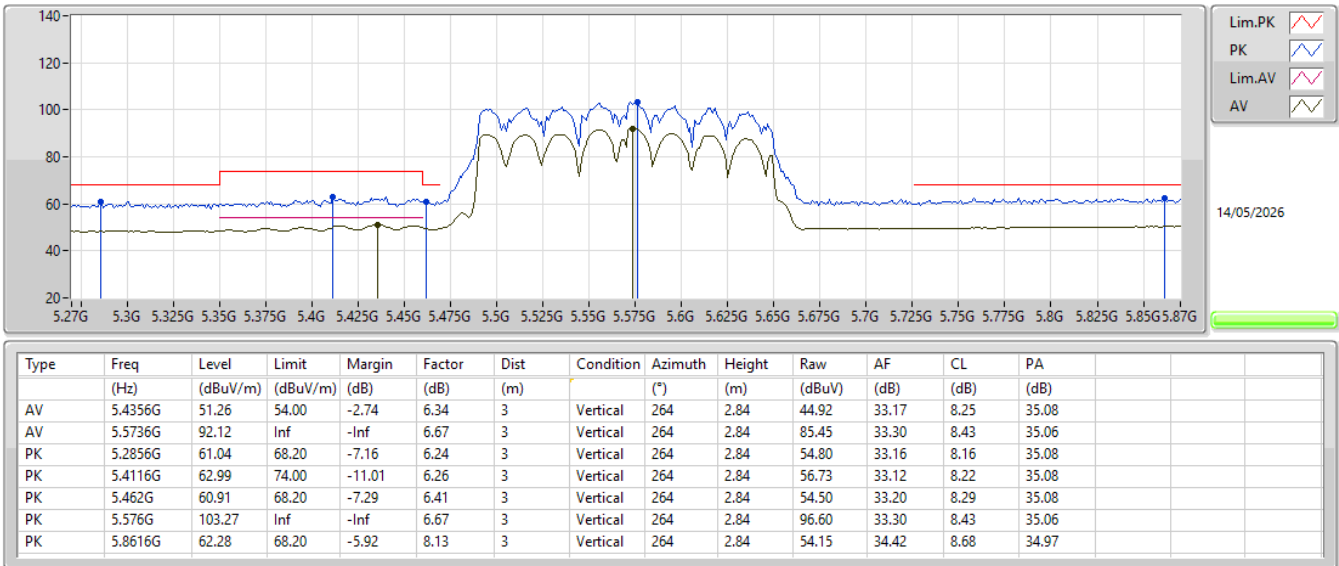


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

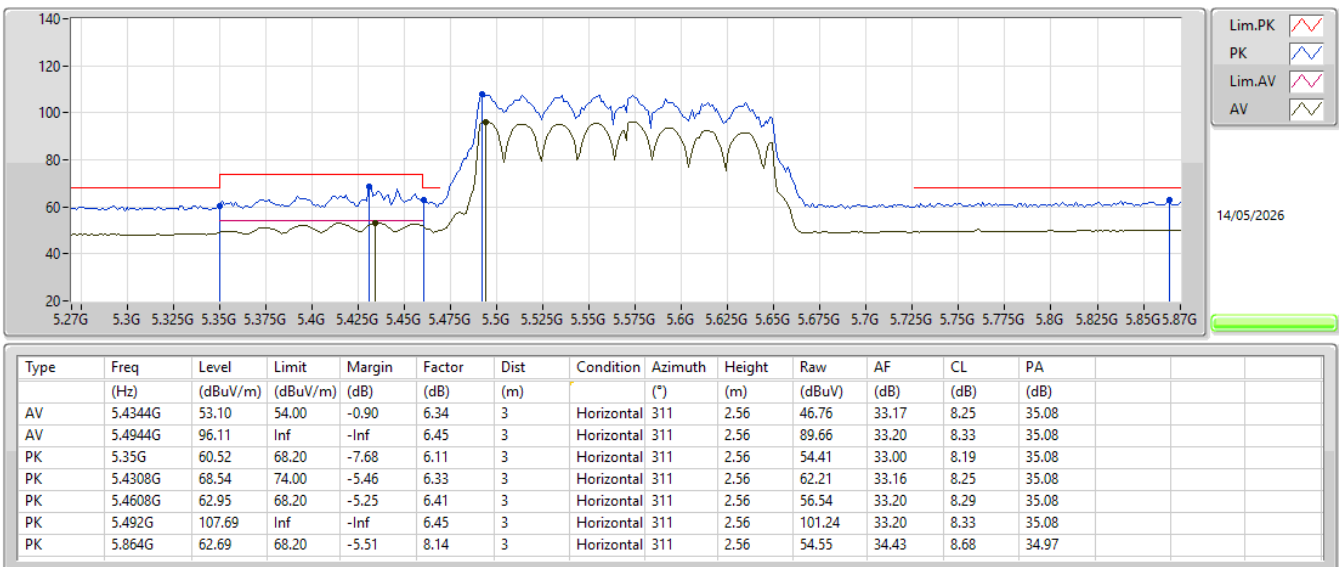


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

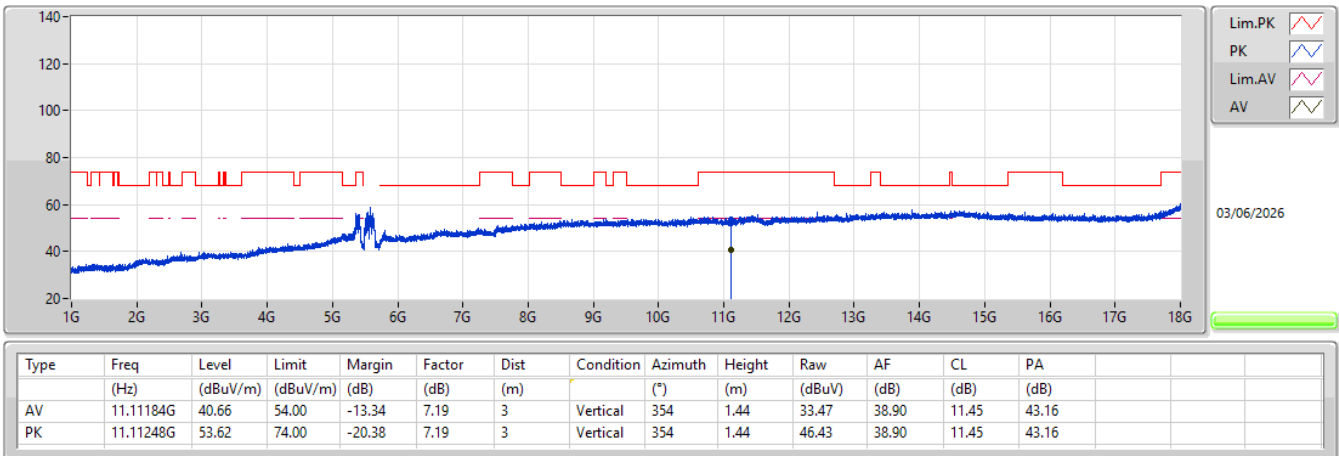


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

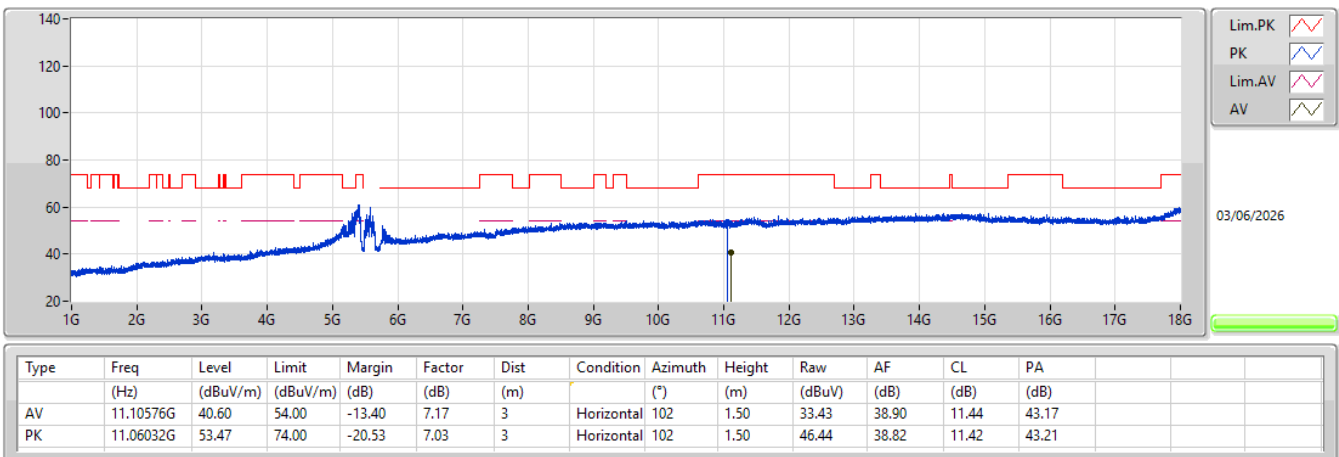


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

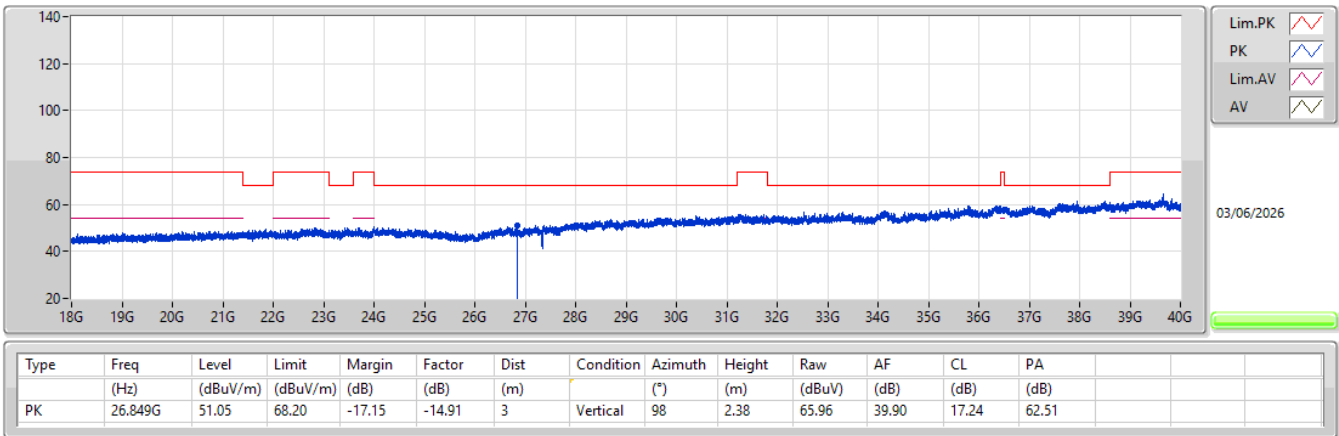


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

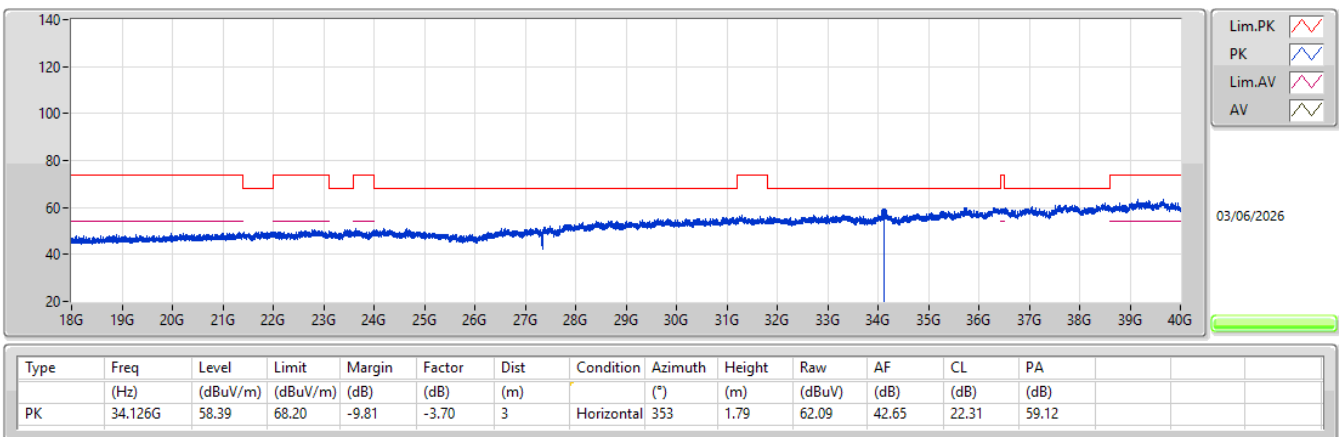

5.47-5.725GHz_802.11be EHT240_Nss1,(MCS0)_2TX


5610MHz Straddle 5.47-5.725GHz_TX

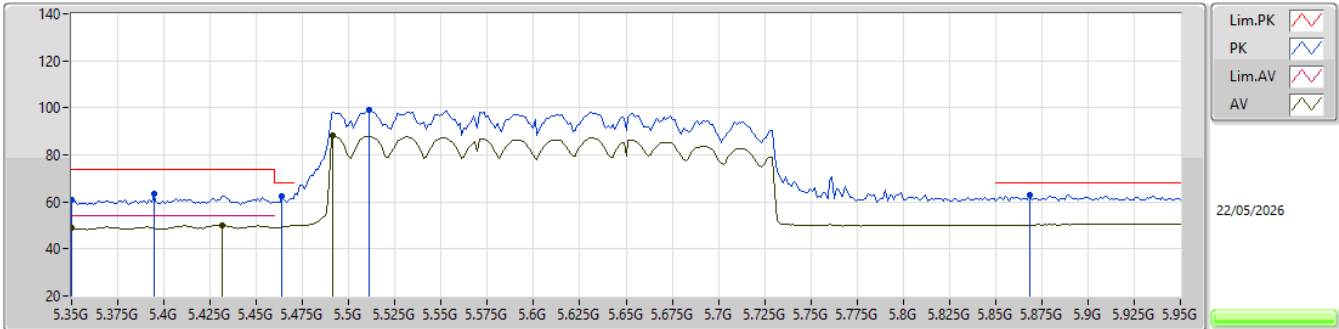

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.35G	48.85	54.00	-5.15	6.11	3	Vertical	126	2.18	42.74	33.00	8.19	35.08
AV	5.4316G	50.08	54.00	-3.92	6.33	3	Vertical	126	2.18	43.75	33.16	8.25	35.08
AV	5.4916G	88.03	Inf	-Inf	6.44	3	Vertical	126	2.18	81.59	33.20	8.32	35.08
PK	5.35G	61.03	74.00	-12.97	6.11	3	Vertical	126	2.18	54.92	33.00	8.19	35.08
PK	5.3944G	63.53	74.00	-10.47	6.22	3	Vertical	126	2.18	57.31	33.09	8.21	35.08
PK	5.464G	62.20	68.20	-6.00	6.41	3	Vertical	126	2.18	55.79	33.20	8.29	35.08
PK	5.5108G	98.94	Inf	-Inf	6.49	3	Vertical	126	2.18	92.45	33.22	8.35	35.08
PK	5.8684G	62.94	68.20	-5.26	8.15	3	Vertical	126	2.18	54.79	34.44	8.68	34.97

5.47-5.725GHz_802.11be EHT240_Nss1,(MCS0)_2TX


5610MHz Straddle 5.47-5.725GHz_TX

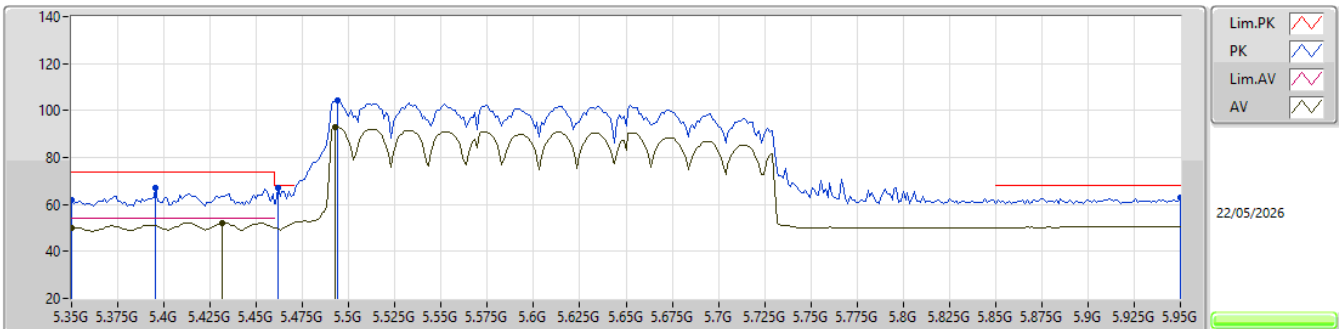

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.35G	49.84	54.00	-4.16	6.11	3	Horizontal	33	1.80	43.73	33.00	8.19	35.08
AV	5.4316G	52.13	54.00	-1.87	6.33	3	Horizontal	33	1.80	45.80	33.16	8.25	35.08
AV	5.4928G	92.76	Inf	-Inf	6.45	3	Horizontal	33	1.80	86.31	33.20	8.33	35.08
PK	5.35G	61.65	74.00	-12.35	6.11	3	Horizontal	33	1.80	55.54	33.00	8.19	35.08
PK	5.3956G	67.04	74.00	-6.96	6.22	3	Horizontal	33	1.80	60.82	33.09	8.21	35.08
PK	5.4616G	67.15	68.20	-1.05	6.41	3	Horizontal	33	1.80	60.74	33.20	8.29	35.08
PK	5.494G	104.41	Inf	-Inf	6.45	3	Horizontal	33	1.80	97.96	33.20	8.33	35.08
PK	5.95G	63.03	68.20	-5.17	8.16	3	Horizontal	33	1.80	54.87	34.40	8.71	34.95


5.47-5.725GHz_802.11be EHT240_Nss1,(MCS0)_2TX

5610MHz Straddle 5.47-5.725GHz_TX

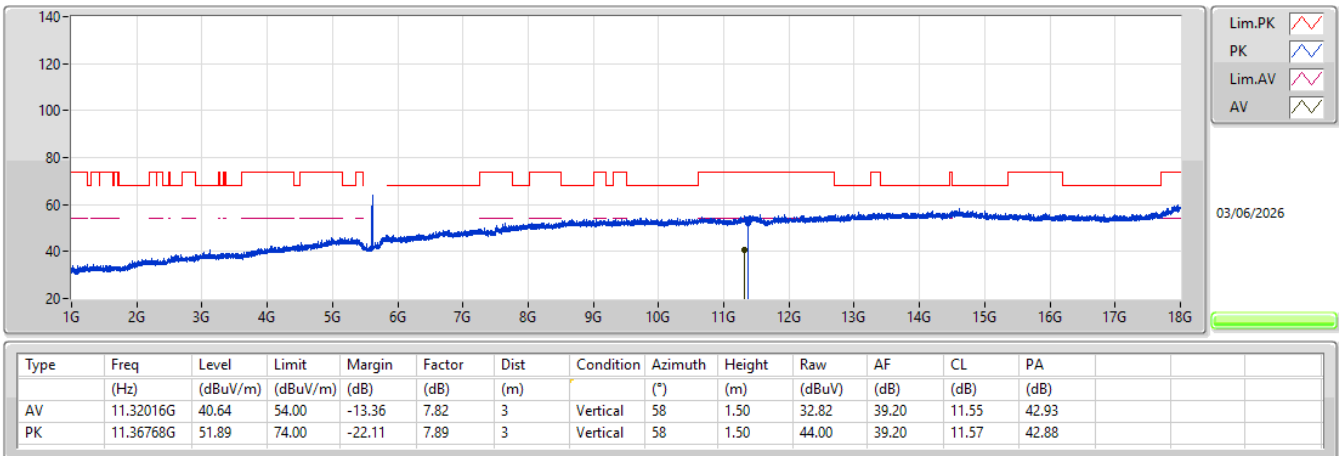


5.47-5.725GHz_802.11be EHT240_Nss1,(MCS0)_2TX

5610MHz Straddle 5.47-5.725GHz_TX

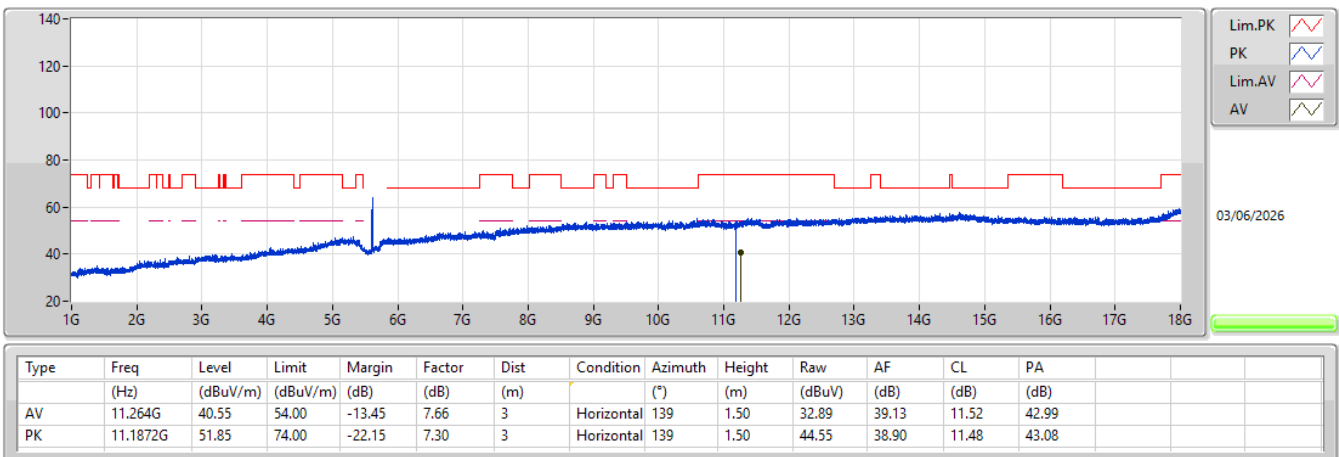


5.47-5.725GHz_802.11be EHT240_Nss1,(MCS0)_2TX

5610MHz Straddle 5.47-5.725GHz_TX

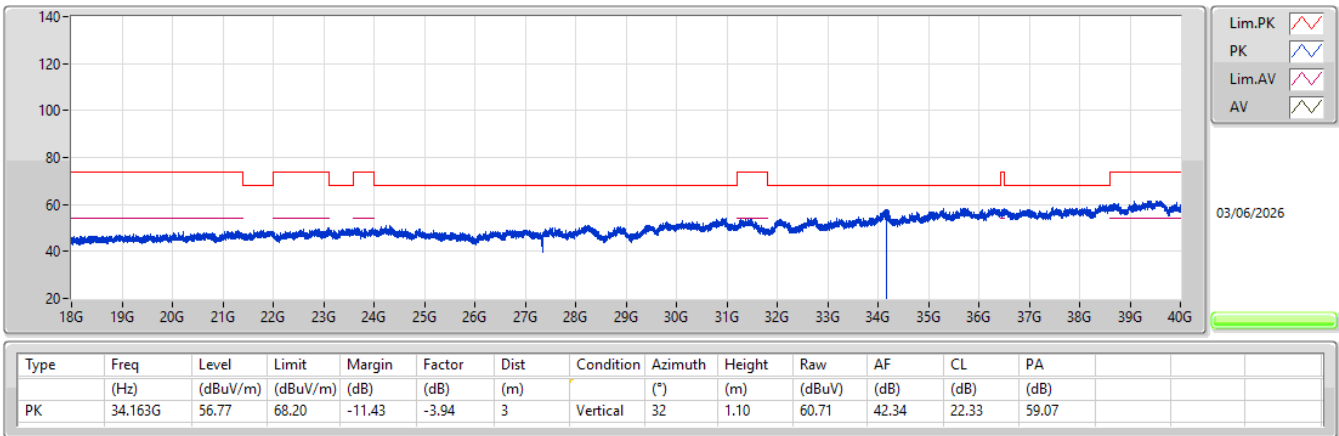


5.47-5.725GHz_802.11be EHT240_Nss1,(MCS0)_2TX

5610MHz Straddle 5.47-5.725GHz_TX

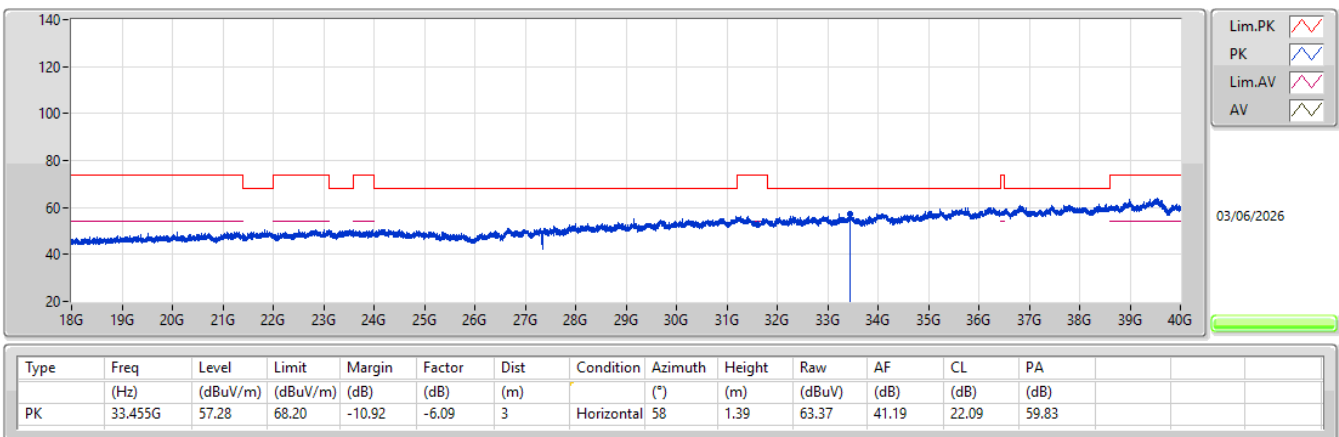


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

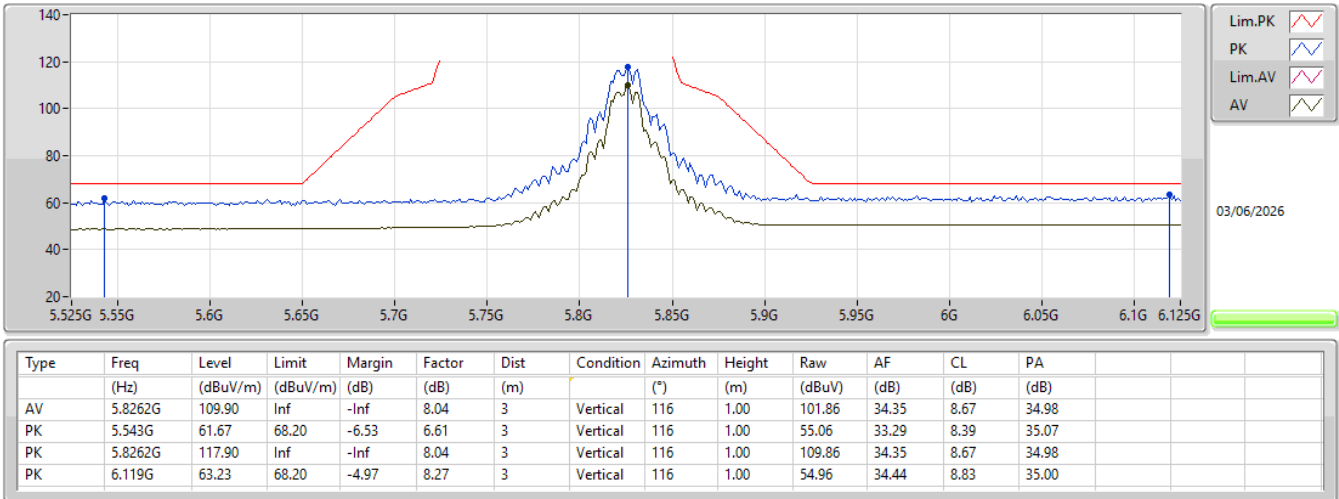


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

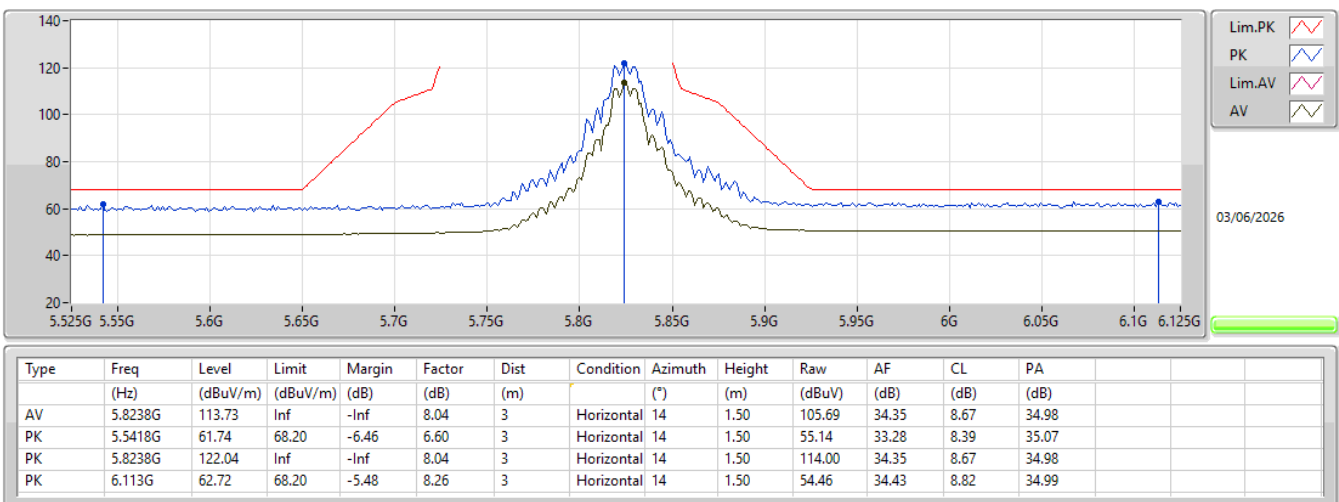


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

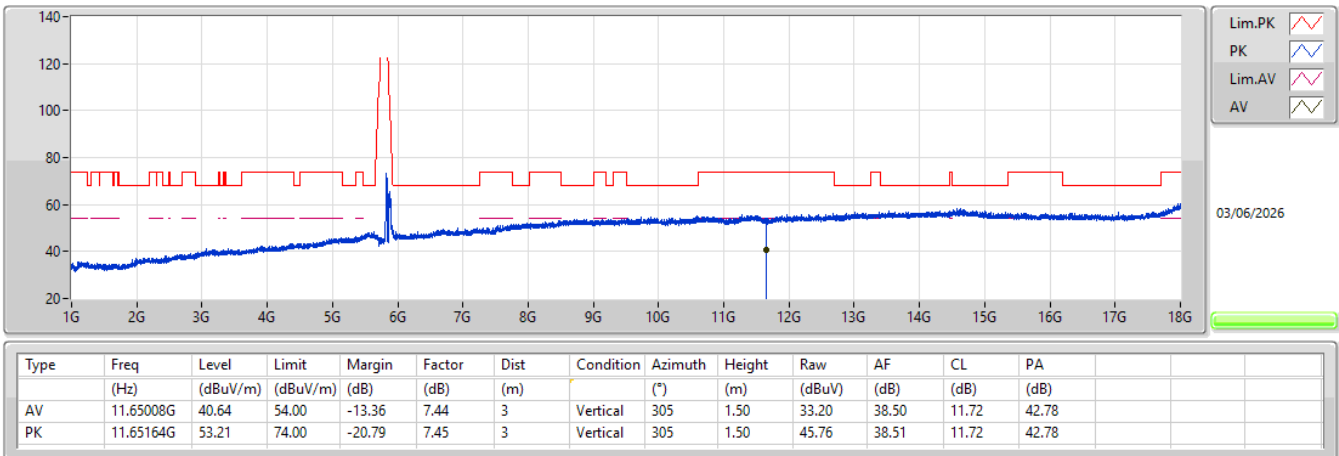


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

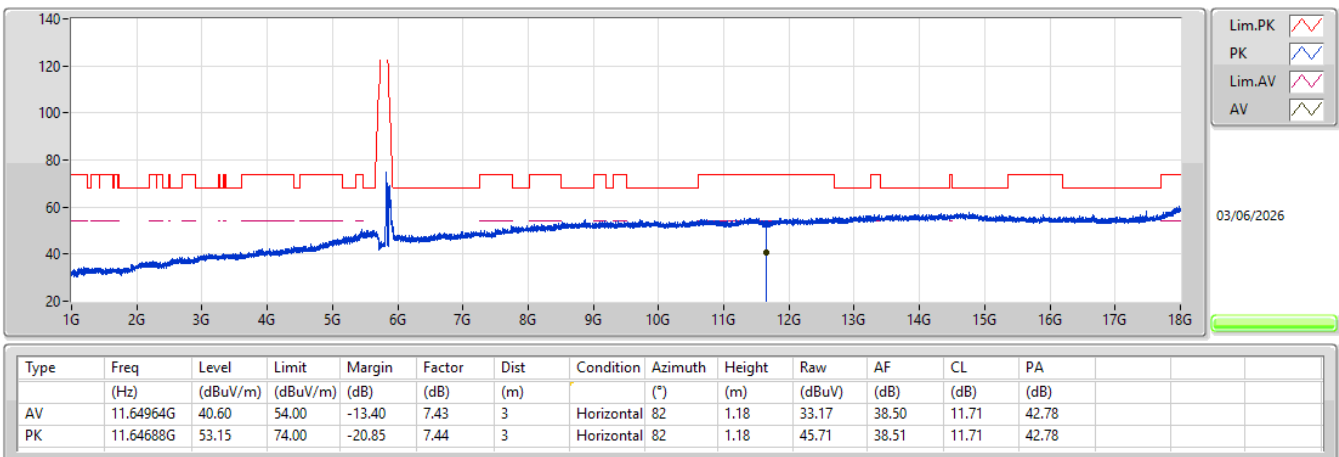


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

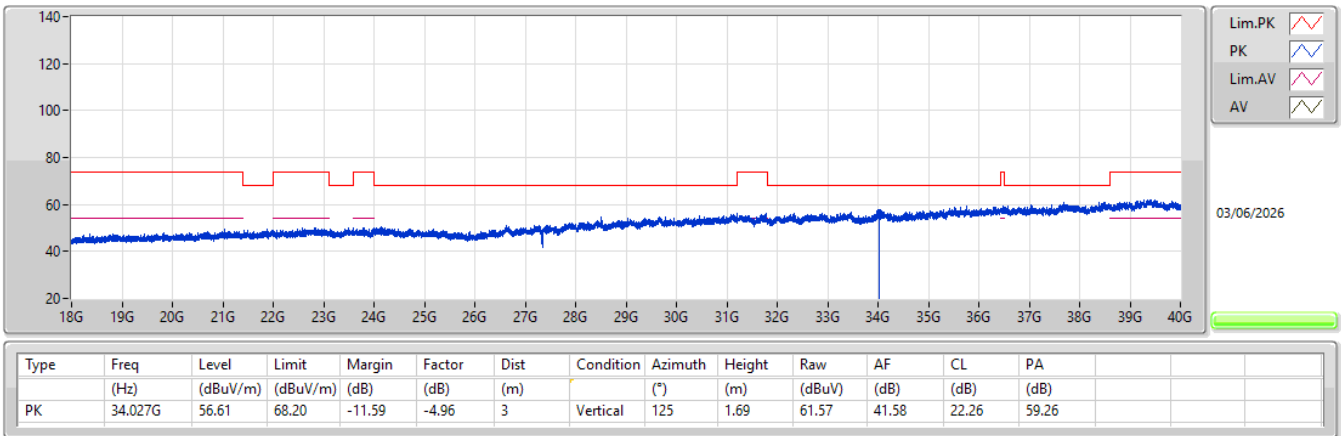


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

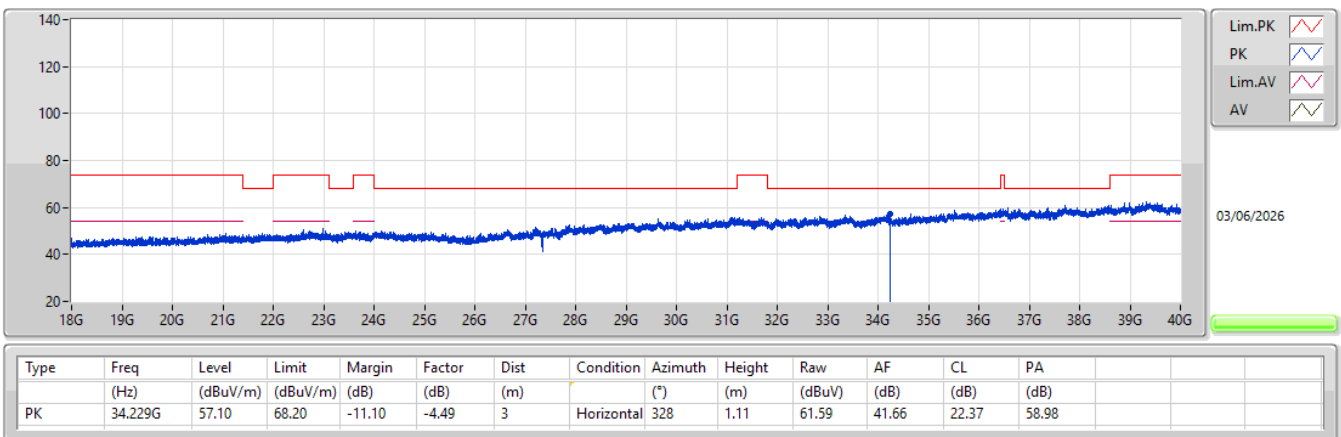


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

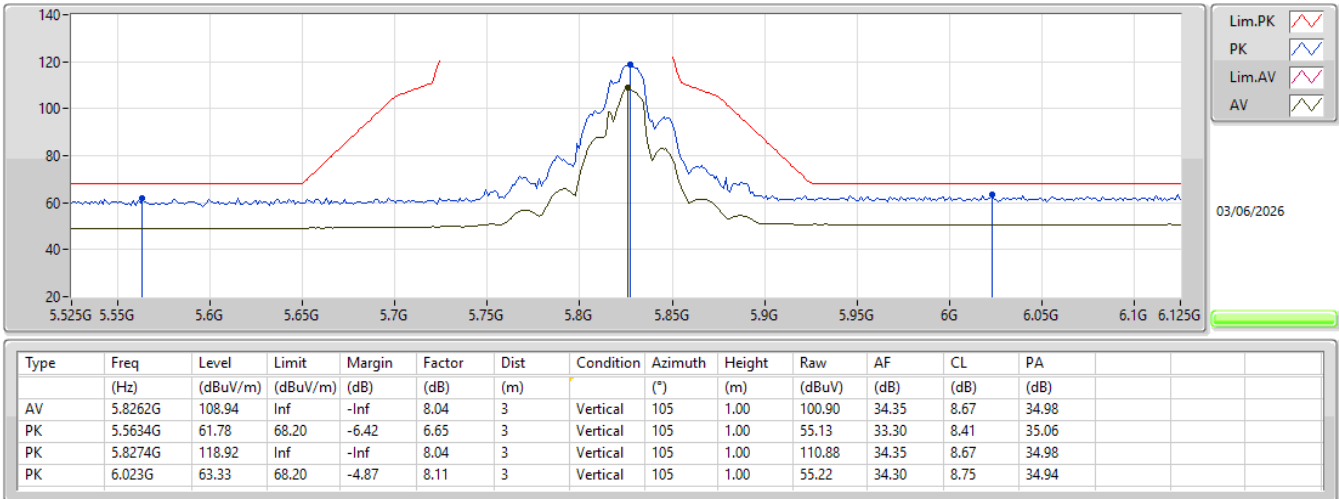


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

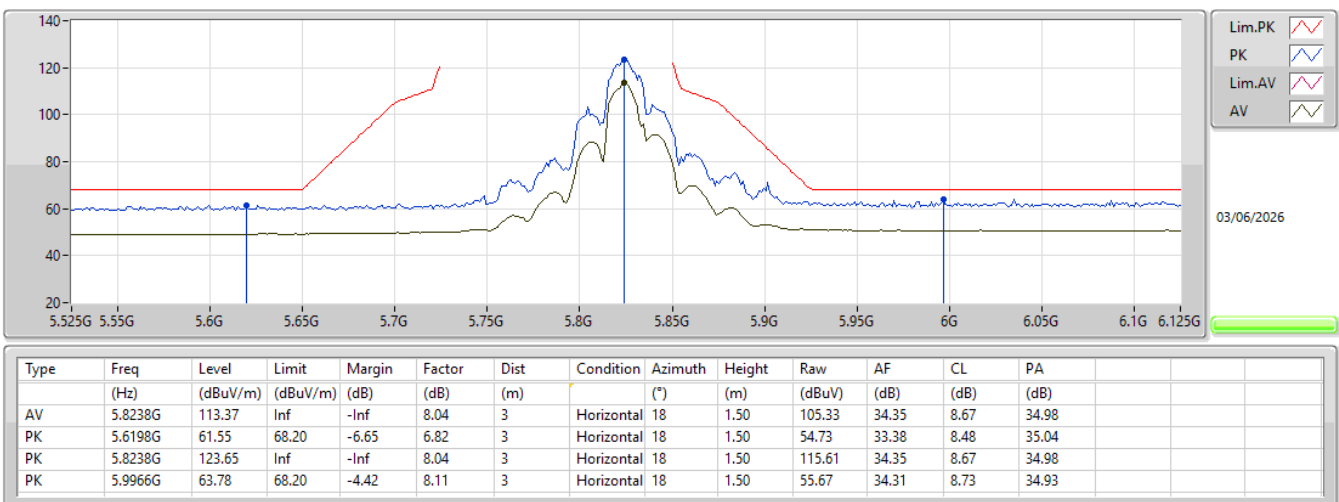


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

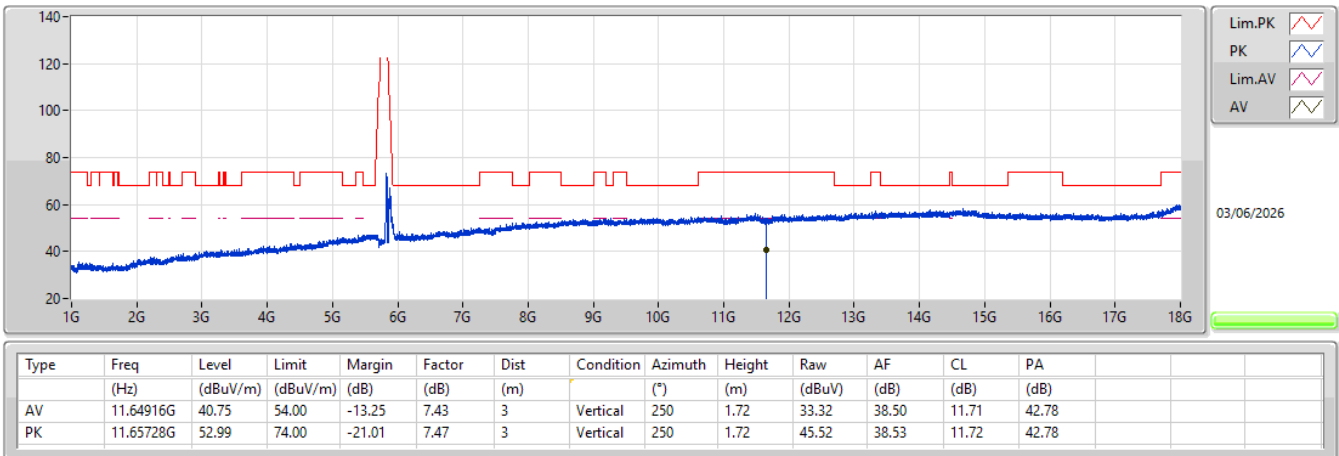


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

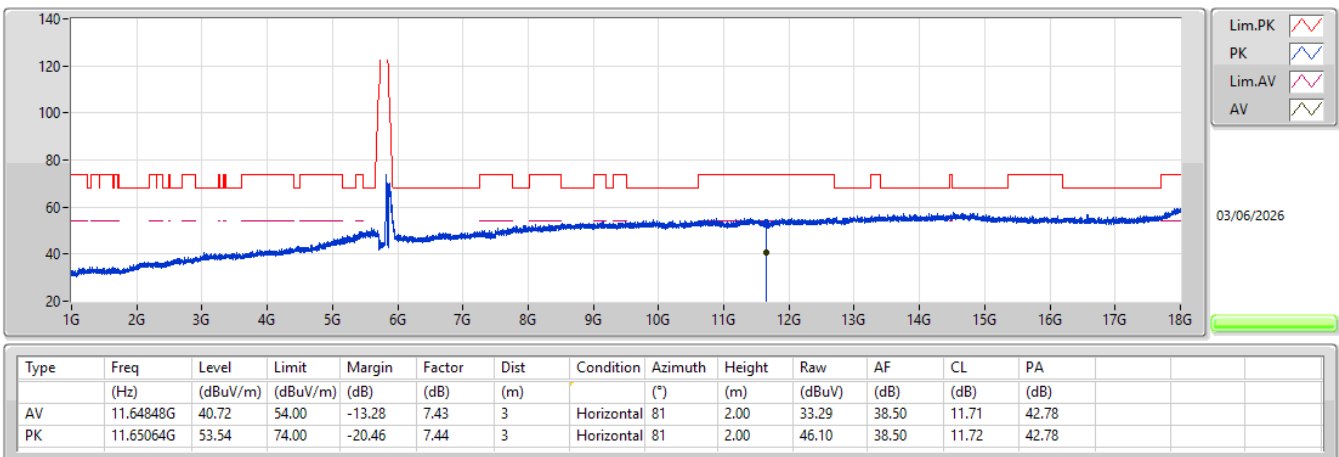


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

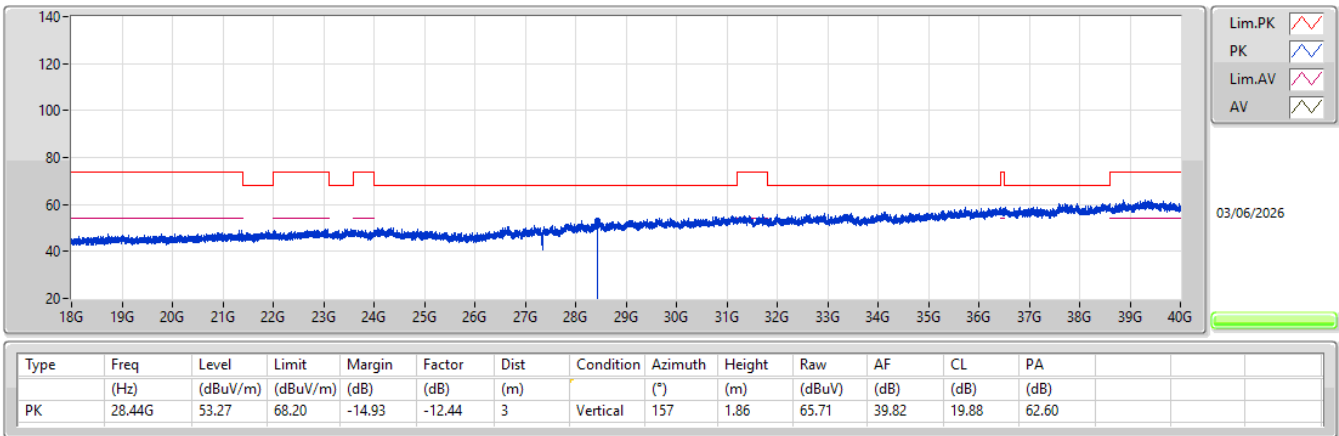


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

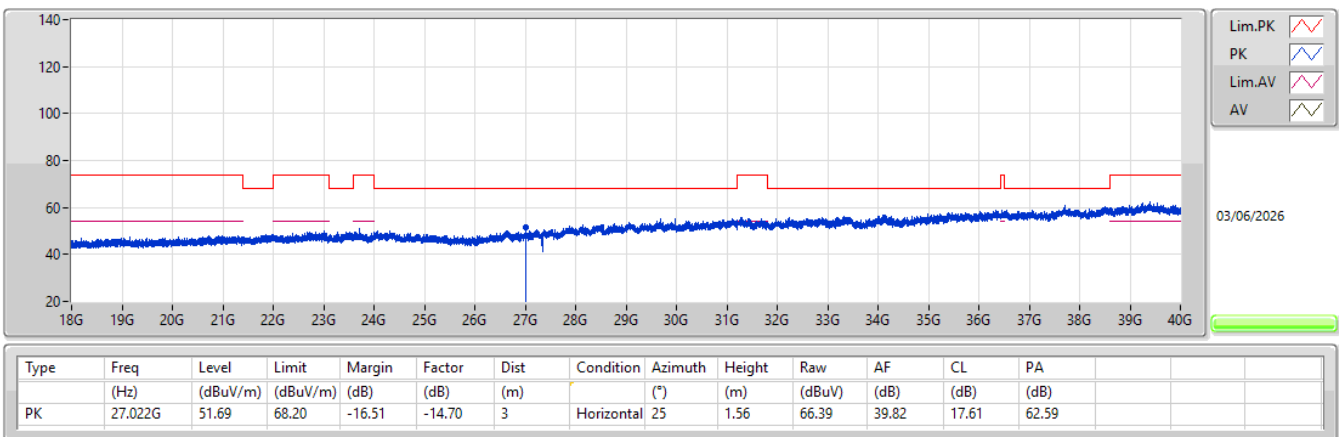


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5795MHz_TX

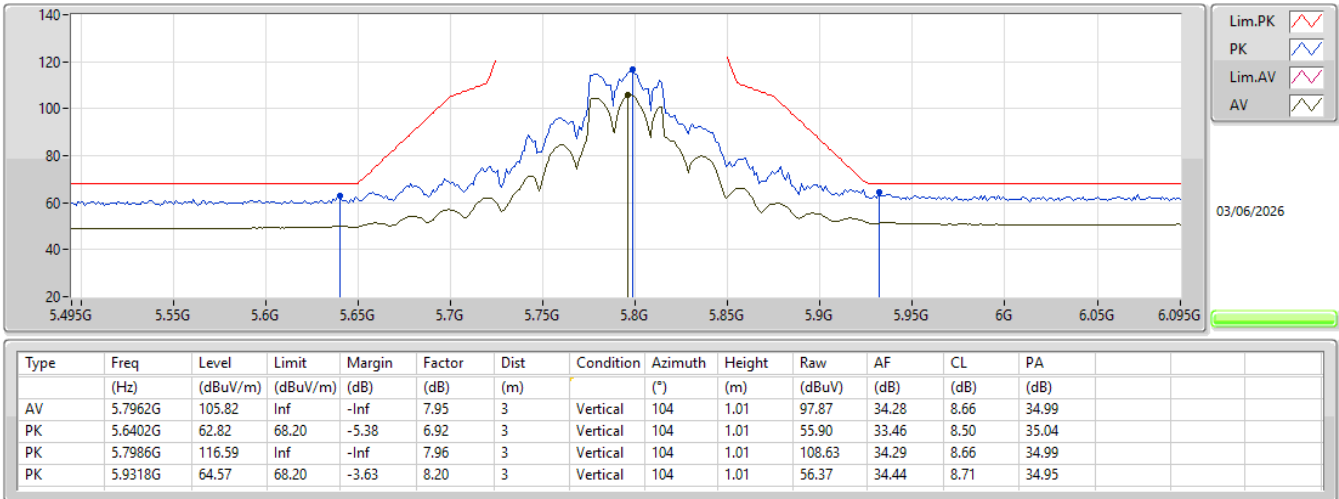


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5795MHz_TX

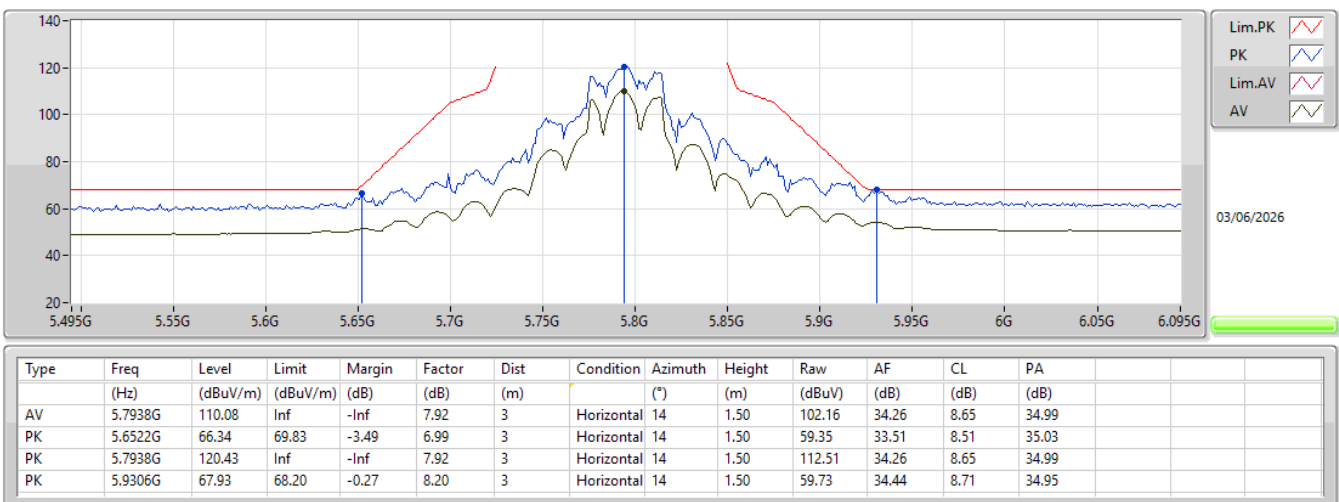


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5795MHz_TX

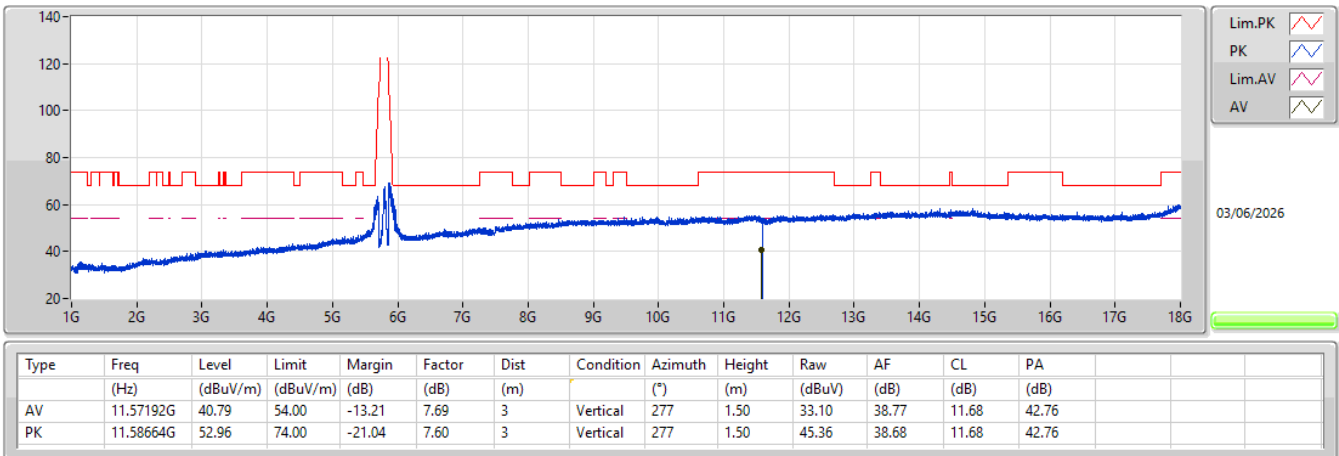


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5795MHz_TX

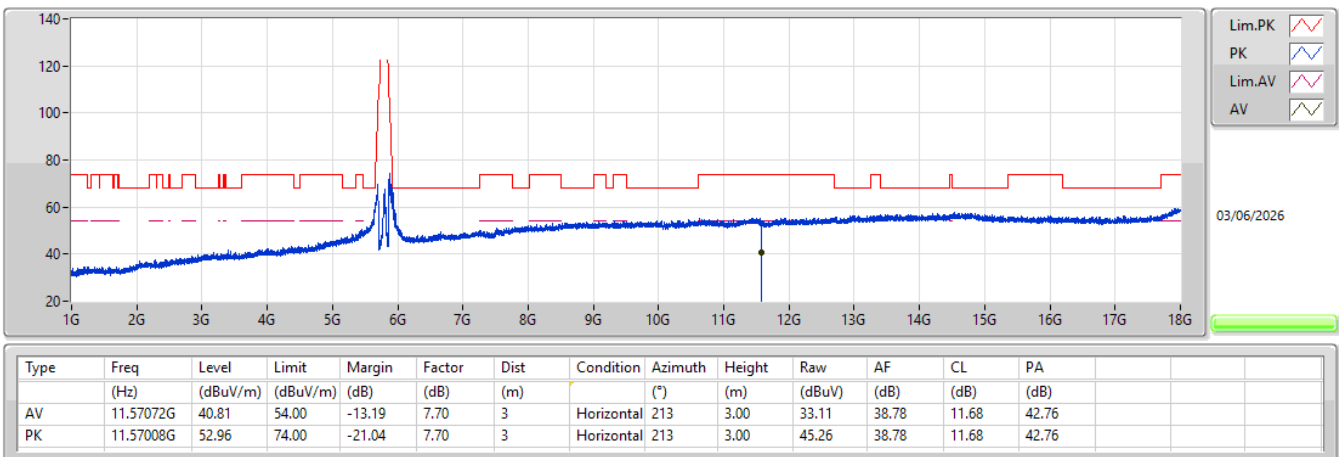


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5795MHz_TX

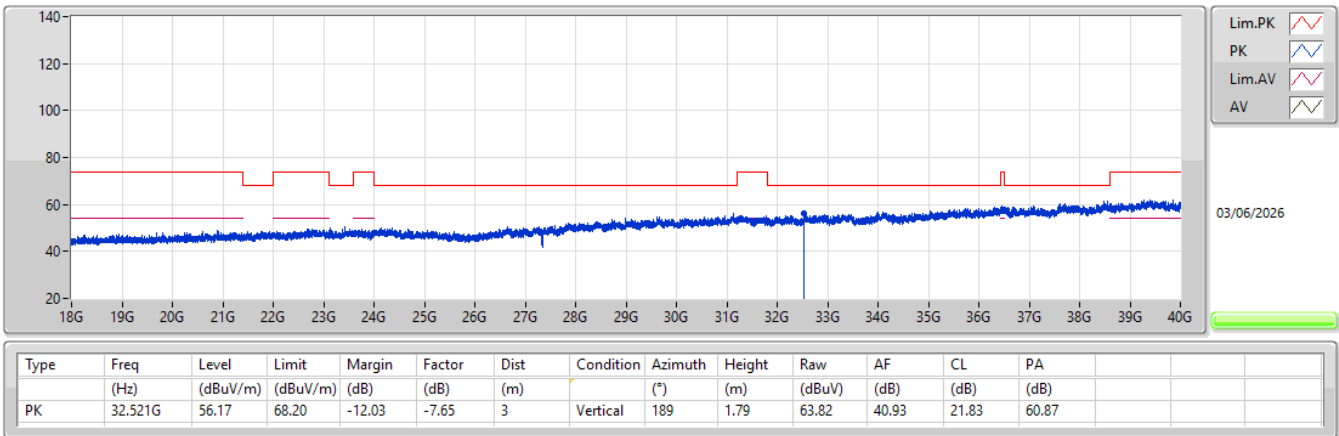


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5795MHz_TX

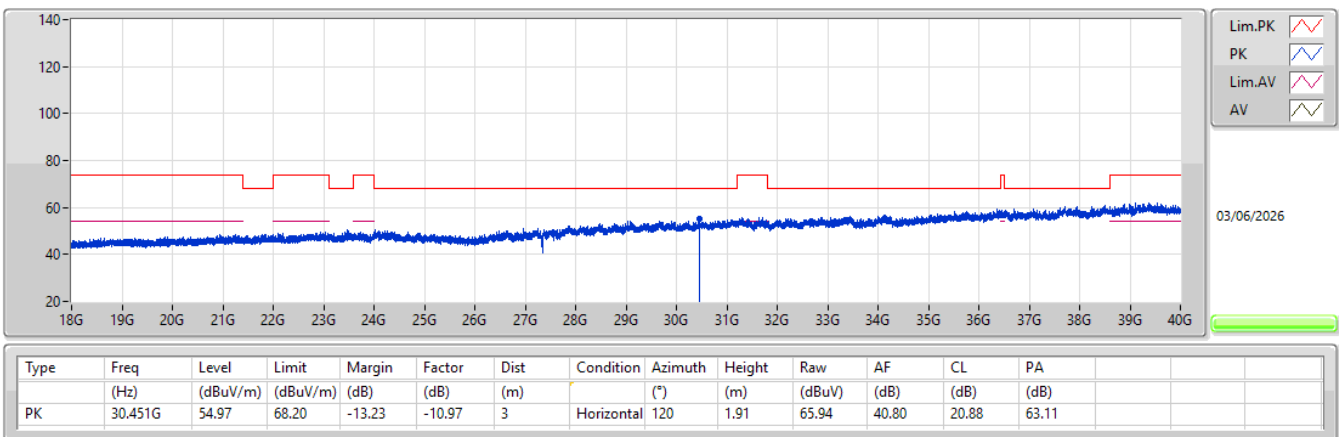


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

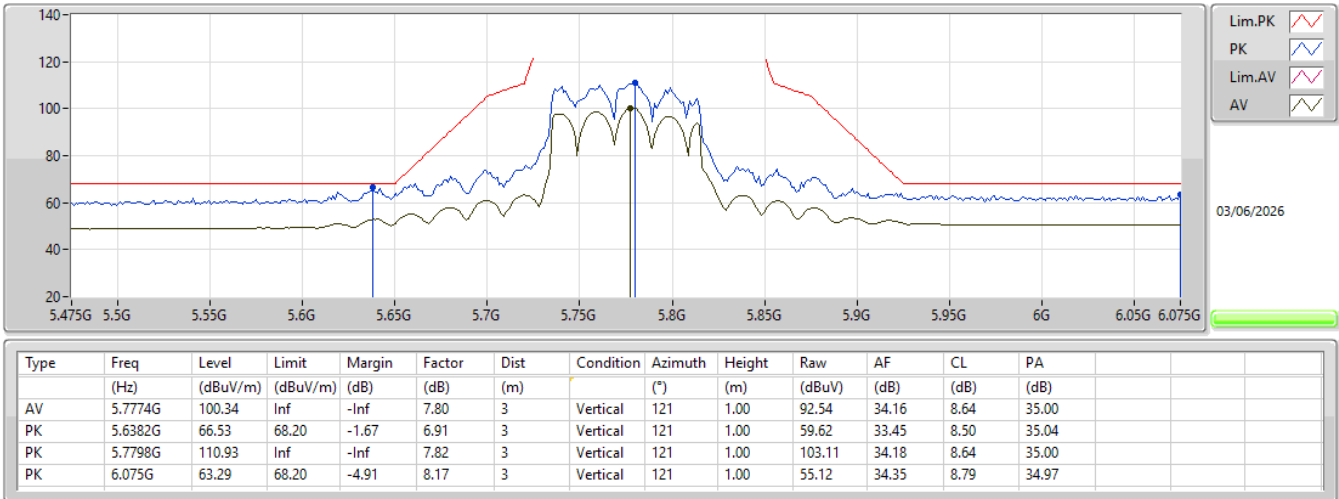


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

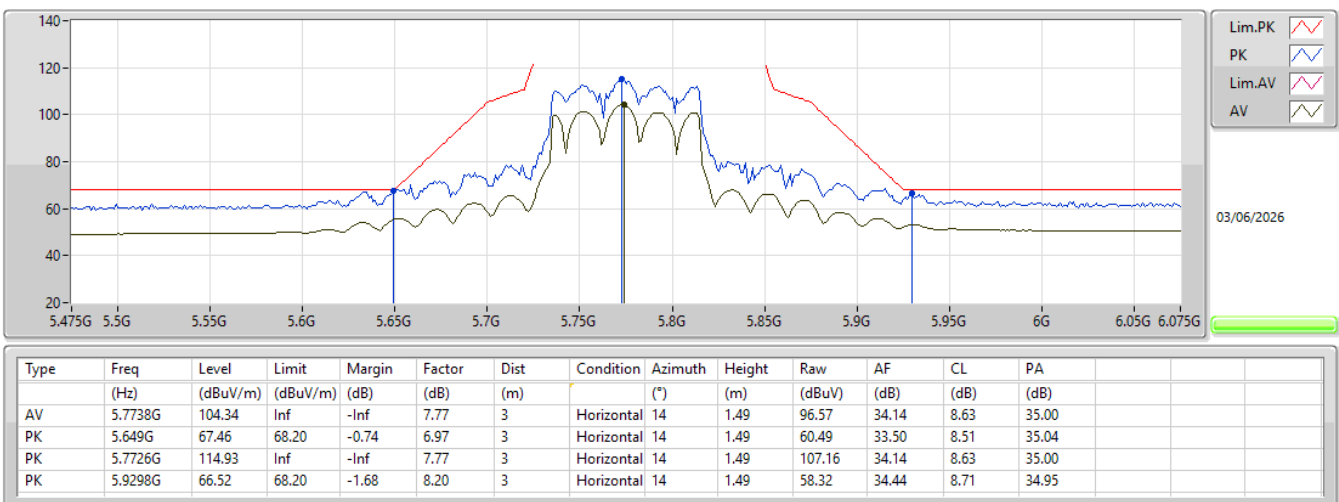


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

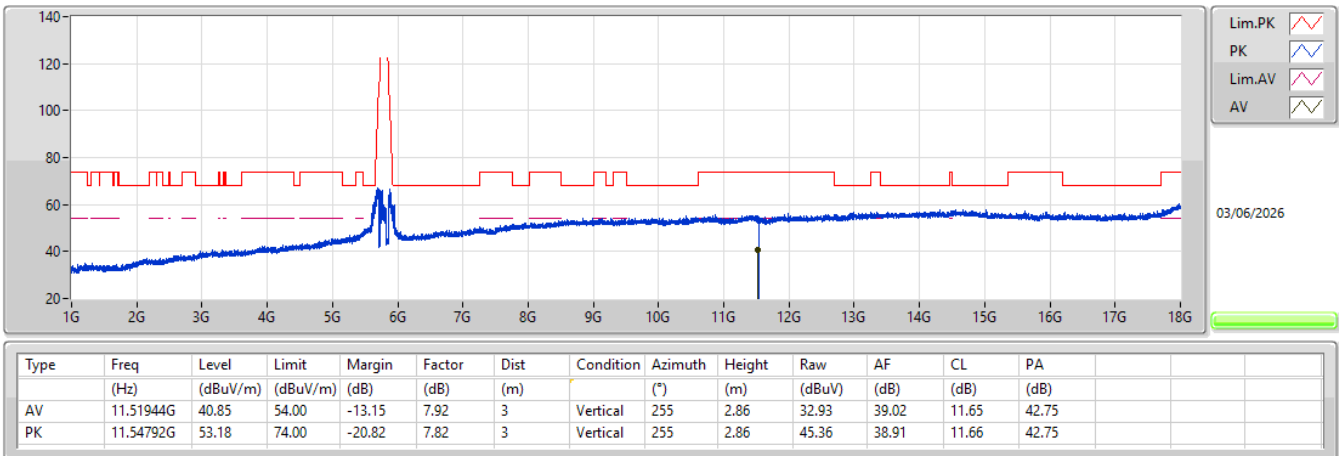


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

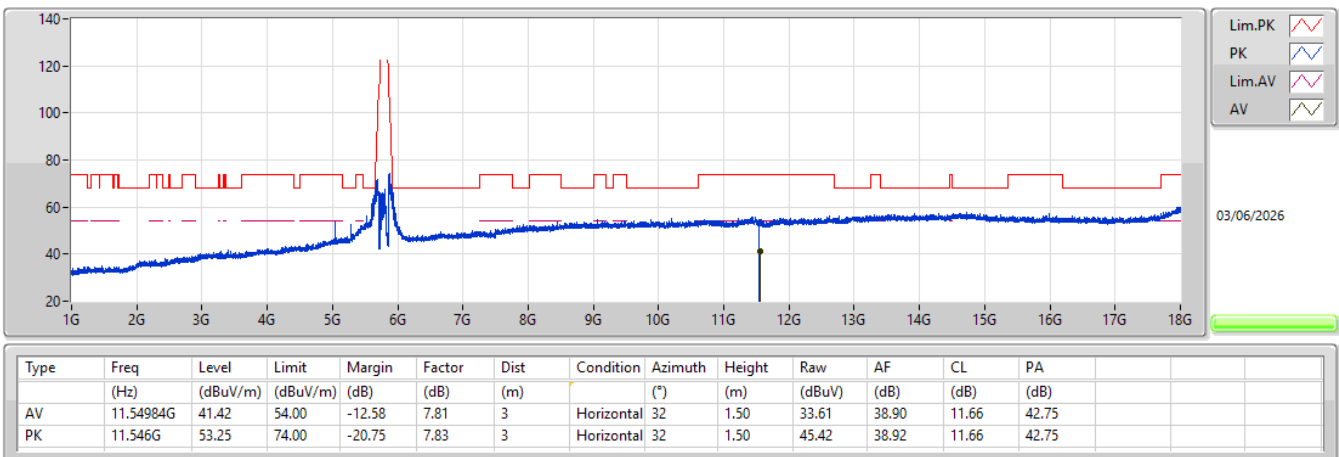


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

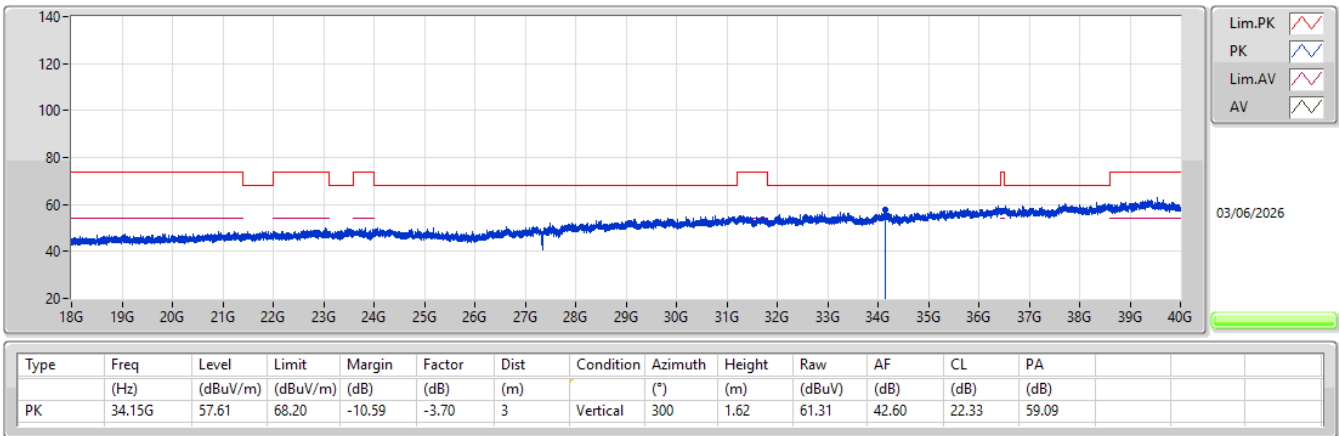

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

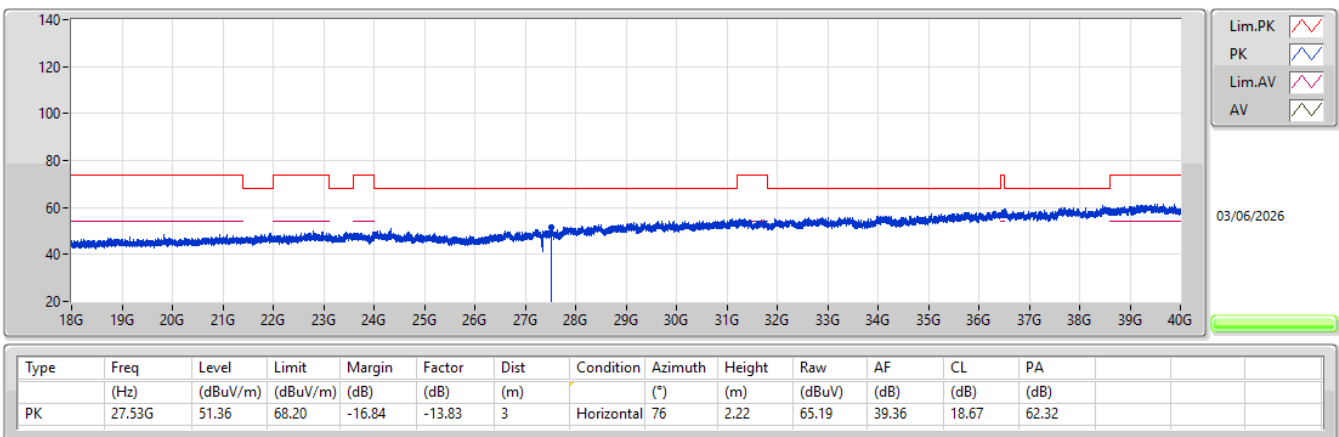




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	11.48976G	45.59	54.00	-8.41	Horizontal

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
Mode 1	Pass	AV	4.92399G	34.89	54.00	-19.11	3	Vertical	330	2.50
Mode 1	Pass	AV	4.96132G	33.19	54.00	-20.81	3	Vertical	95	2.02
Mode 1	Pass	AV	7.38445G	36.79	54.00	-17.21	3	Vertical	42	1.50
Mode 1	Pass	AV	11.492G	44.38	54.00	-9.62	3	Vertical	350	2.87
Mode 1	Pass	PK	4.92194G	44.86	74.00	-29.14	3	Vertical	330	2.50
Mode 1	Pass	PK	4.96067G	45.53	74.00	-28.47	3	Vertical	95	2.02
Mode 1	Pass	PK	7.38694G	49.42	74.00	-24.58	3	Vertical	42	1.50
Mode 1	Pass	PK	11.48808G	56.61	74.00	-17.39	3	Vertical	350	2.87
Mode 1	Pass	AV	4.92395G	36.58	54.00	-17.42	3	Horizontal	1	1.00
Mode 1	Pass	AV	4.96122G	33.55	54.00	-20.45	3	Horizontal	337	1.50
Mode 1	Pass	AV	7.38685G	37.99	54.00	-16.01	3	Horizontal	66	1.03
Mode 1	Pass	AV	11.48976G	45.59	54.00	-8.41	3	Horizontal	37	1.75
Mode 1	Pass	PK	4.92398G	45.75	74.00	-28.25	3	Horizontal	1	1.00
Mode 1	Pass	PK	4.95933G	45.98	74.00	-28.02	3	Horizontal	337	1.50
Mode 1	Pass	PK	7.38741G	48.92	74.00	-25.08	3	Horizontal	66	1.03
Mode 1	Pass	PK	11.49006G	57.57	74.00	-16.43	3	Horizontal	37	1.75

Radiated Emissions above 1GHz_Mode 1

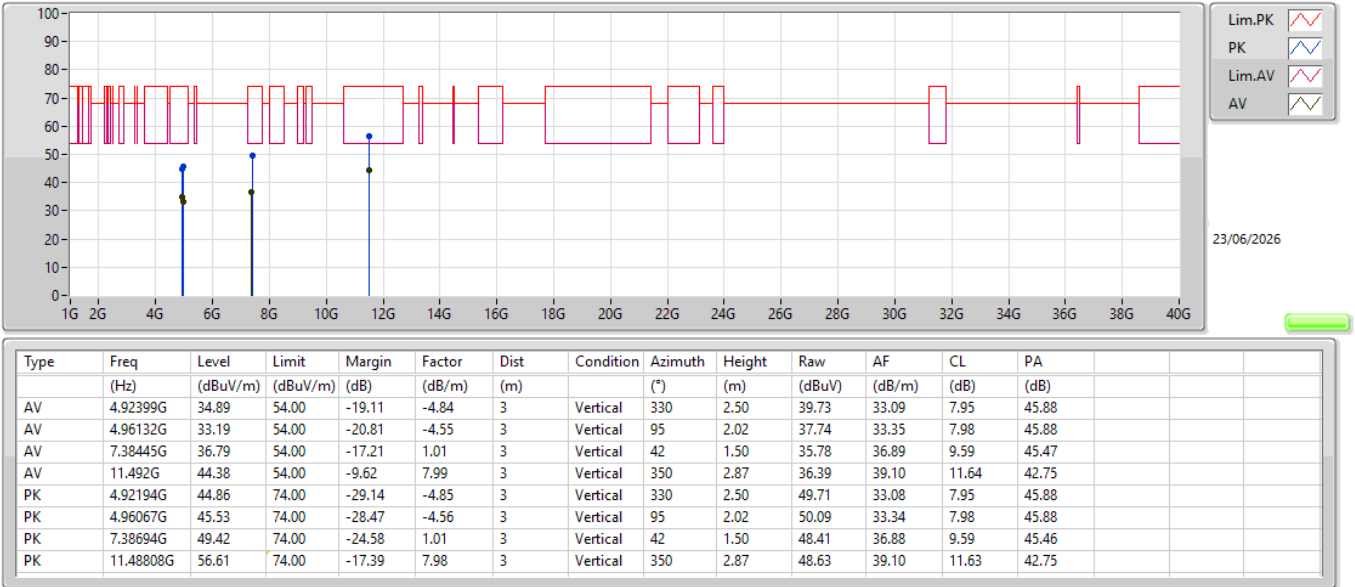

Radiated Emissions above 1GHz_Mode 1

