

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_05.04.02

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

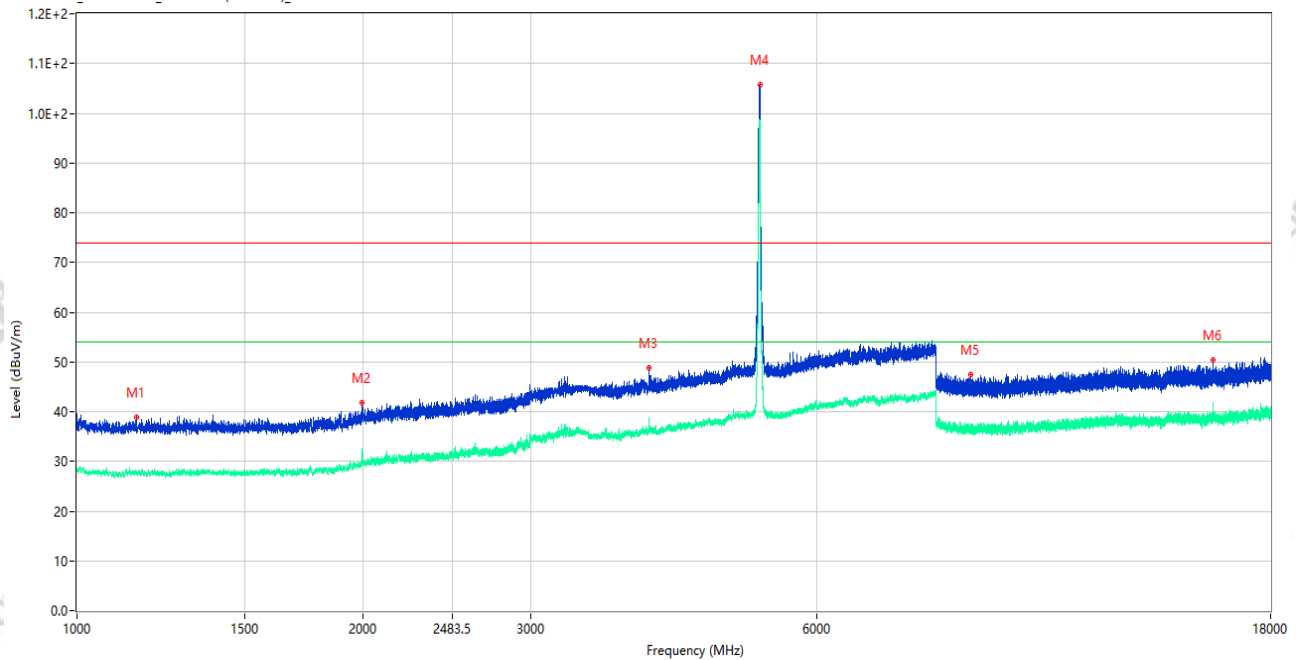

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1155.750	38.95	-15.61	74.0	35.05	Peak	224.00	150	Vertical	Pass
1**	1155.750	27.28	-15.61	54.0	26.72	AV	224.00	150	Vertical	Pass
2	1996.000	41.82	-14.51	74.0	32.18	Peak	256.00	150	Vertical	Pass
2**	1996.000	30.53	-14.51	54.0	23.47	AV	256.00	150	Vertical	Pass
3	3993.500	48.79	-4.83	74.0	25.21	Peak	237.00	150	Vertical	Pass
3**	3993.500	36.23	-4.83	54.0	17.77	AV	237.00	150	Vertical	Pass
4	5224.500	105.79	-2.35	74.0	-31.79	Peak	249.00	150	Vertical	N/A
4**	5224.500	98.21	-2.35	54.0	-44.21	AV	249.00	150	Vertical	N/A
5	8714.875	47.52	-5.24	74.0	26.48	Peak	239.00	150	Vertical	Pass
5**	8714.875	36.60	-5.24	54.0	17.40	AV	239.00	150	Vertical	Pass
6	15662.175	50.32	-1.45	74.0	23.68	Peak	48.00	150	Vertical	Pass
6**	15662.175	39.98	-1.45	54.0	14.02	AV	48.00	150	Vertical	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_05.09.41

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

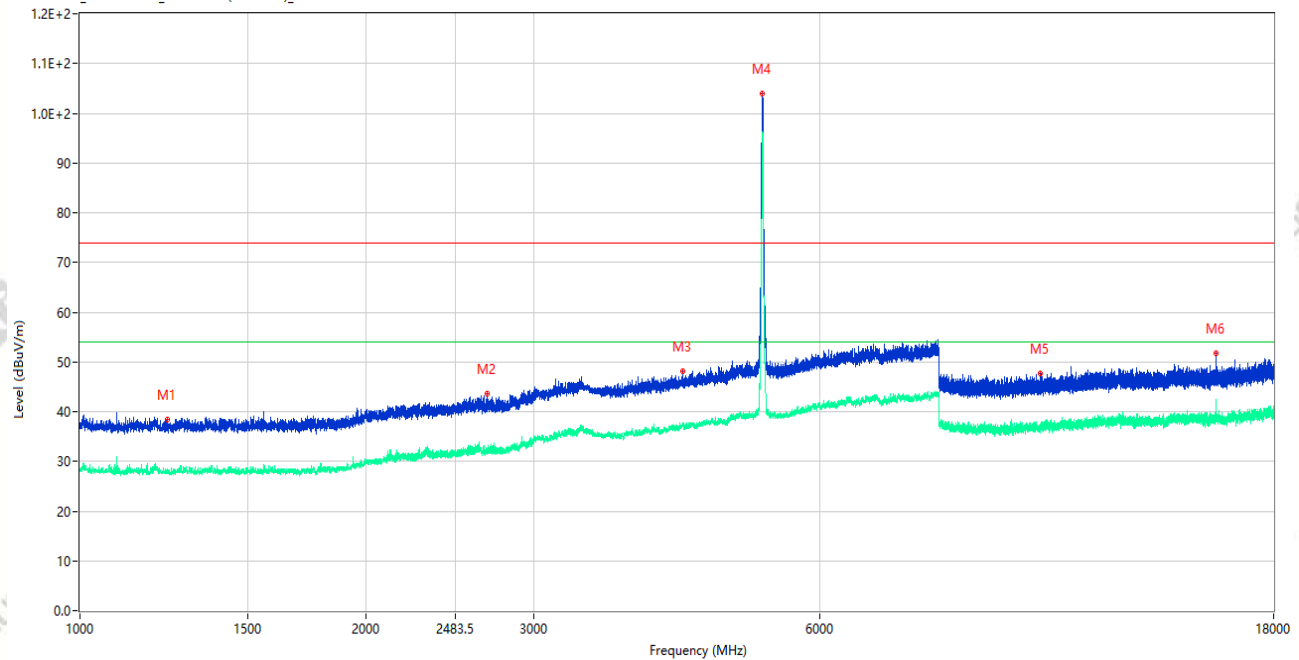

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1235.000	38.37	-16.00	74.0	35.63	Peak	348.00	150	Horizontal	Pass
1**	1235.000	28.41	-16.00	54.0	25.59	AV	348.00	150	Horizontal	Pass
2	2680.750	43.64	-10.55	74.0	30.36	Peak	13.00	150	Horizontal	Pass
2**	2680.750	31.89	-10.55	54.0	22.11	AV	13.00	150	Horizontal	Pass
3	4308.000	48.13	-3.53	74.0	25.87	Peak	77.00	150	Horizontal	Pass
3**	4308.000	37.21	-3.53	54.0	16.79	AV	77.00	150	Horizontal	Pass
4	5221.500	104.01	-2.37	74.0	-30.01	Peak	106.00	150	Horizontal	N/A
4**	5221.500	95.97	-2.37	54.0	-41.97	AV	106.00	150	Horizontal	N/A
5	10227.750	47.58	-3.12	74.0	26.42	Peak	360.00	150	Horizontal	Pass
5**	10227.750	36.59	-3.12	54.0	17.41	AV	360.00	150	Horizontal	Pass
6	15657.187	51.76	-1.43	74.0	22.24	Peak	48.00	150	Horizontal	Pass
6**	15657.187	40.60	-1.43	54.0	13.40	AV	48.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_08.06.20

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n20 CH44 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

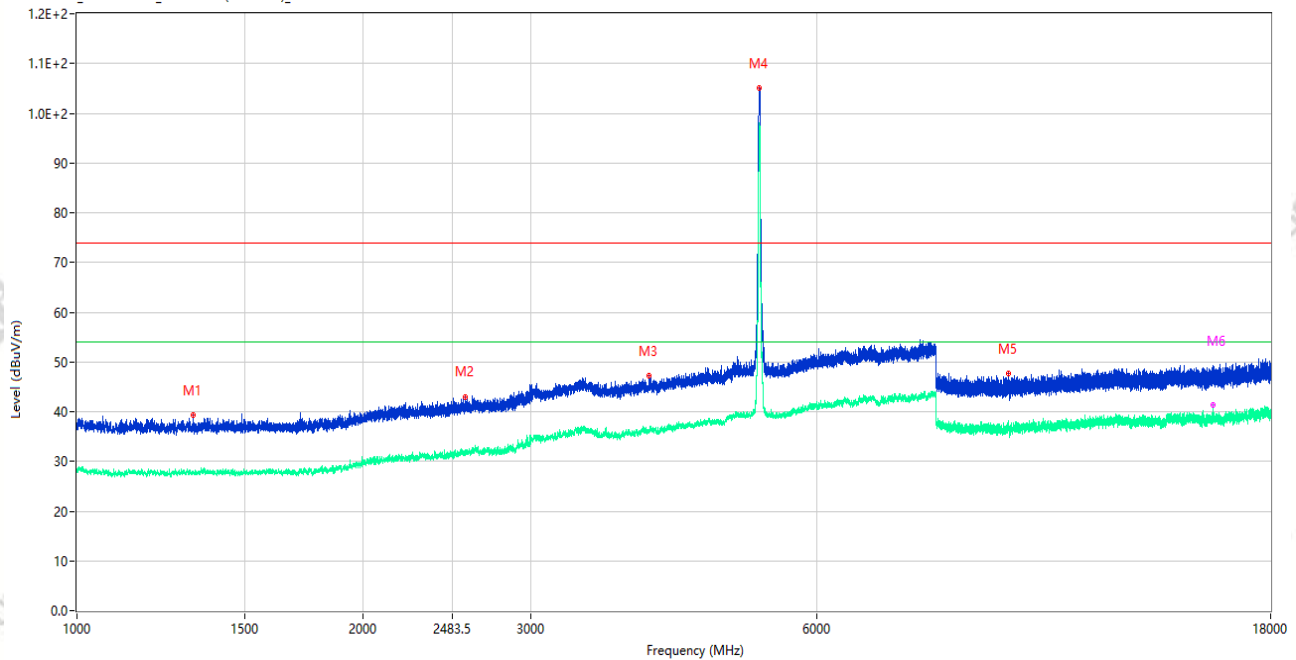

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1325.250	39.23	-15.89	74.0	34.77	Peak	8.00	150	Vertical	Pass
1**	1325.250	27.80	-15.89	54.0	26.20	AV	8.00	150	Vertical	Pass
2	2562.000	43.04	-11.10	74.0	30.96	Peak	271.00	150	Vertical	Pass
2**	2562.000	31.29	-11.10	54.0	22.71	AV	271.00	150	Vertical	Pass
3	3997.000	47.16	-4.80	74.0	26.84	Peak	233.00	150	Vertical	Pass
3**	3997.000	36.01	-4.80	54.0	17.99	AV	233.00	150	Vertical	Pass
4	5219.500	105.12	-2.36	74.0	-31.12	Peak	192.00	150	Vertical	N/A
4**	5219.500	97.83	-2.36	54.0	-43.83	AV	192.00	150	Vertical	N/A
5	9545.650	47.75	-2.56	74.0	26.25	Peak	286.00	150	Vertical	Pass
5**	9545.650	37.80	-2.56	54.0	16.20	AV	286.00	150	Vertical	Pass
6	15657.713	49.20	-1.38	74.0	24.80	Peak	0.00	150	Vertical	Pass
6**	15657.713	41.45	-1.38	54.0	12.55	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_08.02.10

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n20 CH44 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

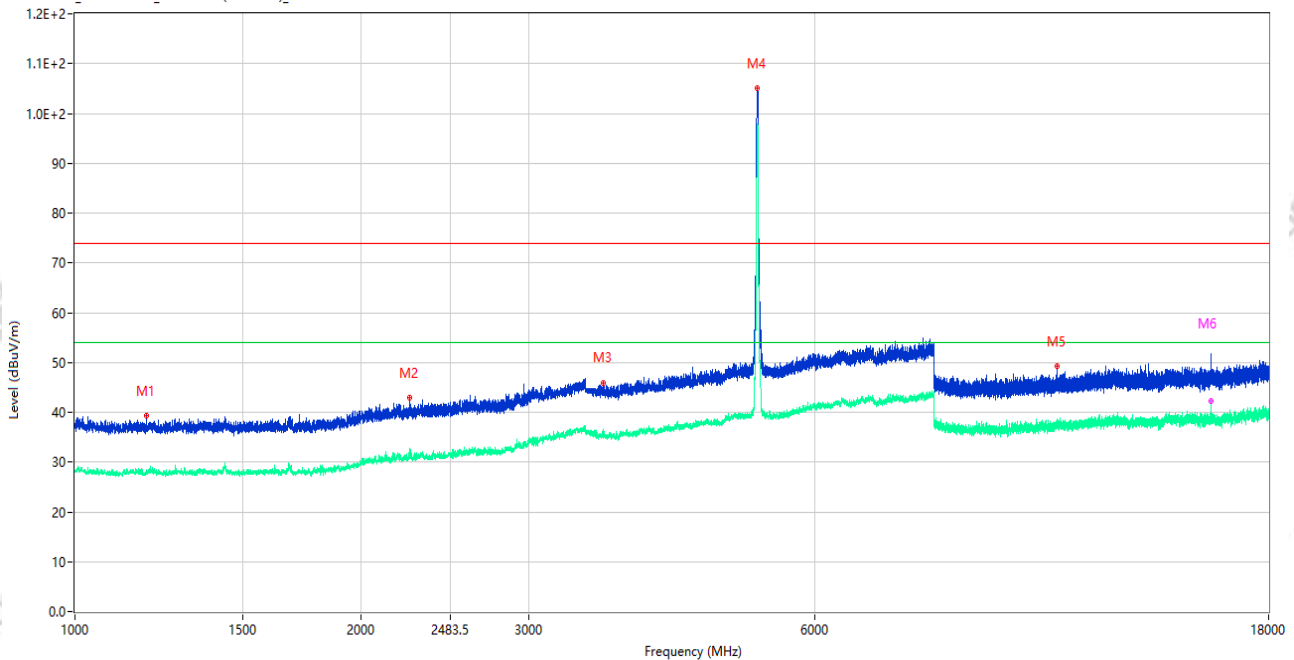

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1188.000	39.32	-15.90	74.0	34.68	Peak	154.00	150	Horizontal	Pass
1**	1188.000	28.14	-15.90	54.0	25.86	AV	154.00	150	Horizontal	Pass
2	2249.000	42.96	-12.89	74.0	31.04	Peak	0.00	150	Horizontal	Pass
2**	2249.000	31.26	-12.89	54.0	22.74	AV	0.00	150	Horizontal	Pass
3	3597.000	45.96	-5.11	74.0	28.04	Peak	291.00	150	Horizontal	Pass
3**	3597.000	36.54	-5.11	54.0	17.46	AV	291.00	150	Horizontal	Pass
4	5217.500	105.07	-2.36	74.0	-31.07	Peak	37.00	150	Horizontal	N/A
4**	5217.500	97.23	-2.36	54.0	-43.23	AV	37.00	150	Horizontal	N/A
5	10774.950	49.23	-2.97	74.0	24.77	Peak	238.00	150	Horizontal	Pass
5**	10774.950	37.58	-2.97	54.0	16.42	AV	238.00	150	Horizontal	Pass
6	15664.275	51.67	-1.52	74.0	22.33	Peak	314.00	150	Horizontal	Pass
6**	15664.275	42.35	-1.52	54.0	11.65	AV	314.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_08.12.18

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ax20 CH44 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

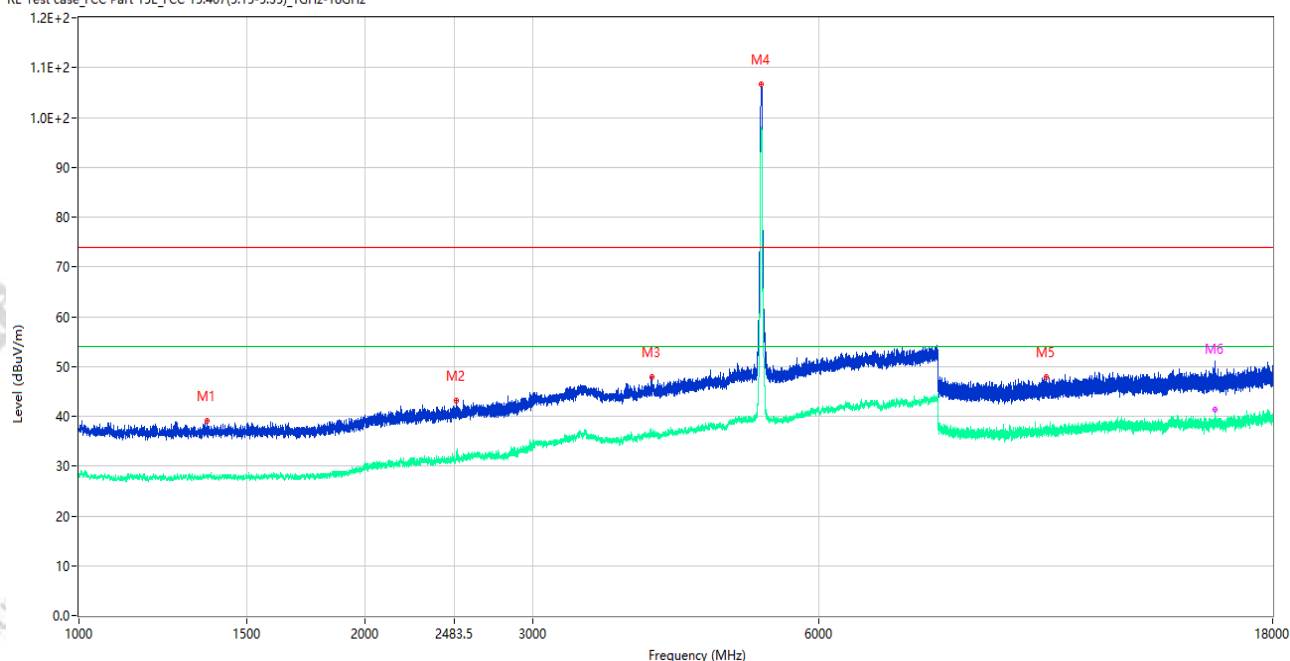

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1365.000	39.11	-15.85	74.0	34.89	Peak	231.00	150	Vertical	Pass
1**	1365.000	27.51	-15.85	54.0	26.49	AV	231.00	150	Vertical	Pass
2	2496.500	43.11	-12.02	74.0	30.89	Peak	249.00	150	Vertical	Pass
2**	2496.500	33.00	-12.02	54.0	21.00	AV	249.00	150	Vertical	Pass
3	4006.500	47.89	-4.66	74.0	26.11	Peak	268.00	150	Vertical	Pass
3**	4006.500	36.06	-4.66	54.0	17.94	AV	268.00	150	Vertical	Pass
4	5218.500	106.59	-2.37	74.0	-32.59	Peak	51.00	150	Vertical	N/A
4**	5218.500	97.82	-2.37	54.0	-43.82	AV	51.00	150	Vertical	N/A
5	10407.537	47.88	-3.21	74.0	26.12	Peak	0.00	150	Vertical	Pass
5**	10407.537	37.74	-3.21	54.0	16.26	AV	0.00	150	Vertical	Pass
6	15660.075	48.91	-1.50	74.0	25.09	Peak	360.00	150	Vertical	Pass
6**	15660.075	41.34	-1.50	54.0	12.66	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_08.54.08

EUT Name: Dash Cam

Temp.(°C): 22.7

Model Number: A900-RC44H

Humidity (%RH): 51

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ax20 CH44 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 数据线: A09

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

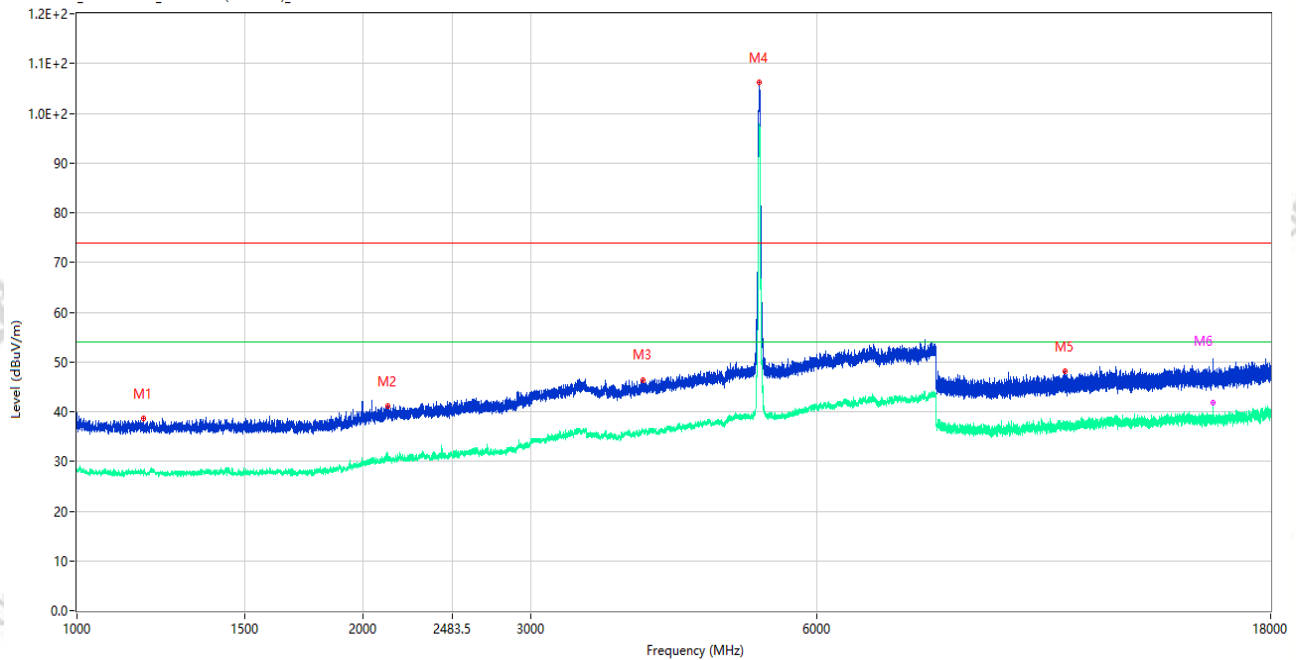

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1173.750	38.67	-15.61	74.0	35.33	Peak	213.00	150	Horizontal	Pass
1**	1173.750	27.55	-15.61	54.0	26.45	AV	213.00	150	Horizontal	Pass
2	2120.750	41.12	-13.34	74.0	32.88	Peak	249.00	150	Horizontal	Pass
2**	2120.750	31.68	-13.34	54.0	22.32	AV	249.00	150	Horizontal	Pass
3	3942.500	46.38	-4.22	74.0	27.62	Peak	192.00	150	Horizontal	Pass
3**	3942.500	36.31	-4.22	54.0	17.69	AV	192.00	150	Horizontal	Pass
4	5222.500	106.19	-2.36	74.0	-32.19	Peak	43.00	150	Horizontal	N/A
4**	5222.500	97.56	-2.36	54.0	-43.56	AV	43.00	150	Horizontal	N/A
5	10932.175	48.20	-3.28	74.0	25.80	Peak	241.00	150	Horizontal	Pass
5**	10932.175	37.71	-3.28	54.0	16.29	AV	241.00	150	Horizontal	Pass
6	15656.138	49.22	-1.52	74.0	24.78	Peak	312.00	150	Horizontal	Pass
6**	15656.138	41.80	-1.52	54.0	12.20	AV	312.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_05.20.22

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G WIFI)

Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

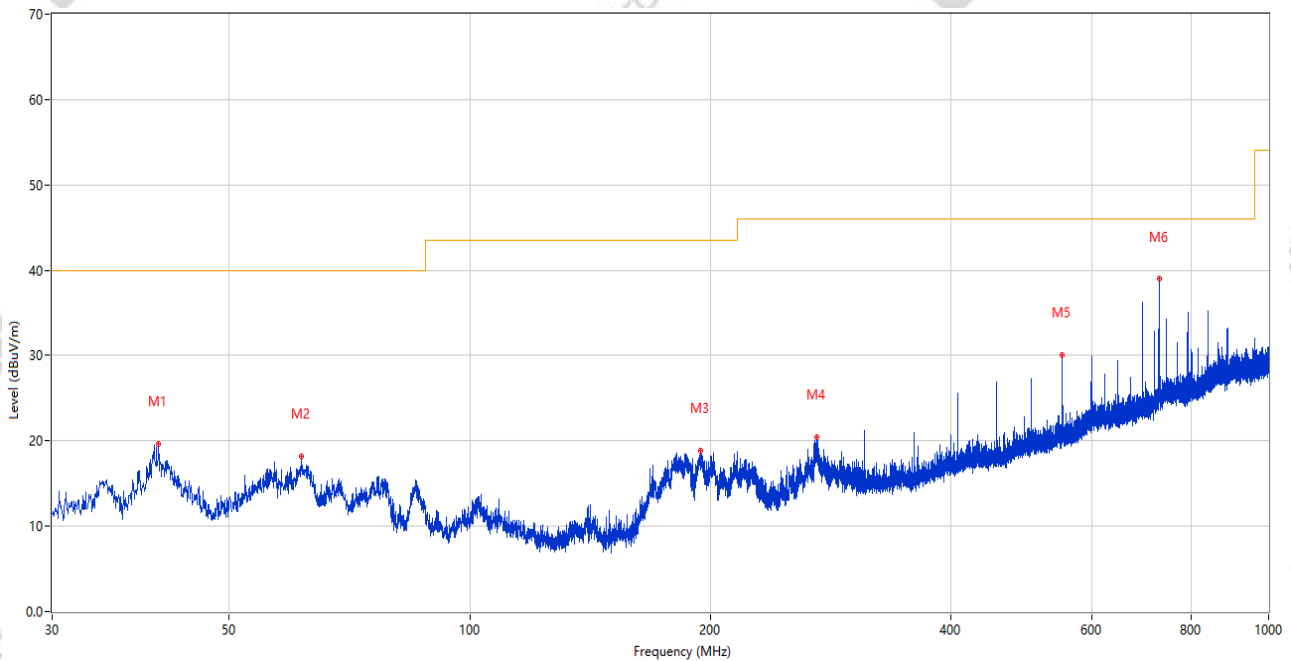

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	40.767	19.62	-25.67	40.0	20.38	Peak	168.00	100	Vertical	Pass
2	61.574	18.17	-26.41	40.0	21.83	Peak	253.00	100	Vertical	Pass
3	194.464	18.89	-25.65	43.5	24.61	Peak	289.00	200	Vertical	Pass
4	271.627	20.43	-24.05	46.0	25.57	Peak	258.00	200	Vertical	Pass
5	552.006	30.02	-16.88	46.0	15.98	Peak	1.00	100	Vertical	Pass
6	728.982	38.96	-12.78	46.0	7.04	Peak	149.00	100	Vertical	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_00.06.15

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G WIFI)

Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

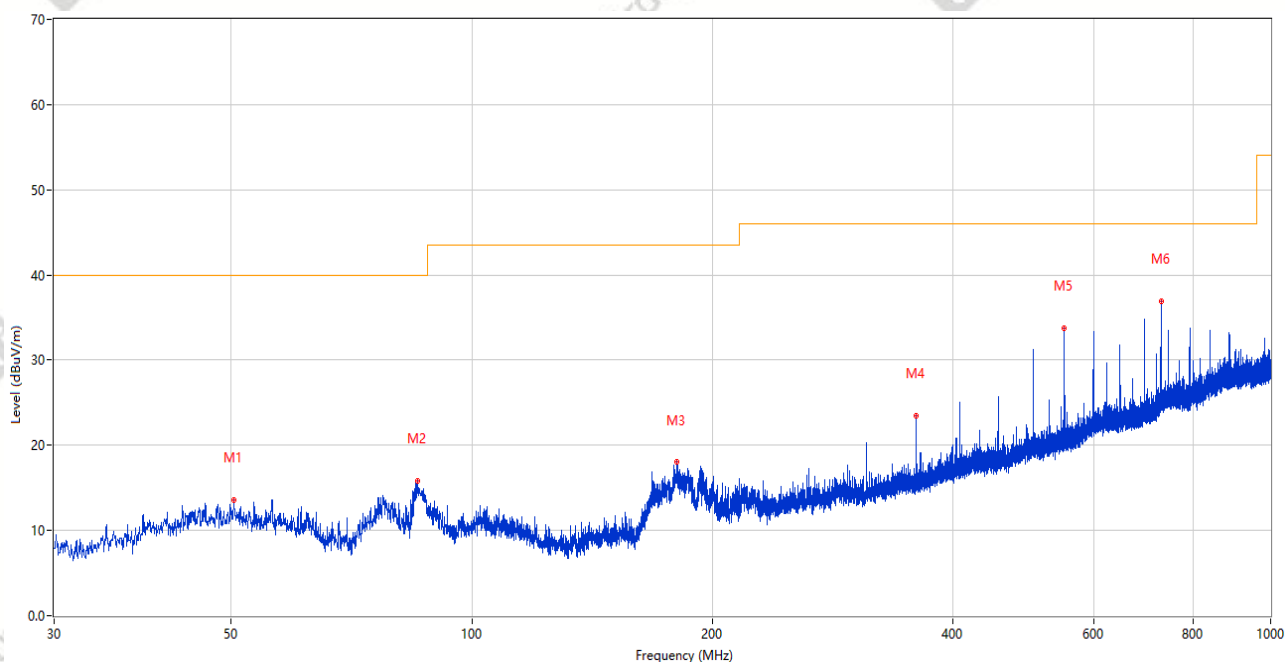

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	50.322	13.56	-24.53	40.0	26.44	Peak	321.00	100	Horizontal	Pass
2	85.533	15.87	-29.57	40.0	24.13	Peak	0.00	200	Horizontal	Pass
3	180.496	18.00	-27.75	43.5	25.50	Peak	31.00	100	Horizontal	Pass
4	359.994	23.45	-21.83	46.0	22.55	Peak	194.00	100	Horizontal	Pass
5	552.006	32.65	-16.88	46.0	13.35	Peak	279.00	100	Horizontal	Pass
6	728.982	36.95	-12.78	46.0	9.05	Peak	360.00	100	Horizontal	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_10.29.59

EUT Name: Dash Cam

Temp.(°C): 22.7

Model Number: A900-RC44H

Humidity (%RH): 51

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 数据线: A09

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

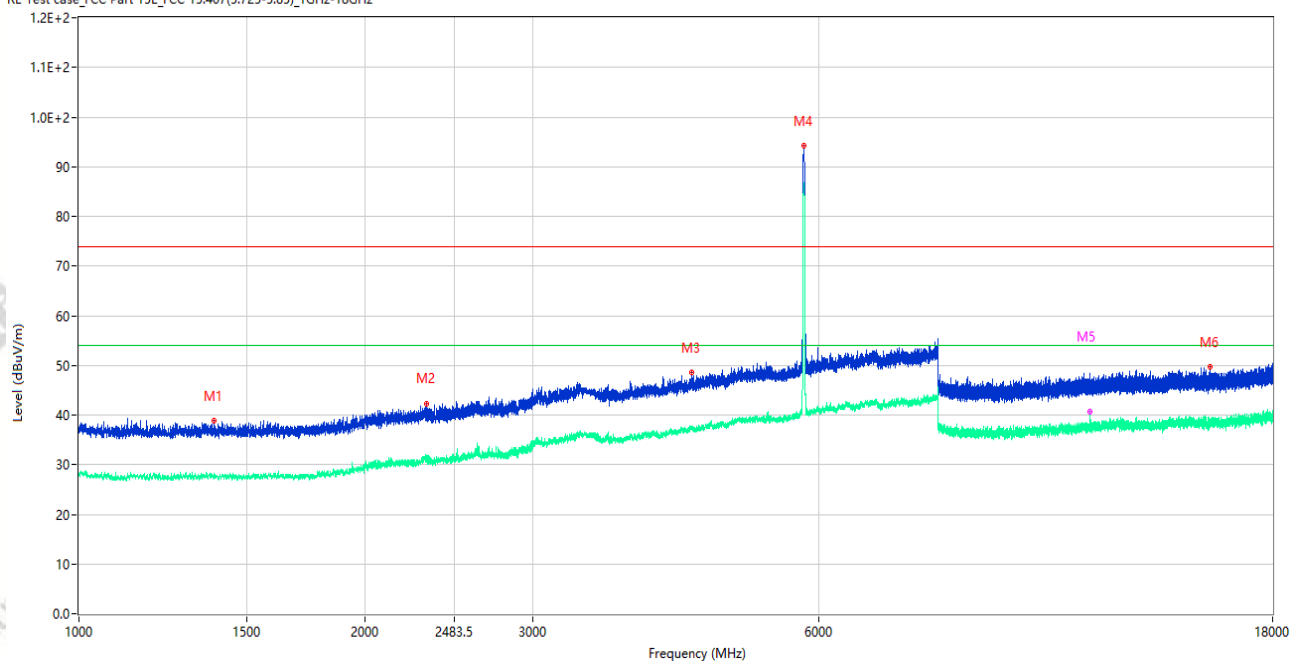

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1387.000	38.92	-15.99	74.0	35.08	Peak	5.00	150	Vertical	Pass
1**	1387.000	27.63	-15.99	54.0	26.37	AV	5.00	150	Vertical	Pass
2	2318.000	42.35	-12.39	74.0	31.65	Peak	360.00	150	Vertical	Pass
2**	2318.000	31.02	-12.39	54.0	22.98	AV	360.00	150	Vertical	Pass
3	4405.500	48.57	-3.02	74.0	25.43	Peak	52.00	150	Vertical	Pass
3**	4405.500	37.41	-3.02	54.0	16.59	AV	52.00	150	Vertical	Pass
4	5783.000	94.21	-1.53	74.0	-20.21	Peak	240.00	150	Vertical	N/A
4**	5783.000	85.95	-1.53	54.0	-31.95	AV	240.00	150	Vertical	N/A
5	11567.725	46.76	-2.41	74.0	27.24	Peak	28.00	150	Vertical	Pass
5**	11567.725	40.59	-2.41	54.0	13.41	AV	28.00	150	Vertical	Pass
6	15470.812	49.71	-2.05	74.0	24.29	Peak	153.00	150	Vertical	Pass
6**	15470.812	38.30	-2.05	54.0	15.70	AV	153.00	150	Vertical	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_10.33.55

EUT Name: Dash Cam

Temp.(°C): 22.7

Model Number: A900-RC44H

Humidity (%RH): 51

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 数据线: A09

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

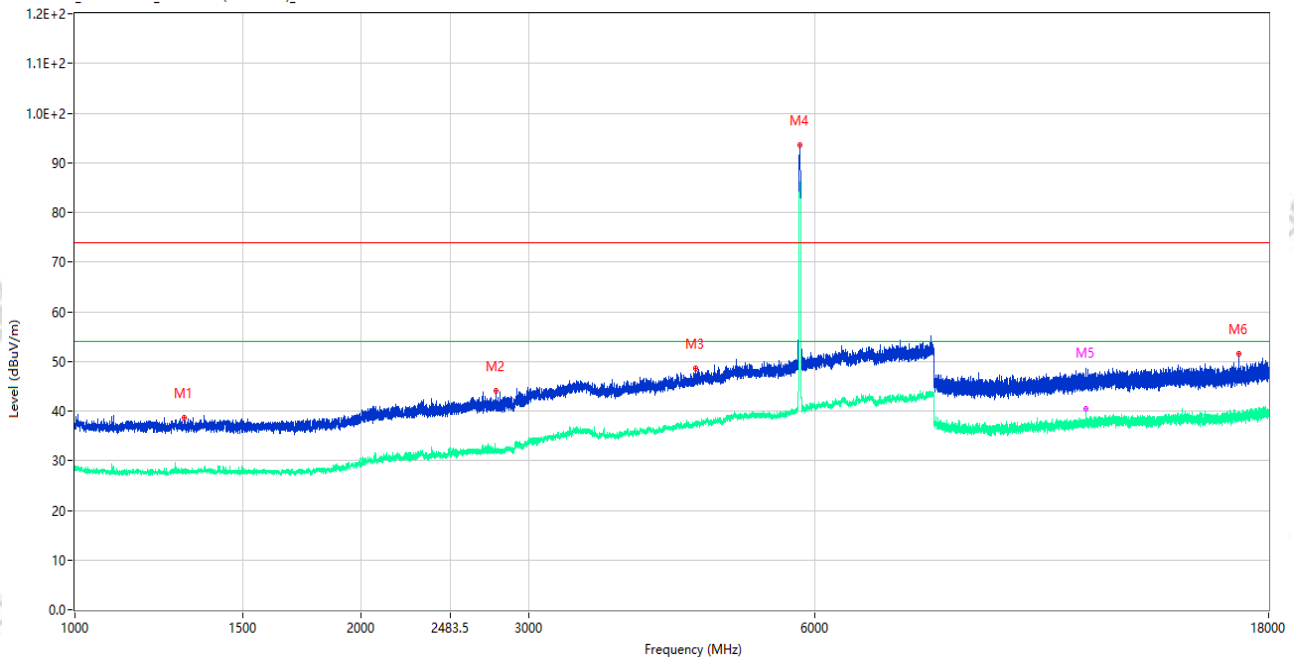

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1303.500	38.55	-15.59	74.0	35.45	Peak	80.00	150	Horizontal	Pass
1**	1303.500	27.86	-15.59	54.0	26.14	AV	80.00	150	Horizontal	Pass
2	2772.750	44.08	-10.19	74.0	29.92	Peak	277.00	150	Horizontal	Pass
2**	2772.750	31.89	-10.19	54.0	22.11	AV	277.00	150	Horizontal	Pass
3	4496.500	48.55	-3.25	74.0	25.45	Peak	21.00	150	Horizontal	Pass
3**	4496.500	38.05	-3.25	54.0	15.95	AV	21.00	150	Horizontal	Pass
4	5782.000	93.58	-1.54	74.0	-19.58	Peak	210.00	150	Horizontal	N/A
4**	5782.000	86.09	-1.54	54.0	-32.09	AV	210.00	150	Horizontal	N/A
5	11572.000	46.49	-2.47	74.0	27.51	Peak	288.00	150	Horizontal	Pass
5**	11572.000	40.46	-2.47	54.0	13.54	AV	288.00	150	Horizontal	Pass
6	16735.275	51.52	-1.50	74.0	22.48	Peak	252.00	150	Horizontal	Pass
6**	16735.275	38.78	-1.50	54.0	15.22	AV	252.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_11.04.08

EUT Name: Dash Cam

Temp.(°C): 22.7

Model Number: A900-RC44H

Humidity (%RH): 51

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11n20 CH157 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 数据线: A09

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

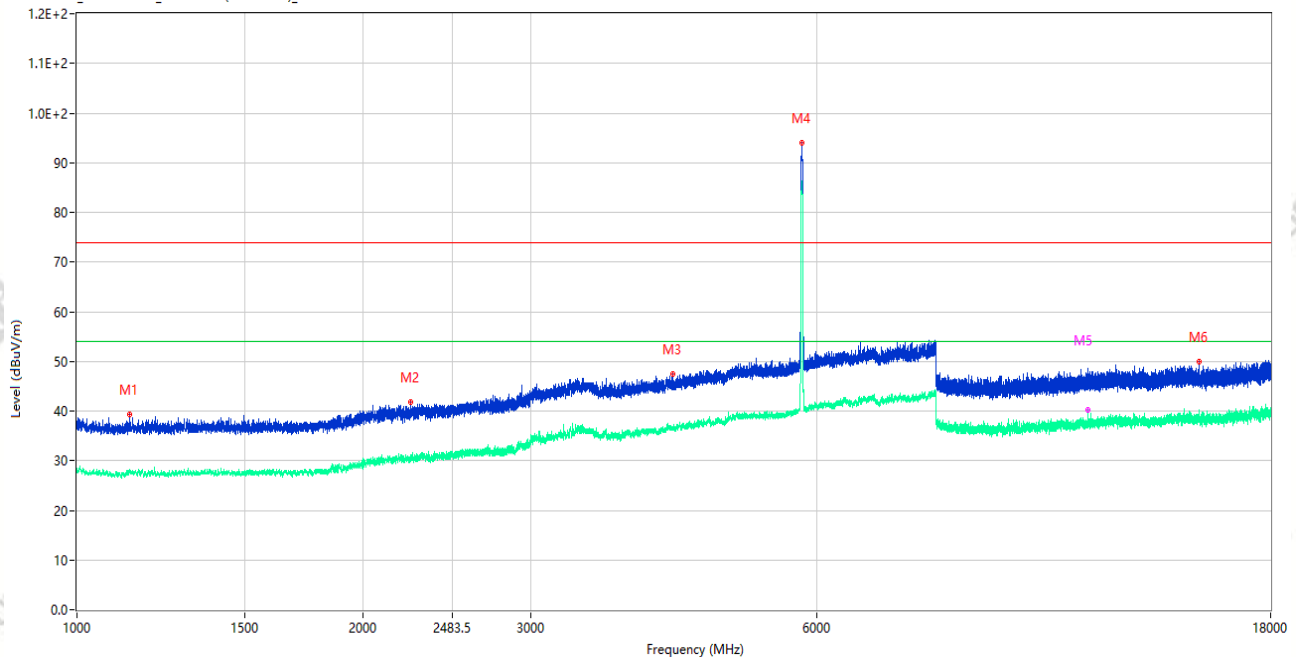

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1137.000	39.40	-15.53	74.0	34.60	Peak	259.00	150	Vertical	Pass
1**	1137.000	27.79	-15.53	54.0	26.21	AV	259.00	150	Vertical	Pass
2	2244.500	41.70	-12.89	74.0	32.30	Peak	360.00	150	Vertical	Pass
2**	2244.500	31.20	-12.89	54.0	22.80	AV	360.00	150	Vertical	Pass
3	4229.000	47.48	-3.90	74.0	26.52	Peak	277.00	150	Vertical	Pass
3**	4229.000	36.07	-3.90	54.0	17.93	AV	277.00	150	Vertical	Pass
4	5781.500	94.07	-1.53	74.0	-20.07	Peak	217.00	150	Vertical	N/A
4**	5781.500	86.17	-1.53	54.0	-32.17	AV	217.00	150	Vertical	N/A
5	11569.625	48.02	-2.29	74.0	25.98	Peak	23.00	150	Vertical	Pass
5**	11569.625	40.26	-2.29	54.0	13.74	AV	23.00	150	Vertical	Pass
6	15132.188	50.00	-2.36	74.0	24.00	Peak	216.00	150	Vertical	Pass
6**	15132.188	38.28	-2.36	54.0	15.72	AV	216.00	150	Vertical	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_11.08.06

EUT Name: Dash Cam

Temp.(°C): 22.7

Model Number: A900-RC44H

Humidity (%RH): 51

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11n20 CH157 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 数据线: A09

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

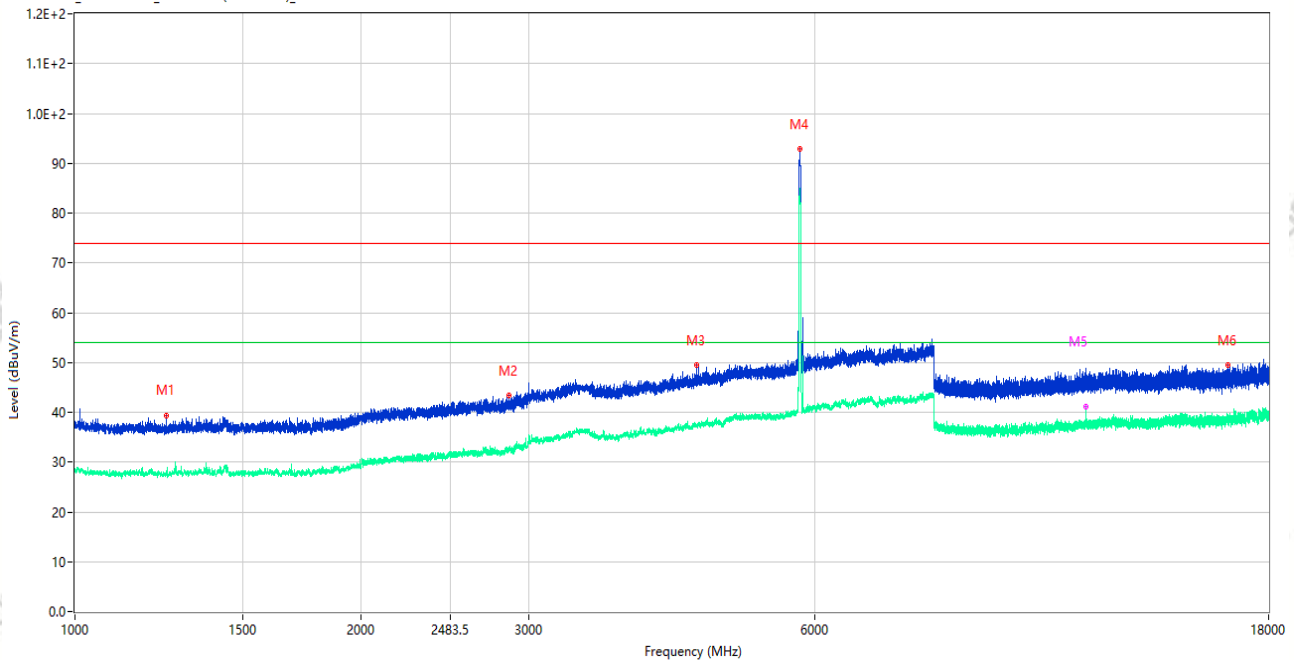

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1247.000	39.41	-16.14	74.0	34.59	Peak	212.00	150	Horizontal	Pass
1**	1247.000	27.86	-16.14	54.0	26.14	AV	212.00	150	Horizontal	Pass
2	2861.250	43.33	-9.67	74.0	30.67	Peak	119.00	150	Horizontal	Pass
2**	2861.250	32.34	-9.67	54.0	21.66	AV	119.00	150	Horizontal	Pass
3	4504.000	49.43	-3.32	74.0	24.57	Peak	12.00	150	Horizontal	Pass
3**	4504.000	37.07	-3.32	54.0	16.93	AV	12.00	150	Horizontal	Pass
4	5783.000	92.94	-1.53	74.0	-18.94	Peak	219.00	150	Horizontal	N/A
4**	5783.000	84.84	-1.53	54.0	-30.84	AV	219.00	150	Horizontal	N/A
5	11570.813	46.63	-2.37	74.0	27.37	Peak	354.00	150	Horizontal	Pass
5**	11570.813	41.05	-2.37	54.0	12.95	AV	354.00	150	Horizontal	Pass
6	16296.112	49.59	-1.54	74.0	24.41	Peak	117.00	150	Horizontal	Pass
6**	16296.112	38.34	-1.54	54.0	15.66	AV	117.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_10.59.07

EUT Name: Dash Cam

Temp.(°C): 22.7

Model Number: A900-RC44H

Humidity (%RH): 51

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax20 CH157 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 数据线: A09

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

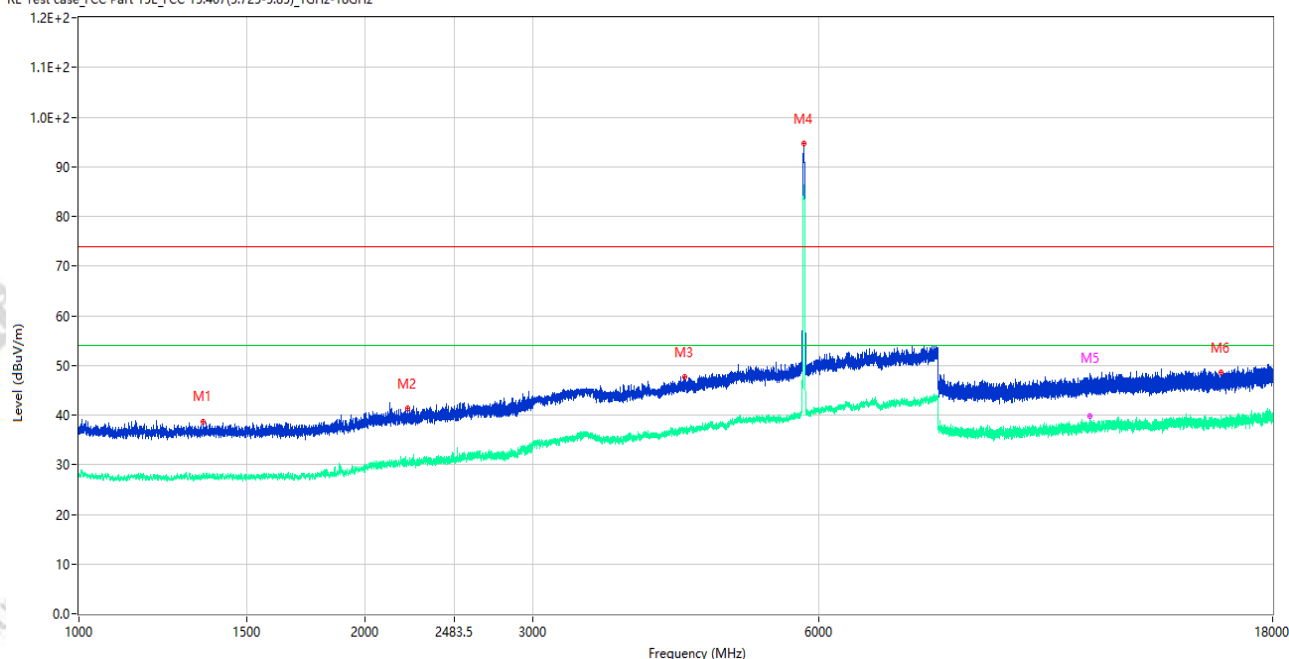

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1351.000	38.73	-15.92	74.0	35.27	Peak	123.00	150	Vertical	Pass
1**	1351.000	27.56	-15.92	54.0	26.44	AV	123.00	150	Vertical	Pass
2	2218.500	41.42	-13.09	74.0	32.58	Peak	254.00	150	Vertical	Pass
2**	2218.500	30.36	-13.09	54.0	23.64	AV	254.00	150	Vertical	Pass
3	4340.000	47.58	-3.08	74.0	26.42	Peak	28.00	150	Vertical	Pass
3**	4340.000	37.24	-3.08	54.0	16.76	AV	28.00	150	Vertical	Pass
4	5782.500	94.69	-1.53	74.0	-20.69	Peak	225.00	150	Vertical	N/A
4**	5782.500	85.78	-1.53	54.0	-31.78	AV	225.00	150	Vertical	N/A
5	11572.475	47.96	-2.50	74.0	26.04	Peak	27.00	150	Vertical	Pass
5**	11572.475	39.84	-2.50	54.0	14.16	AV	27.00	150	Vertical	Pass
6	15879.262	48.62	-1.54	74.0	25.38	Peak	285.00	150	Vertical	Pass
6**	15879.262	38.14	-1.54	54.0	15.86	AV	285.00	150	Vertical	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_10.54.53

EUT Name: Dash Cam

Temp.(°C): 22.7

Model Number: A900-RC44H

Humidity (%RH): 51

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax20 CH157 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 数据线: A09

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

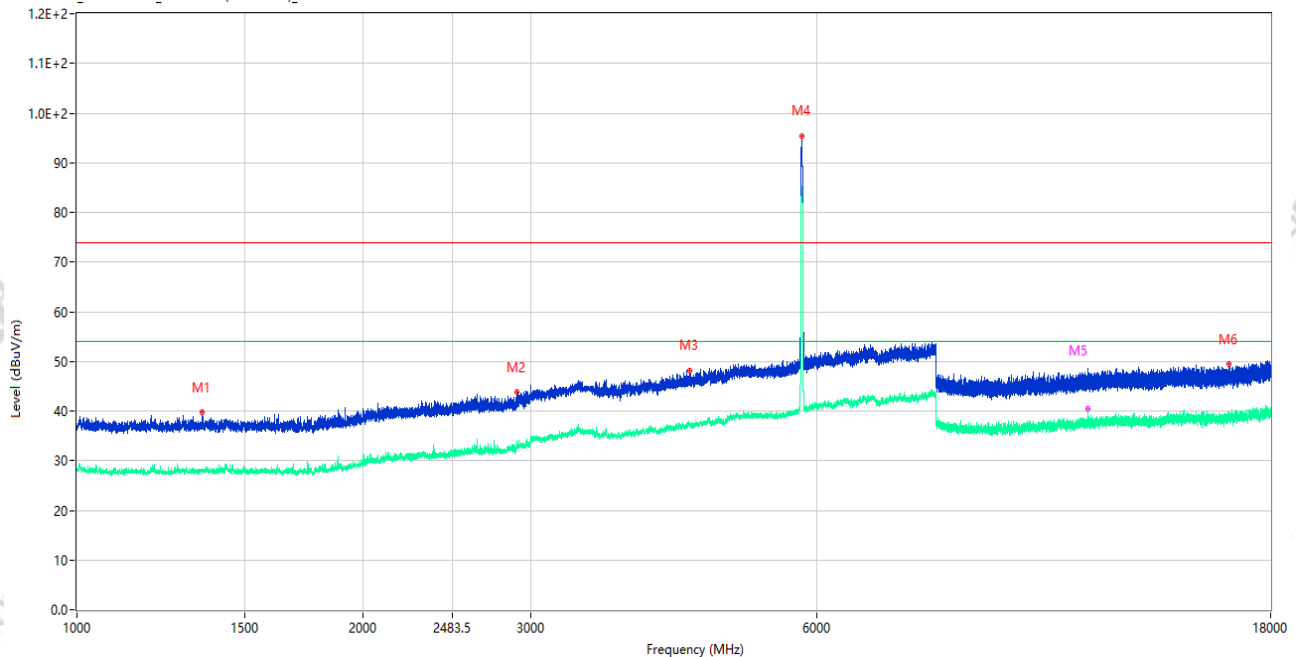

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1353.500	39.84	-15.90	74.0	34.16	Peak	288.00	150	Horizontal	Pass
1**	1353.500	28.24	-15.90	54.0	25.76	AV	288.00	150	Horizontal	Pass
2	2905.000	43.78	-9.49	74.0	30.22	Peak	360.00	150	Horizontal	Pass
2**	2905.000	32.86	-9.49	54.0	21.14	AV	360.00	150	Horizontal	Pass
3	4408.000	48.10	-2.99	74.0	25.90	Peak	237.00	150	Horizontal	Pass
3**	4408.000	36.99	-2.99	54.0	17.01	AV	237.00	150	Horizontal	Pass
4	5786.500	95.46	-1.53	74.0	-21.46	Peak	218.00	150	Horizontal	N/A
4**	5786.500	84.50	-1.53	54.0	-30.50	AV	218.00	150	Horizontal	N/A
5	11570.338	46.55	-2.33	74.0	27.45	Peak	51.00	150	Horizontal	Pass
5**	11570.338	40.39	-2.33	54.0	13.61	AV	51.00	150	Horizontal	Pass
6	16257.787	49.44	-1.59	74.0	24.56	Peak	115.00	150	Horizontal	Pass
6**	16257.787	38.44	-1.59	54.0	15.56	AV	115.00	150	Horizontal	Pass