

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_00.59.58

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11b CH6 P=39


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

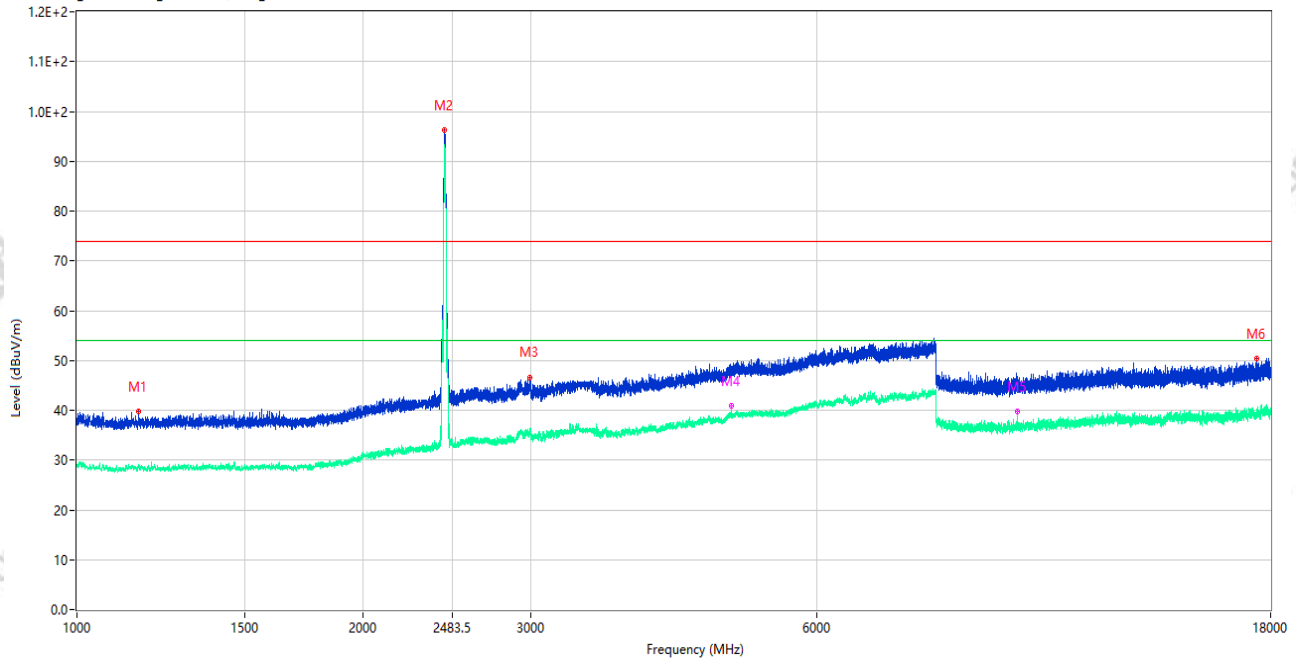

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1160.000	39.76	-15.50	74.0	34.24	Peak	353.00	150	Vertical	Pass
1**	1160.000	28.71	-15.50	54.0	25.29	AV	353.00	150	Vertical	Pass
2	2435.750	96.22	-12.32	74.0	-22.22	Peak	305.00	150	Vertical	N/A
2**	2435.750	93.17	-12.32	54.0	-39.17	AV	305.00	150	Vertical	N/A
3	2995.500	46.46	-8.87	74.0	27.54	Peak	200.00	150	Vertical	Pass
3**	2995.500	35.90	-8.87	54.0	18.10	AV	200.00	150	Vertical	Pass
4	4874.500	48.83	-2.25	74.0	25.17	Peak	243.00	150	Vertical	Pass
4**	4874.500	40.82	-2.25	54.0	13.18	AV	243.00	150	Vertical	Pass
5	9748.500	44.85	-3.75	74.0	29.15	Peak	65.00	150	Vertical	Pass
5**	9748.500	39.70	-3.75	54.0	14.30	AV	65.00	150	Vertical	Pass
6	17387.500	50.31	0.11	74.0	23.69	Peak	359.00	150	Vertical	Pass
6**	17387.500	39.31	0.11	54.0	14.69	AV	359.00	150	Vertical	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_00.53.12

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C


Work Mode: 2.4G WIFI 11b CH6 P=39

Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

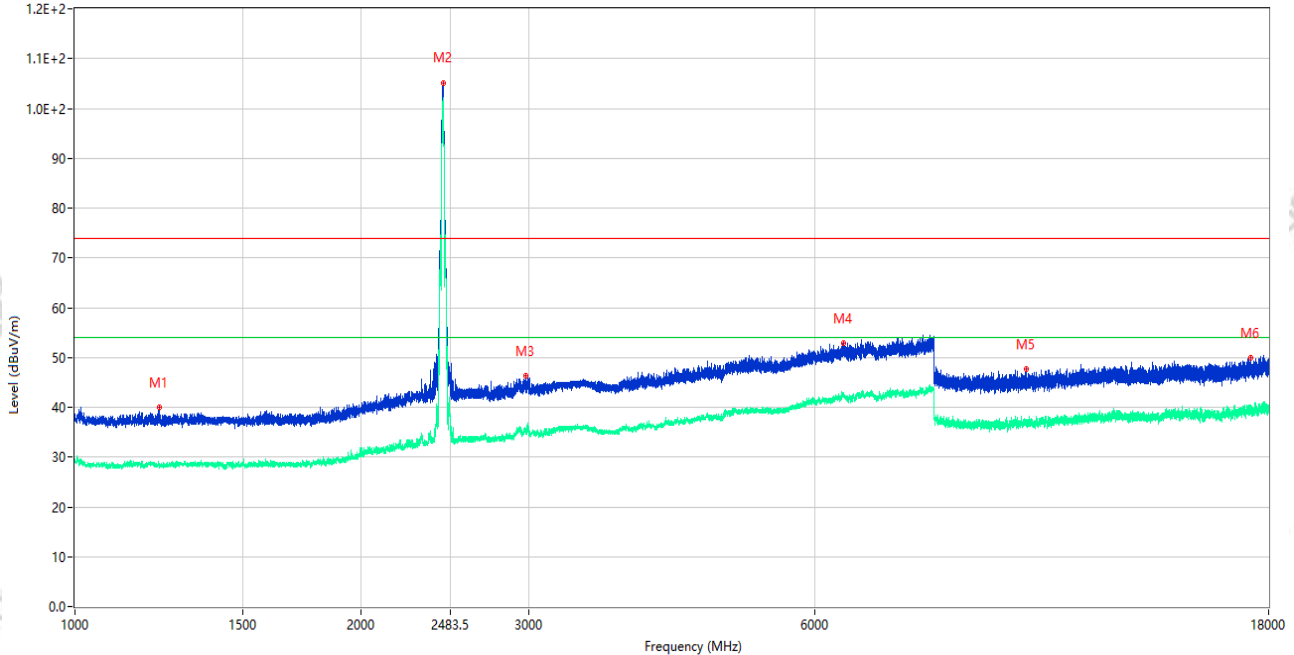RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz
1.2E+2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1227.750	40.05	-15.99	74.0	33.95	Peak	132.00	150	Horizontal	Pass
1**	1227.750	28.02	-15.99	54.0	25.98	AV	132.00	150	Horizontal	Pass
2	2438.250	105.19	-12.38	74.0	-31.19	Peak	68.00	150	Horizontal	N/A
2**	2438.250	102.03	-12.38	54.0	-48.03	AV	68.00	150	Horizontal	N/A
3	2977.750	46.27	-8.89	74.0	27.73	Peak	14.00	150	Horizontal	Pass
3**	2977.750	35.62	-8.89	54.0	18.38	AV	14.00	150	Horizontal	Pass
4	6438.500	52.89	-0.00	74.0	21.11	Peak	343.00	150	Horizontal	Pass
4**	6438.500	42.16	-0.00	54.0	11.84	AV	343.00	150	Horizontal	Pass
5	10022.000	47.59	-4.12	74.0	26.41	Peak	92.00	150	Horizontal	Pass
5**	10022.000	36.57	-4.12	54.0	17.43	AV	92.00	150	Horizontal	Pass
6	17218.001	49.84	-0.74	74.0	24.16	Peak	120.00	150	Horizontal	Pass
6**	17218.001	39.19	-0.74	54.0	14.81	AV	120.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_01.05.02

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11g CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

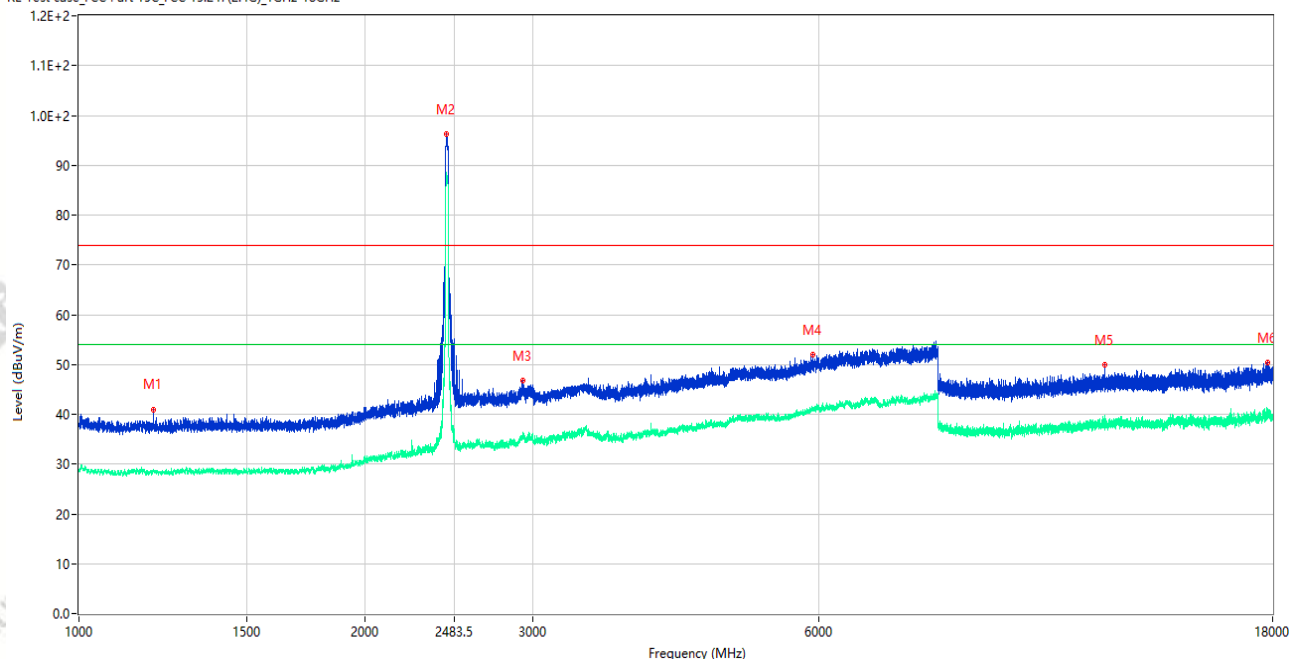

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.500	40.99	-15.75	74.0	33.01	Peak	172.00	150	Vertical	Pass
1**	1198.500	28.65	-15.75	54.0	25.35	AV	172.00	150	Vertical	Pass
2	2435.500	96.23	-12.31	74.0	-22.23	Peak	300.00	150	Vertical	N/A
2**	2435.500	88.21	-12.31	54.0	-34.21	AV	300.00	150	Vertical	N/A
3	2932.000	46.75	-7.97	74.0	27.25	Peak	190.00	150	Vertical	Pass
3**	2932.000	35.61	-7.97	54.0	18.39	AV	190.00	150	Vertical	Pass
4	5906.500	52.01	-0.22	74.0	21.99	Peak	0.00	150	Vertical	Pass
4**	5906.500	40.89	-0.22	54.0	13.11	AV	0.00	150	Vertical	Pass
5	11977.500	49.87	-3.22	74.0	24.13	Peak	265.00	150	Vertical	Pass
5**	11977.500	37.76	-3.22	54.0	16.24	AV	265.00	150	Vertical	Pass
6	17797.501	50.42	1.31	74.0	23.58	Peak	63.00	150	Vertical	Pass
6**	17797.501	40.33	1.31	54.0	13.67	AV	63.00	150	Vertical	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_01.08.46

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C


Work Mode: 2.4G WIFI 11g CH6 P=44

Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

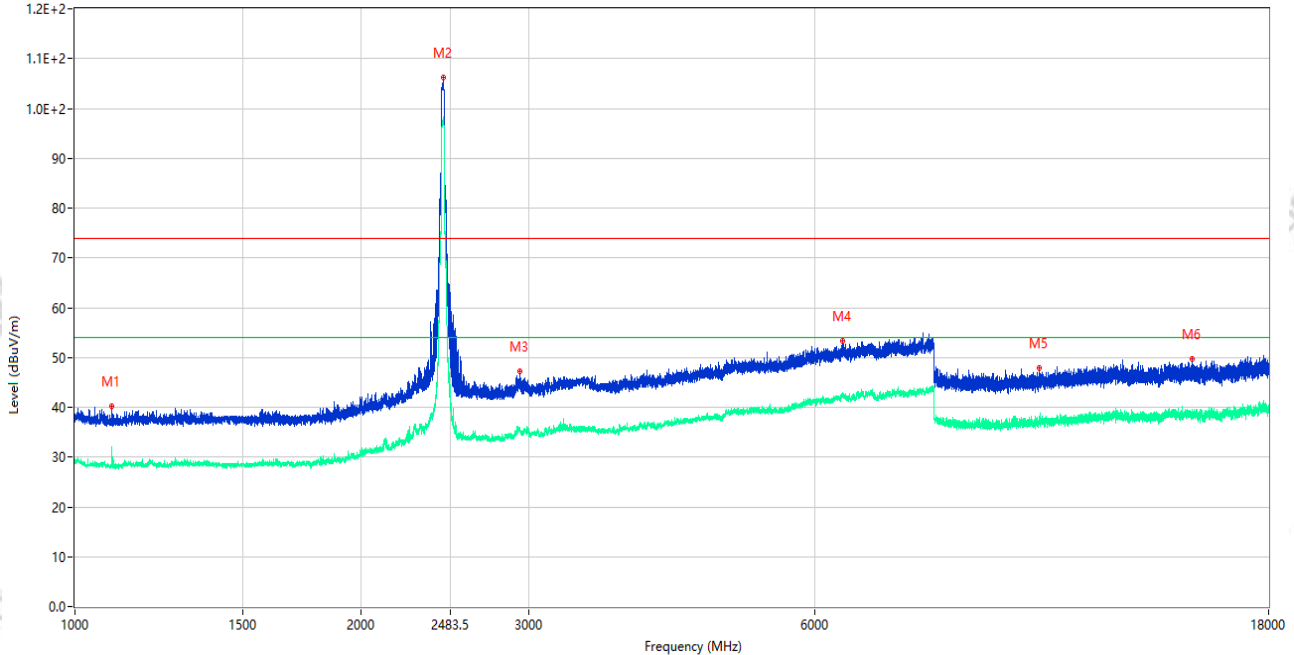RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz
1.2E+2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1093.250	40.20	-15.81	74.0	33.80	Peak	154.00	150	Horizontal	Pass
1**	1093.250	30.37	-15.81	54.0	23.63	AV	154.00	150	Horizontal	Pass
2	2439.000	106.30	-12.37	74.0	-32.30	Peak	71.00	150	Horizontal	N/A
2**	2439.000	98.19	-12.37	54.0	-44.19	AV	71.00	150	Horizontal	N/A
3	2933.500	47.33	-8.04	74.0	26.67	Peak	312.00	150	Horizontal	Pass
3**	2933.500	35.57	-8.04	54.0	18.43	AV	312.00	150	Horizontal	Pass
4	6415.500	53.37	0.25	74.0	20.63	Peak	16.00	150	Horizontal	Pass
4**	6415.500	42.67	0.25	54.0	11.33	AV	16.00	150	Horizontal	Pass
5	10321.500	47.94	-3.33	74.0	26.06	Peak	350.00	150	Horizontal	Pass
5**	10321.500	36.58	-3.33	54.0	17.42	AV	350.00	150	Horizontal	Pass
6	14966.500	49.71	-1.86	74.0	24.29	Peak	360.00	150	Horizontal	Pass
6**	14966.500	38.81	-1.86	54.0	15.19	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_01.19.09

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11n20 CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

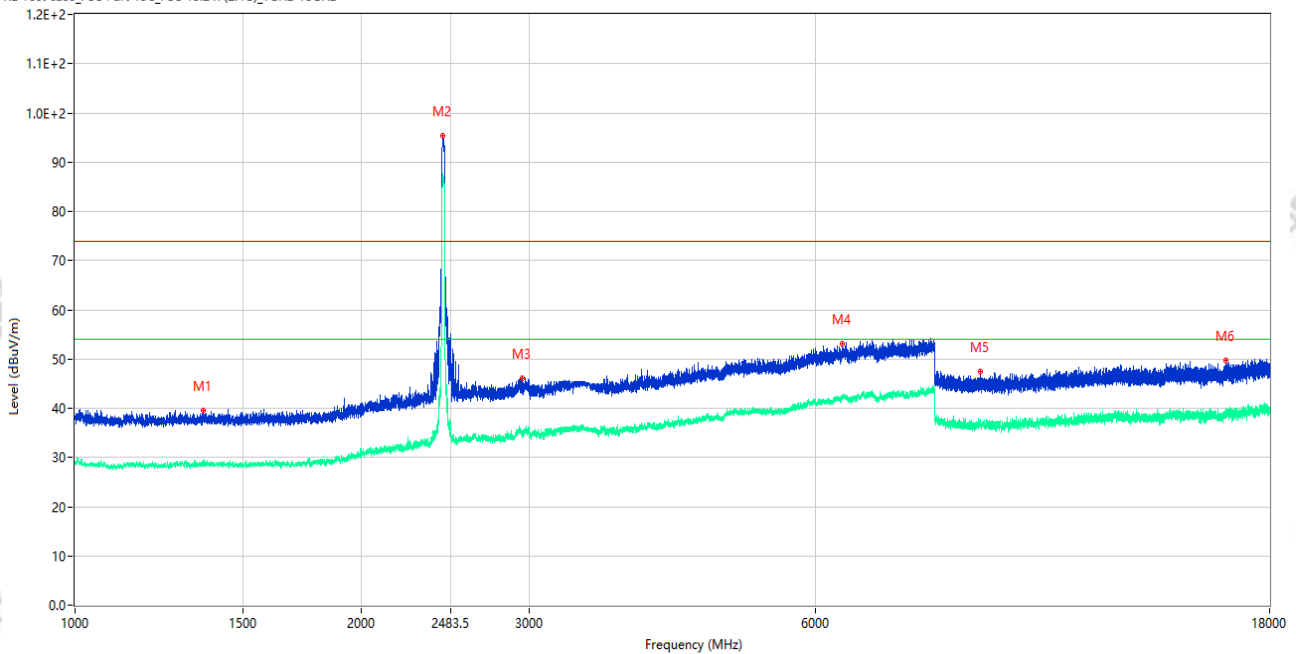

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1363.000	39.60	-15.84	74.0	34.40	Peak	185.00	150	Vertical	Pass
1**	1363.000	28.76	-15.84	54.0	25.24	AV	185.00	150	Vertical	Pass
2	2435.750	95.41	-12.32	74.0	-21.41	Peak	290.00	150	Vertical	N/A
2**	2435.750	87.48	-12.32	54.0	-33.48	AV	290.00	150	Vertical	N/A
3	2951.250	46.05	-9.28	74.0	27.95	Peak	0.00	150	Vertical	Pass
3**	2951.250	34.90	-9.28	54.0	19.10	AV	0.00	150	Vertical	Pass
4	6408.000	53.15	0.26	74.0	20.85	Peak	113.00	150	Vertical	Pass
4**	6408.000	42.47	0.26	54.0	11.53	AV	113.00	150	Vertical	Pass
5	8945.500	47.35	-4.54	74.0	26.65	Peak	300.00	150	Vertical	Pass
5**	8945.500	36.92	-4.54	54.0	17.08	AV	300.00	150	Vertical	Pass
6	16174.000	49.65	-0.96	74.0	24.35	Peak	0.00	150	Vertical	Pass
6**	16174.000	38.93	-0.96	54.0	15.07	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_01.14.59

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11n20 CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

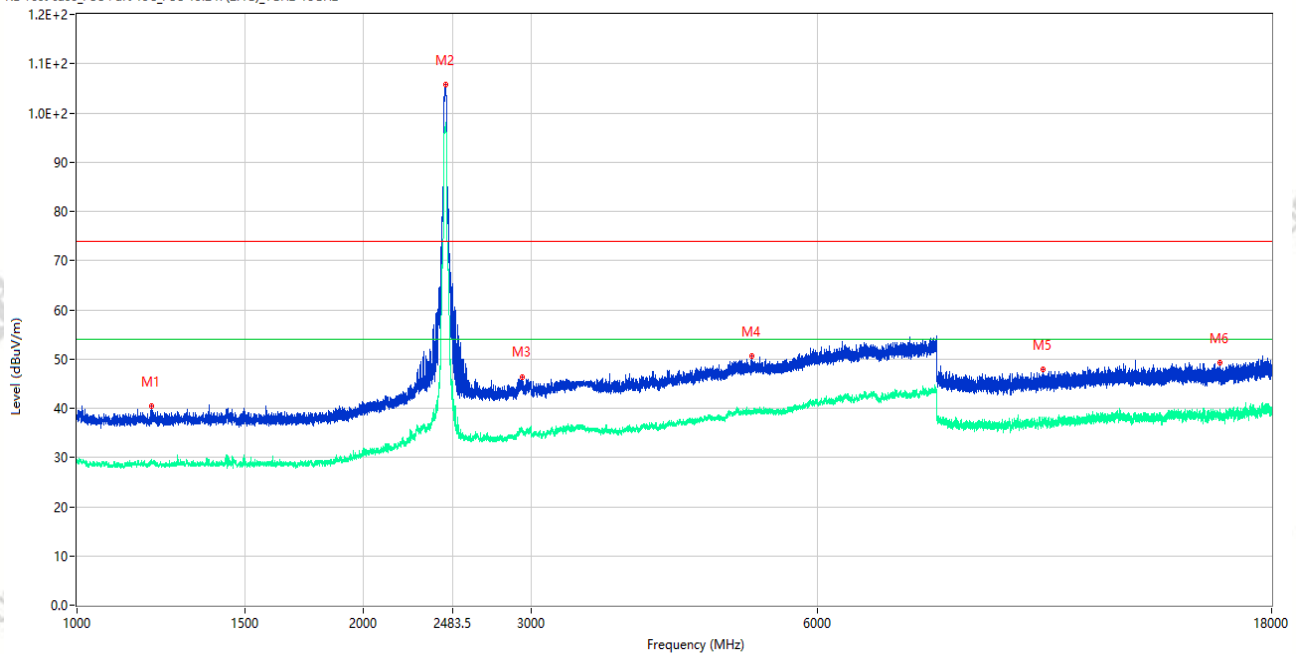

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.500	40.38	-15.75	74.0	33.62	Peak	266.00	150	Horizontal	Pass
1**	1198.500	28.85	-15.75	54.0	25.15	AV	266.00	150	Horizontal	Pass
2	2439.750	105.82	-12.37	74.0	-31.82	Peak	68.00	150	Horizontal	N/A
2**	2439.750	97.97	-12.37	54.0	-43.97	AV	68.00	150	Horizontal	N/A
3	2934.000	46.26	-8.07	74.0	27.74	Peak	360.00	150	Horizontal	Pass
3**	2934.000	35.26	-8.07	54.0	18.74	AV	360.00	150	Horizontal	Pass
4	5116.000	50.53	-2.33	74.0	23.47	Peak	39.00	150	Horizontal	Pass
4**	5116.000	39.23	-2.33	54.0	14.77	AV	39.00	150	Horizontal	Pass
5	10357.000	47.86	-3.18	74.0	26.14	Peak	360.00	150	Horizontal	Pass
5**	10357.000	36.78	-3.18	54.0	17.22	AV	360.00	150	Horizontal	Pass
6	15892.500	49.22	-1.57	74.0	24.78	Peak	9.00	150	Horizontal	Pass
6**	15892.500	39.05	-1.57	54.0	14.95	AV	9.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_01.24.45

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11n40 CH6 P=42


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

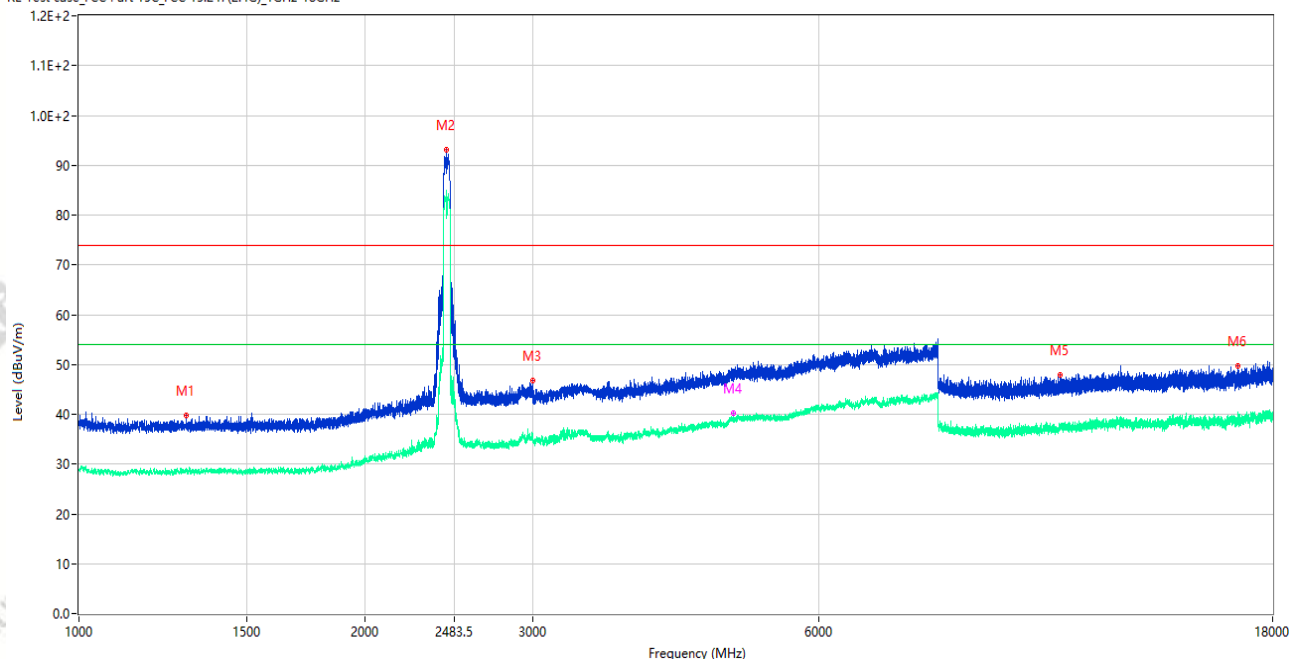

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1296.250	39.68	-15.68	74.0	34.32	Peak	360.00	150	Vertical	Pass
1**	1296.250	28.67	-15.68	54.0	25.33	AV	360.00	150	Vertical	Pass
2	2435.250	93.05	-12.29	74.0	-19.05	Peak	309.00	150	Vertical	N/A
2**	2435.250	84.98	-12.29	54.0	-30.98	AV	309.00	150	Vertical	N/A
3	2998.250	46.75	-8.79	74.0	27.25	Peak	332.00	150	Vertical	Pass
3**	2998.250	35.91	-8.79	54.0	18.09	AV	332.00	150	Vertical	Pass
4	4874.500	47.81	-2.25	74.0	26.19	Peak	285.00	150	Vertical	Pass
4**	4874.500	40.13	-2.25	54.0	13.87	AV	285.00	150	Vertical	Pass
5	10766.500	47.96	-3.45	74.0	26.04	Peak	235.00	150	Vertical	Pass
5**	10766.500	37.17	-3.45	54.0	16.83	AV	235.00	150	Vertical	Pass
6	16551.999	49.79	-0.97	74.0	24.21	Peak	295.00	150	Vertical	Pass
6**	16551.999	39.48	-0.97	54.0	14.52	AV	295.00	150	Vertical	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_01.30.06

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C


Work Mode: 2.4G WIFI 11n40 CH6 P=42

Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

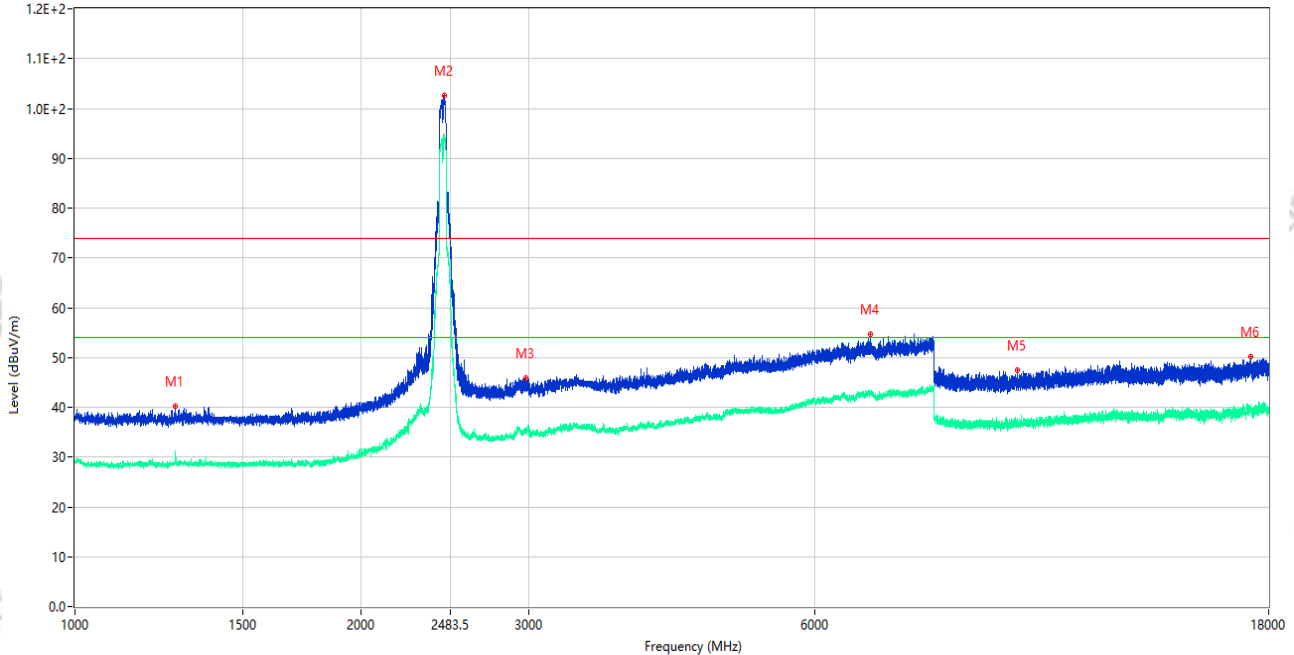RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz
1.2E+2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1274.750	40.27	-15.82	74.0	33.73	Peak	268.00	150	Horizontal	Pass
1**	1274.750	28.72	-15.82	54.0	25.28	AV	268.00	150	Horizontal	Pass
2	2444.250	102.67	-12.47	74.0	-28.67	Peak	65.00	150	Horizontal	N/A
2**	2444.250	94.37	-12.47	54.0	-40.37	AV	65.00	150	Horizontal	N/A
3	2979.250	45.95	-9.03	74.0	28.05	Peak	32.00	150	Horizontal	Pass
3**	2979.250	35.61	-9.03	54.0	18.39	AV	32.00	150	Horizontal	Pass
4	6858.500	54.67	0.89	74.0	19.33	Peak	312.00	150	Horizontal	Pass
4**	6858.500	42.77	0.89	54.0	11.23	AV	312.00	150	Horizontal	Pass
5	9806.500	47.48	-3.85	74.0	26.52	Peak	242.00	150	Horizontal	Pass
5**	9806.500	36.51	-3.85	54.0	17.49	AV	242.00	150	Horizontal	Pass
6	17238.000	50.08	-0.78	74.0	23.92	Peak	98.00	150	Horizontal	Pass
6**	17238.000	39.52	-0.78	54.0	14.48	AV	98.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_01.41.12

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11ax20 CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

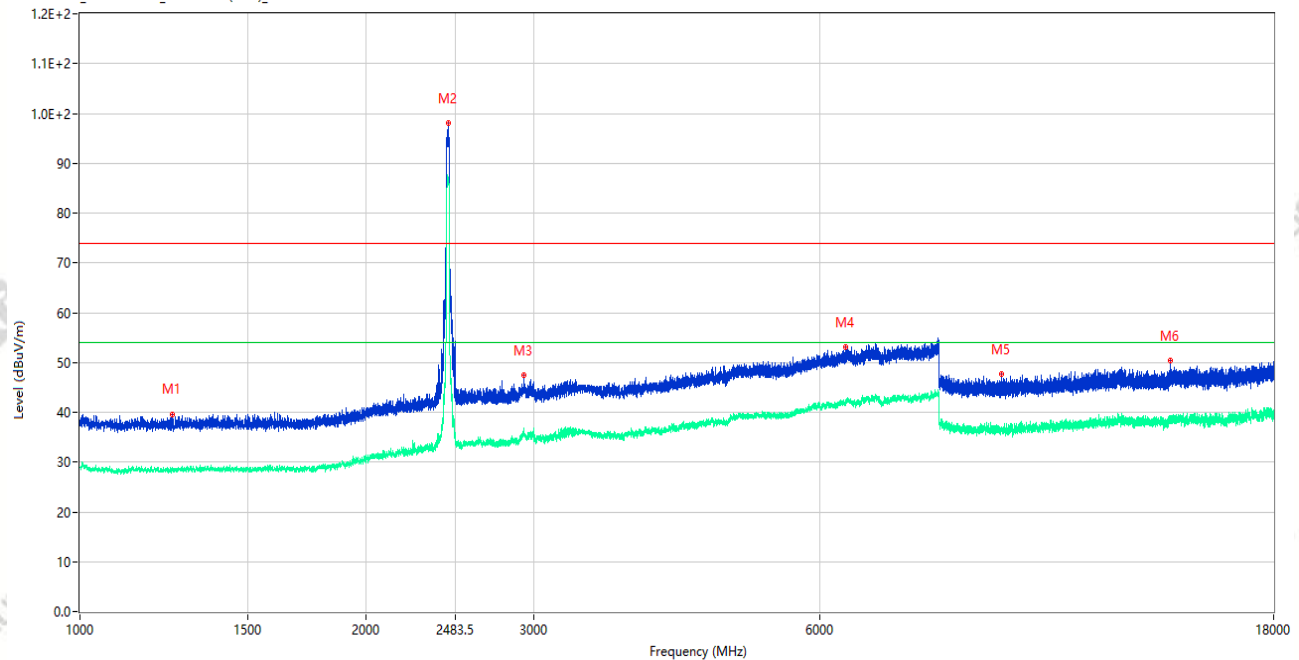

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1249.250	39.65	-16.17	74.0	34.35	Peak	115.00	150	Vertical	Pass
1**	1249.250	28.25	-16.17	54.0	25.75	AV	115.00	150	Vertical	Pass
2	2438.750	98.12	-12.37	74.0	-24.12	Peak	315.00	150	Vertical	N/A
2**	2438.750	86.90	-12.37	54.0	-32.90	AV	315.00	150	Vertical	N/A
3	2932.750	47.47	-8.00	74.0	26.53	Peak	35.00	150	Vertical	Pass
3**	2932.750	35.60	-8.00	54.0	18.40	AV	35.00	150	Vertical	Pass
4	6381.500	53.10	-0.20	74.0	20.90	Peak	24.00	150	Vertical	Pass
4**	6381.500	41.75	-0.20	54.0	12.25	AV	24.00	150	Vertical	Pass
5	9319.500	47.71	-5.31	74.0	26.29	Peak	240.00	150	Vertical	Pass
5**	9319.500	36.47	-5.31	54.0	17.53	AV	240.00	150	Vertical	Pass
6	14004.000	50.37	-1.66	74.0	23.63	Peak	96.00	150	Vertical	Pass
6**	14004.000	38.32	-1.66	54.0	15.68	AV	96.00	150	Vertical	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_01.37.21

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11ax20 CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

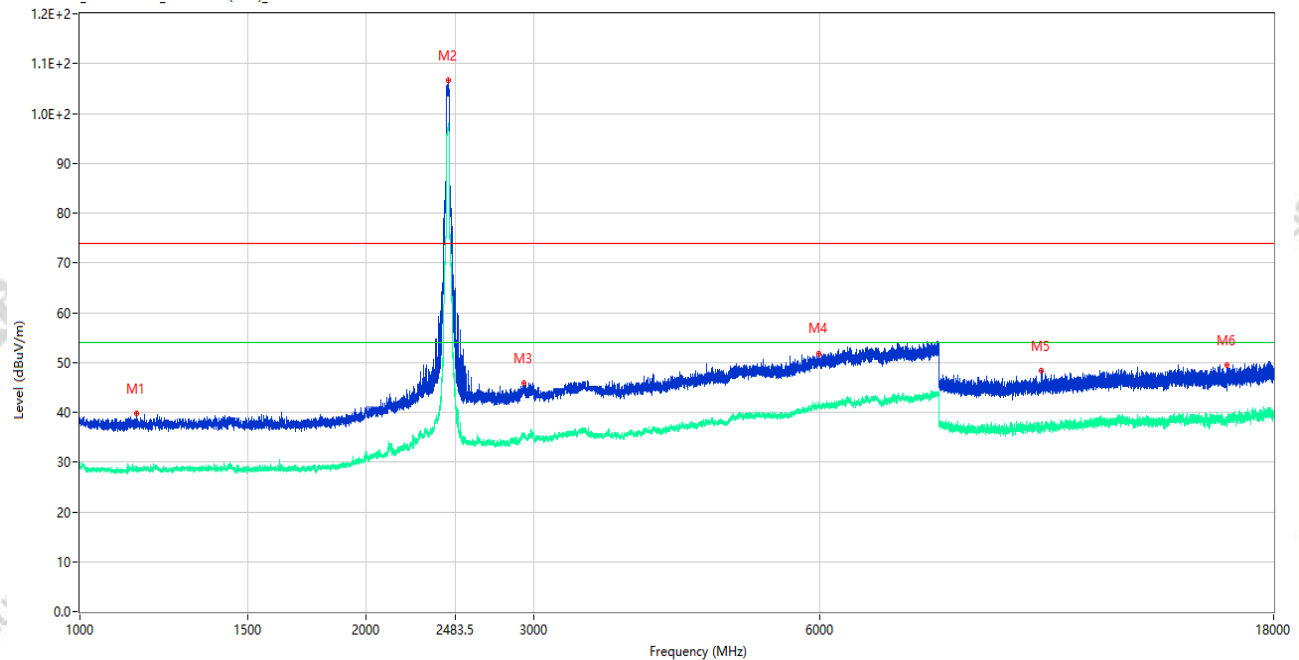

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1146.500	39.74	-15.66	74.0	34.26	Peak	355.00	150	Horizontal	Pass
1**	1146.500	28.51	-15.66	54.0	25.49	AV	355.00	150	Horizontal	Pass
2	2439.000	106.56	-12.37	74.0	-32.56	Peak	56.00	150	Horizontal	N/A
2**	2439.000	97.69	-12.37	54.0	-43.69	AV	56.00	150	Horizontal	N/A
3	2930.500	45.80	-7.95	74.0	28.20	Peak	335.00	150	Horizontal	Pass
3**	2930.500	35.48	-7.95	54.0	18.52	AV	335.00	150	Horizontal	Pass
4	5977.000	51.86	-0.11	74.0	22.14	Peak	130.00	150	Horizontal	Pass
4**	5977.000	41.22	-0.11	54.0	12.78	AV	130.00	150	Horizontal	Pass
5	10255.000	48.40	-3.18	74.0	25.60	Peak	120.00	150	Horizontal	Pass
5**	10255.000	37.28	-3.18	54.0	16.72	AV	120.00	150	Horizontal	Pass
6	16064.000	49.42	-1.21	74.0	24.58	Peak	0.00	150	Horizontal	Pass
6**	16064.000	38.40	-1.21	54.0	15.60	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_01.47.05

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11ax40 CH6 P=42


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

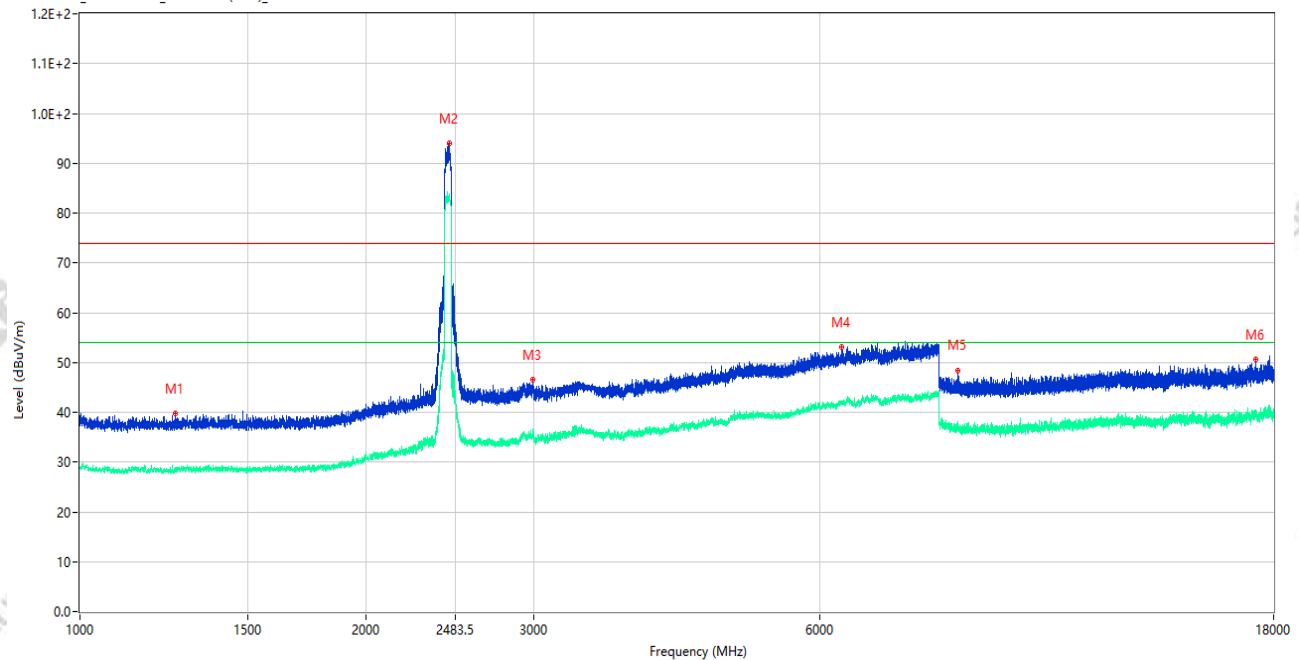

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1260.000	39.74	-16.02	74.0	34.26	Peak	285.00	150	Vertical	Pass
1**	1260.000	28.55	-16.02	54.0	25.45	AV	285.00	150	Vertical	Pass
2	2445.250	94.03	-12.51	74.0	-20.03	Peak	300.00	150	Vertical	N/A
2**	2445.250	83.66	-12.51	54.0	-29.66	AV	300.00	150	Vertical	N/A
3	2997.000	46.53	-8.79	74.0	27.47	Peak	280.00	150	Vertical	Pass
3**	2997.000	35.98	-8.79	54.0	18.02	AV	280.00	150	Vertical	Pass
4	6331.000	53.13	-0.66	74.0	20.87	Peak	100.00	150	Vertical	Pass
4**	6331.000	41.93	-0.66	54.0	12.07	AV	100.00	150	Vertical	Pass
5	8379.000	48.33	-4.59	74.0	25.67	Peak	10.00	150	Vertical	Pass
5**	8379.000	36.97	-4.59	54.0	17.03	AV	10.00	150	Vertical	Pass
6	17240.500	50.63	-0.98	74.0	23.37	Peak	92.00	150	Vertical	Pass
6**	17240.500	39.62	-0.98	54.0	14.38	AV	92.00	150	Vertical	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_01:51:30

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11ax40 CH6 P=42


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

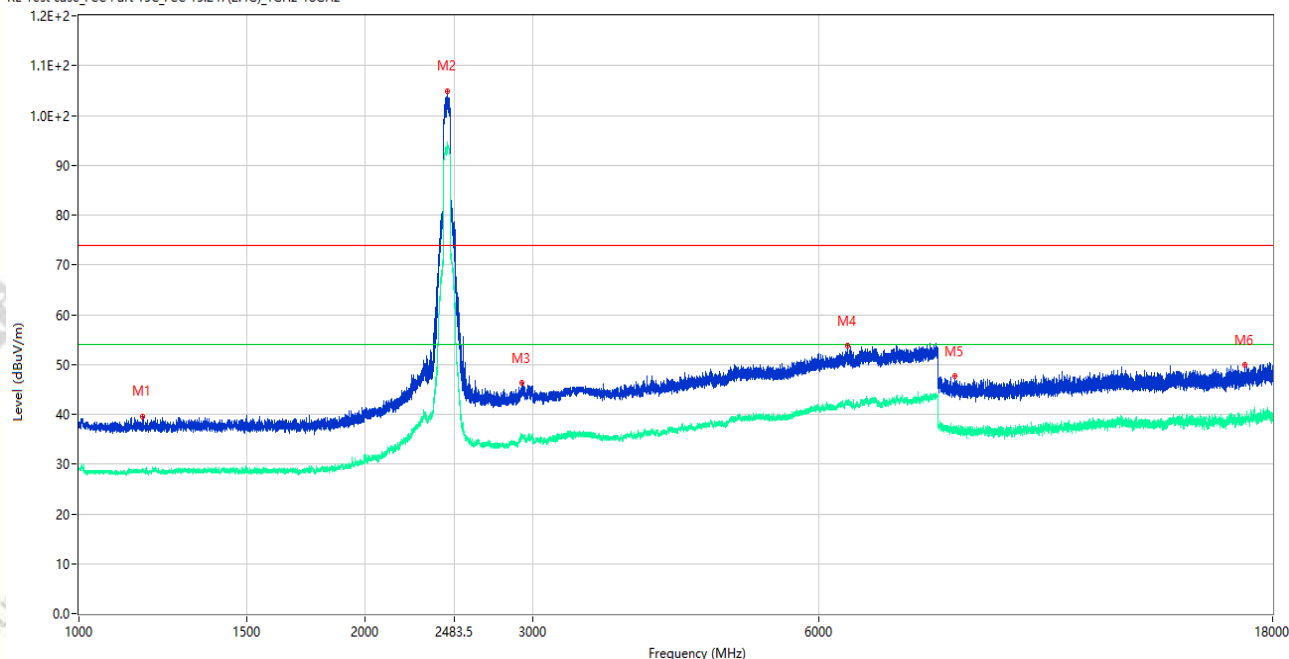

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1166.750	39.61	-15.46	74.0	34.39	Peak	227.00	150	Horizontal	Pass
1**	1166.750	28.70	-15.46	54.0	25.30	AV	227.00	150	Horizontal	Pass
2	2438.000	104.95	-12.38	74.0	-30.95	Peak	69.00	150	Horizontal	N/A
2**	2438.000	93.81	-12.38	54.0	-39.81	AV	69.00	150	Horizontal	N/A
3	2922.500	46.23	-8.38	74.0	27.77	Peak	221.00	150	Horizontal	Pass
3**	2922.500	35.26	-8.38	54.0	18.74	AV	221.00	150	Horizontal	Pass
4	6426.000	53.76	0.03	74.0	20.24	Peak	321.00	150	Horizontal	Pass
4**	6426.000	42.42	0.03	54.0	11.58	AV	321.00	150	Horizontal	Pass
5	8343.500	47.66	-4.50	74.0	26.34	Peak	298.00	150	Horizontal	Pass
5**	8343.500	37.23	-4.50	54.0	16.77	AV	298.00	150	Horizontal	Pass
6	16845.000	49.98	-1.08	74.0	24.02	Peak	360.00	150	Horizontal	Pass
6**	16845.000	38.90	-1.08	54.0	15.10	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_05.17.49

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: Normal working Link(2.4G WIFI)


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

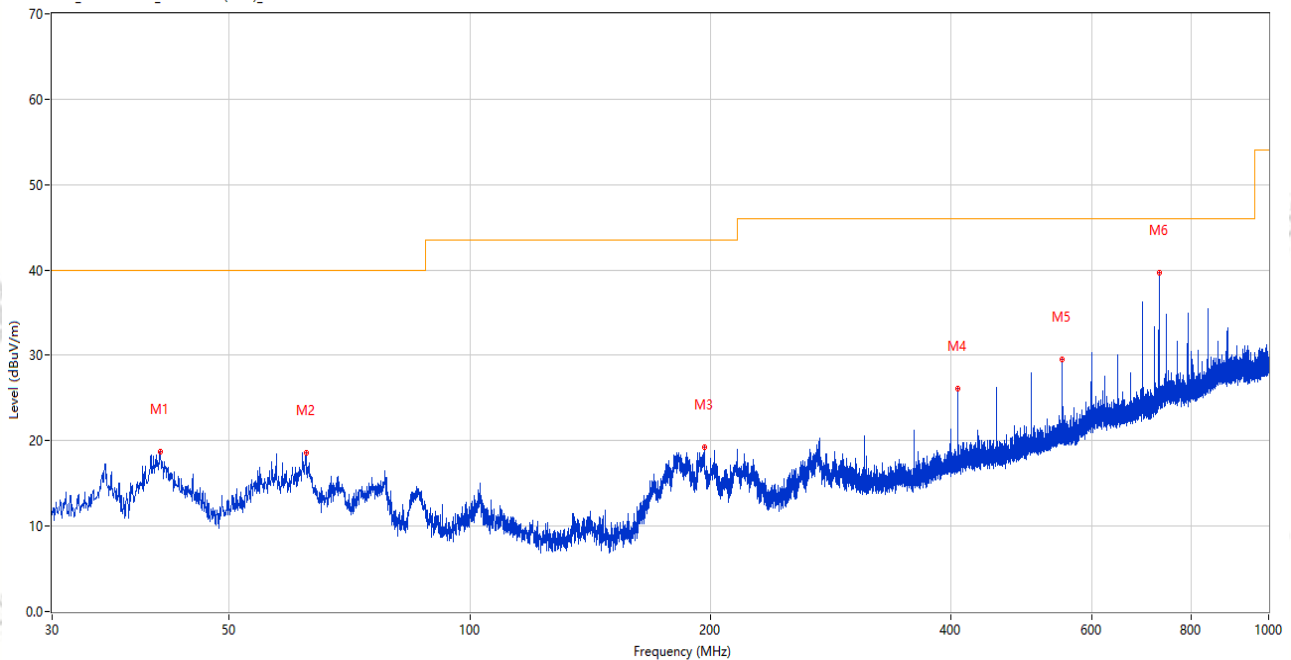

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	41.010	18.72	-25.59	40.0	21.28	Peak	264.00	100	Vertical	Pass
2	62.398	18.64	-26.61	40.0	21.36	Peak	213.00	100	Vertical	Pass
3	196.792	19.24	-25.54	43.5	24.26	Peak	252.00	200	Vertical	Pass
4	408.009	26.11	-20.23	46.0	19.89	Peak	162.00	200	Vertical	Pass
5	552.006	29.49	-16.88	46.0	16.51	Peak	358.00	200	Vertical	Pass
6	728.982	39.70	-12.78	46.0	6.30	Peak	146.00	100	Vertical	Pass

Test Result

Project Number: P-EE26050691

Test Time: 2026-06-12_00.03.23

EUT Name: Dash Cam

Temp.(°C): 23.1

Model Number: A900-RC44H

Humidity (%RH): 50

Sample Number: EE26050537-002-S03

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: Normal working Link(2.4G WIFI)


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A09

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

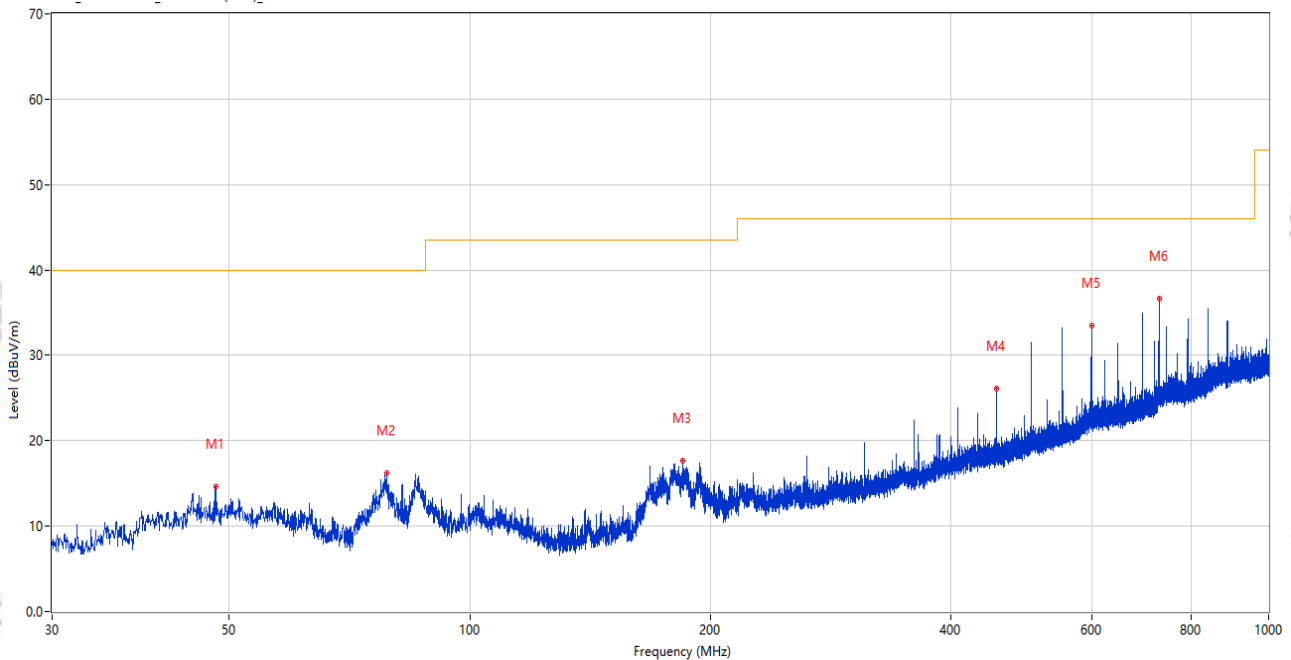

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.090	14.69	-24.52	40.0	25.31	Peak	38.00	100	Horizontal	Pass
2	78.646	16.24	-30.95	40.0	23.76	Peak	0.00	200	Horizontal	Pass
3	184.715	17.69	-27.21	43.5	25.81	Peak	26.00	100	Horizontal	Pass
4	455.975	26.13	-19.37	46.0	19.87	Peak	360.00	100	Horizontal	Pass
5	600.020	33.55	-14.90	46.0	12.45	Peak	306.00	200	Horizontal	Pass
6	728.982	36.60	-12.78	46.0	9.40	Peak	4.00	100	Horizontal	Pass