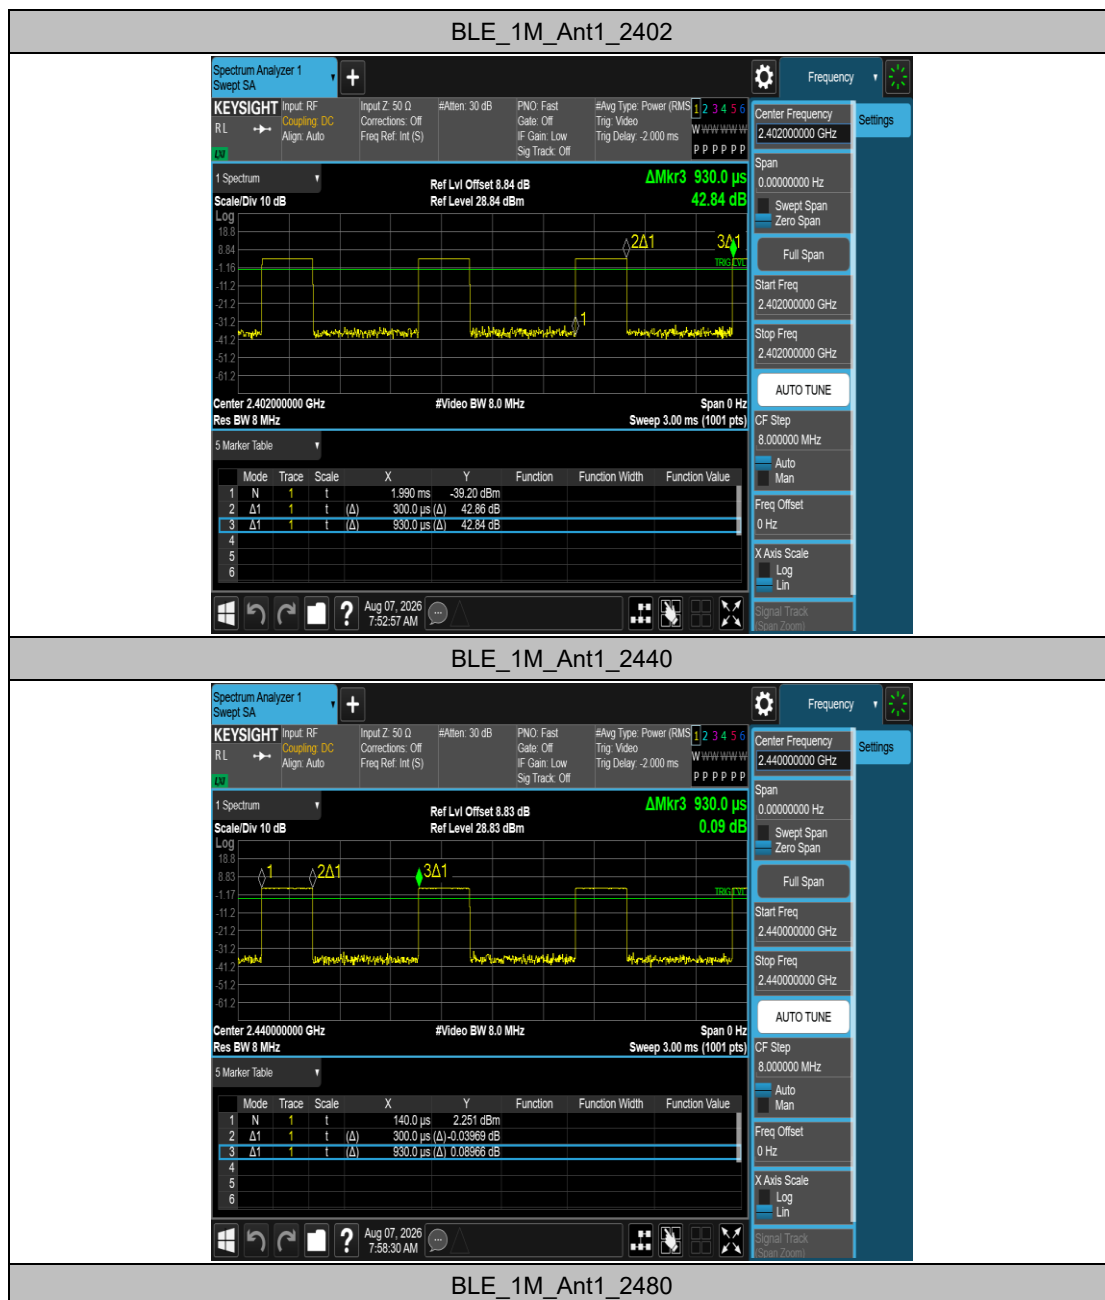


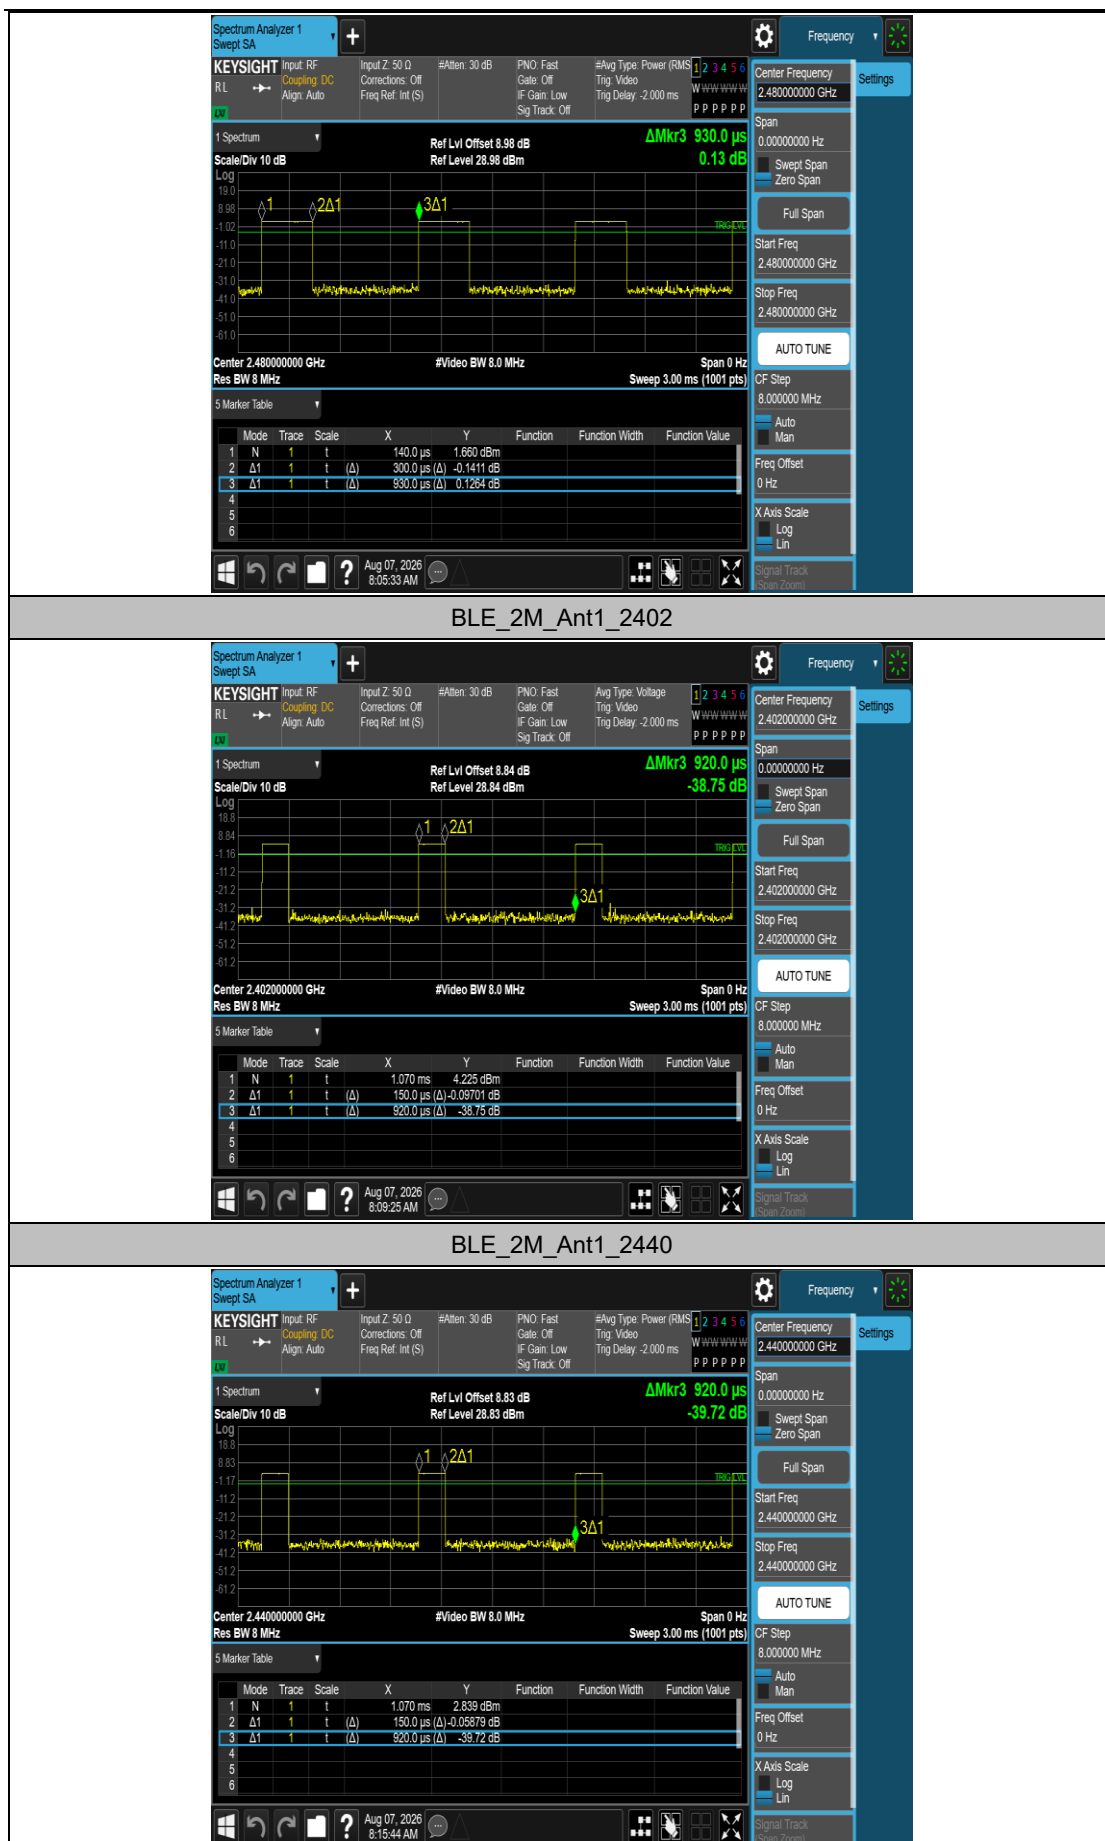
Appendix G: Duty Cycle

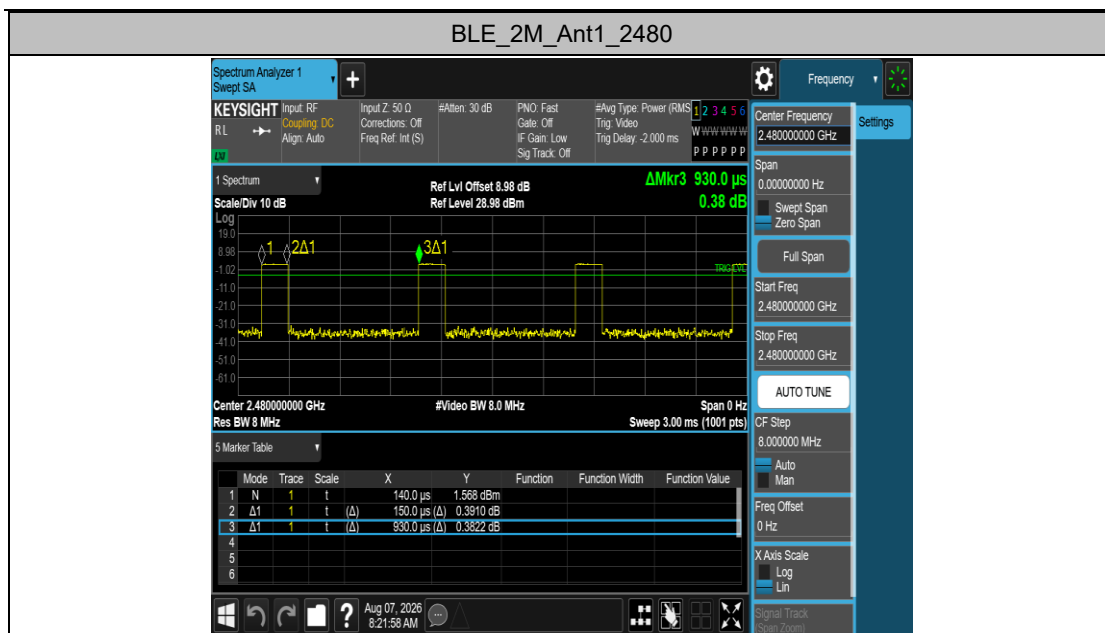
Test Result

TestMode	Antenna	Channel	ON Time [ms]	Period [ms]	X	DC [%]	xFactor
BLE_1M	Ant1	2402	0.30	0.93	0.3226	32.26	4.91
		2440	0.30	0.93	0.3226	32.26	4.91
		2480	0.30	0.93	0.3226	32.26	4.91
BLE_2M	Ant1	2402	0.15	0.92	0.1630	16.30	7.88
		2440	0.15	0.92	0.1630	16.30	7.88
		2480	0.15	0.93	0.1613	16.13	7.92

Test Graphs

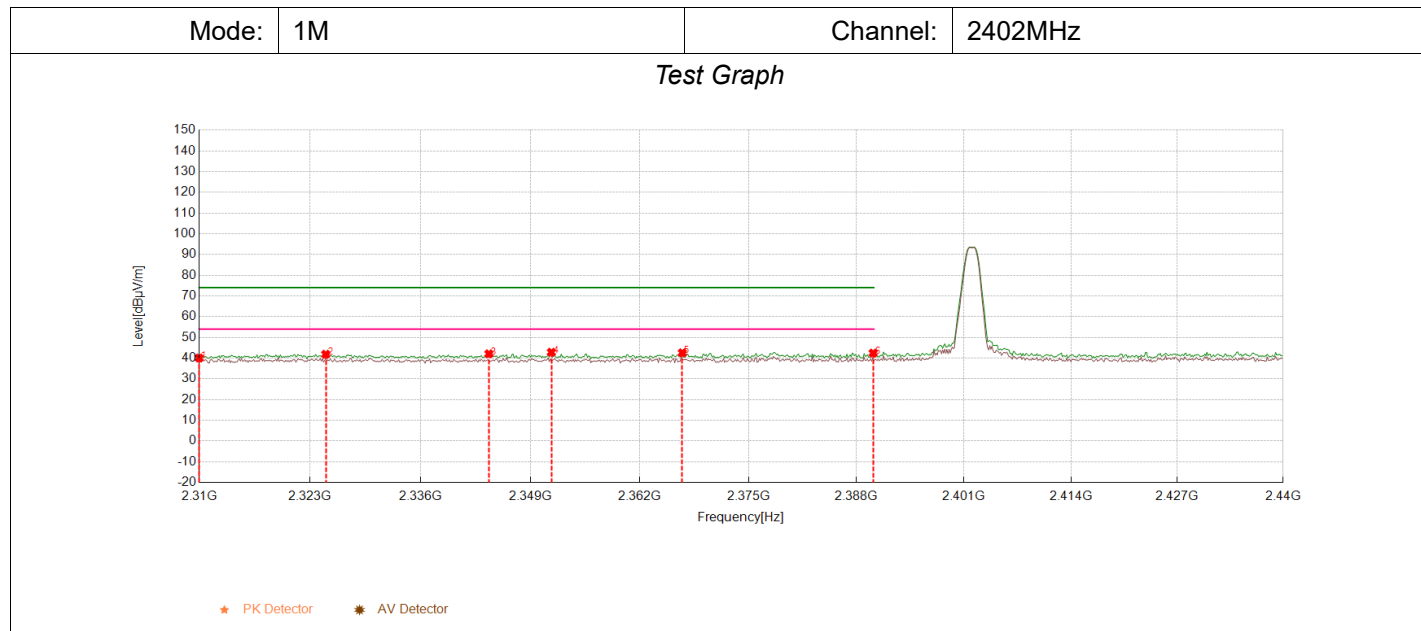






Appendix H: Emissions in Restricted Bands

Test Result



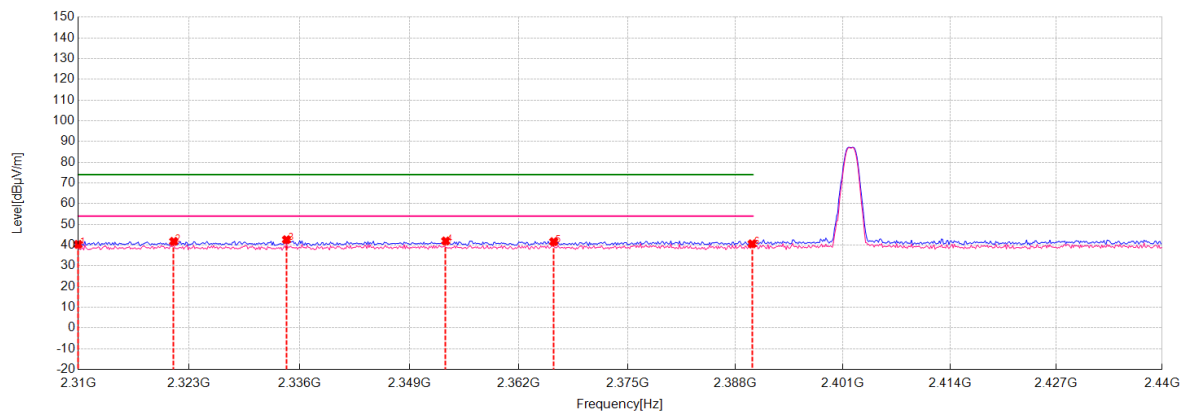
Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2310.0000	37.38	40.05	2.67	74.00	33.95	150	45	PK	Vertical	PASS
2	2324.8200	39.00	41.85	2.85	74.00	32.15	150	3	PK	Vertical	PASS
3	2344.0600	39.11	42.07	2.96	74.00	31.93	150	0	PK	Vertical	PASS
4	2351.4700	39.83	42.82	2.99	74.00	31.18	150	356	PK	Vertical	PASS
5	2367.0700	39.55	42.54	2.99	74.00	31.46	150	128	PK	Vertical	PASS
6	2390.0000	39.47	42.42	2.95	74.00	31.58	150	104	PK	Vertical	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Mode: 1M

Channel: 2402MHz

Test Graph


★ PK Detector ★ AV Detector

Suspected Data List

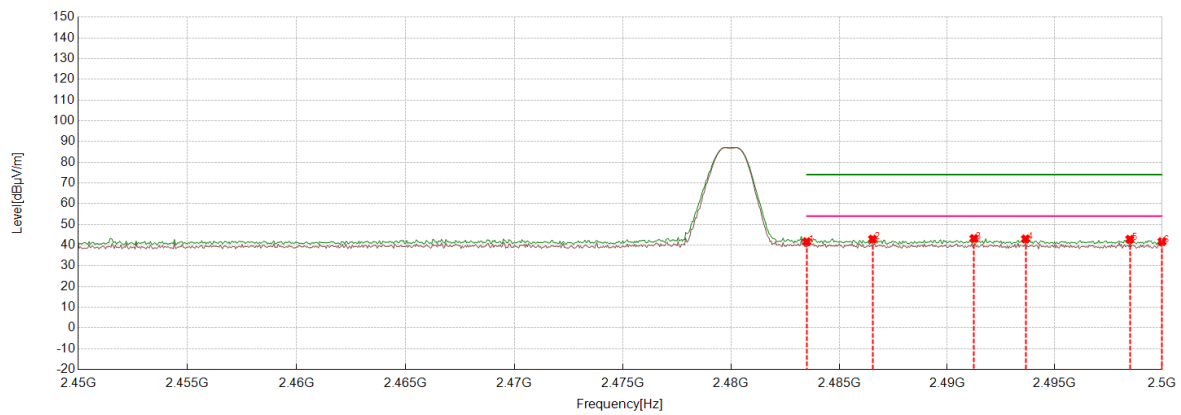
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2310.0000	37.66	40.33	2.67	74.00	33.67	150	320	PK	Horizontal	PASS
2	2321.1800	38.91	41.81	2.90	74.00	32.19	150	287	PK	Horizontal	PASS
3	2334.4400	39.82	42.62	2.80	74.00	31.38	150	47	PK	Horizontal	PASS
4	2353.2900	39.02	41.98	2.96	74.00	32.02	150	4	PK	Horizontal	PASS
5	2366.1600	38.65	41.65	3.00	74.00	32.35	150	249	PK	Horizontal	PASS
6	2390.0000	37.68	40.63	2.95	74.00	33.37	150	47	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 1M

Channel: 2480MHz

Test Graph


★ PK Detector ★ AV Detector

Suspected Data List

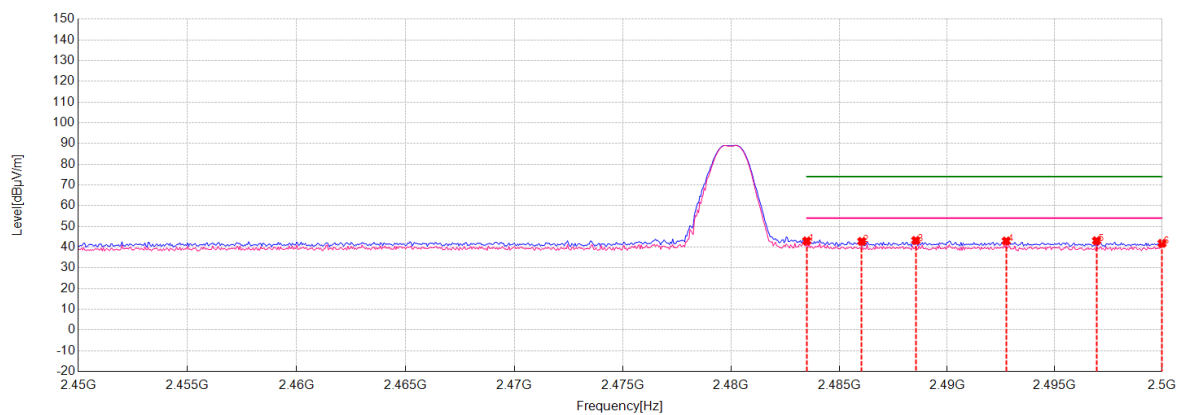
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2483.5000	38.21	41.67	3.46	74.00	32.33	150	226	PK	Vertical	PASS
2	2486.5500	39.39	42.90	3.51	74.00	31.10	150	141	PK	Vertical	PASS
3	2491.2500	39.66	43.21	3.55	74.00	30.79	150	138	PK	Vertical	PASS
4	2493.6500	39.38	42.97	3.59	74.00	31.03	150	104	PK	Vertical	PASS
5	2498.5000	39.30	42.84	3.54	74.00	31.16	150	306	PK	Vertical	PASS
6	2500.0000	38.17	41.67	3.50	74.00	32.33	150	6	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 1M

Channel: 2480MHz

Test Graph


★ PK Detector ★ AV Detector

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2483.5000	39.51	42.97	3.46	74.00	31.03	150	172	PK	Horizontal	PASS
2	2486.0500	39.29	42.76	3.47	74.00	31.24	150	37	PK	Horizontal	PASS
3	2488.5500	39.72	43.23	3.51	74.00	30.77	150	179	PK	Horizontal	PASS
4	2492.7500	39.38	42.95	3.57	74.00	31.05	150	328	PK	Horizontal	PASS
5	2496.9500	39.48	43.07	3.59	74.00	30.93	150	341	PK	Horizontal	PASS
6	2500.0000	38.29	41.79	3.50	74.00	32.21	150	182	PK	Horizontal	PASS

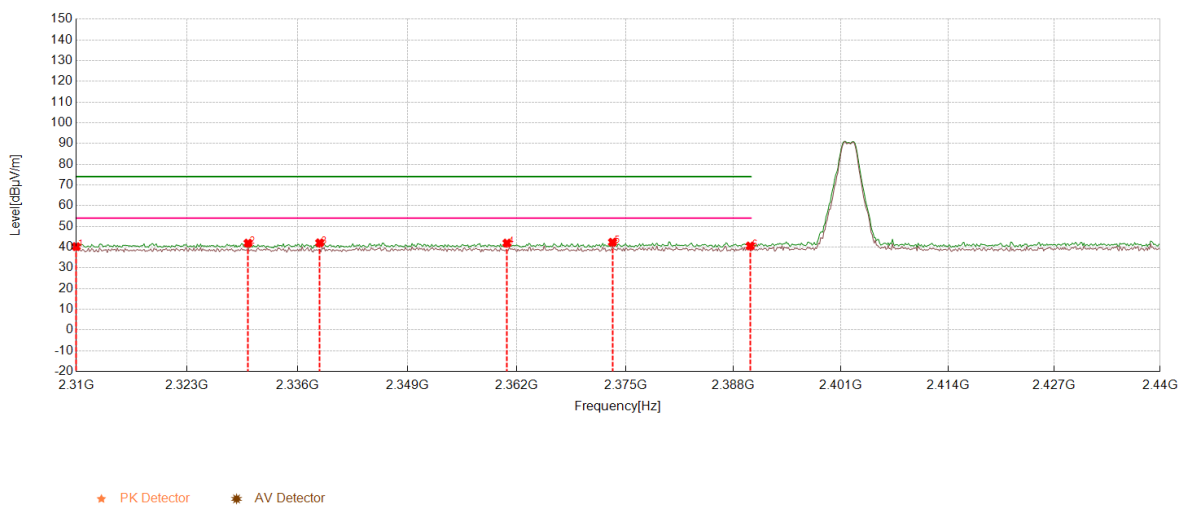
Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 2M

Channel: 2402MHz

Test Graph



Suspected Data List

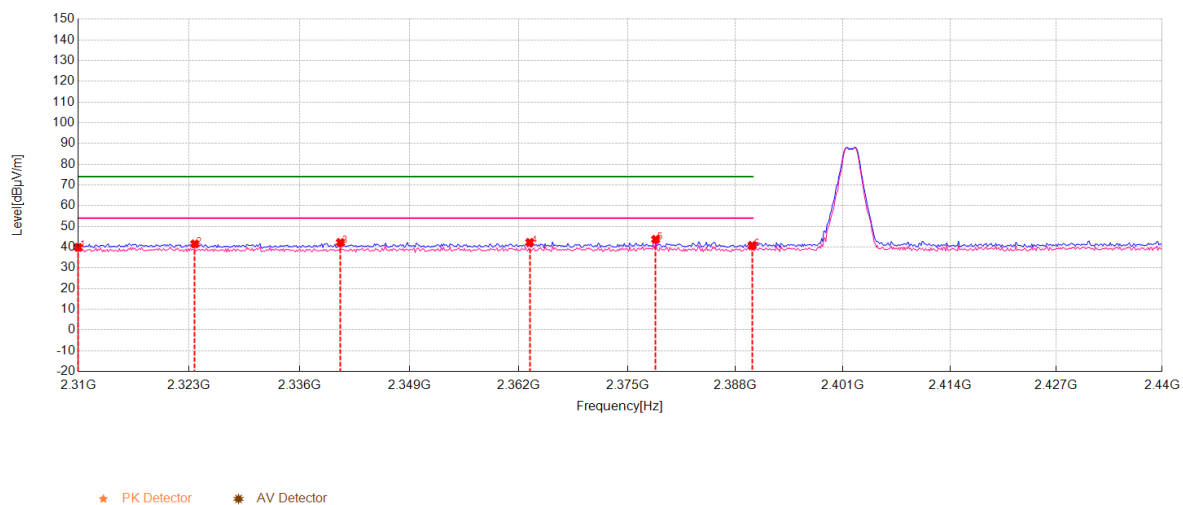
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2310.0000	37.55	40.22	2.67	74.00	33.78	150	228	PK	Vertical	PASS
2	2330.1500	39.10	41.91	2.81	74.00	32.09	150	197	PK	Vertical	PASS
3	2338.6000	39.24	42.06	2.82	74.00	31.94	150	157	PK	Vertical	PASS
4	2360.8300	39.01	41.94	2.93	74.00	32.06	150	294	PK	Vertical	PASS
5	2373.4400	39.35	42.35	3.00	74.00	31.65	150	288	PK	Vertical	PASS
6	2390.0000	37.58	40.53	2.95	74.00	33.47	150	257	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 2M

Channel: 2402MHz

Test Graph

Suspected Data List

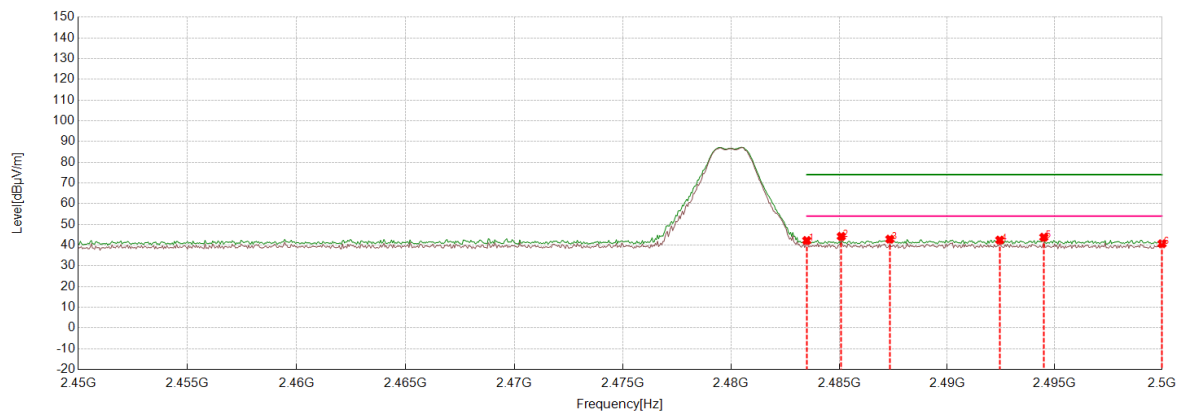
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2310.0000	37.21	39.88	2.67	74.00	34.12	150	4	PK	Horizontal	PASS
2	2323.6500	38.68	41.54	2.86	74.00	32.46	150	4	PK	Horizontal	PASS
3	2340.8100	39.37	42.23	2.86	74.00	31.77	150	75	PK	Horizontal	PASS
4	2363.3000	39.34	42.26	2.92	74.00	31.74	150	154	PK	Horizontal	PASS
5	2378.3800	40.67	43.74	3.07	74.00	30.26	150	69	PK	Horizontal	PASS
6	2390.0000	37.87	40.82	2.95	74.00	33.18	150	307	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 2M

Channel: 2480MHz

Test Graph


★ PK Detector ★ AV Detector

Suspected Data List

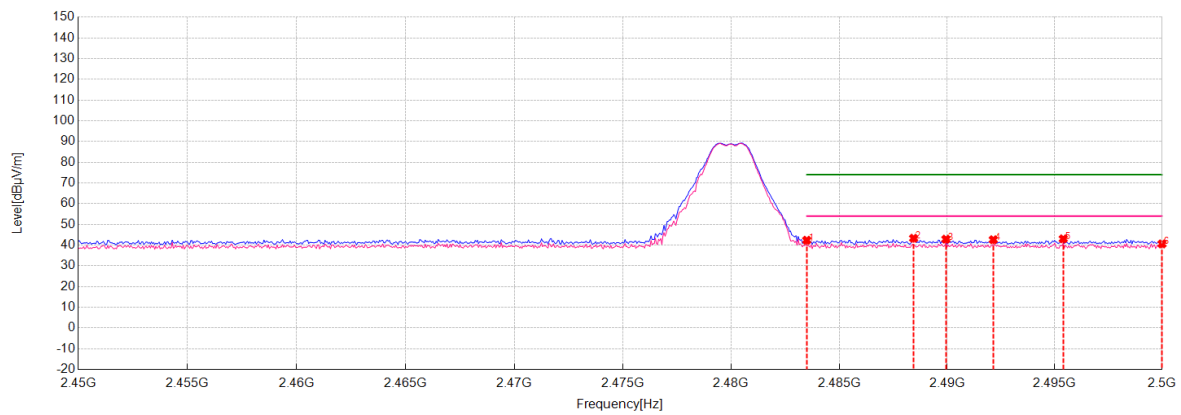
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2483.5000	38.76	42.22	3.46	74.00	31.78	150	248	PK	Vertical	PASS
2	2485.1000	40.68	44.21	3.53	74.00	29.79	150	58	PK	Vertical	PASS
3	2487.3500	39.36	42.87	3.51	74.00	31.13	150	106	PK	Vertical	PASS
4	2492.4500	38.87	42.43	3.56	74.00	31.57	150	235	PK	Vertical	PASS
5	2494.5000	40.23	43.80	3.57	74.00	30.20	150	43	PK	Vertical	PASS
6	2500.0000	37.15	40.65	3.50	74.00	33.35	150	119	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 2M

Channel: 2480MHz

Test Graph


★ PK Detector ★ AV Detector

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	2483.5000	38.89	42.35	3.46	74.00	31.65	150	174	PK	Horizontal	PASS
2	2488.4500	39.80	43.30	3.50	74.00	30.70	150	189	PK	Horizontal	PASS
3	2489.9500	39.28	42.85	3.57	74.00	31.15	150	285	PK	Horizontal	PASS
4	2492.1500	39.03	42.59	3.56	74.00	31.41	150	201	PK	Horizontal	PASS
5	2495.4000	39.47	43.03	3.56	74.00	30.97	150	257	PK	Horizontal	PASS
6	2500.0000	37.08	40.58	3.50	74.00	33.42	150	204	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

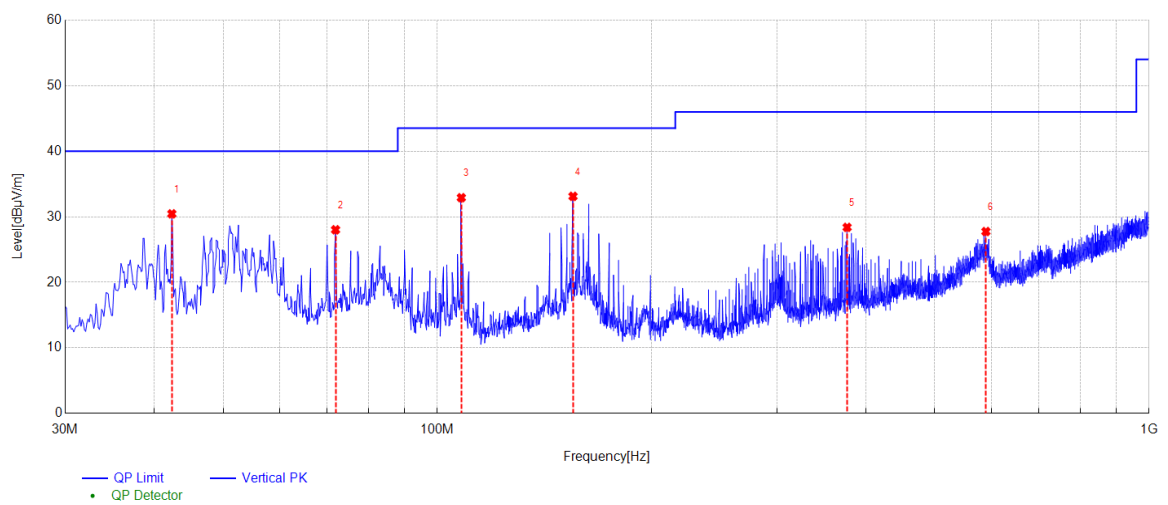
Appendix I: Spurious emissions

Test Result

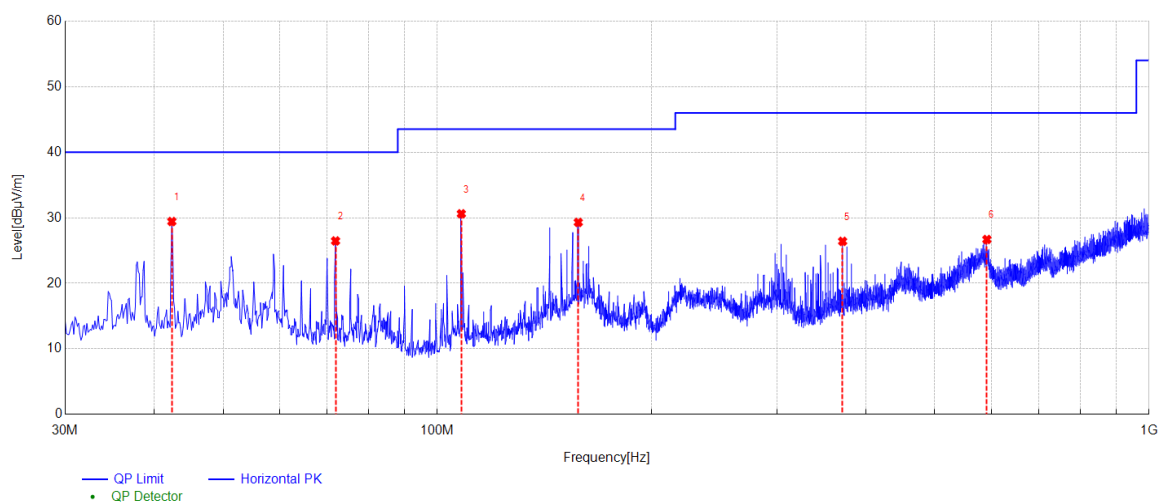
Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

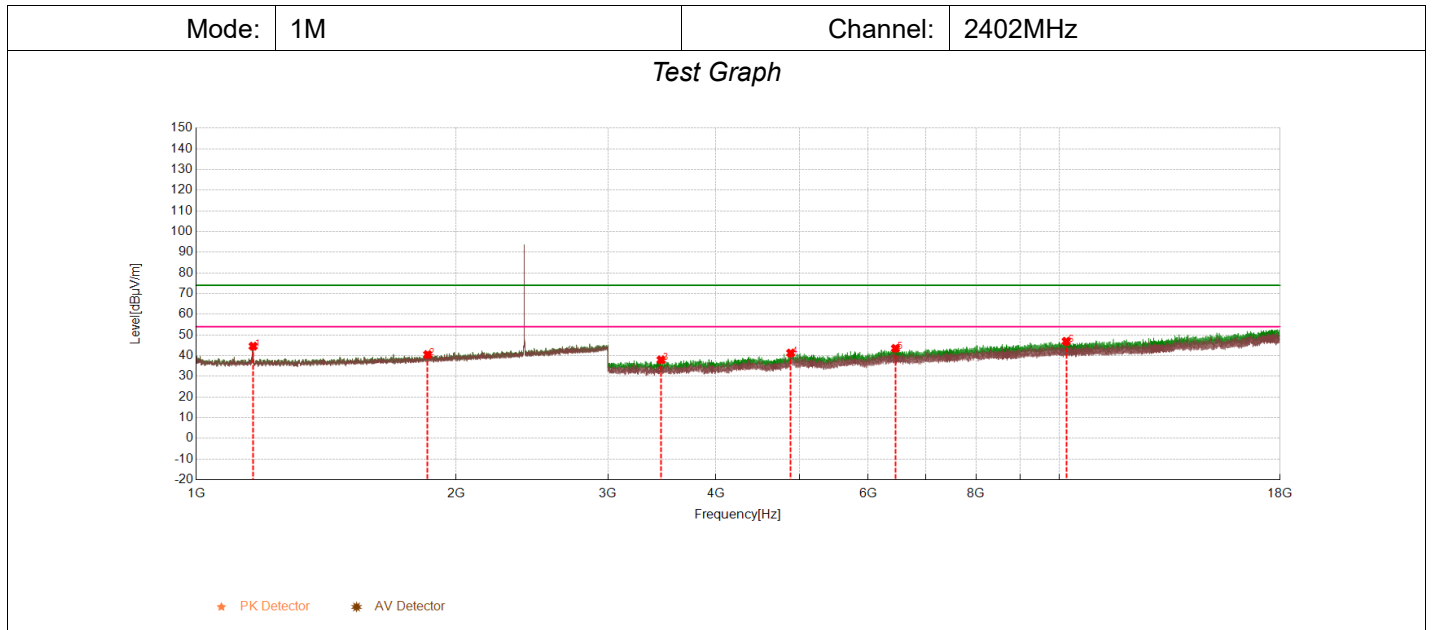
During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels. The test data of the worst-case (1M-2402MHz) condition was recorded in this report. The measurement results above 18GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz are reported.



NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	42.3675	30.45	-15.88	40.00	9.55	100	52	Vertical	PASS
2	71.9525	28.02	-18.93	40.00	11.98	100	210	Vertical	PASS
3	108.085	32.91	-18.78	43.50	10.59	100	108	Vertical	PASS
4	155.130	33.12	-15.80	43.50	10.38	100	102	Vertical	PASS
5	376.532	28.39	-14.07	46.00	17.61	100	28	Vertical	PASS
6	589.932	27.75	-8.71	46.00	18.25	100	59	Vertical	PASS



NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	42.3675	29.43	-15.88	40.00	10.57	100	348	Horizontal	PASS
2	71.9525	26.47	-18.93	40.00	13.53	100	348	Horizontal	PASS
3	108.085	30.61	-18.78	43.50	12.89	100	348	Horizontal	PASS
4	157.797	29.30	-15.81	43.50	14.20	100	348	Horizontal	PASS
5	371.076	26.41	-14.32	46.00	19.59	100	1	Horizontal	PASS
6	591.872	26.69	-8.79	46.00	19.31	100	180	Horizontal	PASS



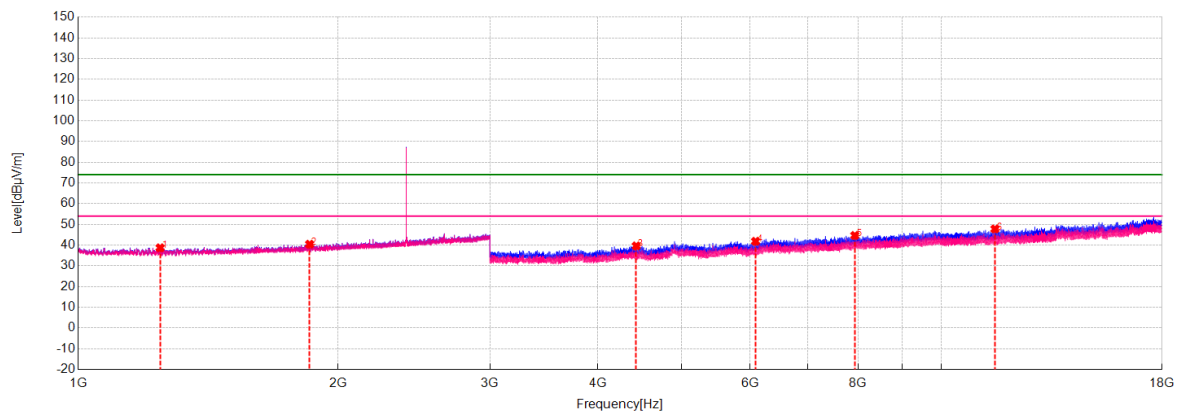
Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1164.2000	44.79	44.56	-0.23	74.00	29.44	150	71	PK	Vertical	PASS
2	1854.2000	39.25	40.50	1.25	74.00	33.50	150	165	PK	Vertical	PASS
3	3455.0000	58.11	37.94	-20.17	74.00	36.06	150	98	PK	Vertical	PASS
4	4882.0000	55.25	41.25	-14.00	74.00	32.75	150	123	PK	Vertical	PASS
5	6455.0000	53.69	43.49	-10.20	74.00	30.51	150	73	PK	Vertical	PASS
6	10178.500	51.28	46.91	-4.37	74.00	27.09	150	10	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 1M

Channel: 2402MHz

Test Graph


★ PK Detector ★ AV Detector

Suspected Data List

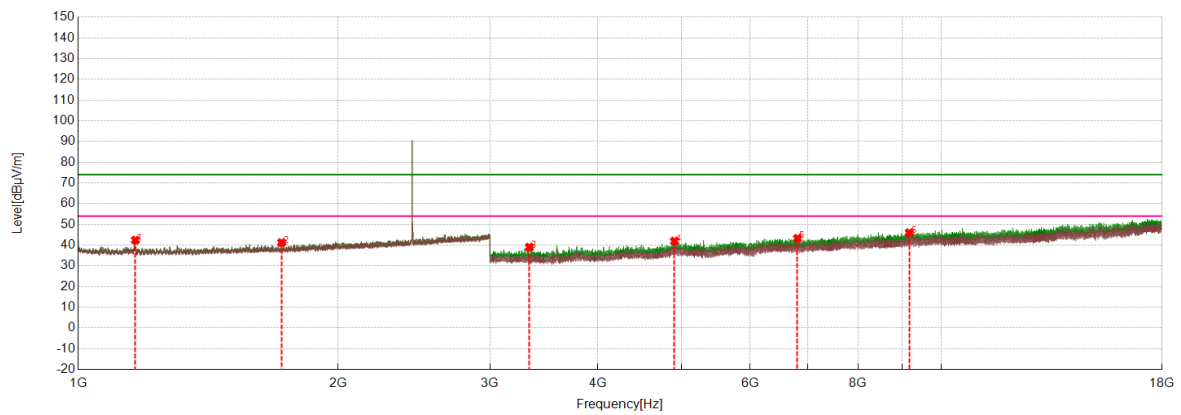
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1244.4000	39.18	38.69	-0.49	74.00	35.31	150	160	PK	Horizontal	PASS
2	1853.8000	39.16	40.42	1.26	74.00	33.58	150	8	PK	Horizontal	PASS
3	4429.5000	55.46	39.61	-15.85	74.00	34.39	150	128	PK	Horizontal	PASS
4	6089.0000	53.62	41.83	-11.79	74.00	32.17	150	166	PK	Horizontal	PASS
5	7933.5000	52.48	44.64	-7.84	74.00	29.36	150	282	PK	Horizontal	PASS
6	11529.000	50.09	47.79	-2.30	74.00	26.21	150	289	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 1M

Channel: 2440MHz

Test Graph


★ PK Detector ★ AV Detector

Suspected Data List

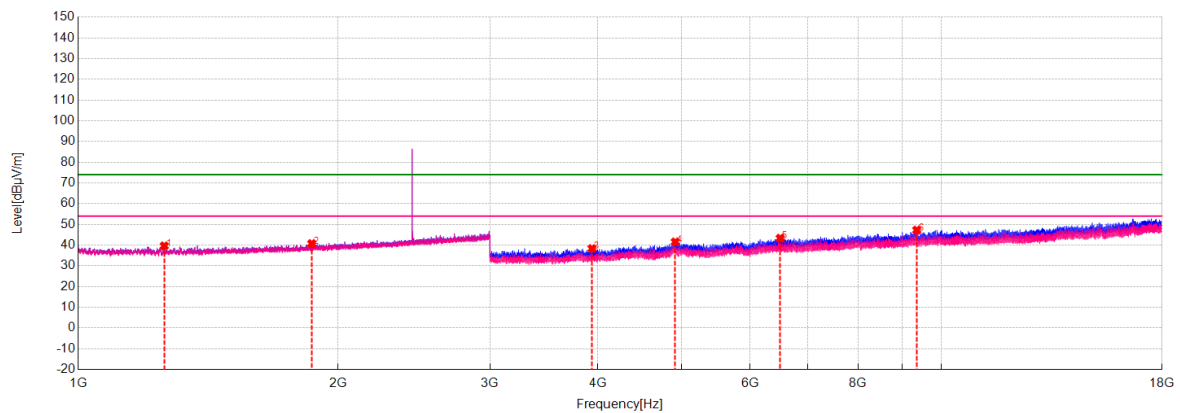
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1165.0000	42.60	42.40	-0.20	74.00	31.60	150	74	PK	Vertical	PASS
2	1720.4000	40.58	41.22	0.64	74.00	32.78	150	26	PK	Vertical	PASS
3	3331.0000	59.58	39.00	-20.58	74.00	35.00	150	78	PK	Vertical	PASS
4	4905.5000	55.23	41.93	-13.30	74.00	32.07	150	255	PK	Vertical	PASS
5	6809.0000	53.74	43.29	-10.45	74.00	30.71	150	268	PK	Vertical	PASS
6	9176.5000	51.69	45.97	-5.72	74.00	28.03	150	230	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 1M

Channel: 2440MHz

Test Graph


★ PK Detector ★ AV Detector

Suspected Data List

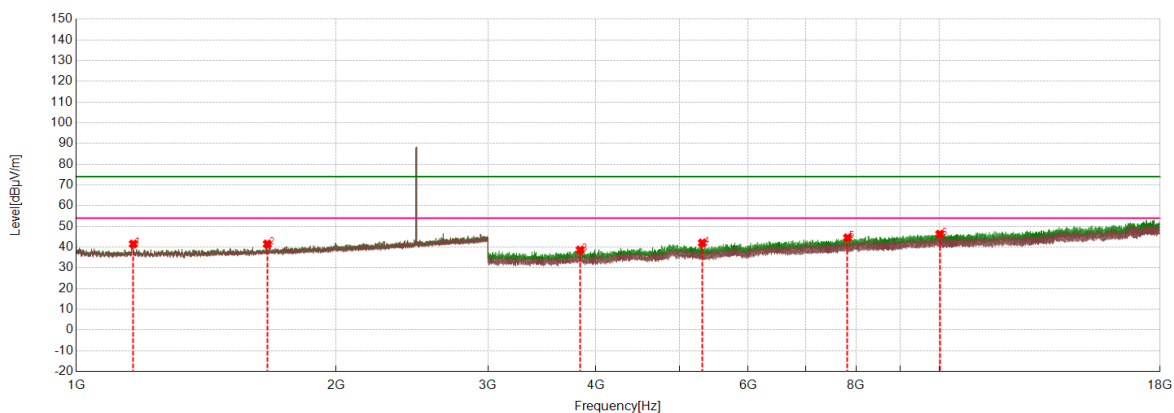
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1258.2000	40.08	39.62	-0.46	74.00	34.38	150	178	PK	Horizontal	PASS
2	1864.6000	39.41	40.72	1.31	74.00	33.28	150	54	PK	Horizontal	PASS
3	3936.5000	56.26	38.33	-17.93	74.00	35.67	150	249	PK	Horizontal	PASS
4	4915.0000	54.84	41.53	-13.31	74.00	32.47	150	28	PK	Horizontal	PASS
5	6502.0000	53.49	43.34	-10.15	74.00	30.66	150	111	PK	Horizontal	PASS
6	9358.5000	52.24	47.24	-5.00	74.00	26.76	150	337	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 1M

Channel: 2480MHz

Test Graph

Suspected Data List

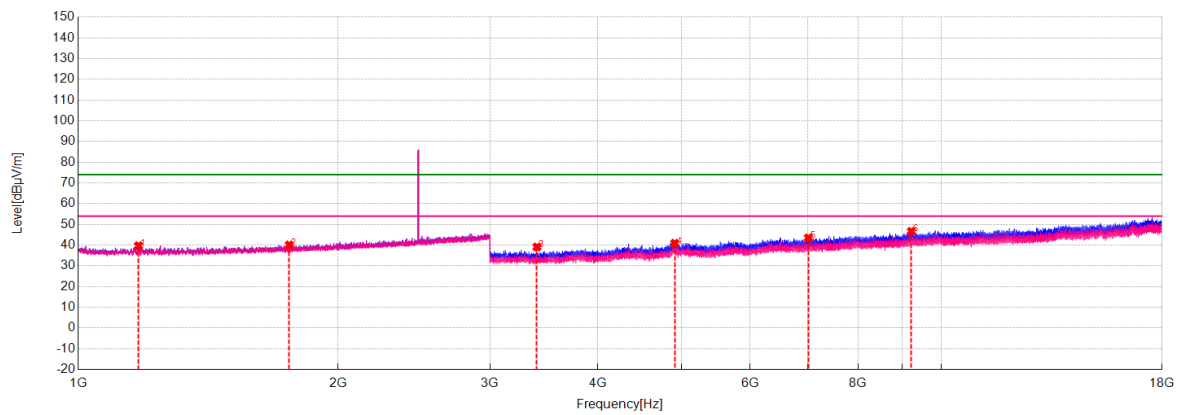
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1164.8000	41.75	41.53	-0.22	74.00	32.47	150	81	PK	Vertical	PASS
2	1665.0000	41.08	41.49	0.41	74.00	32.51	150	106	PK	Vertical	PASS
3	3835.0000	56.27	38.61	-17.66	74.00	35.39	150	242	PK	Vertical	PASS
4	5311.5000	55.04	42.00	-13.04	74.00	32.00	150	45	PK	Vertical	PASS
5	7824.5000	53.03	44.50	-8.53	74.00	29.50	150	217	PK	Vertical	PASS
6	10004.000	50.70	46.26	-4.44	74.00	27.74	150	33	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 1M

Channel: 2480MHz

Test Graph


★ PK Detector ★ AV Detector

Suspected Data List

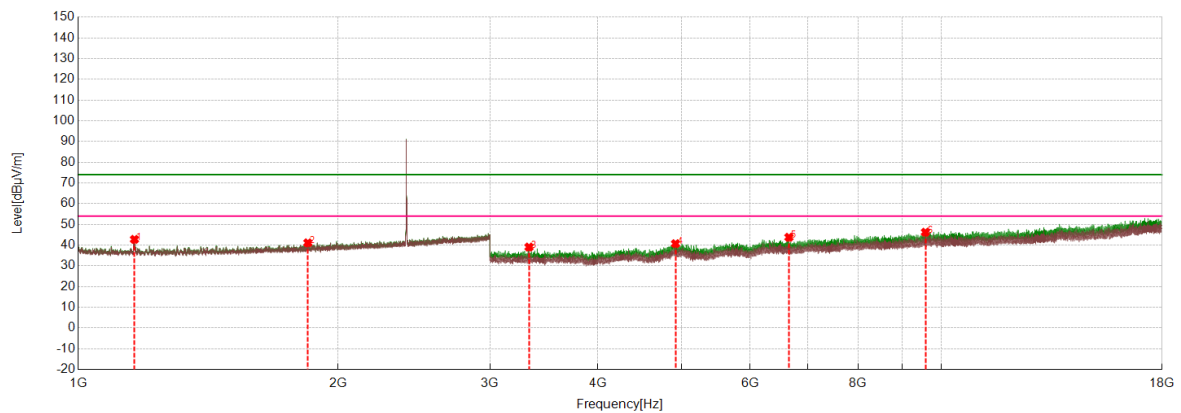
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1174.6000	39.86	39.72	-0.14	74.00	34.28	150	360	PK	Horizontal	PASS
2	1756.0000	39.27	40.08	0.81	74.00	33.92	150	195	PK	Horizontal	PASS
3	3399.0000	58.68	39.11	-19.57	74.00	34.89	150	331	PK	Horizontal	PASS
4	4907.5000	54.10	40.88	-13.22	74.00	33.12	150	338	PK	Horizontal	PASS
5	7010.0000	52.58	43.48	-9.10	74.00	30.52	150	274	PK	Horizontal	PASS
6	9224.0000	51.62	46.68	-4.94	74.00	27.32	150	193	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 2M

Channel: 2402MHz

Test Graph


★ PK Detector ★ AV Detector

Suspected Data List

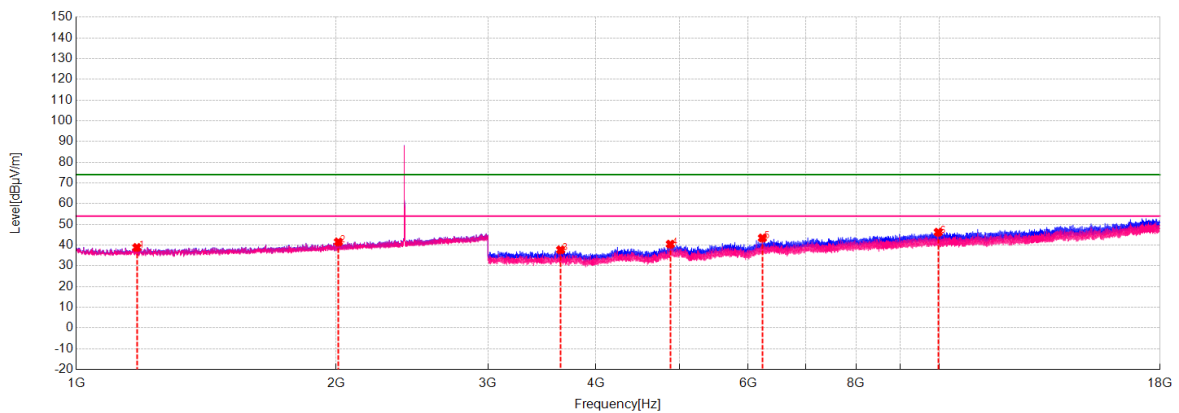
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1162.0000	43.06	42.77	-0.29	74.00	31.23	150	112	PK	Vertical	PASS
2	1845.0000	39.79	41.10	1.31	74.00	32.90	150	13	PK	Vertical	PASS
3	3328.0000	59.57	39.05	-20.52	74.00	34.95	150	68	PK	Vertical	PASS
4	4918.5000	54.13	40.68	-13.45	74.00	33.32	150	244	PK	Vertical	PASS
5	6655.5000	53.95	43.78	-10.17	74.00	30.22	150	68	PK	Vertical	PASS
6	9577.0000	51.00	46.22	-4.78	74.00	27.78	150	302	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 2M

Channel: 2402MHz

Test Graph


★ PK Detector ✱ AV Detector

Suspected Data List

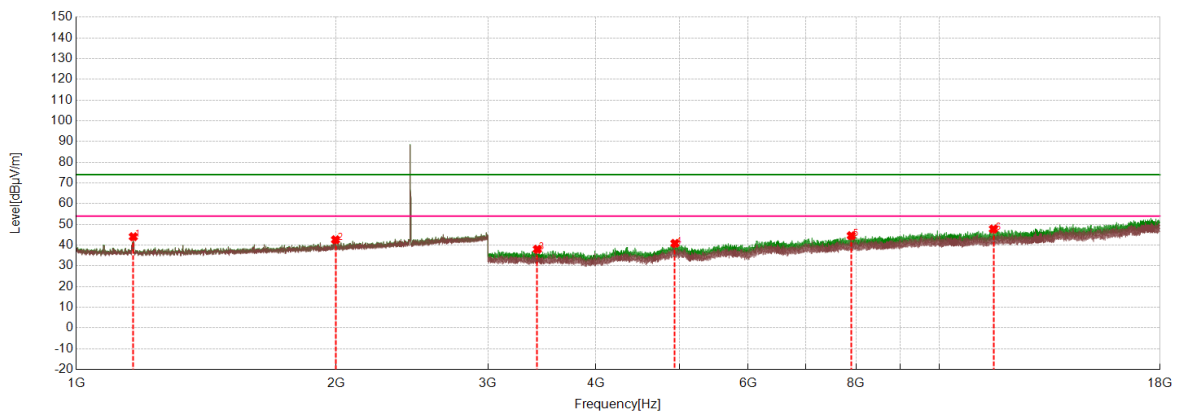
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1175.8000	39.00	38.85	-0.15	74.00	35.15	150	8	PK	Horizontal	PASS
2	2012.4000	39.67	41.51	1.84	74.00	32.49	150	136	PK	Horizontal	PASS
3	3640.0000	57.07	37.70	-19.37	74.00	36.30	150	232	PK	Horizontal	PASS
4	4877.5000	54.57	40.44	-14.13	74.00	33.56	150	213	PK	Horizontal	PASS
5	6234.0000	53.70	43.42	-10.28	74.00	30.58	150	359	PK	Horizontal	PASS
6	9963.0000	50.23	46.23	-4.00	74.00	27.77	150	67	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 2M

Channel: 2440MHz

Test Graph

Suspected Data List

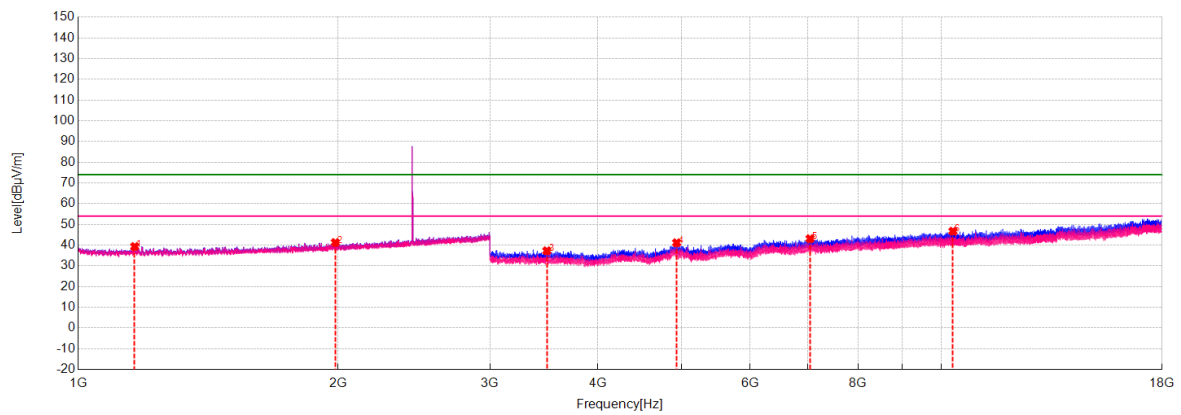
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1164.8000	44.27	44.05	-0.22	74.00	29.95	150	102	PK	Vertical	PASS
2	1997.2000	40.93	42.60	1.67	74.00	31.40	150	25	PK	Vertical	PASS
3	3421.0000	58.20	38.00	-20.20	74.00	36.00	150	111	PK	Vertical	PASS
4	4937.5000	54.78	40.83	-13.95	74.00	33.17	150	186	PK	Vertical	PASS
5	7901.5000	52.74	44.56	-8.18	74.00	29.44	150	198	PK	Vertical	PASS
6	11543.000	50.06	47.76	-2.30	74.00	26.24	150	186	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 2M

Channel: 2440MHz

Test Graph

Suspected Data List

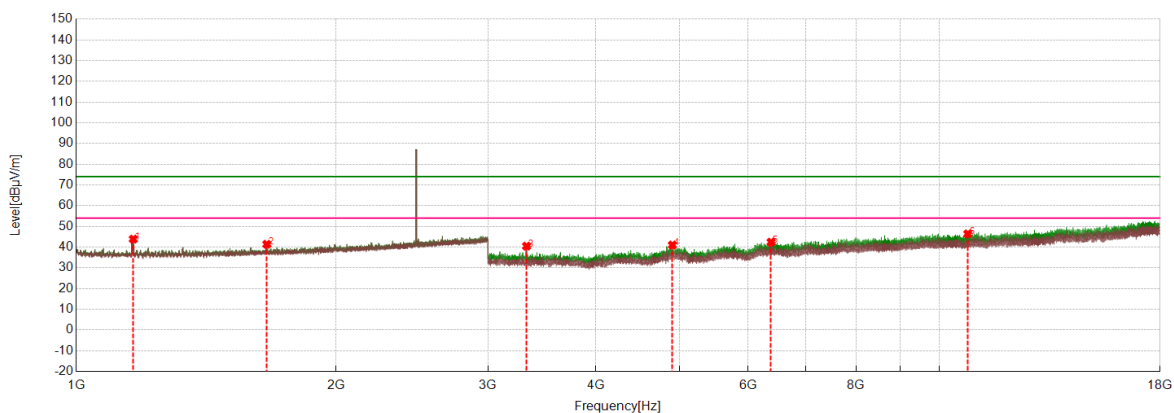
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1162.8000	39.56	39.29	-0.27	74.00	34.71	150	307	PK	Horizontal	PASS
2	1985.6000	39.42	41.25	1.83	74.00	32.75	150	253	PK	Horizontal	PASS
3	3490.0000	57.04	37.24	-19.80	74.00	36.76	150	168	PK	Horizontal	PASS
4	4933.5000	55.07	41.12	-13.95	74.00	32.88	150	80	PK	Horizontal	PASS
5	7041.5000	52.75	43.10	-9.65	74.00	30.90	150	269	PK	Horizontal	PASS
6	10307.000	50.74	46.72	-4.02	74.00	27.28	150	360	PK	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 2M

Channel: 2480MHz

Test Graph

Suspected Data List

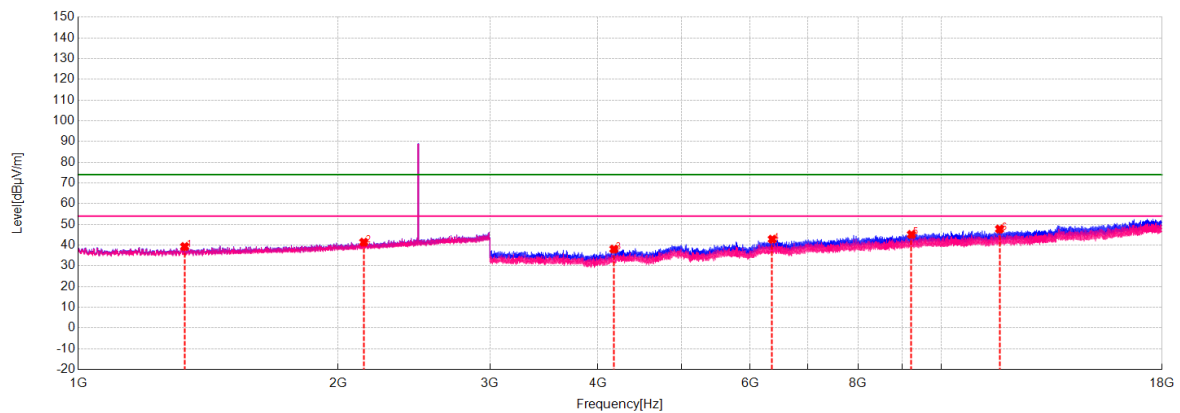
NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1164.6000	44.08	43.86	-0.22	74.00	30.14	150	48	PK	Vertical	PASS
2	1662.8000	40.92	41.37	0.45	74.00	32.63	150	96	PK	Vertical	PASS
3	3324.0000	60.80	40.46	-20.34	74.00	33.54	150	105	PK	Vertical	PASS
4	4903.5000	54.38	41.00	-13.38	74.00	33.00	150	17	PK	Vertical	PASS
5	6380.0000	52.49	42.40	-10.09	74.00	31.60	150	4	PK	Vertical	PASS
6	10781.000	49.55	46.39	-3.16	74.00	27.61	150	213	PK	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode: 2M

Channel: 2480MHz

Test Graph

Suspected Data List

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Polarity	Verdict
1	1328.6000	39.85	39.29	-0.56	74.00	34.71	150	326	PK	Horizontal	PASS
2	2141.8000	39.24	41.41	2.17	74.00	32.59	150	316	PK	Horizontal	PASS
3	4173.5000	55.34	38.07	-17.27	74.00	35.93	150	220	PK	Horizontal	PASS
4	6366.5000	53.32	42.84	-10.48	74.00	31.16	150	252	PK	Horizontal	PASS
5	9227.5000	50.08	45.14	-4.94	74.00	28.86	150	182	PK	Horizontal	PASS
6	11672.000	49.80	47.75	-2.05	74.00	26.25	150	124	PK	Horizontal	PASS

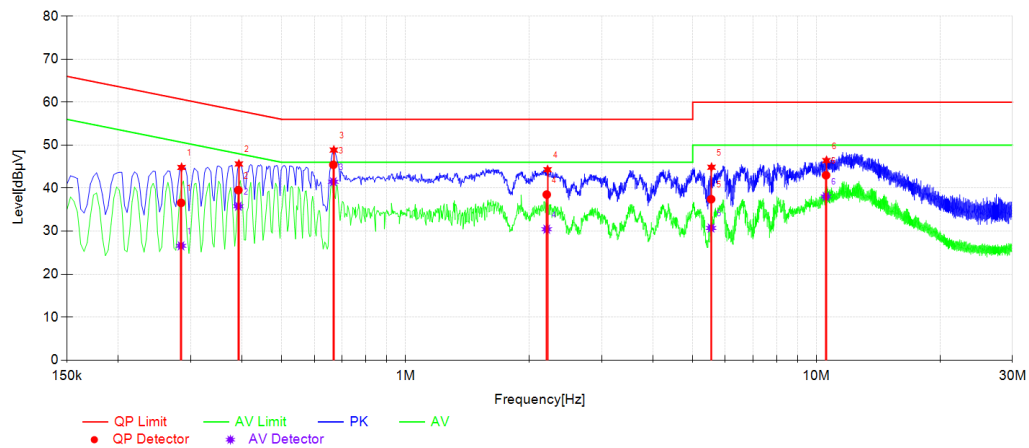
Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Appendix J: Conducted emission AC power port

Test Result

During the test, the Conducted emission was performed in all modes with all channels. The test data of the worst-case (1M-2402MHz) condition was recorded in this report.

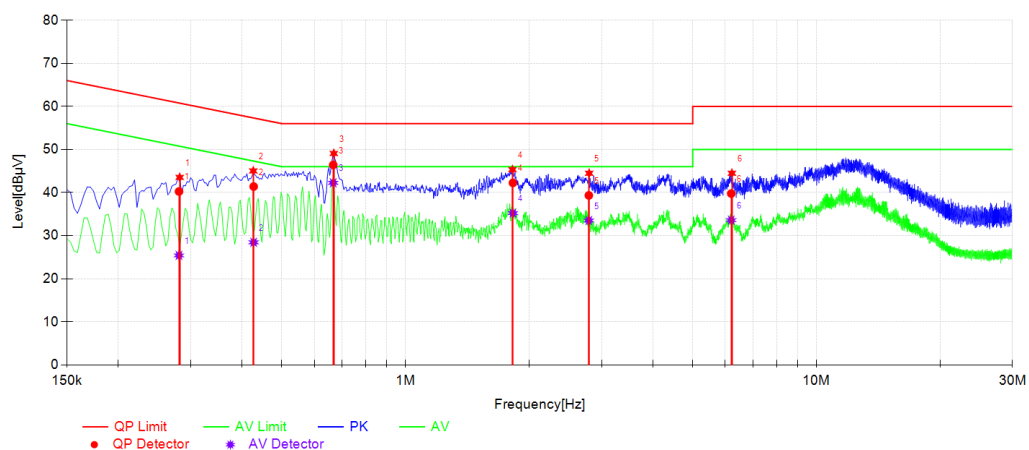


Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type	Verdict
1	0.2842	10.32	26.27	36.59	60.69	24.10	16.27	26.59	50.69	24.10	L1	PASS
2	0.3918	10.29	29.25	39.54	58.03	18.49	25.50	35.79	48.03	12.24	L1	PASS
3	0.6672	10.26	35.17	45.43	56.00	10.57	31.22	41.48	46.00	4.52	L1	PASS
4	2.2062	10.28	28.23	38.51	56.00	17.49	20.18	30.46	46.00	15.54	L1	PASS
5	5.5428	10.41	27.02	37.43	60.00	22.57	20.32	30.73	50.00	19.27	L1	PASS
6	10.5537	10.55	32.46	43.01	60.00	16.99	27.51	38.06	50.00	11.94	L1	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type	Verdict
1	0.2809	10.35	29.91	40.26	60.79	20.53	15.07	25.42	50.79	25.37	N	PASS
2	0.4269	10.35	31.06	41.41	57.31	15.90	18.11	28.46	47.31	18.85	N	PASS
3	0.6666	10.36	36.07	46.43	56.00	9.57	31.91	42.27	46.00	3.73	N	PASS
4	1.8252	10.46	31.80	42.26	56.00	13.74	24.77	35.23	46.00	10.77	N	PASS
5	2.7930	10.49	28.86	39.35	56.00	16.65	23.03	33.52	46.00	12.48	N	PASS
6	6.2041	10.51	29.27	39.78	60.00	20.22	23.10	33.61	50.00	16.39	N	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level