




BLE_2M-Ant1-2440-0~Reference-PASS




BLE_2M-Ant1-2440-30~1000-PASS

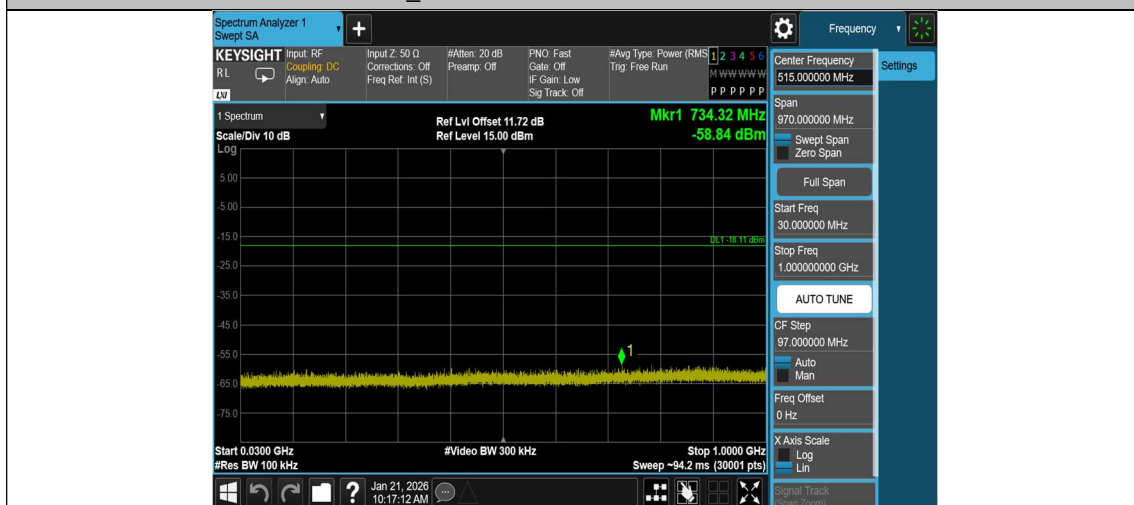

BLE_2M-Ant1-2440-1000~26500-PASS



BLE_2M-Ant1-2480-0~Reference-PASS

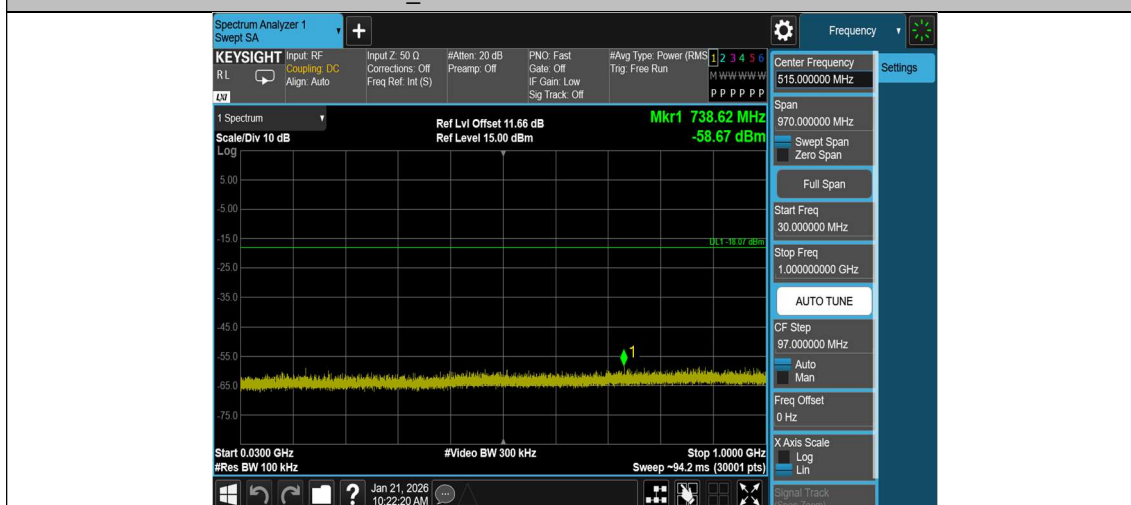

BLE_2M-Ant1-2480-30~1000-PASS



BLE_2M-Ant1-2480-1000~26500-PASS

Appendix G: Duty Cycle

Test Result

TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	0.39	0.63	61.90	2.08
BLE_1M	Ant1	2440	0.39	0.63	61.90	2.08
BLE_1M	Ant1	2480	0.39	0.63	61.90	2.08
BLE_2M	Ant1	2402	0.20	0.63	31.75	4.98
BLE_2M	Ant1	2440	0.20	0.63	31.75	4.98
BLE_2M	Ant1	2480	0.20	0.63	31.75	4.98

Test Graphs





NTNV-BLE_2M-Ant1-2402



NTNV-BLE_2M-Ant1-2440



NTNV-BLE_2M-Ant1-2480

Appendix H: Emissions in Restricted Bands

Test Result

Mode:	BLE 1M-2402
-------	-------------

Final Data List														
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	3.12	27.75	30.87	74	43.13	27.15	30.27	54.00	23.73	150	54	Vertical	PASS
2	2321.36	3.33	27.83	31.16	74	42.84	27.26	30.59	54.00	23.41	150	60	Vertical	PASS
3	2333.76	3.26	27.91	31.17	74	42.83	27.30	30.56	54.00	23.44	150	220	Vertical	PASS
4	2354.4	3.52	27.98	31.5	74	42.5	27.38	30.90	54.00	23.10	150	187	Vertical	PASS
5	2365.6	3.66	27.64	31.3	74	42.7	27.05	30.71	54.00	23.29	150	190	Vertical	PASS
6	2390	4.38	27.43	31.81	74	42.19	27.34	31.72	54.00	22.28	150	357	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List														
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	3.12	27.68	30.80	74.00	43.20	27.12	30.24	54.00	23.76	150	52	Horizontal	PASS
2	2320.72	3.34	27.84	31.18	74.00	42.82	27.29	30.63	54.00	23.37	150	10	Horizontal	PASS
3	2335.92	3.27	27.89	31.16	74.00	42.84	27.29	30.56	54.00	23.44	150	135	Horizontal	PASS
4	2356.4	3.50	27.76	31.26	74.00	42.74	27.20	30.70	54.00	23.30	150	177	Horizontal	PASS
5	2378.08	4.06	27.64	31.70	74.00	42.30	27.02	31.08	54.00	22.92	150	61	Horizontal	PASS
6	2390	4.38	27.93	32.31	74.00	41.69	27.32	31.70	54.00	22.30	150	207	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 1M-2480

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	3.46	35.23	38.69	74.00	35.31	34.61	38.07	54.00	15.93	150	185	Vertical	PASS
2	2486.734	3.52	35.64	39.16	74.00	34.84	34.68	38.20	54.00	15.80	150	244	Vertical	PASS
3	2490.2815	3.56	35.41	38.97	74.00	35.03	34.68	38.24	54.00	15.76	150	113	Vertical	PASS
4	2493.7135	3.59	35.94	39.53	74.00	34.47	34.73	38.32	54.00	15.68	150	25	Vertical	PASS
5	2497.096	3.59	35.26	38.85	74.00	35.15	34.60	38.19	54.00	15.81	150	213	Vertical	PASS
6	2500	3.50	35.32	38.82	74.00	35.18	34.56	38.06	54.00	15.94	150	275	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	3.46	35.32	38.78	74.00	35.22	34.69	38.15	54.00	15.85	150	217	Horizontal	PASS
2	2485.5295	3.50	35.12	38.62	74.00	35.38	34.65	38.15	54.00	15.85	150	200	Horizontal	PASS
3	2489.836	3.57	35.25	38.82	74.00	35.18	34.63	38.20	54.00	15.80	150	53	Horizontal	PASS
4	2494.225	3.58	35.22	38.80	74.00	35.20	34.65	38.23	54.00	15.77	150	14	Horizontal	PASS
5	2497.294	3.58	35.31	38.89	74.00	35.11	34.60	38.18	54.00	15.82	150	190	Horizontal	PASS
6	2500	3.50	35.36	38.86	74.00	35.14	34.63	38.13	54.00	15.87	150	213	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 2M-2402

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	3.12	38.06	41.18	74.00	32.82	35.08	38.20	54.00	15.80	150	253	Vertical	PASS
2	2317.92	3.30	38.87	42.17	74.00	31.83	36.86	40.16	54.00	13.84	150	230	Vertical	PASS
3	2338.32	3.28	38.55	41.83	74.00	32.17	35.52	38.80	54.00	15.20	150	63	Vertical	PASS
4	2350.64	3.55	38.21	41.76	74.00	32.24	35.28	38.83	54.00	15.17	150	202	Vertical	PASS
5	2371.76	3.83	38.38	42.21	74.00	31.79	36.70	40.53	54.00	13.47	150	230	Vertical	PASS
6	2390	4.38	37.29	41.67	74.00	32.33	35.86	40.24	54.00	13.76	150	220	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	3.12	37.41	40.53	74.00	33.47	35.48	38.60	54.00	15.40	150	264	Horizontal	PASS
2	2326.64	3.32	38.49	41.81	74.00	32.19	34.90	38.22	54.00	15.78	150	133	Horizontal	PASS
3	2340.88	3.34	40.02	43.36	74.00	30.64	38.33	41.67	54.00	12.33	150	123	Horizontal	PASS
4	2347.28	3.46	39.78	43.24	74.00	30.76	35.96	39.42	54.00	14.58	150	113	Horizontal	PASS
5	2365.12	3.68	38.88	42.56	74.00	31.44	35.64	39.32	54.00	14.68	150	271	Horizontal	PASS
6	2390	4.38	37.75	42.13	74.00	31.87	35.72	40.10	54.00	13.90	150	123	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 2M-2480

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	3.46	44.8	48.26	74.00	25.74	42.44	45.90	54.00	8.10	150	143	Vertical	PASS
2	2485.051	3.54	46.61	50.15	74.00	23.85	44.38	47.92	54.00	6.08	150	110	Vertical	PASS
3	2489.2255	3.56	46.85	50.41	74.00	23.59	44.28	47.84	54.00	6.16	150	60	Vertical	PASS
4	2492.1955	3.56	46.34	49.90	74.00	24.10	43.71	47.27	54.00	6.73	150	267	Vertical	PASS
5	2495.2645	3.56	45.73	49.29	74.00	24.71	44.21	47.77	54.00	6.23	150	43	Vertical	PASS
6	2500	3.50	44.37	47.87	74.00	26.13	42.84	46.34	54.00	7.66	150	87	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	3.46	44.87	48.33	74.00	25.67	42.27	45.73	54.00	8.27	150	167	Horizontal	PASS
2	2484.0775	3.46	49.38	52.84	74.00	21.16	47.48	50.94	54.00	3.06	150	123	Horizontal	PASS
3	2485.876	3.48	48.04	51.52	74.00	22.48	46.12	49.60	54.00	4.40	150	140	Horizontal	PASS
4	2491.6675	3.56	46.69	50.25	74.00	23.75	44.65	48.21	54.00	5.79	150	125	Horizontal	PASS
5	2495.974	3.56	46.04	49.60	74.00	24.40	42.89	46.45	54.00	7.55	150	352	Horizontal	PASS
6	2500	3.50	45.11	48.61	74.00	25.39	42.19	45.69	54.00	8.31	150	167	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Appendix I: Spurious emissions

Test Result


Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.


During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels. The test data of the worst-case (1M-2402MHz) condition was recorded in this report. The measurement results above 18GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz are reported.

After the pretest, 115C Antenna was selected as the worst antenna and recorded in the report.

Antenna: 115C

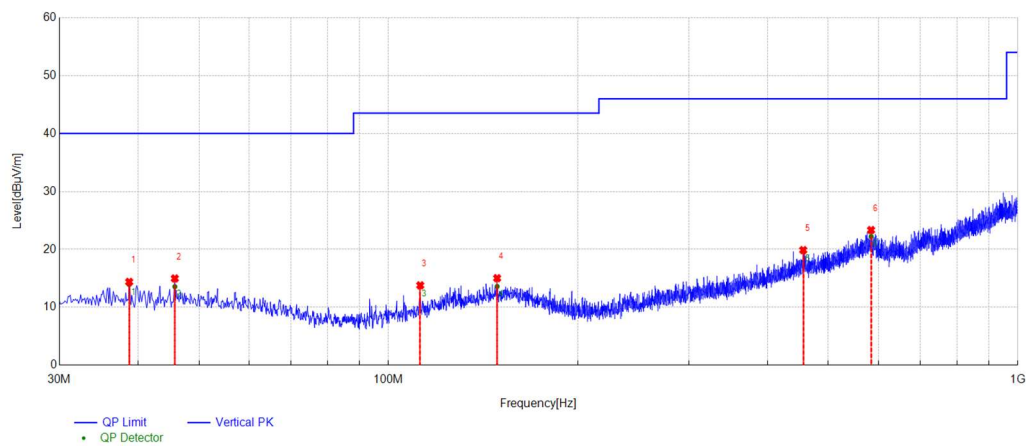

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	38.7300	14.40	-15.99	40.00	25.60	100	15	Vertical	PASS
2	45.7625	14.99	-15.91	40.00	25.01	100	0	Vertical	PASS
3	112.328	13.80	-18.48	43.50	29.70	100	2	Vertical	PASS
4	148.825	15.04	-15.96	43.50	28.46	100	186	Vertical	PASS
5	456.072	19.88	-11.56	46.00	26.12	100	167	Vertical	PASS
6	584.597	23.34	-9.04	46.00	22.66	100	350	Vertical	PASS

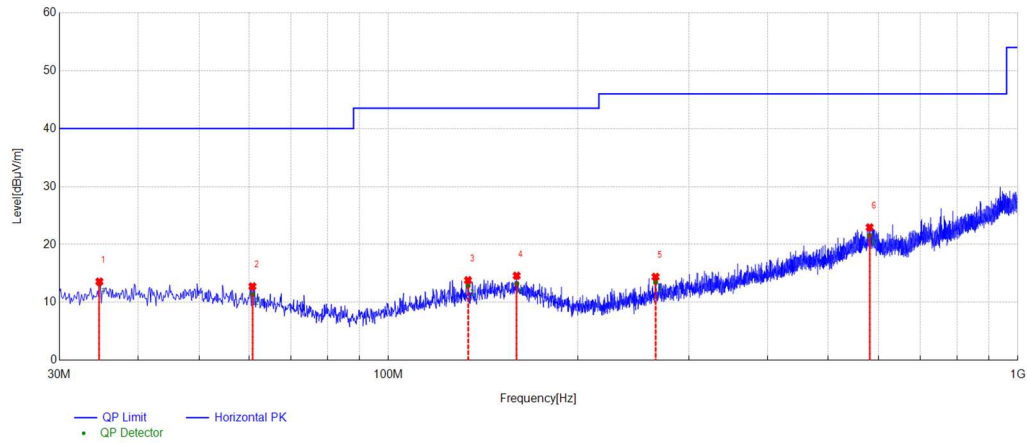

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	34.7288	13.60	-16.23	40.00	26.40	100	209	Horizontal	PASS
2	60.7975	12.77	-17.15	40.00	27.23	100	42	Horizontal	PASS
3	133.790	13.83	-16.85	43.50	29.67	100	229	Horizontal	PASS
4	159.858	14.61	-15.83	43.50	28.89	100	239	Horizontal	PASS
5	265.710	14.42	-17.08	46.00	31.58	100	303	Horizontal	PASS
6	581.566	22.95	-9.05	46.00	23.05	100	350	Horizontal	PASS

Mode:

BLE 1M-2402

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3948	-17.38	56.9	39.52	74.00	34.48	54.01	36.63	54.00	17.37	150	229	Vertical	PASS
2	4478.25	-16.05	56.58	40.53	74.00	33.47	52.35	36.30	54.00	17.70	150	281	Vertical	PASS
3	5880.75	-11.98	55.46	43.48	74.00	30.52	50.39	38.41	54.00	15.59	150	0	Vertical	PASS
4	7206	-9.40	56.53	47.13	74.00	26.87	53.73	44.33	54.00	9.67	150	11	Vertical	PASS
5	10243.5	-3.96	52.1	48.14	74.00	25.86	48.97	45.01	54.00	8.99	150	275	Vertical	PASS
6	13803	1.17	49.14	50.31	74.00	23.69	46.75	47.92	54.00	6.08	150	294	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3909.75	-18.11	57.24	39.13	74.00	34.87	54.25	36.14	54.00	17.86	150	160	Horizontal	PASS
2	4803.75	-14.54	56.3	41.76	74.00	32.24	52.67	38.13	54.00	15.87	150	222	Horizontal	PASS
3	6363.75	-10.56	53.79	43.23	74.00	30.77	49.80	39.24	54.00	14.76	150	272	Horizontal	PASS
4	7207.5	-9.28	54.12	44.84	74.00	29.16	50.28	41.00	54.00	13.00	150	337	Horizontal	PASS
5	10006.5	-4.45	51.15	46.70	74.00	27.30	46.33	41.88	54.00	12.12	150	348	Horizontal	PASS
6	14411.25	1.09	50.23	51.32	74.00	22.68	44.82	45.91	54.00	8.09	150	26	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 1M-2440

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3162	-20.19	59.15	38.96	74.00	35.04	52.86	32.67	54.00	21.33	150	160	Vertical	PASS
2	3933	-17.96	56.53	38.57	74.00	35.43	53.49	35.53	54.00	18.47	150	171	Vertical	PASS
3	5049.75	-12.91	54.88	41.97	74.00	32.03	50.83	37.92	54.00	16.08	150	206	Vertical	PASS
4	7320	-9.14	55.24	46.10	74.00	27.90	52.40	43.26	54.00	10.74	150	11	Vertical	PASS
5	10361.25	-4.34	51.59	47.25	74.00	26.75	48.37	44.03	54.00	9.97	150	200	Vertical	PASS
6	13860	0.67	49.14	49.81	74.00	24.19	44.60	45.27	54.00	8.73	150	147	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3276	-20.17	58.52	38.35	74.00	35.65	55.63	35.46	54.00	18.54	150	360	Horizontal	PASS
2	5676.75	-12.75	55.43	42.68	74.00	31.32	50.21	37.46	54.00	16.54	150	288	Horizontal	PASS
3	7320.75	-9.15	54.53	45.38	74.00	28.62	51.53	42.38	54.00	11.62	150	320	Horizontal	PASS
4	10009.5	-4.46	51.32	46.86	74.00	27.14	45.78	41.32	54.00	12.68	150	160	Horizontal	PASS
5	12832.5	-0.68	48.35	47.67	74.00	26.33	44.68	44.00	54.00	10.00	150	214	Horizontal	PASS
6	14642.25	0.95	51.79	52.74	74.00	21.26	45.16	46.11	54.00	7.89	150	190	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 1M-2480

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3991.5	-17.56	56.95	39.39	74.00	34.61	53.47	35.91	54.00	18.09	150	129	Vertical	PASS
2	5034.75	-13.59	55.5	41.91	74.00	32.09	48.88	35.29	54.00	18.71	150	232	Vertical	PASS
3	6376.5	-10.20	53.67	43.47	74.00	30.53	48.38	38.18	54.00	15.82	150	49	Vertical	PASS
4	7441.5	-8.92	54.49	45.57	74.00	28.43	48.77	39.85	54.00	14.15	150	36	Vertical	PASS
5	10000.5	-4.43	51.59	47.16	74.00	26.84	48.35	43.92	54.00	10.08	150	153	Vertical	PASS
6	13710.75	0.71	49.12	49.83	74.00	24.17	44.89	45.60	54.00	8.40	150	87	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4284.75	-16.18	56.84	40.66	74.00	33.34	53.88	37.70	54.00	16.30	150	104	Horizontal	PASS
2	5094	-13.23	54.46	41.23	74.00	32.77	49.66	36.43	54.00	17.57	150	278	Horizontal	PASS
3	6898.5	-9.87	54.43	44.56	74.00	29.44	46.91	37.04	54.00	16.96	150	321	Horizontal	PASS
4	7440	-8.89	54.39	45.50	74.00	28.50	49.94	41.05	54.00	12.95	150	354	Horizontal	PASS
5	10520.25	-3.67	51.35	47.68	74.00	26.32	48.66	44.99	54.00	9.01	150	265	Horizontal	PASS
6	14881.5	1.78	49.7	51.48	74.00	22.52	47.97	49.75	54.00	4.25	150	359	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 2M-2402

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3368.25	-19.95	57.32	37.37	74.00	36.63	54.68	34.73	54.00	19.27	150	176	Vertical	PASS
2	4872	-14.25	54.89	40.64	74.00	33.36	52.20	37.95	54.00	16.05	150	75	Vertical	PASS
3	7203.75	-9.58	57.39	47.81	74.00	26.19	54.29	44.71	54.00	9.29	150	150	Vertical	PASS
4	9609	-5.06	51.56	46.50	74.00	27.50	47.99	42.93	54.00	11.07	150	356	Vertical	PASS
5	14409	1.14	49.72	50.86	74.00	23.14	46.51	47.65	54.00	6.35	150	302	Vertical	PASS
6	16066.5	2.94	47.99	50.93	74.00	23.07	45.75	48.69	54.00	5.31	150	75	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3681.75	-18.88	55.78	36.90	74.00	37.10	51.90	33.02	54.00	20.98	150	52	Horizontal	PASS
2	4803	-14.58	57.41	42.83	74.00	31.17	55.97	41.39	54.00	12.61	150	163	Horizontal	PASS
3	7203.75	-9.58	56.86	47.28	74.00	26.72	54.07	44.49	54.00	9.51	150	52	Horizontal	PASS
4	9606	-5.08	53.04	47.96	74.00	26.04	47.90	42.82	54.00	11.18	150	149	Horizontal	PASS
5	11958.75	-1.74	48.82	47.08	74.00	26.92	46.38	44.64	54.00	9.36	150	332	Horizontal	PASS
6	14408.25	1.15	52.97	54.12	74.00	19.88	49.40	50.55	54.00	3.45	150	180	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 2M-2440

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3390.75	-20.10	57.23	37.13	74.00	36.87	54.13	34.03	54.00	19.97	150	301	Vertical	PASS
2	4898.25	-13.56	54.73	41.17	74.00	32.83	50.62	37.06	54.00	16.94	150	276	Vertical	PASS
3	6231	-10.40	53.05	42.65	74.00	31.35	50.18	39.78	54.00	14.22	150	344	Vertical	PASS
4	7321.5	-9.16	57.12	47.96	74.00	26.04	51.49	42.33	54.00	11.67	150	194	Vertical	PASS
5	9762	-4.61	51.99	47.38	74.00	26.62	46.68	42.07	54.00	11.93	150	356	Vertical	PASS
6	14642.25	0.95	51.14	52.09	74.00	21.91	48.99	49.94	54.00	4.06	150	313	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3601.5	-19.31	55.76	36.45	74.00	37.55	51.76	32.45	54.00	21.55	150	270	Horizontal	PASS
2	4878.75	-14.10	55.29	41.19	74.00	32.81	52.40	38.30	54.00	15.70	150	177	Horizontal	PASS
3	7318.5	-9.22	56.72	47.50	74.00	26.50	54.08	44.86	54.00	9.14	150	55	Horizontal	PASS
4	9761.25	-4.60	51.54	46.94	74.00	27.06	49.39	44.79	54.00	9.21	150	140	Horizontal	PASS
5	12587.25	-1.01	48.16	47.15	74.00	26.85	44.06	43.05	54.00	10.95	150	104	Horizontal	PASS
6	14643	0.97	55.18	56.15	74.00	17.85	49.86	50.83	54.00	3.17	150	0	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 2M-2480

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3265.5	-19.86	57.12	37.26	74.00	36.74	55.78	35.92	54.00	18.08	150	195	Vertical	PASS
2	4906.5	-13.26	53.29	40.03	74.00	33.97	51.26	38.00	54.00	16.00	150	3	Vertical	PASS
3	7441.5	-8.92	56.22	47.30	74.00	26.70	50.47	41.55	54.00	12.45	150	356	Vertical	PASS
4	9983.25	-4.51	51.71	47.20	74.00	26.80	46.71	42.20	54.00	11.80	150	134	Vertical	PASS
5	11719.5	-1.97	49.61	47.64	74.00	26.36	42.86	40.89	54.00	13.11	150	158	Vertical	PASS
6	14883	1.83	53.07	54.90	74.00	19.10	48.85	50.68	54.00	3.32	150	332	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3257.25	-20.13	57.51	37.38	74.00	36.62	51.62	31.49	54.00	22.51	150	200	Horizontal	PASS
2	4891.5	-13.68	54.33	40.65	74.00	33.35	48.24	34.56	54.00	19.44	150	310	Horizontal	PASS
3	7438.5	-8.97	56.99	48.02	74.00	25.98	55.07	46.10	54.00	7.90	150	30	Horizontal	PASS
4	9921.75	-4.28	51.58	47.30	74.00	26.70	50.24	45.96	54.00	8.04	150	273	Horizontal	PASS
5	13701.75	0.81	49.98	50.79	74.00	23.21	46.68	47.49	54.00	6.51	150	83	Horizontal	PASS
6	14883	1.83	53.06	54.89	74.00	19.11	49.48	51.31	54.00	2.69	150	0	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level