



BLE_2M-Ant1-2440-0~Reference-PASS



BLE_2M-Ant1-2440-30~1000-PASS



BLE_2M-Ant1-2440-1000~26500-PASS


BLE_2M-Ant1-2480-0~Reference-PASS

BLE_2M-Ant1-2480-30~1000-PASS

BLE_2M-Ant1-2480-1000~26500-PASS

Appendix G: Duty Cycle

Test Result

TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	0.39	0.63	61.90	2.08
BLE_1M	Ant1	2440	0.39	0.63	61.90	2.08
BLE_1M	Ant1	2480	0.39	0.63	61.90	2.08
BLE_2M	Ant1	2402	0.20	0.63	31.75	4.98
BLE_2M	Ant1	2440	0.20	0.63	31.75	4.98
BLE_2M	Ant1	2480	0.20	0.63	31.75	4.98

Test Graphs




NTNV-BLE_2M-Ant1-2402

NTNV-BLE_2M-Ant1-2440

NTNV-BLE_2M-Ant1-2480

Appendix H: Emissions in Restricted Bands

Test Result

Mode:	BLE 1M-2402
-------	-------------

Final Data List														
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	3.12	31.52	34.64	74.00	39.36	27.2	30.32	54.00	23.68	150	109	Vertical	PASS
2	2322.48	3.32	31.68	35.00	74.00	39.00	27.23	30.55	54.00	23.45	150	225	Vertical	PASS
3	2333.6	3.27	31.84	35.11	74.00	38.89	27.17	30.44	54.00	23.56	150	238	Vertical	PASS
4	2355.2	3.53	31.92	35.45	74.00	38.55	27.2	30.73	54.00	23.27	150	60	Vertical	PASS
5	2374.64	3.94	32.41	36.35	74.00	37.65	26.98	30.92	54.00	23.08	150	287	Vertical	PASS
6	2390	4.38	32.63	37.01	74.00	36.99	27.27	31.65	54.00	22.35	150	204	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List														
NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	3.12	28.36	31.48	74.00	42.52	27.09	30.21	54.00	23.79	150	252	Horizontal	PASS
2	2321.2	3.34	28.42	31.76	74.00	42.24	27.24	30.58	54.00	23.42	150	137	Horizontal	PASS
3	2334.96	3.27	28.14	31.41	74.00	42.59	27.22	30.49	54.00	23.51	150	221	Horizontal	PASS
4	2349.92	3.58	28.36	31.94	74.00	42.06	27.08	30.66	54.00	23.34	150	301	Horizontal	PASS
5	2364.88	3.68	28.42	32.10	74.00	41.90	27.08	30.76	54.00	23.24	150	83	Horizontal	PASS
6	2390	4.38	28.64	33.02	74.00	40.98	27.26	31.64	54.00	22.36	150	258	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 1M-2480

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	3.46	35.25	38.71	74.00	36.09	34.54	38.00	54.00	16.00	150	197	Vertical	PASS
2	2486.4205	3.50	35.48	38.98	74.00	36.02	34.65	38.15	54.00	15.85	150	199	Vertical	PASS
3	2489.8195	3.57	35.95	39.52	74.00	35.91	34.63	38.20	54.00	15.80	150	224	Vertical	PASS
4	2492.9215	3.57	35.64	39.21	74.00	35.91	34.75	38.32	54.00	15.68	150	56	Vertical	PASS
5	2496.5845	3.58	35.84	39.42	74.00	35.95	34.64	38.22	54.00	15.78	150	316	Vertical	PASS
6	2500	3.50	35.61	39.11	74.00	36.04	34.60	38.10	54.00	15.90	150	41	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	3.46	35.15	38.61	74.00	35.39	34.68	38.14	54.00	15.86	150	313	Horizontal	PASS
2	2484.721	3.52	35.42	38.94	74.00	35.06	34.70	38.22	54.00	15.78	150	311	Horizontal	PASS
3	2488.2025	3.48	35.62	39.10	74.00	34.90	34.76	38.24	54.00	15.76	150	328	Horizontal	PASS
4	2491.915	3.56	35.45	39.01	74.00	34.99	34.80	38.36	54.00	15.64	150	326	Horizontal	PASS
5	2494.027	3.59	35.75	39.34	74.00	34.66	34.70	38.29	54.00	15.71	150	68	Horizontal	PASS
6	2500	3.5	35.46	38.96	74.00	35.04	34.71	38.21	54.00	15.79	150	83	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 2M-2402

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Readin g [dBμV/ m]	PK Value [dBμV/ m]	PK Limit [dBμV/ m]	PK Margin [dB]	AV Readin g [dBμV/ m]	AV Value [dBμV/ m]	AV Limit [dBμV/ m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	3.12	37.29	40.41	74.00	33.59	35.37	38.49	54.00	15.51	150	196	Vertical	PASS
2	2324.88	3.31	38.32	41.63	74.00	32.37	35.84	39.15	54.00	14.85	150	92	Vertical	PASS
3	2341.2	3.34	38.4	41.74	74.00	32.26	35.64	38.98	54.00	15.02	150	135	Vertical	PASS
4	2359.04	3.50	38.92	42.42	74.00	31.58	35.22	38.72	54.00	15.28	150	291	Vertical	PASS
5	2371.04	3.78	38.85	42.63	74.00	31.37	34.96	38.74	54.00	15.26	150	140	Vertical	PASS
6	2390	4.38	36.72	41.10	74.00	32.90	35.29	39.67	54.00	14.33	150	97	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Readin g [dBμV/ m]	PK Value [dBμV/ m]	PK Limit [dBμV/ m]	PK Margin [dB]	AV Readin g [dBμV/ m]	AV Value [dBμV/ m]	AV Limit [dBμV/ m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2310	3.12	38.01	41.13	74.00	32.87	36.37	39.49	54.00	14.51	150	343	Horizontal	PASS
2	2321.76	3.33	39.24	42.57	74.00	31.43	37.79	41.12	54.00	12.88	150	88	Horizontal	PASS
3	2339.84	3.33	38.55	41.88	74.00	32.12	35.34	38.67	54.00	15.33	150	237	Horizontal	PASS
4	2354.64	3.52	38.68	42.20	74.00	31.80	36.05	39.57	54.00	14.43	150	6	Horizontal	PASS
5	2369.44	3.67	39.55	43.22	74.00	30.78	36.79	40.46	54.00	13.54	150	29	Horizontal	PASS
6	2390	4.38	39.04	43.42	74.00	30.58	38.18	42.56	54.00	11.44	150	128	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 2M-2480

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	3.46	38	41.46	74.00	32.54	36.09	39.55	54.00	14.45	150	85	Vertical	PASS
2	2485.8925	3.48	38.64	42.12	74.00	31.88	34.97	38.45	54.00	15.55	150	302	Vertical	PASS
3	2490.6445	3.56	39.49	43.05	74.00	30.95	38.03	41.59	54.00	12.41	150	215	Vertical	PASS
4	2493.5815	3.59	39.84	43.43	74.00	30.57	36.86	40.45	54.00	13.55	150	116	Vertical	PASS
5	2496.634	3.58	38.15	41.73	74.00	32.27	35.97	39.55	54.00	14.45	150	121	Vertical	PASS
6	2500	3.50	37.61	41.11	74.00	32.89	35.17	38.67	54.00	15.33	150	341	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	2483.5	3.46	39.62	43.08	74.00	30.92	36.69	40.15	54.00	13.85	150	181	Horizontal	PASS
2	2483.632	3.46	42.33	45.79	74.00	28.21	38.35	41.81	54.00	12.19	150	45	Horizontal	PASS
3	2487.9385	3.46	39.76	43.22	74.00	30.78	38.02	41.48	54.00	12.52	150	240	Horizontal	PASS
4	2491.1065	3.55	38.69	42.24	74.00	31.76	35.97	39.52	54.00	14.48	150	100	Horizontal	PASS
5	2494.786	3.57	38.79	42.36	74.00	31.64	37.53	41.10	54.00	12.90	150	120	Horizontal	PASS
6	2500	3.50	38.23	41.73	74.00	32.27	36.54	40.04	54.00	13.96	150	181	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Appendix I: Spurious emissions

Test Result


Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.


During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels. The test data of the worst-case (1M-2402MHz) condition was recorded in this report. The measurement results above 18GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz are reported.

After the pretest, 115C Antenna was selected as the worst antenna and recorded in the report.

Antenna: 115C

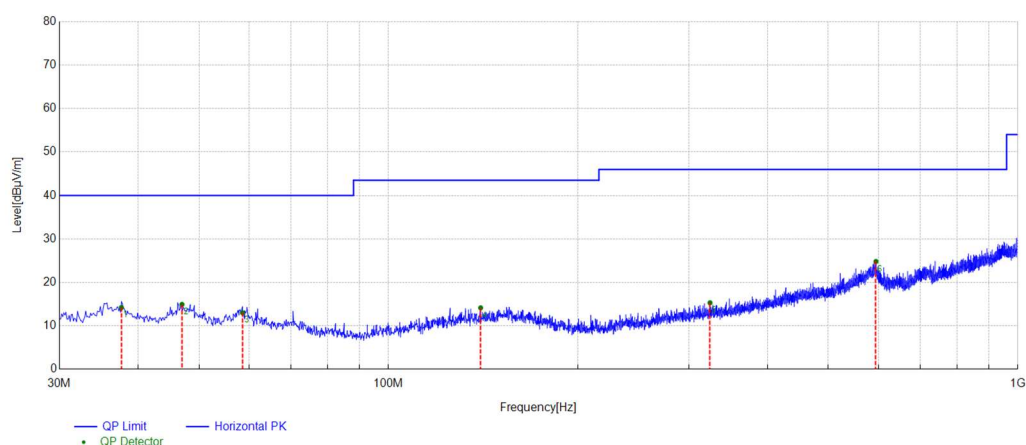

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	38.0025	14.39	-15.99	40.00	25.61	100	268	Vertical	PASS
2	62.0100	13.88	-17.31	40.00	26.12	100	98	Vertical	PASS
3	157.797	14.63	-15.81	43.50	28.87	100	204	Vertical	PASS
4	231.396	15.10	-18.80	46.00	30.90	200	225	Vertical	PASS
5	260.132	16.82	-17.32	46.00	29.18	100	149	Vertical	PASS
6	575.382	23.28	-9.30	46.00	22.72	100	360	Vertical	PASS

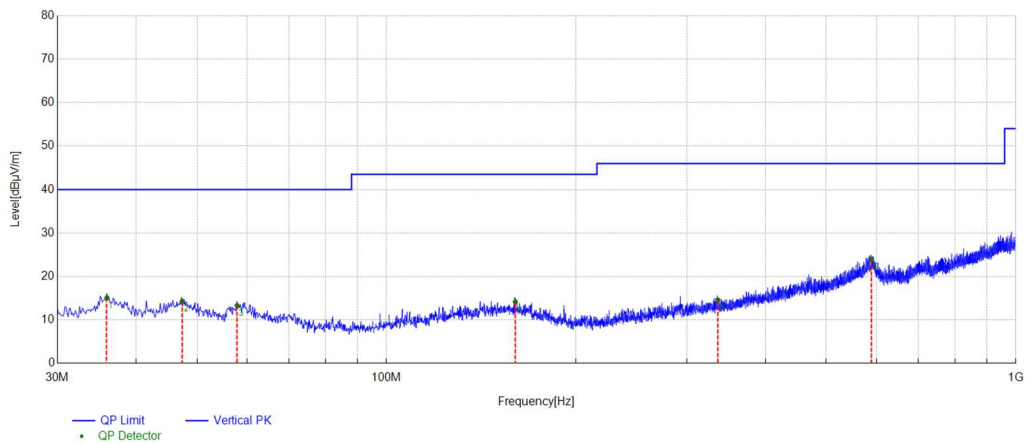

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	44.4288	14.19	-15.92	40.00	25.81	100	199	Horizontal	PASS
2	58.0088	13.23	-16.70	40.00	26.77	100	111	Horizontal	PASS
3	142.641	13.34	-16.39	43.50	30.16	100	297	Horizontal	PASS
4	292.870	15.16	-16.25	46.00	30.84	200	270	Horizontal	PASS
5	562.408	22.76	-9.65	46.00	23.24	200	347	Horizontal	PASS
6	723.065	25.17	-6.41	46.00	20.83	100	30	Horizontal	PASS

Mode:

BLE 1M-2402

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Readin g [dBμV/ m]	PK Value [dBμV/ m]	PK Limit [dBμV/ m]	PK Margin [dB]	AV Readin g [dBμV/ m]	AV Value [dBμV/ m]	AV Limit [dBμV/ m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4803.75	-14.54	58.82	44.28	74.00	29.72	55.03	40.49	54.00	13.51	150	190	Vertical	PASS
2	6480.75	-10.31	54.22	43.91	74.00	30.09	49.37	39.06	54.00	14.94	150	5	Vertical	PASS
3	7207.5	-9.28	55.05	45.77	74.00	28.23	49.16	39.88	54.00	14.12	150	311	Vertical	PASS
4	10323	-3.99	51.16	47.17	74.00	26.83	48.57	44.58	54.00	9.42	150	165	Vertical	PASS
5	14291.25	1.49	48.66	50.15	74.00	23.85	45.79	47.28	54.00	6.72	150	153	Vertical	PASS
6	15985.5	3.77	49.41	53.18	74.00	20.82	43.08	46.85	54.00	7.15	150	225	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Readin g [dBμV/ m]	PK Value [dBμV/ m]	PK Limit [dBμV/ m]	PK Margin [dB]	AV Readin g [dBμV/ m]	AV Value [dBμV/ m]	AV Limit [dBμV/ m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4015.5	-17.61	56.23	38.62	74.00	35.38	54.39	36.78	54.00	17.22	150	302	Horizontal	PASS
2	4804.5	-14.51	62.56	48.05	74.00	25.95	60.00	45.49	54.00	8.51	150	156	Horizontal	PASS
3	7206.75	-9.34	56.94	47.60	74.00	26.40	54.33	44.99	54.00	9.01	150	323	Horizontal	PASS
4	8777.25	-6.53	53.27	46.74	74.00	27.26	50.10	43.57	54.00	10.43	150	170	Horizontal	PASS
5	10753.5	-3.42	50.65	47.23	74.00	26.77	47.80	44.38	54.00	9.62	150	135	Horizontal	PASS
6	13903.5	0.55	49.22	49.77	74.00	24.23	45.52	46.07	54.00	7.93	150	156	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 1M-2440

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3872.25	-18.02	55.9	37.88	74.00	36.12	53.30	35.28	54.00	18.72	150	63	Vertical	PASS
2	4880.25	-14.06	58.27	44.21	74.00	29.79	54.00	39.94	54.00	14.06	150	9	Vertical	PASS
3	7320	-9.14	54.9	45.76	74.00	28.24	51.24	42.10	54.00	11.90	150	234	Vertical	PASS
4	9584.25	-4.85	51.07	46.22	74.00	27.78	48.58	43.73	54.00	10.27	150	98	Vertical	PASS
5	11946.75	-1.68	50.02	48.34	74.00	25.66	46.22	44.54	54.00	9.46	150	131	Vertical	PASS
6	14049	1.08	49.08	50.16	74.00	23.84	42.62	43.70	54.00	10.30	150	180	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	4239	-16.91	56.32	39.41	74.00	34.59	52.61	35.70	54.00	18.30	150	251	Horizontal	PASS
2	4880.25	-14.06	61.4	47.34	74.00	26.66	60.30	46.24	54.00	7.76	150	168	Horizontal	PASS
3	7320	-9.14	60.3	51.16	74.00	22.84	56.36	47.22	54.00	6.78	150	332	Horizontal	PASS
4	9759	-4.60	51.88	47.28	74.00	26.72	48.62	44.02	54.00	9.98	150	332	Horizontal	PASS
5	12011.25	-1.78	50.61	48.83	74.00	25.17	47.11	45.33	54.00	8.67	150	356	Horizontal	PASS
6	13662	1.25	48.91	50.16	74.00	23.84	46.24	47.49	54.00	6.51	150	297	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 1M-2480

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3816.75	-18.46	56.68	38.22	74.00	35.78	53.34	34.88	54.00	19.12	150	221	Vertical	PASS
2	4909.5	-13.13	55.66	42.53	74.00	31.47	51.77	38.64	54.00	15.36	150	37	Vertical	PASS
3	6858.75	-9.49	53.41	43.92	74.00	30.08	49.53	40.04	54.00	13.96	150	161	Vertical	PASS
4	7441.5	-8.92	56.45	47.53	74.00	26.47	50.84	41.92	54.00	12.08	150	99	Vertical	PASS
5	9984.75	-4.51	52.18	47.67	74.00	26.33	48.33	43.82	54.00	10.18	150	131	Vertical	PASS
6	11907.75	-1.64	50.07	48.43	74.00	25.57	45.07	43.43	54.00	10.57	150	238	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3927.75	-18.01	56.29	38.28	74.00	35.72	53.43	35.42	54.00	18.58	150	94	Horizontal	PASS
2	4959.75	-14.81	58.43	43.62	74.00	30.38	56.20	41.39	54.00	12.61	150	172	Horizontal	PASS
3	6409.5	-10.43	53.46	43.03	74.00	30.97	48.28	37.85	54.00	16.15	150	107	Horizontal	PASS
4	7441.5	-8.92	58.67	49.75	74.00	24.25	53.94	45.02	54.00	8.98	150	335	Horizontal	PASS
5	10265.25	-3.96	50.79	46.83	74.00	27.17	44.72	40.76	54.00	13.24	150	184	Horizontal	PASS
6	13418.25	0.04	49.13	49.17	74.00	24.83	45.53	45.57	54.00	8.43	150	228	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 2M-2402

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3262.5	-19.94	56.93	36.99	74.00	37.01	54.63	34.69	54.00	19.31	150	338	Vertical	PASS
2	4803.75	-14.54	57.74	43.20	74.00	30.80	55.52	40.98	54.00	13.02	150	200	Vertical	PASS
3	7206	-9.40	56.14	46.74	74.00	27.26	52.70	43.30	54.00	10.70	150	52	Vertical	PASS
4	9448.5	-5.17	50.65	45.48	74.00	28.52	47.82	42.65	54.00	11.35	150	244	Vertical	PASS
5	12099.75	-1.72	49.34	47.62	74.00	26.38	46.14	44.42	54.00	9.58	150	83	Vertical	PASS
6	13877.25	0.98	47.86	48.84	74.00	25.16	44.78	45.76	54.00	8.24	150	29	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3629.25	-19.29	55.55	36.26	74.00	37.74	50.00	30.71	54.00	23.29	150	11	Horizontal	PASS
2	4804.5	-14.51	62.61	48.10	74.00	25.90	60.25	45.74	54.00	8.26	150	348	Horizontal	PASS
3	5518.5	-13.04	53.21	40.17	74.00	33.83	50.78	37.74	54.00	16.26	150	23	Horizontal	PASS
4	7204.5	-9.52	59.71	50.19	74.00	23.81	54.43	44.91	54.00	9.09	150	150	Horizontal	PASS
5	9666	-4.71	50.44	45.73	74.00	28.27	47.86	43.15	54.00	10.85	150	121	Horizontal	PASS
6	13662.75	1.21	48.4	49.61	74.00	24.39	45.77	46.98	54.00	7.02	150	150	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 2M-2440

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3618.75	-19.54	57.28	37.74	74.00	36.26	54.54	35.00	54.00	19.00	150	74	Vertical	PASS
2	4878.75	-14.10	59	44.90	74.00	29.10	56.90	42.80	54.00	11.20	150	255	Vertical	PASS
3	5990.25	-12.03	54.97	42.94	74.00	31.06	50.42	38.39	54.00	15.61	150	293	Vertical	PASS
4	7321.5	-9.16	56.23	47.07	74.00	26.93	51.52	42.36	54.00	11.64	150	23	Vertical	PASS
5	9762	-4.61	52.11	47.50	74.00	26.50	46.21	41.60	54.00	12.40	150	149	Vertical	PASS
6	13861.5	0.70	48.79	49.49	74.00	24.51	45.55	46.25	54.00	7.75	150	61	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3575.25	-19.80	56.65	36.85	74.00	37.15	53.87	34.07	54.00	19.93	150	257	Horizontal	PASS
2	4878.75	-14.10	61.41	47.31	74.00	26.69	58.86	44.76	54.00	9.24	150	360	Horizontal	PASS
3	6557.25	-10.41	53.15	42.74	74.00	31.26	47.66	37.25	54.00	16.75	150	257	Horizontal	PASS
4	7318.5	-9.22	60.54	51.32	74.00	22.68	56.59	47.37	54.00	6.63	150	72	Horizontal	PASS
5	9762	-4.61	51.66	47.05	74.00	26.95	47.68	43.07	54.00	10.93	150	327	Horizontal	PASS
6	14073.75	1.22	48.53	49.75	74.00	24.25	46.72	47.94	54.00	6.06	150	257	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Mode:

BLE 2M-2480

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3411.75	-19.70	56.96	37.26	74.00	36.74	52.77	33.07	54.00	20.93	150	210	Vertical	PASS
2	4254.75	-16.99	56.95	39.96	74.00	34.04	52.89	35.90	54.00	18.10	150	359	Vertical	PASS
3	6379.5	-10.10	53.04	42.94	74.00	31.06	49.29	39.19	54.00	14.81	150	190	Vertical	PASS
4	7440.75	-8.90	56.54	47.64	74.00	26.36	54.24	45.34	54.00	8.66	150	251	Vertical	PASS
5	9984	-4.51	52.57	48.06	74.00	25.94	49.64	45.13	54.00	8.87	150	155	Vertical	PASS
6	14083.5	1.26	48.67	49.93	74.00	24.07	46.23	47.49	54.00	6.51	150	73	Vertical	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Final Data List

NO.	Frequency [MHz]	Factor [dB]	PK Reading [dBμV/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	3679.5	-18.77	56.41	37.64	74.00	36.36	53.19	34.42	54.00	19.58	150	133	Horizontal	PASS
2	4960.5	-14.77	59.04	44.27	74.00	29.73	56.36	41.59	54.00	12.41	150	357	Horizontal	PASS
3	6389.25	-10.52	52.74	42.22	74.00	31.78	50.22	39.70	54.00	14.30	150	182	Horizontal	PASS
4	7438.5	-8.97	60.21	51.24	74.00	22.76	57.53	48.56	54.00	5.44	150	64	Horizontal	PASS
5	9917.25	-4.31	50.76	46.45	74.00	27.55	48.22	43.91	54.00	10.09	150	138	Horizontal	PASS
6	13647	0.99	47.2	48.19	74.00	25.81	43.35	44.34	54.00	9.66	150	127	Horizontal	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level