





30.0 MHz - 25000.0 MHz
GFSK_DH5_Channel 39

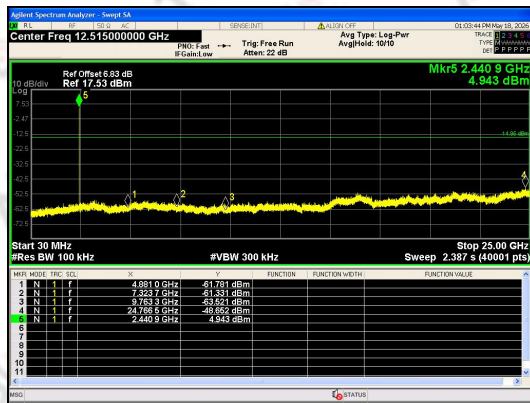


30.0 MHz - 25000.0 MHz
 $\pi/4$ DQPSK_2-DH5_Channel 39

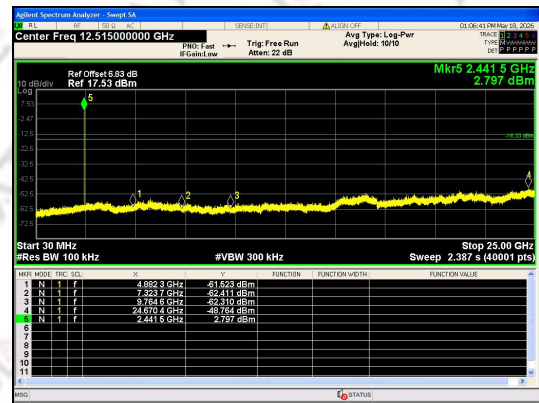


In-Band Reference Level
GFSK_DH5_Channel 78




In-Band Reference Level
 $\pi/4$ DQPSK_2-DH5_Channel 78

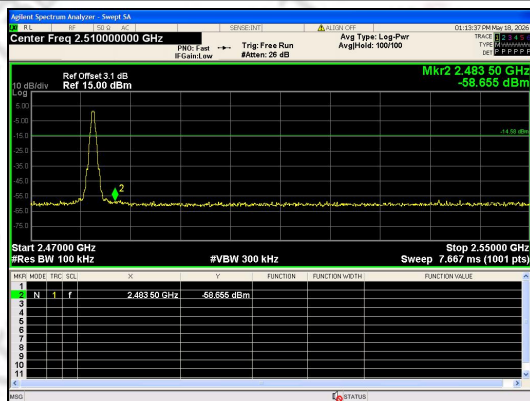


Out Of Band Emission
GFSK_DH5_Channel 78

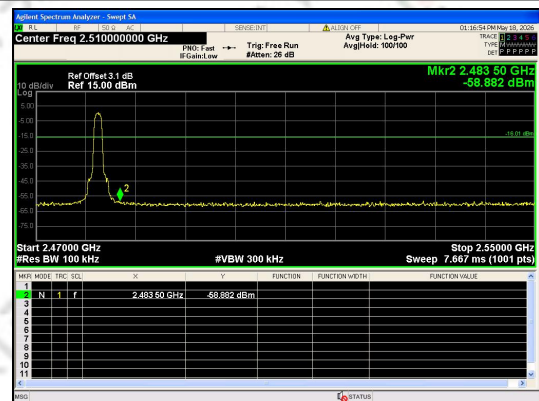

Out Of Band Emission
 $\pi/4$ DQPSK_2-DH5_Channel 78

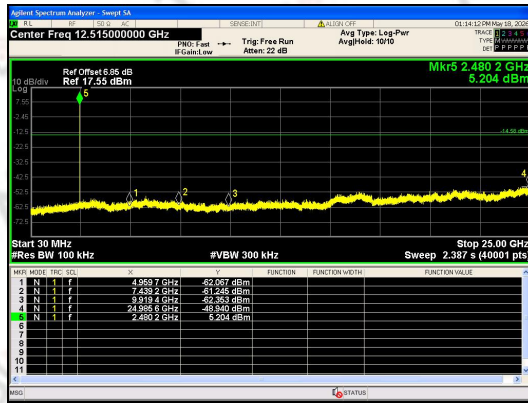


30.0 MHz - 25000.0 MHz
GFSK_DH5_Channel 78

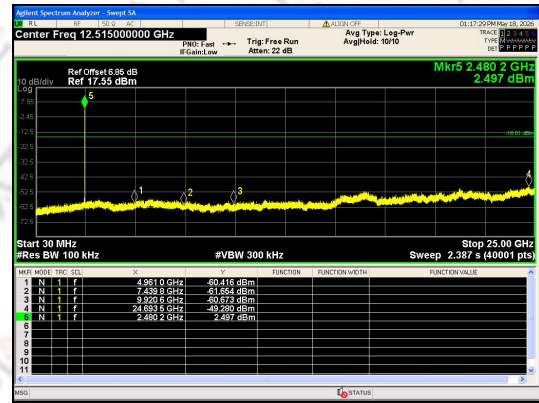


30.0 MHz - 25000.0 MHz
 $\pi/4$ DQPSK_2-DH5_Channel 78



In-Band Reference Level
8DPSK_3-DH5_Channel 0

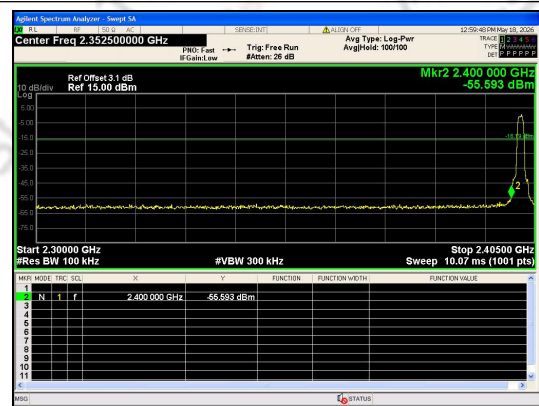


Out Of Band Emission
8DPSK_3-DH5_Channel 0

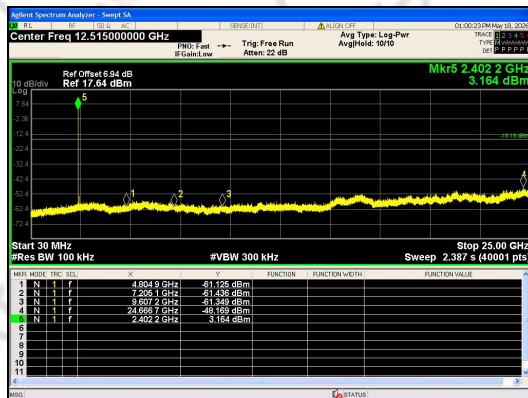


30.0 MHz - 25000.0 MHz
8DPSK_3-DH5_Channel 0



In-Band Reference Level
8DPSK_3-DH5_Channel 39

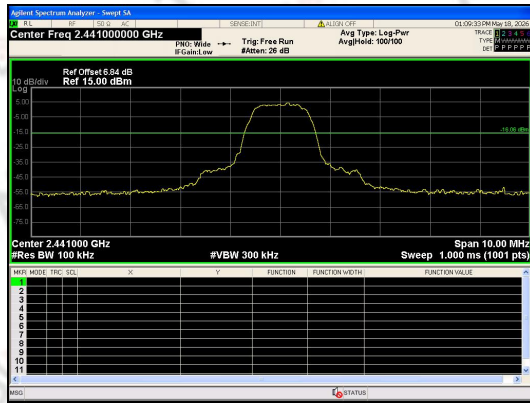


Out Of Band Emission
8DPSK_3-DH5_Channel 39

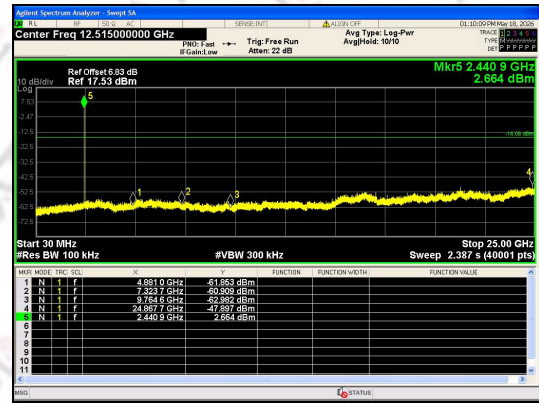


30.0 MHz - 25000.0 MHz
8DPSK_3-DH5_Channel 39



In-Band Reference Level
8DPSK_3-DH5_Channel 78

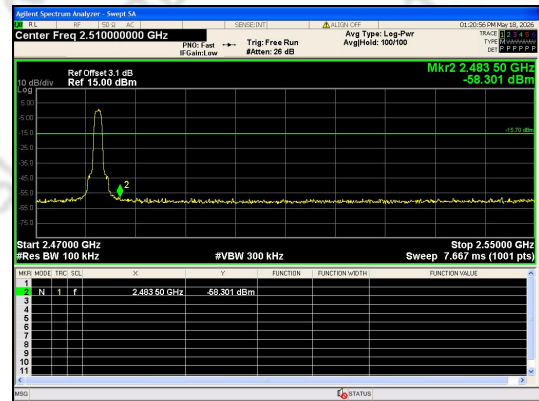

Out Of Band Emission
8DPSK_3-DH5_Channel 78

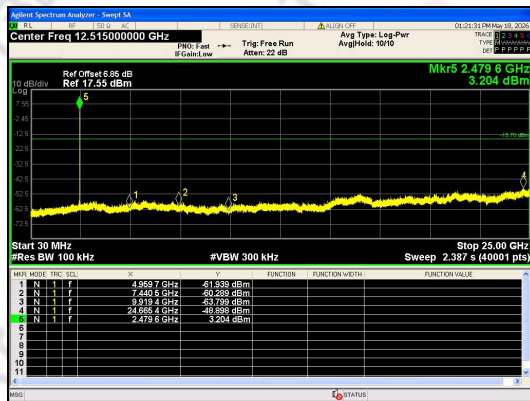

30.0 MHz - 25000.0 MHz
8DPSK_3-DH5_Channel 78

Radiated Test Data

Radiated Spurious Emission

Radiated Emission (9kHz-30MHz)

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Radiated Emission (30MHz-1GHz)

Note:

1. All modes have been tested, only worst case mode (BR:DH5, EDR:3DH5) was recorded in the test report.
2. $\text{Margin} = \text{Result} (\text{Result} = \text{Reading} + \text{Factor}) - \text{Limit}$
3. $\text{Factor} = \text{Cable Loss} + \text{Antenna Factor} - \text{Amplifier Gain}$
4. $\text{Reading} = \text{Level} - \text{factor}$


Radiated Emission (Above 1GHz)

Note:

1. All modes have been tested, only worst case mode (BR:DH5, EDR:3DH5) was recorded in the test report.
2. We used the filter to test and the main frequency was filtered out.
3. Other 18G-25G Emission detected are more than 20dB below the limit, so no need to be reported.
4. $\text{Margin} = \text{Result} (\text{Result} = \text{Reading} + \text{Factor}) - \text{Limit}$
5. $\text{Factor} = \text{Cable Loss} + \text{Antenna Factor} - \text{Amplifier Gain}$
6. $\text{Reading} = \text{Level} - \text{factor}$

Radiated Emission (30MHz-1GHz)


Temperature:	24 °C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	BR-DH5-2402MHz	Comment:	30MHz-1GHz

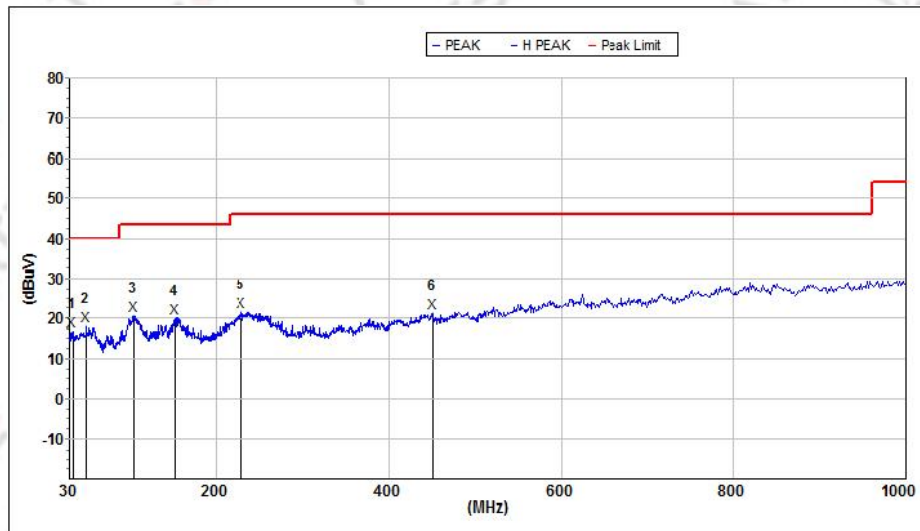

Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	33.328	17.0	40.0	23.0	-12.1	31.8	1.1	H
2	49.359	18.0	40.0	22.0	-10.2	31.0	1.2	H
3	103.624	20.7	43.5	22.8	-14.3	30.8	1.4	H
4	152.932	20.0	43.5	23.5	-10.8	31.3	1.5	H
5	229.695	21.7	46.0	24.3	-13.3	31.9	1.8	H
6	451.135	21.4	46.0	24.6	-6.2	32.3	3.2	H


Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	BR-DH5-2402MHz	Comment:	30MHz-1GHz

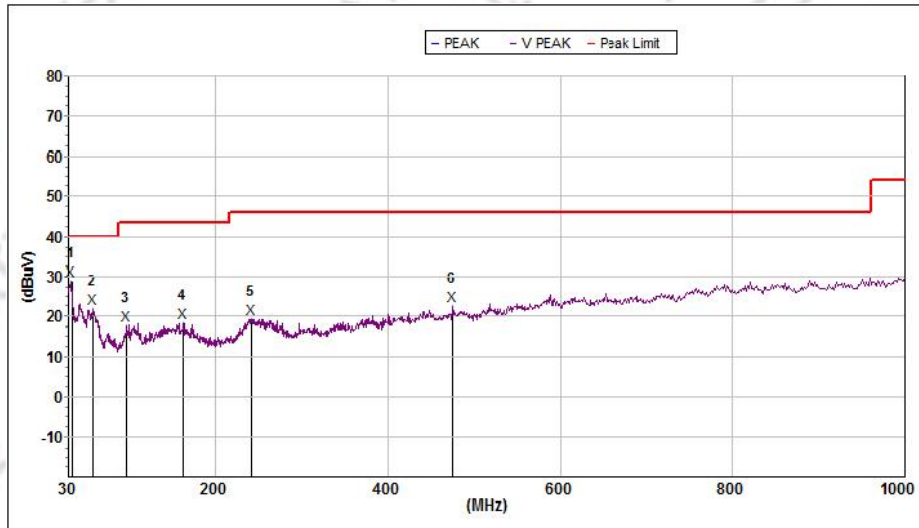

Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	32.864	28.9	40.0	11.1	-12.1	31.8	1.1	V
2	58.101	22.0	40.0	18.0	-11.6	31.1	1.2	V
3	96.436	17.7	43.5	25.8	-14.9	31.0	1.3	V
4	163.182	18.4	43.5	25.1	-11.5	31.4	1.6	V
5	242.100	19.4	46.0	26.6	-12.8	32.0	1.9	V
6	475.499	22.6	46.0	23.4	-5.9	31.9	2.8	V


Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	BR-DH5-2441MHz	Comment:	30MHz-1GHz

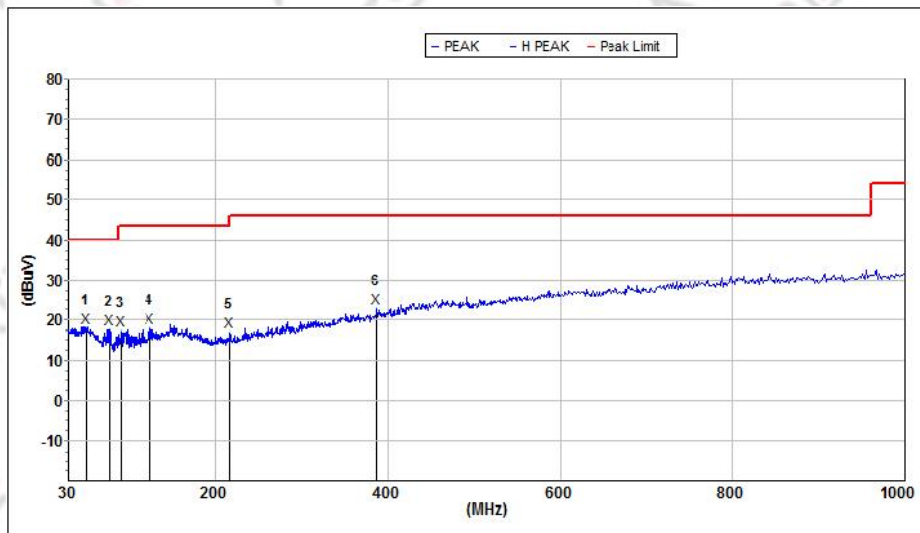

Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	50.321	18.2	40.0	21.8	-19.2	39.9	1.2	H
2	76.512	17.8	40.0	22.2	-23.8	40.5	1.3	H
3	90.062	17.6	43.5	25.9	-24.3	40.4	1.3	H
4	123.916	18.2	43.5	25.3	-22.0	40.3	1.4	H
5	216.403	17.3	46.0	28.7	-22.1	40.2	1.8	H
6	387.312	23.2	46.0	22.8	-15.7	39.1	2.3	H


Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	BR-DH5-2441MHz	Comment:	30MHz-1GHz

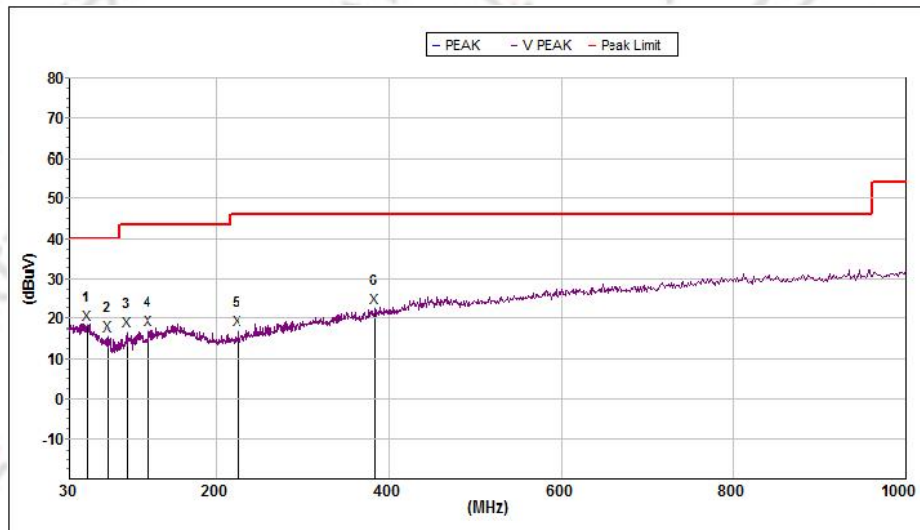

Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	51.301	18.5	40.0	21.5	-19.3	39.9	1.2	V
2	73.617	16.0	40.0	24.0	-23.4	40.5	1.3	V
3	95.930	16.8	43.5	26.7	-24.2	40.3	1.3	V
4	121.976	17.3	43.5	26.2	-22.2	40.3	1.4	V
5	225.308	17.3	46.0	28.7	-21.6	40.1	1.8	V
6	383.932	22.9	46.0	23.1	-15.8	39.1	2.3	V


Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	BR-DH5-2480MHz	Comment:	30MHz-1GHz

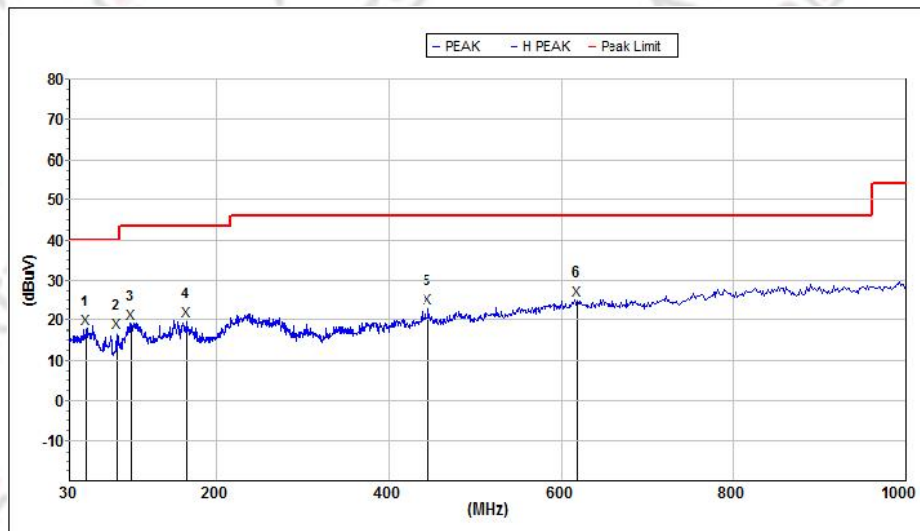

Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	49.881	17.8	40.0	22.2	-10.1	30.9	1.2	H
2	85.149	16.8	40.0	23.2	-15.7	31.8	1.3	H
3	100.757	19.3	43.5	24.2	-14.6	30.8	1.3	H
4	165.197	19.7	43.5	23.8	-11.8	31.5	1.6	H
5	446.414	23.2	46.0	22.8	-6.5	32.4	3.1	H
6	618.537	25.2	46.0	20.8	-2.8	31.7	2.8	H


Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	BR-DH5-2480MHz	Comment:	30MHz-1GHz

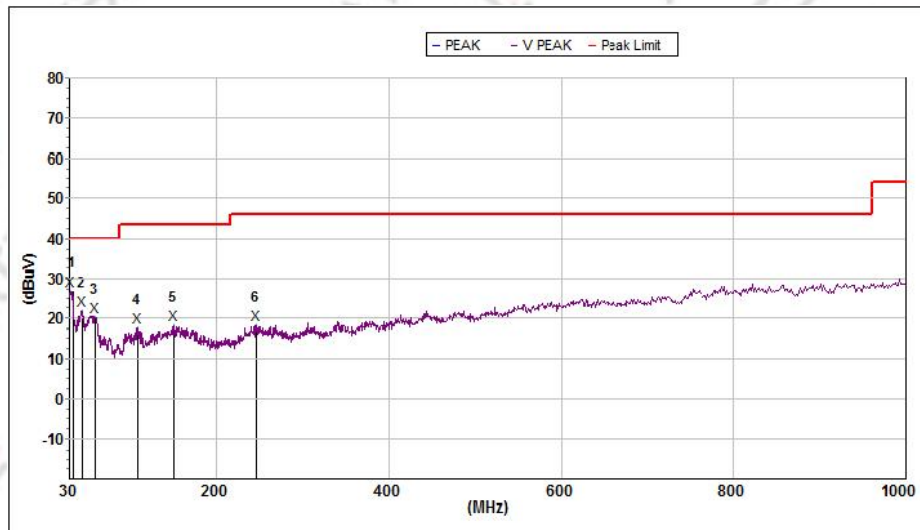

Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	31.899	26.9	40.0	13.1	-12.2	31.8	1.1	V
2	44.509	22.2	40.0	17.8	-10.9	31.4	1.2	V
3	59.232	20.5	40.0	19.5	-11.9	31.2	1.2	V
4	108.077	17.7	43.5	25.8	-14.0	30.9	1.4	V
5	150.274	18.4	43.5	25.1	-10.6	31.3	1.5	V
6	247.248	18.5	46.0	27.5	-12.6	32.0	1.9	V


Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	EDR-3DH5-2402MHz	Comment:	30MHz-1GHz

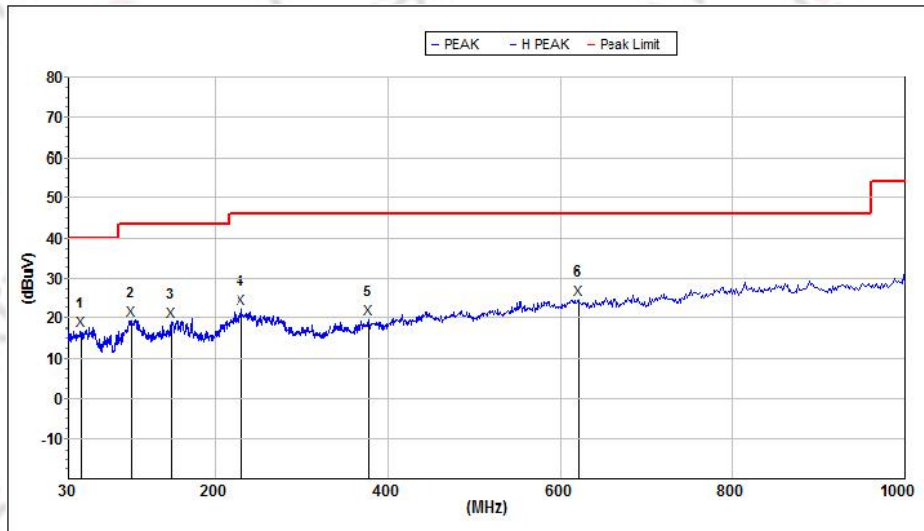

Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	44.043	17.0	40.0	23.0	-11.1	31.4	1.1	H
2	102.180	19.6	43.5	23.9	-14.4	30.8	1.4	H
3	149.748	19.3	43.5	24.2	-10.6	31.3	1.5	H
4	230.099	22.3	46.0	23.7	-13.4	32.0	1.8	H
5	377.259	19.7	46.0	26.3	-9.8	33.0	2.3	H
6	620.710	24.6	46.0	21.4	-2.7	31.7	2.9	H


Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	EDR-3DH5-2402MHz	Comment:	30MHz-1GHz

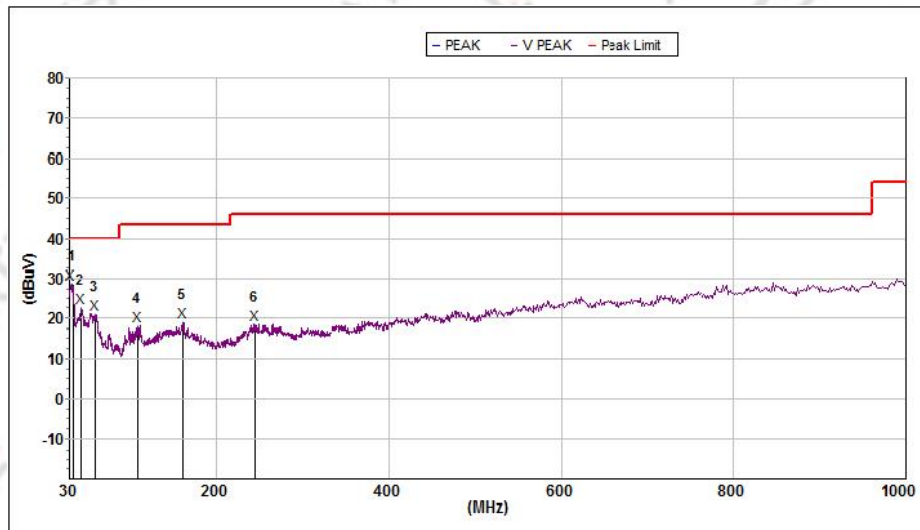

Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	32.011	28.7	40.0	11.3	-12.2	31.8	1.1	V
2	43.506	22.7	40.0	17.3	-11.2	31.5	1.1	V
3	59.545	21.2	40.0	18.8	-11.9	31.2	1.2	V
4	107.510	18.1	43.5	25.4	-14.0	30.9	1.4	V
5	161.758	19.3	43.5	24.2	-11.4	31.4	1.6	V
6	245.520	18.5	46.0	27.5	-12.7	32.0	1.9	V


Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	EDR-3DH5-2441MHz	Comment:	30MHz-1GHz

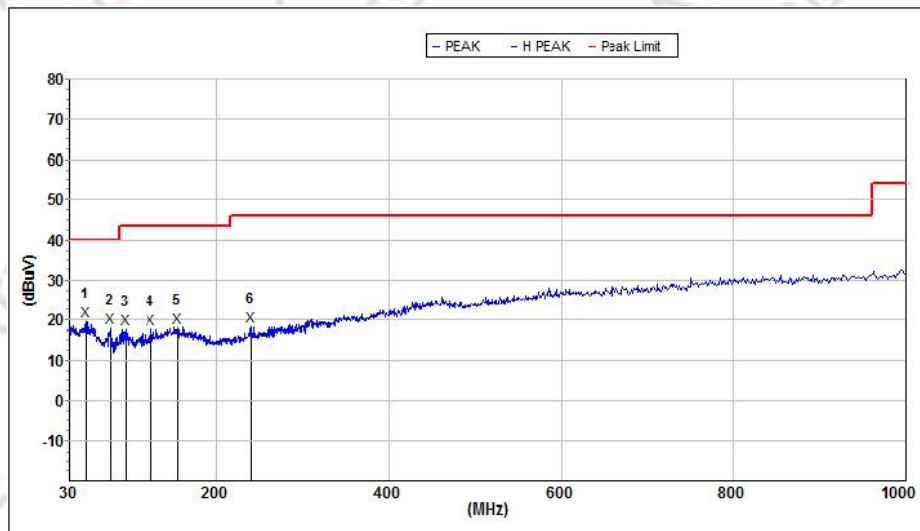

Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	49.881	19.7	40.0	20.3	-19.1	39.9	1.2	H
2	77.457	18.0	40.0	22.0	-24.0	40.5	1.3	H
3	94.428	17.9	43.5	25.6	-24.3	40.4	1.3	H
4	123.916	17.8	43.5	25.7	-22.0	40.3	1.4	H
5	155.910	18.3	43.5	25.2	-19.9	40.2	1.5	H
6	240.408	18.4	46.0	27.6	-21.0	40.1	1.9	H


Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	EDR-3DH5-2441MHz	Comment:	30MHz-1GHz

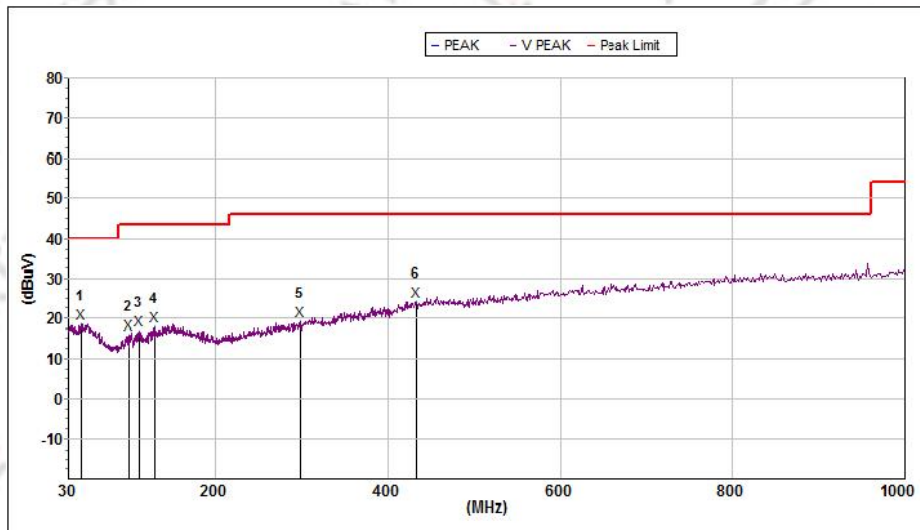

Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	45.455	18.8	40.0	21.2	-19.4	39.9	1.2	V
2	99.703	16.3	43.5	27.2	-24.2	40.3	1.3	V
3	111.347	17.3	43.5	26.2	-23.1	40.3	1.4	V
4	129.695	18.2	43.5	25.3	-21.4	40.3	1.5	V
5	297.746	19.5	46.0	26.5	-18.7	39.9	2.1	V
6	431.788	24.4	46.0	21.6	-13.7	39.0	2.9	V


Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	EDR-3DH5-2480MHz	Comment:	30MHz-1GHz

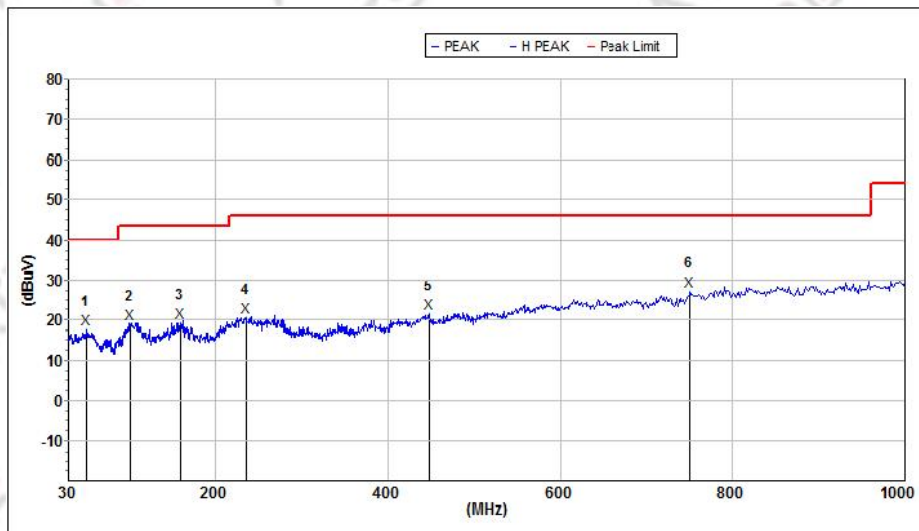

Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	50.321	17.9	40.0	22.1	-10.2	30.9	1.2	H
2	101.111	19.3	43.5	24.2	-14.5	30.8	1.4	H
3	159.225	19.5	43.5	24.0	-11.2	31.4	1.6	H
4	235.816	20.9	46.0	25.1	-13.1	32.0	1.8	H
5	447.982	21.9	46.0	24.1	-6.4	32.4	3.2	H
6	750.108	27.3	46.0	18.7	-1.2	32.0	3.2	H

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	EDR-3DH5-2480MHz	Comment:	30MHz-1GHz

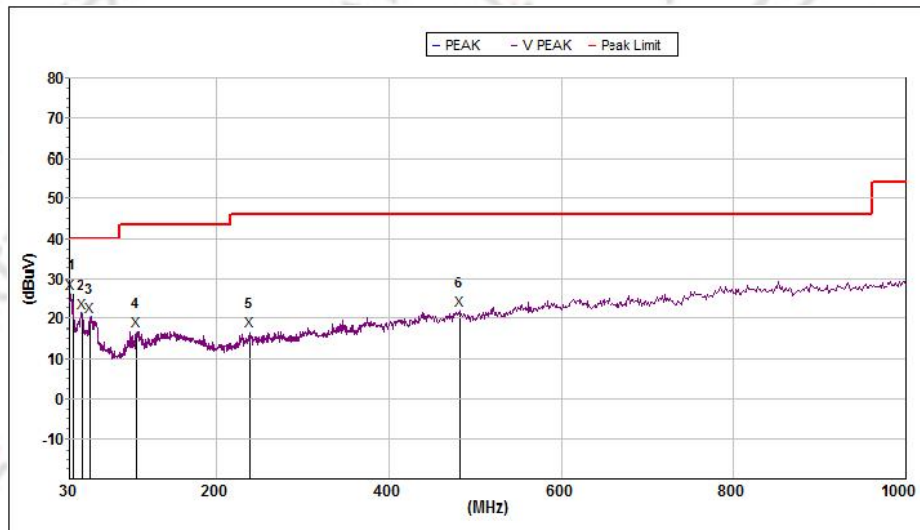


Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	31.454	26.3	40.0	13.7	-12.2	31.8	1.1	V
2	44.979	21.6	40.0	18.4	-10.9	31.4	1.2	V
3	54.166	20.4	40.0	19.6	-10.9	31.0	1.2	V
4	106.572	17.0	43.5	26.5	-14.1	30.9	1.4	V
5	238.728	16.7	46.0	29.3	-12.9	32.0	1.9	V
6	483.062	22.2	46.0	23.8	-5.9	31.8	2.7	V

Radiated Emission (Above 1GHz)

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	BR-DH5-2402MHz	Comment:	1GHz-18GHz

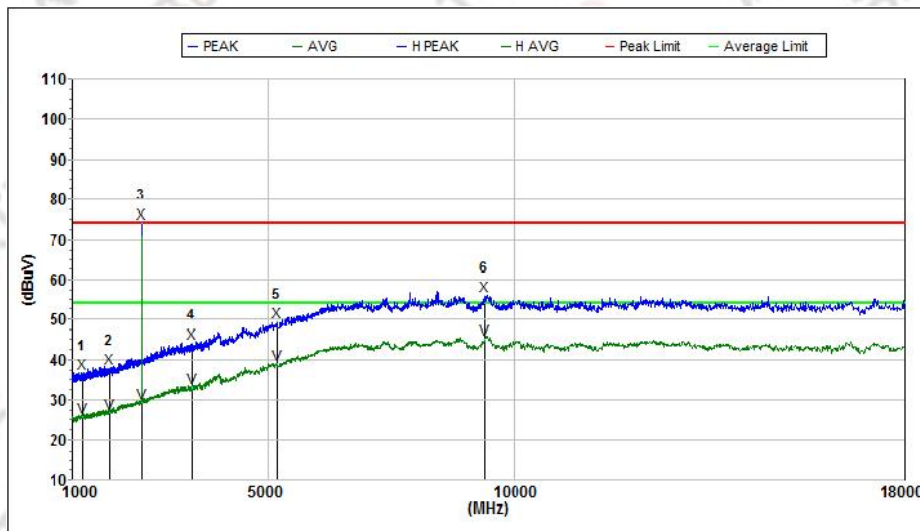


Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1198.000	36.8	74.0	37.2	-23.9	53.6	4.0	H
2	1763.500	38.1	74.0	35.9	-23.8	53.7	4.8	H
3	2401.000	74.3	74.0	-0.3	-21.1	54.1	5.6	H
4	3449.500	44.1	74.0	29.9	-17.4	53.8	6.9	H
5	5169.000	49.4	74.0	24.6	-10.5	52.4	8.9	H
6	9404.000	56.1	74.0	17.9	-1.5	52.3	12.7	H
Avg:								
1	1198.000	25.9	54.0	28.1	-23.9	53.6	4.0	H
2	1763.500	26.8	54.0	27.2	-23.8	53.7	4.8	H
3	2401.000	29.4	54.0	24.6	-21.1	54.1	5.6	H
4	3449.500	33.0	54.0	21.0	-17.4	53.8	6.9	H
5	5169.000	39.1	54.0	14.9	-10.5	52.4	8.9	H
6	9404.000	45.2	54.0	8.8	-1.5	52.3	12.7	H

Note:Point 3 serves as the primary frequency signal.

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	BR-DH5-2402MHz	Comment:	1GHz-18GHz

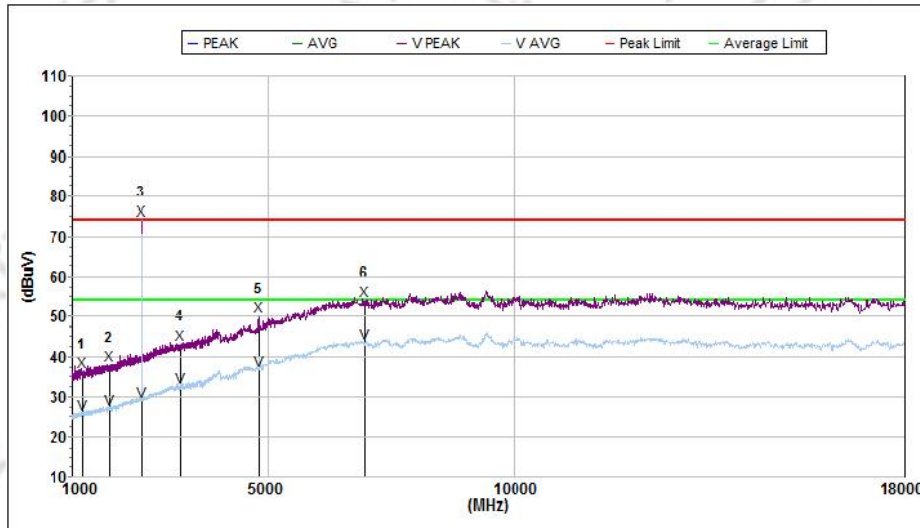


Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1208.500	36.4	74.0	37.6	-23.9	53.6	4.0	V
2	1745.500	38.1	74.0	35.9	-23.6	53.6	4.8	V
3	2401.000	74.3	74.0	-0.3	-21.1	54.1	5.6	V
4	3205.000	43.2	74.0	30.8	-17.9	54.0	6.7	V
5	4805.000	50.0	74.0	24.0	-11.7	52.6	8.4	V
6	6982.000	54.2	74.0	19.8	-4.6	51.7	11.1	V
Avg:								
1	1208.500	25.7	54.0	28.3	-23.9	53.6	4.0	V
2	1745.500	27.0	54.0	27.0	-23.6	53.6	4.8	V
3	2401.000	29.0	54.0	25.0	-21.1	54.1	5.6	V
4	3205.000	32.3	54.0	21.7	-17.9	54.0	6.7	V
5	4805.000	36.6	54.0	17.4	-11.7	52.6	8.4	V
6	6982.000	43.5	54.0	10.5	-4.6	51.7	11.1	V

Note:Point 3 serves as the primary frequency signal.

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	BR-DH5-2441MHz	Comment:	1GHz-18GHz

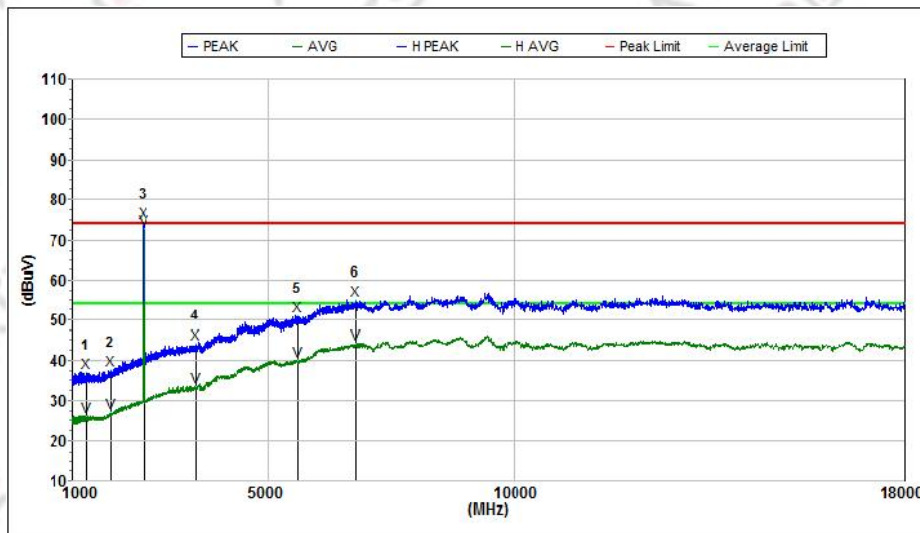


Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1289.000	37.1	74.0	36.9	-23.8	53.5	4.1	H
2	1784.000	37.5	74.0	36.5	-23.8	53.7	4.8	H
3	2442.000	74.4	74.0	-0.4	-20.9	54.1	5.7	H
4	3524.000	44.3	74.0	29.7	-17.2	53.8	7.0	H
5	5598.000	51.2	74.0	22.8	-9.6	52.1	9.4	H
6	6790.000	55.2	74.0	18.8	-5.2	51.7	10.8	H
Avg:								
1	1289.000	26.2	54.0	27.8	-23.8	53.5	4.1	H
2	1784.000	27.1	54.0	26.9	-23.8	53.7	4.8	H
3	2442.000	72.8	54.0	-18.8	-20.9	54.1	5.7	H
4	3524.000	33.5	54.0	20.5	-17.2	53.8	7.0	H
5	5598.000	40.0	54.0	14.0	-9.6	52.1	9.4	H
6	6790.000	44.3	54.0	9.7	-5.2	51.7	10.8	H

Note:Point 3 serves as the primary frequency signal.

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	BR-DH5-2441MHz	Comment:	1GHz-18GHz

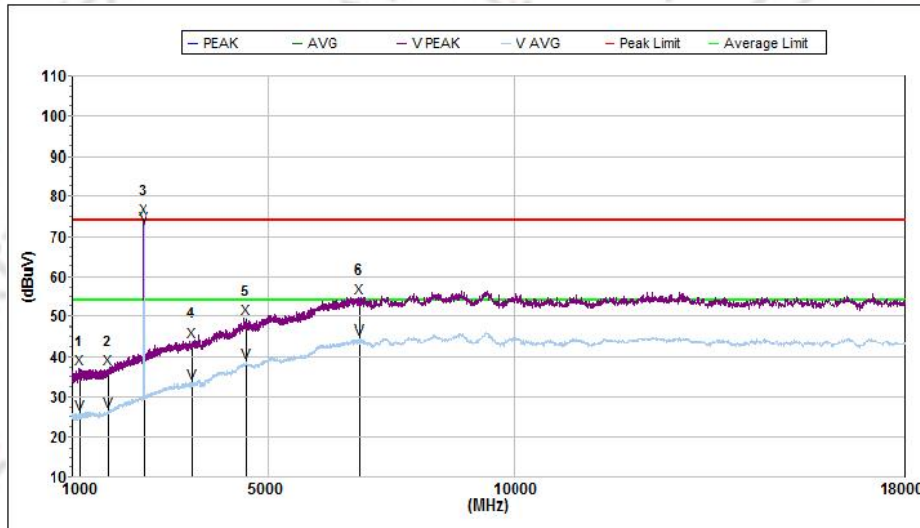


Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1167.000	37.1	74.0	36.9	-24.1	53.6	3.9	V
2	1739.000	37.1	74.0	36.9	-23.6	53.6	4.8	V
3	2442.000	74.4	74.0	-0.4	-20.9	54.1	5.7	V
4	3436.000	43.9	74.0	30.1	-17.4	53.8	6.9	V
5	4560.000	49.4	74.0	24.6	-13.0	52.9	8.1	V
6	6864.000	54.9	74.0	19.1	-5.0	51.7	10.9	V
Avg:								
1	1167.000	25.9	54.0	28.1	-24.1	53.6	3.9	V
2	1739.000	26.5	54.0	27.5	-23.6	53.6	4.8	V
3	2442.000	72.7	54.0	-18.7	-20.9	54.1	5.7	V
4	3436.000	33.2	54.0	20.8	-17.4	53.8	6.9	V
5	4560.000	38.5	54.0	15.5	-13.0	52.9	8.1	V
6	6864.000	44.4	54.0	9.6	-5.0	51.7	10.9	V

Note:Point 3 serves as the primary frequency signal.

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	BR-DH5-2480MHz	Comment:	1GHz-18GHz

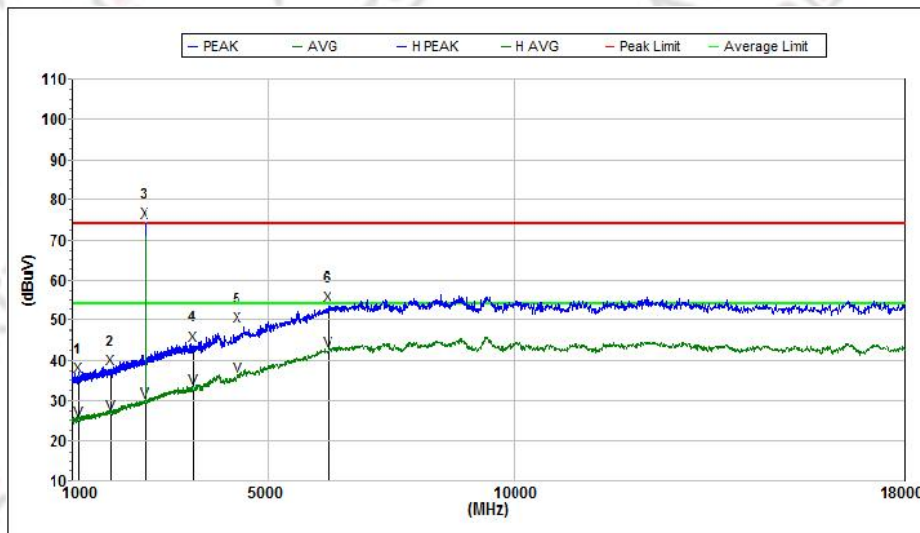


Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1121.500	36.1	74.0	37.9	-24.3	53.6	3.9	H
2	1768.000	37.9	74.0	36.1	-23.8	53.7	4.8	H
3	2479.000	74.4	74.0	-0.4	-20.8	54.1	5.7	H
4	3466.000	44.0	74.0	30.0	-17.3	53.8	7.0	H
5	4378.000	48.4	74.0	25.6	-13.6	53.0	8.0	H
6	6212.000	53.6	74.0	20.4	-6.8	51.5	10.1	H
Avg:								
1	1121.500	25.1	54.0	28.9	-24.3	53.6	3.9	H
2	1768.000	26.8	54.0	27.2	-23.8	53.7	4.8	H
3	2479.000	29.8	54.0	24.2	-20.8	54.1	5.7	H
4	3466.000	32.9	54.0	21.1	-17.3	53.8	7.0	H
5	4378.000	36.0	54.0	18.0	-13.6	53.0	8.0	H
6	6212.000	42.6	54.0	11.4	-6.8	51.5	10.1	H

Note:Point 3 serves as the primary frequency signal.

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	BR-DH5-2480MHz	Comment:	1GHz-18GHz

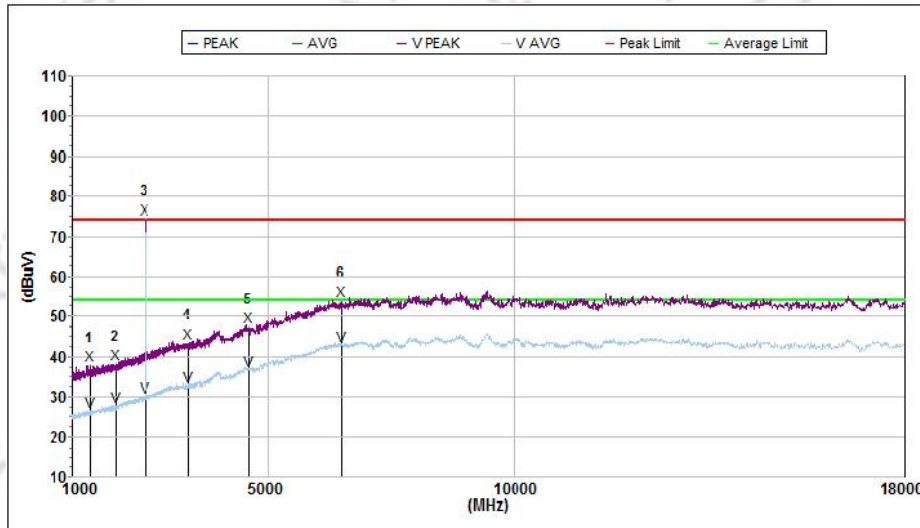


Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1355.500	37.9	74.0	36.1	-23.8	53.5	4.2	V
2	1871.500	38.2	74.0	35.8	-23.2	53.8	5.0	V
3	2479.000	74.4	74.0	-0.4	-20.8	54.1	5.7	V
4	3358.000	43.5	74.0	30.5	-17.5	53.9	6.9	V
5	4602.000	47.5	74.0	26.5	-12.9	52.9	8.1	V
6	6492.000	54.0	74.0	20.0	-5.9	51.6	10.4	V
Avg:								
1	1355.500	26.3	54.0	27.7	-23.8	53.5	4.2	V
2	1871.500	27.6	54.0	26.4	-23.2	53.8	5.0	V
3	2479.000	30.0	54.0	24.0	-20.8	54.1	5.7	V
4	3358.000	32.7	54.0	21.3	-17.5	53.9	6.9	V
5	4602.000	36.7	54.0	17.3	-12.9	52.9	8.1	V
6	6492.000	42.8	54.0	11.2	-5.9	51.6	10.4	V

Note: Point 3 serves as the primary frequency signal.

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	EDR-3DH5-2402MHz	Comment:	1GHz-18GHz

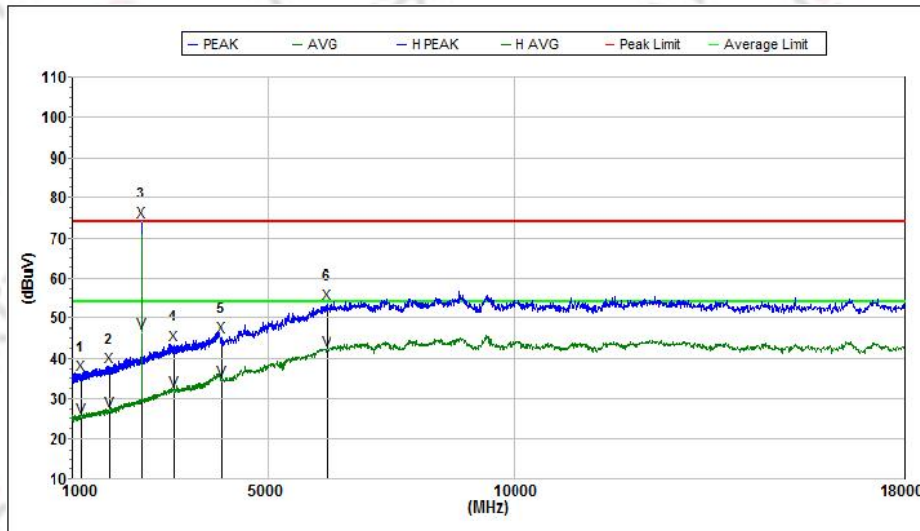


Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1175.500	36.1	74.0	37.9	-24.0	53.6	4.0	H
2	1745.500	38.0	74.0	36.0	-23.6	53.6	4.8	H
3	2401.000	74.3	74.0	-0.3	-21.1	54.1	5.6	H
4	3074.500	43.4	74.0	30.6	-18.1	54.1	6.6	H
5	4028.000	45.5	74.0	28.5	-14.3	53.2	8.0	H
6	6191.000	53.9	74.0	20.1	-6.9	51.5	10.0	H
Avg:								
1	1175.500	25.6	54.0	28.4	-24.0	53.6	4.0	H
2	1745.500	27.0	54.0	27.0	-23.6	53.6	4.8	H
3	2401.000	46.5	54.0	7.5	-21.1	54.1	5.6	H
4	3074.500	31.9	54.0	22.1	-18.1	54.1	6.6	H
5	4028.000	34.7	54.0	19.3	-14.3	53.2	8.0	H
6	6191.000	42.2	54.0	11.8	-6.9	51.5	10.0	H

Note:Point 3 serves as the primary frequency signal.

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	EDR-3DH5-2402MHz	Comment:	1GHz-18GHz

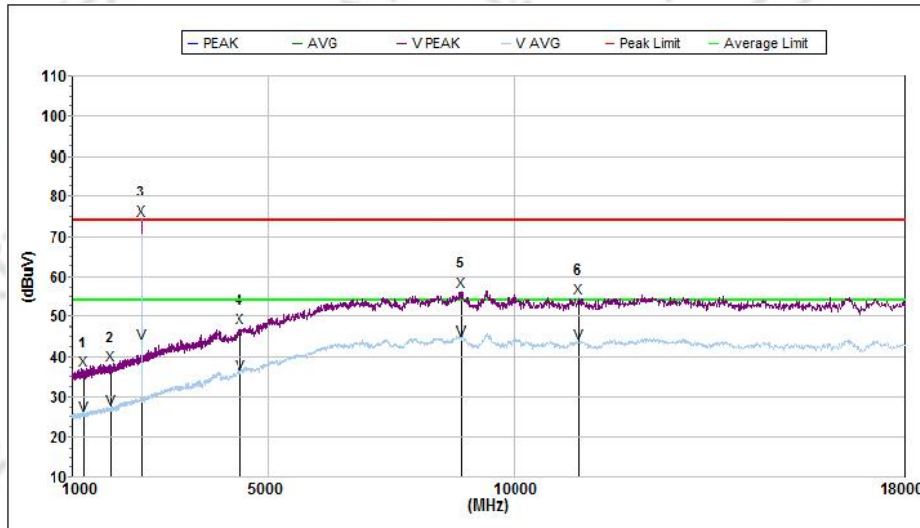


Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1241.500	36.5	74.0	37.5	-23.9	53.6	4.0	V
2	1783.000	37.9	74.0	36.1	-23.8	53.7	4.8	V
3	2401.000	74.3	74.0	-0.3	-21.1	54.1	5.6	V
4	4413.000	47.2	74.0	26.8	-13.5	53.0	8.0	V
5	8942.000	56.4	74.0	17.6	-2.6	52.5	12.1	V
6	11336.000	54.9	74.0	19.1	1.0	51.7	14.0	V
Avg:								
1	1241.500	25.5	54.0	28.5	-23.9	53.6	4.0	V
2	1783.000	27.1	54.0	26.9	-23.8	53.7	4.8	V
3	2401.000	43.4	54.0	10.6	-21.1	54.1	5.6	V
4	4413.000	35.8	54.0	18.2	-13.5	53.0	8.0	V
5	8942.000	44.2	54.0	9.8	-2.6	52.5	12.1	V
6	11336.000	43.6	54.0	10.4	1.0	51.7	14.0	V

Note: Point 3 serves as the primary frequency signal.

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	EDR-3DH5-2441MHz	Comment:	1GHz-18GHz

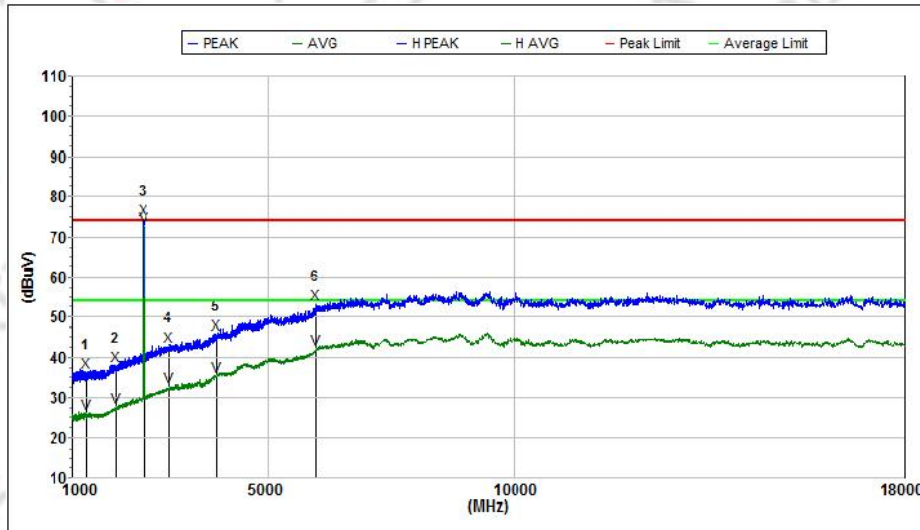


Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margi n (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1296.000	36.4	74.0	37.6	-23.8	53.5	4.1	H
2	1894.000	38.0	74.0	36.0	-23.0	53.8	5.0	H
3	2442.000	74.4	74.0	-0.4	-20.9	54.1	5.7	H
4	2981.000	43.0	74.0	31.0	-18.3	54.1	6.5	H
5	3934.000	45.9	74.0	28.1	-14.7	53.3	7.9	H
6	5966.000	53.3	74.0	20.7	-7.8	51.6	9.8	H
Avg:								
1	1296.000	26.2	54.0	27.8	-23.8	53.5	4.1	H
2	1894.000	27.6	54.0	26.4	-23.0	53.8	5.0	H
3	2442.000	72.7	54.0	-18.7	-20.9	54.1	5.7	H
4	2981.000	32.6	54.0	21.4	-18.3	54.1	6.5	H
5	3934.000	35.4	54.0	18.6	-14.7	53.3	7.9	H
6	5966.000	42.2	54.0	11.8	-7.8	51.6	9.8	H

Note:Point 3 serves as the primary frequency signal.

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	EDR-3DH5-2441MHz	Comment:	1GHz-18GHz

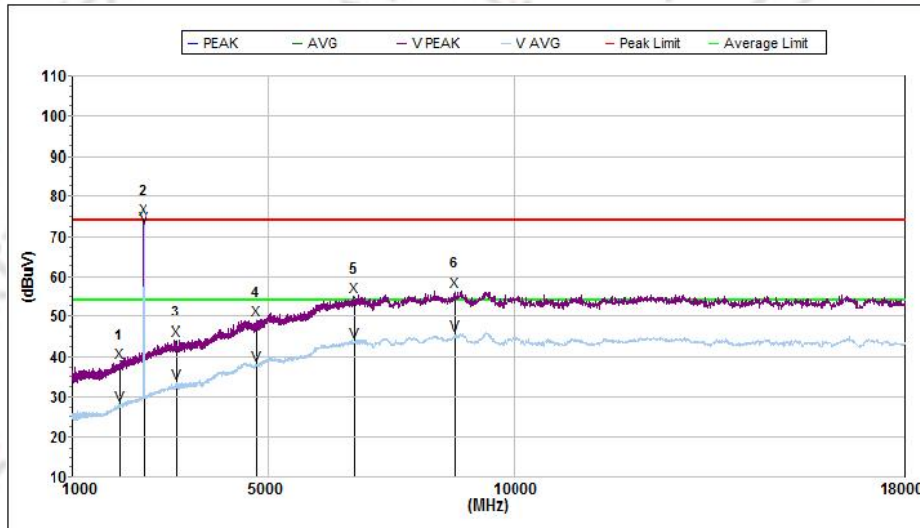


Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor(dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1963.000	38.5	74.0	35.5	-22.6	53.9	5.1	V
2	2442.000	74.4	74.0	-0.4	-20.9	54.1	5.7	V
3	3140.000	44.1	74.0	29.9	-18.0	54.0	6.6	V
4	4764.000	49.2	74.0	24.8	-11.9	52.7	8.4	V
5	6756.000	55.2	74.0	18.8	-5.1	51.6	10.8	V
6	8815.000	56.5	74.0	17.5	-2.7	52.4	12.0	V
Avg:								
1	1963.000	28.0	54.0	26.0	-22.6	53.9	5.1	V
2	2442.000	72.8	54.0	-18.8	-20.9	54.1	5.7	V
3	3140.000	33.4	54.0	20.6	-18.0	54.0	6.6	V
4	4764.000	38.0	54.0	16.0	-11.9	52.7	8.4	V
5	6756.000	44.0	54.0	10.0	-5.1	51.6	10.8	V
6	8815.000	45.5	54.0	8.5	-2.7	52.4	12.0	V

Note:Point 2 serves as the primary frequency signal.

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	EDR-3DH5-2480MHz	Comment:	1GHz-18GHz

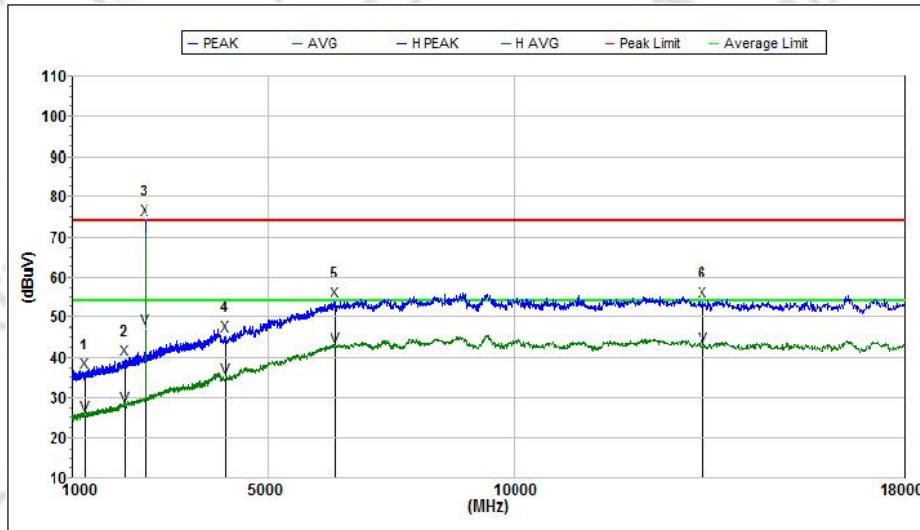


Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1264.000	36.3	74.0	37.7	-23.8	53.5	4.1	H
2	2066.500	39.5	74.0	34.5	-22.1	53.9	5.2	H
3	2479.000	74.4	74.0	-0.4	-20.8	54.1	5.7	H
4	4112.000	45.5	74.0	28.5	-14.1	53.2	8.0	H
5	6366.000	54.0	74.0	20.0	-6.3	51.6	10.3	H
6	13877.000	54.1	74.0	19.9	2.8	52.1	15.1	H
Avg:								
1	1264.000	25.7	54.0	28.3	-23.8	53.5	4.1	H
2	2066.500	28.2	54.0	25.8	-22.1	53.9	5.2	H
3	2479.000	47.1	54.0	6.9	-20.8	54.1	5.7	H
4	4112.000	35.0	54.0	19.0	-14.1	53.2	8.0	H
5	6366.000	42.9	54.0	11.1	-6.3	51.6	10.3	H
6	13877.000	42.9	54.0	11.1	2.8	52.1	15.1	H

Note: Point 3 serves as the primary frequency signal.

Temperature:	24°C	Relative Humidity:	53%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	EDR-3DH5-2480MHz	Comment:	1GHz-18GHz

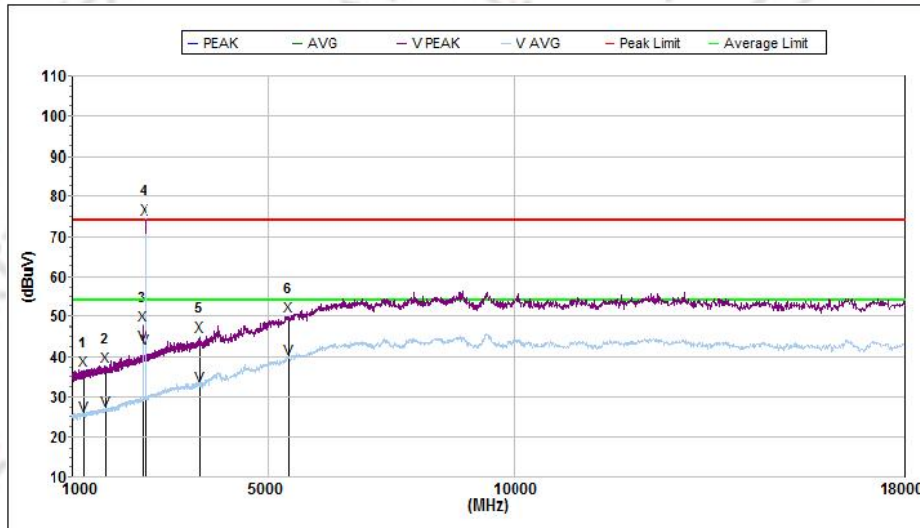

Test Summary Result

Mk.	Freq. (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G (dB)	Amp.G. (dB)	Pol.
Peak:								
1	1235.500	36.8	74.0	37.2	-23.9	53.6	4.0	V
2	1685.500	37.5	74.0	36.5	-23.7	53.6	4.7	V
3	2425.000	47.7	74.0	26.3	-21.0	54.1	5.7	V
4	2479.000	74.4	74.0	-0.4	-20.8	54.1	5.7	V
5	3601.000	45.1	74.0	28.9	-16.7	53.7	7.2	V
6	5400.000	50.1	74.0	23.9	-10.3	52.3	9.1	V
Avg:								
1	1235.500	25.3	54.0	28.7	-23.9	53.6	4.0	V
2	1685.500	26.8	54.0	27.2	-23.7	53.6	4.7	V
3	2425.000	43.1	54.0	10.9	-21.0	54.1	5.7	V
4	2479.000	42.3	54.0	11.7	-20.8	54.1	5.7	V
5	3601.000	32.8	54.0	21.2	-16.7	53.7	7.2	V
6	5400.000	39.7	54.0	14.3	-10.3	52.3	9.1	V


Note:Point 4 serves as the primary frequency signal.

Restricted Band

Note:During the test, pre-scan All mode, the report only reflects the test data of worst mode(BR:DH5, EDR:3DH5).


Test Mode: BR-DH5

Test Channel: Lowest channel, Test Polarization: Horizontal

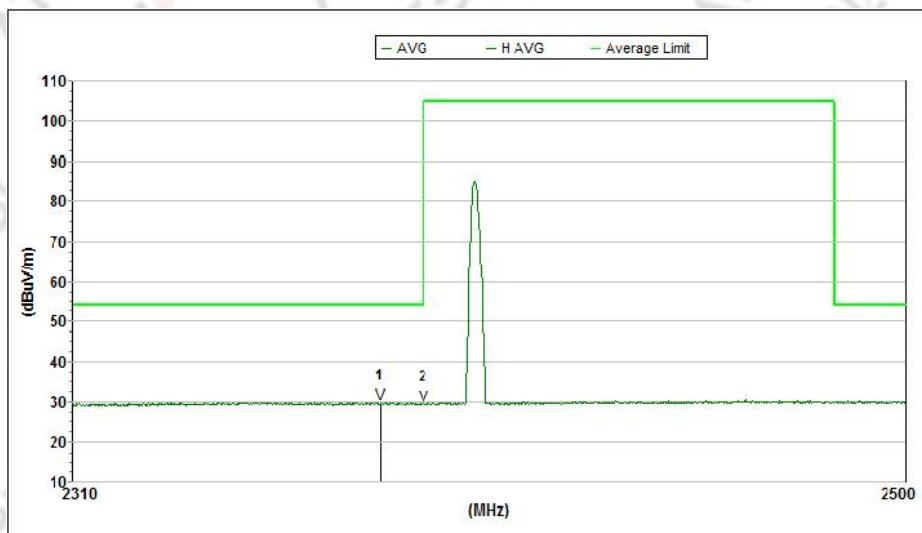

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
AVG								
1	2380.249	29.6	54.0	24.4	-21.2	54.1	5.6	H
2	2390.000	29.5	54.0	24.5	-21.1	54.1	5.6	H


Test Channel: Lowest channel, Test Polarization: Vertical

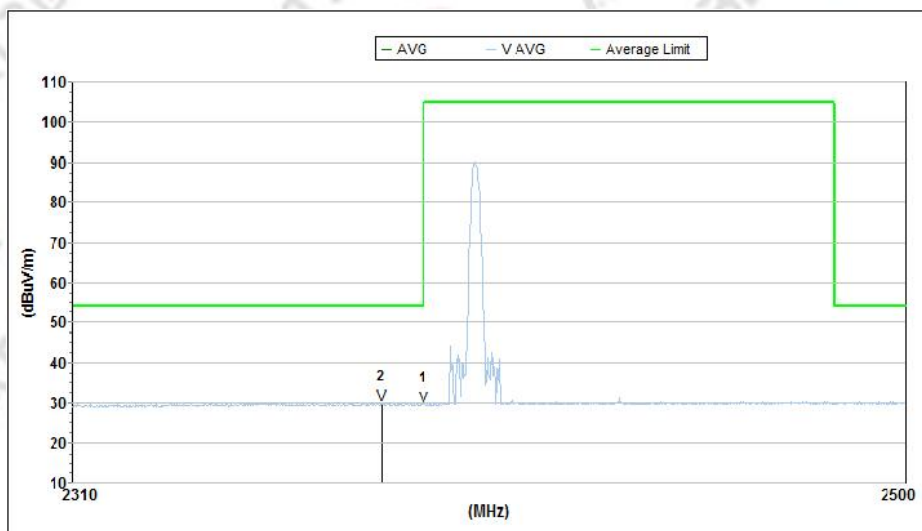

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
AVG								
1	2390.000	29.5	54.0	24.5	-21.1	54.1	5.6	V
2	2380.437	29.7	54.0	24.3	-21.2	54.1	5.6	V


Test Mode: BR-DH5

Test Channel: Lowest channel, Test Polarization: Horizontal

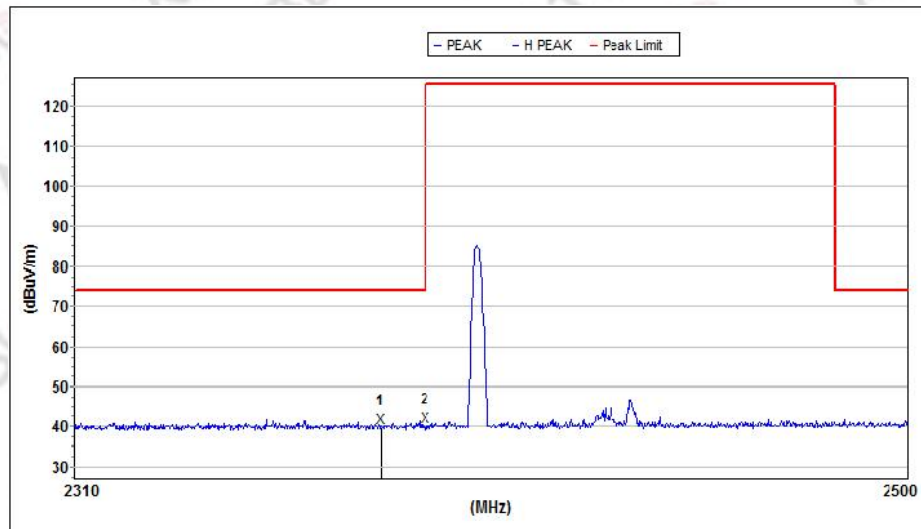


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol
PEAK								
1	2380.000	39.8	74.0	34.2	-21.2	54.1	5.6	H
2	2390.000	40.3	74.0	33.7	-21.1	54.1	5.6	H


Test Channel: Lowest channel, Test Polarization: Vertical

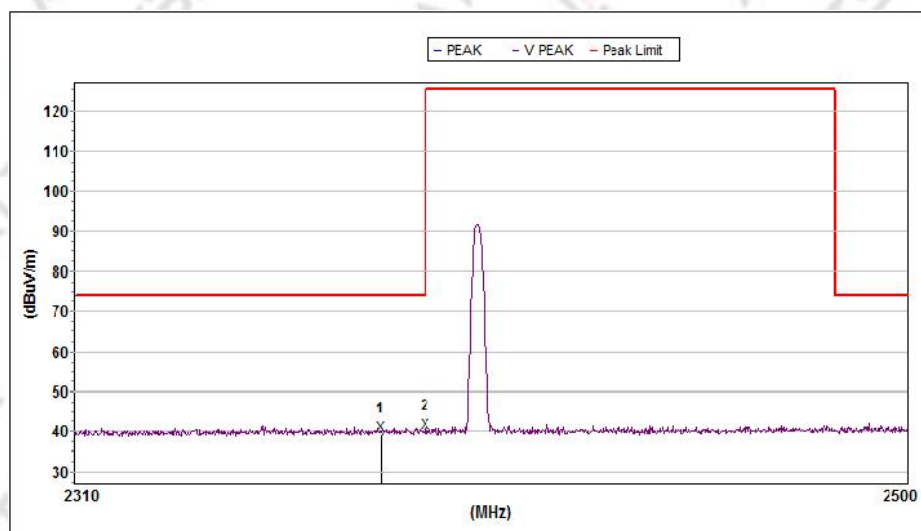

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol
PEAK								
1	2380.000	39.2	74.0	34.8	-21.2	54.1	5.6	V
2	2390.000	39.8	74.0	34.2	-21.1	54.1	5.6	V

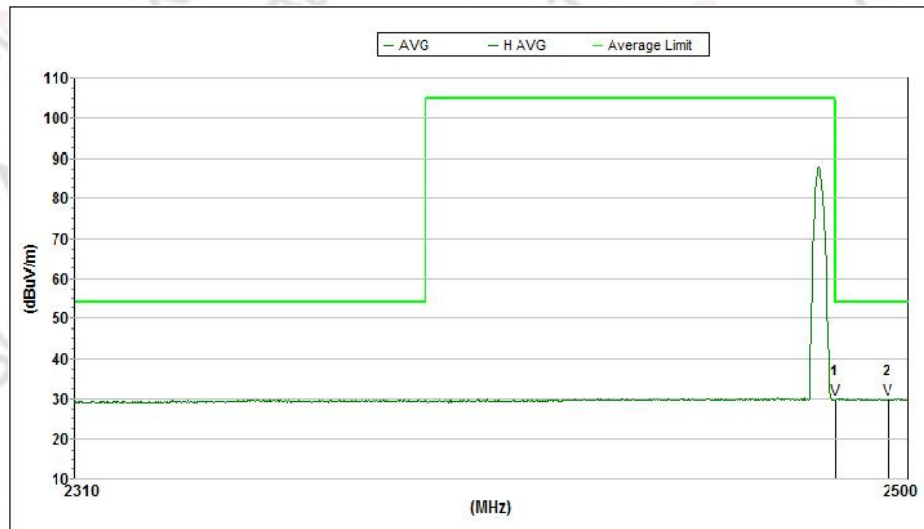Test Mode: BR-DH5
Test Channel: Highest channel, Test Polarization: Horizontal


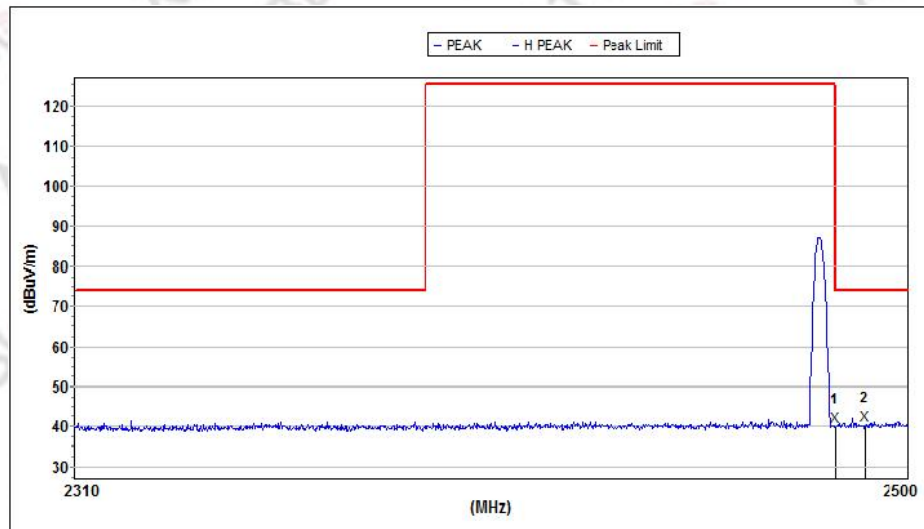
Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
AVG								
1	2483.500	30.2	54.0	23.8	-20.8	54.1	5.7	H
2	2495.459	30.1	54.0	23.9	-20.7	54.1	5.8	H

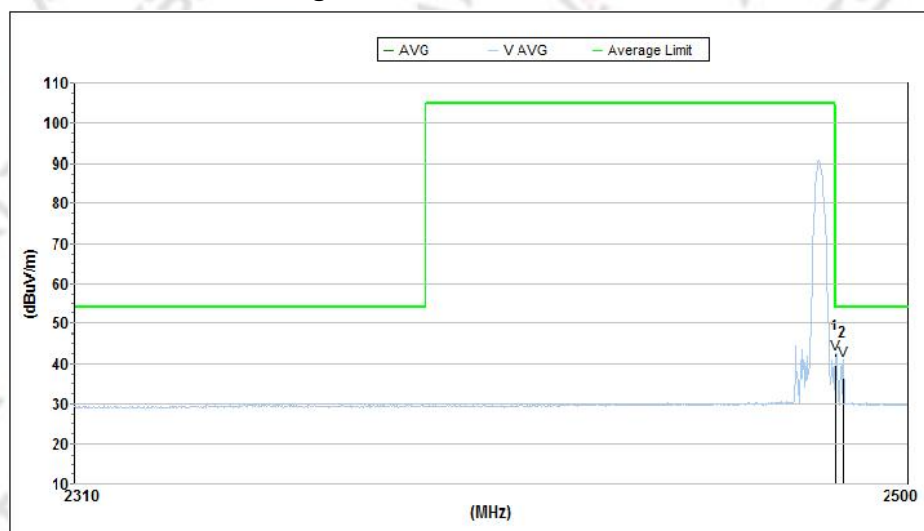Test Channel: Highest channel, Test Polarization: Vertical


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
AVG								
1	2483.500	42.6	54.0	11.4	-20.8	54.1	5.7	V
2	2485.223	41.0	54.0	13.0	-20.8	54.1	5.7	V


Test Mode: BR-DH5

Test Channel: Highest channel, Test Polarization: Horizontal



Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
PEAK								
1	2483.500	40.3	74.0	33.7	-20.8	54.1	5.7	H
2	2490.000	40.5	74.0	33.5	-20.7	54.1	5.8	H


Test Channel: Highest channel, Test Polarization: Vertical

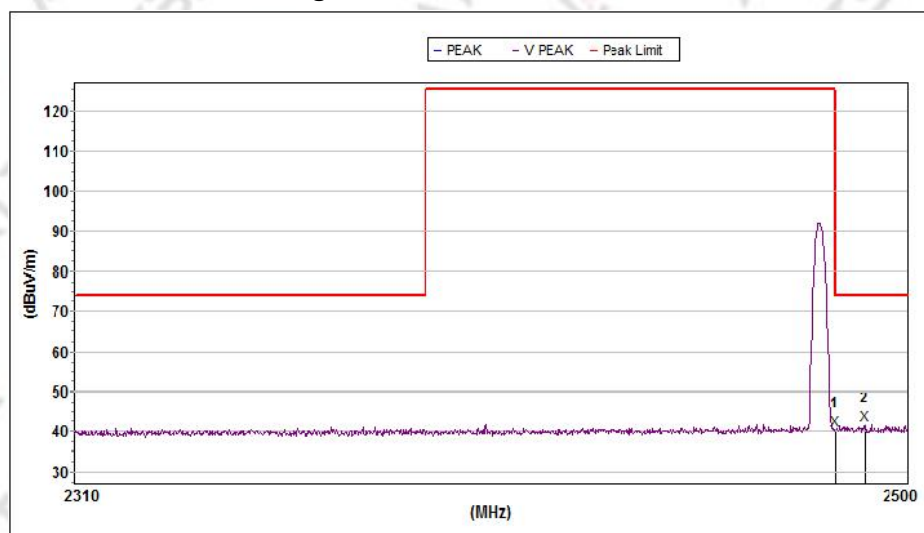

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
PEAK								
1	2483.500	40.5	74.0	33.5	-20.8	54.1	5.7	V
2	2490.000	41.8	74.0	32.2	-20.8	54.1	5.7	V


Test Mode: EDR-3DH5

Test Channel: Lowest channel, Test Polarization: Horizontal

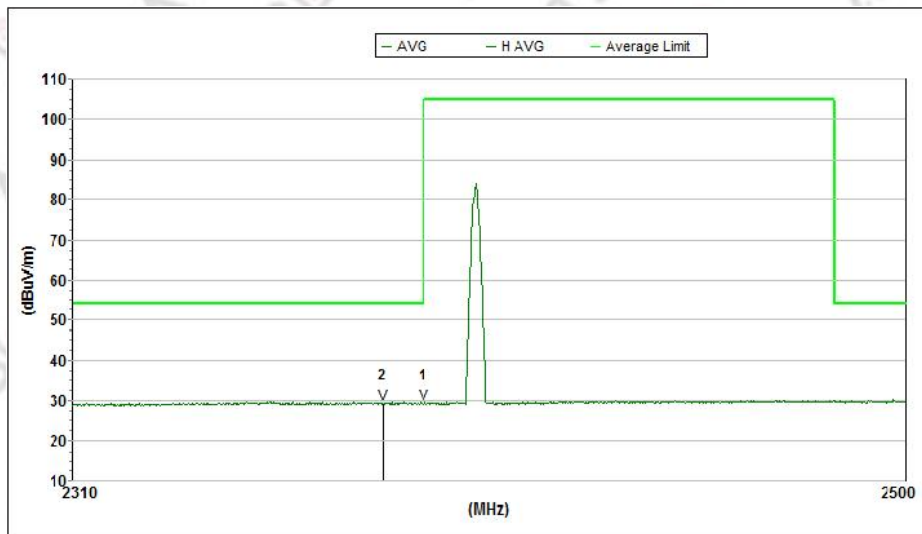

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
AVG								
1	2390.000	29.3	54.0	24.7	-21.1	54.1	5.6	H
2	2380.813	29.4	54.0	24.6	-21.2	54.1	5.6	H


Test Channel: Lowest channel, Test Polarization: Vertical

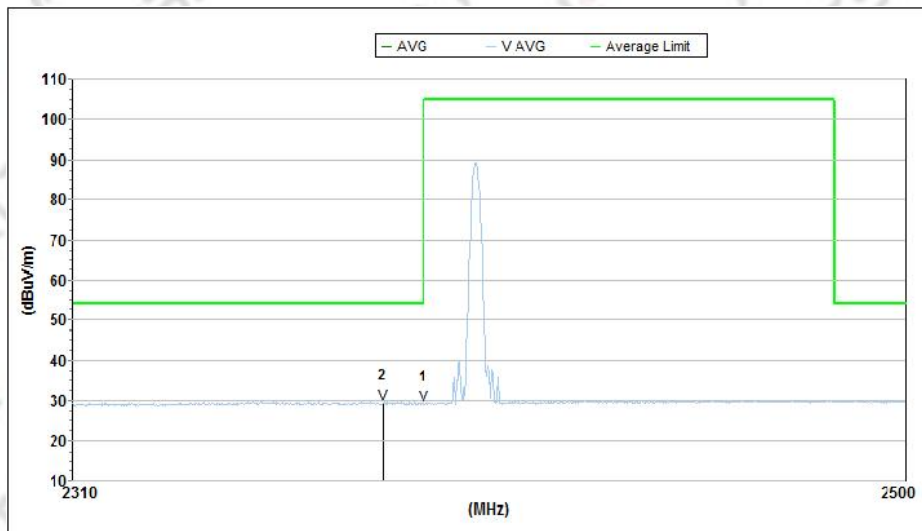

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
AVG								
1	2390.000	29.2	54.0	24.8	-21.1	54.1	5.6	V
2	2380.813	29.4	54.0	24.6	-21.2	54.1	5.6	V


Test Mode: EDR-3DH5

Test Channel: Lowest channel, Test Polarization: Horizontal

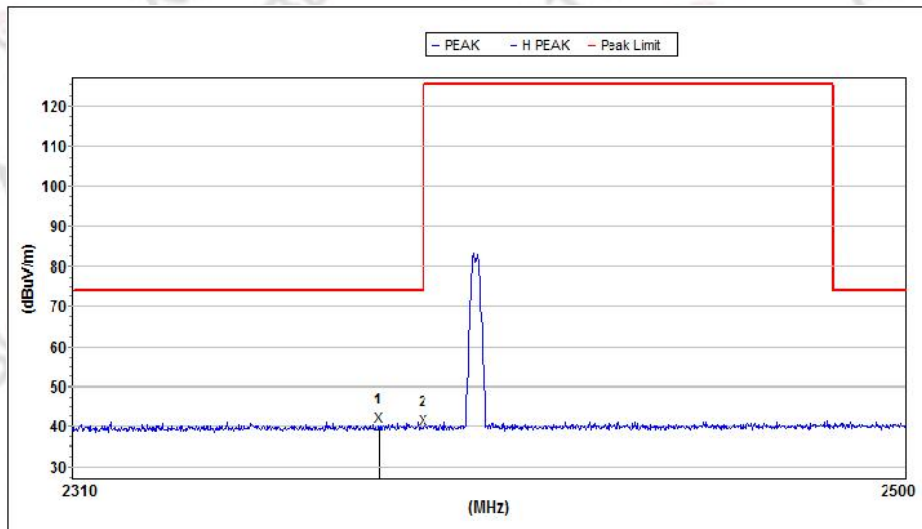


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
PEAK								
1	2380.000	40.0	74.0	34.0	-21.2	54.1	5.6	H
2	2390.000	39.4	74.0	34.6	-21.1	54.1	5.6	H


Test Channel: Lowest channel, Test Polarization: Vertical

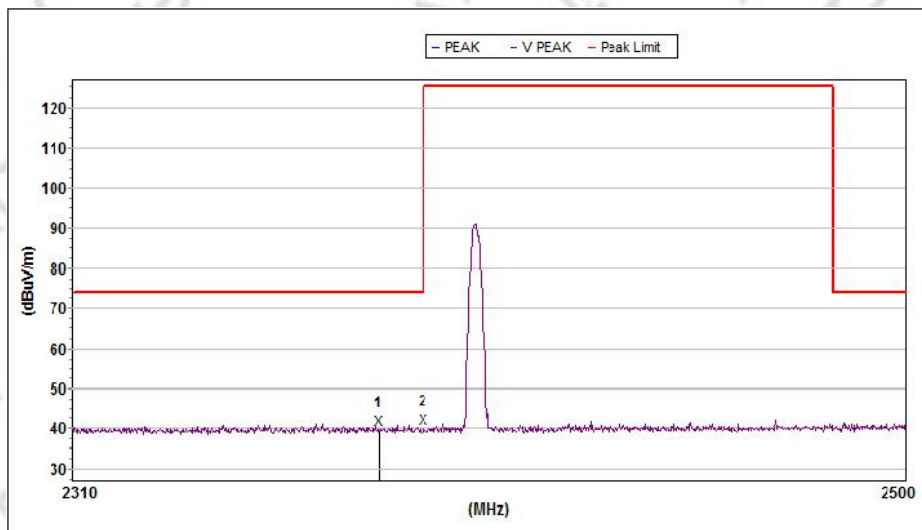


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
PEAK								
1	2380.000	39.9	74.0	34.1	-21.2	54.1	5.6	V
2	2390.000	40.1	74.0	33.9	-21.1	54.1	5.6	V

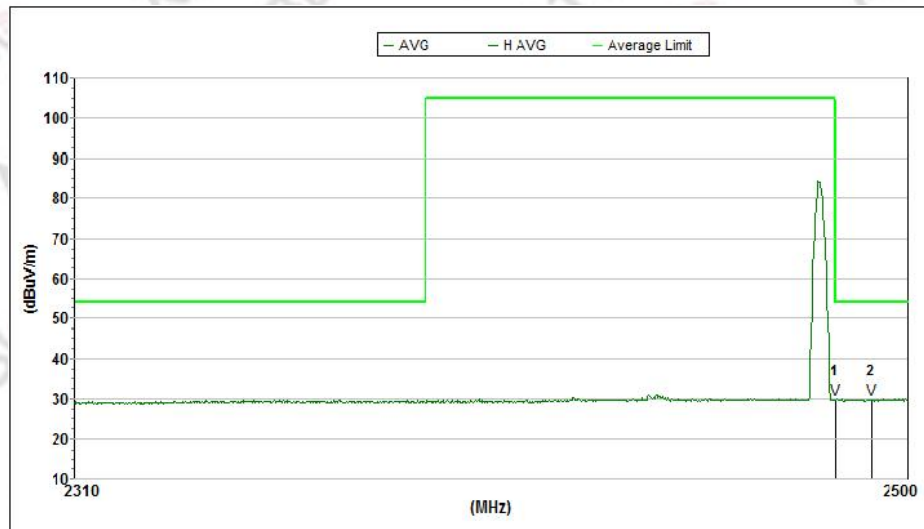Test Mode: EDR-3DH5
Test Channel: Highest channel, Test Polarization: Horizontal


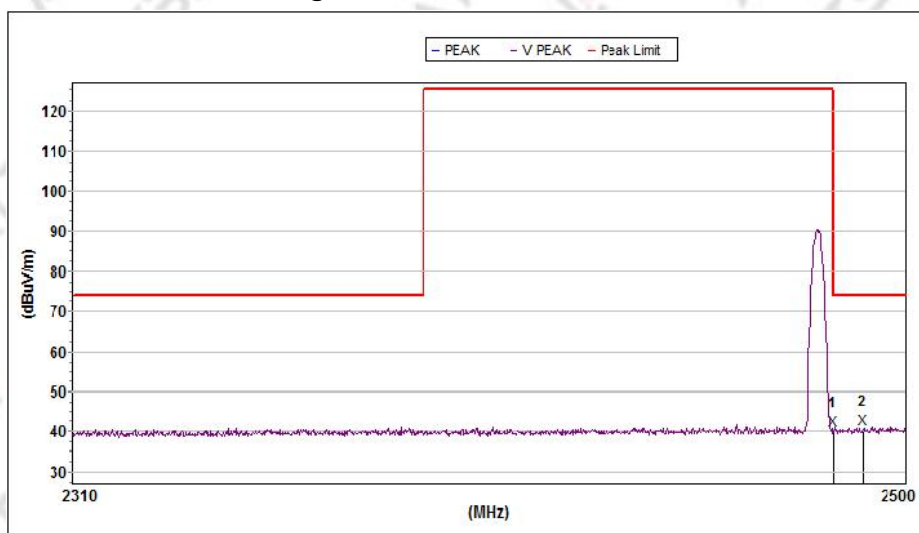
Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
AVG								
1	2483.500	30.2	54.0	23.8	-20.8	54.1	5.7	H
2	2491.714	30.1	54.0	23.9	-20.7	54.1	5.8	H

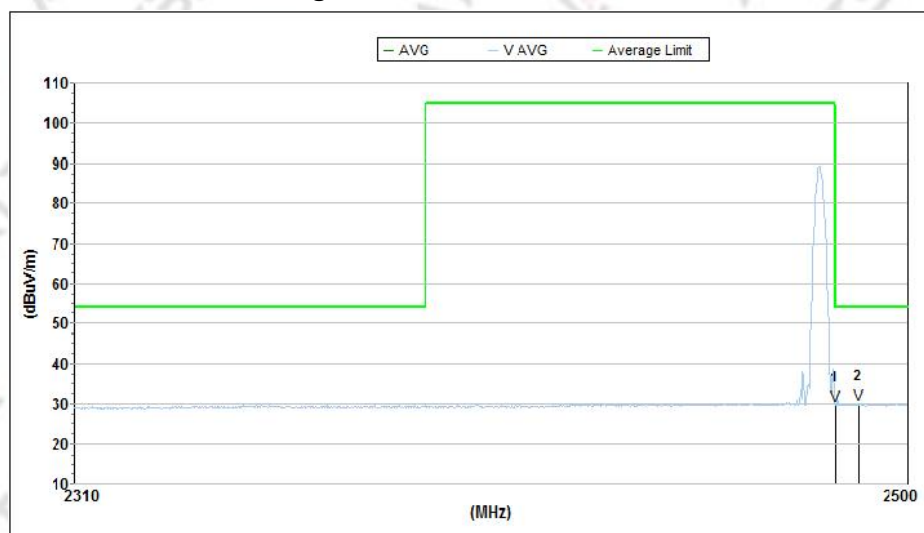Test Channel: Highest channel, Test Polarization: Vertical


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
AVG								
1	2483.500	29.7	54.0	24.3	-20.8	54.1	5.7	V
2	2488.565	30.0	54.0	24.0	-20.7	54.1	5.8	V

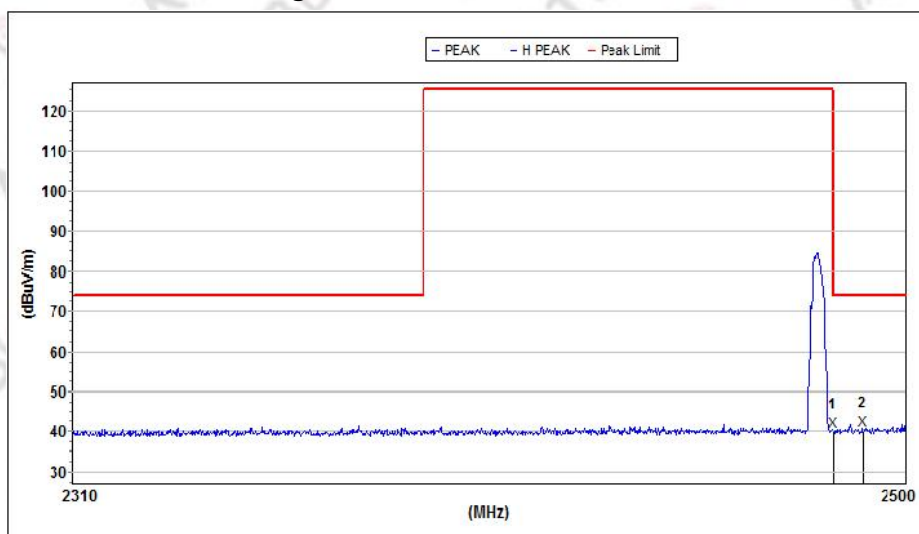Test Mode: EDR-3DH5
Test Channel: Highest channel, Test Polarization: Horizontal


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
PEAK								
1	2483.500	40.1	74.0	33.9	-20.8	54.1	5.7	H
2	2490.000	40.4	74.0	33.6	-20.7	54.1	5.8	H

Test Channel: Highest channel, Test Polarization: Vertical


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factor (dB)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
PEAK								
1	2483.500	40.6	74.0	33.4	-20.8	54.1	5.7	V
2	2490.000	40.7	74.0	33.3	-20.7	54.1	5.8	V

.*****END OF THE Appendix*****