FCC TEST REPORT
FCC ID: 2AT9B-AV1435

Report Number.....:	**BTF230719R00203**
Date of Test.....	June 26, 2023 to July 10, 2023
Date of issue.....:	July 10, 2023
Test Result .....:	PASS
Testing Laboratory..... :	**BTF Testing Lab (Shenzhen) Co., Ltd.**
Address ..... :	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Applicant's name .....:	**MAXMADE AUTO ELECTRONICS Co., LTD**
Address ..... :	Building 2, GIEC Industrial Park, Puzai Road, Pingdi, Longgang District, Shenzhen. China
Manufacturer's name .....:	**MAXMADE AUTO ELECTRONICS Co., LTD**
Address ..... :	Building 2, GIEC Industrial Park, Puzai Road, Pingdi, Longgang District, Shenzhen. China
Test specification:	
Standard.....:	FCC CFR Title 47 Part 15 Subpart C Section 15.247
Test procedure..... :	KDB558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013
Non-standard test method .....:	N/A

This device described above has been tested by BTF, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
This report shall not be reproduced except in full, without the written approval of BTF, this document may be altered or revised by BTF, personal only, and shall be noted in the revision of the document.

Product name..... :	**Car multimedia player**
Trademark .....:	Dual, Jensen, Axxera
Model/Type reference..... :	D2WC7 DMD7W, JC7DM, DC7DWL, JDASHCP, JC7DM, JDM7WL
Ratings..... :	Input: DC 12V, 2A Output: DC 5V, 2.1A

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Testing procedure and testing location:

Testing Laboratory.....:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address..... :	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Tested by (name + signature).....:	Chris Liu
Approved (name + signature)..... :	Ryan.CJ

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Table of Contents

Page

1. VERSION 5
2. TEST SUMMARY 6
2.1 TEST FACILITY 7
2.2 MEASUREMENT UNCERTAINTY 7
3. GENERAL INFORMATION 8
3.1 GENERAL DESCRIPTION OF EUT 8
3.2 Test Setup Configuration 9
3.3 Support Equipment 10
3.4 Test Mode 10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS 11
4. EMC EMISSION TEST 13
4.1 Conducted emissions 13
4.1.1 POWER LINE CONDUCTED EMISSION Limits 13
4.1.2 TEST PROCEDURE 13
4.1.3 DEVIATION FROM TEST STANDARD 13
4.1.4 TEST SETUP 14
4.1.5 EUT OPERATING CONDITIONS 14
4.1.6 Test Result 14
4.2 Radiated emissions 15
4.2.1 Radiated Emission Limits 15
4.2.2 TEST PROCEDURE 15
4.2.3 DEVIATION FROM TEST STANDARD 16
4.2.4 TEST SETUP 16
4.2.5 EUT OPERATING CONDITIONS 17
4.2.6 TEST RESULTS 18
5. RADIATED BAND EMISSION MEASUREMENT 26
5.1 Test Requirement: 26
5.2 TEST PROCEDURE 26
5.3 DEVIATION FROM TEST STANDARD 27
5.4 TEST SETUP 27
5.5 EUT OPERATING CONDITIONS 27
5.6 TEST RESULT 28
6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION 30
6.1 Limit 30
6.2 Test Setup 30
6.3 Test procedure 30
6.4 DEVIATION FROM STANDARD 30
6.5 Test Result 31
7. 20DB&99% BANDWIDTH 43
7.1 Test Setup 43
7.2 Limit 43
7.3 Test procedure 43
7.4 DEVIATION FROM STANDARD 43
7.5 Test Result 44
8. MAXIMUM PEAK OUTPUT POWER 49
8.1 Block Diagram Of Test Setup 49
8.2 Limit 49
8.3 Test procedure 49
8.4 DEVIATION FROM STANDARD 49
8.5 Test Result 49

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

9. HOPPING CHANNEL SEPARATION 52
9.1 Test Setup 52
9.2 Test procedure 52
9.3 DEVIATION FROM STANDARD 52
9.4 Test Result 53
10.NUMBER OF HOPPING FREQUENCY 58
10.1 Test Setup 58
10.2 Test procedure 58
10.3 DEVIATION FROM STANDARD 58
10.4 Test Result 59
11. DWELL TIME 61
11.1 Test Setup 61
11.2 Test procedure 61
11.3 DEVIATION FROM STANDARD 61
11.4 Test Result 62
12. ANTENNA REQUIREMENT 68
13. TEST SETUP PHOTO 69
14. EUT CONSTRUCTIONAL DETAILS 69

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

1. VERSION

Report No.	Version	Description	Approved
BTF230719R00203	R_V0	Initial issue of report	July 10, 2023

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

2. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (b)(4)	Antenna Requirement	PASS	
15.207	AC Power Line Conducted Emission	N/A	
15.247 (b)(1)	Conducted Peak Output Power	PASS	
15.247 (a)(1)	20dB Occupied Bandwidth 99% OCB	PASS	
15.247 (a)(1)	Carrier Frequencies Separation	PASS	
15.247 (a)(1)(iii)	Hopping Channel Number	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205/15.209	Radiated Emission and Restricted Band	PASS	
15.247(d)	Conducted Unwanted emissions and Band Edge	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

2.1 TEST FACILITY

BTF Testing Lab (Shenzhen) Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 518915
Designation Number: CN1330
Company Number: 27844
CAB Identifier: CN0135

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ± U，where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2，providing a level of confidence of approximately 95 %。

Measurement	Value
Occupied Channel Bandwidth	69 KHz
RF output power, conducted	0.87 dB
Power Spectral Density, conducted	0.69 dB
Unwanted Emissions, conducted	0.94 dB
All emissions, radiated(<1GHz)	4.12 dB
All emissions, radiated(>1GHz)	4.16 dB
Temperature	0.82 °C
Humidity	4.1 %

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Car multimedia player
Model No.:	D2WC7 DMD7W, JC7DM, DC7DWL, JDASHCP, JC7DM, JDM7WL
Model Difference:	All the model are of the same circuit and RF module, and the only difference are brand and packaging. The model D2WC7 is the tested sample.
Hardware Version:	R4
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Channel numbers:	79
Channel separation:	2402MHz-2480MHz
Modulation technology:	GFSK, π/4DQPSK, 8DPSK
Antenna Type:	FPC Antenna
Antenna gain:	6.42 dBi
Power supply:	Input: DC 12 V, 2 A Output: DC 5V, 2.1A

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

3.2 Test Setup Configuration

Radiated Emission

EUT

Conducted Spurious

EUT

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Car multimedia player	N/A	D2WC7	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:
(1) The support equipment was authorized by Declaration of Confirmation.
(2) For detachable type I/O cable should be specified the length in cm in『Length』column.

3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	RFTest software	/	V1.00	/	/	/
2	RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
3	RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
4	Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
5	Adjustable Direct Current Regulated Power Supply	Tongmen	etm-6050c	20211026123	2022-11-24	2023-11-23
6	WIDEBAND RADIO COMMNUNICATIO N TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
7	MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23
8	Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
9	Preamplifier	SCHWARZBE CK	BBV9744	00246	2022-11-24	2023-11-23
10	RE Cable	REBES Talent	UF1-SMASMA M-10m	21101566	2022-11-24	2023-11-23
11	RE Cable	REBES Talent	UF2-NMNM-1 0m	21101570	2022-11-24	2023-11-23
12	RE Cable	REBES Talent	UF1-SMASMA M-1m	21101568	2022-11-24	2023-11-23
13	RE Cable	REBES Talent	UF2-NMNM-1 m	21101576	2022-11-24	2023-11-23
14	RE Cable	REBES Talent	UF2-NMNM-2. 5m	21101573	2022-11-24	2023-11-23
15	POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
16	Horn Antenna	SCHWARZBE CK	BBHA9170	01157	2021-11-28	2023-11-27
17	EMI TEST RECEIVER	ROHDE&SCH WARZ	ESCI7	101032	2022-11-24	2023-11-23
18	SIGNAL ANALYZER	ROHDE&SCH WARZ	FSQ40	100010	2022-11-24	2023-11-23
19	POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
20	Broadband Preamplilifier	SCHWARZBE CK	BBV9718D	00008	2023-03-24	2024-03-23
21	Horn Antenna	SCHWARZBE CK	BBHA9120D	2597	2022-05-22	2024-05-21

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

22	EZ_EMC	Frad	FA-03A2 RE+	/	/	/
23	POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
24	Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27
25	Loop Antenna	SCHWARZBECK	FMZB1519B	00191	2022.6.12	2024.6.11

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00953	2022-11-24	2023-11-23
2	Coaxial Switcher	SCHWARZBECK	CX210	CX210	2022-11-24	2023-11-23
3	V-LISN	SCHWARZBECK	NSLK 8127	01073	2022-11-24	2023-11-23
4	LISN	AFJ	LS16/110VAC	16010020076	2023-02-23	2024-02-22
5	EMI Receiver	ROHDE&SCHWARZ	ESCI3	101422	2022-11-24	2023-11-23
6	EZ_EMC	Frad	FA-03A2 RE+	/	/	/

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

4. EMC EMISSION TEST

4.1 Conducted emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
d. LISN at least 80 cm from nearest part of EUT chassis.
e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

4.1.4 TEST SETUP

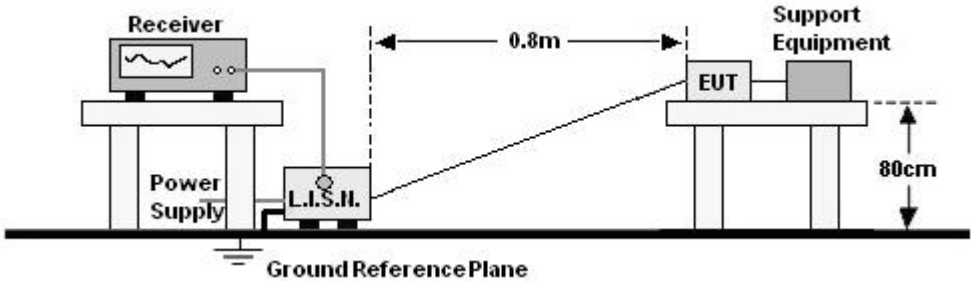

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 Test Result

N/A
The EUT is powered by the DC only, the test item is not applicable.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

4.2 Radiated emissions

Test Requirement:	FCC Part15 C Section 15.209
Test Method:	ANSI C63.10:2013
Test Frequency Range:	9kHz to 25GHz
Test site:	Measurement Distance: 3m
Receiver setup:	

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

4.2.1 Radiated Emission Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation

4.2.4 TEST SETUP

（A）Radiated Emission Test-Up Frequency Below 30MHz

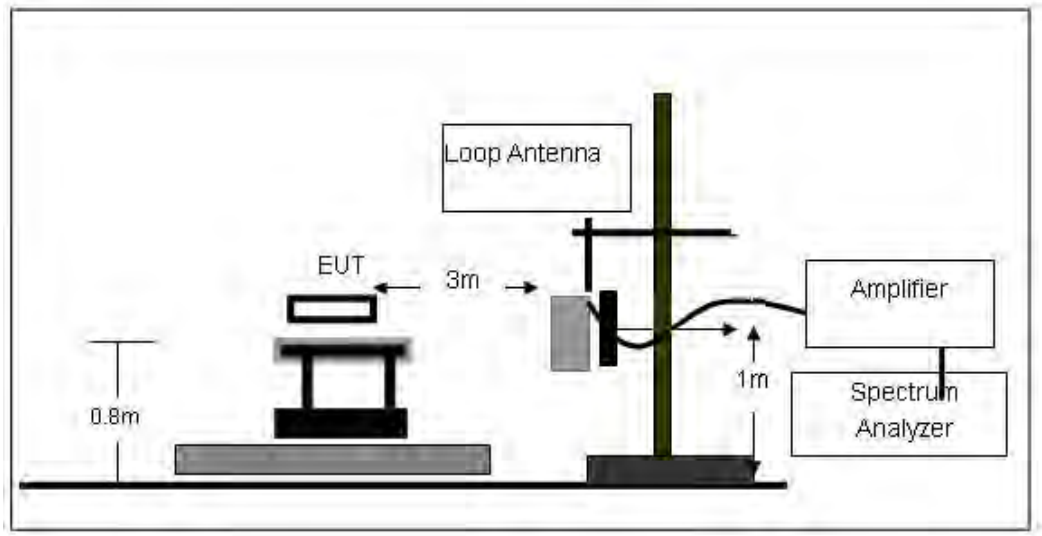

（B）Radiated Emission Test-Up Frequency 30MHz~1GHz

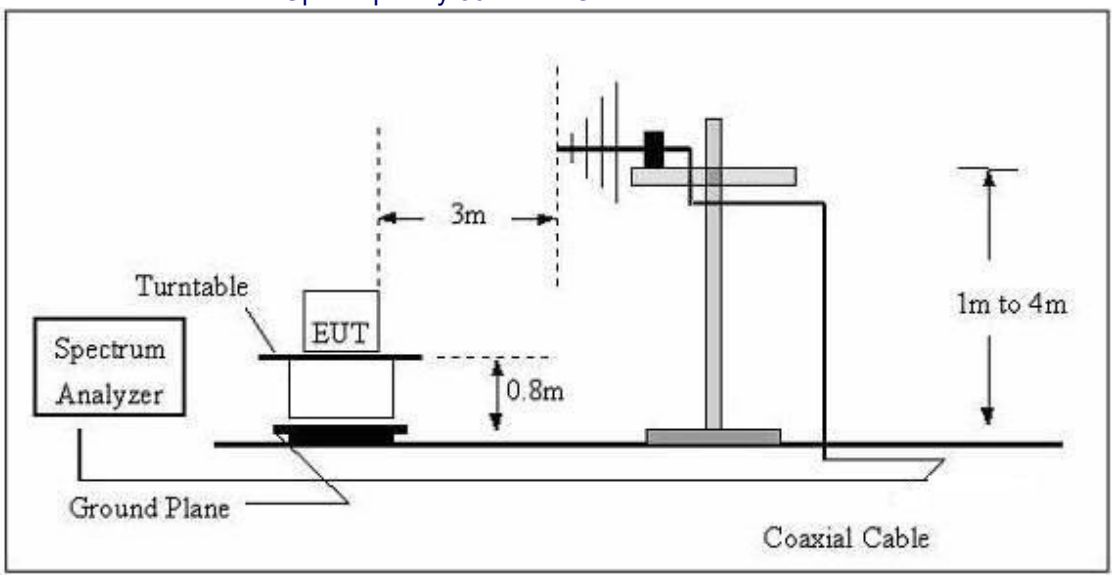

（C）Radiated Emission Test-Up Frequency Above 1GHz

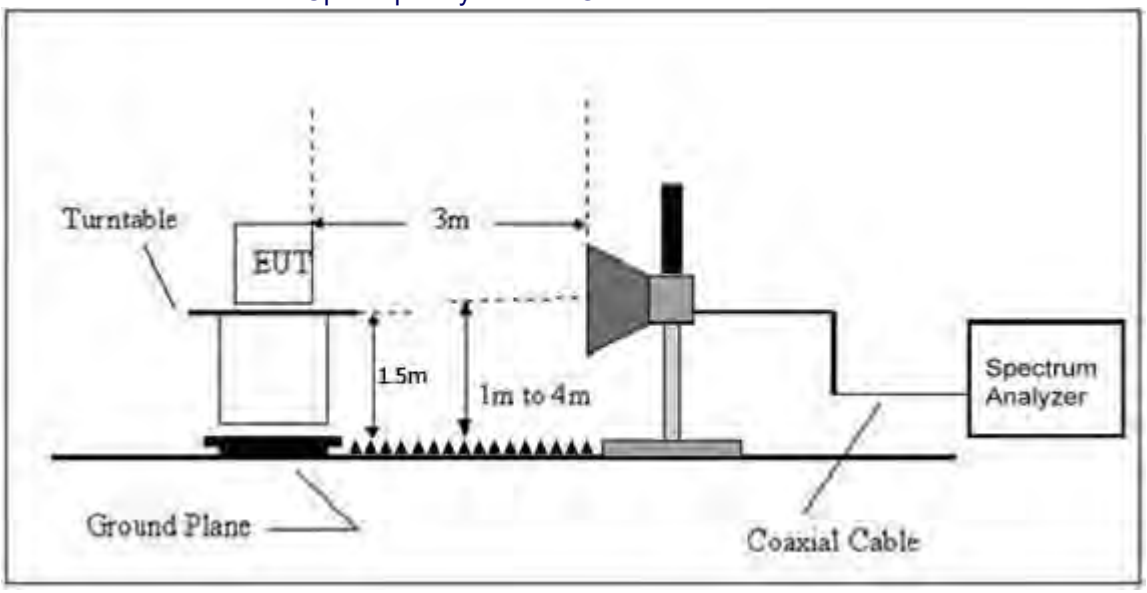

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

4.2.6 TEST RESULTS

Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

Between 30MHz – 1GHz

Temperature:	25.6℃	Relative Humidity:	47%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 12V		

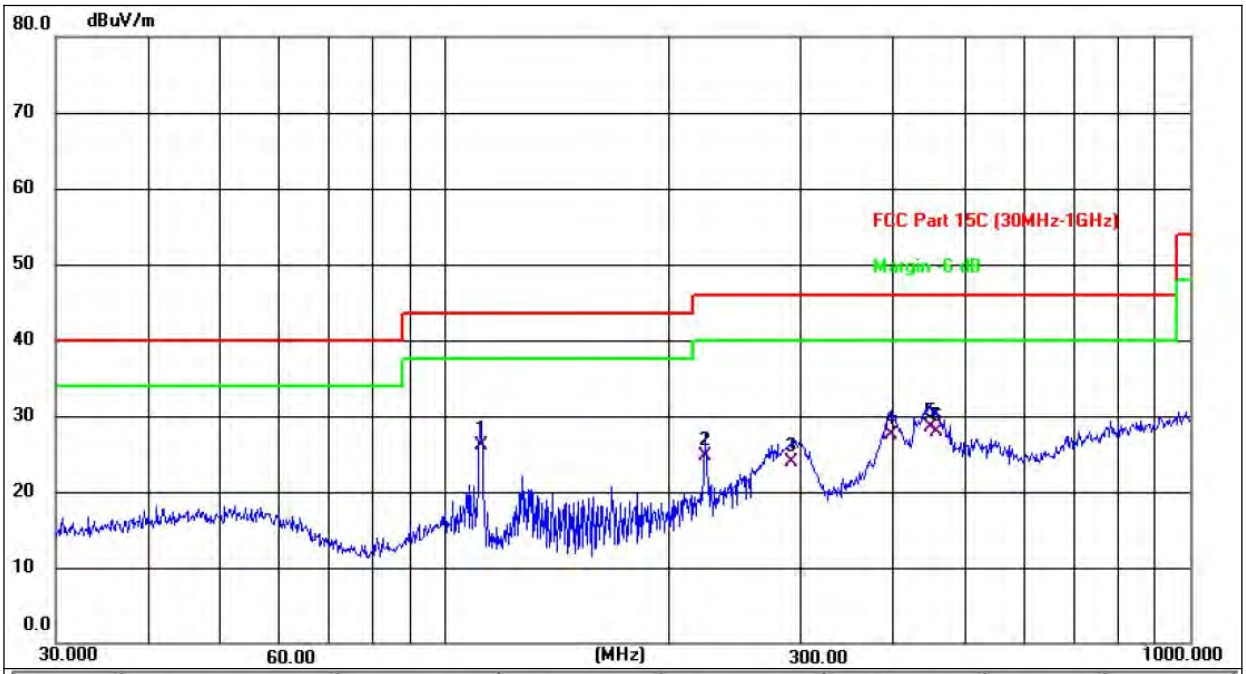

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	111.7380	37.90	-11.79	26.11	43.50	-17.39	QP
2	223.7333	34.40	-9.67	24.73	46.00	-21.27	QP
3	292.0583	31.75	-7.92	23.83	46.00	-22.17	QP
4	396.2415	33.49	-5.93	27.56	46.00	-18.44	QP
5	447.9822	33.49	-4.96	28.53	46.00	-17.47	QP
6	457.5073	32.62	-4.78	27.84	46.00	-18.16	QP

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Temperature:	25.6℃	Relative Humidity:	47%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

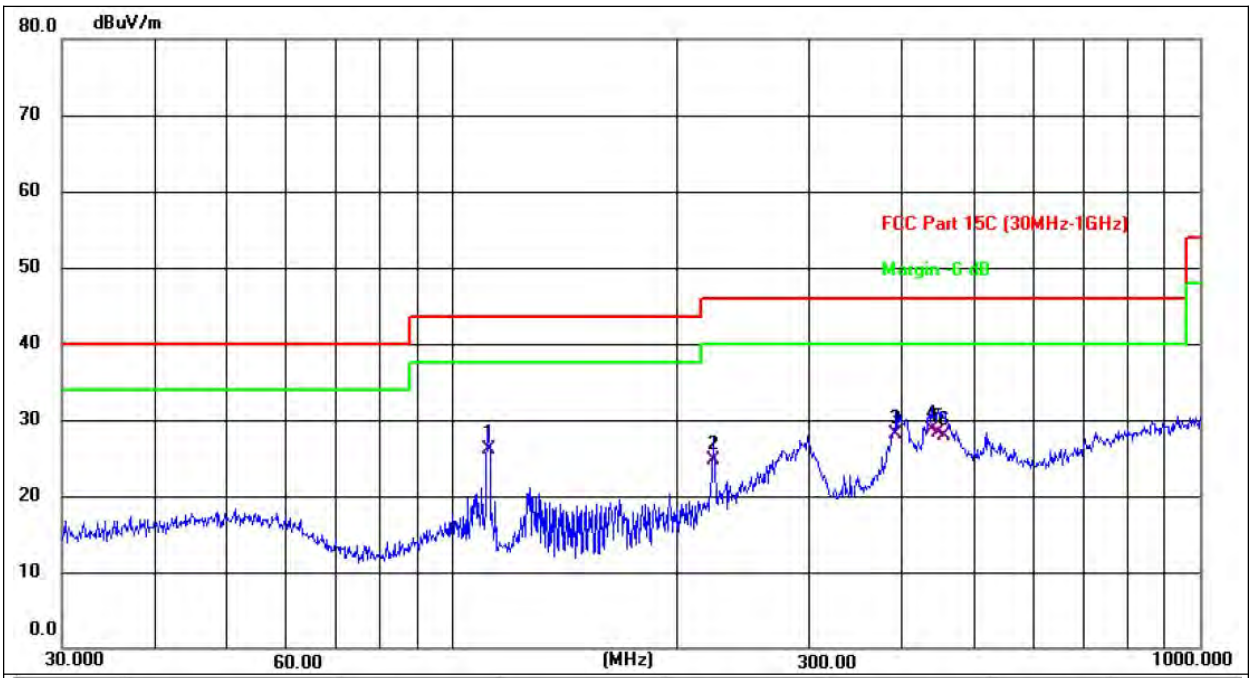

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	111.7380	37.82	-11.79	26.03	43.50	-17.47	QP
2	222.9502	34.43	-9.69	24.74	46.00	-21.26	QP
3	392.0950	34.13	-6.01	28.12	46.00	-17.88	QP
4 *	437.1200	33.80	-5.16	28.64	46.00	-17.36	QP
5	446.4140	33.35	-4.98	28.37	46.00	-17.63	QP
6	454.3100	32.68	-4.84	27.84	46.00	-18.16	QP

Remarks:
1.Final Level =Receiver Read level + Antenna Factor + Cable Loss
2.The emission levels of other frequencies are very lower than the limit and not show in test report.
3.The test data shows only the worst case GFSK mode(Low Channel:2402MHz).

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

1GHz~25GHz

GFSK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2402MHz									
V	4804.00	61.08	30.55	5.77	24.66	60.96	74	-13.04	Pk
V	4804.00	44.15	30.55	5.77	24.66	44.03	54	-9.97	AV
V	7206.00	53.82	30.33	6.32	24.55	54.36	74	-19.64	Pk
V	7206.00	37.51	30.33	6.32	24.55	38.05	54	-15.95	AV
V	9608.00	51.68	30.85	7.45	24.69	52.97	74	-21.03	Pk
V	9608.00	34.72	30.85	7.45	24.69	36.01	54	-17.99	AV
V	12010.00	56.55	31.02	8.99	25.57	60.09	74	-13.91	Pk
V	12010.00	38.51	31.02	8.99	25.57	42.05	54	-11.95	AV
H	4804.00	53.38	30.55	5.77	24.66	53.26	74	-20.74	Pk
H	4804.00	36.55	30.55	5.77	24.66	36.43	54	-17.57	AV
H	7206.00	50.47	30.33	6.32	24.55	51.01	74	-22.99	Pk
H	7206.00	35.7	30.33	6.32	24.55	36.24	54	-17.76	AV
H	9608.00	48.97	30.85	7.45	24.69	50.26	74	-23.74	Pk
H	9608.00	36.42	30.85	7.45	24.69	37.71	54	-16.29	AV
H	12010.00	47.73	31.02	8.99	25.57	51.27	74	-22.73	Pk
H	12010.00	33.79	31.02	8.99	25.57	37.33	54	-16.67	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2441MHz									
V	4882.00	61.27	30.55	5.77	24.66	61.15	74	-12.85	Pk
V	4882.00	42.52	30.55	5.77	24.66	42.4	54	-11.6	AV
V	7323.00	53.18	30.33	6.32	24.55	53.72	74	-20.28	Pk
V	7323.00	36.74	30.33	6.32	24.55	37.28	54	-16.72	AV
V	9764.00	51.19	30.85	7.45	24.69	52.48	74	-21.52	Pk
V	9764.00	36.79	30.85	7.45	24.69	38.08	54	-15.92	AV
V	12205.00	55.59	31.02	8.99	25.57	59.13	74	-14.87	Pk
V	12205.00	39.33	31.02	8.99	25.57	42.87	54	-11.13	AV
H	4882.00	54.24	30.55	5.77	24.66	54.12	74	-19.88	Pk
H	4882.00	37.34	30.55	5.77	24.66	37.22	54	-16.78	AV
H	7323.00	52.26	30.33	6.32	24.55	52.8	74	-21.2	Pk
H	7323.00	36.46	30.33	6.32	24.55	37	54	-17	AV
H	9764.00	49.76	30.85	7.45	24.69	51.05	74	-22.95	Pk
H	9764.00	34.61	30.85	7.45	24.69	35.9	54	-18.1	AV
H	12205.00	46.92	31.02	8.99	25.57	50.46	74	-23.54	Pk
H	12205.00	34.1	31.02	8.99	25.57	37.64	54	-16.36	AV

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	60.12	30.55	5.77	24.66	60	74	-14	Pk
V	4960.00	43.22	30.55	5.77	24.66	43.1	54	-10.9	AV
V	7440.00	53.99	30.33	6.32	24.55	54.53	74	-19.47	Pk
V	7440.00	37.53	30.33	6.32	24.55	38.07	54	-15.93	AV
V	9920.00	51.15	30.85	7.45	24.69	52.44	74	-21.56	Pk
V	9920.00	35.45	30.85	7.45	24.69	36.74	54	-17.26	AV
V	12400.00	56.18	31.02	8.99	25.57	59.72	74	-14.28	Pk
V	12400.00	37.65	31.02	8.99	25.57	41.19	54	-12.81	AV
H	4960.00	53.87	30.55	5.77	24.66	53.75	74	-20.25	Pk
H	4960.00	38.13	30.55	5.77	24.66	38.01	54	-15.99	AV
H	7440.00	51.18	30.33	6.32	24.55	51.72	74	-22.28	Pk
H	7440.00	35.33	30.33	6.32	24.55	35.87	54	-18.13	AV
H	9920.00	48.5	30.85	7.45	24.69	49.79	74	-24.21	Pk
H	9920.00	35.58	30.85	7.45	24.69	36.87	54	-17.13	AV
H	12400.00	47.32	31.02	8.99	25.57	50.86	74	-23.14	Pk
H	12400.00	33.3	31.02	8.99	25.57	36.84	54	-17.16	AV

Remark:
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

π/4DQPSK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2402MHz									
V	4804.00	62.33	30.55	5.77	24.66	62.21	74	-11.79	Pk
V	4804.00	43.79	30.55	5.77	24.66	43.67	54	-10.33	AV
V	7206.00	53.24	30.33	6.32	24.55	53.78	74	-20.22	Pk
V	7206.00	38.04	30.33	6.32	24.55	38.58	54	-15.42	AV
V	9608.00	51.69	30.85	7.45	24.69	52.98	74	-21.02	Pk
V	9608.00	35.04	30.85	7.45	24.69	36.33	54	-17.67	AV
V	12010.00	56.35	31.02	8.99	25.57	59.89	74	-14.11	Pk
V	12010.00	38.82	31.02	8.99	25.57	42.36	54	-11.64	AV
H	4804.00	53.98	30.55	5.77	24.66	53.86	74	-20.14	Pk
H	4804.00	37.73	30.55	5.77	24.66	37.61	54	-16.39	AV
H	7206.00	50.88	30.33	6.32	24.55	51.42	74	-22.58	Pk
H	7206.00	36.09	30.33	6.32	24.55	36.63	54	-17.37	AV
H	9608.00	49.42	30.85	7.45	24.69	50.71	74	-23.29	Pk
H	9608.00	35.69	30.85	7.45	24.69	36.98	54	-17.02	AV
H	12010.00	46.91	31.02	8.99	25.57	50.45	74	-23.55	Pk
H	12010.00	33.74	31.02	8.99	25.57	37.28	54	-16.72	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2441MHz									
V	4882.00	60.22	30.55	5.77	24.66	60.1	74	-13.9	Pk
V	4882.00	43.2	30.55	5.77	24.66	43.08	54	-10.92	AV
V	7323.00	53.66	30.33	6.32	24.55	54.2	74	-19.8	Pk
V	7323.00	38.38	30.33	6.32	24.55	38.92	54	-15.08	AV
V	9764.00	52.26	30.85	7.45	24.69	53.55	74	-20.45	Pk
V	9764.00	34.56	30.85	7.45	24.69	35.85	54	-18.15	AV
V	12205.00	55.71	31.02	8.99	25.57	59.25	74	-14.75	Pk
V	12205.00	37.87	31.02	8.99	25.57	41.41	54	-12.59	AV
H	4882.00	53.94	30.55	5.77	24.66	53.82	74	-20.18	Pk
H	4882.00	37.14	30.55	5.77	24.66	37.02	54	-16.98	AV
H	7323.00	52.18	30.33	6.32	24.55	52.72	74	-21.28	Pk
H	7323.00	37.07	30.33	6.32	24.55	37.61	54	-16.39	AV
H	9764.00	50.23	30.85	7.45	24.69	51.52	74	-22.48	Pk
H	9764.00	35.43	30.85	7.45	24.69	36.72	54	-17.28	AV
H	12205.00	48.17	31.02	8.99	25.57	51.71	74	-22.29	Pk
H	12205.00	33.94	31.02	8.99	25.57	37.48	54	-16.52	AV

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	58.8	30.55	5.77	24.66	58.68	74	-15.32	Pk
V	4960.00	43.38	30.55	5.77	24.66	43.26	54	-10.74	AV
V	7440.00	53.87	30.33	6.32	24.55	54.41	74	-19.59	Pk
V	7440.00	38.06	30.33	6.32	24.55	38.6	54	-15.4	AV
V	9920.00	51.82	30.85	7.45	24.69	53.11	74	-20.89	Pk
V	9920.00	36.61	30.85	7.45	24.69	37.9	54	-16.1	AV
V	12400.00	56.91	31.02	8.99	25.57	60.45	74	-13.55	Pk
V	12400.00	39.09	31.02	8.99	25.57	42.63	54	-11.37	AV
H	4960.00	52.95	30.55	5.77	24.66	52.83	74	-21.17	Pk
H	4960.00	36.82	30.55	5.77	24.66	36.7	54	-17.3	AV
H	7440.00	50.11	30.33	6.32	24.55	50.65	74	-23.35	Pk
H	7440.00	37.5	30.33	6.32	24.55	38.04	54	-15.96	AV
H	9920.00	49.19	30.85	7.45	24.69	50.48	74	-23.52	Pk
H	9920.00	35.98	30.85	7.45	24.69	37.27	54	-16.73	AV
H	12400.00	47.82	31.02	8.99	25.57	51.36	74	-22.64	Pk
H	12400.00	33.42	31.02	8.99	25.57	36.96	54	-17.04	AV

Remark:
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

8DPSK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2402MHz									
V	4804.00	61.28	30.55	5.77	24.66	61.16	74	-12.84	Pk
V	4804.00	44.31	30.55	5.77	24.66	44.19	54	-9.81	AV
V	7206.00	54.28	30.33	6.32	24.55	54.82	74	-19.18	Pk
V	7206.00	36.88	30.33	6.32	24.55	37.42	54	-16.58	AV
V	9608.00	52.74	30.85	7.45	24.69	54.03	74	-19.97	Pk
V	9608.00	36.1	30.85	7.45	24.69	37.39	54	-16.61	AV
V	12010.00	56.25	31.02	8.99	25.57	59.79	74	-14.21	Pk
V	12010.00	38.81	31.02	8.99	25.57	42.35	54	-11.65	AV
H	4804.00	53.89	30.55	5.77	24.66	53.77	74	-20.23	Pk
H	4804.00	36.34	30.55	5.77	24.66	36.22	54	-17.78	AV
H	7206.00	52.39	30.33	6.32	24.55	52.93	74	-21.07	Pk
H	7206.00	36.65	30.33	6.32	24.55	37.19	54	-16.81	AV
H	9608.00	48.88	30.85	7.45	24.69	50.17	74	-23.83	Pk
H	9608.00	35.19	30.85	7.45	24.69	36.48	54	-17.52	AV
H	12010.00	46.89	31.02	8.99	25.57	50.43	74	-23.57	Pk
H	12010.00	32.77	31.02	8.99	25.57	36.31	54	-17.69	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2441MHz									
V	4882.00	61.16	30.55	5.77	24.66	61.04	74	-12.96	Pk
V	4882.00	44.44	30.55	5.77	24.66	44.32	54	-9.68	AV
V	7323.00	52.8	30.33	6.32	24.55	53.34	74	-20.66	Pk
V	7323.00	38.7	30.33	6.32	24.55	39.24	54	-14.76	AV
V	9764.00	51.16	30.85	7.45	24.69	52.45	74	-21.55	Pk
V	9764.00	34.9	30.85	7.45	24.69	36.19	54	-17.81	AV
V	12205.00	55.27	31.02	8.99	25.57	58.81	74	-15.19	Pk
V	12205.00	38.31	31.02	8.99	25.57	41.85	54	-12.15	AV
H	4882.00	53.51	30.55	5.77	24.66	53.39	74	-20.61	Pk
H	4882.00	37.56	30.55	5.77	24.66	37.44	54	-16.56	AV
H	7323.00	50.47	30.33	6.32	24.55	51.01	74	-22.99	Pk
H	7323.00	36.33	30.33	6.32	24.55	36.87	54	-17.13	AV
H	9764.00	49.74	30.85	7.45	24.69	51.03	74	-22.97	Pk
H	9764.00	34.95	30.85	7.45	24.69	36.24	54	-17.76	AV
H	12205.00	46.43	31.02	8.99	25.57	49.97	74	-24.03	Pk
H	12205.00	33.47	31.02	8.99	25.57	37.01	54	-16.99	AV

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	60.53	30.55	5.77	24.66	60.41	74	-13.59	Pk
V	4960.00	42.74	30.55	5.77	24.66	42.62	54	-11.38	AV
V	7440.00	53.39	30.33	6.32	24.55	53.93	74	-20.07	Pk
V	7440.00	38.89	30.33	6.32	24.55	39.43	54	-14.57	AV
V	9920.00	52.33	30.85	7.45	24.69	53.62	74	-20.38	Pk
V	9920.00	34.8	30.85	7.45	24.69	36.09	54	-17.91	AV
V	12400.00	57.07	31.02	8.99	25.57	60.61	74	-13.39	Pk
V	12400.00	39.31	31.02	8.99	25.57	42.85	54	-11.15	AV
H	4960.00	54.97	30.55	5.77	24.66	54.85	74	-19.15	Pk
H	4960.00	37.59	30.55	5.77	24.66	37.47	54	-16.53	AV
H	7440.00	52.48	30.33	6.32	24.55	53.02	74	-20.98	Pk
H	7440.00	35.75	30.33	6.32	24.55	36.29	54	-17.71	AV
H	9920.00	50.34	30.85	7.45	24.69	51.63	74	-22.37	Pk
H	9920.00	35.15	30.85	7.45	24.69	36.44	54	-17.56	AV
H	12400.00	47.64	31.02	8.99	25.57	51.18	74	-22.82	Pk
H	12400.00	33.23	31.02	8.99	25.57	36.77	54	-17.23	AV

Remark:
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

5. RADIATED BAND EMISSION MEASUREMENT

5.1 Test Requirement:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205
Test Method:	ANSI C63.10: 2013
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.
Test site:	Measurement Distance: 3m
Receiver setup:	

Frequency	Detector	RBW	VBW	Value
Above 1GHz	Peak	1MHz	3MHz	Peak
	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
g. Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

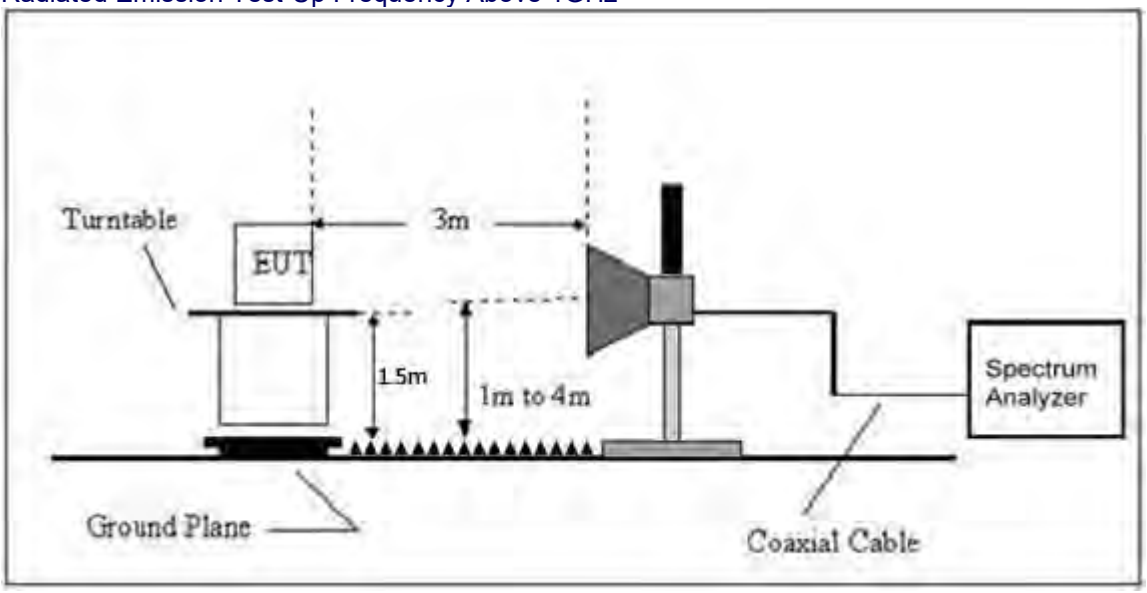

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

5.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type	Result
GFSK	Low Channel: 2402MHz										
	H	2390.00	64.51	30.22	4.85	23.98	63.12	74	-10.88	PK	PASS
	H	2390.00	49.47	30.22	4.85	23.98	48.08	54	-5.92	AV	PASS
	H	2400.00	57.1	30.22	4.85	23.98	55.71	74	-18.29	PK	PASS
	H	2400.00	47.93	30.22	4.85	23.98	46.54	54	-7.46	AV	PASS
	V	2390.00	58.66	30.22	4.85	23.98	57.27	74	-16.73	PK	PASS
	V	2390.00	52.17	30.22	4.85	23.98	50.78	54	-3.22	AV	PASS
	V	2400.00	58.55	30.22	4.85	23.98	57.16	74	-16.84	PK	PASS
	V	2400.00	49.97	30.22	4.85	23.98	48.58	54	-5.42	AV	PASS
	High Channel: 2480MHz										
	H	2483.50	60.09	30.22	4.85	23.98	58.7	74	-15.3	PK	PASS
	H	2483.50	48.38	30.22	4.85	23.98	46.99	54	-7.01	AV	PASS
	H	2500.00	62.2	30.22	4.85	23.98	60.81	74	-13.19	PK	PASS
	H	2500.00	49.85	30.22	4.85	23.98	48.46	54	-5.54	AV	PASS
	V	2483.50	60.83	30.22	4.85	23.98	59.44	74	-14.56	PK	PASS
	V	2483.50	47.98	30.22	4.85	23.98	46.59	54	-7.41	AV	PASS
	V	2500.00	57.57	30.22	4.85	23.98	56.18	74	-17.82	PK	PASS
	V	2500.00	47.2	30.22	4.85	23.98	45.81	54	-8.19	AV	PASS
π/4DQPSK	Low Channel: 2402MHz										
	H	2390.00	60.07	30.22	4.85	23.98	58.68	74	-15.32	PK	PASS
	H	2390.00	47.3	30.22	4.85	23.98	45.91	54	-8.09	AV	PASS
	H	2400.00	61.13	30.22	4.85	23.98	59.74	74	-14.26	PK	PASS
	H	2400.00	48.79	30.22	4.85	23.98	47.4	54	-6.6	AV	PASS
	V	2390.00	59.62	30.22	4.85	23.98	58.23	74	-15.77	PK	PASS
	V	2390.00	48.16	30.22	4.85	23.98	46.77	54	-7.23	AV	PASS
	V	2400.00	59.97	30.22	4.85	23.98	58.58	74	-15.42	PK	PASS
	V	2400.00	50.93	30.22	4.85	23.98	49.54	54	-4.46	AV	PASS
	High Channel: 2480MHz										
	H	2483.50	59.73	30.22	4.85	23.98	58.34	74	-15.66	PK	PASS
	H	2483.50	47.01	30.22	4.85	23.98	45.62	54	-8.38	AV	PASS
	H	2500.00	60.54	30.22	4.85	23.98	59.15	74	-14.85	PK	PASS
	H	2500.00	49.54	30.22	4.85	23.98	48.15	54	-5.85	AV	PASS
	V	2483.50	59.27	30.22	4.85	23.98	57.88	74	-16.12	PK	PASS
	V	2483.50	48.07	30.22	4.85	23.98	46.68	54	-7.32	AV	PASS
	V	2500.00	61.03	30.22	4.85	23.98	59.64	74	-14.36	PK	PASS
	V	2500.00	50.15	30.22	4.85	23.98	48.76	54	-5.24	AV	PASS

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

8DPSK	Low Channel: 2402MHz										
	H	2390.00	59.39	30.22	4.85	23.98	58	74	-16	PK	PASS
	H	2390.00	47.83	30.22	4.85	23.98	46.44	54	-7.56	AV	PASS
	H	2400.00	60.33	30.22	4.85	23.98	58.94	74	-15.06	PK	PASS
	H	2400.00	47.5	30.22	4.85	23.98	46.11	54	-7.89	AV	PASS
	V	2390.00	58.58	30.22	4.85	23.98	57.19	74	-16.81	PK	PASS
	V	2390.00	49.45	30.22	4.85	23.98	48.06	54	-5.94	AV	PASS
	V	2400.00	60.32	30.22	4.85	23.98	58.93	74	-15.07	PK	PASS
	V	2400.00	48.65	30.22	4.85	23.98	47.26	54	-6.74	AV	PASS
	High Channel: 2480MHz										
	H	2483.50	59.31	30.22	4.85	23.98	57.92	74	-16.08	PK	PASS
	H	2483.50	46.23	30.22	4.85	23.98	44.84	54	-9.16	AV	PASS
	H	2500.00	62.03	30.22	4.85	23.98	60.64	74	-13.36	PK	PASS
	H	2500.00	51.36	30.22	4.85	23.98	49.97	54	-4.03	AV	PASS
	V	2483.50	58.85	30.22	4.85	23.98	57.46	74	-16.54	PK	PASS
	V	2483.50	48.42	30.22	4.85	23.98	47.03	54	-6.97	AV	PASS
	V	2500.00	58.29	30.22	4.85	23.98	56.9	74	-17.1	PK	PASS
	V	2500.00	48.18	30.22	4.85	23.98	46.79	54	-7.21	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 Limit

Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2 Test Setup

6.3 Test procedure

Using the following spectrum analyzer setting:
A) Set the RBW = 100KHz.
B) Set the VBW = 300KHz.
C) Sweep time = auto couple.
D) Detector function = peak.
E) Trace mode = max hold.
F) Allow trace to fully stabilize.

6.4 DEVIATION FROM STANDARD

No deviation.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

6.5 Test Result

GFSK mode:

Test channel:	Lowest channel

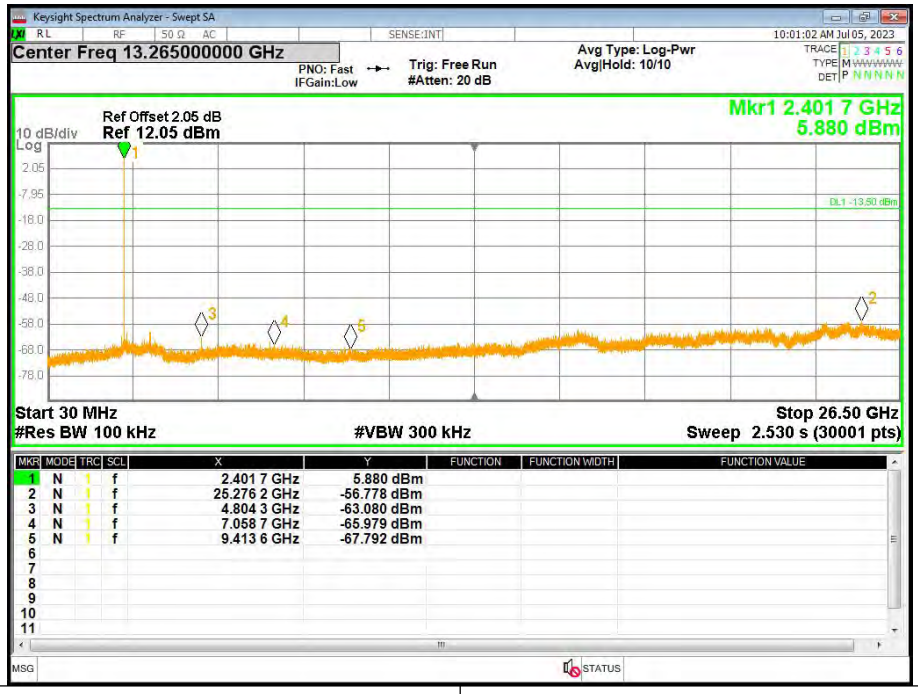

Test channel:	Middle channel

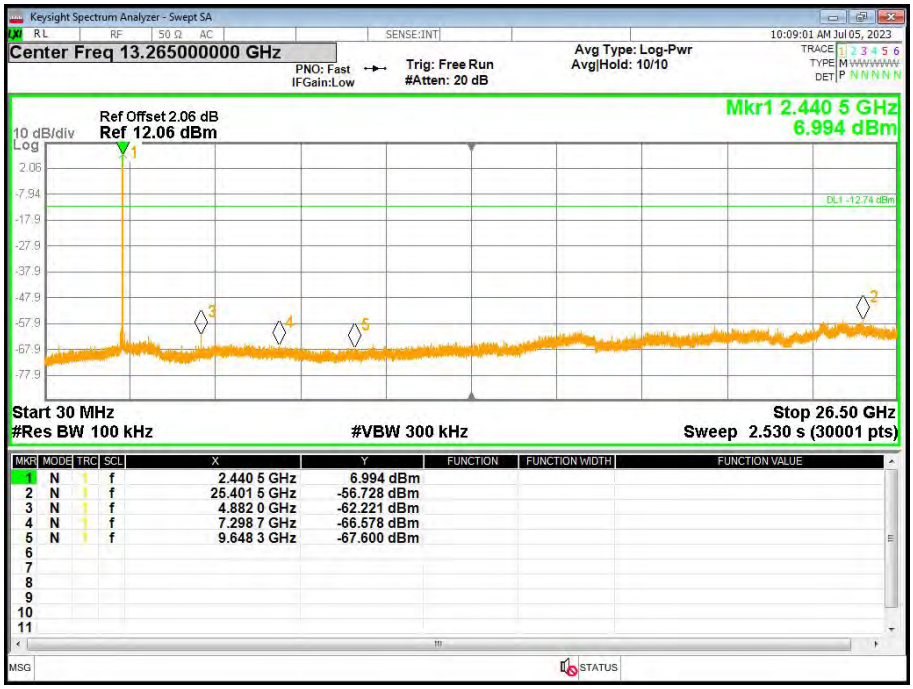

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Test channel:	Highest channel

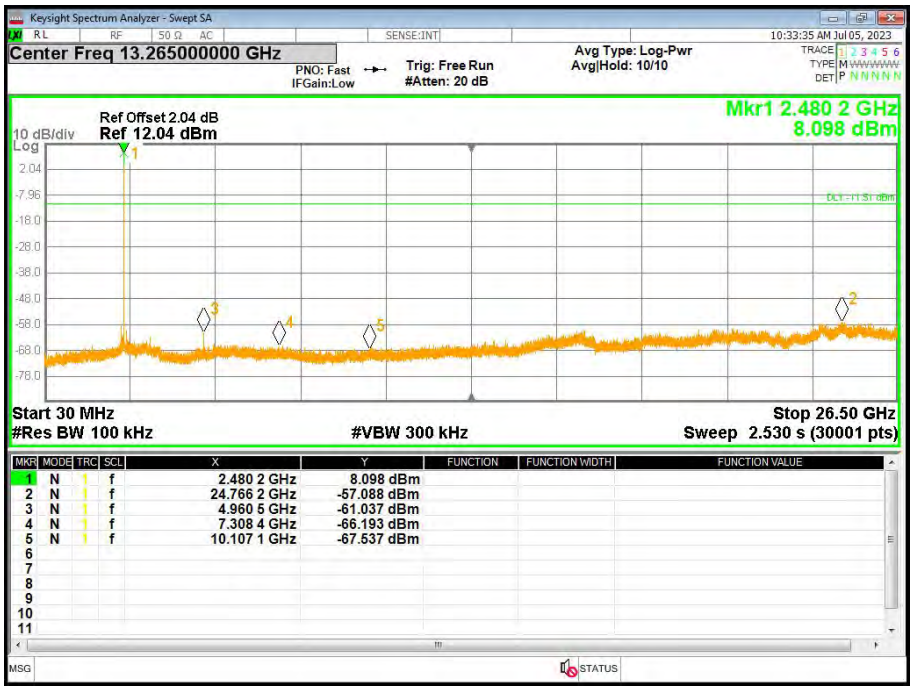

π/4DQPSK mode:

Test channel:	Lowest channel

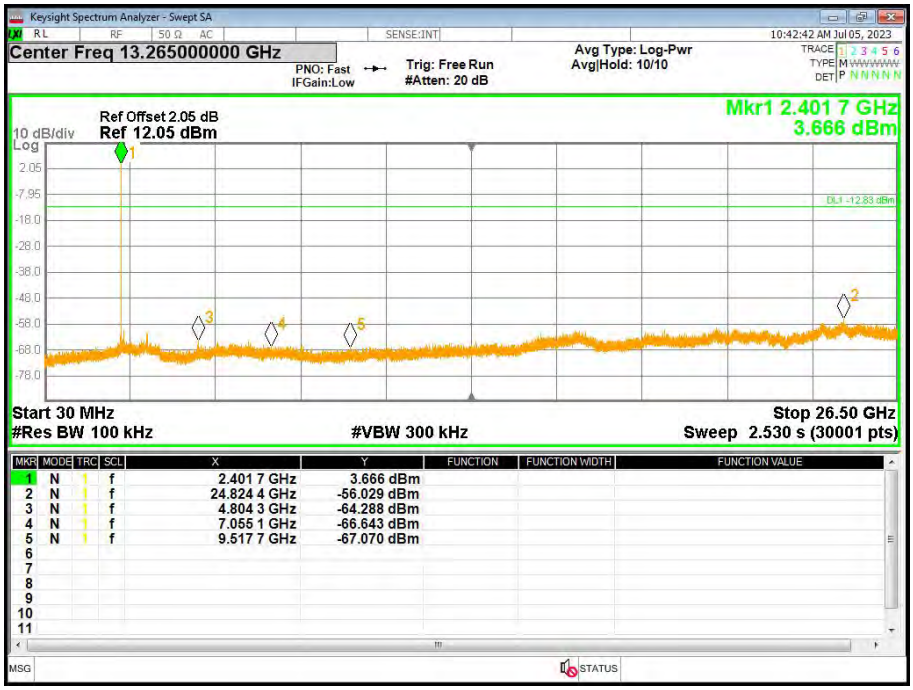

Test channel:	Middle channel

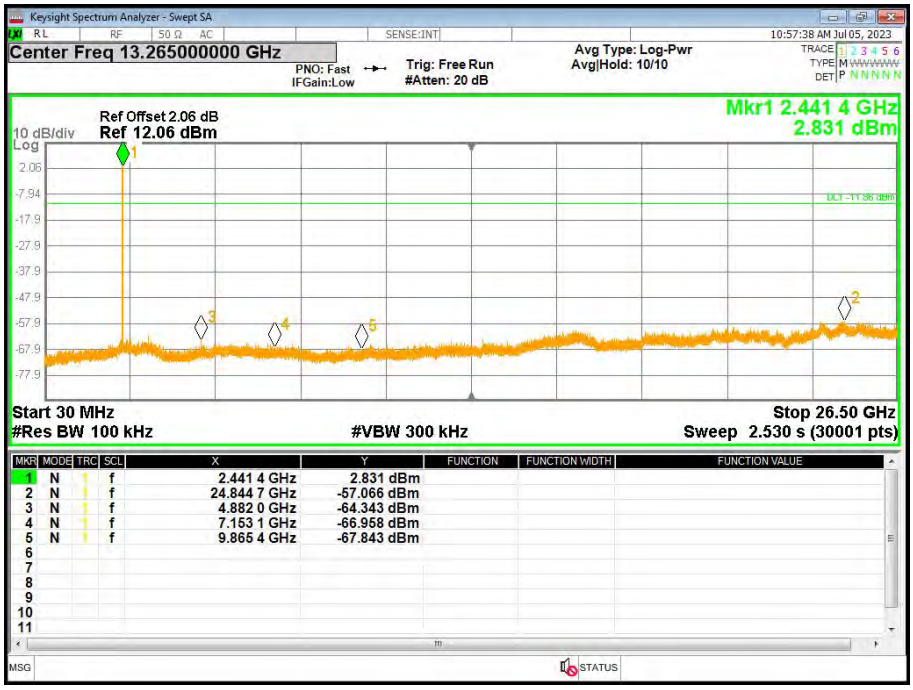

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Test channel:	Highest channel

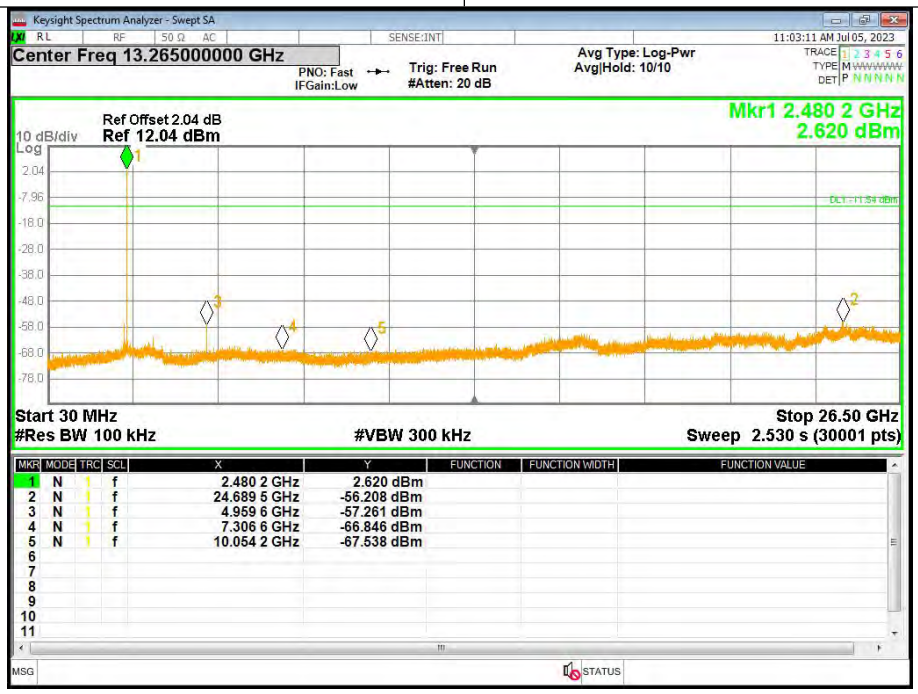

8DPSK mode:

Test channel:	Lowest channel

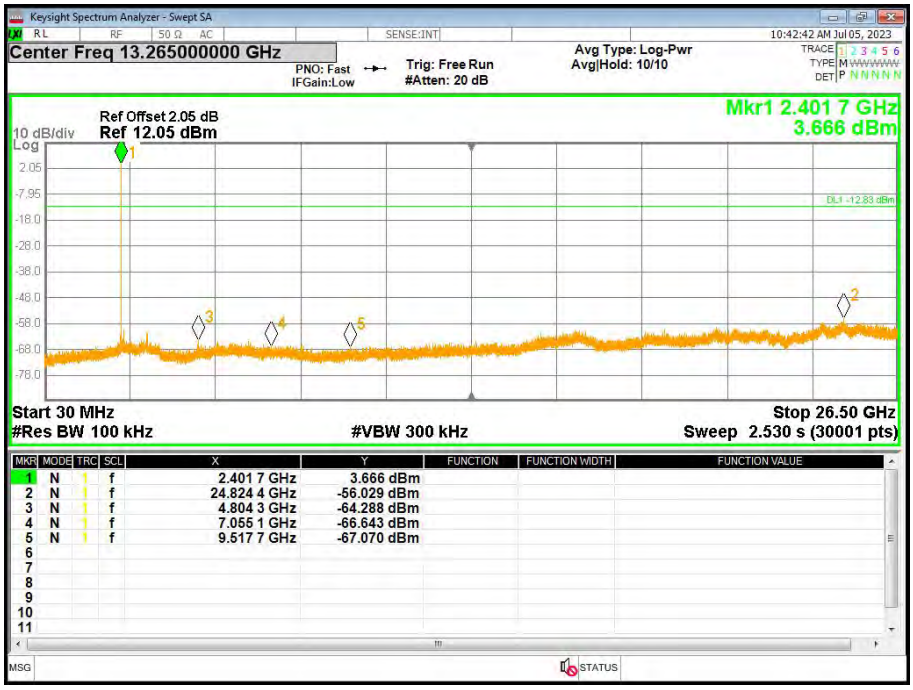

Test channel:	Middle channel

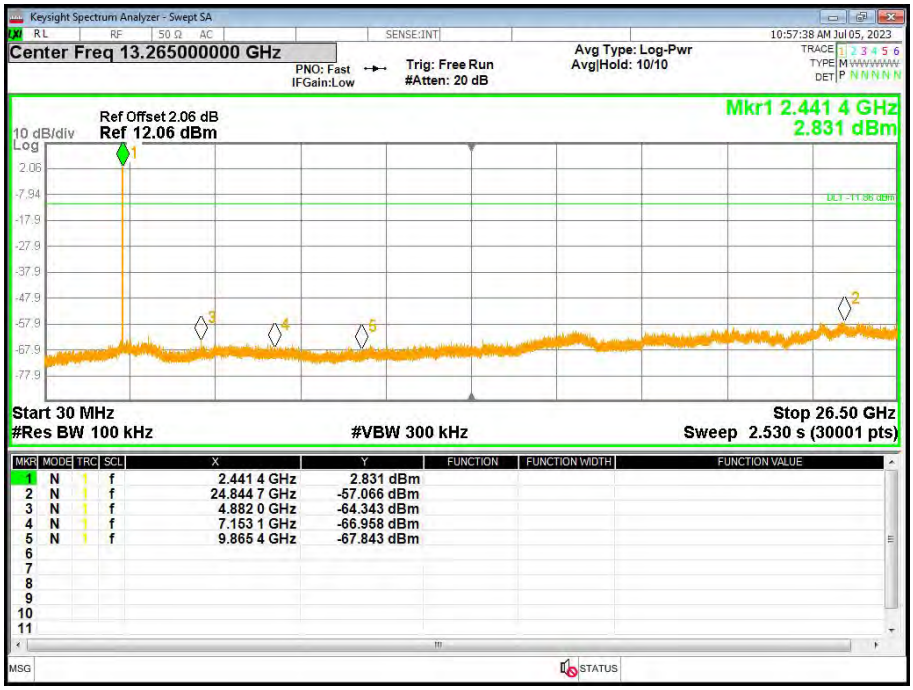

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Test channel:	Highest channel

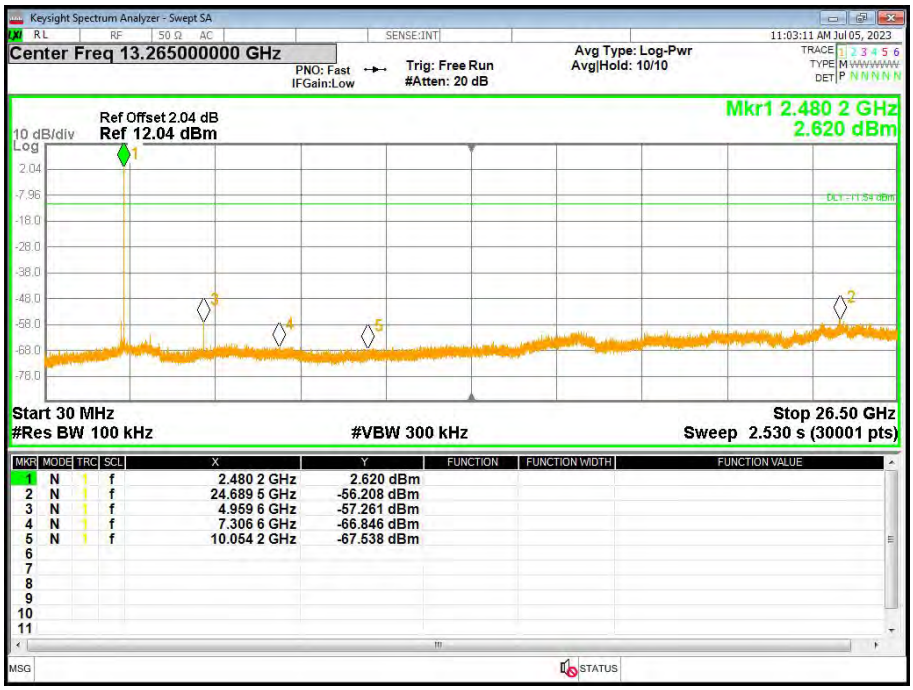

GFSK No-hopping Band edge-left side

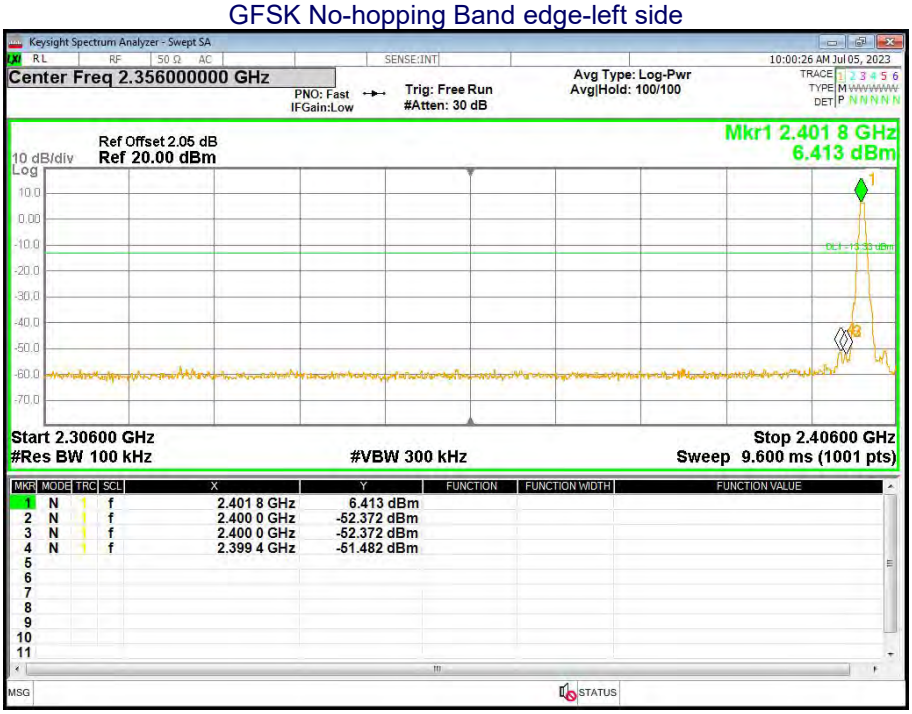

GFSK Hopping Band edge-left side

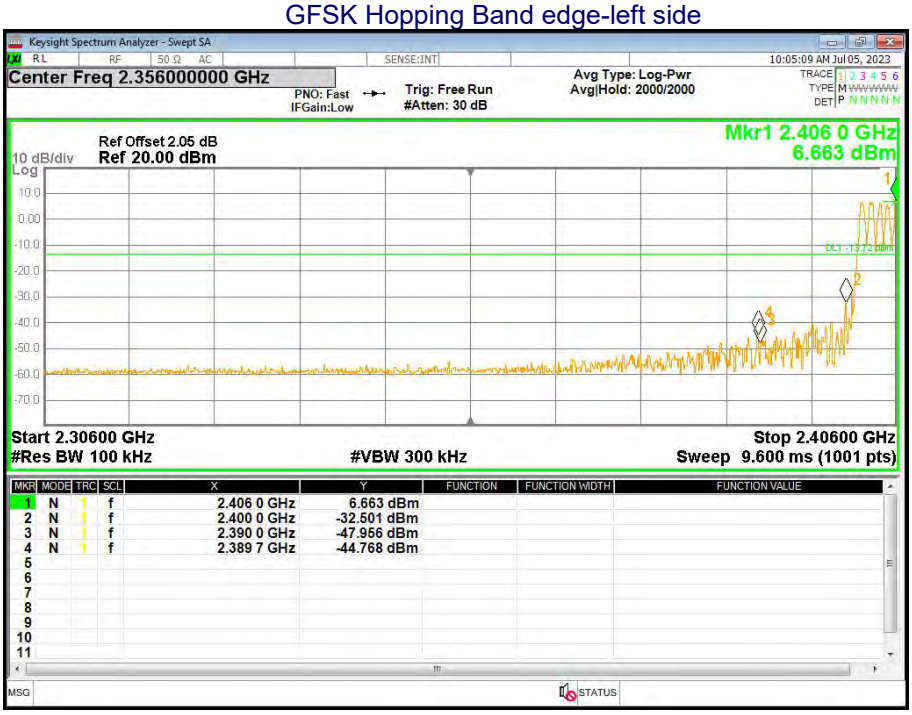

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

GFSK No-hopping Band edge-right side

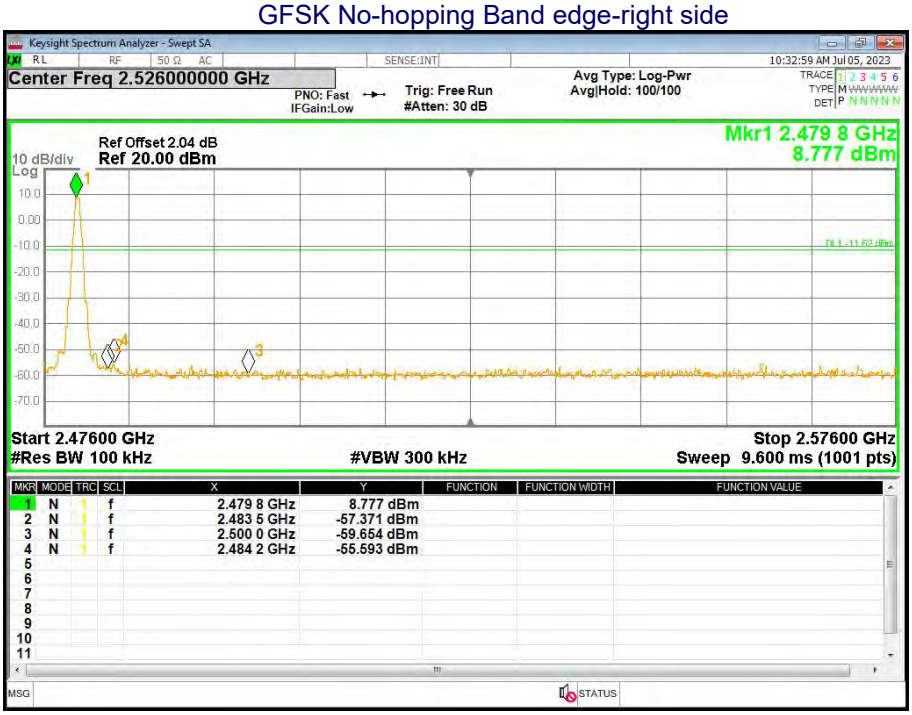

GFSK Hopping Band edge-right side

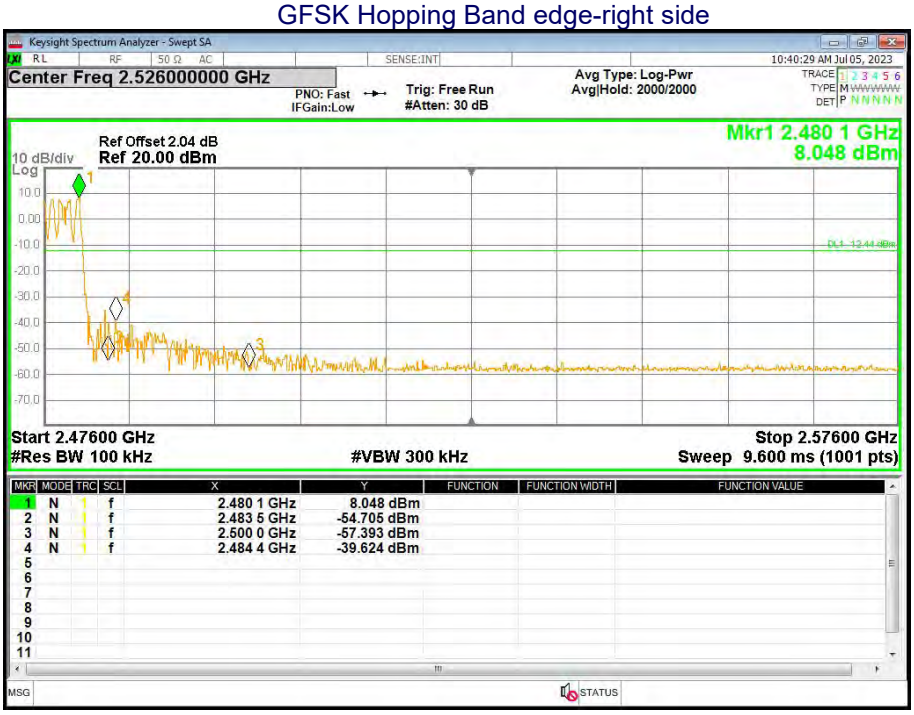

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

π/4DQPSK No-hopping Band edge-left side

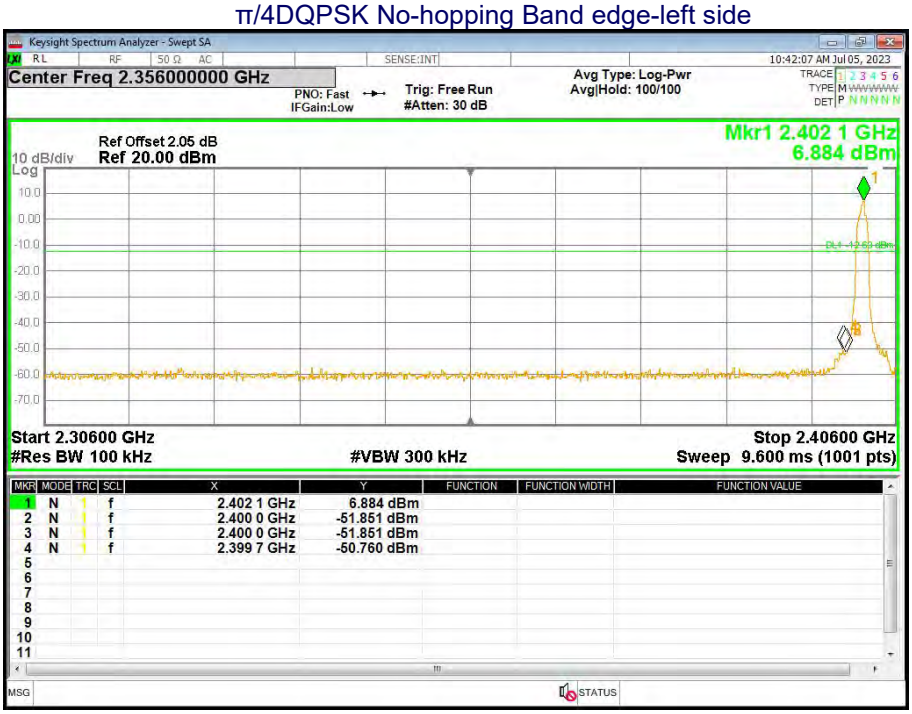

π/4DQPSK Hopping Band edge-left side

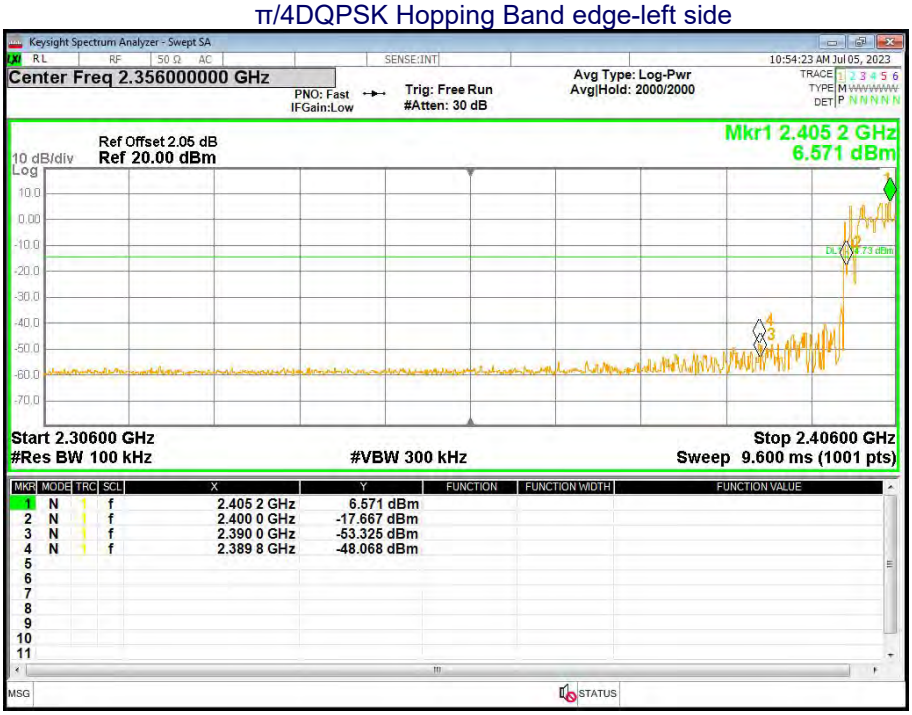

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

π/4DQPSK No-hopping Band edge-right side

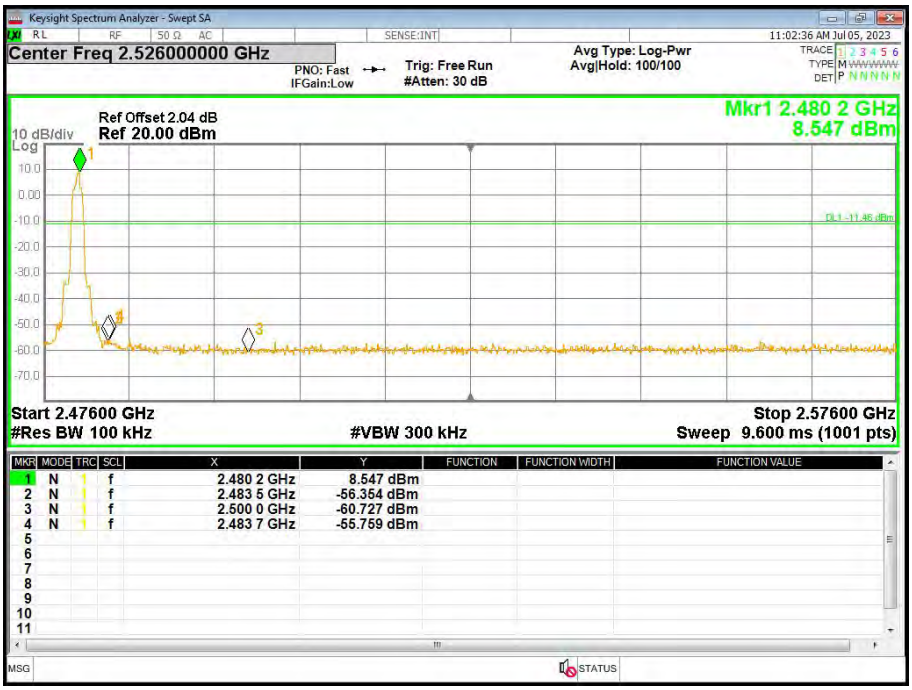

π/4DQPSK Hopping Band edge-right side

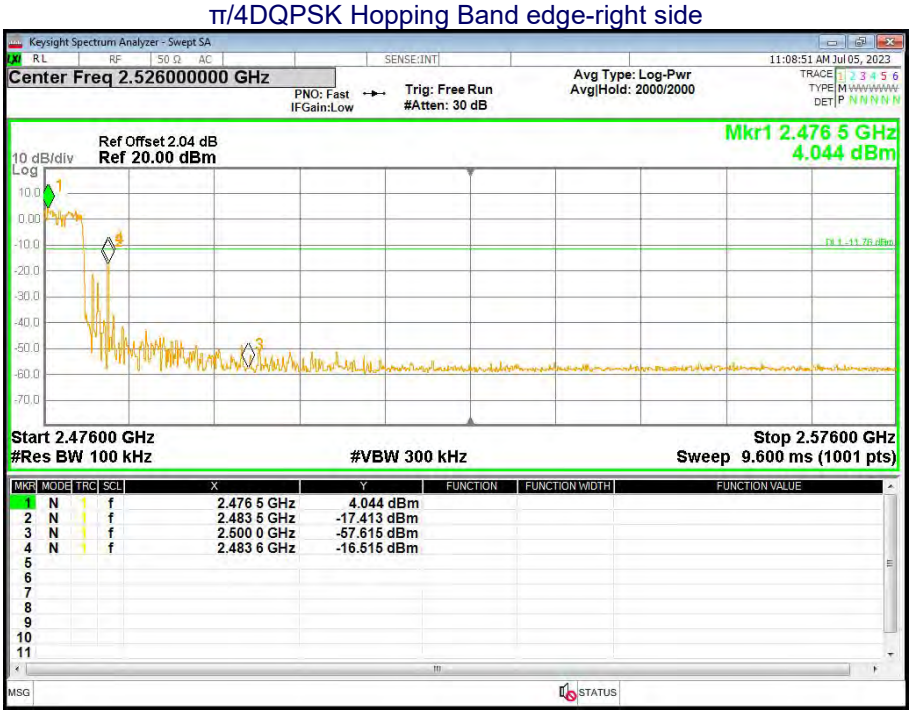

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

8DPSK No-hopping Band edge-left side

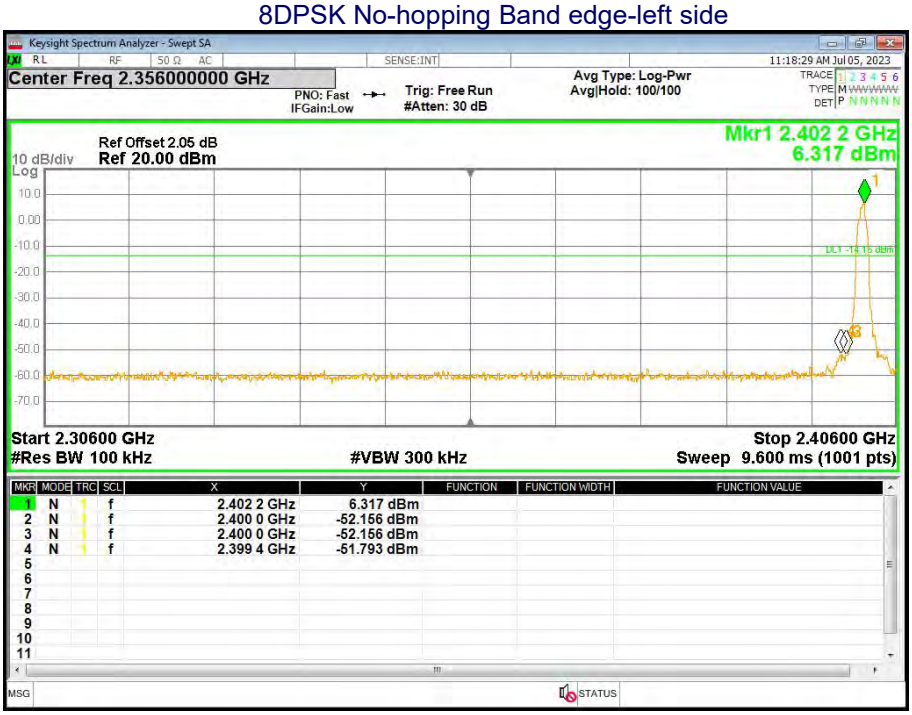

8DPSK Hopping Band edge-left side

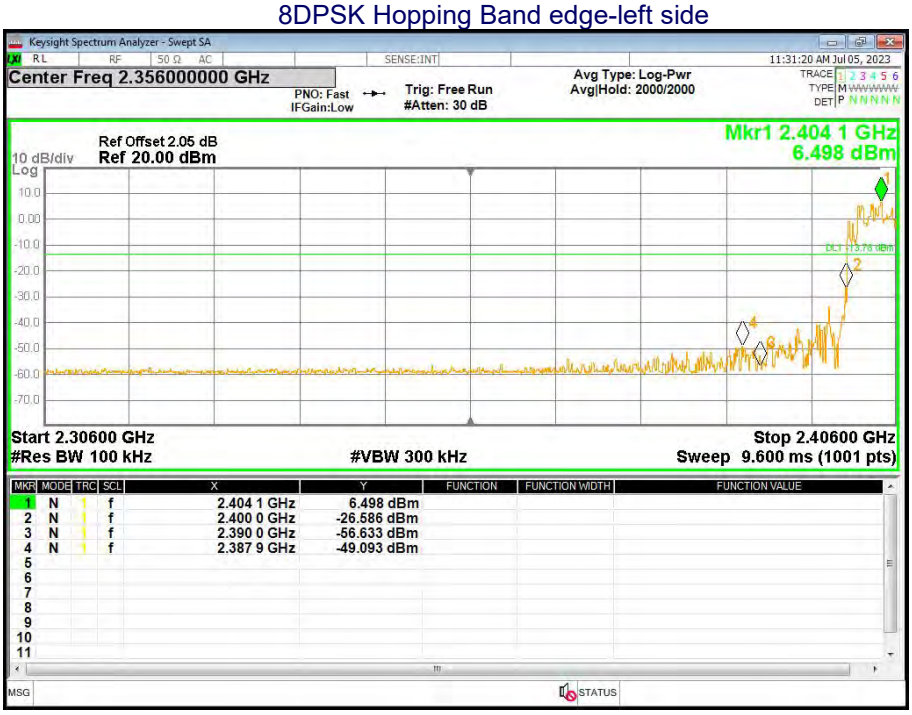

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

8DPSK No-hopping Band edge-right side

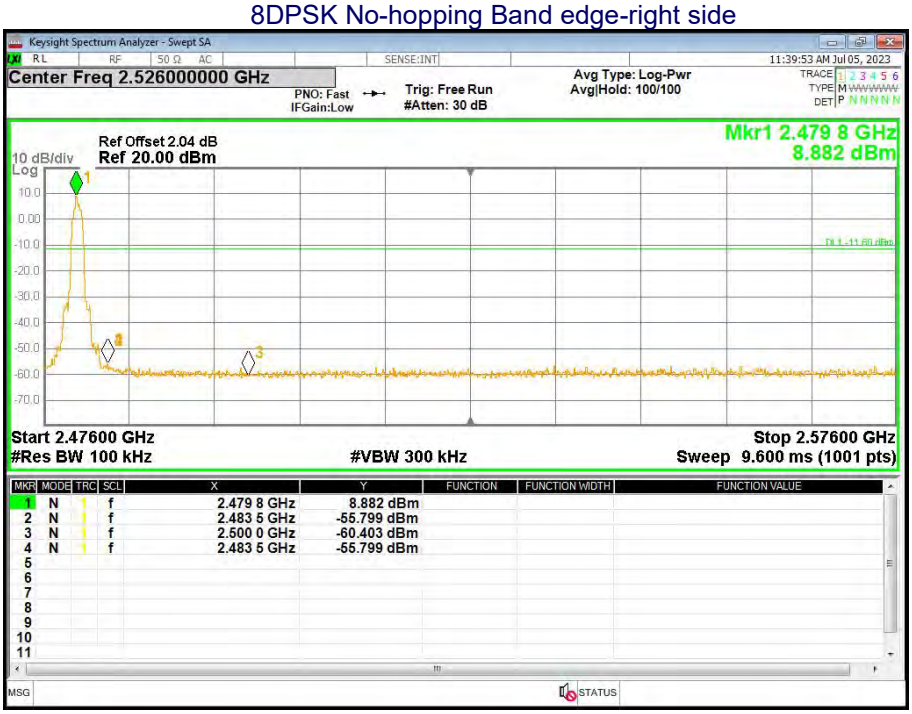

8DPSK Hopping Band edge-right side

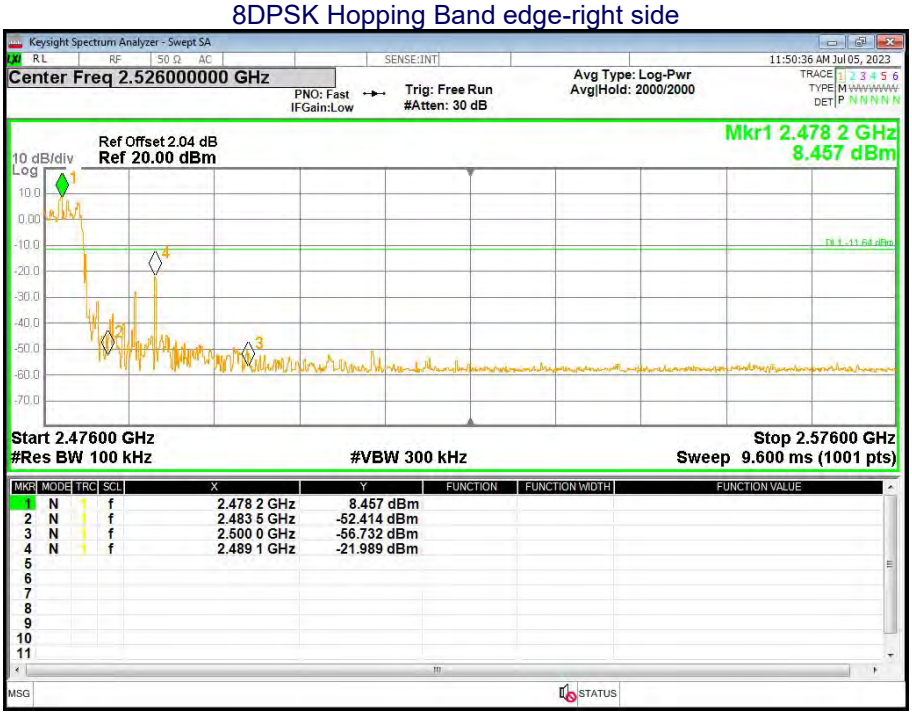

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

7. 20DB&99% BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013

7.1 Test Setup

7.2 Limit

N/A

7.3 Test procedure

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 DEVIATION FROM STANDARD

No deviation.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

7.5 Test Result

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.938	Pass
	Middle	0.949	
	Highest	0.948	
π/4DQPSK	Lowest	1.221	Pass
	Middle	1.27	
	Highest	1.222	
8DPSK	Lowest	1.261	Pass
	Middle	1.294	
	Highest	1.265	

Test plots
GFSK Low Channel

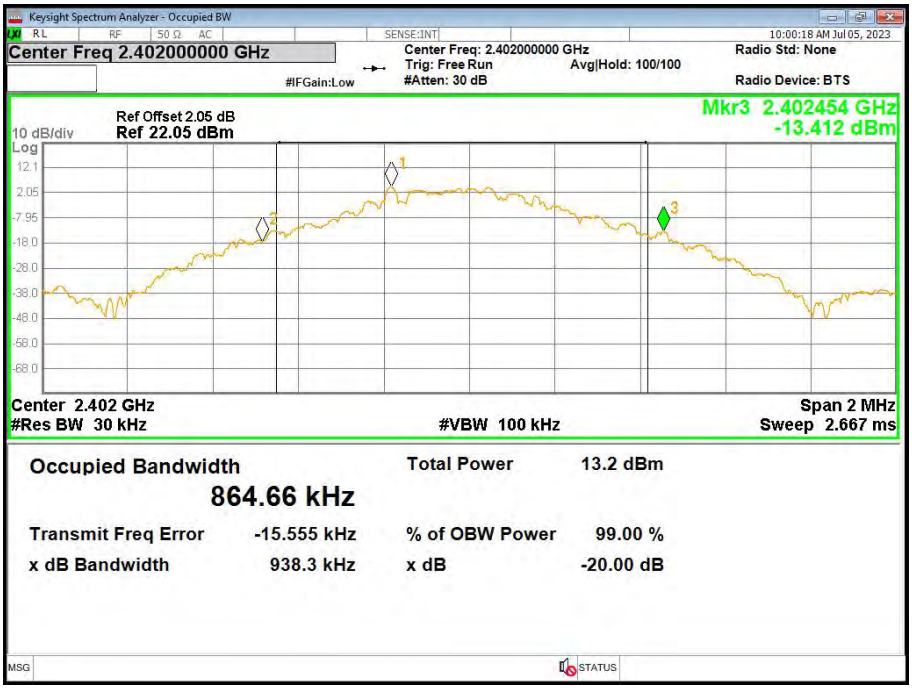

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

GFSK Middle Channel

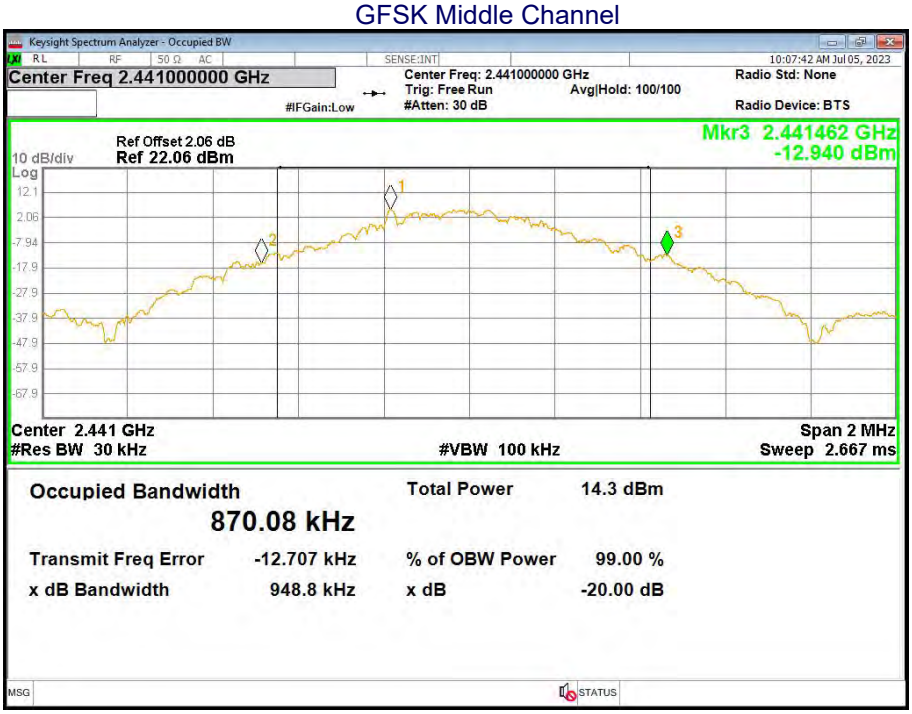

GFSK High Channel

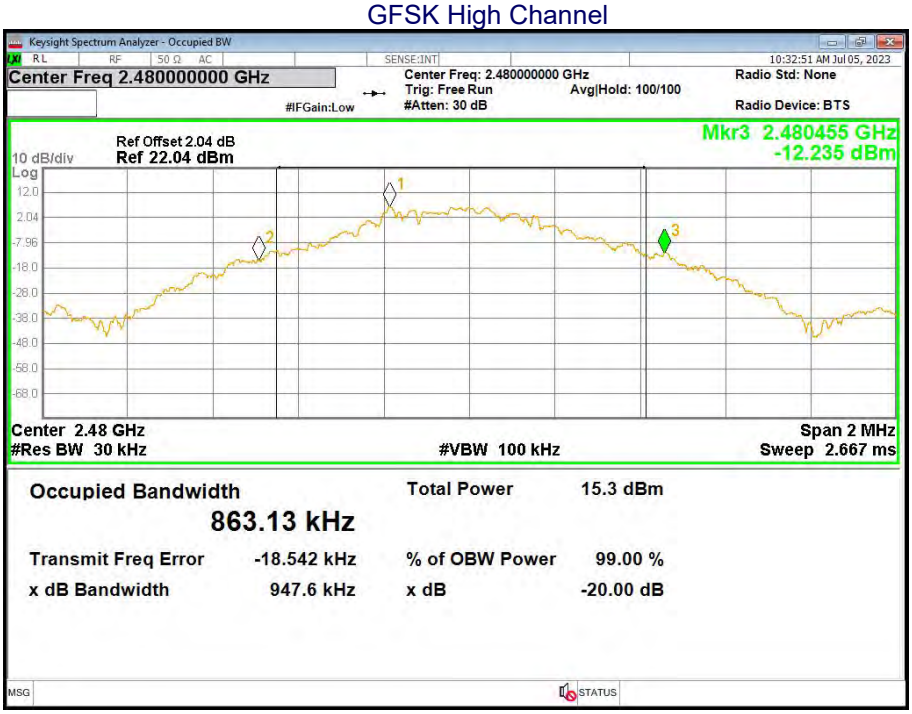

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

π/4DQPSK Low Channel

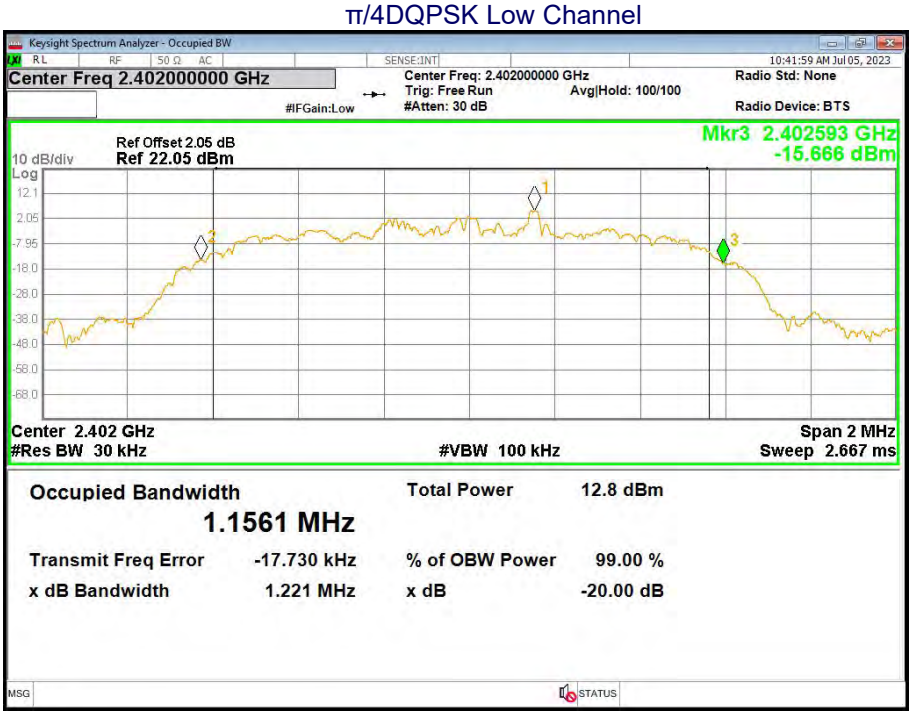

π/4DQPSK Middle Channel

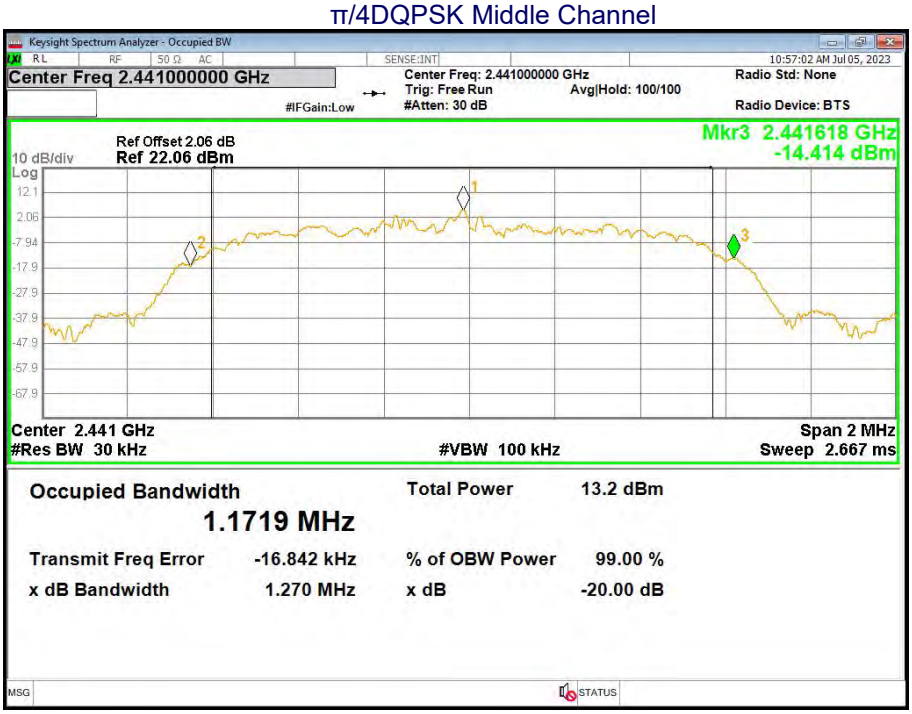

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

π/4DQPSK High Channel

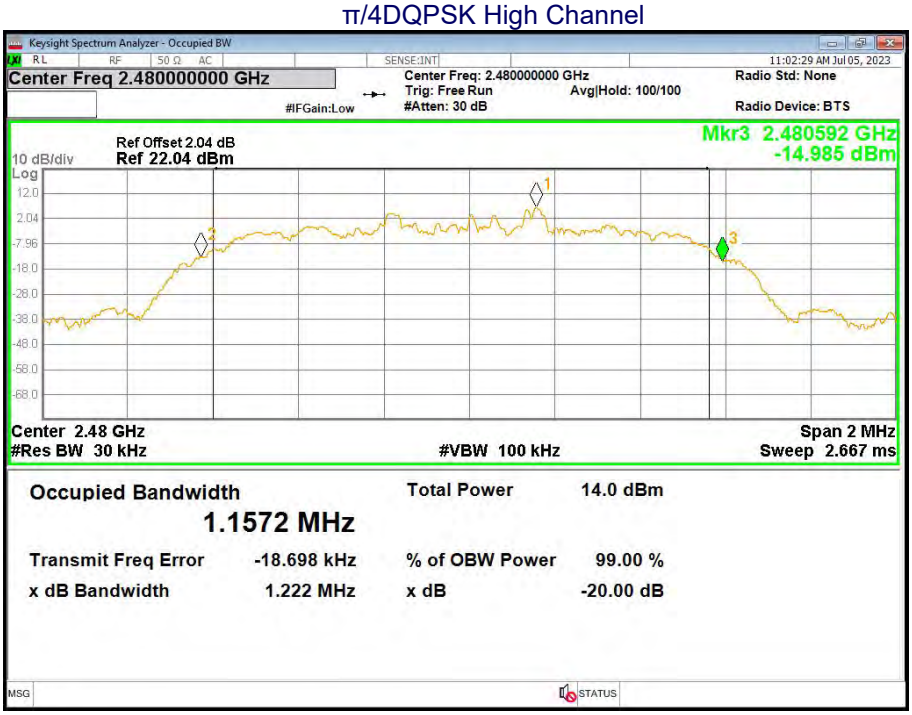

8DPSK Low Channel

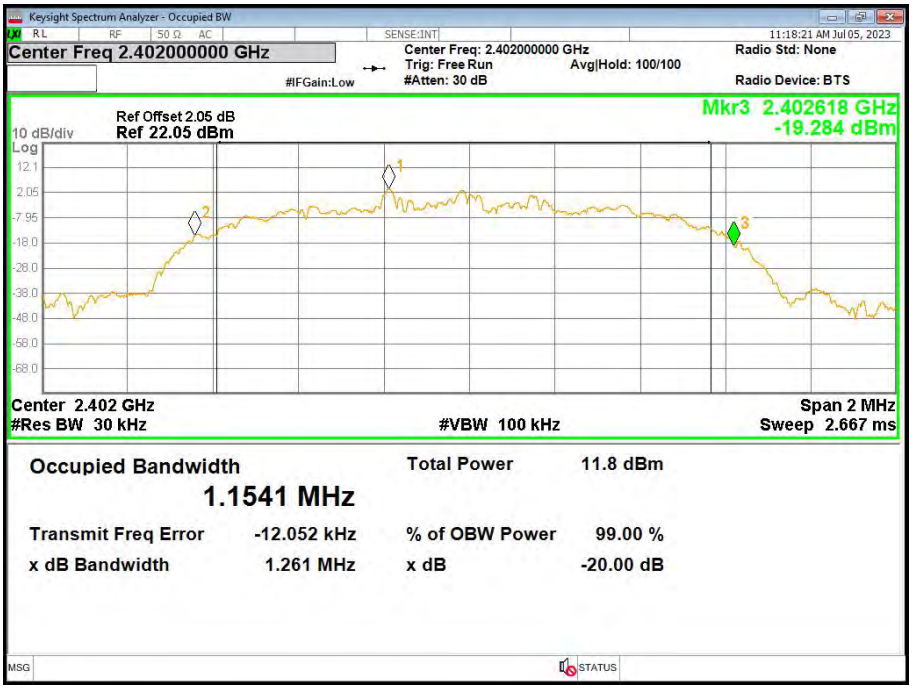

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

8-DPSK Middle Channel

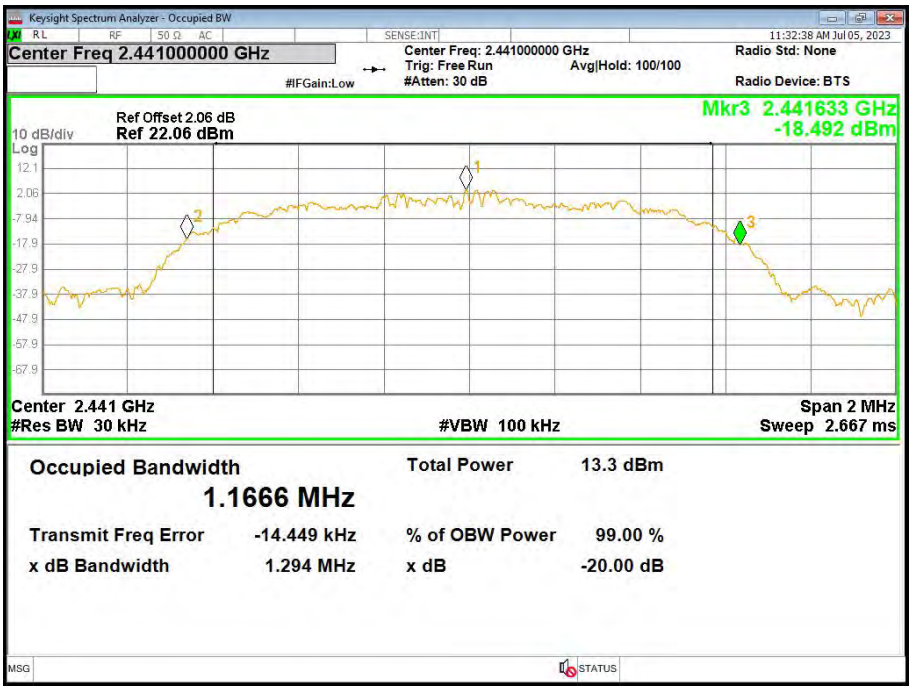

8DPSK High Channel

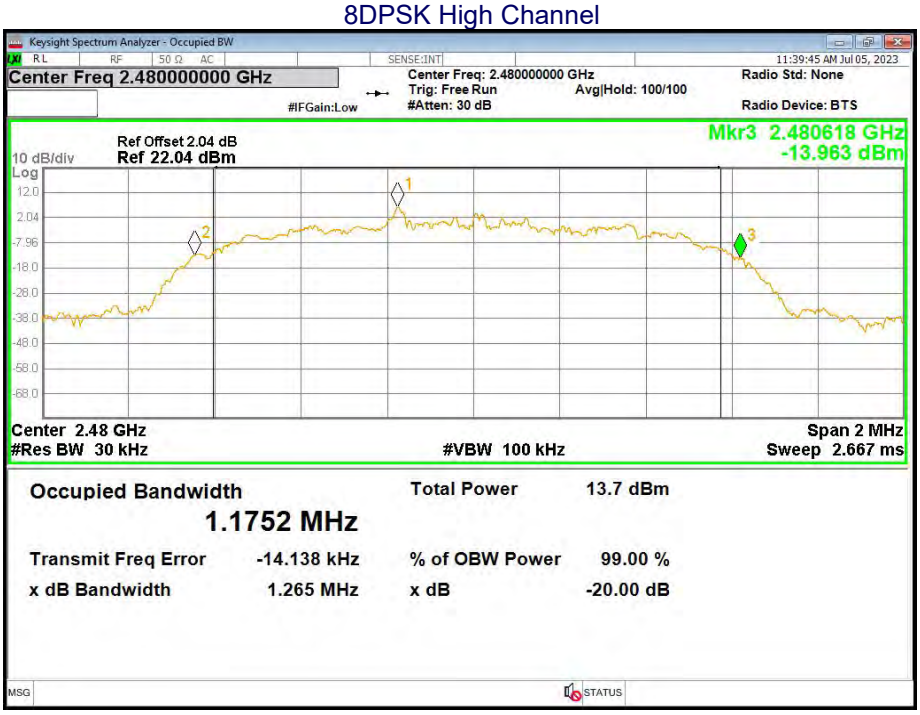

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013

8.1 Block Diagram Of Test Setup

8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

2. Set the spectrum analyzer: RBW = 2MHz. VBW =6MHz. Sweep = auto; Detector Function = Peak.

3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

8.4 DEVIATION FROM STANDARD

No deviation.

8.5 Test Result

Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
GFSK	Lowest	7.02	20.58	Pass
	Middle	8.04		
	Highest	9.02		
π/4DQPSK	Lowest	7.65	20.58	Pass
	Middle	8.82		
	Highest	9.06		
8DPSK	Lowest	7.18	20.58	Pass
	Middle	9.24		
	Highest	9.42		

Limit=21-0.42=20.58dBm

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Test plots	
GFSK	π/4DQPSK
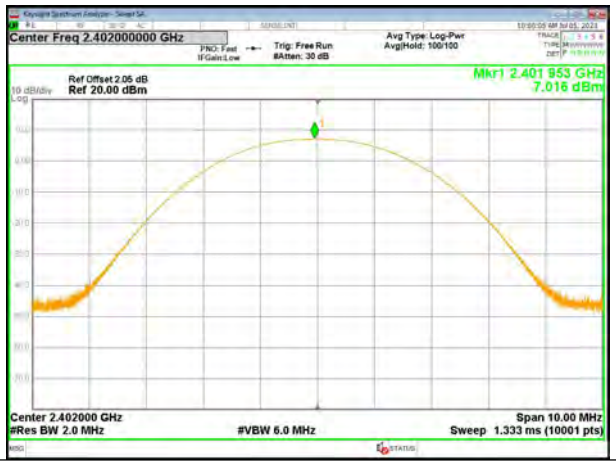	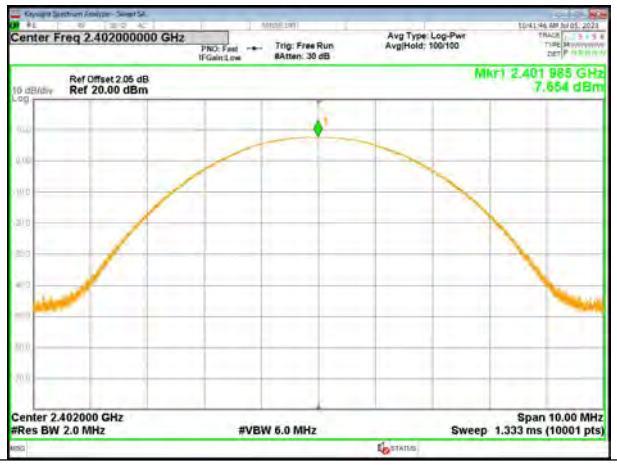
Lowest	
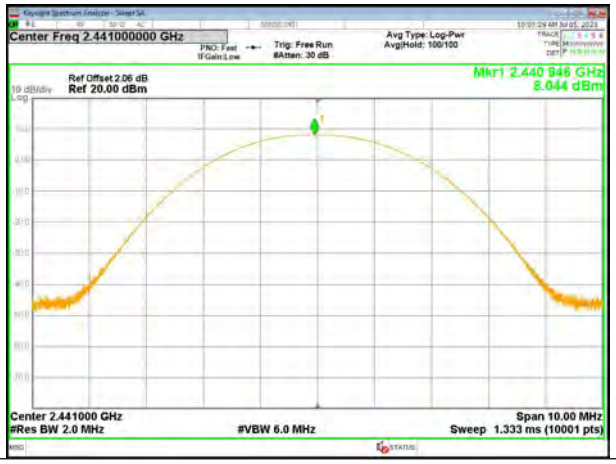	
Middle	
Highest	

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Test plots	
8DPSK	
Lowest	
Middle	
Highest	

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

9. HOPPING CHANNEL SEPARATION

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=30KHz, VBW=100KHz, detector=Peak
Limit:	GFSK: 20dB bandwidth π/4-DQPSK & 8DSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

9.1 Test Setup

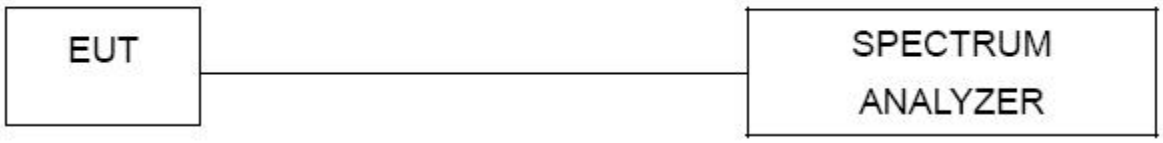

9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port

to the spectrum.

2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.

3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

9.3 DEVIATION FROM STANDARD

No deviation.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

9.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.076	0.941	PASS
GFSK	Middle	0.946	0.940	PASS
GFSK	High	1.042	0.940	PASS
π/4DQPSK	Low	1.116	0.851	PASS
π/4DQPSK	Middle	1.008	0.850	PASS
π/4DQPSK	High	0.982	0.870	PASS
8DPSK	Low	0.954	0.873	PASS
8DPSK	Middle	0.940	0.837	PASS
8DPSK	High	1.164	0.829	PASS

Test plots
GFSK Low Channel

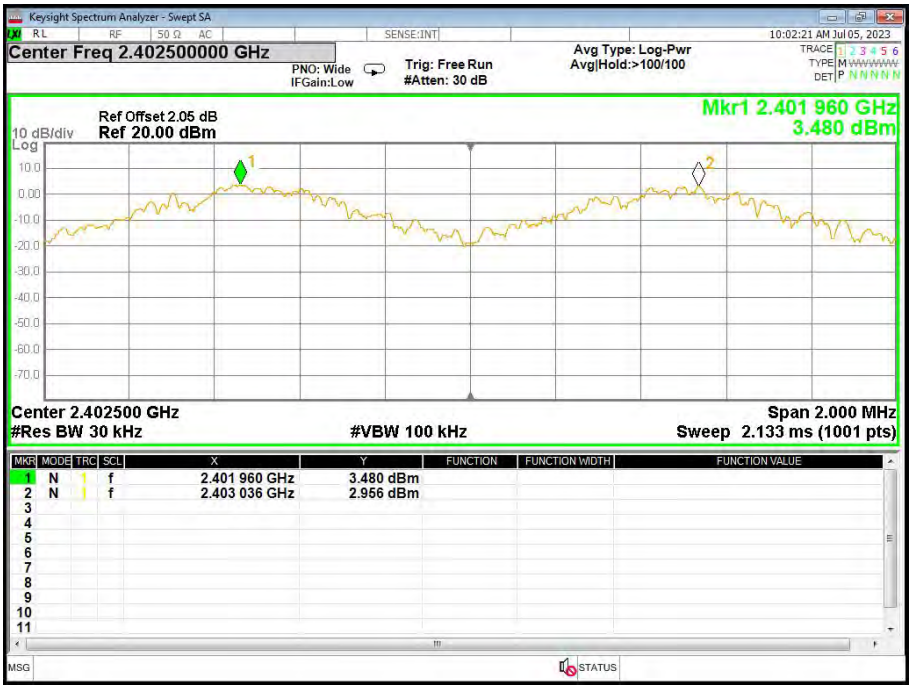

GFSK Middle Channel

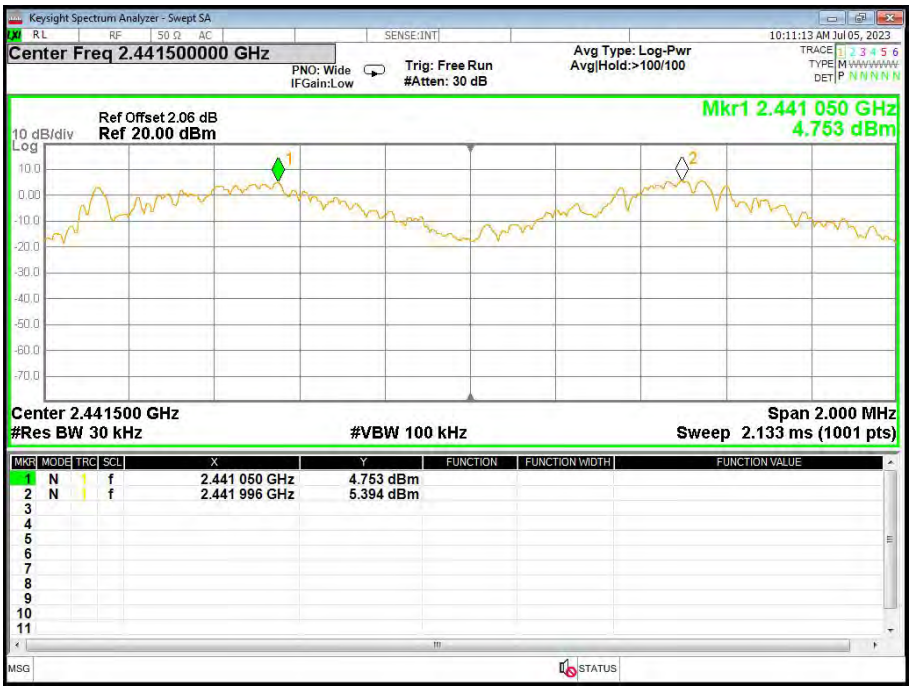

GFSK High Channel

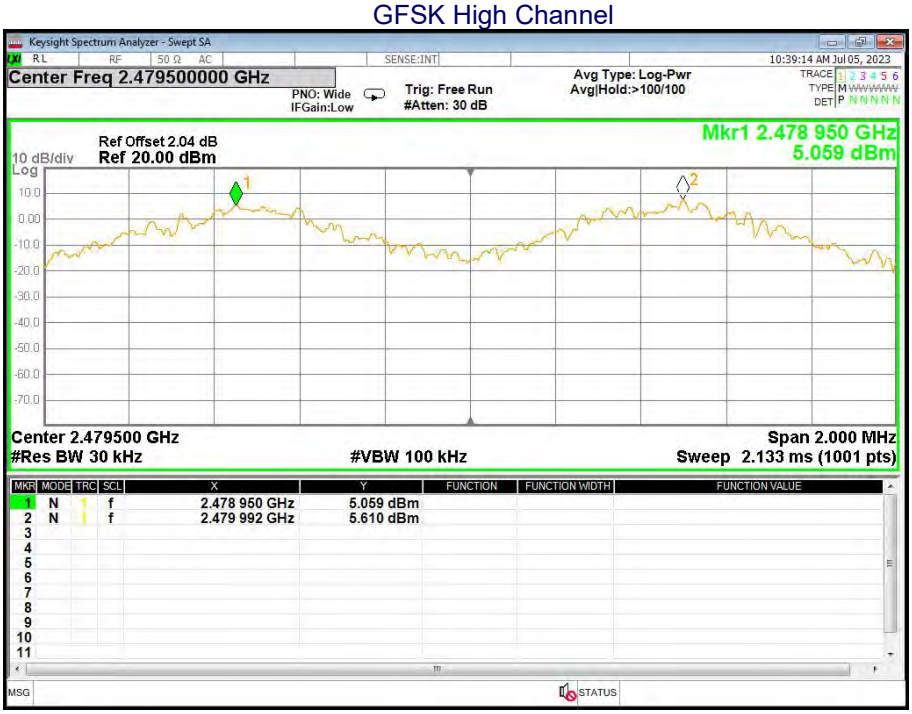

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

π/4DQPSK Low Channel

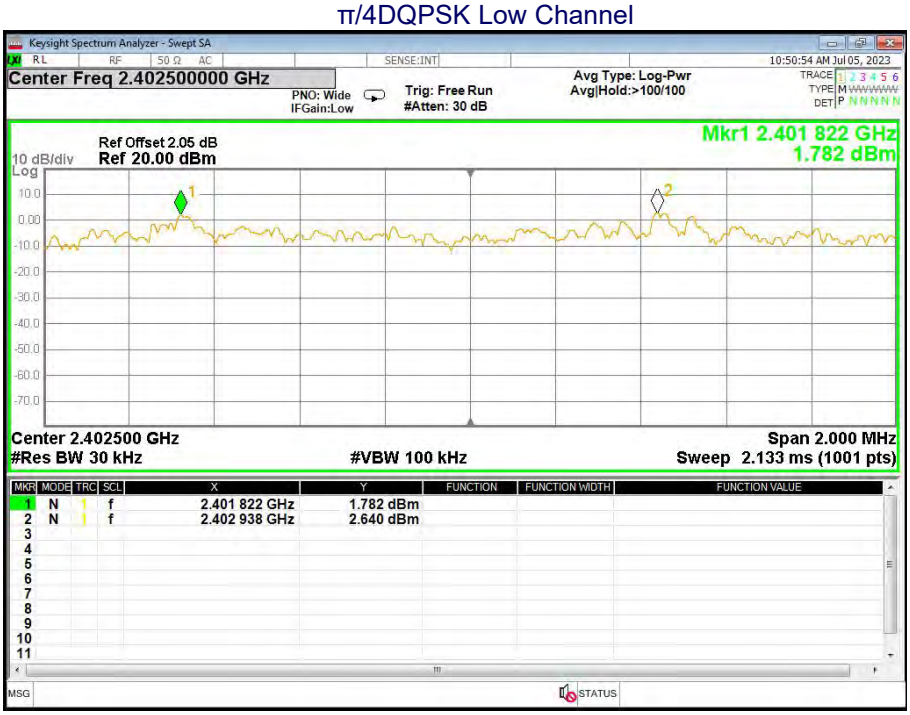

π/4DQPSK Middle Channel

π/4DQPSK High Channel

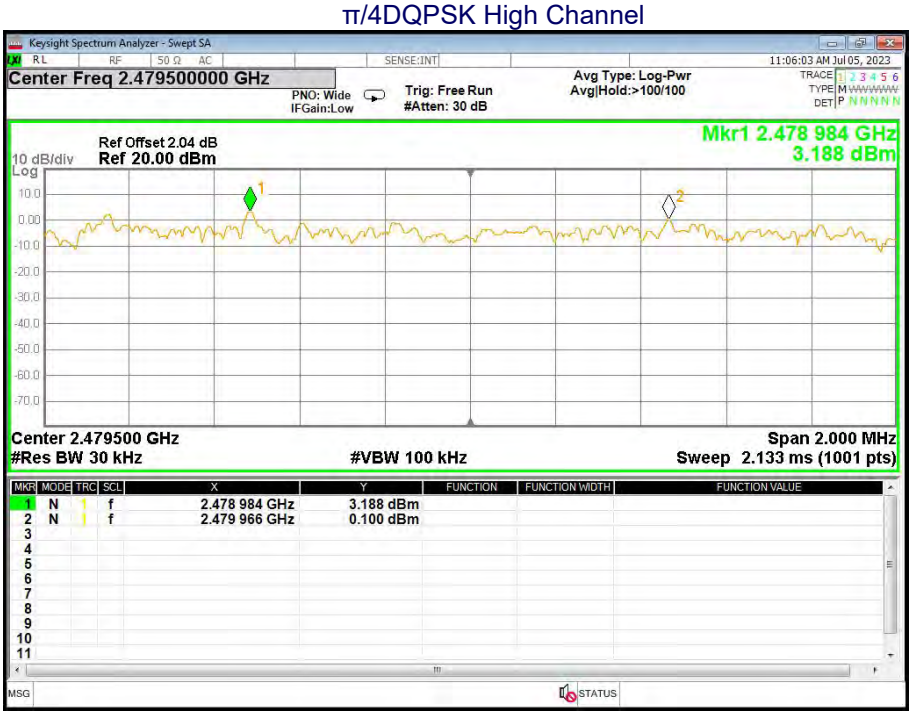

8DPSK Low Channel

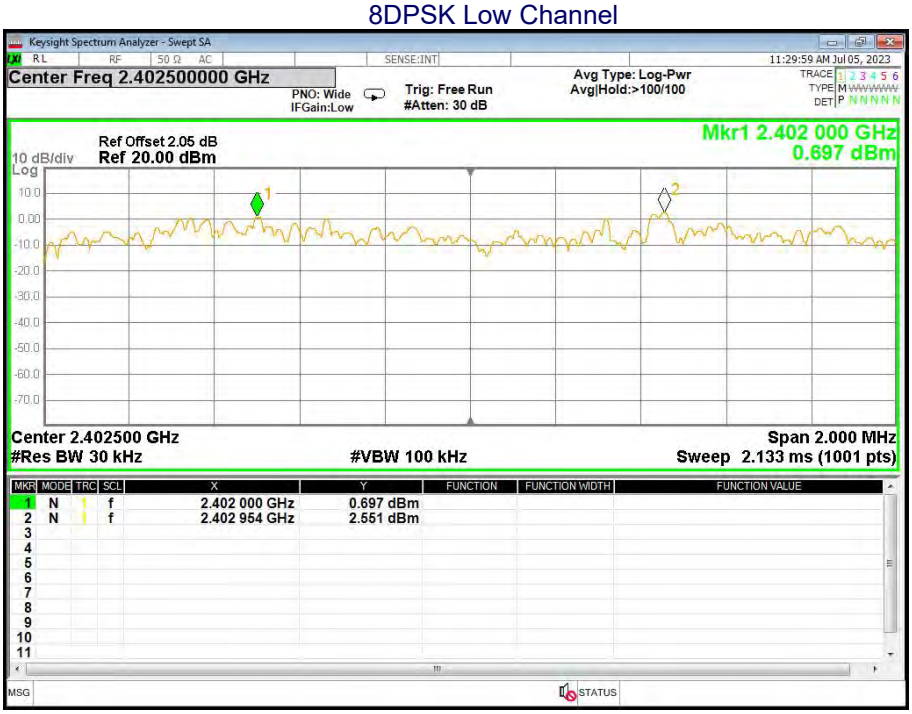

8DPSK Middle Channel

8DPSK High Channel

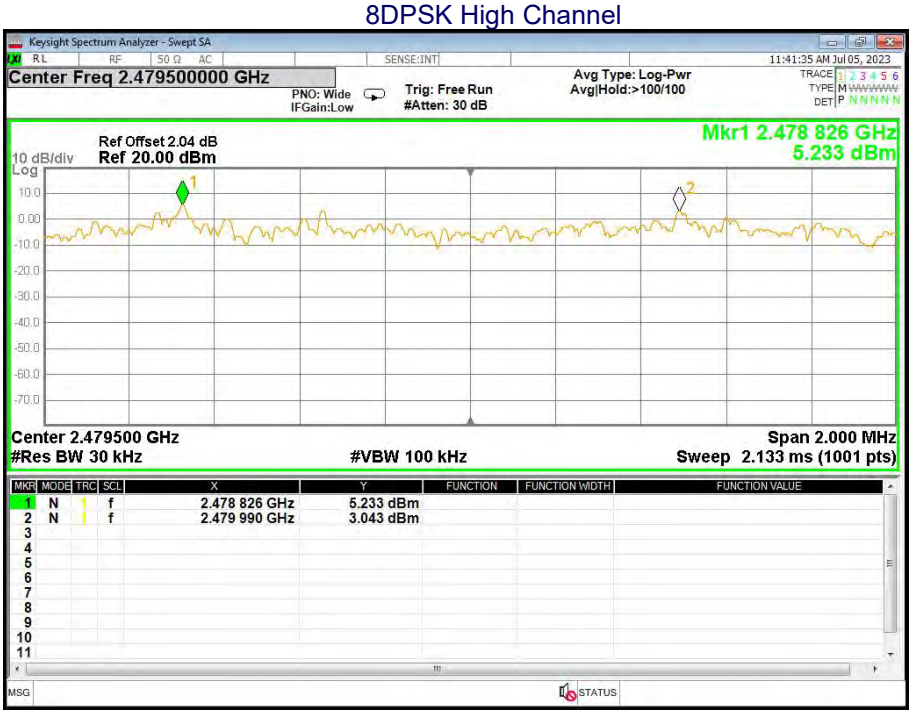

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

10.NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

10.1 Test Setup

10.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.

3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.

4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

10.3 DEVIATION FROM STANDARD

No deviation.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

10.4 Test Result

Test Plots:
79 Channels in total
GFSK

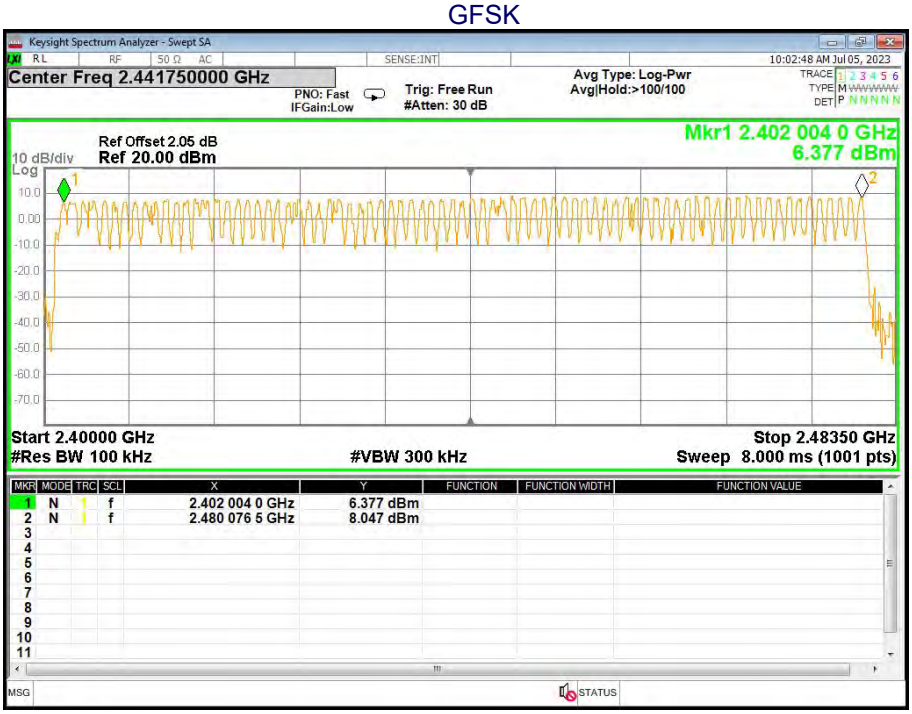

π/4DQPSK

8DPSK

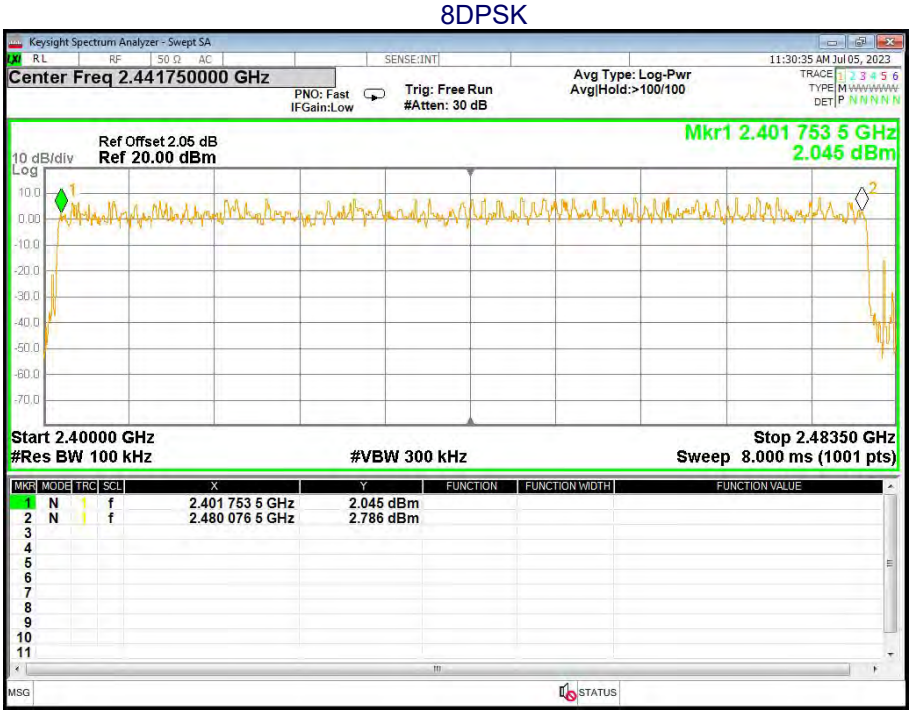
Keysight Spectrum Analyzer - Swept SA
Center Freq 2.441750000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
Avg Type: Log-Pwr
Avg|Hold:>100/100
11:30:35 AM Jul 05, 2023
Ref Offset 2.05 dB
10 dB/div
Ref 20.00 dBm
Mkr1 2.401 753 5 GHz
2.045 dBm
Start 2.40000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 2.48350 GHz
Sweep 8.000 ms (1001 pts)
1 N f 2.401 753 5 GHz 2.045 dBm
2 N f 2.480 076 5 GHz 2.786 dBm

11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

11.1 Test Setup

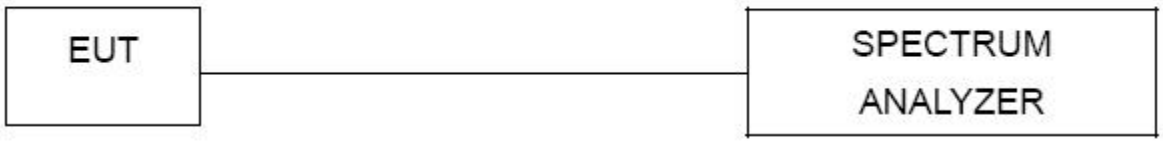

11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

2. Set spectrum analyzer span = 0Hz;

3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.

4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

11.3 DEVIATION FROM STANDARD

No deviation.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

11.4 Test Result

Modulation	Frequency	Packet	Pulse Time (ms)	Dwell time (ms)	Limit (ms)	Result
GFSK	2441MHz	1-DH1	0.38	121.60	400	Pass
GFSK	2441MHz	1-DH3	0.74	118.40	400	Pass
GFSK	2441MHz	1-DH5	1.715	182.93	400	Pass
π/4DQPSK	2441MHz	2-DH1	0.228	72.96	400	Pass
π/4DQPSK	2441MHz	2-DH3	1.052	168.32	400	Pass
π/4DQPSK	2441MHz	2-DH5	1.582	168.75	400	Pass
8DPSK	2441MHz	3-DH1	0.335	107.20	400	Pass
8DPSK	2441MHz	3-DH3	0.654	104.64	400	Pass
8DPSK	2441MHz	3-DH5	1.637	174.61	400	Pass

Remarks:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

(1 / 2 / 3)-DH1: Dwell time (ms) = Pulse Time (ms) * [1600 / (2 * 79)] * 31.6s

(1 / 2 / 3)-DH3: Dwell time (ms) = Pulse Time (ms) * [1600 / (4 * 79)] * 31.6s

(1 / 2 / 3)-DH5: Dwell time (ms) = Pulse Time (ms) * [1600 / (6 * 79)] * 31.6s

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Test Plots

GFSK DH1 2441MHz

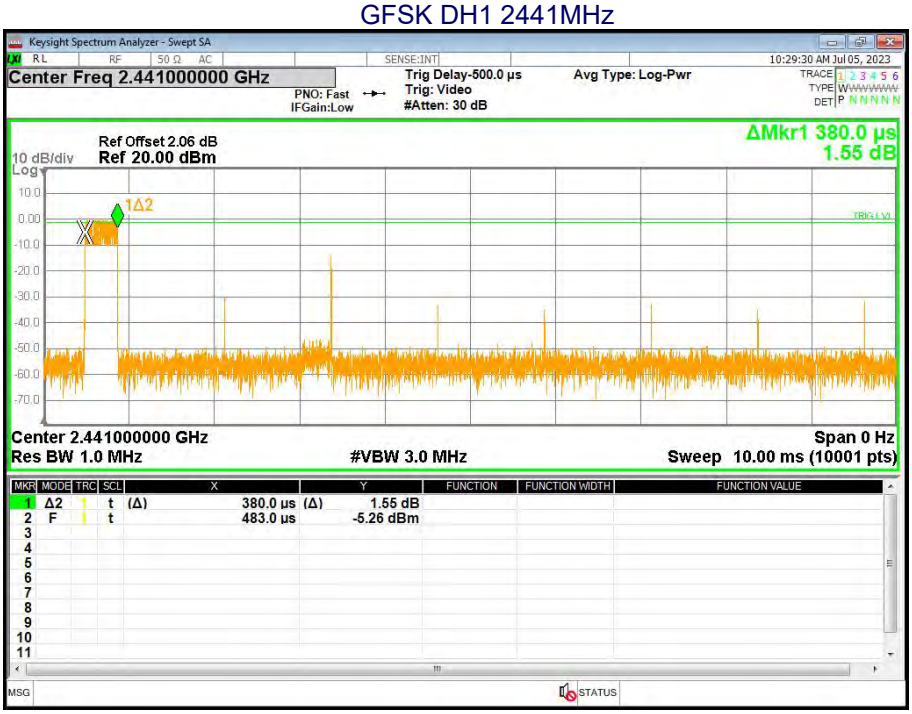

GFSK DH3 2441MHz

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

GFSK DH5 2441MHz

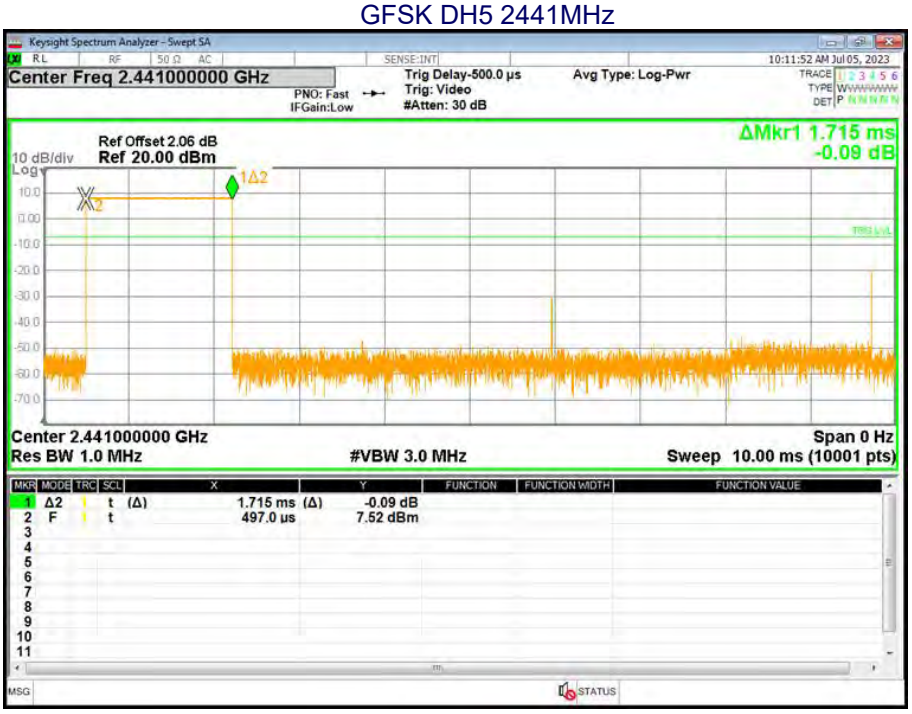

π/4DQPSK 2DH1 2441MHz

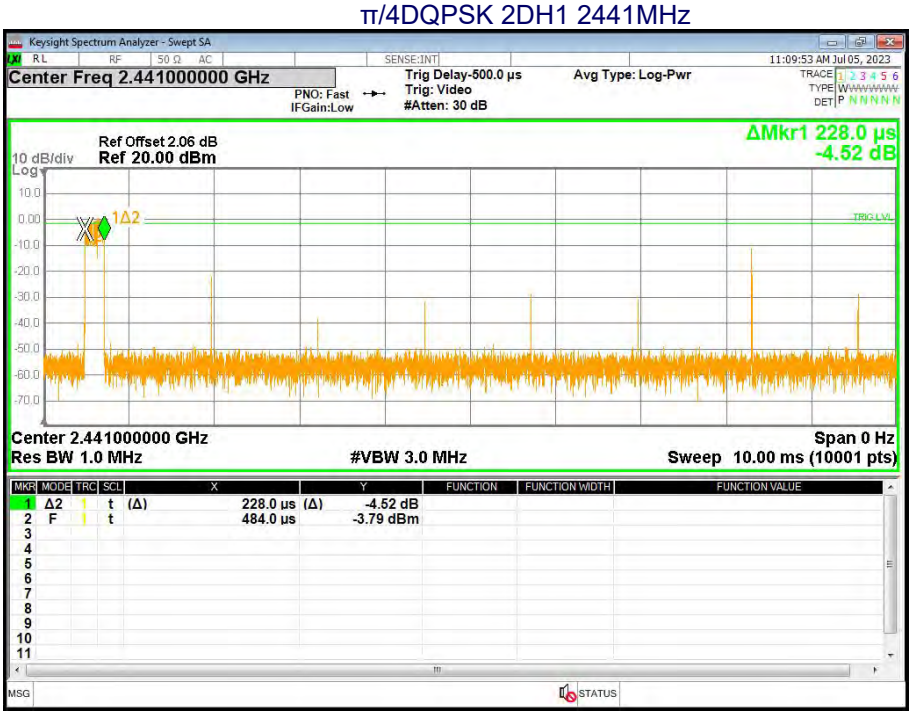

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

π/4DQPSK 2DH3 2441MHz

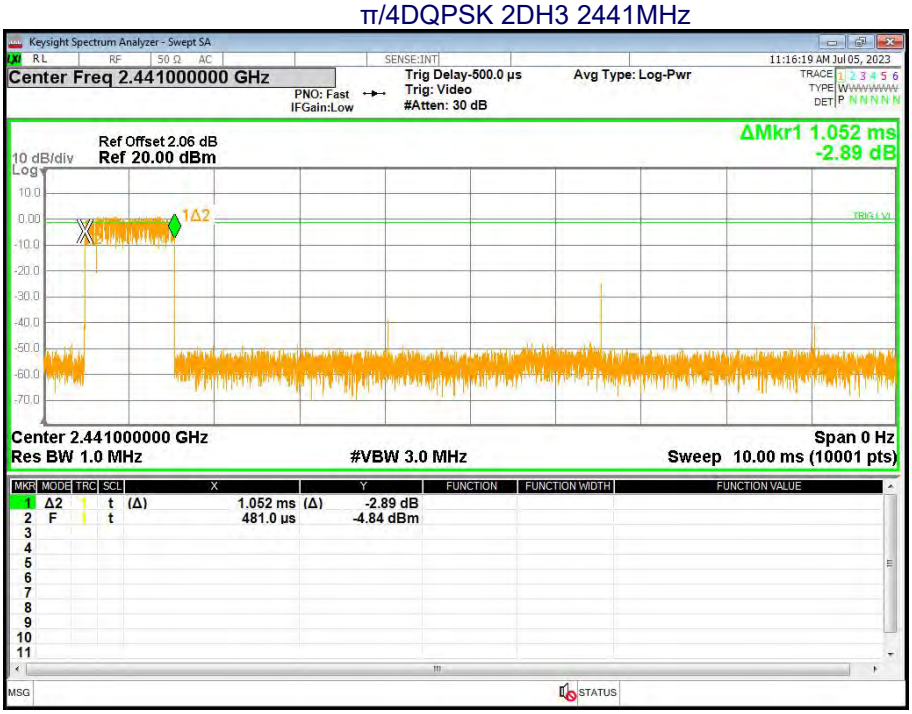

π/4DQPSK 2DH5 2441MHz

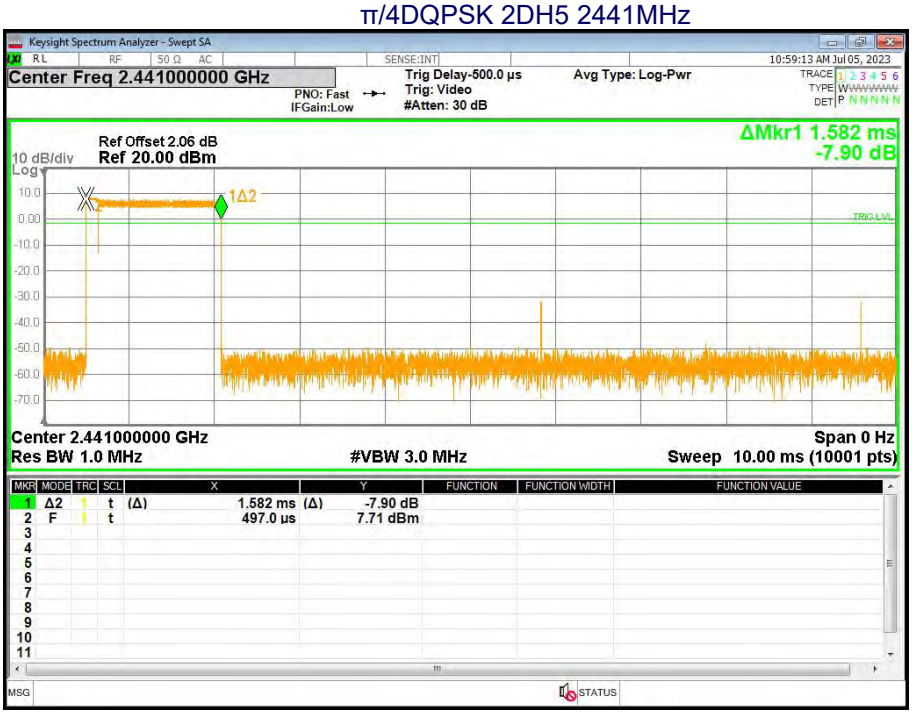

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

8DPSK 3DH1 2441MHz

8DPSK 3DH3 2441MHz

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

8DPSK 3DH5 2441MHz

12. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is FPC Antenna, the best case gain of the antennas is 6.42 dBi, reference to the appendix II for details	

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

13. Test Setup Photo

Reference to the appendix I for details.

14. EUT Constructional Details

Reference to the appendix II for details.

BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

-- END OF REPORT --

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China