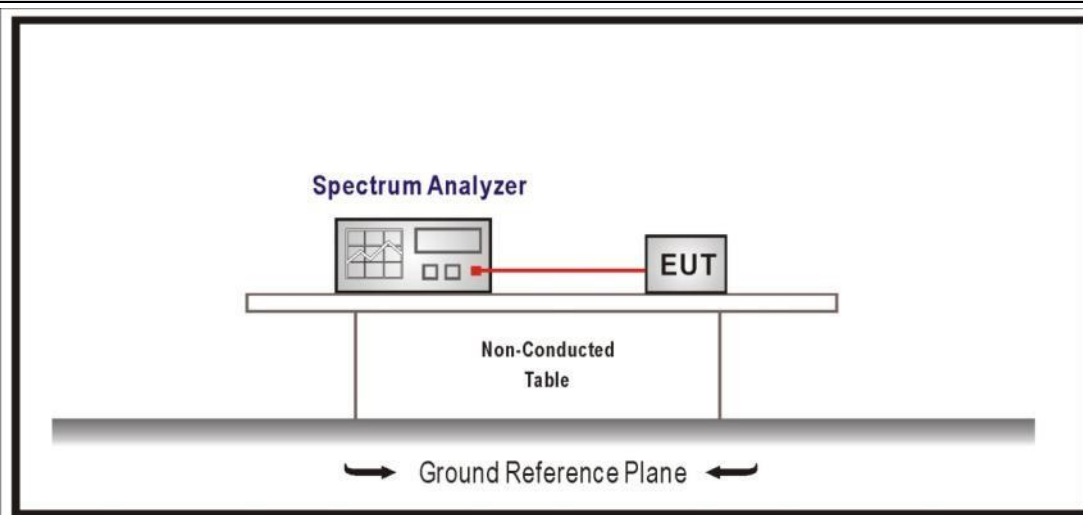


4.3 Emissions in non-restricted frequency band**VERDICT: PASS****4.3.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).


Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

4.3.2 Test Setup**4.3.3 Test Procedure**


References Rule	Chapter	Description
☒ ANSI C63.10	11.11	Emissions in non-restricted frequency bands
☒ ANSI C63.10	11.11.1	General
☒ ANSI C63.10	11.11.2	Reference level measurement
☒ ANSI C63.10	11.11.3	Emission level measurement

4.3.4 Test Data


Mode 1 2412MHz

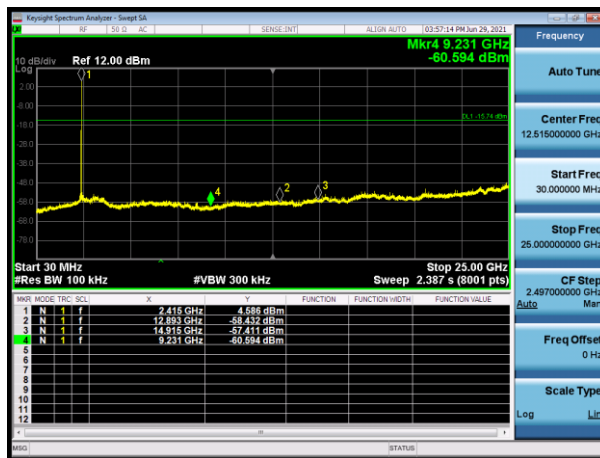

Mode 1 2462MHz

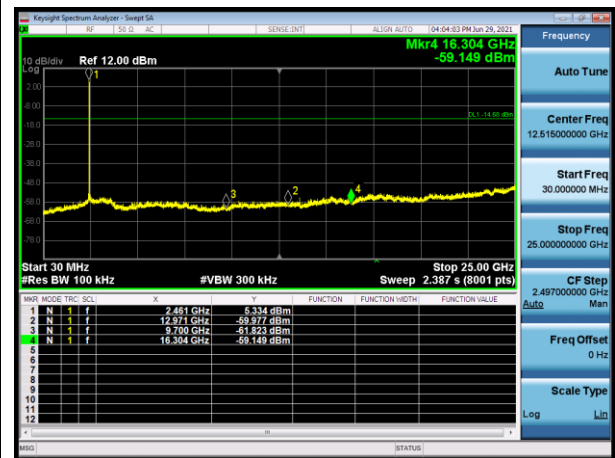


Mode 2 2412MHz

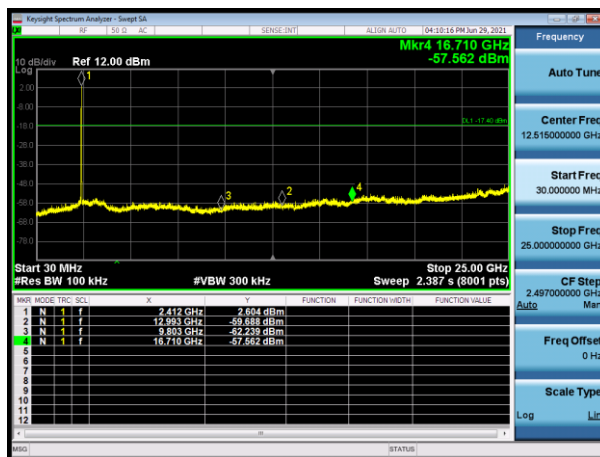


Mode 2 2462MHz




Mode 3 2412MHz

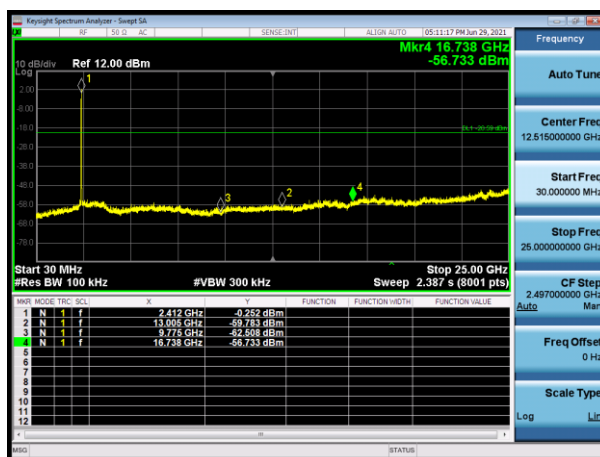


Mode 3 2462MHz

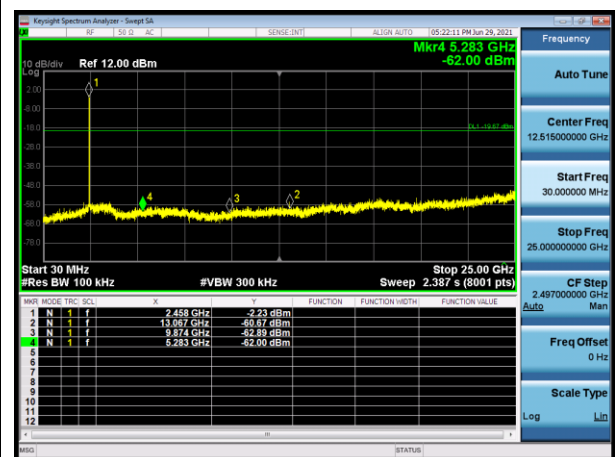


Mode 4 2412MHz

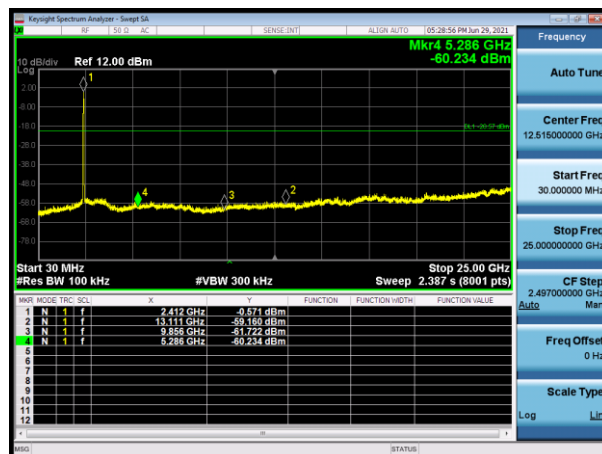


Mode 4 2462MHz

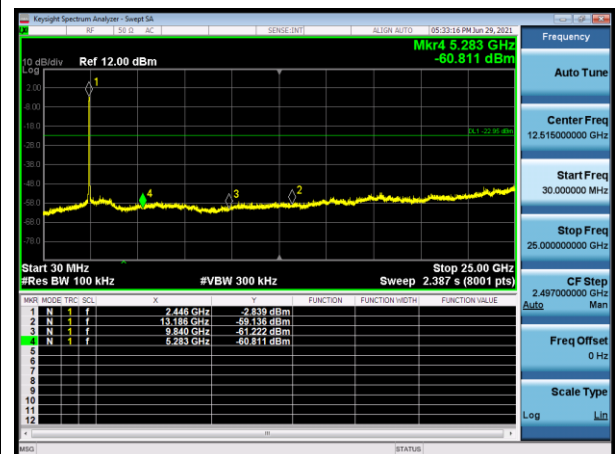


Mode 5 2412MHz

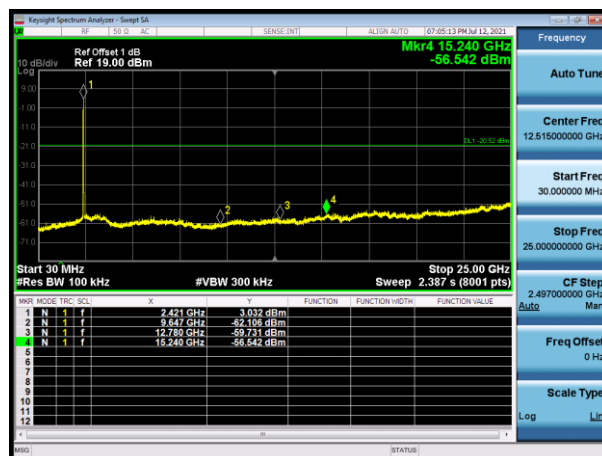


Mode 5 2462MHz

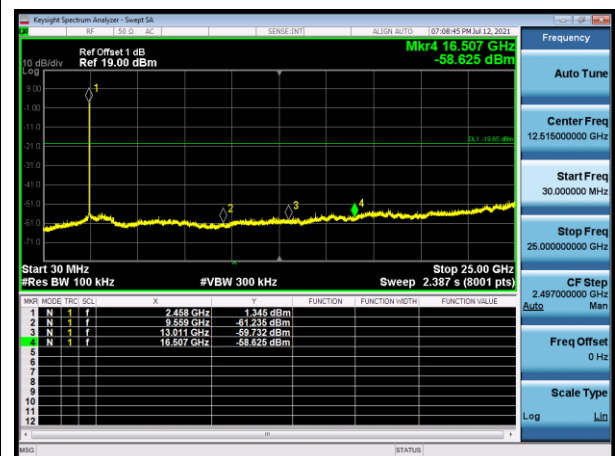


Mode 6 2422MHz

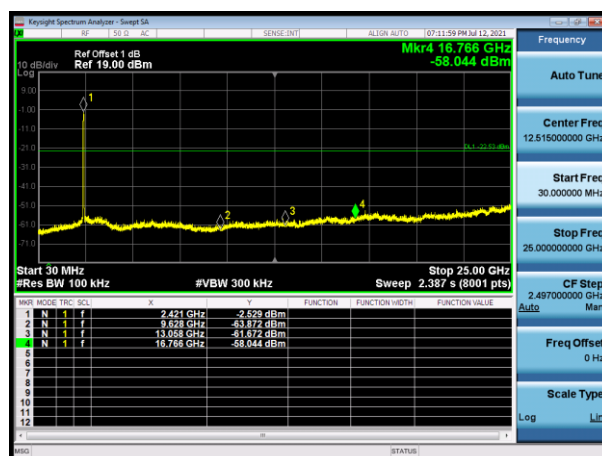


Mode 6 2452MHz

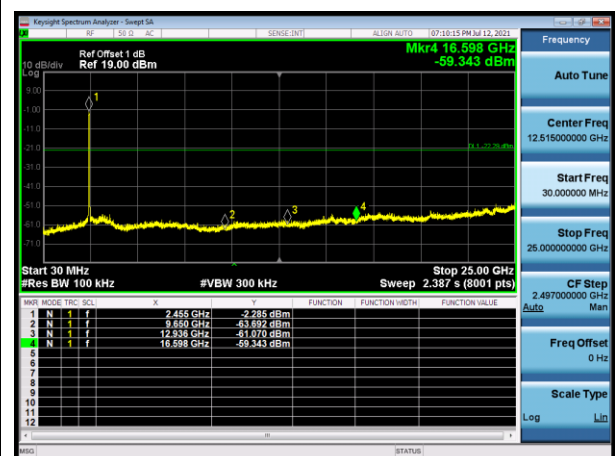


Mode 1 2412MHz

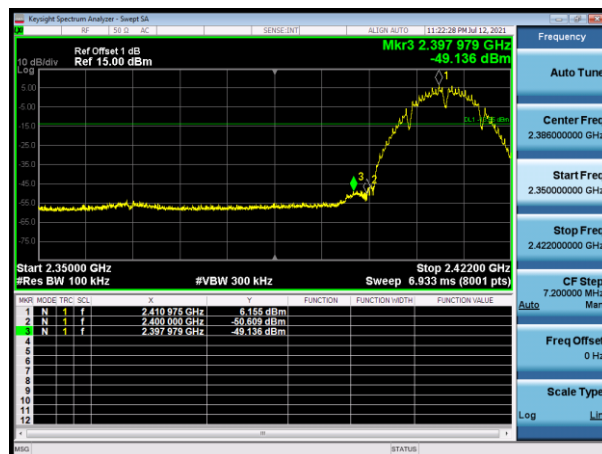


Mode 1 2462MHz

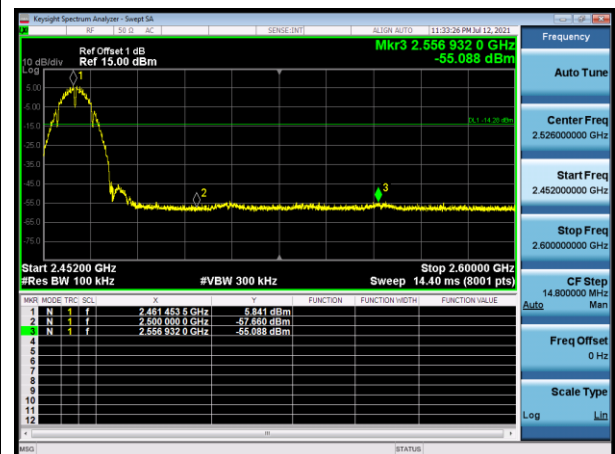


Mode 2 2412MHz

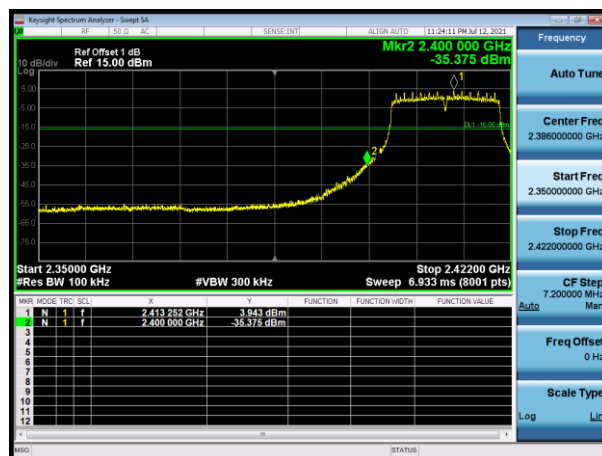


Mode 2 2462MHz

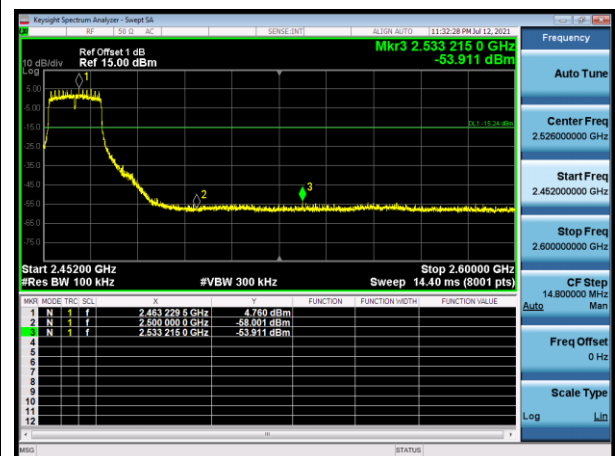


Mode 3 2412MHz

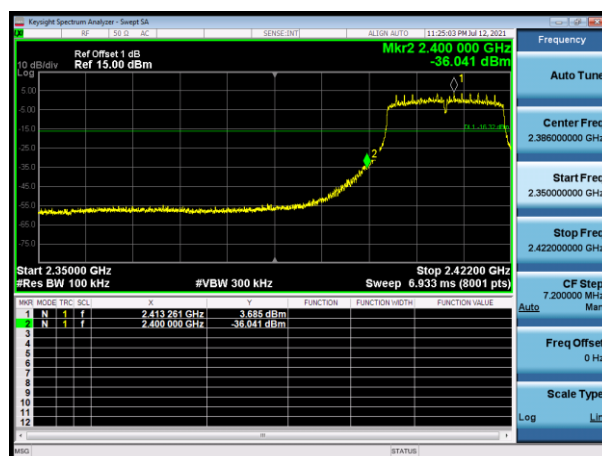


Mode 3 2462MHz

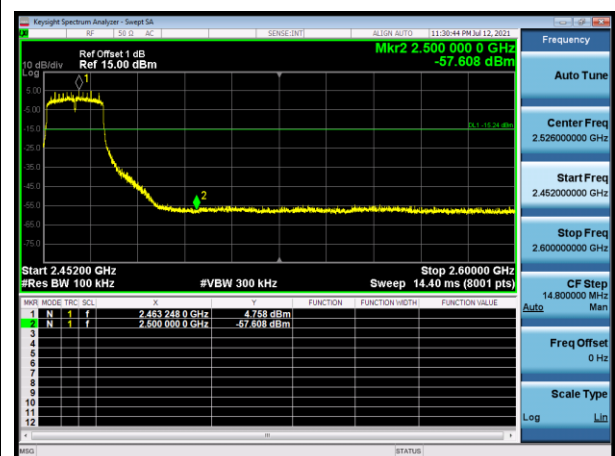


Mode 4 2422MHz

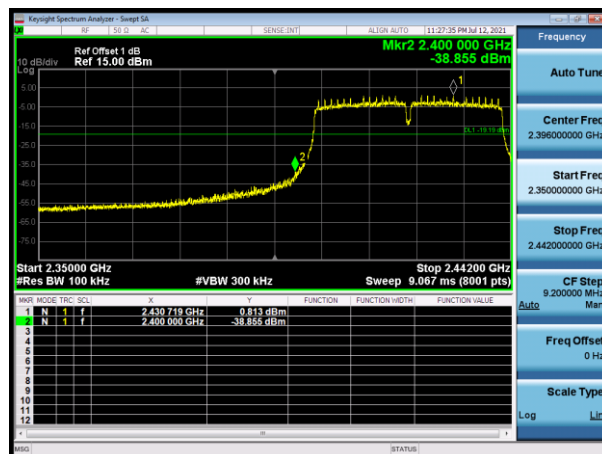


Mode 4 2452MHz

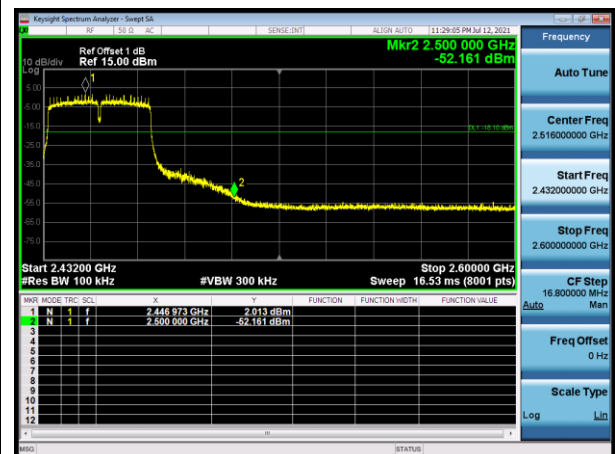


Mode 5 2412MHz

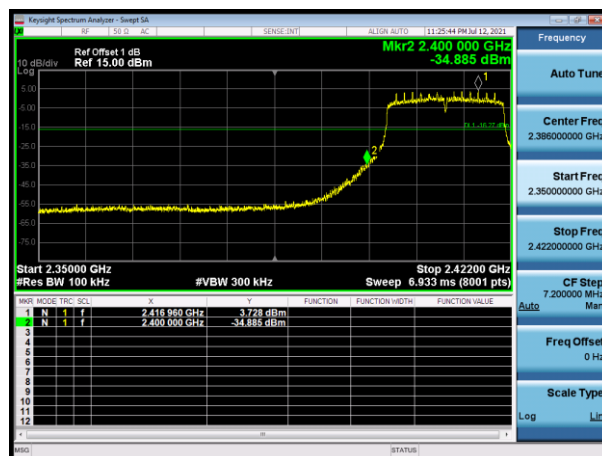


Mode 5 2462MHz

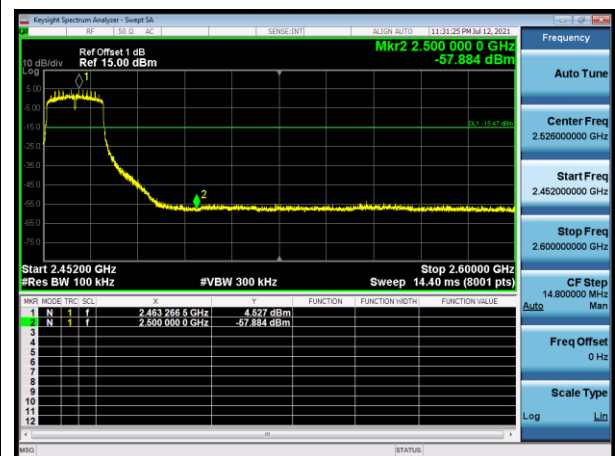

Mode 6 2422MHz

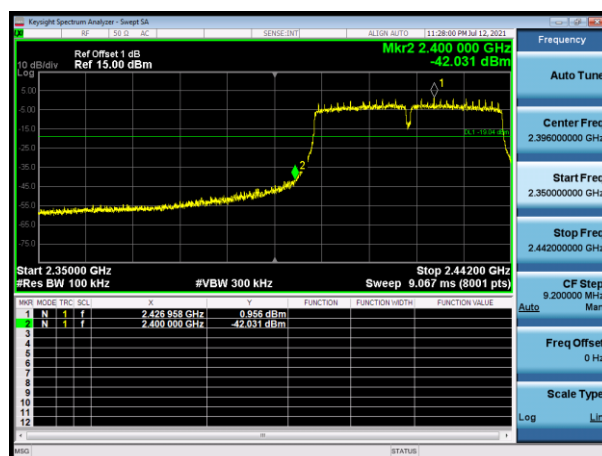


Mode 6 2452MHz

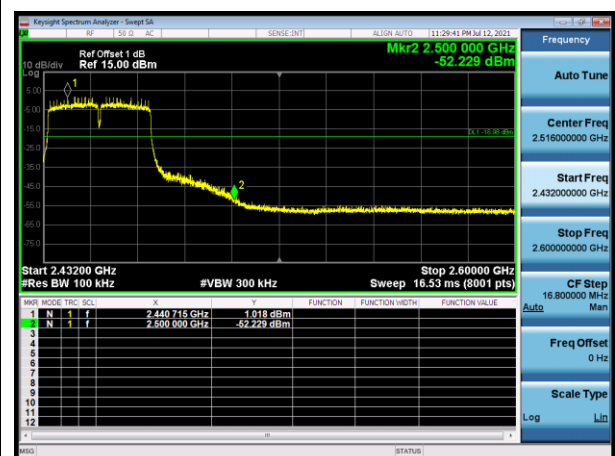

4.4 Duty cycle**VERDICT: PASS****4.4.1 Limit**

N/A

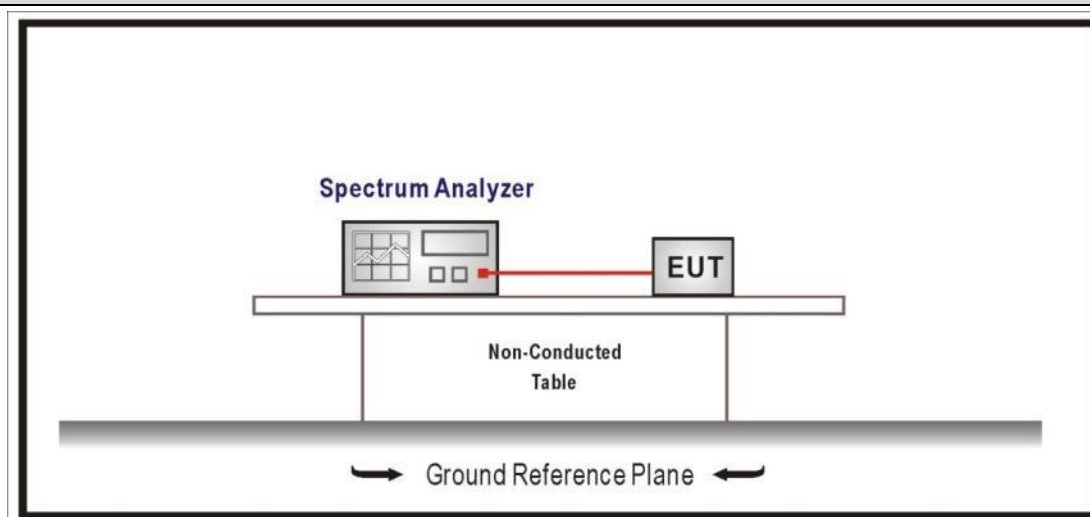4.4.2 Test Setup**4.1.1 Test Procedure**

References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level


4.4.3 Test Data

Test Mode	Tx On (us)	VBW	Tx On + Tx Off (us)	Duty Cycle (%)
Mode 1	--	10Hz	--	100%
Mode 2	220	5	252	87.3%
Mode 3	--	10Hz	--	100%
Mode 4	--	10Hz	--	100%
Mode 5	--	10Hz	--	100%
Mode 6	--	10Hz	--	100%


Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: $VBW \geq 1/T$ will be used.


Mode 1 2412MHz

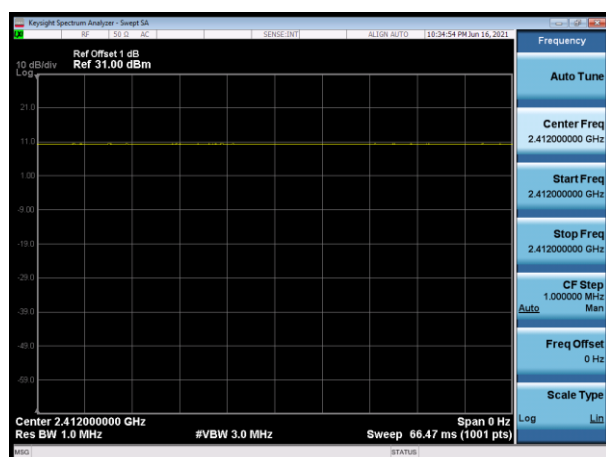


Mode 2 2412MHz

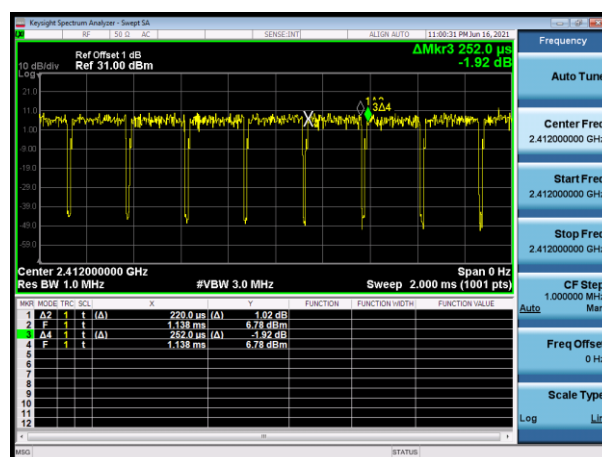


Mode 3 2412MHz

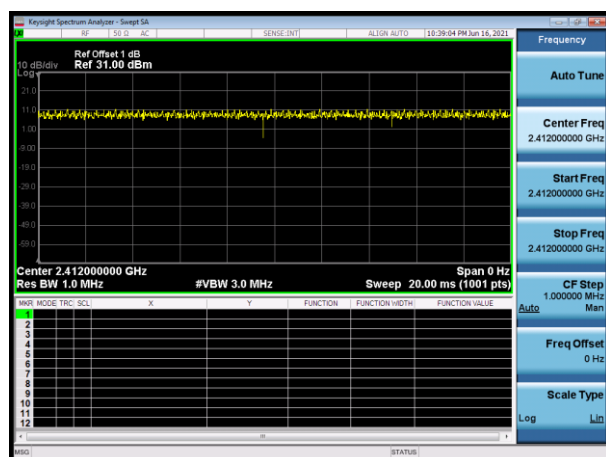


Mode 4 2422MHz

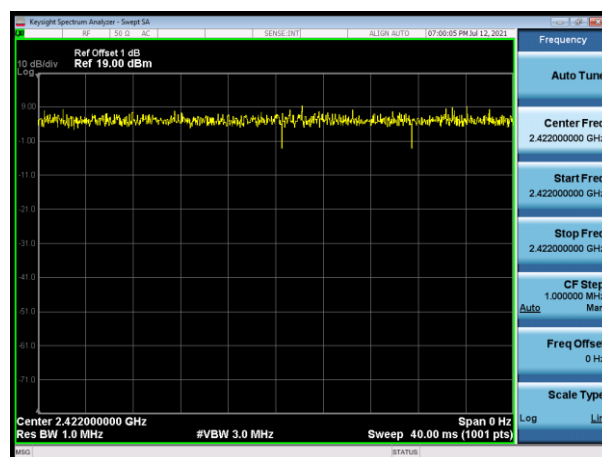

Mode 5 2412MHz

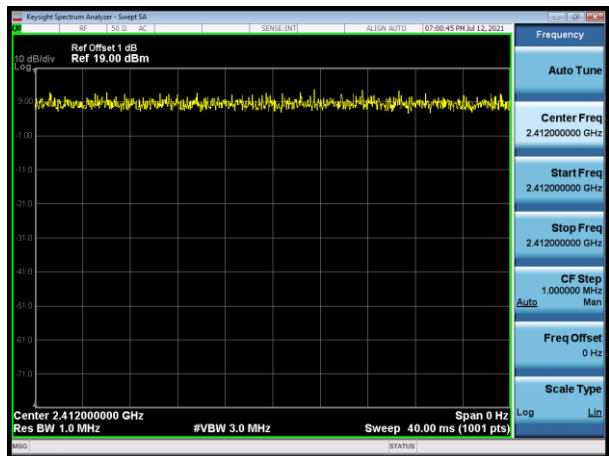

Mode 6 2422MHz

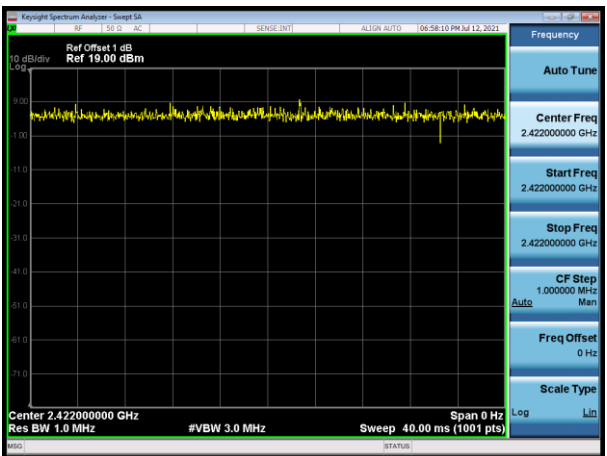


4.5 Radiated Emission Band Edge**VERDICT: PASS****4.5.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.205, 15.209		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390 2483.5-2500	PK	74	1	3
	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.5.2 Test Setup

Above 1GHz Test Setup:

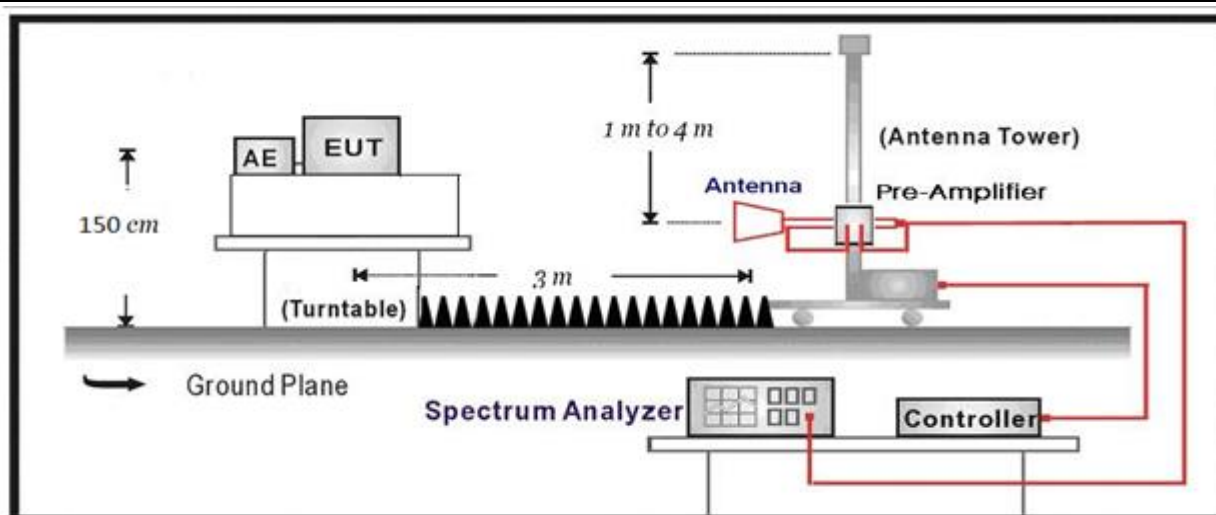


4.5.3 Test Procedure			
	References Rule	Chapter	Description
☒	ANSI C63.10	6.10	Band-edge testing
	☒ ANSI C63.10	6.10.5	Restricted-band band-edge measurements
	☐ ANSI C63.10	6.10.6	Marker-delta method
☒	ANSI C63.10	11.12	Emissions in restricted frequency bands
	☒ ANSI C63.10	11.12.1	Radiated emission measurements
	☒ ANSI C63.10	6.3	Radiated spurious emission test
☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.5.4 Test Data


SISO-Ant 1(Worst Data)

Profile: 2360091R	Page No.: 1
Engineer: Juliuszhou	
Site: AC5	Time: 2020/03/12 - 00:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2412MHz by 802.11b	

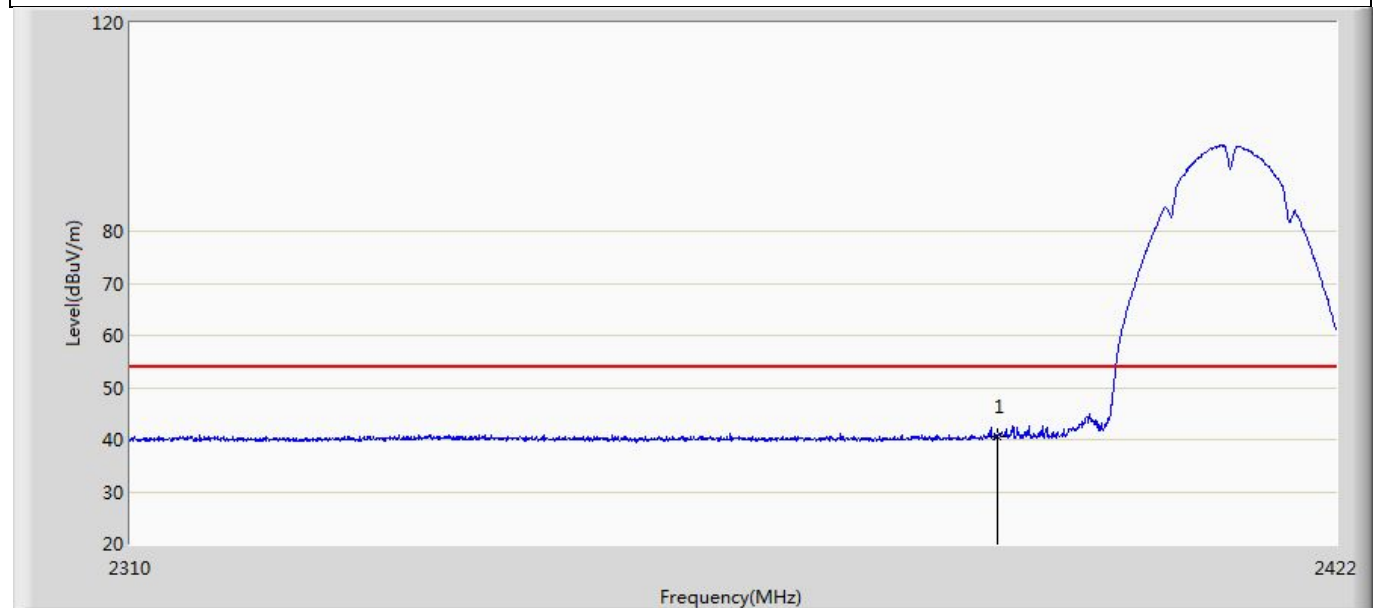


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	40.618	5.159	-13.382	54.000	35.459	AV

Profile: 2360091R	Page No.: 2
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2412MHz by 802.11b	

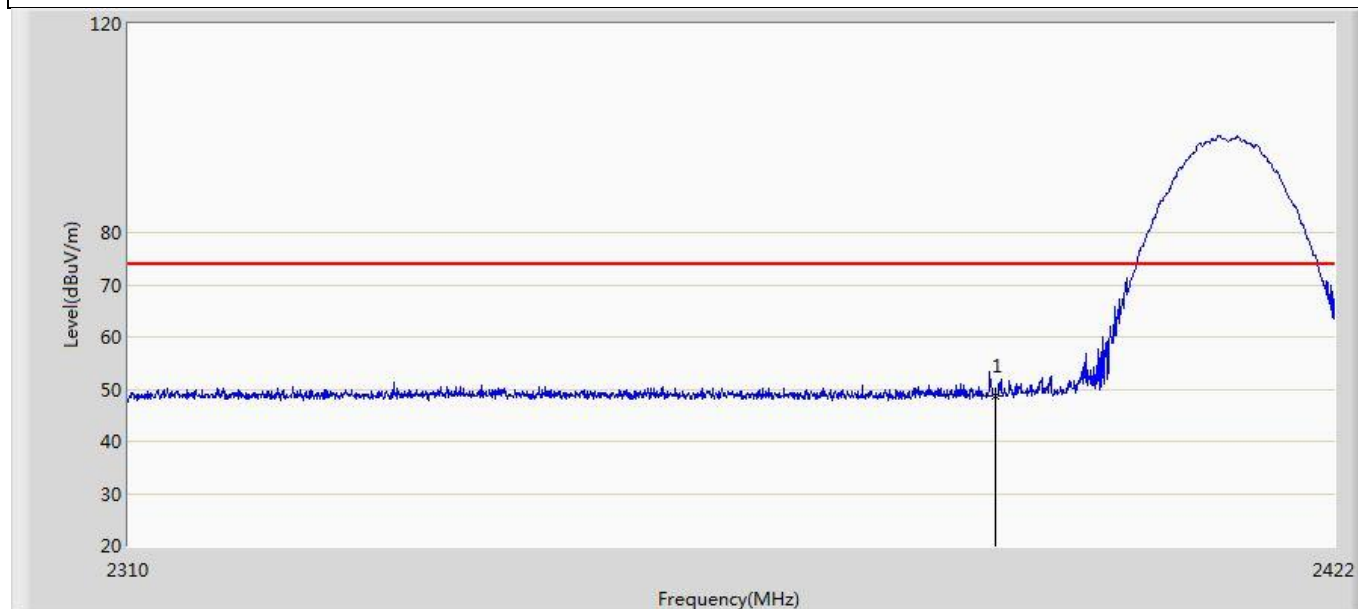


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	48.838	13.379	-25.162	74.000	35.459	PK

Profile: 2360091R	Page No.: 3
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2412MHz by 802.11b	

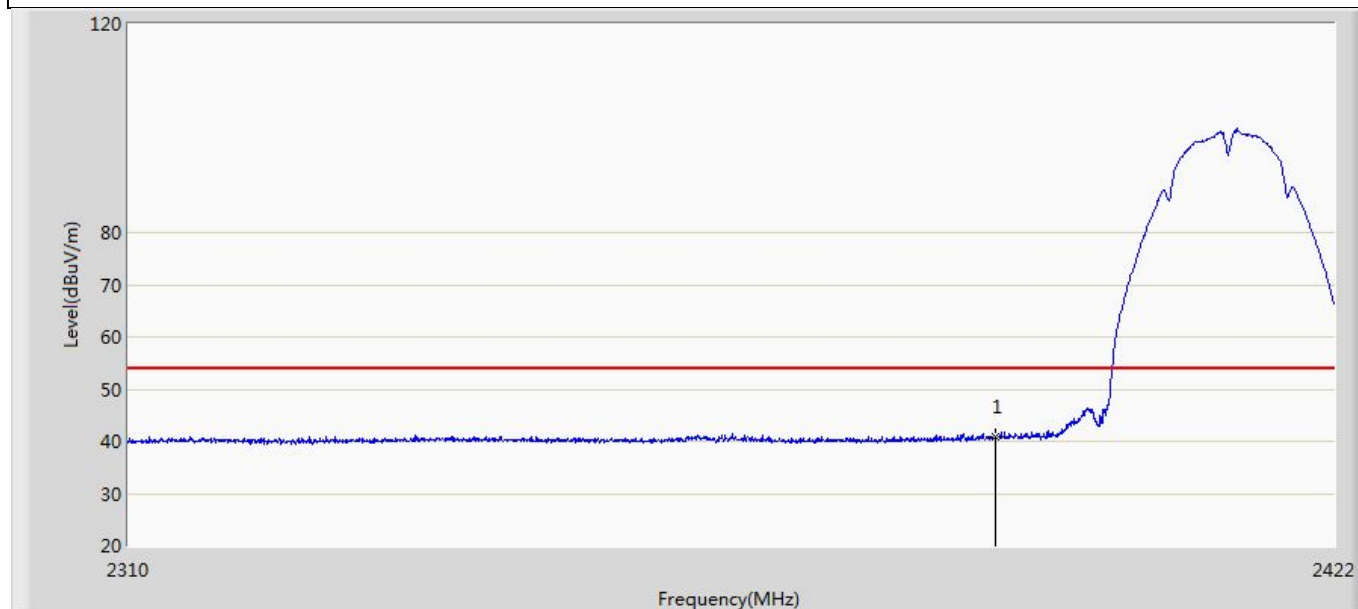


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	40.810	5.351	-13.190	54.000	35.459	AV

Profile: 2360091R	Page No.: 4
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2412MHz by 802.11b	

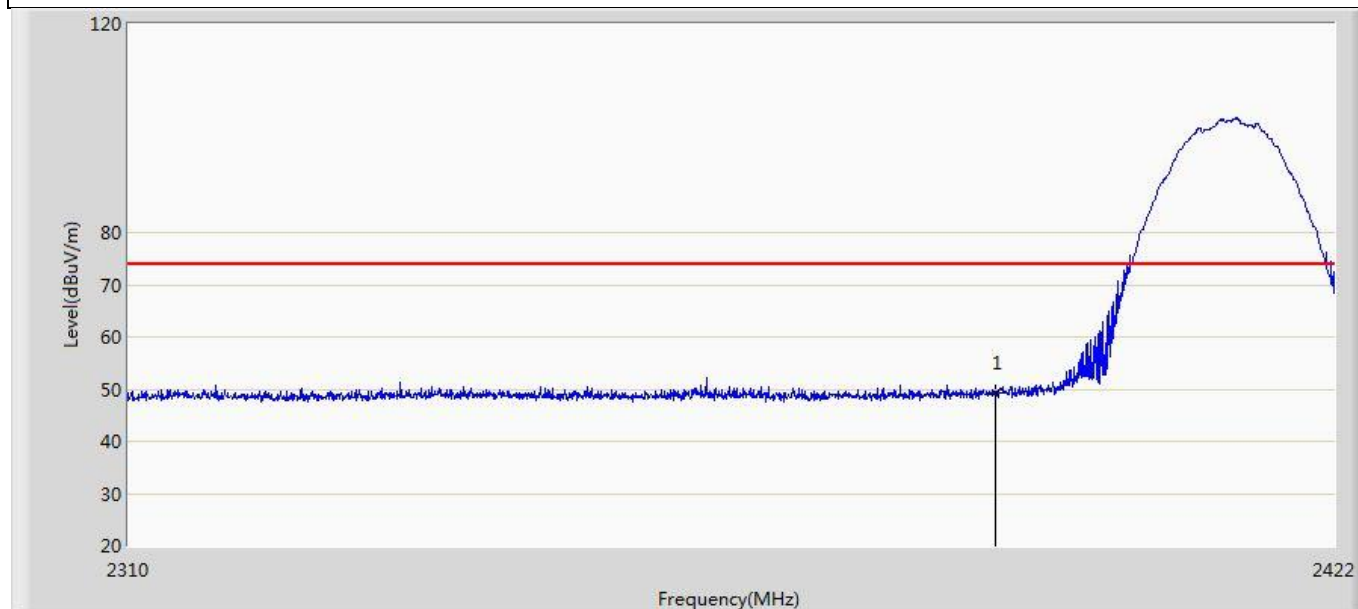


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.305	13.846	-24.695	74.000	35.459	PK

Profile: 2360091R	Page No.: 5
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2462MHz by 802.11b	

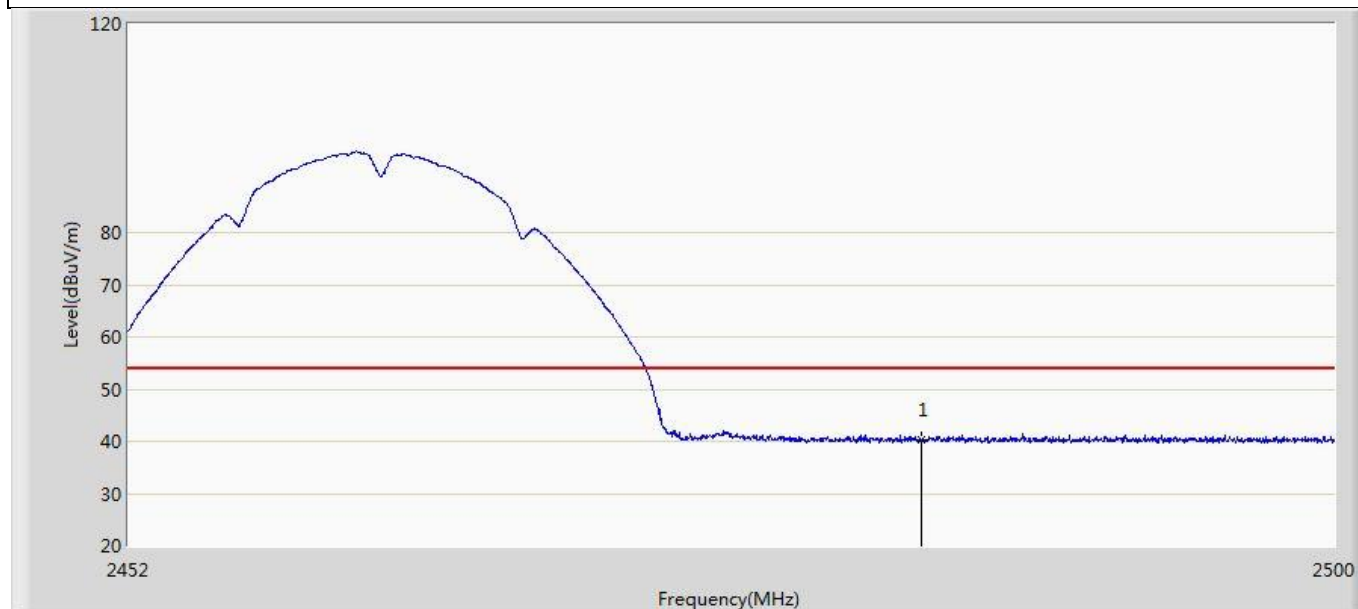


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	40.331	4.656	-13.669	54.000	35.675	AV

Profile: 2360091R	Page No.: 6
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2462MHz by 802.11b	

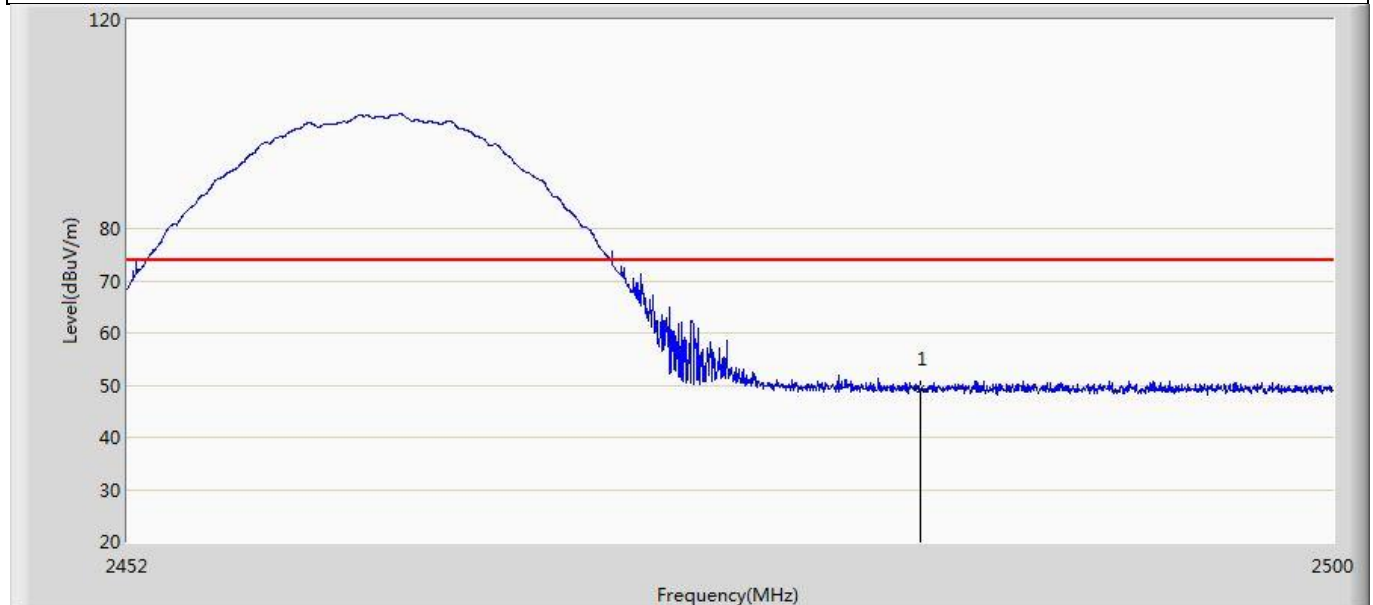


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	49.208	13.533	-24.792	74.000	35.675	PK

Profile: 2360091R	Page No.: 7
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2462MHz by 802.11b	

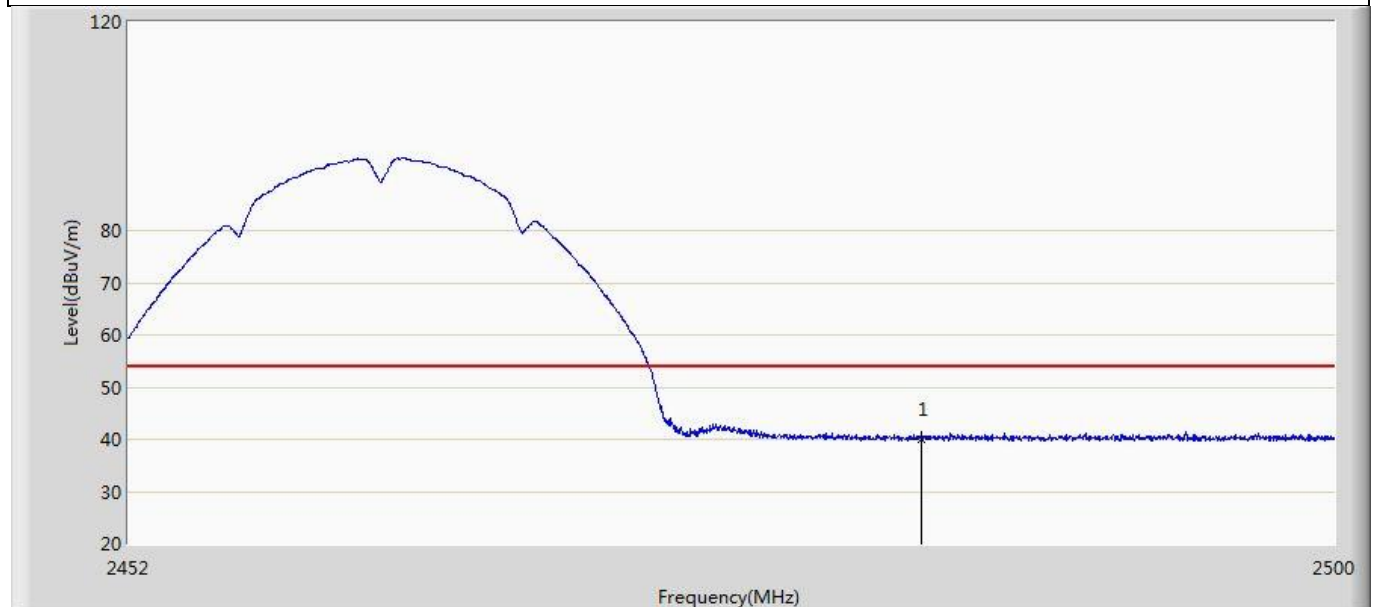


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	40.133	4.458	-13.867	54.000	35.675	AV

Profile: 2360091R	Page No.: 8
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2462MHz by 802.11b	

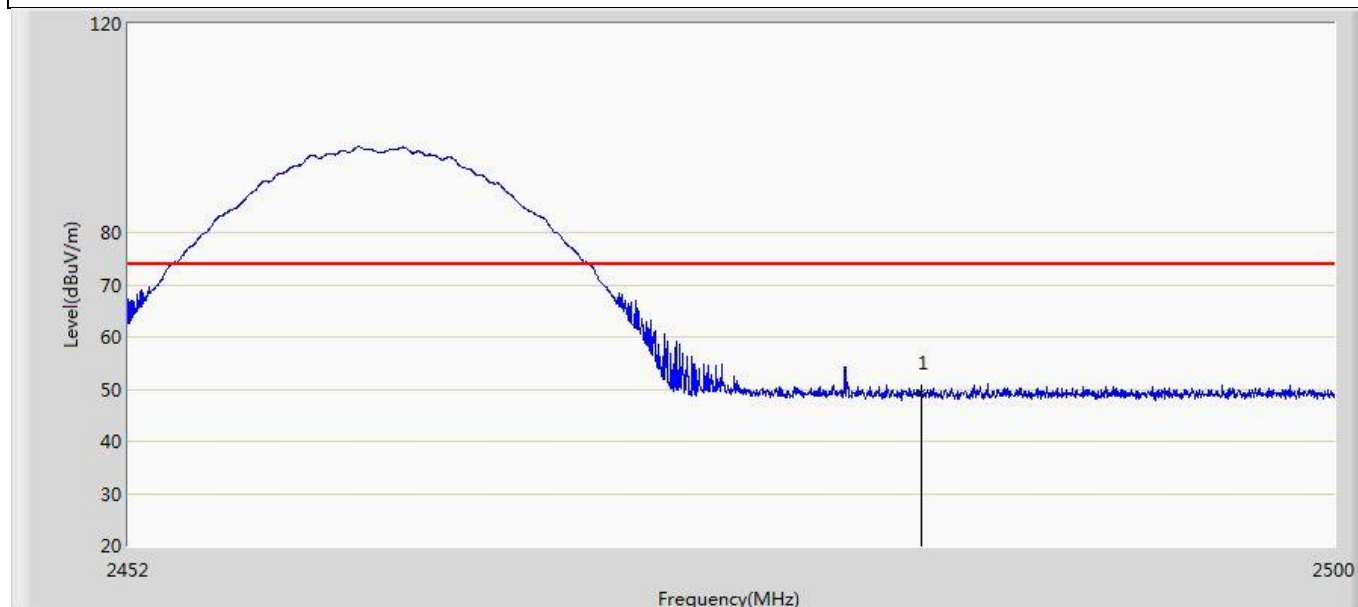


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	49.259	13.584	-24.741	74.000	35.675	PK

Profile: 2360091R	Page No.: 9
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2412MHz by 802.11g	

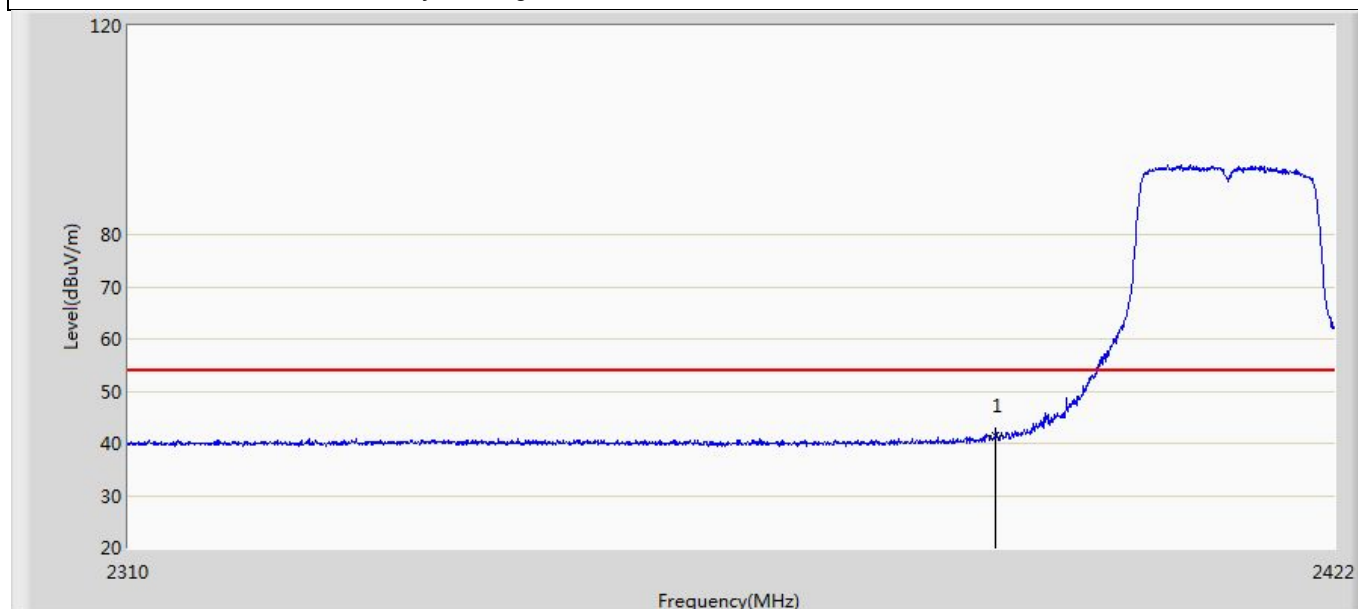


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.549	6.090	-12.451	54.000	35.459	AV

Profile: 2360091R	Page No.: 10
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2412MHz by 802.11g	

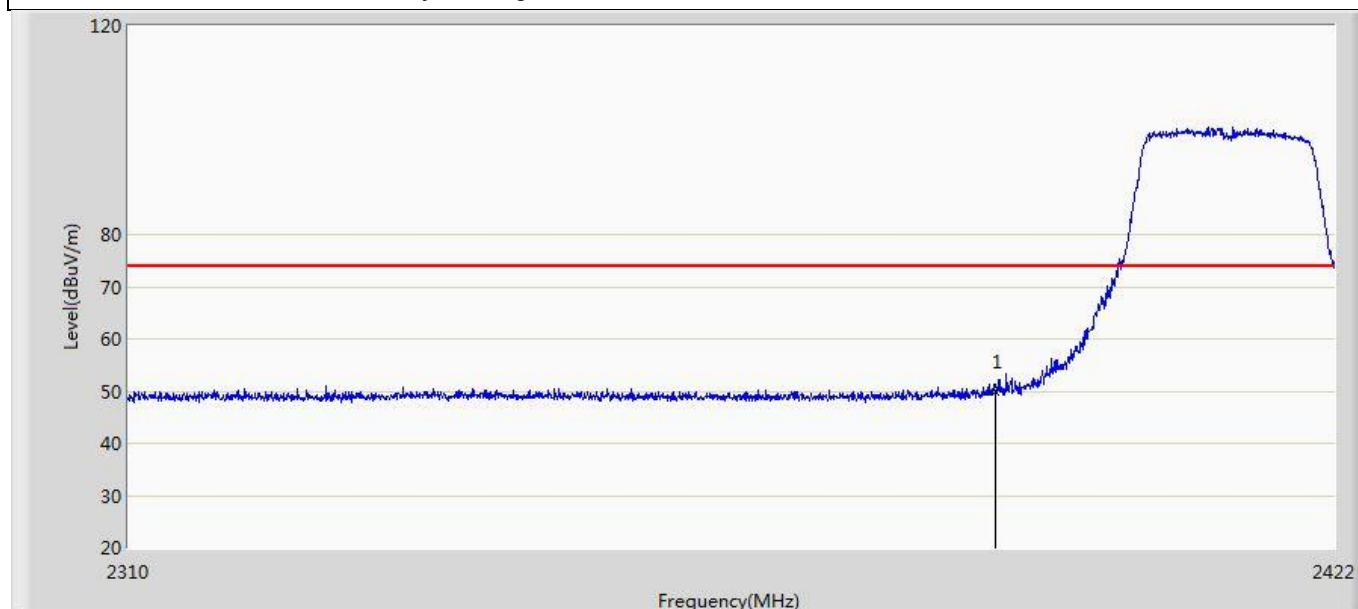


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.804	14.345	-24.196	74.000	35.459	PK

Profile: 2360091R	Page No.: 11
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2412MHz by 802.11g	

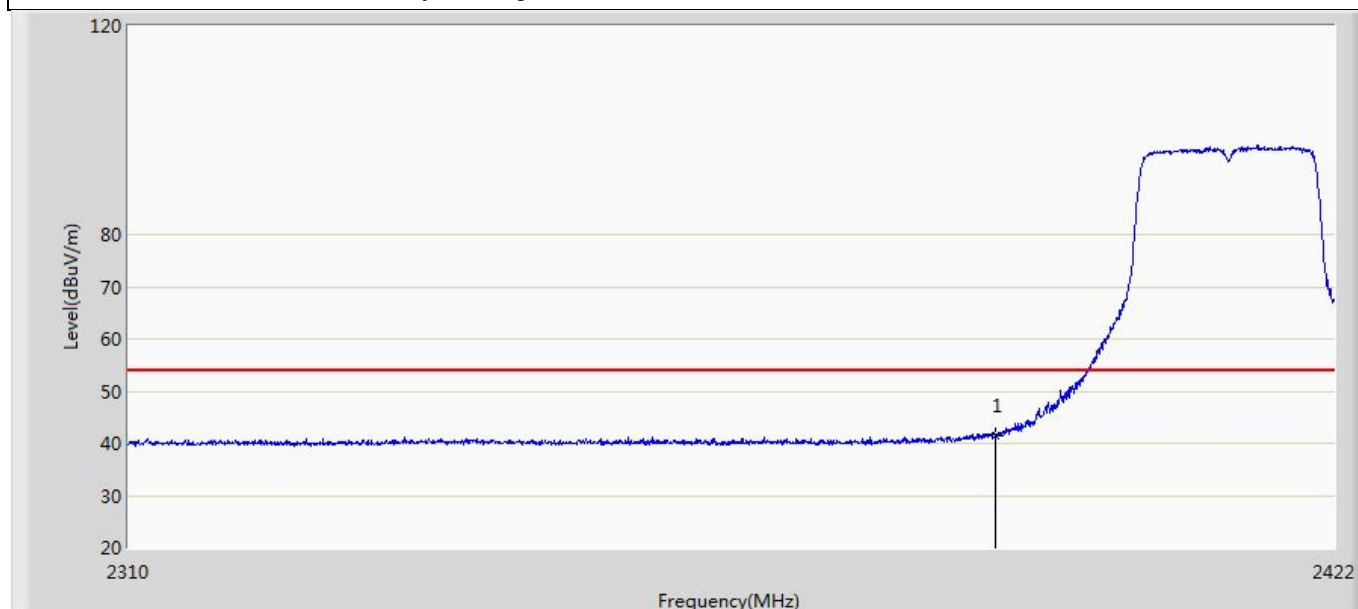


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.472	6.013	-12.528	54.000	35.459	AV

Profile: 2360091R	Page No.: 12
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2412MHz by 802.11g	

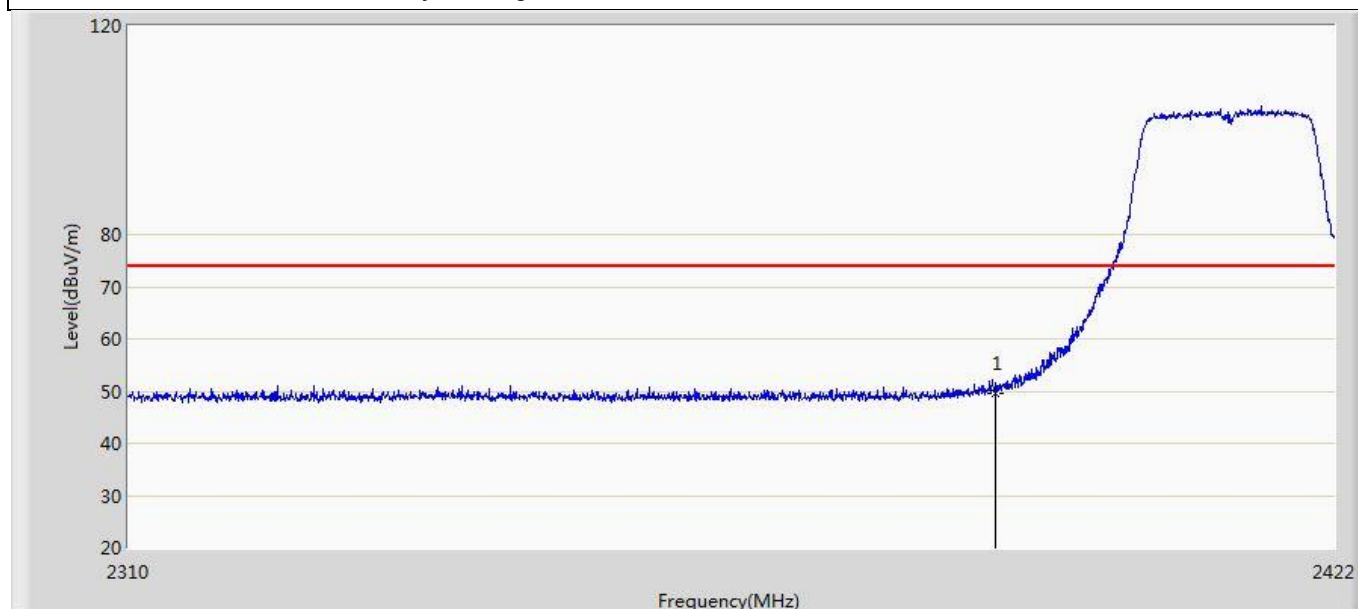


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.574	14.115	-24.426	74.000	35.459	PK

Profile: 2360091R	Page No.: 13
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2462MHz by 802.11g	

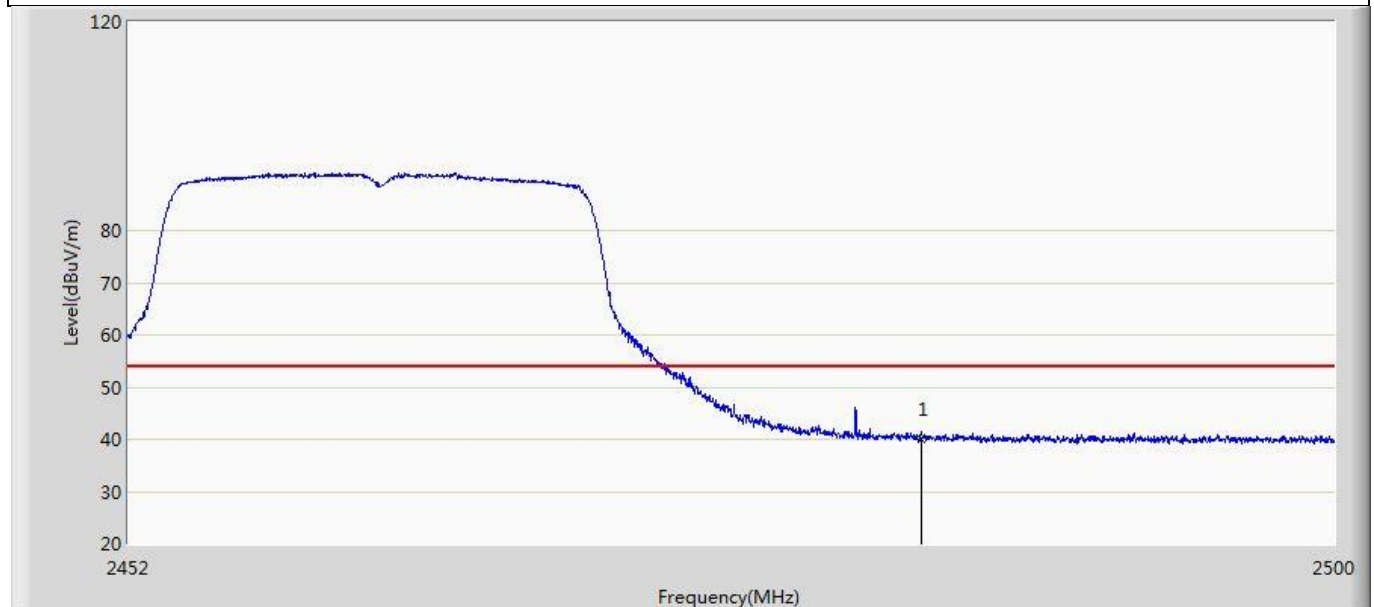


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	40.127	4.452	-13.873	54.000	35.675	AV

Profile: 2360091R	Page No.: 14
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2462MHz by 802.11g	

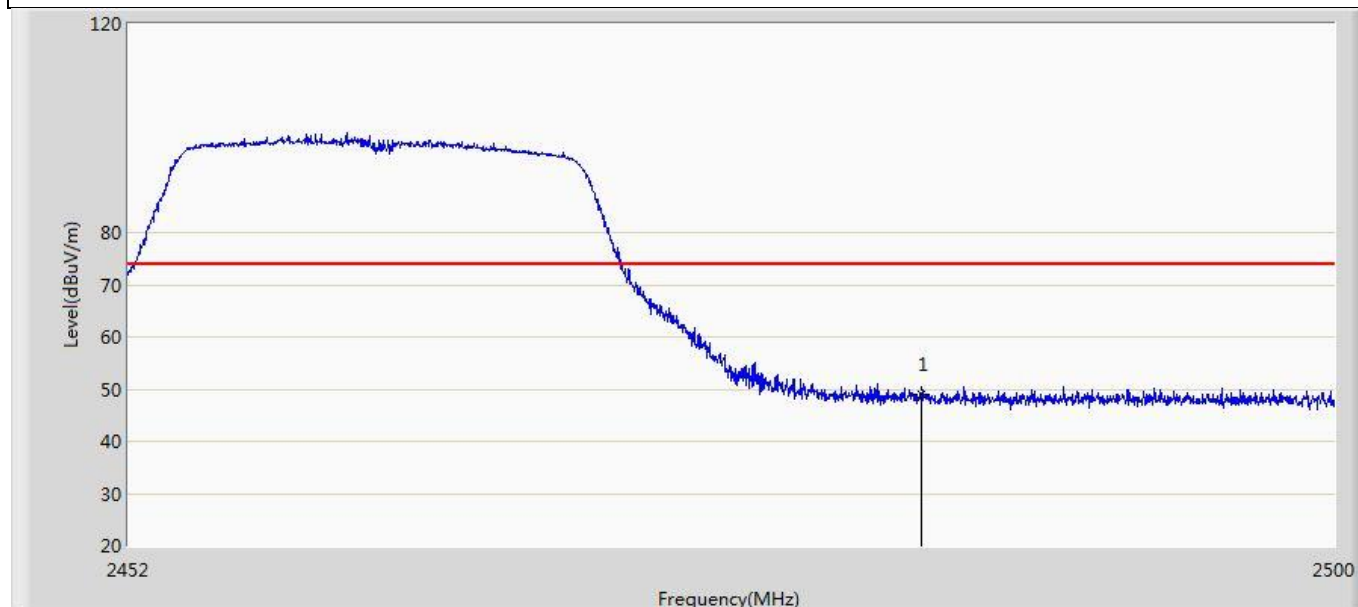


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	48.850	13.175	-25.150	74.000	35.675	PK

Profile: 2360091R	Page No.: 15
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2462MHz by 802.11g	

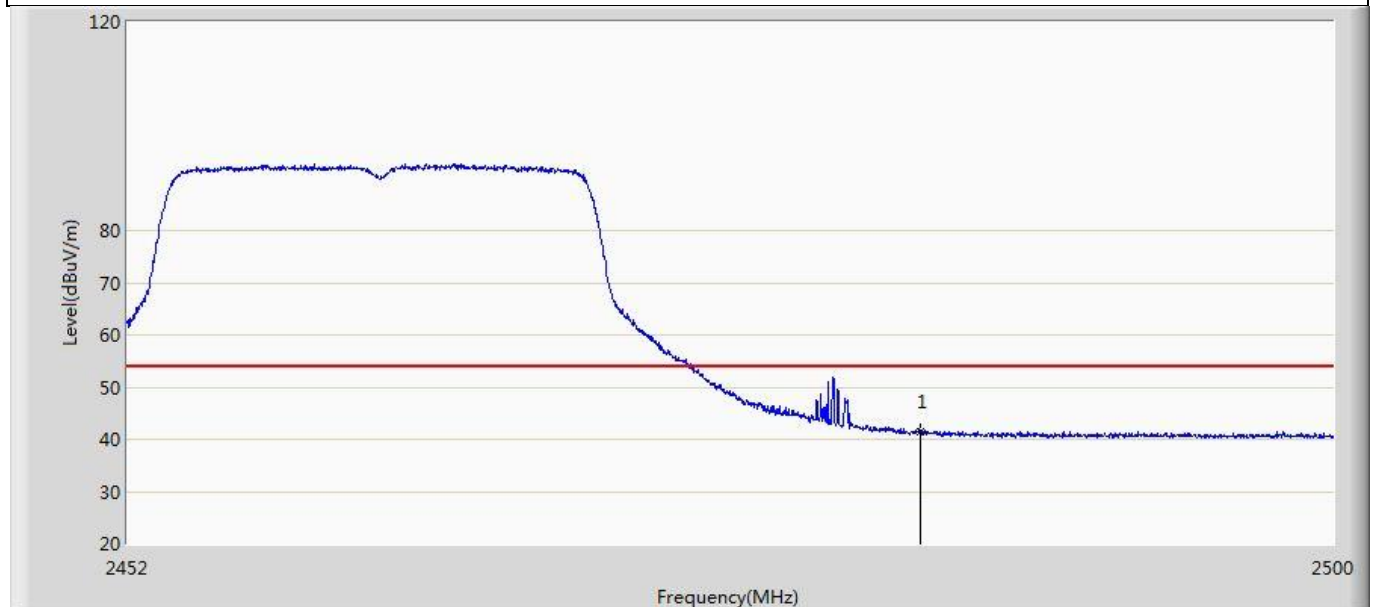


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	41.577	5.902	-12.423	54.000	35.675	AV

Profile: 2360091R	Page No.: 16
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2462MHz by 802.11g	

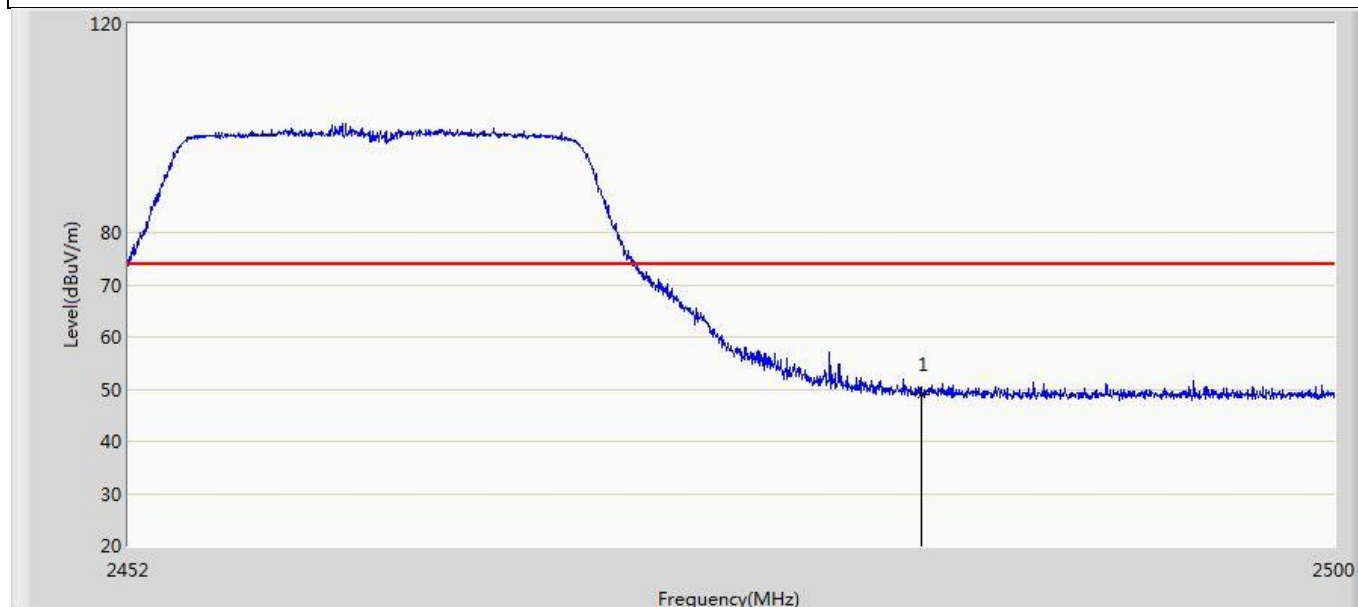


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	48.989	13.314	-25.011	74.000	35.675	PK

Profile: 2360091R	Page No.: 17
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 3:Transmit at 2412MHz by 802.11n20	

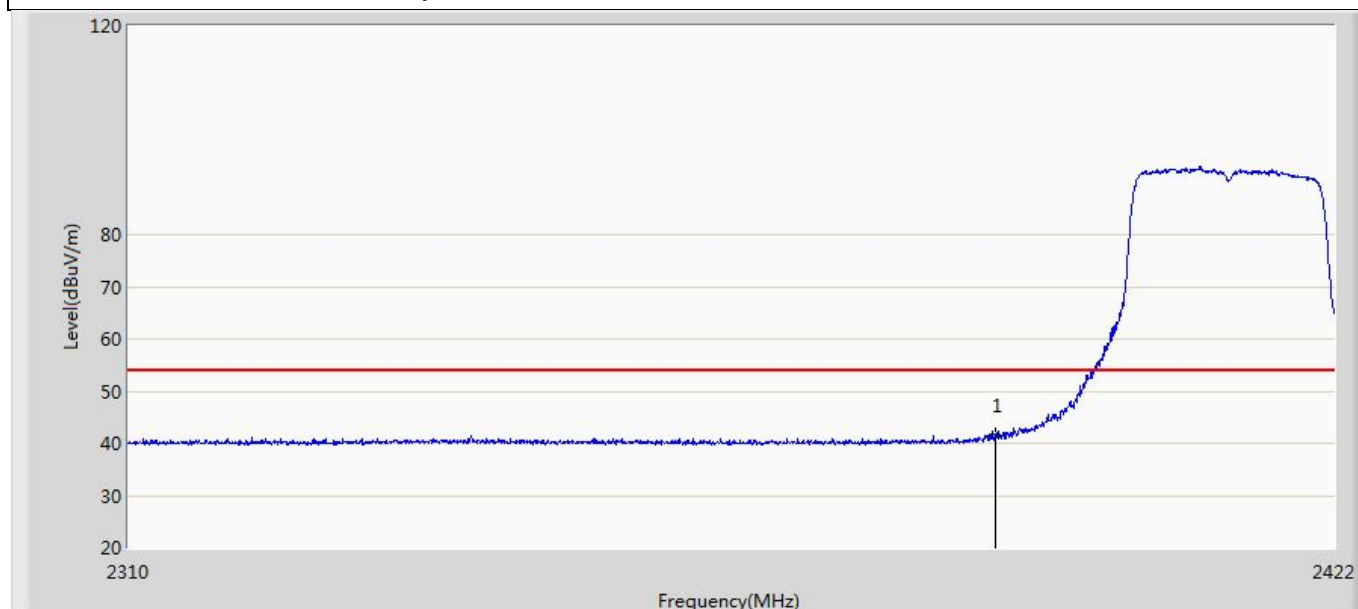


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.367	5.908	-12.633	54.000	35.459	AV

Profile: 2360091R	Page No.: 18
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 3:Transmit at 2412MHz by 802.11n20	

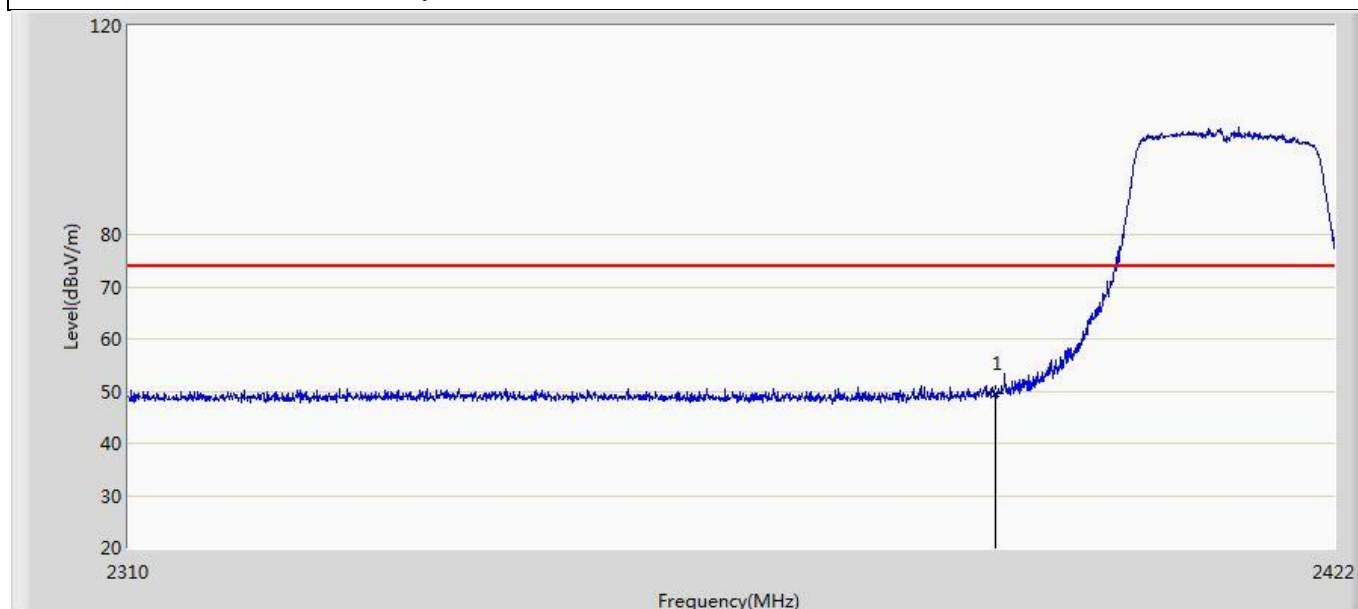


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.554	14.095	-24.446	74.000	35.459	PK

Profile: 2360091R	Page No.: 19
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 3:Transmit at 2412MHz by 802.11n20	

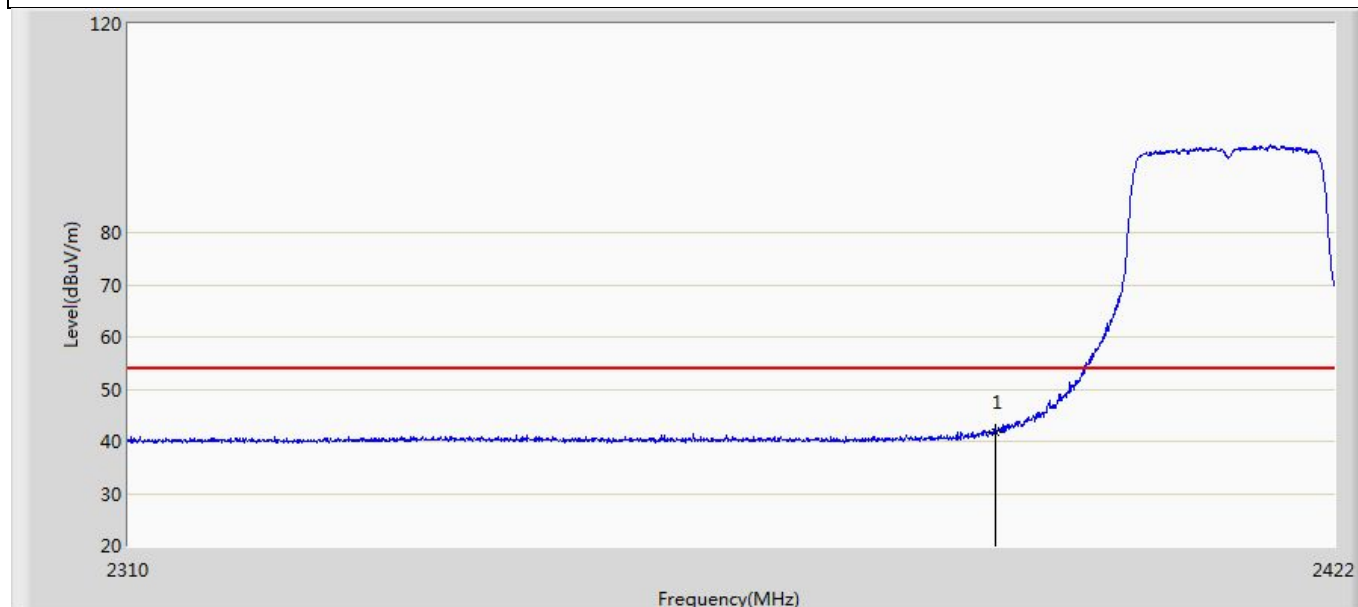


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.648	6.189	-12.352	54.000	35.459	AV

Profile: 2360091R	Page No.: 20
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 3:Transmit at 2412MHz by 802.11n20	

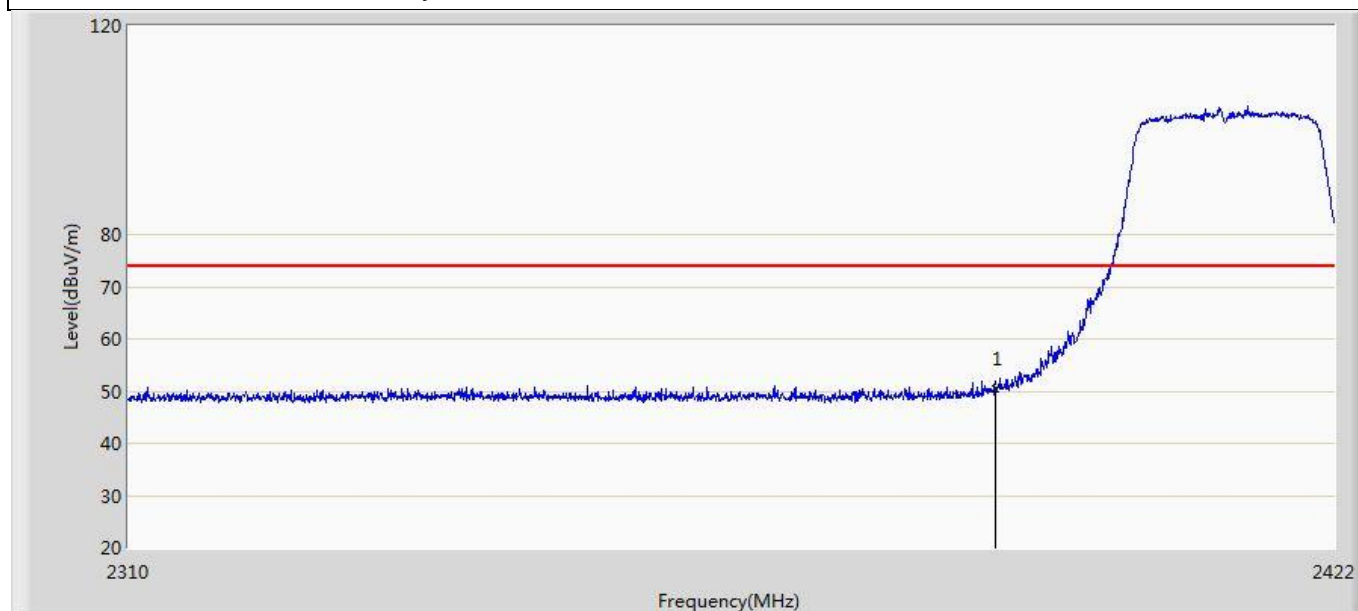


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.315	14.856	-23.685	74.000	35.459	PK

Profile: 2360091R	Page No.: 21
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 3:Transmit at 2462MHz by 802.11n20	

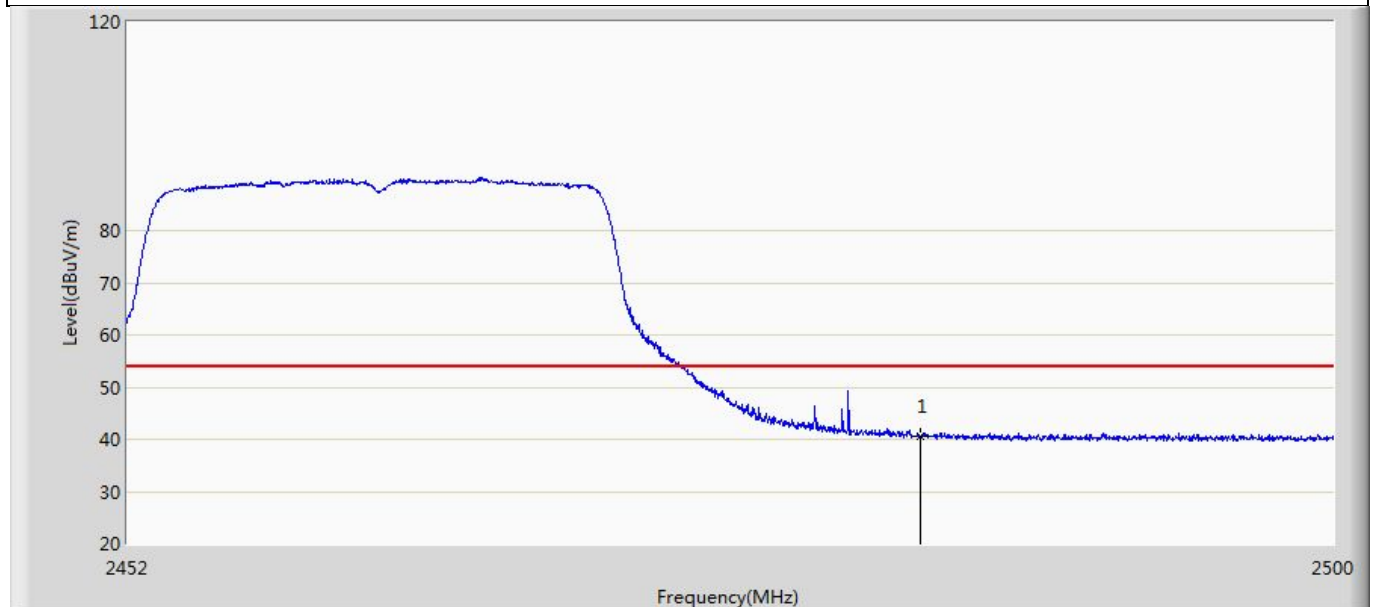


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	40.439	4.764	-13.561	54.000	35.675	AV

Profile: 2360091R	Page No.: 22
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 3:Transmit at 2462MHz by 802.11n20	

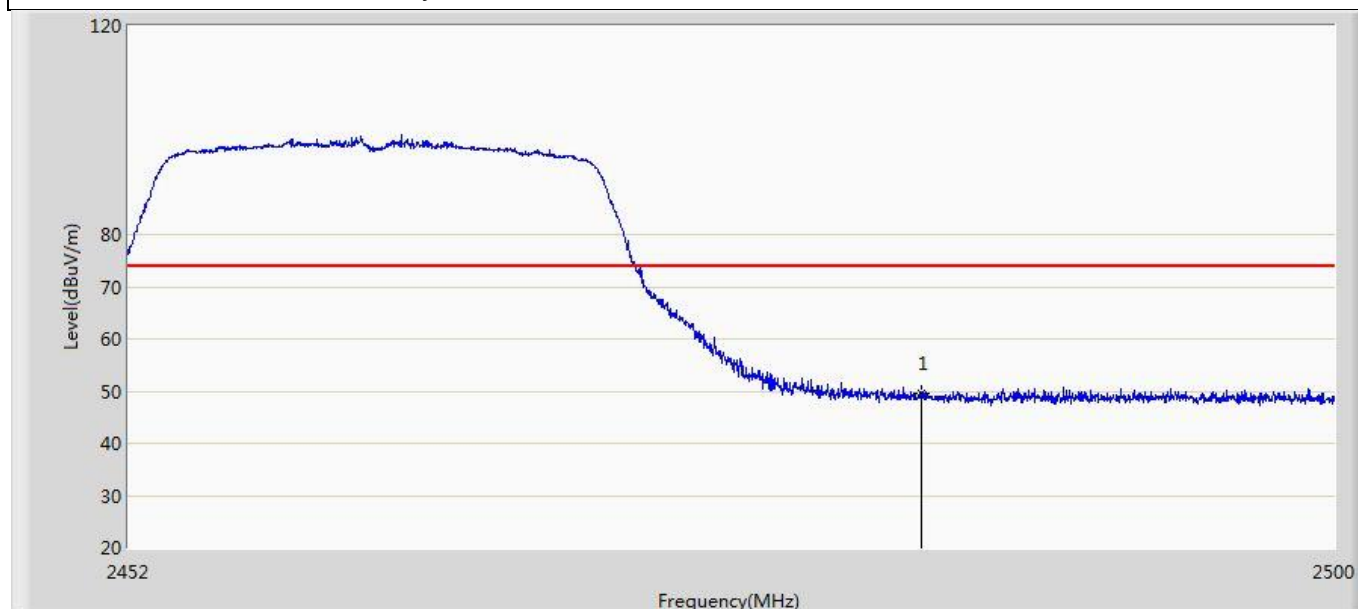


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	49.663	13.988	-24.337	74.000	35.675	PK

Profile: 2360091R	Page No.: 23
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 3:Transmit at 2462MHz by 802.11n20	

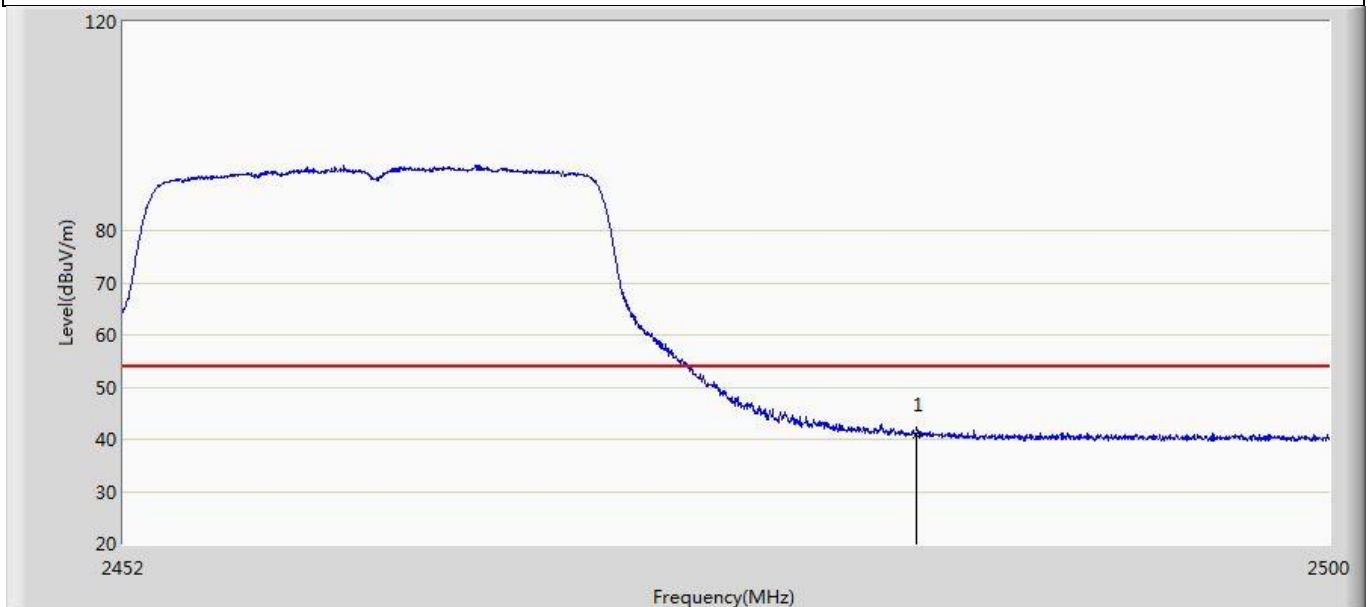


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	40.985	5.310	-13.015	54.000	35.675	AV

Profile: 2360091R	Page No.: 24
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 3:Transmit at 2462MHz by 802.11n20	

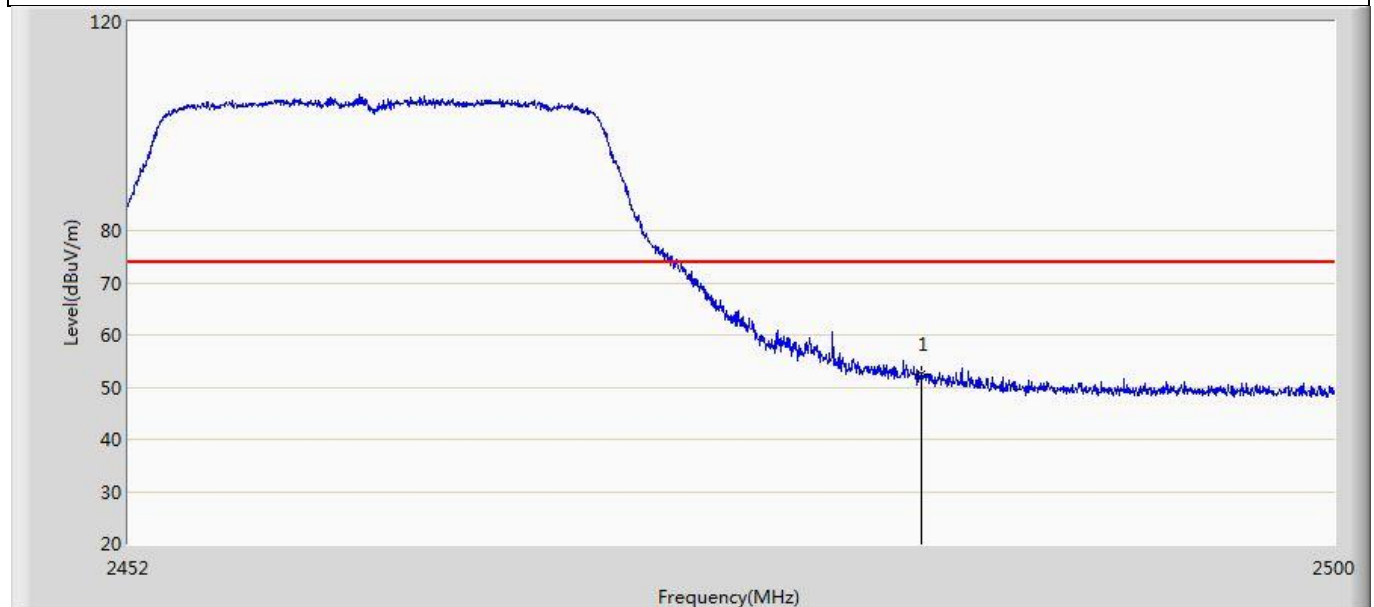


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	52.428	16.753	-21.572	74.000	35.675	PK

Profile: 2360091R	Page No.: 25
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 4:Transmit at 2422MHz by 802.11n40	

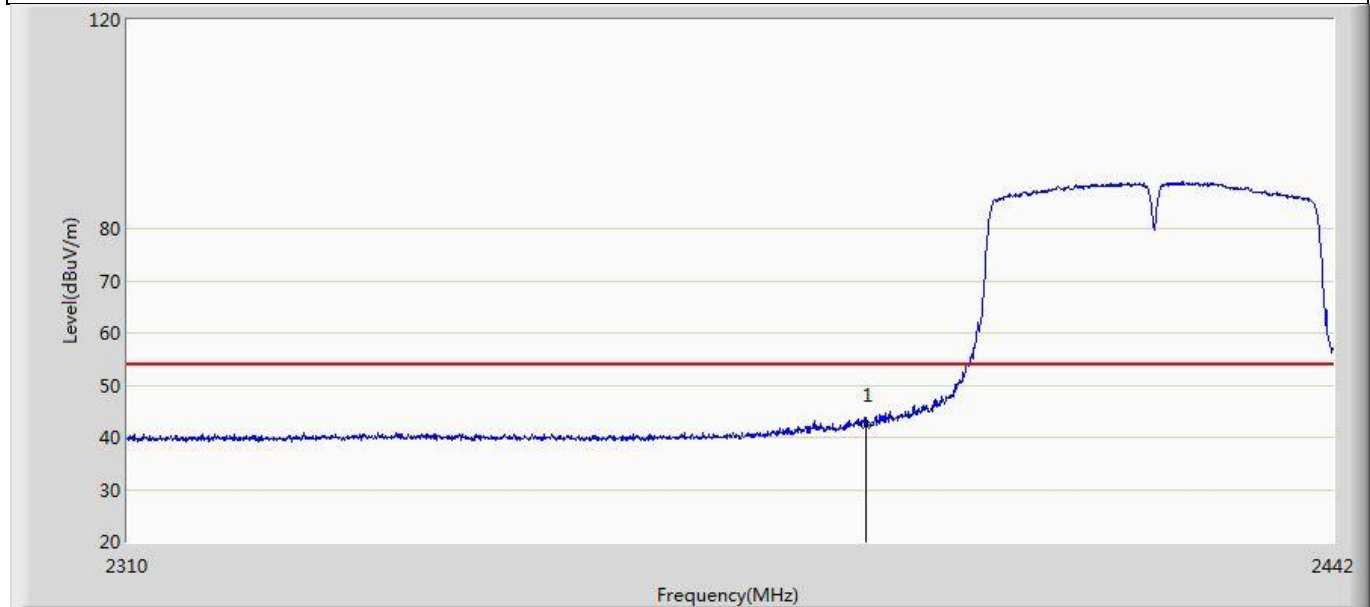


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	42.322	6.863	-11.678	54.000	35.459	AV

Profile: 2360091R	Page No.: 26
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 4:Transmit at 2422MHz by 802.11n40	

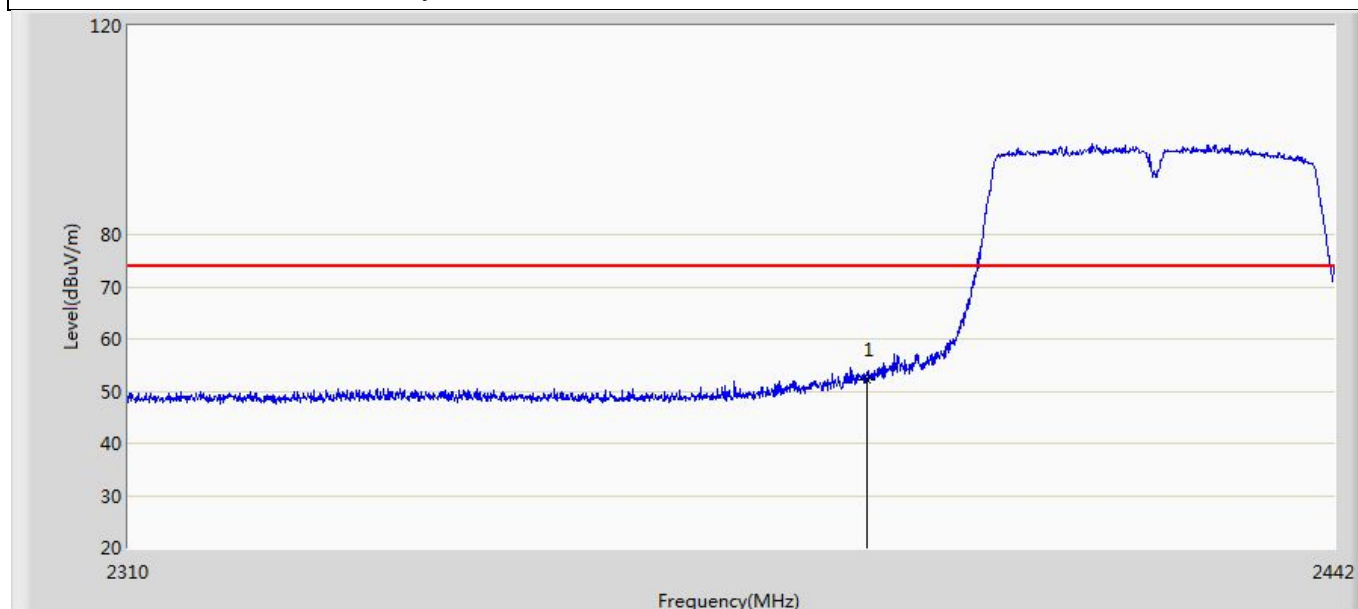


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	52.078	16.619	-21.922	74.000	35.459	PK

Profile: 2360091R	Page No.: 27
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 4:Transmit at 2422MHz by 802.11n40	

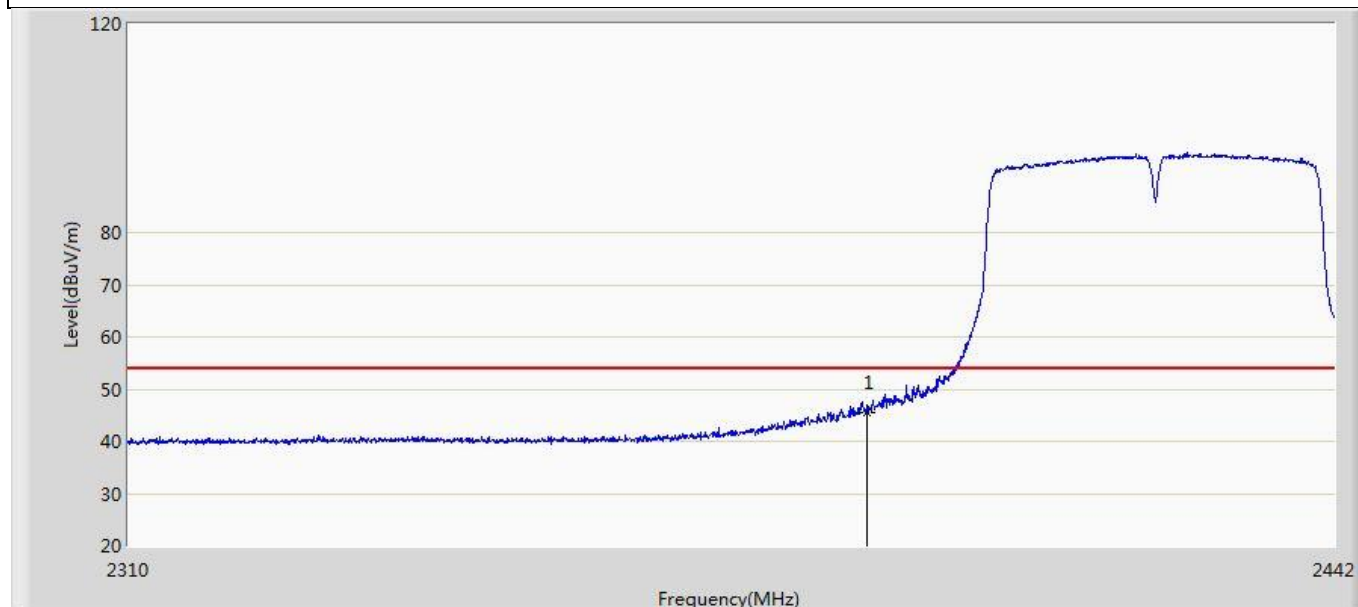


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	45.382	9.923	-8.618	54.000	35.459	AV

Profile: 2360091R	Page No.: 28
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 4:Transmit at 2422MHz by 802.11n40	

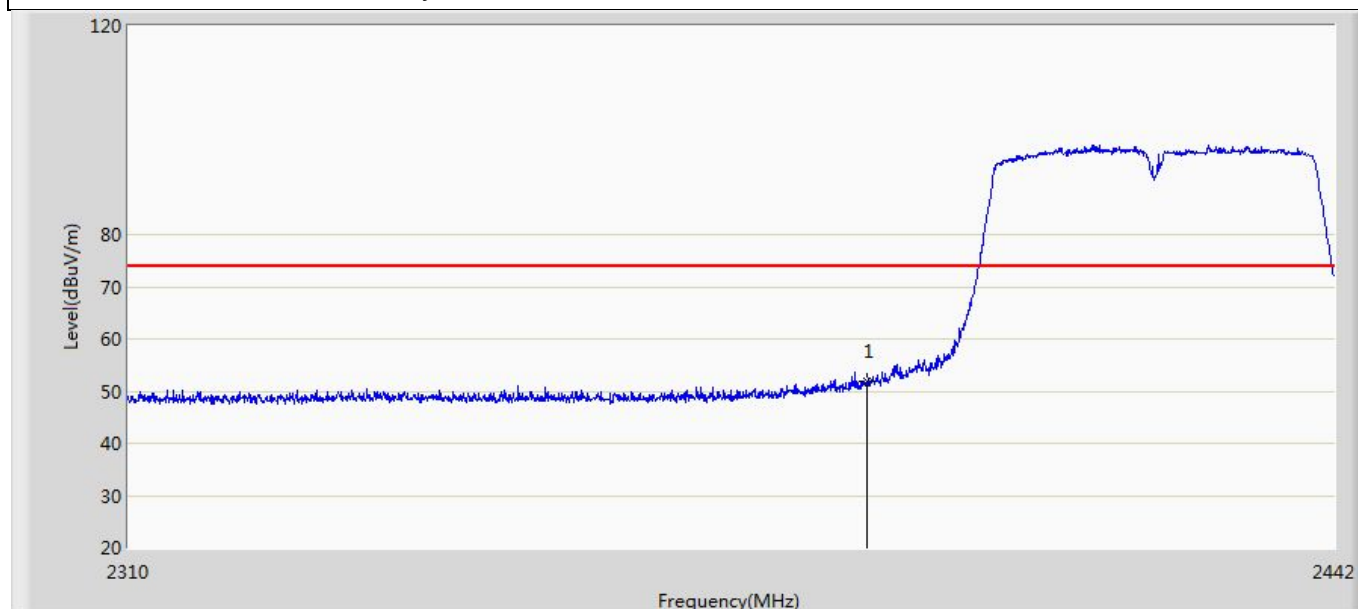


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	51.868	16.409	-22.132	74.000	35.459	PK

Profile: 2360091R	Page No.: 29
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 4:Transmit at 2452MHz by 802.11n40	

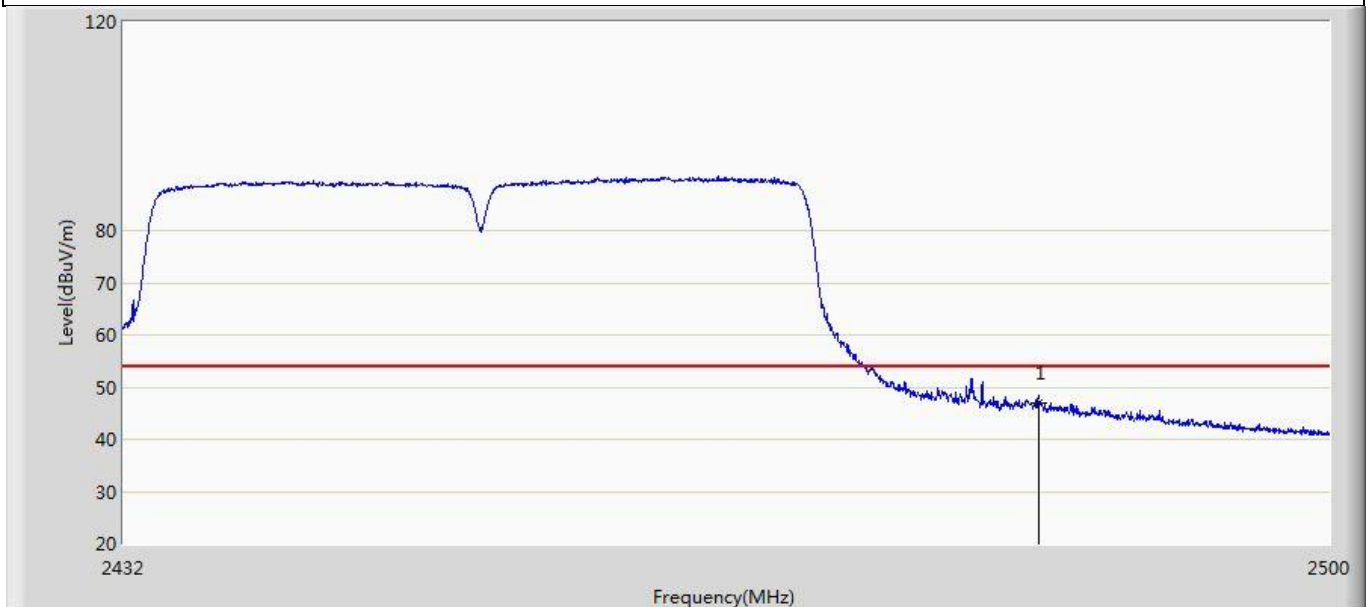


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	46.962	11.287	-7.038	54.000	35.675	AV

Profile: 2360091R	Page No.: 30
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 4:Transmit at 2452MHz by 802.11n40	

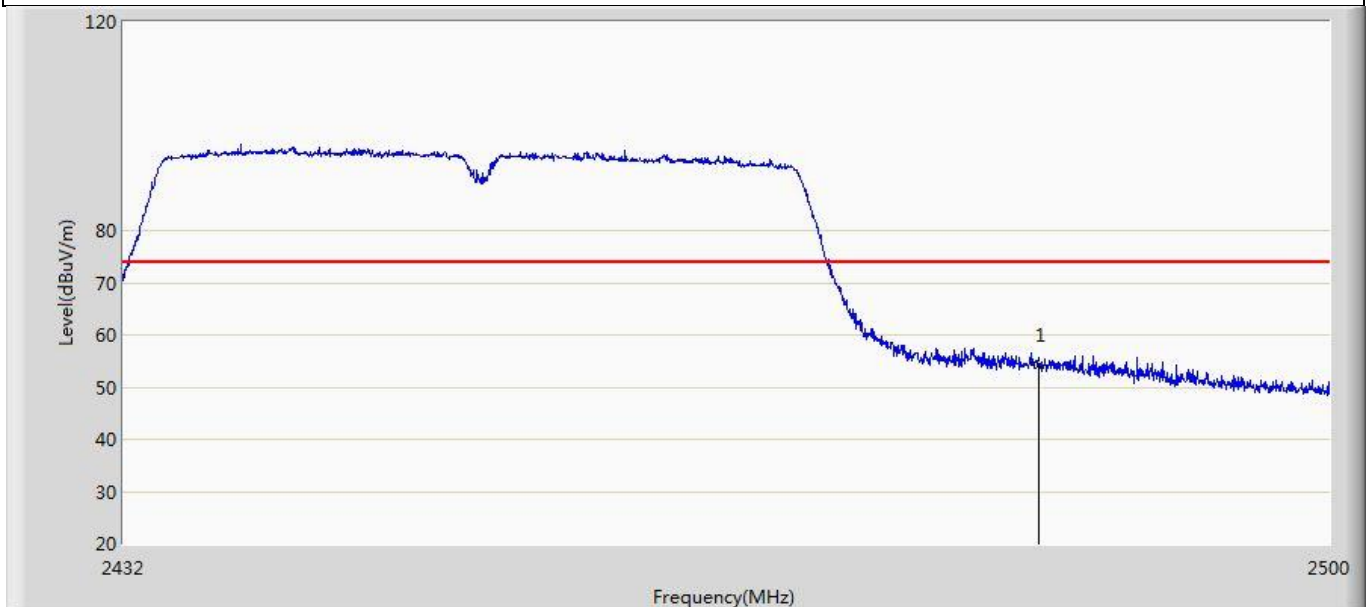


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	54.146	18.471	-19.854	74.000	35.675	PK

Profile: 2360091R	Page No.: 31
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 4:Transmit at 2452MHz by 802.11n40	

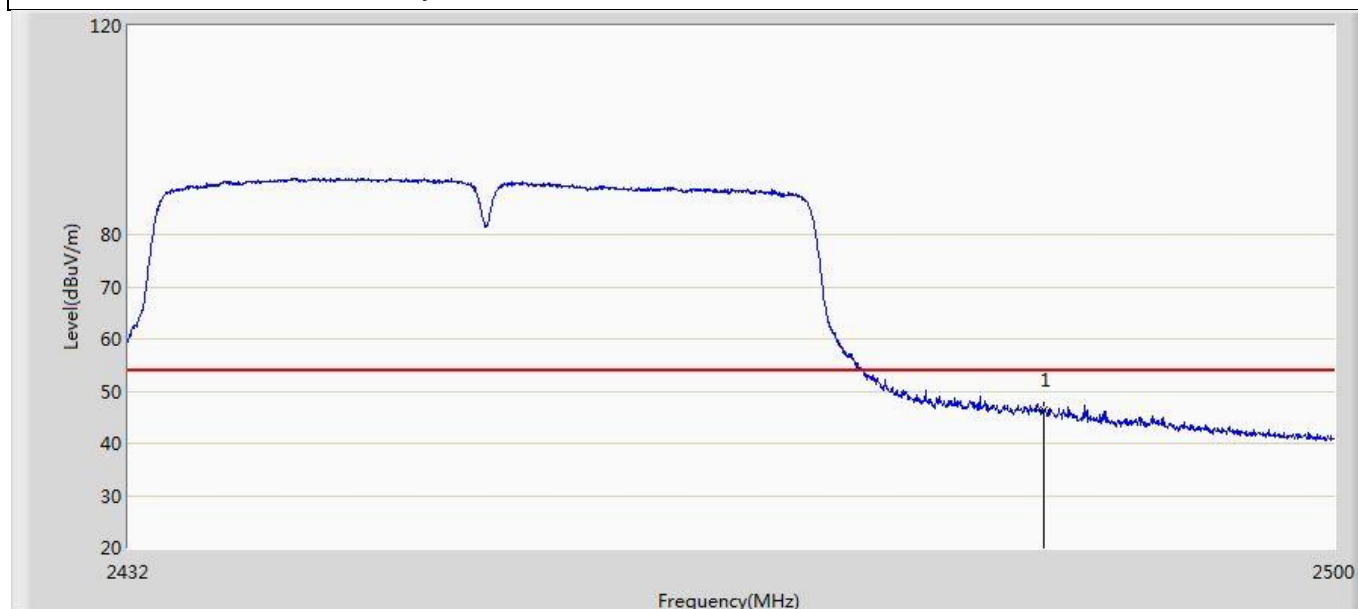


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	46.303	10.628	-7.697	54.000	35.675	AV

Profile: 2360091R	Page No.: 32
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 4:Transmit at 2452MHz by 802.11n40	

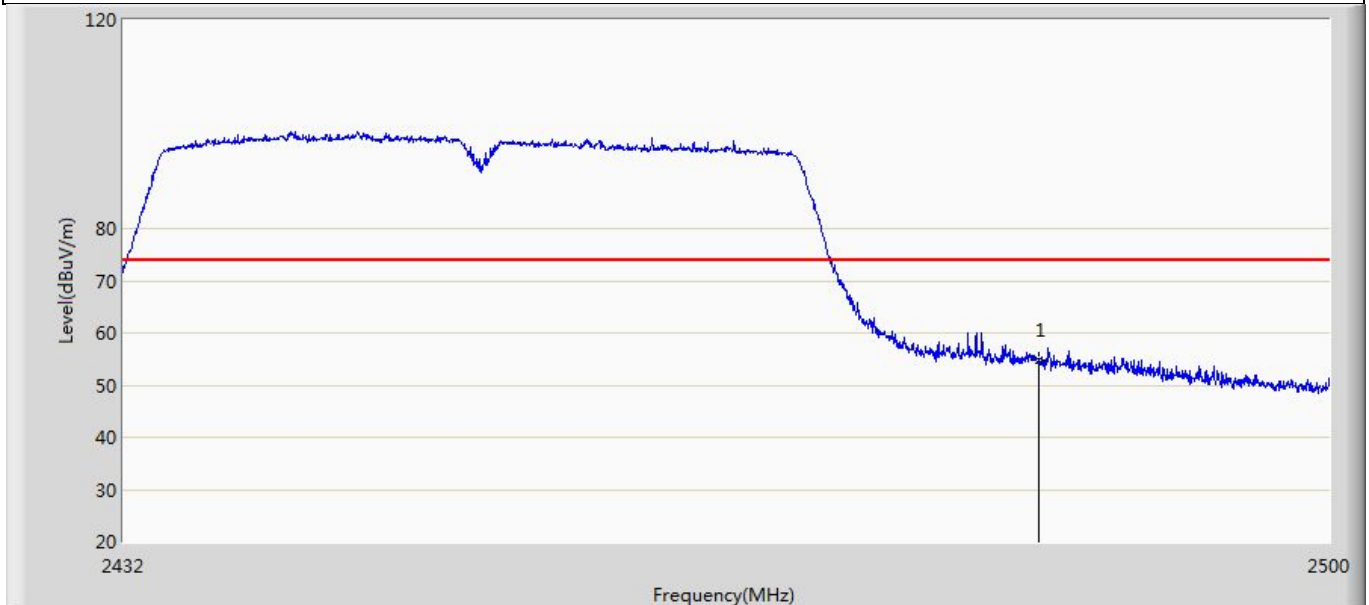


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	54.912	19.237	-19.088	74.000	35.675	PK

Profile: 2360091R	Page No.: 49
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 5:Transmit at 2412MHz by 802.11ax20	

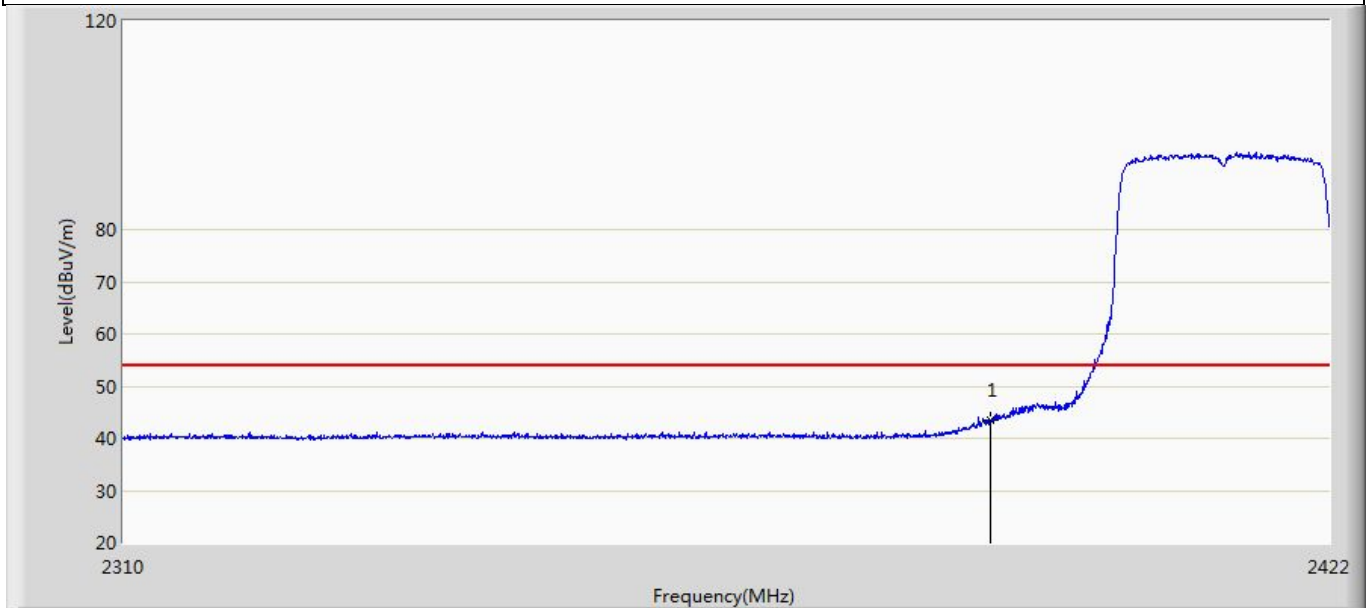


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	43.461	8.002	-10.539	54.000	35.459	AV

Profile: 2360091R	Page No.: 50
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 5:Transmit at 2412MHz by 802.11ax20	

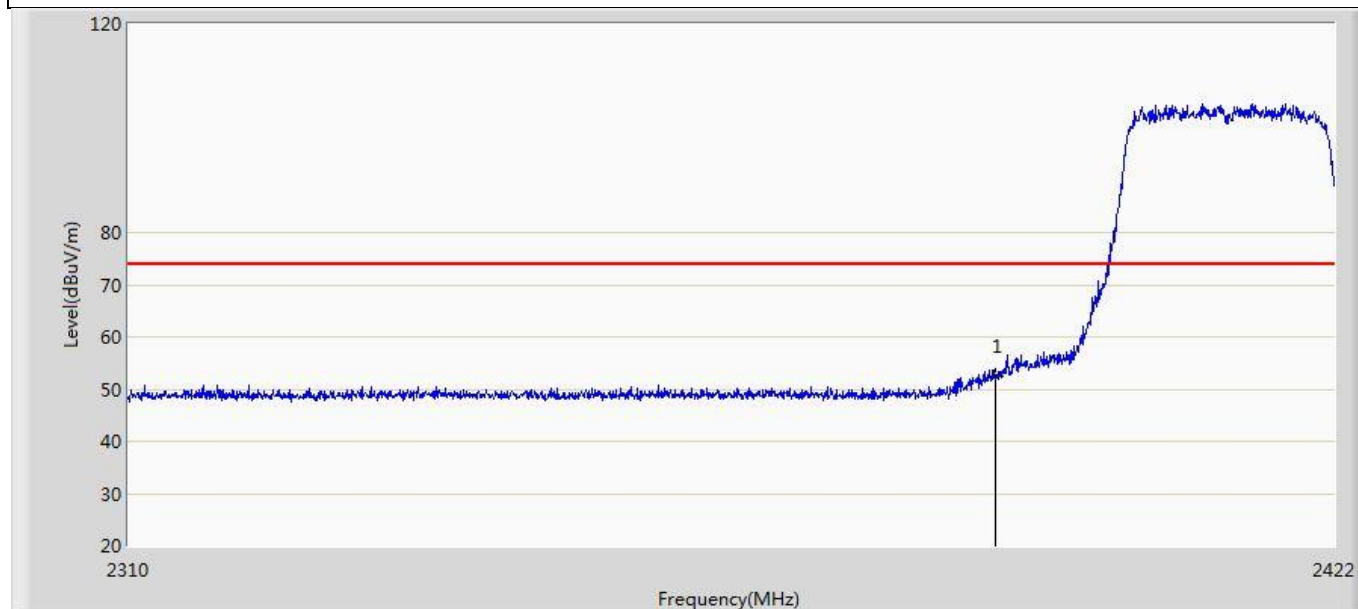


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	52.424	16.965	-21.576	74.000	35.459	PK

Profile: 2360091R	Page No.: 51
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 5:Transmit at 2412MHz by 802.11ax20	

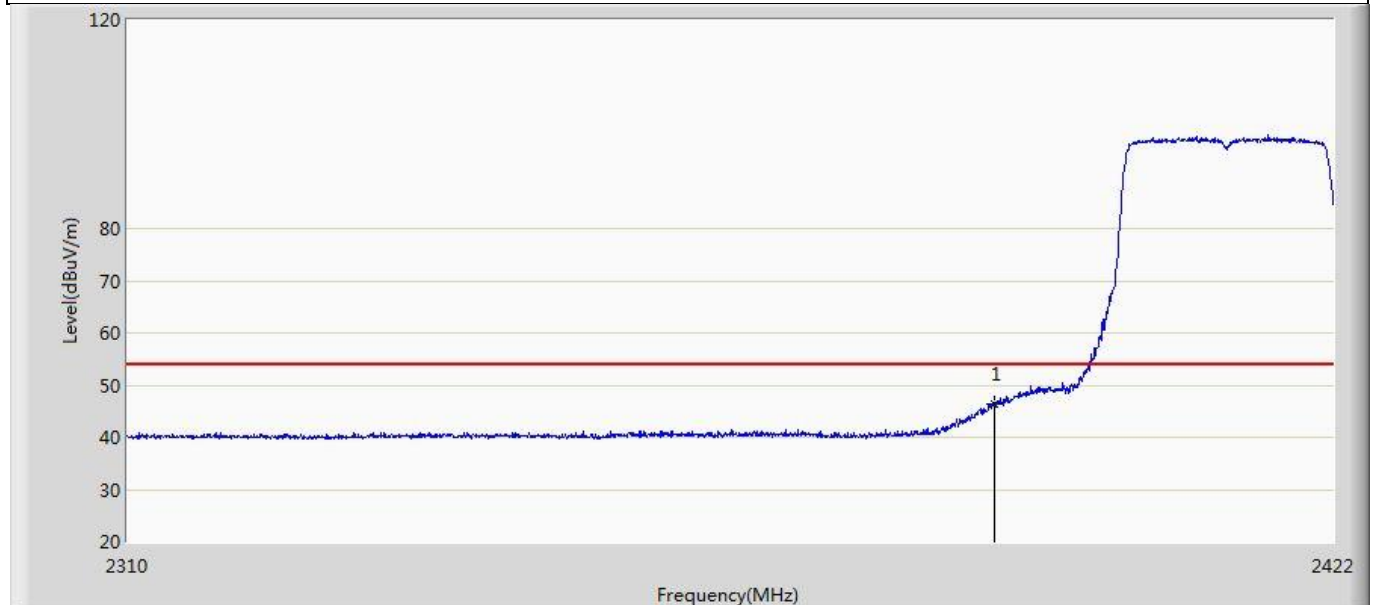


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	46.511	11.052	-7.489	54.000	35.459	AV

Profile: 2360091R	Page No.: 52
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 5:Transmit at 2412MHz by 802.11ax20	

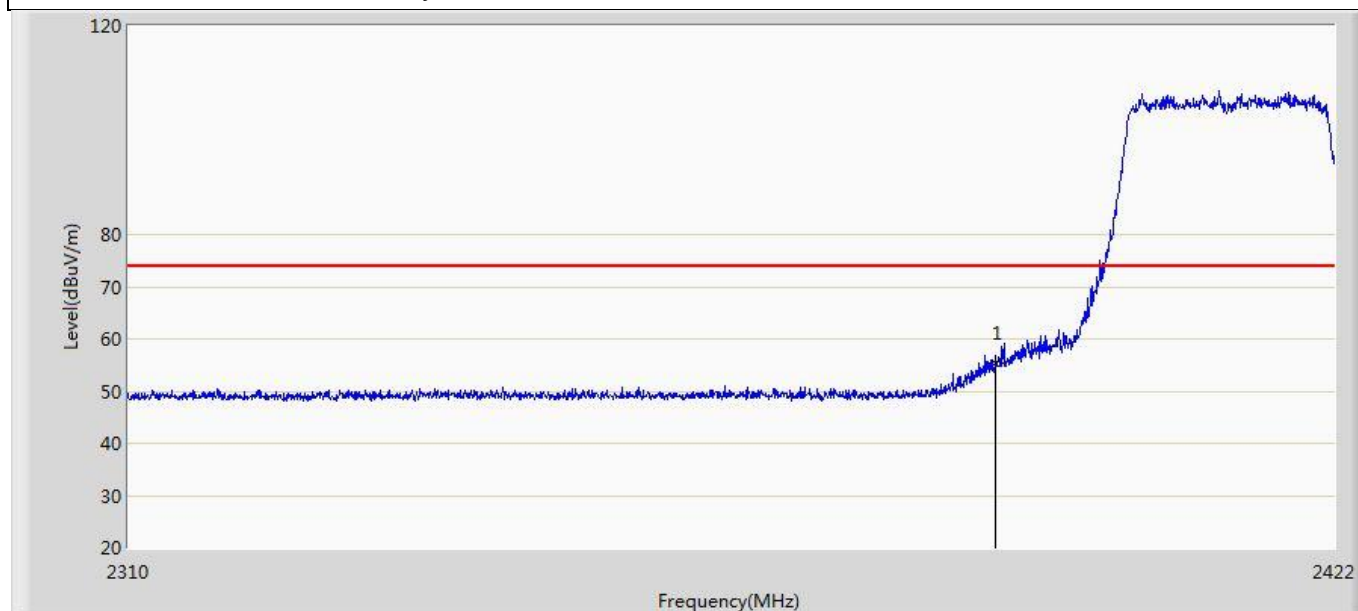


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	55.441	19.982	-18.559	74.000	35.459	PK

Profile: 2360091R	Page No.: 53
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 5:Transmit at 2462MHz by 802.11ax20	

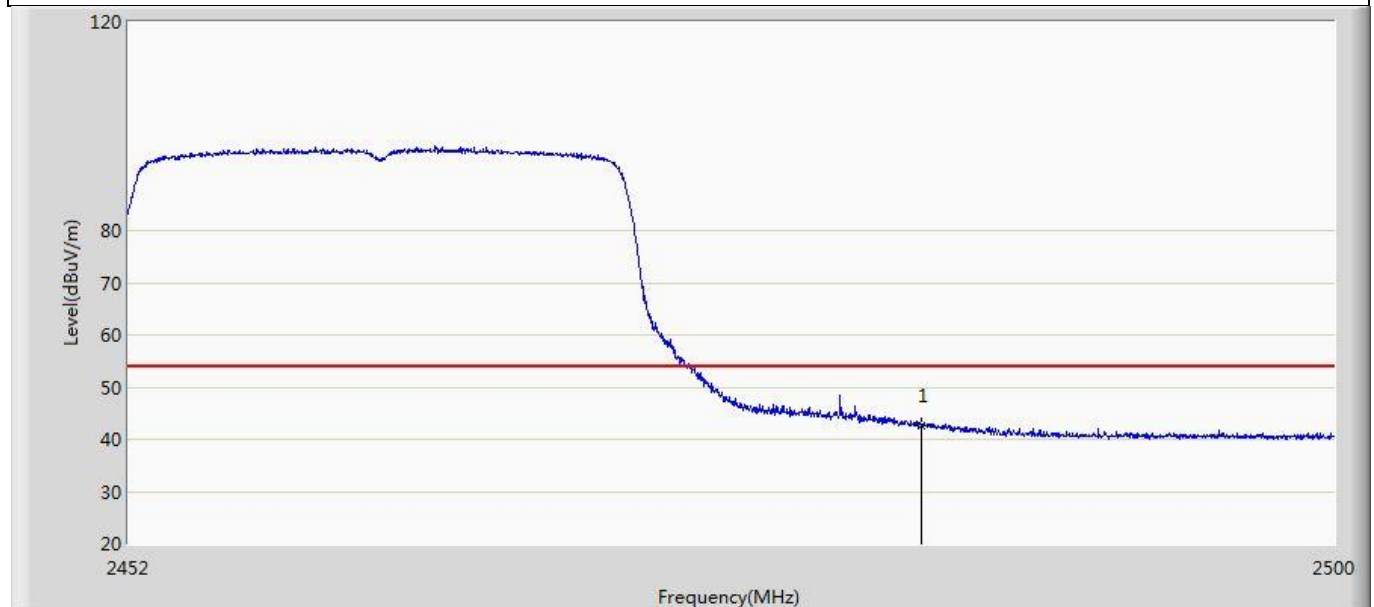


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	42.567	6.892	-11.433	54.000	35.675	AV

Profile: 2360091R	Page No.: 54
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 5:Transmit at 2462MHz by 802.11ax20	

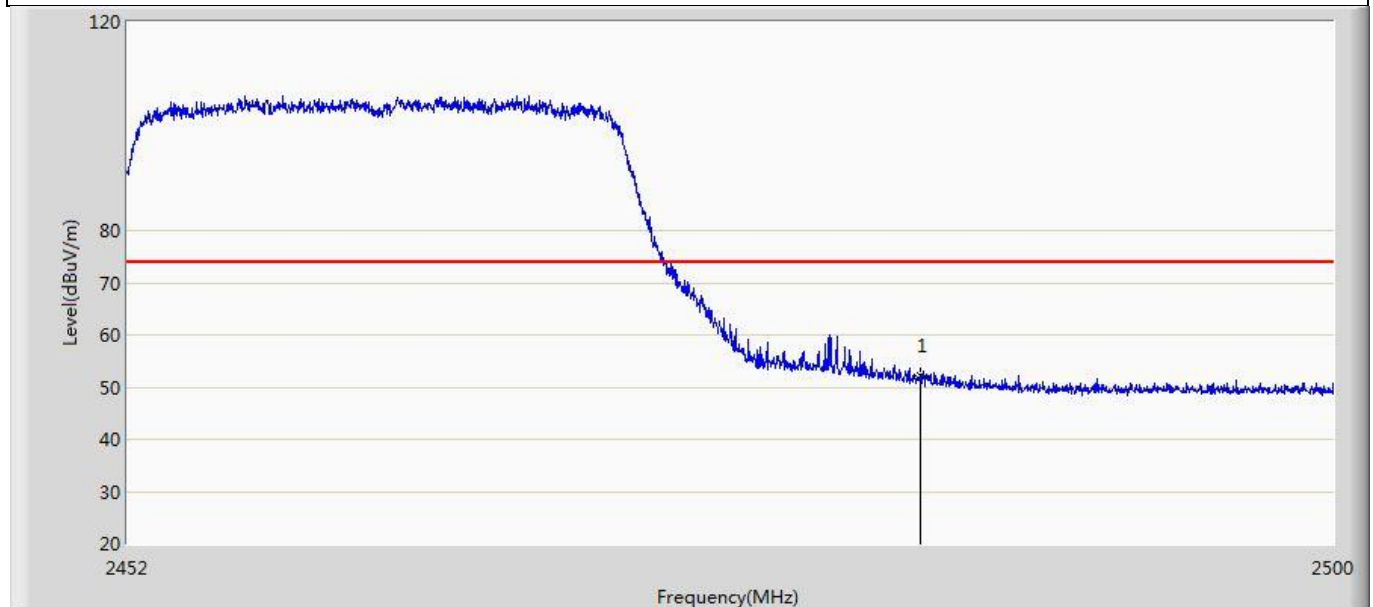


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	52.287	16.612	-21.713	74.000	35.675	PK

Profile: 2360091R	Page No.: 55
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 5:Transmit at 2462MHz by 802.11ax20	

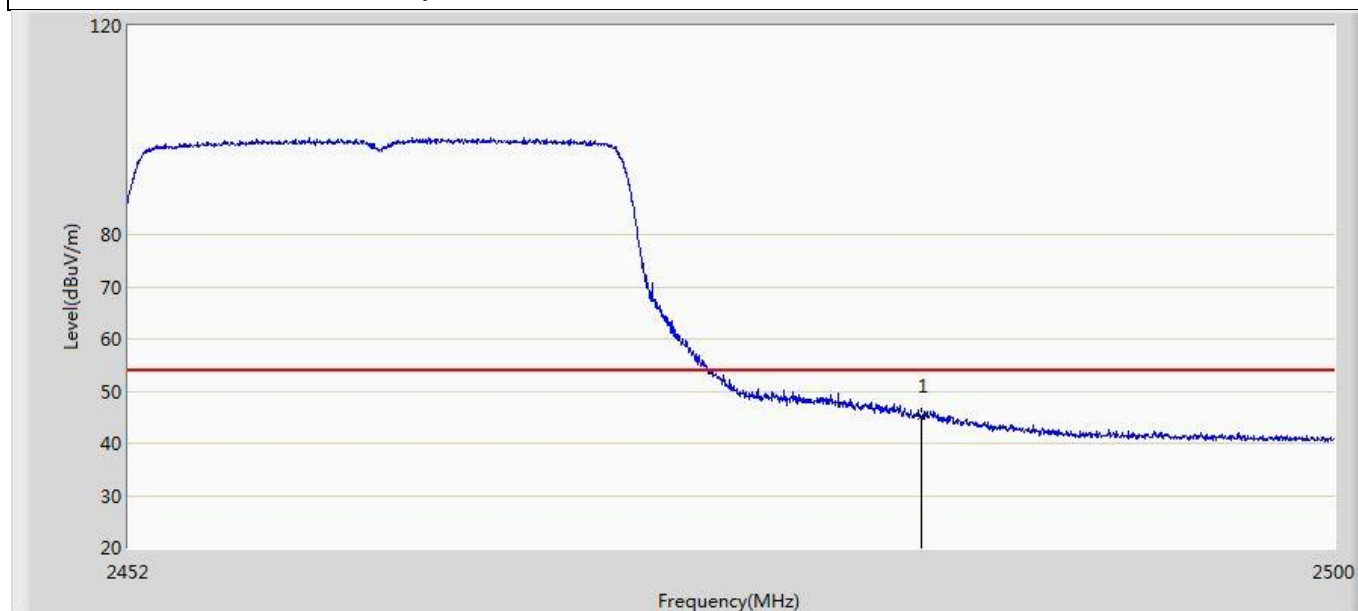


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	45.357	9.682	-8.643	54.000	35.675	AV

Profile: 2360091R	Page No.: 56
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 5:Transmit at 2462MHz by 802.11ax20	

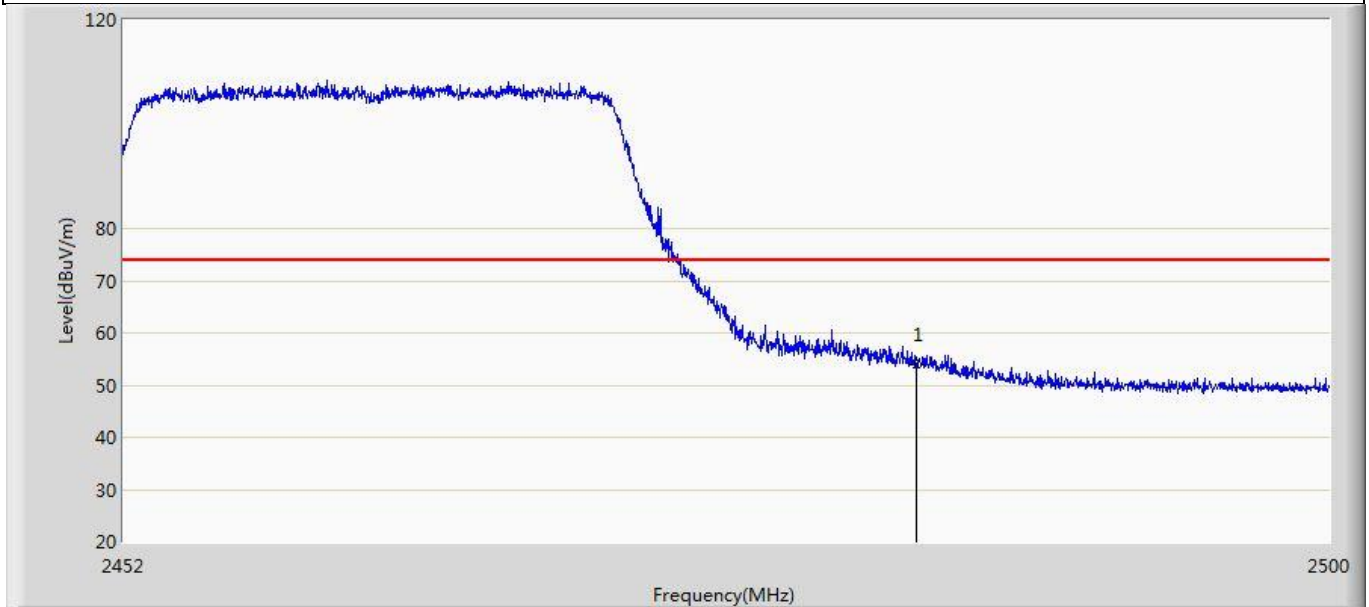


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	53.787	18.112	-20.213	74.000	35.675	PK

Profile: 2360091R	Page No.: 57
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 6:Transmit at 2422MHz by 802.11ax40	

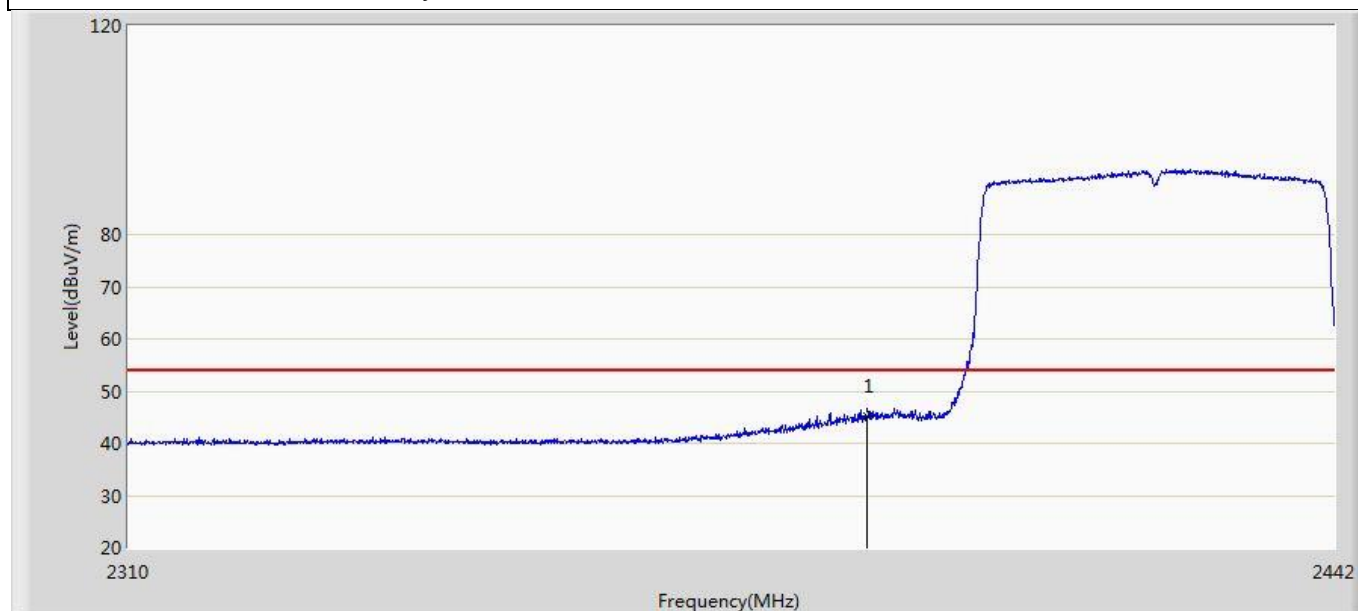


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	45.225	9.766	-8.775	54.000	35.459	AV

Profile: 2360091R	Page No.: 58
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 6:Transmit at 2422MHz by 802.11ax40	

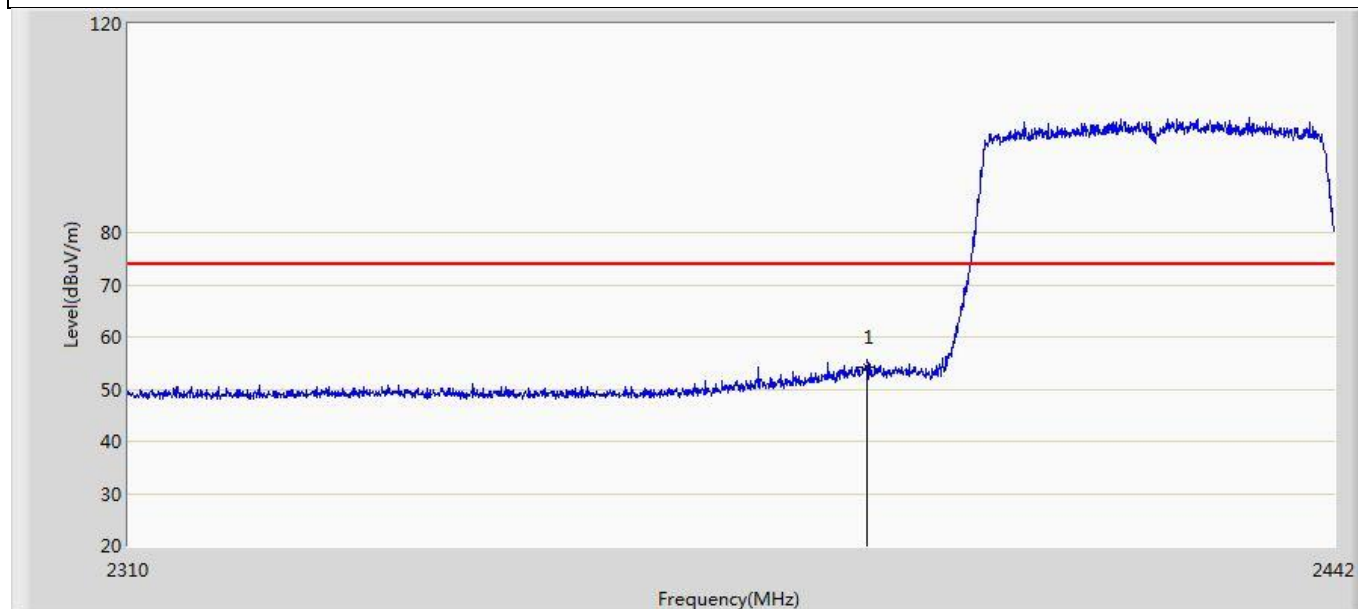


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	54.254	18.795	-19.746	74.000	35.459	PK

Profile: 2360091R	Page No.: 59
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 6:Transmit at 2422MHz by 802.11ax40	

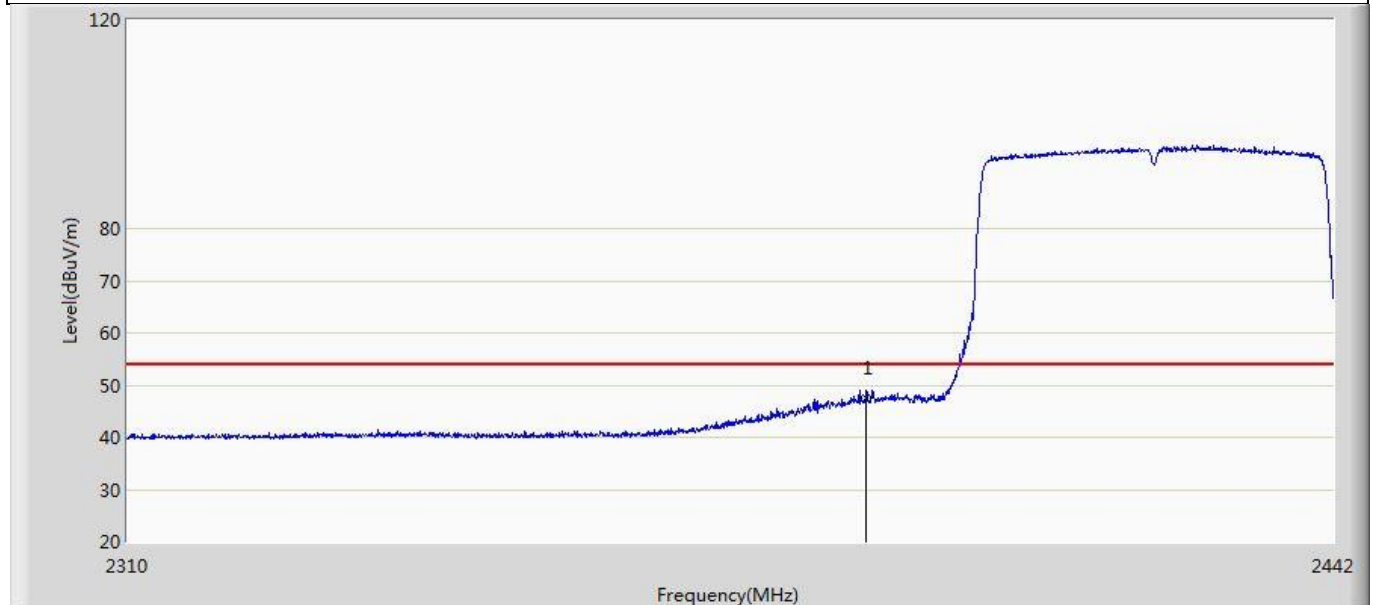

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	47.634	12.175	-6.366	54.000	35.459	AV

Profile: 2360091R	Page No.: 60
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 6:Transmit at 2422MHz by 802.11ax40	

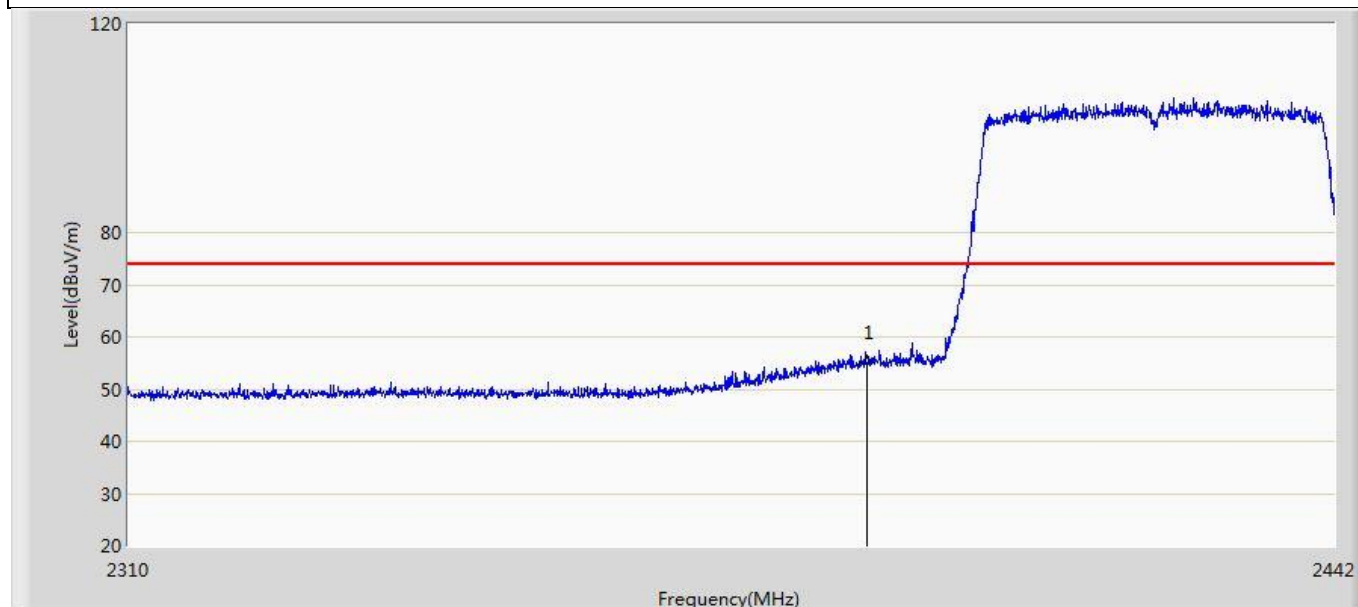


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	54.988	19.529	-19.012	74.000	35.459	PK

Profile: 2360091R	Page No.: 61
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 6:Transmit at 2452MHz by 802.11ax40	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.770	49.435	13.767	-4.565	54.000	35.668	AV
2		2483.500	44.861	9.186	-9.139	54.000	35.675	AV

Profile: 2360091R	Page No.: 62
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 6:Transmit at 2452MHz by 802.11ax40	

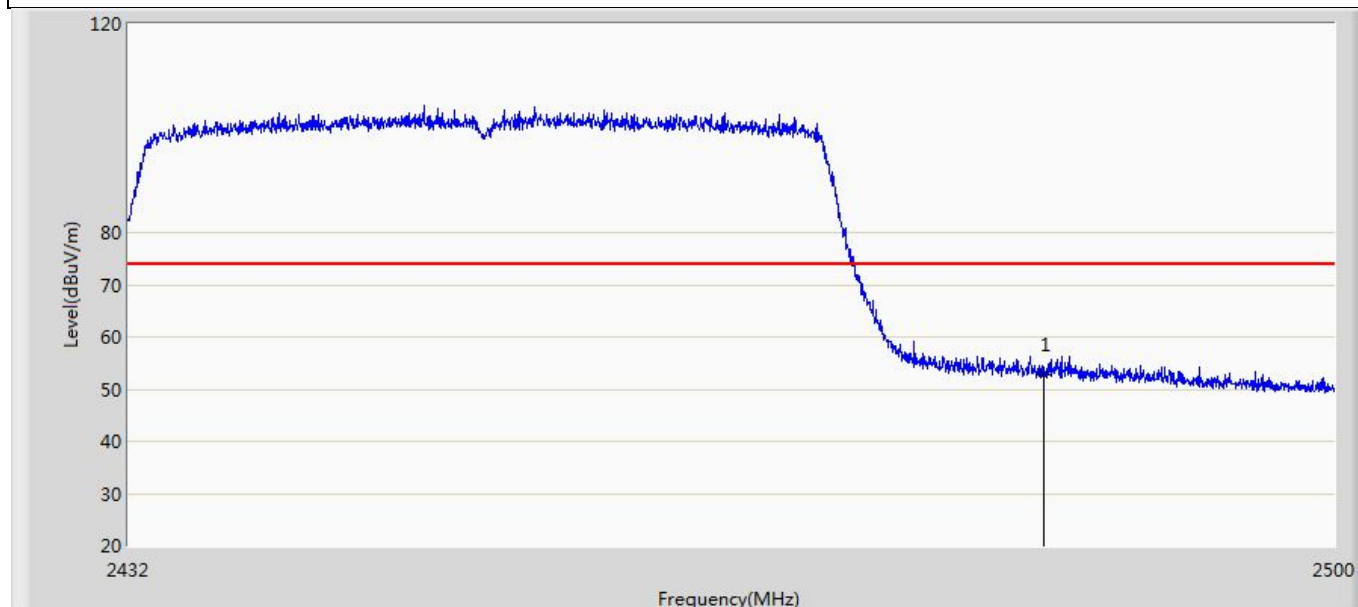


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	52.835	17.160	-21.165	74.000	35.675	PK

Profile: 2360091R	Page No.: 63
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 6:Transmit at 2452MHz by 802.11ax40	

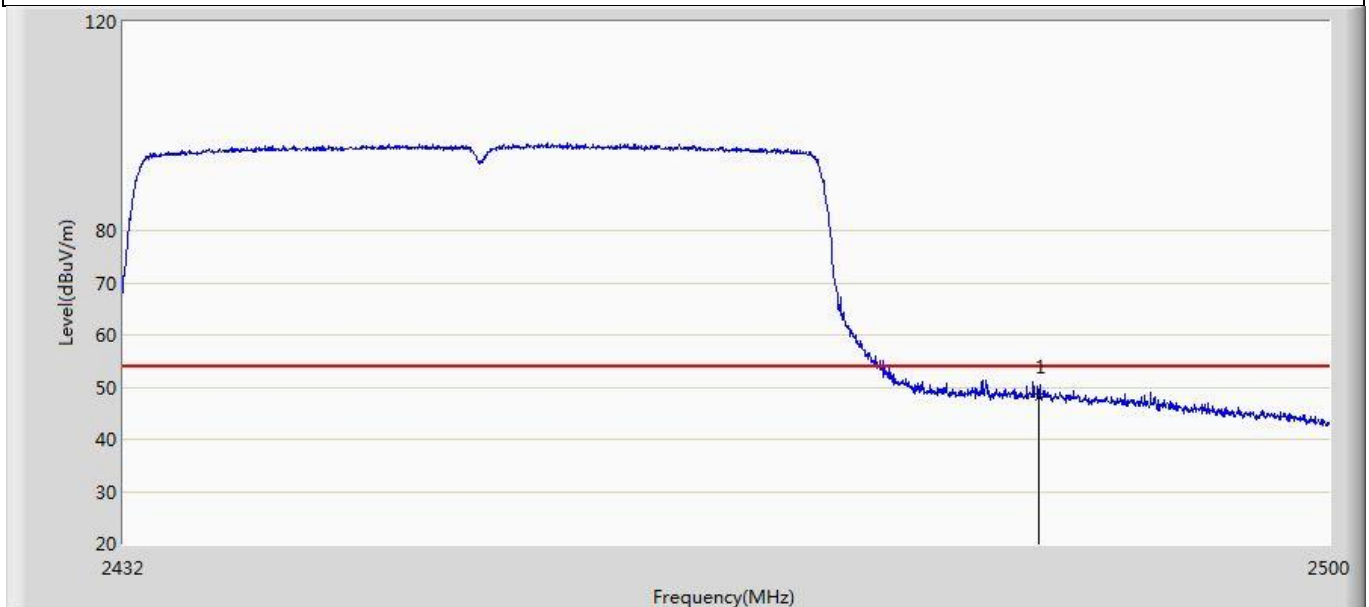

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	48.185	12.510	-5.815	54.000	35.675	AV


Profile: 2360091R	Page No.: 64
Engineer: Juliuszhou	
Site: AC5	Time: 2021/06/23 - 09:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 6:Transmit at 2452MHz by 802.11ax40	

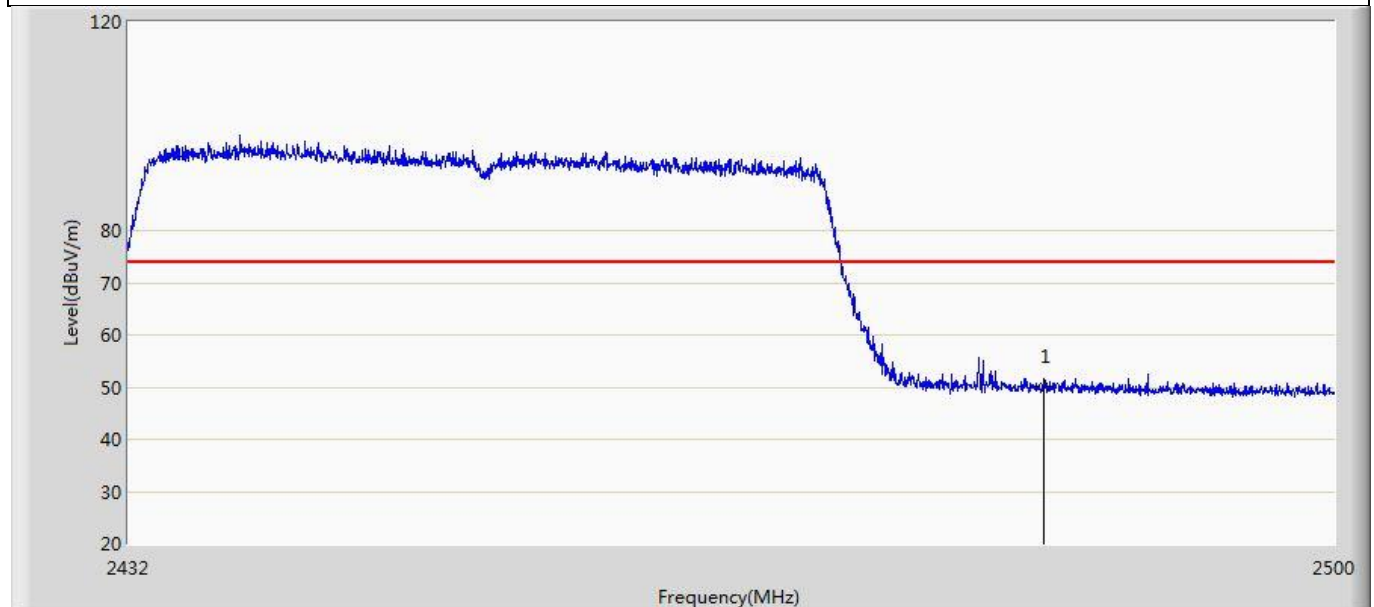

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.042	14.367	-23.958	74.000	35.675	PK


MIMO

Profile: 2360091R	Page No.: 1
Engineer: Juliuszhou	
Site: AC5	Time: 2020/03/12 - 00:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1: Transmit at 2412MHz by 802.11b	

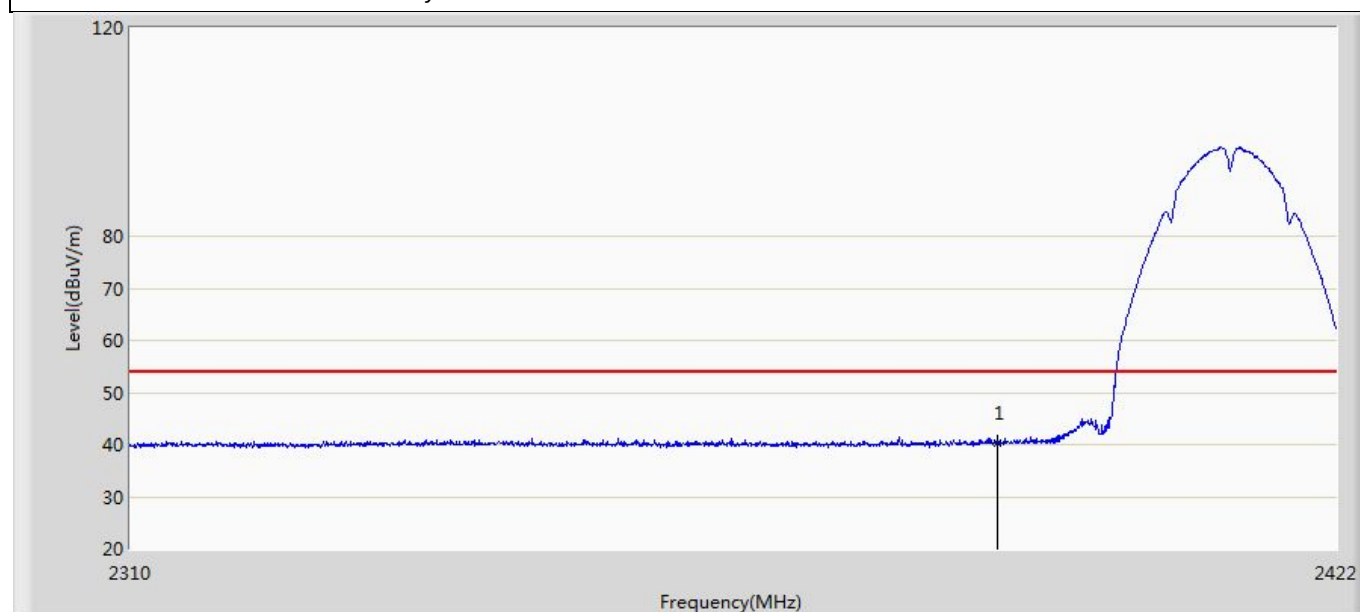


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	40.306	4.847	-13.694	54.000	35.459	AV

Profile: 2360091R	Page No.: 2
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2412MHz by 802.11b	

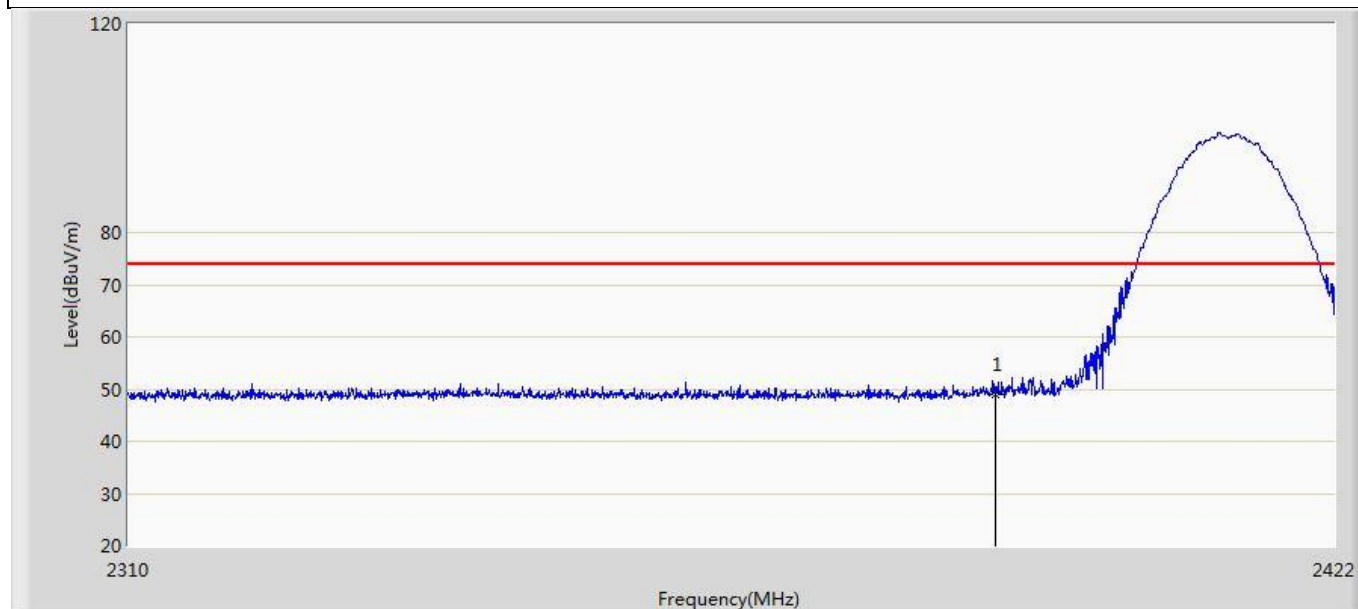


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.080	13.621	-24.920	74.000	35.459	PK

Profile: 2360091R	Page No.: 3
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2412MHz by 802.11b	

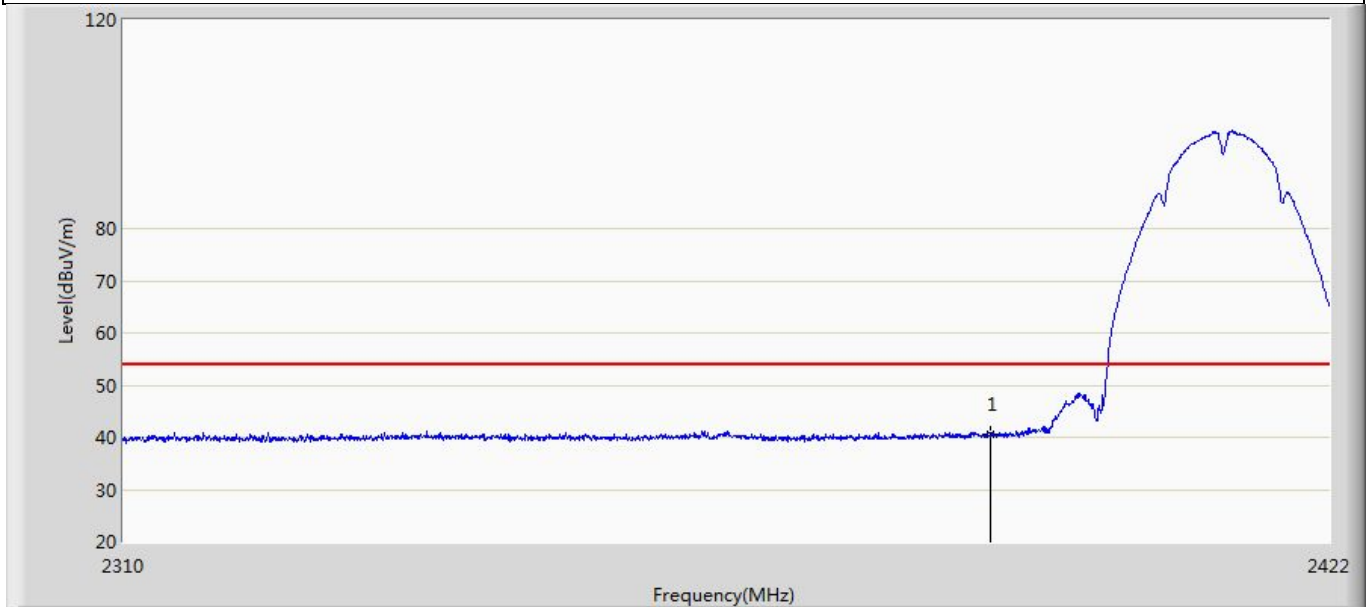


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	40.700	5.241	-13.300	54.000	35.459	AV

Profile: 2360091R	Page No.: 4
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2412MHz by 802.11b	

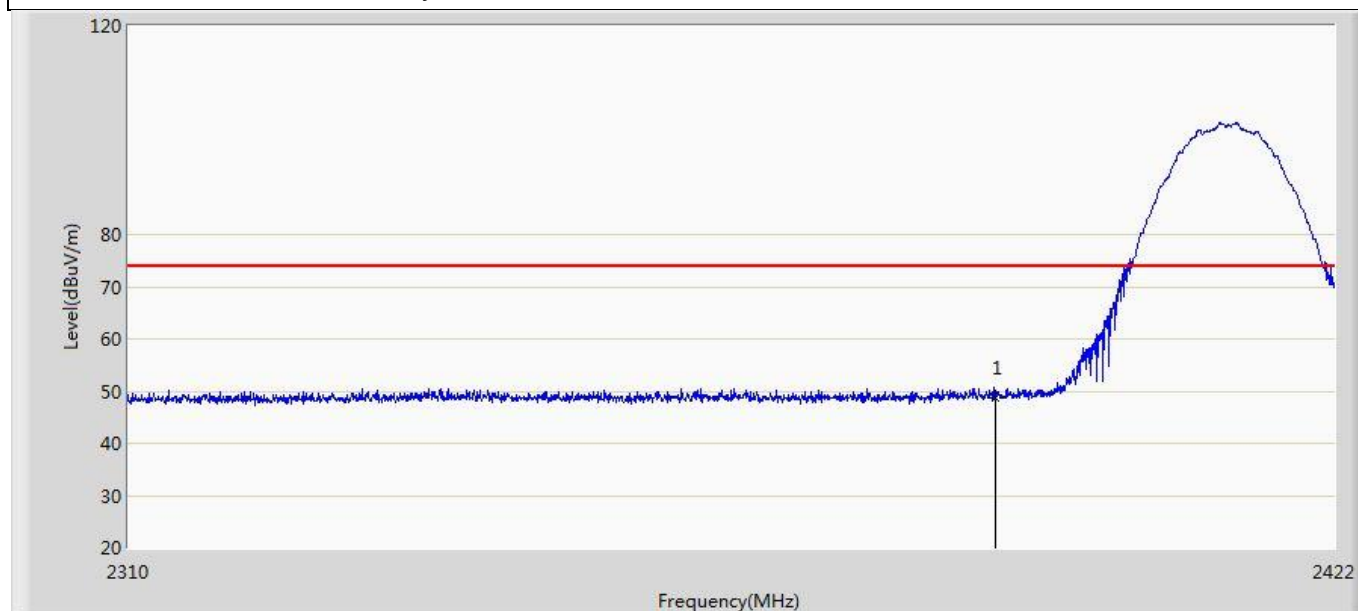


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	48.647	13.188	-25.353	74.000	35.459	PK

Profile: 2360091R	Page No.: 5
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2462MHz by 802.11b	

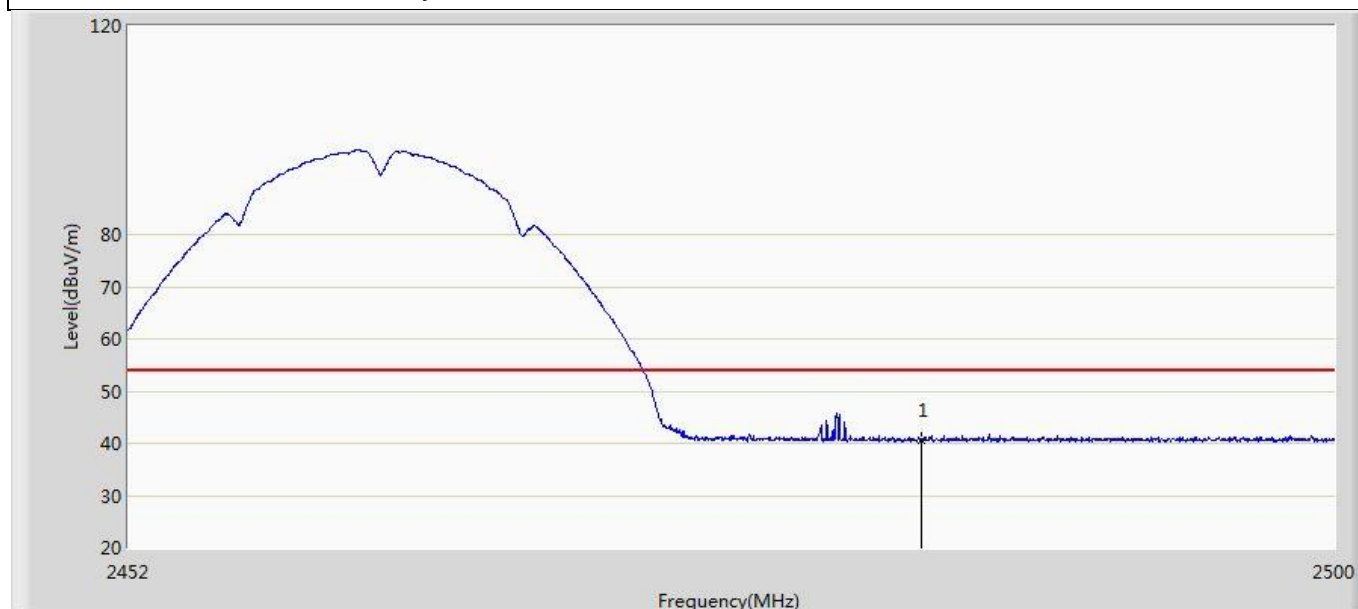


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	40.696	5.021	-13.304	54.000	35.675	AV

Profile: 2360091R	Page No.: 6
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2462MHz by 802.11b	

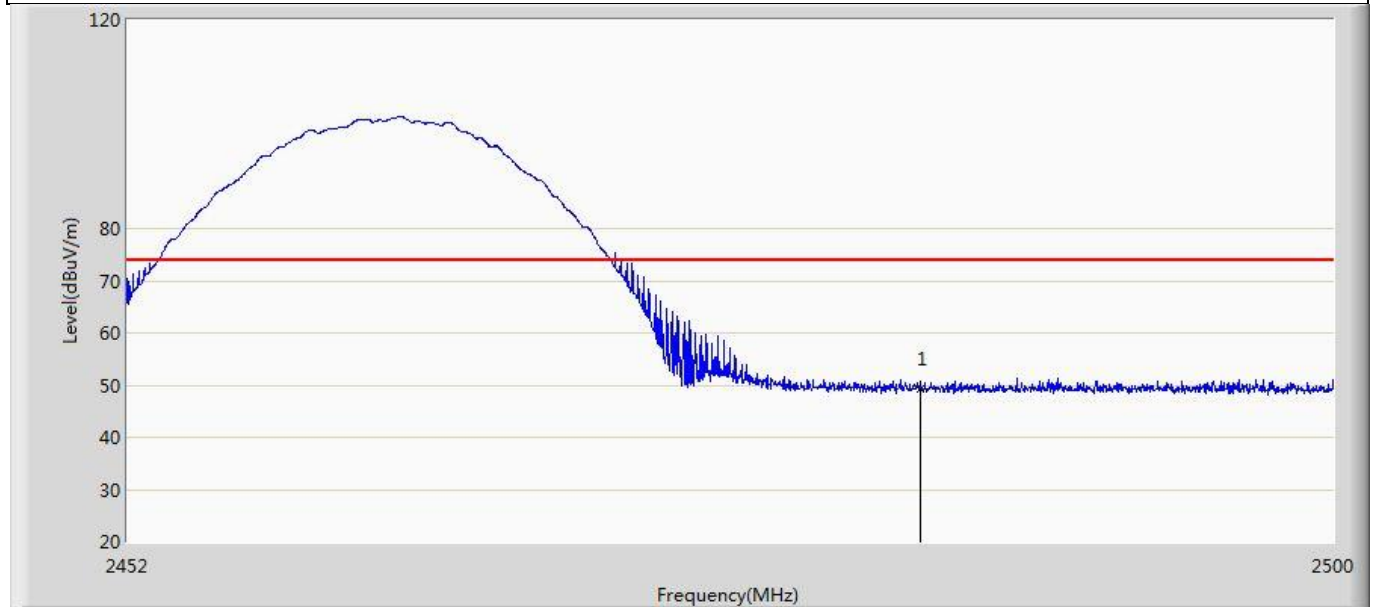


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	49.260	13.585	-24.740	74.000	35.675	PK

Profile: 2360091R	Page No.: 7
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2462MHz by 802.11b	

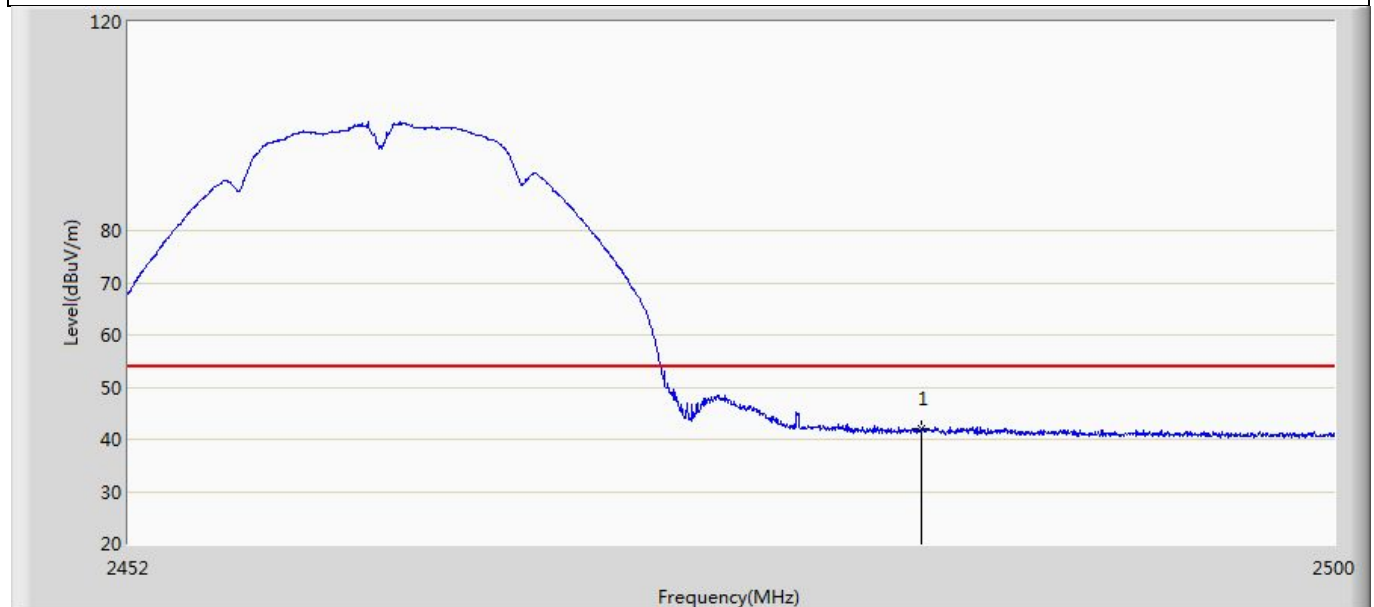


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	42.083	6.408	-11.917	54.000	35.675	AV

Profile: 2360091R	Page No.: 8
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 1:Transmit at 2462MHz by 802.11b	

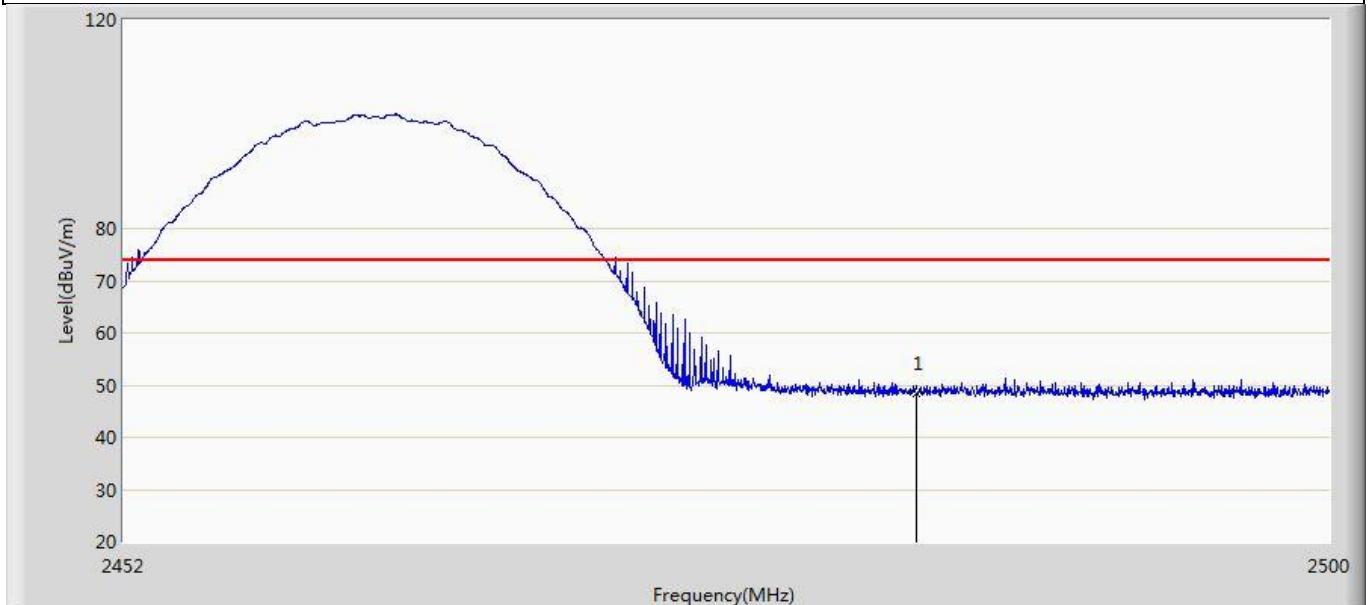


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	48.268	12.593	-25.732	74.000	35.675	PK

Profile: 2360091R	Page No.: 9
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2412MHz by 802.11g	

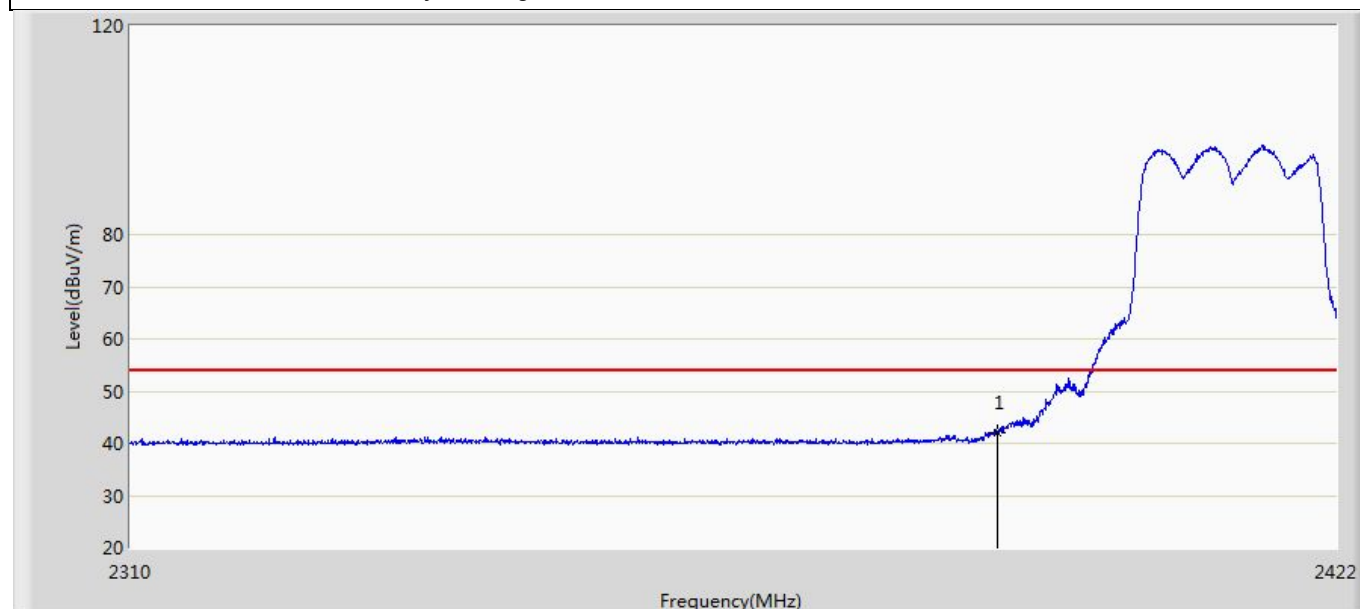


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.958	6.499	-12.042	54.000	35.459	AV

Profile: 2360091R	Page No.: 10
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2412MHz by 802.11g	

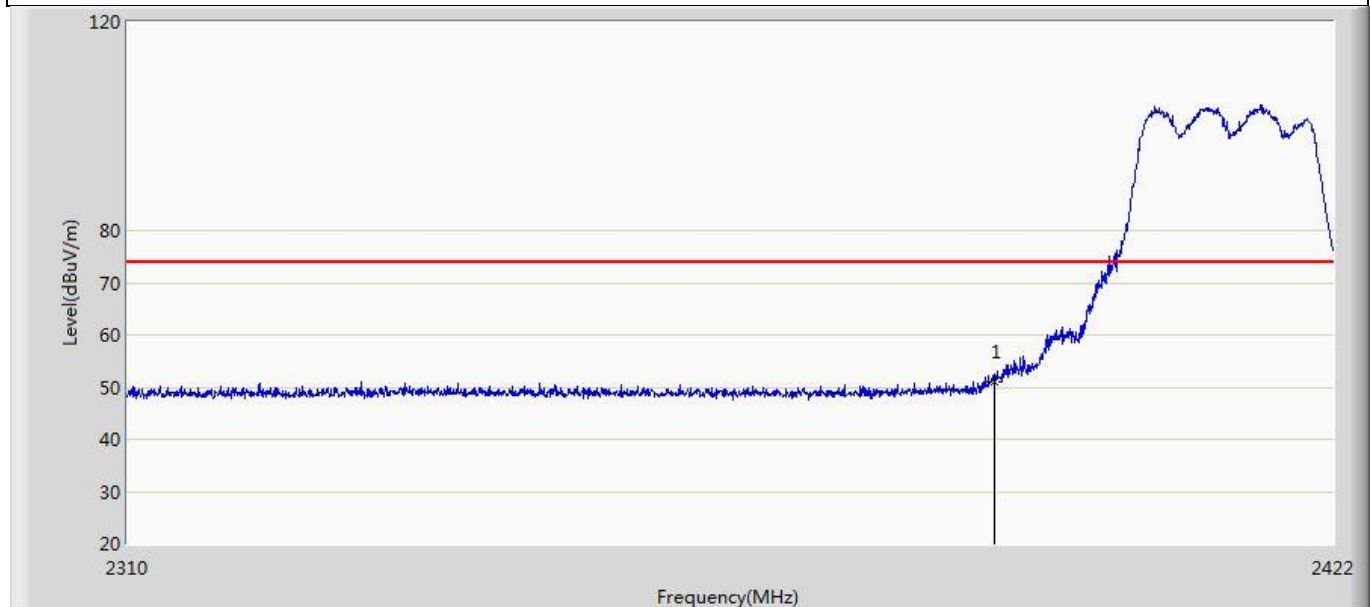


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	51.051	15.592	-22.949	74.000	35.459	PK

Profile: 2360091R	Page No.: 11
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2412MHz by 802.11g	

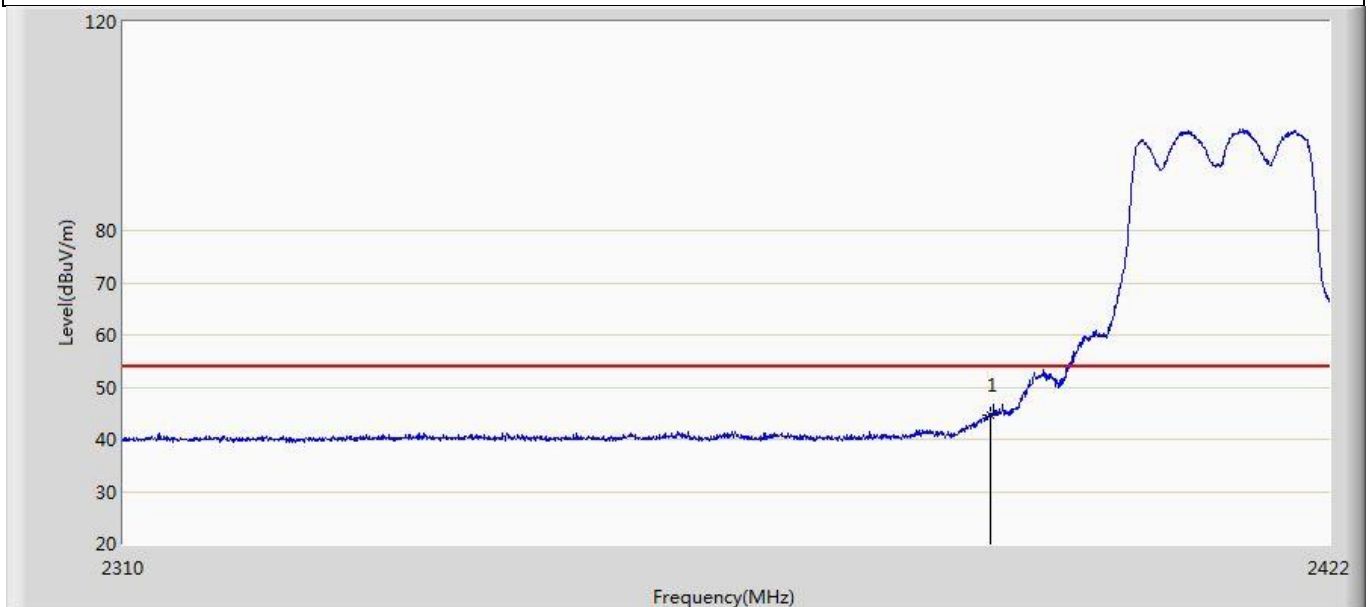


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	44.721	9.262	-9.279	54.000	35.459	AV

Profile: 2360091R	Page No.: 12
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2412MHz by 802.11g	

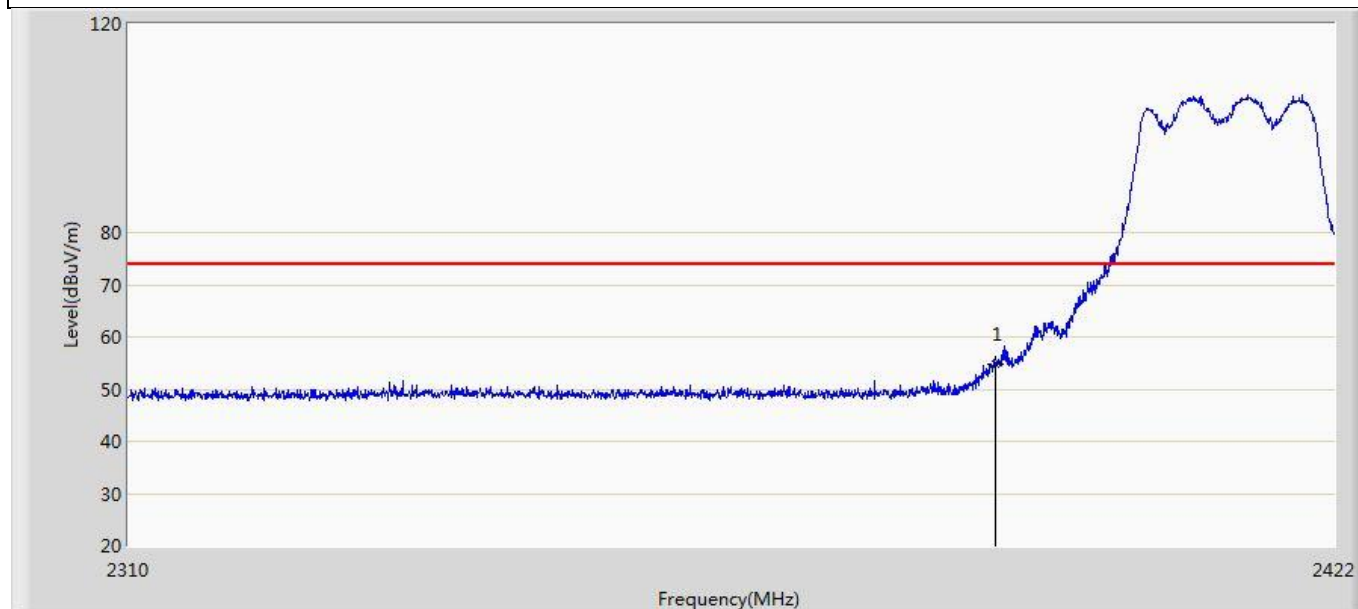


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	54.751	19.292	-19.249	74.000	35.459	PK

Profile: 2360091R	Page No.: 13
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2462MHz by 802.11g	

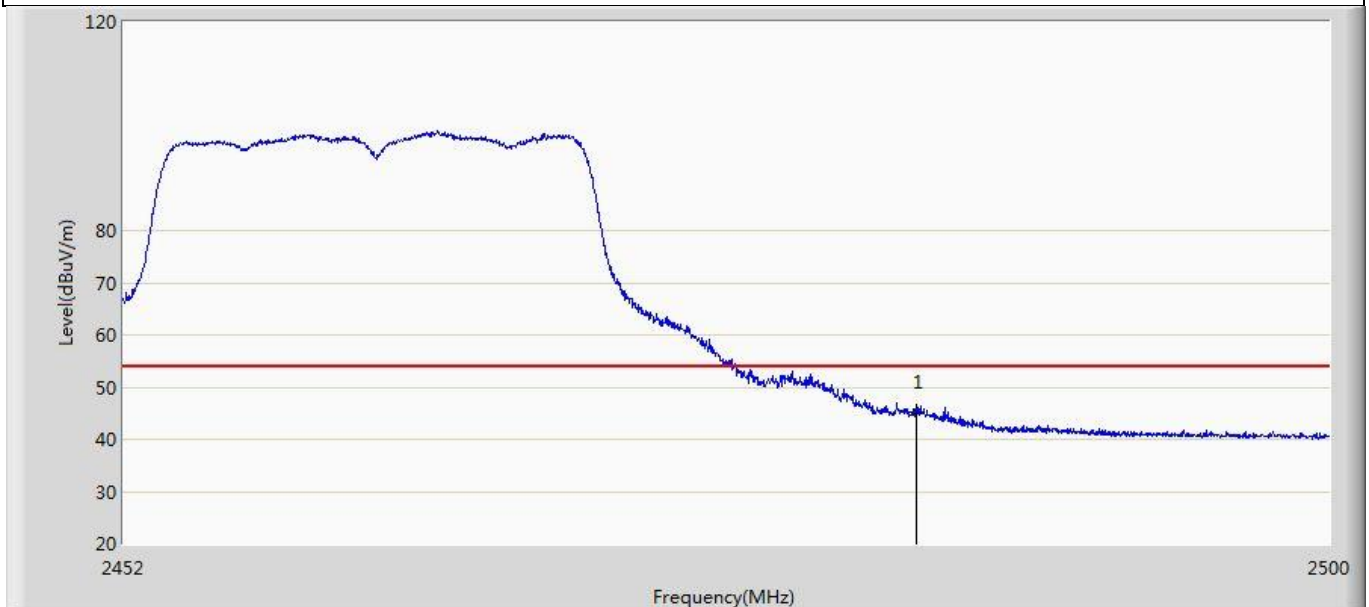


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	45.270	9.595	-8.730	54.000	35.675	AV

Profile: 2360091R	Page No.: 14
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2462MHz by 802.11g	

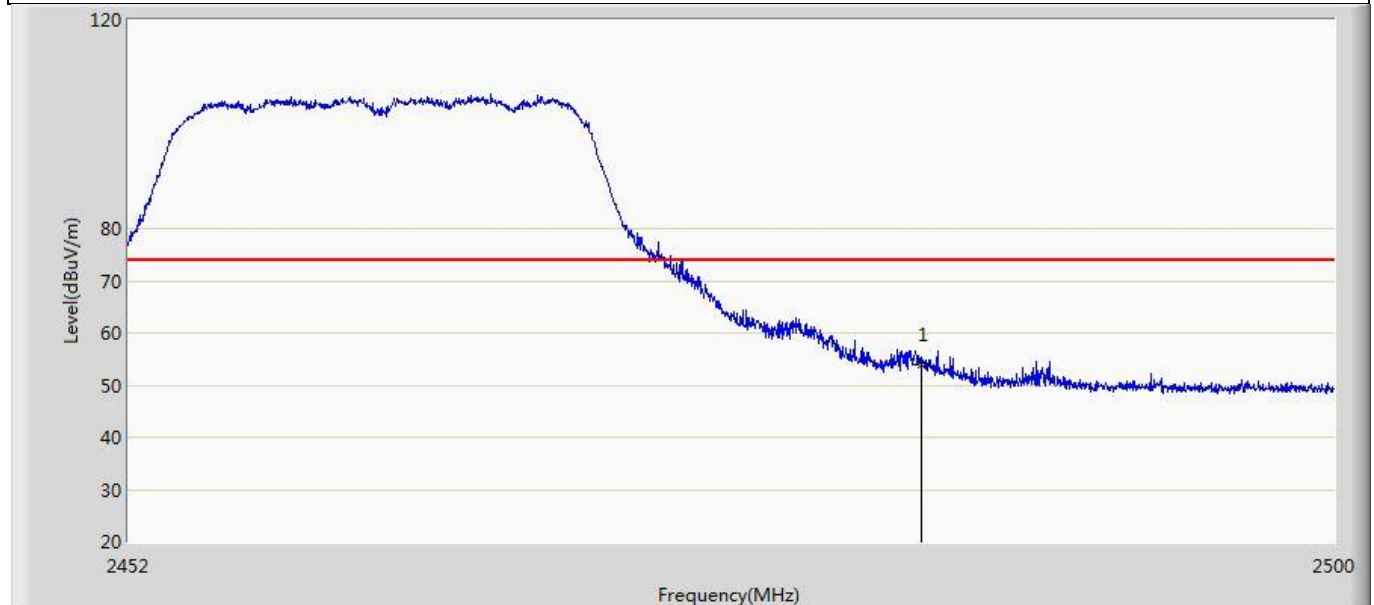


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	53.865	18.190	-20.135	74.000	35.675	PK

Profile: 2360091R	Page No.: 15
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2462MHz by 802.11g	

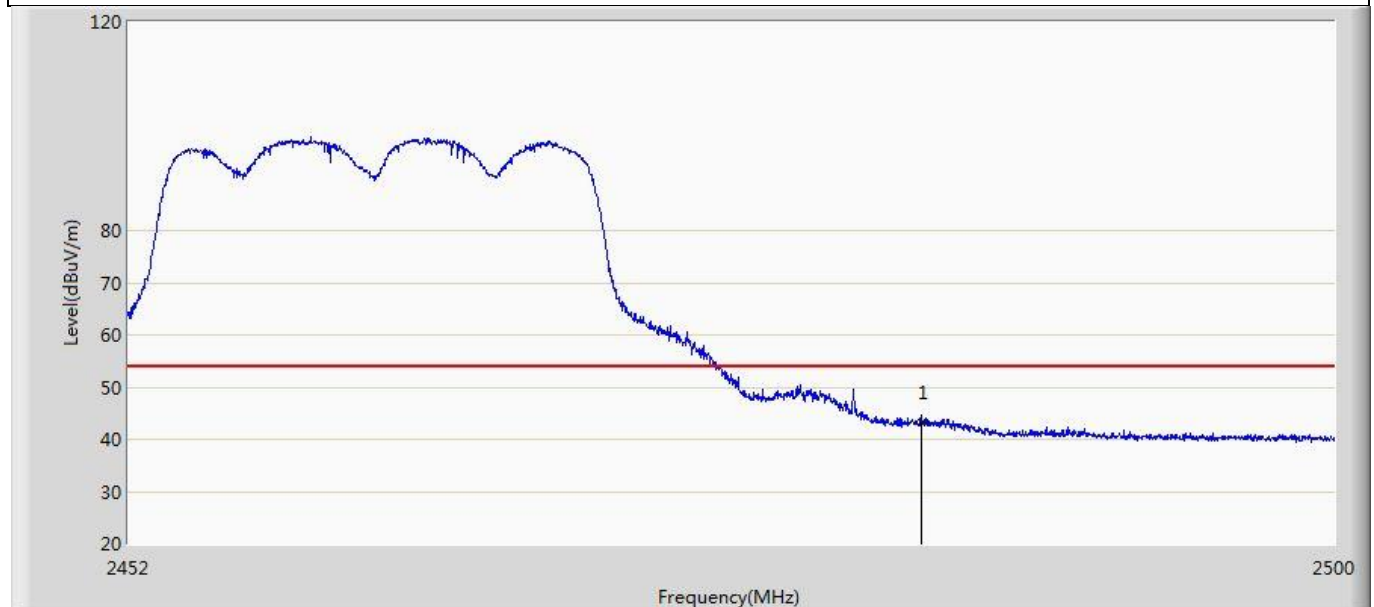

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	43.063	7.388	-10.937	54.000	35.675	AV

Profile: 2360091R	Page No.: 16
Engineer: Juliuszhou	
Site: AC5	Time: 2021/05/27 - 18:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: VR All-In-One Headset	Power: 120Vac / 60Hz
Note: Mode 2:Transmit at 2462MHz by 802.11g	

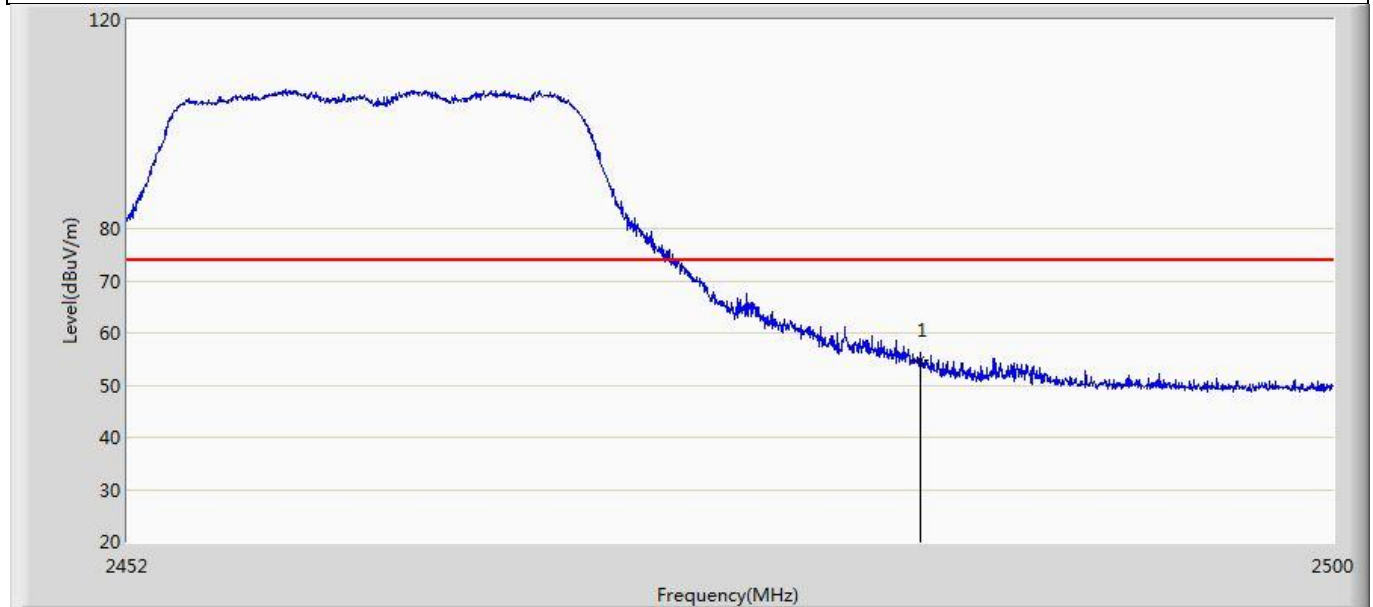

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	54.895	19.220	-19.105	74.000	35.675	PK